



FCC RADIO TEST REPORT

Applicant : Ubiquiti Inc.
Address : 685 Third Avenue, New York, New York 10017, USA
Equipment : Magic PoE
Model No. : UACC-M-PoE
Trade Name : UBIQUITI
FCC ID. : SWX-UAMP

I HEREBY CERTIFY THAT:

The sample was received on Jun. 17, 2022 and the testing was completed on Jul. 07, 2022 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels	7
2.3 Test Mode and Test Software	7
2.4 Description of Test System.....	8
2.5 General Information of Test.....	9
2.6 Measurement Uncertainty	9
3. Test Equipment and Ancillaries Used for Tests	10
4. Antenna Requirements.....	12
4.1 Antenna Construction and Directional Gain.....	12
5. Test of AC Power Line Conducted Emission	13
5.1 Test Limit	13
5.2 Test Procedures	13
5.3 Typical Test Setup	14
5.4 Test Result and Data	15
5.5 Test Photographs	17
6. Test of Spurious Emission (Radiated)	18
6.1 Test Limit	18
6.2 Test Procedures	19
6.3 Typical Test Setup	20
6.4 Test Result and Data (9kHz ~ 30MHz).....	22
6.5 Test Result and Data (30MHz ~ 1GHz).....	22
6.6 Test Result and Data (1GHz ~ 25GHz).....	24
6.7 Restricted Bands of Operation	30
6.8 Test Photographs (30MHz ~ 1GHz).....	31
6.9 Test Photographs (1GHz ~ 25GHz).....	32
7. Test of Spurious Emission (Conducted).....	34
7.1 Test Limit	34
7.2 Test Procedure	34
7.3 Test Setup Layout	34
7.4 Test Result and Data	34
8. On Time, Duty Cycle and Measurement methods	37
8.1 Test Limit	37
8.2 Test Procedure	37
8.3 Test Setup Layout	37
8.4 Test Result and Data	37
9. 6dB Bandwidth Measurement Data	39
9.1 Test Limit	39
9.2 Test Procedures	39
9.3 Test Setup Layout	39



9.4 Test Result and Data 39

10. Maximum Average Output Power 41

10.1 Test Limit 41

10.2 Test Procedures 41

10.3 Test Setup Layout 41

10.4 Test Result and Data 41

11. Power Spectral Density 42

11.1 Test Limit 42

11.2 Test Procedures 42

11.3 Test Setup Layout 42

11.4 Test Result and Data 42

12. Radio Frequency Exposure 44

12.1 Applicable Standards 44

12.2 EUT Specification 44

12.3 Test Results 45



History of this test report

Attachment No.	Issued Date	Description
22060120-TRFCC01	Aug. 02, 2022	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207	AC Power Line Conducted Emission	PASS
15.209 15.205	Radiated Spurious Emission	PASS
15.247(d)	Conducted Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)	Maximum Output Power	PASS
15.247(e)	Power Spectral Density	PASS
2.1091	Radio Frequency Exposure	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Operation Frequency Range	BLE: 2400-2483.5MHz 802.11b/g/n: 2400-2483.5MHz 802.11a/n/ac: 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5875MHz
Center Frequency Range	BLE: 2402MHz-2480MHz 802.11b/g/n: 2412MHz-2462MHz 802.11a/n/ac: 5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5825MHz
Modulation Type	BLE: GFSK WLAN: 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 5GHz: 802.11a/n: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Modulation Technology	DSSS, OFDM, DTS
Data Rate	BLE: GFSK: 1Mbps WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80
Antenna Type	For BLE: PIFA Antenna For WLAN: Dipole Antenna
Antenna Gain	For BLE: 2400-2483.5MHz: ANT C: -1.00dBi For WLAN: 2400-2483.5MHz: ANT A: 3.50dBi, ANT B: 3.50dBi 5150-5850MHz: ANT A: 5.00dBi, ANT B: 5.00dBi
Power Cord	Brand: SHEN ZHEN GOSPELL DIGITAL TECHNOLOGY CO.,LTD Model: CH-331C+CH-706

Note:

1. EUT support TPC Function.
2. WLAN 2.4G and WLAN 5G can simultaneously transmission.
3. EUT support Client Mode without radar detection.
4. For more details, please refer to the User's manual of the EUT.



2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	*19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	*39	2480
12	2426	26	2454	--	--
13	2428	27	2456	--	--

Note: Channels remarked * are selected to perform test.

2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. An executive program, “wl command” under Windows 10 system was executed to transmit and receive data via Bluetooth.
- c. The following test mode was performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode 1	Normal Mode (120V/60 Hz)
Test Mode 2	Normal Mode (240V/60 Hz)
caused "Test Mode 2" generated the worst case, it was reported as the final data.	
Radiated Emissions (Below 1GHz)	
Test Mode 1	Normal Mode (120V/60 Hz)
Test Mode 2	Normal Mode (240V/60 Hz)
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiated Emissions (1GHz ~ 25GHz)	
Test Mode 1	GFSK (1Mbps)
caused "Test Mode 1" generated the worst case, it was reported as the final data.	

Modulation Type	TX CONFIGURATION
GFSK (1Mbps)	1TX



2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/ Length/Type
Notebook	Lenovo	S1GL2W	N/A	Adapter / 1.8m / NS
RJ45 Cable	N/A	N/A	15m / NS	N/A

Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	lenovo	S1GL2W	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	15m / NS	N/A

AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude E5470	N/A	Adapter / 1.8m / NS
UDM Pro SE	UBIQUITI	UDM Pro SE	N/A	N/A
U6 Pro	UBIQUITI	U6 Pro	N/A	N/A
RJ45 Cable*3	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
RJ45 Cable	TE CONNECTIVITY	CAT5E	15m / NS	N/A
Mobile Phone	MI	M1906G7G	N/A	N/A
Camera	UBIQUITI	G3 FLEX	N/A	N/A



2.5 General Information of Test

Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	VCCI	T-12205 for Telecommunication test C-14663 for Conducted emission test R-14218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2022/06/25	25.5 °C / 52%	Dian Chen
Radiated Emissions	3M02-NK	2022/6/24~ 2022/07/07	21~23 °C / 42~44%	Dian Chen
AC Power Line Conducted Emission	CON01-NK	2022/07/06	24 °C / 61%	Dian Chen

2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.12dB
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.7dB
Radiated Spurious Emission(1GHz~25GHz)	±6.8dB
Conducted Spurious Emission	±1.8dB
6dB Bandwidth	±4.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±1.2%
Power Spectral Density	±1.8dB
Duty Cycle	±1.2%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2021/11/05	2022/11/04
Horn Antenna	EMCO	3115	31601	2021/10/14	2022/10/13
Horn Antenna	EMCO	3116	31974	2021/10/04	2022/10/03
Active Loop Antenna	EMCO	6507	40855	2022/05/25	2023/05/24
EMI Receiver	ROHDE & SCHWARZ	ESCI	100821	2021/11/16	2022/11/15
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2021/08/06	2022/08/05
Preamplifier	Agilent	8449B	3008A01954	2022/03/17	2023/03/16
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2021/11/16	2022/11/15
Preamplifier	EM Electronics corp.	EM330	60658	2021/10/13	2022/10/12
Cable-6m(9k~300M)	NA	EMC5D-BM-B M-6	130605	2021/09/22	2022/09/21
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2022/03/21	2023/03/20
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 102	MY4569/2	2021/09/03	2022/09/02
Cable-1m(1G-40G)	HUBER SUHNER	SUCOFLEX 102	MY5739/2	2021/09/03	2022/09/02
Cable-6m(1G-40G)	HUBER SUHNER	SUCOFLEX 102	MY5740/2	2021/09/03	2022/09/02
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2022/01/11	2023/01/10
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2022/01/11	2023/01/10
Cable-8m(1G-26.5G)	WOKEN	WCBA-WCA20 3SM	CCE1374	2022/04/25	2023/04/24
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2022/01/10	2023/01/09
Power Meter	Anritsu	ML2495A	1224005	2022/04/12	2023/04/11
Power Sensor	Anritsu	MA2411B	1207295	2022/04/12	2023/04/11
Attenuator	KEYSIGHT	8491B	MY39250705	2021/08/19	2022/09/26



Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	101200	2021/08/30	2022/08/29
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-516	2021/10/05	2022/10/04
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101933	2021/09/15	2022/09/14
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2021/09/22	2022/09/21
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Antenna Requirements

4.1 Antenna Construction and Directional Gain

Antenna Type	PIFA Antenna
Antenna Gain	-1 dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

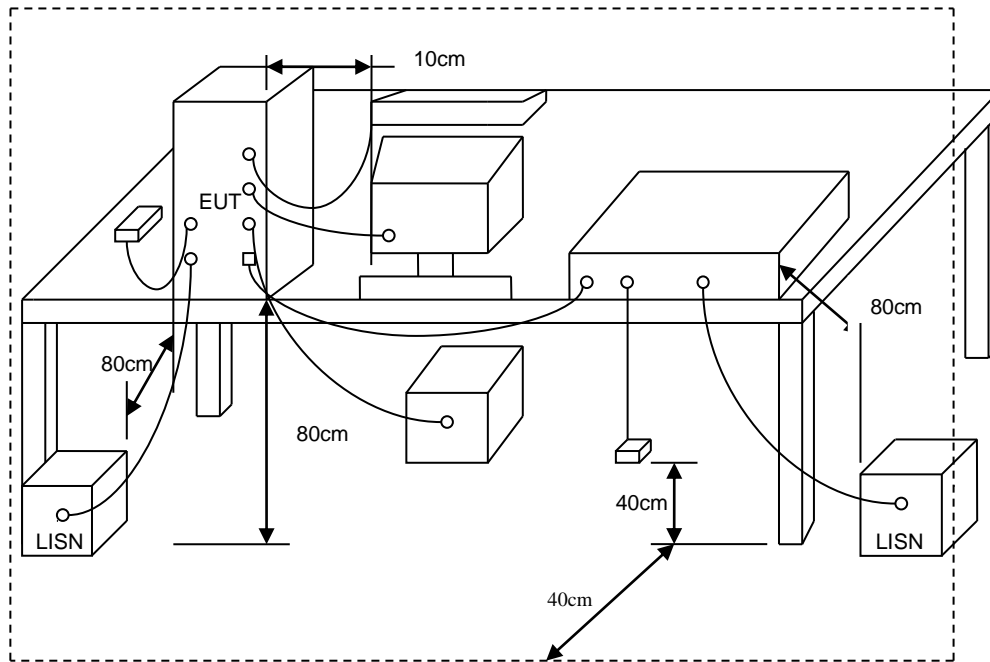



5.4 Test Result and Data


5.4.1 Test Result and Data of Transmitter

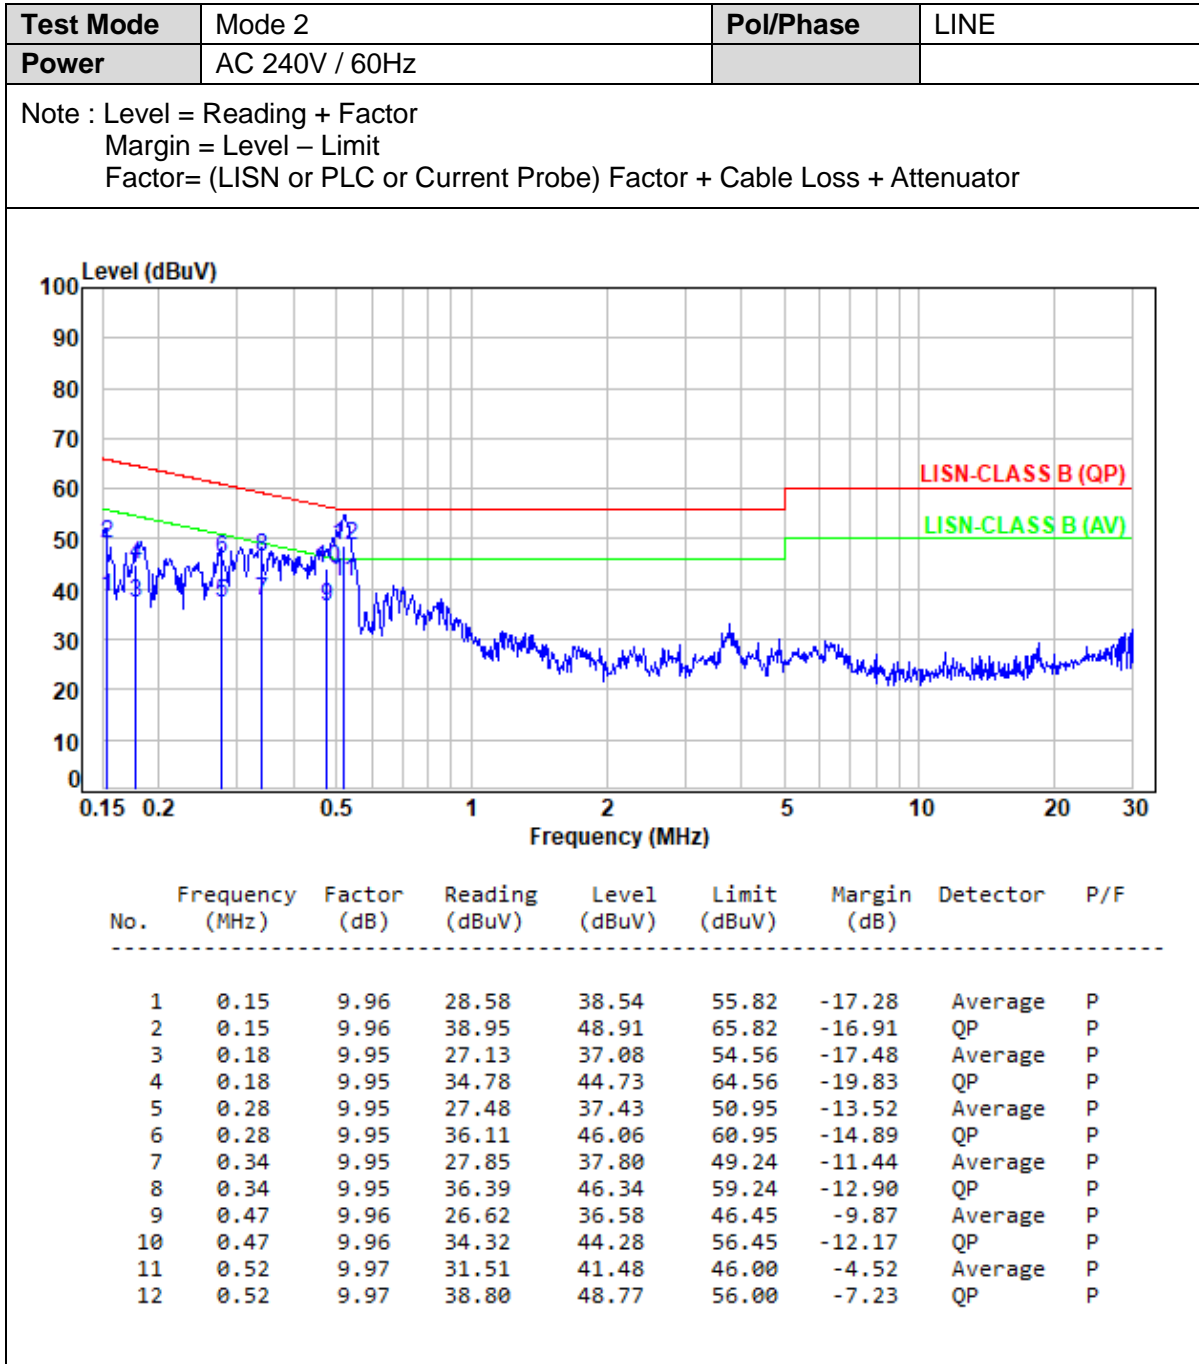



Test Mode	Mode 2	Pol/Phase	NEUTRAL
Power	AC 240V / 60Hz		

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor= (LISN or PLC or Current Probe) Factor + Cable Loss + Attenuator

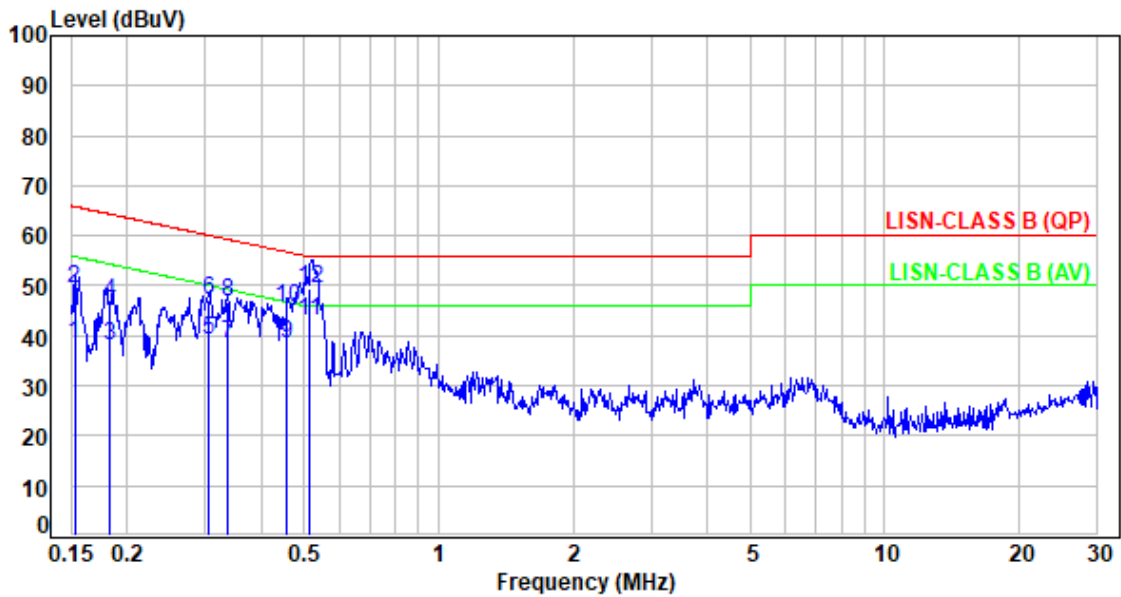

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.94	28.58	38.52	55.86	-17.34	Average	P
2	0.15	9.94	39.66	49.60	65.86	-16.26	QP	P
3	0.18	9.93	28.05	37.98	54.34	-16.36	Average	P
4	0.18	9.93	36.68	46.61	64.34	-17.73	QP	P
5	0.30	9.93	29.10	39.03	50.11	-11.08	Average	P
6	0.30	9.93	37.03	46.96	60.11	-13.15	QP	P
7	0.34	9.93	28.64	38.57	49.26	-10.69	Average	P
8	0.34	9.93	36.96	46.89	59.26	-12.37	QP	P
9	0.46	9.94	28.37	38.31	46.74	-8.43	Average	P
10	0.46	9.94	35.75	45.69	56.74	-11.05	QP	P
11	0.51	9.94	32.93	42.87	46.00	-3.13	Average	P
12	0.51	9.94	39.45	49.39	56.00	-6.61	QP	P



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter’s fundamental emission.

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Distance Meters	Radiated ($\mu\text{V/m}$)	Radiated ($\text{dB}\mu\text{V/m}$)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A/m}$)	Measurement distance (m)
9 - 490 kHz	$6.37/F$ (F in kHz)	300
490 - 1705 kHz	$63.7/F$ (F in kHz)	30
1.705 - 30 MHz	0.08	30



6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
(Z-AXIS is the worst.)
- 2.Due to the test software function limit the operation band setting(200dBuV/m).
There's no corresponding limitation in the actual test item.




6.3 Typical Test Setup

Below 30MHz test setup

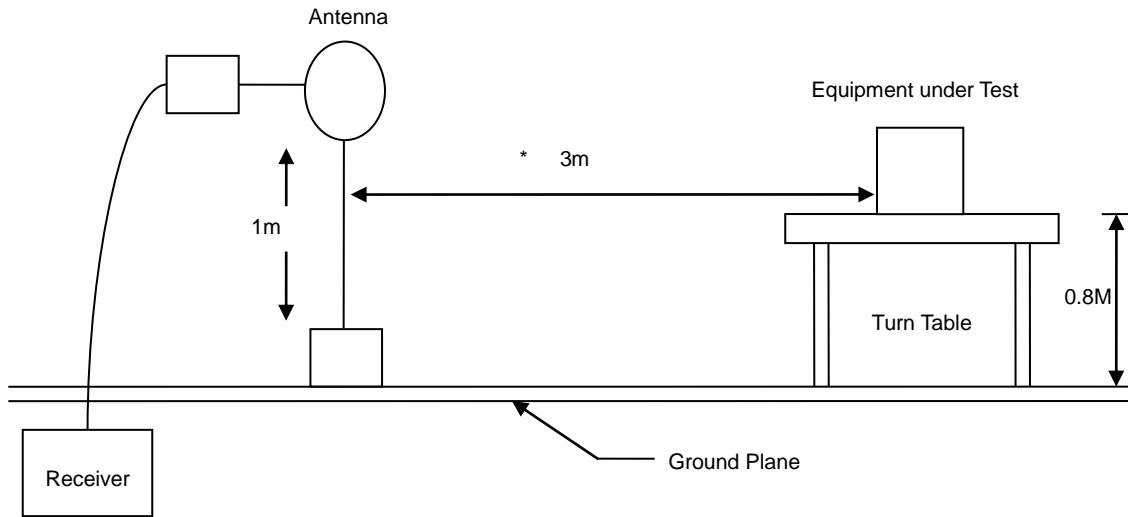


30MHz- 1GHz Test Setup

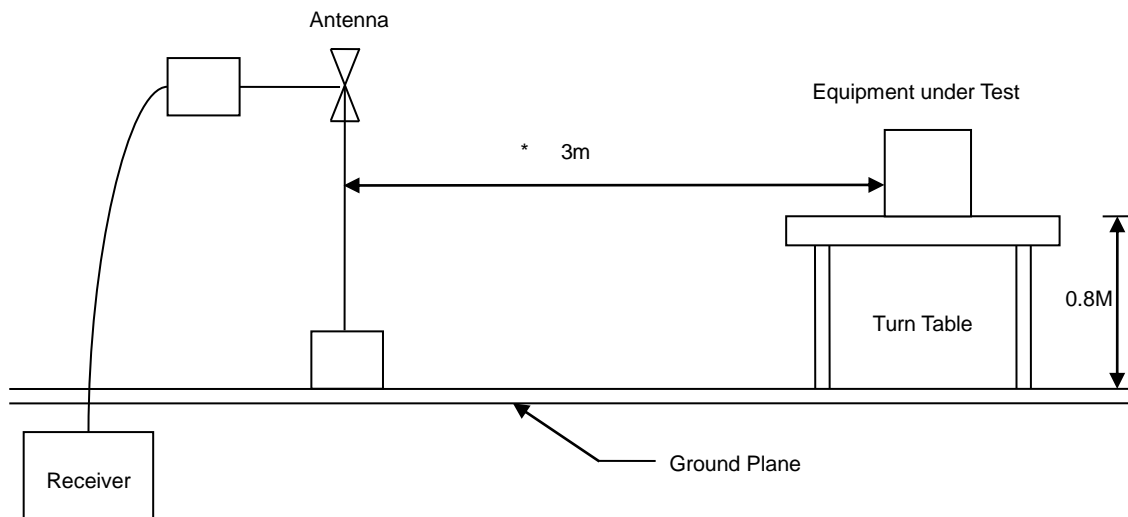



Above 1GHz Test Setup

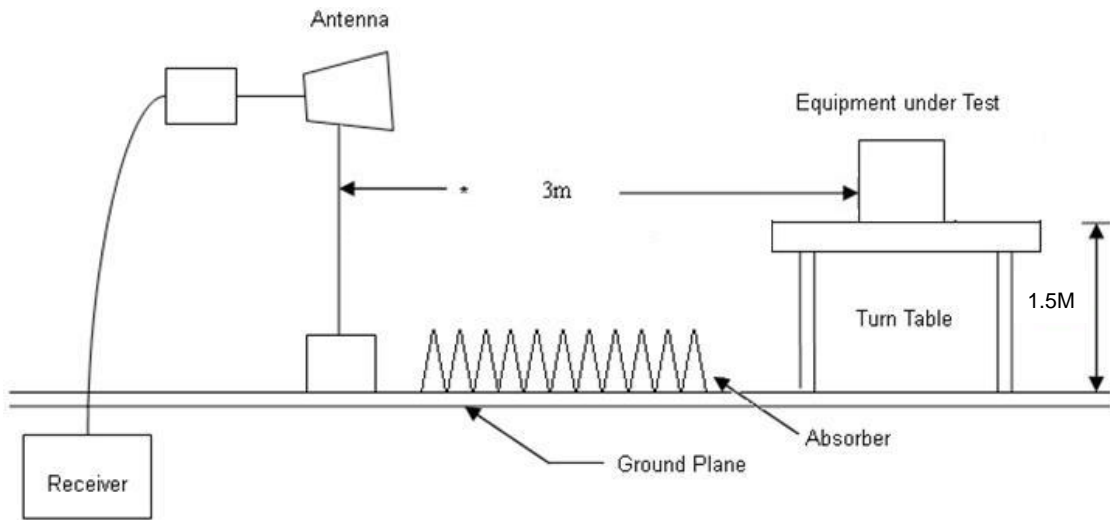




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)


6.5.1 Test Result and Data of Transmitter

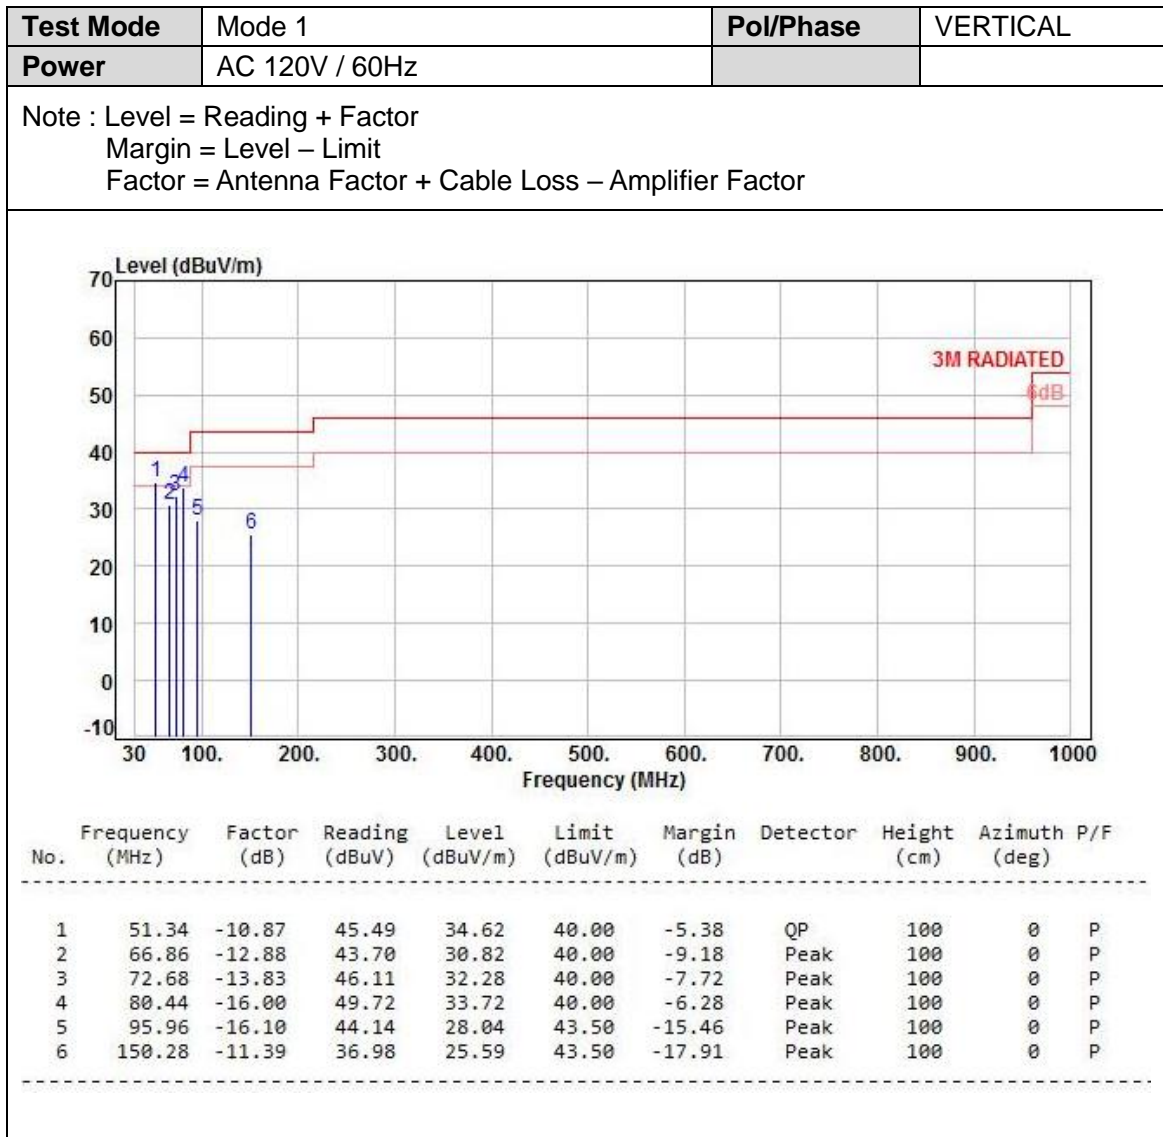



Test Mode	Mode 1	Pol/Phase	HORIZONTAL
Power	AC 120V / 60Hz		

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor

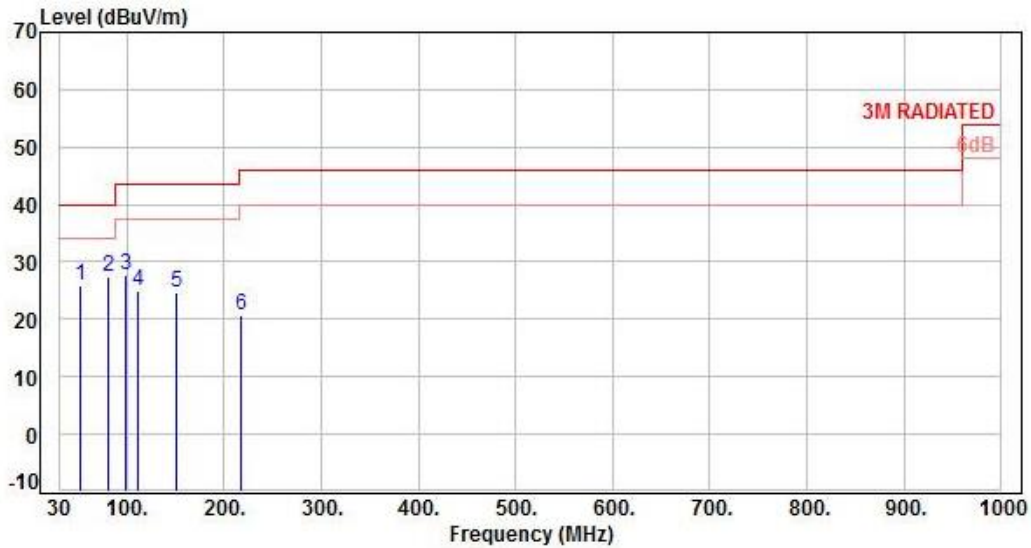


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	51.34	-10.87	36.79	25.92	40.00	-14.08	Peak	100	360	P
2	80.44	-16.00	43.28	27.28	40.00	-12.72	Peak	100	360	P
3	97.90	-15.96	43.62	27.66	43.50	-15.84	Peak	100	360	P
4	111.48	-14.46	39.59	25.13	43.50	-18.37	Peak	100	360	P
5	150.28	-11.39	35.95	24.56	43.50	-18.94	Peak	100	360	P
6	218.18	-14.01	34.63	20.62	46.00	-25.38	Peak	100	360	P



6.6 Test Result and Data (1GHz ~ 25GHz)


6.6.1 Test Result and Data of Transmitter

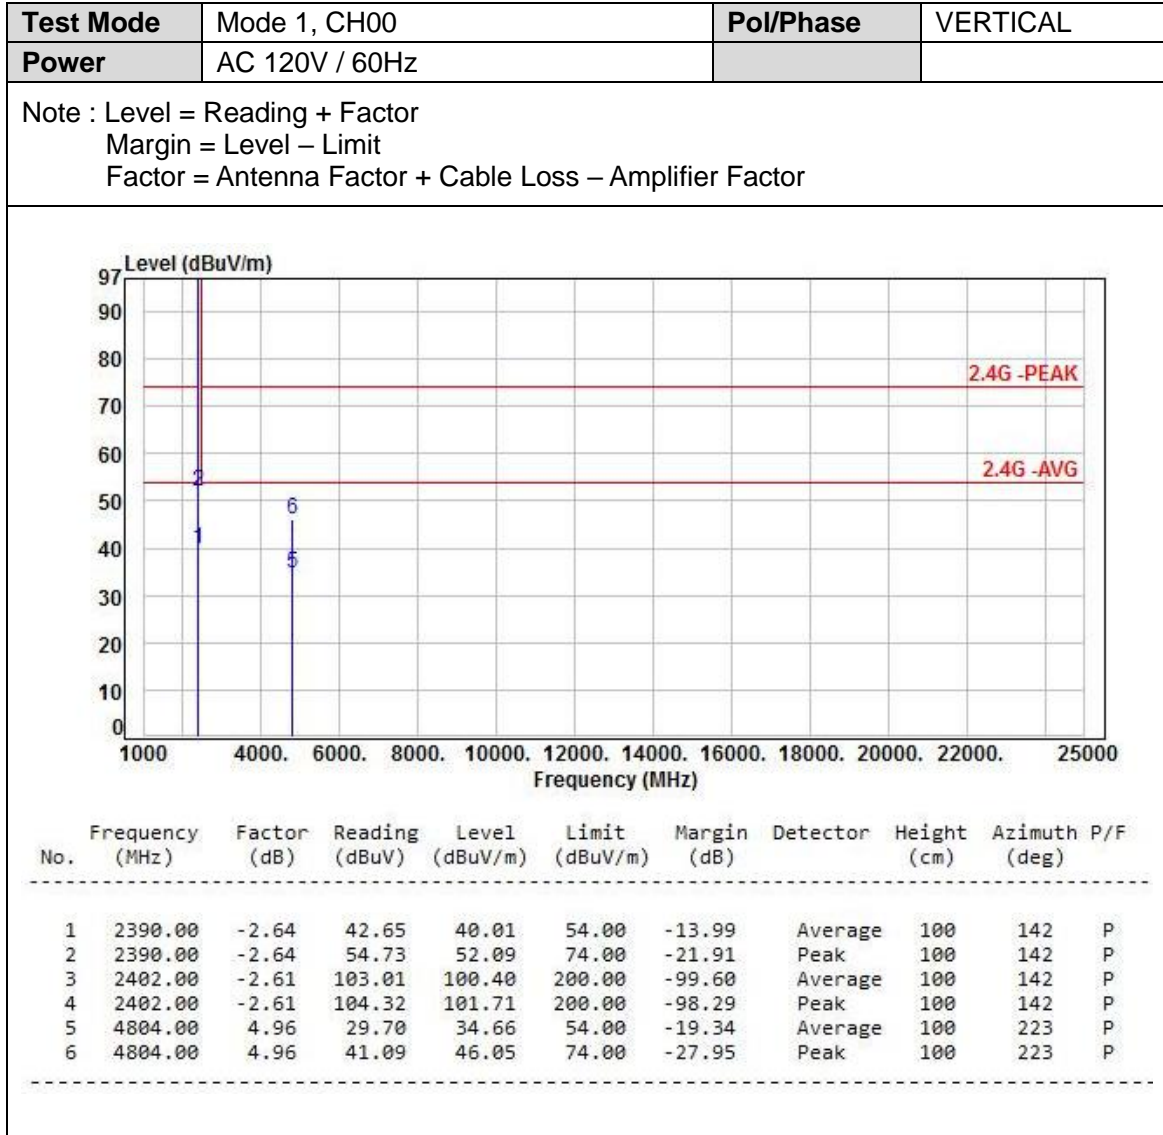



Test Mode	Mode 1, CH00	Pol/Phase	HORIZONTAL
Power	AC 120V / 60Hz		

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor

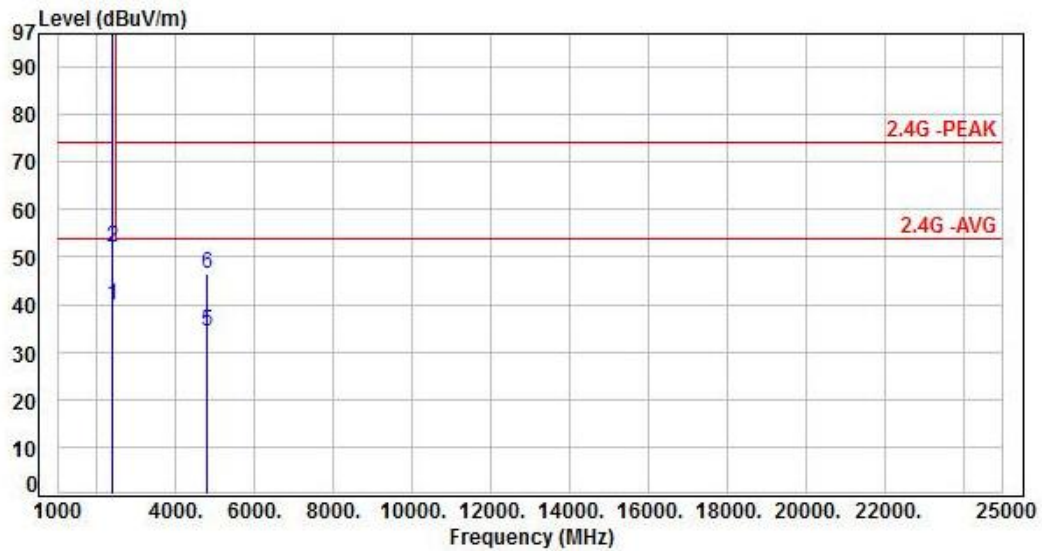


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.64	42.37	39.73	54.00	-14.27	Average	164	308	P
2	2390.00	-2.64	54.63	51.99	74.00	-22.01	Peak	164	308	P
3	2402.00	-2.61	100.37	97.76	200.00	-102.24	Average	164	308	P
4	2402.00	-2.61	101.55	98.94	200.00	-101.06	Peak	164	308	P
5	4804.00	4.96	29.31	34.27	54.00	-19.73	Average	100	291	P
6	4804.00	4.96	41.47	46.43	74.00	-27.57	Peak	100	291	P



Test Mode	Mode 1, CH19	Pol/Phase	VERTICAL
Power	AC 120V / 60Hz		

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor

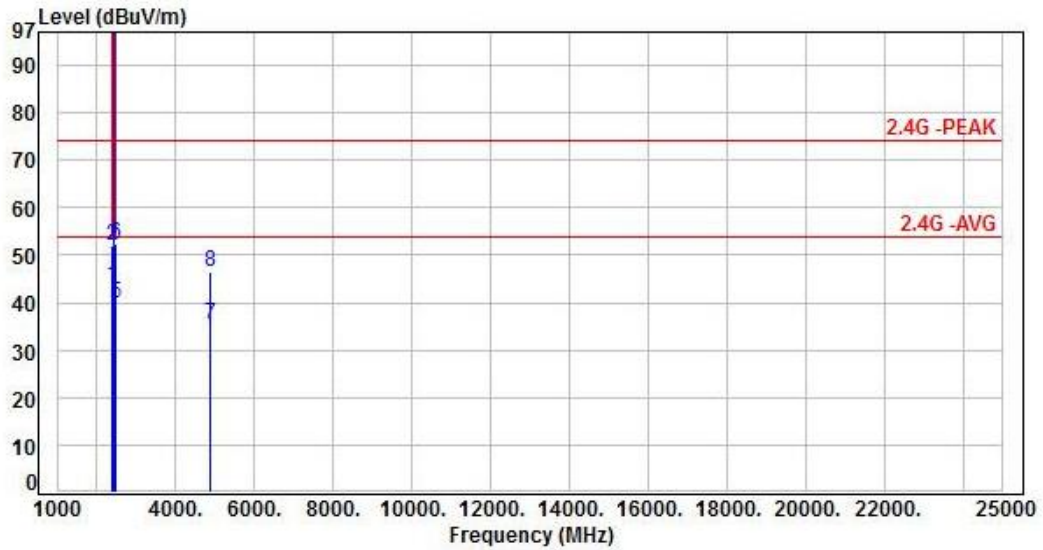


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.64	46.05	43.41	54.00	-10.59	Average	107	140	P
2	2390.00	-2.64	54.75	52.11	74.00	-21.89	Peak	107	140	P
3	2440.00	-2.57	103.63	101.06	200.00	-98.94	Average	107	140	P
4	2440.00	-2.57	104.85	102.28	200.00	-97.72	Peak	107	140	P
5	2483.50	-2.39	42.20	39.81	54.00	-14.19	Average	107	140	P
6	2483.50	-2.39	54.67	52.28	74.00	-21.72	Peak	107	140	P
7	4880.00	5.20	30.04	35.24	54.00	-18.76	Average	100	183	P
8	4880.00	5.20	41.45	46.65	74.00	-27.35	Peak	100	183	P



Test Mode	Mode 1, CH19	Pol/Phase	HORIZONTAL
Power	AC 120V / 60Hz		

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor

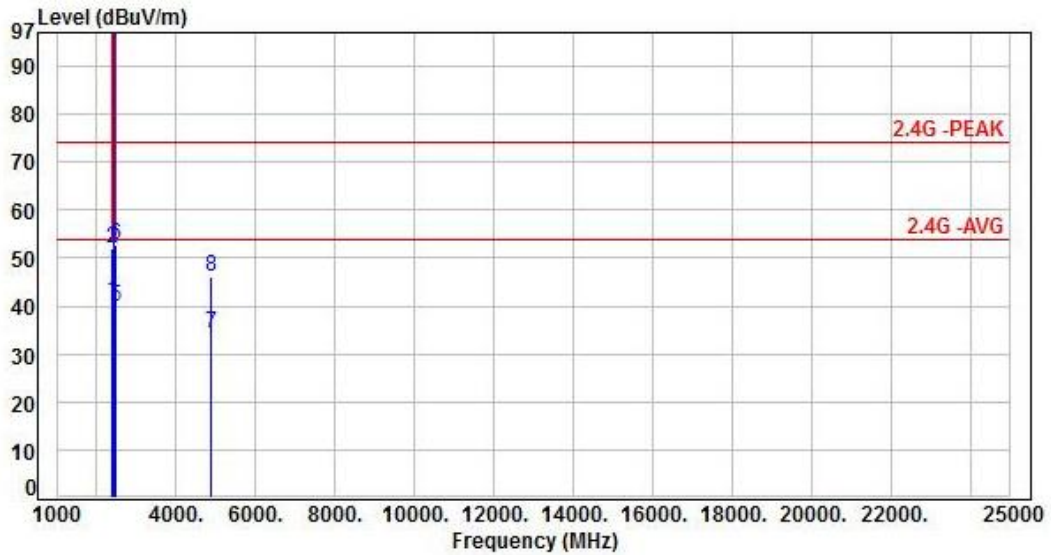


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.64	43.67	41.03	54.00	-12.97	Average	158	311	P
2	2390.00	-2.64	54.49	51.85	74.00	-22.15	Peak	158	311	P
3	2440.00	-2.57	101.05	98.48	200.00	-101.52	Average	158	311	P
4	2440.00	-2.57	102.29	99.72	200.00	-100.28	Peak	158	311	P
5	2483.50	-2.39	42.22	39.83	54.00	-14.17	Average	158	311	P
6	2483.50	-2.39	54.99	52.60	74.00	-21.40	Peak	158	311	P
7	4880.00	5.20	28.94	34.14	54.00	-19.86	Average	100	284	P
8	4880.00	5.20	40.77	45.97	74.00	-28.03	Peak	100	284	P



Test Mode	Mode 1, CH39	Pol/Phase	VERTICAL
Power	AC 120V / 60Hz		

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor

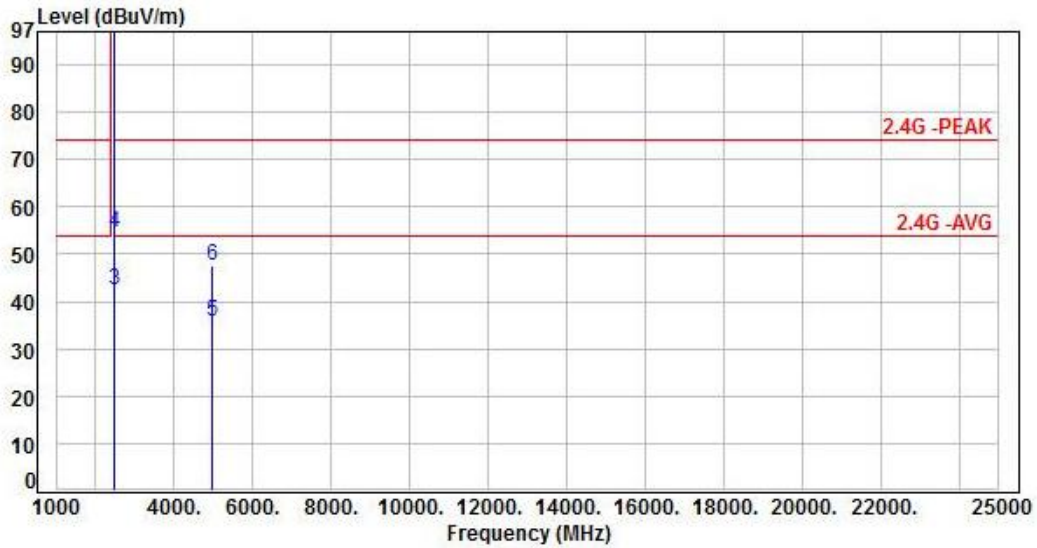


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-2.40	103.18	100.78	200.00	-99.22	Average	113	147	P
2	2480.00	-2.40	104.39	101.99	200.00	-98.01	Peak	113	147	P
3	2483.50	-2.39	44.98	42.59	54.00	-11.41	Average	113	147	P
4	2483.50	-2.39	56.92	54.53	74.00	-19.47	Peak	113	147	P
5	4960.00	5.54	30.06	35.60	54.00	-18.40	Average	100	184	P
6	4960.00	5.54	42.00	47.54	74.00	-26.46	Peak	100	184	P



Test Mode	Mode 1, CH39	Pol/Phase	HORIZONTAL
Power	AC 120V / 60Hz		

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor

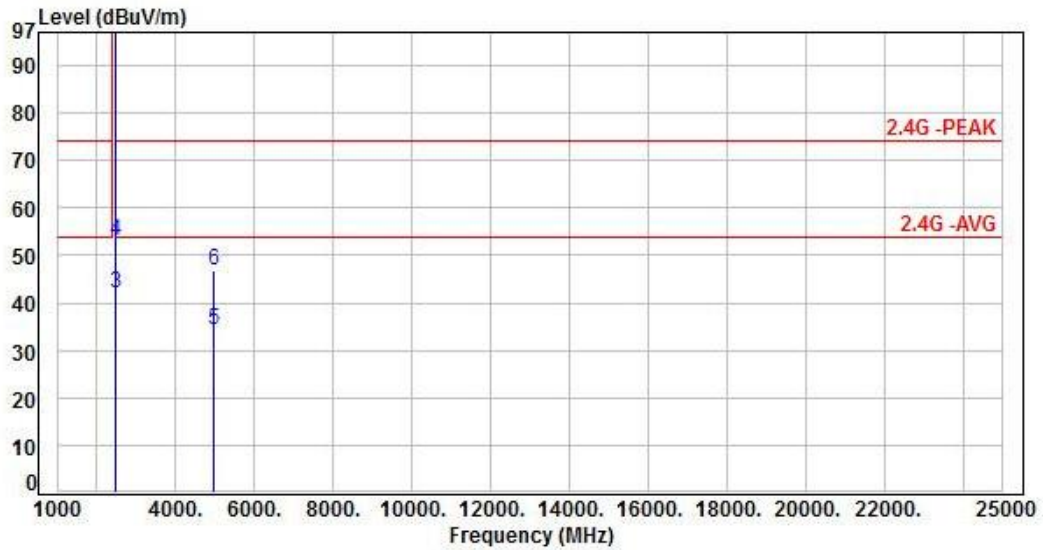

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-2.40	101.90	99.50	200.00	-100.50	Average	105	312	P
2	2480.00	-2.40	103.08	100.68	200.00	-99.32	Peak	105	312	P
3	2483.50	-2.39	44.41	42.02	54.00	-11.98	Average	105	312	P
4	2483.50	-2.39	55.40	53.01	74.00	-20.99	Peak	105	312	P
5	4960.00	5.54	28.83	34.37	54.00	-19.63	Average	100	297	P
6	4960.00	5.54	41.40	46.94	74.00	-27.06	Peak	100	297	P



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	9 – 9.2
0.495 – 0.505	16.69475 – 16.69525	608 – 614	9.3– 9.5
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1427	10.6 – 12.7
3.020 – 3.026	25.5 – 25.67	1435 – 1626.5	13.25 – 13.4
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	14.47 – 14.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	15.35 – 16.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	17.7 – 21.4
5.677 – 5.683	108 – 138	2200 – 2300	22.01 – 23.12
6.215 – 6.218	149.9 – 150.05	2310 – 2390	23.6 – 24.0
6.26775 – 6.26825	156.52475 – 156.52525	2483.5 – 2500	31.2 – 31.8
6.31175 – 6.31225	156.7 – 156.9	2655 – 2900	36.43 – 36.5
8.291 – 8.294	162.0125 – 167.17	3260 – 3267	Above 38.6
8.362 – 8.366	167.72 – 173.2	3332 – 3339	
8.37625 – 8.38675	240 – 285	3345.8 – 3358	
8.41425 – 8.41475	322 – 335.4	3500 – 4400	
12.29 – 12.293		4500 – 5150	
12.51975 – 12.52025		5350 – 5460	
12.57675 – 12.57725		7250 – 7750	
13.36 – 13.41		8025 – 8500	

* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.



7. Test of Spurious Emission (Conducted)

7.1 Test Limit

According to the methods defined in ANSI C63.10-2013 Section 11.11.1


Below -30dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.11.2 & 11.11.3

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 30dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

7.3 Test Setup Layout

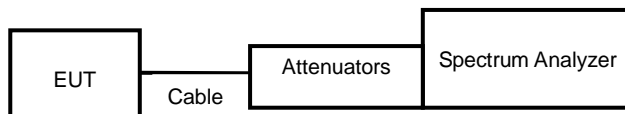






7.4 Test Result and Data

Note: Test plots refer to the following pages.






Modulation Type: GFSK(1Mbps)
CH00

Modulation Type: GFSK(1Mbps)
CH19

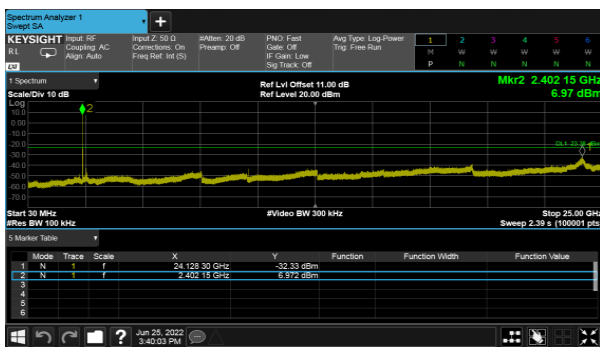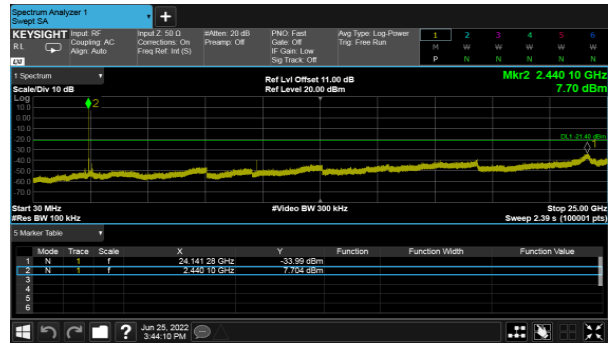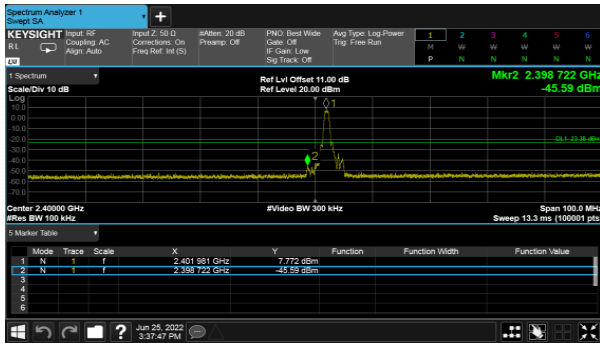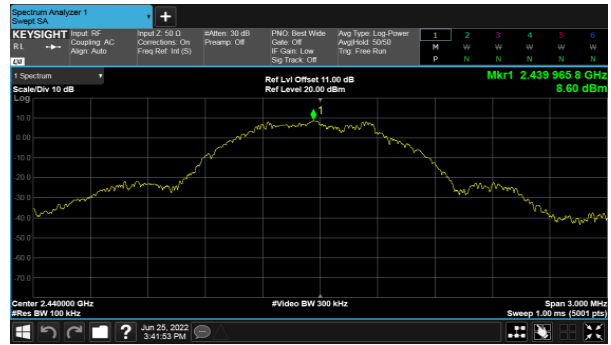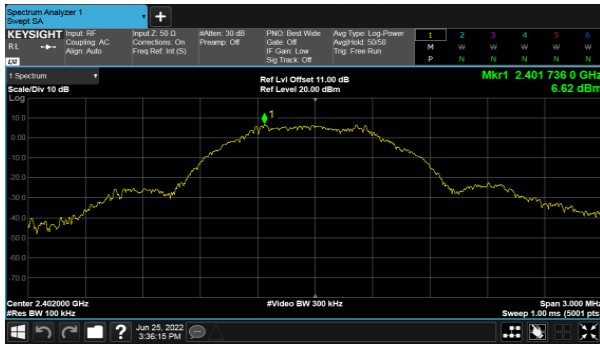



Modulation Type: GFSK(1Mbps)
CH39

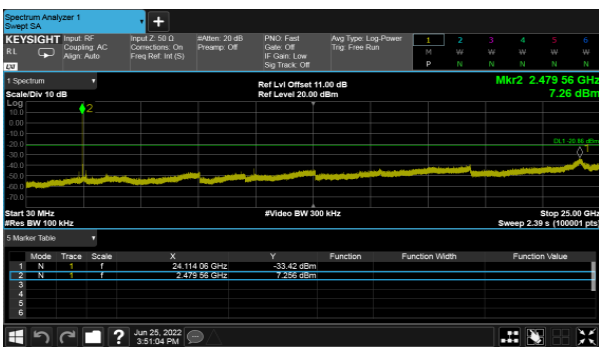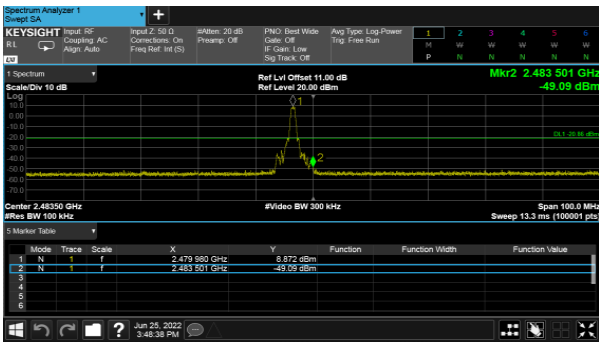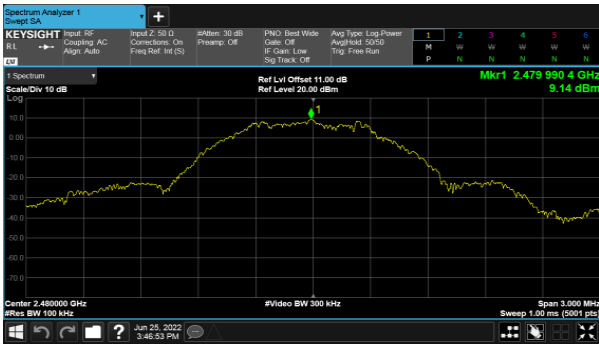



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.6
Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout

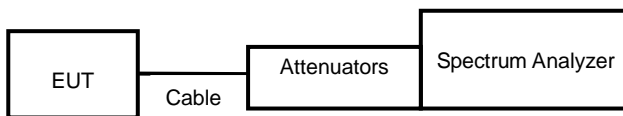


8.4 Test Result and Data

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
GFSK	0.42	0.65	64.07%



Modulation Type: GFSK(1Mbps)

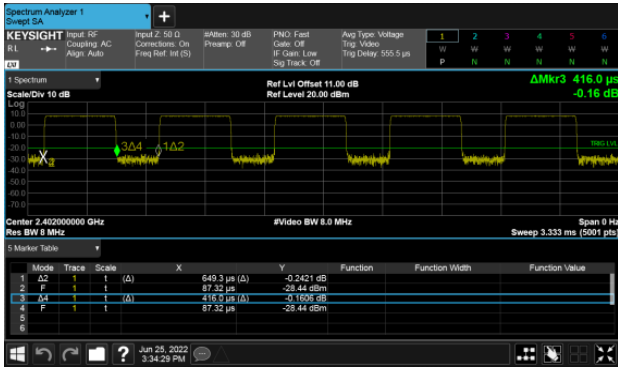



9. 6dB Bandwidth Measurement Data

9.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.


9.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.8.1

6dB Bandwidth:

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout

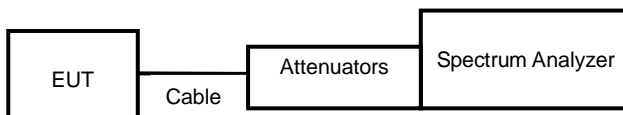


9.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK(1Mbps)	0	2402	697.00	1030.00
	19	2440	699.20	1031.80
	39	2480	705.60	1029.10




Modulation Type: GFSK(1Mbps) CH00

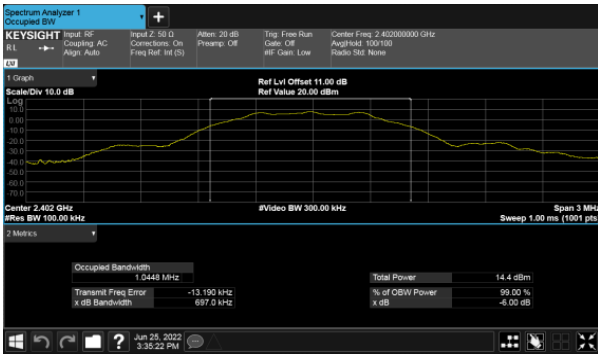

Modulation Type: GFSK(1Mbps) CH19

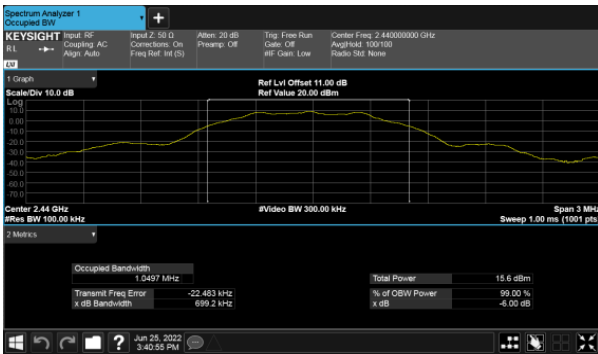

Modulation Type: GFSK(1Mbps) CH39

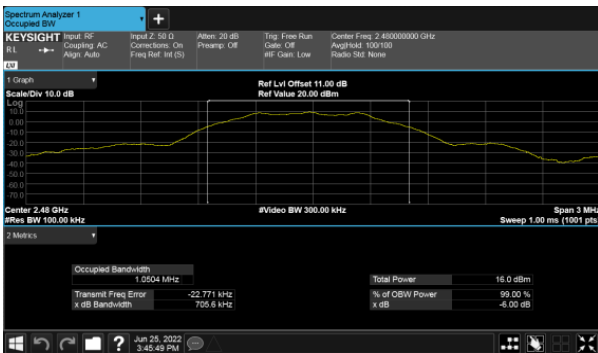



10. Maximum Average Output Power

10.1 Test Limit


The Maximum Output Power Measurement is 30dBm.

10.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.9.2.3.2

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout

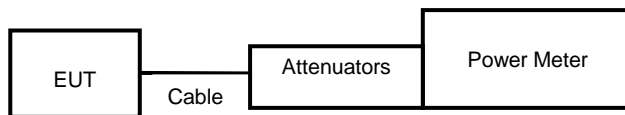

10.4 Test Result and Data

Power Set	Modulation Type	Channel	Frequency (MHz)	Power Output (dBm)	Power Output (mW)
				Average	Average
8	GFSK	0	2402	7.86	7.65
8		19	2440	9.15	9.01
8		39	2480	9.44	9.33



11. Power Spectral Density

11.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

11.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.10

- a. The transmitter output was connected to spectrum analyzer.
- b. The spectrum analyzer's resolution bandwidth were set at 10KHz RBW and 30KHz VBW as that of the fundamental frequency.
- c. The power spectral density was measured and recorded.

11.3 Test Setup Layout

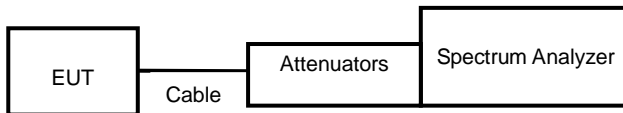


11.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 10KHz Bandwidth(dBm)	Limit
GFSK(1Mbps)	0	2402	-9.38	8.00
	19	2440	-7.98	8.00
	39	2480	-7.831	8.00



Modulation Type: GFSK(1Mbps)
CH00

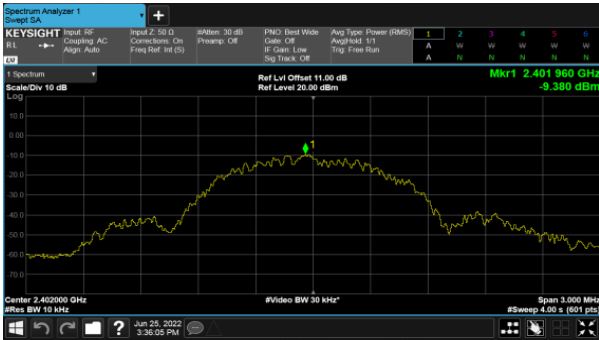

Modulation Type: GFSK(1Mbps)
CH19

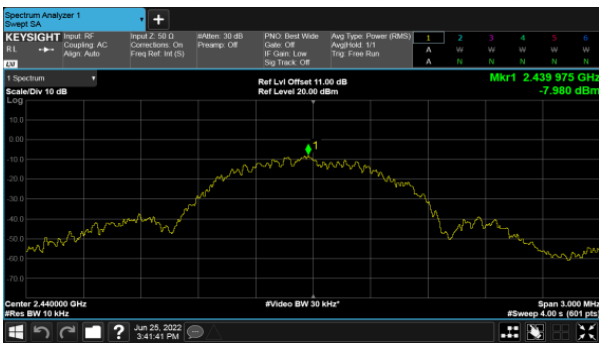

Modulation Type: GFSK(1Mbps)
CH39

