



FCC TEST REPORT

According to

FCC Rules and Regulations

Part 15 Subpart E

Applicant	: Ubiquiti Networks Inc.
Address	: 12F, No. 105, Song Ren Rd., Sin Yi District, Taipei : 110, Taiwan
Equipment	: UAP AC
Model No.	: UAP-AC Outdoor, UAP-AC
Trade Name	: Ubiquiti
FCC ID	: SWX-UAPAC

- The test result refers exclusively to the test presented test model / sample..
- The test result does not include DFS test for 5250 ~ 5350 MHz.
- Without written approval of **Cerpass Technology Corp.**, the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



CONTENTS

1.	Report of Measurements and Examinations	6
1.1.	List of Measurements and Examinations	6
2.	Test Configuration of Equipment under Test.....	7
2.1.	Feature of Equipment under Test.....	7
2.2.	Carrier Frequency of Channels.....	7
2.3.	Test Mode and Test Software.....	8
2.4.	Description of Test System.....	9
2.5.	General Information of Test.....	10
2.6.	Measurement Uncertainty	10
3.	Antenna Requirements	11
3.1.	Standard Applicable	11
3.2.	Antenna Construction and Directional Gain.....	11
4.	Test of Conducted Emission	12
4.1.	Test Procedures	12
4.2.	Typical Test Setup Layout of Conducted Emission	12
4.3.	Conducted Emission Requirement	13
4.4.	Measurement Equipment.....	13
4.5.	Test Result and Data.....	14
4.6.	Test Photographs	20
5.	Test of Radiated Emission	21
5.1.	Test Procedures	21
5.2.	Typical Test Setup Layout of Radiated Emission	22
5.3.	Measurement Equipment.....	22
5.4.	Test Result and Data (9kHz ~ 30MHz).....	23
5.5.	Test Result of Radiated Emission (30MHz ~ 1GHz)	23
5.6.	Test Result of Radiated Emission (Above 1GHz)	35
5.7.	Photographs of Radiated Emission Test (30MHz-1GHz).....	47
5.8.	Photographs of Radiated Emission Test (Above 1GHz)	48
6.	Peak Transmit Power	49
6.1.	Test Procedure	49
6.2.	Test Setup Layout	49
6.3.	Measurement Equipment.....	49
6.4.	Test Result and Data.....	50
7.	Peak Power Excursion	63
7.1.	Test Procedure	63
7.2.	Test Setup Layout	63
7.3.	Measurement Equipment.....	63
7.4.	Test Result and Data.....	63
8.	Peak Power Spectral Density	73
8.1.	Test Procedure	73
8.2.	Test Setup Layout	73
8.3.	Measurement Equipment.....	73



8.4. Test Result and Data.....	73
9. Frequency Stability	83
9.1. Test Procedure	83
9.2. Test Setup Layout	83
9.3. Measurement Equipment.....	83
9.4. Test Result and Data.....	84
10. Band Edges Measurement.....	85
10.1. Test Procedure	85
10.2. Measurement Equipment.....	85
10.3. Test Result and Data.....	85
10.4. Restrict Band Emission Measurement Data	91
11. Restricted Bands of Operation	93
11.1. Labeling Requirement.....	93
Appendix A. Photographs of EUT.....	A1 ~ A17



History of this test report

■ ORIGINAL.

Additional attachment as following record:



CERTIFICATE OF COMPLIANCE

According to

FCC Rules and Regulations

Part 15 Subpart E

Applicant : Ubiquiti Networks Inc.

Address : 12F, No. 105, Song Ren Rd., Sin Yi District, Taipei
110, Taiwan

Equipment : UAP AC

Model No. : UAP-AC Outdoor, UAP-AC

FCC ID : SWX-UAPAC

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4(2009)** The equipment was **passed** the test performed according to **FCC Rules and Regulations Part 15 Subpart E (2010) , and KDB789033.**

The test was carried out on Mar. 20, 2013 at Cerpass Technology Corp.

Approved by:

Hill Chen
EMC/RF B.U. Assistant Manager

Tested by:

Ben Lu
Engineer



1. Report of Measurements and Examinations

1.1. List of Measurements and Examinations

For Frequency 5.15GHz ~ 5.25GHZ

Applied Standard : FCC Part 15, Subpart E (Section 15.407)		
FCC Rule	Description of Test	Result
15.407(b)(5)	. Conducted Emission	Pass
15.407(b/1/2/3)(b)(5)	. Radiated Emission	Pass
15.407(a/1/2/3)	. Peak Transmit Power	Pass
15.407(a)(6)	. Peak Power Excursion	Pass
15.407(a/1/2/3)	. Peak Power Spectral Density	Pass
15.407(g)	. Frequency Stability	Pass



2. Test Configuration of Equipment under Test

2.1. Feature of Equipment under Test

Frequency Range	IEEE 802.11b/g: 2412-2462MHz
	IEEE 802.11n HT20: 2412-2462MHz
	IEEE 802.11n HT40: 2422-2452MHz
	IEEE 802.11ac U-NII Band: 5150-5250MHz/ 5725-5825MHz
Type of Modulation	DSSS, OFDM
Channel of Bandwidth	20MHz/ 40MHz/ 80MHz
Channel Control	Auto
Antenna Delivery	3TX+3RX
Type of Antenna	Internal
Antenna Gain	6 dBi

2.2. Carrier Frequency of Channels

802.11ac VHT20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*36	5180	*44	5220
40	5200	*48	5240

802.11 ac VHT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*38	5190	*46	5230

802.11 ac VHT80

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*42	5210	---	---

Note: Channels remarked * are selected to perform test.



2.3. Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included Notebook, Mouse and EUT for RF test.
- c. An executive program "MTool" under XP was executed to keep transmitting and receiving data via Wireless.
- d. Power output of data rate:

Spatial Streams	802.11ac VHT20		802.11ac VHT40		802.11ac VHT80	
	Data Rate (Mbps)	Power output (dBm)	Data Rate (Mbps)	Power output (dBm)	Data Rate (Mbps)	Power output (dBm)
1	---	---	180/9	7.51	390/9	7.42
	78/8	6.22	162/8	7.51	351/8	7.44
	65/7	6.21	135/7	7.52	292.5/7	7.45
	58.5/6	6.19	121.5/6	7.53	263.3/6	7.46
	52/5	6.23	108/5	7.58	234/5	7.47
	39/4	6.22	81/4	7.56	175.5/4	7.49
	26/3	6.25	54/3	7.54	117/3	7.48
	19.5/2	6.27	40.5/2	7.55	87.8/2	7.51
	13/1	6.26	27/1	7.57	58.5/1	7.51
	6/0	6.32	13.5/0	7.60	29.3/0	7.53
2	---	---	360/9	7.46	780/9	7.38
	156/8	6.18	324/8	7.47	702/8	7.40
	130/7	6.21	270/7	7.51	585/7	7.42
	117/6	6.23	243/6	7.50	526.6/6	7.43
	104/5	6.22	216/5	7.54	468/5	7.47
	78/4	6.24	162/4	7.53	351/4	7.46
	52/3	6.27	108/3	7.56	234/3	7.49
	39/2	6.26	81/2	7.56	175.6/2	7.48
	26/1	6.27	54/1	7.57	117/1	7.50
	13/0	6.29	27/0	7.59	58.6/0	7.50



Spatial Streams	802.11ac VHT20		802.11ac VHT40		802.11ac VHT80	
	Data Rate (Mbps)	Power output (dBm)	Data Rate (Mbps)	Power output (dBm)	Data Rate (Mbps)	Power output (dBm)
3	---	---	540/9	7.47	1170/9	7.41
	234/8	6.19	486/8	7.50	1053/8	7.43
	195/7	6.20	405/7	7.52	877.5/7	7.42
	175.5/6	6.22	364.5/6	7.51	789.9/6	7.43
	156/5	6.25	324/5	7.54	702/5	7.46
	117/4	6.28	243/4	7.54	526.5/4	7.46
	78/3	6.27	162/3	7.55	351/3	7.47
	58.5/2	6.26	121.5/2	7.54	263.4/2	7.50
	39/1	6.29	81/1	7.56	175.5/1	7.50
	19.5/0	6.30	40.5/0	7.57	87.9/0	7.51

2.4. Description of Test System

Device	Manufacturer	Model No.	Description
Notebook	TOSHIBA	PSA50T-05M00C	Power Cable, Non-Shielded, 1.8m
Mouse	DELL	MOC5UO	Data Cable, USB Shielding 1.85m



2.5. General Information of Test

Test Site:	Cerpass Technology Corp. 2F-11, No. 3, Yuan Qu St., (Nankang Software Park), Taipei, Taiwan 115, R.O.C.
Test Site Location (OATS2-SD) :	No.68-1, Shihbachongsi, Shihding Township, Taipei City 223, Taiwan, R.O.C.
FCC Registration Number :	TW1049, TW1061, 488071, 390316
IC Registration Number :	4934B-1, 4934D-1
VCCI Registration Number :	T-1173 for Telecommunication Test C-4139 for Conducted emission test R-3428 for Radiated emission test G-97 for radiated disturbance above 1GHz
Frequency Range Investigated:	AC Power Conducted Emission : from 150kHz to 30 MHz Radiated and conducted Emission: from 30 MHz to 40 GHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.
Laboratory Accreditation	 Testing Laboratory 1439

2.6. Measurement Uncertainty

Measurement Item	Uncertainty
Radiated emission	±4.11dB
Peak Output Power(conducted)	±1.38dB
Peak Output Power(Radiated)	±1.70dB
Power Spectral Density	±1.39dB
Radiated emission(3m)	±4.11dB
Radiated emission(10m)	±3.89dB



3. Antenna Requirements

3.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2. Antenna Construction and Directional Gain

802.11b/g/n:

ANT R, ANT M, ANT L

Antenna Type: PIFA Antenna

Antenna Gain: 6 dBi

Note: directional antenna gain for N mode = $6+10 \log(3)=10.77$

802.11ac:

ANT R, ANT M, ANT L

Antenna Type: PIFA Antenna

Antenna Gain: 6 dBi

Note: directional antenna gain for N mode = $6+10 \log(3)=10.77$




4. Test of Conducted Emission

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 1.3.1. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

4.1. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

4.2. Typical Test Setup Layout of Conducted Emission

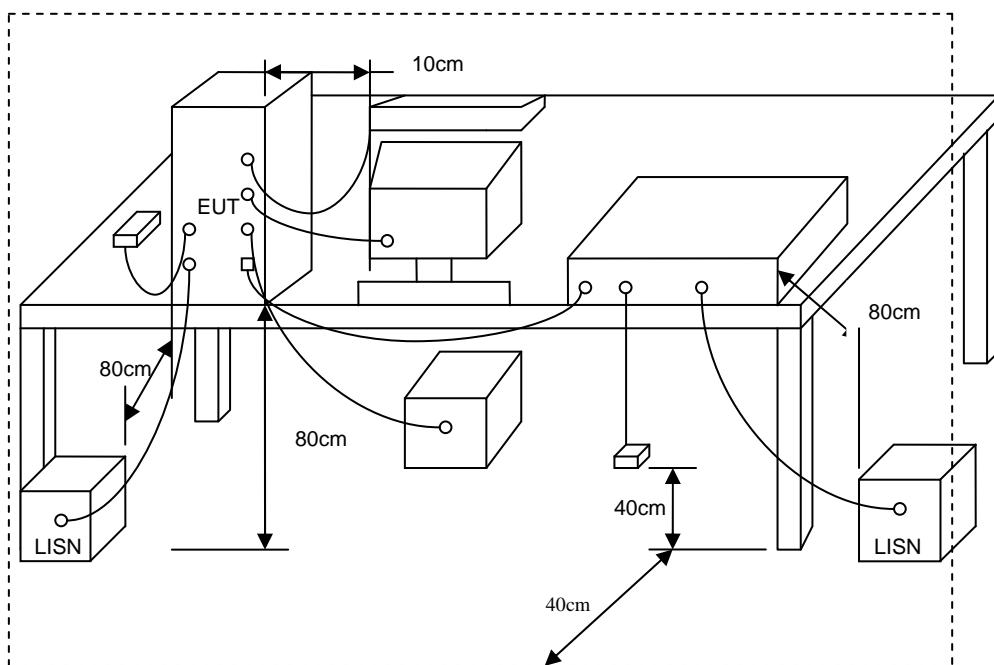



4.3. Conducted Emission Requirement

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

*Decreases with the logarithm of the frequency.


4.4. Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date.
EMI Receiver	R&S	ESCI	100821	2012/12/24	2013/12/23
LISN	Schwarzbeck	NSLK 8127	8127-516	2013/03/08	2014/03/07
LISN	Schwarzbeck	NSLK 8127	8127-568	2012/08/22	2013/08/21



4.5. Test Result and Data

Power	: DC 48V from PoE	Pol/Phase	: LINE
Test Mode 1	: 802.11ac VHT20, CH36	Temperature	: 24 °C
Test Date	: Mar. 18, 2013	Humidity	: 58 %

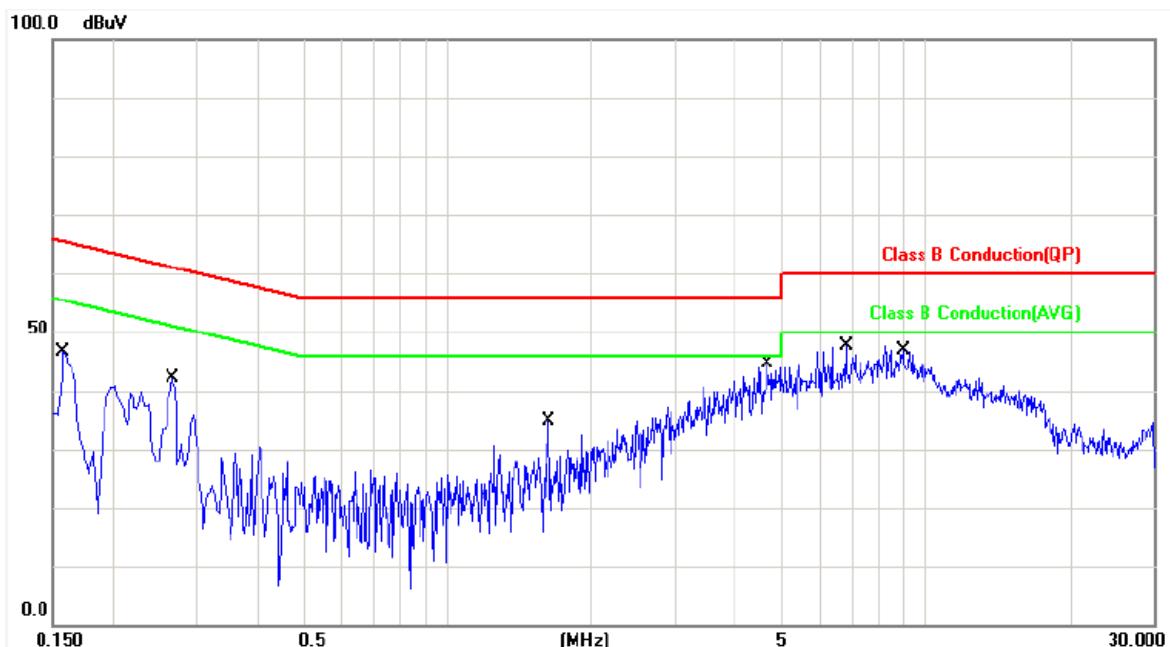


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1580	0.05	40.91	40.96	65.56	-24.60	QP	P
2	0.1580	0.05	23.43	23.48	55.56	-32.08	AVG	P
3	0.2660	0.05	42.61	42.66	61.24	-18.58	QP	P
4	0.2660	0.05	34.11	34.16	51.24	-17.08	AVG	P
5	1.6340	0.07	23.69	23.76	56.00	-32.24	QP	P
6	1.6340	0.07	14.51	14.58	46.00	-31.42	AVG	P
7	4.6900	0.10	38.09	38.19	56.00	-17.81	QP	P
8	4.6900	0.10	26.56	26.66	46.00	-19.34	AVG	P
9	6.8100	0.13	38.66	38.79	60.00	-21.21	QP	P
10	6.8100	0.13	30.40	30.53	50.00	-19.47	AVG	P
11	8.9940	0.16	40.12	40.28	60.00	-19.72	QP	P
12	8.9940	0.16	33.28	33.44	50.00	-16.56	AVG	P

Note: Level = Reading + Factor

Margin = Level – Limit



Power	:	DC 48V from PoE	Pol/Phase	:	NEUTRAL
Test Mode 1	:	802.11ac VHT20, CH36	Temperature	:	24 °C
Test Date	:	Mar. 18, 2013	Humidity	:	58 %

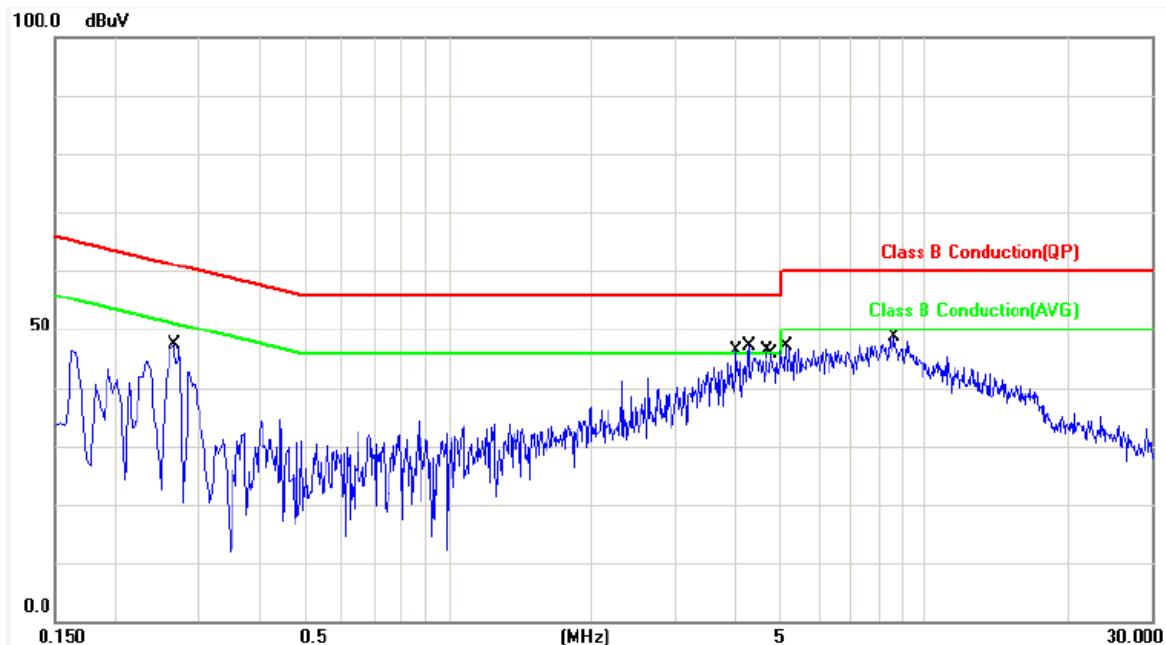


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2660	0.07	45.19	45.26	61.24	-15.98	QP	P
2	0.2660	0.07	41.48	41.55	51.24	-9.69	Avg	P
3	4.0460	0.10	39.11	39.21	56.00	-16.79	QP	P
4	4.0460	0.10	29.64	29.74	46.00	-16.26	Avg	P
5	4.2780	0.10	39.53	39.63	56.00	-16.37	QP	P
6	4.2780	0.10	29.12	29.22	46.00	-16.78	Avg	P
7	4.6540	0.11	40.60	40.71	56.00	-15.29	QP	P
8	4.6540	0.11	30.39	30.50	46.00	-15.50	Avg	P
9	4.7900	0.11	40.14	40.25	56.00	-15.75	QP	P
10	4.7900	0.11	30.07	30.18	46.00	-15.82	Avg	P
11	5.1380	0.12	40.10	40.22	60.00	-19.78	QP	P
12	5.1380	0.12	30.21	30.33	50.00	-19.67	Avg	P
13	8.6420	0.16	42.41	42.57	60.00	-17.43	QP	P
14	8.6420	0.16	34.27	34.43	50.00	-15.57	Avg	P

Note: Level = Reading + Factor
Margin = Level – Limit



Power :	DC 48V from PoE	Pol/Phase :	LINE
Test Mode 2 :	802.11ac VHT40, CH38	Temperature :	24 °C
Test Date :	Mar. 18, 2013	Humidity :	58 %

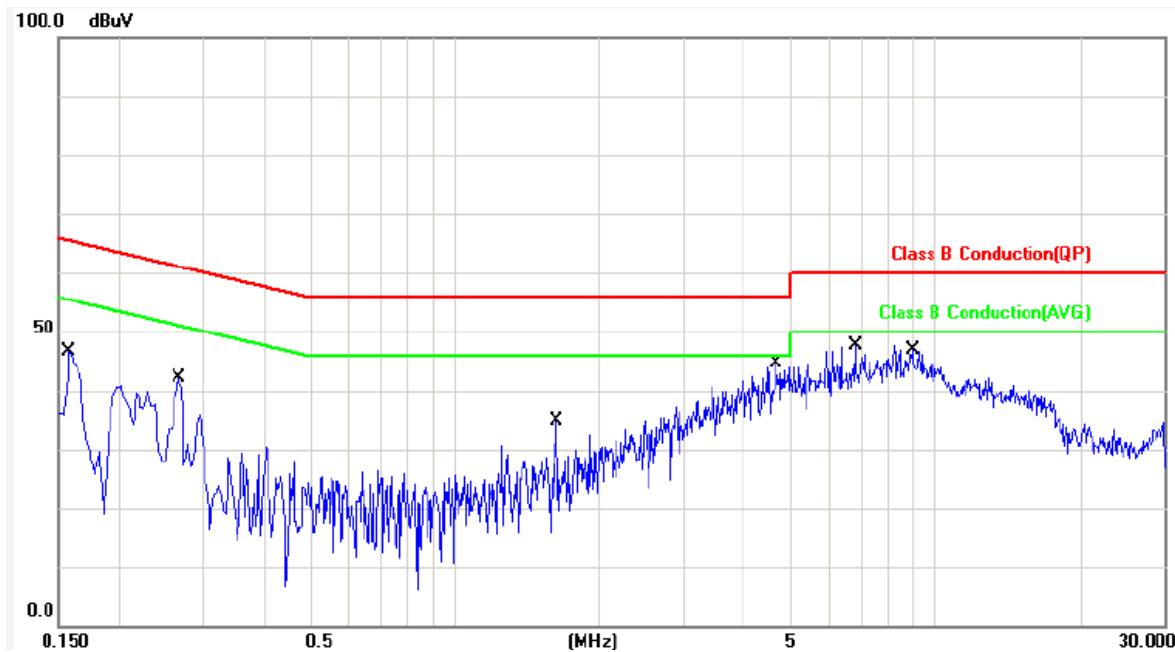


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1580	0.05	40.78	40.83	65.56	-24.73	QP	P
2	0.1580	0.05	23.42	23.47	55.56	-32.09	AVG	P
3	0.2660	0.05	42.57	42.62	61.24	-18.62	QP	P
4	0.2660	0.05	34.22	34.27	51.24	-16.97	AVG	P
5	1.6340	0.07	23.78	23.85	56.00	-32.15	QP	P
6	1.6340	0.07	14.34	14.41	46.00	-31.59	AVG	P
7	4.6900	0.10	38.26	38.36	56.00	-17.64	QP	P
8	4.6900	0.10	26.07	26.17	46.00	-19.83	AVG	P
9	6.8100	0.13	38.12	38.25	60.00	-21.75	QP	P
10	6.8100	0.13	30.26	30.39	50.00	-19.61	AVG	P
11	8.9940	0.16	40.08	40.24	60.00	-19.76	QP	P
12	8.9940	0.16	32.94	33.10	50.00	-16.90	AVG	P

Note: Level = Reading + Factor
Margin = Level – Limit



Power :	DC 48V from PoE	Pol/Phase :	NEUTRAL
Test Mode 2 :	802.11ac VHT40, CH38	Temperature :	24 °C
Test Date :	Mar. 18, 2013	Humidity :	58 %

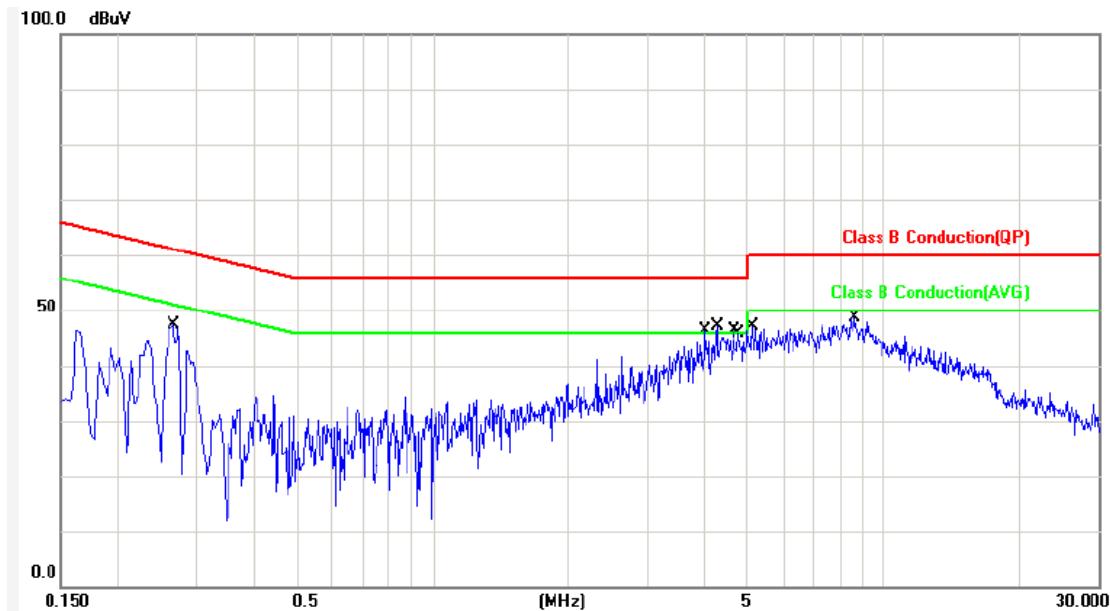


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2660	0.07	45.49	45.56	61.24	-15.68	QP	P
2	0.2660	0.07	41.18	41.25	51.24	-9.99	AVG	P
3	4.0460	0.10	39.65	39.75	56.00	-16.25	QP	P
4	4.0460	0.10	29.16	29.26	46.00	-16.74	AVG	P
5	4.2780	0.10	39.53	39.63	56.00	-16.37	QP	P
6	4.2780	0.10	29.38	29.48	46.00	-16.52	AVG	P
7	4.6540	0.11	40.74	40.85	56.00	-15.15	QP	P
8	4.6540	0.11	30.58	30.69	46.00	-15.31	AVG	P
9	4.7900	0.11	40.35	40.46	56.00	-15.54	QP	P
10	4.7900	0.11	30.85	30.96	46.00	-15.04	AVG	P
11	5.1380	0.12	40.10	40.22	60.00	-19.78	QP	P
12	5.1380	0.12	30.54	30.66	50.00	-19.34	AVG	P
13	8.6420	0.16	42.25	42.41	60.00	-17.59	QP	P
14	8.6420	0.16	34.39	34.55	50.00	-15.45	AVG	P

Note: Level = Reading + Factor

Margin = Level – Limit



Power	: DC 48V from PoE	Pol/Phase	: LINE
Test Mode 3	: 802.11ac VHT80, CH42	Temperature	: 24 °C
Test Date	: Mar. 18, 2013	Humidity	: 58 %

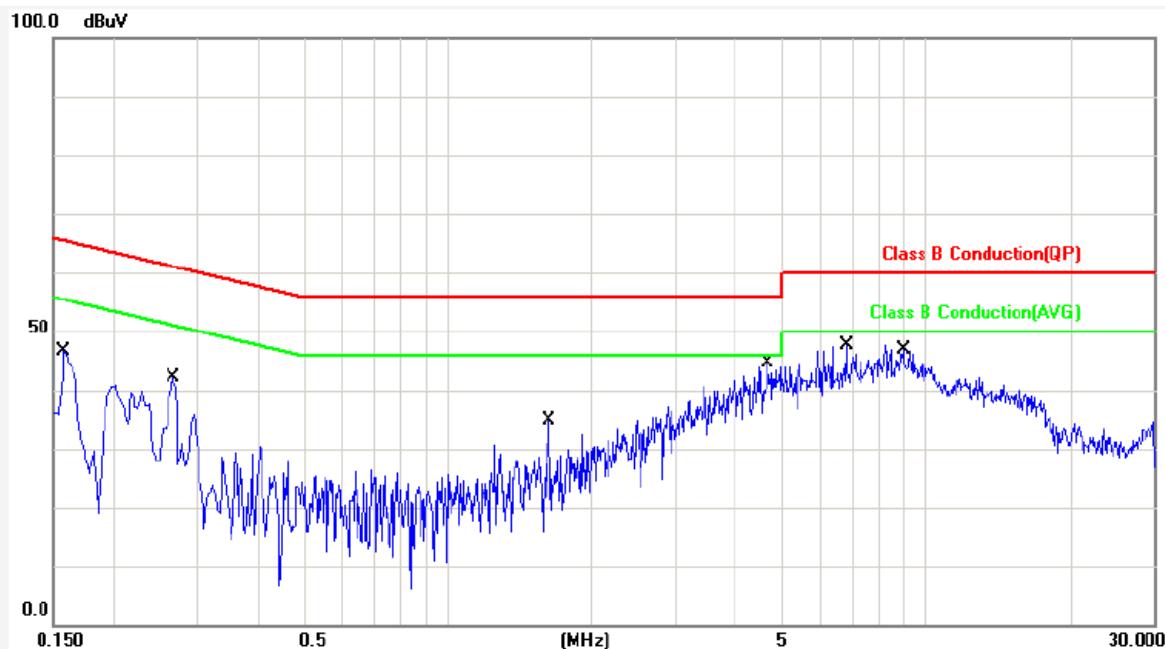


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1580	0.05	40.51	40.56	65.56	-25.00	QP	P
2	0.1580	0.05	23.24	23.29	55.56	-32.27	AVG	P
3	0.2660	0.05	42.91	42.96	61.24	-18.28	QP	P
4	0.2660	0.05	34.37	34.42	51.24	-16.82	AVG	P
5	1.6340	0.07	23.48	23.55	56.00	-32.45	QP	P
6	1.6340	0.07	14.05	14.12	46.00	-31.88	AVG	P
7	4.6900	0.10	38.23	38.33	56.00	-17.67	QP	P
8	4.6900	0.10	26.37	26.47	46.00	-19.53	AVG	P
9	6.8100	0.13	38.29	38.42	60.00	-21.58	QP	P
10	6.8100	0.13	30.86	30.99	50.00	-19.01	AVG	P
11	8.9940	0.16	40.26	40.42	60.00	-19.58	QP	P
12	8.9940	0.16	33.10	33.26	50.00	-16.74	AVG	P

Note: Level = Reading + Factor
Margin = Level – Limit



Power :	DC 48V from PoE	Pol/Phase :	NEUTRAL
Test Mode 3 :	802.11ac VHT80, CH42	Temperature :	24 °C
Test Date :	Mar. 18, 2013	Humidity :	58 %

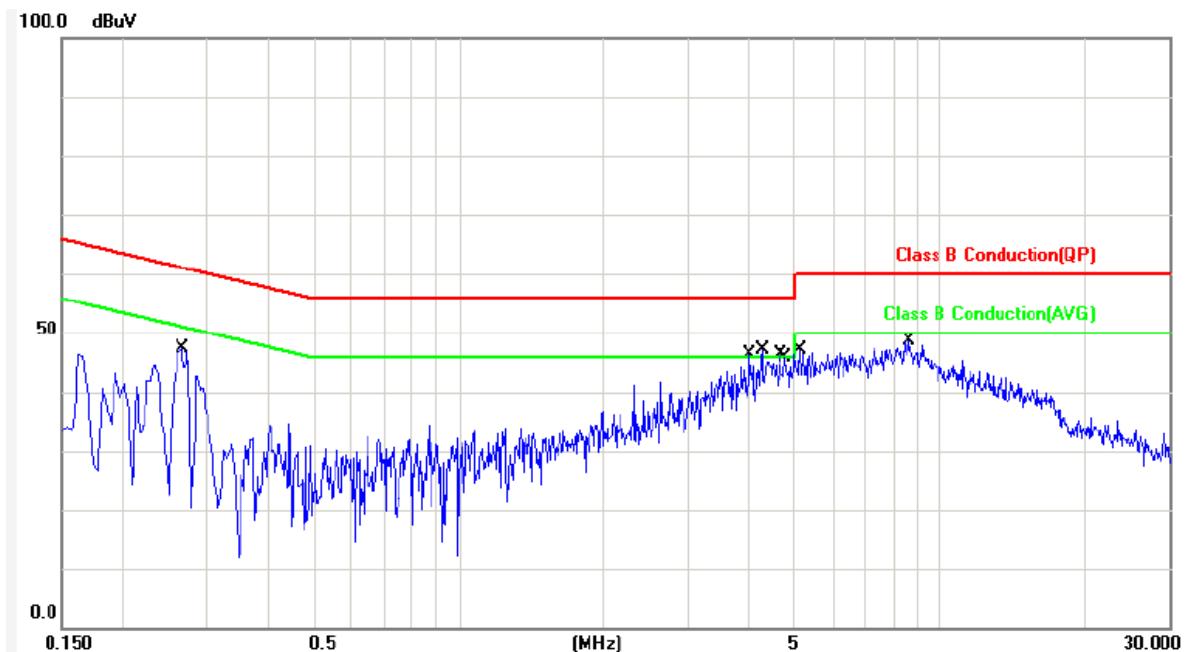

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2660	0.07	45.26	45.33	61.24	-15.91	QP	P
2	0.2660	0.07	41.55	41.62	51.24	-9.62	AVG	P
3	4.0460	0.10	39.32	39.42	56.00	-16.58	QP	P
4	4.0460	0.10	29.18	29.28	46.00	-16.72	AVG	P
5	4.2780	0.10	39.56	39.66	56.00	-16.34	QP	P
6	4.2780	0.10	29.32	29.42	46.00	-16.58	AVG	P
7	4.6540	0.11	40.22	40.33	56.00	-15.67	QP	P
8	4.6540	0.11	30.46	30.57	46.00	-15.43	AVG	P
9	4.7900	0.11	40.52	40.63	56.00	-15.37	QP	P
10	4.7900	0.11	30.30	30.41	46.00	-15.59	AVG	P
11	5.1380	0.12	40.40	40.52	60.00	-19.48	QP	P
12	5.1380	0.12	30.29	30.41	50.00	-19.59	AVG	P
13	8.6420	0.16	42.17	42.33	60.00	-17.67	QP	P
14	8.6420	0.16	34.13	34.29	50.00	-15.71	AVG	P

Note: Level = Reading + Factor

Margin = Level – Limit



5. Test of Radiated Emission

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


5.1. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.




5.2. Typical Test Setup Layout of Radiated Emission

For radiated emissions below 30MHz

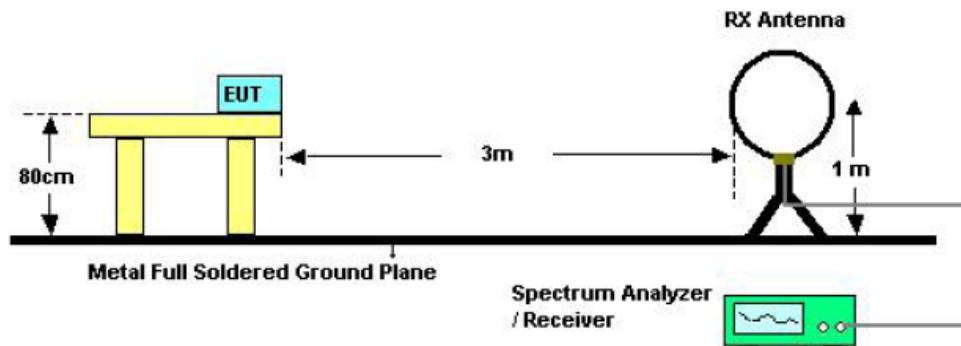

For radiated emissions above 30MHz

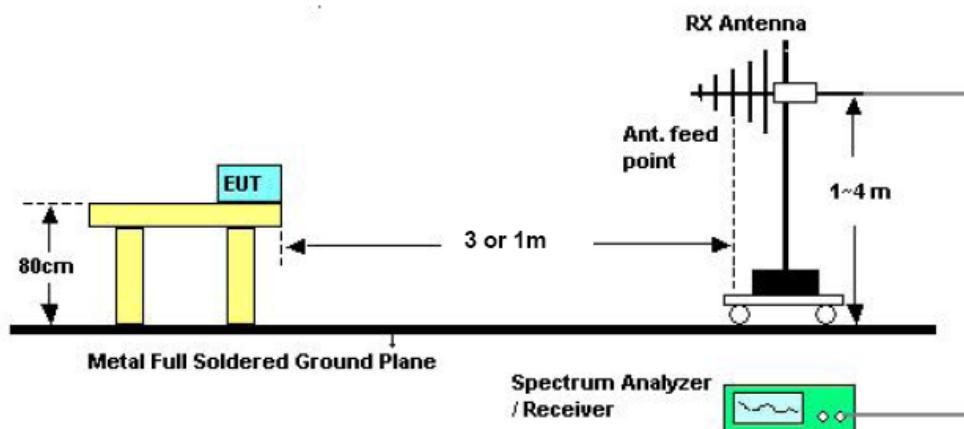

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);
Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

5.3. Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI	100443	2013/01/15	2014/01/14
Bilog Antenna	Schwarzbeck	VULB 9168	369	2013/03/06	2014/03/05
Amplifier	QuieTek	AP/0100A	CHM0906075	2013/01/15	2014/01/14
SPECTRUM ANALYZER	R&S	FSP40	100219	2012/09/13	2013/09/12
HORN ANTENNA	EMCO	3115	31601	2012/09/13	2013/09/12
PREAMPLIFIER	EMC	EMC012635	980029	2012/09/12	2013/09/11




5.4. Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

5.5. Test Result of Radiated Emission (30MHz ~ 1GHz)

Power	: DC 48V from PoE	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11ac VHT20, CH36	Temperature	: 25 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

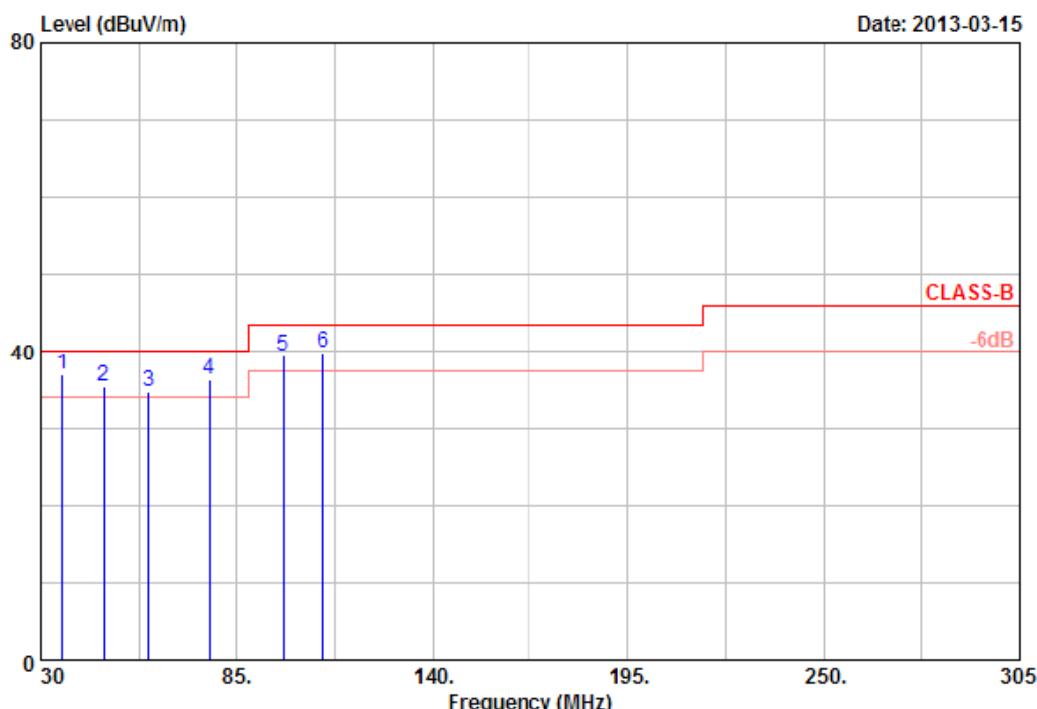


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	36.05	38.84	-1.94	36.90	40.00	-3.10	QP	100	360
2	47.88	39.93	-4.42	35.51	40.00	-4.49	QP	100	360
3	60.25	45.67	-10.86	34.81	40.00	-5.19	QP	100	360
4	77.30	45.09	-8.84	36.25	40.00	-3.75	QP	100	360
5	98.20	48.41	-8.99	39.42	43.50	-4.08	QP	100	360
6	109.20	47.22	-7.26	39.96	43.50	-3.54	QP	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a/an mode at Band1~4 channel are almost the same below 1GHz, so that the channel 36 or 38(for HT40), channel 149 or 151(for HT40) was chosen as representative in final test.
5. The data is worse case.



Power	:	DC 48V from PoE	Pol/Phase	:	VERTICAL
Test Mode 1	:	802.11ac VHT20, CH36	Temperature	:	25 °C
Memo	:	Model No. UAP-AC	Humidity	:	65 %

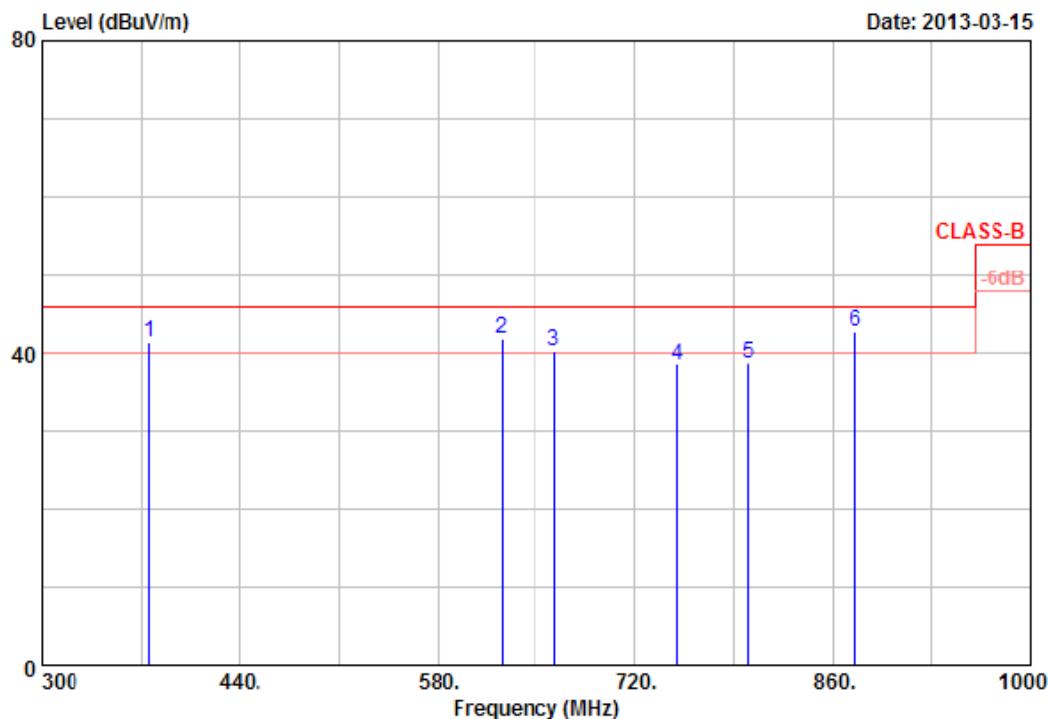


Item	Freq	Read		Result	Limit	Margin	Remark	Ant	Tab
		Value	Factor					Pos	Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	375.60	49.37	-7.95	41.42	46.00	-4.58	QP	100	0
2	625.50	41.39	0.57	41.96	46.00	-4.04	QP	100	0
3	662.60	41.57	-1.14	40.43	46.00	-5.57	QP	100	0
4	749.40	33.46	5.06	38.52	46.00	-7.48	Peak	100	0
5	800.50	33.17	5.56	38.73	46.00	-7.27	Peak	100	0
6	875.40	33.30	9.53	42.83	46.00	-3.17	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a/an mode at Band1~4 channel are almost the same below 1GHz, so that the channel 36 or 38(for HT40), channel 149 or 151(for HT40) was chosen as representative in final test.
5. The data is worse case.



Power	: DC 48V from PoE	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11ac VHT20, CH36	Temperature	: 25 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

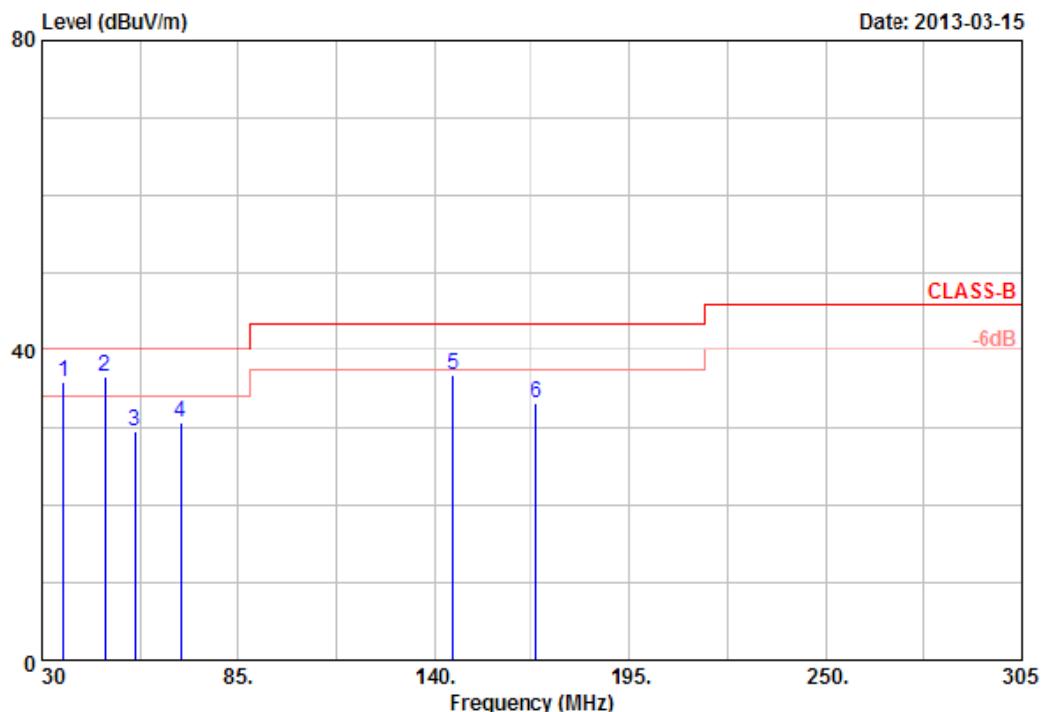


Item	Freq	Read		Result	Limit	Margin	Remark	Ant	Tab
		Value	Factor					Pos	Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	36.05	42.57	-6.78	35.79	40.00	-4.21	QP	100	360
2	47.88	45.35	-8.70	36.65	40.00	-3.35	QP	100	360
3	56.13	42.74	-12.99	29.75	40.00	-10.25	Peak	100	360
4	69.05	52.09	-21.36	30.73	40.00	-9.27	Peak	100	360
5	145.50	51.52	-14.65	36.87	43.50	-6.63	Peak	100	360
6	168.88	45.42	-12.17	33.25	43.50	-10.25	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a/an mode at Band1~4 channel are almost the same below 1GHz, so that the channel 36 or 38(for HT40), channel 149 or 151(for HT40) was chosen as representative in final test.
5. The data is worse case.



Power	:	DC 48V from PoE	Pol/Phase	:	HORIZONTAL
Test Mode 1	:	802.11ac VHT20, CH36	Temperature	:	25 °C
Memo	:	Model No. UAP-AC	Humidity	:	65 %

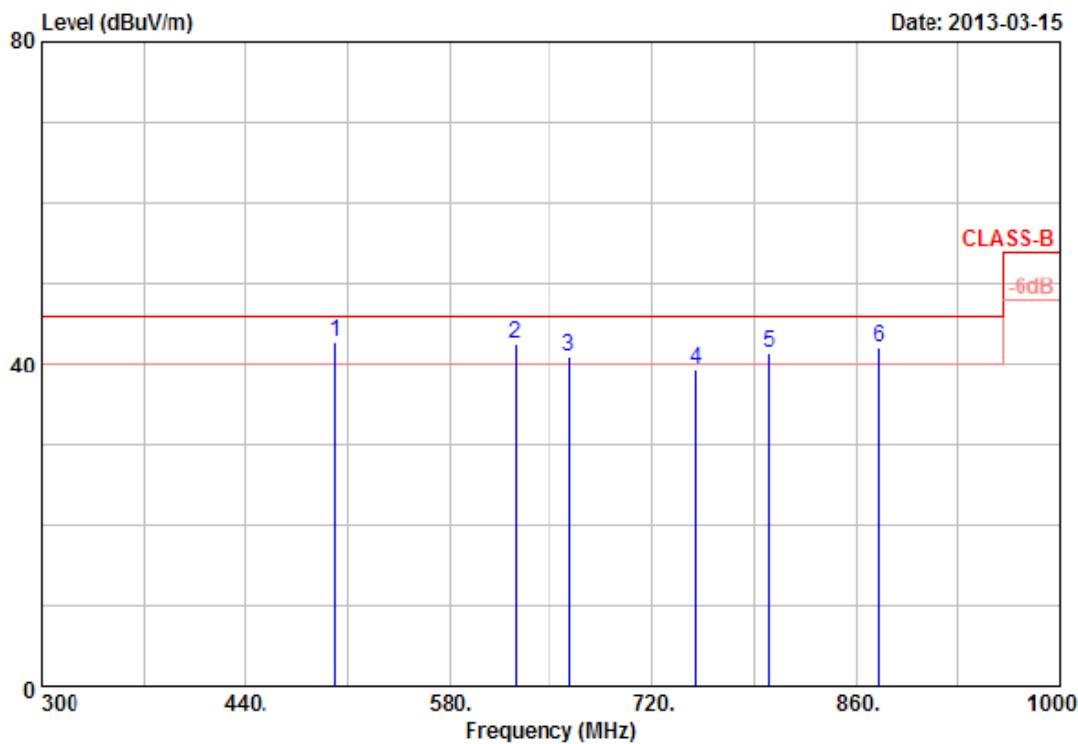


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	501.60	42.68	0.10	42.78	46.00	-3.22	QP	100	0
2	625.50	38.27	4.23	42.50	46.00	-3.50	QP	100	0
3	662.60	41.31	-0.27	41.04	46.00	-4.96	QP	100	0
4	749.40	36.86	2.67	39.53	46.00	-6.47	Peak	100	0
5	800.50	35.27	6.14	41.41	46.00	-4.59	QP	100	0
6	875.40	37.34	4.88	42.22	46.00	-3.78	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a/an mode at Band1~4 channel are almost the same below 1GHz, so that the channel 36 or 38(for HT40), channel 149 or 151(for HT40) was chosen as representative in final test.
5. The data is worse case.



Power	: DC 48V from PoE	Pol/Phase	: VERTICAL
Test Mode 2	: 802.11ac VHT40, CH38	Temperature	: 25 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

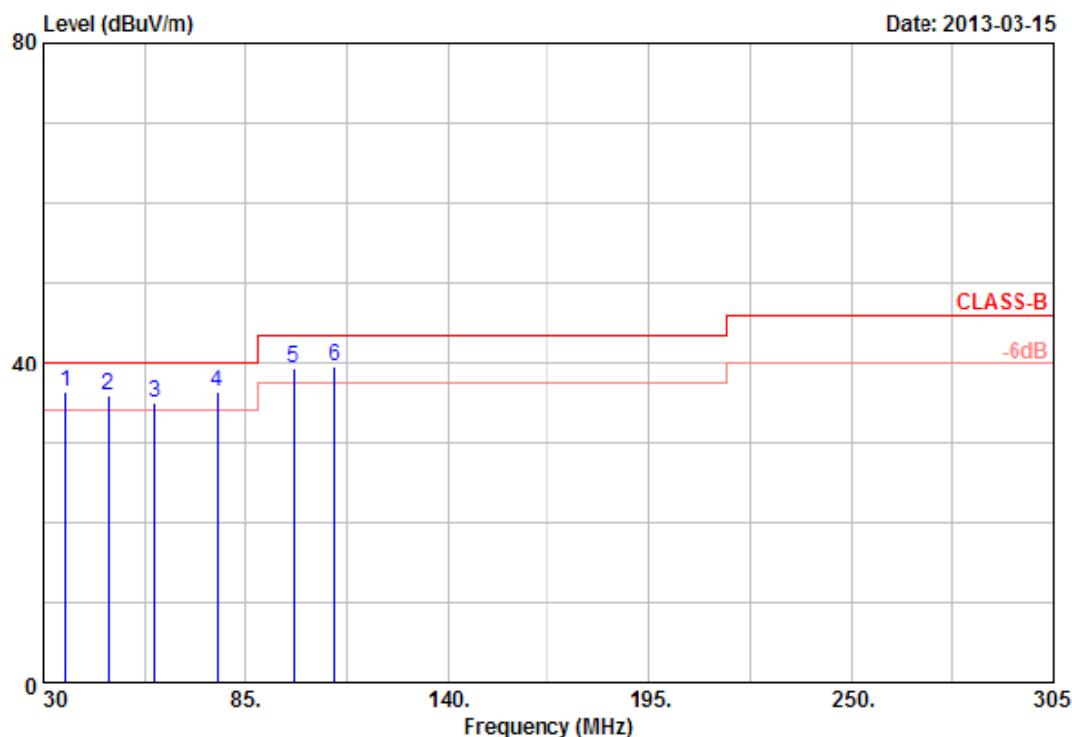


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	36.05	38.26	-1.94	36.32	40.00	-3.68	QP	100	360
2	47.88	40.25	-4.42	35.83	40.00	-4.17	QP	100	360
3	60.25	45.90	-10.86	35.04	40.00	-4.96	QP	100	360
4	77.30	45.05	-8.84	36.21	40.00	-3.79	QP	100	360
5	98.20	48.47	-8.99	39.48	43.50	-4.02	QP	100	360
6	109.20	46.97	-7.26	39.71	43.50	-3.79	QP	100	360

Notes:

1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
 4. According to technical experiences, all spurious emission of 802.11a/an mode at Band1~4 channel are almost the same below 1GHz, so that the channel 36 or 38(for HT40), channel 149 or 151(for HT40) was chosen as representative in final test.
 5. The data is worse case.



Power	:	DC 48V from PoE	Pol/Phase	:	VERTICAL
Test Mode 2	:	802.11ac VHT40, CH38	Temperature	:	25 °C
Memo	:	Model No. UAP-AC	Humidity	:	65 %

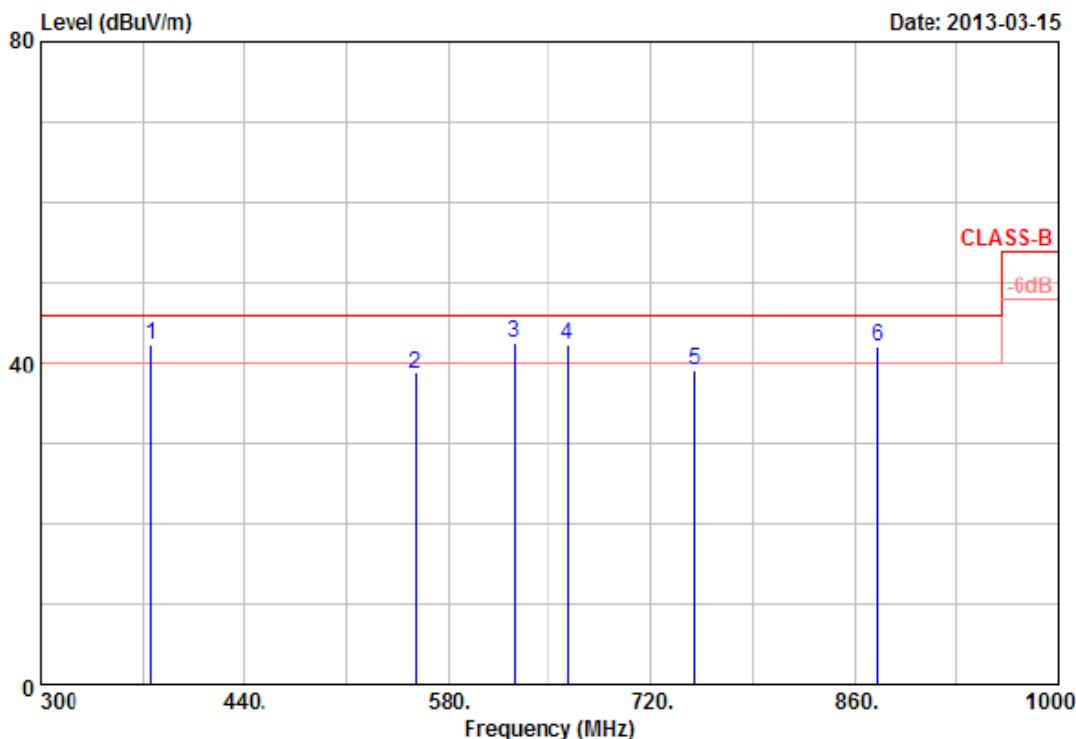


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	375.60	50.24	-7.95	42.29	46.00	-3.71	QP	100	0
2	557.60	31.38	7.38	38.76	46.00	-7.24	Peak	100	0
3	625.50	41.89	0.57	42.46	46.00	-3.54	QP	100	0
4	662.60	43.47	-1.14	42.33	46.00	-3.67	QP	100	0
5	749.40	34.15	5.06	39.21	46.00	-6.79	Peak	100	0
6	875.40	32.58	9.53	42.11	46.00	-3.89	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a/an mode at Band1~4 channel are almost the same below 1GHz, so that the channel 36 or 38(for HT40), channel 149 or 151(for HT40) was chosen as representative in final test.
5. The data is worse case.



Power	:	DC 48V from PoE	Pol/Phase	:	HORIZONTAL
Test Mode 2	:	802.11ac VHT40, CH38	Temperature	:	25 °C
Memo	:	Model No. UAP-AC	Humidity	:	65 %

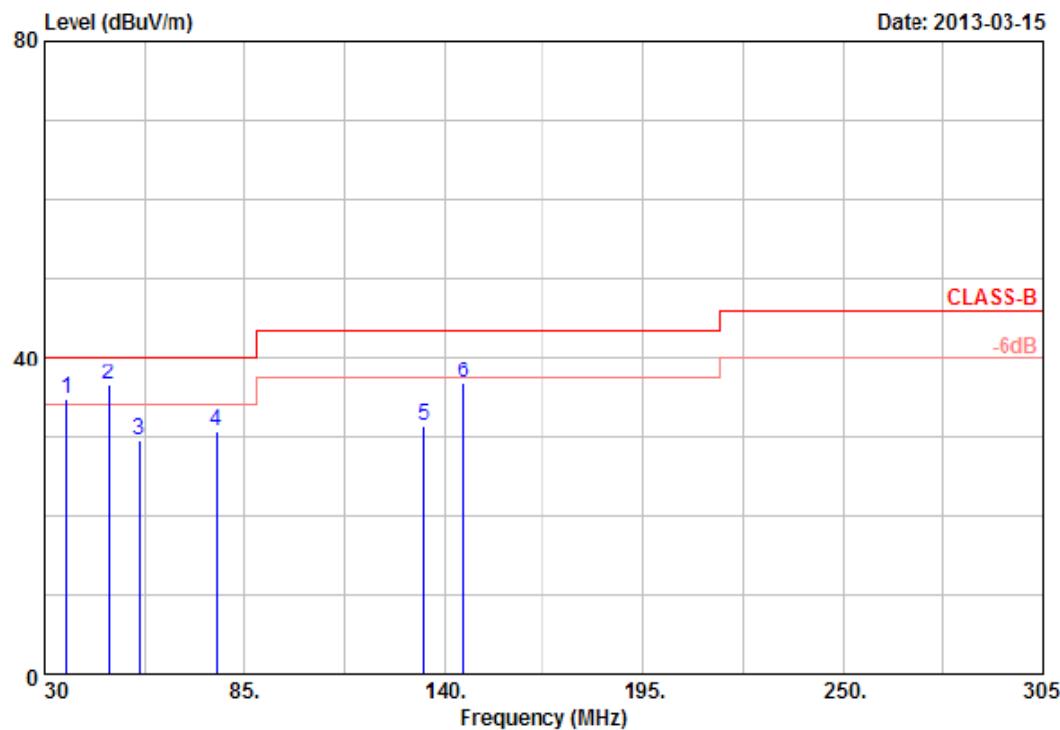

Item	Freq	Read		Result	Limit	Margin	Remark	Ant	Tab
		Value	Factor					Pos	Pos


	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	36.05	41.45	-6.78	34.67	40.00	-5.33	QP	100	360
2	47.88	45.14	-8.70	36.44	40.00	-3.56	QP	100	360
3	56.13	42.54	-12.99	29.55	40.00	-10.45	Peak	100	360
4	77.30	50.57	-19.83	30.74	40.00	-9.26	Peak	100	360
5	134.50	46.31	-14.98	31.33	43.50	-12.17	Peak	100	360
6	145.50	51.32	-14.65	36.67	43.50	-6.83	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a/an mode at Band1~4 channel are almost the same below 1GHz, so that the channel 36 or 38(for HT40), channel 149 or 151(for HT40) was chosen as representative in final test.
5. The data is worse case.



Power	:	DC 48V from PoE	Pol/Phase	:	HORIZONTAL
Test Mode 2	:	802.11ac VHT40, CH38	Temperature	:	25 °C
Memo	:	Model No. UAP-AC	Humidity	:	65 %

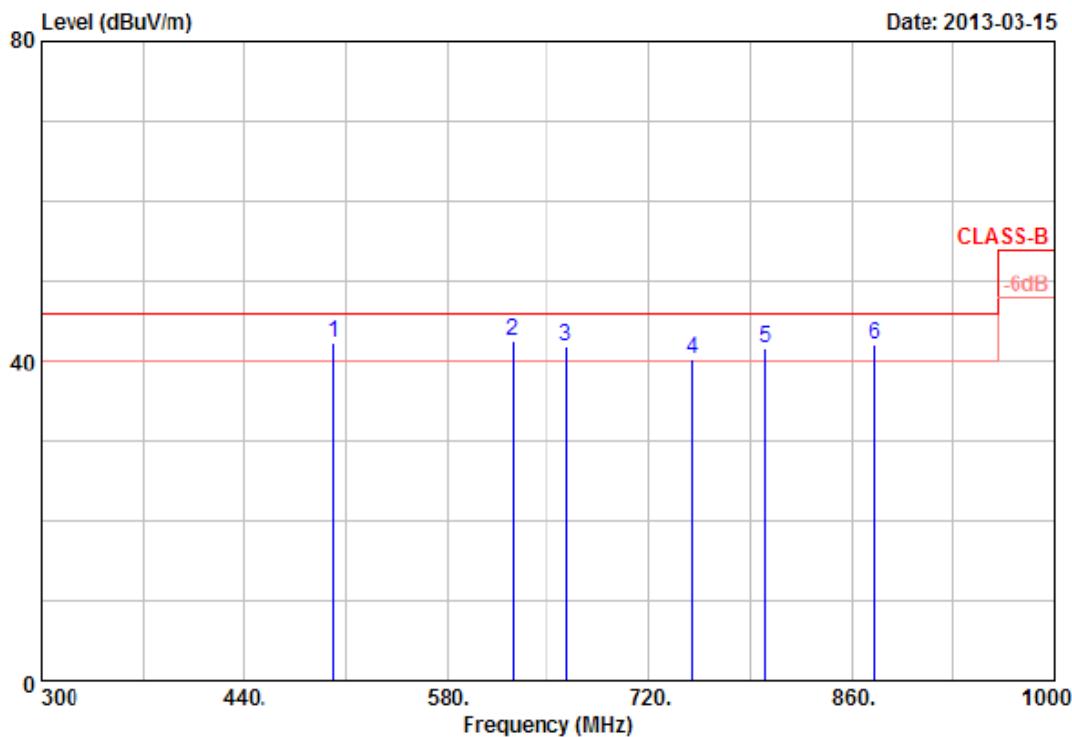


Item	Freq	Read			Margin	Remark	Ant	Tab
		Value	Factor	Result				
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	Deg
1	501.60	42.28	0.10	42.38	46.00	-3.62	QP	100 0
2	625.50	38.34	4.23	42.57	46.00	-3.43	QP	100 0
3	662.60	42.18	-0.27	41.91	46.00	-4.09	QP	100 0
4	749.40	37.64	2.67	40.31	46.00	-5.69	QP	100 0
5	800.50	35.45	6.14	41.59	46.00	-4.41	QP	100 0
6	875.40	37.24	4.88	42.12	46.00	-3.88	QP	100 0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a/an mode at Band1~4 channel are almost the same below 1GHz, so that the channel 36 or 38(for HT40), channel 149 or 151(for HT40) was chosen as representative in final test.
5. The data is worse case.



Power	:	DC 48V from PoE	Pol/Phase	:	VERTICAL
Test Mode 3	:	802.11ac VHT80, CH42	Temperature	:	25 °C
Memo	:	Model No. UAP-AC	Humidity	:	65 %

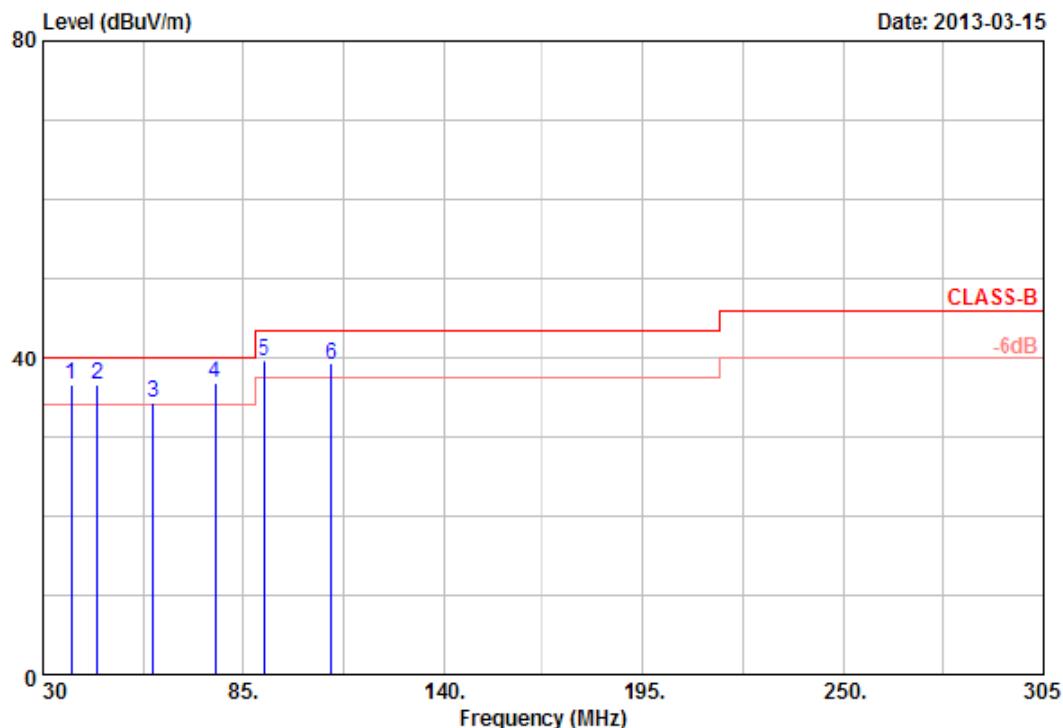

Item	Freq	Read		Result	Limit	Margin	Remark	Ant	Tab
		Value	Factor					Pos	Pos


	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	37.70	38.41	-1.78	36.63	40.00	-3.37	QP	100	360
2	45.13	37.89	-1.24	36.65	40.00	-3.35	QP	100	360
3	60.25	45.17	-10.86	34.31	40.00	-5.69	QP	100	360
4	77.30	45.71	-8.84	36.87	40.00	-3.13	QP	100	360
5	91.05	48.52	-8.78	39.74	43.50	-3.76	QP	100	360
6	109.20	46.55	-7.26	39.29	43.50	-4.21	QP	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a/an mode at Band1~4 channel are almost the same below 1GHz, so that the channel 36 or 38(for HT40), channel 149 or 151(for HT40) was chosen as representative in final test.
5. The data is worse case.



Power	: DC 48V from PoE	Pol/Phase	: VERTICAL
Test Mode 3	: 802.11ac VHT80, CH42	Temperature	: 25 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

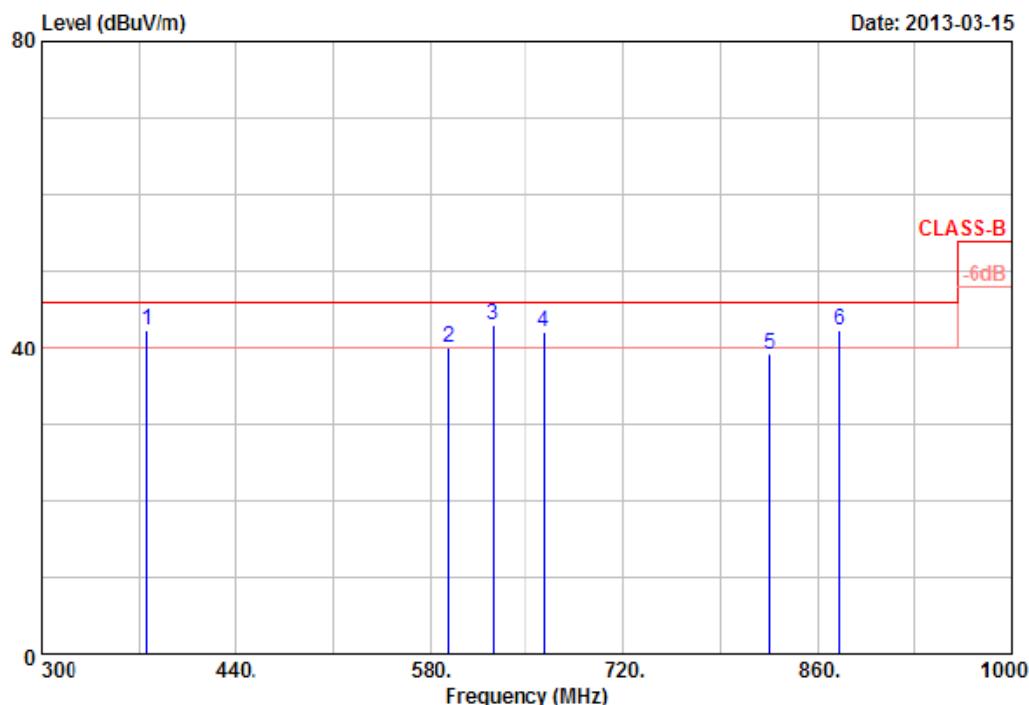


Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a/an mode at Band1~4 channel are almost the same below 1GHz, so that the channel 36 or 38(for HT40), channel 149 or 151(for HT40) was chosen as representative in final test.
5. The data is worse case.



Power	:	DC 48V from PoE	Pol/Phase	:	HORIZONTAL
Test Mode 3	:	802.11ac VHT80, CH42	Temperature	:	25 °C
Memo	:	Model No. UAP-AC	Humidity	:	65 %

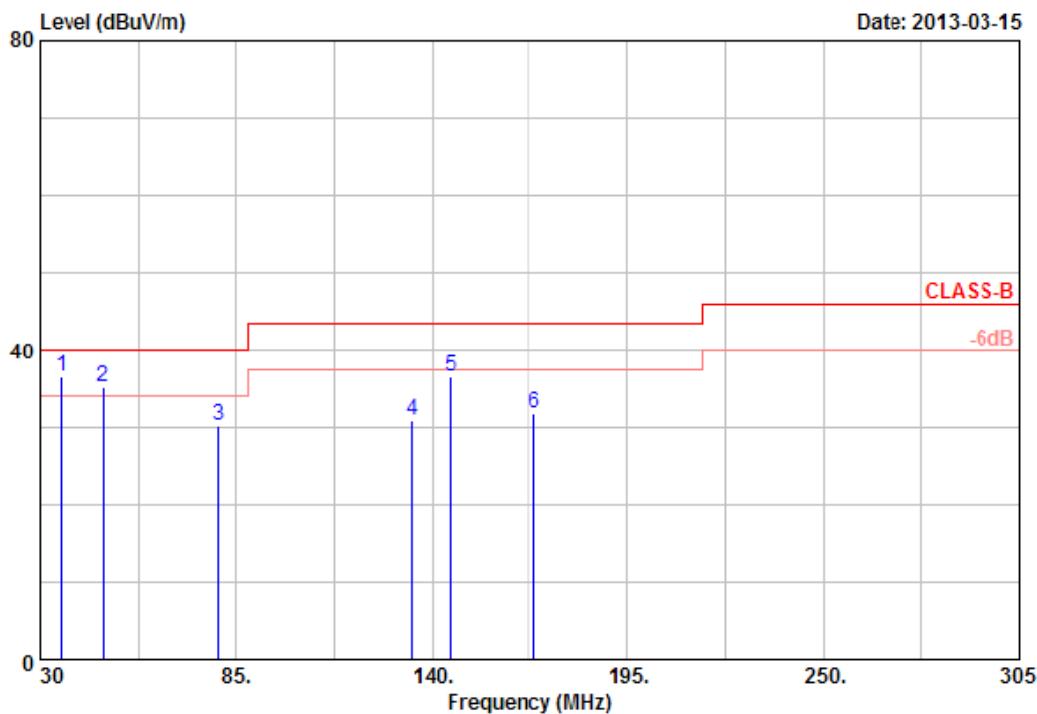


Item	Freq	Read		Result	Limit	Margin	Remark	Ant	Tab
		Value	Factor					Pos	Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	36.05	43.29	-6.78	36.51	40.00	-3.49	QP	100	360
2	47.88	43.88	-8.70	35.18	40.00	-4.82	QP	100	360
3	80.05	48.96	-18.63	30.33	40.00	-9.67	Peak	100	360
4	134.50	45.91	-14.98	30.93	43.50	-12.57	Peak	100	360
5	145.50	51.18	-14.65	36.53	43.50	-6.97	Peak	100	360
6	168.00	44.01	-12.17	31.84	43.50	-11.66	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a/an mode at Band1~4 channel are almost the same below 1GHz, so that the channel 36 or 38(for HT40), channel 149 or 151(for HT40) was chosen as representative in final test.
5. The data is worse case.



Power	: DC 48V from PoE	Pol/Phase	: HORIZONTAL
Test Mode 3	: 802.11ac VHT80, CH42	Temperature	: 25 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

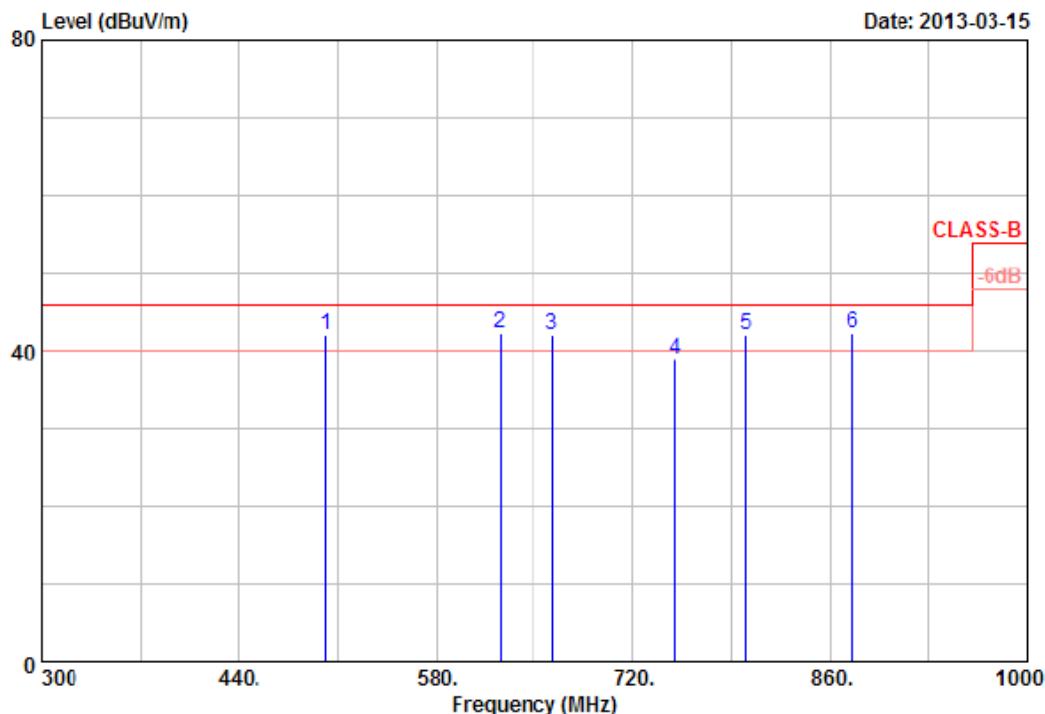

Item	Freq	Read		Result	Limit	Margin	Remark	Ant	Tab
		Value	Factor					Pos	Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	501.60	42.08	0.10	42.18	46.00	-3.82	QP	100	0
2	625.50	38.08	4.23	42.31	46.00	-3.69	QP	100	0
3	662.60	42.37	-0.27	42.10	46.00	-3.90	QP	100	0
4	749.40	36.25	2.67	38.92	46.00	-7.08	Peak	100	0
5	800.50	35.99	6.14	42.13	46.00	-3.87	QP	100	0
6	875.40	37.54	4.88	42.42	46.00	-3.58	QP	100	0


Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a/an mode at Band1~4 channel are almost the same below 1GHz, so that the channel 36 or 38(for HT40), channel 149 or 151(for HT40) was chosen as representative in final test.
5. The data is worse case.



5.6. Test Result of Radiated Emission (Above 1GHz)


Power	: DC 48V from PoE	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11ac VHT20, CH36	Temperature	: 22 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

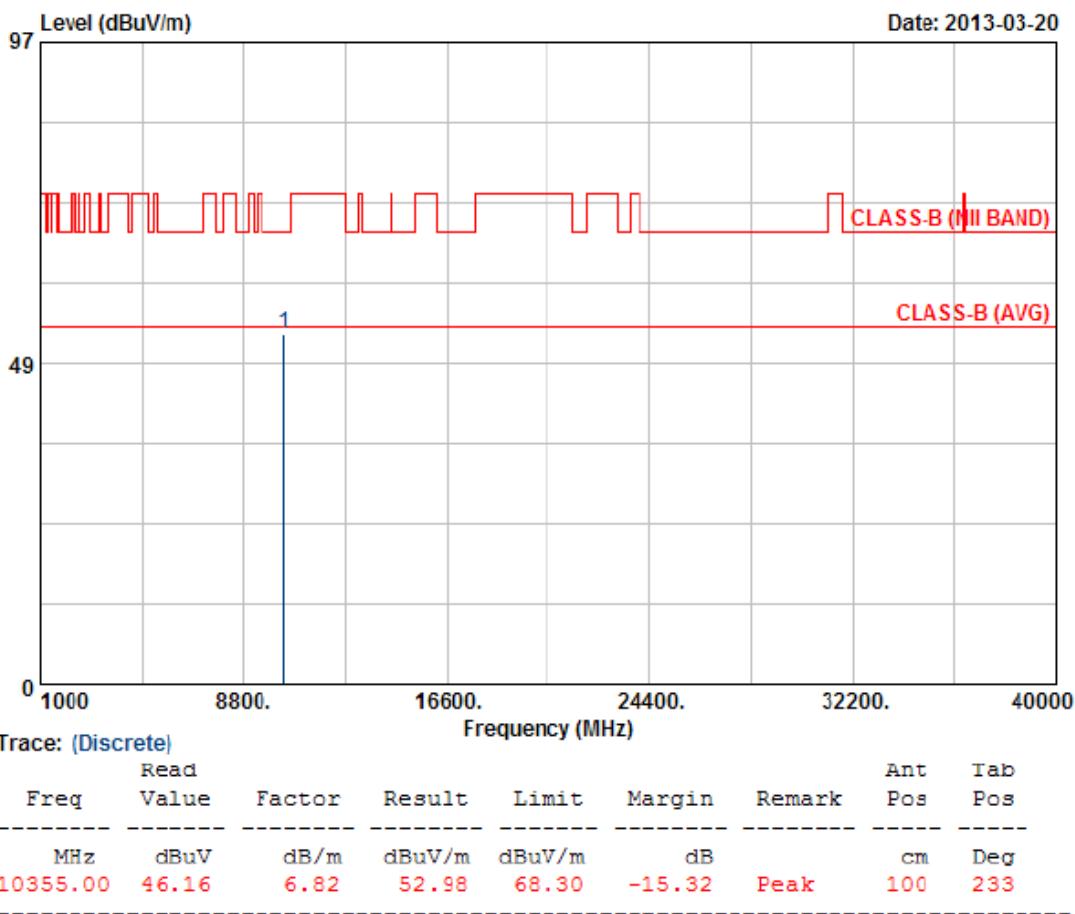

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: DC 48V from PoE	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11ac VHT20, CH36	Temperature	: 22 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

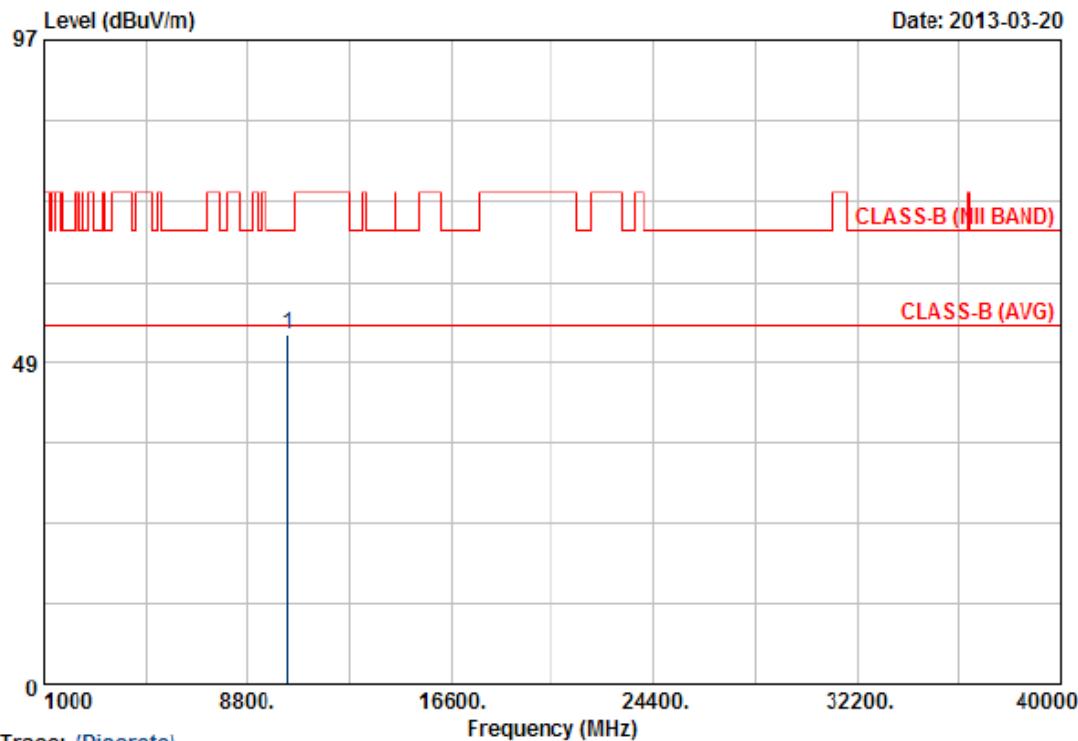


Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: DC 48V from PoE	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11ac VHT20, CH44	Temperature	: 22 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

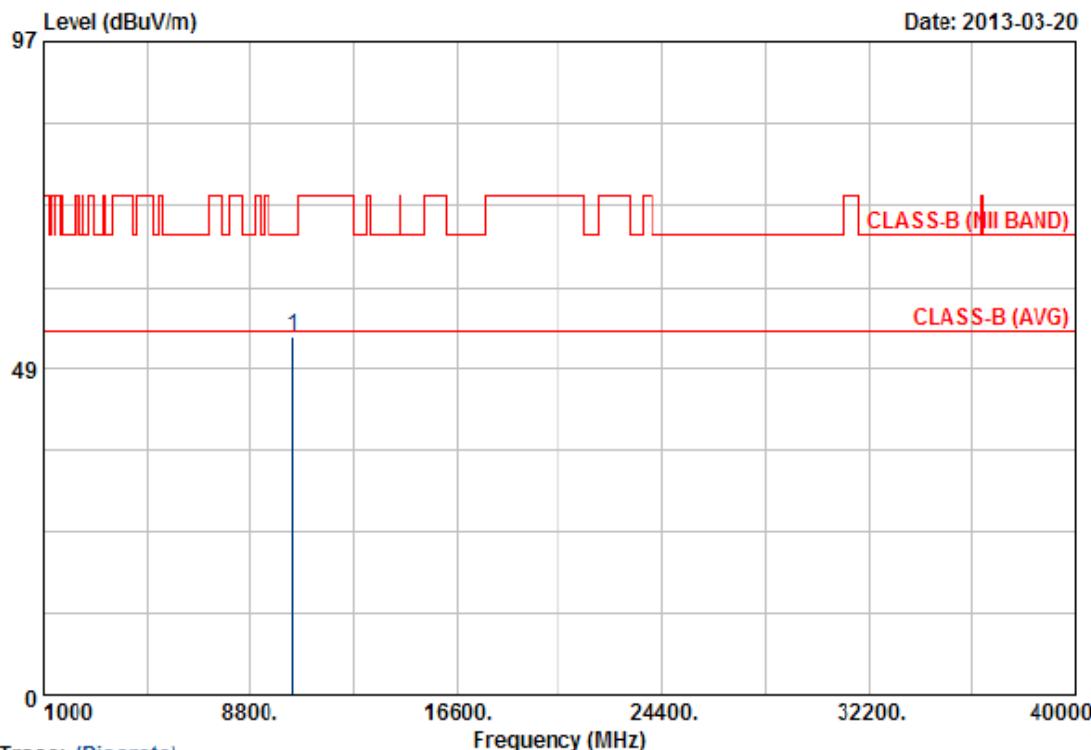


Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: DC 48V from PoE	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11ac VHT20, CH44	Temperature	: 22 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

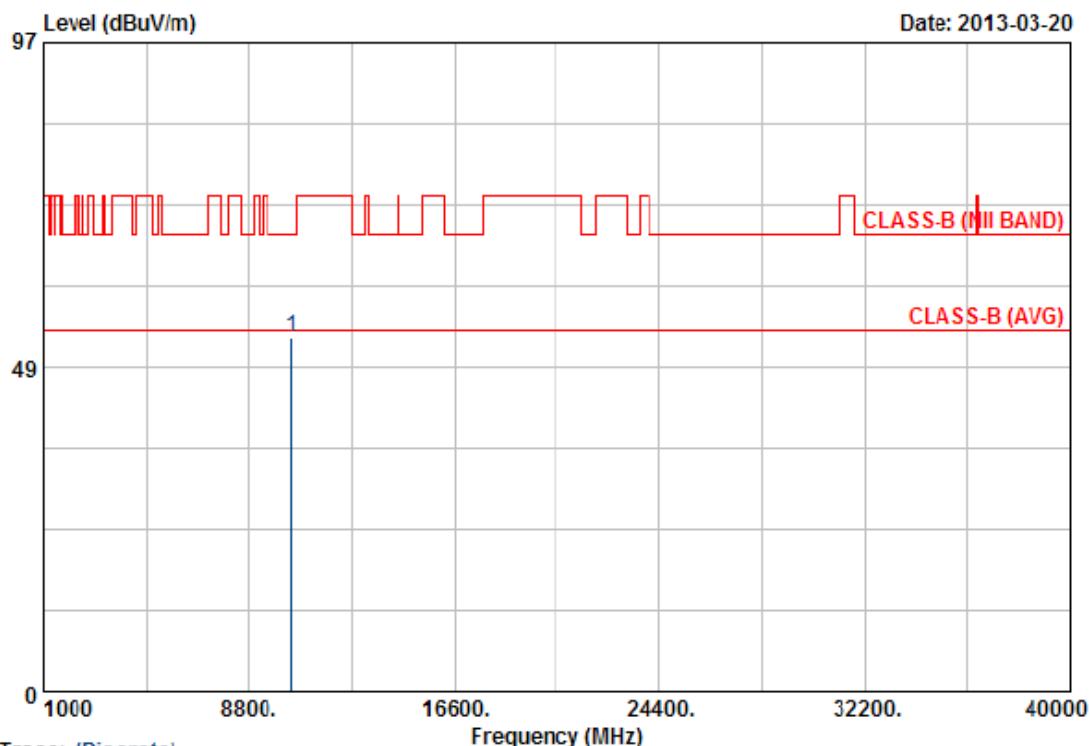


Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	:	DC 48V from PoE	Pol/Phase	:	VERTICAL
Test Mode 1	:	802.11ac VHT20, CH48	Temperature	:	22 °C
Memo	:	Model No. UAP-AC	Humidity	:	65 %

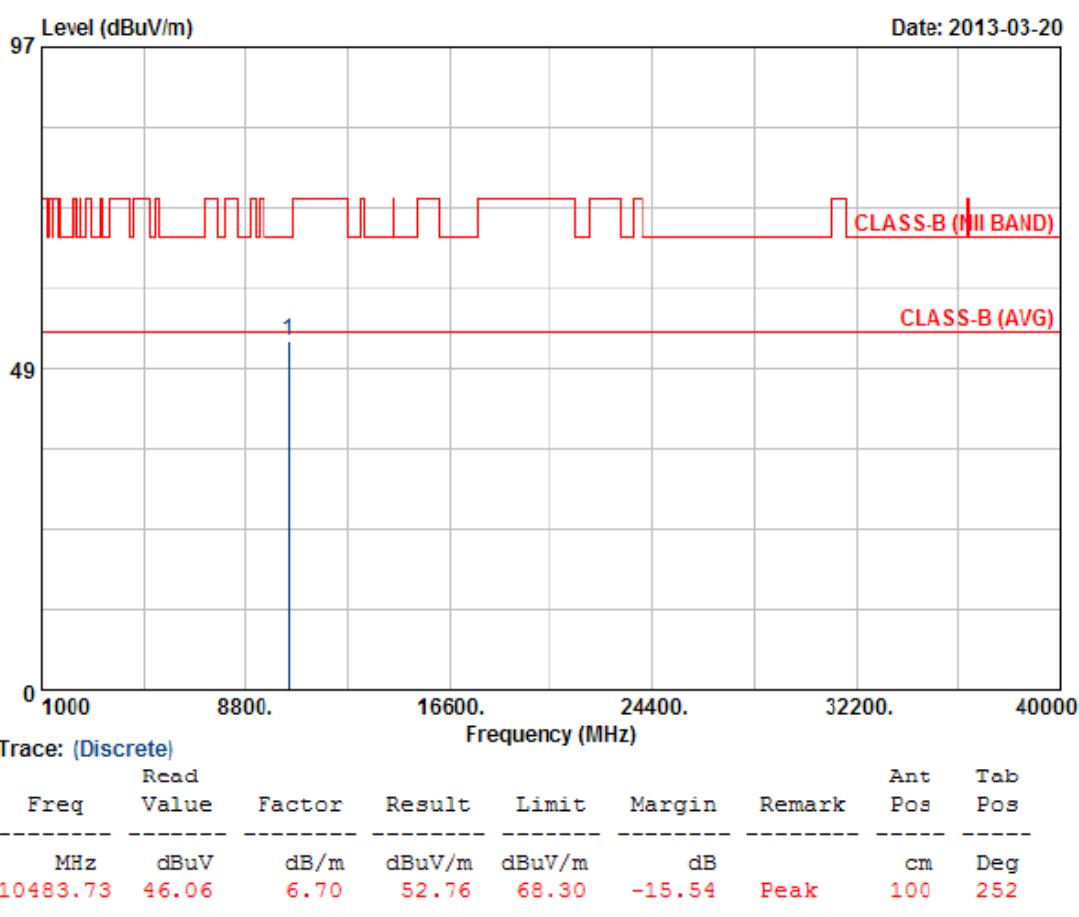


Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: DC 48V from PoE	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11ac VHT20, CH48	Temperature	: 22 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

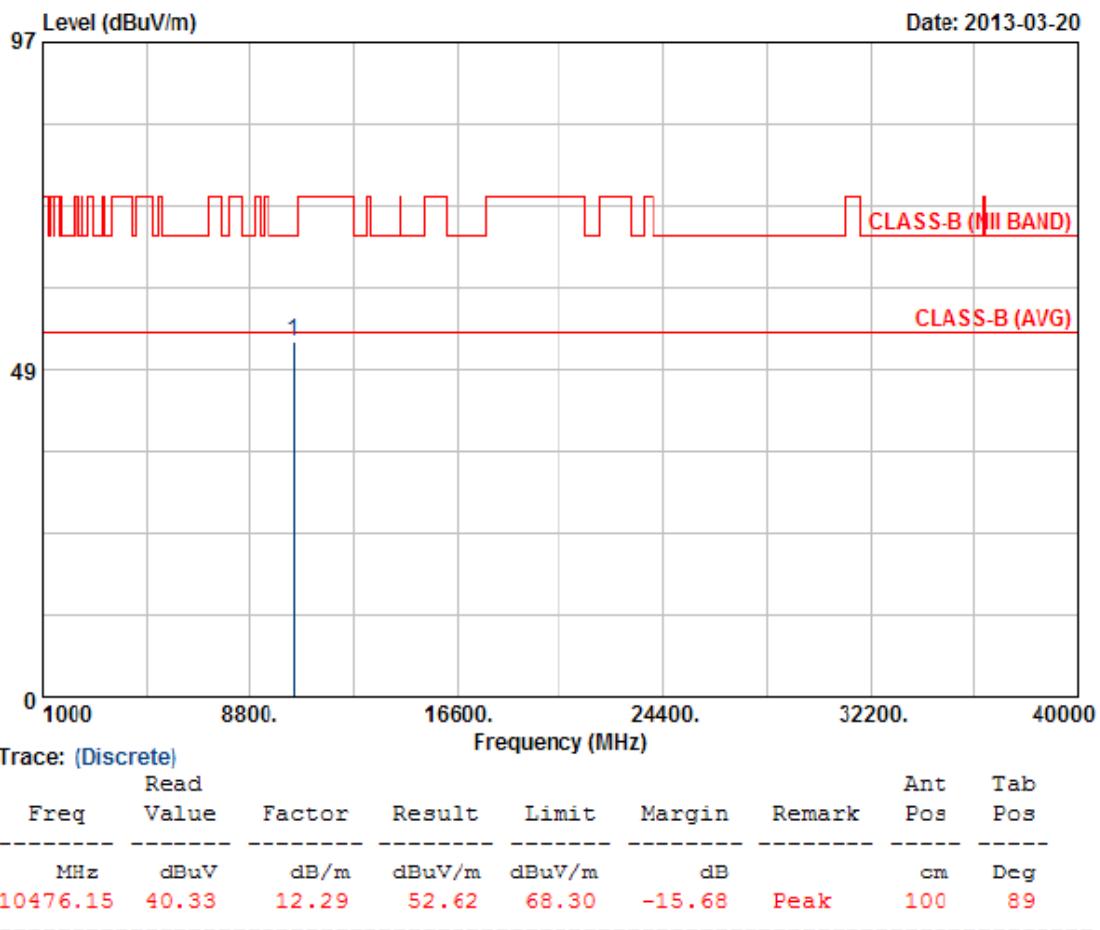


Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: DC 48V from PoE	Pol/Phase	: VERTICAL
Test Mode 2	: 802.11ac VHT40, CH38	Temperature	: 22 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

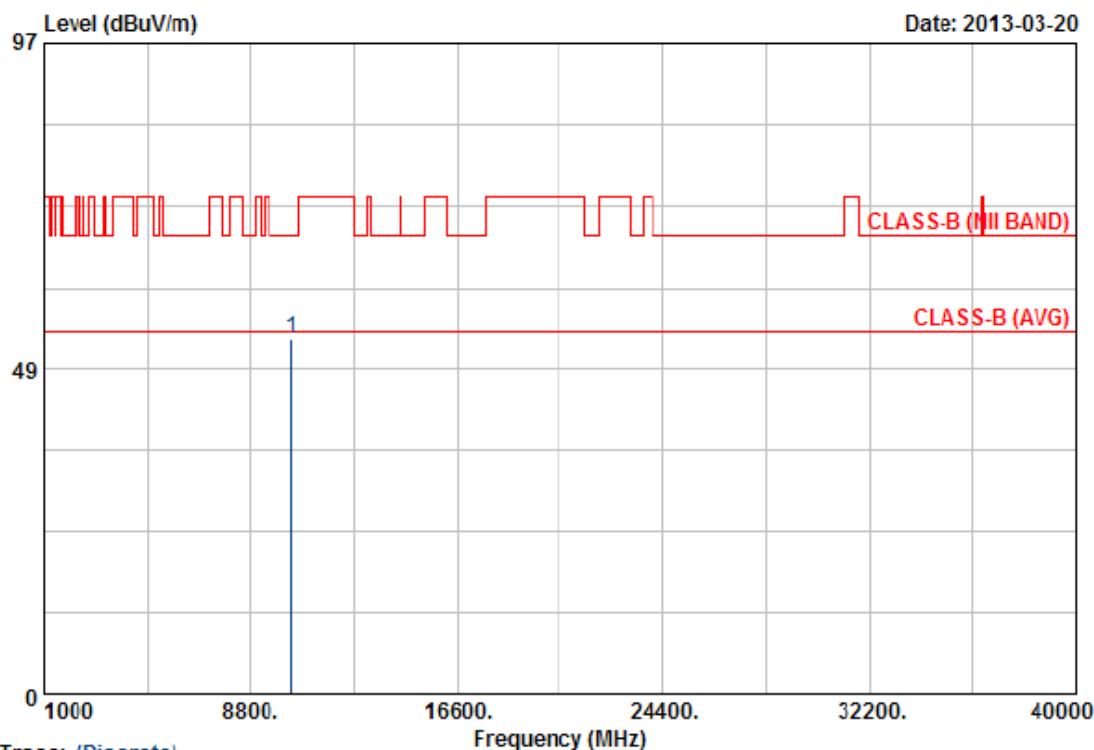


Item	Freq	Read		Result	Limit	Margin	Remark	Ant Pos	Tab Pos
		Value	Factor						
1	10383.54	46.43	6.59	53.02	68.30	-15.28	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.




Power	: DC 48V from PoE	Pol/Phase	: HORIZONTAL
Test Mode 2	: 802.11ac VHT40, CH38	Temperature	: 22 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

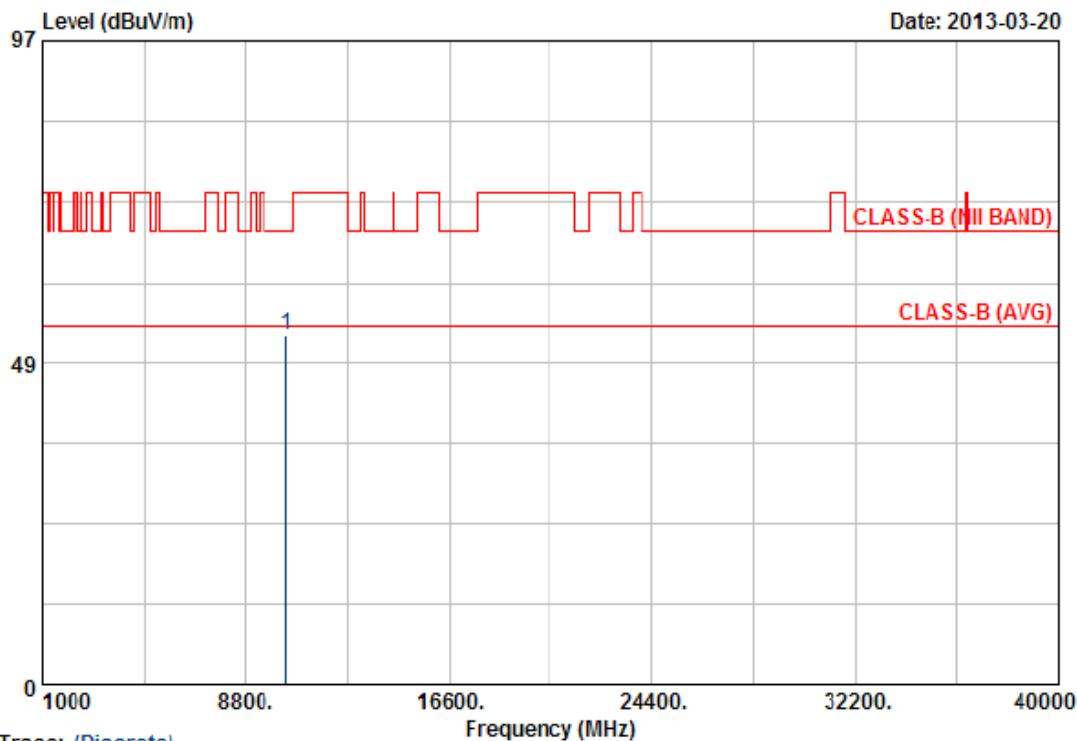**Notes:**

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: DC 48V from PoE	Pol/Phase	: VERTICAL
Test Mode 2	: 802.11ac VHT40, CH46	Temperature	: 22 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

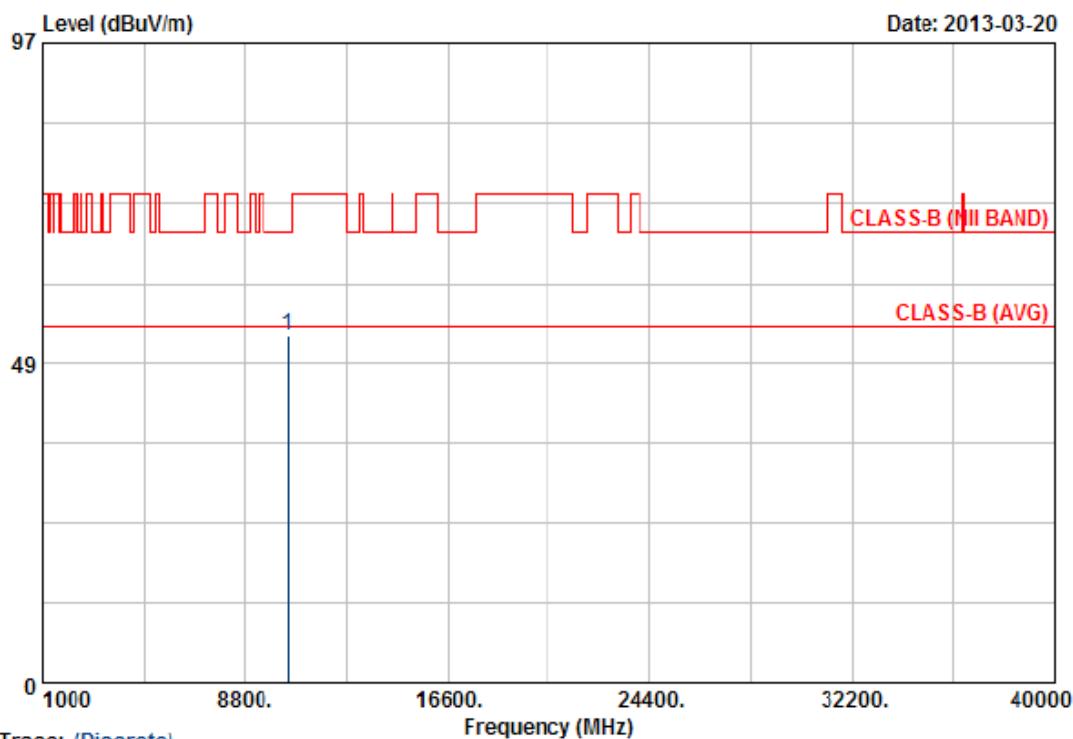

Trace: (Discrete)


Item	Freq	Read	Factor	Result	Limit	Margin	Remark	Ant	Tab
		Value		dB/m	dBuV/m	dBuV/m		cm	Deg
1	10460.42	46.03	6.64	52.67	68.30	-15.63	Peak	100	133

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.




Power	: DC 48V from PoE	Pol/Phase	: HORIZONTAL
Test Mode 2	: 802.11ac VHT40, CH46	Temperature	: 22 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

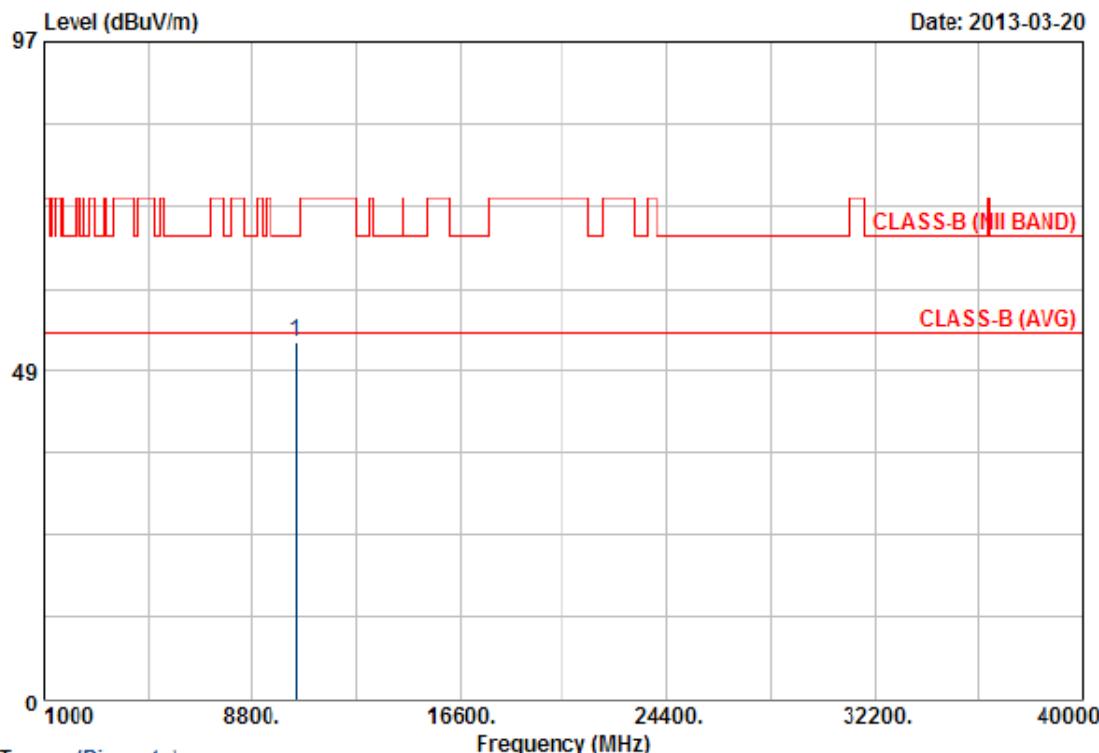**Notes:**

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: DC 48V from PoE	Pol/Phase	: VERTICAL
Test Mode 3	: 802.11ac VHT80, CH42	Temperature	: 22 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

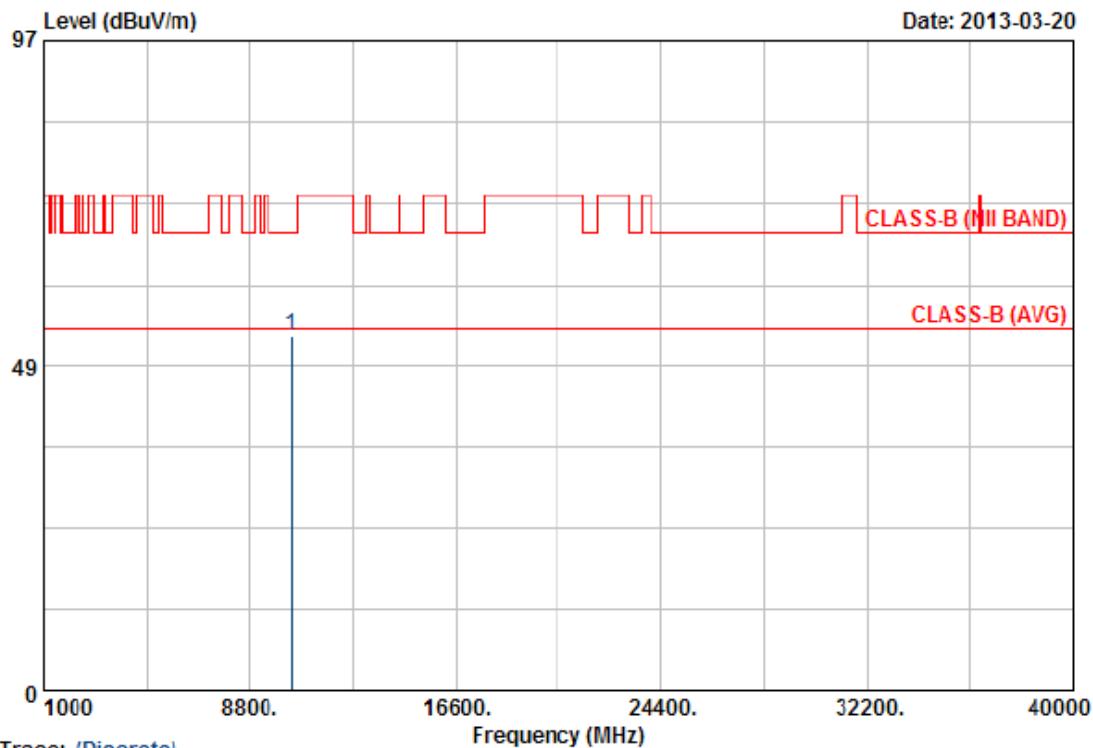


Item	Freq	Read		Result	Limit	Margin	Remark	Ant	Tab
		Value	Factor					Pos	Pos
1	10420.30	46.40	6.52	52.92	68.30	-15.38	Peak	100	133

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: DC 48V from PoE	Pol/Phase	: HORIZONTAL
Test Mode 3	: 802.11ac VHT80, CH42	Temperature	: 22 °C
Memo	: Model No. UAP-AC	Humidity	: 65 %

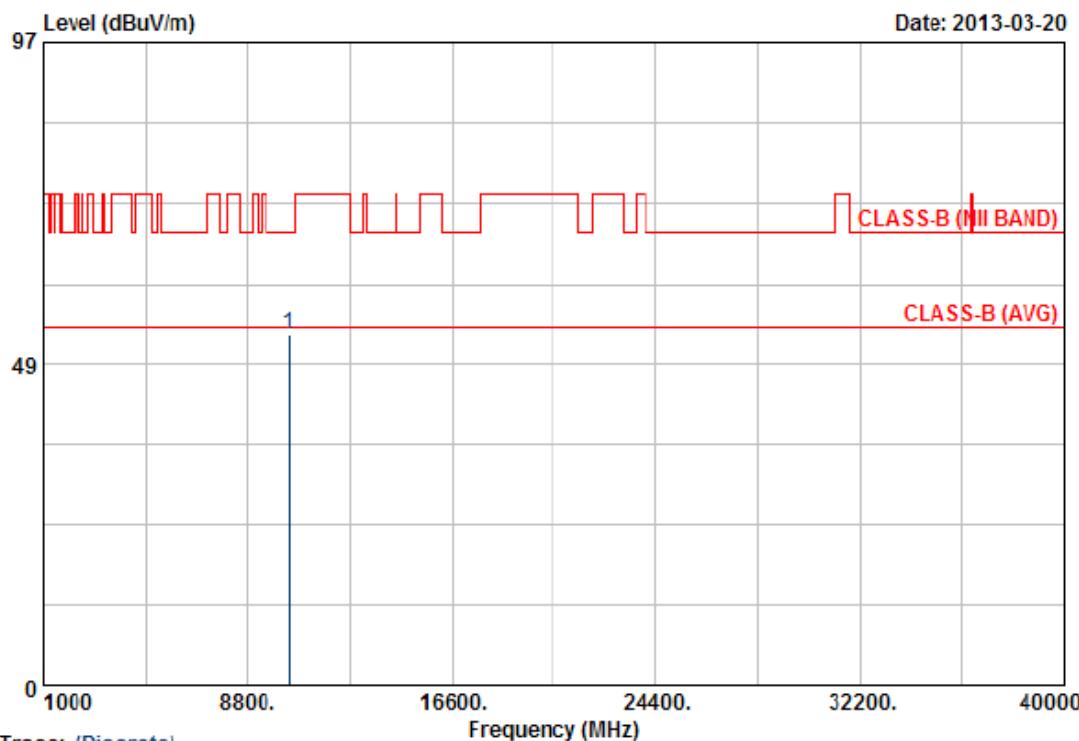

Item	Freq	Read		Result	Limit	Margin	Remark	Ant	Tab
		Value	Factor						
1	10420.04	40.52	12.52	53.04	68.30	-15.26	Peak	100	118

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.




6. Peak Transmit Power

6.1. Test Procedure

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.
3. Set detector mode to RMS, trace average 100 traces in power averaging mode.
4. Use the spectrum analyzer's integrated band power measurement function with band limits set equal to the EBW band edges.
5. The peak transmit power was measured and recorded.

6.2. Test Setup Layout

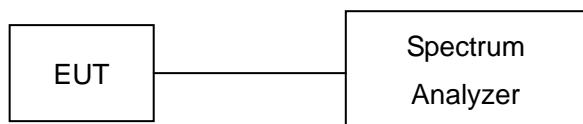

6.3. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2012/03/01	2013/02/28
SERIES POWER METER	ANRITSU	ML2495A	1224005	2012/06/22	2013/06/21
POWER SENSOR	ANRITSU	MA2411B	1207295	2012/07/09	2013/07/08



6.4. Test Result and Data

Test Date: Feb. 26, 2013

Temperature: 22°C

Atmospheric pressure: 1020 hPa

Humidity: 65%

Modulation Standard: IEEE 802.11ac VHT20 (6.5Mbps)

Channel	Frequency (MHz)	Peak Power Output (dBm)				Peak Power Output (mW)
		ANT R	ANT M	ANT L	Total	
36	5180	3.74	5.21	6.32	9.99	9.97
44	5220	4.46	5.28	6.52	10.27	10.65
48	5240	4.55	5.45	6.03	10.16	10.37

Channel	Frequency (MHz)	26dB Occupied Bandwidth (MHz)		
		ANT R	ANT M	ANT L
36	5180	21.1	20.6	20.6
44	5220	21.0	20.7	20.7
48	5240	20.8	20.6	20.6

Modulation Standard: IEEE 802.11ac VHT40 (13.5Mbps)

Channel	Frequency (MHz)	Peak Power Output (dBm)				Peak Power Output (mW)
		ANT R	ANT M	ANT L	Total	
38	5190	6.29	6.77	7.60	11.69	14.76
46	5230	6.13	6.52	7.43	11.50	14.12

Channel	Frequency (MHz)	26dB Occupied Bandwidth (MHz)		
		ANT R	ANT M	ANT L
38	5190	40.0	39.4	39.6
46	5230	39.8	39.6	39.6



Modulation Standard: IEEE 802.11ac VHT80 (29.3Mbps)

Channel	Frequency (MHz)	Peak Power Output (dBm)				Peak Power Output (mW)
		ANT R	ANT M	ANT L	Total	
42	5210	5.49	6.54	7.53	11.37	13.71

Channel	Frequency (MHz)	26dB Occupied Bandwidth (MHz)		
		ANT R	ANT M	ANT L
42	5210	81.6	80.0	81.2


Limit:

Frequency Band	Limit
5.15 – 5.25 GHz	The lesser of 50mW(17dBm) or 4dBm + 10logB
B is the 26dB emission bandwidth in MHz.	




Peak Output Power

Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT R
Channel: 42

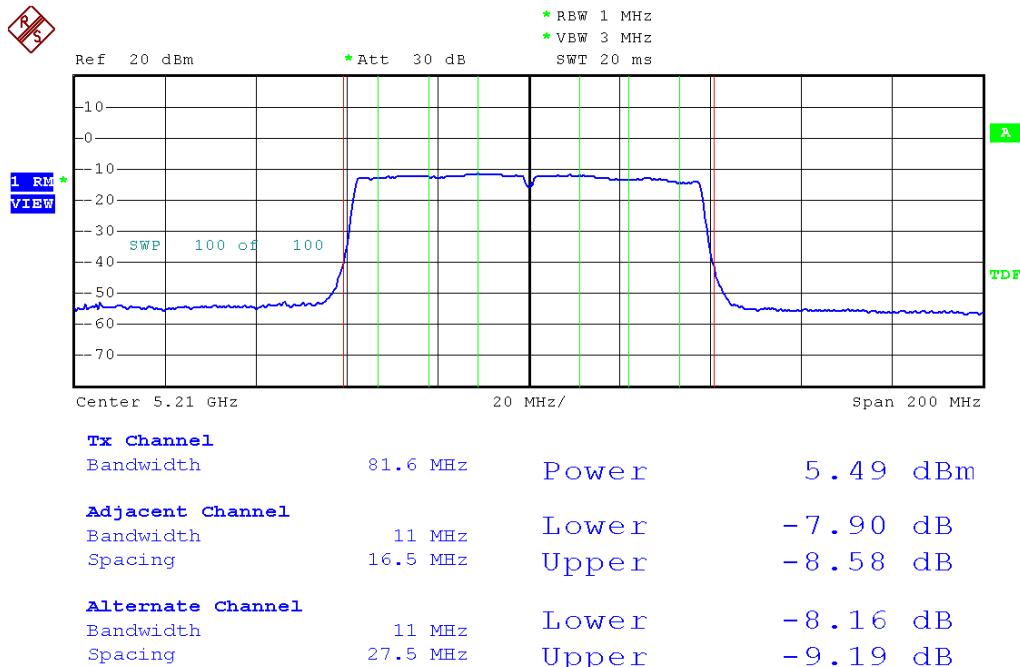


Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT M
Channel: 42

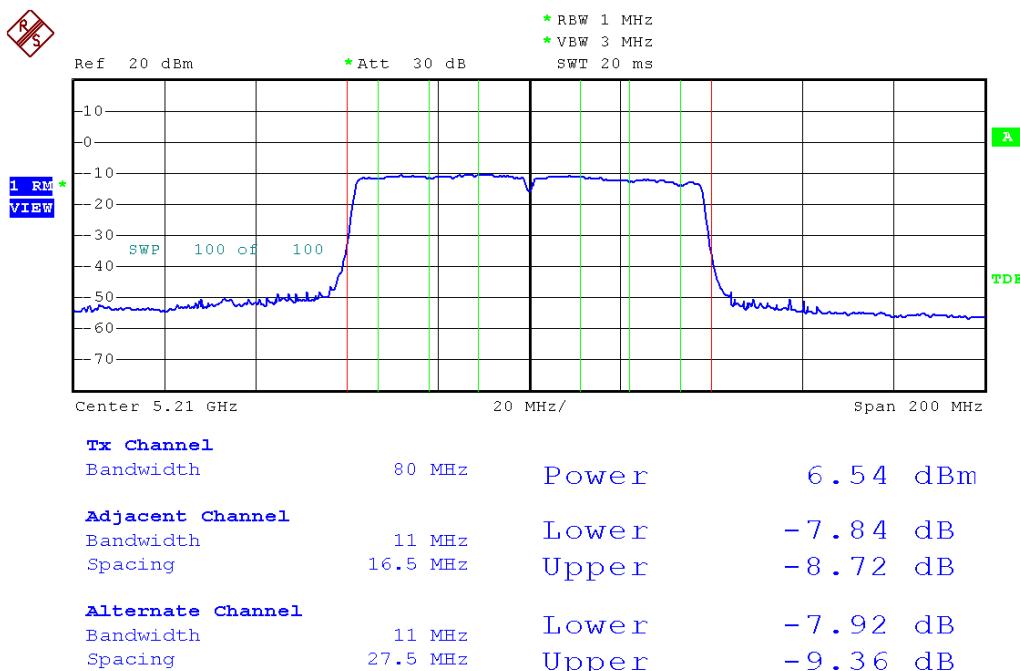




Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT L
Channel: 42

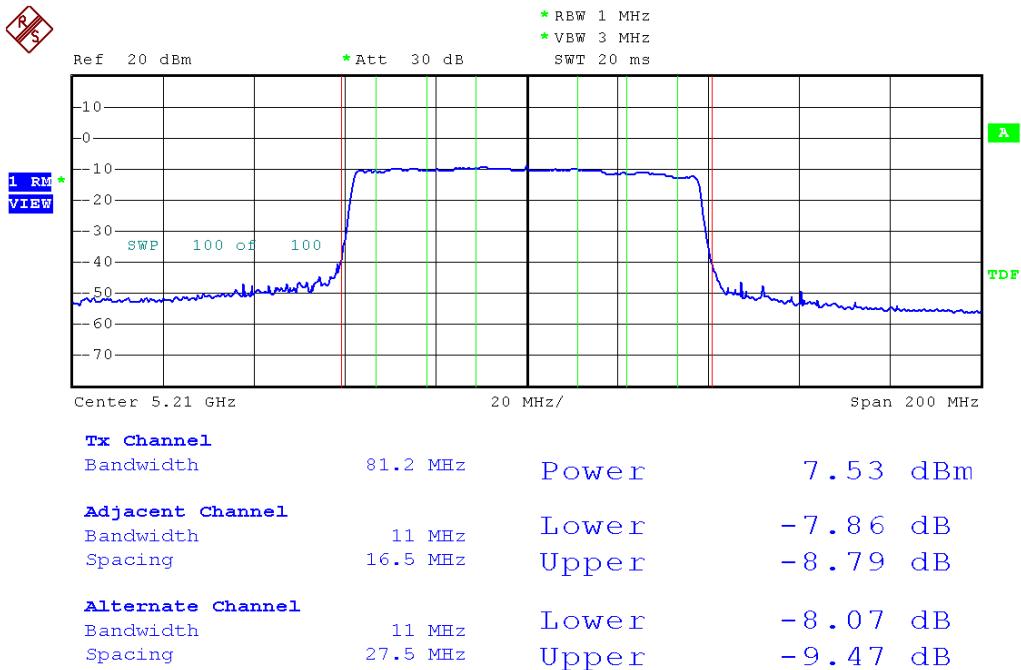


**26dB Occupied Bandwidth**

Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT R
Channel: 36

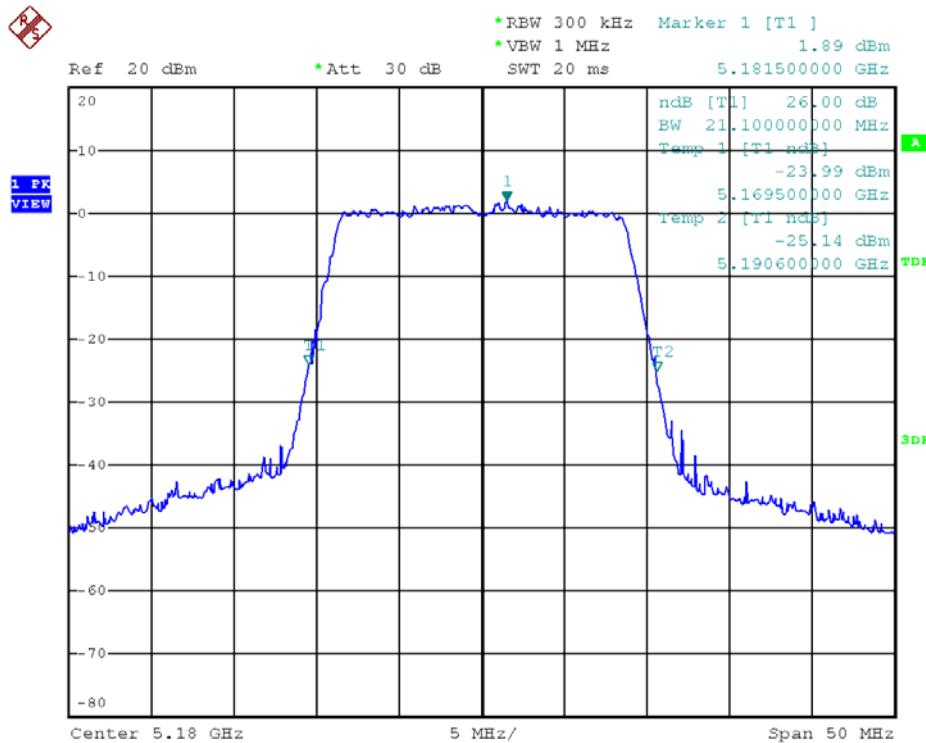


Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT M
Channel: 36

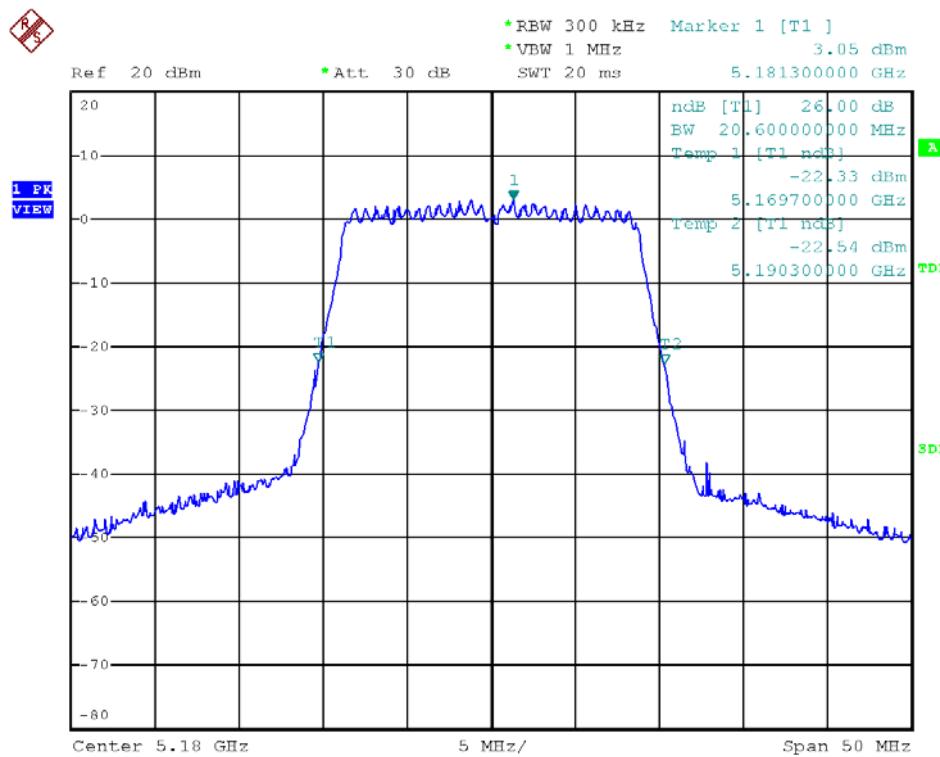




Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT L
Channel: 36

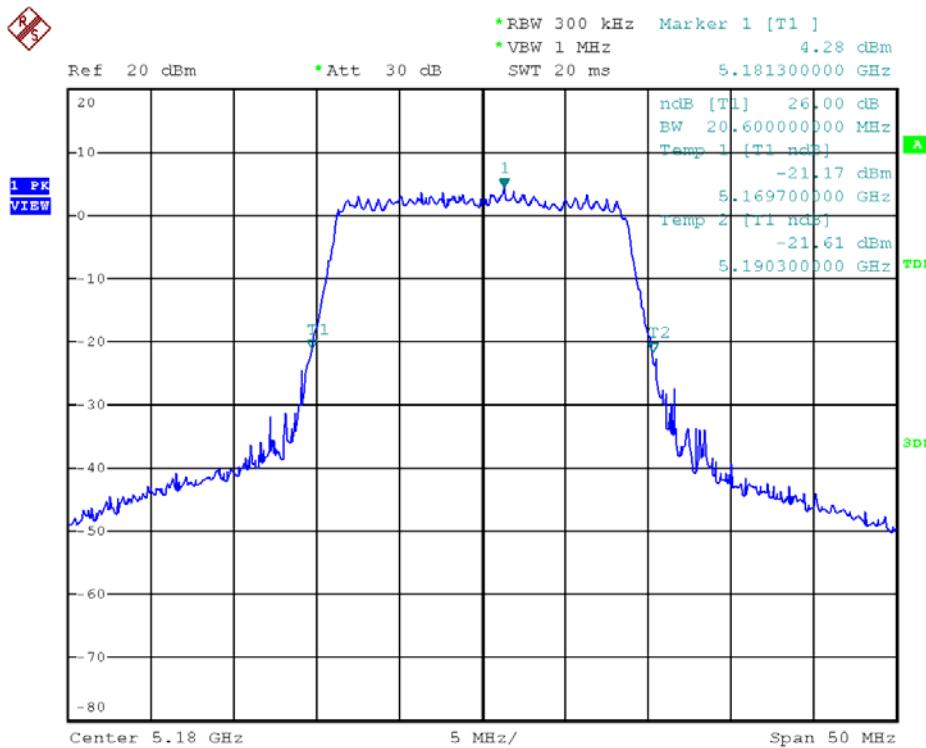


Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT R
Channel: 44

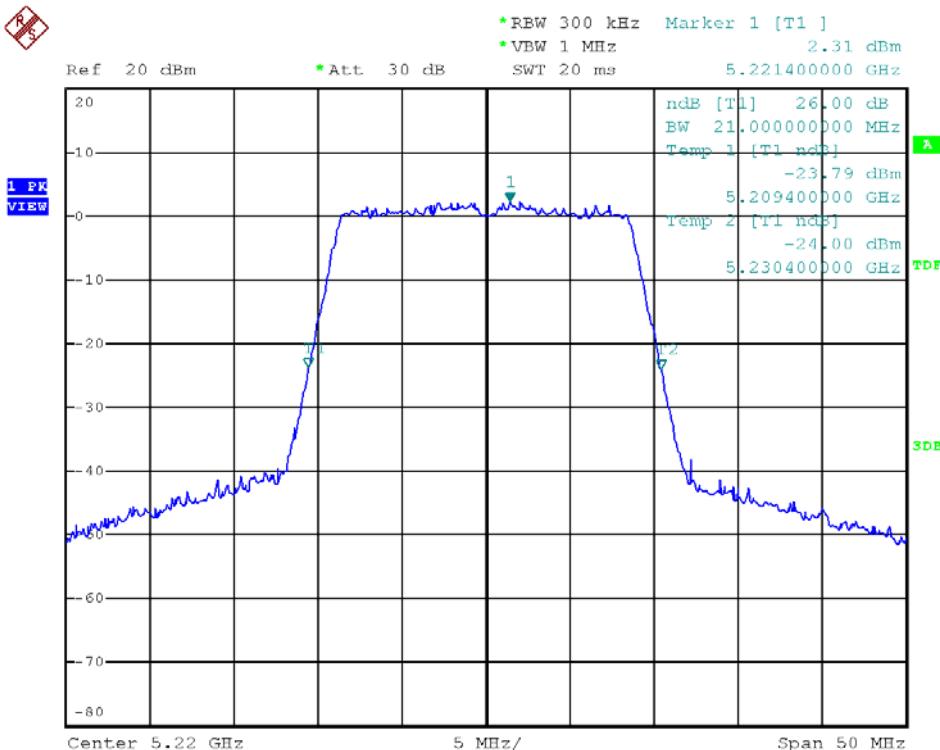




Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT M
Channel: 44

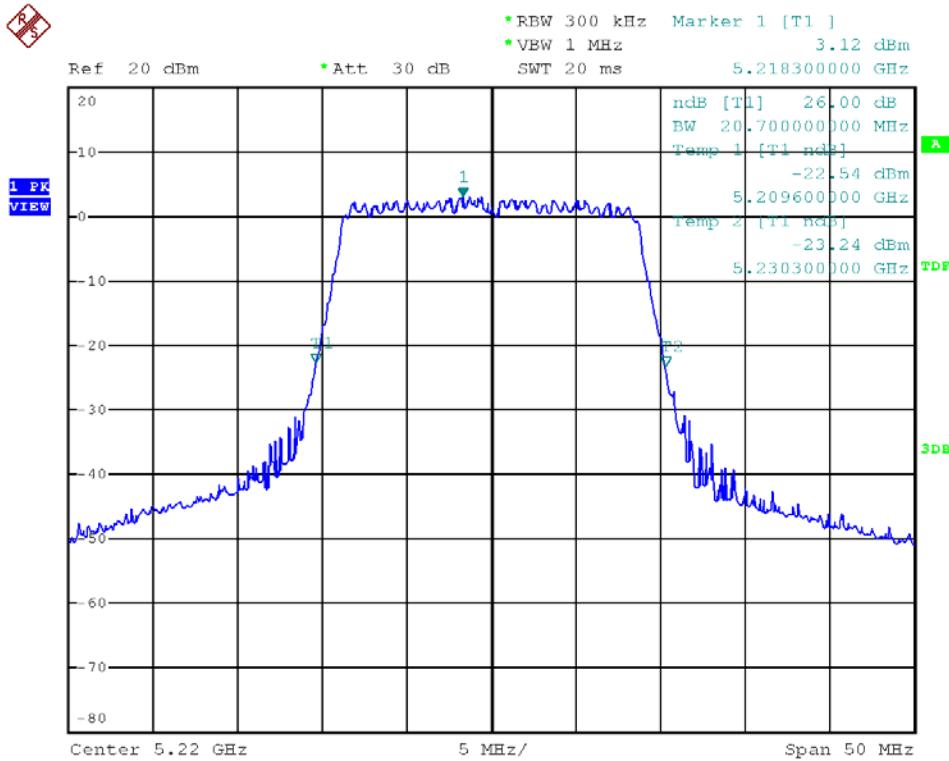


Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT L
Channel: 44

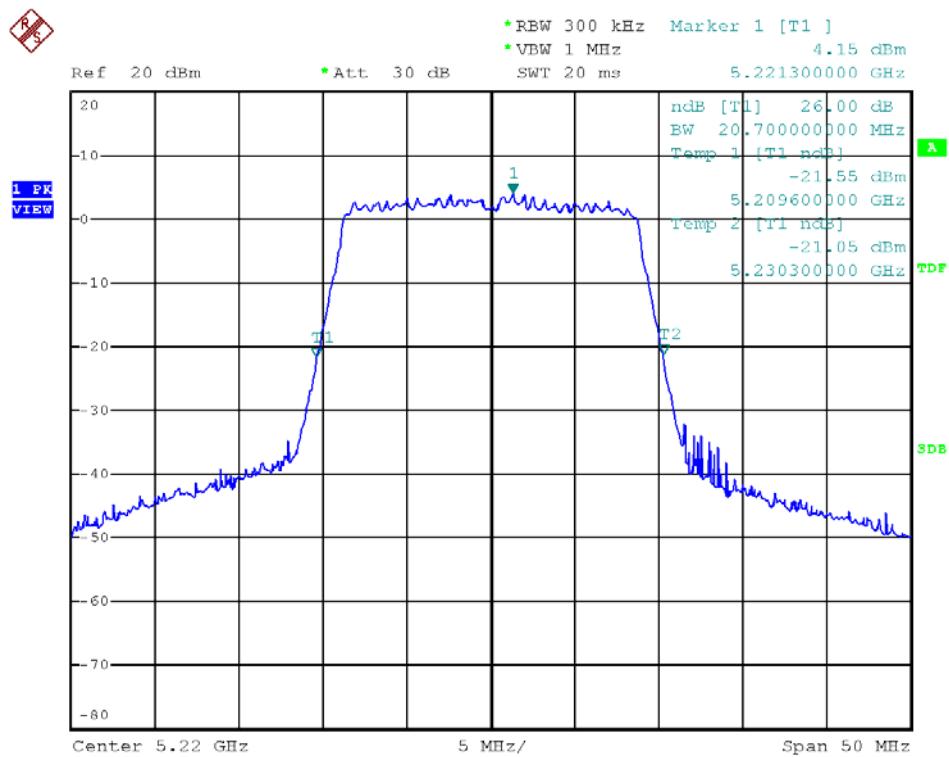




Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT R
Channel: 48

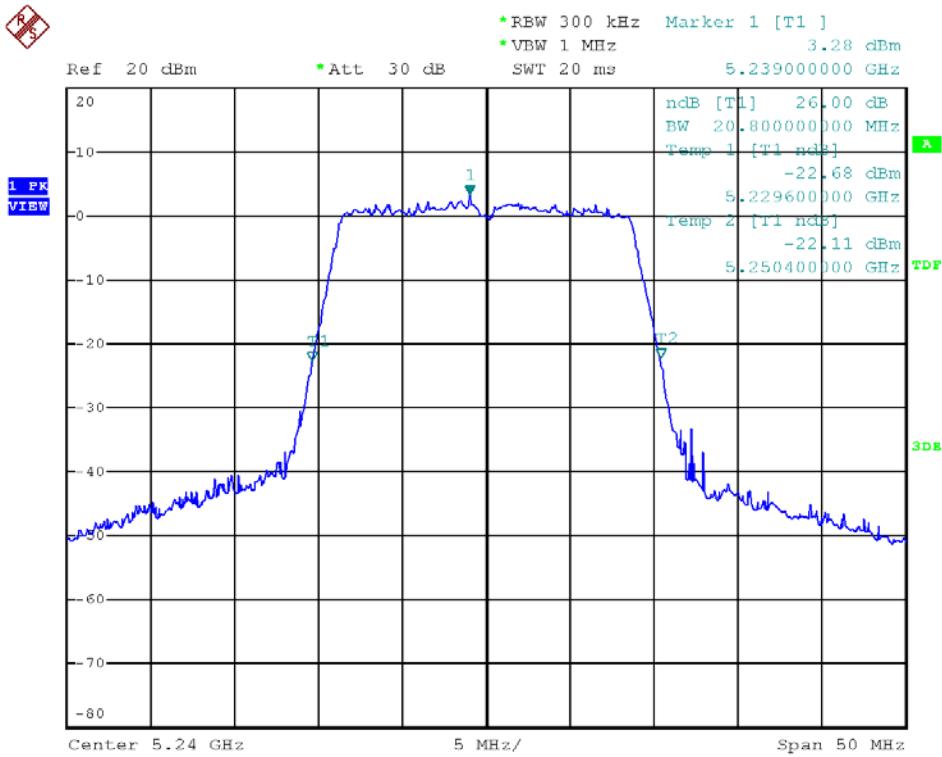


Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT M
Channel: 48

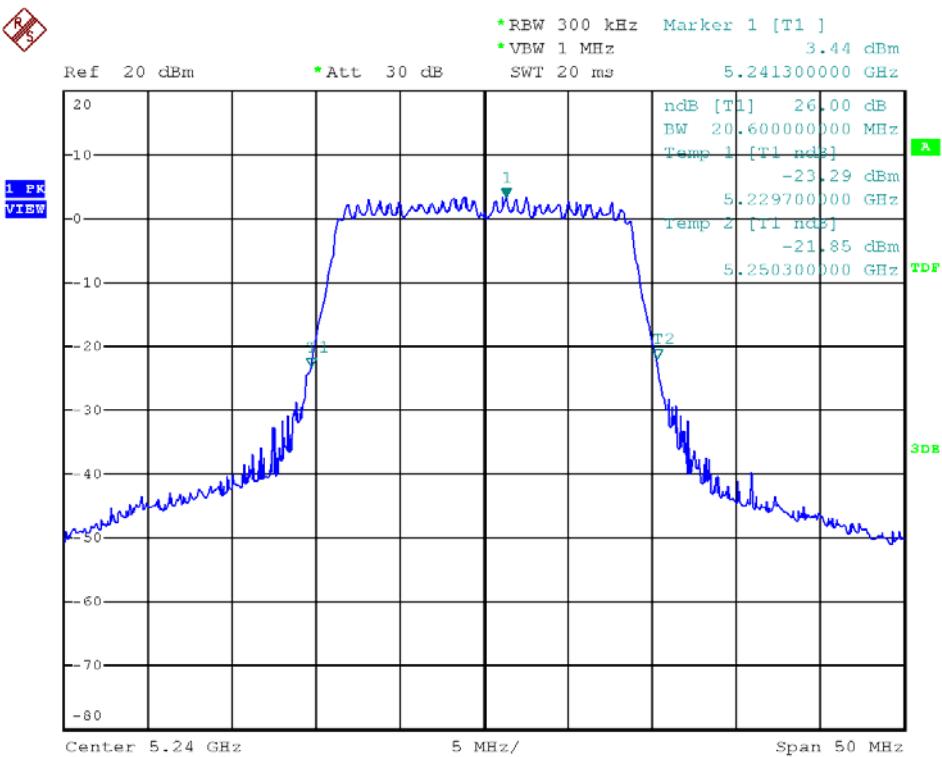




Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT L
Channel: 48

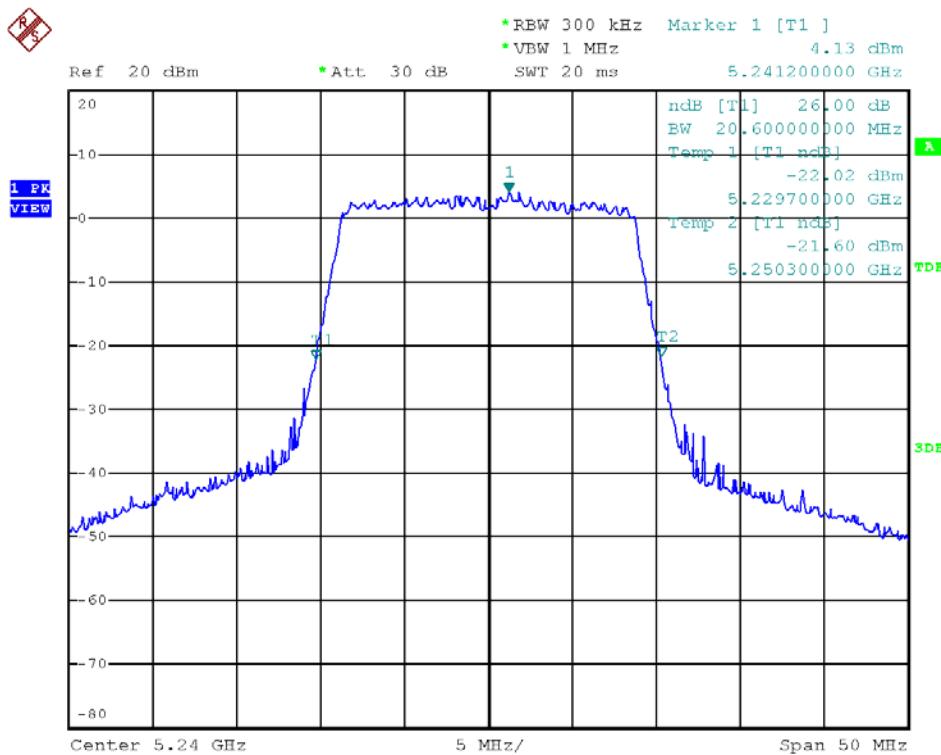


Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT R
Channel: 38

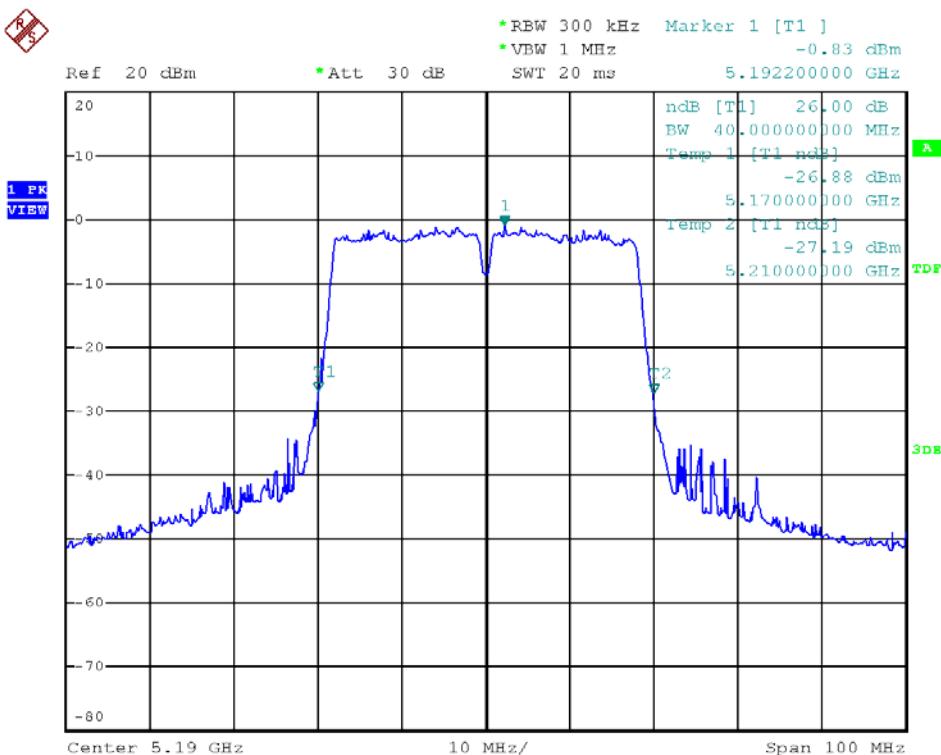




Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT M
Channel: 38

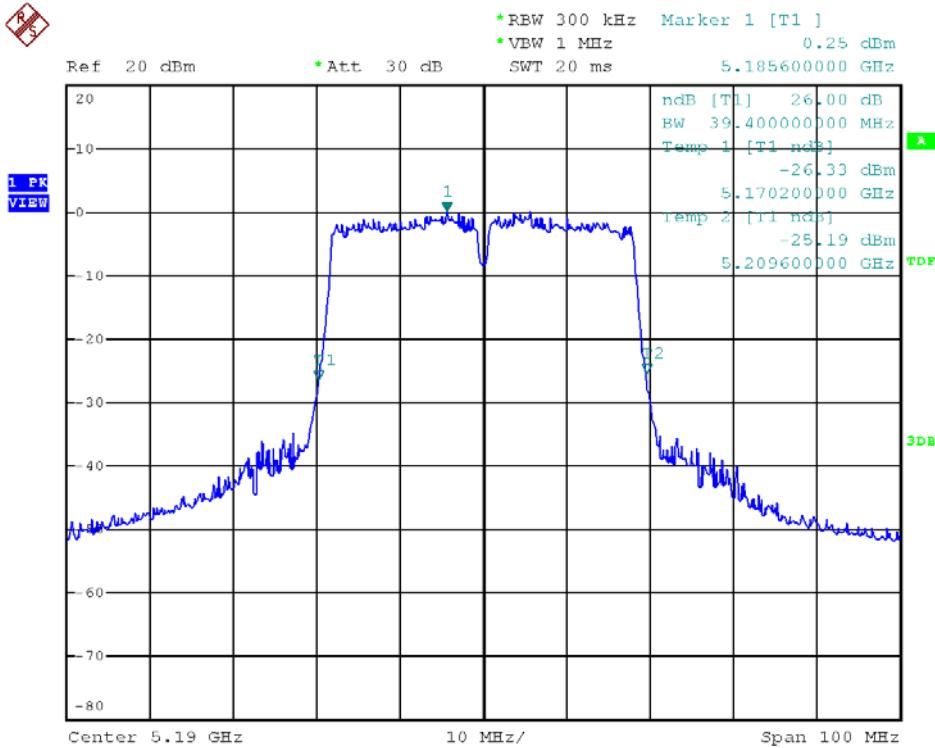


Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT L
Channel: 38

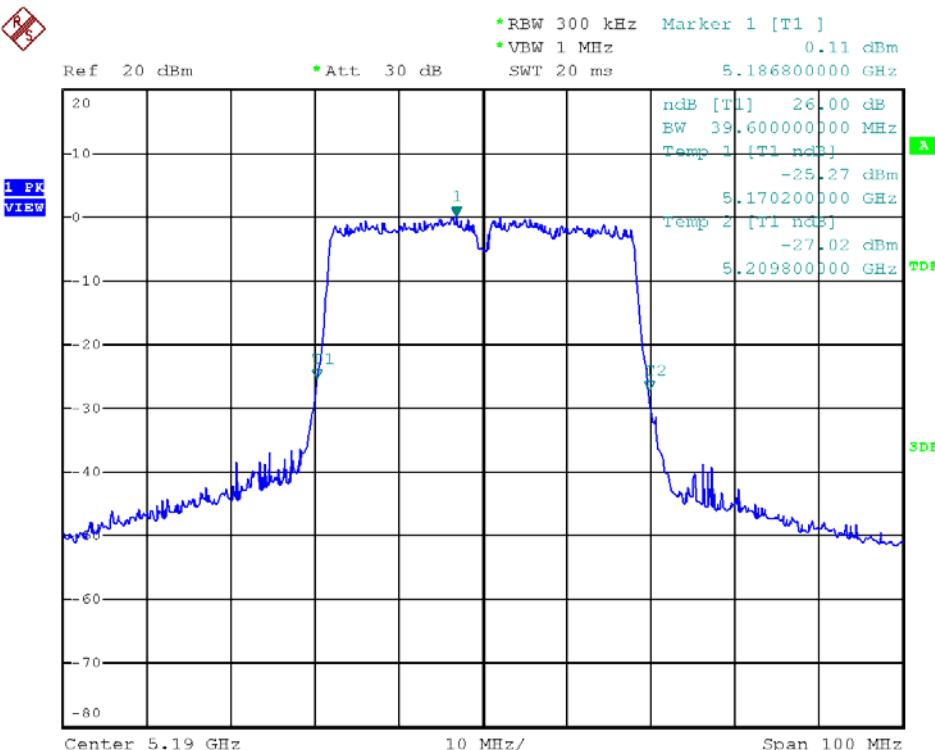




Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT R
Channel: 46

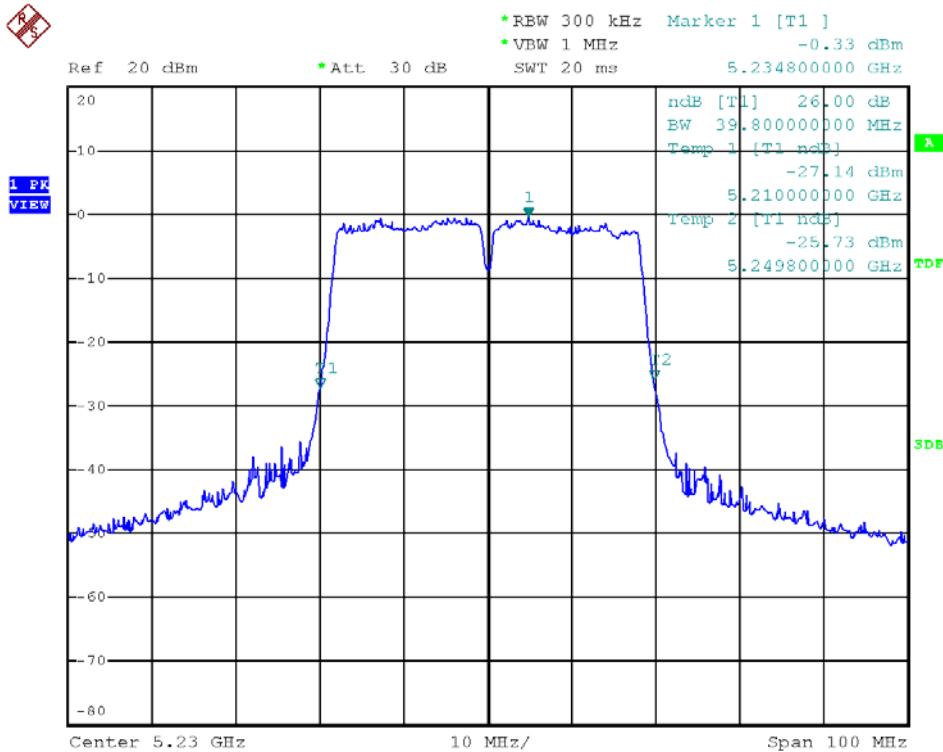


Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT M
Channel: 46

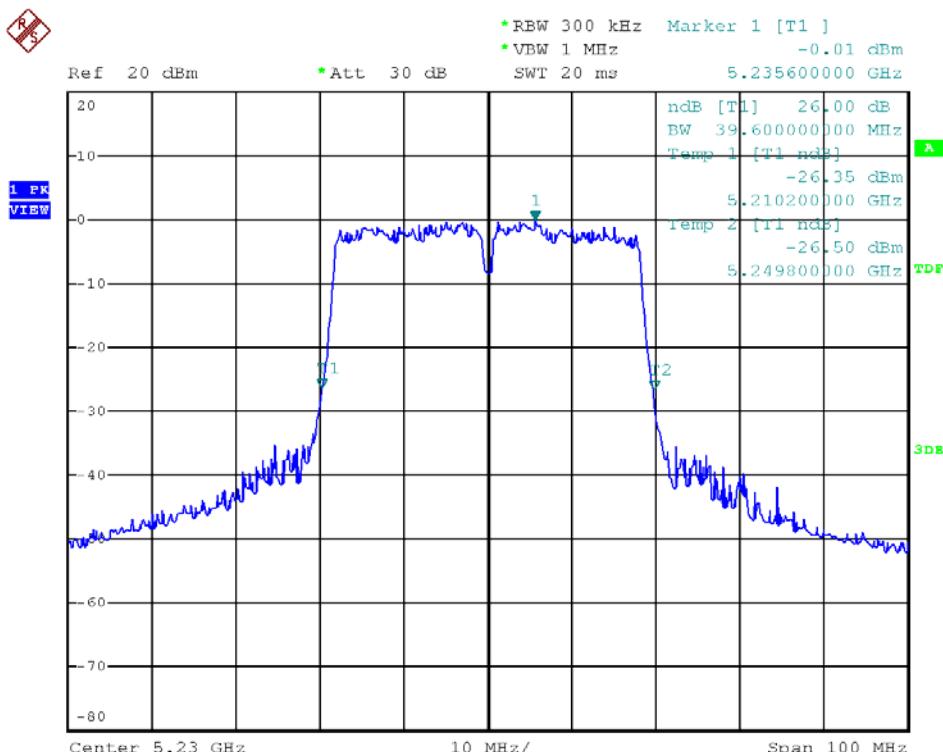




Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT L
Channel: 46

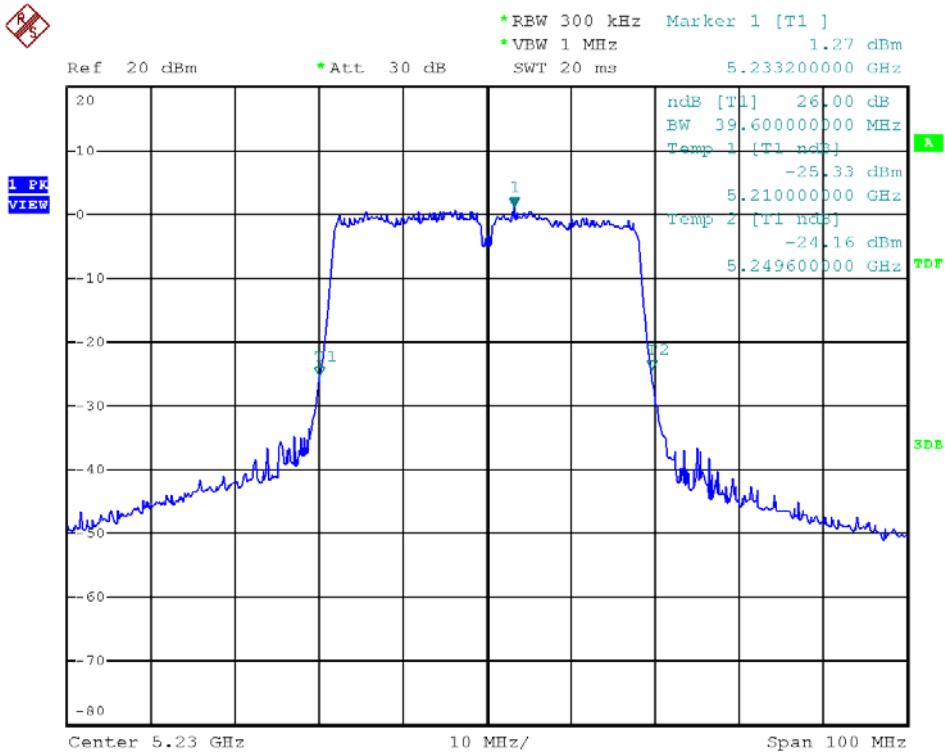


Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT R
Channel: 42

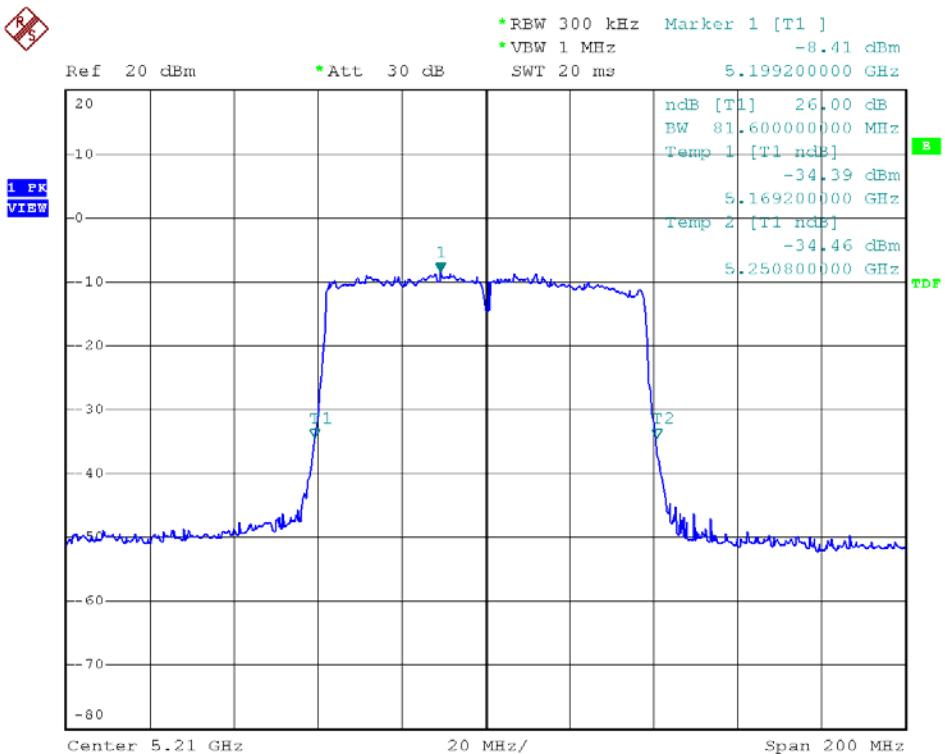




Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT M
Channel: 42

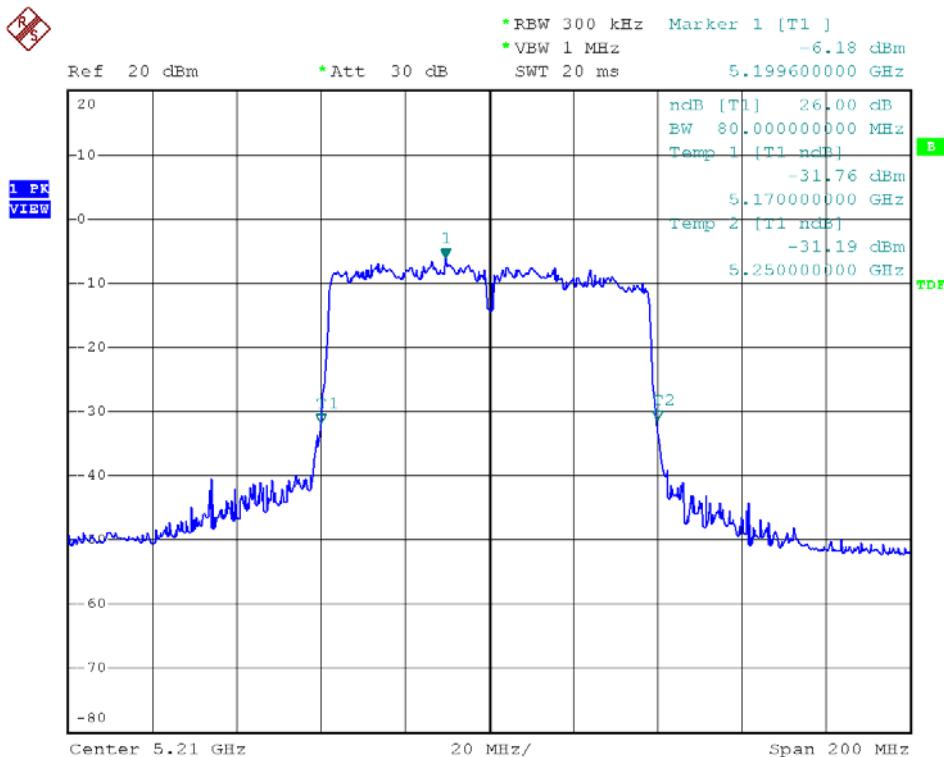

Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT L
Channel: 42

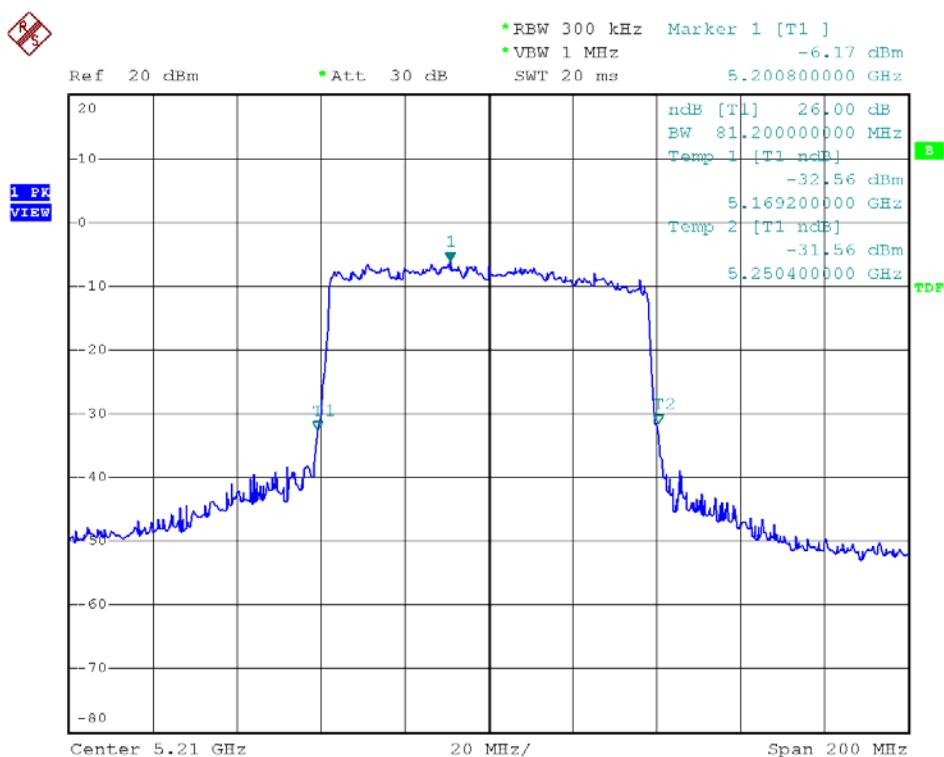




7. Peak Power Excursion

7.1. Test Procedure

1. The transmitter output was connected to the spectrum analyzer
2. Using Peak detector and max-hold function for Trace 1.
3. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz for Trace 1.
4. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz for Trace 2, Set detector mode to RMS, trace average 100 traces in power averaging mode.
5. The largest difference between Trace 1 and Trace 2 in any 1 MHz band on any frequency was recorded.

7.2. Test Setup Layout

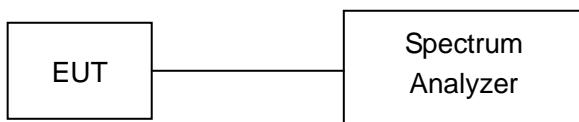

7.3. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2012/03/01	2013/02/28

7.4. Test Result and Data

Test Date: Feb. 26, 2013

Temperature: 22°C


Atmospheric pressure: 1020 hPa

Humidity: 65%


Modulation Standard	Channel	Frequency (MHz)	Peak Power Output (dBm)			Limit (dB)
			ANT R	ANT M	ANT L	
802.11ac VHT20 (6.5Mbps)	36	5180	8.40	8.53	9.47	13
	44	5220	8.72	8.51	9.64	13
	48	5240	9.08	9.24	10.37	13
802.11ac VHT40 (13.5Mbps)	38	5190	8.57	9.03	10.29	13
	46	5230	8.75	8.96	8.93	13
802.11ac VHT40 (29.3Mbps)	42	5210	8.36	8.70	9.48	13



Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT R
Channel: 36

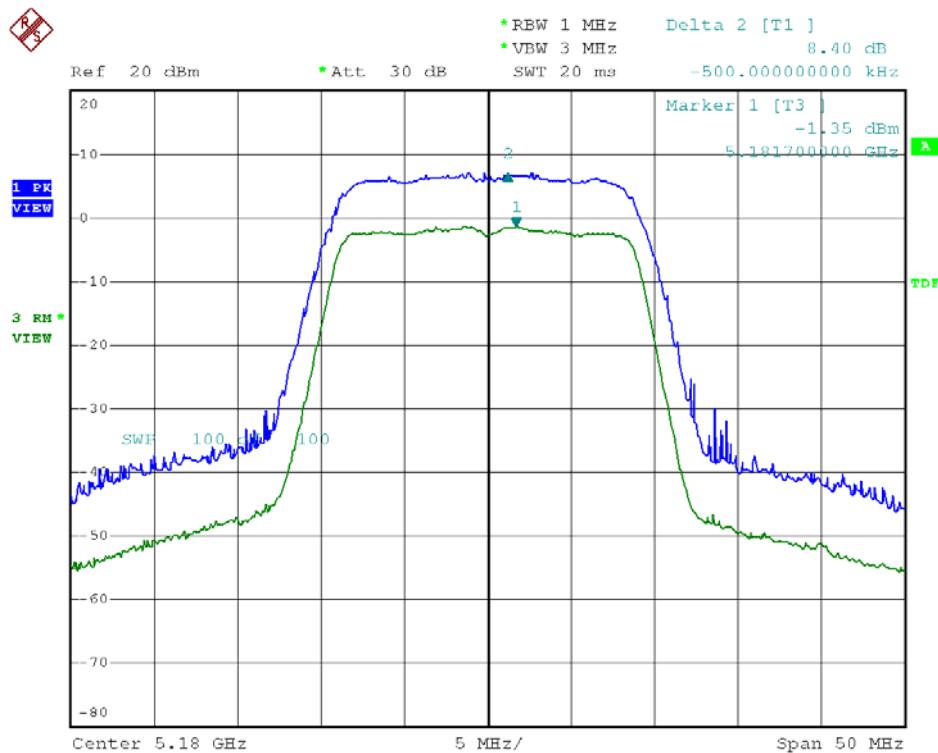


Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT M
Channel: 36

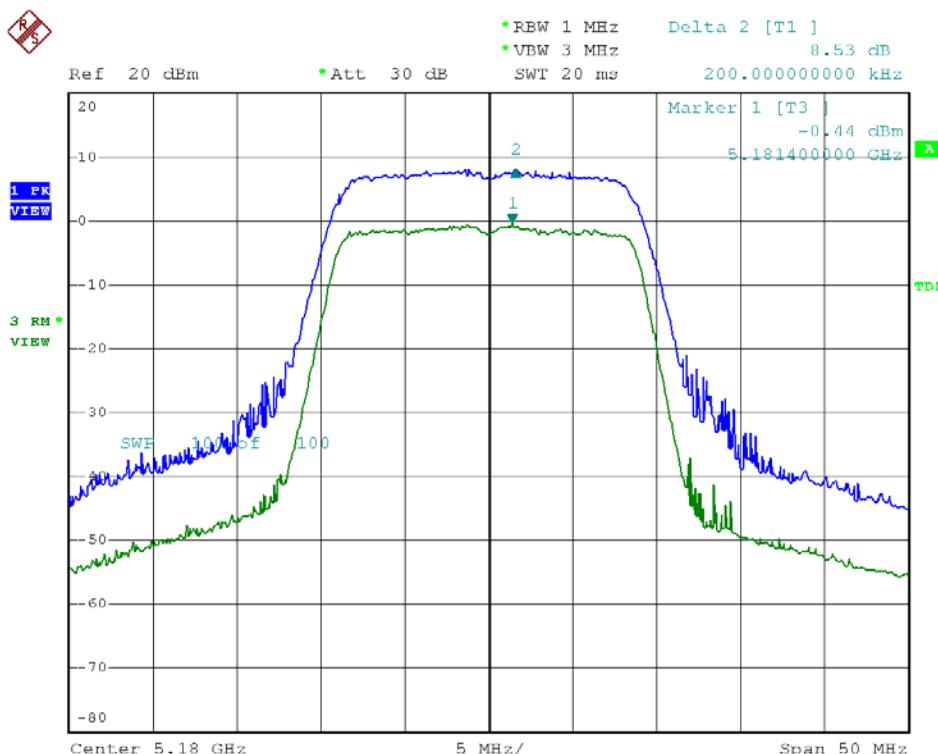




Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT L
Channel: 36

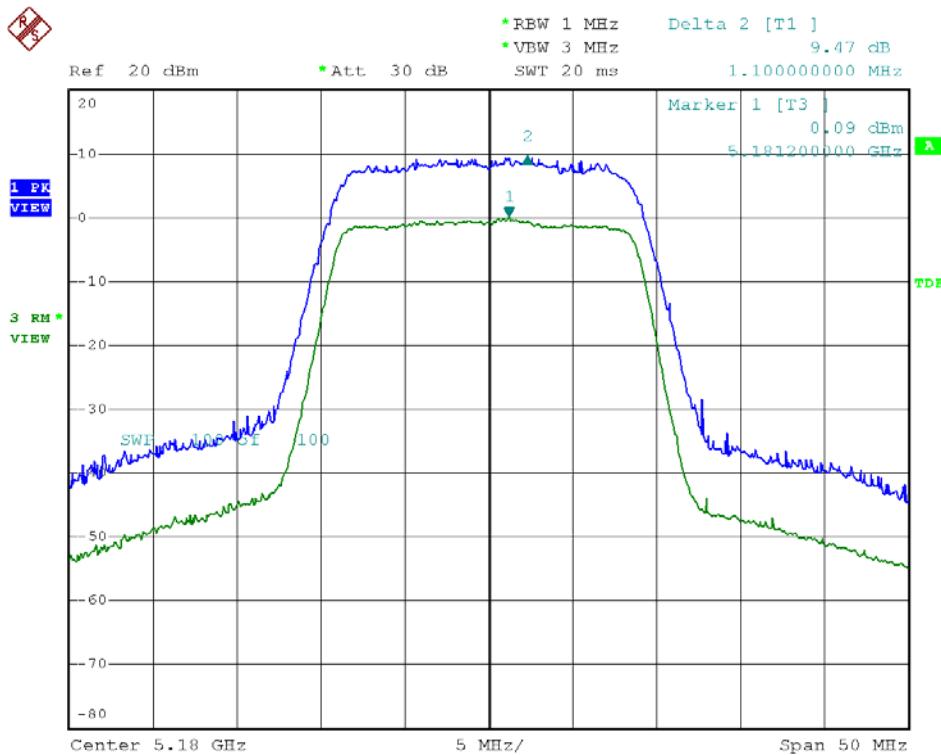


Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT R
Channel: 44

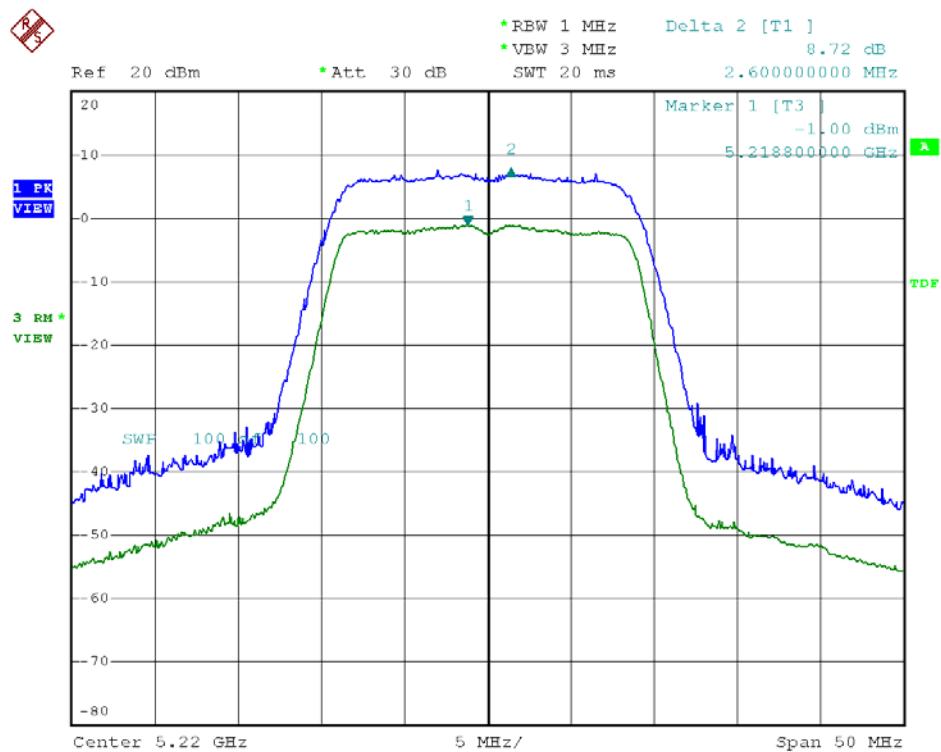




Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT M
Channel: 44

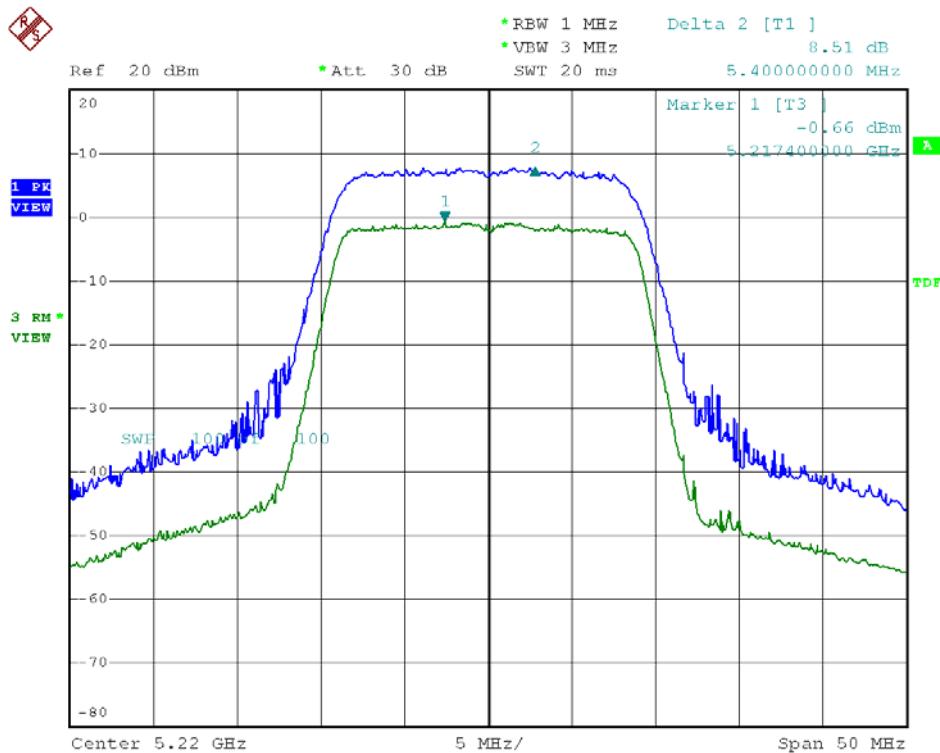


Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT L
Channel: 44

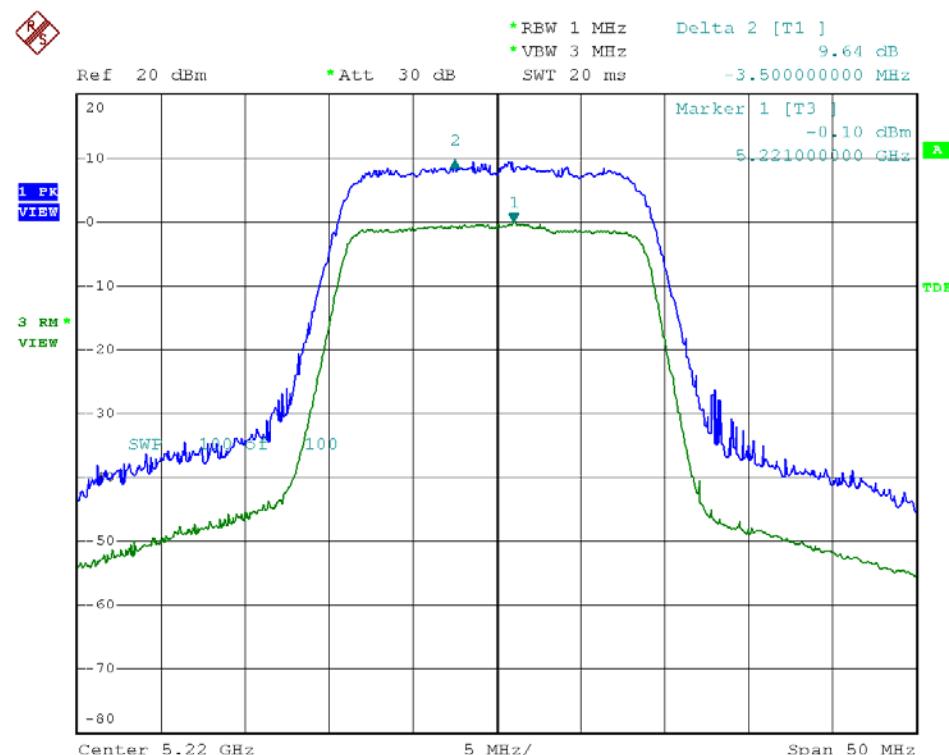




Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT R
Channel: 48

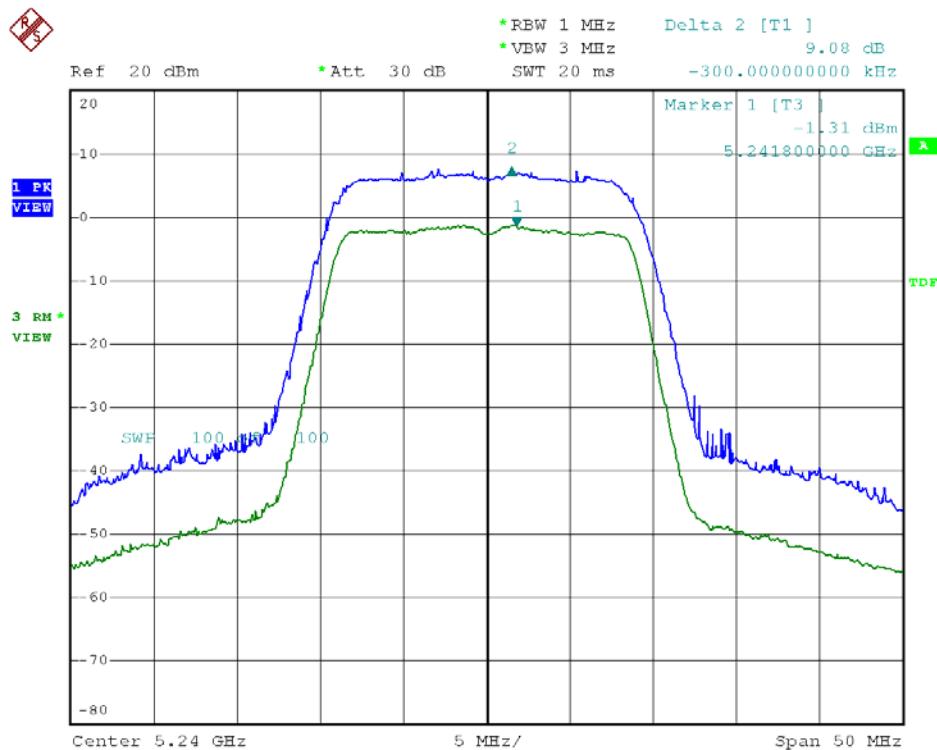


Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT M
Channel: 48

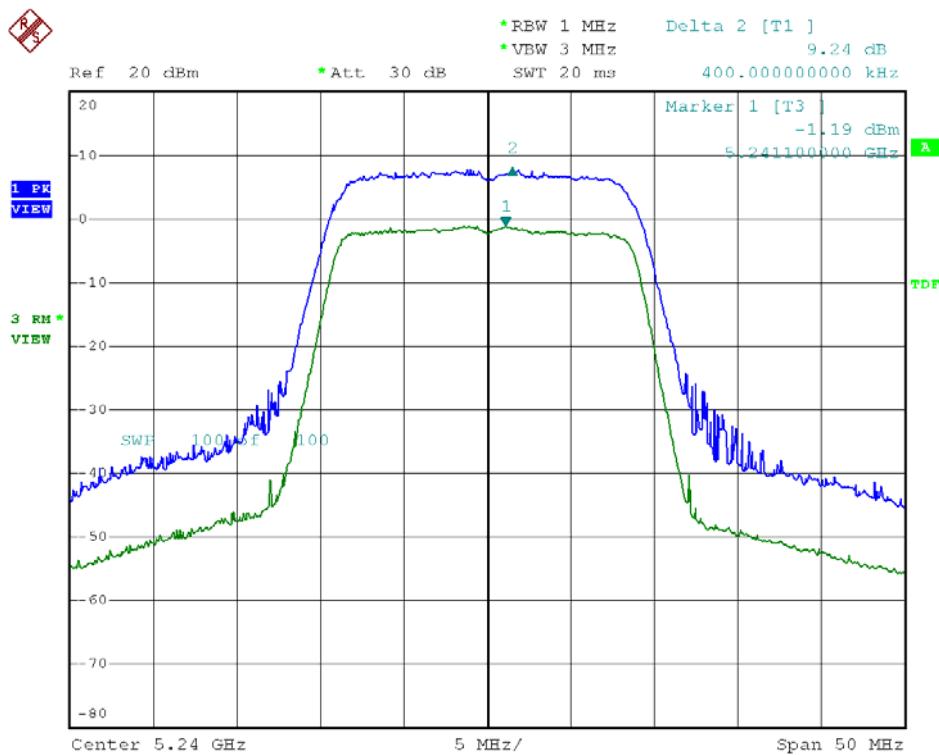




Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT L
Channel: 48

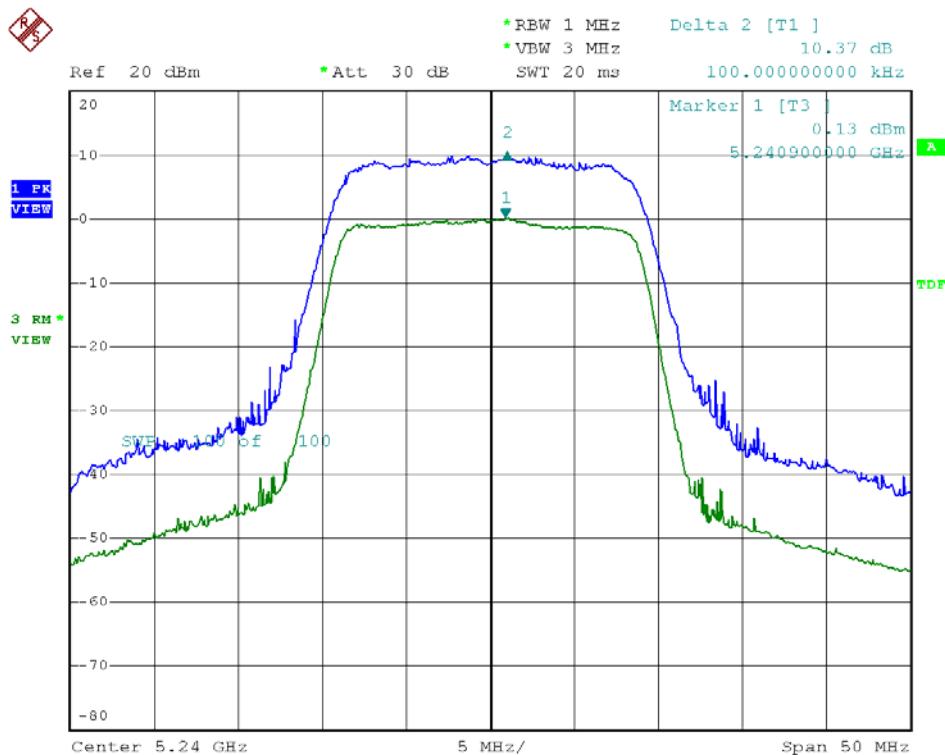


Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT R
Channel: 38

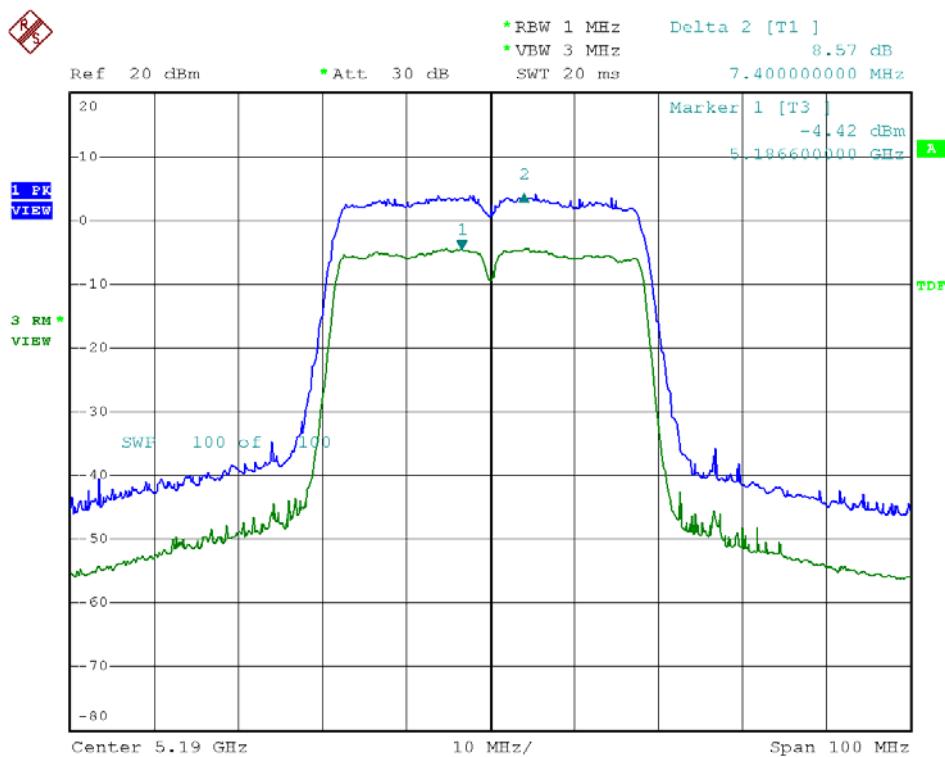




Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT M
Channel: 38

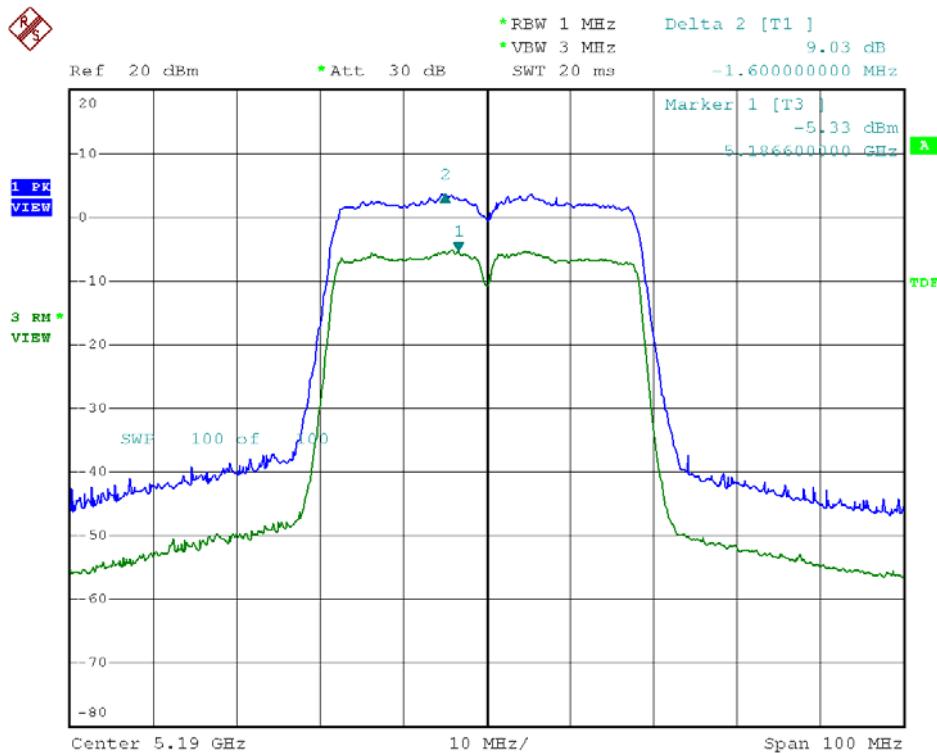


Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT L
Channel: 38

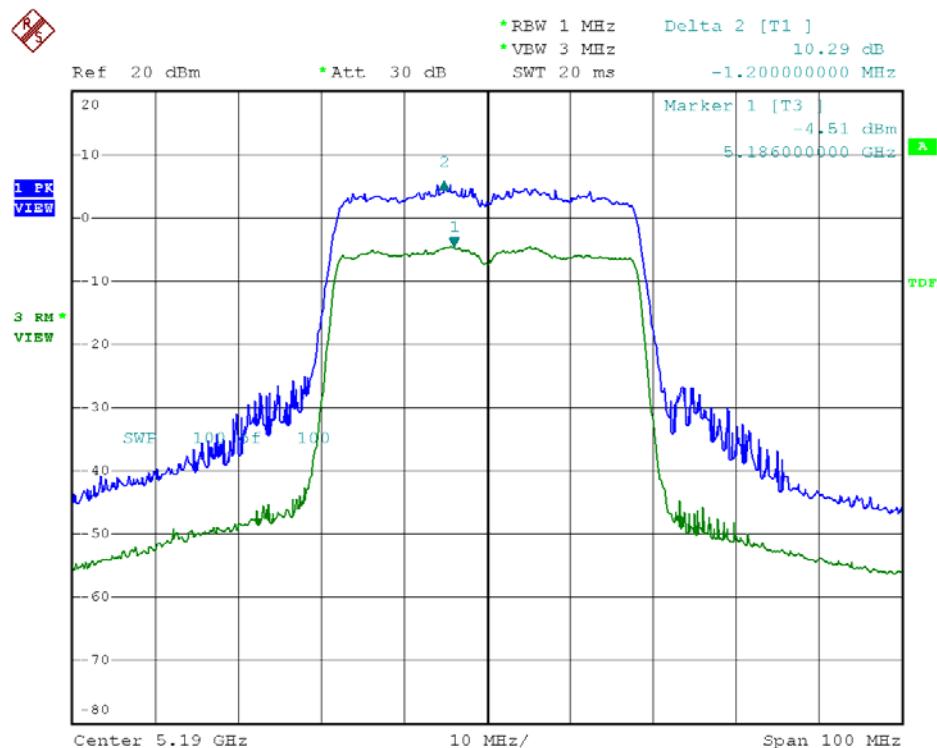




Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT R
Channel: 46

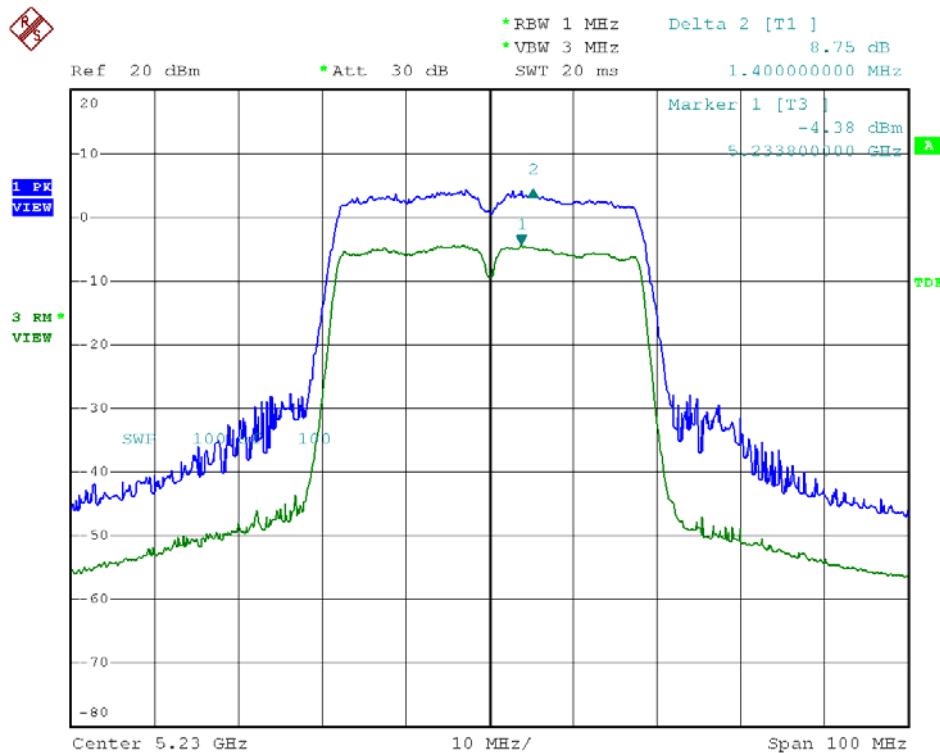


Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT M
Channel: 46

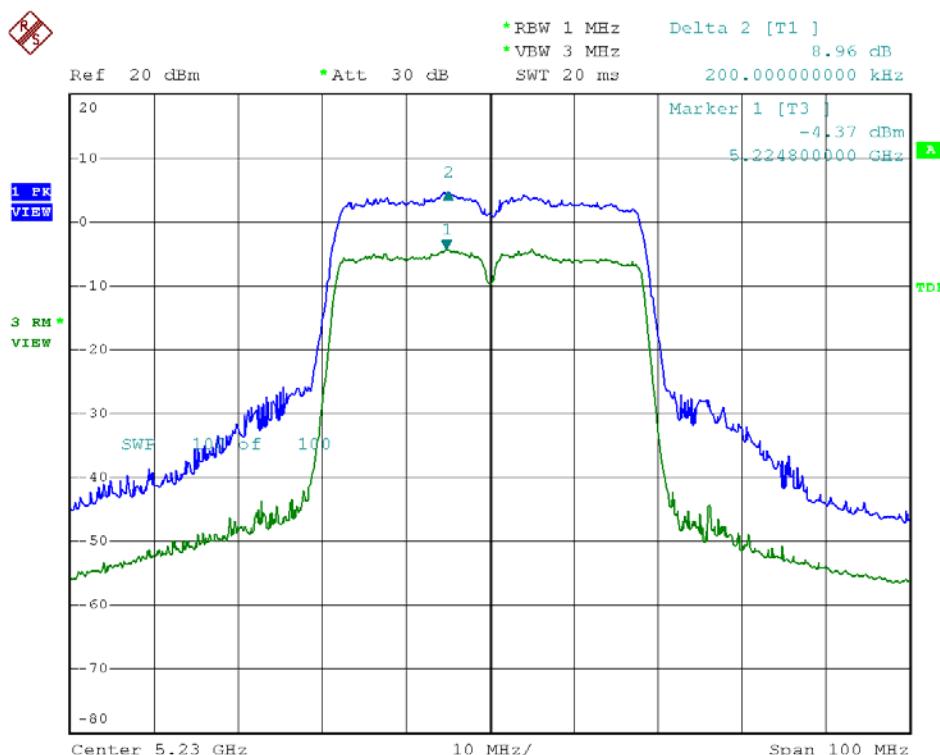




Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT L
Channel: 46

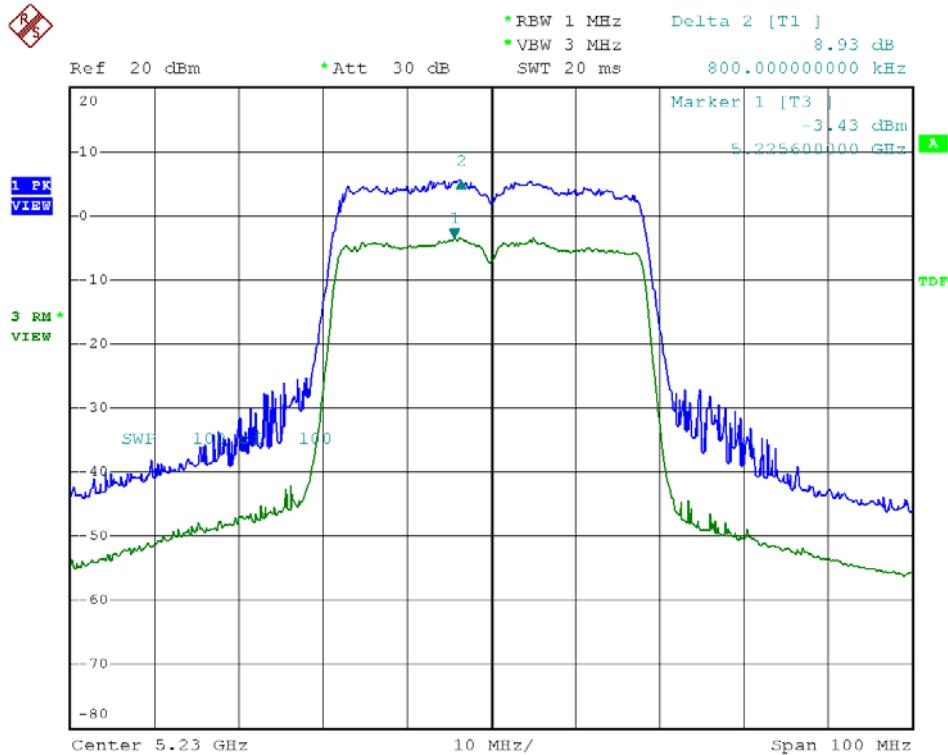


Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT R
Channel: 42

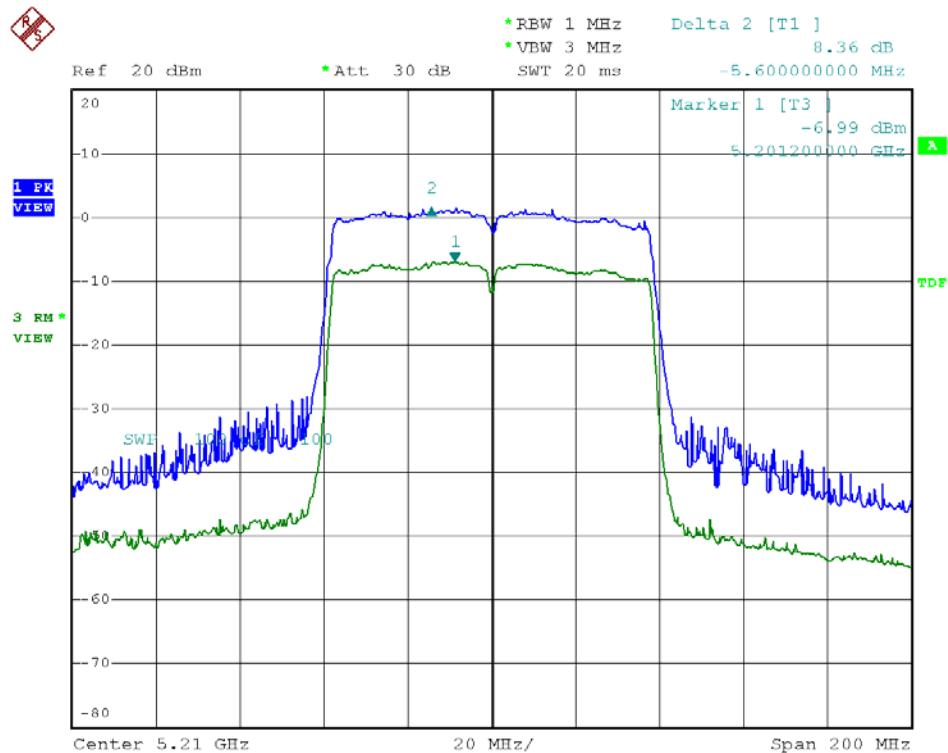




Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT M
Channel: 42

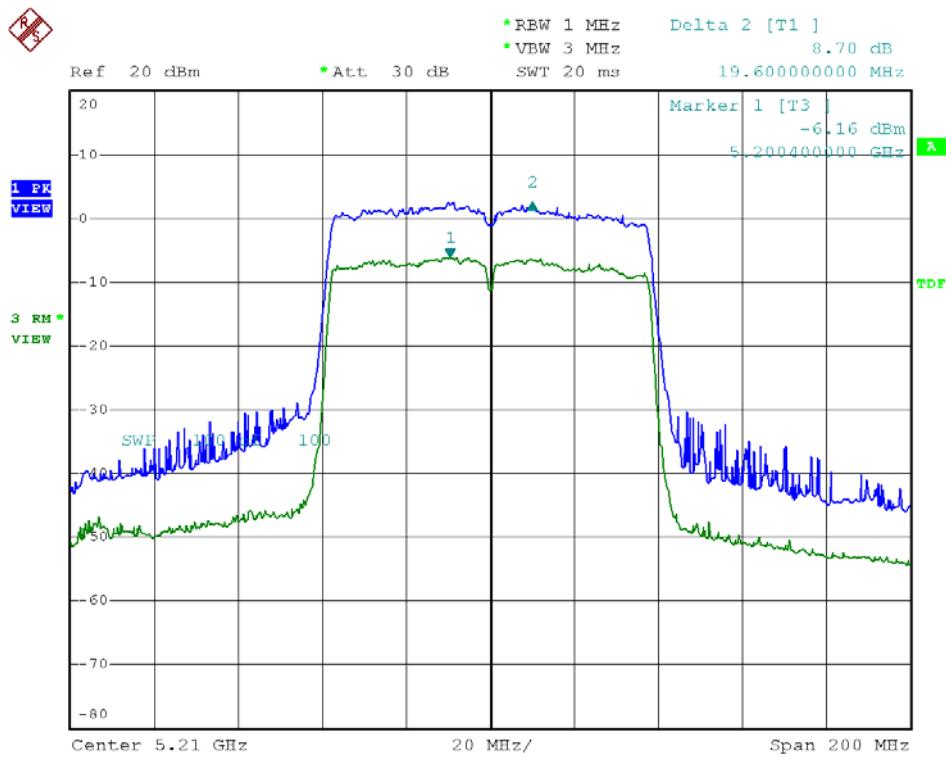

Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT L
Channel: 42

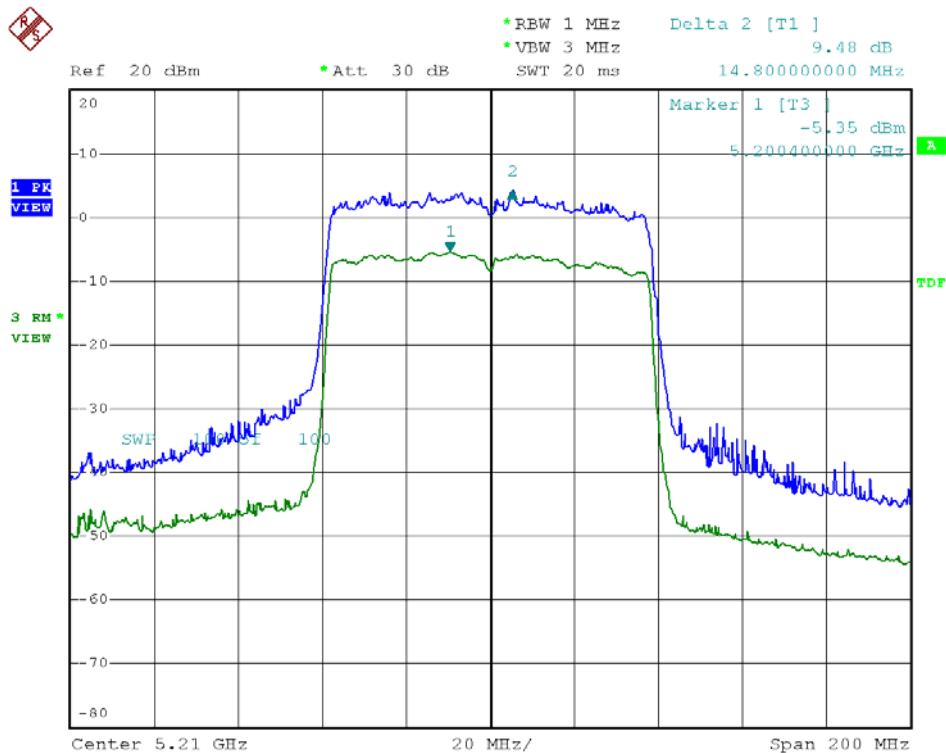



8. Peak Power Spectral Density

8.1. Test Procedure

1. The transmitter output was connected to spectrum analyzer.
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz, Set detector mode to RMS, trace average 100 traces in power averaging mode.
3. The Peak Power Spectral Density is the highest level found across the emission in any 1MHz Band

8.2. Test Setup Layout



8.3. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2012/03/01	2013/02/28

8.4. Test Result and Data

Test Date: Feb. 26, 2013

Temperature: 22°C

Atmospheric pressure: 1020 hPa


Humidity: 65%

Modulation Standard	Channel	Frequency (MHz)	RF Power Level In 1MHz BW (dBm)				Limit (dB)
			ANT R	ANT M	ANT L	Total	
802.11ac VHT20 (6.5Mbps)	36	5180	-8.30	-6.50	-5.53	-1.86	-0.77
	44	5220	-7.53	-6.39	-5.17	-1.49	-0.77
	48	5240	-8.04	-7.00	-5.78	-2.07	-0.77
802.11ac VHT40 (13.5Mbps)	38	5190	-8.95	-7.92	-7.24	-3.21	-0.77
	46	5230	-8.55	-7.72	-7.12	-2.99	-0.77
802.11ac VHT80 (29.3Mbps)	42	5210	-10.50	-8.70	-8.49	-4.37	-0.77


Limit= 4dBm - (10.77dB_i - 6dB_i) = -0.77dBm



Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT R
Channel: 36

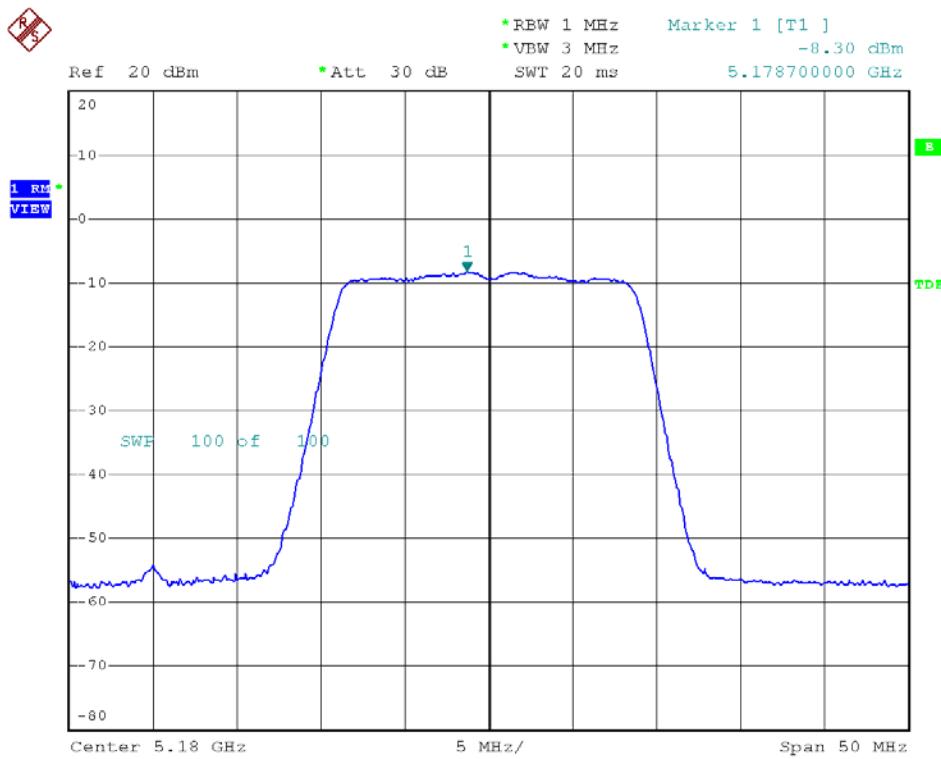


Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT M
Channel: 36

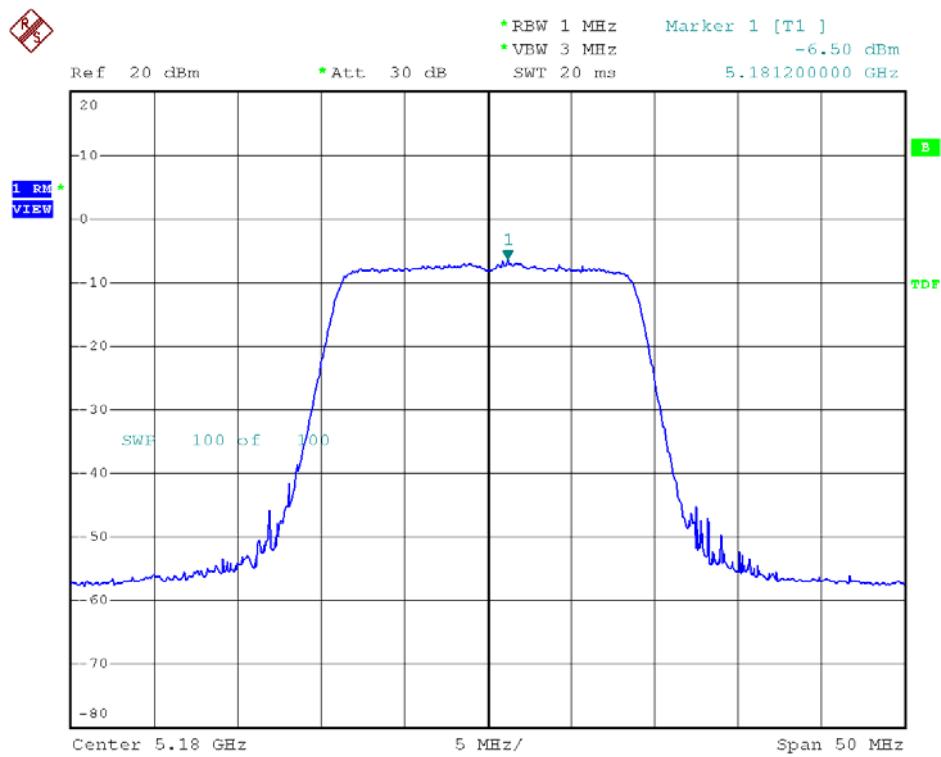




Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT L
Channel: 36

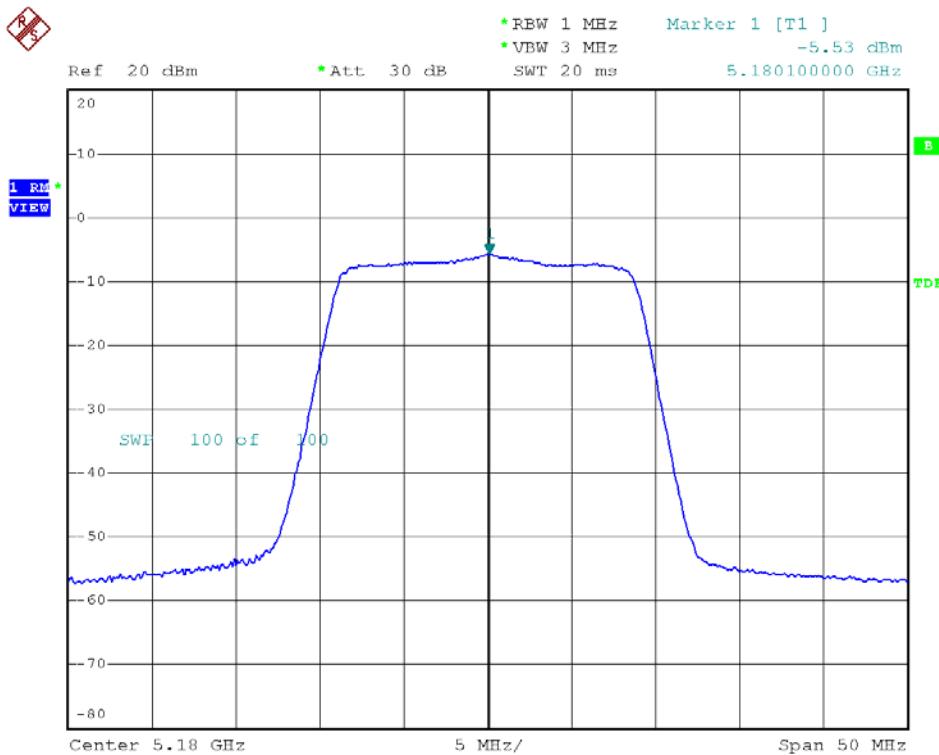


Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT R
Channel: 44

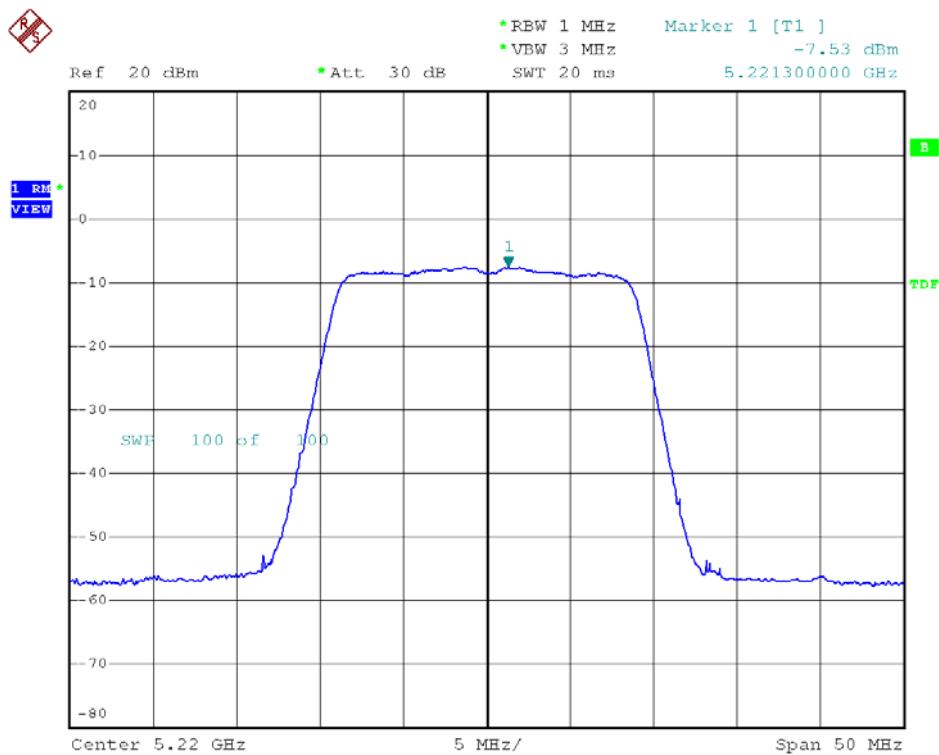




Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT M
Channel: 44

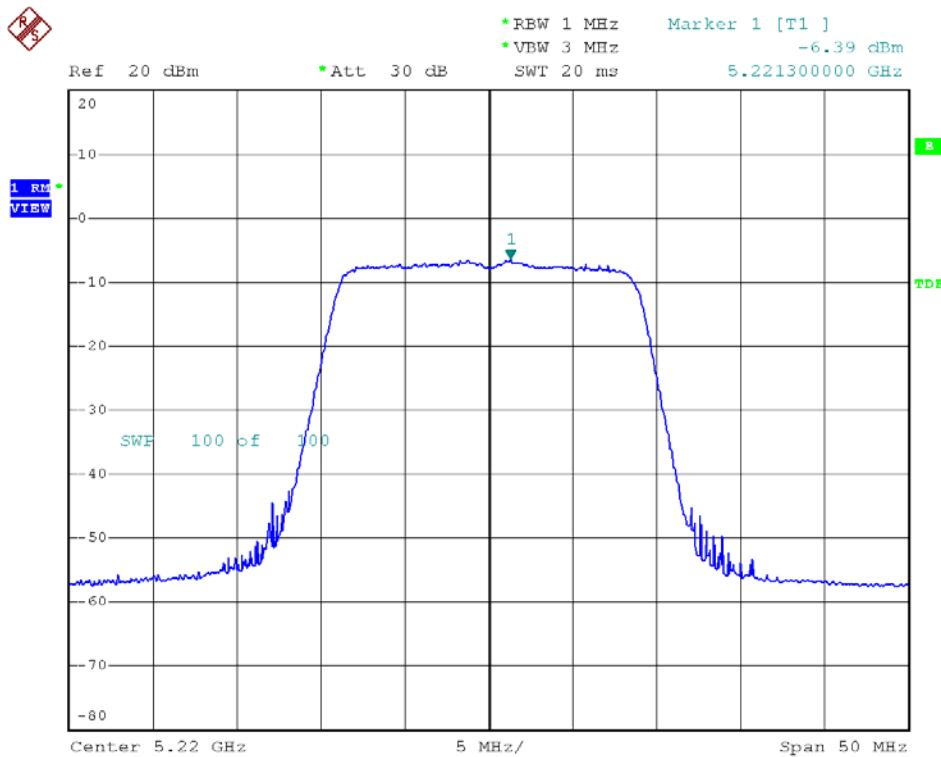


Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT L
Channel: 44

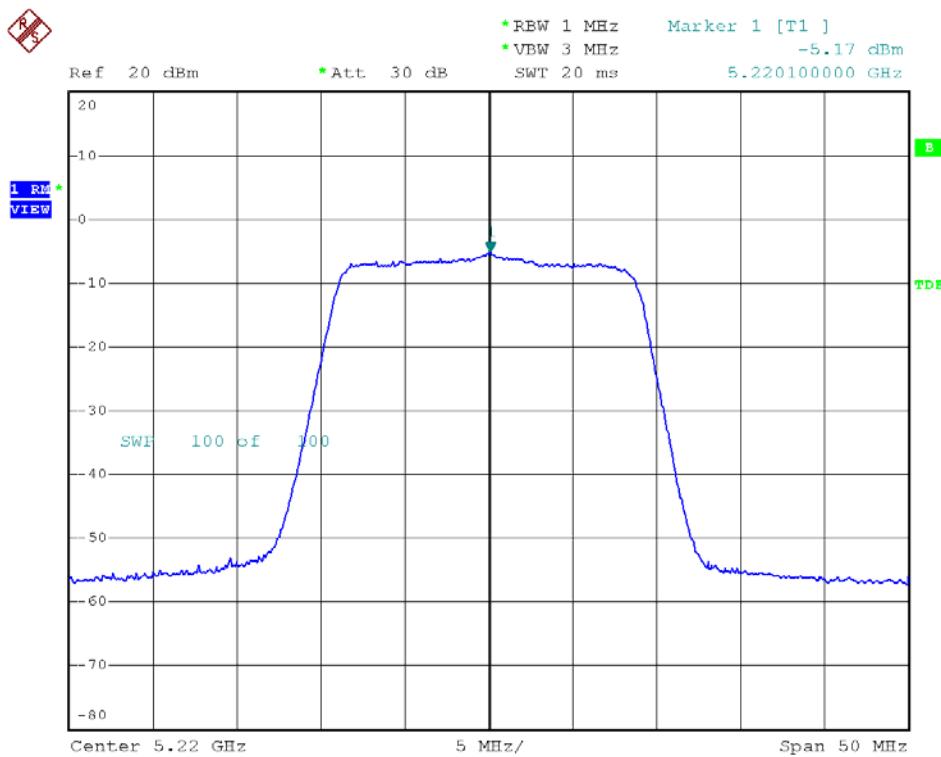




Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT R
Channel: 48

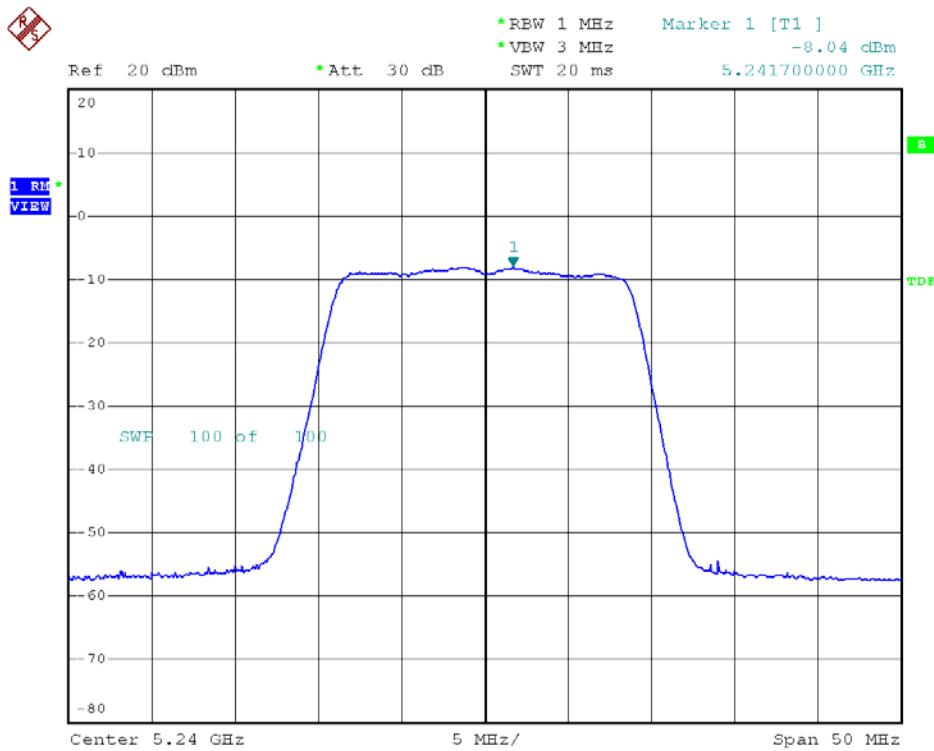


Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT M
Channel: 48

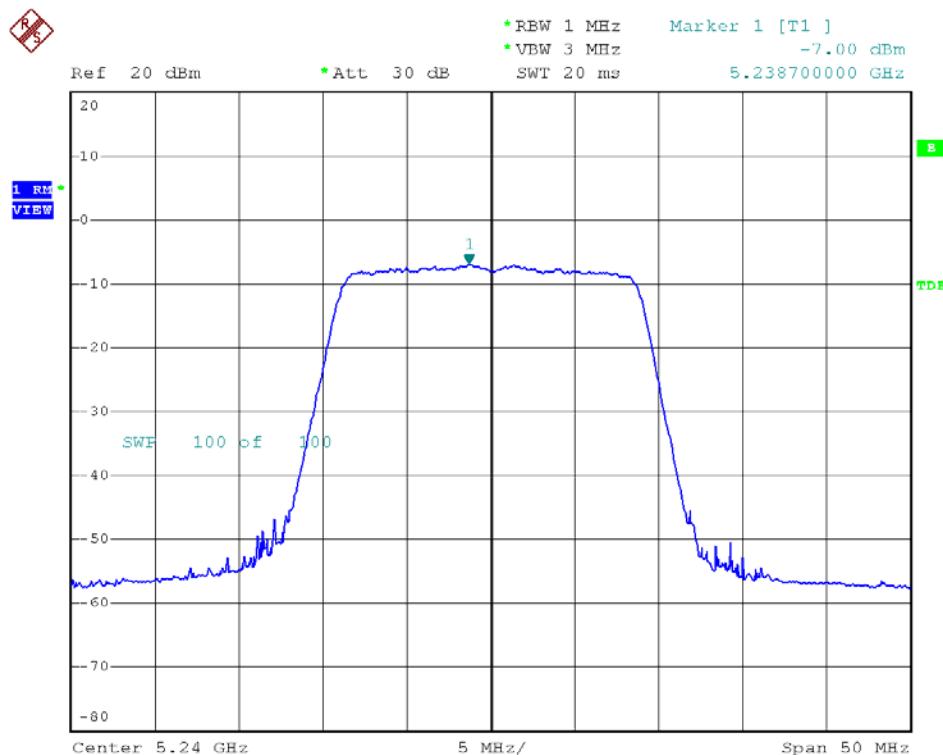




Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT L
Channel: 48

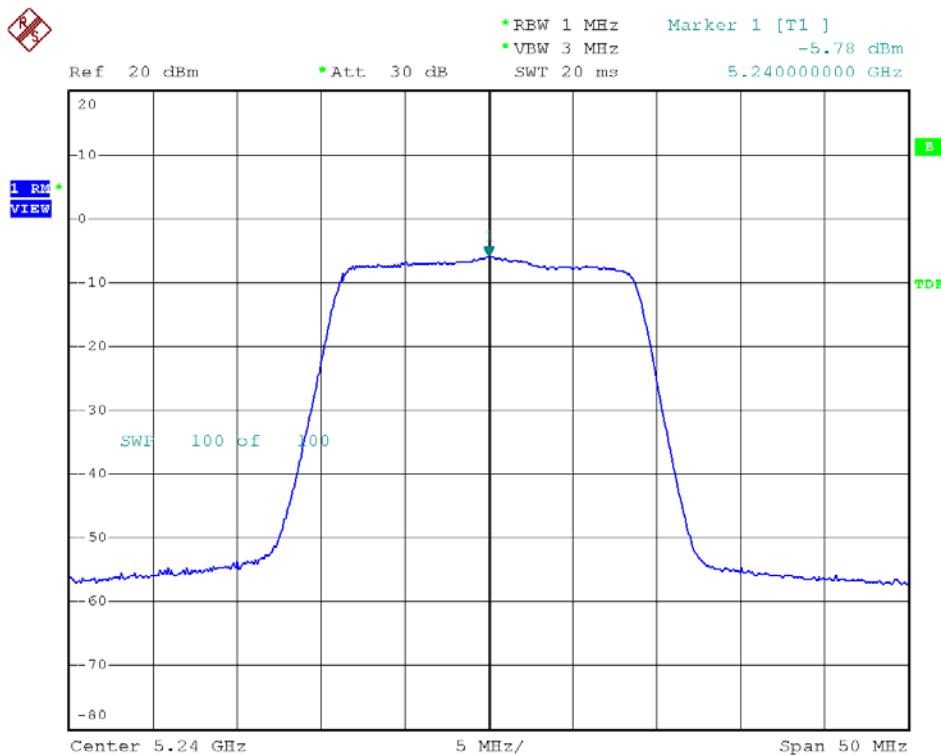


Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT R
Channel: 38

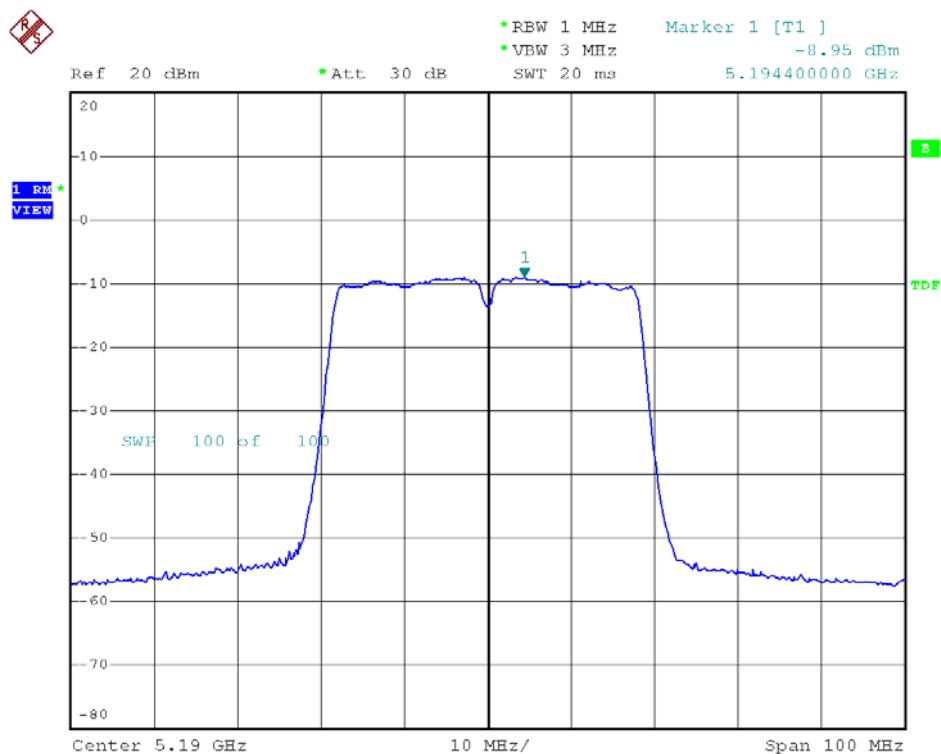




Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT M
Channel: 38

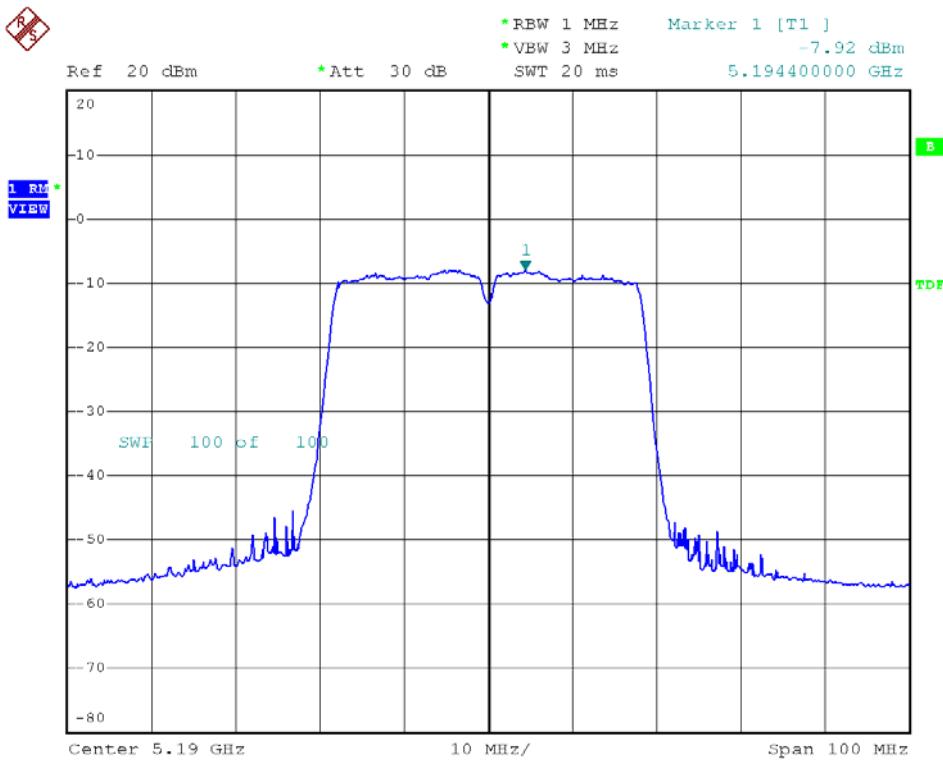


Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT L
Channel: 38

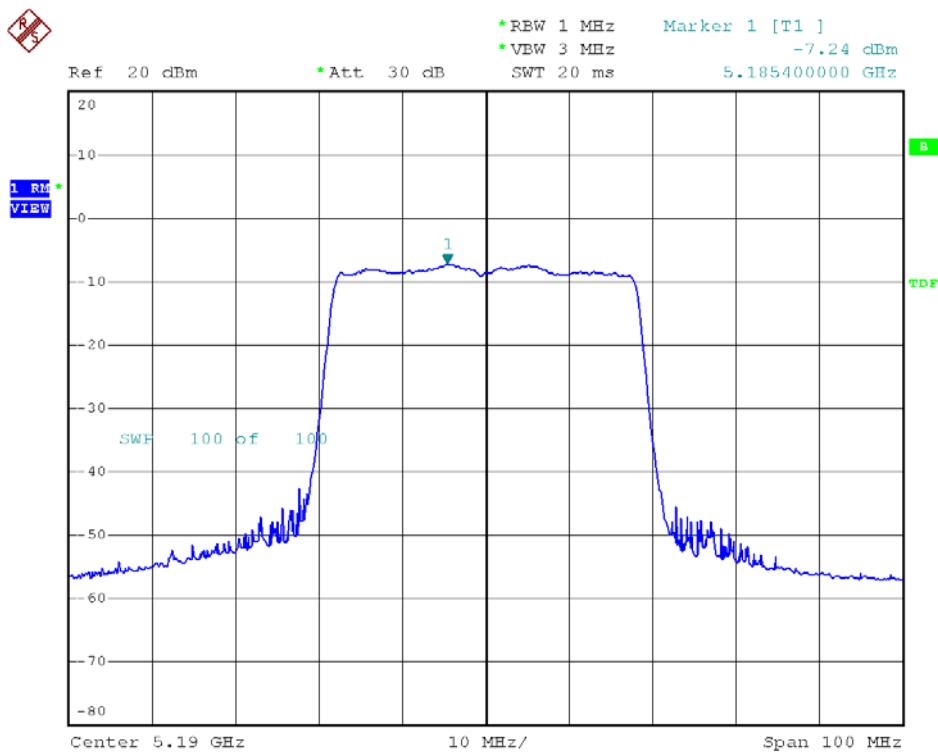




Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT R
Channel: 46

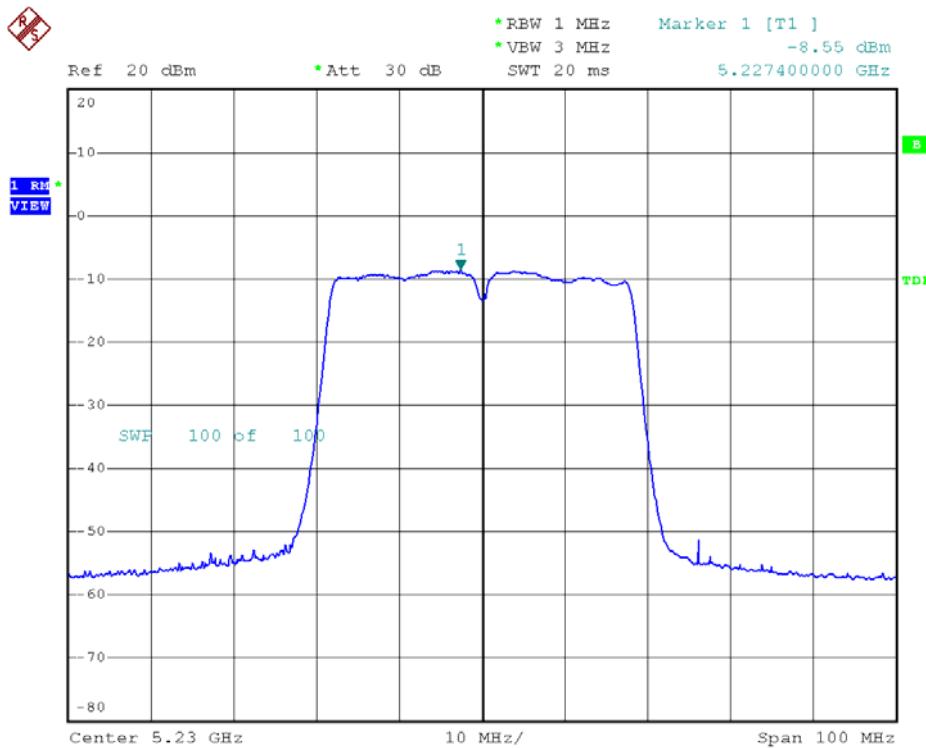


Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT M
Channel: 46

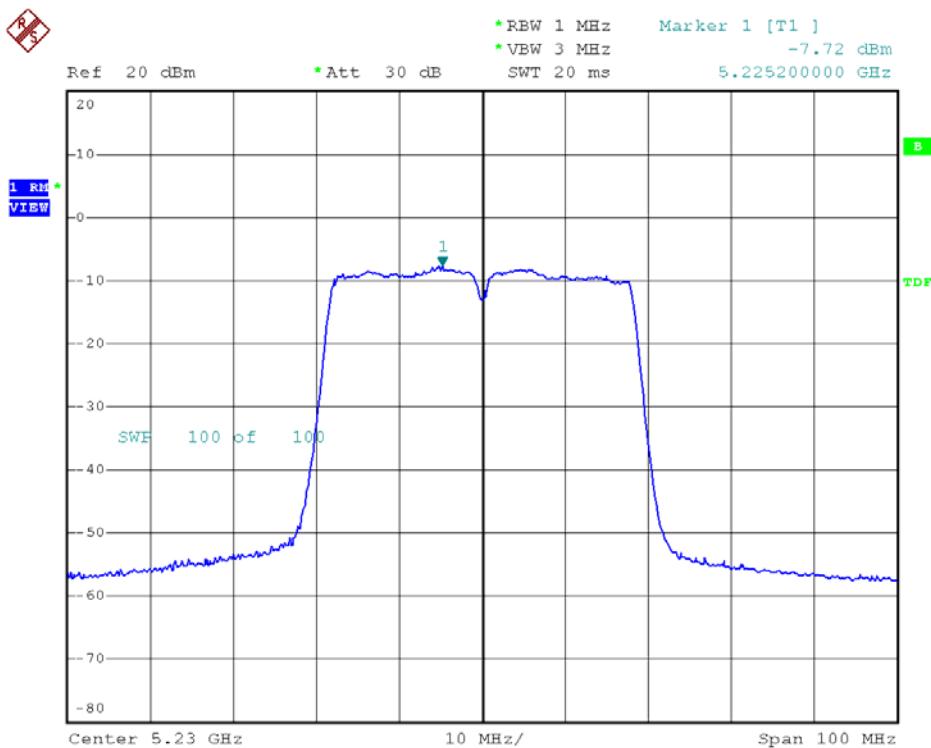




Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT L
Channel: 46

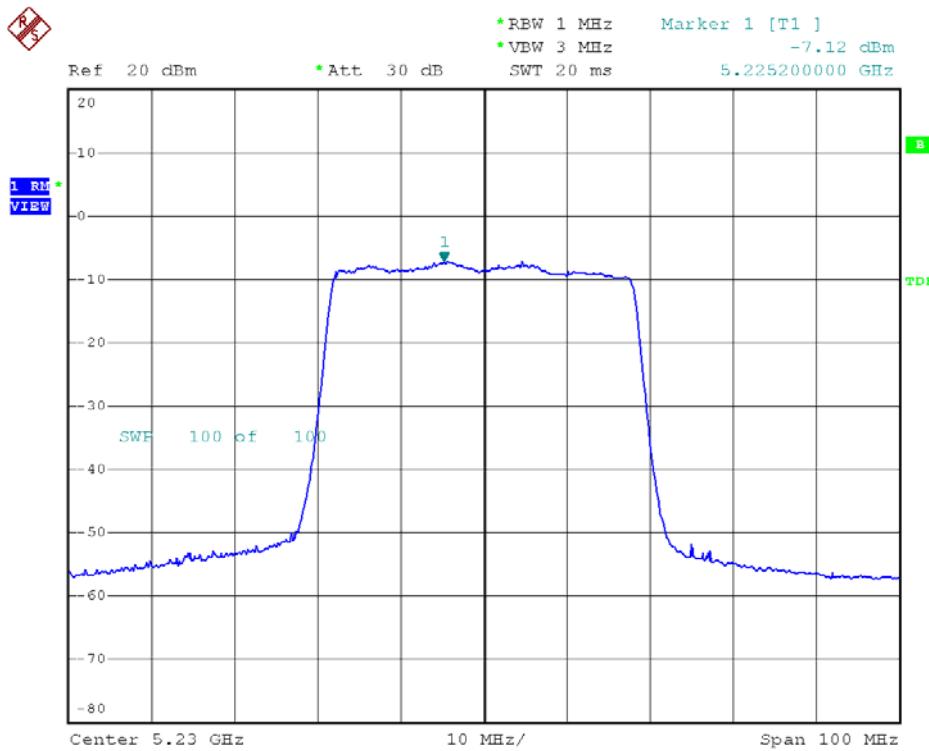


Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT R
Channel: 42

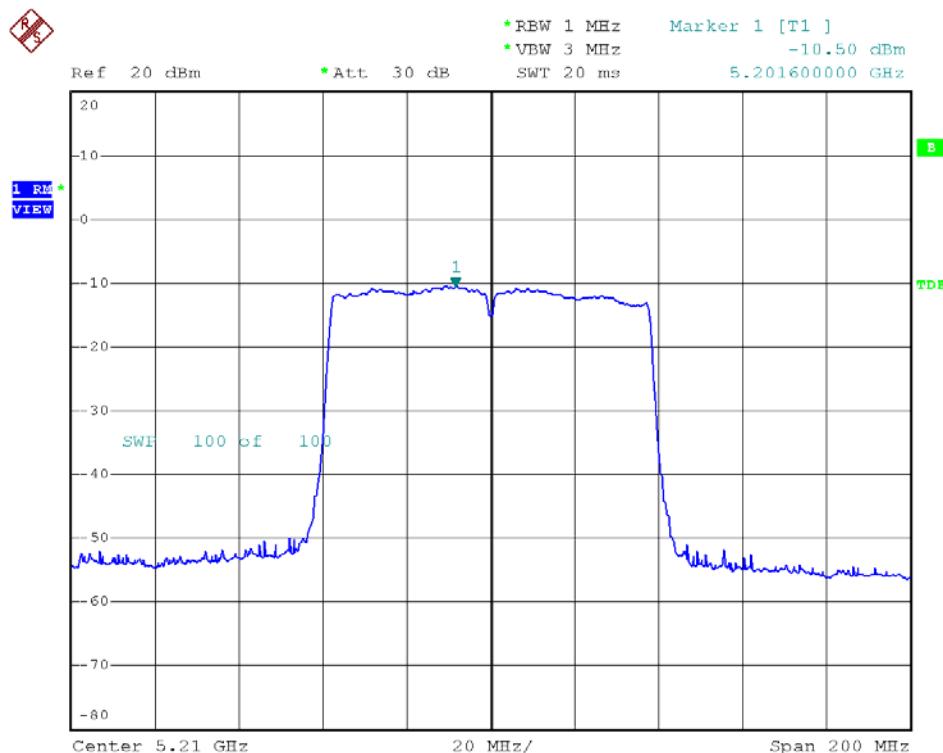




Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT M
Channel: 42

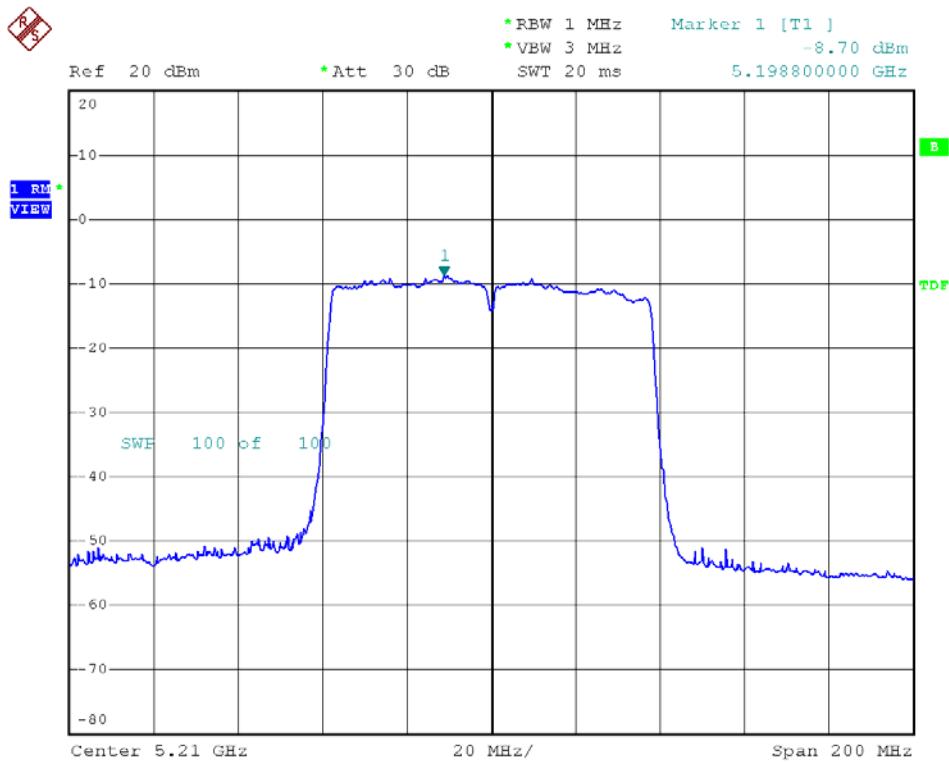

Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT L
Channel: 42

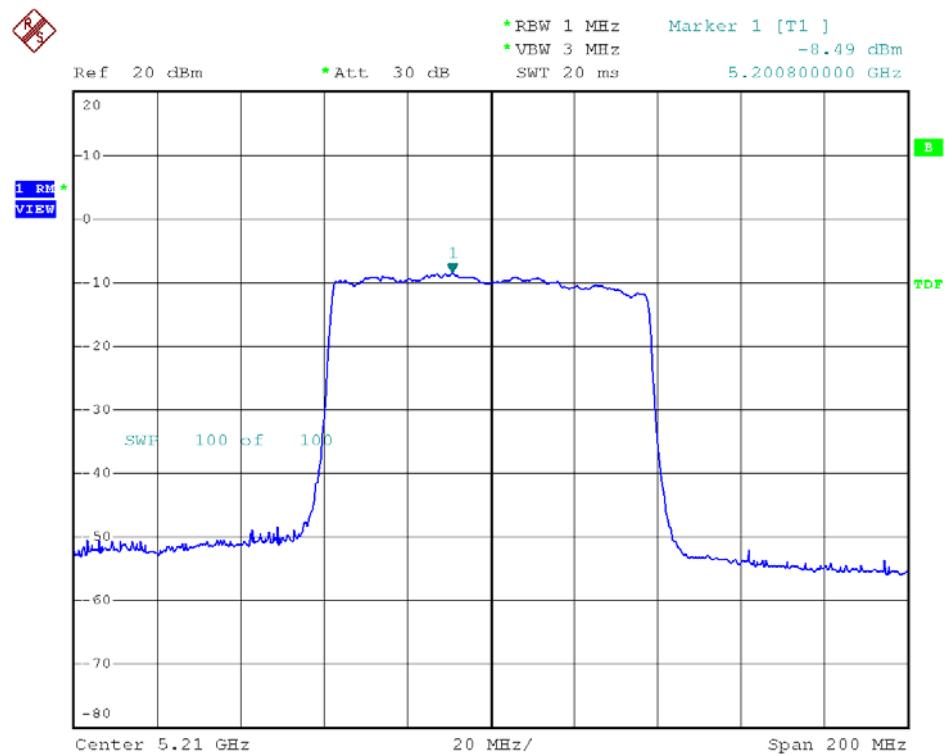




9. Frequency Stability

9.1. Test Procedure

1. The EUT was placed inside the Temperature and Humidity chamber.
2. The transmitter output was connected to spectrum analyzer.
3. Turn the EUT on and couple its output to a spectrum analyzer.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
6. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
7. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

9.2. Test Setup Layout

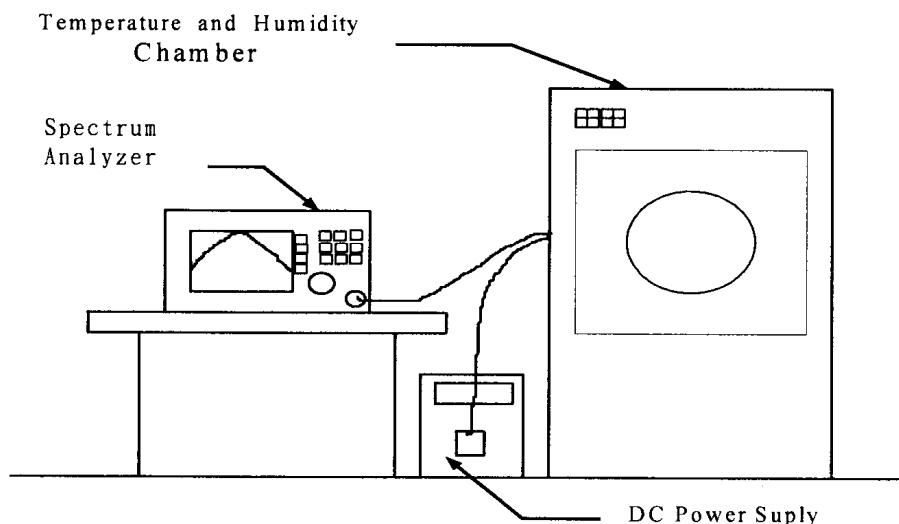

9.3. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2012/03/01	2013/02/28
Temperature Chamber	TMJ-9712	T MACHINE	T-12-040111	2012/09/21	2013/09/20
DC Power Supply	GPD-3030	GM	7020936	N/A	N/A
AC POWER CONVERTER	AFC-11005	APC	F103120008	N/A	N/A



9.4. Test Result and Data

Test Date: Feb. 26, 2013

Temperature: 22°C

Atmospheric pressure: 1020 hPa

Humidity: 65%

Operating frequency: 5180 MHz							
Temp (°C)	Power supply (V)	2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	102	5179.9824	-0.000340	5179.9808	-0.000371	5179.9802	-0.000382
	120	5179.9888	-0.000216	5179.9850	-0.000290	5179.9826	-0.000336
	138	5179.9892	-0.000208	5179.9902	-0.000189	5179.9882	-0.000228
40	102	5179.9886	-0.000220	5179.9878	-0.000236	5179.9884	-0.000224
	120	5179.9882	-0.000228	5179.9886	-0.000220	5179.9884	-0.000224
	138	5179.9898	-0.000197	5179.9884	-0.000224	5179.9888	-0.000216
30	102	5179.9484	-0.000996	5179.9482	-0.001000	5179.9484	-0.000996
	120	5179.9490	-0.000985	5179.9495	-0.000975	5179.9484	-0.000996
	138	5179.9484	-0.000996	5179.9488	-0.000988	5179.9494	-0.000977
20	102	5179.9384	-0.001189	5179.9392	-0.001174	5179.9388	-0.001181
	120	5179.9392	-0.001174	5179.9386	-0.001185	5179.9394	-0.001170
	138	5179.9388	-0.001181	5179.9388	-0.001181	5179.9396	-0.001166
10	102	5179.9502	-0.000961	5179.9492	-0.000981	5179.9502	-0.000961
	120	5179.9500	-0.000965	5179.9496	-0.000973	5179.9490	-0.000985
	138	5179.9498	-0.000969	5179.9490	-0.000985	5179.9494	-0.000977
0	102	5179.9776	-0.000432	5179.9760	-0.000463	5179.9734	-0.000514
	120	5179.9706	-0.000568	5179.9706	-0.000568	5179.9690	-0.000598
	138	5179.9674	-0.000629	5179.9672	-0.000633	5179.9664	-0.000649
-10	102	5179.9778	-0.000429	5179.9774	-0.000436	5179.9776	-0.000432
	120	5179.9780	-0.000425	5179.9780	-0.000425	5179.9774	-0.000436
	138	5179.9790	-0.000405	5179.9792	-0.000402	5179.9806	-0.000375
-20	102	5179.9828	-0.000332	5179.9820	-0.000347	5179.9822	-0.000344
	120	5179.9826	-0.000336	5179.9812	-0.000363	5179.9808	-0.000371
	138	5179.9838	-0.000313	5179.9240	-0.001467	5179.9838	-0.000313
-30	102	5179.9848	-0.000293	5179.9890	-0.000212	5179.9852	-0.000286
	120	5179.9844	-0.000301	5179.9844	-0.000301	5179.9842	-0.000305
	138	5179.9826	-0.000336	5179.9842	-0.000305	5179.9846	-0.000297

Limit : ±20ppm



10. Band Edges Measurement

10.1. Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low loss cable.
2. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz with convenient frequency span including 100 MHz bandwidth from band edge.
3. The band edges was measured and recorded.

10.2. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2012/03/01	2013/02/28

10.3. Test Result and Data

Test Date: Feb. 26, 2013

Temperature: 22°C


Atmospheric pressure: 1020 hPa

Humidity: 65%


Modulation Standard	Channel	Frequency (MHz)	maximum value in frequency (MHz)			maximum value (dBm)		
			ANT R	ANT M	ANT L	ANT R	ANT M	ANT L
802.11ac VHT20 (6.5Mbps)	36	5180	5101.20	5101.20	5101.40	-38.88	-38.70	-38.05
802.11ac VHT40 (13.5Mbps)	38	5190	5147.20	5149.60	5149.60	-39.74	-38.96	-39.01
802.11ac VHT80 (29.3Mbps)	42	5210	5145.20	5150.00	5148.40	-34.03	-30.81	-29.40



Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT R
Channel: 36

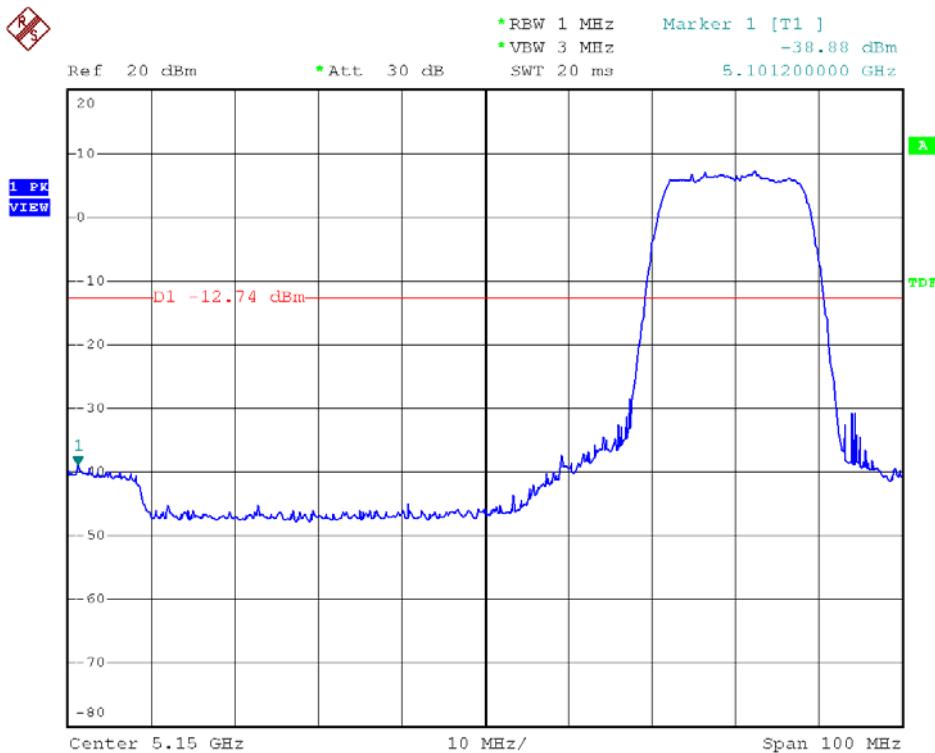


Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT M
Channel: 36

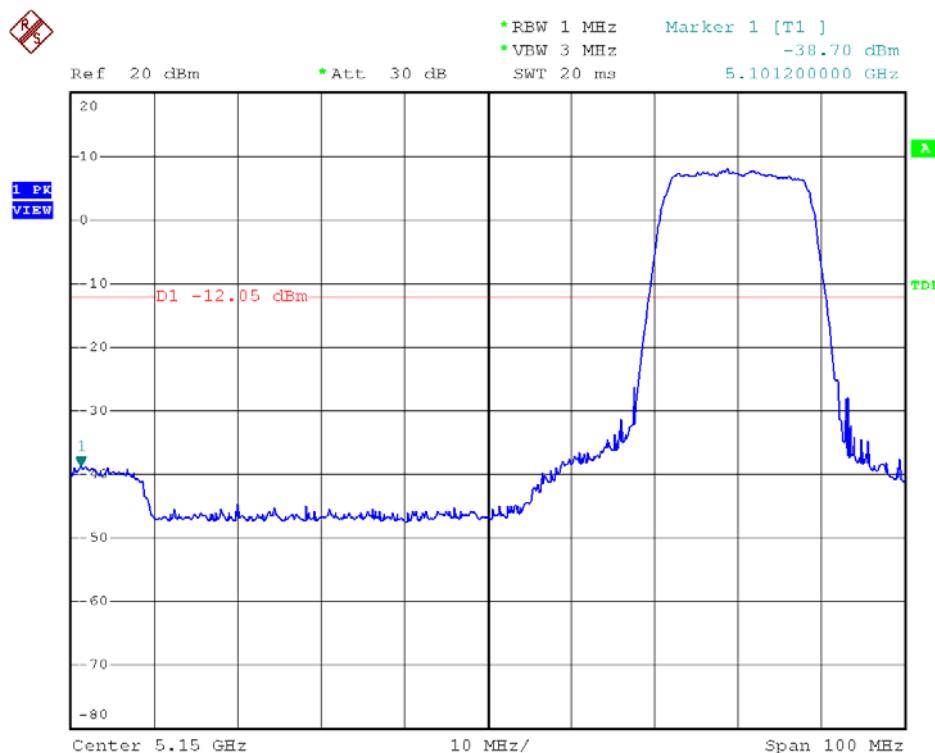




Modulation Standard: 802.11ac VHT20 (6.5Mbps), ANT L
Channel: 36

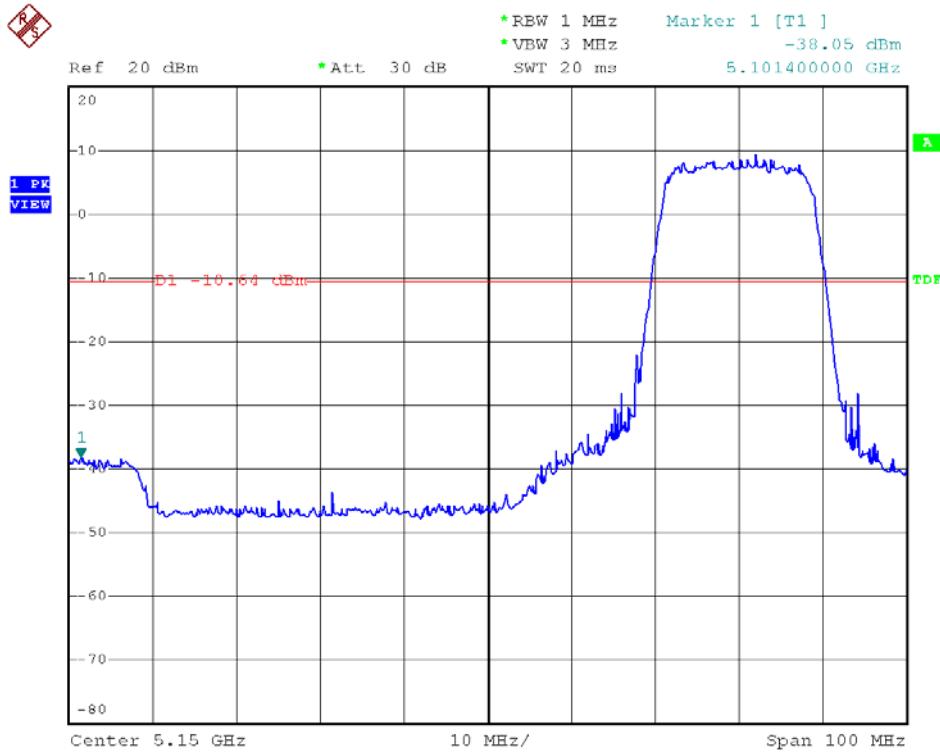


Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT R
Channel: 38

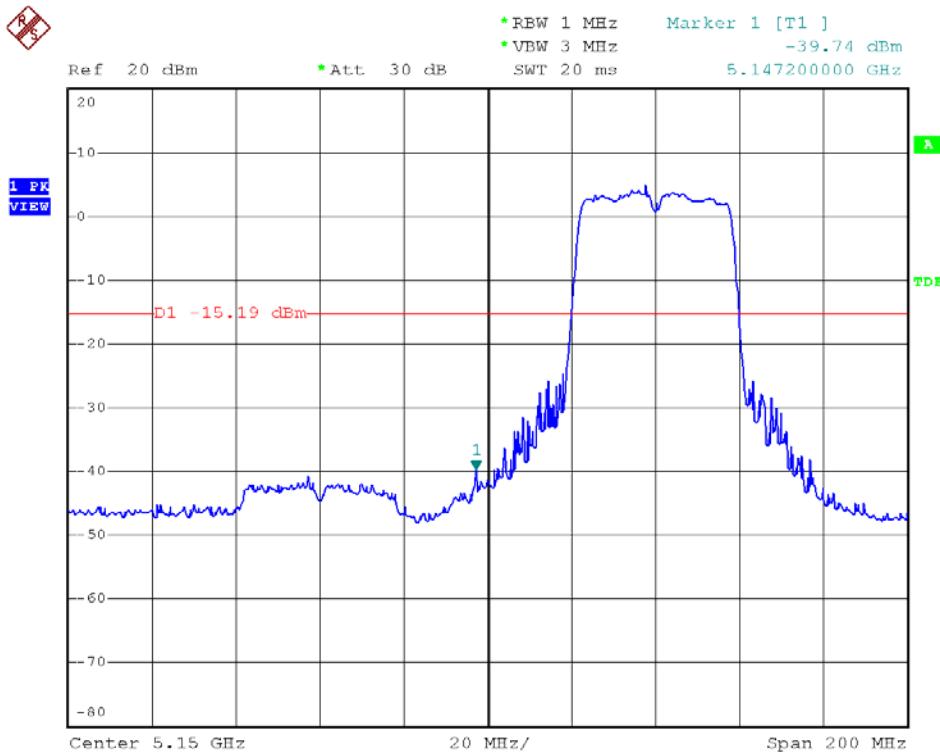



Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT M
Channel: 38

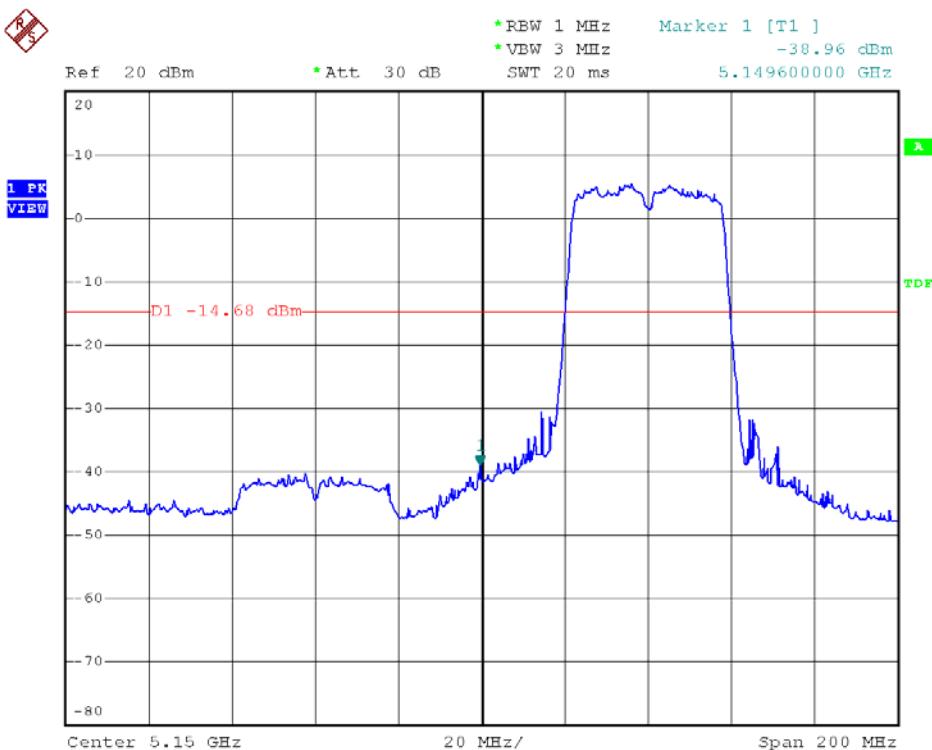


Modulation Standard: 802.11ac VHT40 (13.5Mbps), ANT L
Channel: 38






Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT R
Channel: 42

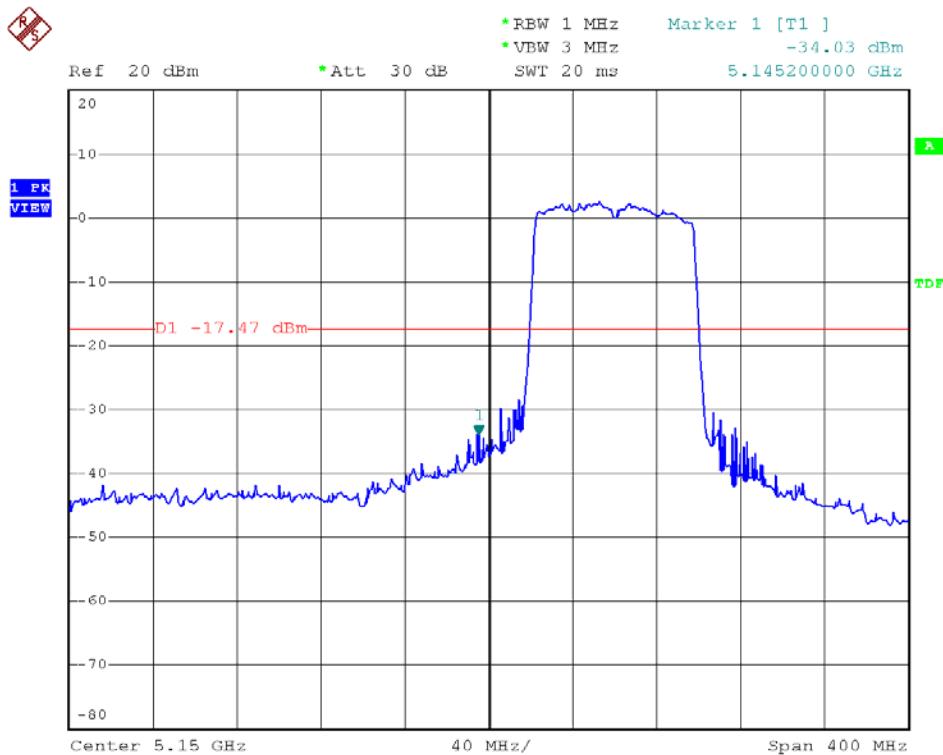


Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT M
Channel: 42

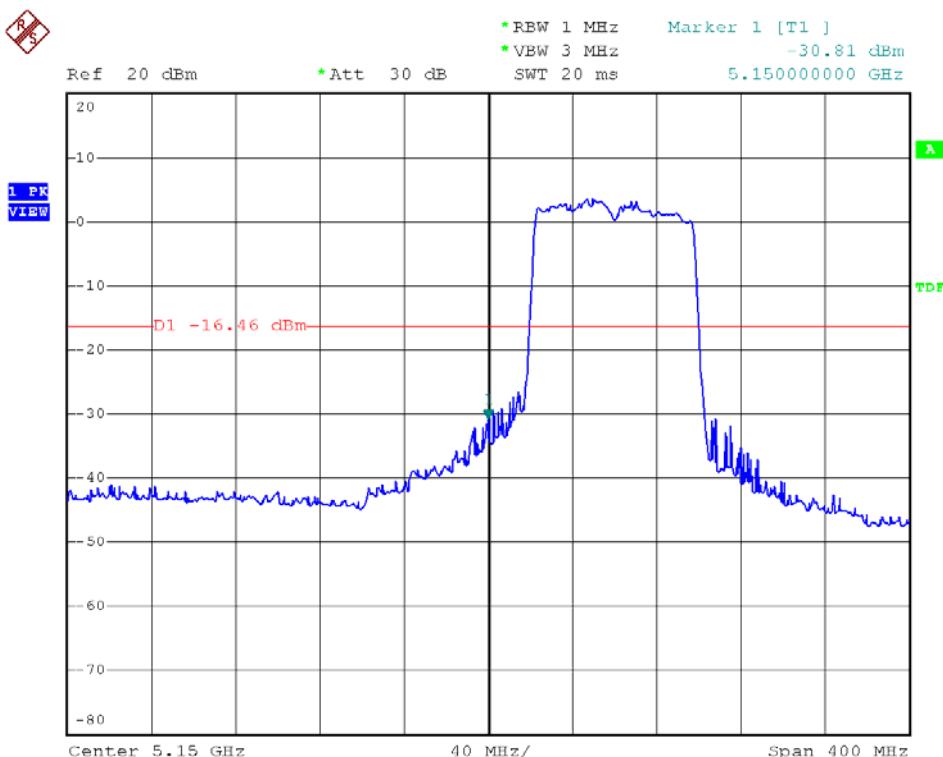



Modulation Standard: 802.11ac VHT80 (29.3Mbps), ANT L
Channel: 42

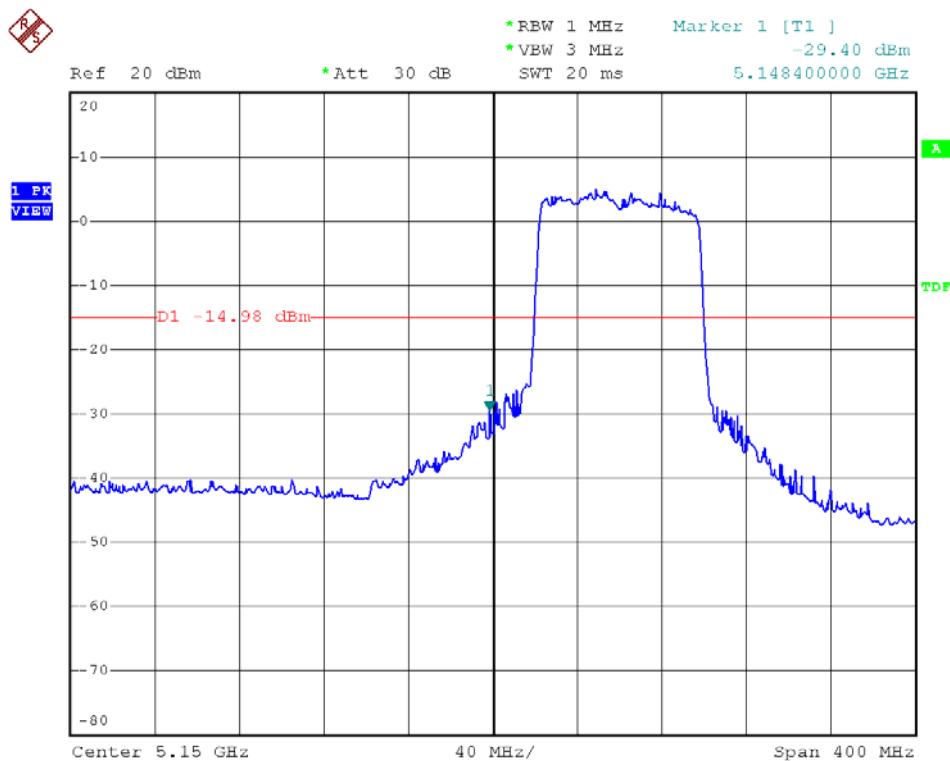



10.4. Restrict Band Emission Measurement Data

Test Date: Mar. 19, 2013 Temperature: 22°C

Atmospheric pressure: 1020 hPa Humidity: 65%

Model No.: UAP-AC

Modulation Standard: IEEE 802.11ac VHT20 (6.5Mbps)

Channel 36							Fundamental Frequency: 5180 MHz			
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
5142.00	H	40.08	7.24	47.32	Peak	74	54	-26.68	0	1.00
---	H	---	---	---	Ave	74	54	---	---	---
5095.00	V	40.34	7.65	47.99	Peak	74	54	-26.01	360	1.00
---	V	---	---	---	Ave	74	54	---	---	---

Modulation Standard: IEEE 802.11ac VHT40 (13.5Mbps)

Channel 38							Fundamental Frequency: 5190 MHz			
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
5149.80	H	40.59	7.29	47.88	Peak	74	54	-26.12	360	1.00
---	H	---	---	---	Ave	74	54	---	---	---
5115.50	V	40.46	7.48	47.94	Peak	74	54	-26.06	360	1.00
---	V	---	---	---	Ave	74	54	---	---	---

Modulation Standard: IEEE 802.11ac VHT80 (29.3Mbps)

Channel 42							Fundamental Frequency: 5210 MHz			
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
5137.20	H	40.22	7.20	47.42	Peak	74	54	-26.58	0	1.00
---	H	---	---	---	Ave	74	54	---	---	---
5104.20	V	40.24	7.61	47.85	Peak	74	54	-26.15	360	1.00
---	V	---	---	---	Ave	74	54	---	---	---

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector peak mode) for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector sample mode) for Average detection at frequency above 1GHz.



Test Date: Mar. 19, 2013

Temperature: 22°C

Atmospheric pressure: 1020 hPa

Humidity: 65%

Model No.: UAP-AC Outdoor

Modulation Standard: IEEE 802.11ac VHT20 (6.5Mbps)

Channel 36							Fundamental Frequency: 5180 MHz			
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
5097.80	H	44.86	6.87	51.73	Peak	74	54	-22.27	360	1.00
---	H	---	---	---	Ave	74	54	---	---	---
5099.00	V	40.23	7.67	47.90	Peak	74	54	-26.10	360	1.00
---	V	---	---	---	Ave	74	54	---	---	---

Modulation Standard: IEEE 802.11ac VHT40 (13.5Mbps)

Channel 38							Fundamental Frequency: 5190 MHz			
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
5115.00	H	44.26	7.03	51.29	Peak	74	54	-22.71	187	1.00
---	H	---	---	---	Ave	74	54	---	---	---
5100.20	V	40.02	7.67	47.69	Peak	74	54	-26.31	0	1.00
---	V	---	---	---	Ave	74	54	---	---	---

Modulation Standard: IEEE 802.11ac VHT80 (29.3Mbps)

Channel 42							Fundamental Frequency: 5210 MHz			
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
5145.50	H	50.47	7.27	57.74	Peak	74	54	-16.26	0	1.00
5148.75	H	32.34	7.29	39.63	Ave	74	54	-14.37	327	1.00
5141.50	V	41.07	7.15	48.22	Peak	74	54	-25.87	360	1.00
---	V	---	---	---	Ave	74	54	---	---	---

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector peak mode) for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector sample mode) for Average detection at frequency above 1GHz.



11. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

**: Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

11.1. Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.