



FCC RF Test Report

APPLICANT : Ubiquiti Networks, Inc.
EQUIPMENT : UniFi® AC Access Point
BRAND NAME : UBIQUITI
MODEL NAME : UAP-AC-M
FCC ID : SWX-UAPACM
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Jun. 16, 2016 and testing was completed on Jul. 25, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : SWX-UAPACM

Page Number : 1 of 31

Report Issued Date : Aug. 03, 2016

Report Version : Rev. 01

Report Template No.: BU5-FR15EWLB4 AC MA Version 1.4



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Modification of EUT 6

 1.6 Testing Location 7

 1.7 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example 11

3 TEST RESULT 12

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 12

 3.2 Maximum Conducted Output Power Measurement 15

 3.3 Power Spectral Density Measurement 16

 3.4 Unwanted Emissions Measurement 19

 3.5 AC Conducted Emission Measurement 23

 3.6 Frequency Stability Measurement 27

 3.7 Automatically Discontinue Transmission 28

 3.8 Antenna Requirements 29

4 LIST OF MEASURING EQUIPMENT 30

5 UNCERTAINTY OF EVALUATION 31

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) ≤ -17, -27 dBm/MHz &15.209(a)	Pass	Under limit 3.04 dB at 5422.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 14.00 dB at 0.150 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Ubiquiti Networks, Inc.

12F, No. 105, Song Ren Rd., SinYi District, Taipei 110, Taiwan

1.2 Manufacturer

Ubiquiti Networks, Inc.

12F, No. 105, Song Ren Rd., SinYi District, Taipei 110, Taiwan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	UniFi® AC Access Point
Brand Name	UBIQUITI
Model Name	UAP-AC-M
FCC ID	SWX-UAPACM
EUT supports Radios application	WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification							
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz						
Maximum Output Power	MIMO <Ant. 1 + 2> 802.11a : 21.05 dBm / 0.1274 W 802.11n HT20 : 21.26 dBm / 0.1337 W 802.11n HT40 : 20.77 dBm / 0.1194 W 802.11ac VHT20: 21.20 dBm / 0.1318 W 802.11ac VHT40: 20.64 dBm / 0.1159 W 802.11ac VHT80: 14.53 dBm / 0.0284 W						
99% Occupied Bandwidth	802.11a : 17.85 MHz 802.11n HT20 : 19.05 MHz 802.11n HT40 : 37.00 MHz 802.11ac VHT20 : 19.10 MHz 802.11ac VHT40 : 37.00 MHz 802.11ac VHT80 : 75.96 MHz						
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)						
Antenna Type	Ant. 1 : Dipole Antenna Ant. 2 : Dipole Antenna						
Antenna Gain	Ant. 1 : 4.00 dBi Ant. 2 : 4.00 dBi						
Antenna Function Description	<table border="1"> <thead> <tr> <th></th> <th>Ant. 1</th> <th>Ant. 2</th> </tr> </thead> <tbody> <tr> <td>802.11 a/n/ac MIMO</td> <td>V</td> <td>V</td> </tr> </tbody> </table>		Ant. 1	Ant. 2	802.11 a/n/ac MIMO	V	V
	Ant. 1	Ant. 2					
802.11 a/n/ac MIMO	V	V					

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151	5755	159	5795
	153	5765	161	5805
	155	5775	165	5825


Note: The above Frequency and Channel in boldface were 802.11n HT40.

2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

MIMO Antenna

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

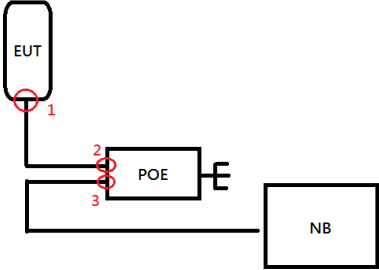
Test Cases	
AC Conducted Emission	Mode 1 : WLAN (5GHz) Link + POE + LAN Link
<p>Remark: The following figure was the connection diagram of telecommunication port.</p> 	

Ch. #		Band IV : 5725-5850 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159


Ch. #		Band IV : 5725-5850 MHz		
		802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	149	151	-
M	Middle	157	-	155
H	High	165	159	-

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

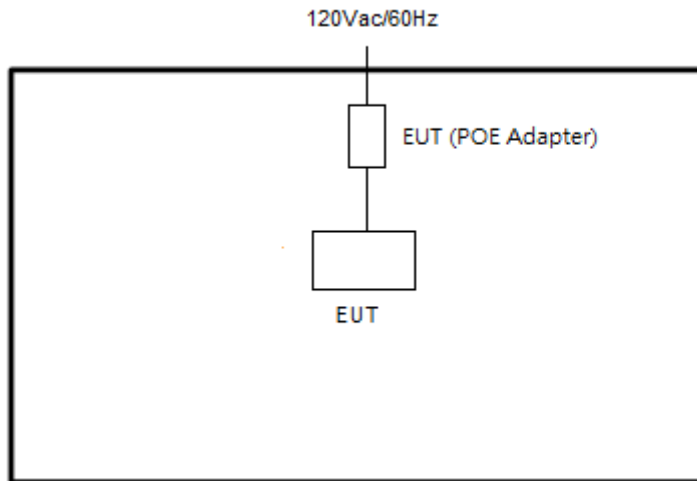

<AC Conducted Emission Mode>

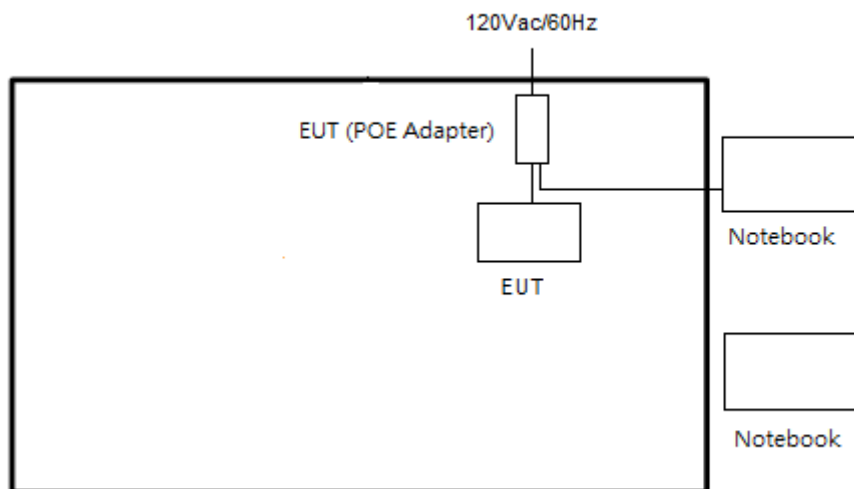



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	Notebook	DELL	P20G	FCC DoC/ Contains FCC ID: QDS-BRCM1051	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

For WLAN function, programmed RF utility, "Cart.exe" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



3.1.4 Test Setup

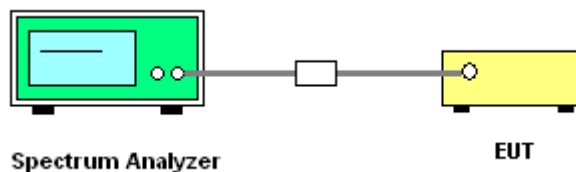




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

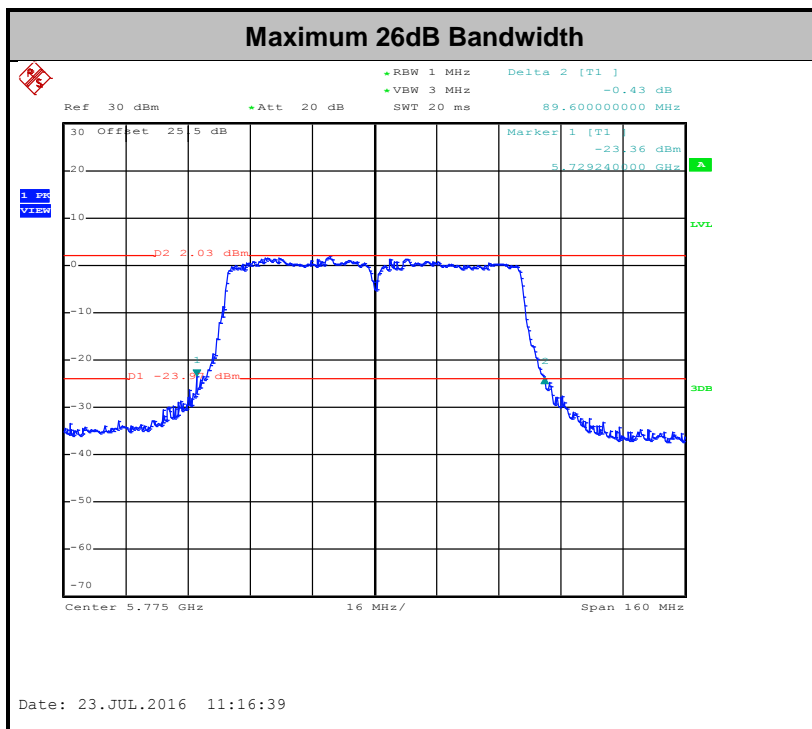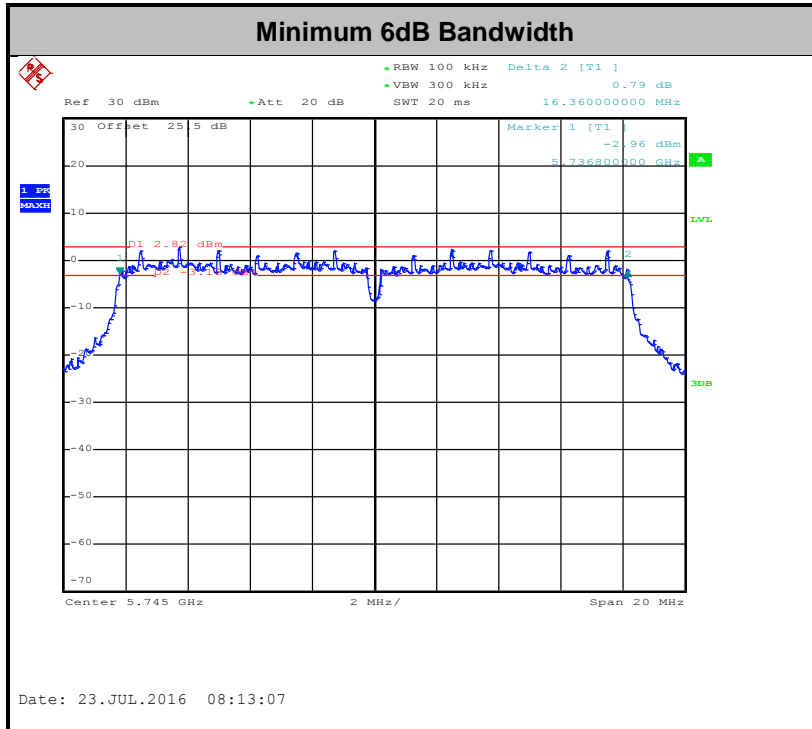

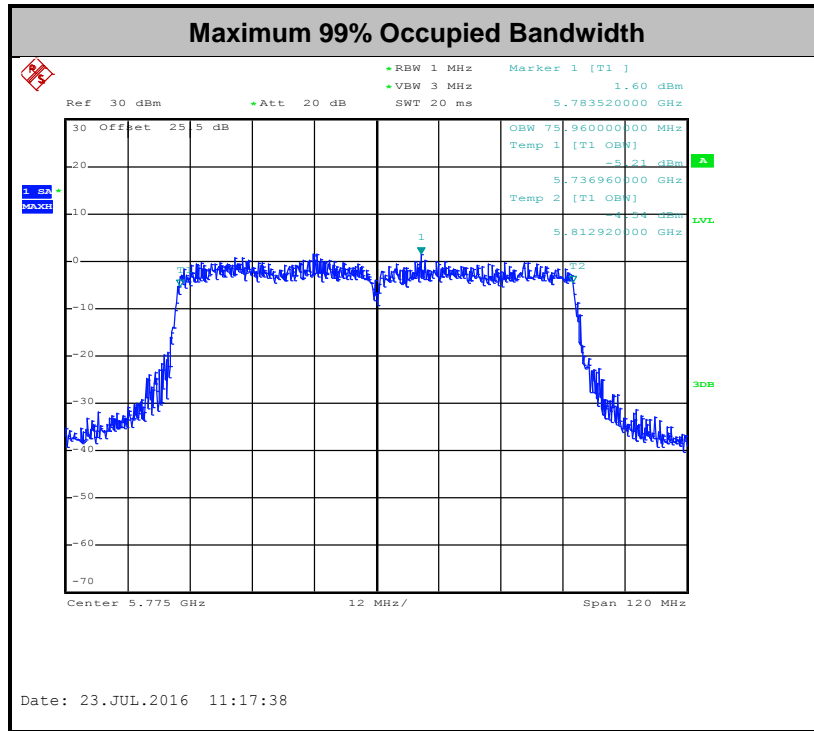

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

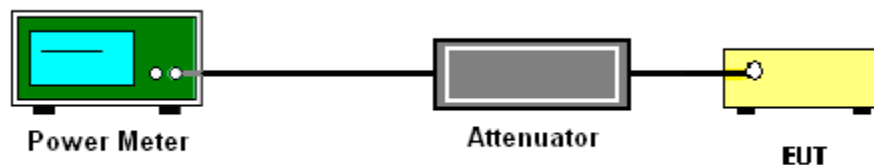

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW \geq 1 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
4. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter

Output v02r01.

Method (a): Measure and sum the spectra across the outputs.



The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

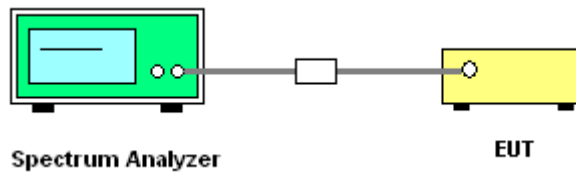

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

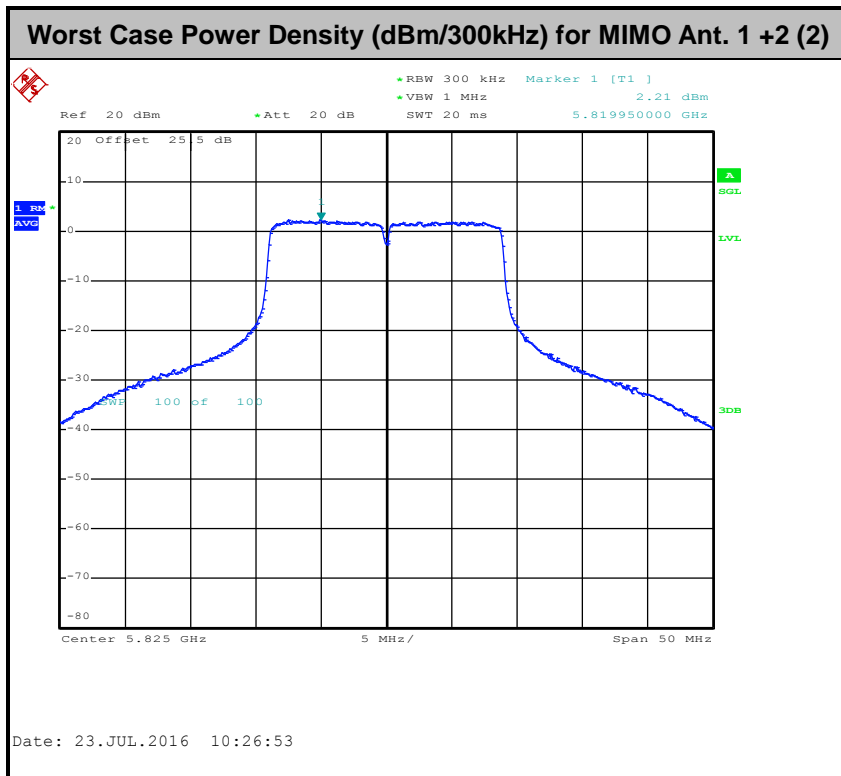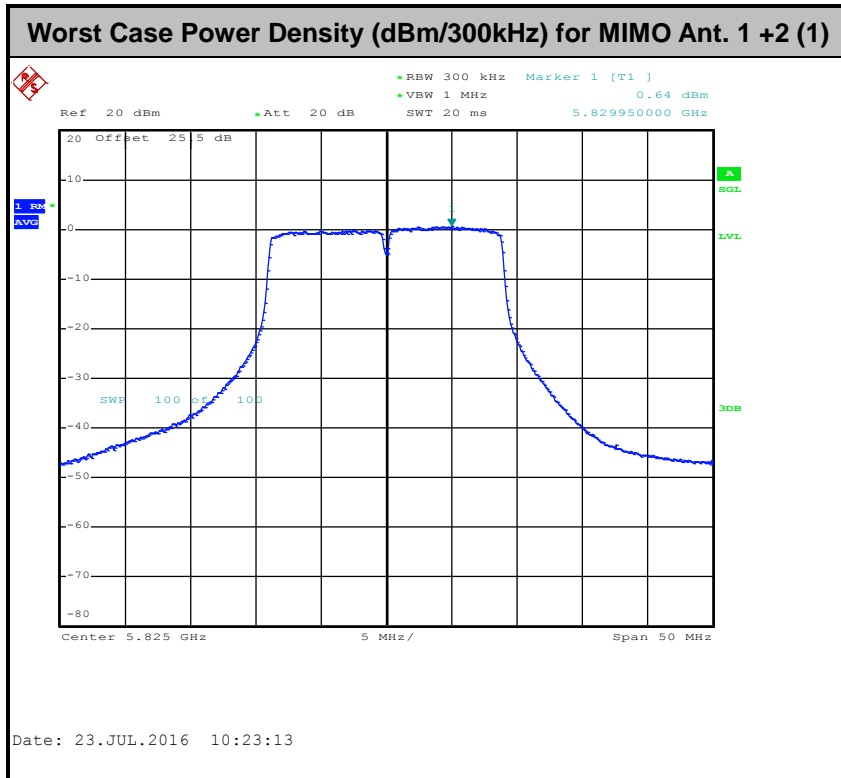



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
-27	68.3

(3) KDB 789033 D02 General UNII Test Procedures New Rules v01r02 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.



3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.


- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

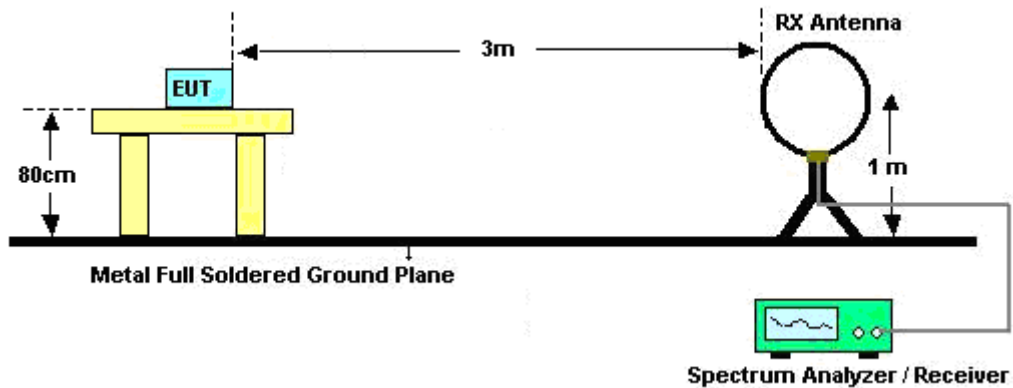

For radiated emissions from 30MHz to 1GHz

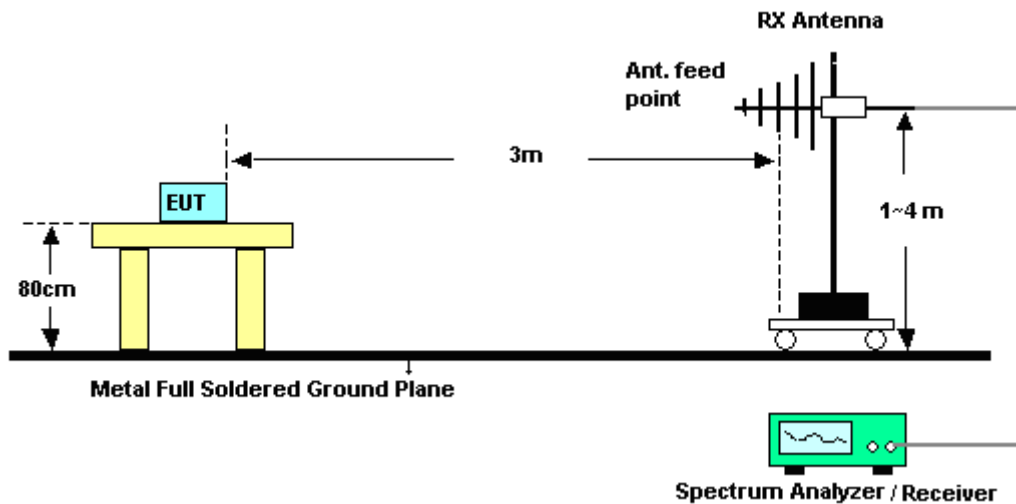

For radiated emissions above 1GHz

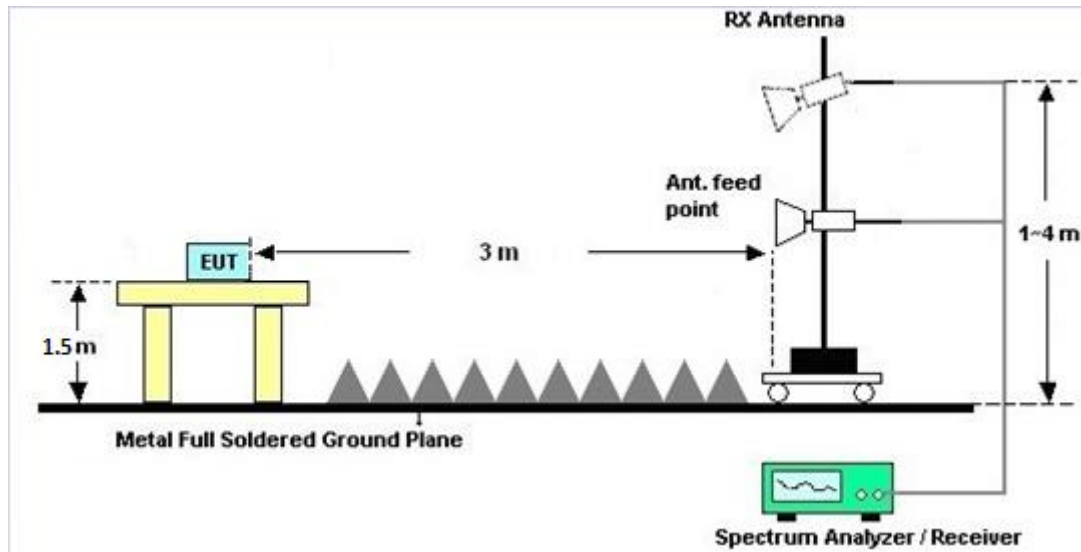

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix B and C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

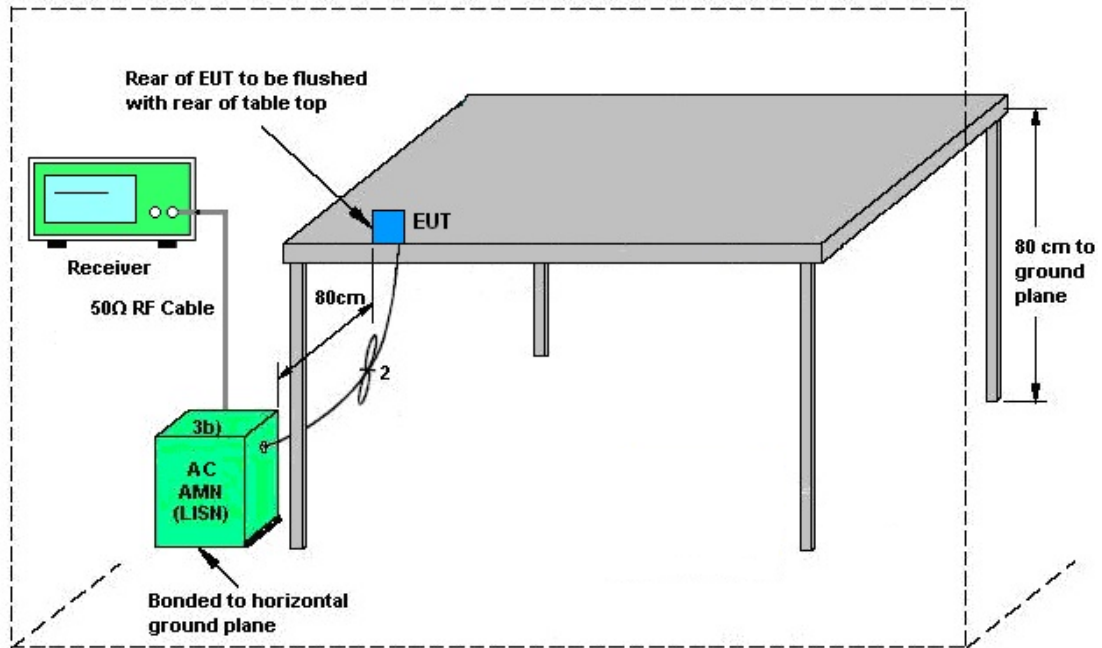


AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network



3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	23~24°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	50~51%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN (5GHz) Link + POE + LAN Link		

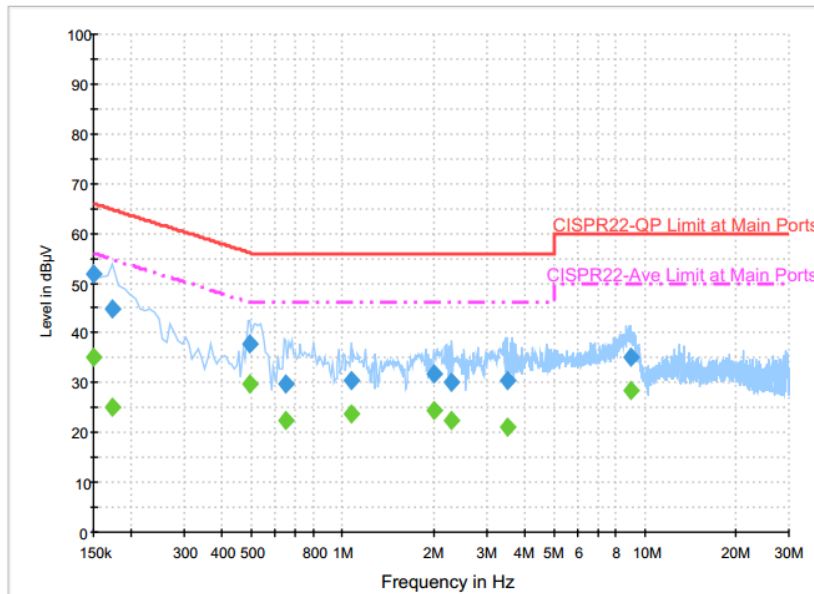

Final Result : QuasiPeak


Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	52.0	Off	L1	19.6	14.0	66.0
0.174000	44.8	Off	L1	19.6	20.0	64.8
0.494000	37.9	Off	L1	19.6	18.2	56.1
0.646000	29.7	Off	L1	19.6	26.3	56.0
1.070000	30.6	Off	L1	19.7	25.4	56.0
2.006000	31.8	Off	L1	19.7	24.2	56.0
2.302000	30.2	Off	L1	19.6	25.8	56.0
3.510000	30.5	Off	L1	19.8	25.5	56.0
9.022000	35.0	Off	L1	20.0	25.0	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	35.2	Off	L1	19.6	20.8	56.0
0.174000	24.9	Off	L1	19.6	29.9	54.8
0.494000	29.8	Off	L1	19.6	16.3	46.1
0.646000	22.5	Off	L1	19.6	23.5	46.0
1.070000	23.7	Off	L1	19.7	22.3	46.0
2.006000	24.3	Off	L1	19.7	21.7	46.0
2.302000	22.4	Off	L1	19.6	23.6	46.0
3.510000	20.9	Off	L1	19.8	25.1	46.0
9.022000	28.5	Off	L1	20.0	21.5	50.0



Test Mode :	Mode 1	Temperature :	23~24°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	50~51%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN (5GHz) Link + POE + LAN Link		

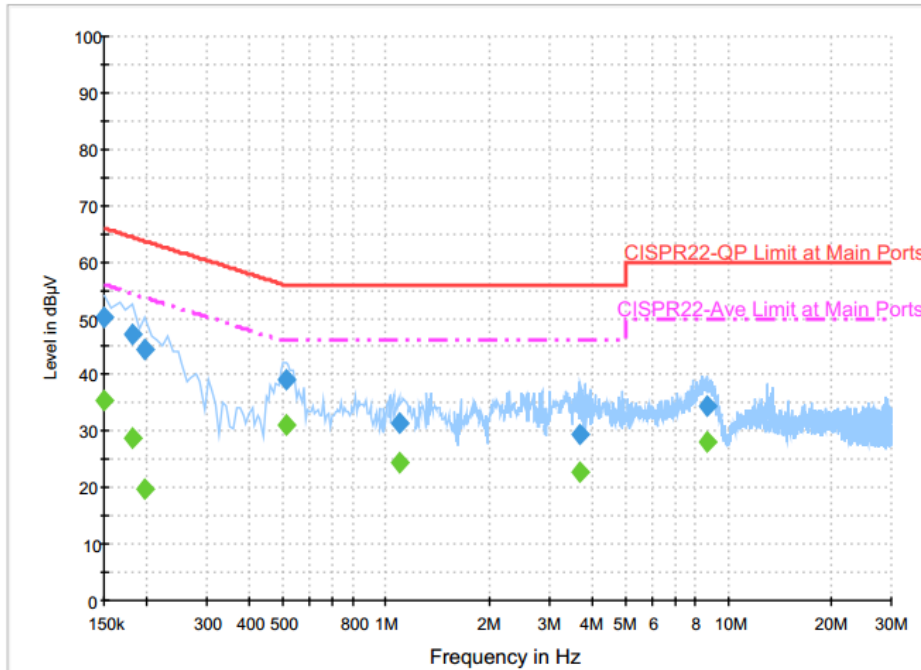

Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	50.3	Off	N	19.6	15.7	66.0
0.182000	47.0	Off	N	19.6	17.4	64.4
0.198000	44.3	Off	N	19.6	19.4	63.7
0.510000	39.2	Off	N	19.6	16.8	56.0
1.094000	31.4	Off	N	19.6	24.6	56.0
3.670000	29.3	Off	N	19.7	26.7	56.0
8.718000	34.4	Off	N	20.0	25.6	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	35.3	Off	N	19.6	20.7	56.0
0.182000	28.9	Off	N	19.6	25.5	54.4
0.198000	19.8	Off	N	19.6	33.9	53.7
0.510000	31.1	Off	N	19.6	14.9	46.0
1.094000	24.5	Off	N	19.6	21.5	46.0
3.670000	22.8	Off	N	19.7	23.2	46.0
8.718000	28.0	Off	N	20.0	22.0	50.0

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

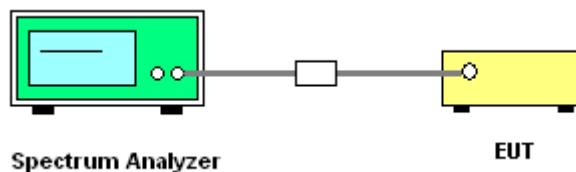

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.8.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

The EUT supports CDD mode.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant 1 (dBi)	Ant 2 (dBi)				
Band IV	4.00	4.00	4.00	7.01	0.00	1.01

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	AC POWER	AFC-500W	F104070011	50Hz~60Hz	Dec. 02, 2015	Jun. 24, 2016 ~ Jul. 25, 2016	Dec. 01, 2016	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1132003	300MHz~40GHz	Aug. 12, 2015	Jun. 24, 2016 ~ Jul. 25, 2016	Aug. 11, 2016	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1126017	300MHz~40GHz	Aug. 12, 2015	Jun. 24, 2016 ~ Jul. 25, 2016	Aug. 11, 2016	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 23, 2015	Jun. 24, 2016 ~ Jul. 25, 2016	Nov. 22, 2016	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40℃ ~90℃	Sep. 08, 2015	Jun. 24, 2016 ~ Jul. 25, 2016	Sep. 07, 2016	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Jul. 18, 2016 ~ Jul. 23, 2016	Sep. 01, 2016	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 20, 2015	Jul. 18, 2016 ~ Jul. 23, 2016	Nov. 19, 2016	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Nov. 17, 2015	Jul. 18, 2016 ~ Jul. 23, 2016	Nov. 16, 2016	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 08, 2015	Jul. 18, 2016 ~ Jul. 23, 2016	Oct. 07, 2016	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 19, 2015	Jul. 18, 2016 ~ Jul. 23, 2016	Nov. 18, 2016	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1902247	1GHz~18GHz	Jun. 22, 2016	Jul. 18, 2016 ~ Jul. 23, 2016	Jun. 21, 2017	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHZ	Sep. 24, 2015	Jul. 18, 2016 ~ Jul. 23, 2016	Sep. 23, 2016	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jul. 18, 2016 ~ Jul. 23, 2016	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jul. 18, 2016 ~ Jul. 23, 2016	N/A	Radiation (03CH11-HY)
Preamplifier	MITEQ	TTA0204	1872107	2GHz~40GHz	Feb. 15, 2016	Jul. 18, 2016 ~ Jul. 23, 2016	Feb. 14, 2017	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Nov. 02, 2015	Jul. 18, 2016 ~ Jul. 23, 2016	Nov. 01, 2016	Radiation (03CH11-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 30, 2016	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 26, 2015	Jun. 30, 2016	Aug. 25, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2015	Jun. 30, 2016	Dec. 01, 2016	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.90
---	------



Appendix A. Conducted Test Results

Test Engineer:	Osolemio Chang	Temperature:	21.7~24.2	°C
Test Date:	2016/6/24 ~ 2016/7/23	Relative Humidity:	51.2~53.8	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	17.75	17.55	23.88	22.92	16.36	16.36	0.5	0.5	Pass
11a	6Mbps	2	157	5785	17.60	17.85	25.20	27.96	16.36	16.36	0.5	0.5	Pass
11a	6Mbps	2	165	5825	17.65	17.80	23.52	30.96	16.36	16.36	0.5	0.5	Pass
HT20	MCS0	2	149	5745	18.90	18.70	24.60	24.72	17.56	17.56	0.5	0.5	Pass
HT20	MCS0	2	157	5785	18.75	19.00	24.60	29.64	17.60	17.60	0.5	0.5	Pass
HT20	MCS0	2	165	5825	18.60	19.05	24.36	31.80	17.60	17.56	0.5	0.5	Pass
HT40	MCS0	2	151	5755	36.70	36.80	46.40	45.20	35.84	35.76	0.5	0.5	Pass
HT40	MCS0	2	159	5795	36.60	37.00	45.40	52.80	36.00	36.00	0.5	0.5	Pass
VHT20	MCS0	2	149	5745	18.60	18.85	24.60	24.24	17.60	17.60	0.5	0.5	Pass
VHT20	MCS0	2	157	5785	18.65	19.10	23.64	32.34	17.60	17.56	0.5	0.5	Pass
VHT20	MCS0	2	165	5825	18.50	18.95	24.48	32.40	17.60	17.60	0.5	0.5	Pass
VHT40	MCS0	2	151	5755	36.80	36.70	45.80	44.40	35.76	35.76	0.5	0.5	Pass
VHT40	MCS0	2	159	5795	37.00	37.00	45.40	55.00	36.08	36.08	0.5	0.5	Pass
VHT80	MCS0	2	155	5775	75.96	75.84	89.60	85.76	75.20	75.84	0.5	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	0.25	0.25	13.36	15.18	17.38	30.00		4.00		Pass
11a	6Mbps	2	157	5785	0.25	0.25	16.85	18.35	20.68	30.00		4.00		Pass
11a	6Mbps	2	165	5825	0.25	0.25	17.30	18.67	21.05	30.00		4.00		Pass
HT20	MCS0	2	149	5745	0.23	0.30	13.45	15.08	17.35	30.00		4.00		Pass
HT20	MCS0	2	157	5785	0.23	0.30	16.54	18.81	20.83	30.00		4.00		Pass
HT20	MCS0	2	165	5825	0.23	0.30	16.94	19.26	21.26	30.00		4.00		Pass
HT40	MCS0	2	151	5755	0.43	0.44	11.47	13.66	15.71	30.00		4.00		Pass
HT40	MCS0	2	159	5795	0.43	0.44	16.47	18.75	20.77	30.00		4.00		Pass
VHT20	MCS0	2	149	5745	0.23	0.23	13.39	15.09	17.34	30.00		4.00		Pass
VHT20	MCS0	2	157	5785	0.23	0.23	16.76	18.67	20.83	30.00		4.00		Pass
VHT20	MCS0	2	165	5825	0.23	0.23	17.15	19.02	21.20	30.00		4.00		Pass
VHT40	MCS0	2	151	5755	0.47	0.47	11.31	13.62	15.63	30.00		4.00		Pass
VHT40	MCS0	2	159	5795	0.47	0.47	16.07	18.77	20.64	30.00		4.00		Pass
VHT80	MCS0	2	155	5775	0.86	0.86	10.26	12.50	14.53	30.00		4.00		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	0.25	0.25	2.22				3.80	28.99	7.01		Pass	
11a	6Mbps	2	157	5785	0.25	0.25	2.22				7.11	28.99	7.01		Pass	
11a	6Mbps	2	165	5825	0.25	0.25	2.22				7.31	28.99	7.01		Pass	
HT20	MCS0	2	149	5745	0.23	0.30	2.22				3.73	28.99	7.01		Pass	
HT20	MCS0	2	157	5785	0.23	0.30	2.22				7.47	28.99	7.01		Pass	
HT20	MCS0	2	165	5825	0.23	0.30	2.22				7.56	28.99	7.01		Pass	
HT40	MCS0	2	151	5755	0.43	0.44	2.22				-0.69	28.99	7.01		Pass	
HT40	MCS0	2	159	5795	0.43	0.44	2.22				4.09	28.99	7.01		Pass	
VHT20	MCS0	2	149	5745	0.23	0.23	2.22				3.90	28.99	7.01		Pass	
VHT20	MCS0	2	157	5785	0.23	0.23	2.22				7.21	28.99	7.01		Pass	
VHT20	MCS0	2	165	5825	0.23	0.23	2.22				7.67	28.99	7.01		Pass	
VHT40	MCS0	2	151	5755	0.47	0.47	2.22				-0.66	28.99	7.01		Pass	
VHT40	MCS0	2	159	5795	0.47	0.47	2.22				4.21	28.99	7.01		Pass	
VHT80	MCS0	2	155	5775	0.86	0.86	2.22				-4.52	28.99	7.01		Pass	

TEST RESULTS DATA
Frequency Stability

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	149	5745	5744.975	-0.025	-4.35	20	108	
11a	6Mbps	1	149	5745	5745.000	0.000	0.00	20	132	
11a	6Mbps	1	149	5745	5744.975	-0.025	-4.35	20	120	
11a	6Mbps	1	149	5745	5745.000	0.000	0.00	-30	120	
11a	6Mbps	1	149	5745	5745.000	0.000	0.00	50	120	



Appendix B. Radiated Spurious Emission

Test Engineer :	Ken Wu, J.C. Liang, Jacky Hung	Temperature :	20~23°C
		Relative Humidity :	45~50%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 149 5745MHz		5606.2	50.95	-17.35	68.3	41.63	32.14	10.71	33.53	100	0	P	H	
		5698.2	50.41	-53.56	103.97	41.03	32.27	10.67	33.56	100	0	P	H	
		5717.8	59.1	-51.18	110.28	49.71	32.31	10.65	33.57	100	0	P	H	
		5724.8	61.01	-60.83	121.84	51.62	32.31	10.65	33.57	100	0	P	H	
		5745	106.7	-15.6	122.3	97.3	32.34	10.63	33.57	100	0	P	H	
		5745	97.9	-	-	88.5	32.34	10.63	33.57	100	0	A	H	
														H
														H
			5607.2	57.45	-10.85	68.3	48.13	32.14	10.71	33.53	122	181	P	V
			5692	58.42	-40.98	99.4	49.04	32.27	10.67	33.56	122	181	P	V
			5716	71.41	-38.37	109.78	62.04	32.29	10.65	33.57	122	181	P	V
			5723.6	74.14	-44.97	119.11	64.75	32.31	10.65	33.57	122	181	P	V
			5422	57.49	-16.51	74	48.23	31.9	10.84	33.48	122	181	P	V
			5422	50.96	-3.04	54	41.7	31.9	10.84	33.48	122	181	A	V
			5745	117.93	-4.37	122.3	108.53	32.34	10.63	33.57	122	181	P	V
		5745	110.7	-	-	101.3	32.34	10.63	33.57	122	181	A	V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 157 5785MHz		5607.6	49.86	-18.44	68.3	40.54	32.14	10.71	33.53	100	0	P	H	
		5699	50.5	-54.06	104.56	41.12	32.27	10.67	33.56	100	0	P	H	
		5701	49.57	-56.01	105.58	40.19	32.29	10.65	33.56	100	0	P	H	
		5723.6	49.87	-69.24	119.11	40.48	32.31	10.65	33.57	100	0	P	H	
		5785	106.26	-16.04	122.3	96.85	32.39	10.61	33.59	100	0	P	H	
		5785	98.31	-	-	88.9	32.39	10.61	33.59	100	0	A	H	
		5854	46.77	-66.41	113.18	37.09	32.51	10.78	33.61	100	0	P	H	
		5869.8	49.84	-56.91	106.75	40.01	32.51	10.94	33.62	100	0	P	H	
		5879.2	49.93	-52.25	102.18	40.08	32.53	10.94	33.62	100	0	P	H	
		5937.8	48.44	-19.86	68.3	38.38	32.6	11.11	33.65	100	0	P	H	
														H
														H
			5647	58.9	-9.4	68.3	49.56	32.19	10.69	33.54	120	180	P	V
			5661.2	57.94	-18.68	76.62	48.6	32.22	10.67	33.55	120	180	P	V
			5702	57.09	-48.77	105.86	47.71	32.29	10.65	33.56	120	180	P	V
			5722.6	55.57	-61.26	116.83	46.18	32.31	10.65	33.57	120	180	P	V
			5785	118.51	-3.79	122.3	109.1	32.39	10.61	33.59	120	180	P	V
			5785	111.01	-	-	101.6	32.39	10.61	33.59	120	180	A	V
			5853.8	53.58	-60.06	113.64	43.9	32.51	10.78	33.61	120	180	P	V
			5875	54.07	-51.23	105.3	44.22	32.53	10.94	33.62	120	180	P	V
		5888.8	56.1	-38.96	95.06	46.23	32.56	10.94	33.63	120	180	P	V	
		5948.4	52.83	-15.47	68.3	42.58	32.63	11.27	33.65	120	180	P	V	
													V	
													V	



WiFi Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 165 5825MHz		5825	106.92	-15.38	122.3	97.28	32.46	10.78	33.6	100	179	P	H	
		5825	98.87	-	-	89.23	32.46	10.78	33.6	100	179	A	H	
		5851.6	57.84	-60.81	118.65	48.19	32.48	10.78	33.61	100	179	P	H	
		5855.6	56.94	-53.79	110.73	47.26	32.51	10.78	33.61	100	179	P	H	
		5920.4	49.84	-21.85	71.69	39.79	32.58	11.11	33.64	100	179	P	H	
		5931.6	48.99	-19.31	68.3	38.92	32.6	11.11	33.64	100	179	P	H	
														H
														H
			5825	118.81	-3.49	122.3	109.17	32.46	10.78	33.6	117	188	P	V
			5825	118.02	-	-	108.38	32.46	10.78	33.6	117	188	A	V
			5852	70.23	-47.51	117.74	60.58	32.48	10.78	33.61	117	188	P	V
			5857.4	68.22	-42.01	110.23	58.54	32.51	10.78	33.61	117	188	P	V
			5895.2	54.66	-35.65	90.31	44.79	32.56	10.94	33.63	117	188	P	V
			5948.8	53.03	-15.27	68.3	42.78	32.63	11.27	33.65	117	188	P	V
														V
														V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	58.09	-15.91	74	53.83	39.91	15.59	51.24	207	0	P	H
		11490	47.38	-6.62	54	43.12	39.91	15.59	51.24	207	0	A	H
		17235	52.28	-16.02	68.3	44.67	41	18.6	51.99	100	0	P	H
													H
		11490	56.68	-17.32	74	52.42	39.91	15.59	51.24	117	0	P	V
		11490	47.28	-6.72	54	43.02	39.91	15.59	51.24	117	0	A	V
		17235	56.3	-12	68.3	48.69	41	18.6	51.99	100	0	P	V
802.11a CH 157 5785MHz		11570	55.46	-18.54	74	51.32	39.76	15.64	51.26	168	0	P	H
		11570	46.06	-7.94	54	41.92	39.76	15.64	51.26	168	0	A	H
		17355	53.29	-15.01	68.3	45.3	41.35	18.65	52.01	100	0	P	H
													H
		11570	56.51	-17.49	74	52.37	39.76	15.64	51.26	249	0	P	V
		11570	46.79	-7.21	54	42.65	39.76	15.64	51.26	249	0	A	V
		17355	57.19	-11.11	68.3	49.2	41.35	18.65	52.01	100	0	P	V
802.11a CH 165 5825MHz		11650	58.84	-15.16	74	54.82	39.62	15.69	51.29	198	0	P	H
		11650	49.85	-4.15	54	45.83	39.62	15.69	51.29	198	0	A	H
		17475	50.68	-17.62	68.3	42.3	41.7	18.7	52.02	100	0	P	H
													H
		11650	56.88	-17.12	74	52.86	39.62	15.69	51.29	284	0	P	V
		11650	47.04	-6.96	54	43.02	39.62	15.69	51.29	284	0	A	V
		17475	54.98	-13.32	68.3	46.6	41.7	18.7	52.02	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 149 5745MHz		5649.8	50.41	-17.89	68.3	41.04	32.22	10.69	33.54	100	0	P	H	
		5653.2	50.97	-19.71	70.68	41.6	32.22	10.69	33.54	100	0	P	H	
		5720	57.61	-53.29	110.9	48.22	32.31	10.65	33.57	100	0	P	H	
		5722.8	64.32	-52.96	117.28	54.93	32.31	10.65	33.57	100	0	P	H	
		5745	106.7	-15.6	122.3	97.3	32.34	10.63	33.57	100	0	P	H	
		5745	98.3	-	-	88.9	32.34	10.63	33.57	100	0	A	H	
														H
														H
			5608.8	56.93	-11.37	68.3	47.61	32.14	10.71	33.53	122	181	P	V
			5690.4	58.4	-39.82	98.22	49.02	32.27	10.67	33.56	122	181	P	V
			5719.4	71.84	-38.89	110.73	62.45	32.31	10.65	33.57	122	181	P	V
			5722.2	73.83	-42.09	115.92	64.44	32.31	10.65	33.57	122	181	P	V
			5745	117.65	-4.65	122.3	108.25	32.34	10.63	33.57	122	181	P	V
			5745	109.7	-	-	100.3	32.34	10.63	33.57	122	181	A	V
													V	
													V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 157 5785MHz		5619.4	50.98	-17.32	68.3	41.63	32.17	10.71	33.53	100	0	P	H	
		5662.2	49.92	-27.44	77.36	40.58	32.22	10.67	33.55	100	0	P	H	
		5714	49.61	-59.61	109.22	40.24	32.29	10.65	33.57	100	0	P	H	
		5720.8	47.46	-65.26	112.72	38.07	32.31	10.65	33.57	100	0	P	H	
		5785	106.81	-15.49	122.3	97.4	32.39	10.61	33.59	100	0	P	H	
		5785	98.31	-	-	88.9	32.39	10.61	33.59	100	0	A	H	
		5855	47.89	-63.01	110.9	38.21	32.51	10.78	33.61	100	0	P	H	
		5870.8	48.15	-58.32	106.47	38.3	32.53	10.94	33.62	100	0	P	H	
		5884.4	49.23	-49.09	98.32	39.39	32.53	10.94	33.63	100	0	P	H	
		5932	48.41	-19.89	68.3	38.34	32.6	11.11	33.64	100	0	P	H	
														H
														H
			5618.8	58.29	-10.01	68.3	48.94	32.17	10.71	33.53	120	180	P	V
			5657.4	57.86	-15.94	73.8	48.5	32.22	10.69	33.55	120	180	P	V
			5703.8	56.16	-50.21	106.37	46.78	32.29	10.65	33.56	120	180	P	V
			5720.8	55.29	-57.43	112.72	45.9	32.31	10.65	33.57	120	180	P	V
			5785	117.77	-4.53	122.3	108.36	32.39	10.61	33.59	120	180	P	V
			5785	109.31	-	-	99.9	32.39	10.61	33.59	120	180	A	V
			5854.2	54.29	-58.43	112.72	44.61	32.51	10.78	33.61	120	180	P	V
			5866	54.25	-53.57	107.82	44.42	32.51	10.94	33.62	120	180	P	V
		5890.4	56.14	-37.73	93.87	46.27	32.56	10.94	33.63	120	180	P	V	
		5934.8	52.54	-15.76	68.3	42.48	32.6	11.11	33.65	120	180	P	V	
													V	
													V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 165 5825MHz		5825	107.52	-14.78	122.3	97.88	32.46	10.78	33.6	100	179	P	H	
		5825	99.52	-	-	89.88	32.46	10.78	33.6	100	179	A	H	
		5850.2	57.78	-64.06	121.84	48.13	32.48	10.78	33.61	100	179	P	H	
		5861.2	53.48	-55.68	109.16	43.65	32.51	10.94	33.62	100	179	P	H	
		5912	49.79	-28.1	77.89	39.74	32.58	11.11	33.64	100	179	P	H	
		5936.4	49.68	-18.62	68.3	39.62	32.6	11.11	33.65	100	179	P	H	
														H
														H
			5825	118.61	-3.69	122.3	108.97	32.46	10.78	33.6	117	188	P	V
			5825	110.71	-	-	101.07	32.46	10.78	33.6	117	188	A	V
			5854.6	69.63	-42.18	111.81	59.95	32.51	10.78	33.61	117	188	P	V
			5857.6	68.38	-41.79	110.17	58.7	32.51	10.78	33.61	117	188	P	V
			5903.8	55	-28.95	83.95	44.96	32.56	11.11	33.63	117	188	P	V
			5949	53.75	-14.55	68.3	43.5	32.63	11.27	33.65	117	188	P	V
														V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	56.24	-17.76	74	51.98	39.91	15.59	51.24	274	0	P	H
		11490	46.59	-7.41	54	42.33	39.91	15.59	51.24	274	0	A	H
		17235	50.4	-17.9	68.3	42.79	41	18.6	51.99	100	0	P	H
													H
		11490	56.08	-17.92	74	51.82	39.91	15.59	51.24	239	0	P	V
		11490	46.6	-7.4	54	42.34	39.91	15.59	51.24	239	0	A	V
		17235	54.89	-13.41	68.3	47.28	41	18.6	51.99	100	0	P	V
													V
802.11n HT20 CH 157 5785MHz		11570	55.52	-18.48	74	51.38	39.76	15.64	51.26	294	0	P	H
		11570	46.42	-7.58	54	42.28	39.76	15.64	51.26	294	0	A	H
		17355	51.32	-16.98	68.3	43.33	41.35	18.65	52.01	100	0	P	H
													H
		11570	56.62	-17.38	74	52.48	39.76	15.64	51.26	291	0	P	V
		11570	47.32	-6.68	54	43.18	39.76	15.64	51.26	291	0	A	V
		17355	56.75	-11.55	68.3	48.76	41.35	18.65	52.01	100	0	P	V
													V
802.11n HT20 CH 165 5825MHz		11650	56.35	-17.65	74	52.33	39.62	15.69	51.29	248	0	P	H
		11650	47.42	-6.58	54	43.4	39.62	15.69	51.29	248	0	A	H
		17475	51.78	-16.52	68.3	43.4	41.7	18.7	52.02	100	0	P	H
													H
		11650	56.86	-17.14	74	52.84	39.62	15.69	51.29	148	0	P	V
		11650	46.55	-7.45	54	42.53	39.62	15.69	51.29	148	0	A	V
		17475	54.24	-14.06	68.3	45.86	41.7	18.7	52.02	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5637	48.67	-19.63	68.3	39.33	32.19	10.69	33.54	320	343	P	H
		5689.6	50.33	-47.3	97.63	40.95	32.27	10.67	33.56	320	343	P	H
		5718.6	58.98	-51.53	110.51	49.59	32.31	10.65	33.57	320	343	P	H
		5722.8	59.68	-57.6	117.28	50.29	32.31	10.65	33.57	320	343	P	H
		5755	101.31	-20.99	122.3	91.89	32.36	10.63	33.57	320	343	P	H
		5755	93.86	-	-	84.44	32.36	10.63	33.57	320	343	A	H
		5852.8	46.47	-69.45	115.92	36.82	32.48	10.78	33.61	320	343	P	H
		5856	47.54	-63.08	110.62	37.86	32.51	10.78	33.61	320	343	P	H
		5919.6	48.77	-23.51	72.28	38.72	32.58	11.11	33.64	320	343	P	H
		5947.4	48.59	-19.71	68.3	38.34	32.63	11.27	33.65	320	343	P	H
802.11n													H
HT40													H
CH 151		5603	53.53	-14.77	68.3	44.21	32.14	10.71	33.53	141	3	P	V
5755MHz		5697.2	56.51	-46.73	103.24	47.13	32.27	10.67	33.56	141	3	P	V
		5716.2	68.34	-41.5	109.84	58.97	32.29	10.65	33.57	141	3	P	V
		5720	66.77	-44.13	110.9	57.38	32.31	10.65	33.57	141	3	P	V
		5755	111.04	-11.26	122.3	101.62	32.36	10.63	33.57	141	3	P	V
		5755	103.9	-	-	94.48	32.36	10.63	33.57	141	3	A	V
		5852.4	51.9	-64.93	116.83	42.25	32.48	10.78	33.61	141	3	P	V
		5867.4	51.48	-55.95	107.43	41.65	32.51	10.94	33.62	141	3	P	V
		5881.6	52	-48.4	100.4	42.15	32.53	10.94	33.62	141	3	P	V
		5927.2	52	-16.3	68.3	41.93	32.6	11.11	33.64	141	3	P	V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT40 CH 159 5795MHz		5620	50	-18.3	68.3	40.65	32.17	10.71	33.53	203	360	P	H	
		5671.6	49.27	-35.05	84.32	39.91	32.24	10.67	33.55	203	360	P	H	
		5719.8	52.1	-58.74	110.84	42.71	32.31	10.65	33.57	203	360	P	H	
		5724.8	52.83	-69.01	121.84	43.44	32.31	10.65	33.57	203	360	P	H	
		5795	105.2	-17.1	122.3	95.77	32.41	10.61	33.59	203	360	P	H	
		5795	97.44	-	-	88.01	32.41	10.61	33.59	203	360	A	H	
		5851.8	55.6	-62.6	118.2	45.95	32.48	10.78	33.61	203	360	P	H	
		5855.8	54.72	-55.96	110.68	45.04	32.51	10.78	33.61	203	360	P	H	
		5887.4	50.83	-45.26	96.09	40.99	32.53	10.94	33.63	203	360	P	H	
		5947.4	50.48	-17.82	68.3	40.23	32.63	11.27	33.65	203	360	P	H	
														H
														H
			5603.6	57.98	-10.32	68.3	48.66	32.14	10.71	33.53	142	3	P	V
			5682.6	57.69	-34.77	92.46	48.34	32.24	10.67	33.56	142	3	P	V
			5719	60.22	-50.4	110.62	50.83	32.31	10.65	33.57	142	3	P	V
			5724	61.55	-58.47	120.02	52.16	32.31	10.65	33.57	142	3	P	V
			5795	116.68	-5.62	122.3	107.25	32.41	10.61	33.59	142	3	P	V
			5795	108.29	-	-	98.86	32.41	10.61	33.59	142	3	A	V
			5850.4	66.93	-54.46	121.39	57.28	32.48	10.78	33.61	142	3	P	V
			5864.8	67.12	-41.03	108.15	57.29	32.51	10.94	33.62	142	3	P	V
		5875.4	55.7	-49.3	105	45.85	32.53	10.94	33.62	142	3	P	V	
		5948.2	53.34	-14.96	68.3	43.09	32.63	11.27	33.65	142	3	P	V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT40 CH 151 5755MHz		11510	47.95	-26.05	74	43.68	39.9	15.61	51.24	100	0	P	H	
		17265	44.77	-23.53	68.3	37.05	41.1	18.62	52	100	0	P	H	
													H	
													H	
			11510	50.28	-23.72	74	46.01	39.9	15.61	51.24	100	0	P	V
			17265	44.61	-23.69	68.3	36.89	41.1	18.62	52	100	0	P	V
														V
802.11n HT40 CH 159 5795MHz		11590	54.14	-19.86	74	50.01	39.73	15.66	51.26	314	0	P	H	
		11590	45.15	-8.85	54	41.02	39.73	15.66	51.26	314	0	A	H	
		17385	50.24	-18.06	68.3	42.14	41.45	18.66	52.01	100	0	P	H	
													H	
			11590	54.16	-19.84	74	50.03	39.73	15.66	51.26	249	0	P	V
			11590	44.67	-9.33	54	40.54	39.73	15.66	51.26	249	0	A	V
			17385	52.71	-15.59	68.3	44.61	41.45	18.66	52.01	100	0	P	V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5615	48.04	-20.26	68.3	38.72	32.14	10.71	33.53	333	351	P	H
		5697.4	55.34	-48.04	103.38	45.96	32.27	10.67	33.56	333	351	P	H
		5719.2	56.67	-54.01	110.68	47.28	32.31	10.65	33.57	333	351	P	H
		5724.2	57.52	-62.96	120.48	48.13	32.31	10.65	33.57	333	351	P	H
		5775	97.02	-25.28	122.3	87.58	32.39	10.63	33.58	333	351	P	H
		5775	89.64	-	-	80.2	32.39	10.63	33.58	333	351	A	H
		5850.4	48.44	-72.95	121.39	38.79	32.48	10.78	33.61	333	351	P	H
		5862.4	49.62	-59.21	108.83	39.79	32.51	10.94	33.62	333	351	P	H
		5902.4	48.89	-36.1	84.99	38.85	32.56	11.11	33.63	333	351	P	H
		5940	48.44	-19.86	68.3	38.35	32.63	11.11	33.65	333	351	P	H
802.11ac													H
VHT80													H
CH 155		5608.4	55.04	-13.26	68.3	45.72	32.14	10.71	33.53	144	3	P	V
5775MHz		5689.8	65.84	-31.94	97.78	56.46	32.27	10.67	33.56	144	3	P	V
		5703.4	66.44	-39.81	106.25	57.06	32.29	10.65	33.56	144	3	P	V
		5724.4	68.41	-52.52	120.93	59.02	32.31	10.65	33.57	144	3	P	V
		5775	108.23	-14.07	122.3	98.79	32.39	10.63	33.58	144	3	P	V
		5775	101.5	-	-	92.06	32.39	10.63	33.58	144	3	A	V
		5850.2	59.18	-62.66	121.84	49.53	32.48	10.78	33.61	144	3	P	V
		5863.8	58	-50.43	108.43	48.17	32.51	10.94	33.62	144	3	P	V
		5900.2	52.29	-34.32	86.61	42.25	32.56	11.11	33.63	144	3	P	V
		5949.6	51.3	-17	68.3	41.05	32.63	11.27	33.65	144	3	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT80 CH 155 5775MHz		11550	46.02	-27.98	74	41.83	39.8	15.64	51.25	100	0	P	H	
		17325	44.62	-23.68	68.3	36.74	41.25	18.63	52	100	0	P	H	
													H	
													H	
			11550	46.93	-27.07	74	42.74	39.8	15.64	51.25	100	0	P	V
			17325	45.19	-23.11	68.3	37.31	41.25	18.63	52	100	0	P	V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

5GHz WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
5GHz 802.11a LF		165.54	34.98	-8.52	43.5	48.78	16.3	1.68	31.78	-	-	P	H	
		215.76	37.45	-6.05	43.5	51.29	16.2	1.74	31.78	166	252	P	H	
		278.13	34.79	-11.21	46	45.2	19.22	2.13	31.76	-	-	P	H	
		374.9	31.34	-14.66	46	39.03	21.76	2.34	31.79	-	-	P	H	
		650	35.31	-10.69	46	37.79	26.2	3.36	32.04	-	-	P	H	
		950.3	37	-9	46	33.54	30.6	3.89	31.03	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
			31.89	36.75	-3.25	40	42.99	24.66	0.93	31.83	100	146	P	V
			81.84	35.65	-4.35	40	52.45	13.82	1.17	31.79	-	-	P	V
			278.13	33.63	-12.37	46	44.04	19.22	2.13	31.76	-	-	P	V
			318.9	34.58	-11.42	46	43.88	20.24	2.23	31.77	-	-	P	V
			943.3	41.74	-4.26	46	38.5	30.44	3.89	31.09	-	-	P	V
			974.8	38.85	-15.15	54	35.25	30.55	3.89	30.84	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Ken Wu, J.C. Liang, Jacky Hung	Temperature :	20~23°C
		Relative Humidity :	45~50%

Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT-Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT-Auto Detector : Peak</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Horizontal	Fundamental
<p>Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
<p>Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Left blank</p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>

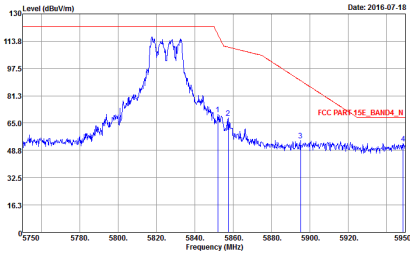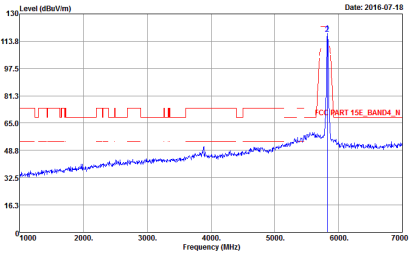



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>






Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>

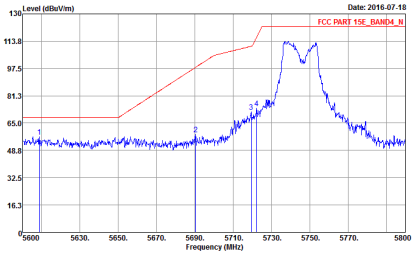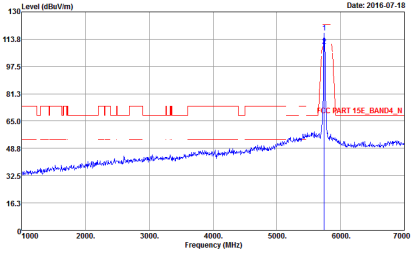

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>

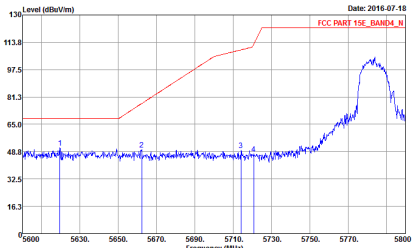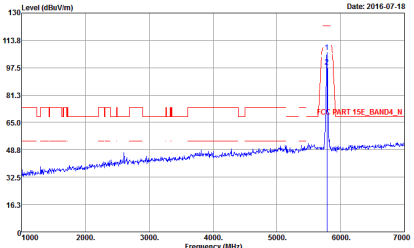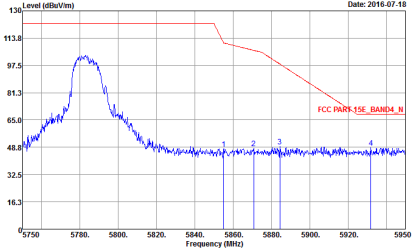

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Peak	 <p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

Table with 2 columns: WIFI (Band 4 5725~5850MHz Band Edge @ 3m), ANT (802.11n HT40 CH151 5755MHz). Rows include '1+2' (Horizontal/Fundamental) and 'Peak' (Horizontal/Left blank) with associated spectral plots and site/condition details.



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	Left blank






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Peak	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	Left blank



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

Table with 2 columns: WIFI (Band 4 5725~5850MHz Band Edge @ 3m), ANT (802.11ac VHT80 CH155 5775MHz). Rows show Peak measurements for Horizontal and Fundamental directions, including spectral plots and site/condition details.

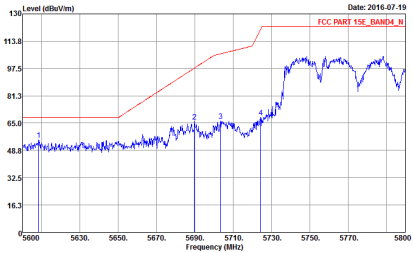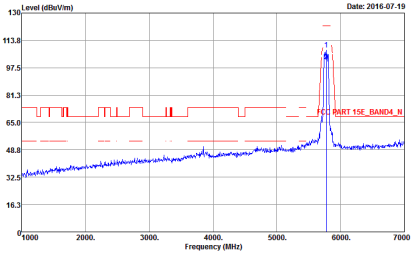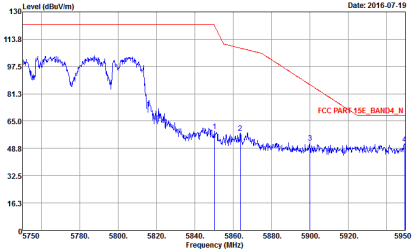

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Peak	 <p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	Left blank



Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL Detector : Peak</p>



WIFI	Band 4 5725-5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL Detector : Peak</p>





WIFI	Band 4 5725-5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL Detector : Peak</p>



**Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Horizontal	Vertical
<p>Peak Avg.</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL Detector : Peak</p>

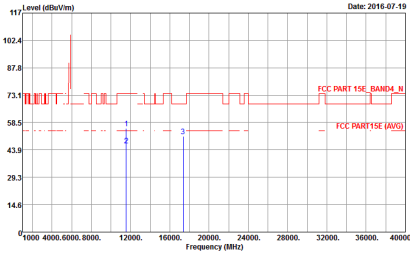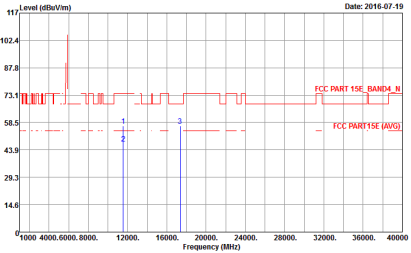

WIFI	Band 4 5725-5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL Detector : Peak</p>



WIFI	Band 4 5725-5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL Detector : Peak</p>



**Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Horizontal	Vertical
<p>Peak Avg.</p>	<p>Site : 03GH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03GH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL Detector : Peak</p>



WIFI	Band 4 5725-5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 9120D-HF VERTICAL Detector : Peak</p>



**Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Vertical
<p>Peak Avg.</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 91200-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC PART 15E_BAND4_N 3m HORN 91200-HF VERTICAL Detector : Peak</p>



Emission below 1GHz
5GHz WIFI 802.11a (LF)

WIFI	5GHz 5725~5850MHz	
ANT	802.11a LF	
1+2	Horizontal	Vertical
QP / Peak	<p>Site : 03CH11-HY Condition : FCC CLASS-B 3m BT-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : FCC CLASS-B 3m BT-LOG 6111D-LF_ETC VERTICAL Detector : Peak</p>




Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
MIMO <Ant. 1+2(1)>	802.11a	94.37	1340.00	0.75	1kHz
MIMO <Ant. 1+2(2)>	802.11a	94.37	1340.00	0.75	1kHz
MIMO <Ant. 1+2(1)>	5GHz 802.11n HT20	94.74	1260.00	0.79	1kHz
MIMO <Ant. 1+2(2)>	5GHz 802.11n HT20	93.33	1260.00	0.79	1kHz
MIMO <Ant. 1+2(1)>	5GHz 802.11n HT40	90.52	630.00	1.59	3kHz
MIMO <Ant. 1+2(2)>	5GHz 802.11n HT40	90.44	624.00	1.60	3kHz
MIMO <Ant. 1+2(1)>	5GHz 802.11ac VHT80	82.11	312.00	3.21	10kHz
MIMO <Ant. 1+2(2)>	5GHz 802.11ac VHT80	82.11	312.00	3.21	10kHz




MIMO <Ant. 1+2(1)>

802.11a

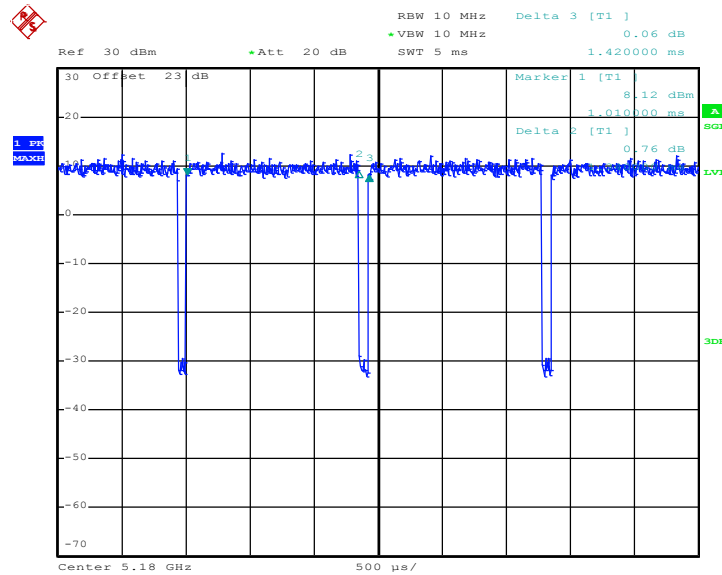

Date: 24.JUN.2016 02:15:10


802.11n HT20

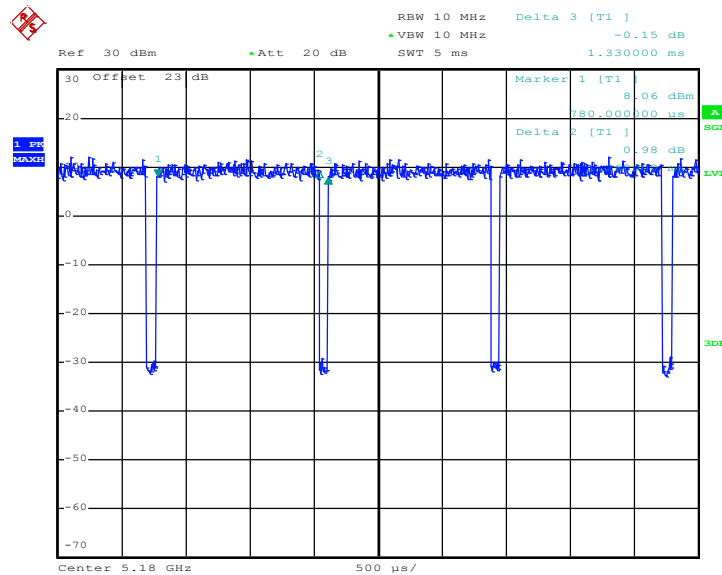

Date: 24.JUN.2016 02:17:45




802.11n HT40

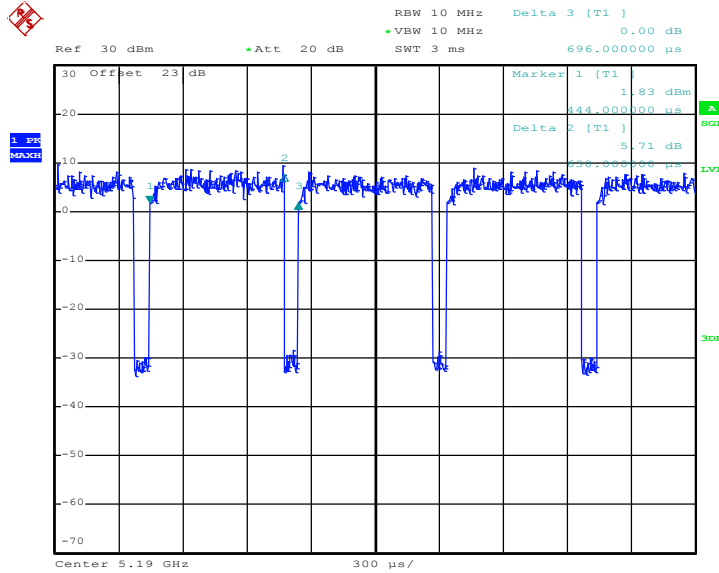

Date: 24.JUN.2016 02:26:33

802.11ac VHT80

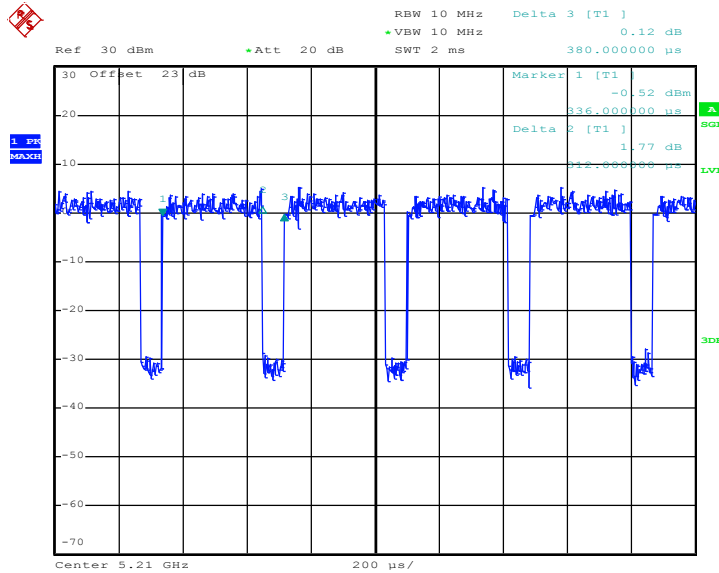


Date: 24.JUN.2016 02:30:49




MIMO <Ant. 1+2(2)>

802.11a

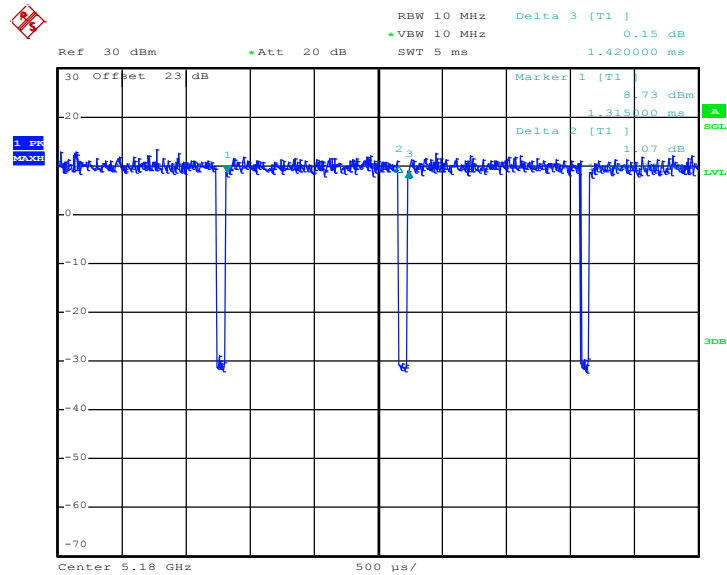

Date: 24.JUN.2016 02:16:31


802.11n HT20

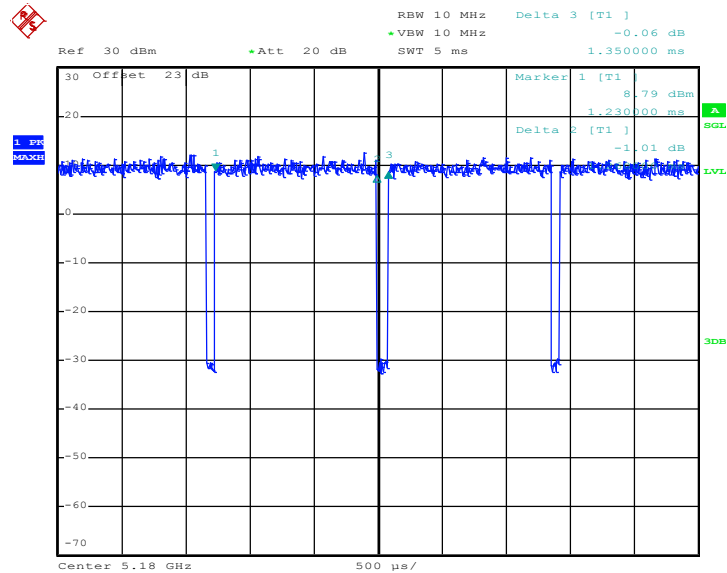

Date: 24.JUN.2016 02:17:19




802.11n HT40

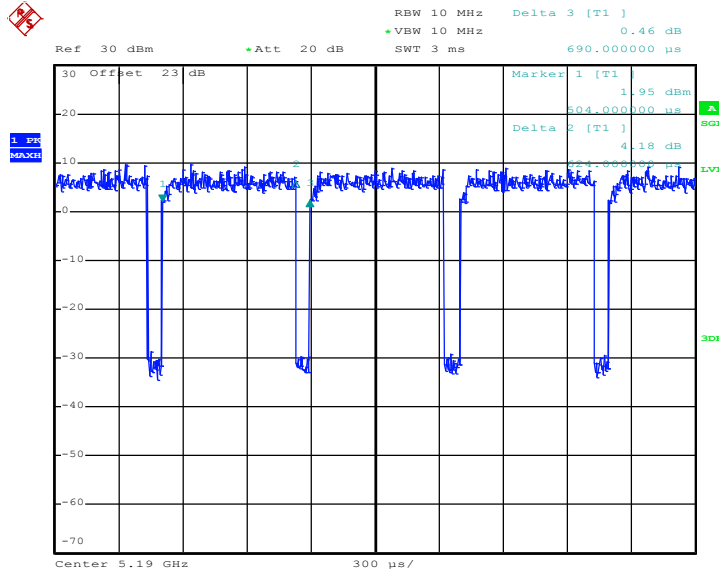

Date: 24.JUN.2016 02:27:10

802.11ac VHT80

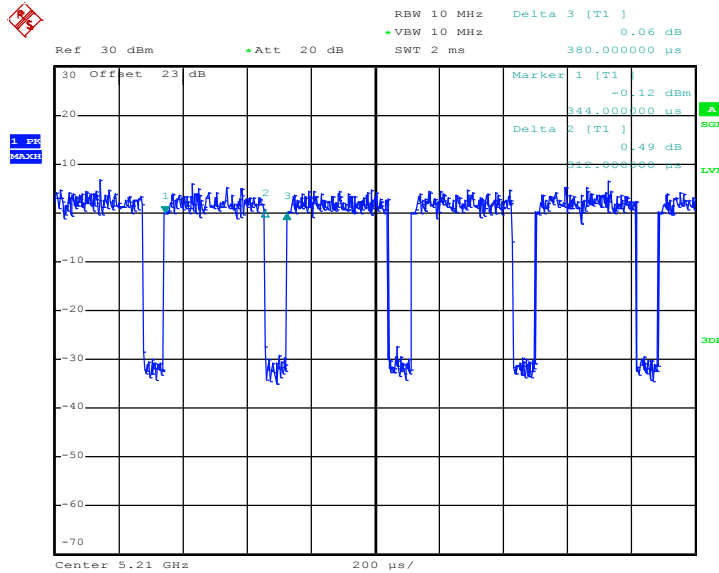

Date: 24.JUN.2016 02:30:09