



FCC RADIO TEST REPORT

Applicant : Ubiquiti Inc.
Address : 685 Third Avenue, New York, New York 10017, USA
Equipment : UniFi Display Cast Pro
Model No. : UC-Cast-Pro
Trade Name : UBIQUITI
FCC ID : SWX-UCCASTP

I HEREBY CERTIFY THAT :

The sample was received on Jan. 17, 2024 and the testing was completed on Jan. 30, 2024 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Test Mode and Test Software.....	8
2.4 Description of Test System.....	9
2.5 General Information of Test.....	10
2.6 Measurement Uncertainty	11
3. Test Equipment and Ancillaries Used for Tests	12
4. Antenna Requirements	14
4.1 Standard Applicable	14
4.2 Antenna Construction and Directional Gain.....	14
5. Test of AC Power Line Conducted Emission.....	15
5.1 Test Limit	15
5.2 Test Procedures	15
5.3 Typical Test Setup	16
5.4 Test Result and Data.....	17
5.5 Test Photographs	19
6. Test of Radiated Spurious Emission	20
6.1 Test Limit	20
6.2 Test Procedures	21
6.3 Typical Test Setup	22
6.4 Test Result and Data (9KHz ~ 30MHz)	23
6.5 Test Result and Data (30MHz ~ 1GHz)	23
6.6 Test Result and Data (1GHz ~ 25GHz).....	25
6.7 Restricted Bands of Operation.....	49
6.8 Test Photographs (30MHz ~ 1GHz)	50
6.9 Test Photographs (1GHz ~ 25GHz)	51
7. Test of Conducted Spurious Emission.....	53
7.1 Test Limit	53
7.2 Test Procedure	53
7.3 Test Setup Layout	53
7.4 Test Result and Data.....	53
8. On Time, Duty Cycle and Measurement methods	70
8.1 Test Limit	70
8.2 Test Procedure	70
8.3 Test Setup Layout	70
8.4 Test Result and Data.....	70
9. 6dB Bandwidth Measurement Data	72
9.1 Test Limit	72
9.2 Test Procedures	72



9.3	Test Setup Layout	72
9.4	Test Result and Data.....	73
10.	Maximum Average Output Power	78
10.1	Test Limit	78
10.2	Test Procedures	78
10.3	Test Setup Layout	78
10.4	Test Result and Data.....	79
11.	Power Spectral Density.....	80
11.1	Test Limit	80
11.2	Test Procedures	80
11.3	Test Setup Layout	80
11.4	Test Result and Data.....	81
12.	Radio Frequency Exposure	86
12.1	Applicable Standards	86
12.2	EUT Specification.....	87
12.3	Result	87



History of this test report

Report No.	Issued Date	Description
24010270-TRFCC03	Mar. 08, 2022	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(2)	. 6dB Bandwidth	PASS
15.247(b)	. Output Power	PASS
15.247(e)	. Power Spectral Density	PASS
2.1091	. Radio Frequency Exposure	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Operation Frequency Range	BT / BLE: 2400-2483.5MHz 2.4GHz: 802.11b/g/n: 2400-2483.5MHz 5GHz: 802.11a/n/ac: 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
Center Frequency Range	BT / BLE: 2402MHz-2480MHz 2.4GHz: 802.11b/g/n: 2412MHz-2462MHz 5GHz: 802.11a/n/ac: 5180-5240MHz, 5260-5320MHz, 5500-5720MHz, 5745-5825MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK WLAN: 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 5GHz: 802.11a/n: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Modulation Technology	DSSS, OFDM, FHSS, DTS
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80
Antenna Type	Dipole Antenna
Antenna Gain	BT / BLE: 2400-2500MHz: ANT A: 3dBi WLAN: 2400-2500MHz: ANT A: 3dBi, ANT B: 3dBi 5150-5850MHz: ANT A: 5dBi, ANT B: 5dBi

Note:

1. EUT supports TPC function.
2. WLAN and BT can simultaneously transmission.
3. EUT supports DFS client mode, without radar detection.
4. For more details, please refer to the user's manual of the EUT.



2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT20 (2412MHz-2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	*11	2462
*06	2437	---	---

802.11n HT40 (2422MHz-2452MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
*03	2422	*09	2452
04	2427	---	---
05	2432	---	---
*06	2437	---	---

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included remote workstation and EUT for RF test. The remote workstation included Notebook.
- c. An executive program, " wifitest command" under Windows OS system was executed to transmit and receive data via WLAN.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)

caused "Test Mode 1" generated the worst case, it was reported as the final data.

Radiation Emissions (Below 1GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)

caused "Test Mode 1" generated the worst case, it was reported as the final data.

Radiation Emissions (Above 1GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)

caused "Test Mode 1~4" generated the worst case, they were reported as the final data.

Note:

1. There are two kinds of EUT Power Type: Power From Adapter and Power From PoE
For AC Power Line Conducted Emission, Power From PoE is worst case.
For Radiated Spurious Emission, Power From Adapter is worst case.
2. There are two kinds of test voltage: AC 120V / 60Hz and AC 240V / 60Hz.
For AC Power Line Conducted Emission, AC 120V / 60Hz is worst case.
For Radiated Spurious Emission, AC 120V / 60Hz is worst case.

The EUT incorporates a MIMO function

Modulation Type	TX CONFIGURATION
802.11b	2TX
802.11g	2TX
802.11n HT20	2TX
802.11n HT40	2TX



2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	lenovo	S1GL2W	N/A	N/A
Type-c USB	kolin	KEX-DLCP08	1m / NS	N/A
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
POE	UBIQUITI	GP-H480-050G	N/A	0.6m / NS
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude E5470	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
Power Cord	Longwell	LS-33	1.8/NS	N/A
Type-C Adapter	UI	GP-M015-QC	N/A	Adapter / 1.8m / NS
POE	UI	GP-V480-032G	N/A	N/A
Type-c USB	kolin	KEX-DLCP08	1m / NS	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude E5470	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
Power Cord	Longwell	LS-33	1.8/NS	N/A
Type-C Adapter	UI	GP-M015-QC	N/A	Adapter / 1.8m / NS
POE	UI	GP-V480-032G	N/A	N/A
Type-c USB	kolin	KEX-DLCP08	1m / NS	N/A



2.5 General Information of Test

<input checked="" type="checkbox"/> Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	Conducted: from 150kHz to 30 MHz Radiation: from 9kHz to 25,000MHz	
Frequency Range Investigated	The test distance of radiated emission from antenna to EUT is 3 M.	
Test Distance		

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2024/1/24~2024/1/25	21.2~23.2°C / 46~54%	Leon Huang
Radiated Emissions	3M02-NK	2024/1/22~2024/1/30	18.5~19.1°C / 48~52%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2024/01/30	17.5°C / 50%	Leon Huang



2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.12dB
Radiated Spurious Emission(9KHz~30MHz)	±3.5dB
Radiated Spurious Emission(30MHz~1GHz)	±5.1dB
Radiated Spurious Emission(1GHz~40GHz)	±5.2dB
Conducted Spurious Emission	±2.1dB
6dB Bandwidth	±5.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.5%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±7.6%
Power Spectral Density	±2.0dB
Duty Cycle	±3.5%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2023/03/15	2024/03/14
Active Loop Antenna	Schwarzbeck	FMZB 1513	414	2023/02/03	2024/02/02
Horn Antenna	EMCO	3115	31589	2023/03/23	2024/03/22
Horn Antenna	EMCO	3116	31970	2023/03/03	2024/03/02
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2023/07/05	2024/07/04
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2023/08/15	2024/08/14
Preamplifier	Agilent	8449B	3008A01954	2023/03/08	2024/03/07
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2023/10/13	2024/10/12
Preamplifier	EM Electronics corp.	EM330	60659	2023/03/10	2024/03/09
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130606	2023/03/13	2024/03/12
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2023/02/25	2024/02/24
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2023/03/07	2024/03/06
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2023/03/07	2024/03/06
Cable-8m(1G-26.5G)	WOKEN	WCBA-WCA203SM	CCE1374	2023/03/07	2024/03/06
Cable-1m(1G-40G)	HUBER SUHNER	HUBER SUHNER / SF102	552450	2023/06/08	2024/06/07
Cable-3m(1G-40G)	HUBER SUHNER	HUBER SUHNER / SF102	552451	2023/06/08	2024/06/07
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	Warison	WFIL-H3000-18000F-03	WRJ5CFWC2J1	2023/07/03	2024/07/02
Notch Filter	Warison	WFIL-N5925-7125F-04	WRQ4BFWC4M1	2023/03/13	2024/03/12
Hipass Filter	Warison	WFIL-H7500-18000F	WRQ4BFWC2J1	2023/03/13	2024/03/12

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100047	2023/02/24	2024/02/23
Attenuator	KEYSIGHT	8491B	MY39250703	2023/03/07	2024/03/06
Cable-0.5m(1G-26.5G)	HUBER SUHNER	SUCOFLEX 102	28422/2	2023/03/07	2024/03/06
Power Meter	Anritsu	ML2495A	1224005	2023/03/07	2024/03/06
Power Sensor	Anritsu	MA2411B	1207295	2023/03/07	2024/03/06
Switch Box	Theda	1月4日	TW5451159	NA	NA



Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESR 7	101906	2023/05/08	2024/05/07
TWO-LINE V-NETWORK	ROHDE & SCHWARZ	ENV216	102185	2023/08/29	2024/08/28
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2023/07/31	2024/07/30
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	Dipole Antenna
Antenna Gain	2400-2500MHz: ANT A: 3dBi, ANT B: 3dBi

2400-2500MHz

For Power directional gain= G_{ant} = 3 dBi

$$\text{For PSD directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] \\ = 6.01 \text{ (dBi)}$$

*MIMO type: Cyclic Delay Diversity (CDD) mode.



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



5.3 Typical Test Setup

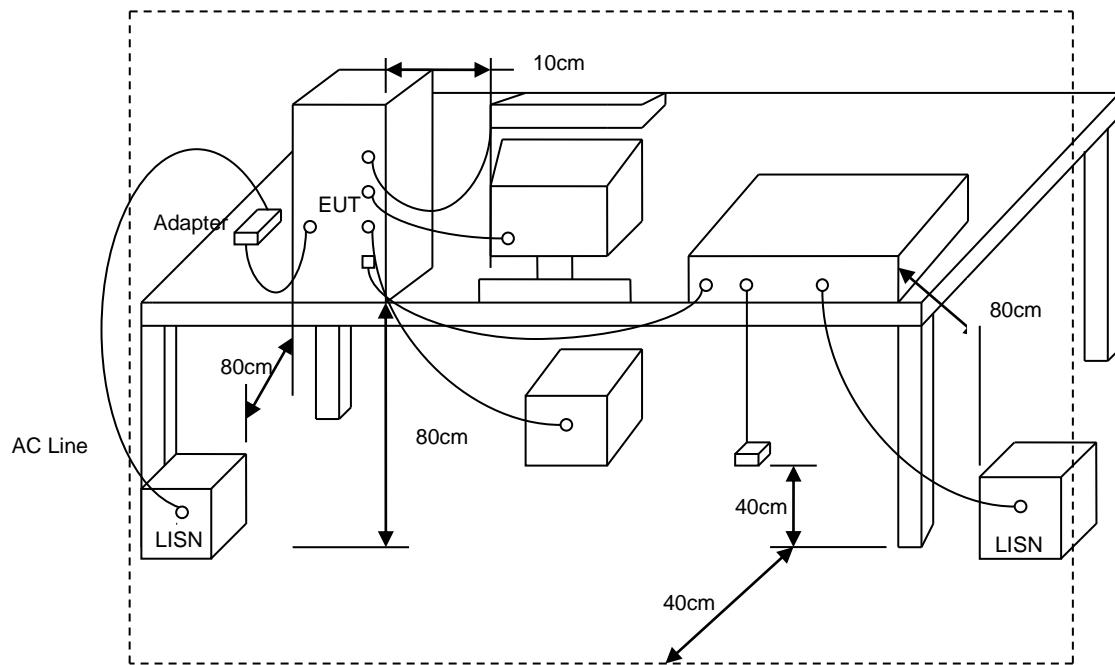




5.4 Test Result and Data

Test Mode : 2TX 11b CH11 1Mbps
Voltage : From POE(AC 120V/60Hz)
Phase : Line

Data: 11

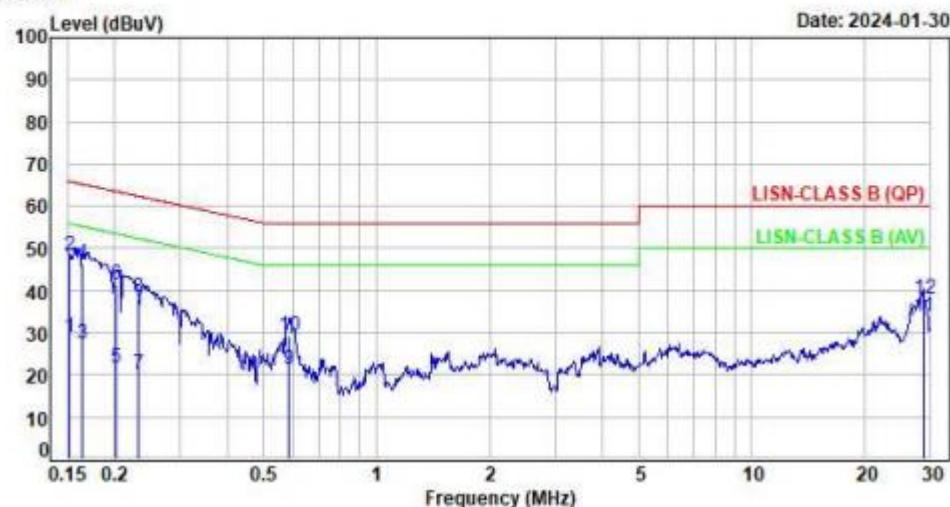


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1519	9.66	19.20	28.86	55.90	-27.04	Average	P
2	0.1519	9.66	38.55	48.21	65.90	-17.69	QP	P
3	0.1643	9.65	17.83	27.48	55.25	-27.77	Average	P
4	0.1643	9.65	36.65	46.30	65.25	-18.95	QP	P
5	0.2020	9.64	12.07	21.71	53.53	-31.82	Average	P
6	0.2020	9.64	31.91	41.55	63.53	-21.98	QP	P
7	0.2311	9.64	10.46	20.10	52.41	-32.31	Average	P
8	0.2311	9.64	28.83	38.47	62.41	-23.94	QP	P
9	0.5853	9.65	11.50	21.15	46.00	-24.85	Average	P
10	0.5853	9.65	19.56	29.21	56.00	-26.79	QP	P
11	28.6704	9.95	24.01	33.96	50.00	-16.04	Average	P
12	28.6704	9.95	27.94	37.89	60.00	-22.11	QP	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Test Mode : 2TX 11b CH11 1Mbps
Voltage : From POE(AC 120V/60Hz)
Phase : Neutral

Data: 12

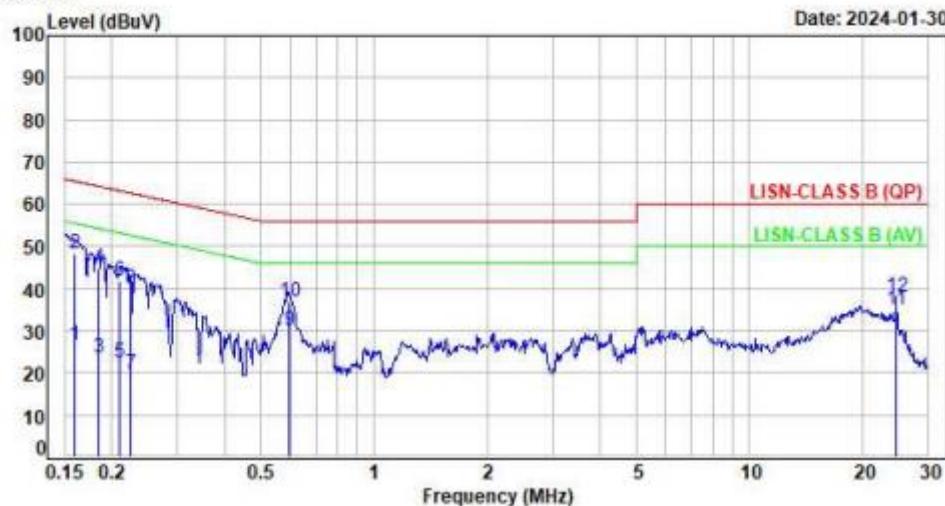

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1590	9.57	17.16	26.73	55.52	-28.79	Average	P
2	0.1590	9.57	38.78	48.35	65.52	-17.17	QP	P
3	0.1841	9.58	14.16	23.74	54.30	-30.56	Average	P
4	0.1841	9.58	35.34	44.92	64.30	-19.38	QP	P
5	0.2100	9.59	12.72	22.31	53.21	-30.90	Average	P
6	0.2100	9.59	32.38	41.97	63.21	-21.24	QP	P
7	0.2251	9.58	10.09	19.67	52.63	-32.96	Average	P
8	0.2251	9.58	30.49	40.07	62.63	-22.56	QP	P
9	0.5965	9.58	20.30	29.88	46.00	-16.12	Average	P
10	0.5965	9.58	27.16	36.74	56.00	-19.26	QP	P
11	24.5781	10.03	24.93	34.96	50.00	-15.04	Average	P
12	24.5781	10.03	27.99	38.02	60.00	-21.98	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
(Z-AXIS is the worst.)
- 2.Due to the test software function limit the operation band setting(200dBuV/m).
There's no corresponding limitation in the actual test item.




6.3 Typical Test Setup


Below 30MHz test setup

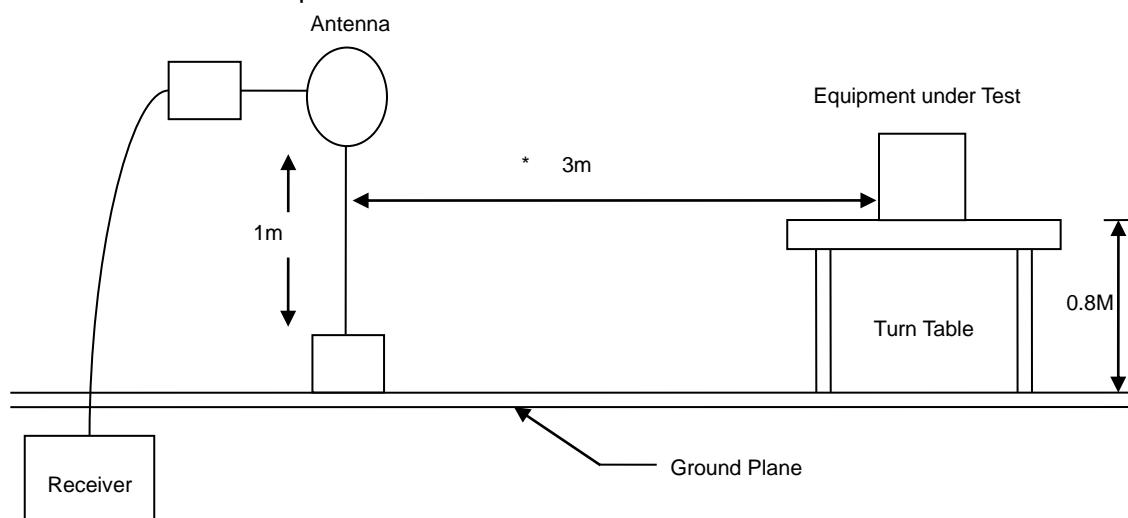

30MHz- 1GHz Test Setup

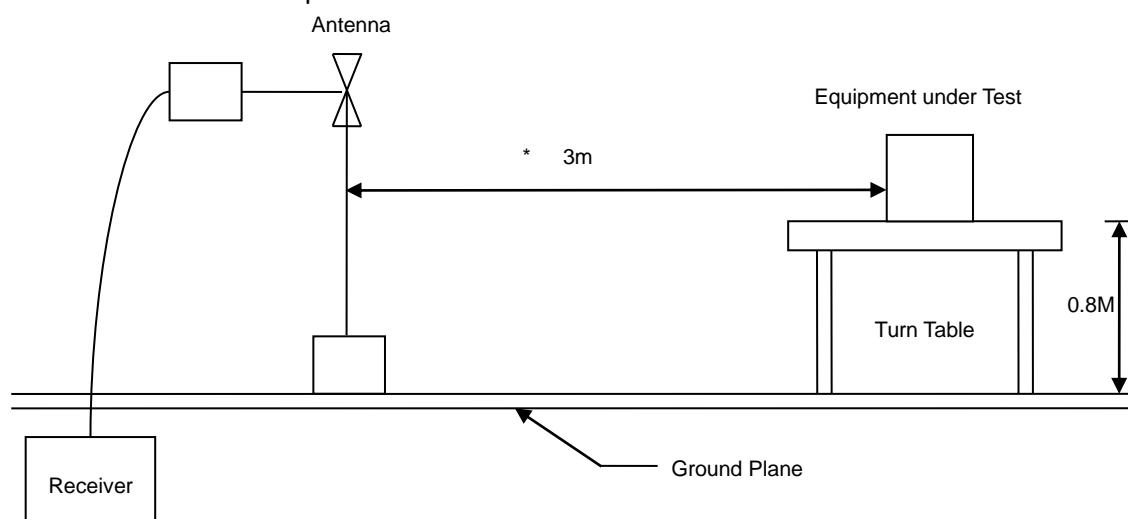

Above 1GHz Test Setup

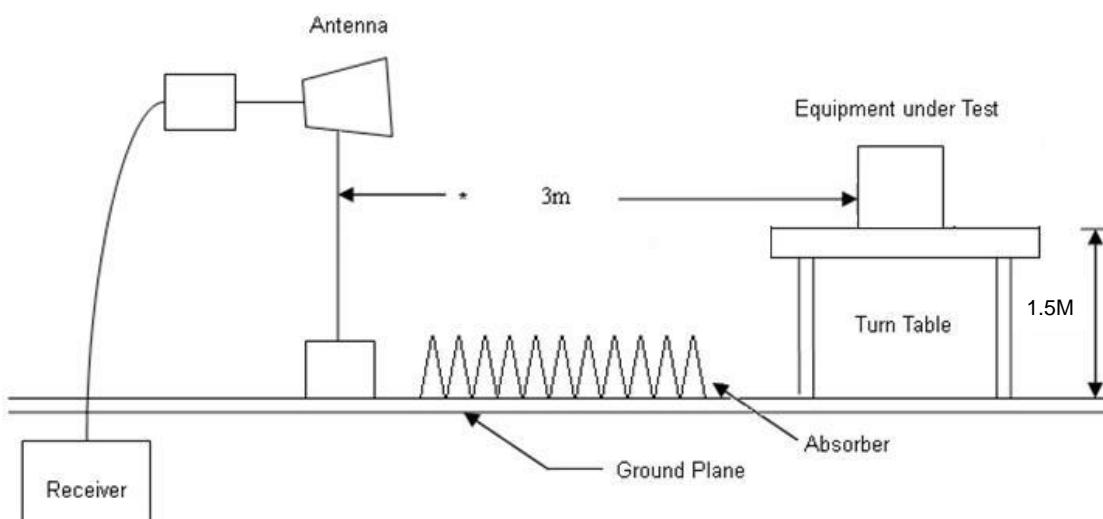




6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Test Mode : 2TX 11b CH11 1Mbps
Voltage : Adapter(AC120V/60Hz)
Pol : Vertical

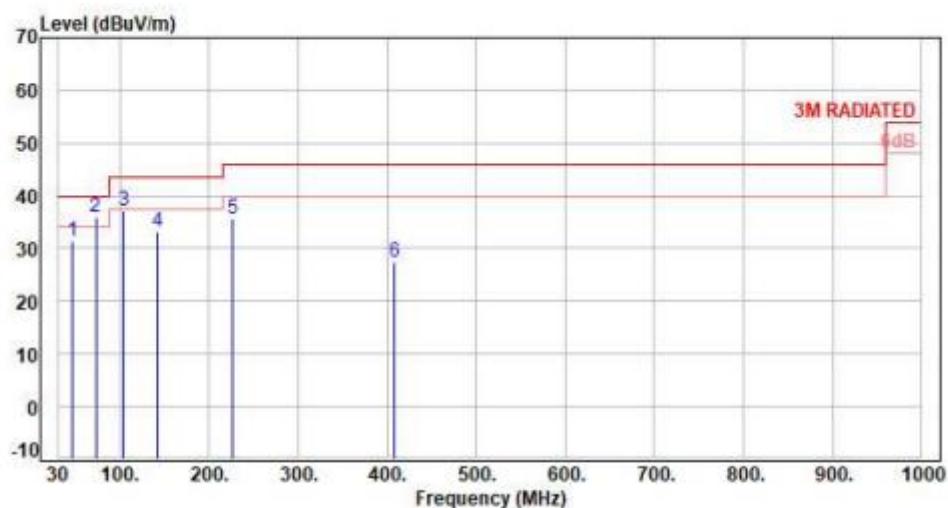

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)
1	47.46	-8.30	39.56	31.26	40.00	-8.74	Peak	400	360 P
2	72.68	-12.44	48.32	35.88	40.00	-4.12	Peak	400	360 P
3	103.72	-13.33	50.51	37.18	43.50	-6.32	Peak	400	360 P
4	142.52	-9.54	42.80	33.26	43.50	-10.24	Peak	400	360 P
5	225.94	-11.51	47.13	35.62	46.00	-10.38	Peak	400	360 P
6	408.30	-5.28	32.70	27.42	46.00	-18.58	Peak	400	360 P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11b CH11 1Mbps
Voltage : Adapter(AC120V/60Hz)
Pol : Horizontal

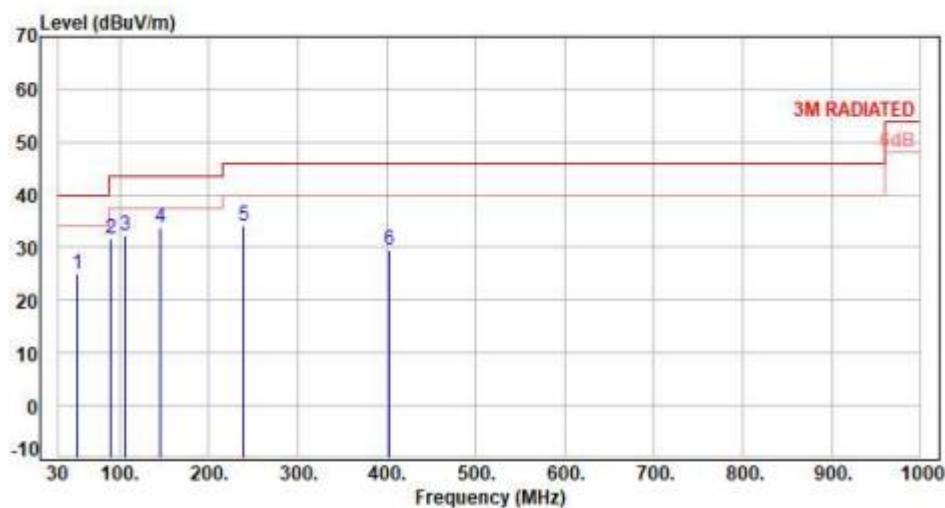

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)
1	51.34	-8.40	33.42	25.02	40.00	-14.98	Peak	400	360 P
2	90.14	-15.46	47.23	31.77	43.50	-11.73	Peak	400	360 P
3	105.66	-13.10	45.44	32.34	43.50	-11.16	Peak	400	360 P
4	145.56	-9.35	43.20	33.85	43.50	-9.65	QP	200	249 P
5	239.52	-10.01	44.05	34.04	46.00	-11.96	Peak	400	360 P
6	402.48	-5.48	35.09	29.61	46.00	-16.39	Peak	400	360 P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Test Mode : 2TX 11b CH01 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

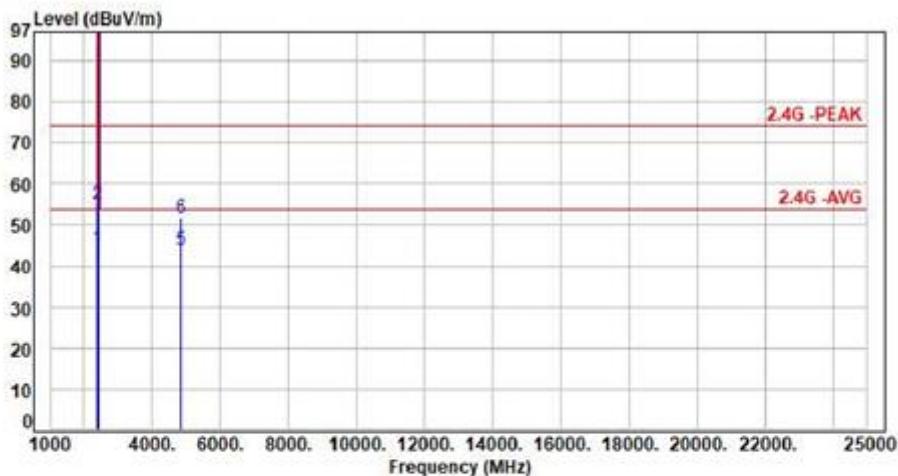

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	46.31	44.19	54.00	-9.81	Average	316	207	P
2	2390.00	-2.12	56.97	54.85	74.00	-19.15	Peak	316	207	P
3	2412.00	-2.10	105.17	103.07	200.00	-96.93	Average	316	207	P
4	2412.00	-2.10	107.75	105.65	200.00	-94.35	Peak	316	207	P
5	4824.00	6.09	37.77	43.86	54.00	-10.14	Average	188	83	P
6	4824.00	6.09	45.44	51.53	74.00	-22.47	Peak	188	83	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11b CH01 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

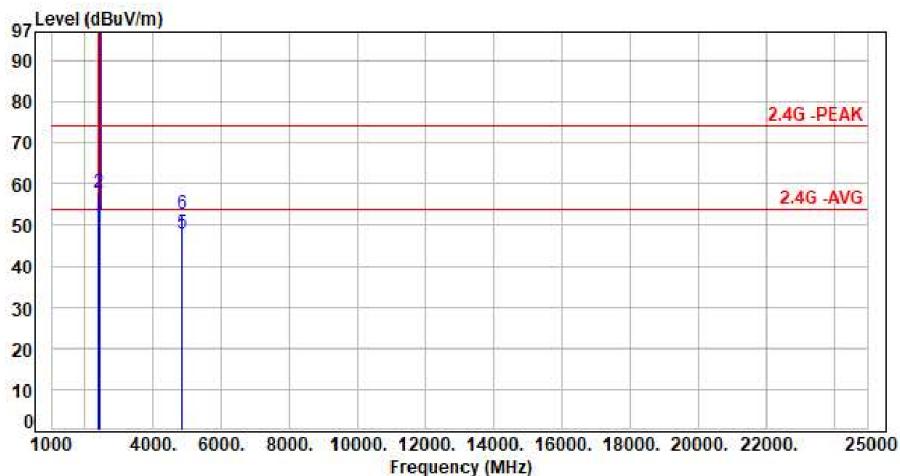


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	52.33	50.21	54.00	-3.79	Average	302	287	P
2	2390.00	-2.12	59.87	57.75	74.00	-16.25	Peak	302	287	P
3	2412.00	-2.10	110.34	108.24	200.00	-91.76	Average	302	287	P
4	2412.00	-2.10	112.85	110.75	200.00	-89.25	Peak	302	287	P
5	4824.00	6.09	41.80	47.89	54.00	-6.11	Average	111	242	P
6	4824.00	6.09	46.81	52.90	74.00	-21.10	Peak	111	242	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11b CH06 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

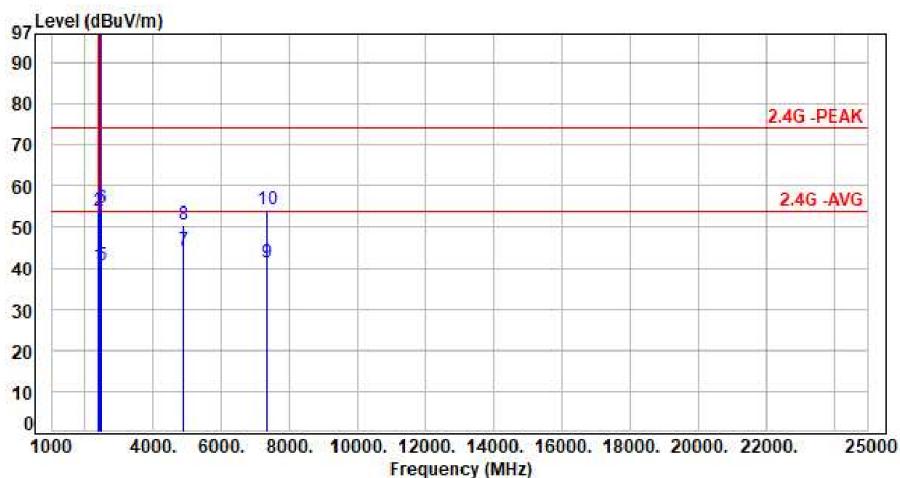


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	42.82	40.70	54.00	-13.30	Average	289	178	P
2	2390.00	-2.12	55.79	53.67	74.00	-20.33	Peak	289	178	P
3	2437.00	-2.07	103.66	101.59	200.00	-98.41	Average	289	178	P
4	2437.00	-2.07	106.10	104.03	200.00	-95.97	Peak	289	178	P
5	2483.50	-1.98	42.69	40.71	54.00	-13.29	Average	289	178	P
6	2483.50	-1.98	56.57	54.59	74.00	-19.41	Peak	289	178	P
7	4874.00	6.36	37.74	44.10	54.00	-9.90	Average	184	80	P
8	4874.00	6.36	44.07	50.43	74.00	-23.57	Peak	184	80	P
9	7311.00	11.42	29.76	41.18	54.00	-12.82	Average	100	152	P
10	7311.00	11.42	42.88	54.30	74.00	-19.70	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11b CH06 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

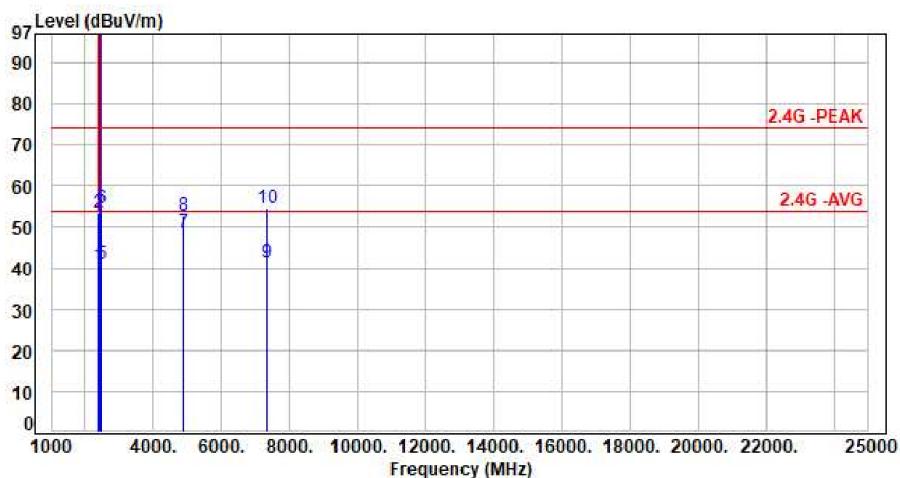


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	42.83	40.71	54.00	-13.29	Average	297	277	P
2	2390.00	-2.12	55.74	53.62	74.00	-20.38	Peak	297	277	P
3	2437.00	-2.07	106.61	104.54	200.00	-95.46	Average	297	277	P
4	2437.00	-2.07	109.26	107.19	200.00	-92.81	Peak	297	277	P
5	2483.50	-1.98	42.90	40.92	54.00	-13.08	Average	297	277	P
6	2483.50	-1.98	56.42	54.44	74.00	-19.56	Peak	297	277	P
7	4874.00	6.36	42.25	48.61	54.00	-5.39	Average	290	238	P
8	4874.00	6.36	46.53	52.89	74.00	-21.11	Peak	290	238	P
9	7311.00	11.42	29.80	41.22	54.00	-12.78	Average	100	196	P
10	7311.00	11.42	43.03	54.45	74.00	-19.55	Peak	100	196	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11b CH11 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

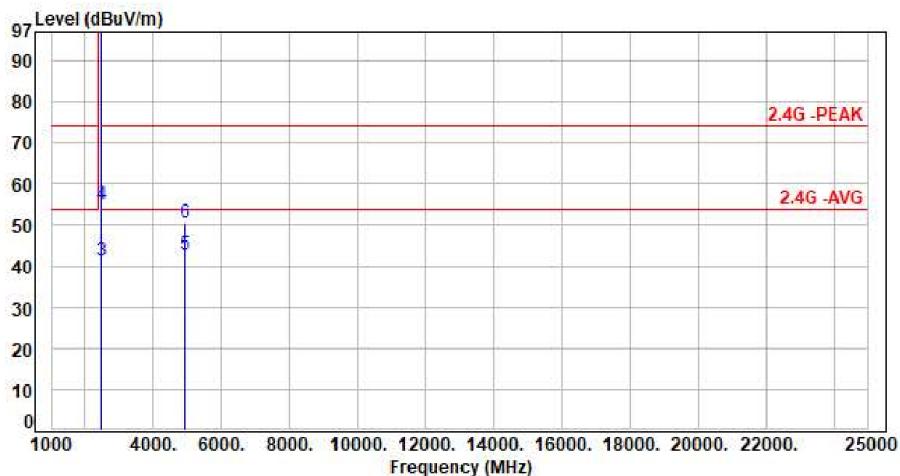


No.	Frequency (MHz)	Factor (dB)	Reading (dB _{uV})	Level (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.02	102.48	100.46	200.00	-99.54	Average	271	174	P
2	2462.00	-2.02	105.06	103.04	200.00	-96.96	Peak	271	174	P
3	2483.50	-1.98	43.28	41.30	54.00	-12.70	Average	271	174	P
4	2483.50	-1.98	56.77	54.79	74.00	-19.21	Peak	271	174	P
5	4924.00	6.48	36.13	42.61	54.00	-11.39	Average	100	85	P
6	4924.00	6.48	44.12	50.60	74.00	-23.40	Peak	100	85	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11b CH11 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

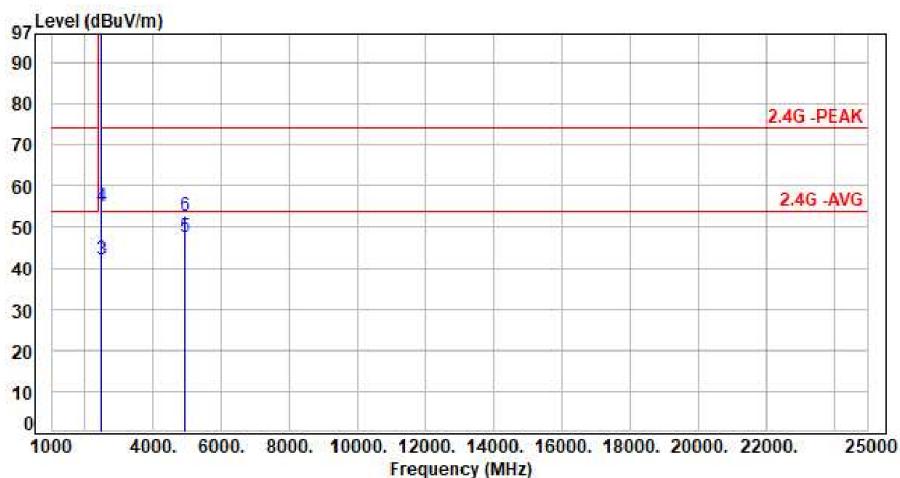


No.	Frequency (MHz)	Factor (dB)	Reading (dB _{uV})	Level (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.02	106.26	104.24	200.00	-95.76	Average	122	284	P
2	2462.00	-2.02	108.86	106.84	200.00	-93.16	Peak	122	284	P
3	2483.50	-1.98	44.20	42.22	54.00	-11.78	Average	122	284	P
4	2483.50	-1.98	56.96	54.98	74.00	-19.02	Peak	122	284	P
5	4924.00	6.48	41.24	47.72	54.00	-6.28	Average	252	241	P
6	4924.00	6.48	46.28	52.76	74.00	-21.24	Peak	252	241	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11g CH01 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

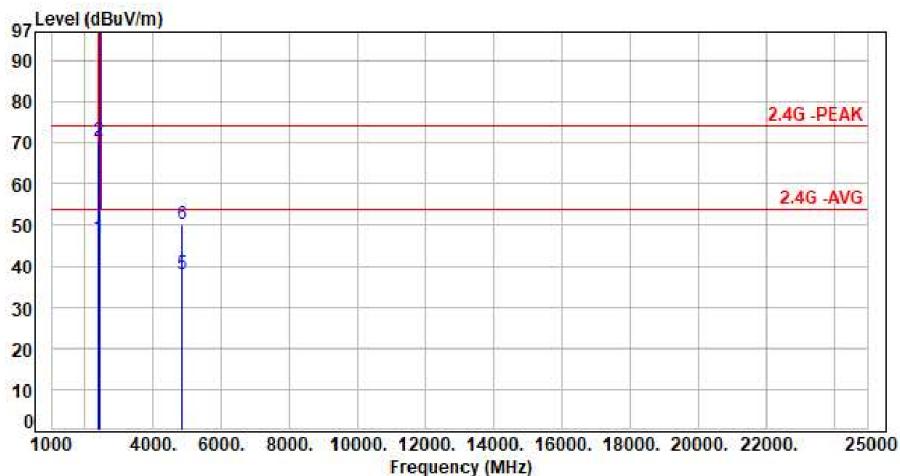


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	49.01	46.89	54.00	-7.11	Average	294	173	P
2	2390.00	-2.12	72.52	70.40	74.00	-3.60	Peak	294	173	P
3	2412.00	-2.10	101.27	99.17	200.00	-100.83	Average	294	173	P
4	2412.00	-2.10	110.97	108.87	200.00	-91.13	Peak	294	173	P
5	4824.00	6.09	31.73	37.82	54.00	-16.18	Average	288	254	P
6	4824.00	6.09	44.05	50.14	74.00	-23.86	Peak	288	254	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11g CH01 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

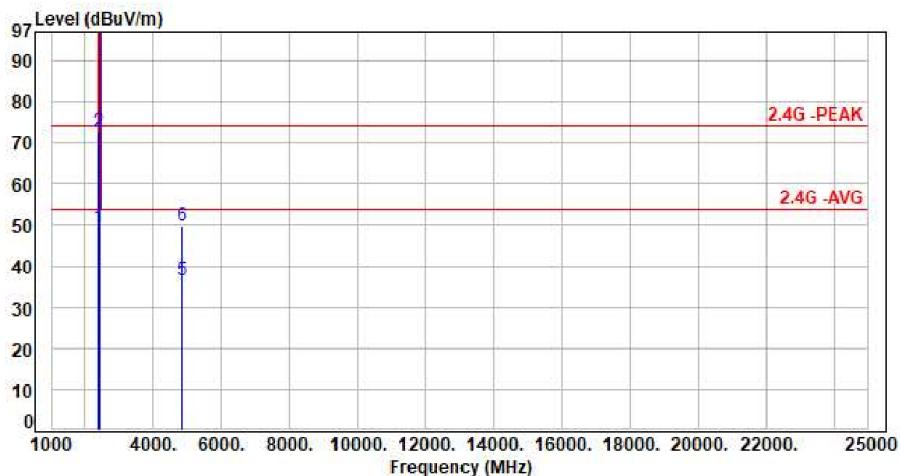


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	51.43	49.31	54.00	-4.69	Average	118	76	P
2	2390.00	-2.12	74.69	72.57	74.00	-1.43	Peak	118	76	P
3	2412.00	-2.10	103.95	101.85	200.00	-98.15	Average	118	76	P
4	2412.00	-2.10	113.42	111.32	200.00	-88.68	Peak	118	76	P
5	4824.00	6.09	30.55	36.64	54.00	-17.36	Average	225	82	P
6	4824.00	6.09	43.61	49.70	74.00	-24.30	Peak	225	82	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11g CH06 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

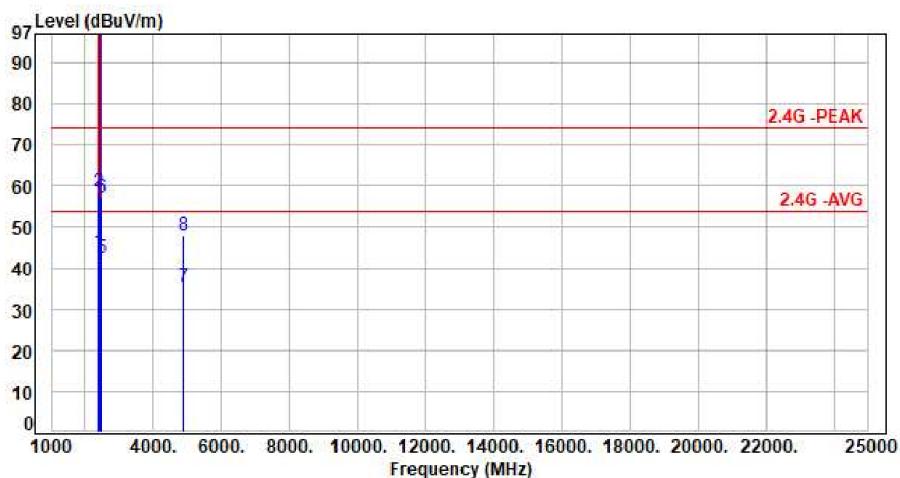


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	46.06	43.94	54.00	-10.06	Average	279	179	P
2	2390.00	-2.12	60.80	58.68	74.00	-15.32	Peak	279	179	P
3	2437.00	-2.07	100.19	98.12	200.00	-101.88	Average	279	179	P
4	2437.00	-2.07	109.66	107.59	200.00	-92.41	Peak	279	179	P
5	2483.50	-1.98	44.24	42.26	54.00	-11.74	Average	279	179	P
6	2483.50	-1.98	59.23	57.25	74.00	-16.75	Peak	279	179	P
7	4874.00	6.36	29.16	35.52	54.00	-18.48	Average	100	152	P
8	4874.00	6.36	41.60	47.96	74.00	-26.04	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11g CH06 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

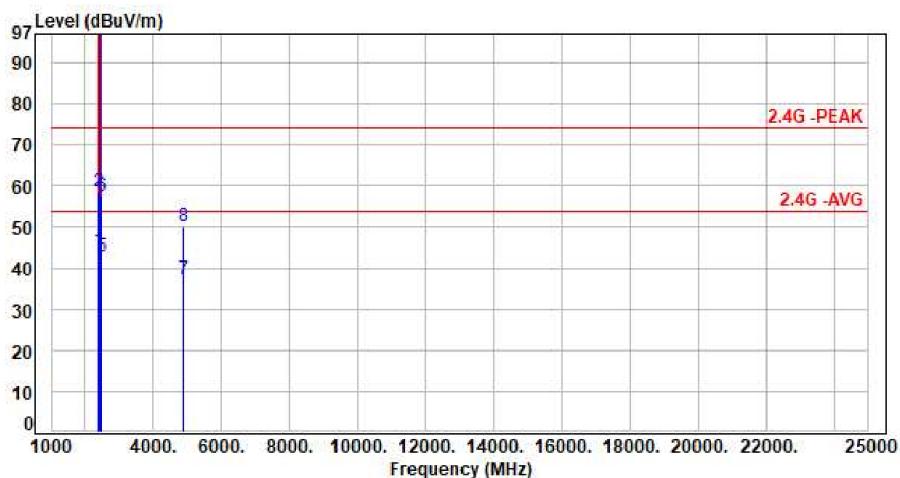


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	46.52	44.40	54.00	-9.60	Average	299	296	P
2	2390.00	-2.12	60.78	58.66	74.00	-15.34	Peak	299	296	P
3	2437.00	-2.07	100.96	98.89	200.00	-101.11	Average	299	296	P
4	2437.00	-2.07	109.68	107.61	200.00	-92.39	Peak	299	296	P
5	2483.50	-1.98	44.94	42.96	54.00	-11.04	Average	299	296	P
6	2483.50	-1.98	59.45	57.47	74.00	-16.53	Peak	299	296	P
7	4874.00	6.36	30.80	37.16	54.00	-16.84	Average	100	254	P
8	4874.00	6.36	43.66	50.02	74.00	-23.98	Peak	100	254	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11g CH11 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

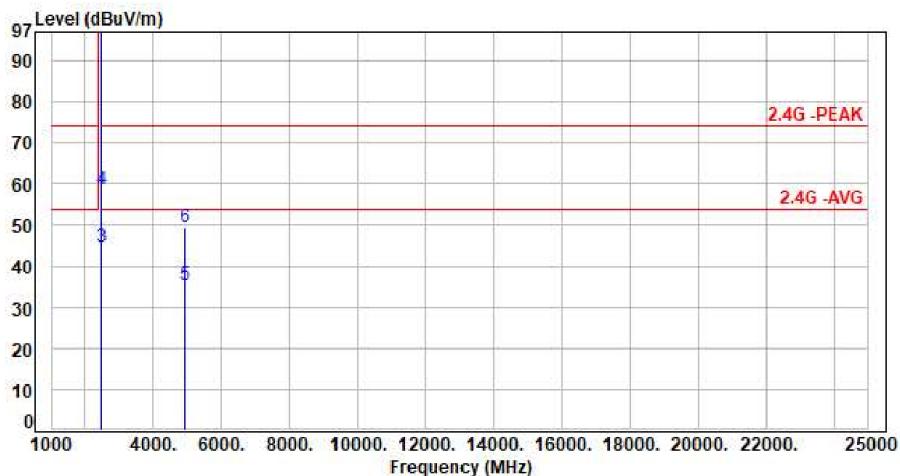


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.02	99.09	97.07	200.00	-102.93	Average	274	171	P
2	2462.00	-2.02	108.55	106.53	200.00	-93.47	Peak	274	171	P
3	2483.50	-1.98	46.48	44.50	54.00	-9.50	Average	274	171	P
4	2483.50	-1.98	60.47	58.49	74.00	-15.51	Peak	274	171	P
5	4924.00	6.48	29.10	35.58	54.00	-18.42	Average	100	152	P
6	4924.00	6.48	42.93	49.41	74.00	-24.59	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11g CH11 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

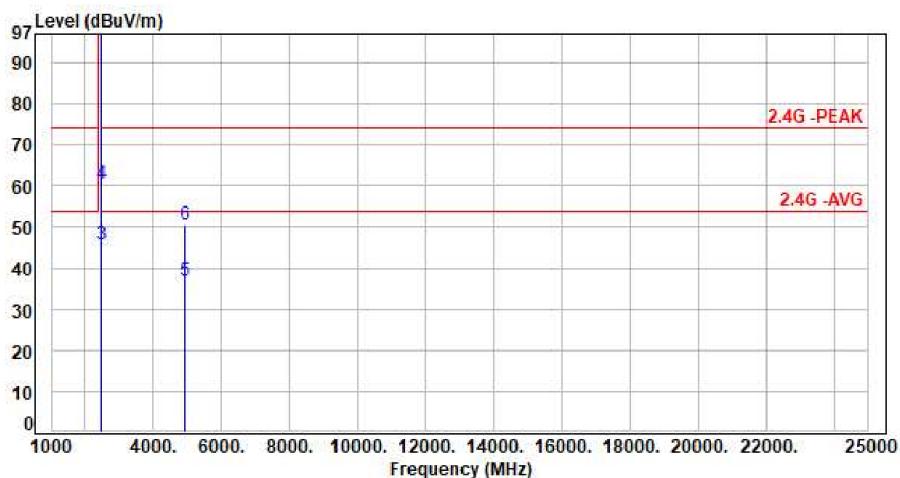


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.02	101.56	99.54	200.00	-100.46	Average	137	80	P
2	2462.00	-2.02	111.46	109.44	200.00	-90.56	Peak	137	80	P
3	2483.50	-1.98	47.86	45.88	54.00	-8.12	Average	137	80	P
4	2483.50	-1.98	62.43	60.45	74.00	-13.55	Peak	137	80	P
5	4924.00	6.48	30.55	37.03	54.00	-16.97	Average	100	288	P
6	4924.00	6.48	43.89	50.37	74.00	-23.63	Peak	100	288	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n20 CH01 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

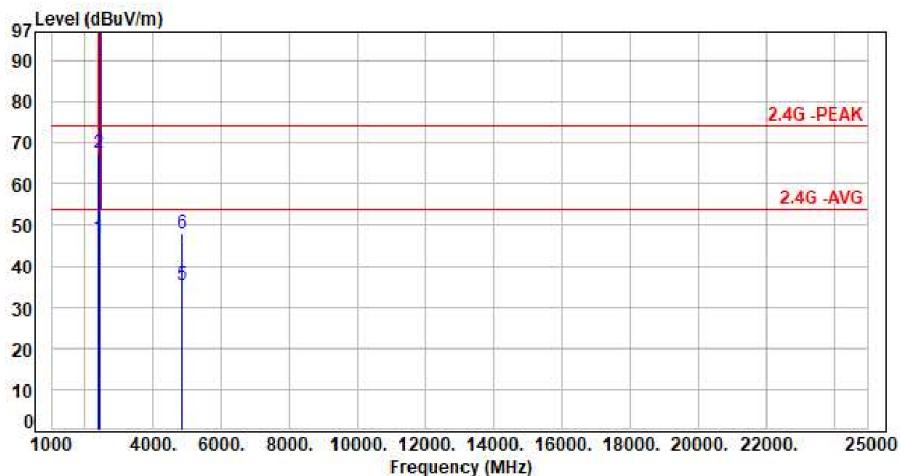


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	49.13	47.01	54.00	-6.99	Average	290	171	P
2	2390.00	-2.12	69.67	67.55	74.00	-6.45	Peak	290	171	P
3	2412.00	-2.10	100.33	98.23	200.00	-101.77	Average	290	171	P
4	2412.00	-2.10	109.59	107.49	200.00	-92.51	Peak	290	171	P
5	4824.00	6.09	29.17	35.26	54.00	-18.74	Average	100	135	P
6	4824.00	6.09	41.81	47.90	74.00	-26.10	Peak	100	135	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n20 CH01 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

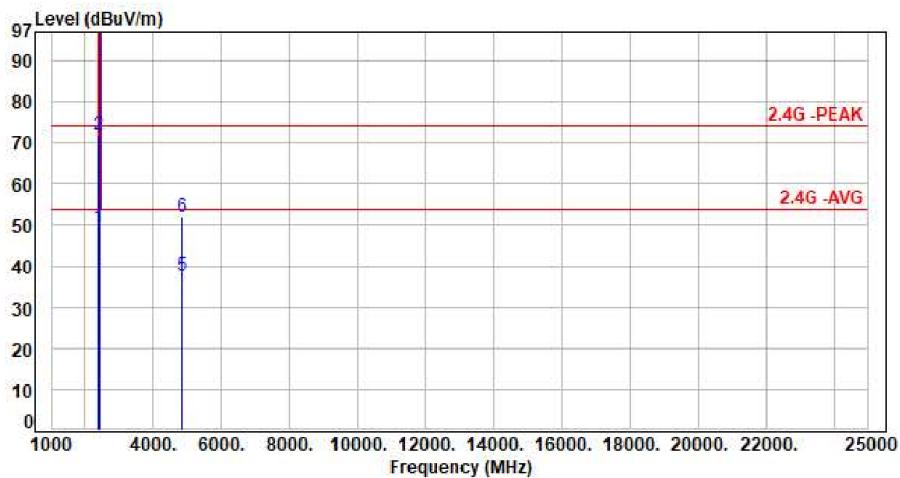


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	51.69	49.57	54.00	-4.43	Average	122	77	P
2	2390.00	-2.12	74.19	72.07	74.00	-1.93	Peak	122	77	P
3	2412.00	-2.10	102.23	100.13	200.00	-99.87	Average	122	77	P
4	2412.00	-2.10	112.47	110.37	200.00	-89.63	Peak	122	77	P
5	4824.00	6.09	31.47	37.56	54.00	-16.44	Average	100	240	P
6	4824.00	6.09	45.97	52.06	74.00	-21.94	Peak	100	240	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n20 CH06 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

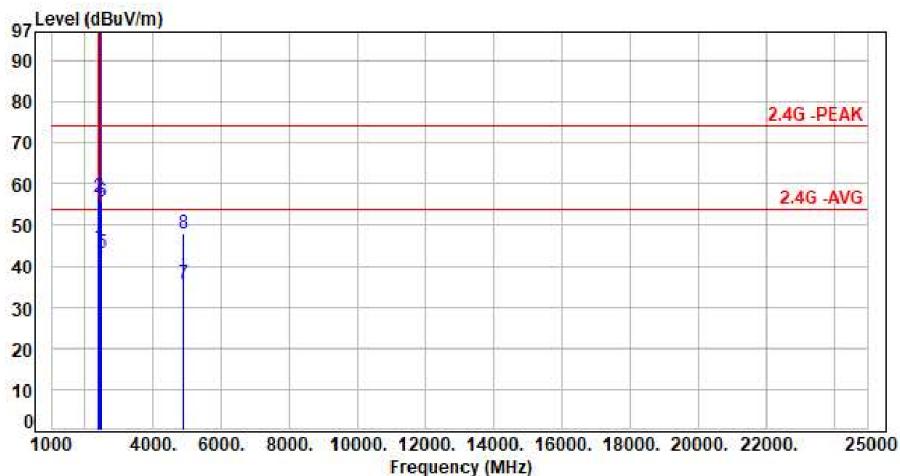


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	46.75	44.63	54.00	-9.37	Average	281	174	P
2	2390.00	-2.12	58.79	56.67	74.00	-17.33	Peak	281	174	P
3	2437.00	-2.07	99.68	97.61	200.00	-102.39	Average	281	174	P
4	2437.00	-2.07	109.24	107.17	200.00	-92.83	Peak	281	174	P
5	2483.50	-1.98	45.11	43.13	54.00	-10.87	Average	281	174	P
6	2483.50	-1.98	57.74	55.76	74.00	-18.24	Peak	281	174	P
7	4874.00	6.36	29.27	35.63	54.00	-18.37	Average	10	135	P
8	4874.00	6.36	41.74	48.10	74.00	-25.90	Peak	10	135	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n20 CH06 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

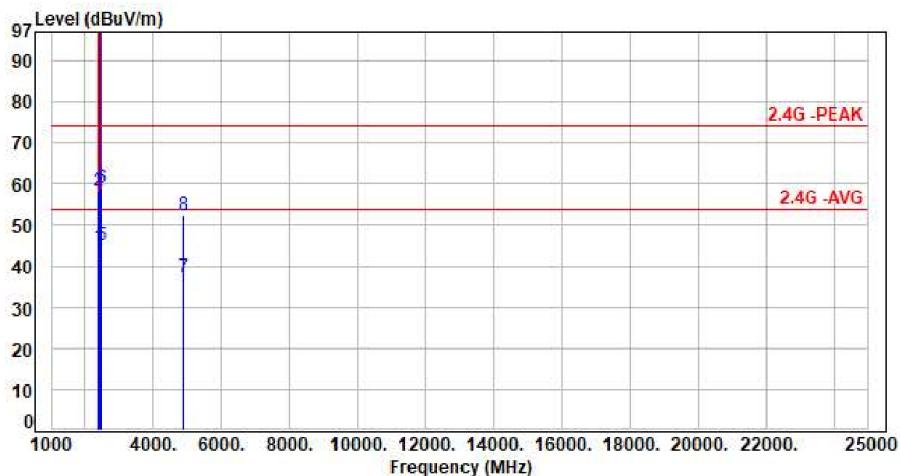


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.12	46.89	44.77	54.00	-9.23	Average	100	285	P
2	2390.00	-2.12	60.22	58.10	74.00	-15.90	Peak	100	285	P
3	2437.00	-2.07	101.56	99.49	200.00	-100.51	Average	100	285	P
4	2437.00	-2.07	111.21	109.14	200.00	-90.86	Peak	100	285	P
5	2483.50	-1.98	46.96	44.98	54.00	-9.02	Average	100	285	P
6	2483.50	-1.98	61.15	59.17	74.00	-14.83	Peak	100	285	P
7	4874.00	6.36	30.76	37.12	54.00	-16.88	Average	100	242	P
8	4874.00	6.36	46.19	52.55	74.00	-21.45	Peak	100	242	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n20 CH11 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

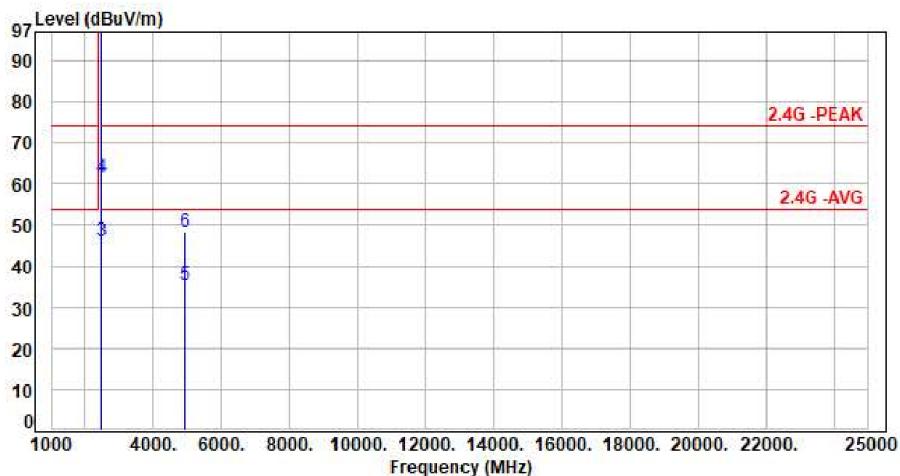

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.02	98.71	96.69	200.00	-103.31	Average	275	169	P
2	2462.00	-2.02	108.42	106.40	200.00	-93.60	Peak	275	169	P
3	2483.50	-1.98	48.01	46.03	54.00	-7.97	Average	275	169	P
4	2483.50	-1.98	63.50	61.52	74.00	-12.48	Peak	275	169	P
5	4924.00	6.48	29.10	35.58	54.00	-18.42	Average	100	152	P
6	4924.00	6.48	41.82	48.30	74.00	-25.70	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor