




Test Mode : 2TX 11ac20 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

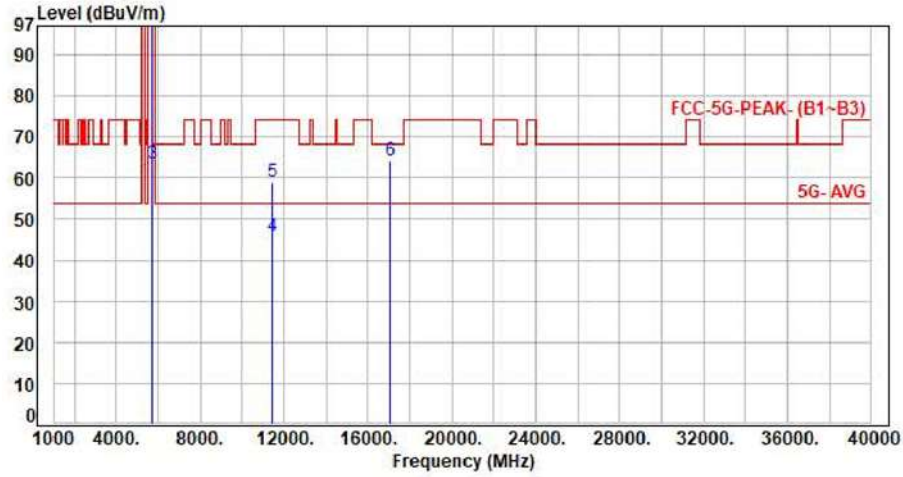


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.37	91.51	98.88	200.00	-101.12	Average	100	241	P
2	5700.00	7.37	101.10	108.47	200.00	-91.53	Peak	100	241	P
3	5725.00	7.33	55.97	63.30	68.20	-4.90	Peak	100	241	P
4	11400.00	16.14	29.56	45.70	54.00	-8.30	Average	100	109	P
5	11400.00	16.14	42.96	59.10	74.00	-14.90	Peak	100	109	P
6	17100.00	21.98	42.18	64.16	68.20	-4.04	Peak	100	177	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

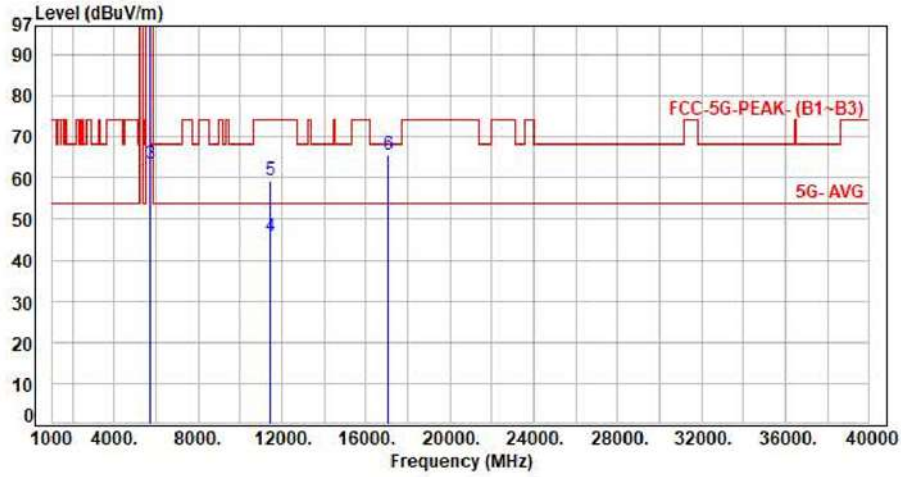


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.37	93.75	101.12	200.00	-98.88	Average	100	360	P
2	5700.00	7.37	103.45	110.82	200.00	-89.18	Peak	100	360	P
3	5725.00	7.33	56.08	63.41	68.20	-4.79	Peak	100	360	P
4	11400.00	16.14	29.61	45.75	54.00	-8.25	Average	100	155	P
5	11400.00	16.14	43.14	59.28	74.00	-14.72	Peak	100	155	P
6	17100.00	21.98	43.51	65.49	68.20	-2.71	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH102 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

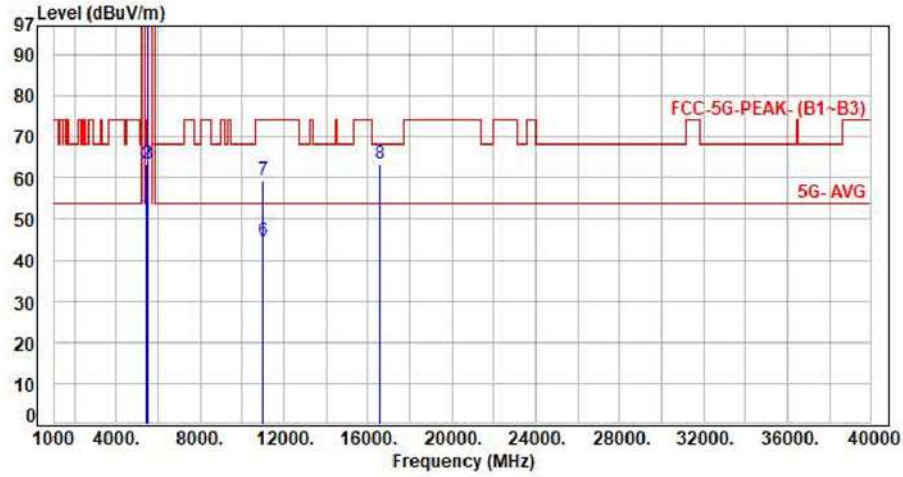


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.35	50.80	54.00	-3.20	Average	100	243	P
2	5460.00	7.45	56.08	63.53	74.00	-10.47	Peak	100	243	P
3	5470.00	7.46	56.12	63.58	68.20	-4.62	Peak	100	243	P
4	5510.00	7.47	90.07	97.54	200.00	-102.46	Average	100	243	P
5	5510.00	7.47	99.27	106.74	200.00	-93.26	Peak	100	243	P
6	11020.00	15.65	29.12	44.77	54.00	-9.23	Average	100	288	P
7	11020.00	15.65	43.61	59.26	74.00	-14.74	Peak	100	288	P
8	16530.00	18.77	44.51	63.28	68.20	-4.92	Peak	100	240	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH102 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

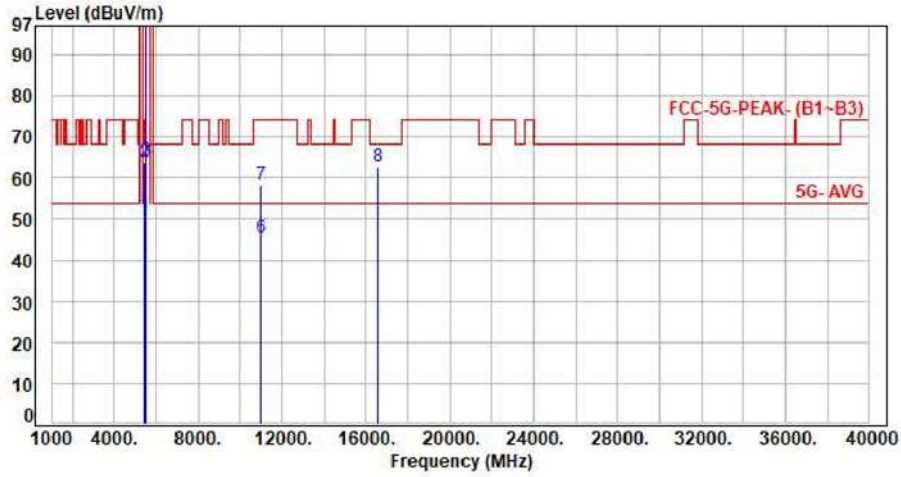


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.52	50.97	54.00	-3.03	Average	100	360	P
2	5460.00	7.45	56.25	63.70	74.00	-10.30	Peak	100	360	P
3	5470.00	7.46	56.55	64.01	68.20	-4.19	Peak	100	360	P
4	5510.00	7.47	91.36	98.83	200.00	-101.17	Average	100	360	P
5	5510.00	7.47	100.56	108.03	200.00	-91.97	Peak	100	360	P
6	11020.00	15.65	29.61	45.26	54.00	-8.74	Average	100	165	P
7	11020.00	15.65	42.64	58.29	74.00	-15.71	Peak	100	165	P
8	16530.00	18.77	44.04	62.81	68.20	-5.39	Peak	100	170	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH118 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

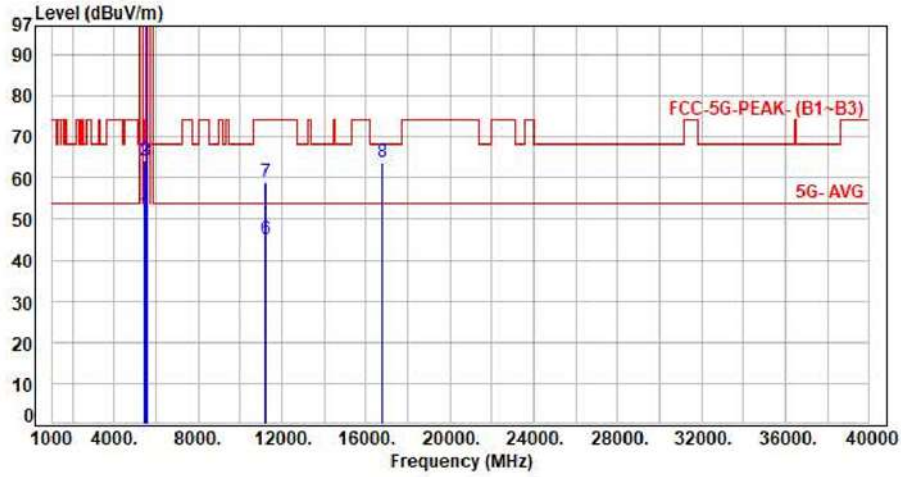


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.83	51.28	54.00	-2.72	Average	100	291	P
2	5460.00	7.45	56.58	64.03	74.00	-9.97	Peak	100	291	P
3	5470.00	7.46	56.70	64.16	68.20	-4.04	Peak	100	291	P
4	5590.00	7.43	88.05	95.48	200.00	-104.52	Average	100	291	P
5	5590.00	7.43	97.65	105.08	200.00	-94.92	Peak	100	291	P
6	11180.00	15.90	29.15	45.05	54.00	-8.95	Average	100	142	P
7	11180.00	15.90	43.22	59.12	74.00	-14.88	Peak	100	142	P
8	16770.00	20.44	43.39	63.83	68.20	-4.37	Peak	100	310	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH118 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

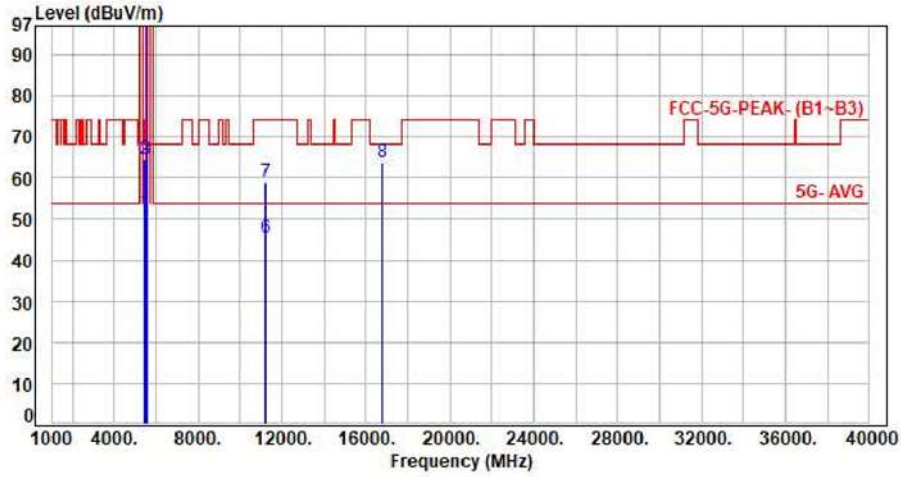


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	44.18	51.63	54.00	-2.37	Average	100	164	P
2	5460.00	7.45	57.09	64.54	74.00	-9.46	Peak	100	164	P
3	5470.00	7.46	57.12	64.58	68.20	-3.62	Peak	100	164	P
4	5590.00	7.43	91.21	98.64	200.00	-101.36	Average	100	164	P
5	5590.00	7.43	100.29	107.72	200.00	-92.28	Peak	100	164	P
6	11180.00	15.90	29.32	45.22	54.00	-8.78	Average	100	238	P
7	11180.00	15.90	42.94	58.84	74.00	-15.16	Peak	100	238	P
8	16770.00	20.44	43.21	63.65	68.20	-4.55	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH134 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

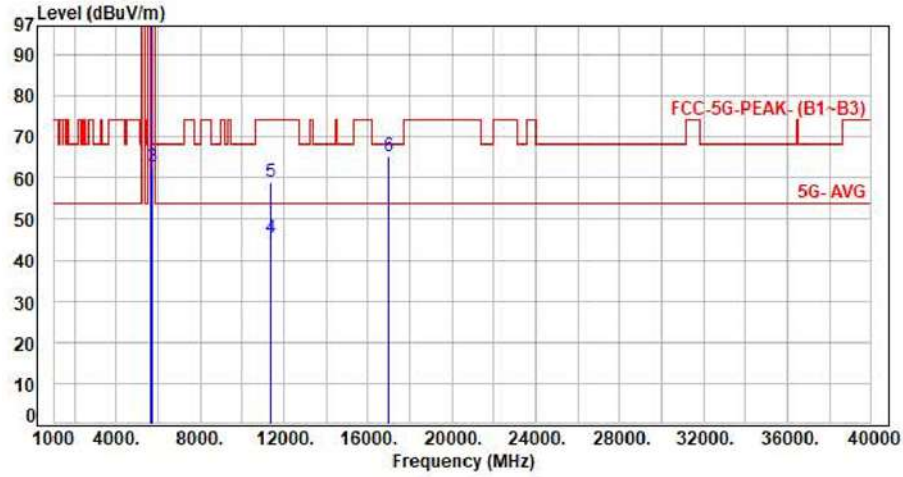


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.36	89.36	96.72	200.00	-103.28	Average	100	243	P
2	5670.00	7.36	99.20	106.56	200.00	-93.44	Peak	100	243	P
3	5725.00	7.33	55.38	62.71	68.20	-5.49	Peak	100	243	P
4	11340.00	16.00	29.37	45.37	54.00	-8.63	Average	100	195	P
5	11340.00	16.00	42.95	58.95	74.00	-15.05	Peak	100	195	P
6	17010.00	21.87	43.52	65.39	68.20	-2.81	Peak	100	256	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH134 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Horizontal

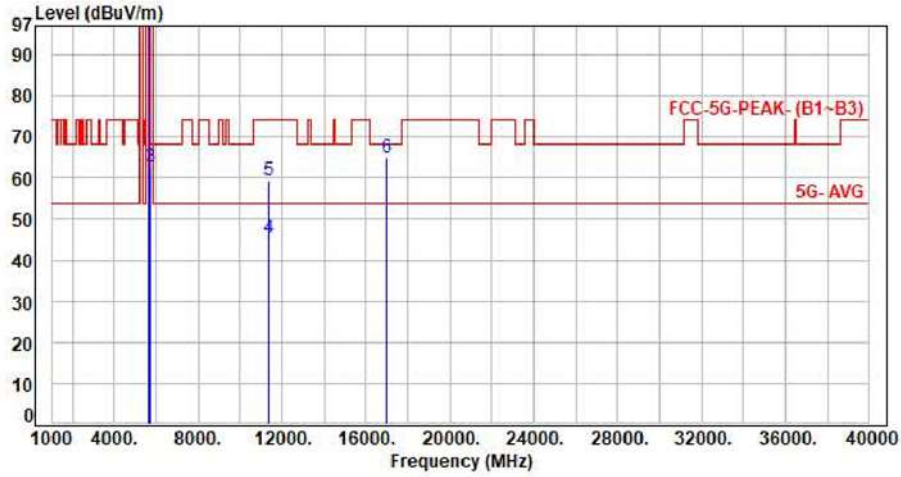


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.36	91.97	99.33	200.00	-100.67	Average	100	360	P
2	5670.00	7.36	101.70	109.06	200.00	-90.94	Peak	100	360	P
3	5725.00	7.33	55.49	62.82	68.20	-5.38	Peak	100	360	P
4	11340.00	16.00	29.48	45.48	54.00	-8.52	Average	100	207	P
5	11340.00	16.00	43.28	59.28	74.00	-14.72	Peak	100	207	P
6	17010.00	21.87	43.00	64.87	68.20	-3.33	Peak	100	224	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH106 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Vertical

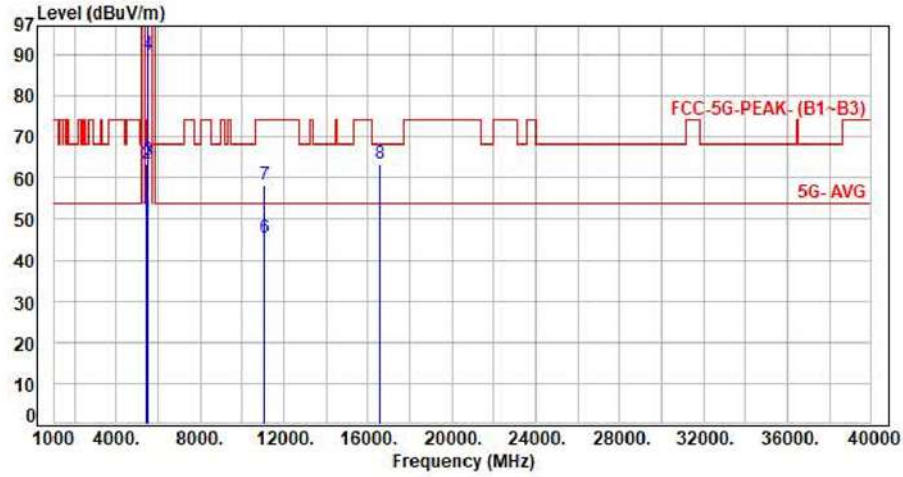


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.91	50.36	54.00	-3.64	Average	227	270	P
2	5460.00	7.45	55.85	63.30	74.00	-10.70	Peak	227	270	P
3	5470.00	7.46	56.64	64.10	68.20	-4.10	Peak	227	270	P
4	5530.00	7.44	82.48	89.92	200.00	-110.08	Average	227	270	P
5	5530.00	7.44	91.74	99.18	200.00	-100.82	Peak	227	270	P
6	11060.00	15.66	29.77	45.43	54.00	-8.57	Average	100	147	P
7	11060.00	15.66	42.62	58.28	74.00	-15.72	Peak	100	147	P
8	16590.00	19.23	44.25	63.48	68.20	-4.72	Peak	100	335	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

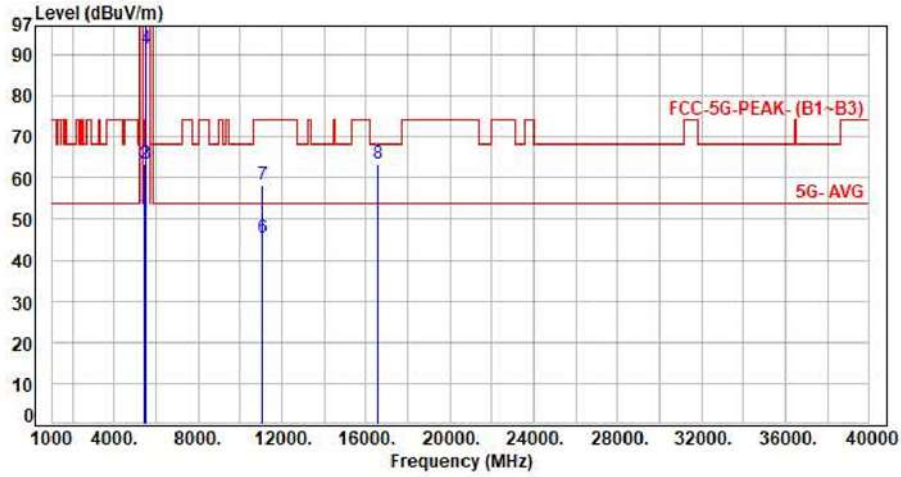


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.48	50.93	54.00	-3.07	Average	339	360	P
2	5460.00	7.45	56.07	63.52	74.00	-10.48	Peak	339	360	P
3	5470.00	7.46	56.03	63.49	68.20	-4.71	Peak	339	360	P
4	5530.00	7.44	84.17	91.61	200.00	-108.39	Average	339	360	P
5	5530.00	7.44	94.21	101.65	200.00	-98.35	Peak	339	360	P
6	11060.00	15.66	29.83	45.49	54.00	-8.51	Average	100	256	P
7	11060.00	15.66	42.73	58.39	74.00	-15.61	Peak	100	256	P
8	16590.00	19.23	44.18	63.41	68.20	-4.79	Peak	100	241	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH122 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

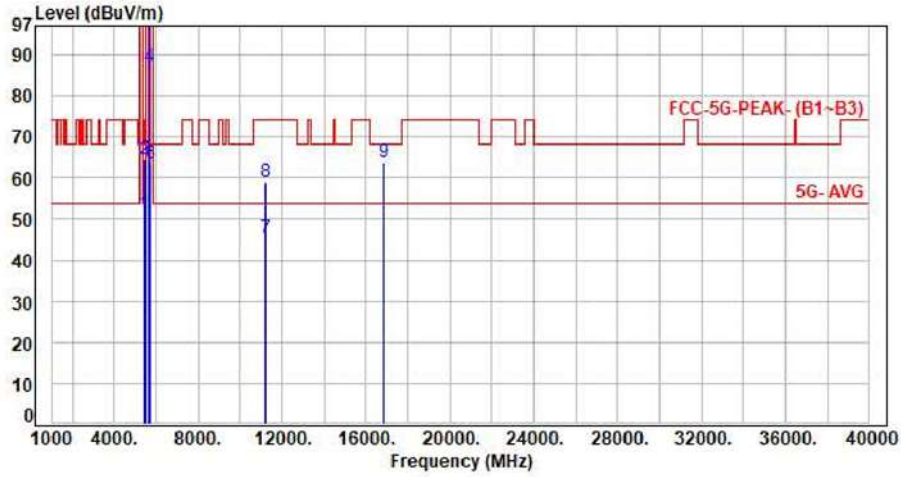


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.74	51.19	54.00	-2.81	Average	331	70	P
2	5460.00	7.45	57.08	64.53	74.00	-9.47	Peak	331	70	P
3	5470.00	7.46	57.12	64.58	68.20	-3.62	Peak	331	70	P
4	5610.00	7.42	79.62	87.04	200.00	-112.96	Average	331	70	P
5	5610.00	7.42	94.87	102.29	200.00	-97.71	Peak	331	70	P
6	5725.00	7.33	56.11	63.44	68.20	-4.76	Peak	331	70	P
7	11220.00	15.93	29.41	45.34	54.00	-8.66	Average	100	128	P
8	11220.00	15.93	43.08	59.01	74.00	-14.99	Peak	100	128	P
9	16830.00	20.55	43.28	63.83	68.20	-4.37	Peak	100	294	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH122 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

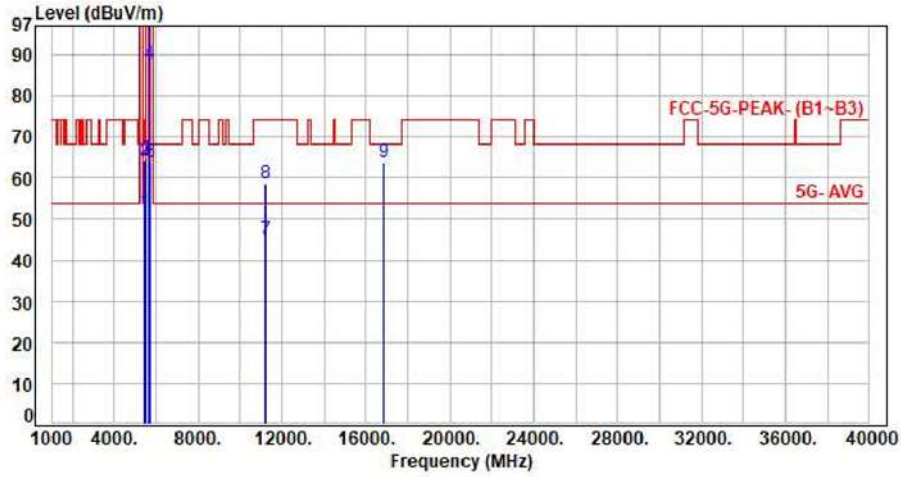


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	44.12	51.57	54.00	-2.43	Average	103	104	P
2	5460.00	7.45	56.78	64.23	74.00	-9.77	Peak	103	104	P
3	5470.00	7.46	56.92	64.38	68.20	-3.82	Peak	103	104	P
4	5610.00	7.42	80.26	87.68	200.00	-112.32	Average	103	104	P
5	5610.00	7.42	95.51	102.93	200.00	-97.07	Peak	103	104	P
6	5725.00	7.33	56.57	63.90	68.20	-4.30	Peak	100	104	P
7	11220.00	15.93	29.17	45.10	54.00	-8.90	Average	100	241	P
8	11220.00	15.93	42.85	58.78	74.00	-15.22	Peak	100	126	P
9	16830.00	20.55	43.28	63.83	68.20	-4.37	Peak	100	126	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

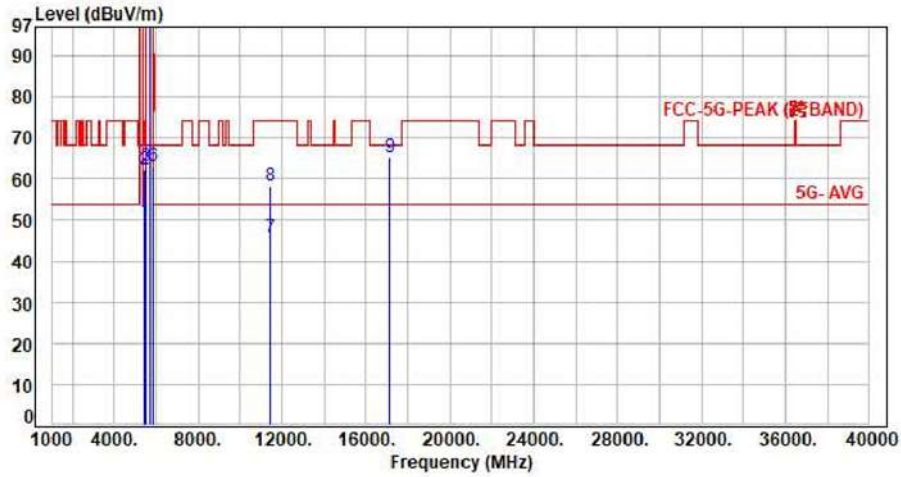


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.30	49.75	54.00	-4.25	Average	390	271	P
2	5460.00	7.45	54.81	62.26	74.00	-11.74	Peak	390	271	P
3	5470.00	7.46	55.61	63.07	68.20	-5.13	Peak	390	271	P
4	5720.00	7.34	93.89	101.23	200.00	-98.77	Average	390	271	P
5	5720.00	7.34	103.52	110.86	200.00	-89.14	Peak	390	271	P
6	5850.00	7.43	55.75	63.18	68.20	-5.02	Peak	390	271	P
7	11440.00	16.25	29.62	45.87	54.00	-8.13	Average	100	193	P
8	11440.00	16.25	42.18	58.43	74.00	-15.57	Peak	100	193	P
9	17160.00	22.12	43.15	65.27	68.20	-2.93	Peak	100	127	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

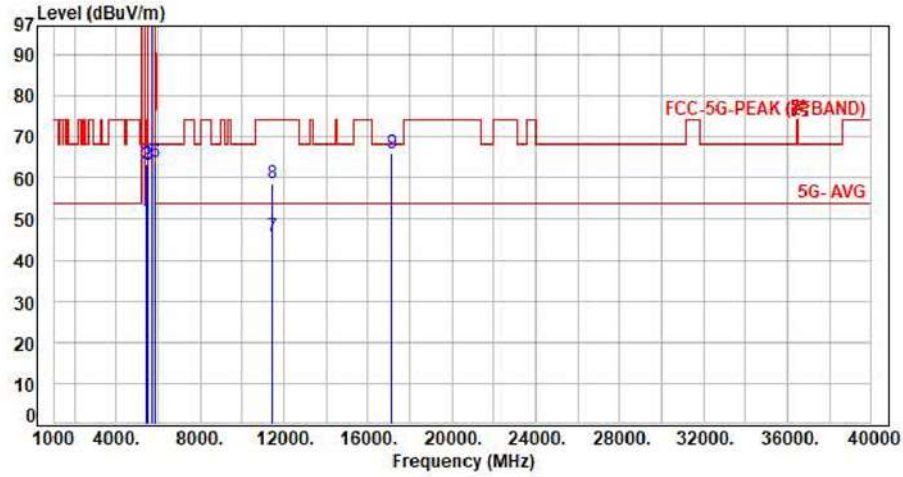


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.33	49.78	54.00	-4.22	Average	100	360	P
2	5460.00	7.45	56.00	63.45	74.00	-10.55	Peak	100	360	P
3	5470.00	7.46	55.43	62.89	68.20	-5.31	Peak	100	360	P
4	5720.00	7.34	95.01	102.35	200.00	-97.65	Average	100	360	P
5	5720.00	7.34	104.36	111.70	200.00	-88.30	Peak	100	360	P
6	5850.00	7.43	56.31	63.74	68.20	-4.46	Peak	100	360	P
7	11440.00	16.25	29.36	45.61	54.00	-8.39	Average	100	152	P
8	11440.00	16.25	42.32	58.57	74.00	-15.43	Peak	100	152	P
9	17160.00	22.12	43.74	65.86	68.20	-2.34	Peak	100	147	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH144 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

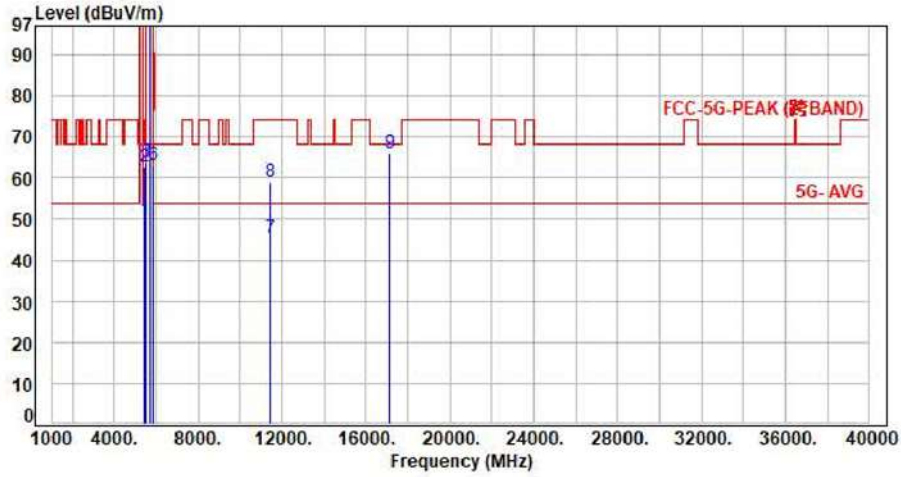


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.33	49.78	54.00	-4.22	Average	391	267	P
2	5460.00	7.45	55.22	62.67	74.00	-11.33	Peak	391	267	P
3	5470.00	7.46	56.50	63.96	68.20	-4.24	Peak	391	267	P
4	5720.00	7.34	93.19	100.53	200.00	-99.47	Average	391	267	P
5	5720.00	7.34	103.15	110.49	200.00	-89.51	Peak	391	267	P
6	5850.00	7.43	55.51	62.94	68.20	-5.26	Peak	391	267	P
7	11440.00	16.25	29.19	45.44	54.00	-8.56	Average	100	142	P
8	11440.00	16.25	42.62	58.87	74.00	-15.13	Peak	100	142	P
9	17160.00	22.12	43.85	65.97	68.20	-2.23	Peak	100	115	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH144 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

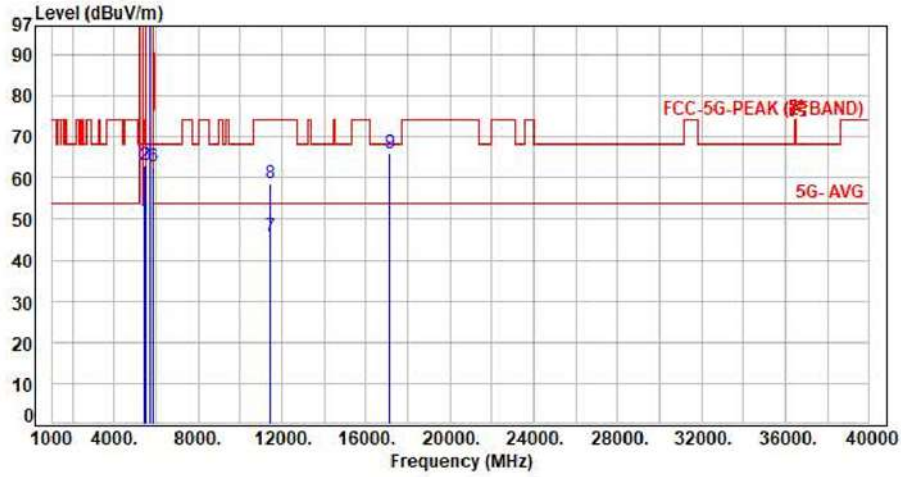


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.37	49.82	54.00	-4.18	Average	100	360	P
2	5460.00	7.45	55.63	63.08	74.00	-10.92	Peak	100	360	P
3	5470.00	7.46	55.55	63.01	68.20	-5.19	Peak	100	360	P
4	5720.00	7.34	93.94	101.28	200.00	-98.72	Average	100	360	P
5	5720.00	7.34	103.19	110.53	200.00	-89.47	Peak	100	360	P
6	5850.00	7.43	55.24	62.67	68.20	-5.53	Peak	100	360	P
7	11440.00	16.25	29.41	45.66	54.00	-8.34	Average	100	358	P
8	11440.00	16.25	42.35	58.60	74.00	-15.40	Peak	100	358	P
9	17160.00	22.12	43.84	65.96	68.20	-2.24	Peak	100	301	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH142 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

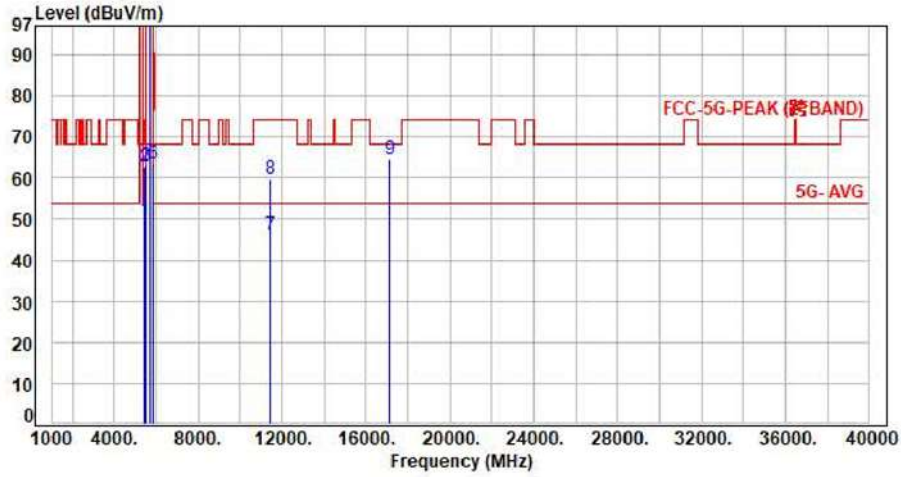


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.33	49.78	54.00	-4.22	Average	396	243	P
2	5460.00	7.45	55.16	62.61	74.00	-11.39	Peak	396	243	P
3	5470.00	7.46	55.43	62.89	68.20	-5.31	Peak	396	243	P
4	5710.00	7.36	89.55	96.91	200.00	-103.09	Average	396	243	P
5	5710.00	7.36	99.65	107.01	200.00	-92.99	Peak	396	243	P
6	5850.00	7.43	56.14	63.57	68.20	-4.63	Peak	396	243	P
7	11420.00	16.20	29.84	46.04	54.00	-7.96	Average	100	194	P
8	11420.00	16.20	43.48	59.68	74.00	-14.32	Peak	100	194	P
9	17130.00	22.05	42.66	64.71	68.20	-3.49	Peak	100	116	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH142 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

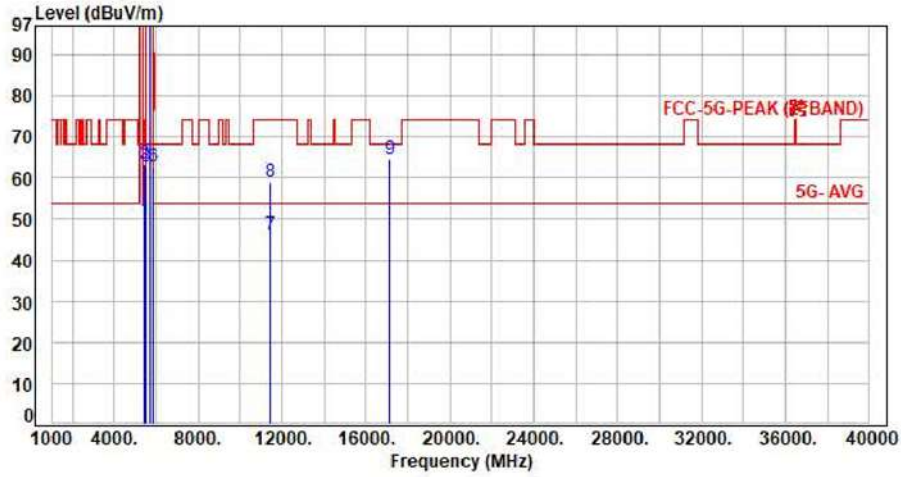


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.40	49.85	54.00	-4.15	Average	100	360	P
2	5460.00	7.45	55.89	63.34	74.00	-10.66	Peak	100	360	P
3	5470.00	7.46	55.26	62.72	68.20	-5.48	Peak	100	360	P
4	5710.00	7.36	91.65	99.01	200.00	-100.99	Average	100	360	P
5	5710.00	7.36	101.05	108.41	200.00	-91.59	Peak	100	360	P
6	5850.00	7.43	55.30	62.73	68.20	-5.47	Peak	100	360	P
7	11420.00	16.20	29.87	46.07	54.00	-7.93	Average	100	128	P
8	11420.00	16.20	42.75	58.95	74.00	-15.05	Peak	100	128	P
9	17130.00	22.05	42.63	64.68	68.20	-3.52	Peak	100	153	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH138 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Vertical

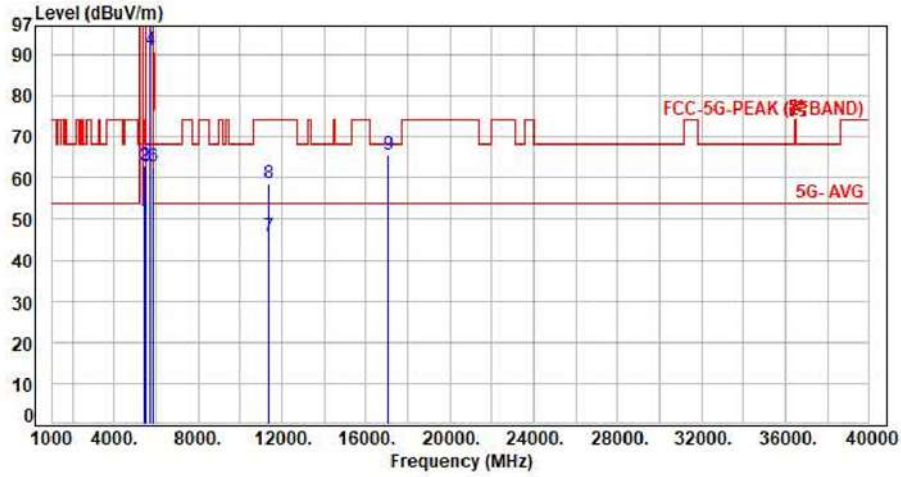


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.39	49.84	54.00	-4.16	Average	377	267	P
2	5460.00	7.45	55.76	63.21	74.00	-10.79	Peak	377	267	P
3	5470.00	7.46	55.36	62.82	68.20	-5.38	Peak	377	267	P
4	5690.00	7.37	83.69	91.06	200.00	-108.94	Average	377	267	P
5	5690.00	7.37	93.43	100.80	200.00	-99.20	Peak	377	267	P
6	5850.00	7.43	55.35	62.78	68.20	-5.42	Peak	377	267	P
7	11380.00	16.09	29.67	45.76	54.00	-8.24	Average	100	145	P
8	11380.00	16.09	42.68	58.77	74.00	-15.23	Peak	100	145	P
9	17070.00	21.97	43.78	65.75	68.20	-2.45	Peak	100	114	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH138 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

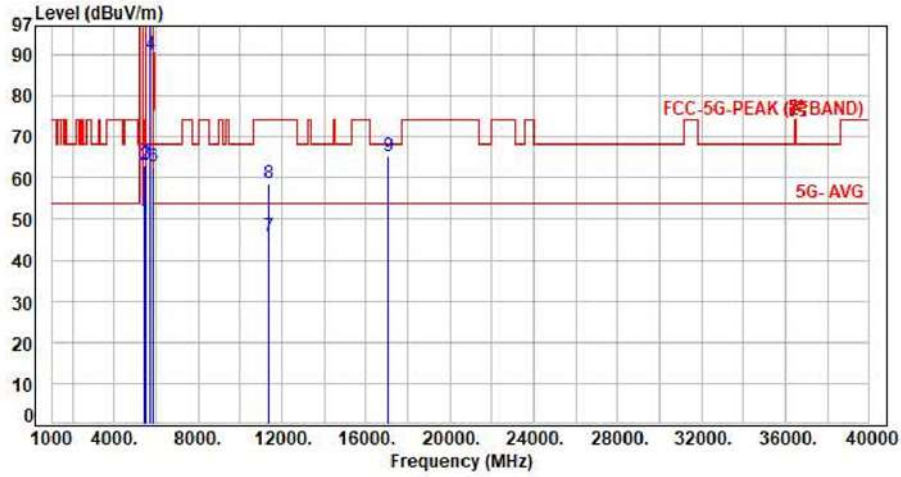


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.31	49.76	54.00	-4.24	Average	100	295	P
2	5460.00	7.45	55.65	63.10	74.00	-10.90	Peak	100	295	P
3	5470.00	7.46	55.90	63.36	68.20	-4.84	Peak	100	295	P
4	5690.00	7.37	82.69	90.06	200.00	-109.94	Average	100	295	P
5	5690.00	7.37	93.42	100.79	200.00	-99.21	Peak	100	295	P
6	5850.00	7.43	55.31	62.74	68.20	-5.46	Peak	100	295	P
7	11380.00	16.09	29.73	45.82	54.00	-8.18	Average	100	253	P
8	11380.00	16.09	42.44	58.53	74.00	-15.47	Peak	100	253	P
9	17070.00	21.97	43.48	65.45	68.20	-2.75	Peak	100	175	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

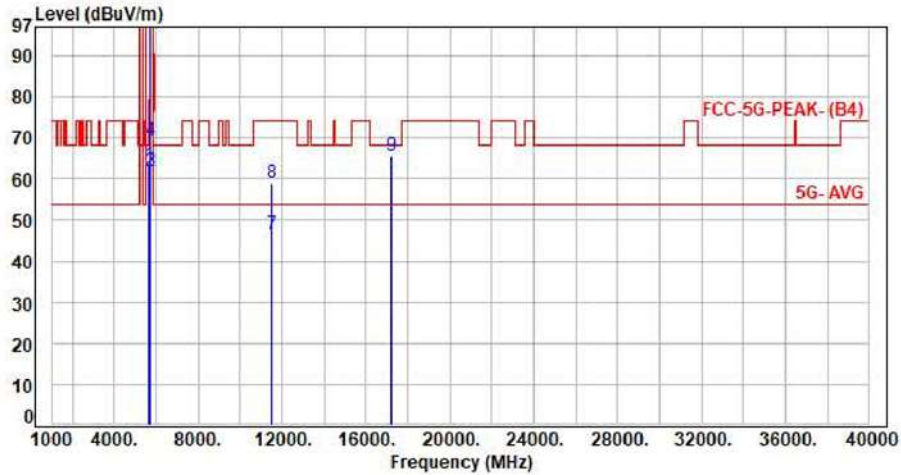


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	56.12	63.47	68.20	-4.73	Peak	366	268	P
2	5700.00	7.37	54.60	61.97	105.20	-43.23	Peak	366	268	P
3	5720.00	7.34	54.69	62.03	110.80	-48.77	Peak	366	268	P
4	5725.00	7.33	62.15	69.48	122.20	-52.72	Peak	366	268	P
5	5745.00	7.30	92.91	100.21	200.00	-99.79	Average	366	268	P
6	5745.00	7.30	102.48	109.78	200.00	-90.22	Peak	366	268	P
7	11490.00	16.46	29.89	46.35	54.00	-7.65	Average	100	304	P
8	11490.00	16.46	42.63	59.09	74.00	-14.91	Peak	100	304	P
9	17235.00	22.37	43.10	65.47	68.20	-2.73	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

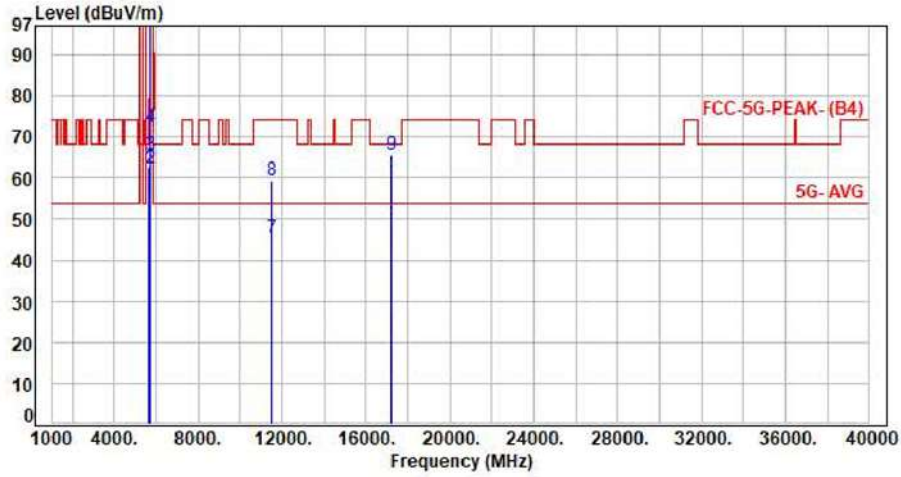


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	55.17	62.52	68.20	-5.68	Peak	100	360	P
2	5700.00	7.37	54.86	62.23	105.20	-42.97	Peak	100	360	P
3	5720.00	7.34	58.47	65.81	110.80	-44.99	Peak	100	360	P
4	5725.00	7.33	65.00	72.33	122.20	-49.87	Peak	100	360	P
5	5745.00	7.30	94.71	102.01	200.00	-97.99	Average	100	360	P
6	5745.00	7.30	104.47	111.77	200.00	-88.23	Peak	100	360	P
7	11490.00	16.46	29.03	45.49	54.00	-8.51	Average	100	225	P
8	11490.00	16.46	43.08	59.54	74.00	-14.46	Peak	100	225	P
9	17235.00	22.37	43.21	65.58	68.20	-2.62	Peak	100	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

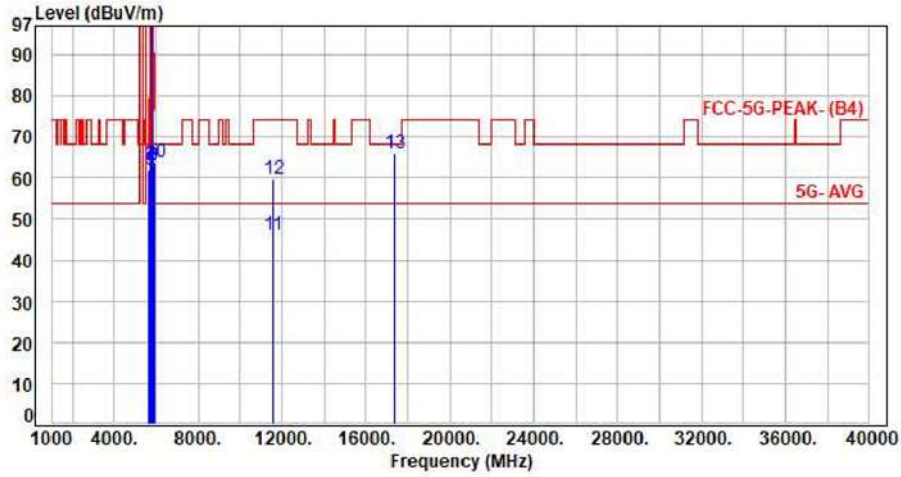


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.65	62.00	68.20	-6.20	Peak	100	261	P
2	5700.00	7.37	56.02	63.39	105.20	-41.81	Peak	100	261	P
3	5720.00	7.34	54.80	62.14	110.80	-48.66	Peak	100	261	P
4	5725.00	7.33	55.10	62.43	122.20	-59.77	Peak	100	261	P
5	5785.00	7.37	92.20	99.57	200.00	-100.43	Average	100	261	P
6	5785.00	7.37	102.32	109.69	200.00	-90.31	Peak	100	261	P
7	5850.00	7.43	55.33	62.76	122.20	-59.44	Peak	100	261	P
8	5855.00	7.45	55.49	62.94	110.80	-47.86	Peak	100	261	P
9	5875.00	7.54	55.62	63.16	105.20	-42.04	Peak	100	261	P
10	5925.00	7.66	56.16	63.82	68.20	-4.38	Peak	100	261	P
11	11570.00	16.67	29.49	46.16	54.00	-7.84	Average	100	251	P
12	11570.00	16.67	42.93	59.60	74.00	-14.40	Peak	100	251	P
13	17355.00	23.18	43.00	66.18	68.20	-2.02	Peak	100	117	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

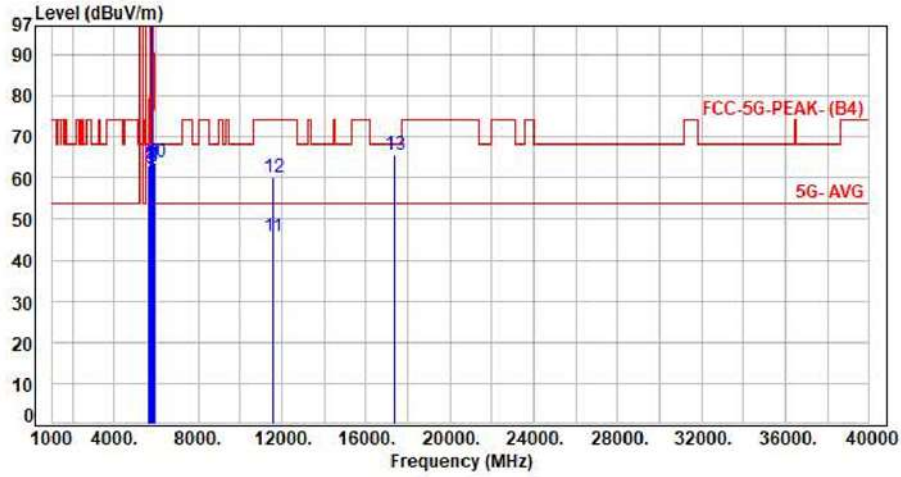


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	55.72	63.07	68.20	-5.13	Peak	100	360	P
2	5700.00	7.37	55.93	63.30	105.20	-41.90	Peak	100	360	P
3	5720.00	7.34	54.81	62.15	110.80	-48.65	Peak	100	360	P
4	5725.00	7.33	55.24	62.57	122.20	-59.63	Peak	100	360	P
5	5785.00	7.37	94.13	101.50	200.00	-98.50	Average	100	360	P
6	5785.00	7.37	103.47	110.84	200.00	-89.16	Peak	100	360	P
7	5850.00	7.43	55.53	62.96	122.20	-59.24	Peak	100	360	P
8	5855.00	7.45	55.36	62.81	110.80	-47.99	Peak	100	360	P
9	5875.00	7.54	56.23	63.77	105.20	-41.43	Peak	100	360	P
10	5925.00	7.66	56.16	63.82	68.20	-4.38	Peak	100	360	P
11	11570.00	16.67	28.90	45.57	54.00	-8.43	Average	100	261	P
12	11570.00	16.67	43.50	60.17	74.00	-13.83	Peak	100	261	P
13	17355.00	23.18	42.60	65.78	68.20	-2.42	Peak	100	312	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

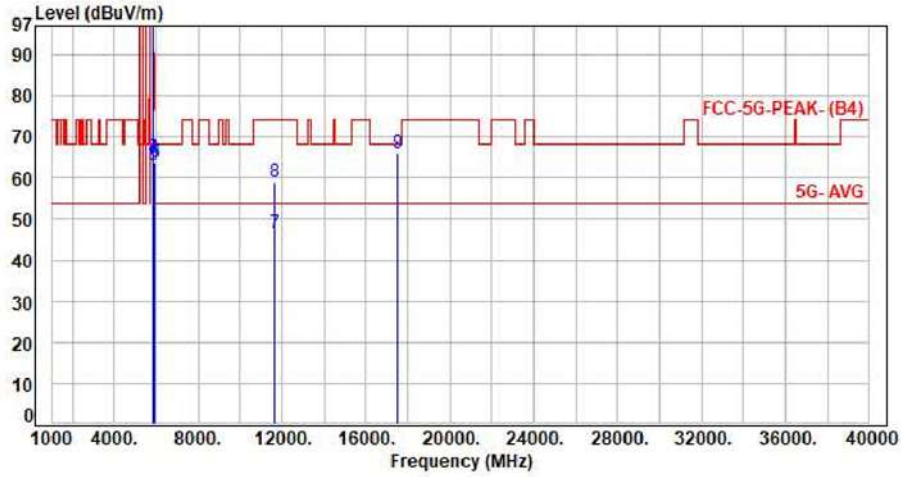


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	92.43	99.85	200.00	-100.15	Average	100	243	P
2	5825.00	7.42	101.51	108.93	200.00	-91.07	Peak	100	243	P
3	5850.00	7.43	57.39	64.82	122.20	-57.38	Peak	100	243	P
4	5855.00	7.45	57.36	64.81	110.80	-45.99	Peak	100	243	P
5	5875.00	7.54	55.70	63.24	105.20	-41.96	Peak	100	243	P
6	5925.00	7.66	56.27	63.93	68.20	-4.27	Peak	100	243	P
7	11650.00	16.84	29.64	46.48	54.00	-7.52	Average	100	194	P
8	11650.00	16.84	42.02	58.86	74.00	-15.14	Peak	100	194	P
9	17475.00	23.76	42.31	66.07	68.20	-2.13	Peak	100	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

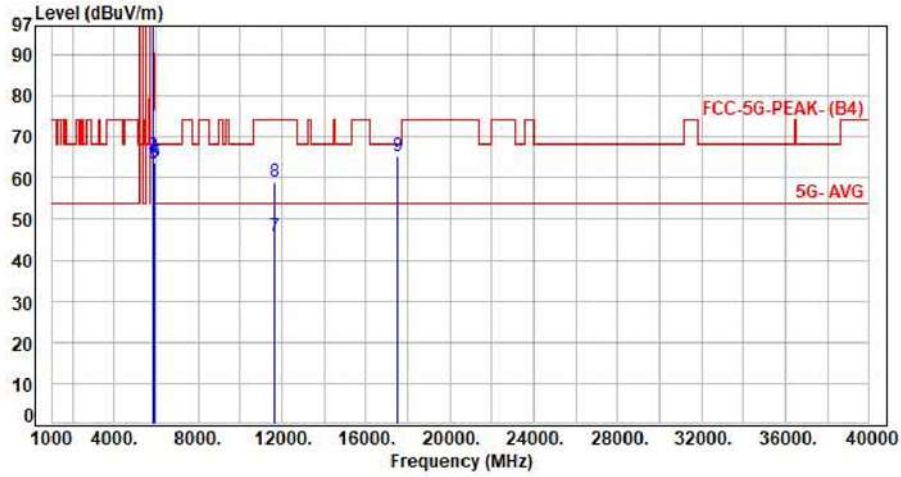


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	94.83	102.25	200.00	-97.75	Average	100	360	P
2	5825.00	7.42	104.55	111.97	200.00	-88.03	Peak	100	360	P
3	5850.00	7.43	57.68	65.11	122.20	-57.09	Peak	100	360	P
4	5855.00	7.45	57.42	64.87	110.80	-45.93	Peak	100	360	P
5	5875.00	7.54	56.06	63.60	105.20	-41.60	Peak	100	360	P
6	5925.00	7.66	56.03	63.69	68.20	-4.51	Peak	100	360	P
7	11650.00	16.84	28.76	45.60	54.00	-8.40	Average	100	196	P
8	11650.00	16.84	42.01	58.85	74.00	-15.15	Peak	100	196	P
9	17475.00	23.76	41.52	65.28	68.20	-2.92	Peak	100	119	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH149 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

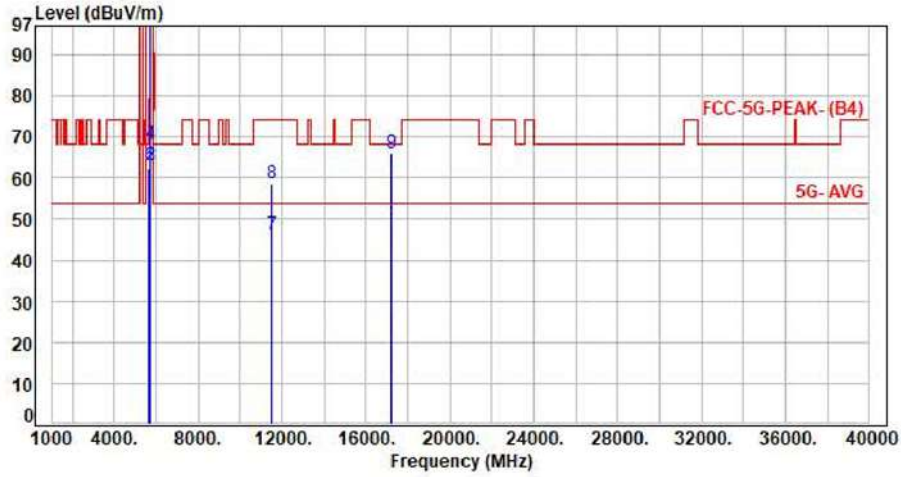


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.92	62.27	68.20	-5.93	Peak	388	267	P
2	5700.00	7.37	55.83	63.20	105.20	-42.00	Peak	388	267	P
3	5720.00	7.34	55.76	63.10	110.80	-47.70	Peak	388	267	P
4	5725.00	7.33	60.72	68.05	122.20	-54.15	Peak	388	267	P
5	5745.00	7.30	92.30	99.60	200.00	-100.40	Average	388	267	P
6	5745.00	7.30	102.34	109.64	200.00	-90.36	Peak	388	267	P
7	11490.00	16.46	29.52	45.98	54.00	-8.02	Average	100	145	P
8	11490.00	16.46	42.31	58.77	74.00	-15.23	Peak	100	145	P
9	17235.00	22.37	43.62	65.99	68.20	-2.21	Peak	100	266	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH149 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

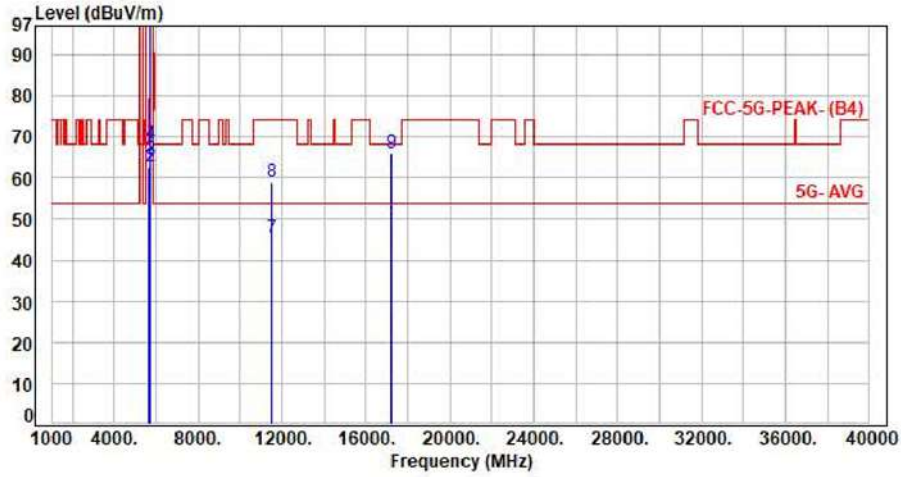


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	55.26	62.61	68.20	-5.59	Peak	100	360	P
2	5700.00	7.37	55.43	62.80	105.20	-42.40	Peak	100	360	P
3	5720.00	7.34	57.24	64.58	110.80	-46.22	Peak	100	360	P
4	5725.00	7.33	60.96	68.29	122.20	-53.91	Peak	100	360	P
5	5745.00	7.30	93.67	100.97	200.00	-99.03	Average	100	360	P
6	5745.00	7.30	103.28	110.58	200.00	-89.42	Peak	100	360	P
7	11490.00	16.46	29.03	45.49	54.00	-8.51	Average	100	117	P
8	11490.00	16.46	42.53	58.99	74.00	-15.01	Peak	100	117	P
9	17235.00	22.37	43.69	66.06	68.20	-2.14	Peak	100	254	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH157 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

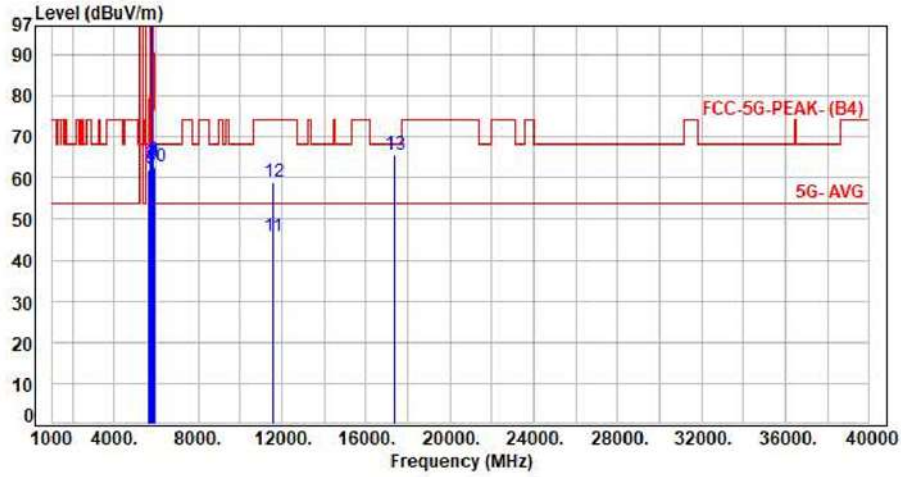


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.76	62.11	68.20	-6.09	Peak	400	265	P
2	5700.00	7.37	55.95	63.32	105.20	-41.88	Peak	400	265	P
3	5720.00	7.34	55.06	62.40	110.80	-48.40	Peak	400	265	P
4	5725.00	7.33	55.24	62.57	122.20	-59.63	Peak	400	265	P
5	5785.00	7.37	91.91	99.28	200.00	-100.72	Average	400	265	P
6	5785.00	7.37	101.95	109.32	200.00	-90.68	Peak	400	265	P
7	5850.00	7.43	55.58	63.01	122.20	-59.19	Peak	400	265	P
8	5855.00	7.45	56.70	64.15	110.80	-46.65	Peak	400	265	P
9	5875.00	7.54	56.08	63.62	105.20	-41.58	Peak	400	265	P
10	5925.00	7.66	55.00	62.66	68.20	-5.54	Peak	400	265	P
11	11570.00	16.67	28.92	45.59	54.00	-8.41	Average	100	299	P
12	11570.00	16.67	42.20	58.87	74.00	-15.13	Peak	100	299	P
13	17355.00	23.18	42.56	65.74	68.20	-2.46	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH157 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

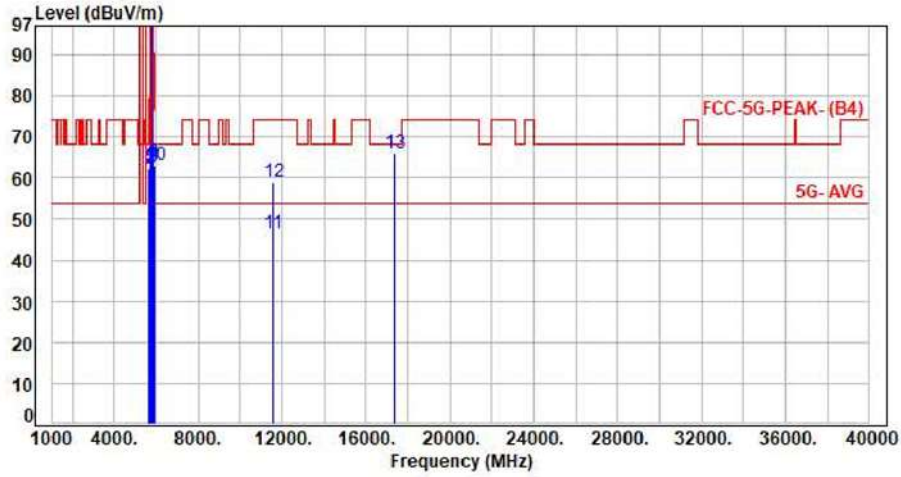


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	55.14	62.49	68.20	-5.71	Peak	100	360	P
2	5700.00	7.37	54.93	62.30	105.20	-42.90	Peak	100	360	P
3	5720.00	7.34	55.42	62.76	110.80	-48.04	Peak	100	360	P
4	5725.00	7.33	56.14	63.47	122.20	-58.73	Peak	100	360	P
5	5785.00	7.37	93.50	100.87	200.00	-99.13	Average	100	360	P
6	5785.00	7.37	102.87	110.24	200.00	-89.76	Peak	100	360	P
7	5850.00	7.43	55.81	63.24	122.20	-58.96	Peak	100	360	P
8	5855.00	7.45	55.31	62.76	110.80	-48.04	Peak	100	360	P
9	5875.00	7.54	56.21	63.75	105.20	-41.45	Peak	100	360	P
10	5925.00	7.66	55.44	63.10	68.20	-5.10	Peak	100	360	P
11	11570.00	16.67	29.62	46.29	54.00	-7.71	Average	100	143	P
12	11570.00	16.67	42.47	59.14	74.00	-14.86	Peak	100	143	P
13	17355.00	23.18	42.81	65.99	68.20	-2.21	Peak	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

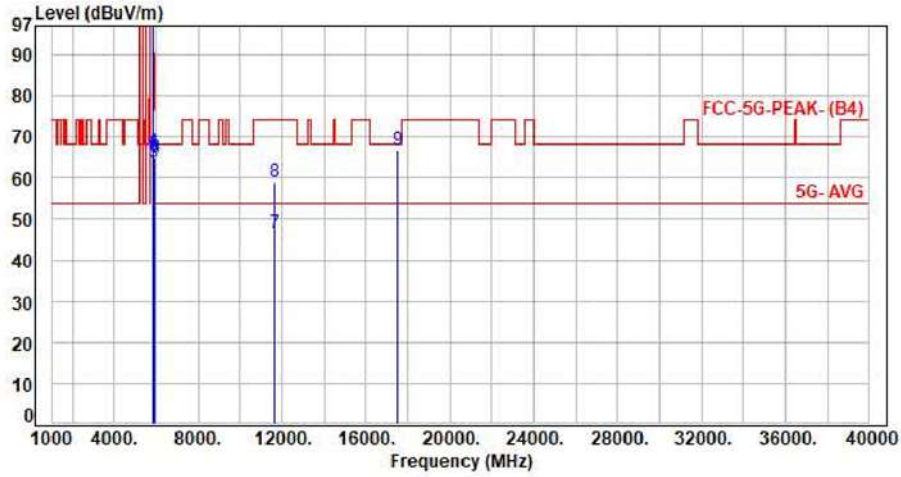


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	91.13	98.55	200.00	-101.45	Average	100	240	P
2	5825.00	7.42	101.29	108.71	200.00	-91.29	Peak	100	240	P
3	5850.00	7.43	56.50	63.93	122.20	-58.27	Peak	100	240	P
4	5855.00	7.45	58.79	66.24	110.80	-44.56	Peak	100	240	P
5	5875.00	7.54	57.93	65.47	105.20	-39.73	Peak	100	240	P
6	5925.00	7.66	57.38	65.04	68.20	-3.16	Peak	100	240	P
7	11650.00	16.84	29.64	46.48	54.00	-7.52	Average	100	119	P
8	11650.00	16.84	42.03	58.87	74.00	-15.13	Peak	100	119	P
9	17475.00	23.76	43.17	66.93	68.20	-1.27	Peak	100	135	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

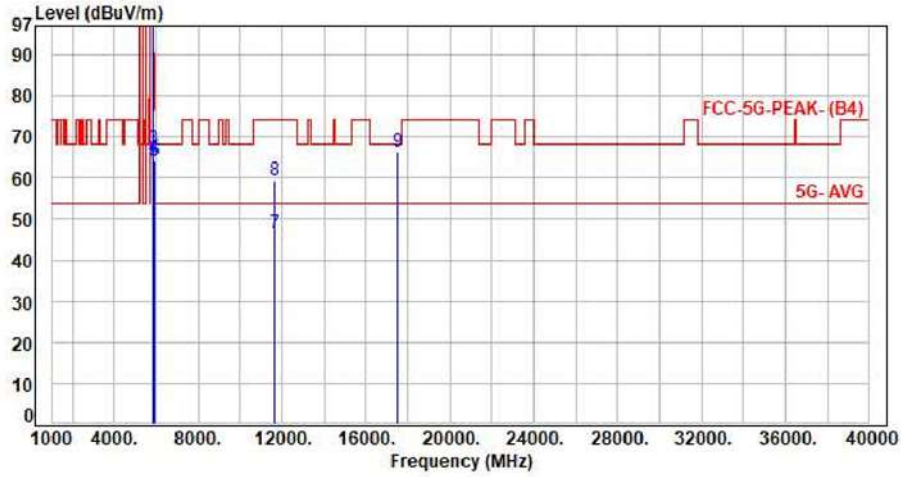


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	93.82	101.24	200.00	-98.76	Average	100	360	P
2	5825.00	7.42	103.64	111.06	200.00	-88.94	Peak	100	360	P
3	5850.00	7.43	59.60	67.03	122.20	-55.17	Peak	100	360	P
4	5855.00	7.45	57.44	64.89	110.80	-45.91	Peak	100	360	P
5	5875.00	7.54	56.71	64.25	105.20	-40.95	Peak	100	360	P
6	5925.00	7.66	56.39	64.05	68.20	-4.15	Peak	100	360	P
7	11650.00	16.84	29.54	46.38	54.00	-7.62	Average	100	328	P
8	11650.00	16.84	42.38	59.22	74.00	-14.78	Peak	100	328	P
9	17475.00	23.76	42.50	66.26	68.20	-1.94	Peak	100	196	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

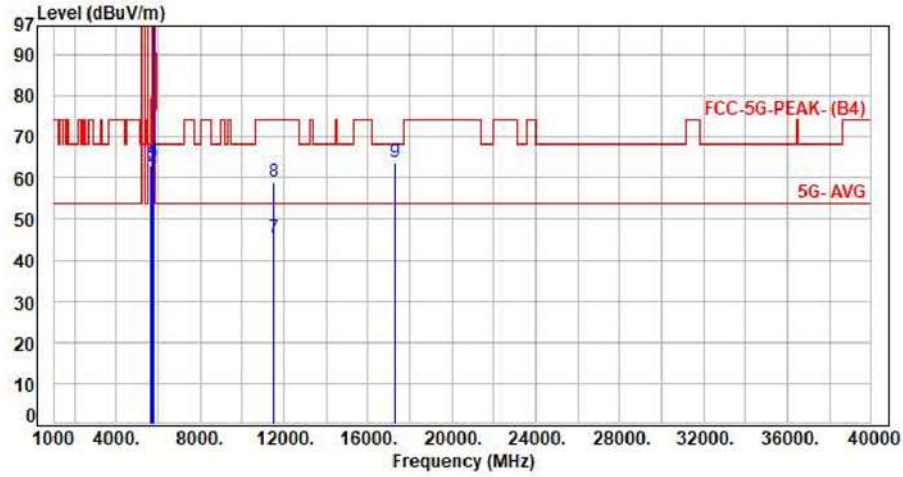


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	55.65	63.00	68.20	-5.20	Peak	100	246	P
2	5700.00	7.37	55.40	62.77	105.20	-42.43	Peak	100	246	P
3	5720.00	7.34	56.18	63.52	110.80	-47.28	Peak	100	246	P
4	5725.00	7.33	56.90	64.23	122.20	-57.97	Peak	100	246	P
5	5755.00	7.30	88.71	96.01	200.00	-103.99	Average	100	246	P
6	5755.00	7.30	98.40	105.70	200.00	-94.30	Peak	100	246	P
7	11510.00	16.53	28.95	45.48	54.00	-8.52	Average	100	195	P
8	11510.00	16.53	42.30	58.83	74.00	-15.17	Peak	100	195	P
9	17265.00	22.53	41.35	63.88	68.20	-4.32	Peak	100	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

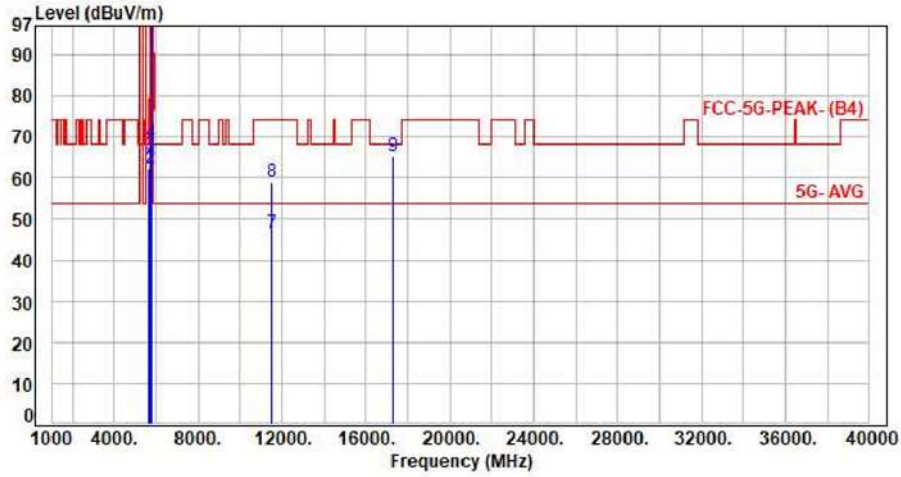


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	55.15	62.50	68.20	-5.70	Peak	100	360	P
2	5700.00	7.37	54.84	62.21	105.20	-42.99	Peak	100	360	P
3	5720.00	7.34	58.16	65.50	110.80	-45.30	Peak	100	360	P
4	5725.00	7.33	61.10	68.43	122.20	-53.77	Peak	100	360	P
5	5755.00	7.30	91.64	98.94	200.00	-101.06	Average	100	360	P
6	5755.00	7.30	101.11	108.41	200.00	-91.59	Peak	100	360	P
7	11510.00	16.53	29.82	46.35	54.00	-7.65	Average	100	325	P
8	11510.00	16.53	42.40	58.93	74.00	-15.07	Peak	100	325	P
9	17265.00	22.53	42.68	65.21	68.20	-2.99	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH159 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

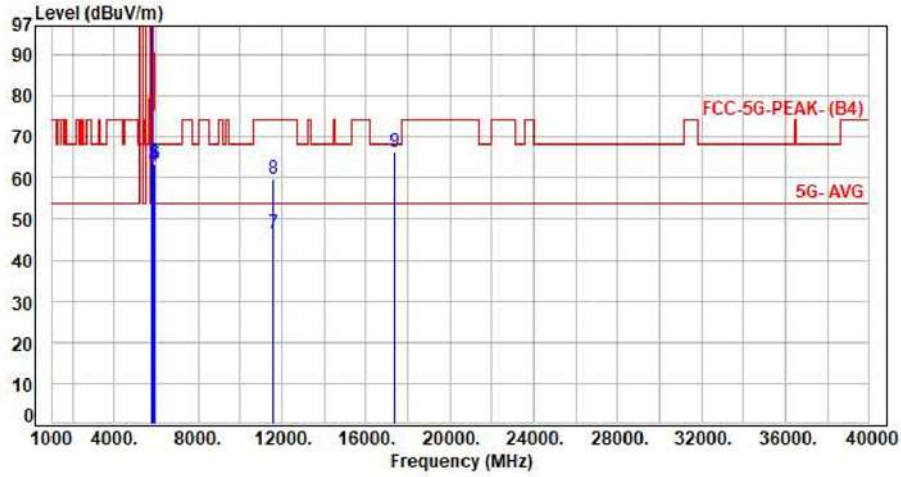


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.39	89.08	96.47	200.00	-103.53	Average	100	243	P
2	5795.00	7.39	98.24	105.63	200.00	-94.37	Peak	100	243	P
3	5850.00	7.43	56.00	63.43	122.20	-58.77	Peak	100	243	P
4	5855.00	7.45	55.15	62.60	110.80	-48.20	Peak	100	243	P
5	5875.00	7.54	56.18	63.72	105.20	-41.48	Peak	100	243	P
6	5925.00	7.66	55.84	63.50	68.20	-4.70	Peak	100	243	P
7	11590.00	16.70	29.83	46.53	54.00	-7.47	Average	100	199	P
8	11590.00	16.70	42.91	59.61	74.00	-14.39	Peak	100	199	P
9	17385.00	23.25	43.31	66.56	68.20	-1.64	Peak	100	211	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH159 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

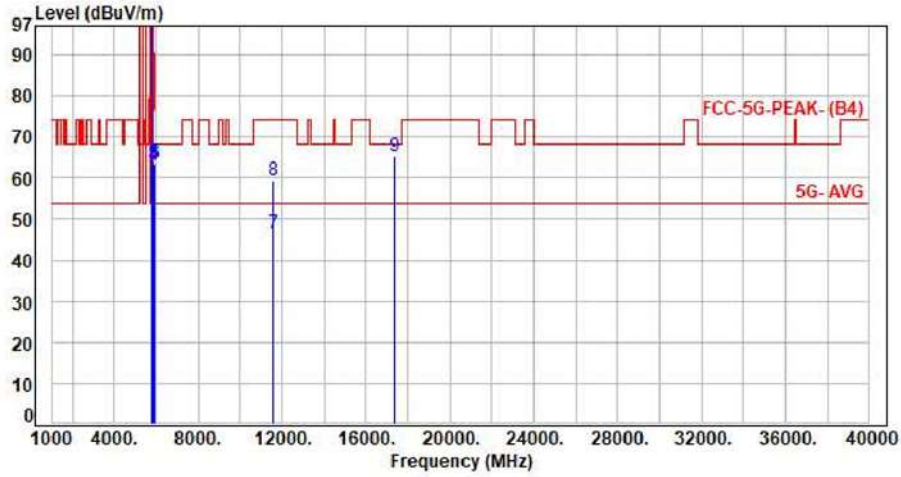


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.39	91.16	98.55	200.00	-101.45	Average	100	360	P
2	5795.00	7.39	100.93	108.32	200.00	-91.68	Peak	100	360	P
3	5850.00	7.43	56.17	63.60	122.20	-58.60	Peak	100	360	P
4	5855.00	7.45	55.73	63.18	110.80	-47.62	Peak	100	360	P
5	5875.00	7.54	56.34	63.88	105.20	-41.32	Peak	100	360	P
6	5925.00	7.66	55.64	63.30	68.20	-4.90	Peak	100	360	P
7	11590.00	16.70	29.82	46.52	54.00	-7.48	Average	100	142	P
8	11590.00	16.70	42.53	59.23	74.00	-14.77	Peak	100	142	P
9	17385.00	23.25	42.09	65.34	68.20	-2.86	Peak	100	183	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH155 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Vertical

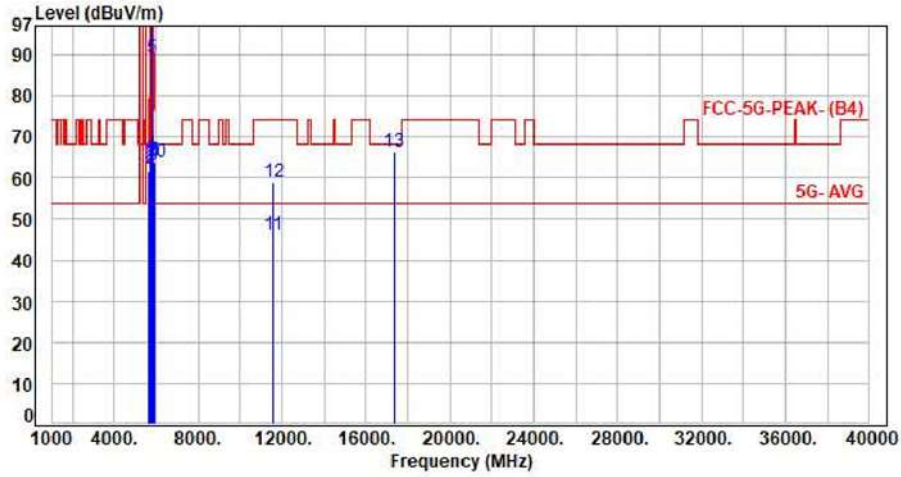


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.19	61.54	68.20	-6.66	Peak	372	267	P
2	5700.00	7.37	55.06	62.43	105.20	-42.77	Peak	372	267	P
3	5720.00	7.34	55.86	63.20	110.80	-47.60	Peak	372	267	P
4	5725.00	7.33	58.50	65.83	122.20	-56.37	Peak	372	267	P
5	5775.00	7.35	81.81	89.16	200.00	-110.84	Average	372	267	P
6	5775.00	7.35	91.95	99.30	200.00	-100.70	Peak	372	267	P
7	5850.00	7.43	56.79	64.22	122.20	-57.98	Peak	372	267	P
8	5855.00	7.45	56.79	64.24	110.80	-46.56	Peak	372	267	P
9	5875.00	7.54	55.69	63.23	105.20	-41.97	Peak	372	267	P
10	5925.00	7.66	56.02	63.68	68.20	-4.52	Peak	372	267	P
11	11550.00	16.62	29.38	46.00	54.00	-8.00	Average	100	239	P
12	11550.00	16.62	42.51	59.13	74.00	-14.87	Peak	100	239	P
13	17325.00	22.96	43.44	66.40	68.20	-1.80	Peak	100	228	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

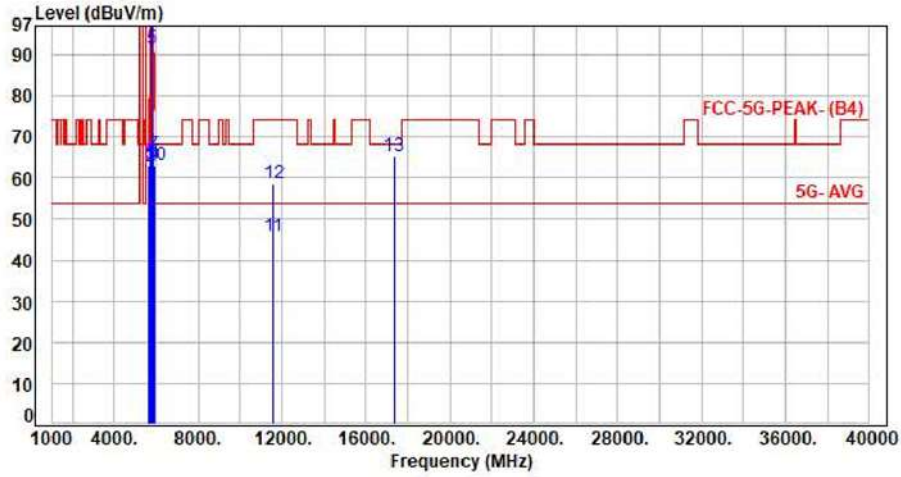


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	55.65	63.00	68.20	-5.20	Peak	100	296	P
2	5700.00	7.37	55.34	62.71	105.20	-42.49	Peak	100	296	P
3	5720.00	7.34	56.07	63.41	110.80	-47.39	Peak	100	296	P
4	5725.00	7.33	57.12	64.45	122.20	-57.75	Peak	100	296	P
5	5775.00	7.35	84.16	91.51	200.00	-108.49	Average	100	296	P
6	5775.00	7.35	92.59	99.94	200.00	-100.06	Peak	100	296	P
7	5850.00	7.43	58.22	65.65	122.20	-56.55	Peak	100	296	P
8	5855.00	7.45	56.46	63.91	110.80	-46.89	Peak	100	296	P
9	5875.00	7.54	55.63	63.17	105.20	-42.03	Peak	100	296	P
10	5925.00	7.66	55.50	63.16	68.20	-5.04	Peak	100	296	P
11	11550.00	16.62	28.96	45.58	54.00	-8.42	Average	100	187	P
12	11550.00	16.62	41.96	58.58	74.00	-15.42	Peak	100	187	P
13	17325.00	22.96	42.40	65.36	68.20	-2.84	Peak	100	264	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For 802.11ax add test

Test Mode : 2TX 11ax20 CH36 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

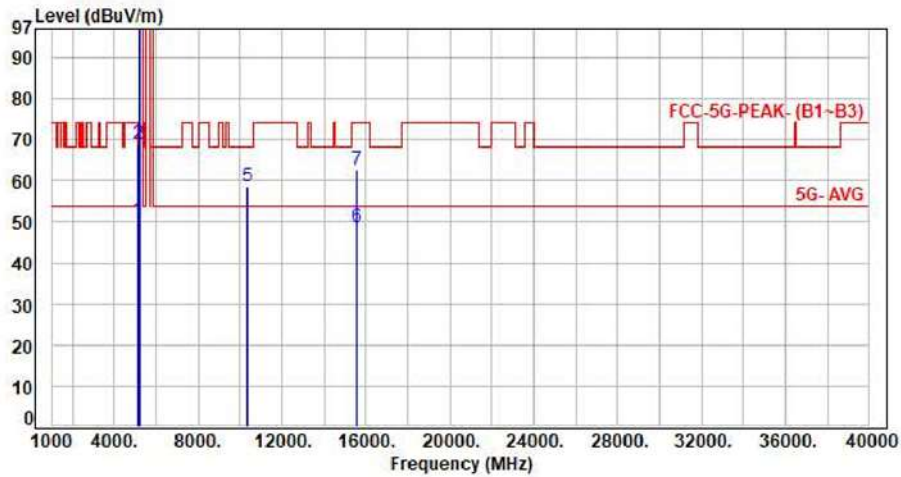


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.87	50.56	54.00	-3.44	Average	100	292	P
2	5150.00	6.69	62.43	69.12	74.00	-4.88	Peak	100	292	P
3	5180.00	6.79	92.69	99.48	200.00	-100.52	Average	100	292	P
4	5180.00	6.79	105.16	111.95	200.00	-88.05	Peak	100	292	P
5	10360.00	16.10	42.43	58.53	68.20	-9.67	Peak	100	161	P
6	15540.00	19.78	28.92	48.70	54.00	-5.30	Average	100	226	P
7	15540.00	19.78	42.87	62.65	74.00	-11.35	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH36 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

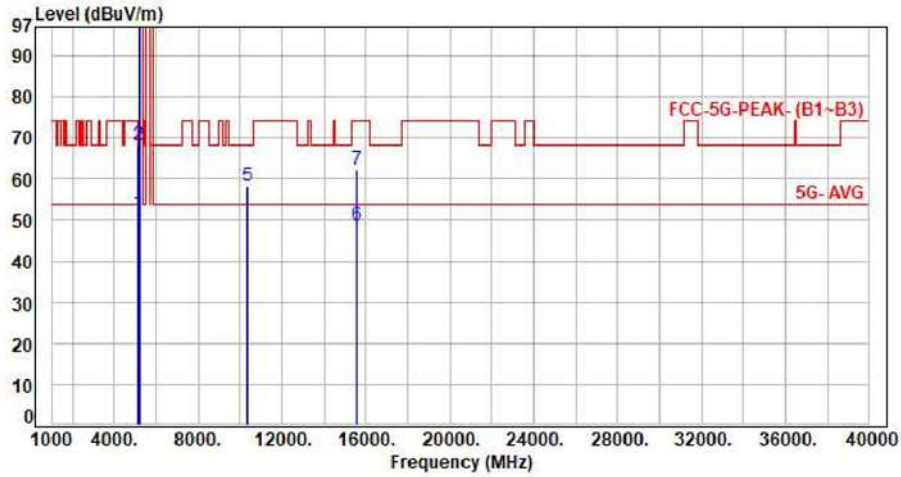


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	44.80	51.49	54.00	-2.51	Average	292	218	P
2	5150.00	6.69	61.59	68.28	74.00	-5.72	Peak	292	218	P
3	5180.00	6.79	95.94	102.73	200.00	-97.27	Average	292	218	P
4	5180.00	6.79	108.03	114.82	200.00	-85.18	Peak	292	218	P
5	10360.00	16.10	42.35	58.45	68.20	-9.75	Peak	100	15	P
6	15540.00	19.78	28.73	48.51	54.00	-5.49	Average	100	360	P
7	15540.00	19.78	42.67	62.45	74.00	-11.55	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

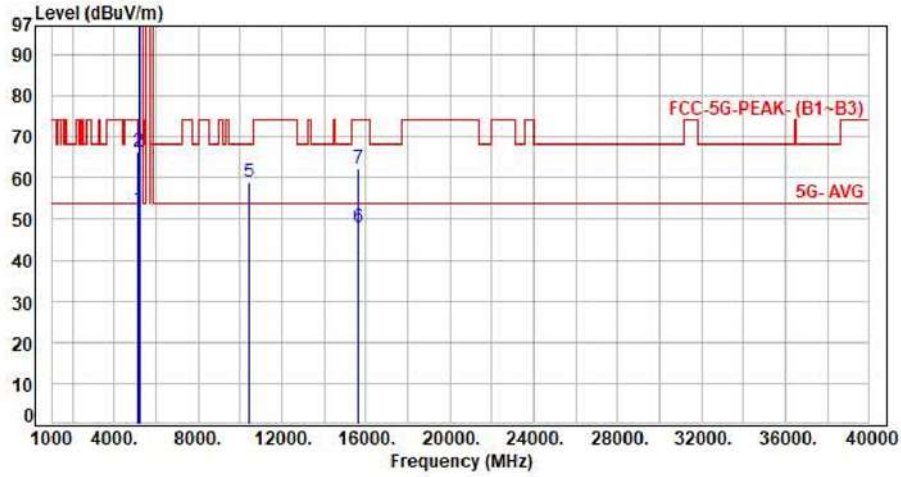


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	45.63	52.32	54.00	-1.68	Average	100	291	P
2	5150.00	6.69	59.71	66.40	74.00	-7.60	Peak	100	291	P
3	5200.00	6.86	94.46	101.32	200.00	-98.68	Average	100	291	P
4	5200.00	6.86	107.94	114.80	200.00	-85.20	Peak	100	291	P
5	10400.00	16.00	42.84	58.84	68.20	-9.36	Peak	100	158	P
6	15600.00	19.52	28.46	47.98	54.00	-6.02	Average	100	226	P
7	15600.00	19.52	42.88	62.40	74.00	-11.60	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

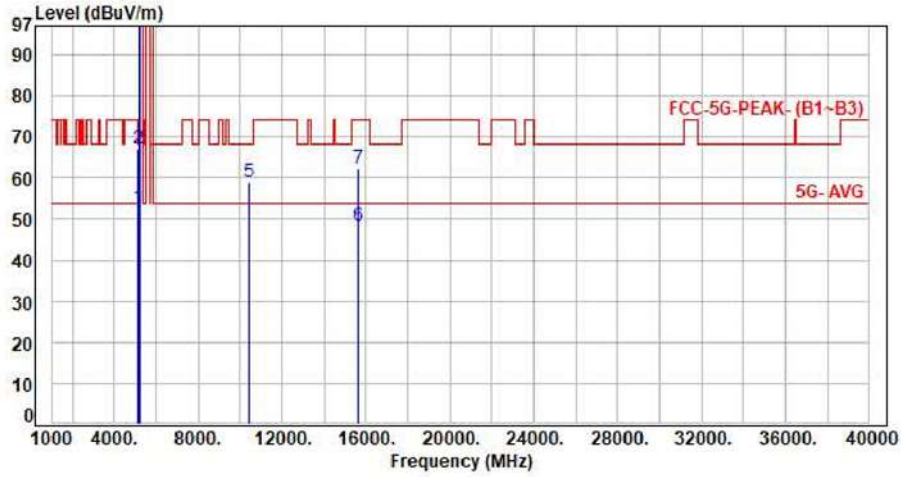


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	46.01	52.70	54.00	-1.30	Average	328	218	P
2	5150.00	6.69	60.59	67.28	74.00	-6.72	Peak	328	218	P
3	5200.00	6.86	97.66	104.52	200.00	-95.48	Average	328	218	P
4	5200.00	6.86	109.95	116.81	200.00	-83.19	Peak	328	218	P
5	10400.00	16.00	43.07	59.07	68.20	-9.13	Peak	100	11	P
6	15600.00	19.52	28.71	48.23	54.00	-5.77	Average	100	355	P
7	15600.00	19.52	42.74	62.26	74.00	-11.74	Peak	100	355	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

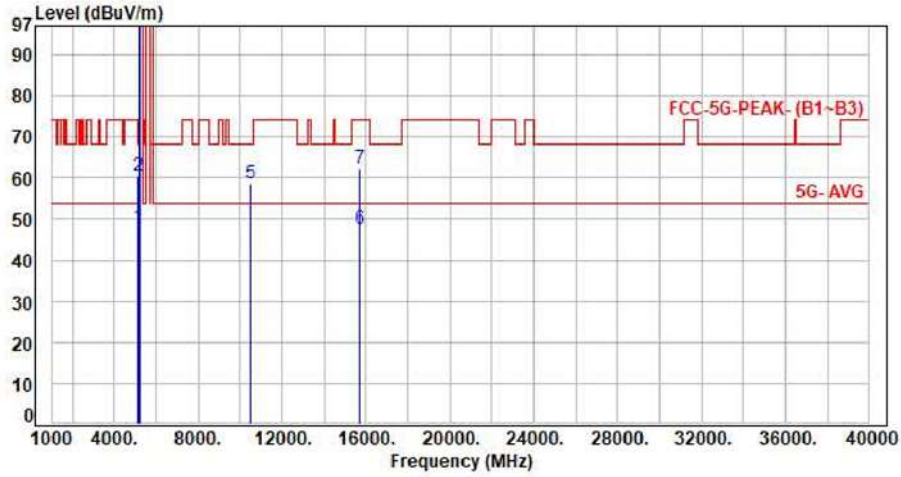


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	41.21	47.90	54.00	-6.10	Average	100	290	P
2	5150.00	6.69	53.95	60.64	74.00	-13.36	Peak	100	290	P
3	5240.00	6.91	95.19	102.10	200.00	-97.90	Average	100	290	P
4	5240.00	6.91	108.77	115.68	200.00	-84.32	Peak	100	290	P
5	10480.00	16.17	42.58	58.75	68.20	-9.45	Peak	100	154	P
6	15720.00	19.12	28.46	47.58	54.00	-6.42	Average	100	228	P
7	15720.00	19.12	43.15	62.27	74.00	-11.73	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Horizontal

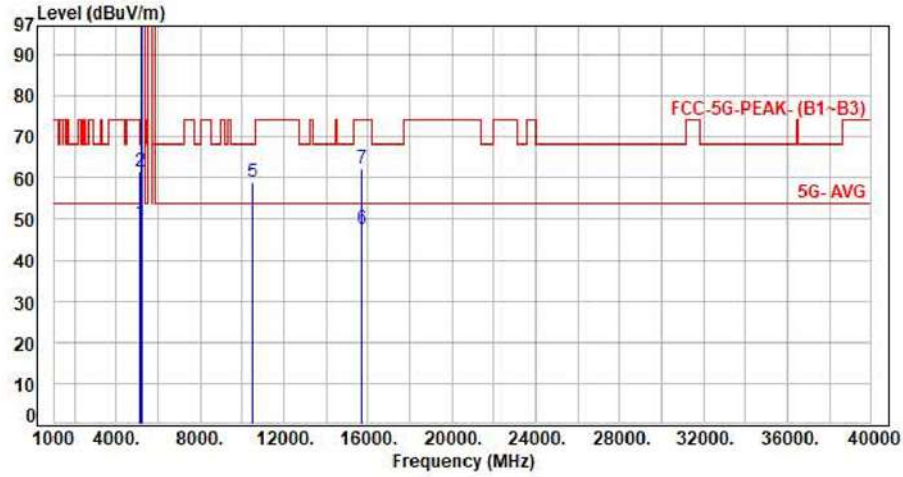


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.48	49.17	54.00	-4.83	Average	288	217	P
2	5150.00	6.69	54.84	61.53	74.00	-12.47	Peak	288	217	P
3	5240.00	6.91	99.83	106.74	200.00	-93.26	Average	288	217	P
4	5240.00	6.91	112.33	119.24	200.00	-80.76	Peak	288	217	P
5	10480.00	16.17	42.99	59.16	68.20	-9.04	Peak	100	15	P
6	15720.00	19.12	28.46	47.58	54.00	-6.42	Average	100	360	P
7	15720.00	19.12	43.22	62.34	74.00	-11.66	Peak	100	360	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Vertical

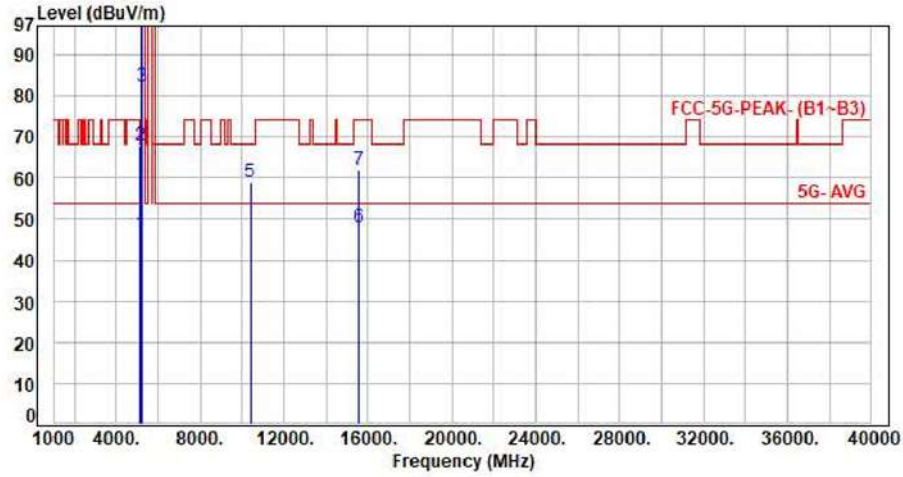


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	39.91	46.60	54.00	-7.40	Average	100	290	P
2	5150.00	6.69	61.01	67.70	74.00	-6.30	Peak	100	290	P
3	5190.00	6.82	75.33	82.15	200.00	-117.85	Average	100	290	P
4	5190.00	6.82	98.06	104.88	200.00	-95.12	Peak	100	290	P
5	10380.00	16.05	43.11	59.16	68.20	-9.04	Peak	100	158	P
6	15570.00	19.65	28.31	47.96	54.00	-6.04	Average	100	223	P
7	15570.00	19.65	42.48	62.13	74.00	-11.87	Peak	100	223	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

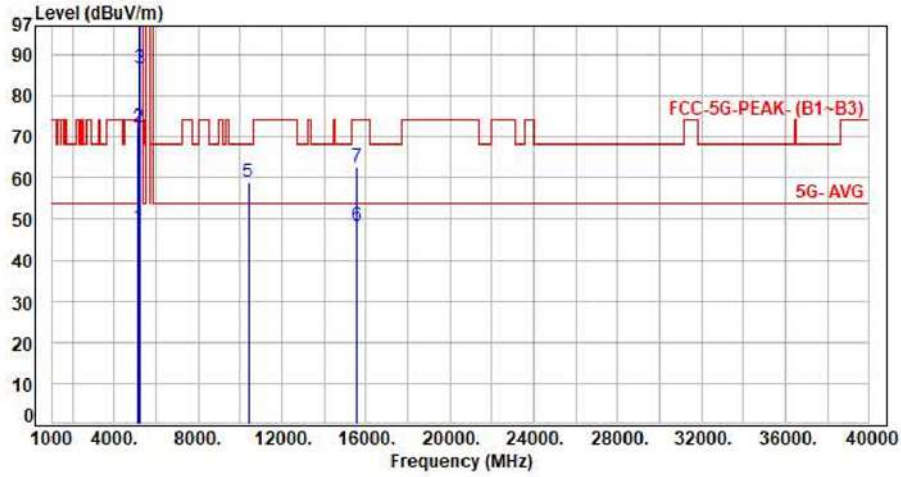


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	41.09	47.78	54.00	-6.22	Average	295	214	P
2	5150.00	6.69	65.60	72.29	74.00	-1.71	Peak	295	214	P
3	5190.00	6.82	79.71	86.53	200.00	-113.47	Average	295	214	P
4	5190.00	6.82	102.12	108.94	200.00	-91.06	Peak	295	214	P
5	10380.00	16.05	42.83	58.88	68.20	-9.32	Peak	100	21	P
6	15570.00	19.65	28.49	48.14	54.00	-5.86	Average	100	359	P
7	15570.00	19.65	43.14	62.79	74.00	-11.21	Peak	100	359	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

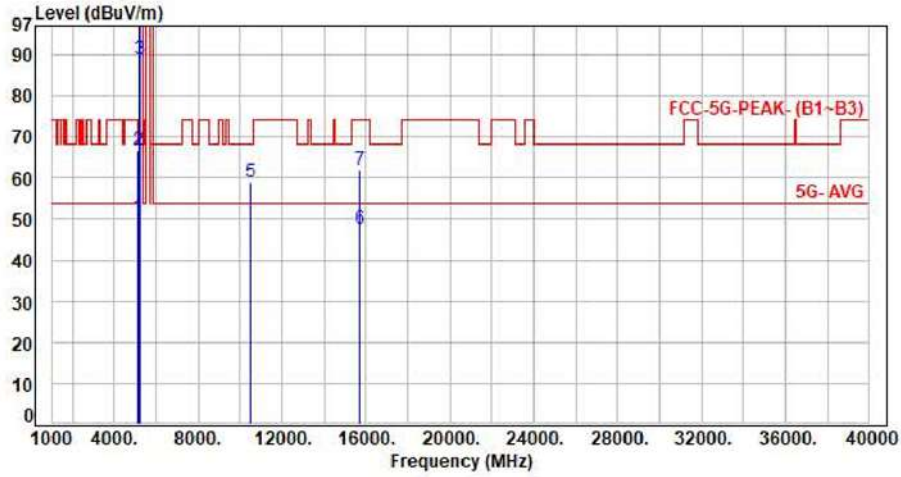


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.77	50.46	54.00	-3.54	Average	100	290	P
2	5150.00	6.69	60.14	66.83	74.00	-7.17	Peak	100	290	P
3	5230.00	6.90	81.88	88.78	200.00	-111.22	Average	100	290	P
4	5230.00	6.90	104.03	110.93	200.00	-89.07	Peak	100	290	P
5	10460.00	16.10	42.94	59.04	68.20	-9.16	Peak	100	160	P
6	15690.00	19.20	28.33	47.53	54.00	-6.47	Average	100	223	P
7	15690.00	19.20	42.60	61.80	74.00	-12.20	Peak	100	223	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

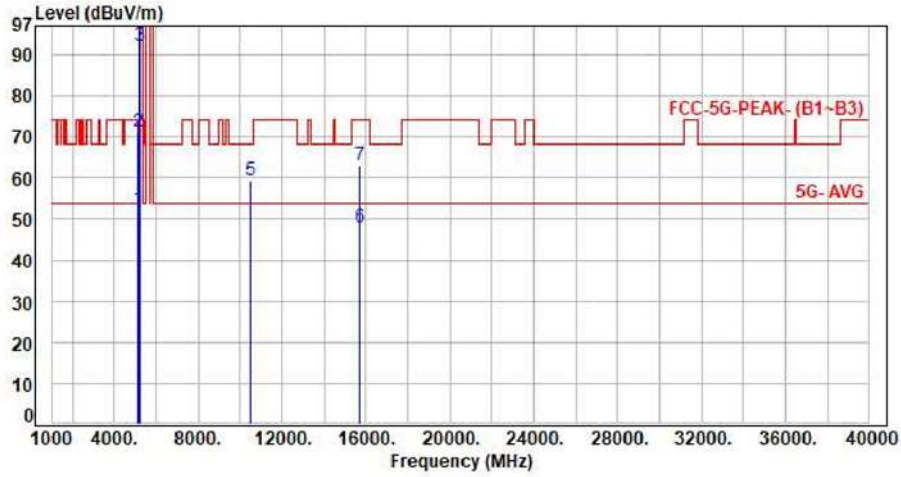


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	45.62	52.31	54.00	-1.69	Average	268	214	P
2	5150.00	6.69	64.33	71.02	74.00	-2.98	Peak	268	214	P
3	5230.00	6.90	85.45	92.35	200.00	-107.65	Average	268	214	P
4	5230.00	6.90	108.65	115.55	200.00	-84.45	Peak	268	214	P
5	10460.00	16.10	43.24	59.34	68.20	-8.86	Peak	100	8	P
6	15690.00	19.20	28.72	47.92	54.00	-6.08	Average	100	4	P
7	15690.00	19.20	43.75	62.95	74.00	-11.05	Peak	100	4	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

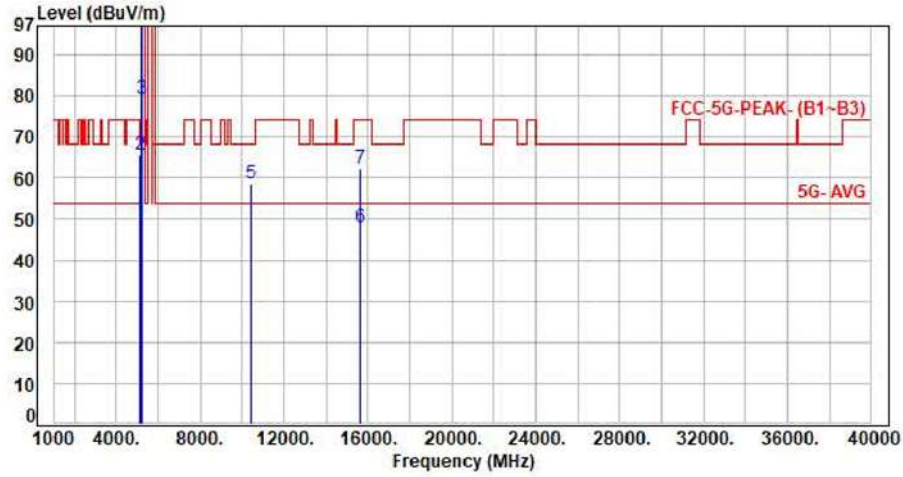


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.45	50.14	54.00	-3.86	Average	100	291	P
2	5150.00	6.69	58.90	65.59	74.00	-8.41	Peak	100	291	P
3	5210.00	6.87	72.60	79.47	200.00	-120.53	Average	100	291	P
4	5210.00	6.87	94.47	101.34	200.00	-98.66	Peak	100	291	P
5	10420.00	16.02	42.77	58.79	68.20	-9.41	Peak	100	163	P
6	15630.00	19.38	28.58	47.96	54.00	-6.04	Average	100	227	P
7	15630.00	19.38	42.80	62.18	74.00	-11.82	Peak	100	227	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

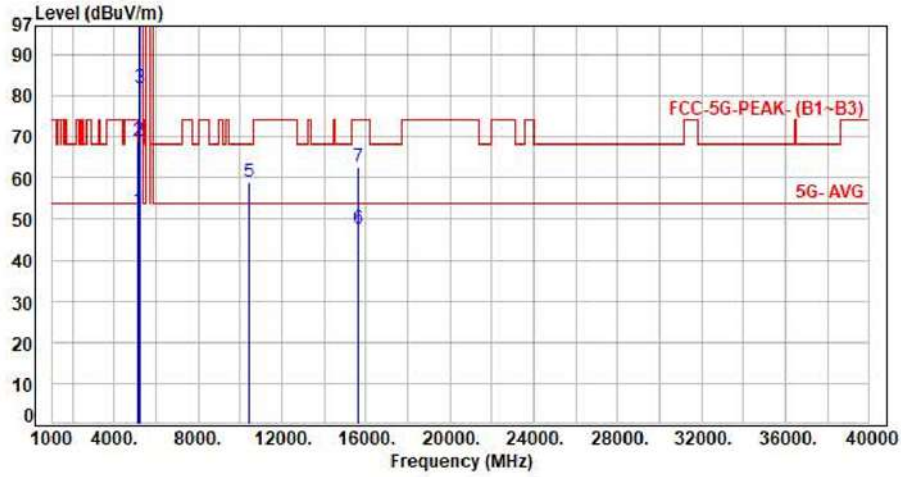


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	45.34	52.03	54.00	-1.97	Average	283	213	P
2	5150.00	6.69	62.24	68.93	74.00	-5.07	Peak	283	213	P
3	5210.00	6.87	74.98	81.85	200.00	-118.15	Average	283	213	P
4	5210.00	6.87	98.83	105.70	200.00	-94.30	Peak	283	213	P
5	10420.00	16.02	43.16	59.18	68.20	-9.02	Peak	100	16	P
6	15630.00	19.38	28.37	47.75	54.00	-6.25	Average	100	357	P
7	15630.00	19.38	43.44	62.82	74.00	-11.18	Peak	100	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

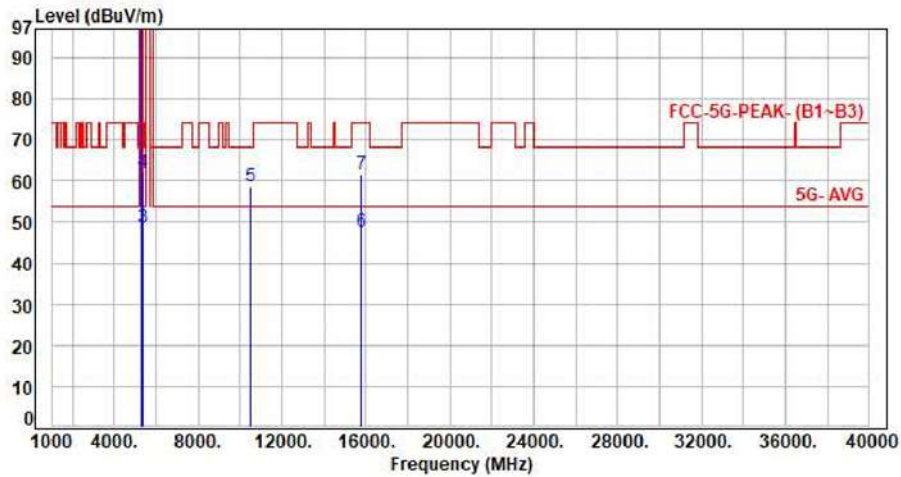


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	95.43	102.42	200.00	-97.58	Average	100	290	P
2	5260.00	6.99	108.52	115.51	200.00	-84.49	Peak	100	290	P
3	5350.00	7.27	41.28	48.55	54.00	-5.45	Average	100	290	P
4	5350.00	7.27	54.83	62.10	74.00	-11.90	Peak	100	290	P
5	10520.00	16.31	42.41	58.72	68.20	-9.48	Peak	100	164	P
6	15780.00	18.92	28.57	47.49	54.00	-6.51	Average	100	221	P
7	15780.00	18.92	42.62	61.54	74.00	-12.46	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

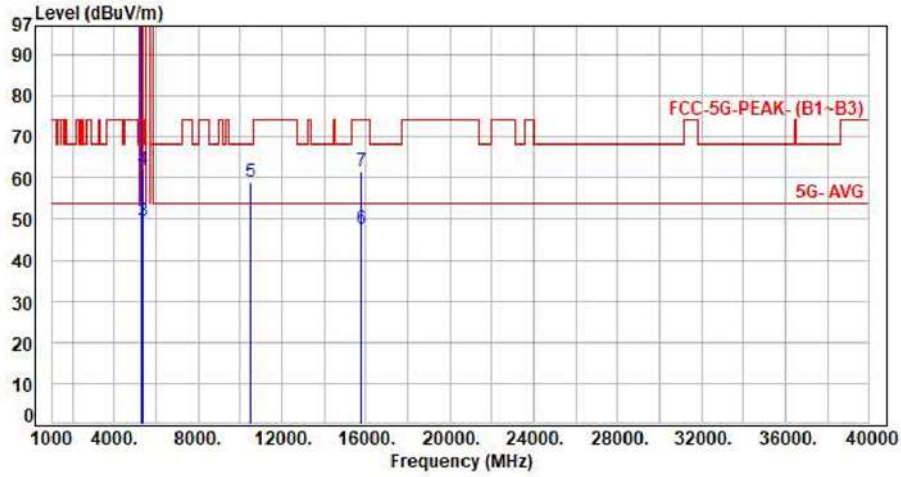


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	100.20	107.19	200.00	-92.81	Average	290	217	P
2	5260.00	6.99	113.16	120.15	200.00	-79.85	Peak	290	217	P
3	5350.00	7.27	42.33	49.60	54.00	-4.40	Average	290	217	P
4	5350.00	7.27	54.65	61.92	74.00	-12.08	Peak	290	217	P
5	10520.00	16.31	42.80	59.11	68.20	-9.09	Peak	100	13	P
6	15780.00	18.92	28.61	47.53	54.00	-6.47	Average	100	354	P
7	15780.00	18.92	42.57	61.49	74.00	-12.51	Peak	100	354	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

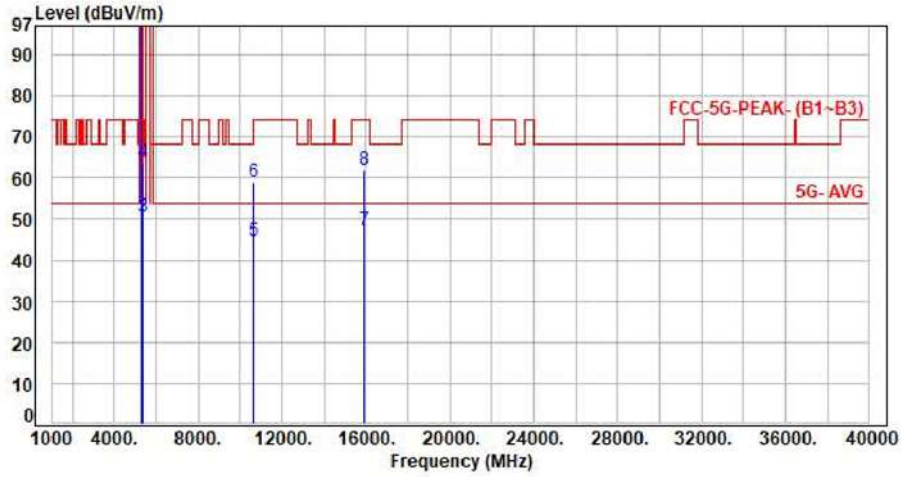


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	94.84	102.04	200.00	-97.96	Average	100	295	P
2	5300.00	7.20	107.58	114.78	200.00	-85.22	Peak	100	295	P
3	5350.00	7.27	43.33	50.60	54.00	-3.40	Average	100	295	P
4	5350.00	7.27	56.59	63.86	74.00	-10.14	Peak	100	295	P
5	10600.00	16.52	28.10	44.62	54.00	-9.38	Average	100	160	P
6	10600.00	16.52	42.47	58.99	74.00	-15.01	Peak	100	160	P
7	15900.00	18.78	28.49	47.27	54.00	-6.73	Average	100	225	P
8	15900.00	18.78	43.15	61.93	74.00	-12.07	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

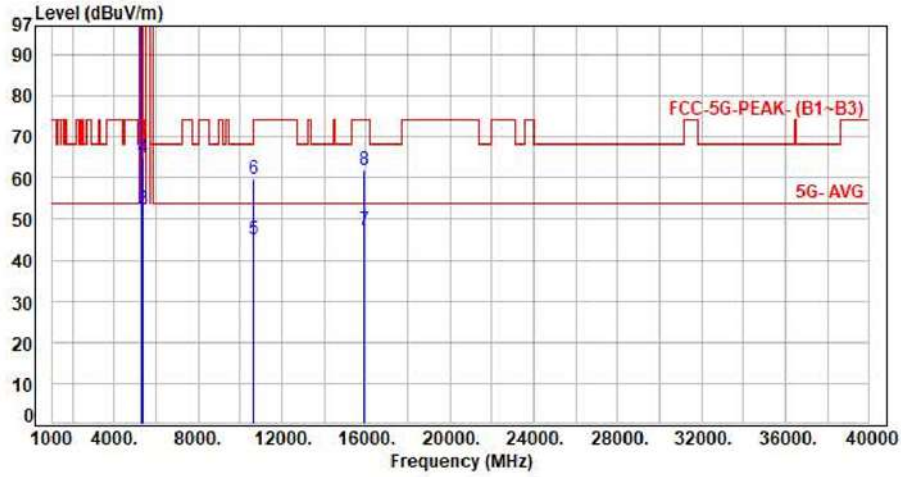


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	98.26	105.46	200.00	-94.54	Average	282	211	P
2	5300.00	7.20	110.71	117.91	200.00	-82.09	Peak	282	211	P
3	5350.00	7.27	45.25	52.52	54.00	-1.48	Average	282	211	P
4	5350.00	7.27	57.65	64.92	74.00	-9.08	Peak	282	211	P
5	10600.00	16.52	28.49	45.01	54.00	-8.99	Average	100	13	P
6	10600.00	16.52	43.32	59.84	74.00	-14.16	Peak	100	13	P
7	15900.00	18.78	28.49	47.27	54.00	-6.73	Average	100	356	P
8	15900.00	18.78	43.08	61.86	74.00	-12.14	Peak	100	356	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

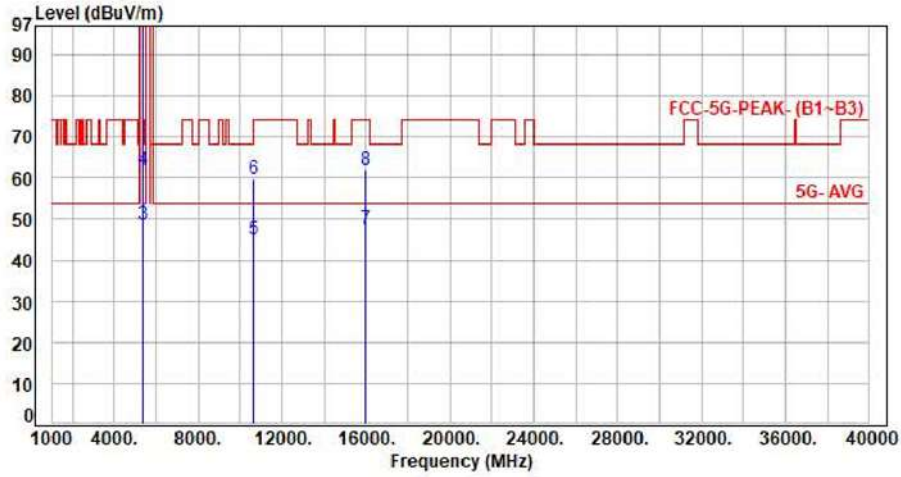


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	92.20	99.43	200.00	-100.57	Average	116	295	P
2	5320.00	7.23	104.42	111.65	200.00	-88.35	Peak	116	295	P
3	5350.00	7.27	41.51	48.78	54.00	-5.22	Average	116	295	P
4	5350.00	7.27	54.51	61.78	74.00	-12.22	Peak	116	295	P
5	10640.00	16.68	28.39	45.07	54.00	-8.93	Average	100	157	P
6	10640.00	16.68	42.94	59.62	74.00	-14.38	Peak	100	157	P
7	15960.00	18.78	28.82	47.60	54.00	-6.40	Average	100	222	P
8	15960.00	18.78	43.33	62.11	74.00	-11.89	Peak	100	222	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Horizontal

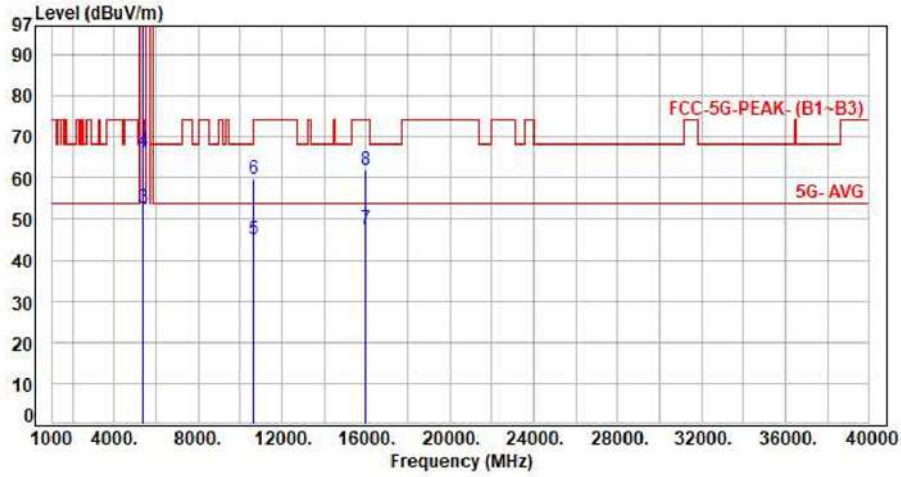


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	94.31	101.54	200.00	-98.46	Average	268	209	P
2	5320.00	7.23	107.17	114.40	200.00	-85.60	Peak	268	209	P
3	5350.00	7.27	45.57	52.84	54.00	-1.16	Average	268	209	P
4	5350.00	7.27	59.25	66.52	74.00	-7.48	Peak	268	209	P
5	10640.00	16.68	28.41	45.09	54.00	-8.91	Average	100	13	P
6	10640.00	16.68	43.16	59.84	74.00	-14.16	Peak	100	13	P
7	15960.00	18.78	28.75	47.53	54.00	-6.47	Average	100	359	P
8	15960.00	18.78	43.21	61.99	74.00	-12.01	Peak	100	359	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Vertical

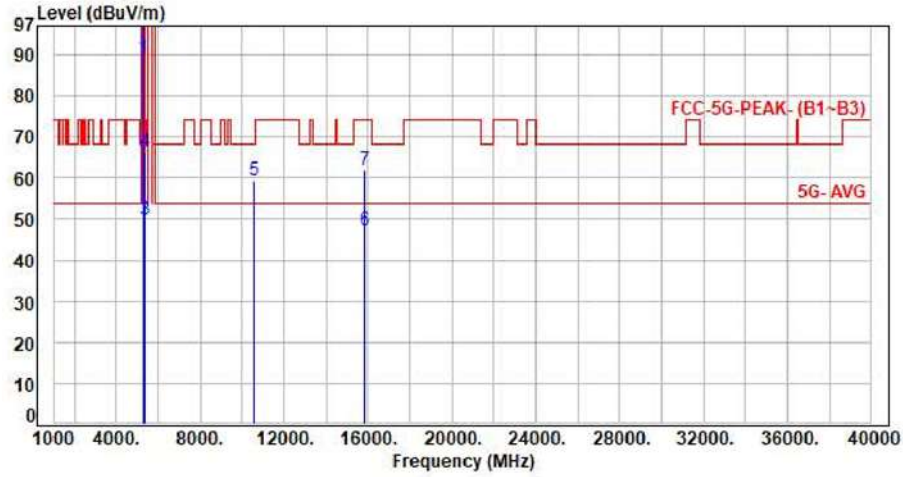


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.04	82.36	89.40	200.00	-110.60	Average	100	289	P
2	5270.00	7.04	103.99	111.03	200.00	-88.97	Peak	100	289	P
3	5350.00	7.27	42.34	49.61	54.00	-4.39	Average	100	289	P
4	5350.00	7.27	59.28	66.55	74.00	-7.45	Peak	100	289	P
5	10540.00	16.40	42.85	59.25	68.20	-8.95	Peak	100	163	P
6	15810.00	18.82	28.33	47.15	54.00	-6.85	Average	100	218	P
7	15810.00	18.82	42.96	61.78	74.00	-12.22	Peak	100	218	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

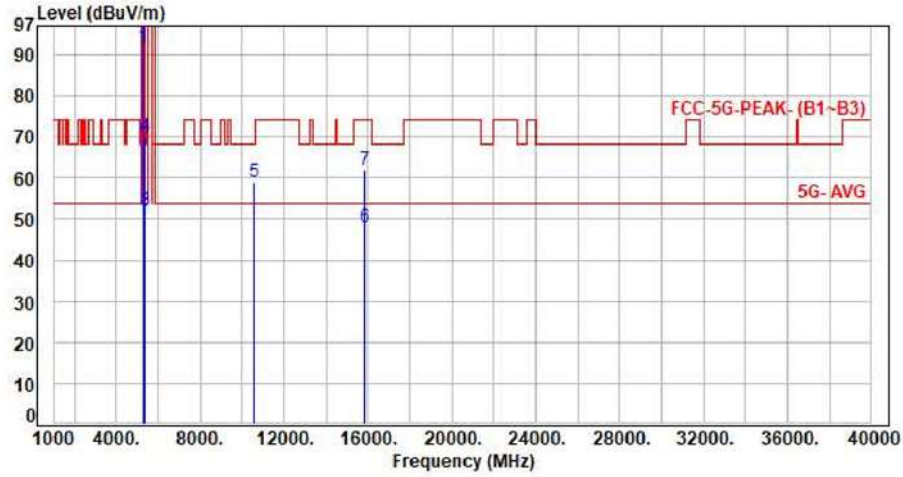


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.04	84.76	91.80	200.00	-108.20	Average	271	210	P
2	5270.00	7.04	109.87	116.91	200.00	-83.09	Peak	271	210	P
3	5350.00	7.27	44.84	52.11	54.00	-1.89	Average	271	210	P
4	5350.00	7.27	62.86	70.13	74.00	-3.87	Peak	271	210	P
5	10540.00	16.40	42.70	59.10	68.20	-9.10	Peak	100	17	P
6	15810.00	18.82	28.94	47.76	54.00	-6.24	Average	100	356	P
7	15810.00	18.82	43.18	62.00	74.00	-12.00	Peak	100	356	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

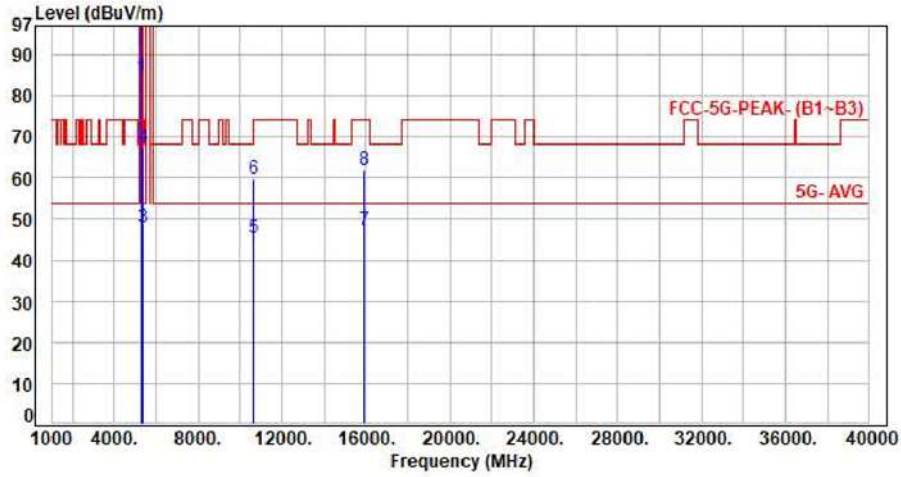


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.22	77.09	84.31	200.00	-115.69	Average	116	295	P
2	5310.00	7.22	98.51	105.73	200.00	-94.27	Peak	116	295	P
3	5350.00	7.27	40.52	47.79	54.00	-6.21	Average	116	295	P
4	5350.00	7.27	60.31	67.58	74.00	-6.42	Peak	116	295	P
5	10620.00	16.60	28.75	45.35	54.00	-8.65	Average	100	159	P
6	10620.00	16.60	43.23	59.83	74.00	-14.17	Peak	100	159	P
7	15930.00	18.77	28.44	47.21	54.00	-6.79	Average	100	224	P
8	15930.00	18.77	43.10	61.87	74.00	-12.13	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

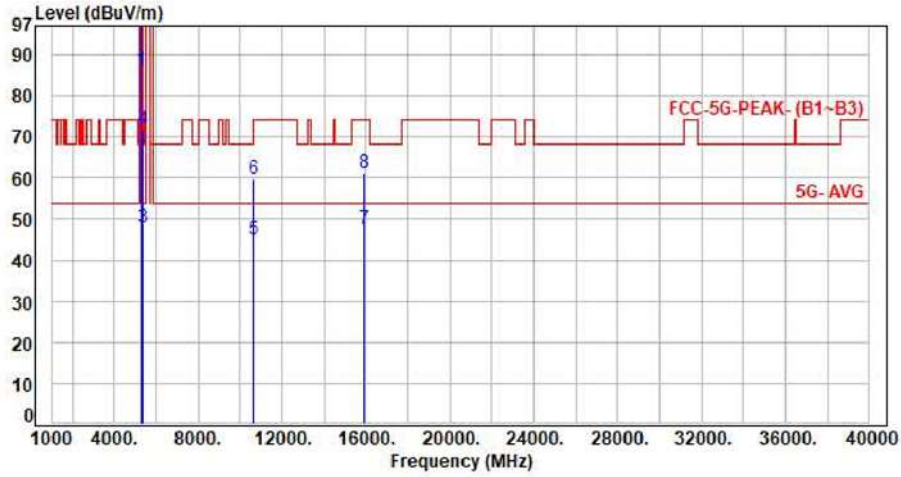


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.22	79.21	86.43	200.00	-113.57	Average	267	210	P
2	5310.00	7.22	102.44	109.66	200.00	-90.34	Peak	267	210	P
3	5350.00	7.27	40.81	48.08	54.00	-5.92	Average	267	210	P
4	5350.00	7.27	64.76	72.03	74.00	-1.97	Peak	267	210	P
5	10620.00	16.60	28.56	45.16	54.00	-8.84	Average	100	16	P
6	10620.00	16.60	43.31	59.91	74.00	-14.09	Peak	100	16	P
7	15930.00	18.77	28.63	47.40	54.00	-6.60	Average	100	360	P
8	15930.00	18.77	42.39	61.16	74.00	-12.84	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

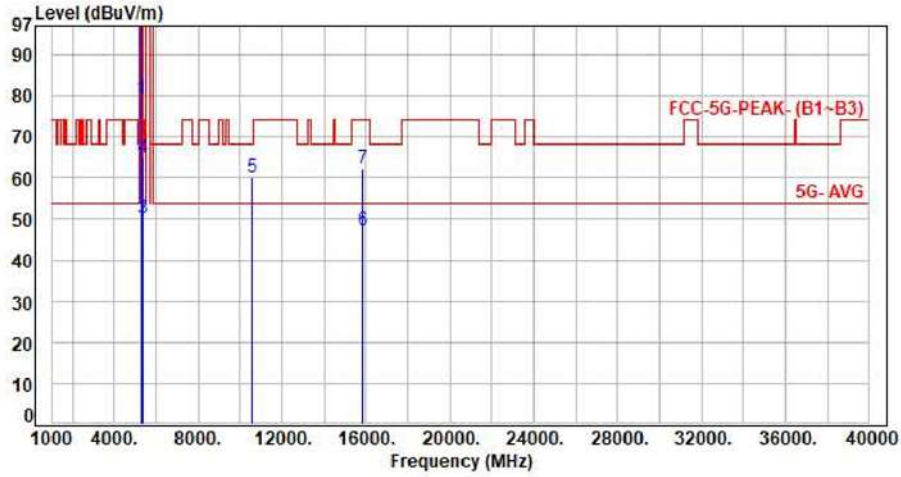


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.15	72.31	79.46	200.00	-120.54	Average	108	296	P
2	5290.00	7.15	94.25	101.40	200.00	-98.60	Peak	108	296	P
3	5350.00	7.27	42.94	50.21	54.00	-3.79	Average	108	296	P
4	5350.00	7.27	57.64	64.91	74.00	-9.09	Peak	108	296	P
5	10580.00	16.48	43.67	60.15	68.20	-8.05	Peak	100	158	P
6	15870.00	18.80	28.40	47.20	54.00	-6.80	Average	100	231	P
7	15870.00	18.80	43.49	62.29	74.00	-11.71	Peak	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

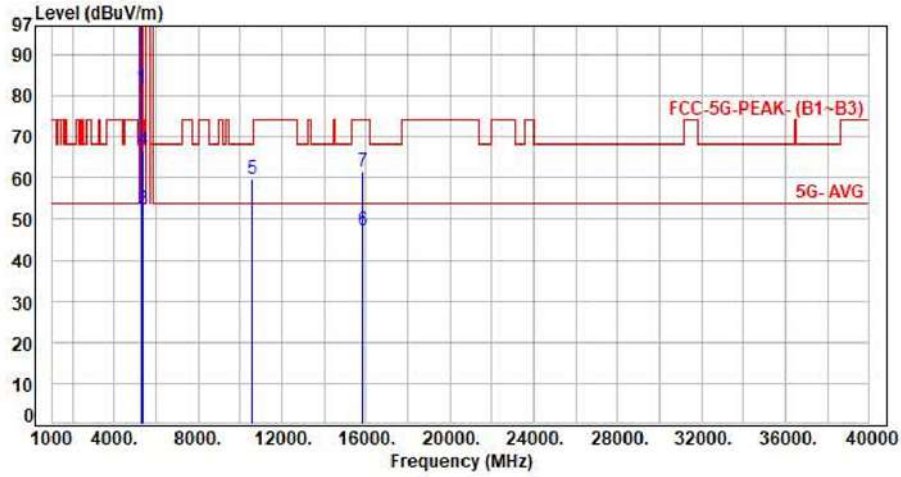


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.15	74.75	81.90	200.00	-118.10	Average	285	216	P
2	5290.00	7.15	98.63	105.78	200.00	-94.22	Peak	285	216	P
3	5350.00	7.27	45.12	52.39	54.00	-1.61	Average	285	216	P
4	5350.00	7.27	59.39	66.66	74.00	-7.34	Peak	285	216	P
5	10580.00	16.48	43.28	59.76	68.20	-8.44	Peak	100	12	P
6	15870.00	18.80	28.47	47.27	54.00	-6.73	Average	100	352	P
7	15870.00	18.80	42.79	61.59	74.00	-12.41	Peak	100	352	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

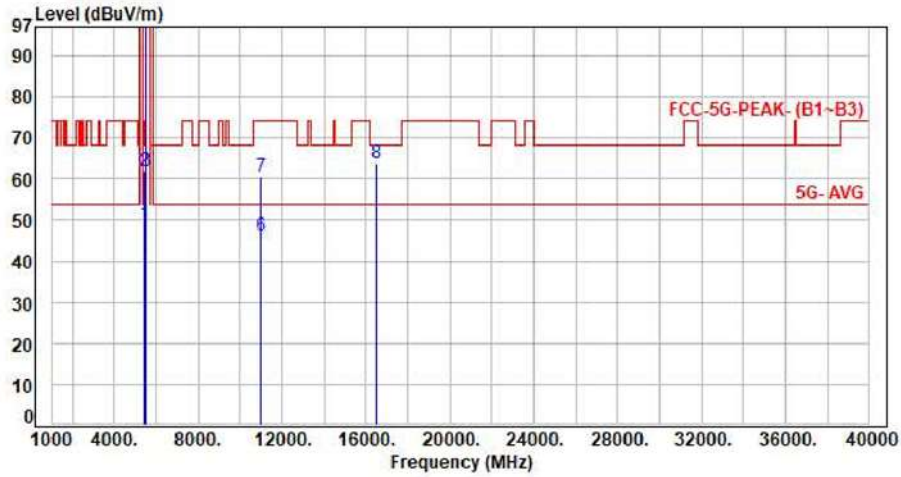


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	41.35	48.90	54.00	-5.10	Average	100	291	P
2	5460.00	7.55	54.53	62.08	74.00	-11.92	Peak	100	291	P
3	5470.00	7.58	54.23	61.81	68.20	-6.39	Peak	100	291	P
4	5500.00	7.68	91.75	99.43	200.00	-100.57	Average	100	291	P
5	5500.00	7.68	104.72	112.40	200.00	-87.60	Peak	100	291	P
6	11000.00	17.45	28.61	46.06	54.00	-7.94	Average	100	160	P
7	11000.00	17.45	43.17	60.62	74.00	-13.38	Peak	100	160	P
8	16500.00	20.24	43.62	63.86	68.20	-4.34	Peak	100	220	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

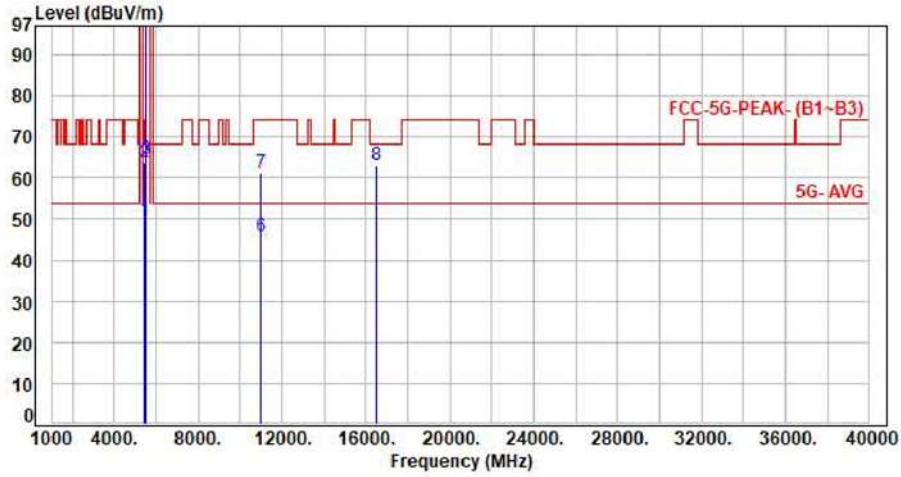


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.31	49.86	54.00	-4.14	Average	295	213	P
2	5460.00	7.55	56.16	63.71	74.00	-10.29	Peak	295	213	P
3	5470.00	7.58	56.97	64.55	68.20	-3.65	Peak	295	213	P
4	5500.00	7.68	95.51	103.19	200.00	-96.81	Average	295	213	P
5	5500.00	7.68	108.49	116.17	200.00	-83.83	Peak	295	213	P
6	11000.00	17.45	28.38	45.83	54.00	-8.17	Average	100	15	P
7	11000.00	17.45	43.59	61.04	74.00	-12.96	Peak	100	15	P
8	16500.00	20.24	42.88	63.12	68.20	-5.08	Peak	100	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

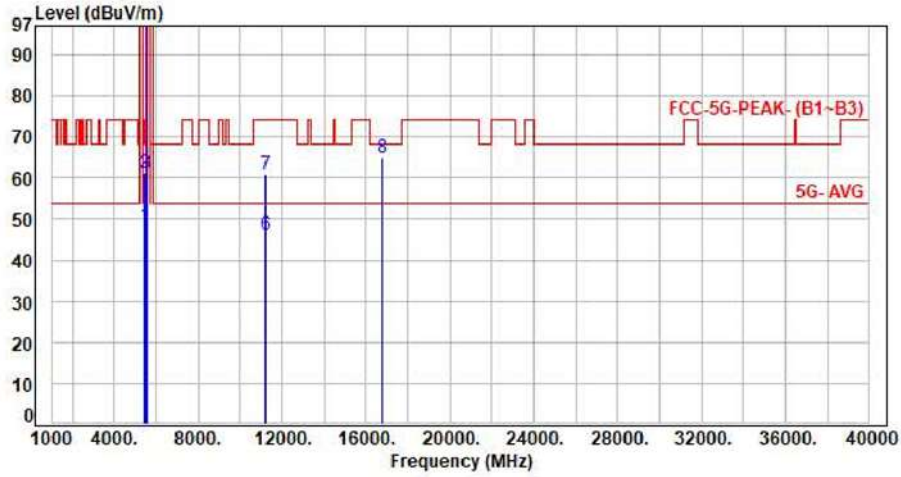


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	40.91	48.46	54.00	-5.54	Average	103	289	P
2	5460.00	7.55	53.71	61.26	74.00	-12.74	Peak	103	289	P
3	5470.00	7.58	53.64	61.22	68.20	-6.98	Peak	103	289	P
4	5600.00	7.51	92.70	100.21	200.00	-99.79	Average	103	289	P
5	5600.00	7.51	106.00	113.51	200.00	-86.49	Peak	103	289	P
6	11200.00	17.53	28.66	46.19	54.00	-7.81	Average	100	159	P
7	11200.00	17.53	43.48	61.01	74.00	-12.99	Peak	100	159	P
8	16800.00	21.93	42.85	64.78	68.20	-3.42	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

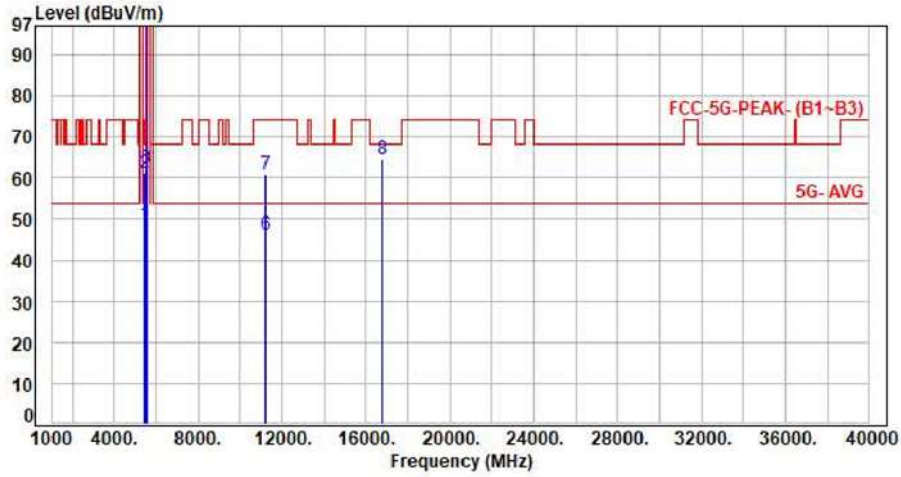


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	41.23	48.78	54.00	-5.22	Average	273	214	P
2	5460.00	7.55	53.57	61.12	74.00	-12.88	Peak	273	214	P
3	5470.00	7.58	54.71	62.29	68.20	-5.91	Peak	273	214	P
4	5600.00	7.51	97.92	105.43	200.00	-94.57	Average	273	214	P
5	5600.00	7.51	111.20	118.71	200.00	-81.29	Peak	273	214	P
6	11200.00	17.53	28.55	46.08	54.00	-7.92	Average	100	12	P
7	11200.00	17.53	43.16	60.69	74.00	-13.31	Peak	100	355	P
8	16800.00	21.93	42.55	64.48	68.20	-3.72	Peak	100	355	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Vertical

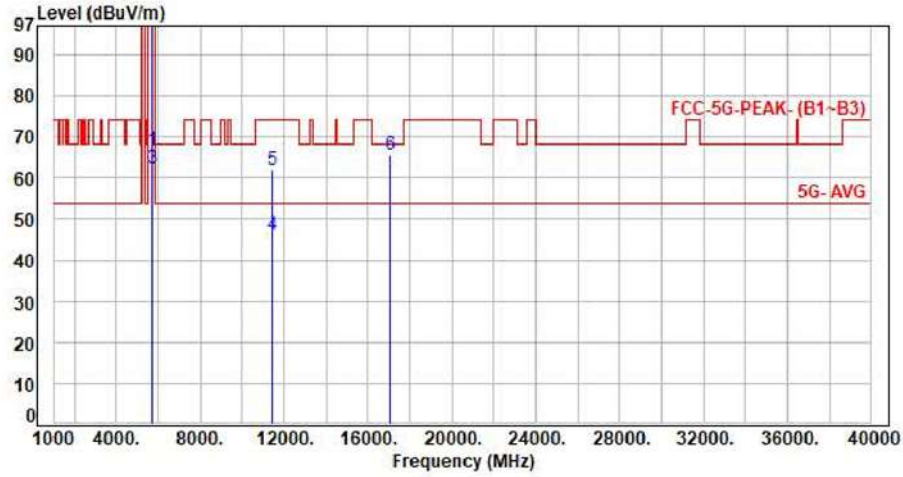


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	59.32	66.75	200.00	-133.25	Average	100	301	P
2	5700.00	7.43	101.91	109.34	200.00	-90.66	Peak	100	301	P
3	5725.00	7.43	54.86	62.29	68.20	-5.91	Peak	100	301	P
4	11400.00	17.61	28.50	46.11	54.00	-7.89	Average	100	162	P
5	11400.00	17.61	44.51	62.12	74.00	-11.88	Peak	100	162	P
6	17100.00	23.25	42.36	65.61	68.20	-2.59	Peak	100	227	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

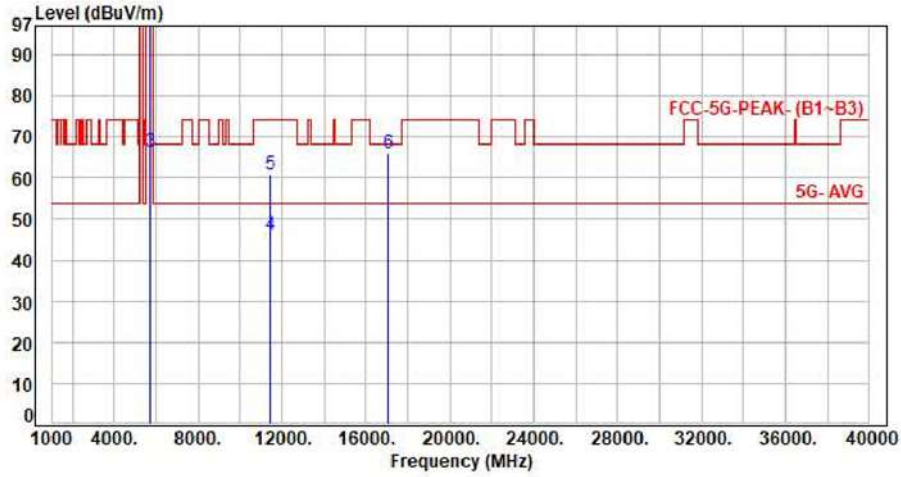


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	93.20	100.63	200.00	-99.37	Average	295	213	P
2	5700.00	7.43	106.17	113.60	200.00	-86.40	Peak	295	213	P
3	5725.00	7.43	58.98	66.41	68.20	-1.79	Peak	295	213	P
4	11400.00	17.61	28.38	45.99	54.00	-8.01	Average	100	20	P
5	11400.00	17.61	43.08	60.69	74.00	-13.31	Peak	100	20	P
6	17100.00	23.25	42.70	65.95	68.20	-2.25	Peak	100	352	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

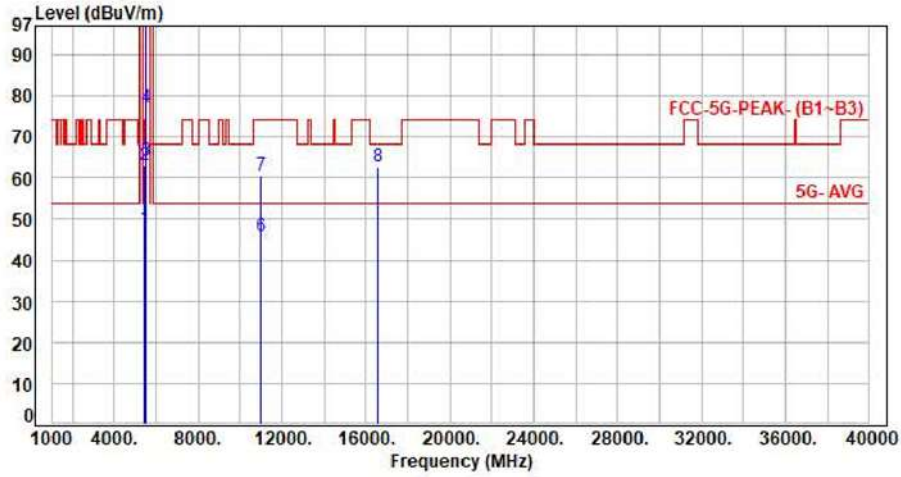


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	39.92	47.47	54.00	-6.53	Average	100	290	P
2	5460.00	7.55	55.36	62.91	74.00	-11.09	Peak	100	290	P
3	5470.00	7.58	56.52	64.10	68.20	-4.10	Peak	100	290	P
4	5510.00	7.66	69.39	77.05	200.00	-122.95	Average	100	290	P
5	5510.00	7.66	91.35	99.01	200.00	-100.99	Peak	100	290	P
6	11020.00	17.45	28.38	45.83	54.00	-8.17	Average	100	160	P
7	11020.00	17.45	42.98	60.43	74.00	-13.57	Peak	100	160	P
8	16530.00	20.40	42.23	62.63	68.20	-5.57	Peak	100	223	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Horizontal

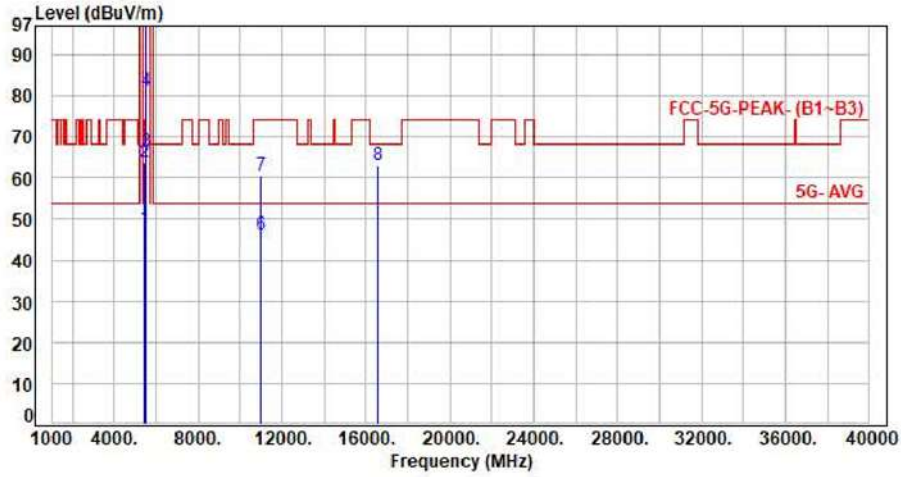


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	40.00	47.55	54.00	-6.45	Average	265	214	P
2	5460.00	7.55	56.39	63.94	74.00	-10.06	Peak	265	214	P
3	5470.00	7.58	58.86	66.44	68.20	-1.76	Peak	265	214	P
4	5510.00	7.66	73.37	81.03	200.00	-118.97	Average	265	214	P
5	5510.00	7.66	93.26	100.92	200.00	-99.08	Peak	265	214	P
6	11020.00	17.45	28.62	46.07	54.00	-7.93	Average	100	14	P
7	11020.00	17.45	43.18	60.63	74.00	-13.37	Peak	100	14	P
8	16530.00	20.40	42.55	62.95	68.20	-5.25	Peak	100	354	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH118 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

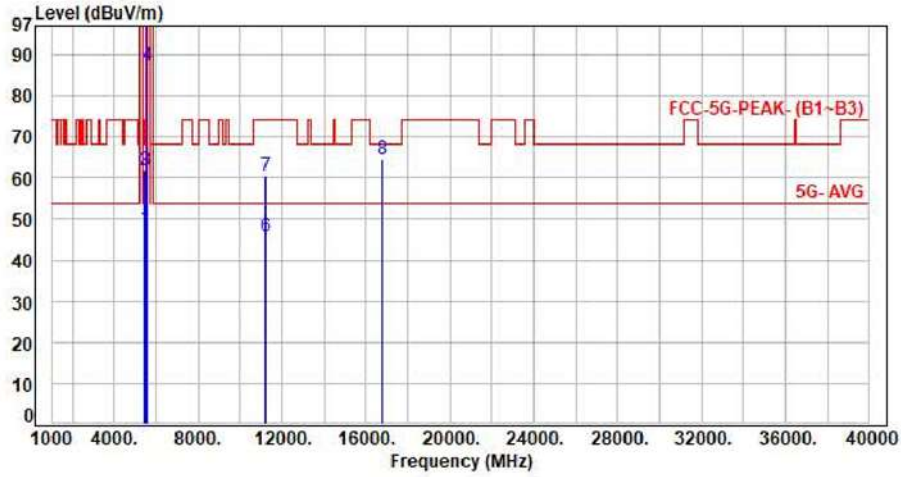


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	40.13	47.68	54.00	-6.32	Average	100	297	P
2	5460.00	7.55	54.38	61.93	74.00	-12.07	Peak	100	297	P
3	5470.00	7.58	54.46	62.04	68.20	-6.16	Peak	100	297	P
4	5590.00	7.53	79.70	87.23	200.00	-112.77	Average	100	297	P
5	5590.00	7.53	102.28	109.81	200.00	-90.19	Peak	100	297	P
6	11180.00	17.49	28.28	45.77	54.00	-8.23	Average	100	162	P
7	11180.00	17.49	42.88	60.37	74.00	-13.63	Peak	100	162	P
8	16770.00	21.72	42.65	64.37	68.20	-3.83	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH118 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

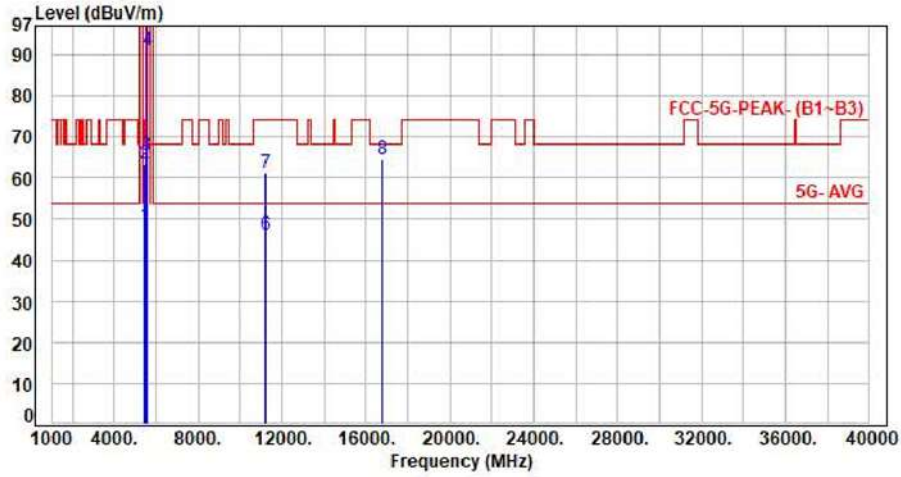


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	40.78	48.33	54.00	-5.67	Average	271	182	P
2	5460.00	7.55	55.85	63.40	74.00	-10.60	Peak	271	182	P
3	5470.00	7.58	58.12	65.70	68.20	-2.50	Peak	271	182	P
4	5590.00	7.53	83.61	91.14	200.00	-108.86	Average	271	182	P
5	5590.00	7.53	108.00	115.53	200.00	-84.47	Peak	271	182	P
6	11180.00	17.49	28.49	45.98	54.00	-8.02	Average	100	15	P
7	11180.00	17.49	43.89	61.38	74.00	-12.62	Peak	100	15	P
8	16770.00	21.72	42.87	64.59	68.20	-3.61	Peak	100	356	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

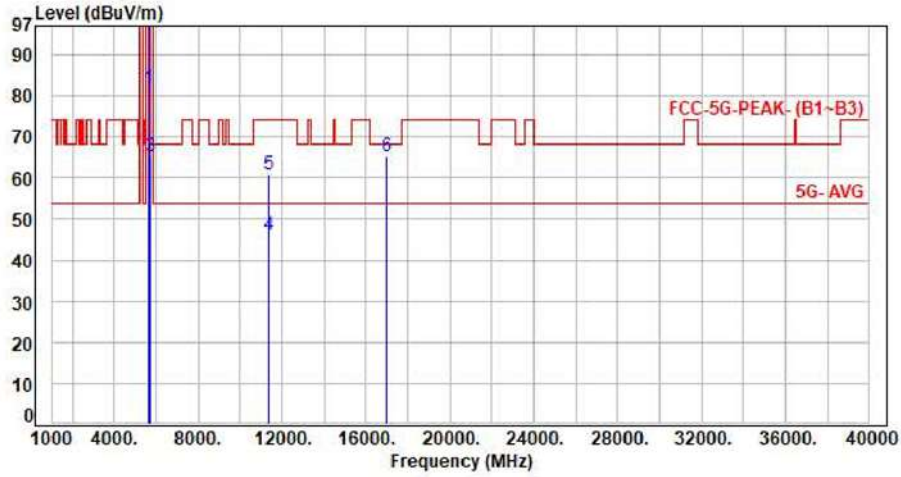


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	74.41	81.89	200.00	-118.11	Average	100	71	P
2	5670.00	7.48	95.57	103.05	200.00	-96.95	Peak	100	71	P
3	5725.00	7.43	57.82	65.25	68.20	-2.95	Peak	100	71	P
4	11340.00	17.59	28.38	45.97	54.00	-8.03	Average	100	162	P
5	11340.00	17.59	43.16	60.75	74.00	-13.25	Peak	100	162	P
6	17010.00	23.01	42.29	65.30	68.20	-2.90	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

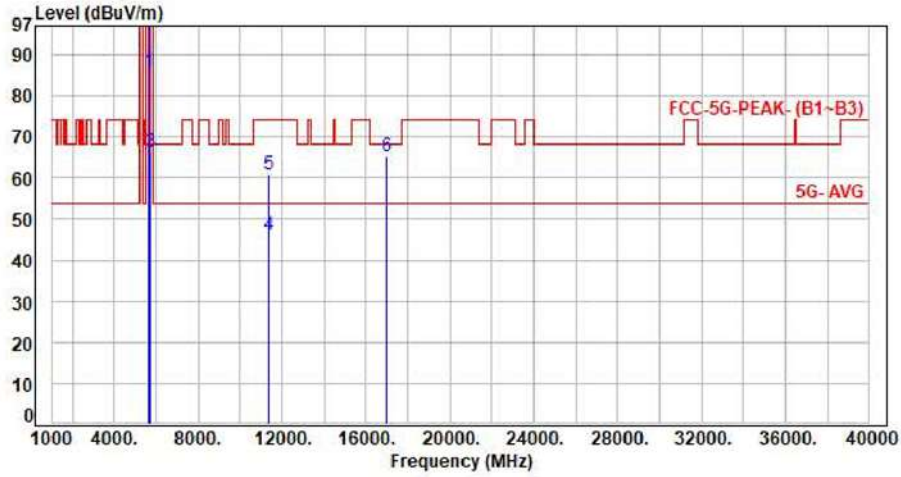


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	78.43	85.91	200.00	-114.09	Average	277	180	P
2	5670.00	7.48	100.57	108.05	200.00	-91.95	Peak	277	180	P
3	5725.00	7.43	59.13	66.56	68.20	-1.64	Peak	277	180	P
4	11340.00	17.59	28.69	46.28	54.00	-7.72	Average	100	21	P
5	11340.00	17.59	43.44	61.03	74.00	-12.97	Peak	100	21	P
6	17010.00	23.01	42.37	65.38	68.20	-2.82	Peak	100	4	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

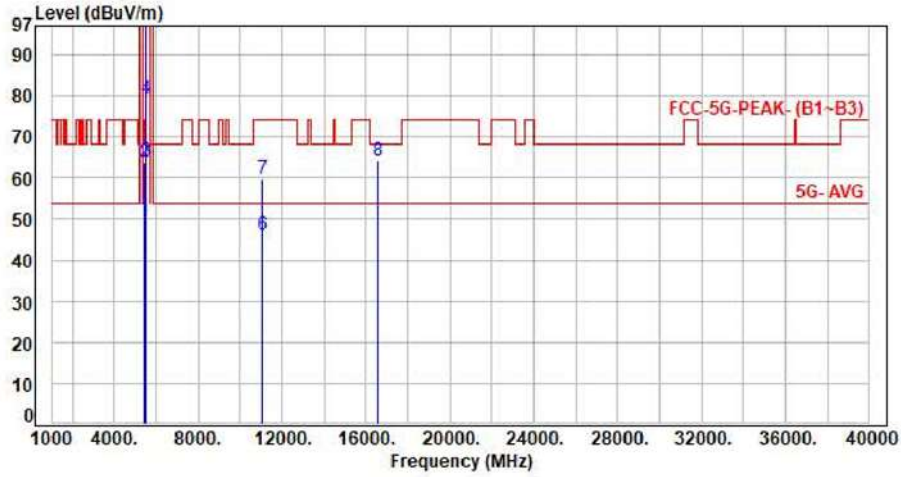


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.69	50.24	54.00	-3.76	Average	100	290	P
2	5460.00	7.55	56.30	63.85	74.00	-10.15	Peak	100	290	P
3	5470.00	7.58	56.52	64.10	68.20	-4.10	Peak	100	290	P
4	5530.00	7.63	71.84	79.47	200.00	-120.53	Average	100	290	P
5	5530.00	7.63	93.28	100.91	200.00	-99.09	Peak	100	290	P
6	11060.00	17.46	28.46	45.92	54.00	-8.08	Average	100	157	P
7	11060.00	17.46	42.38	59.84	74.00	-14.16	Peak	100	157	P
8	16590.00	20.80	43.37	64.17	68.20	-4.03	Peak	100	229	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

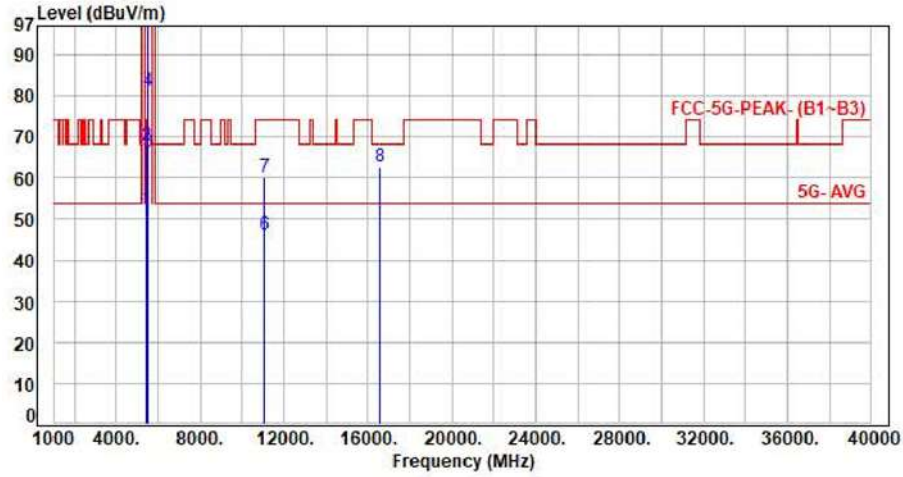


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.84	52.39	54.00	-1.61	Average	305	217	P
2	5460.00	7.55	60.27	67.82	74.00	-6.18	Peak	305	217	P
3	5470.00	7.58	58.97	66.55	68.20	-1.65	Peak	305	217	P
4	5530.00	7.63	73.62	81.25	200.00	-118.75	Average	305	217	P
5	5530.00	7.63	97.78	105.41	200.00	-94.59	Peak	305	217	P
6	11060.00	17.46	28.72	46.18	54.00	-7.82	Average	100	16	P
7	11060.00	17.46	42.49	59.95	74.00	-14.05	Peak	100	16	P
8	16590.00	20.80	42.07	62.87	68.20	-5.33	Peak	100	3	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH122 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Vertical

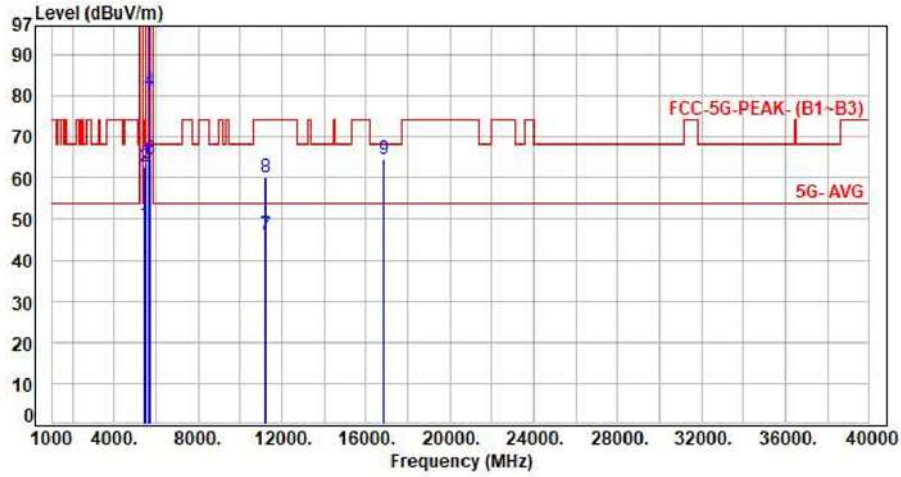


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	41.07	48.62	54.00	-5.38	Average	399	296	P
2	5460.00	7.55	55.32	62.87	74.00	-11.13	Peak	399	296	P
3	5470.00	7.58	55.68	63.26	68.20	-4.94	Peak	399	296	P
4	5610.00	7.51	73.48	80.99	200.00	-119.01	Average	399	296	P
5	5610.00	7.51	96.07	103.58	200.00	-96.42	Peak	399	296	P
6	5725.00	7.43	57.22	64.65	68.20	-3.55	Peak	399	296	P
7	11220.00	17.53	28.44	45.97	54.00	-8.03	Average	100	161	P
8	11220.00	17.53	42.52	60.05	74.00	-13.95	Peak	100	161	P
9	16830.00	22.03	42.37	64.40	68.20	-3.80	Peak	100	229	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH122 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Horizontal

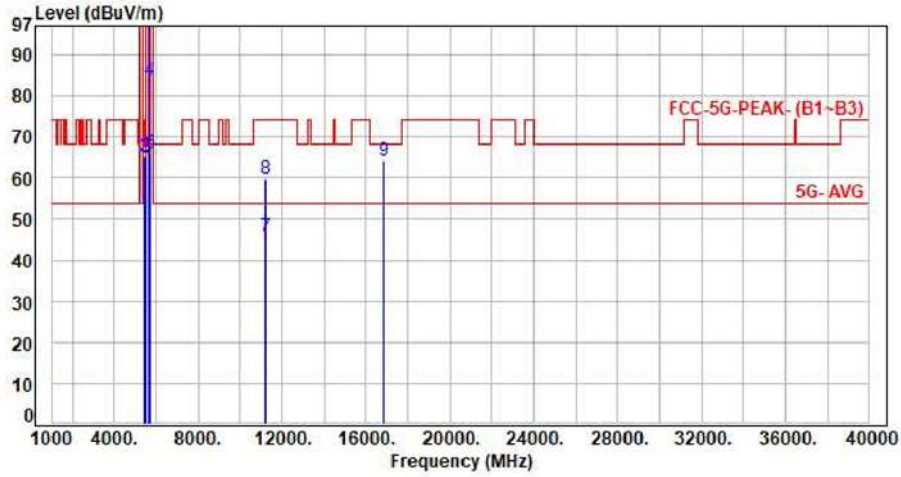


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.43	49.98	54.00	-4.02	Average	280	214	P
2	5460.00	7.55	57.80	65.35	74.00	-8.65	Peak	280	214	P
3	5470.00	7.58	57.27	64.85	68.20	-3.35	Peak	280	214	P
4	5610.00	7.51	76.35	83.86	200.00	-116.14	Average	280	214	P
5	5610.00	7.51	99.69	107.20	200.00	-92.80	Peak	280	214	P
6	5725.00	7.43	58.45	65.88	68.20	-2.32	Peak	280	214	P
7	11220.00	17.53	28.38	45.91	54.00	-8.09	Average	100	19	P
8	11220.00	17.53	42.19	59.72	74.00	-14.28	Peak	100	19	P
9	16830.00	22.03	42.19	64.22	68.20	-3.98	Peak	100	358	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH144 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

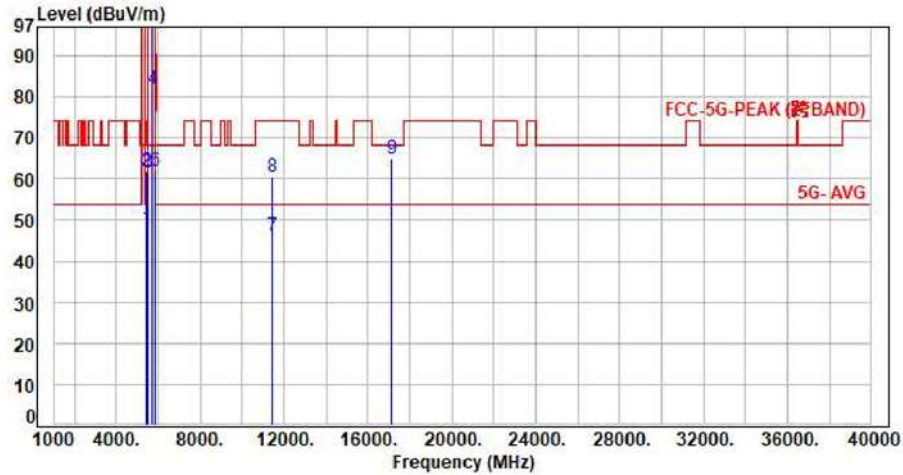


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	40.29	47.84	54.00	-6.16	Average	100	299	P
2	5460.00	7.55	54.55	62.10	74.00	-11.90	Peak	100	299	P
3	5470.00	7.58	53.98	61.56	68.20	-6.64	Peak	100	299	P
4	5720.00	7.43	74.32	81.75	200.00	-118.25	Average	100	299	P
5	5720.00	7.43	108.03	115.46	200.00	-84.54	Peak	100	299	P
6	5850.00	7.47	54.41	61.88	68.20	-6.32	Peak	100	299	P
7	11440.00	17.69	28.60	46.29	54.00	-7.71	Average	100	162	P
8	11440.00	17.69	42.68	60.37	74.00	-13.63	Peak	100	162	P
9	17160.00	23.51	41.39	64.90	68.20	-3.30	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH144 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Horizontal

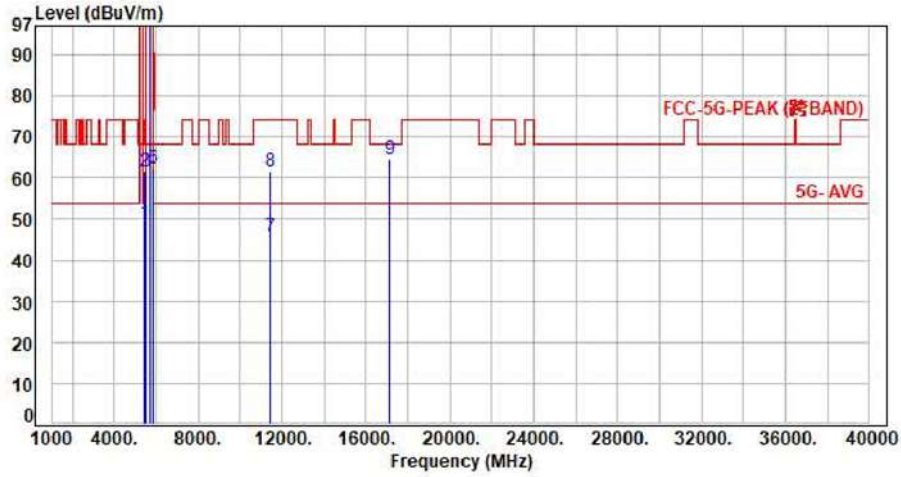

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	41.44	48.99	54.00	-5.01	Average	100	183	P
2	5460.00	7.55	54.04	61.59	74.00	-12.41	Peak	100	183	P
3	5470.00	7.58	53.88	61.46	68.20	-6.74	Peak	100	183	P
4	5720.00	7.43	88.79	96.22	200.00	-103.78	Average	100	183	P
5	5720.00	7.43	111.94	119.37	200.00	-80.63	Peak	100	183	P
6	5850.00	7.47	54.83	62.30	68.20	-5.90	Peak	100	183	P
7	11440.00	17.69	28.15	45.84	54.00	-8.16	Average	100	14	P
8	11440.00	17.69	43.94	61.63	74.00	-12.37	Peak	100	14	P
9	17160.00	23.51	40.94	64.45	68.20	-3.75	Peak	100	358	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor