



# RADIO TEST REPORT

Applicant : Ubiquiti Inc.  
Address : 685 Third Avenue, New York, New York 10017,  
USA  
Equipment : UniFi Connect 21  
Model No. : UC-Display21  
Trade Name : UBIQUITI  
FCC ID. : SWX-UCD21

## I HEREBY CERTIFY THAT :

The sample was received on Apr. 01, 2021 and the testing was completed on Jan. 04, 2022 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





## Contents

<b>1. Summary of Test Procedure and Test Results.....</b>	<b>4</b>
1.1. Applicable Standards .....	4
<b>2. Test Configuration of Equipment under Test .....</b>	<b>5</b>
2.1. Feature of Equipment under Test.....	5
2.2. Carrier Frequency of Channels .....	6
2.3. Test Mode and Test Software .....	6
2.4. Description of Test System.....	6
2.5. General Information of Test.....	7
2.6. Measurement Uncertainty .....	7
<b>3. Test Equipment and Ancillaries Used for Tests .....</b>	<b>8</b>
<b>4. Antenna Requirements .....</b>	<b>9</b>
4.1. Standard Applicable .....	9
4.2. Antenna Construction and Directional Gain.....	9
<b>5. Test of AC Power Line Conducted Emission .....</b>	<b>10</b>
5.1. Test Limit .....	10
5.2. Test Procedures .....	10
5.3. Typical Test Setup .....	11
5.4. Test Result and Data .....	12
5.5. Test Photographs .....	14
<b>6. Test of Radiated Emission .....</b>	<b>15</b>
6.1. Test Limit .....	15
6.2. Test Procedures .....	16
6.3. Typical Test Setup Layout of Radiated Emission .....	17
6.4. Test Result and Data .....	18
6.5. 20dB Bandwidth .....	30
6.6. Test Photographs (9KHz ~ 30MHz) .....	31
6.7. Test Photographs (30MHz ~ 1GHz).....	32
<b>7. Frequency Stability .....</b>	<b>33</b>
7.1. Test Procedure .....	33
7.2. Test Setup Layout .....	33
7.3. Test Result and Data .....	34
<b>8. Radio Frequency Exposure .....</b>	<b>35</b>
8.1. Applicable Standards .....	35
8.2. EUT Specification.....	35
8.3. Test Results.....	36
8.4. Calculation.....	36
8.5. Maximum Permissible Exposure.....	37



### History of this test report

Report No.	Issue Date	Description
21030230-TRFCC01	Jan. 05, 2022	Original



# 1. Summary of Test Procedure and Test Results

## 1.1. Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.225

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207	AC Power Line Conducted Emission	PASS
15.209 15.225	Radiated Emission	PASS
15.225	20dB Bandwidth	PASS
15.225(e)	Frequency Stability	PASS

\*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.

\*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(21030206-TEFV01).



## 2. Test Configuration of Equipment under Test

### 2.1. Feature of Equipment under Test

Frequency Range	NFC: 13.553MHz~13.567MHz BT / BLE: 2400-2483.5MHz 802.11b/g/n: 2400-2483.5MHz 802.11a/n/ac: 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
Modulation Type	NFC: ASK BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK WLAN: 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM, 5GHz: 802.11n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Modulation Technology	DSSS, OFDM, FHSS, DTS,
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS7, HT20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS7, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80
Antenna Type	Internal Antenna
Antenna Gain	For NFC: 13.553MHz~13.567MHz: ANT B: 0dBi, ANT C: 0dBi For BT / BLE: 2400MHz~2483.5MHz: ANT A: 4.20dBi For WLAN: 2400MHz~2483.5MHz: ANT A: 4.20dBi 5150MHz~5250MHz: ANT A: 5.00dBi 5250MHz~5350MHz: ANT A: 5.00dBi 5470MHz~5725MHz: ANT A: 5.00dBi 5725MHz~5850MHz: ANT A: 5.00dBi

Note:

1. EUT support TPC Function.
2. WLAN and BT can simultaneously transmission.
3. EUT supports DFS Client Mode, without radar detection.
4. EUT support indoor / outdoor function.
5. For more details, please refer to the User's manual of the EUT.



### 2.2. Carrier Frequency of Channels

Channel	Frequency(MHz)
*1	13.56

Note: Channel remarked “\*” is selected to perform test.

### 2.3. Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included EUT for RF test.
- c. Hardware control was executed to transmit and receive data via NFC.
- d. The test mode of RF test as follow:  
 Test Mode 1. NFC mode , Power from POE

### 2.4. Description of Test System

Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	N/A	N/A	15m / S	N/A
Micro USB Cable	kolin	EX-DLCP07	1m / NS	N/A
POE	UBIQUITI	GP-H480-050G	N/A	0.6m / NS
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Vostro 3560	N/A	Adapter / 1.8m / NS
RJ45 Cable	N/A	N/A	1.2m / NS	N/A
Micro USB Cable	kolin	EX-DLCP07	1m / NS	N/A
POE	UBIQUITI	GP-H480-050G	N/A	0.6m / NS



## 2.5. General Information of Test

Test Site	<b>CerpPASS Technology Corporation Test Laboratory</b> Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 1,000MHz	
Test Distance:	9KHz~30MHz: radiated emission from antenna to EUT is 1 M. 30MHz~1GHz: radiated emission from antenna to EUT is 3 M.	

For ANT B:

Test Item	Test Site	Test period	Environmental Conditions	Tested By
Radiated Emissions	3M02-NK	2021/06/12	22°C / 45%	Nick Guan
AC Power Line Conducted Emission	CON01-NK	2021/06/17	25°C / 45%	Dian Chen

For ANT C:

Test Item	Test Site	Test period	Environmental Conditions	Tested By
Radiated Emissions	3M02-NK	2022/01/04	19°C / 48%	Dian Chen

## 2.6. Measurement Uncertainty

Measurement Item	Uncertainty
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.6dB
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Frequency Stability	±0.26KHz



### 3. Test Equipment and Ancillaries Used for Tests

For ANT B:

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2021/04/26	2022/04/25
Active Loop Antenna	EMCO	6507	40855	2021/06/10	2022/06/09
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2020/06/23	2021/06/22
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2020/08/03	2021/08/02
Preamplifier	EM Electronics corp.	EM330	60658	2020/10/20	2021/10/19
Preamplifier	EM Electronics corp.	EM330	60660	2021/03/18	2022/03/17
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2021/04/12	2022/04/11
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2021/04/03	2022/04/02
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2020/09/18	2021/09/17
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	100821	2020/09/11	2021/09/10
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-516	2020/09/26	2021/09/25
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101933	2020/09/17	2021/09/16
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2020/09/18	2021/09/17
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA

For ANT C:

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2021/11/05	2022/11/04
Active Loop Antenna	EMCO	6507	40855	2021/06/10	2022/06/09
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2021/06/30	2022/06/29
Preamplifier	EM Electronics corp.	EM330	60658	2021/10/13	2022/10/12
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2021/04/12	2022/04/11
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50314	2021/04/08	2022/04/07
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2021/09/22	2022/09/21
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA





## 4. Antenna Requirements

### 4.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.2. Antenna Construction and Directional Gain

Antenna Type	Internal Antenna
Antenna Gain	ANT B: 0dBi ANT C: 0dBi



## 5. Test of AC Power Line Conducted Emission

### 5.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


\*Decreases with the logarithm of the frequency.

### 5.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




### 5.3. Typical Test Setup

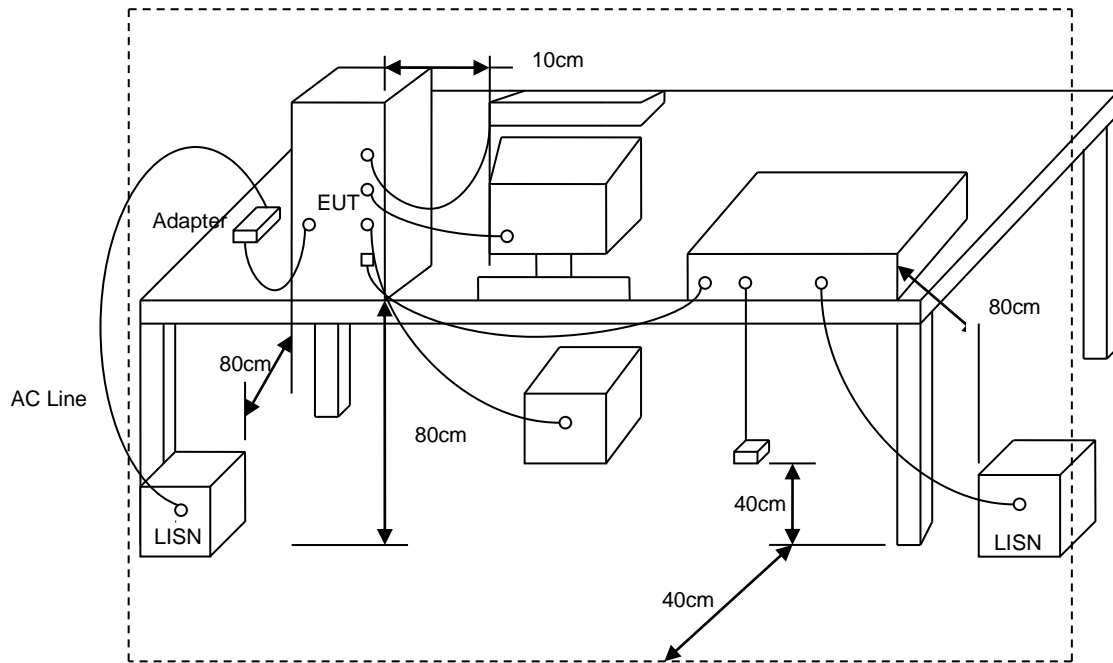



### 5.4. Test Result and Data

Power	: From POE DC48V	Pol/Phase	: LINE
Test Mode	: Mode 1		:

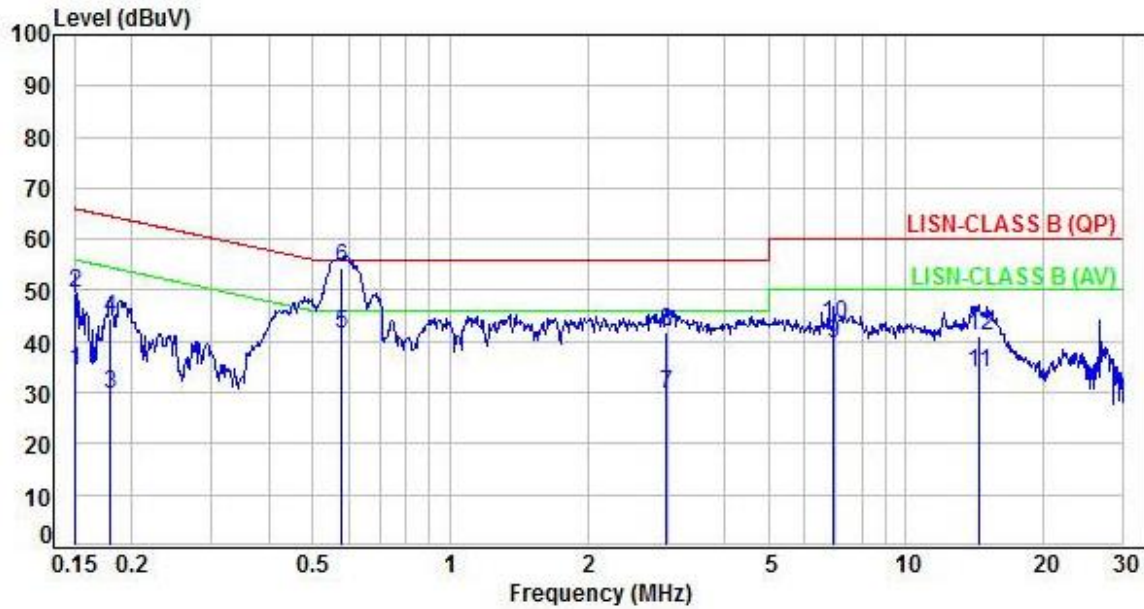


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	P/F
1	0.15	9.96	24.33	34.29	55.97	-21.68	Average	P
2	0.15	9.96	39.53	49.49	65.97	-16.48	QP	P
3	0.18	9.96	19.75	29.71	54.53	-24.82	Average	P
4	0.18	9.96	34.47	44.43	64.53	-20.10	QP	P
5	0.57	9.99	31.50	41.49	46.00	-4.51	Average	P
6	0.57	9.99	44.49	54.48	56.00	-1.52	QP	P
7	2.98	10.18	19.31	29.49	46.00	-16.51	Average	P
8	2.98	10.18	31.51	41.69	56.00	-14.31	QP	P
9	6.96	10.44	29.04	39.48	50.00	-10.52	Average	P
10	6.96	10.44	32.91	43.35	60.00	-16.65	QP	P
11	14.49	10.96	22.95	33.91	50.00	-16.09	Average	P
12	14.49	10.96	30.02	40.98	60.00	-19.02	QP	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	: From POE DC48V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 1		:

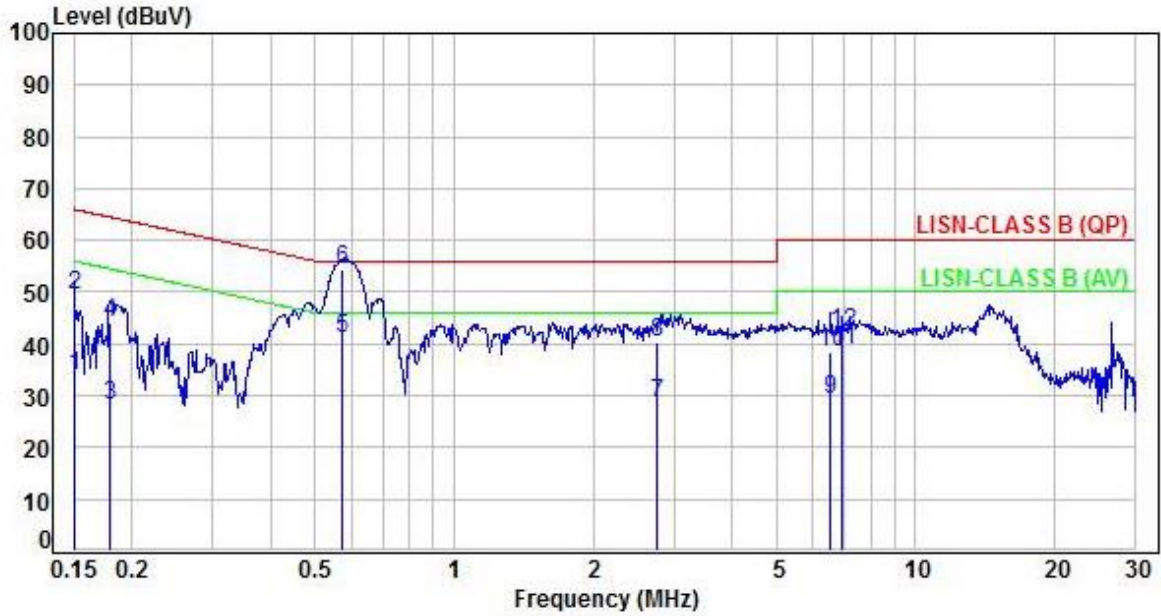

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.97	23.87	33.84	55.97	-22.13	Average	P
2	0.15	9.97	39.58	49.55	65.97	-16.42	QP	P
3	0.18	9.97	18.03	28.00	54.53	-26.53	Average	P
4	0.18	9.97	34.20	44.17	64.53	-20.36	QP	P
5	0.57	10.00	31.16	41.16	46.00	-4.84	Average	P
6	0.57	10.00	44.27	54.27	56.00	-1.73	QP	P
7	2.76	10.12	18.24	28.36	46.00	-17.64	Average	P
8	2.76	10.12	30.36	40.48	56.00	-15.52	QP	P
9	6.56	10.34	18.81	29.15	50.00	-20.85	Average	P
10	6.56	10.34	28.02	38.36	60.00	-21.64	QP	P
11	6.96	10.37	28.43	38.80	50.00	-11.20	Average	P
12	6.96	10.37	32.00	42.37	60.00	-17.63	QP	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



## 6. Test of Radiated Emission

### 6.1. Test Limit

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Frequency (MHz)	Distance	Limit (µV/ m)
0.09 ~ 0.490	300m	2400/F(kHz)
0.490 ~ 1.705	30m	24000/ F(kHz)
1.705 ~ 30	30m	30
30 ~ 88	3m	100
88 ~ 216	3m	150
216 ~ 960	3m	200
Above 960	3m	500

### 15.215 Additional provisions to the general radiated emission limitations.:

- (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.



## 6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. "Cone of radiation" has been considered to be 3dB beamwidth of the measurement antenna.

### NOTE:


- 1. The resolution bandwidth of test receiver/spectrum analyzer is 300Hz or CISPS 200Hz(QP detector) at frequency Below 150 kHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 10KHz or CISPS 9KHz(QP detector) at frequency 150 kHz to 30 MHz.
- 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.

Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.  
(Y-AXIS is the worst.)




### 6.3. Typical Test Setup Layout of Radiated Emission

Below 30MHz test setup

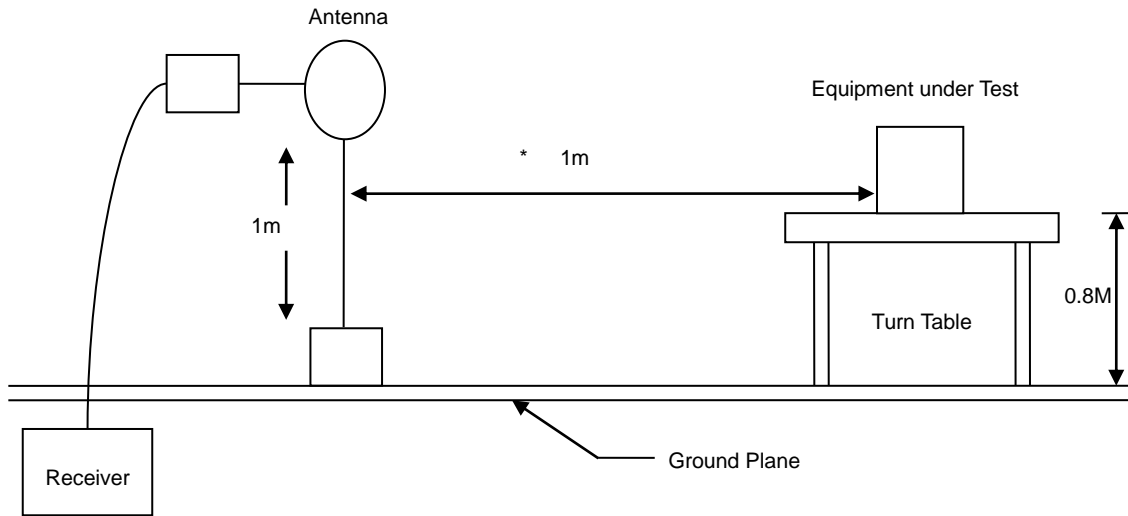

30MHz- 1GHz Test Setup

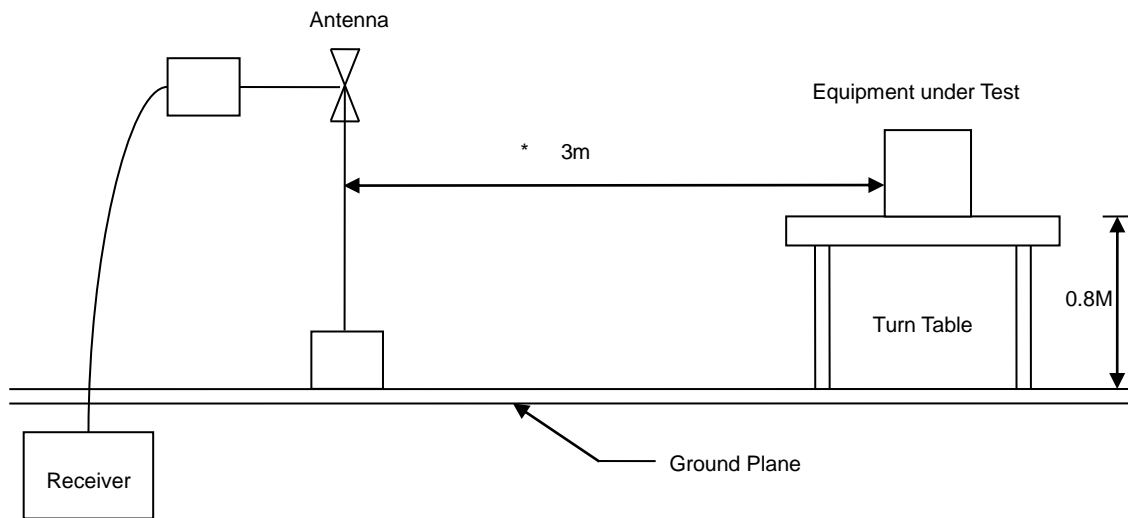






### 6.4. Test Result and Data

#### 6.4.1. Test Result of Fundamental Emission

For ANT B:

Power	:	From POE DC48V	Pol/Phase	:	OPEN
Test Mode	:	Mode 1		:	

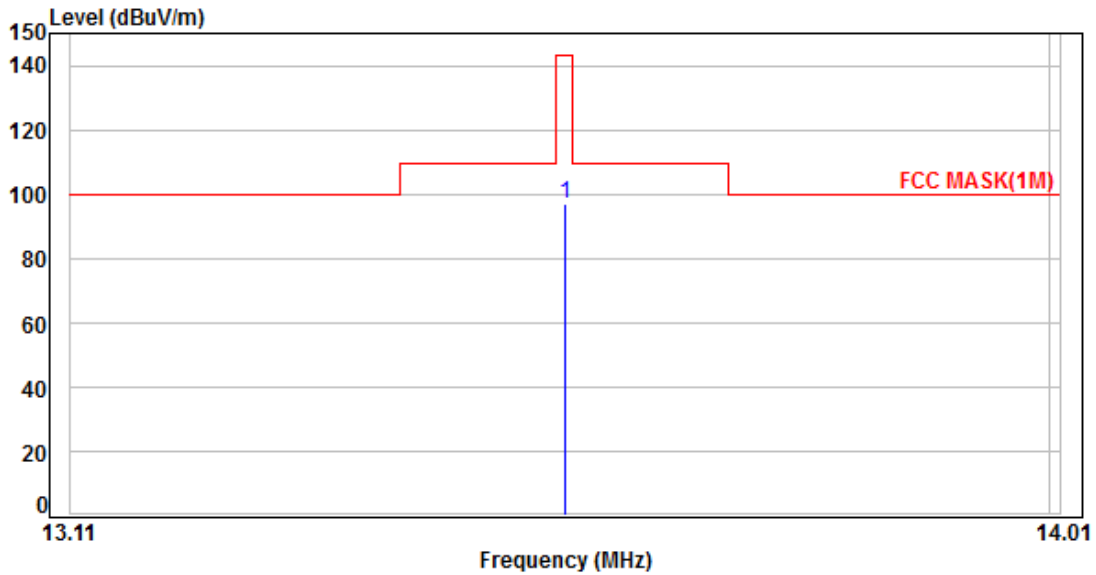


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	13.56	17.01	80.12	97.13	143.08	-45.95	Peak	100	360	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT B:

Power	:	From POE DC48V	Pol/Phase	:	CLOSE
Test Mode	:	Mode 1		:	

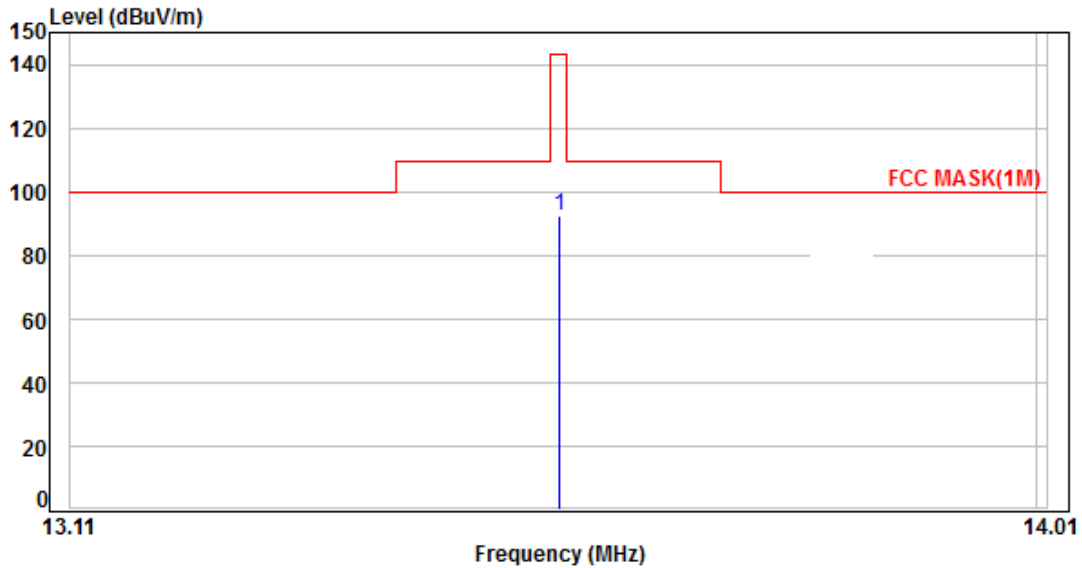


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	13.56	17.01	75.11	92.12	143.08	-50.96	Peak	100	266	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT C:

Power	:	From POE DC48V	Pol/Phase	:	OPEN
Test Mode	:	Mode 1		:	

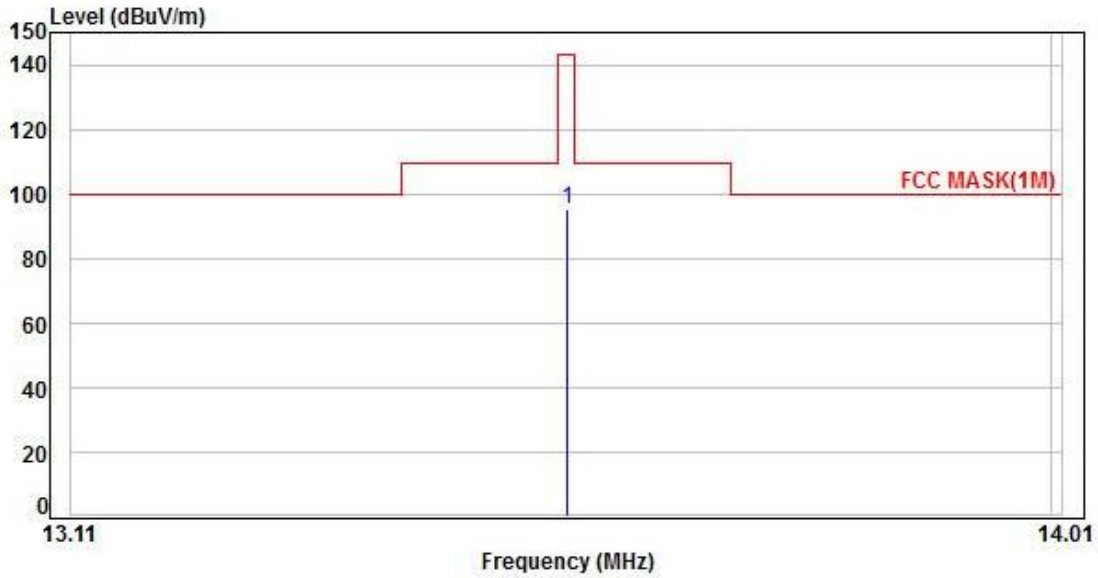

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	13.56	17.41	77.65	95.06	143.08	-48.02	Peak	100	109	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT C:

Power	: From POE DC48V	Pol/Phase	: CLOSE
Test Mode	: Mode 1		:

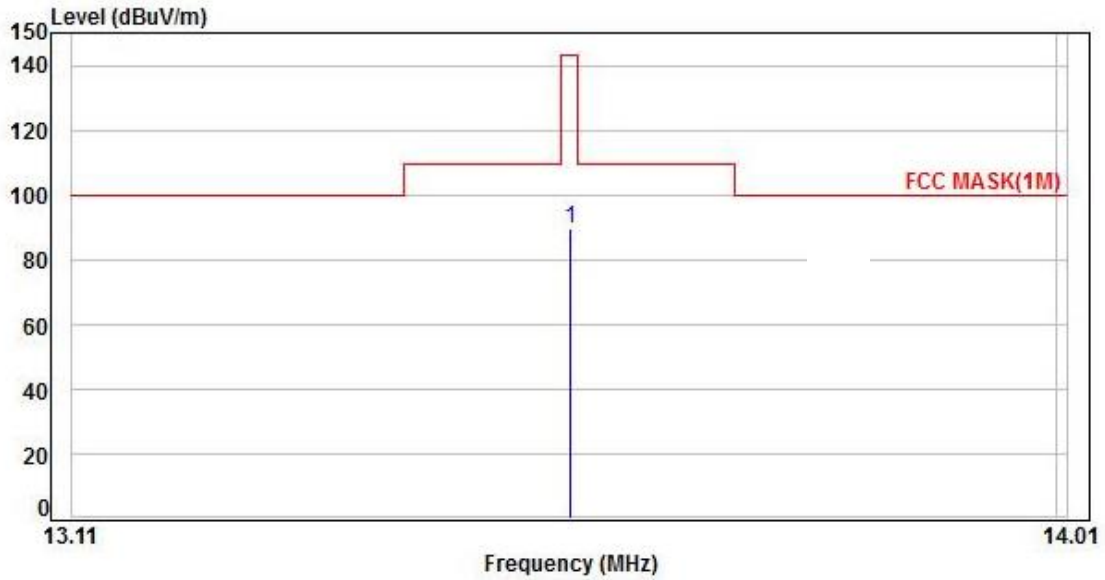

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	13.56	17.41	72.03	89.44	143.08	-53.64	Peak	100	213	P


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



6.4.2. Test Result of Unwanted Spurious emission (9KHz ~ 30MHz)

For ANT B:

Power	:	From POE DC48V	Pol/Phase	:	OPEN
Test Mode	:	Mode 1		:	

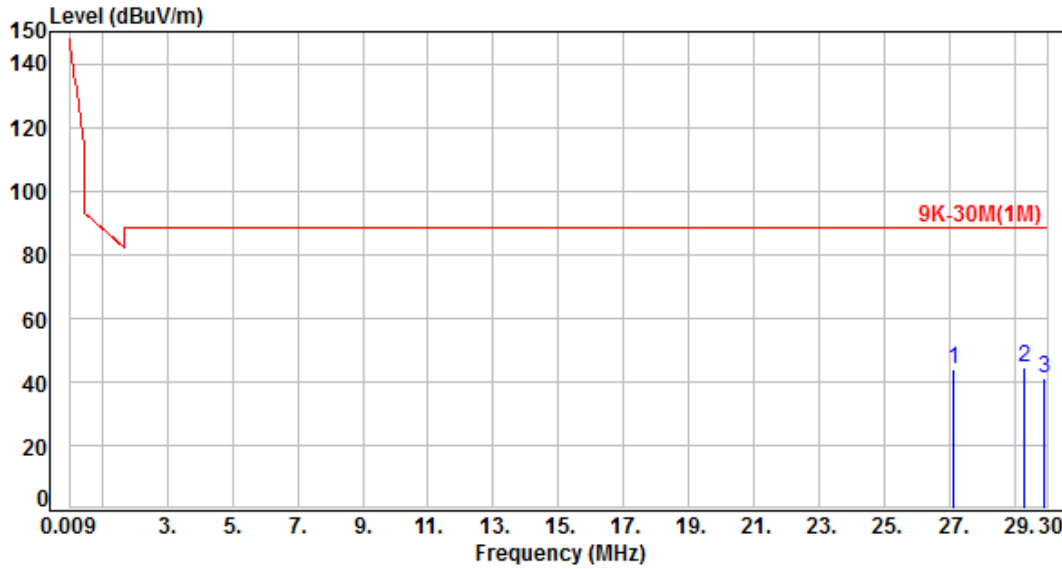

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	27.12	16.12	27.75	43.87	88.63	-44.76	Peak	100	264	P
2	29.25	15.91	28.57	44.48	88.63	-44.15	Peak	100	252	P
3	29.86	15.85	25.07	40.92	88.63	-47.71	Peak	100	257	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT B:

Power	:	From POE DC48V	Pol/Phase	:	CLOSE
Test Mode	:	Mode 1		:	

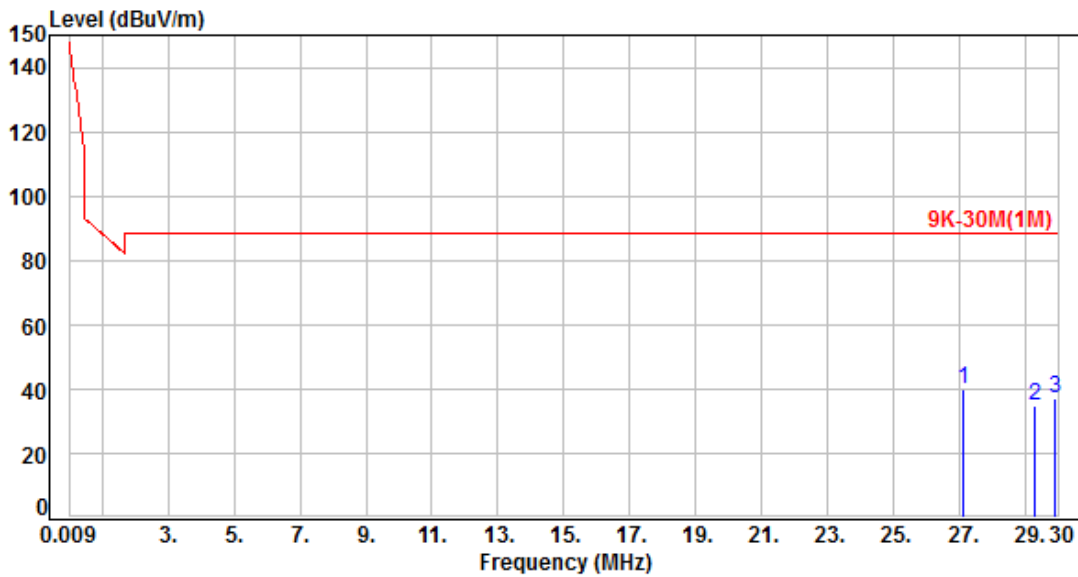


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	27.12	16.12	23.75	39.87	88.63	-48.76	Peak	100	313	P
2	29.25	15.91	18.72	34.63	88.63	-54.00	Peak	100	326	P
3	29.86	15.85	20.94	36.79	88.63	-51.84	Peak	100	321	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT C:

Power	:	From POE DC48V	Pol/Phase	:	OPEN
Test Mode	:	Mode 1		:	

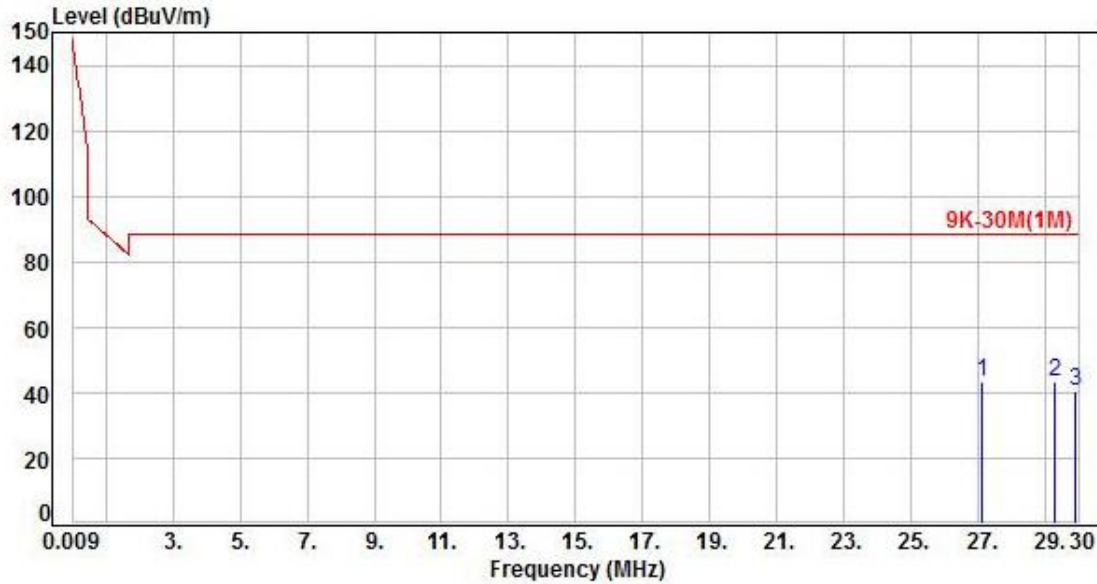


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	27.12	16.52	26.72	43.24	88.63	-45.39	Peak	100	275	P
2	29.25	16.31	27.05	43.36	88.63	-45.27	Peak	100	273	P
3	29.86	16.25	24.41	40.66	88.63	-47.97	Peak	100	235	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT C:

Power	:	From POE DC48V	Pol/Phase	:	CLOSE
Test Mode	:	Mode 1		:	

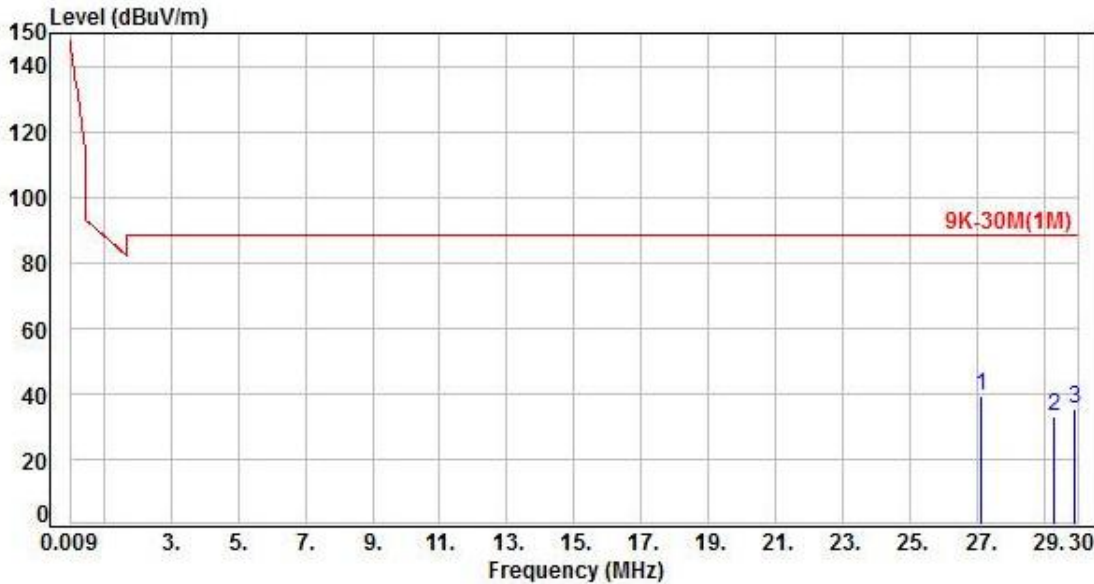

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	27.12	16.52	22.71	39.23	88.63	-49.40	Peak	100	295	P
2	29.25	16.31	16.96	33.27	88.63	-55.36	Peak	100	299	P
3	29.86	16.25	19.23	35.48	88.63	-53.15	Peak	100	309	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor






6.4.3. Test Result of Unwanted Spurious emission (30GHz ~ 1GHz)

For ANT B:

Power	:	From POE DC48V	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1		:	

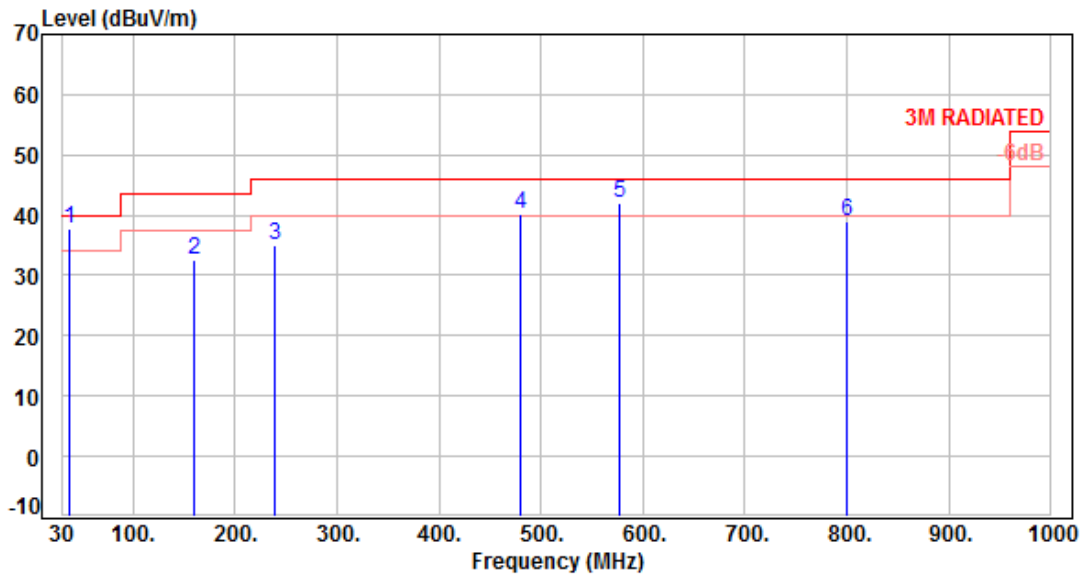


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	37.76	-11.33	49.20	37.87	40.00	-2.13	QP	100	318	P
2	159.98	-10.69	43.33	32.64	43.50	-10.86	Peak	400	360	P
3	239.52	-11.95	46.93	34.98	46.00	-11.02	Peak	400	360	P
4	480.08	-5.26	45.49	40.23	46.00	-5.77	Peak	400	360	P
5	577.08	-3.22	45.11	41.89	46.00	-4.11	Peak	400	360	P
6	800.18	0.62	38.42	39.04	46.00	-6.96	Peak	400	360	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT B:

Power	: From POE DC48V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1		:

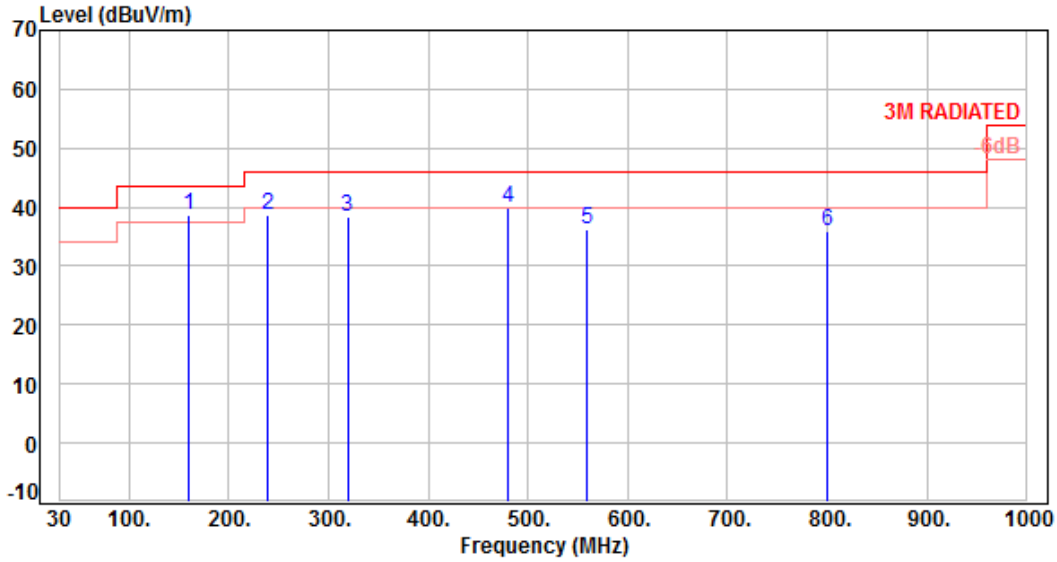


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	159.98	-10.69	49.40	38.71	43.50	-4.79	QP	100	153	P
2	239.52	-11.95	50.54	38.59	46.00	-7.41	Peak	400	0	P
3	319.06	-9.16	47.46	38.30	46.00	-7.70	Peak	400	0	P
4	480.08	-5.26	45.22	39.96	46.00	-6.04	Peak	400	0	P
5	559.62	-3.65	39.74	36.09	46.00	-9.91	Peak	400	0	P
6	800.18	0.62	35.45	36.07	46.00	-9.93	Peak	400	0	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT C:

Power	: From POE DC48V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1		:

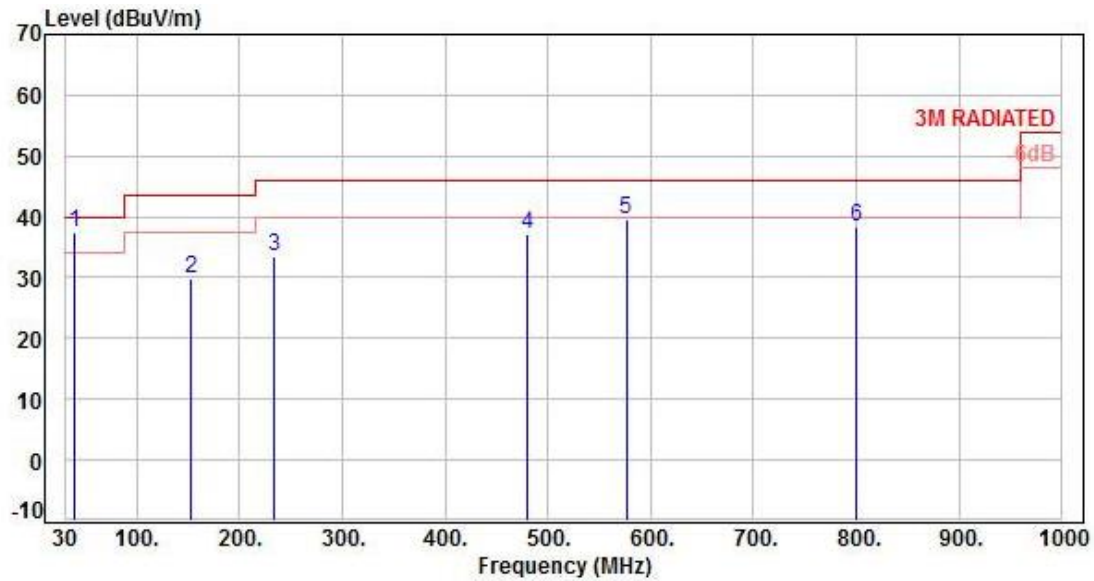


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	39.05	-13.15	50.54	37.39	40.00	-2.61	QP	100	212	P
2	152.49	-13.02	43.00	29.98	43.50	-13.52	Peak	400	360	P
3	233.61	-15.29	48.76	33.47	46.00	-12.53	Peak	400	360	P
4	479.63	-8.34	45.55	37.21	46.00	-8.79	Peak	400	360	P
5	576.15	-6.35	46.02	39.67	46.00	-6.33	Peak	400	360	P
6	799.94	-2.95	41.30	38.35	46.00	-7.65	Peak	400	360	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT C:

Power	: From POE DC48V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1		:

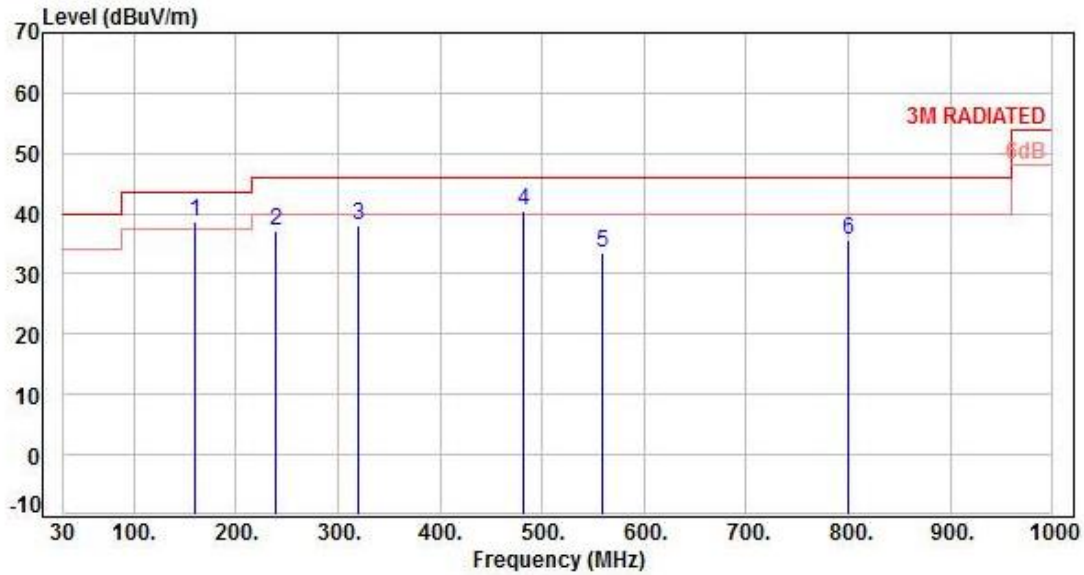

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	160.33	-13.06	51.60	38.54	43.50	-4.96	QP	100	145	P
2	239.46	-14.44	51.57	37.13	46.00	-8.87	Peak	400	0	P
3	320.69	-11.85	49.87	38.02	46.00	-7.98	Peak	400	0	P
4	481.32	-8.31	48.70	40.39	46.00	-5.61	Peak	400	0	P
5	559.88	-6.93	40.53	33.60	46.00	-12.40	Peak	400	0	P
6	800.46	-2.95	38.70	35.75	46.00	-10.25	Peak	400	0	P


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



### 6.5. 20dB Bandwidth

Modulation Mode	Freq. (MHz)	20dB Bandwidth (kHz)	F <sub>L</sub> at 20dB BW (MHz)	F <sub>H</sub> at 20dB BW (MHz)
NFC	13.56	4.76	13.55832	13.56308
Limit		N/A	13.553	13.567
Result	Pass			

#### 20dB Bandwidth 13.56 MHz

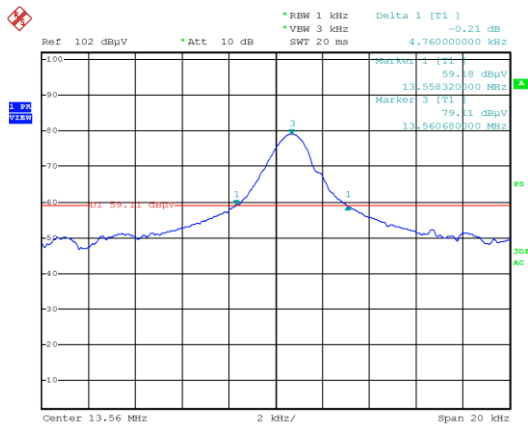




## 7. Frequency Stability

### 7.1. Test Procedure

1. The EUT was placed inside the Temperature and Humidity chamber.
2. The transmitter output was connected to spectrum analyzer.
3. Turn the EUT on and couple its output to a spectrum analyzer.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
6. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
7. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

### 7.2. Test Setup Layout

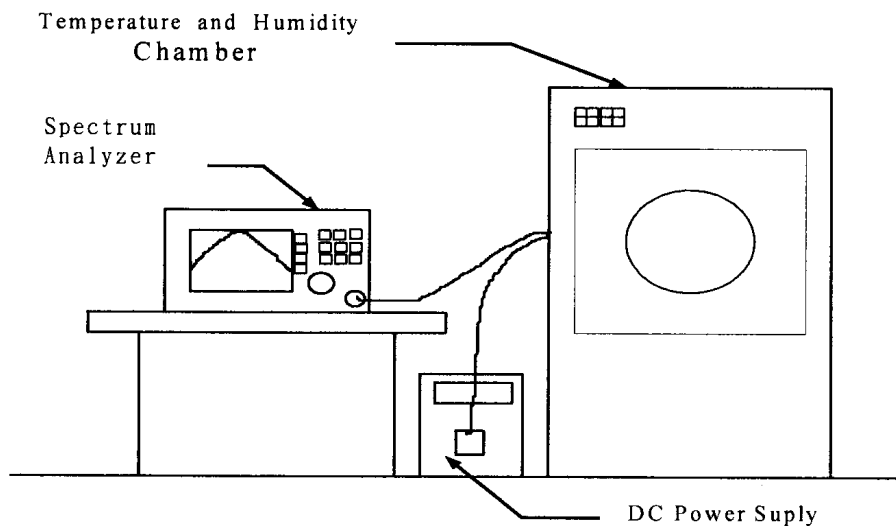



### 7.3. Test Result and Data

Temp (°C)	Power supply (V)	2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
40	102	13.5594	-0.004425	13.5594	-0.004425	13.5593	-0.005162
	120	13.5594	-0.004425	13.5594	-0.004425	13.5595	-0.003687
	138	13.5595	-0.003687	13.5594	-0.004425	13.5594	-0.004425
30	102	13.5594	-0.004425	13.5595	-0.003687	13.5594	-0.004425
	120	13.5593	-0.005162	13.5594	-0.004425	13.5593	-0.005162
	138	13.5595	-0.003687	13.5593	-0.005162	13.5594	-0.004425
20	102	13.5594	-0.004425	13.5595	-0.003687	13.5595	-0.003687
	120	13.5594	-0.004425	13.5594	-0.004425	13.5594	-0.004425
	138	13.5594	-0.004425	13.5594	-0.004425	13.5594	-0.004425
10	102	13.5595	-0.003687	13.5593	-0.005162	13.5595	-0.003687
	120	13.5594	-0.004425	13.5595	-0.003687	13.5594	-0.004425
	138	13.5593	-0.005162	13.5594	-0.004425	13.5593	-0.005162
0	102	13.5597	-0.002212	13.5598	-0.001475	13.5597	-0.002212
	120	13.5595	-0.003687	13.5598	-0.001475	13.5596	-0.002950
	138	13.5598	-0.001475	13.5597	-0.002212	13.5597	-0.002212