



# RADIO TEST REPORT

Applicant : Ubiquiti Inc.  
Address : 685 Third Avenue, New York, New York 10017,  
USA  
Equipment : UniFi Connect 27  
Model No. : UC-Display27  
Trade Name : UBIQUITI  
FCC ID : SWX-UCD27

**I HEREBY CERTIFY THAT :**

The sample was received on Apr. 27, 2021 and the testing was completed on Apr. 18, 2022 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





## Contents

<b>1. Summary of Test Procedure and Test Results.....</b>	<b>4</b>
1.1. Applicable Standards .....	4
<b>2. Test Configuration of Equipment under Test .....</b>	<b>5</b>
2.1. Feature of Equipment under Test.....	5
2.2. Carrier Frequency of Channels .....	6
2.3. Test Mode and Test Software .....	6
2.4. Description of Test System.....	6
2.5. General Information of Test.....	7
2.6. Measurement Uncertainty .....	7
<b>3. Test Equipment and Ancillaries Used for Tests .....</b>	<b>8</b>
<b>4. Antenna Requirements.....</b>	<b>9</b>
4.1. Standard Applicable .....	9
4.2. Antenna Construction and Directional Gain.....	9
<b>5. Test of AC Power Line Conducted Emission .....</b>	<b>10</b>
5.1. Test Limit .....	10
5.2. Test Procedures .....	10
5.3. Typical Test Setup .....	11
5.4. Test Result and Data .....	12
5.5. Test Photographs .....	14
<b>6. Test of Radiated Emission .....</b>	<b>15</b>
6.1. Test Limit .....	15
6.2. Test Procedures .....	16
6.3. Typical Test Setup Layout of Radiated Emission .....	17
6.4. Test Result and Data .....	18
6.5. 20dB Bandwidth & 99% Occupied Bandwidth .....	30
6.6. Test Photographs (9KHz ~ 30MHz) .....	31
6.7. Test Photographs (30MHz ~ 1GHz).....	32
<b>7. Frequency Stability .....</b>	<b>33</b>
7.1. Test Procedure .....	33
7.2. Test Setup Layout .....	33
7.3. Test Result and Data .....	34
<b>8. Radio Frequency Exposure .....</b>	<b>35</b>
8.1. Applicable Standards .....	35
8.2. EUT Specification.....	35
8.1. Test Results.....	36
8.2. Calculation.....	36
8.3. Result .....	37



**History of this test report**

Report No.	Issued Date	Description
21040256-TRFCC01	Apr. 22, 2022	Original
21040256-TRFCC01-A	May. 16, 2022	Revise:1. Fundamental Emission Add 1.EMC test report Item 2.Co-location



# 1. Summary of Test Procedure and Test Results

## 1.1. Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.225

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207	AC Power Line Conducted Emission	PASS
15.209 15.225	Radiated Emission	PASS
15.225	20dB Bandwidth	PASS
15.225(e)	Frequency Stability	PASS

\*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.

\*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(21040256-TEFV01).



## 2. Test Configuration of Equipment under Test

### 2.1. Feature of Equipment under Test

Operation Frequency Range	NFC: 13.553MHz~13.567MHz BT / BLE: 2400-2483.5MHz
Center Frequency Range	NFC: 13.56MHz BT / BLE: 2402MHz-2480MHz
Modulation Type	NFC: ASK BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK
Modulation Technology	FHSS, DTS
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps
Antenna Type	Dipole Antenna
Antenna Gain	For NFC: 13.553MHz~13.567MHz: ANT B: 0dBi (Right), ANT C: 0dBi (Left) For BT / BLE: 2400MHz~2483.5MHz: ANT A: 6.4dBi

Note:

- 1.BT and NFC can simultaneously transmission.
- 2.For more details, please refer to the User's manual of the EUT.



## 2.2. Carrier Frequency of Channels

Channel	Frequency(MHz)
*1	13.56

Note: Channel remarked “\*” is selected to perform test.

## 2.3. Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included EUT for RF test.
- c. An executive program, "ReaderUtility" under Windows OS system was executed to transmit and receive data via NFC.
- e. The test mode of RF test as follow:  
Test Mode 1. RFID (ASK), 13.56MHz

## 2.4. Description of Test System

Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
RJ45 Cable	TE CONNECTIVITY	CAT5E	15m / NS	N/A
POE	UBIQUITI	GP-C500-120G	N/A	0.6m / NS
Power Cord	CHADHUI	E322424	0.6m/NS	N/A
NFC Card	Tiananxin	NFC Tag Kit	N/A	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
POE	UBIQUITI	GP-C500-120G	N/A	0.6m / NS
Power Cord	CHADHUI	E322424	0.6m/NS	N/A
NFC Card	Tiananxin	NFC Tag Kit	N/A	N/A



## 2.5. General Information of Test

Test Site	<b>CerpPASS Technology Corporation Test Laboratory</b> Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 1,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test period	Environmental Conditions	Tested By
Frequency Stability	RFCON01-NK	2022/04/12	21°C / 43%	Dian Chen
Radiated Emissions	3M02-NK	2022/01/13~2022/04/14	18~23°C / 46~48%	Dian Chen
AC Power Line Conducted Emission	CON01-NK	2022/04/15~2022/04/18	22~25°C / 50~55%	Dian Chen

## 2.6. Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Item	Uncertainty
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.6dB
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Frequency Stability	±0.26KHz



### 3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2021/11/05	2022/11/04
Active Loop Antenna	EMCO	6507	40855	2021/06/10	2022/06/09
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2021/06/30	2022/06/29
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2021/08/06	2022/08/05
Preamplifier	EM Electronics corp.	EM330	60658	2021/10/13	2022/10/12
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1316	2022/01/11	2023/01/10
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2021/09/22	2022/09/21
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	Frequency Stability				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2022/01/10	2023/01/09
TEMP & HUMIDITY CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2021/08/27	2022/08/26
Cable-0.5m(1G-18G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2022/01/11	2023/01/10

Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	101200	2021/08/30	2022/08/29
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-568	2021/06/02	2022/06/01
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101933	2021/09/15	2022/09/14
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2021/09/22	2022/09/21
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA





## 4. Antenna Requirements

### 4.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.2. Antenna Construction and Directional Gain

Antenna Type	Dipole Antenna
Antenna Gain	For NFC: 13.553MHz~13.567MHz: ANT B: 0dBi (Right), ANT C: 0dBi (left)



## 5. Test of AC Power Line Conducted Emission

### 5.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


\*Decreases with the logarithm of the frequency.

### 5.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




### 5.3. Typical Test Setup

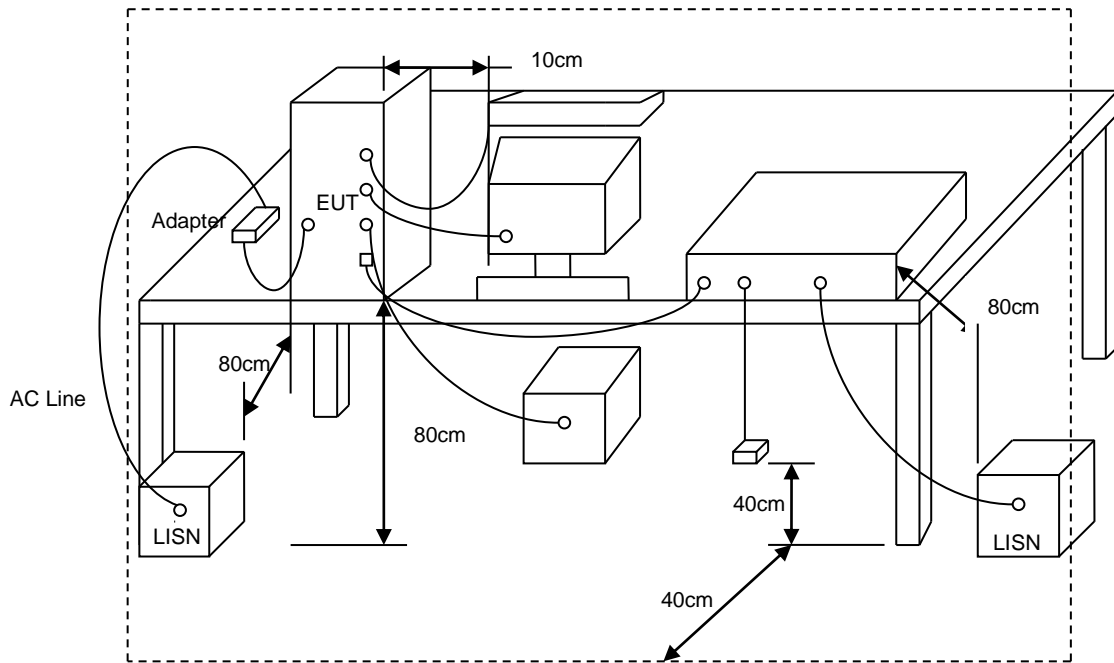



5.4. Test Result and Data

Power	: From POE (AC 120V / 60Hz)	Pol/Phase	: LINE
Test Mode	: Mode 1		:

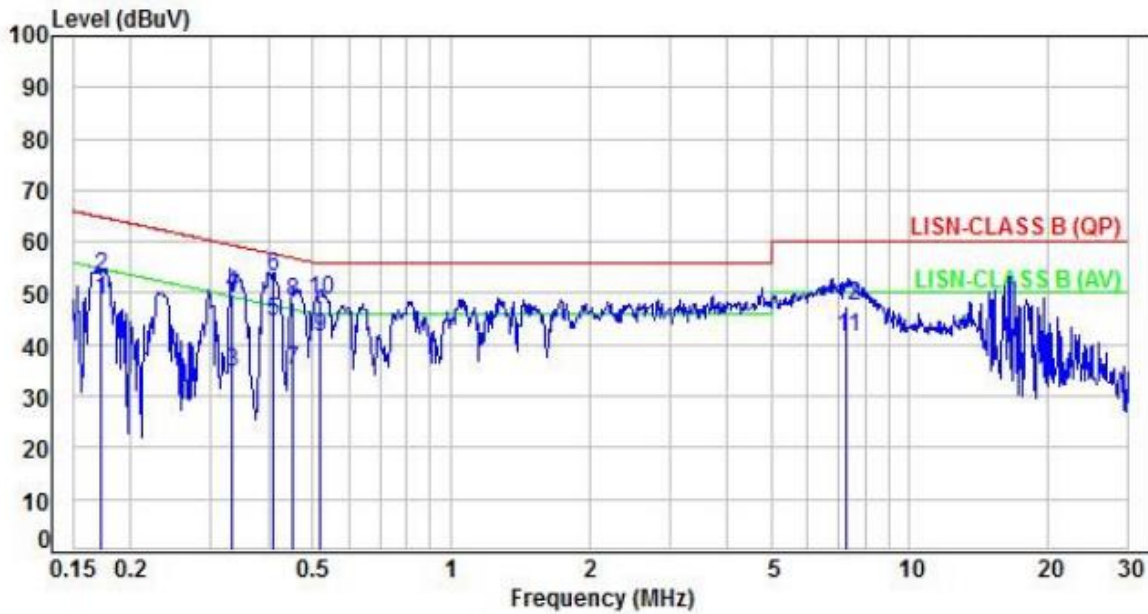


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.17	9.96	38.81	48.77	54.83	-6.06	Average	P
2	0.17	9.96	43.22	53.18	64.83	-11.65	QP	P
3	0.33	9.96	24.48	34.44	49.34	-14.90	Average	P
4	0.33	9.96	39.86	49.82	59.34	-9.52	QP	P
5	0.41	9.97	34.36	44.33	47.67	-3.34	Average	P
6	0.41	9.97	43.34	53.31	57.67	-4.36	QP	P
7	0.45	9.97	24.88	34.85	46.86	-12.01	Average	P
8	0.45	9.97	38.28	48.25	56.86	-8.61	QP	P
9	0.52	9.98	31.42	41.40	46.00	-4.60	Average	P
10	0.52	9.98	38.81	48.79	56.00	-7.21	QP	P
11	7.30	10.31	31.19	41.50	50.00	-8.50	Average	P
12	7.30	10.31	37.13	47.44	60.00	-12.56	QP	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	: From POE (AC 120V / 60Hz)	Pol/Phase	: NEUTRAL
Test Mode	: Mode 1		:

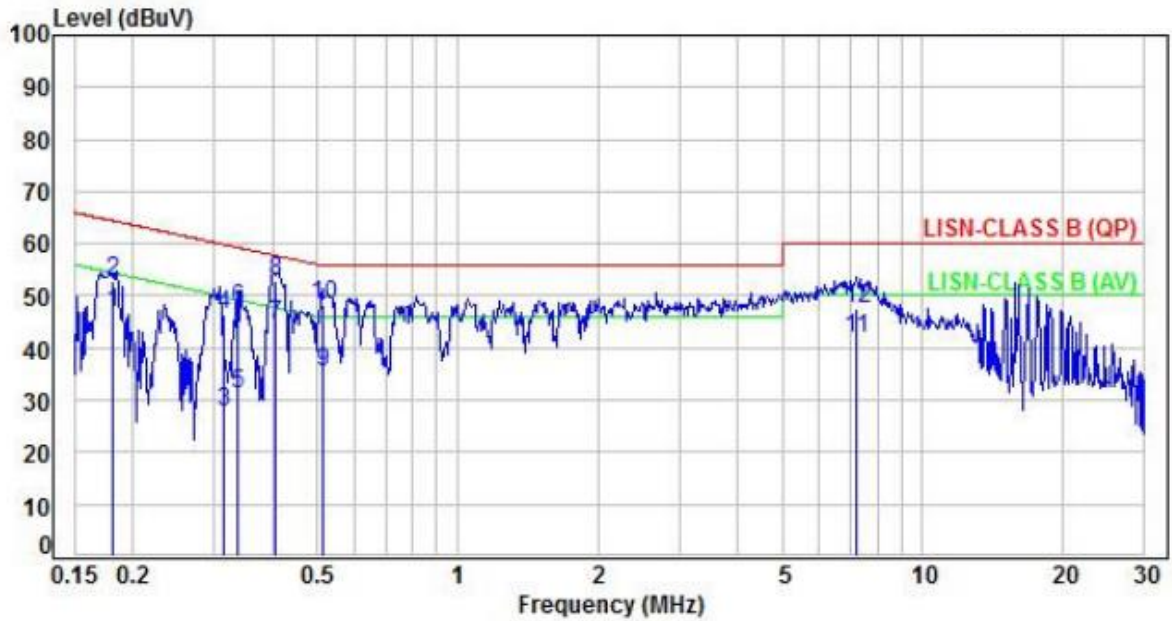

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.18	9.96	36.78	46.74	54.45	-7.71	Average	P
2	0.18	9.96	42.89	52.85	64.45	-11.60	QP	P
3	0.31	9.96	17.66	27.62	49.89	-22.27	Average	P
4	0.31	9.96	36.38	46.34	59.89	-13.55	QP	P
5	0.34	9.96	21.20	31.16	49.29	-18.13	Average	P
6	0.34	9.96	37.56	47.52	59.29	-11.77	QP	P
7	0.40	9.97	34.58	44.55	47.78	-3.23	Average	P
8	0.40	9.97	42.81	52.78	57.78	-5.00	QP	P
9	0.51	9.97	25.25	35.22	46.00	-10.78	Average	P
10	0.51	9.97	38.39	48.36	56.00	-7.64	QP	P
11	7.18	10.28	31.63	41.91	50.00	-8.09	Average	P
12	7.18	10.28	37.41	47.69	60.00	-12.31	QP	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



## 6. Test of Radiated Emission

### 6.1. Test Limit

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Frequency (MHz)	Distance	Limit (µV/ m)
0.09 ~ 0.490	300m	2400/F(kHz)
0.490 ~ 1.705	30m	24000/ F(kHz)
1.705 ~ 30	30m	30
30 ~ 88	3m	100
88 ~ 216	3m	150
216 ~ 960	3m	200
Above 960	3m	500

### 15.215 Additional provisions to the general radiated emission limitations.:

- (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.



## 6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. "Cone of radiation" has been considered to be 3dB beamwidth of the measurement antenna.

### NOTE:


- 1. The resolution bandwidth of test receiver/spectrum analyzer is 300Hz or CISPS 200Hz(QP detector) at frequency Below 150 kHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 10KHz or CISPS 9KHz(QP detector) at frequency 150 kHz to 30 MHz.
- 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.

Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.  
(X -AXIS is the worst.)




### 6.3. Typical Test Setup Layout of Radiated Emission

Below 30MHz test setup

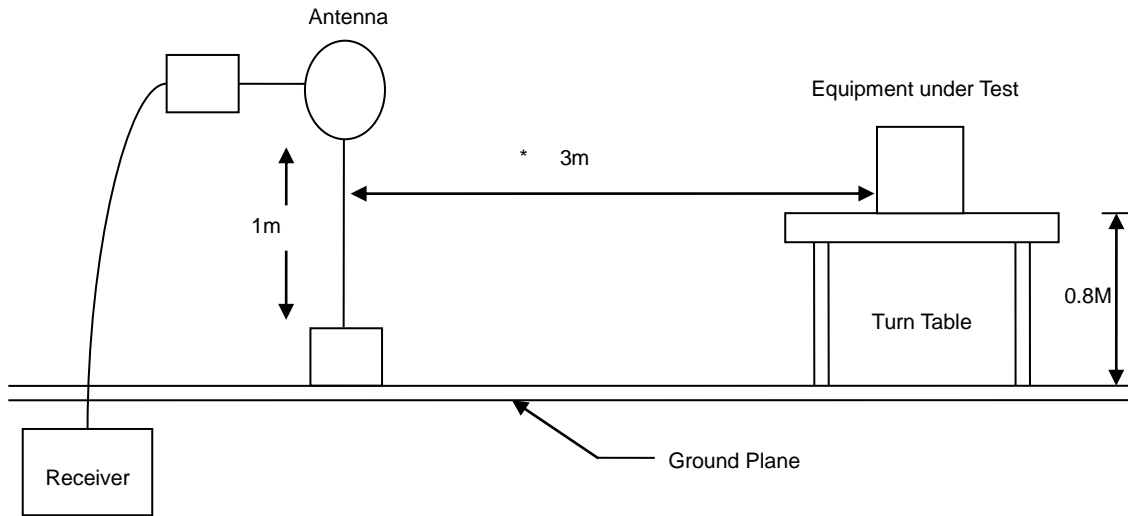

30MHz- 1GHz Test Setup

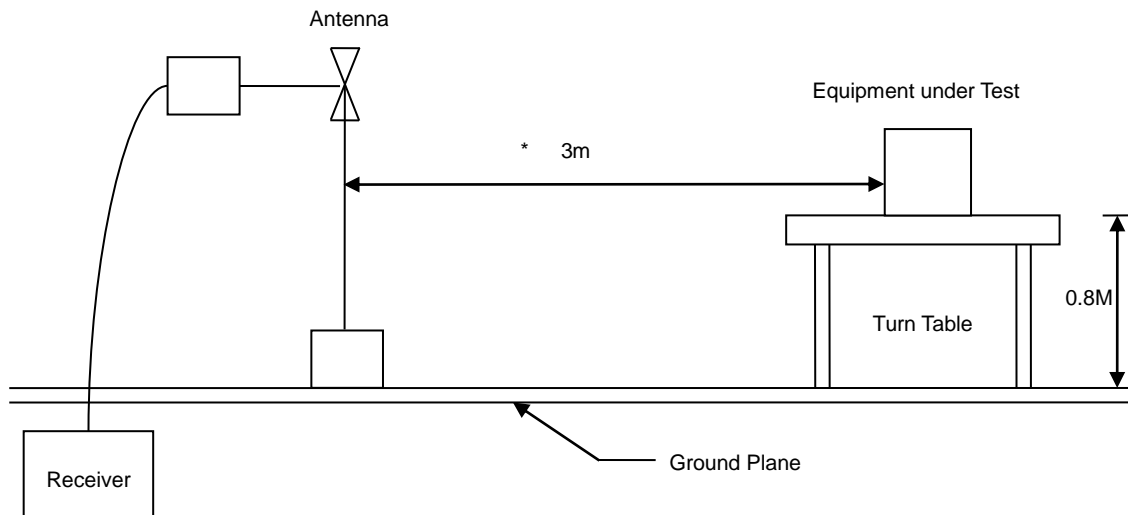






### 6.4. Test Result and Data

#### 6.4.1. Test Result of Fundamental Emission

For ANT B

Power	:	From POE (AC 120V / 60Hz)	Pol/Phase	:	OPEN
Test Mode	:	Mode 1		:	

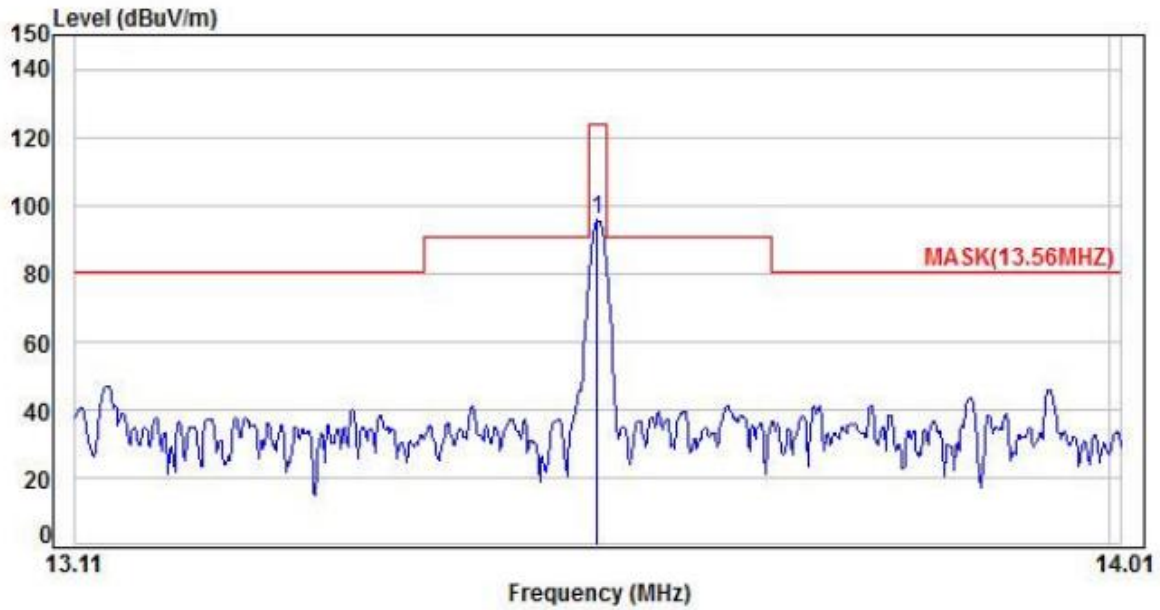

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	13.56	17.38	78.16	95.54	124.00	-28.46	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT B

Power	:	From POE (AC 120V / 60Hz)	Pol/Phase	:	CLOSE
Test Mode	:	Mode 1		:	

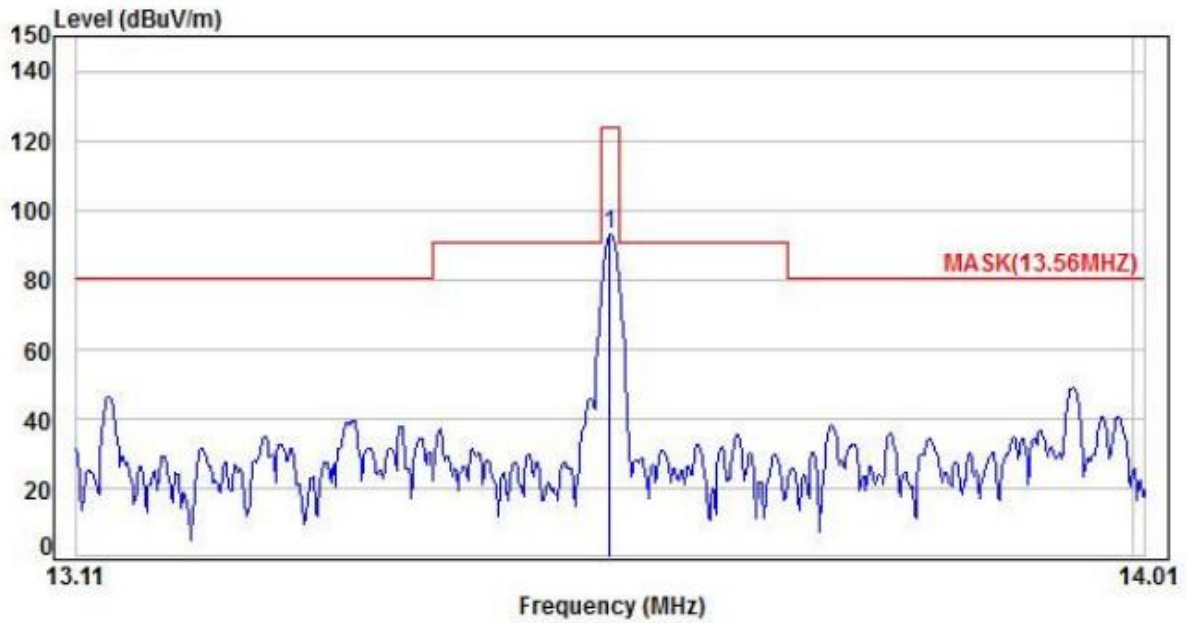


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	13.56	17.38	75.44	92.82	124.00	-31.18	Peak	100	0	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT C

Power	:	From POE (AC 120V / 60Hz)	Pol/Phase	:	OPEN
Test Mode	:	Mode 1		:	

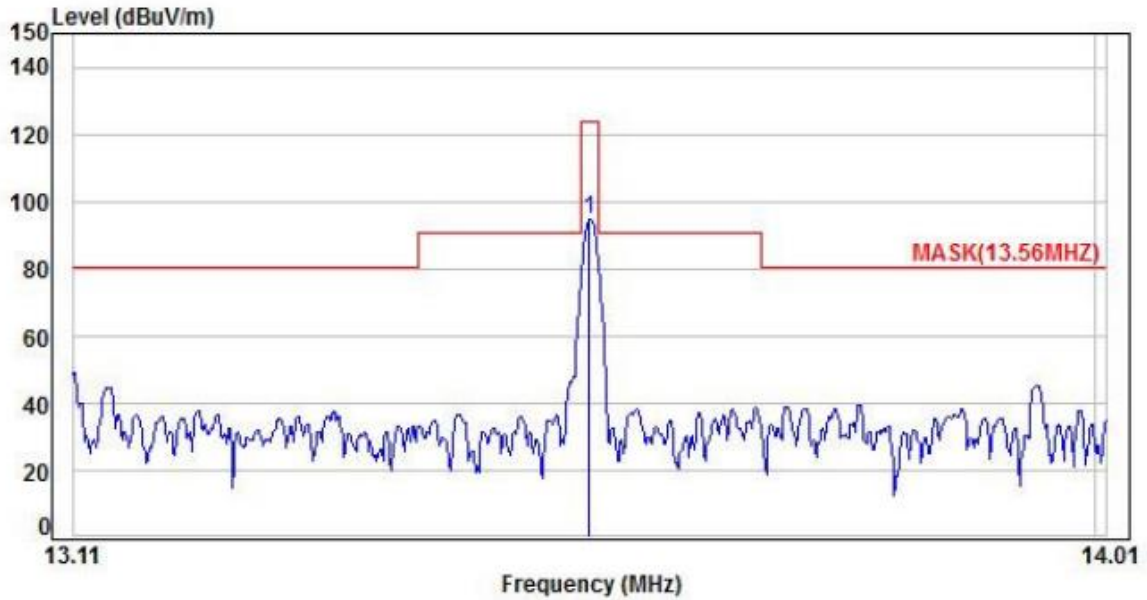


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	13.56	17.38	77.21	94.59	124.00	-29.41	Peak	100	0	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT C

Power	:	From POE (AC 120V / 60Hz)	Pol/Phase	:	CLOSE
Test Mode	:	Mode 1		:	

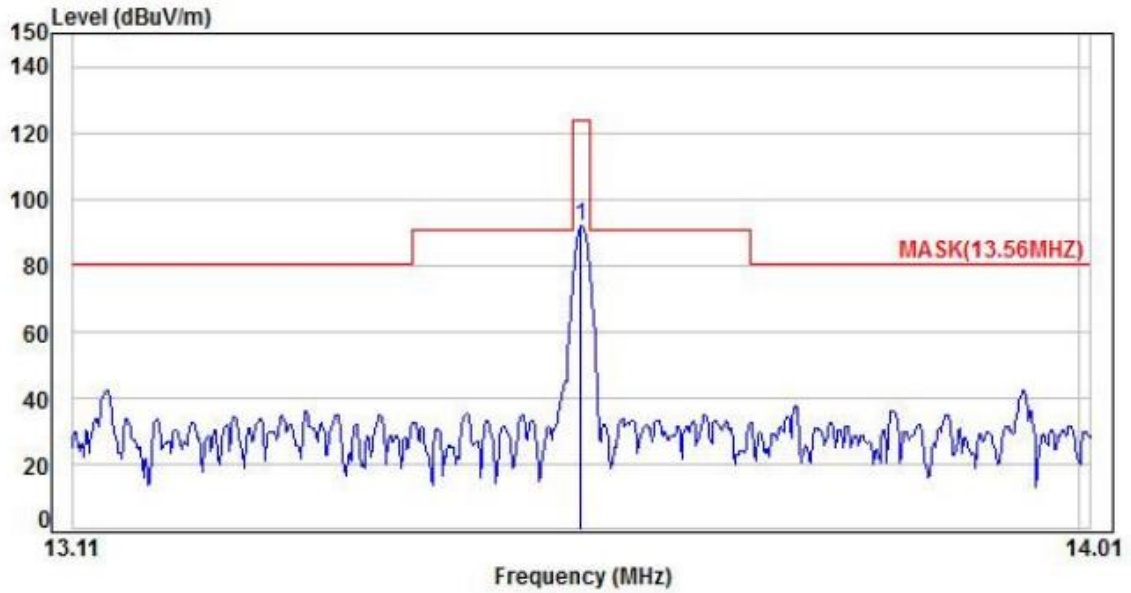

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	13.56	17.38	74.25	91.63	124.00	-32.37	Peak	100	0	P


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



6.4.2. Test Result of Unwanted Spurious emission (9KHz ~ 30MHz)

For ANT B

Power	:	From POE (AC 120V / 60Hz)	Pol/Phase	:	OPEN
Test Mode	:	Mode 1		:	

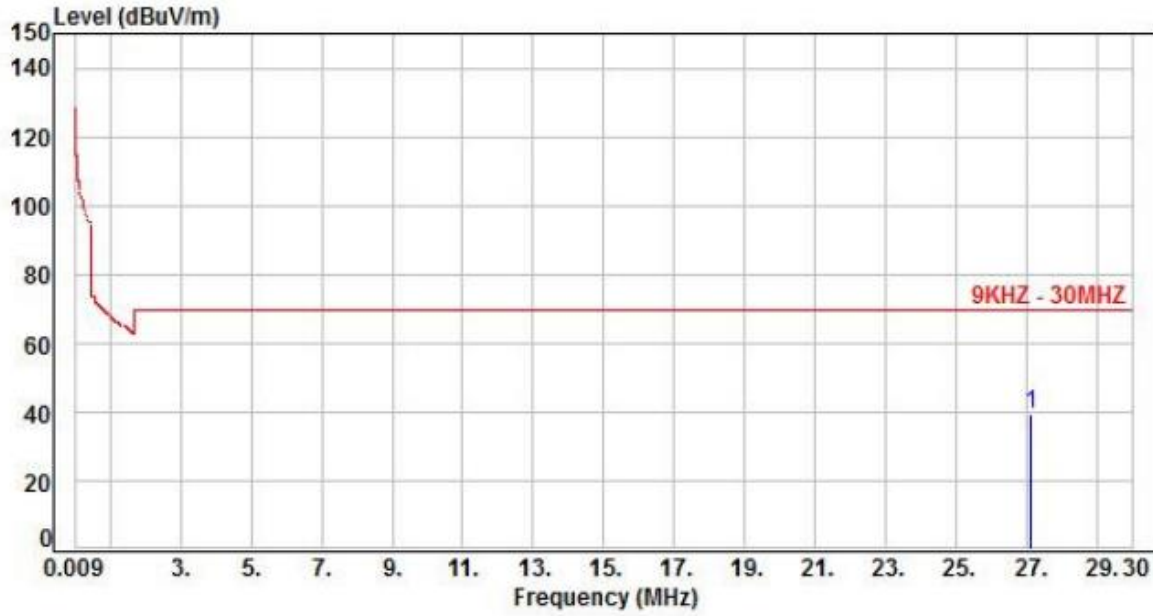


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	27.12	16.48	23.03	39.51	69.54	-30.03	Peak	100	79	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT B

Power	:	From POE (AC 120V / 60Hz)	Pol/Phase	:	CLOSE
Test Mode	:	Mode 1		:	

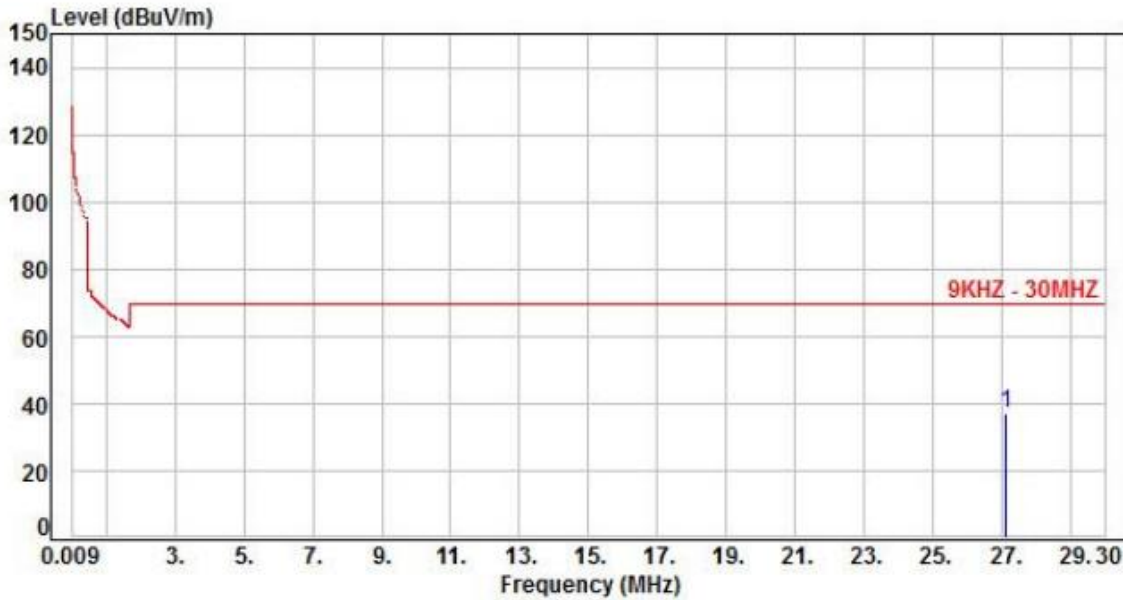


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	27.12	16.48	20.58	37.06	69.54	-32.48	Peak	100	92	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT C

Power	:	From POE (AC 120V / 60Hz)	Pol/Phase	:	OPEN
Test Mode	:	Mode 1		:	

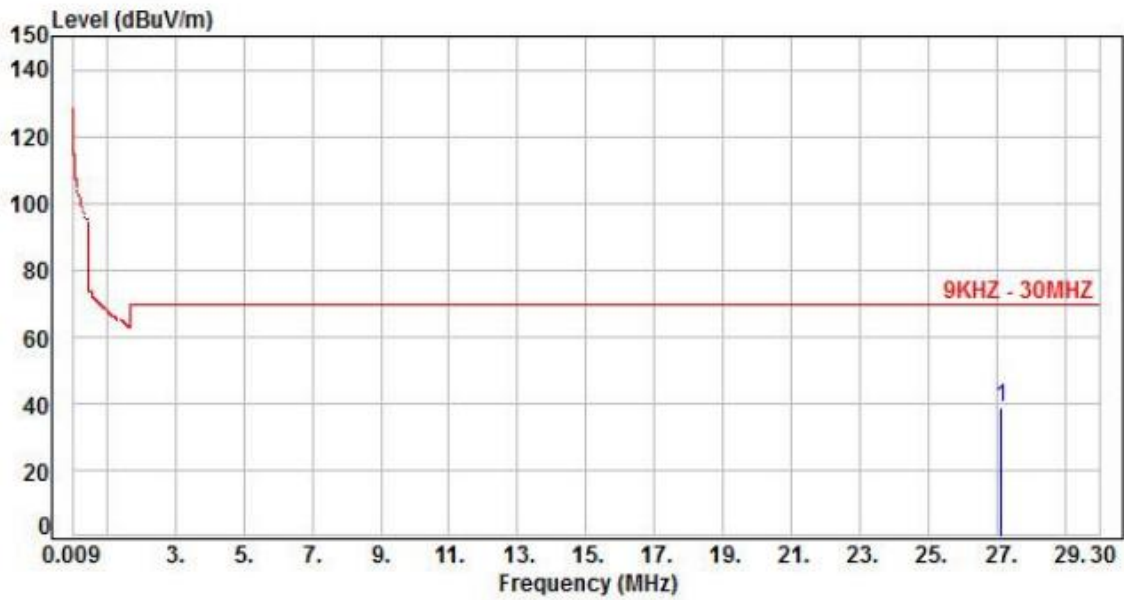


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	27.12	16.48	22.16	38.64	69.54	-30.90	Peak	100	312	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT C

Power	:	From POE (AC 120V / 60Hz)	Pol/Phase	:	CLOSE
Test Mode	:	Mode 1		:	

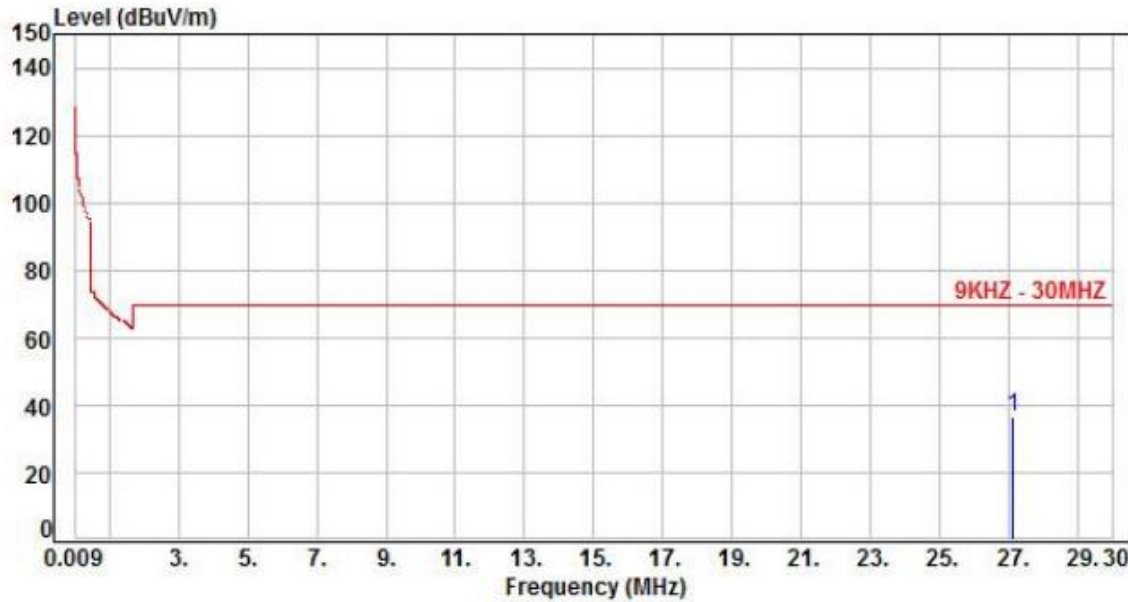

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	27.12	16.48	20.04	36.52	69.54	-33.02	Peak	100	319	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor






6.4.3. Test Result of Unwanted Spurious emission (30GHz ~ 1GHz)

For ANT B

Power	:	From POE (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1		:	

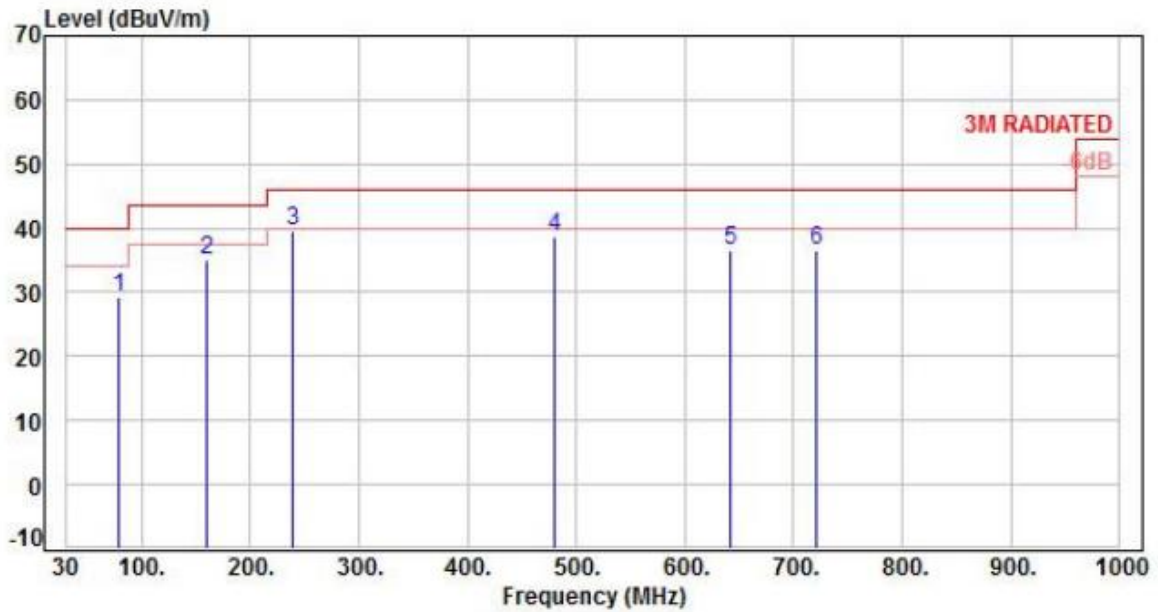


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	78.50	-15.54	44.76	29.22	40.00	-10.78	Peak	400	0	P
2	159.98	-11.44	46.32	34.88	43.50	-8.62	Peak	400	0	P
3	239.52	-12.53	51.98	39.45	46.00	-6.55	Peak	400	0	P
4	480.08	-5.63	44.19	38.56	46.00	-7.44	Peak	400	0	P
5	641.10	-1.95	38.48	36.53	46.00	-9.47	Peak	400	0	P
6	720.64	-1.34	37.89	36.55	46.00	-9.45	Peak	400	0	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT B

Power	: From POE (AC 120V / 60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1		:

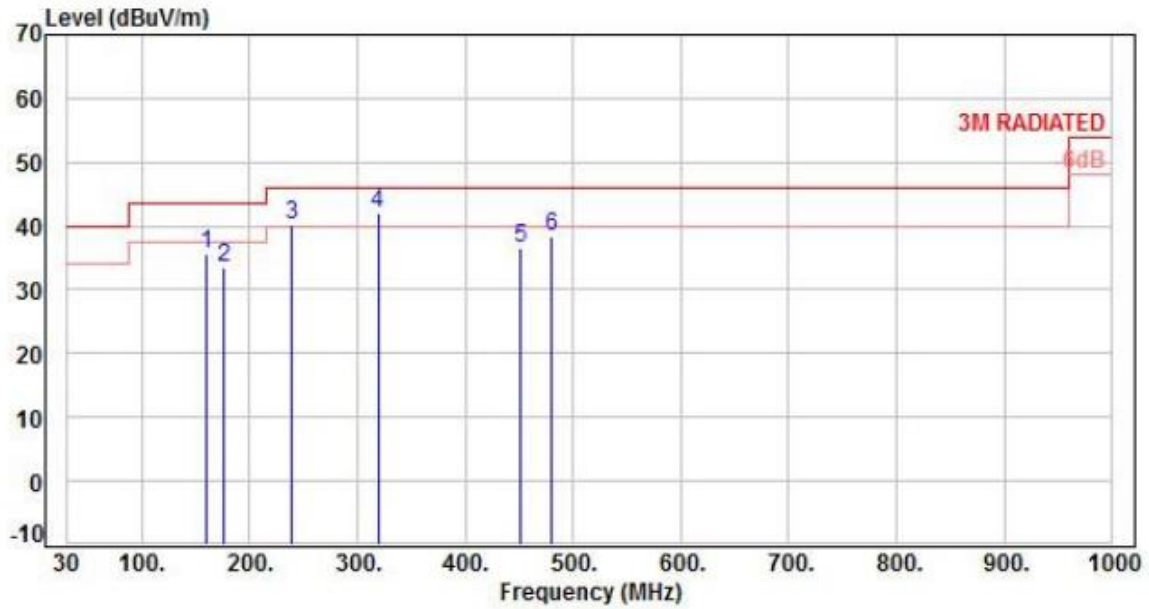


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	159.98	-11.44	47.18	35.74	43.50	-7.76	Peak	400	0	P
2	175.50	-12.38	45.85	33.47	43.50	-10.03	Peak	400	0	P
3	239.52	-12.53	52.66	40.13	46.00	-5.87	Peak	400	0	P
4	319.06	-9.60	51.71	42.11	46.00	-3.89	Peak	400	0	P
5	450.98	-6.10	42.59	36.49	46.00	-9.51	Peak	400	0	P
6	480.08	-5.63	43.96	38.33	46.00	-7.67	Peak	400	0	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT C

Power	: From POE (AC 120V / 60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 1		:

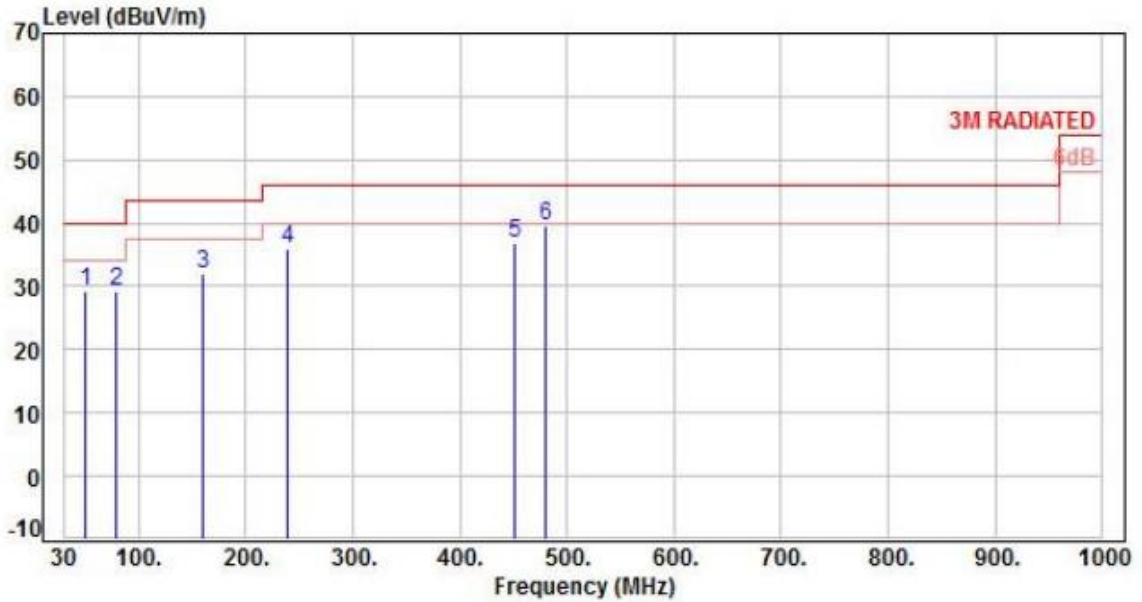


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	49.40	-10.84	40.07	29.23	40.00	-10.77	Peak	400	0	P
2	78.50	-15.54	44.72	29.18	40.00	-10.82	Peak	400	0	P
3	159.98	-11.44	43.55	32.11	43.50	-11.39	Peak	400	0	P
4	239.52	-12.53	48.36	35.83	46.00	-10.17	Peak	400	0	P
5	450.98	-6.10	43.04	36.94	46.00	-9.06	Peak	400	0	P
6	480.08	-5.63	45.31	39.68	46.00	-6.32	Peak	400	0	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For ANT C

Power	: From POE (AC 120V / 60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1		:

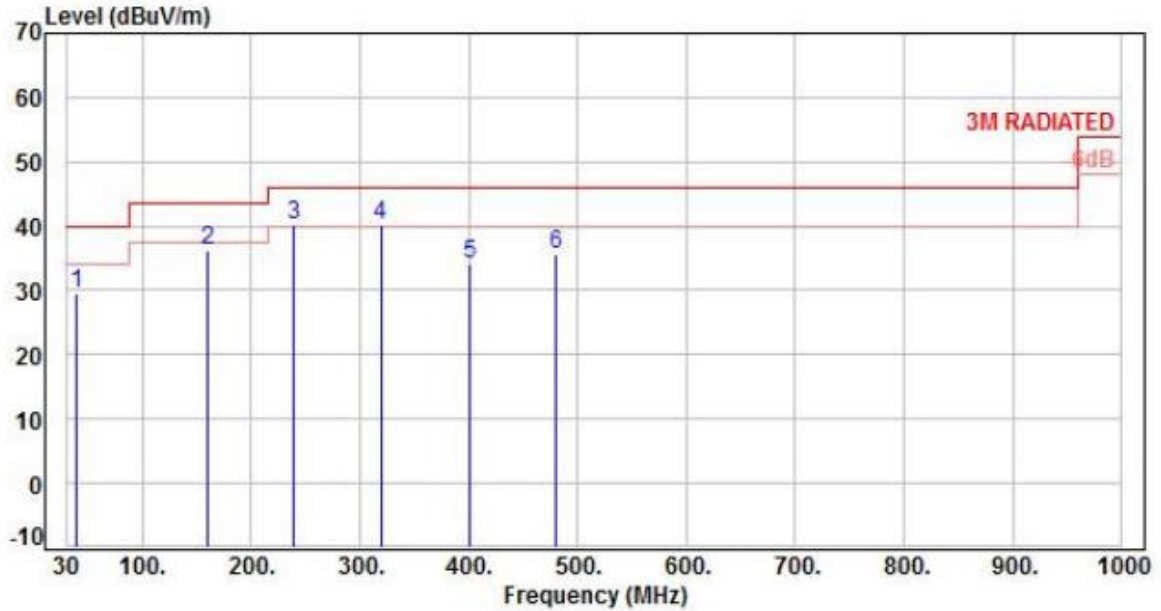

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	39.70	-11.84	41.24	29.40	40.00	-10.60	Peak	400	360	P
2	159.98	-11.44	47.82	36.38	43.50	-7.12	Peak	400	360	P
3	239.52	-12.53	52.77	40.24	46.00	-5.76	Peak	400	360	P
4	319.06	-9.60	49.92	40.32	46.00	-5.68	Peak	400	360	P
5	400.54	-7.63	41.60	33.97	46.00	-12.03	Peak	400	360	P
6	480.08	-5.63	41.15	35.52	46.00	-10.48	Peak	400	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor




### 6.5. 20dB Bandwidth & 99% Occupied Bandwidth

Modulation Mode	Freq. (MHz)	20dB Bandwidth (kHz)	F <sub>L</sub> at 20dB BW (MHz)	F <sub>H</sub> at 20dB BW (MHz)	99% Bandwidth (kHz)
RFID	13.56	2.76	13.55912	13.56188	2.800
Limit		N/A	13.553	13.567	N/A
Result	Pass				

20dB Bandwidth  
13.56 MHz

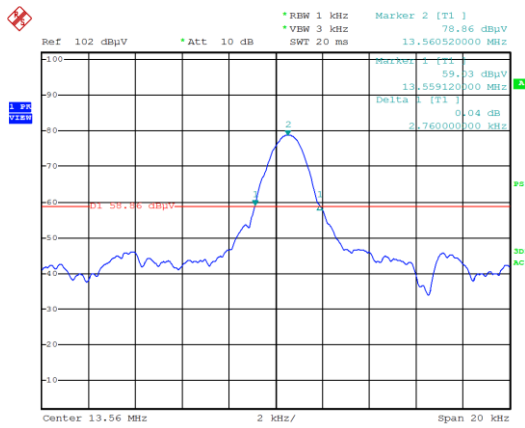

99% Bandwidth  
13.56 MHz

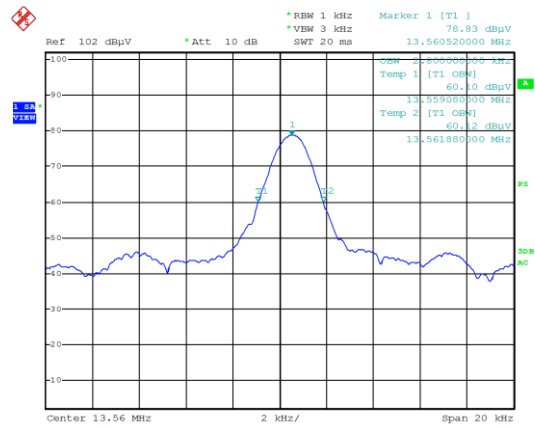




## 7. Frequency Stability

### 7.1. Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 6.8

1. The EUT was placed inside the Temperature and Humidity chamber.
2. The transmitter output was connected to spectrum analyzer.
3. Turn the EUT on and couple its output to a spectrum analyzer.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
6. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
7. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

### 7.2. Test Setup Layout

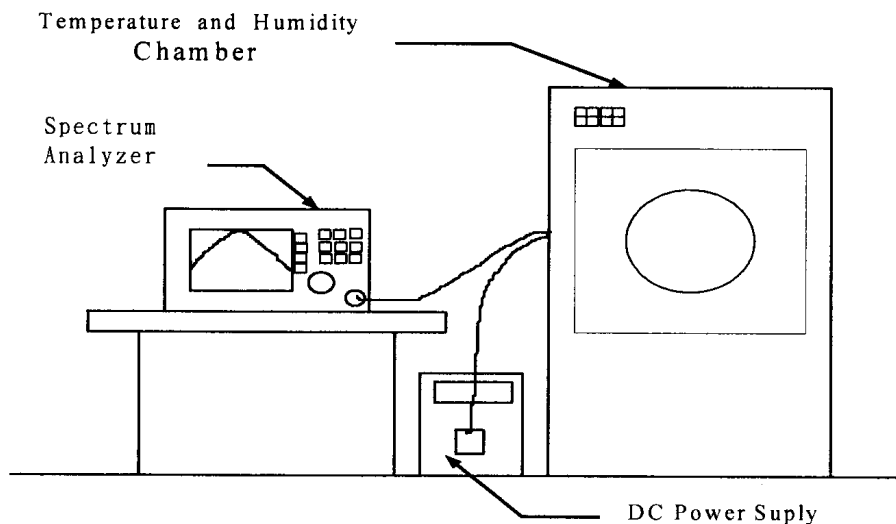



7.3. Test Result and Data

Operating frequency: 13.56 MHz							
Temp (°C)	Power supply (V)	2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
40	102	13.5592	-0.005900	13.5591	-0.006637	13.5597	-0.002212
	120	13.5598	-0.001475	13.5598	-0.001475	13.5598	-0.001475
	138	13.5595	-0.003687	13.5599	-0.000737	13.5600	0.000000
30	102	13.5596	-0.002950	13.5594	-0.004425	13.5597	-0.002212
	120	13.5598	-0.001475	13.5600	0.000000	13.5601	0.000737
	138	13.5597	-0.002212	13.5594	-0.004425	13.5595	-0.003687
20	102	13.5596	-0.002950	13.5596	-0.002950	13.5595	-0.003687
	120	13.5596	-0.002950	13.5596	-0.002950	13.5598	-0.001475
	138	13.5592	-0.005900	13.5593	-0.005162	13.5595	-0.003687
10	102	13.5594	-0.004425	13.5591	-0.006637	13.5591	-0.006637
	120	13.5601	0.000737	13.5602	0.001475	13.5600	0.000000
	138	13.5599	-0.000737	13.5599	-0.000737	13.5597	-0.002212
0	102	13.5595	-0.003687	13.5598	-0.001475	13.5597	-0.002212
	120	13.5599	-0.000737	13.5598	-0.001475	13.5596	-0.002950
	138	13.5596	-0.002950	13.5595	-0.003687	13.5591	-0.006637



### 8. Radio Frequency Exposure

#### 8.1. Applicable Standards

The measurements shown in this test report were made in accordance with the procedures given in FCC Part 2 (Section 2.1091)

#### 8.2. EUT Specification

<b>Frequency band (Operating)</b>	<input type="checkbox"/> WLAN: 2412MHz ~ 2462MHz <input type="checkbox"/> WLAN: 5150MHz ~ 5250MHz <input type="checkbox"/> WLAN: 5250MHz ~ 5350MHz <input type="checkbox"/> WLAN: 5470MHz ~ 5725MHz <input type="checkbox"/> WLAN: 5725MHz ~ 5850MHz <input type="checkbox"/> Bluetooth: 2402MHz ~ 2480MHz <input checked="" type="checkbox"/> NFC: 13.553MHz~13.567MHz
<b>Device category</b>	<input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation)
<b>Antenna diversity</b>	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
<b>Evaluation applied</b>	<input type="checkbox"/> Blanket 1 mW Blanket Exemption <input checked="" type="checkbox"/> MPE-based Exemption <input type="checkbox"/> SAR-based Exemption
<b>Remark:</b>	
1. For ANT B ,The maximum Fundamental Emission is <u>95.89dBuV/m</u> at <u>13.56MHz</u> (with <u>0dBi</u> antenna gain.) 2. For ANT C,The maximum Fundamental Emission is <u>94.83dBuV/m</u> at <u>13.56MHz</u> (with <u>0dBi</u> antenna gain.)	





### 8.1. Test Results

No non-compliance noted.

### 8.2. Calculation

$$\text{Given } E = \frac{\sqrt{30 \times P \times G}}{d} \quad \& \quad S = \frac{E^2}{3770}$$

Where  $E$  = Field strength in Volts / meter

$P$  = Power in Watts

$G$  = Numeric antenna gain

$d$  = Distance in meters

$S$  = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770d^2}$$

Changing to units of mW and cm, using:

$P$  (mW) =  $P$  (W) / 1000 and

$d$  (cm) =  $d$  (m) / 100

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2} \quad \text{Equation 1}$$

Where  $d$  = Distance in cm

$P$  = Power in mW

$G$  = Numeric antenna gain

$S$  = Power density in mW / cm<sup>2</sup>



8.3. Result

Modulation Mode	Channel Frequency (MHz)	Fundamental Emission (dBm)	Max. Tune up power (dBm)	Antenna Gain(dBi)	Distance (cm)	Power Density (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )
ASK	13.56	0.21	0.71	0	20	0.00023	0.9789334

Antenna Gain (dBi)	Antenna Gain (linear)	Distance (m)	Fundamental Emission (dBuV/m)	Fundamental Emission (V/m)	Fundamental Emission (W)	Fundamental Emission (dBm)
0	1	3	95.44	0.06	0.00105	0.21

No non-compliance noted.

**Maximum Permissible Exposure (Co-location)**

Modulation Type	Channel Frequency (MHz)	Max. Conducted output power (dBm)	Max. Tune up power (dBm)	Antenna Gain(dBi)	Distance (cm)	Power Density (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )	MPE Ratio
ASK	13.56	0.21	0.71	0	20	0.000234	0.979	0.0002
GFSK	2480	10.5	11	6.4	20	0.010933	1.000	0.0109
Co-location Total								0.0111
Σ MPE ratios Limit								1

-----THE END OF REPORT-----