

# FCC Test Report

**FCC ID** : SWX-UDR  
**Equipment** : UniFi Dream Router  
**Model No.** : UDR  
**Brand Name** : UBIQUITI  
**Applicant** : Ubiquiti Inc.  
**Address** : 685 Third Avenue, (27th Floor) New York, New York 10017 USA  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Jun. 08, 2021  
**Tested Date** : Jul. 12 ~ Jul. 19, 2021

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	8
1.3	Test Setup Chart .....	8
1.4	The Equipment List .....	9
1.5	Test Standards .....	10
1.6	Reference Guidance .....	10
1.7	Deviation from Test Standard and Measurement Procedure.....	10
1.8	Measurement Uncertainty .....	10
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>11</b>
2.1	Testing Facility.....	11
2.2	The Worst Test Modes and Channel Details .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>12</b>
3.1	Conducted Emissions.....	12
3.2	6dB and Occupied Bandwidth .....	15
3.3	RF Output Power .....	21
3.4	Power Spectral Density .....	23
3.5	Unwanted Emissions into Restricted Frequency Bands .....	29
3.6	Emissions in Non-Restricted Frequency Bands.....	57
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>62</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR160801AC	Rev. 01	Initial issue	Aug. 05, 2021
FR160801AC	Rev. 02	1. Antenna information is modify 2. EIRP and limit of power spectral density is modified.	Oct. 08, 2021

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.546MHz 38.90 (Margin -7.10dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 7386.00MHz 53.73 (Margin -0.27dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 27.26	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	4	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	4	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	4	MCS 0-31
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	4	MCS 0-31

Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.  
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.  
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

### 1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Gain (dBi)
1	ANT 0	Short-circuited Monopole	I-PEX	3.4
2	ANT 1	Short-circuited Monopole	I-PEX	3.4
3	ANT 2	Short-circuited Monopole	I-PEX	3.4
4	ANT 3	Short-circuited Monopole	I-PEX	3.4

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	100-240V, 50/60Hz, 1.1A
-------------------	-------------------------

### 1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	Power cord	2m, non-shielded without core

### 1.1.5 Channel List

Frequency band (MHz)		2400~2483.5	
802.11 b / g / n HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2452
8	2447	---	---
9	2452	---	---
10	2457	---	---
11	2462	---	---

### 1.1.6 Test Tool and Duty Cycle

Test Tool	MT7622, Version: QA0.0.1.85		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	11b	100.00%	0.00
	11g	98.97%	0.04
	HT20	98.90%	0.05
	HT40	97.22%	0.12


### 1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)	Power Index
11b	2412	20
11b	2437	22
11b	2462	22
11g	2412	16
11g	2437	1F
11g	2462	17
HT20	2412	14
HT20	2437	1F
HT20	2462	15
HT40	2422	0D
HT40	2437	17
HT40	2452	10

## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	RJ45	ICC	RJ45-10m	---	---
2	RJ45	ICC	RJ45-10m	---	---
3	RJ45	ICC	RJ45-1m	---	---
4	RJ45	ICC	RJ45-1m	---	---
5	RJ45	ICC	RJ45-1m	---	---
6	RJ45 Load	ICC	--	---	---
7	Notebook	DELL	Latitude 5400	DoC	---
8	Notebook	DELL	Latitude E5470	DoC	---

## 1.3 Test Setup Chart

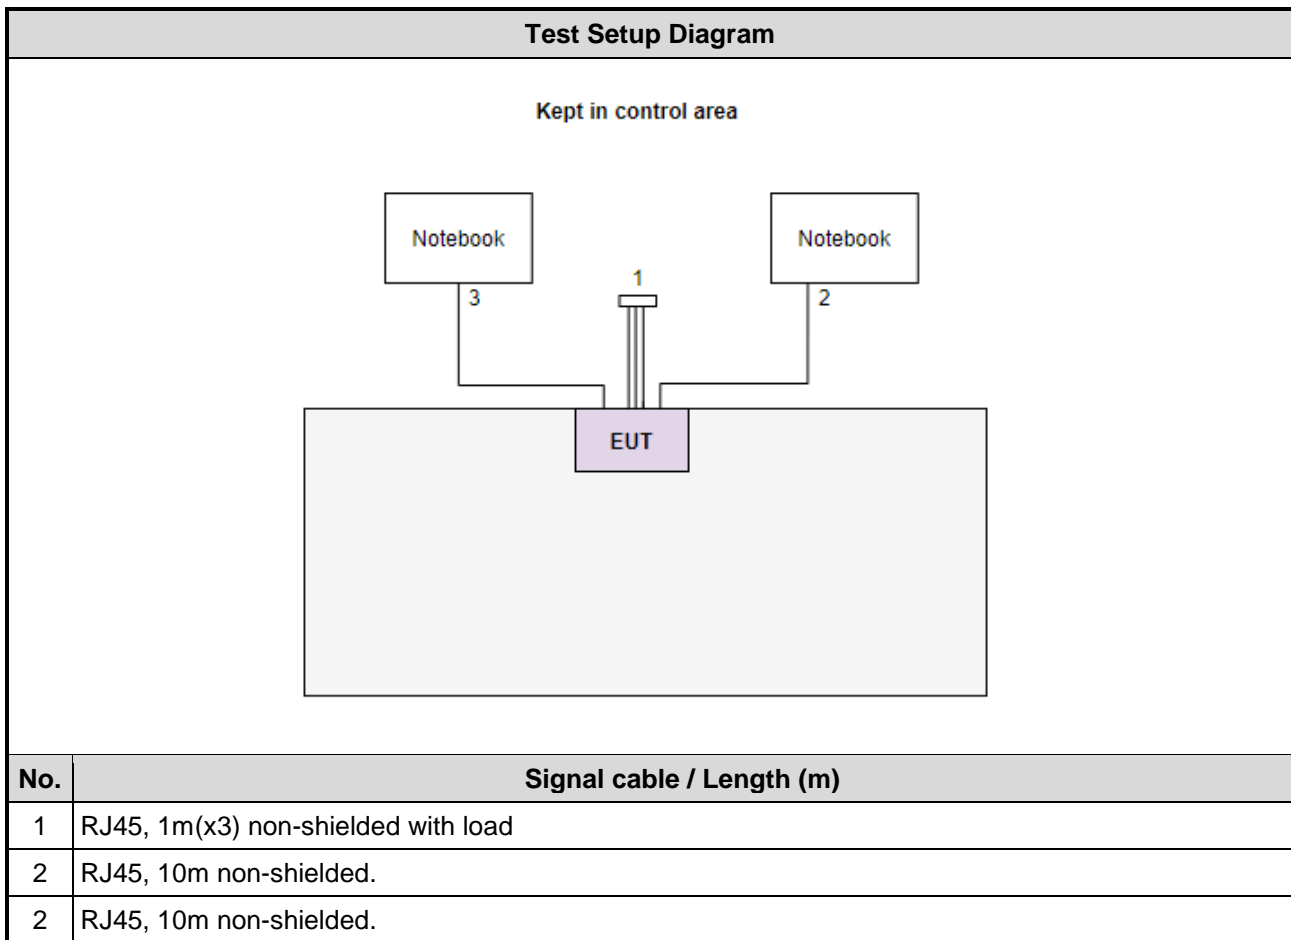



## 1.4 The Equipment List

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Test Date</b>	Jul. 19, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101658	Feb. 08, 2021	Feb. 07, 2022
LISN	R&S	ENV216	101579	Mar. 17, 2021	Mar. 16, 2022
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 29, 2020	Dec. 28, 2021
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 21, 2020	Oct. 20, 2021
50 ohm terminal (Support Unit)	NA	50	04	May 25, 2021	May 24, 2022
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber1 / (03CH01-WS)				
<b>Test Date</b>	Jul. 12 ~ Jul. 14, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101657	Mar. 12, 2021	Mar. 11, 2022
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2020	Dec. 03, 2021
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2020	Nov. 16, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jun. 30, 2021	Jun. 29, 2022
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 11, 2020	Dec. 10, 2021
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 06, 2020	Nov. 05, 2021
Preamplifier	EMC	EMC02325	980225	Jun. 29, 2021	Jun. 28, 2022
Preamplifier	Agilent	83017A	MY39501308	Sep. 26, 2020	Sep. 25, 2021
Preamplifier	EMC	EMC184045B	980192	Jul. 21, 2020	Jul. 20, 2021
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 06, 2020	Oct. 05, 2021
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 06, 2020	Oct. 05, 2021
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 06, 2020	Oct. 05, 2021
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 06, 2020	Oct. 05, 2021
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 06, 2020	Oct. 05, 2021
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 06, 2020	Oct. 05, 2021
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Test Date</b>	Jul. 14, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101063	Apr. 19, 2021	Apr. 18, 2022
Power Meter	Anritsu	ML2495A	1241002	Nov. 04, 2020	Nov. 03, 2021
Power Sensor	Anritsu	MA2411B	1207366	Nov. 04, 2020	Nov. 03, 2021
Measurement Software	Sporton	SENSE-15247_FS	V5.10.7.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

47 CFR FCC Part 15.247  
ANSI C63.10-2013

## 1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02  
FCC KDB 662911 D01 Multiple Transmitter Output v02r01

## 1.7 Deviation from Test Standard and Measurement Procedure

None

## 1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ )).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	$\pm 34.130$ Hz
Conducted power	$\pm 0.808$ dB
Power density	$\pm 0.583$ dB
Conducted emission	$\pm 2.715$ dB
AC conducted emission	$\pm 2.92$ dB
Radiated emission $\leq 1$ GHz	$\pm 3.41$ dB
Radiated emission $> 1$ GHz	$\pm 4.59$ dB

## 2 Test Configuration

### 2.1 Testing Facility

<b>Test Laboratory</b>	International Certification Corporation
<b>Test Site</b>	CO01-WS, 03CH01-WS, TH01-WS
<b>Address of Test Site</b>	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	11b	2462	1 Mbps	---
Radiated Emissions ≤1GHz	11b	2462	1 Mbps	---
Radiated Emissions >1GHz	11b	2412 / 2437 / 2462	1 Mbps	---
Maximum Output Power	11g	2412 / 2437 / 2462	6 Mbps	
6dB bandwidth	HT20	2412 / 2437 / 2462	MCS 0	
Power spectral density	HT40	2422 / 2437 / 2452	MCS 0	

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup




- Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions
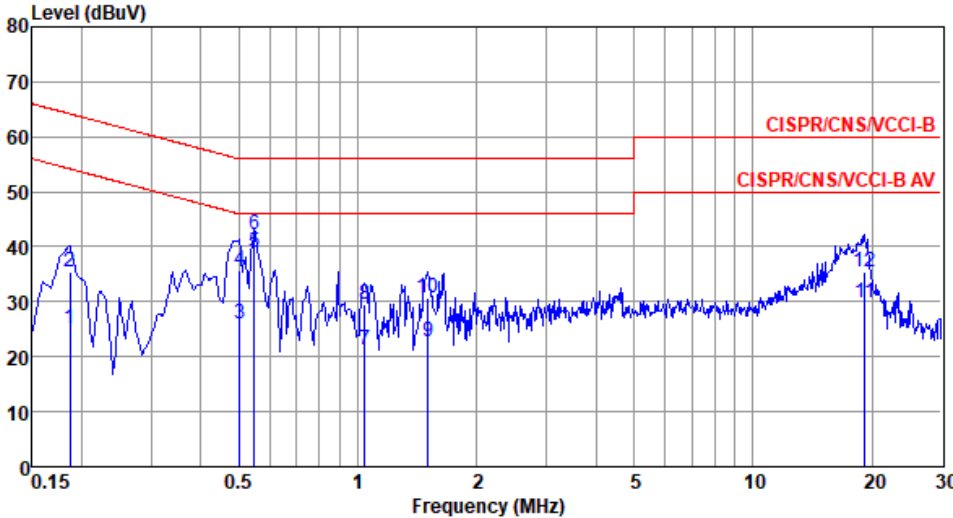
<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462																																																																																																																					
<b>Power Phase</b>	Line																																																																																																																							
<p>Test by : Joe Liao      Temperature: 22°C      Humidity: 68%</p>																																																																																																																								
																																																																																																																								
<table border="1"> <thead> <tr> <th></th> <th>Freq MHz</th> <th>Level dBuV</th> <th>Limit Line dBuV</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Cable loss dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.186</td><td>25.06</td><td>54.20</td><td>-29.14</td><td>15.35</td><td>9.65</td><td>0.06</td><td>Average</td></tr> <tr><td>2</td><td>0.186</td><td>35.37</td><td>64.20</td><td>-28.83</td><td>25.66</td><td>9.65</td><td>0.06</td><td>QP</td></tr> <tr><td>3</td><td>0.502</td><td>26.09</td><td>46.00</td><td>-19.91</td><td>16.36</td><td>9.64</td><td>0.09</td><td>Average</td></tr> <tr><td>4</td><td>0.502</td><td>35.65</td><td>56.00</td><td>-20.35</td><td>25.92</td><td>9.64</td><td>0.09</td><td>QP</td></tr> <tr><td>5*</td><td>0.546</td><td>38.90</td><td>46.00</td><td>-7.10</td><td>29.17</td><td>9.64</td><td>0.09</td><td>Average</td></tr> <tr><td>6</td><td>0.546</td><td>42.27</td><td>56.00</td><td>-13.73</td><td>32.54</td><td>9.64</td><td>0.09</td><td>QP</td></tr> <tr><td>7</td><td>1.043</td><td>21.25</td><td>46.00</td><td>-24.75</td><td>11.48</td><td>9.65</td><td>0.12</td><td>Average</td></tr> <tr><td>8</td><td>1.043</td><td>29.53</td><td>56.00</td><td>-26.47</td><td>19.76</td><td>9.65</td><td>0.12</td><td>QP</td></tr> <tr><td>9</td><td>1.503</td><td>22.68</td><td>46.00</td><td>-23.32</td><td>12.86</td><td>9.66</td><td>0.16</td><td>Average</td></tr> <tr><td>10</td><td>1.503</td><td>30.64</td><td>56.00</td><td>-25.36</td><td>20.82</td><td>9.66</td><td>0.16</td><td>QP</td></tr> <tr><td>11</td><td>19.224</td><td>29.68</td><td>50.00</td><td>-20.32</td><td>19.34</td><td>9.68</td><td>0.66</td><td>Average</td></tr> <tr><td>12</td><td>19.224</td><td>35.42</td><td>60.00</td><td>-24.58</td><td>25.08</td><td>9.68</td><td>0.66</td><td>QP</td></tr> </tbody> </table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Remark	1	0.186	25.06	54.20	-29.14	15.35	9.65	0.06	Average	2	0.186	35.37	64.20	-28.83	25.66	9.65	0.06	QP	3	0.502	26.09	46.00	-19.91	16.36	9.64	0.09	Average	4	0.502	35.65	56.00	-20.35	25.92	9.64	0.09	QP	5*	0.546	38.90	46.00	-7.10	29.17	9.64	0.09	Average	6	0.546	42.27	56.00	-13.73	32.54	9.64	0.09	QP	7	1.043	21.25	46.00	-24.75	11.48	9.65	0.12	Average	8	1.043	29.53	56.00	-26.47	19.76	9.65	0.12	QP	9	1.503	22.68	46.00	-23.32	12.86	9.66	0.16	Average	10	1.503	30.64	56.00	-25.36	20.82	9.66	0.16	QP	11	19.224	29.68	50.00	-20.32	19.34	9.68	0.66	Average	12	19.224	35.42	60.00	-24.58	25.08	9.68	0.66	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Remark																																																																																																																
1	0.186	25.06	54.20	-29.14	15.35	9.65	0.06	Average																																																																																																																
2	0.186	35.37	64.20	-28.83	25.66	9.65	0.06	QP																																																																																																																
3	0.502	26.09	46.00	-19.91	16.36	9.64	0.09	Average																																																																																																																
4	0.502	35.65	56.00	-20.35	25.92	9.64	0.09	QP																																																																																																																
5*	0.546	38.90	46.00	-7.10	29.17	9.64	0.09	Average																																																																																																																
6	0.546	42.27	56.00	-13.73	32.54	9.64	0.09	QP																																																																																																																
7	1.043	21.25	46.00	-24.75	11.48	9.65	0.12	Average																																																																																																																
8	1.043	29.53	56.00	-26.47	19.76	9.65	0.12	QP																																																																																																																
9	1.503	22.68	46.00	-23.32	12.86	9.66	0.16	Average																																																																																																																
10	1.503	30.64	56.00	-25.36	20.82	9.66	0.16	QP																																																																																																																
11	19.224	29.68	50.00	-20.32	19.34	9.68	0.66	Average																																																																																																																
12	19.224	35.42	60.00	-24.58	25.08	9.68	0.66	QP																																																																																																																
<p>Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).          2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).</p>																																																																																																																								

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Power Phase</b>	Neutral		

Test by : Joe Liao      Temperature: 22°C      Humidity: 68%

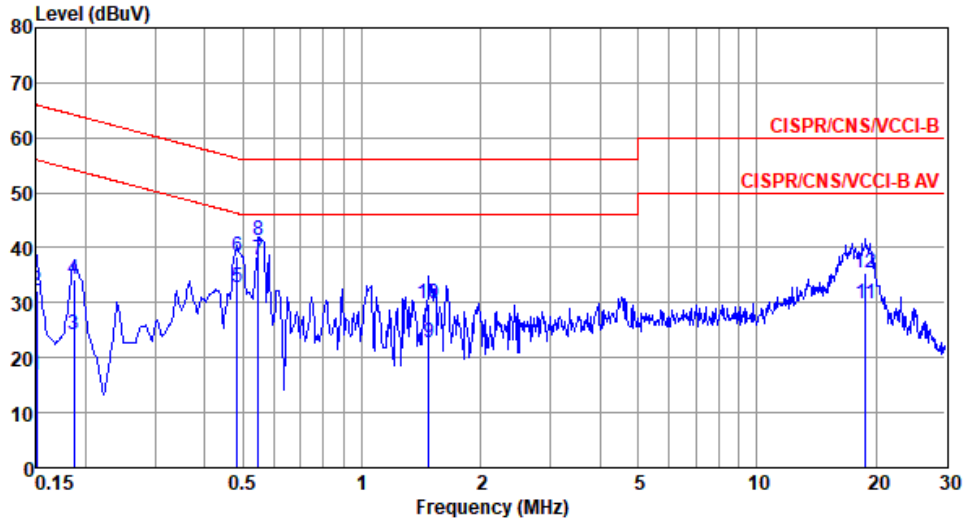

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Remark
1	0.150	16.82	56.00	-39.18	7.08	9.69	0.05	Average
2	0.150	32.07	66.00	-33.93	22.33	9.69	0.05	QP
3	0.186	24.15	54.20	-30.05	14.41	9.68	0.06	Average
4	0.186	34.38	64.20	-29.82	24.64	9.68	0.06	QP
5	0.484	32.85	46.27	-13.42	23.09	9.67	0.09	Average
6	0.484	38.28	56.27	-17.99	28.52	9.67	0.09	QP
7*	0.546	37.76	46.00	-8.24	28.00	9.67	0.09	Average
8	0.546	41.33	56.00	-14.67	31.57	9.67	0.09	QP
9	1.480	22.68	46.00	-23.32	12.84	9.69	0.15	Average
10	1.480	29.93	56.00	-26.07	20.09	9.69	0.15	QP
11	18.820	29.85	50.00	-20.15	19.36	9.83	0.66	Average
12	18.820	35.54	60.00	-24.46	25.05	9.83	0.66	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 6dB and Occupied Bandwidth

### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

### 3.2.2 Test Procedures

#### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

### 3.2.3 Test Setup



### 3.2.4 Test Result of 6dB and Occupied Bandwidth

<b>Ambient Condition</b>	24°C / 67%	<b>Tested By</b>	Aska Huang
--------------------------	------------	------------------	------------

#### Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	10.072M	16.136M	16M1G1D	9.058M	14.11M
802.11g_Nss1,(6Mbps)_4TX	16.087M	17.149M	17M1D1D	13.913M	16.425M
802.11n HT20_Nss1,(MCS0)_4TX	16.594M	18.017M	18MOD1D	13.261M	17.511M
802.11n HT40_Nss1,(MCS0)_4TX	35.072M	36.179M	36M2D1D	28.986M	35.89M

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;  
**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

#### Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	9.058M	14.11M	9.058M	14.11M	9.058M	14.11M	9.565M	14.834M
2437MHz	Pass	500k	9.565M	14.689M	9.565M	14.761M	9.565M	14.616M	10.072M	15.847M
2462MHz	Pass	500k	9.783M	15.051M	9.71M	14.978M	10.072M	14.906M	10.072M	16.136M
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	15.797M	16.498M	15.072M	16.425M	14.42M	16.425M	15.29M	16.498M
2437MHz	Pass	500k	13.913M	17.149M	16.014M	16.787M	14.638M	16.86M	15.942M	16.57M
2462MHz	Pass	500k	14.13M	16.57M	16.087M	16.425M	14.783M	16.498M	14.42M	16.498M
802.11n HT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	14.783M	17.511M	15.072M	17.511M	14.493M	17.511M	16.594M	17.583M
2437MHz	Pass	500k	13.261M	18.017M	15.145M	17.873M	15.145M	17.945M	13.841M	17.728M
2462MHz	Pass	500k	15.072M	17.583M	16.304M	17.511M	15.072M	17.511M	15.145M	17.583M
802.11n HT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	500k	32.609M	35.89M	33.768M	35.89M	35.072M	36.035M	31.304M	36.179M
2437MHz	Pass	500k	28.986M	36.035M	33.913M	36.179M	32.609M	36.179M	32.464M	36.179M
2452MHz	Pass	500k	33.768M	35.89M	34.493M	35.89M	33.913M	35.89M	29.565M	36.035M


**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;



### 802.11b\_Nss1,(1Mbps)\_4TX

EBW


2412MHz

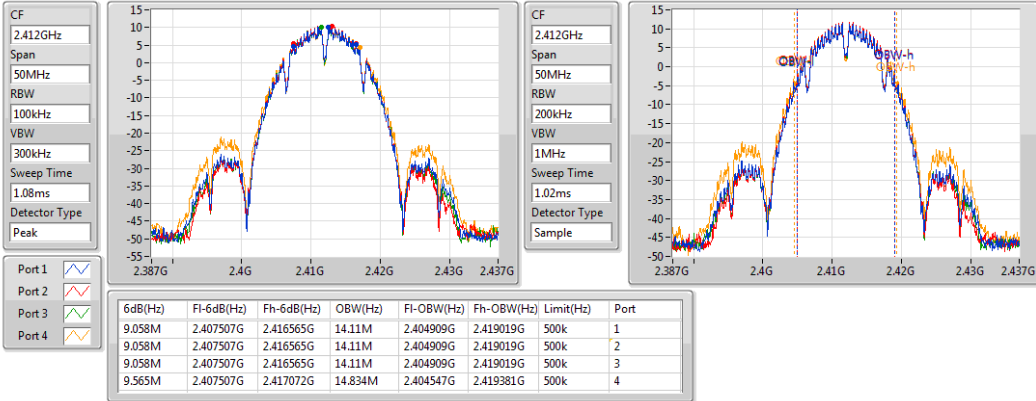

### 802.11b\_Nss1,(1Mbps)\_4TX

EBW


2437MHz

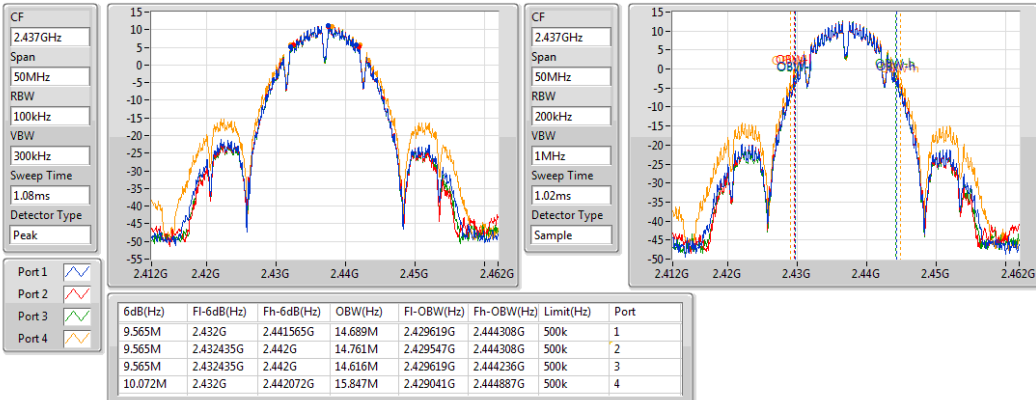

### 802.11b\_Nss1,(1Mbps)\_4TX

EBW


2462MHz

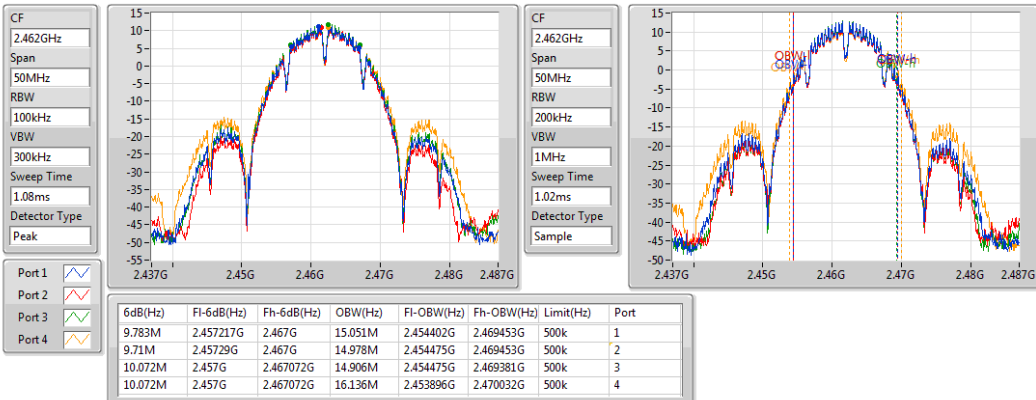

### 802.11g\_Nss1,(6Mbps)\_4TX

EBW


2412MHz

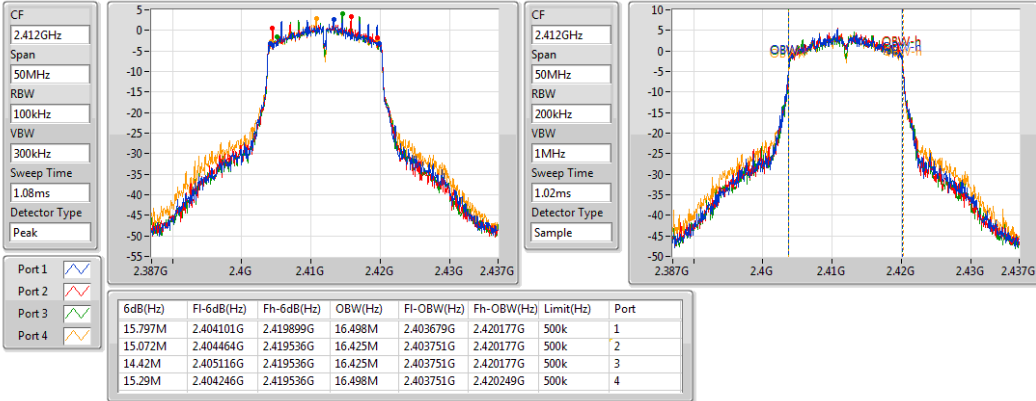

### 802.11g\_Nss1,(6Mbps)\_4TX

EBW


2437MHz

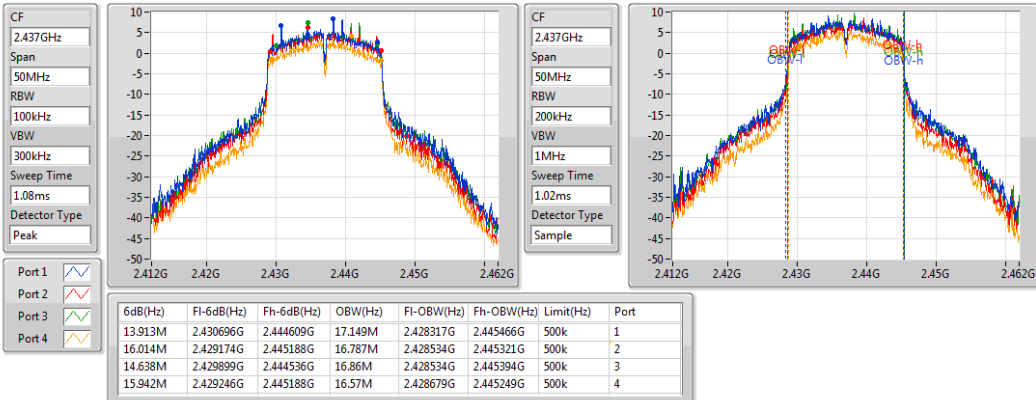

### 802.11g\_Nss1,(6Mbps)\_4TX

EBW


2462MHz

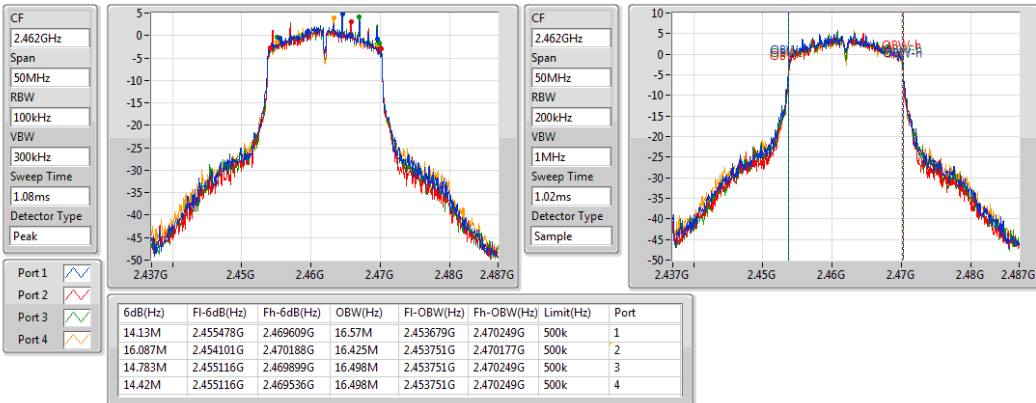

802.11n HT20\_Nss1,(MCS0)\_4TX

EBW


2412MHz

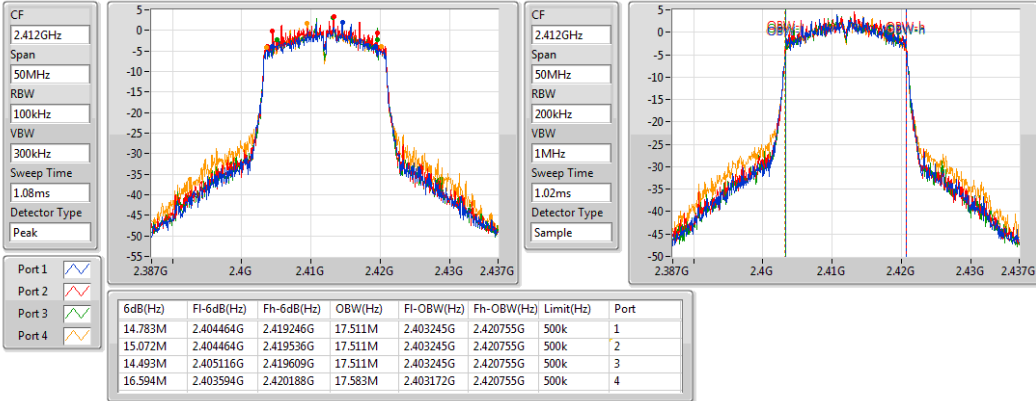

802.11n HT20\_Nss1,(MCS0)\_4TX

EBW


2437MHz

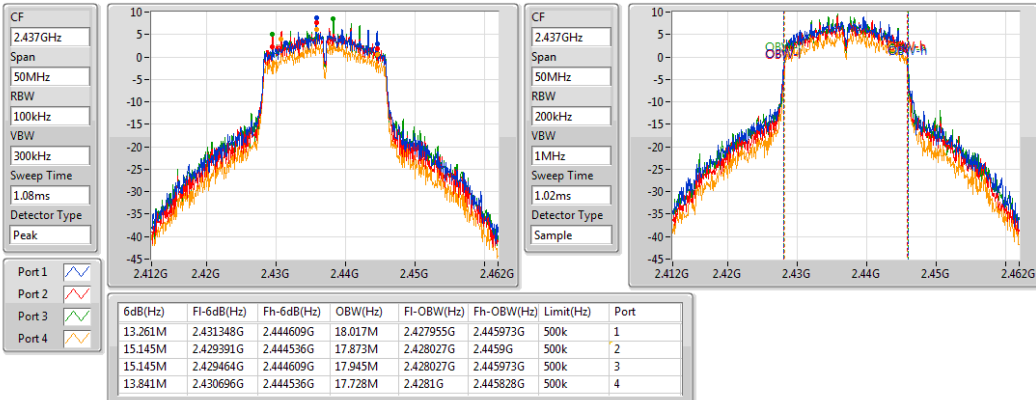

802.11n HT20\_Nss1,(MCS0)\_4TX

EBW


2462MHz

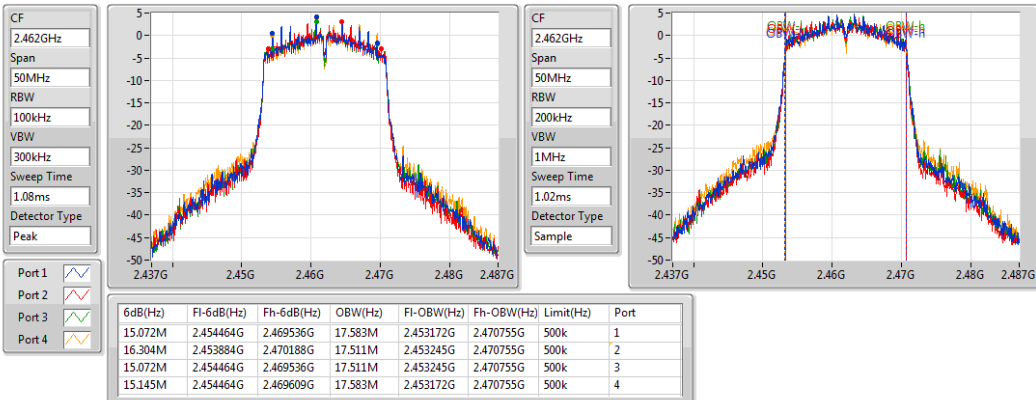

802.11n HT40\_Nss1,(MCS0)\_4TX

EBW


2422MHz

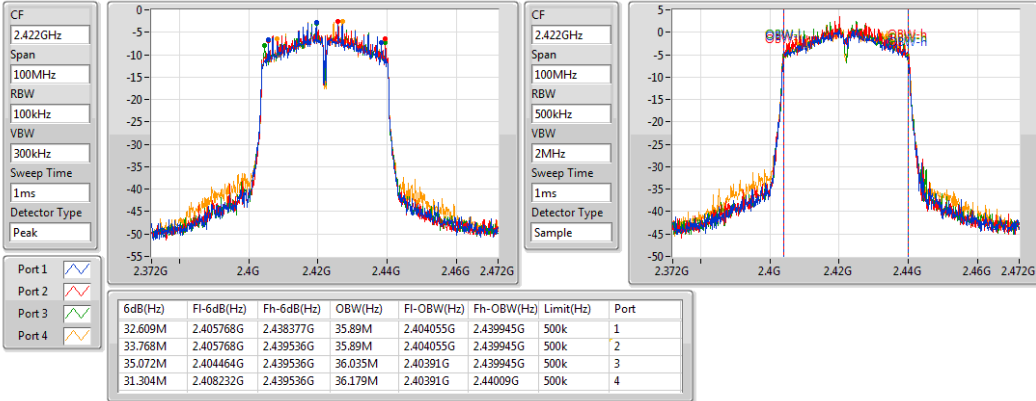

802.11n HT40\_Nss1,(MCS0)\_4TX

EBW


2437MHz

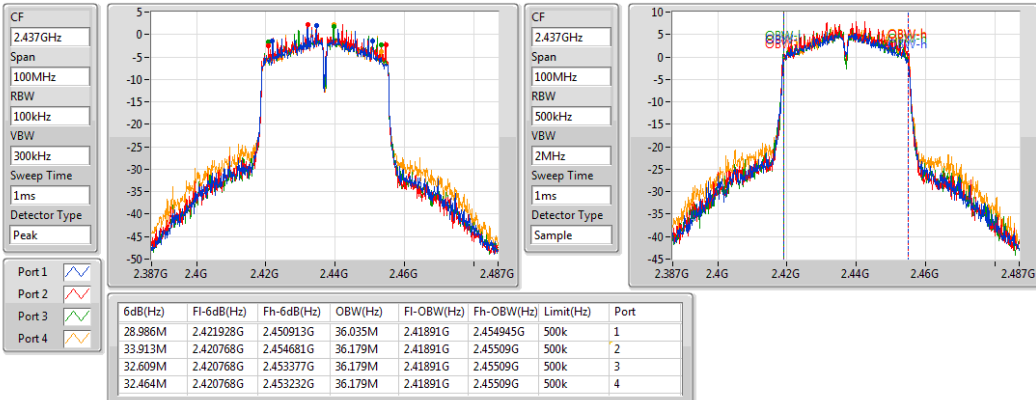

802.11n HT40\_Nss1,(MCS0)\_4TX

EBW

2452MHz

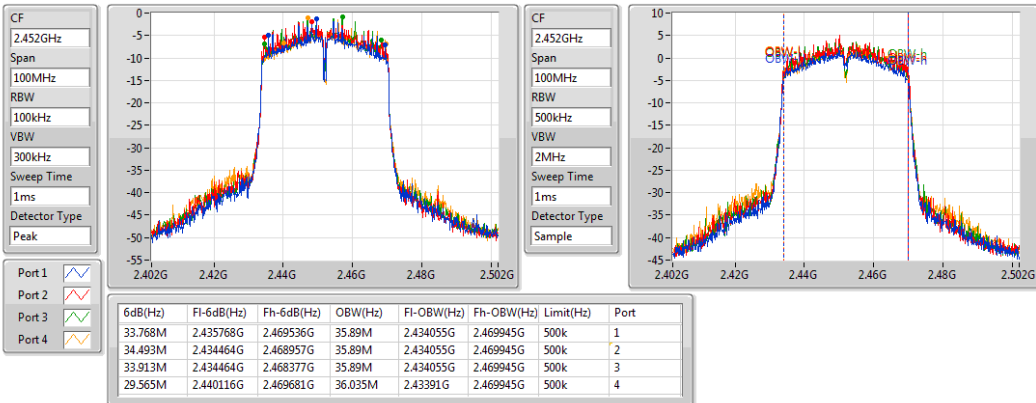

### 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power


Conducted power shall not exceed 1Watt.

Antenna gain  $\leq 6\text{dBi}$ , no any corresponding reduction is in output power limit.

#### 3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

#### 3.3.3 Test Setup



### 3.3.4 Test Result of Maximum Output Power

<b>Ambient Condition</b>	24°C / 67%	<b>Tested By</b>	Aska Huang
--------------------------	------------	------------------	------------

#### Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_4TX	27.26	0.53211
802.11g_Nss1,(6Mbps)_4TX	24.65	0.29174
802.11n HT20_Nss1,(MCS0)_4TX	24.57	0.28642
802.11n HT40_Nss1,(MCS0)_4TX	21.09	0.12853

#### Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3.40	19.68	19.92	19.81	20.09	25.90	30.00	29.30	36.00
2437MHz	Pass	3.40	20.82	21.18	20.56	21.34	27.01	30.00	30.41	36.00
2462MHz	Pass	3.40	21.13	21.25	21.17	21.39	27.26	30.00	30.66	36.00
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3.40	14.52	14.76	14.66	14.53	20.64	30.00	24.04	36.00
2437MHz	Pass	3.40	19.08	19.28	18.98	16.73	24.65	30.00	28.05	36.00
2462MHz	Pass	3.40	15.03	15.03	15.46	14.86	21.12	30.00	24.52	36.00
802.11n HT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3.40	13.32	13.64	13.53	13.51	19.52	30.00	22.92	36.00
2437MHz	Pass	3.40	18.74	19.24	18.96	16.87	24.57	30.00	27.97	36.00
2462MHz	Pass	3.40	13.96	14.05	14.32	13.93	20.09	30.00	23.49	36.00
802.11n HT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	3.40	9.93	10.41	10.32	10.11	16.22	30.00	19.62	36.00
2437MHz	Pass	3.40	14.83	15.18	15.16	15.09	21.09	30.00	24.49	36.00
2452MHz	Pass	3.40	11.14	11.91	12.13	11.56	17.72	30.00	21.12	36.00

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference only

## 3.4 Power Spectral Density

### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

### 3.4.2 Test Procedures


#### Average PSD, duty cycle $\geq 98\%$

1. Set the RBW = 30 kHz, VBW = 100 kHz.
2. Detector = RMS, Sweep time = auto couple.
3. Sweep time = auto couple.
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.

#### Average PSD, duty cycle $< 98\%$

1. Set the RBW = 30 kHz, VBW = 100 kHz. Detector = RMS.
2. Set the sweep time to:  $\geq 10$  (number of measurement points in sweep)  $\times$  (total on/off period of the transmitted signal).
3. Perform the measurement over a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add  $10 \log (1/x)$ , where  $x$  is the duty cycle.

### 3.4.3 Test Setup



### 3.4.4 Test Result of Power Spectral Density

<b>Ambient Condition</b>	24°C / 67%	<b>Tested By</b>	Aska Huang
--------------------------	------------	------------------	------------

#### Summary

Mode	PD (dBm/3kHz)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_4TX	-0.21
802.11g_Nss1,(6Mbps)_4TX	-3.54
802.11n HT20_Nss1,(MCS0)_4TX	-3.66
802.11n HT40_Nss1,(MCS0)_4TX	-4.01

#### Result

Mode	Result	DG (dBi)	Port 1 (dBm/3kHz)	Port 2 (dBm/3kHz)	Port 3 (dBm/3kHz)	Port 4 (dBm/3kHz)	PD (dBm/3kHz)	PD Limit (dBm/3kHz)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	9.42	-5.74	-5.24	-5.63	-6.93	-1.05	4.58
2437MHz	Pass	9.42	-6.00	-4.23	-5.74	-5.83	-0.21	4.58
2462MHz	Pass	9.42	-6.52	-6.12	-5.37	-6.10	-0.59	4.58
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	9.42	-7.89	-8.09	-12.96	-12.79	-4.49	4.58
2437MHz	Pass	9.42	-8.78	-9.32	-8.46	-10.86	-3.54	4.58
2462MHz	Pass	9.42	-8.52	-8.42	-11.79	-12.10	-4.89	4.58
802.11n HT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	9.42	-7.73	-7.38	-13.41	-13.55	-3.99	4.58
2437MHz	Pass	9.42	-8.89	-8.74	-8.15	-10.39	-3.66	4.58
2462MHz	Pass	9.42	-8.27	-7.72	-12.76	-13.13	-4.37	4.58
802.11n HT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	9.42	-7.88	-7.25	-17.21	-20.23	-4.23	4.58
2437MHz	Pass	9.42	-8.12	-7.86	-15.28	-15.58	-4.52	4.58
2452MHz	Pass	9.42	-7.69	-7.31	-14.63	-18.61	-4.01	4.58


**DG** = Directional Gain= $3.4+10*\log(4/1) = 9.42$  dBi >6 dBi, limit shall be reduced to 8 dBm – (9.42 dBi – 6 dBi) = 4.58 dBm;  
**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;



### 802.11b\_Nss1,(1Mbps)\_4TX

PSD

2412MHz

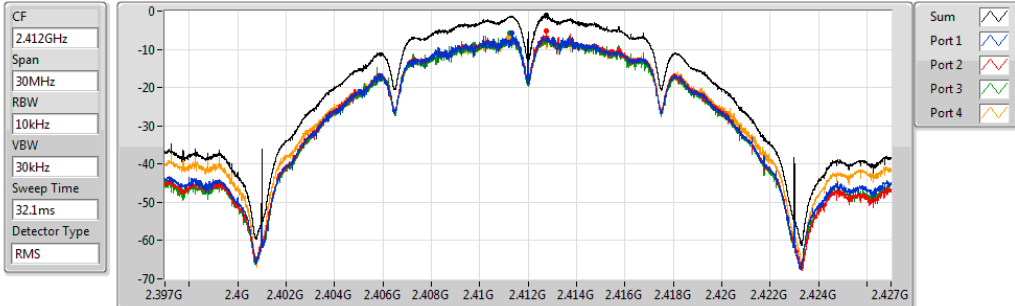


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.05	-1.05	-5.74	-5.24	-5.63	-6.93

### 802.11b\_Nss1,(1Mbps)\_4TX

PSD

2437MHz

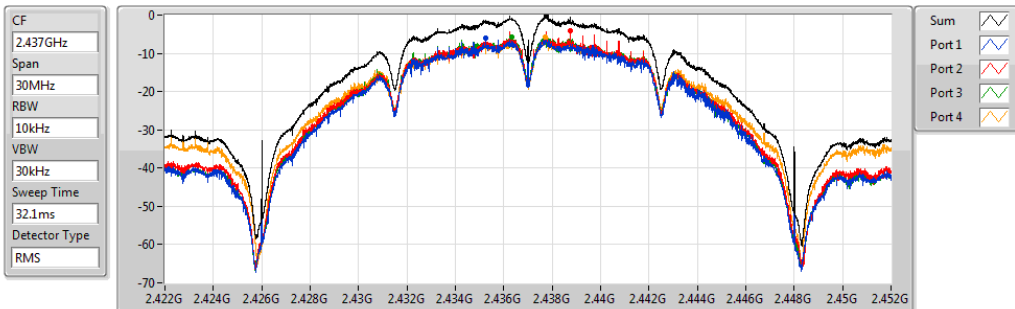


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.21	-0.21	-6.00	-4.23	-5.74	-5.83

### 802.11b\_Nss1,(1Mbps)\_4TX

PSD

2462MHz

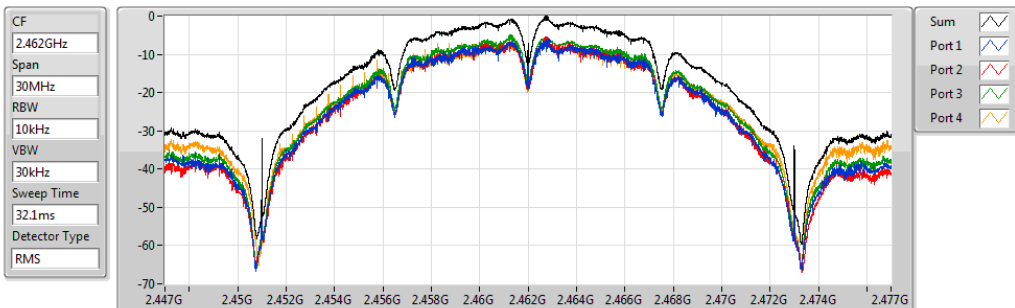


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.59	-0.59	-6.52	-6.12	-5.37	-6.10

### 802.11g\_Nss1,(6Mbps)\_4TX

PSD

2412MHz

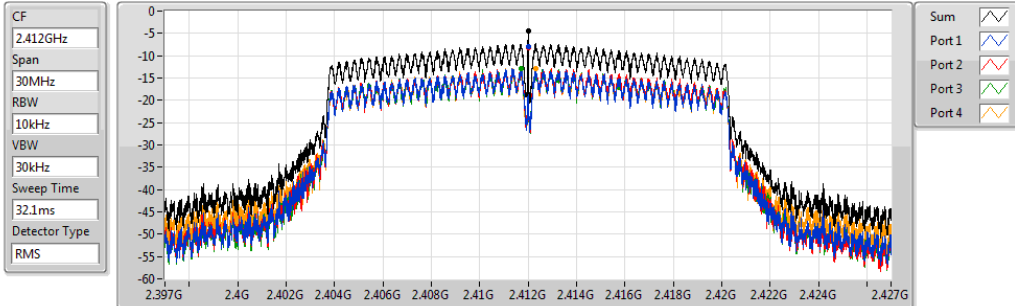


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.49	-4.49	-7.89	-8.09	-12.96	-12.79

### 802.11g\_Nss1,(6Mbps)\_4TX

PSD

2437MHz

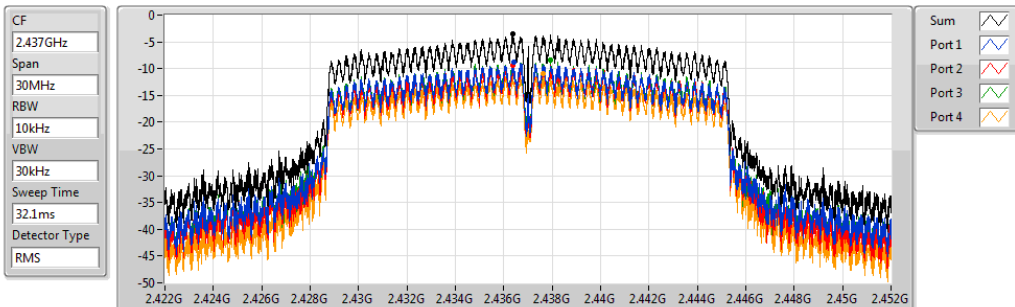


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.54	-3.54	-8.78	-9.32	-8.46	-10.86

### 802.11g\_Nss1,(6Mbps)\_4TX

PSD

2462MHz

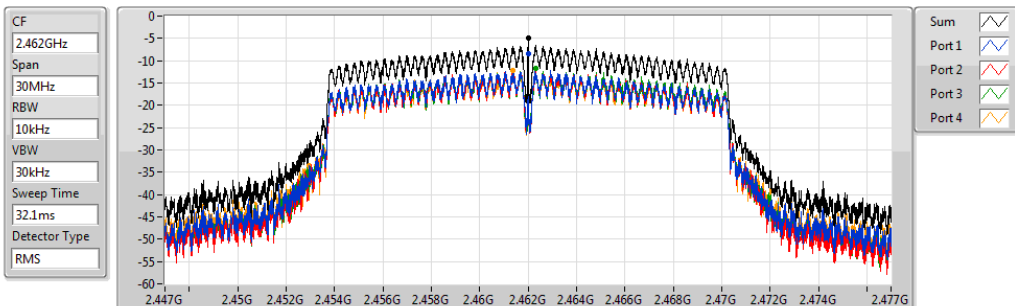


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.89	-4.89	-8.52	-8.42	-11.79	-12.10

### 802.11n HT20\_Nss1,(MCS0)\_4TX

PSD


2412MHz

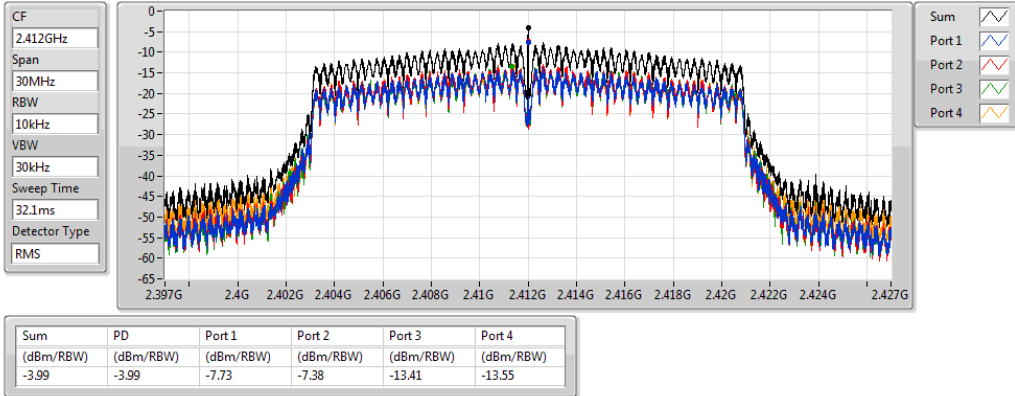

### 802.11n HT20\_Nss1,(MCS0)\_4TX

PSD


2437MHz

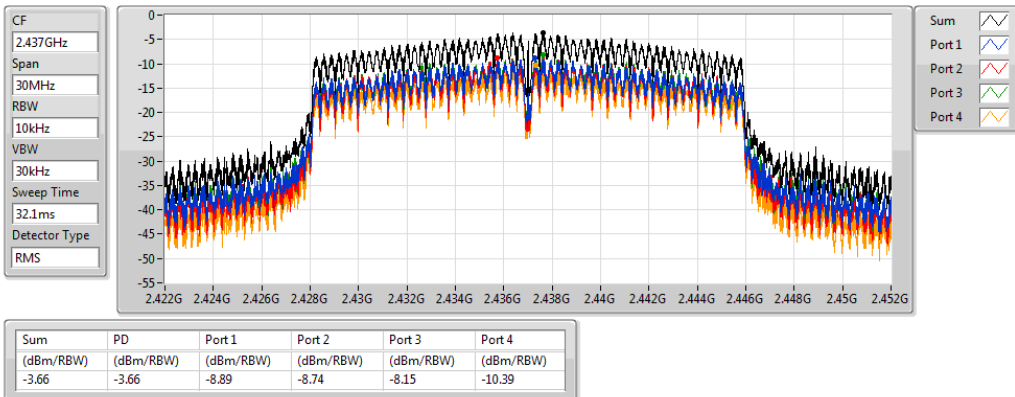

### 802.11n HT20\_Nss1,(MCS0)\_4TX

PSD


2462MHz

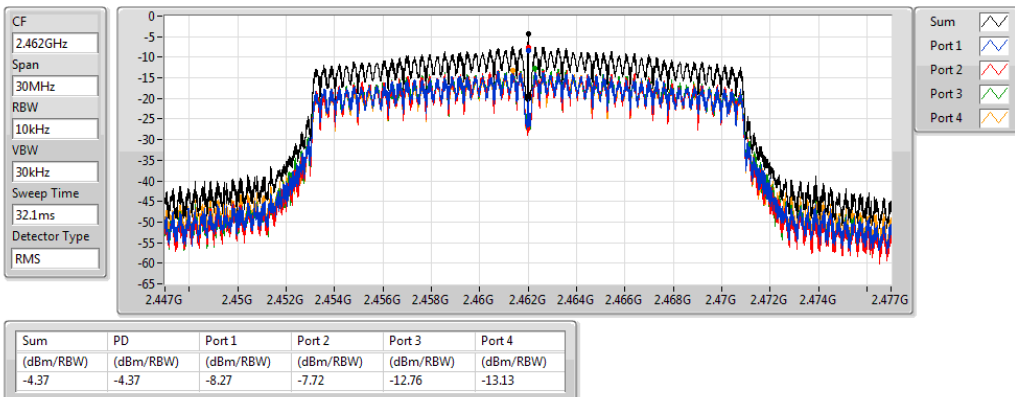

### 802.11n HT40\_Nss1,(MCS0)\_4TX

PSD

2422MHz

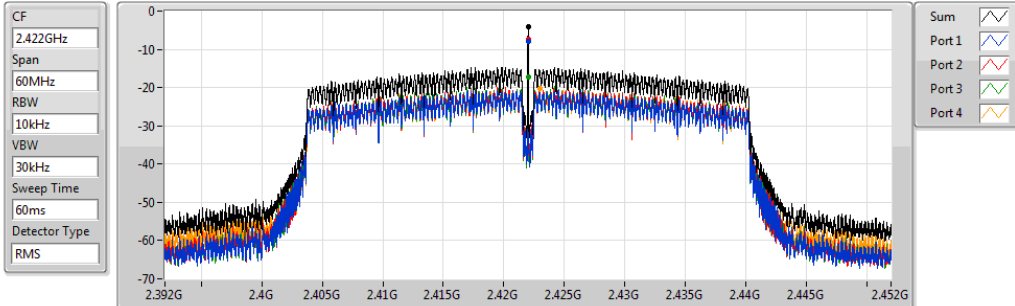


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.23	-4.23	-7.88	-7.25	-17.21	-20.23

### 802.11n HT40\_Nss1,(MCS0)\_4TX

PSD

2437MHz

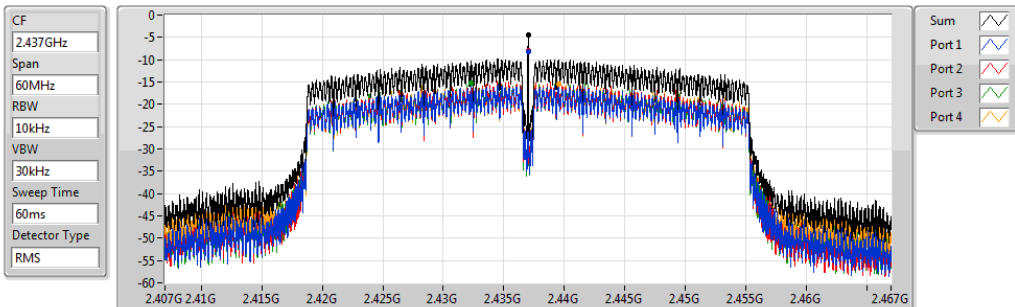


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.52	-4.52	-8.12	-7.86	-15.28	-15.58

### 802.11n HT40\_Nss1,(MCS0)\_4TX

PSD

2452MHz

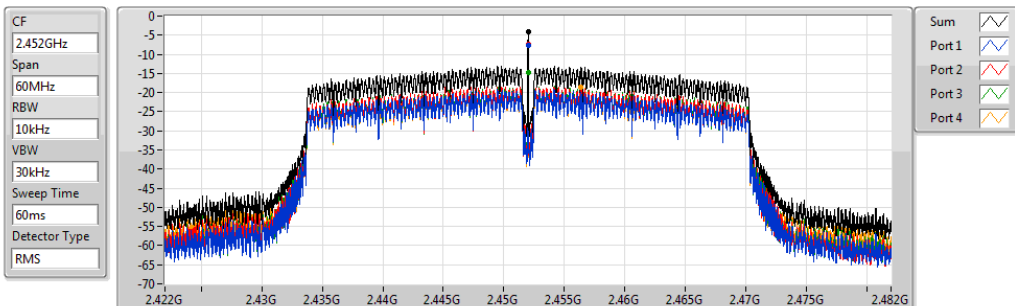

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.01	-4.01	-7.69	-7.31	-14.63	-18.61

## 3.5 Unwanted Emissions into Restricted Frequency Bands

### 3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

**Note:**


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup


#### Radiated Emissions below 1 GHz

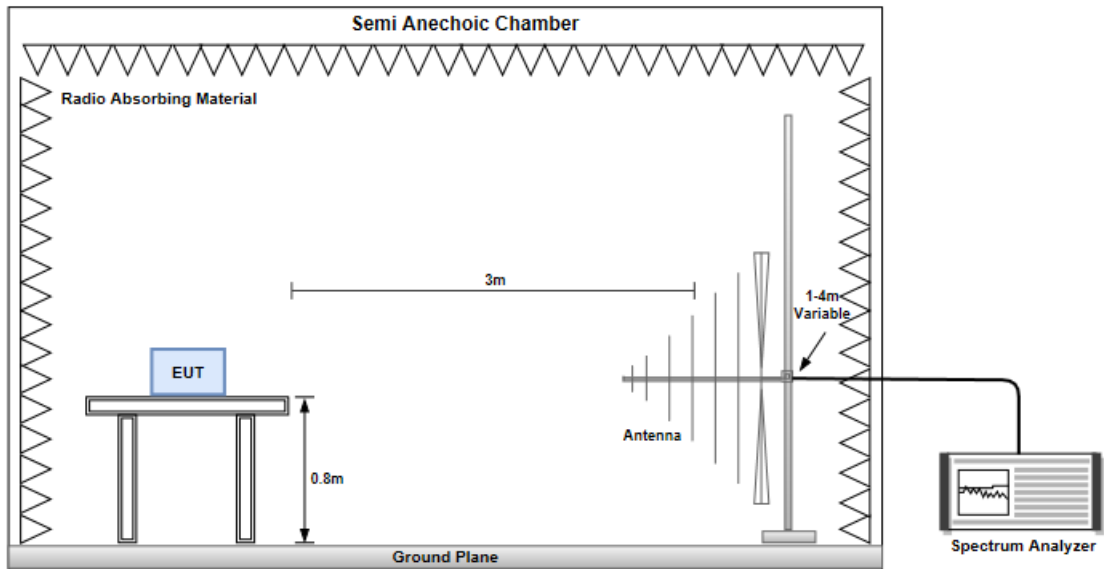

#### Radiated Emissions above 1 GHz

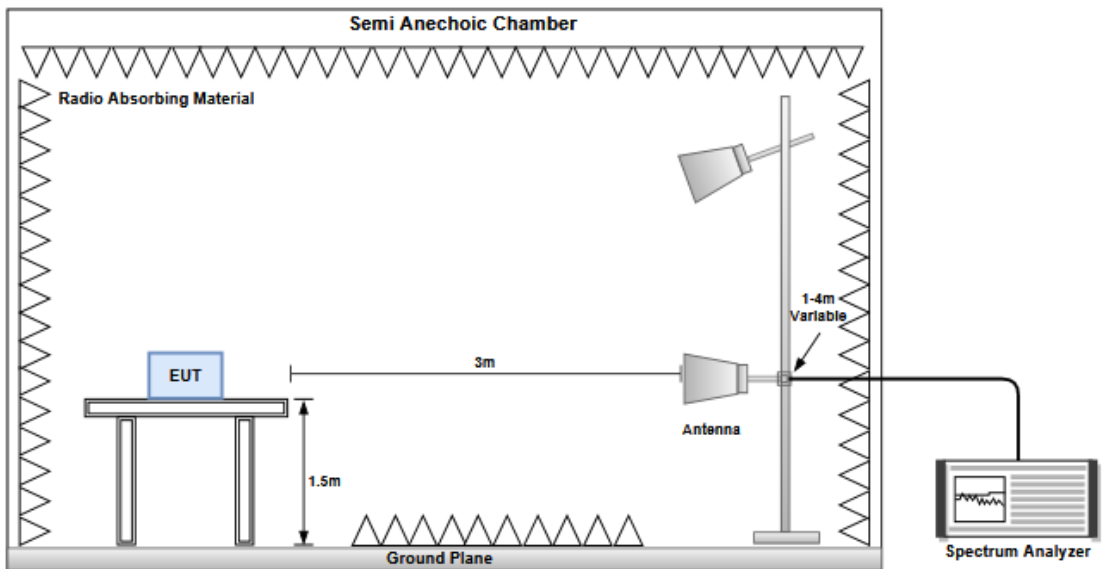


### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)
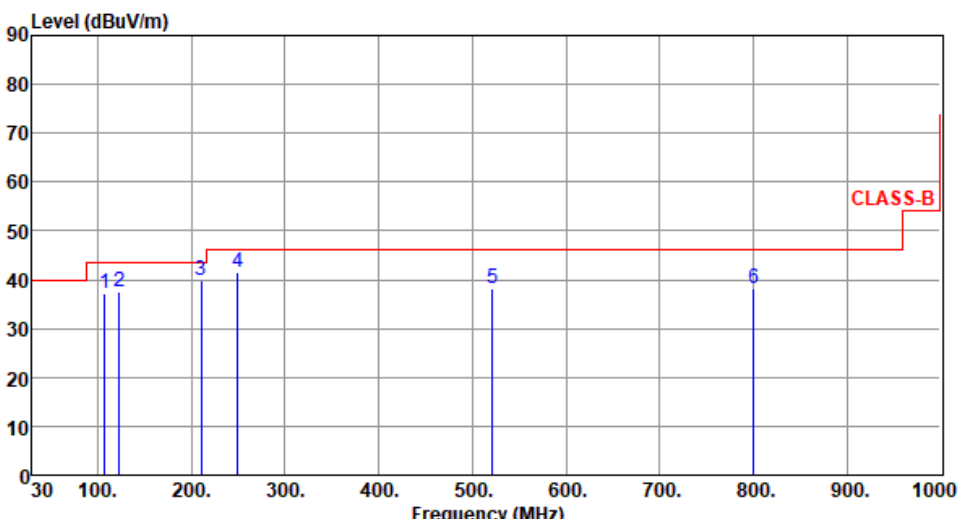
<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462						
<b>Polarization</b>	Horizontal								
Test By : Roger Lu      Temperature(°C):25      Humidity(%):63									
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	107.29	37.29	43.50	-6.21	49.44	-12.15	Peak	---	---
2	122.85	37.46	43.50	-6.04	48.02	-10.56	Peak	---	---
3	210.34	39.86	43.50	-3.64	51.87	-12.01	Peak	---	---
4	249.56	41.57	46.00	-4.43	51.72	-10.15	Peak	---	---
5	521.26	38.26	46.00	-7.74	41.27	-3.01	Peak	---	---
6	800.22	38.16	46.00	-7.84	36.29	1.87	Peak	---	---
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)          *Factor includes antenna factor , cable loss and amplifier gain          Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).          Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>									

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):63

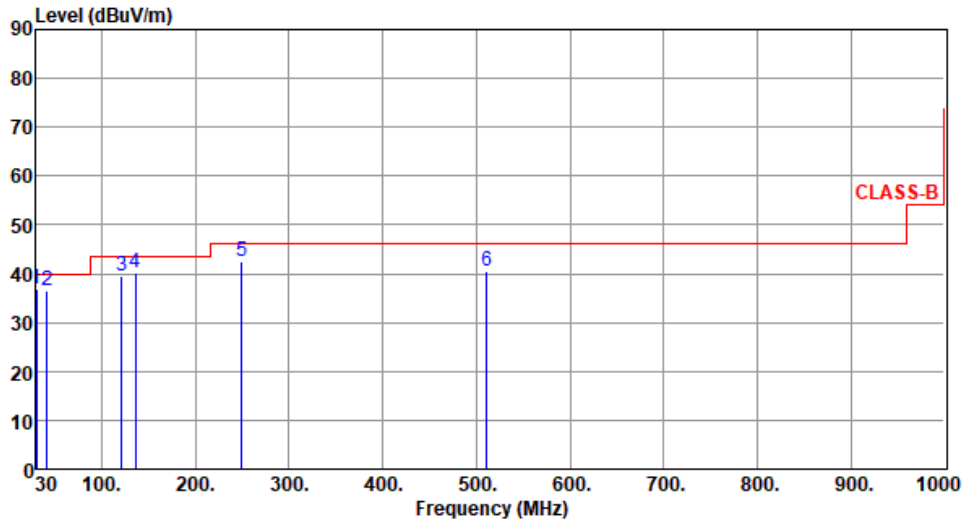

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	30.42	36.79	40.00	-3.21	46.80	-10.01	QP	101	7
2	41.75	36.59	40.00	-3.41	45.11	-8.52	QP	100	15
3	121.26	39.65	43.50	-3.85	50.28	-10.63	Peak	---	---
4	136.15	40.25	43.50	-3.25	49.76	-9.51	Peak	---	---
5	249.43	42.61	46.00	-3.39	52.76	-10.15	Peak	---	---
6	511.39	40.64	46.00	-5.36	43.74	-3.10	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.




### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b
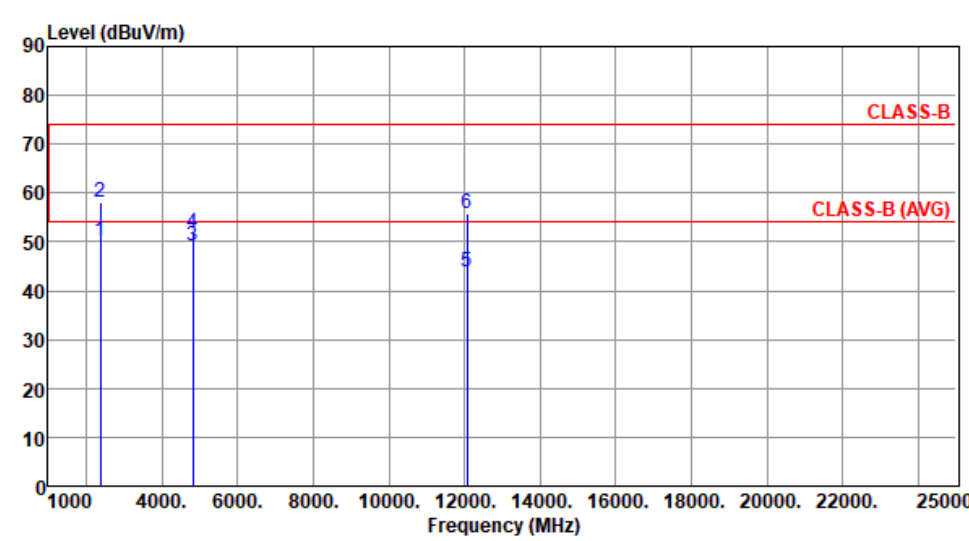
<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2412						
<b>Polarization</b>	Horizontal								
Test By : Roger Lu      Temperature(°C):24      Humidity(%):65									
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	2390.00	50.08	54.00	-3.92	52.87	-2.79	Average	100	174
2	2390.00	58.01	74.00	-15.99	60.80	-2.79	Peak	100	174
3	4824.00	49.09	54.00	-4.91	45.62	3.47	Average	297	158
4	4824.00	51.90	74.00	-22.10	48.43	3.47	Peak	297	158
5	12060.00	43.89	54.00	-10.11	29.57	14.32	Average	100	40
6	12060.00	55.82	74.00	-18.18	41.50	14.32	Peak	100	40
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)          *Factor includes antenna factor , cable loss and amplifier gain          Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

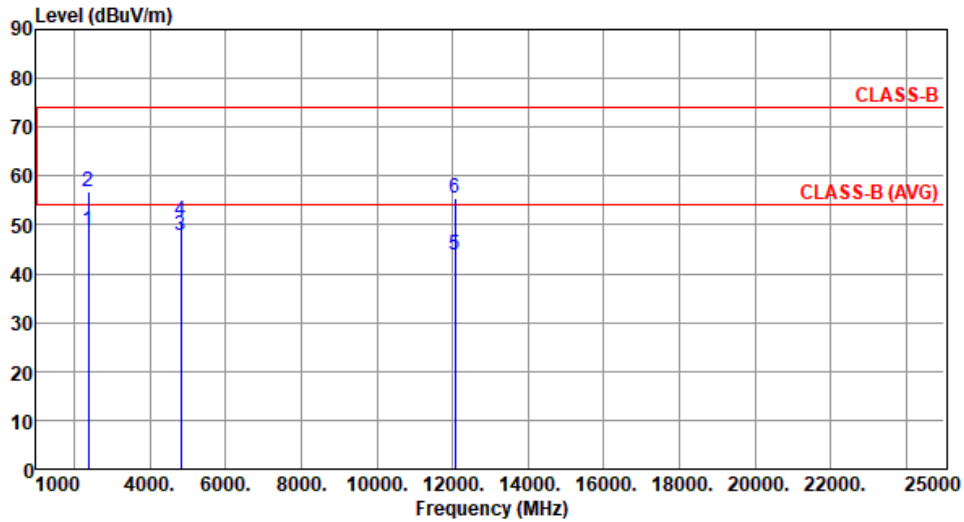

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	48.86	54.00	-5.14	51.65	-2.79	Average	165	245
2	2390.00	56.70	74.00	-17.30	59.49	-2.79	Peak	165	245
3	4824.00	47.73	54.00	-6.27	44.26	3.47	Average	238	66
4	4824.00	50.73	74.00	-23.27	47.26	3.47	Peak	238	66
5	12060.00	43.74	54.00	-10.26	29.42	14.32	Average	100	30
6	12060.00	55.61	74.00	-18.39	41.29	14.32	Peak	100	30


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

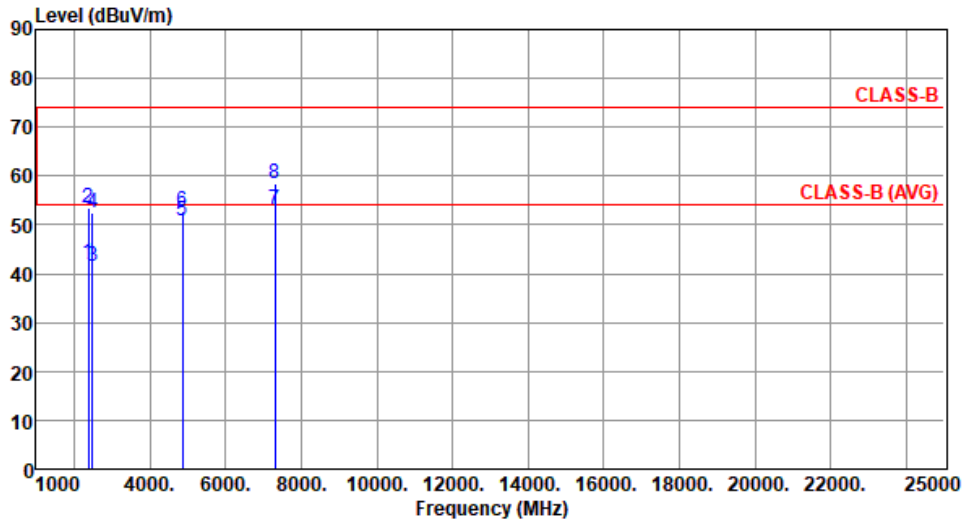

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	42.15	54.00	-11.85	44.94	-2.79	Average	100	178
2	2390.00	53.31	74.00	-20.69	56.10	-2.79	Peak	100	178
3	2483.50	41.61	54.00	-12.39	44.35	-2.74	Average	100	178
4	2483.50	52.45	74.00	-21.55	55.19	-2.74	Peak	100	178
5	4874.00	50.73	54.00	-3.27	47.28	3.45	Average	293	151
6	4874.00	52.97	74.00	-21.03	49.52	3.45	Peak	293	151
7	7311.00	53.11	54.00	-0.89	44.12	8.99	Average	100	187
8	7311.00	58.53	74.00	-15.47	49.54	8.99	Peak	100	187


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

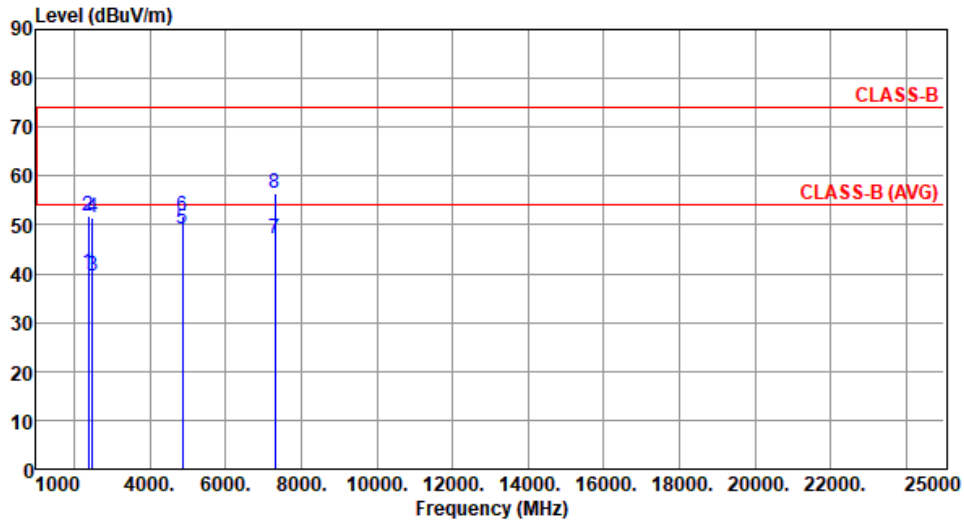

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	40.07	54.00	-13.93	42.86	-2.79	Average	166	251
2	2390.00	51.80	74.00	-22.20	54.59	-2.79	Peak	166	251
3	2483.50	39.54	54.00	-14.46	42.28	-2.74	Average	166	251
4	2483.50	51.37	74.00	-22.63	54.11	-2.74	Peak	166	251
5	4874.00	49.02	54.00	-4.98	45.57	3.45	Average	236	64
6	4874.00	51.84	74.00	-22.16	48.39	3.45	Peak	236	64
7	7311.00	47.28	54.00	-6.72	38.29	8.99	Average	100	164
8	7311.00	56.42	74.00	-17.58	47.43	8.99	Peak	100	164


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

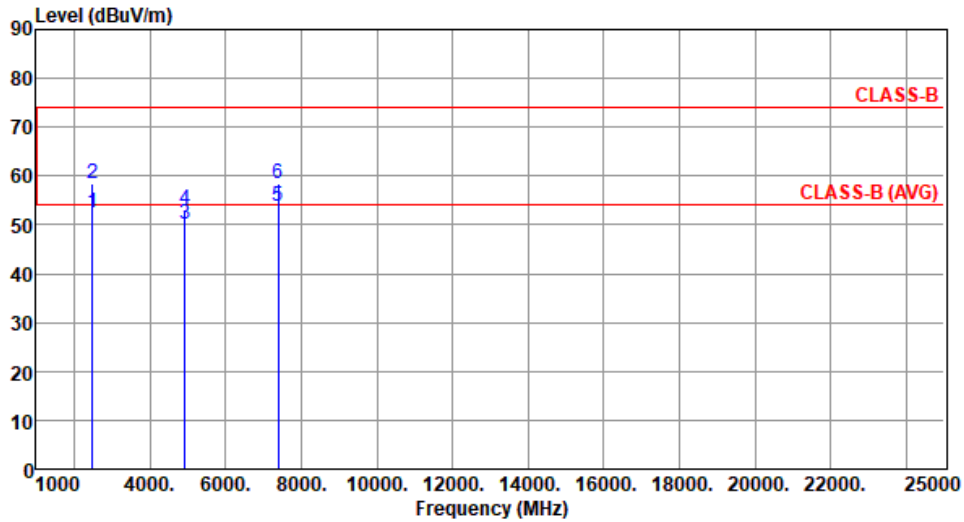

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	52.55	54.00	-1.45	55.29	-2.74	Average	100	180
2	2483.50	58.53	74.00	-15.47	61.27	-2.74	Peak	100	180
3	4924.00	50.31	54.00	-3.69	46.76	3.55	Average	272	152
4	4924.00	52.99	74.00	-21.01	49.44	3.55	Peak	272	152
5	7386.00	53.73	54.00	-0.27	44.76	8.97	Average	100	176
6	7386.00	58.54	74.00	-15.46	49.57	8.97	Peak	100	176


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

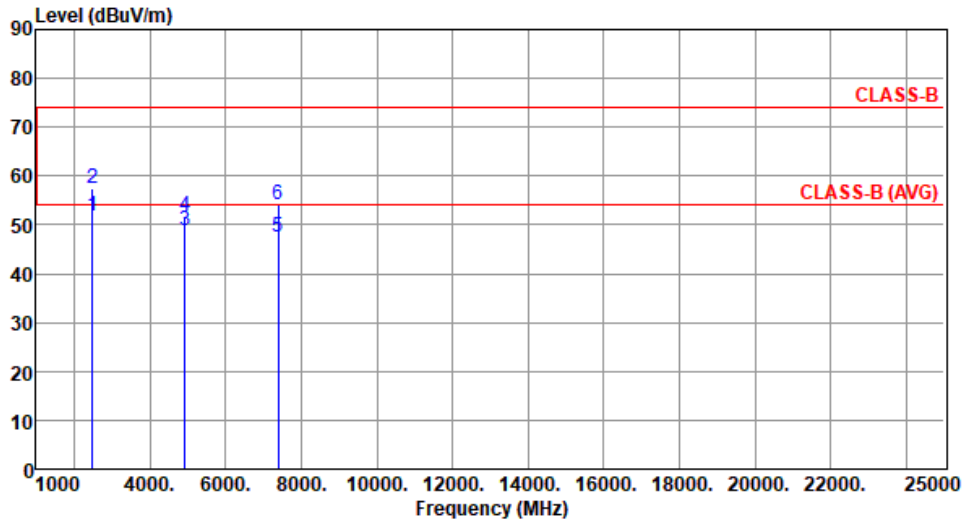


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	51.94	54.00	-2.06	54.68	-2.74	Average	170	248
2	2483.50	57.60	74.00	-16.40	60.34	-2.74	Peak	170	248
3	4924.00	48.77	54.00	-5.23	45.22	3.55	Average	241	68
4	4924.00	51.70	74.00	-22.30	48.15	3.55	Peak	241	68
5	7386.00	47.57	54.00	-6.43	38.60	8.97	Average	100	165
6	7386.00	54.03	74.00	-19.97	45.06	8.97	Peak	100	165

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g
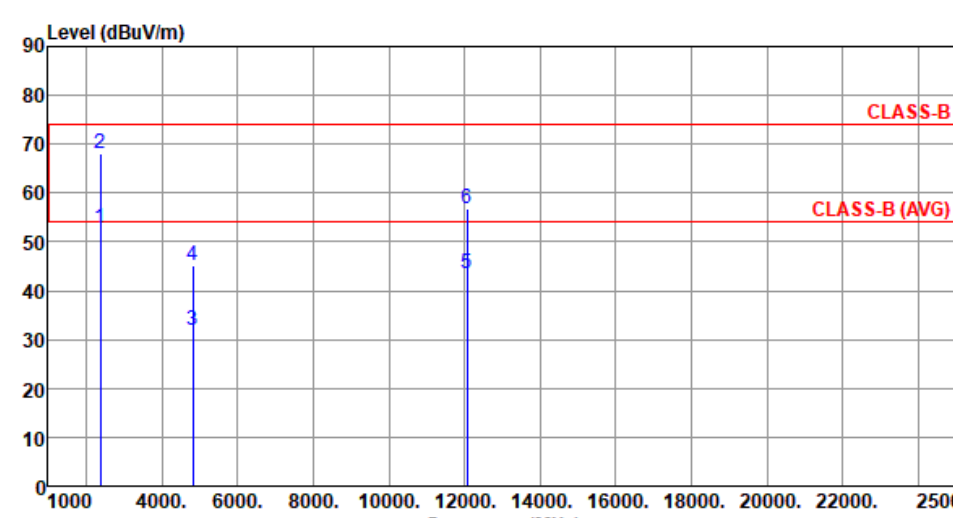
<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2412						
<b>Polarization</b>	Horizontal								
Test By : Roger Lu      Temperature(°C):24      Humidity(%):65									
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	2390.00	52.86	54.00	-1.14	55.65	-2.79	Average	100	179
2	2390.00	68.23	74.00	-5.77	71.02	-2.79	Peak	100	179
3	4824.00	32.03	54.00	-21.97	28.56	3.47	Average	100	161
4	4824.00	45.06	74.00	-28.94	41.59	3.47	Peak	100	161
5	12060.00	43.58	54.00	-10.42	29.26	14.32	Average	100	40
6	12060.00	56.80	74.00	-17.20	42.48	14.32	Peak	100	40
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)  *Factor includes antenna factor , cable loss and amplifier gain  Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

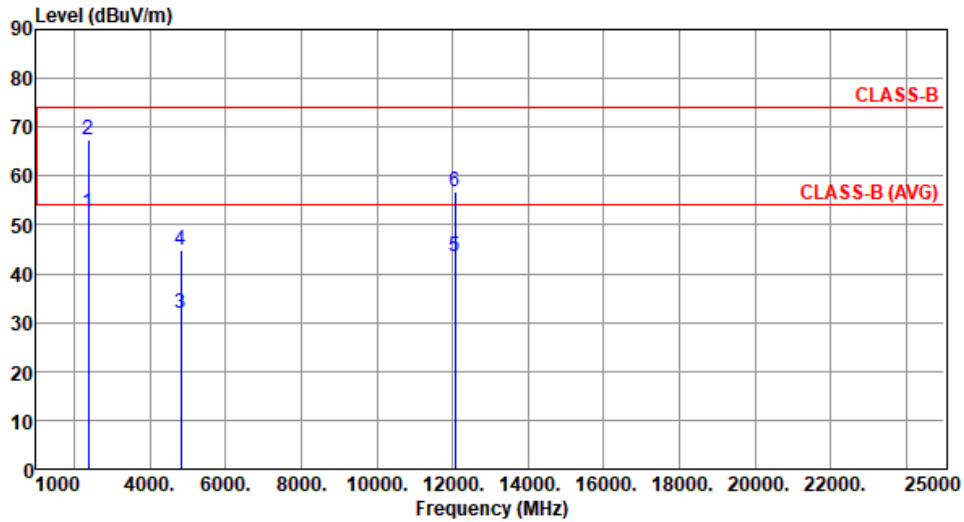

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	52.36	54.00	-1.64	55.15	-2.79	Average	234	149
2	2390.00	67.47	74.00	-6.53	70.26	-2.79	Peak	234	149
3	4824.00	31.88	54.00	-22.12	28.41	3.47	Average	100	60
4	4824.00	44.93	74.00	-29.07	41.46	3.47	Peak	100	60
5	12060.00	43.43	54.00	-10.57	29.11	14.32	Average	100	30
6	12060.00	56.71	74.00	-17.29	42.39	14.32	Peak	100	30

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

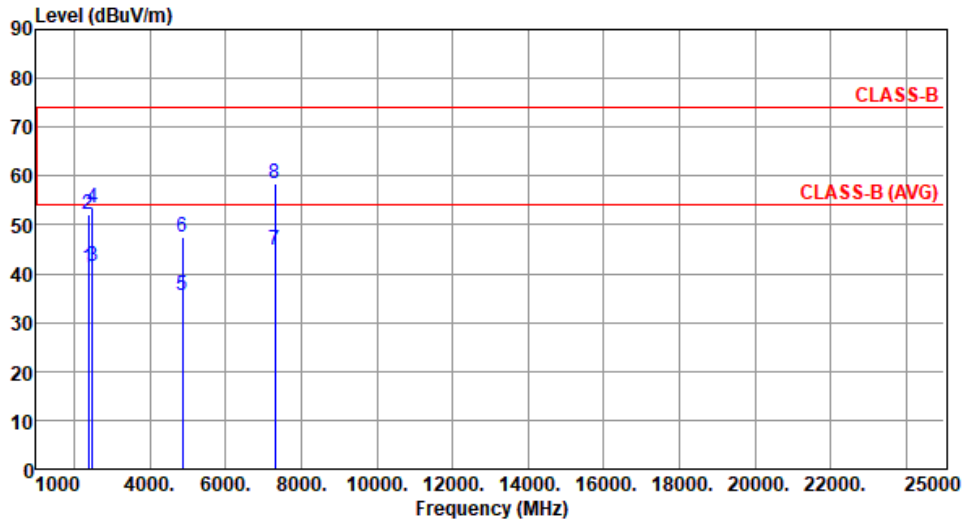

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	41.30	54.00	-12.70	44.09	-2.79	Average	100	184
2	2390.00	52.13	74.00	-21.87	54.92	-2.79	Peak	100	184
3	2483.50	41.41	54.00	-12.59	44.15	-2.74	Average	100	184
4	2483.50	53.34	74.00	-20.66	56.08	-2.74	Peak	100	184
5	4874.00	35.55	54.00	-18.45	32.10	3.45	Average	263	158
6	4874.00	47.61	74.00	-26.39	44.16	3.45	Peak	263	158
7	7311.00	44.80	54.00	-9.20	35.81	8.99	Average	100	181
8	7311.00	58.29	74.00	-15.71	49.30	8.99	Peak	100	181


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

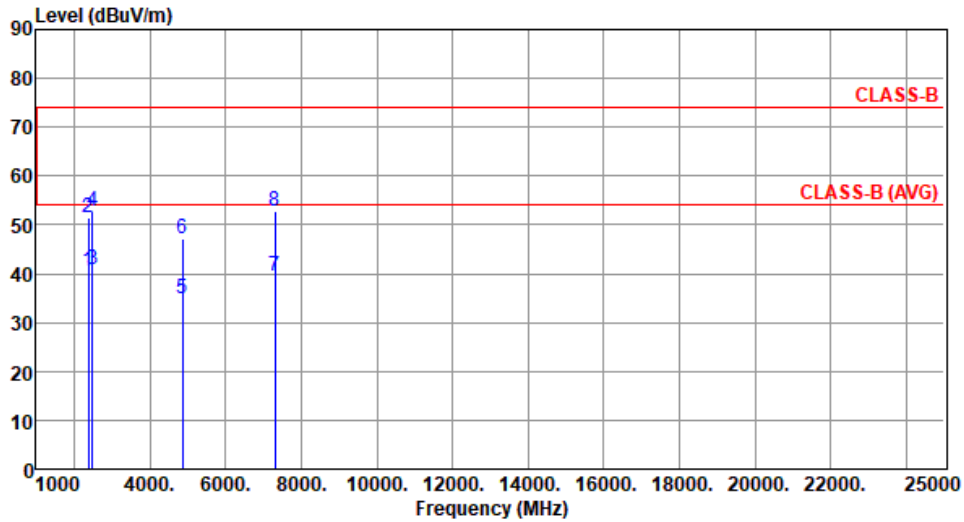

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	40.59	54.00	-13.41	43.38	-2.79	Average	235	151
2	2390.00	51.60	74.00	-22.40	54.39	-2.79	Peak	235	151
3	2483.50	40.83	54.00	-13.17	43.57	-2.74	Average	235	151
4	2483.50	52.74	74.00	-21.26	55.48	-2.74	Peak	235	151
5	4874.00	34.75	54.00	-19.25	31.30	3.45	Average	232	66
6	4874.00	47.04	74.00	-26.96	43.59	3.45	Peak	232	66
7	7311.00	39.48	54.00	-14.52	30.49	8.99	Average	100	165
8	7311.00	52.86	74.00	-21.14	43.87	8.99	Peak	100	165


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

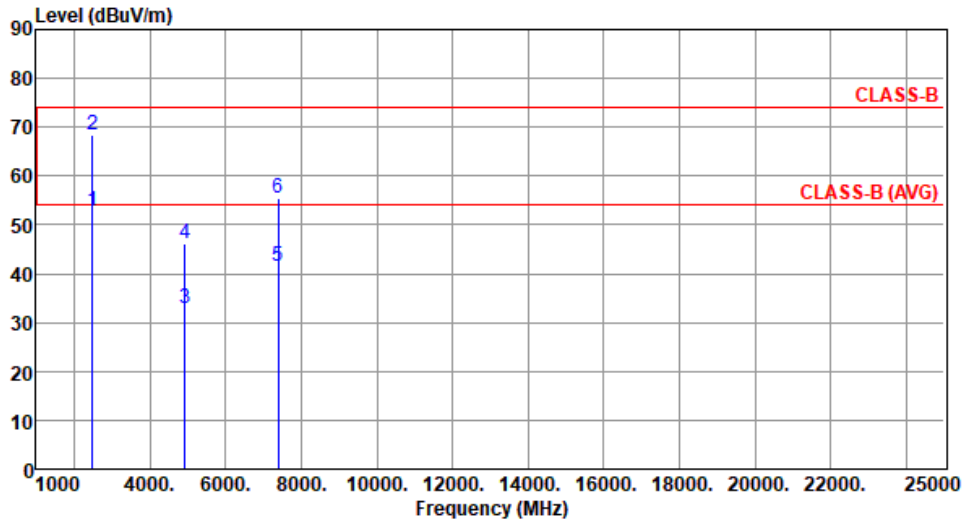

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	52.94	54.00	-1.06	55.68	-2.74	Average	100	182
2	2483.50	68.48	74.00	-5.52	71.22	-2.74	Peak	100	182
3	4924.00	32.99	54.00	-21.01	29.44	3.55	Average	265	155
4	4924.00	46.10	74.00	-27.90	42.55	3.55	Peak	265	155
5	7386.00	41.63	54.00	-12.37	32.66	8.97	Average	100	182
6	7386.00	55.56	74.00	-18.44	46.59	8.97	Peak	100	182


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

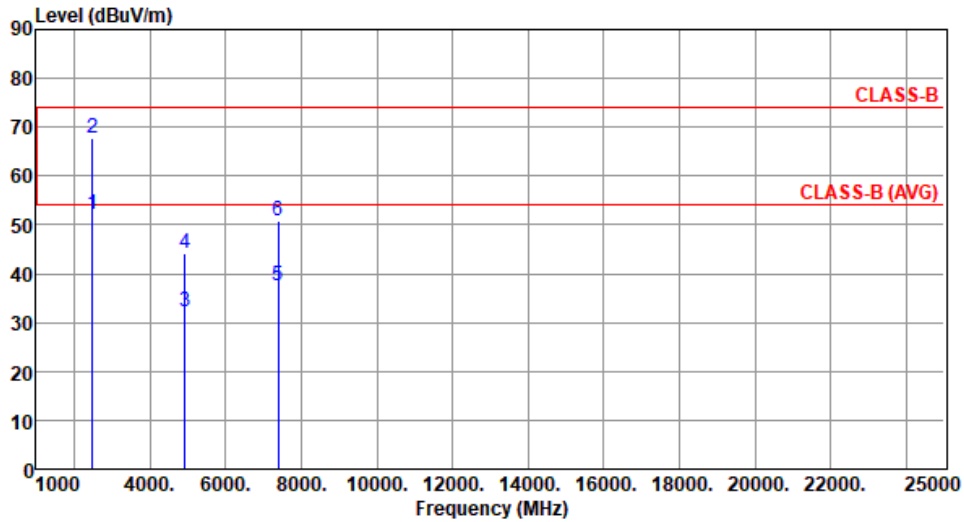


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	52.12	54.00	-1.88	54.86	-2.74	Average	236	141
2	2483.50	67.59	74.00	-6.41	70.33	-2.74	Peak	236	141
3	4924.00	32.09	54.00	-21.91	28.54	3.55	Average	235	61
4	4924.00	44.22	74.00	-29.78	40.67	3.55	Peak	235	61
5	7386.00	37.57	54.00	-16.43	28.60	8.97	Average	100	40
6	7386.00	50.65	74.00	-23.35	41.68	8.97	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20
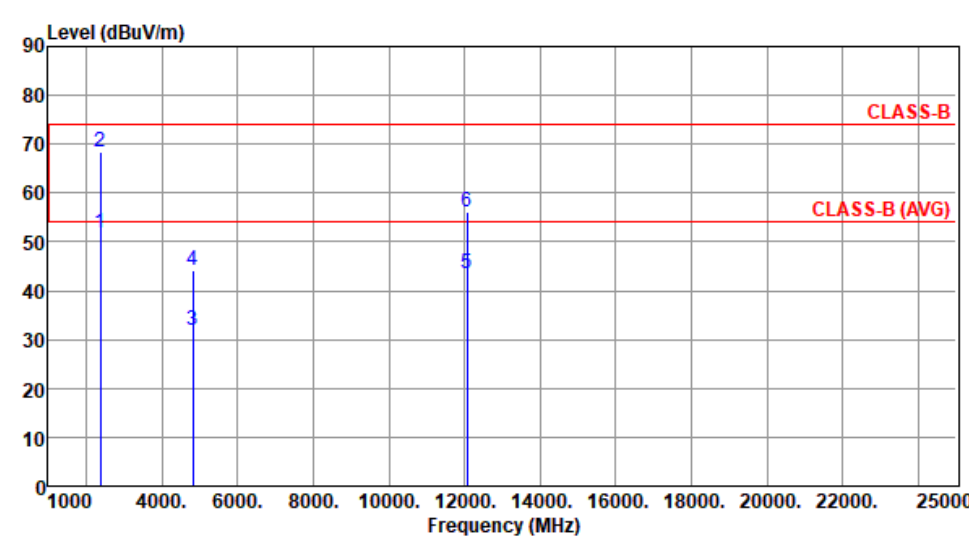
<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	2412						
<b>Polarization</b>	Horizontal								
Test By : Roger Lu      Temperature(°C):24      Humidity(%):65									
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (1000 to 25000). Two horizontal red lines represent limits: CLASS-B at approximately 75 dBuV/m and CLASS-B (AVG) at approximately 55 dBuV/m. Six vertical blue lines represent measured peaks, labeled 1 through 6, with their corresponding data from the table below.</p>									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	2390.00	51.97	54.00	-2.03	54.76	-2.79	Average	100	180
2	2390.00	68.54	74.00	-5.46	71.33	-2.79	Peak	100	180
3	4824.00	31.96	54.00	-22.04	28.49	3.47	Average	100	30
4	4824.00	44.14	74.00	-29.86	40.67	3.47	Peak	100	30
5	12060.00	43.42	54.00	-10.58	29.10	14.32	Average	100	60
6	12060.00	56.00	74.00	-18.00	41.68	14.32	Peak	100	60
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)          *Factor includes antenna factor , cable loss and amplifier gain          Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

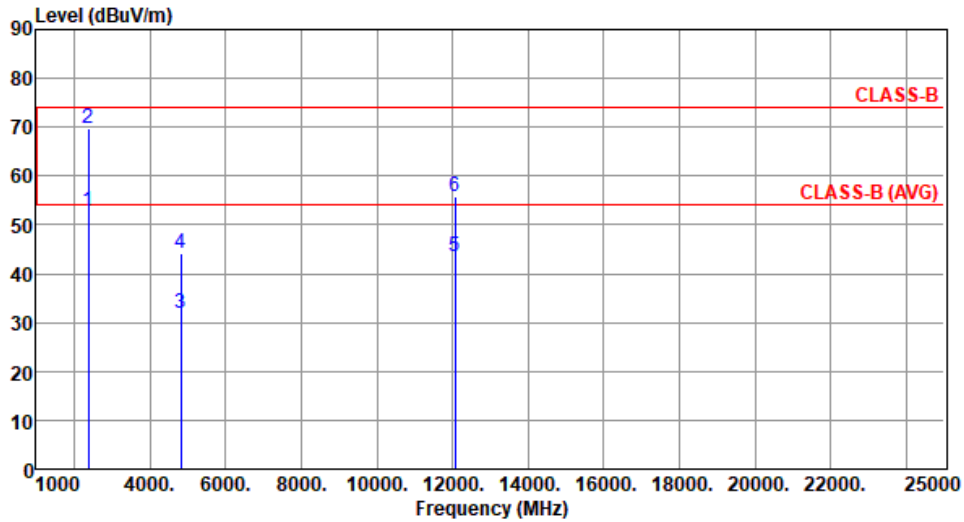

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	52.77	54.00	-1.23	55.56	-2.79	Average	100	70
2	2390.00	69.86	74.00	-4.14	72.65	-2.79	Peak	100	70
3	4824.00	31.79	54.00	-22.21	28.32	3.47	Average	100	20
4	4824.00	44.03	74.00	-29.97	40.56	3.47	Peak	100	20
5	12060.00	43.38	54.00	-10.62	29.06	14.32	Average	100	100
6	12060.00	55.87	74.00	-18.13	41.55	14.32	Peak	100	100


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

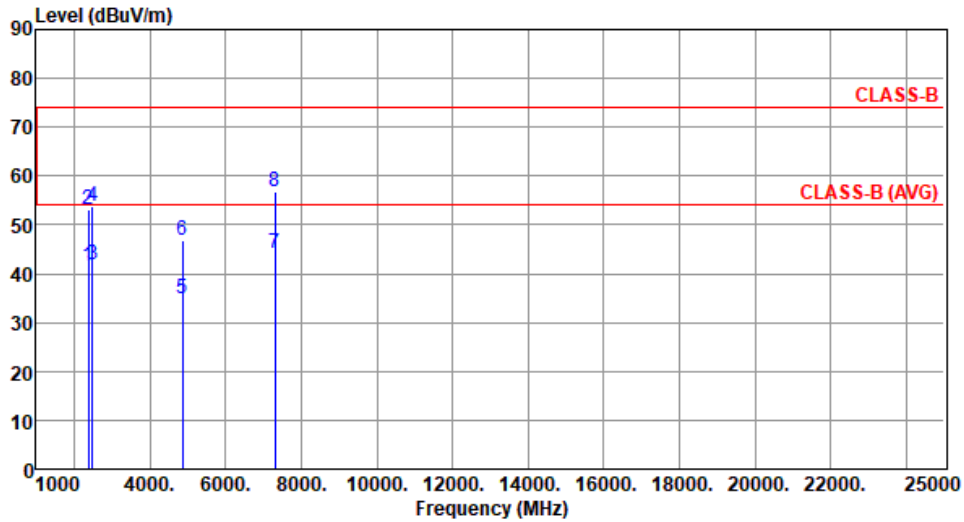

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	41.55	54.00	-12.45	44.34	-2.79	Average	100	182
2	2390.00	53.20	74.00	-20.80	55.99	-2.79	Peak	100	182
3	2483.50	41.74	54.00	-12.26	44.48	-2.74	Average	100	182
4	2483.50	53.84	74.00	-20.16	56.58	-2.74	Peak	100	182
5	4874.00	34.95	54.00	-19.05	31.50	3.45	Average	274	158
6	4874.00	46.99	74.00	-27.01	43.54	3.45	Peak	274	158
7	7311.00	44.23	54.00	-9.77	35.24	8.99	Average	100	182
8	7311.00	56.80	74.00	-17.20	47.81	8.99	Peak	100	182


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

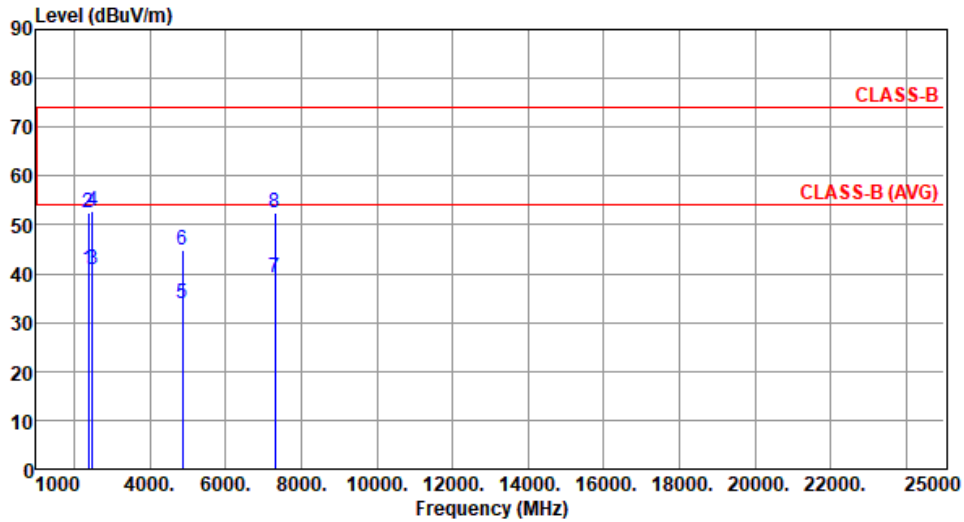

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	40.79	54.00	-13.21	43.58	-2.79	Average	236	152
2	2390.00	52.36	74.00	-21.64	55.15	-2.79	Peak	236	152
3	2483.50	40.85	54.00	-13.15	43.59	-2.74	Average	236	152
4	2483.50	52.69	74.00	-21.31	55.43	-2.74	Peak	236	152
5	4874.00	33.75	54.00	-20.25	30.30	3.45	Average	233	66
6	4874.00	44.99	74.00	-29.01	41.54	3.45	Peak	233	66
7	7311.00	39.21	54.00	-14.79	30.22	8.99	Average	100	166
8	7311.00	52.59	74.00	-21.41	43.60	8.99	Peak	100	166

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

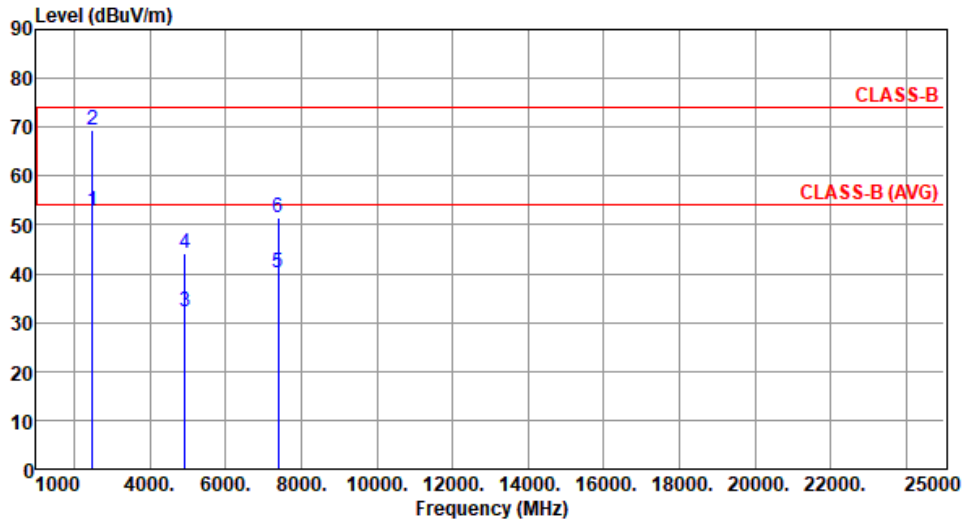

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	52.64	54.00	-1.36	55.38	-2.74	Average	100	182
2	2483.50	69.26	74.00	-4.74	72.00	-2.74	Peak	100	182
3	4924.00	32.09	54.00	-21.91	28.54	3.55	Average	100	160
4	4924.00	44.23	74.00	-29.77	40.68	3.55	Peak	100	160
5	7386.00	40.04	54.00	-13.96	31.07	8.97	Average	100	185
6	7386.00	51.60	74.00	-22.40	42.63	8.97	Peak	100	185


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

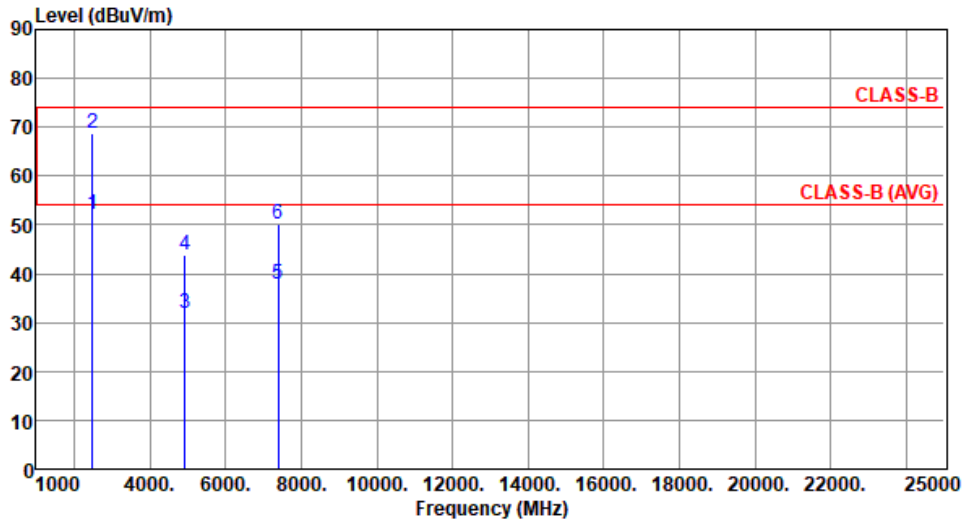


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	52.16	54.00	-1.84	54.90	-2.74	Average	174	19
2	2483.50	68.61	74.00	-5.39	71.35	-2.74	Peak	174	19
3	4924.00	31.80	54.00	-22.20	28.25	3.55	Average	100	30
4	4924.00	44.00	74.00	-30.00	40.45	3.55	Peak	100	30
5	7386.00	37.77	54.00	-16.23	28.80	8.97	Average	100	60
6	7386.00	50.21	74.00	-23.79	41.24	8.97	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


### 3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40
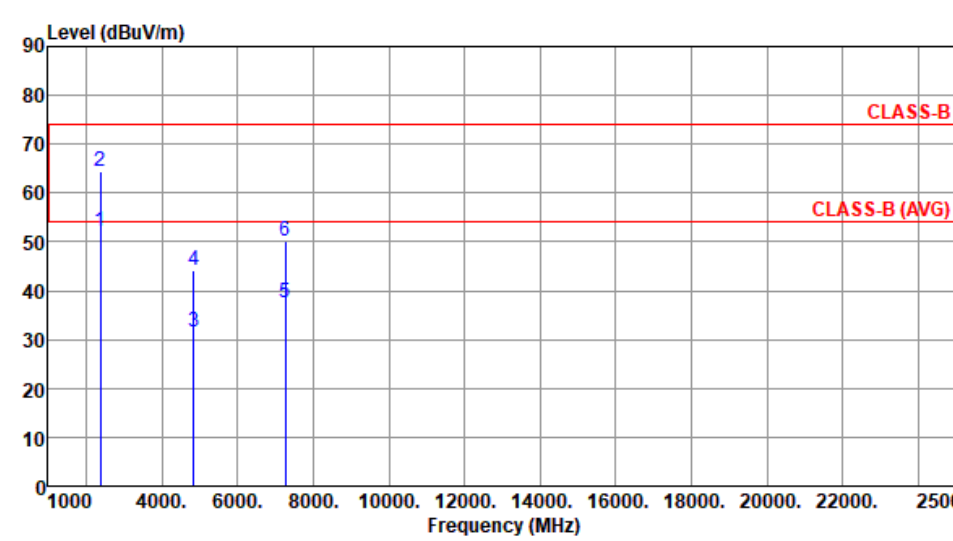
<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	2422						
<b>Polarization</b>	Horizontal								
Test By : Roger Lu      Temperature(°C):24      Humidity(%):65									
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	2390.00	52.16	54.00	-1.84	54.95	-2.79	Average	107	179
2	2390.00	64.59	74.00	-9.41	67.38	-2.79	Peak	107	179
3	4844.00	31.71	54.00	-22.29	28.26	3.45	Average	100	40
4	4844.00	44.07	74.00	-29.93	40.62	3.45	Peak	100	40
5	7266.00	37.69	54.00	-16.31	28.69	9.00	Average	100	30
6	7266.00	50.26	74.00	-23.74	41.26	9.00	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	2422
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

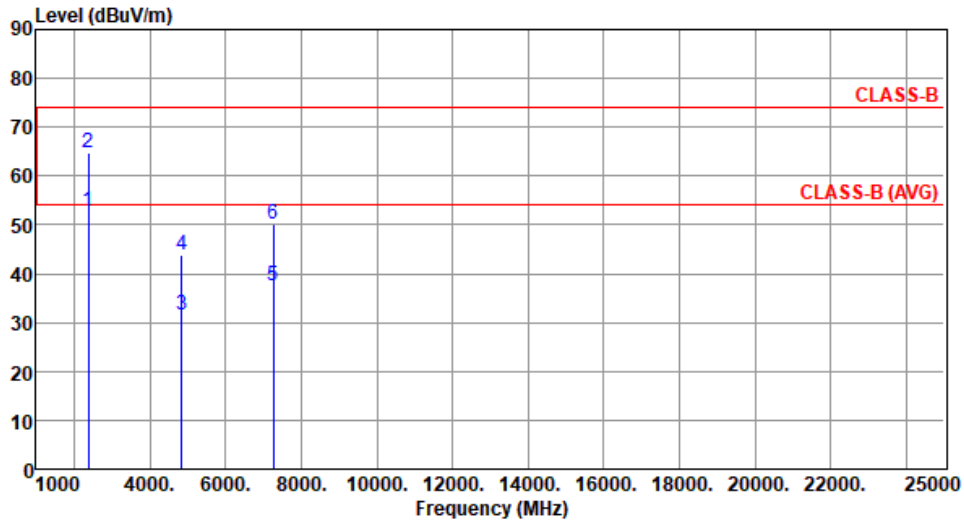

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	52.77	54.00	-1.23	55.56	-2.79	Average	100	68
2	2390.00	64.67	74.00	-9.33	67.46	-2.79	Peak	100	68
3	4844.00	31.58	54.00	-22.42	28.13	3.45	Average	100	40
4	4844.00	43.94	74.00	-30.06	40.49	3.45	Peak	100	40
5	7266.00	37.57	54.00	-16.43	28.57	9.00	Average	100	90
6	7266.00	50.19	74.00	-23.81	41.19	9.00	Peak	100	90


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

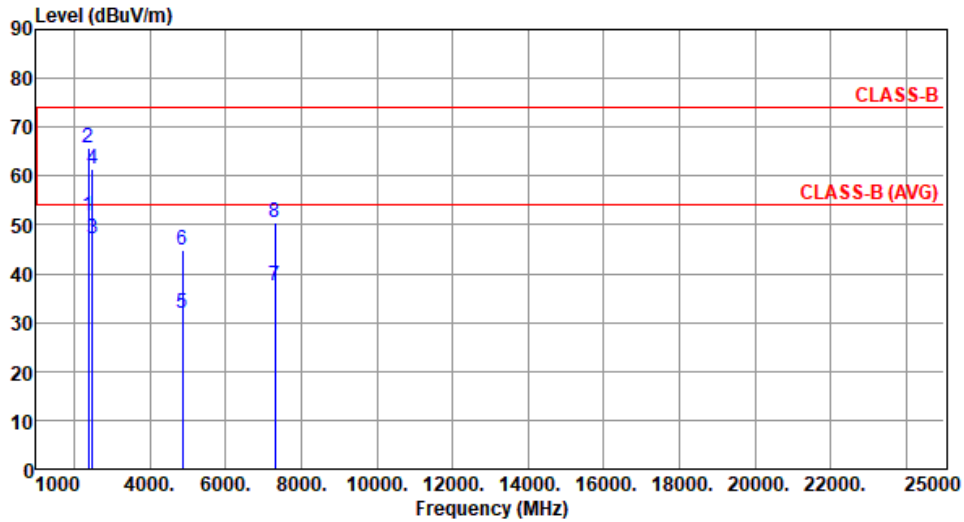

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	51.90	54.00	-2.10	54.69	-2.79	Average	100	187
2	2390.00	65.82	74.00	-8.18	68.61	-2.79	Peak	100	187
3	2483.50	47.10	54.00	-6.90	49.84	-2.74	Average	100	187
4	2483.50	61.48	74.00	-12.52	64.22	-2.74	Peak	100	187
5	4874.00	31.92	54.00	-22.08	28.47	3.45	Average	100	80
6	4874.00	44.82	74.00	-29.18	41.37	3.45	Peak	100	80
7	7311.00	37.59	54.00	-16.41	28.60	8.99	Average	100	65
8	7311.00	50.58	74.00	-23.42	41.59	8.99	Peak	100	65


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

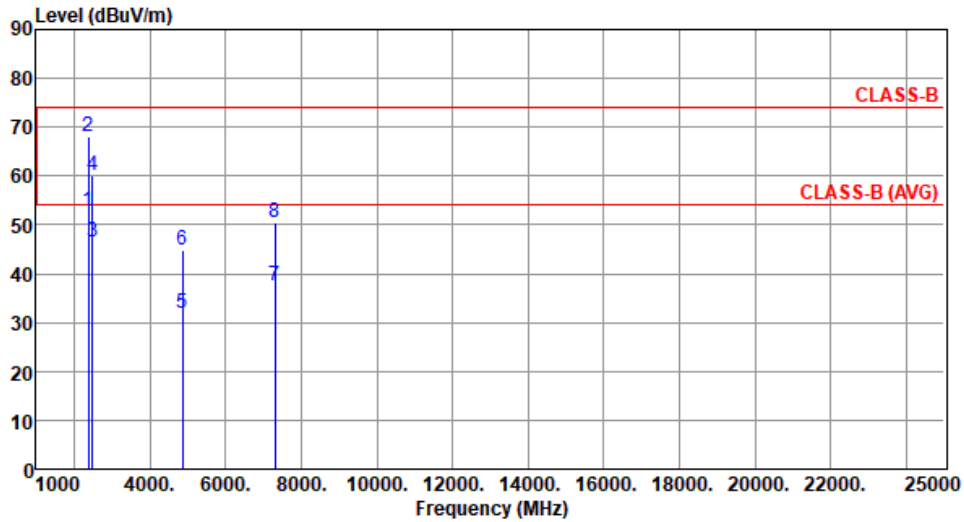

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	52.96	54.00	-1.04	55.75	-2.79	Average	100	71
2	2390.00	68.17	74.00	-5.83	70.96	-2.79	Peak	100	71
3	2483.50	46.38	54.00	-7.62	49.12	-2.74	Average	100	71
4	2483.50	59.96	74.00	-14.04	62.70	-2.74	Peak	100	71
5	4874.00	31.78	54.00	-22.22	28.33	3.45	Average	100	20
6	4874.00	44.75	74.00	-29.25	41.30	3.45	Peak	100	20
7	7311.00	37.48	54.00	-16.52	28.49	8.99	Average	100	40
8	7311.00	50.44	74.00	-23.56	41.45	8.99	Peak	100	40


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	2452
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

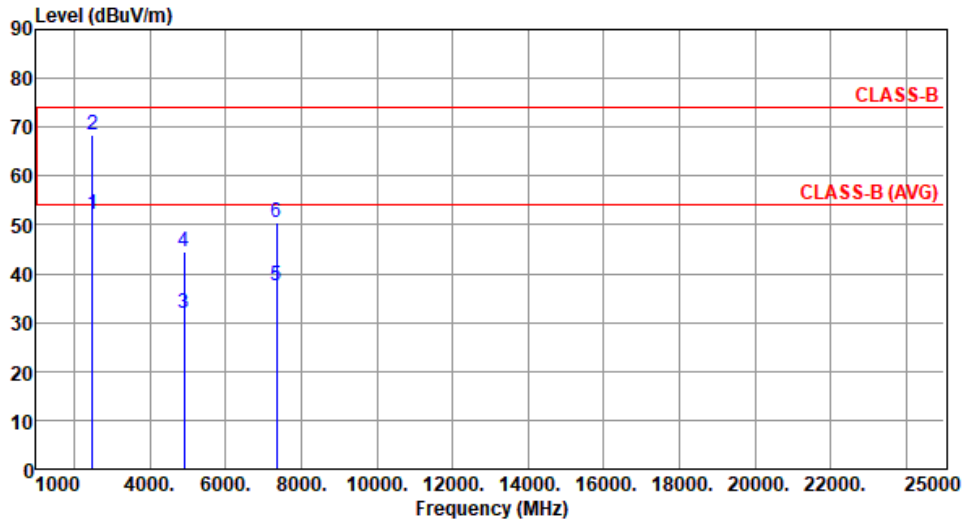

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	52.21	54.00	-1.79	54.95	-2.74	Average	100	180
2	2483.50	68.57	74.00	-5.43	71.31	-2.74	Peak	100	180
3	4904.00	31.96	54.00	-22.04	28.47	3.49	Average	100	50
4	4904.00	44.34	74.00	-29.66	40.85	3.49	Peak	100	50
5	7356.00	37.60	54.00	-16.40	28.55	9.05	Average	100	20
6	7356.00	50.42	74.00	-23.58	41.37	9.05	Peak	100	20


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	2452
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

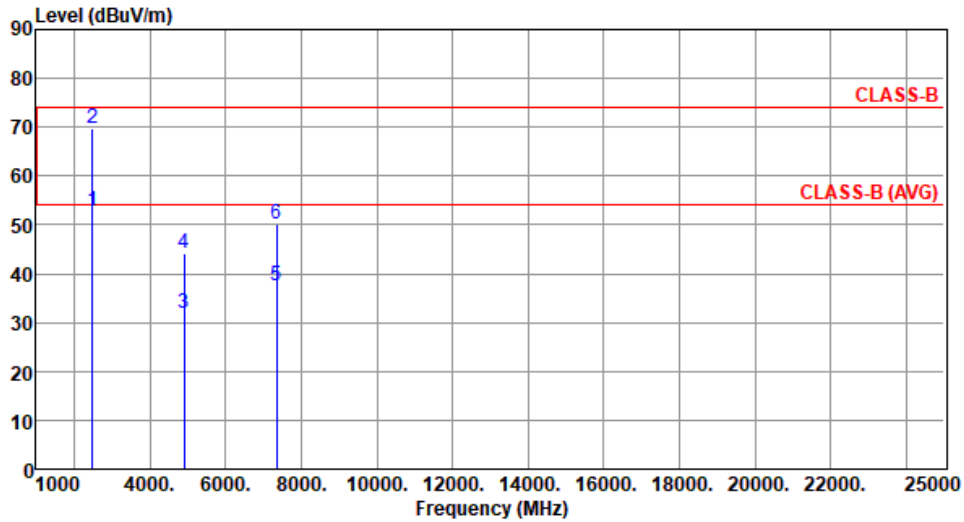

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	52.87	54.00	-1.13	55.61	-2.74	Average	154	37
2	2483.50	69.83	74.00	-4.17	72.57	-2.74	Peak	154	37
3	4904.00	31.80	54.00	-22.20	28.31	3.49	Average	100	40
4	4904.00	44.14	74.00	-29.86	40.65	3.49	Peak	100	40
5	7356.00	37.48	54.00	-16.52	28.43	9.05	Average	100	30
6	7356.00	50.23	74.00	-23.77	41.18	9.05	Peak	100	30

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



## 3.6 Emissions in Non-Restricted Frequency Bands

### 3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

### 3.6.2 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

#### Emission level measurement


1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

### 3.6.3 Test Setup

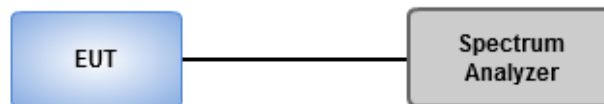

### 3.6.4 Unwanted Emissions into Non-Restricted Frequency Bands


Ambient Condition	24°C / 67%	Tested By	Aska Huang
-------------------	------------	-----------	------------

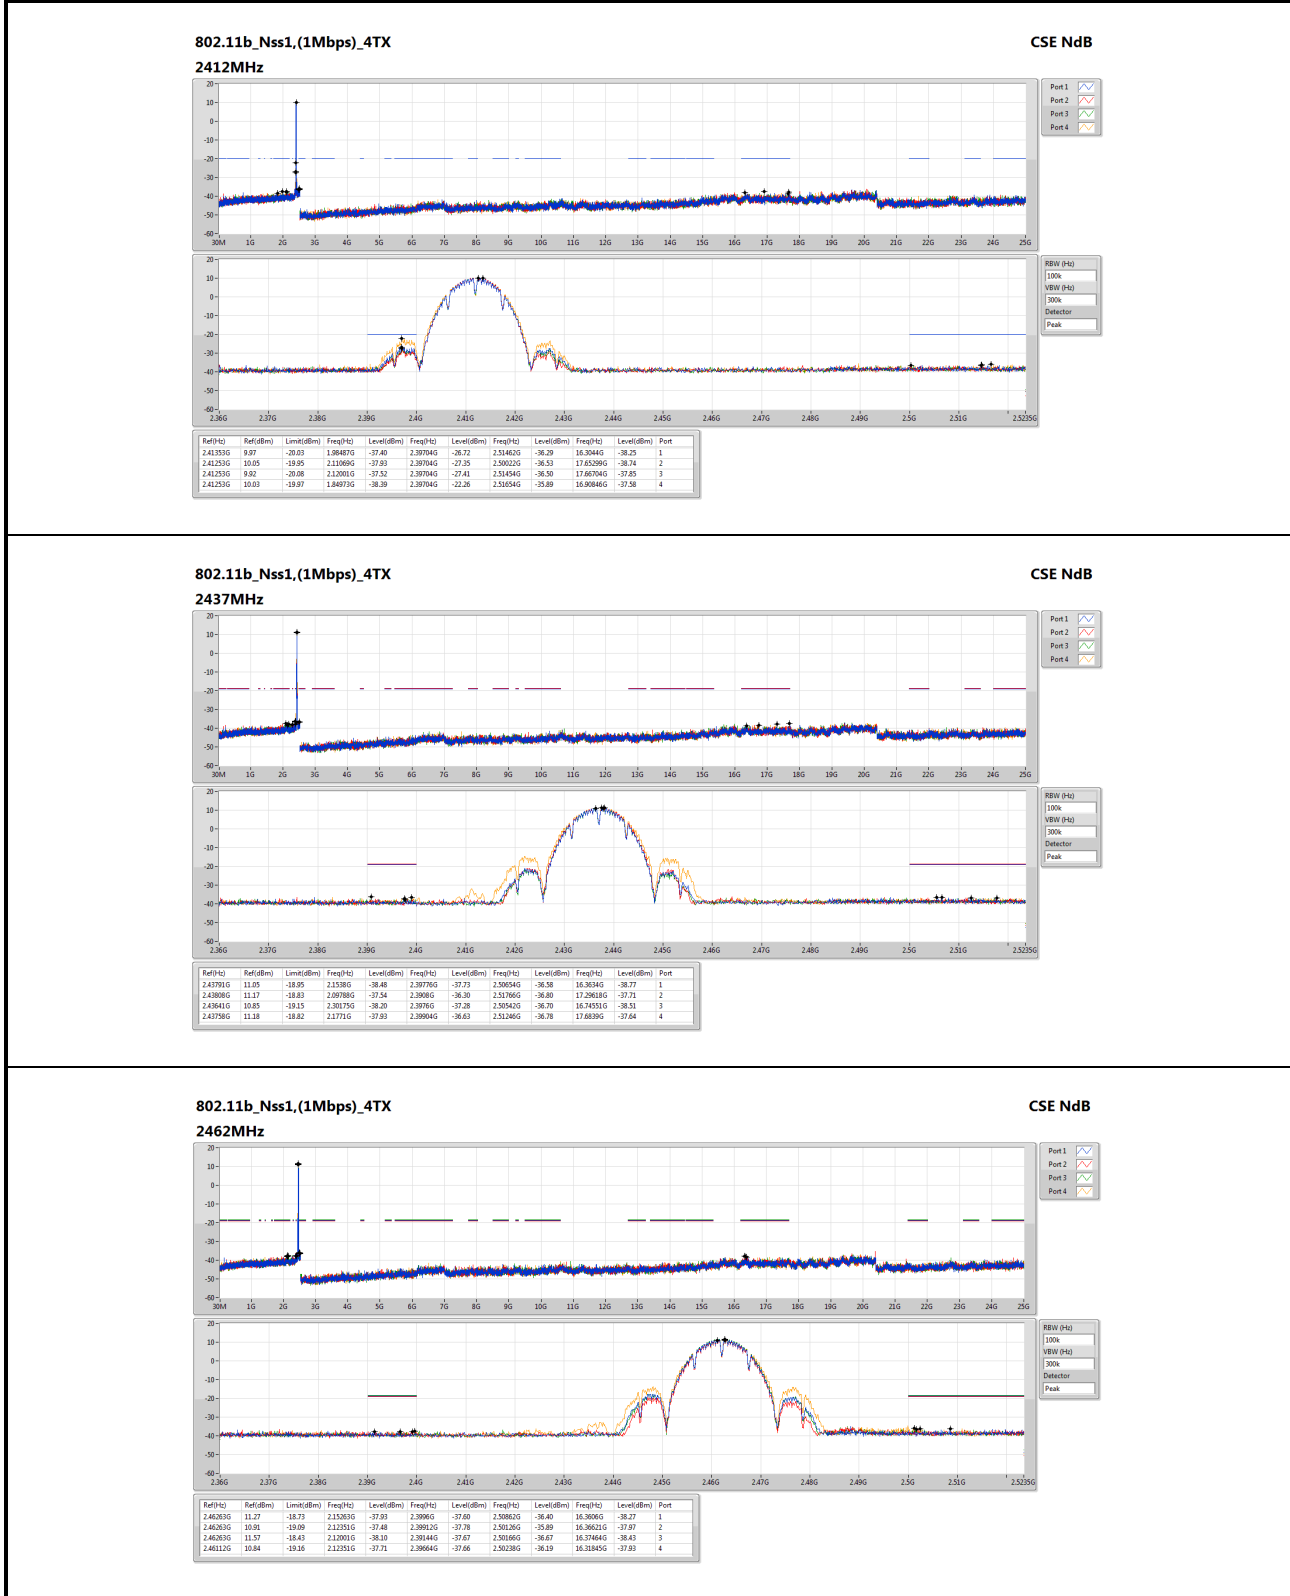

802.11g\_Nss1,(6Mbps)\_4TX

2412MHz


CSE NdB

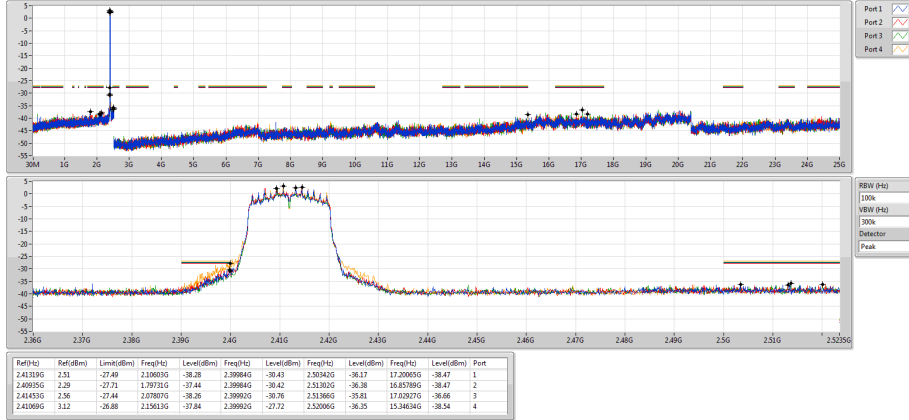

802.11g\_Nss1,(6Mbps)\_4TX

2437MHz


CSE NdB

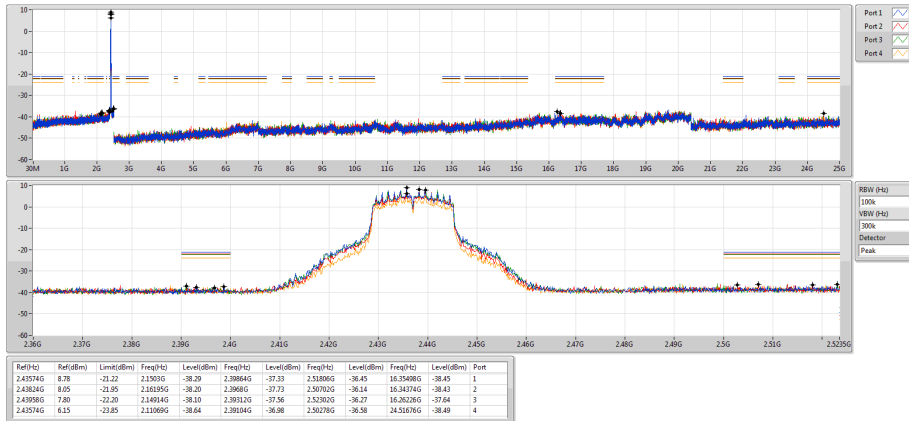

802.11g\_Nss1,(6Mbps)\_4TX

2462MHz


CSE NdB

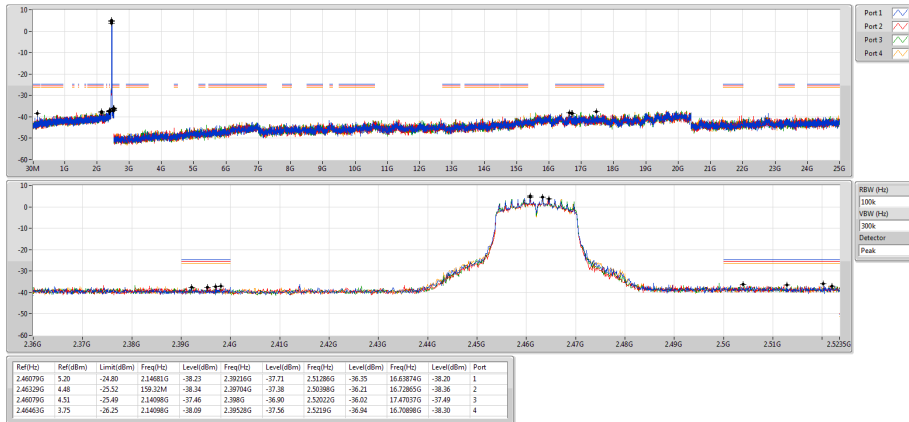

802.11n HT20\_Nss1,(MCS0)\_4TX

2412MHz


CSE NdB

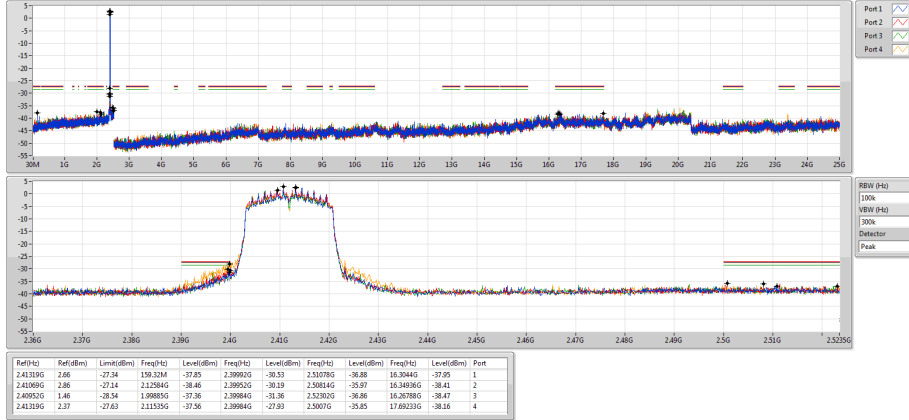

802.11n HT20\_Nss1,(MCS0)\_4TX

2437MHz


CSE NdB

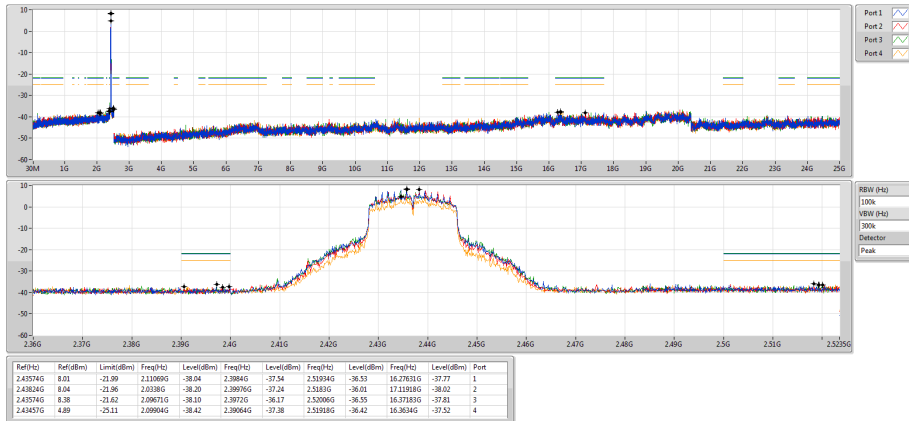

802.11n HT20\_Nss1,(MCS0)\_4TX

2462MHz


CSE NdB

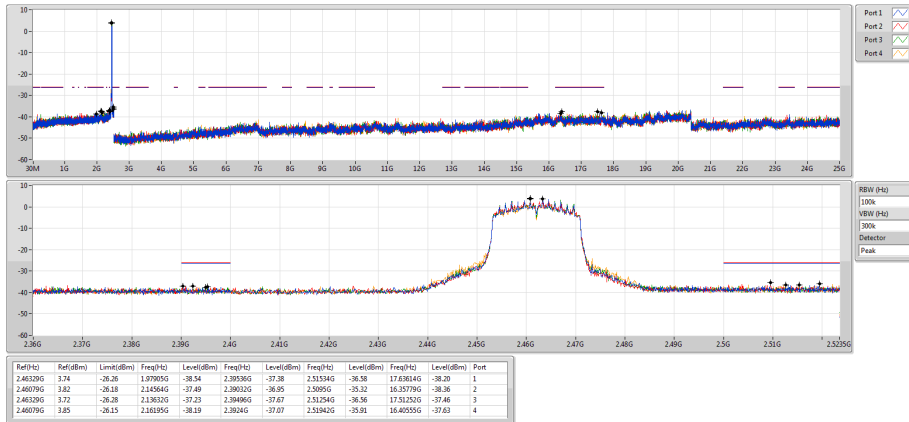

802.11n HT40\_Nss1,(MCS0)\_4TX

2422MHz


CSE NdB

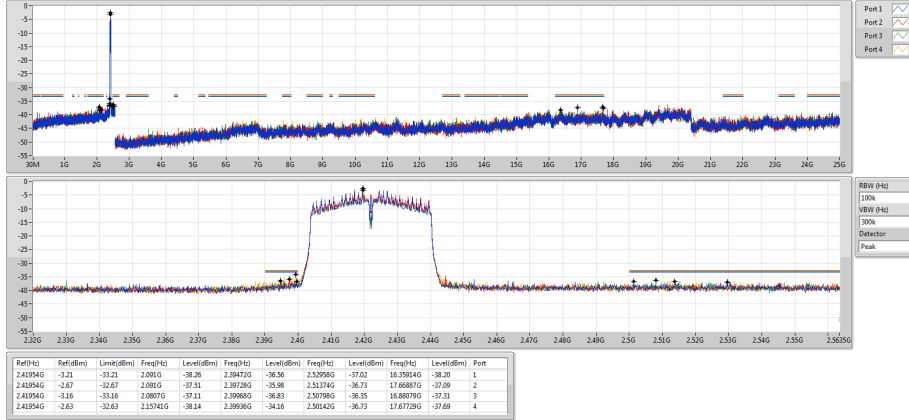

802.11n HT40\_Nss1,(MCS0)\_4TX

2437MHz


CSE NdB

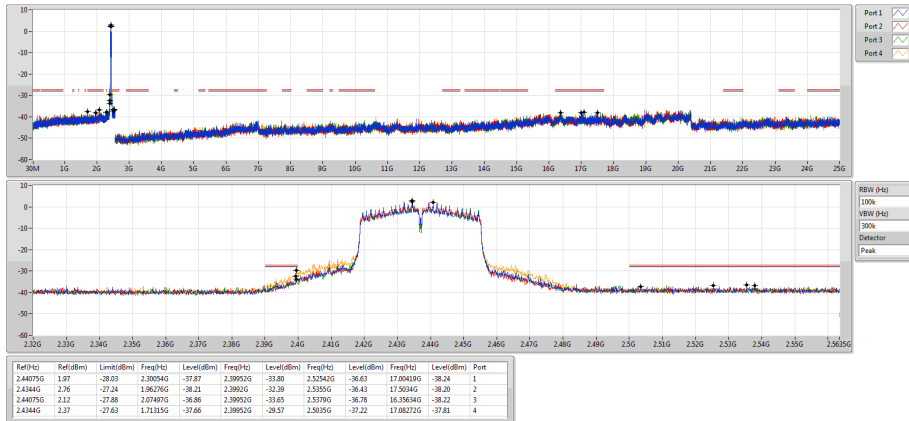

802.11n HT40\_Nss1,(MCS0)\_4TX

2452MHz

CSE NdB

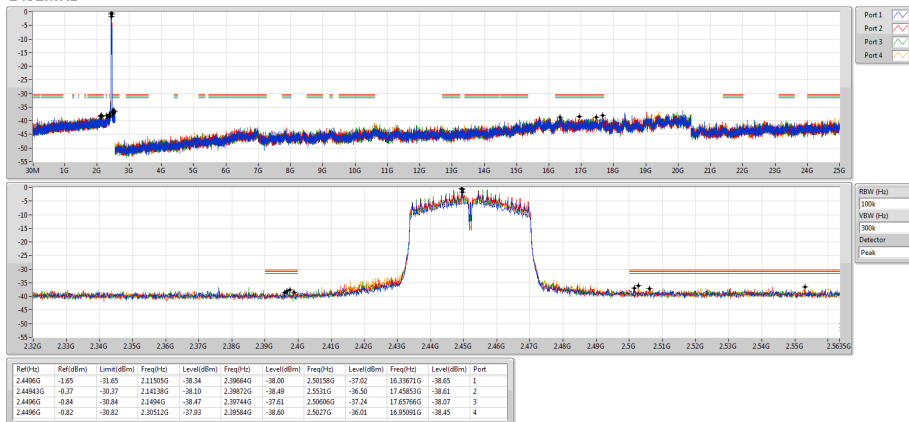

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan  
(R.O.C.)

### **Kwei Shan**

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)  
No.2-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC\_Service@icertifi.com.tw

==END==