

# FCC Test Report

**FCC ID** : SWX-UDR  
**Equipment** : UniFi Dream Router  
**Model No.** : UDR  
**Brand Name** : UBIQUITI  
**Applicant** : Ubiquiti Inc.  
**Address** : 685 Third Avenue, (27th Floor) New York, New York 10017 USA  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Jun. 08, 2021  
**Tested Date** : Jul. 13 ~ Jul. 19, 2021

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	7
1.3	Test Setup Chart .....	7
1.4	Test Equipment List and Calibration Data.....	8
1.5	Test Standards .....	9
1.6	Reference Guidance .....	9
1.7	Deviation from Test Standard and Measurement Procedure.....	9
1.8	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>10</b>
2.1	Testing Facility.....	10
2.2	The Worst Test Modes and Channel Details .....	10
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>11</b>
3.1	Conducted Emissions.....	11
3.2	6dB and Occupied Bandwidth .....	14
3.3	RF Output Power .....	22
3.4	Power Spectral Density .....	25
3.5	Emissions in Restricted Frequency Bands.....	33
3.6	Emissions in non-restricted Frequency Bands.....	49
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>56</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR160801AE	Rev. 01	Initial issue	Aug. 05, 2021
FR160801AE	Rev. 02	Antenna information is modified	Oct. 08, 2021

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.557MHz 37.89 (Margin -8.11dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 30.46MHz 36.74 (Margin -3.26dB) - QP	Pass
15.247(b)(3)	Maximum Output Power	Power [dBm]: 12.30	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	V5.1 LE	2402-2480	0-39 [40]	125 kbps
				500 kbps
				1 Mbps
2400-2483.5	V5.1 LE	2402-2480	0-39 [40]	2 Mbps

Note: Bluetooth LE (Low energy) uses GFSK modulation.

### 1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Gain (dBi)	Remarks
1	ANT 5	Dipole	I-PEX	2.5	---

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	100-240V, 50/60Hz, 1.1A
--------------------------	-------------------------

### 1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	Power cord	2m, non-shielded without core

### 1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

### 1.1.6 Test Tool and Duty Cycle

Test Tool	WCN Combo Tool, Version: V2.1848.00	
Modulation Mode	Duty Cycle Of Test Signal (%)	Duty Factor (dB)
GFSK-125kbps	83.35%	0.79
GFSK-500kbps	57.94%	2.37
GFSK-1Mbps	65.28%	1.85
GFSK-2Mbps	36.11%	4.42


### 1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)		
	2402	2440	2480
GFSK/125kbps	7	7	7
GFSK/500kbps	7	7	7
GFSK/1Mbps	7	7	7
GFSK/2Mbps	7	7	7

## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	RJ45	ICC	RJ45-10m	---	---
2	RJ45	ICC	RJ45-10m	---	---
3	RJ45	ICC	RJ45-1m	---	---
4	RJ45	ICC	RJ45-1m	---	---
5	RJ45	ICC	RJ45-1m	---	---
6	RJ45 Load	ICC	--	---	---
7	Notebook	DELL	Latitude 5400	DoC	---
8	Notebook	DELL	Latitude E5470	DoC	---

## 1.3 Test Setup Chart

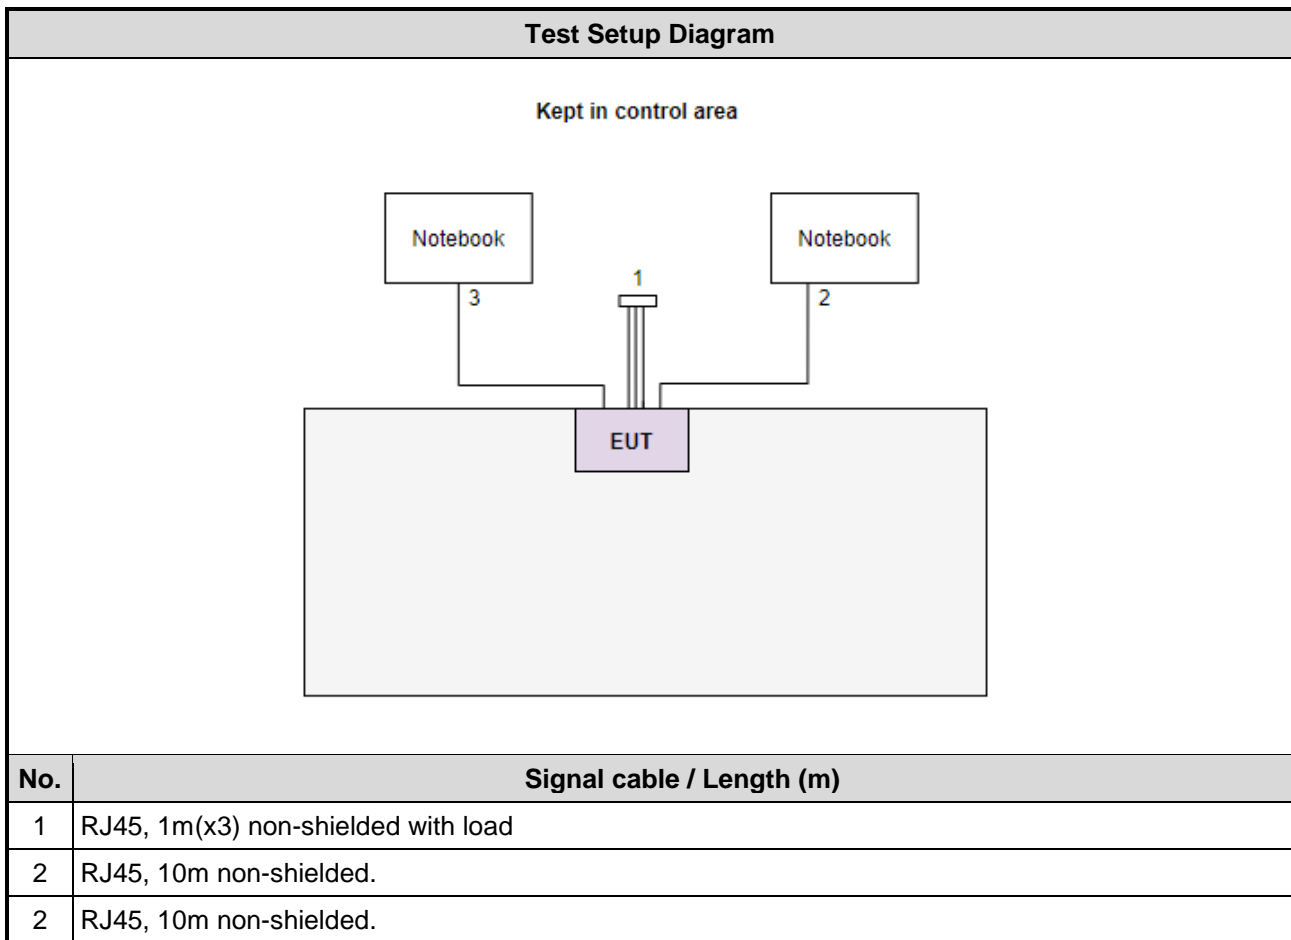

## 1.4 Test Equipment List and Calibration Data

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Test Date</b>	Jul. 19, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101658	Feb. 08, 2021	Feb. 07, 2022
LISN	R&S	ENV216	101579	Mar. 17, 2021	Mar. 16, 2022
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 29, 2020	Dec. 28, 2021
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 21, 2020	Oct. 20, 2021
50 ohm terminal (Support Unit)	NA	50	04	May 25, 2021	May 24, 2022
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber1 / (03CH01-WS)				
<b>Test Date</b>	Jul. 13 ~ Jul. 14, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101657	Mar. 12, 2021	Mar. 11, 2022
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2020	Dec. 03, 2021
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2020	Nov. 16, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jun. 30, 2021	Jun. 29, 2022
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 11, 2020	Dec. 10, 2021
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 06, 2020	Nov. 05, 2021
Preamplifier	EMC	EMC02325	980225	Jun. 29, 2021	Jun. 28, 2022
Preamplifier	Agilent	83017A	MY39501308	Sep. 26, 2020	Sep. 25, 2021
Preamplifier	EMC	EMC184045B	980192	Jul. 21, 2020	Jul. 20, 2021
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 06, 2020	Oct. 05, 2021
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 06, 2020	Oct. 05, 2021
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 06, 2020	Oct. 05, 2021
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 06, 2020	Oct. 05, 2021
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 06, 2020	Oct. 05, 2021
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 06, 2020	Oct. 05, 2021
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.



<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Test Date</b>	Jul. 14, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101063	Apr. 19, 2021	Apr. 18, 2022
Power Meter	Anritsu	ML2495A	1241002	Nov. 04, 2020	Nov. 03, 2021
Power Sensor	Anritsu	MA2411B	1207366	Nov. 04, 2020	Nov. 03, 2021
Measurement Software	-	SENSE-15247_FS	V5.10.7.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

47 CFR FCC Part 15.247  
ANSI C63.10-2013

## 1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.7 Deviation from Test Standard and Measurement Procedure

None

## 1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ )).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	$\pm 34.130$ Hz
Conducted power	$\pm 0.808$ dB
Power density	$\pm 0.583$ dB
Conducted emission	$\pm 2.715$ dB
AC conducted emission	$\pm 2.92$ dB
Radiated emission $\leq 1$ GHz	$\pm 3.41$ dB
Radiated emission $> 1$ GHz	$\pm 4.59$ dB

## 2 Test Configuration

### 2.1 Testing Facility

<b>Test Laboratory</b>	International Certification Corporation
<b>Test Site</b>	CO01-WS, 03CH01-WS, TH01-WS
<b>Address of Test Site</b>	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions Radiated Emissions $\leq$ 1GHz	BT LE	2402	2Mbps	---
Maximum Output Power 6dB bandwidth Power spectral density	BT LE	2402, 2440, 2480	125kbps 500kbps 1Mbps 2Mbps	---
Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1Mbps	---

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

#### 3.1.3 Test Setup




- Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

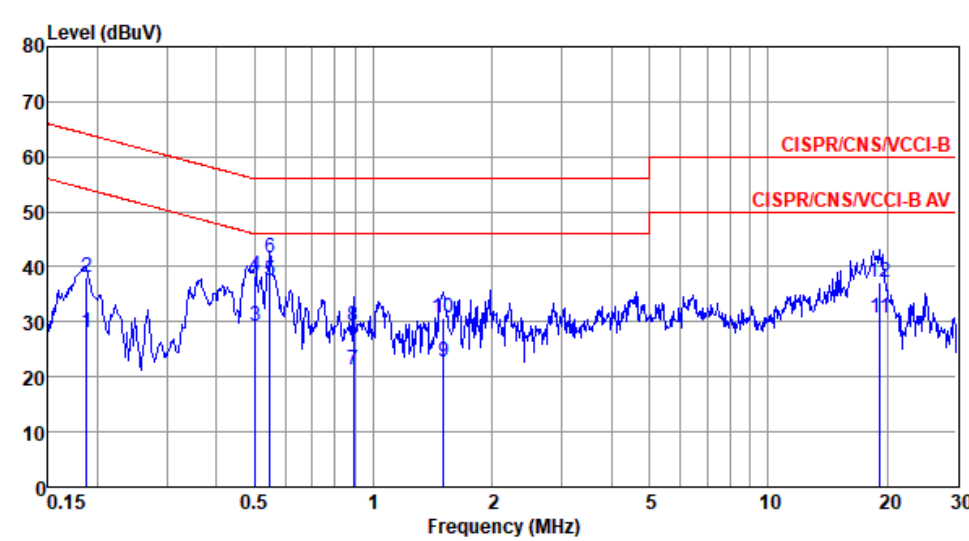Modulation Mode	BT LE-2Mbps	Test Freq. (MHz)	2402																																																																																																																					
Power Phase	Line																																																																																																																							
Test by : Joe Liao      Temperature: 22°C      Humidity: 68%																																																																																																																								
																																																																																																																								
<table border="1"> <thead> <tr> <th></th> <th>Freq MHz</th> <th>Level dBuV</th> <th>Limit Line dBuV</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Cable loss dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.188</td><td>28.16</td><td>54.13</td><td>-25.97</td><td>18.45</td><td>9.65</td><td>0.06</td><td>Average</td></tr> <tr><td>2</td><td>0.188</td><td>38.09</td><td>64.13</td><td>-26.04</td><td>28.38</td><td>9.65</td><td>0.06</td><td>QP</td></tr> <tr><td>3</td><td>0.502</td><td>29.16</td><td>46.00</td><td>-16.84</td><td>19.43</td><td>9.64</td><td>0.09</td><td>Average</td></tr> <tr><td>4</td><td>0.502</td><td>38.25</td><td>56.00</td><td>-17.75</td><td>28.52</td><td>9.64</td><td>0.09</td><td>QP</td></tr> <tr><td>5*</td><td>0.546</td><td>37.43</td><td>46.00</td><td>-8.57</td><td>27.70</td><td>9.64</td><td>0.09</td><td>Average</td></tr> <tr><td>6</td><td>0.546</td><td>41.61</td><td>56.00</td><td>-14.39</td><td>31.88</td><td>9.64</td><td>0.09</td><td>QP</td></tr> <tr><td>7</td><td>0.890</td><td>21.16</td><td>46.00</td><td>-24.84</td><td>11.40</td><td>9.65</td><td>0.11</td><td>Average</td></tr> <tr><td>8</td><td>0.890</td><td>29.11</td><td>56.00</td><td>-26.89</td><td>19.35</td><td>9.65</td><td>0.11</td><td>QP</td></tr> <tr><td>9</td><td>1.504</td><td>22.68</td><td>46.00</td><td>-23.32</td><td>12.86</td><td>9.66</td><td>0.16</td><td>Average</td></tr> <tr><td>10</td><td>1.504</td><td>30.64</td><td>56.00</td><td>-25.36</td><td>20.82</td><td>9.66</td><td>0.16</td><td>QP</td></tr> <tr><td>11</td><td>19.189</td><td>30.56</td><td>50.00</td><td>-19.44</td><td>20.22</td><td>9.68</td><td>0.66</td><td>Average</td></tr> <tr><td>12</td><td>19.189</td><td>37.12</td><td>60.00</td><td>-22.88</td><td>26.78</td><td>9.68</td><td>0.66</td><td>QP</td></tr> </tbody> </table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Remark	1	0.188	28.16	54.13	-25.97	18.45	9.65	0.06	Average	2	0.188	38.09	64.13	-26.04	28.38	9.65	0.06	QP	3	0.502	29.16	46.00	-16.84	19.43	9.64	0.09	Average	4	0.502	38.25	56.00	-17.75	28.52	9.64	0.09	QP	5*	0.546	37.43	46.00	-8.57	27.70	9.64	0.09	Average	6	0.546	41.61	56.00	-14.39	31.88	9.64	0.09	QP	7	0.890	21.16	46.00	-24.84	11.40	9.65	0.11	Average	8	0.890	29.11	56.00	-26.89	19.35	9.65	0.11	QP	9	1.504	22.68	46.00	-23.32	12.86	9.66	0.16	Average	10	1.504	30.64	56.00	-25.36	20.82	9.66	0.16	QP	11	19.189	30.56	50.00	-19.44	20.22	9.68	0.66	Average	12	19.189	37.12	60.00	-22.88	26.78	9.68	0.66	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Remark																																																																																																																
1	0.188	28.16	54.13	-25.97	18.45	9.65	0.06	Average																																																																																																																
2	0.188	38.09	64.13	-26.04	28.38	9.65	0.06	QP																																																																																																																
3	0.502	29.16	46.00	-16.84	19.43	9.64	0.09	Average																																																																																																																
4	0.502	38.25	56.00	-17.75	28.52	9.64	0.09	QP																																																																																																																
5*	0.546	37.43	46.00	-8.57	27.70	9.64	0.09	Average																																																																																																																
6	0.546	41.61	56.00	-14.39	31.88	9.64	0.09	QP																																																																																																																
7	0.890	21.16	46.00	-24.84	11.40	9.65	0.11	Average																																																																																																																
8	0.890	29.11	56.00	-26.89	19.35	9.65	0.11	QP																																																																																																																
9	1.504	22.68	46.00	-23.32	12.86	9.66	0.16	Average																																																																																																																
10	1.504	30.64	56.00	-25.36	20.82	9.66	0.16	QP																																																																																																																
11	19.189	30.56	50.00	-19.44	20.22	9.68	0.66	Average																																																																																																																
12	19.189	37.12	60.00	-22.88	26.78	9.68	0.66	QP																																																																																																																
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																								

<b>Modulation Mode</b>	BT LE-2Mbps	<b>Test Freq. (MHz)</b>	2402
<b>Power Phase</b>	Neutral		

Test by : Joe Liao      Temperature: 22°C      Humidity: 68%

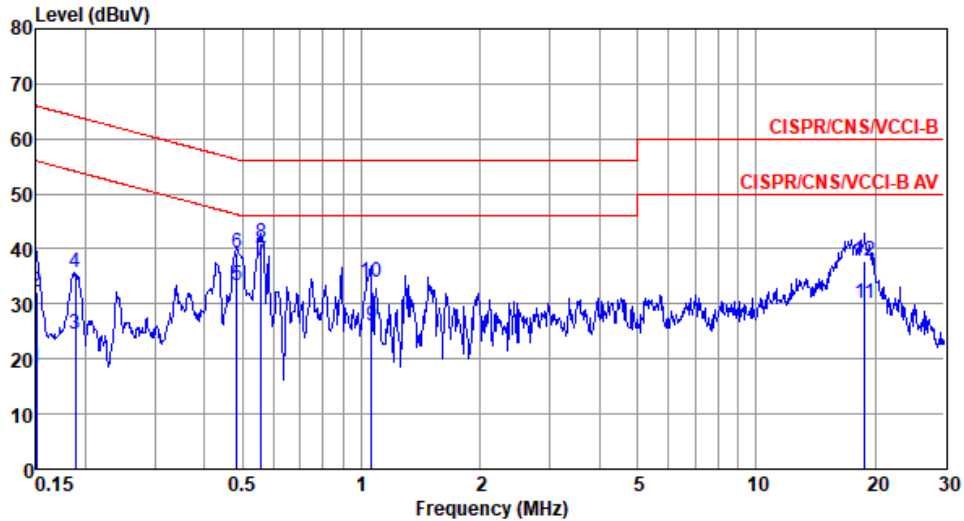

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Remark
1	0.150	18.17	56.00	-37.83	8.43	9.69	0.05	Average
2	0.150	32.29	66.00	-33.71	22.55	9.69	0.05	QP
3	0.189	24.39	54.10	-29.71	14.65	9.68	0.06	Average
4	0.189	35.84	64.10	-28.26	26.10	9.68	0.06	QP
5	0.484	33.29	46.26	-12.97	23.53	9.67	0.09	Average
6	0.484	39.17	56.26	-17.09	29.41	9.67	0.09	QP
7*	0.557	37.89	46.00	-8.11	28.13	9.67	0.09	Average
8	0.557	41.08	56.00	-14.92	31.32	9.67	0.09	QP
9	1.060	25.84	46.00	-20.16	16.03	9.68	0.13	Average
10	1.060	33.95	56.00	-22.05	24.14	9.68	0.13	QP
11	18.820	30.24	50.00	-19.76	19.75	9.83	0.66	Average
12	18.820	37.83	60.00	-22.17	27.34	9.83	0.66	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 6dB and Occupied Bandwidth

### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

### 3.2.2 Test Procedures


#### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

### 3.2.3 Test Setup

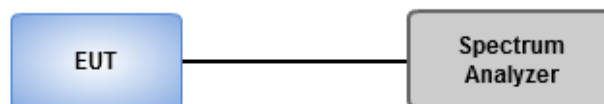

### 3.2.4 Test Result of 6dB and Occupied Bandwidth

<b>Ambient Condition</b>	24°C / 67%	<b>Tested By</b>	Aska Huang
--------------------------	------------	------------------	------------

#### Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(125kbps)	706.522k	1.064M	1M06F1D	688.406k	1.06M
BT-LE(500kbps)	670.29k	1.031M	1M03F1D	659.42k	1.027M
BT-LE(1Mbps)	713.768k	1.035M	1M04F1D	706.522k	1.035M
BT-LE(2Mbps)	1.246M	2.062M	2M06F1D	1.239M	2.062M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;  
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

#### Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	500k	706.522k	1.064M
2440MHz	Pass	500k	706.522k	1.06M
2480MHz	Pass	500k	688.406k	1.06M
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	500k	666.667k	1.027M
2440MHz	Pass	500k	670.29k	1.031M
2480MHz	Pass	500k	659.42k	1.027M
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	706.522k	1.035M
2440MHz	Pass	500k	706.522k	1.035M
2480MHz	Pass	500k	713.768k	1.035M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.239M	2.062M
2440MHz	Pass	500k	1.246M	2.062M
2480MHz	Pass	500k	1.246M	2.062M

Port X-N dB = Port X 6dB down bandwidth;  
Port X-OBW = Port X 99% occupied bandwidth

**BT-LE(125kbps)**

**EBW-DTS**


**2402MHz**

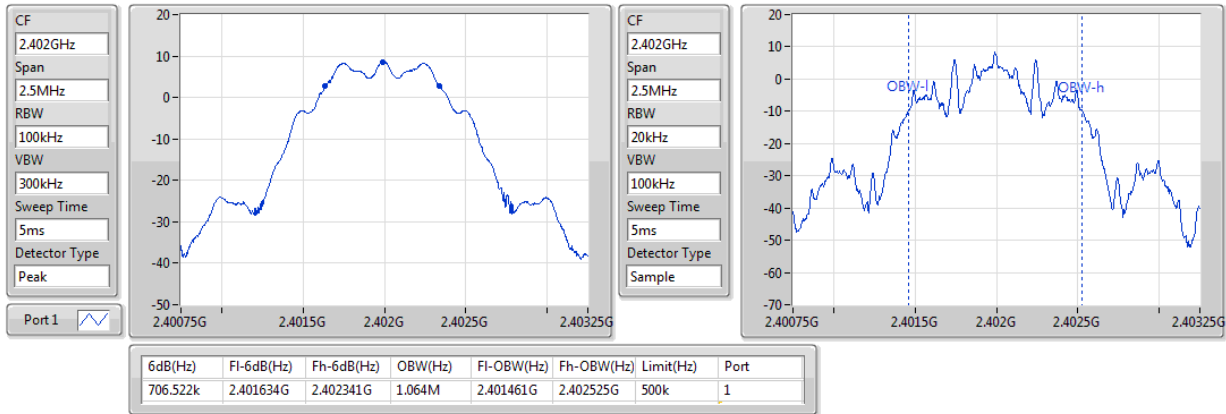

**BT-LE(125kbps)**

**EBW-DTS**

**2440MHz**

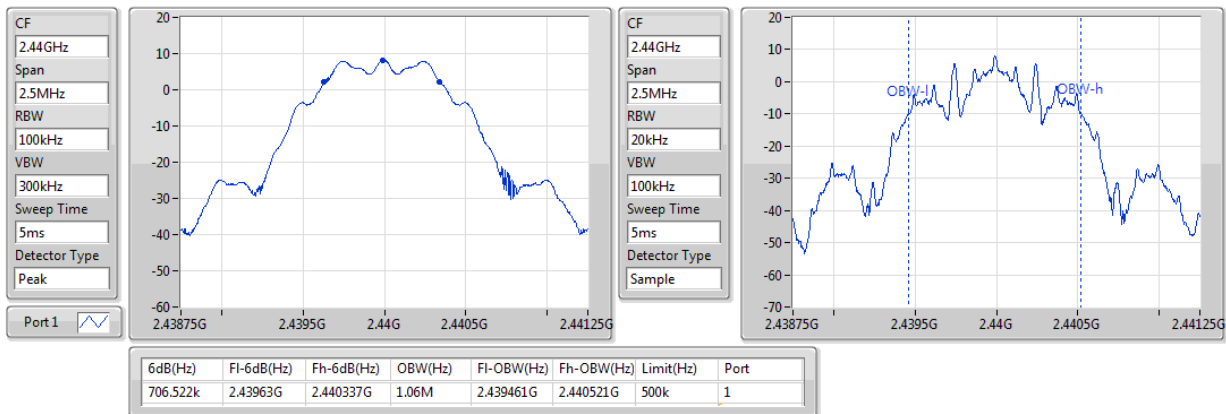




### BT-LE(125kbps)

### EBW-DTS


#### 2480MHz

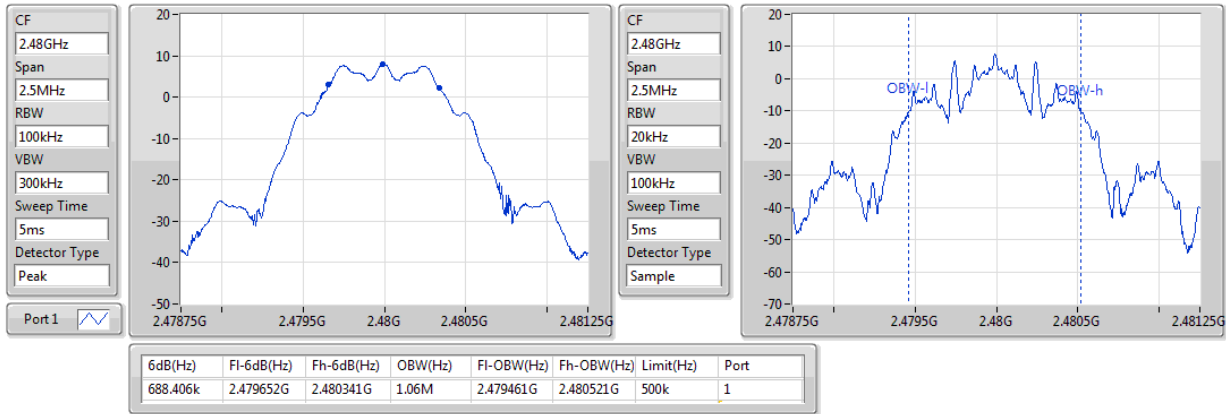

### BT-LE(500kbps)

### EBW-DTS


#### 2402MHz

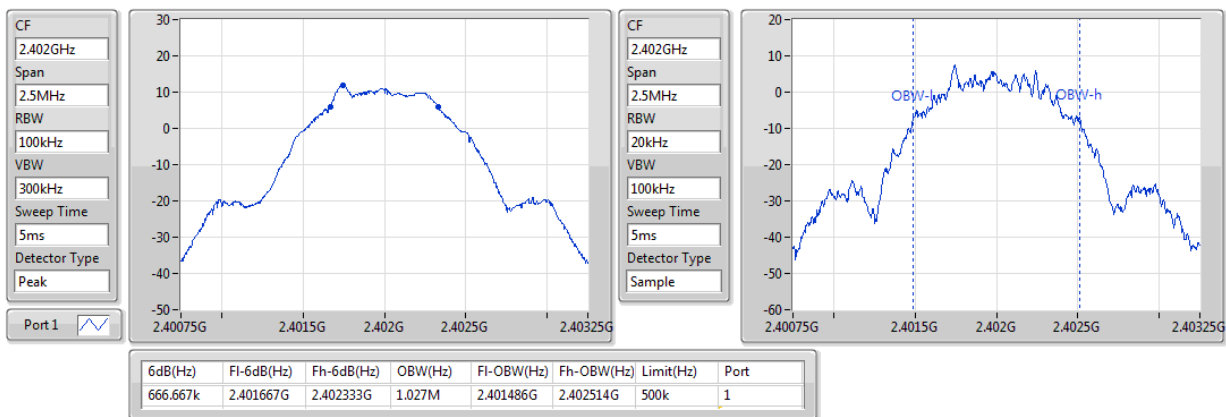

### BT-LE(500kbps)

### EBW-DTS


#### 2440MHz

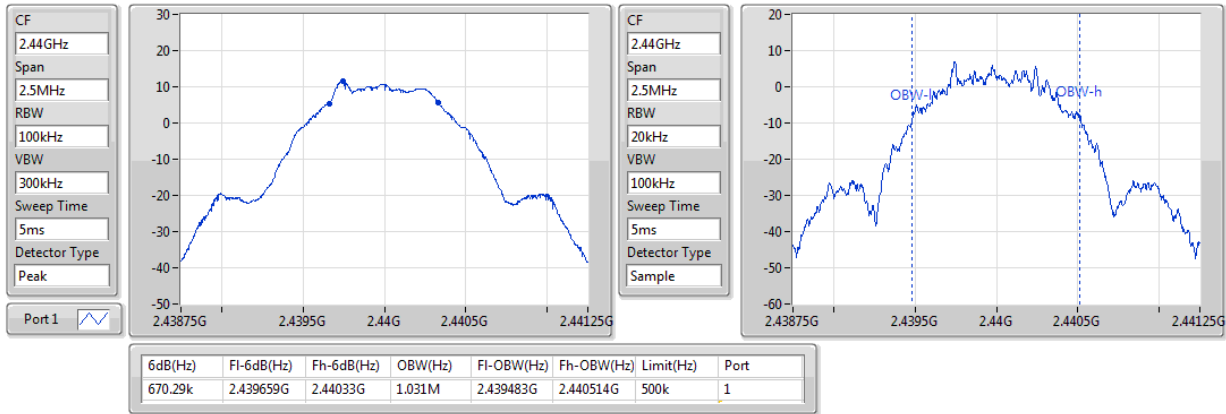

### BT-LE(500kbps)

### EBW-DTS


#### 2480MHz

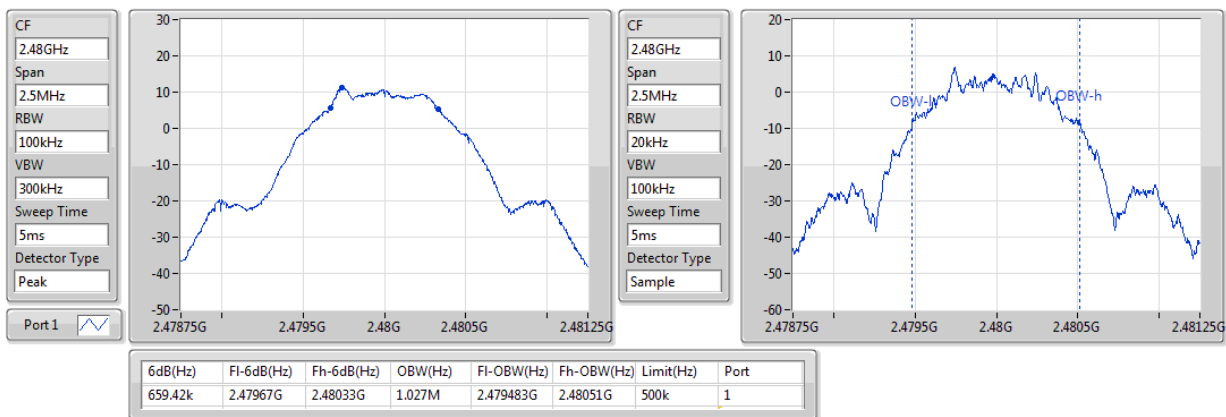

### BT-LE(1Mbps)

### EBW-DTS


#### 2402MHz

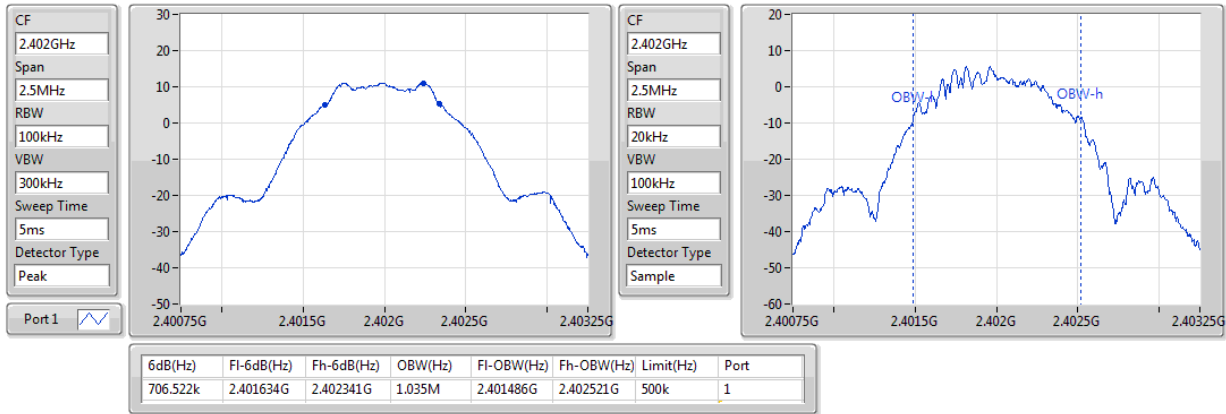

### BT-LE(1Mbps)

### EBW-DTS


#### 2440MHz

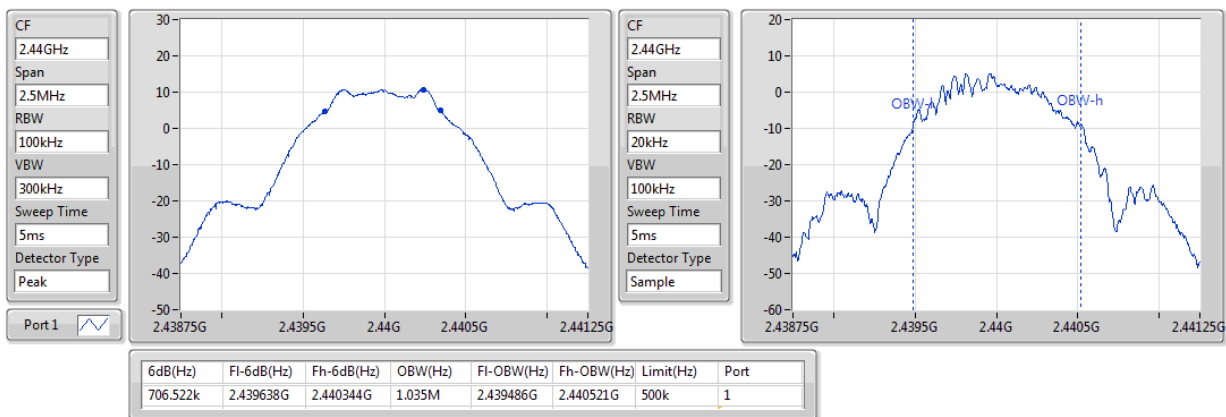

### BT-LE(1Mbps)

### EBW-DTS


#### 2480MHz

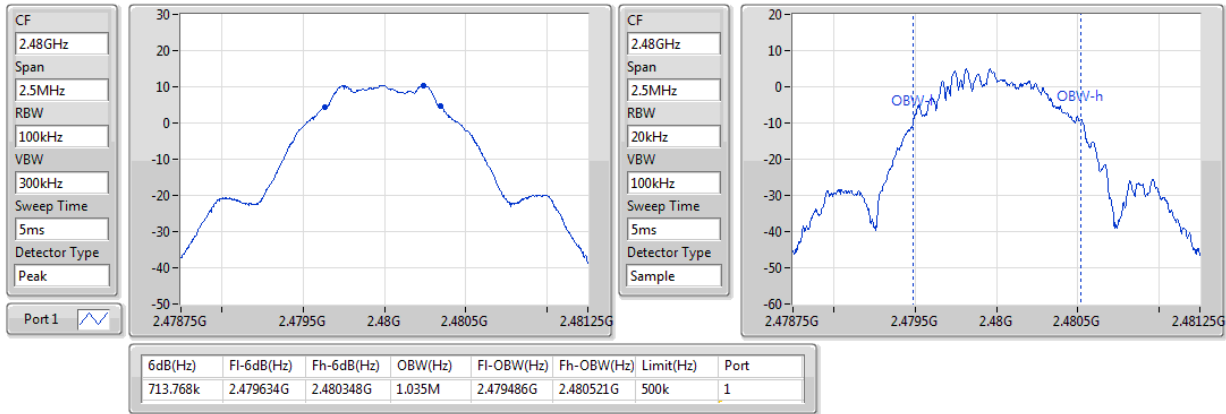

### BT-LE(2Mbps)

### EBW-DTS


#### 2402MHz

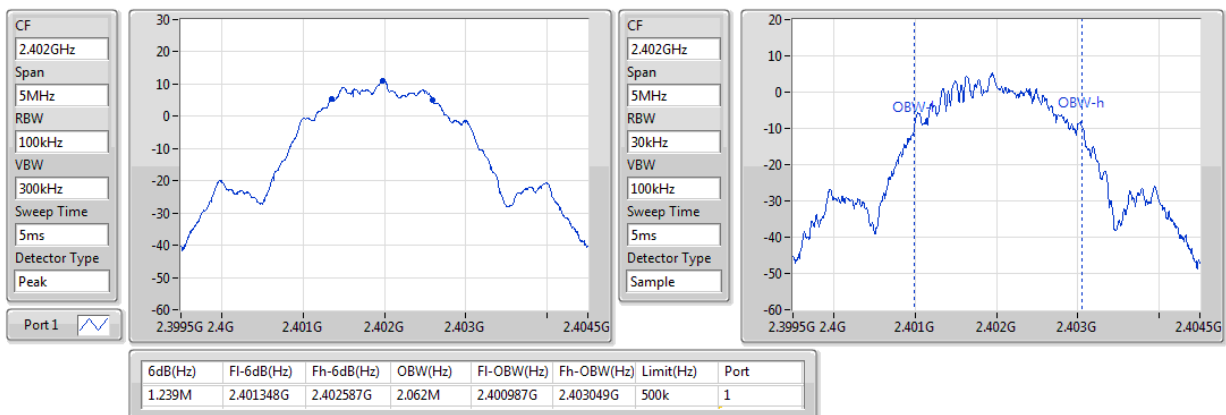

### BT-LE(2Mbps)

### EBW-DTS


#### 2440MHz

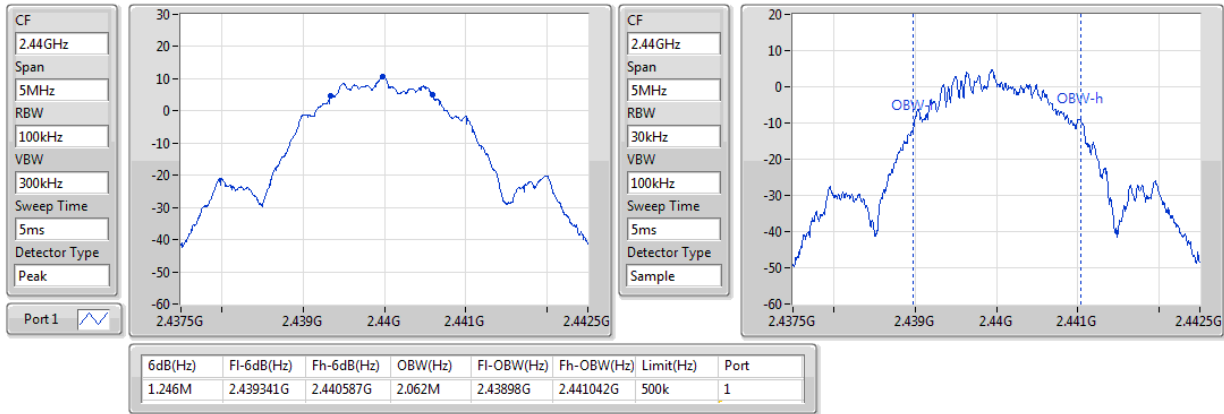

### BT-LE(2Mbps)

### EBW-DTS

#### 2480MHz

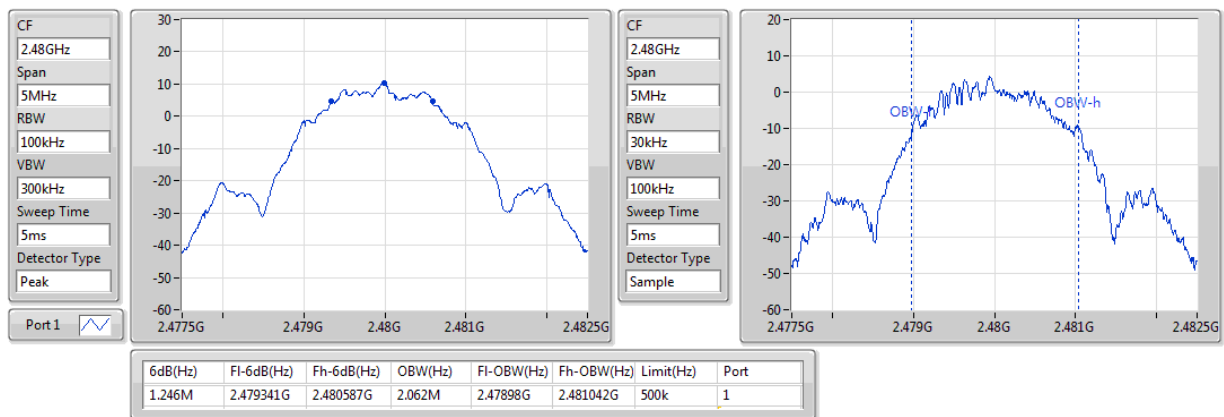

### 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power


Conducted power shall not exceed 1 Watt.

Antenna gain  $\leq 6\text{dBi}$ , no any corresponding reduction is in output power limit.

#### 3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

#### 3.3.3 Test Setup

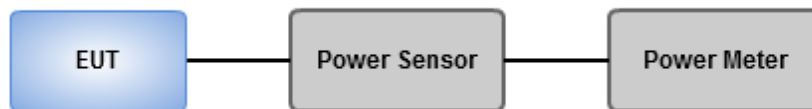

### 3.3.4 Test Result of Maximum Output Power

<b>Ambient Condition</b>	24°C / 67%	<b>Tested By</b>	Aska Huang
--------------------------	------------	------------------	------------

#### Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(125kbps)	11.92	0.01556
BT-LE(500kbps)	11.91	0.01552
BT-LE(1Mbps)	11.98	0.01578
BT-LE(2Mbps)	12.30	0.01698

#### Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	2.50	11.92	30.00
2440MHz	Pass	2.50	11.51	30.00
2480MHz	Pass	2.50	11.21	30.00
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	2.50	11.91	30.00
2440MHz	Pass	2.50	11.49	30.00
2480MHz	Pass	2.50	11.20	30.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.50	11.98	30.00
2440MHz	Pass	2.50	11.58	30.00
2480MHz	Pass	2.50	11.25	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.50	12.30	30.00
2440MHz	Pass	2.50	11.89	30.00
2480MHz	Pass	2.50	11.56	30.00

### Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(125kbps)	11.78	0.01507
BT-LE(500kbps)	11.78	0.01507
BT-LE(1Mbps)	11.86	0.01535
BT-LE(2Mbps)	12.17	0.01648

### Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	2.50	11.78	-
2440MHz	Pass	2.50	11.41	-
2480MHz	Pass	2.50	11.12	-
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	2.50	11.78	-
2440MHz	Pass	2.50	11.40	-
2480MHz	Pass	2.50	11.11	-
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.50	11.86	-
2440MHz	Pass	2.50	11.47	-
2480MHz	Pass	2.50	11.18	-
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.50	12.17	-
2440MHz	Pass	2.50	11.79	-
2480MHz	Pass	2.50	11.47	-

Note: Average power is for reference only.



## 3.4 Power Spectral Density


### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

### 3.4.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

### 3.4.3 Test Setup

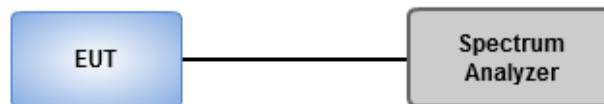

### 3.4.4 Test Result of Power Spectral Density

<b>Ambient Condition</b>	24°C / 67%	<b>Tested By</b>	Aska Huang
--------------------------	------------	------------------	------------

#### Summary

Mode	PD (dBm/3kHz)
2.4-2.4835GHz	-
BT-LE(125kbps)	5.86
BT-LE(500kbps)	5.50
BT-LE(1Mbps)	-3.66
BT-LE(2Mbps)	-5.54

#### Result


Mode	Result	Antenna Gain (dBi)	PD (dBm/3kHz)	PD Limit (dBm/3kHz)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	2.50	5.86	8.00
2440MHz	Pass	2.50	5.49	8.00
2480MHz	Pass	2.50	5.22	8.00
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	2.50	5.50	8.00
2440MHz	Pass	2.50	5.15	8.00
2480MHz	Pass	2.50	4.98	8.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.50	-3.66	8.00
2440MHz	Pass	2.50	-3.99	8.00
2480MHz	Pass	2.50	-4.28	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.50	-5.54	8.00
2440MHz	Pass	2.50	-5.94	8.00
2480MHz	Pass	2.50	-6.25	8.00

PD = Maximum power density

### BT-LE(125kbps)

PSD


2402MHz

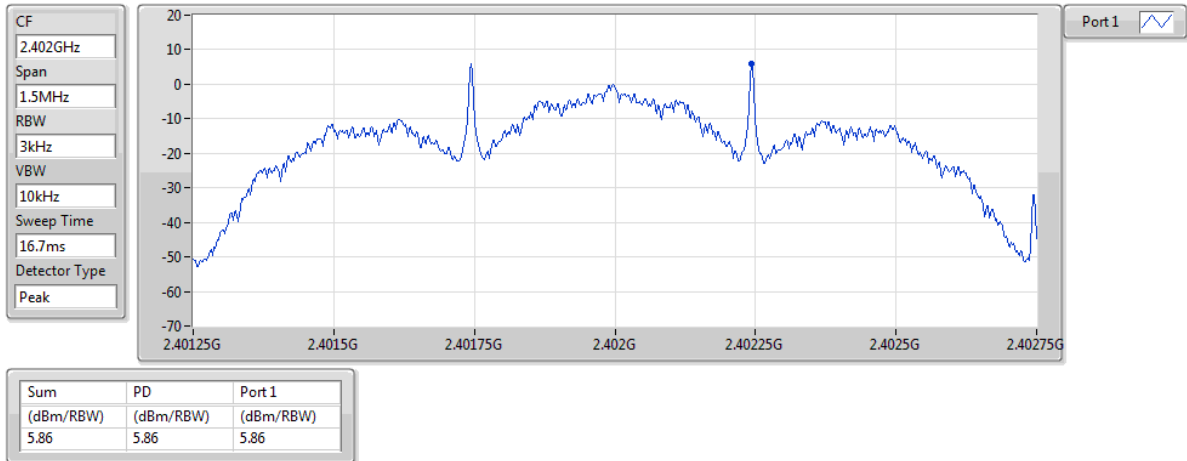

### BT-LE(125kbps)

PSD


2440MHz

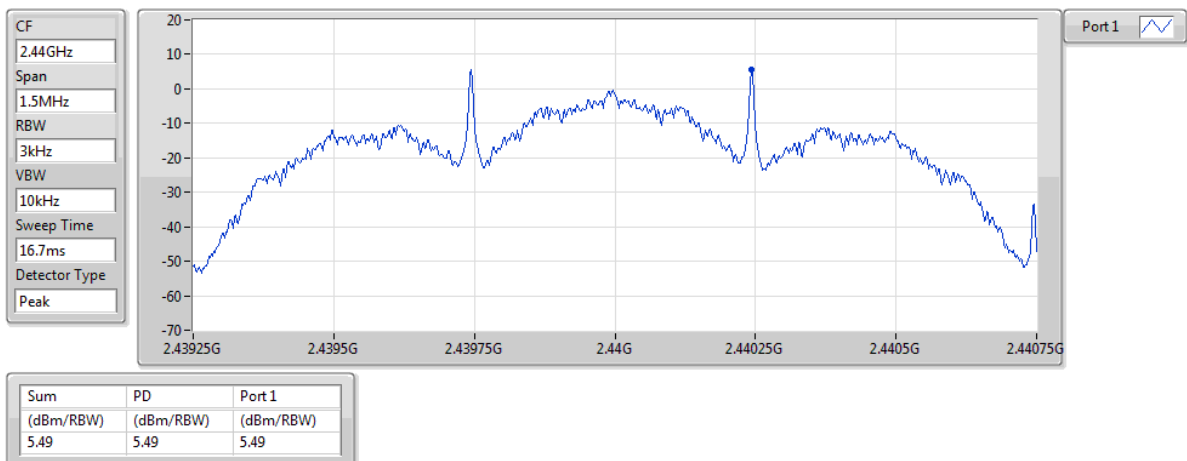

### BT-LE(125kbps)

PSD


2480MHz

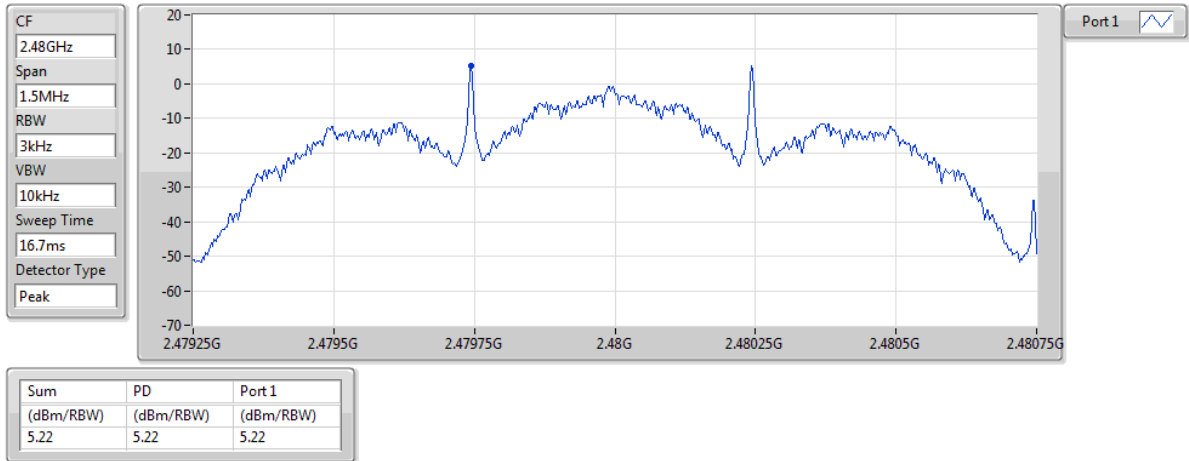

### BT-LE(500kbps)

PSD


2402MHz

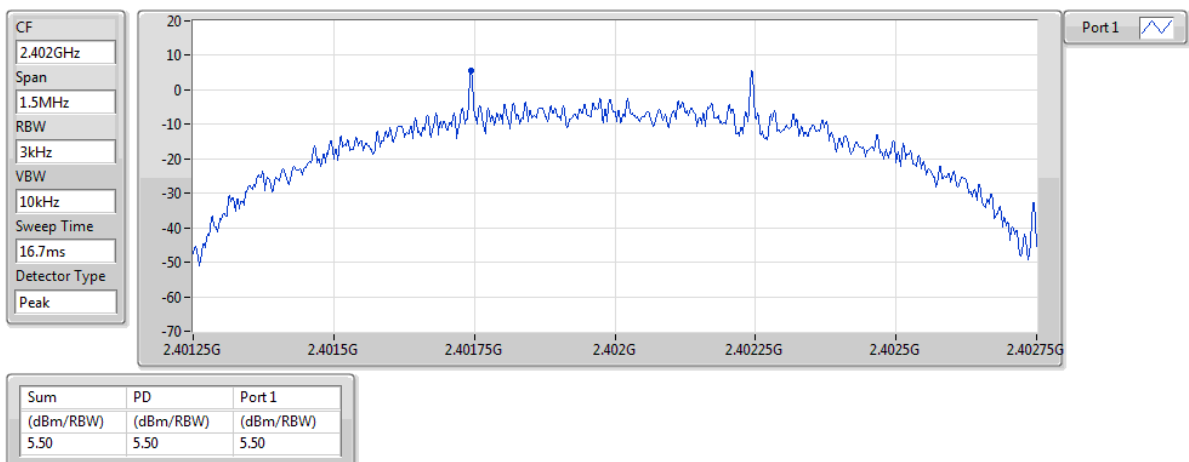

### BT-LE(500kbps)

PSD


#### 2440MHz

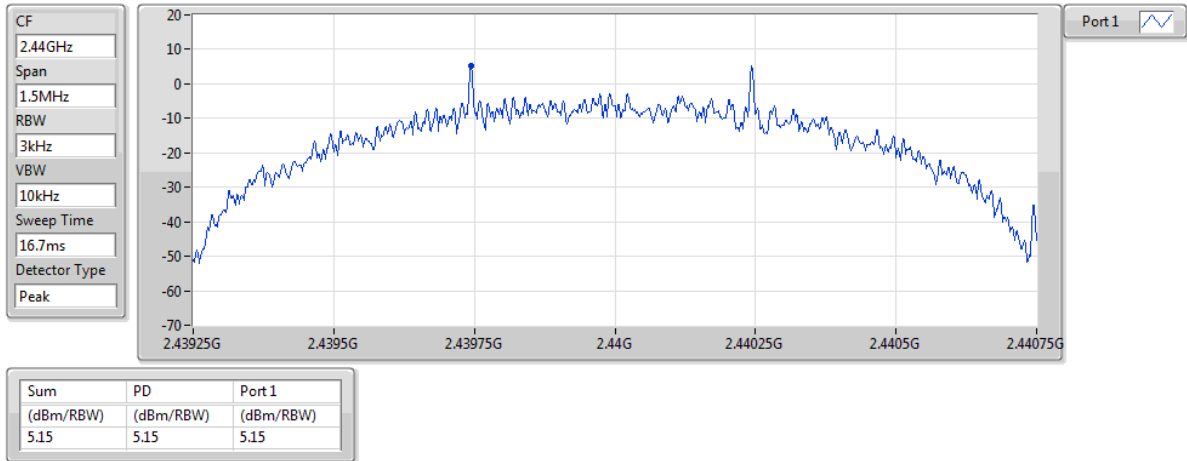

### BT-LE(500kbps)

PSD


#### 2480MHz

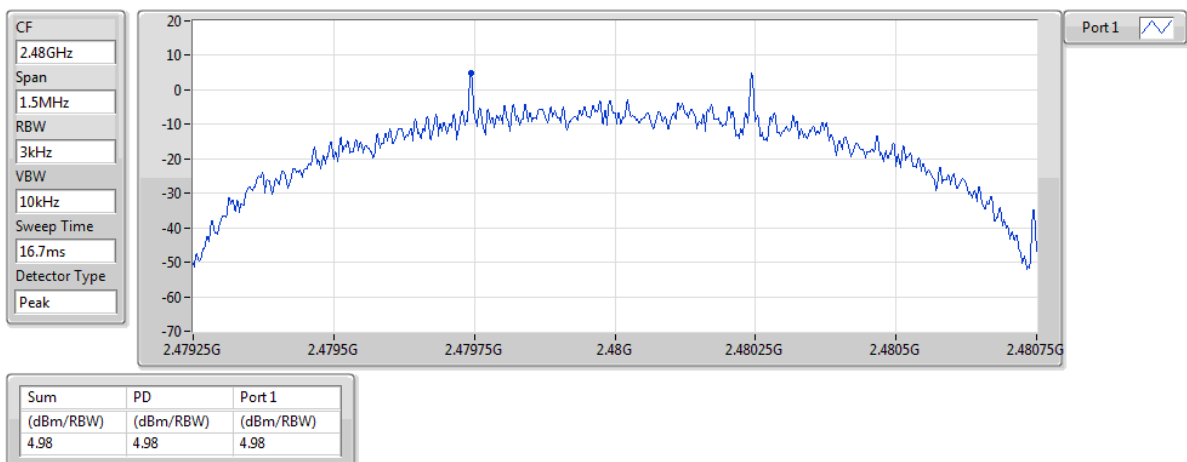

### BT-LE(1Mbps)

PSD


#### 2402MHz

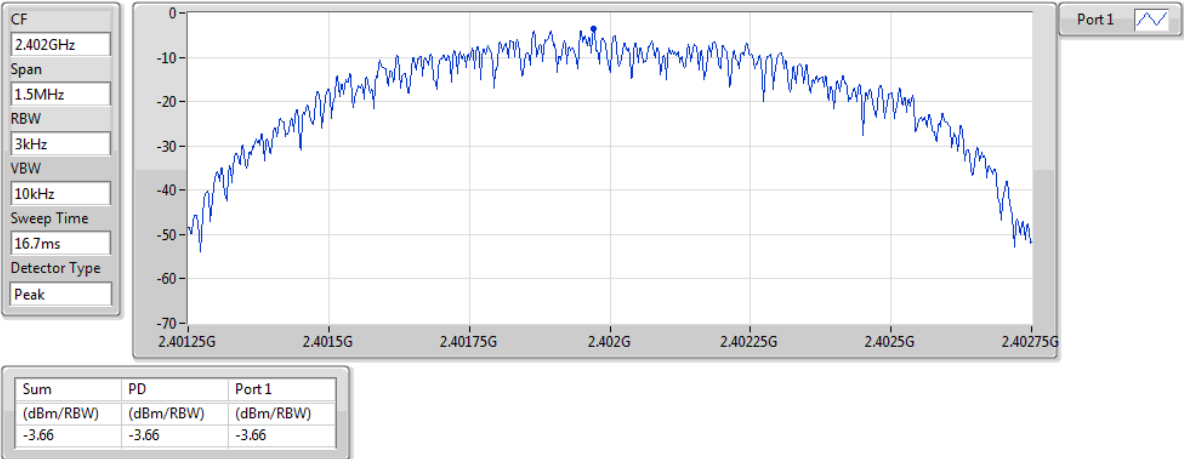

### BT-LE(1Mbps)

PSD


#### 2440MHz

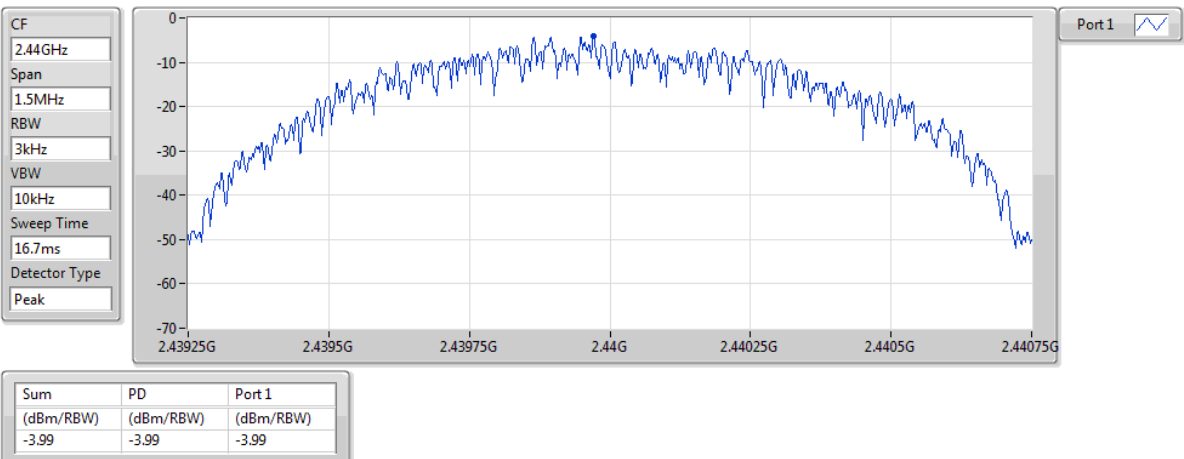

### BT-LE(1Mbps)

PSD


2480MHz

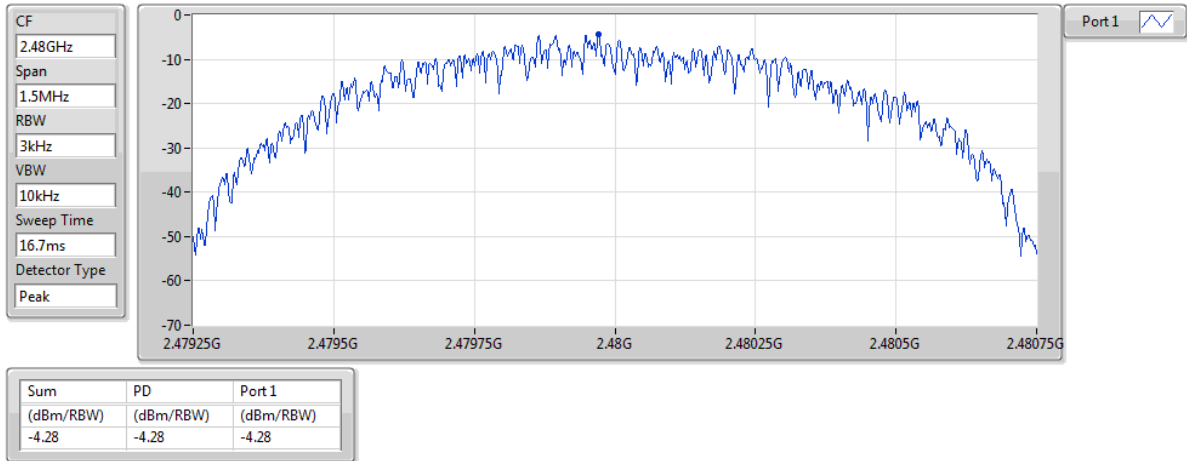

### BT-LE(2Mbps)

PSD


2402MHz

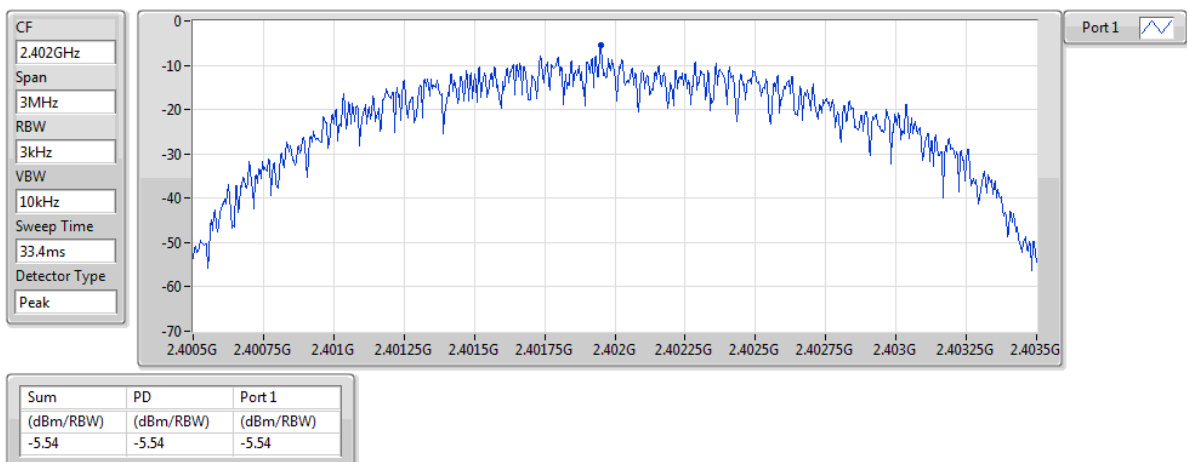

### BT-LE(2Mbps)

PSD


#### 2440MHz

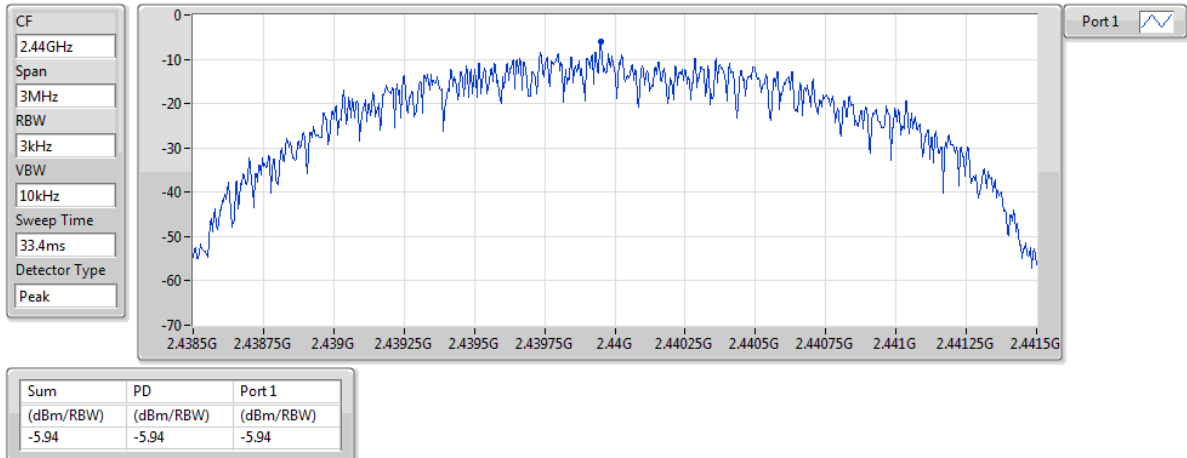

### BT-LE(2Mbps)

PSD

#### 2480MHz

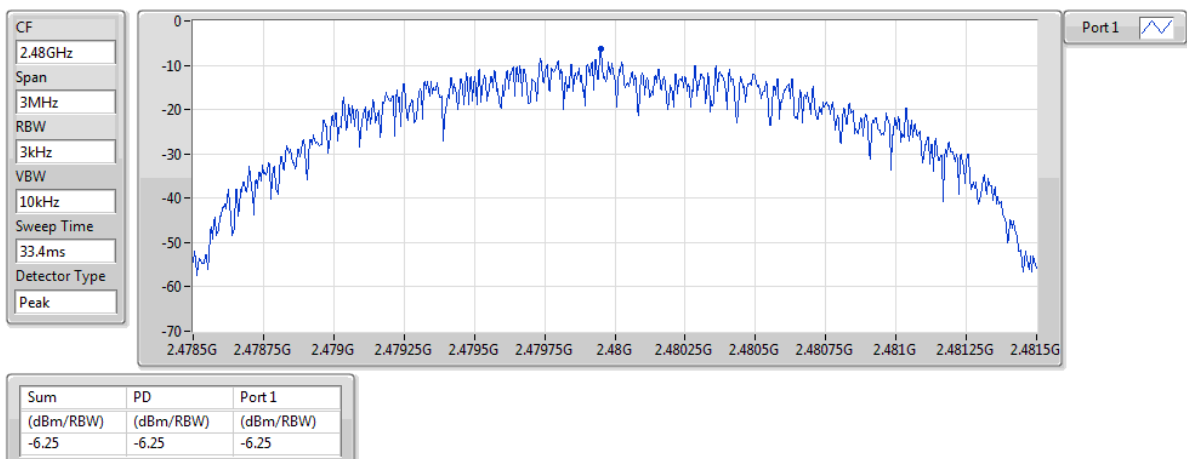



## 3.5 Emissions in Restricted Frequency Bands

### 3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

**Note:**


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup


#### Radiated Emissions below 1 GHz

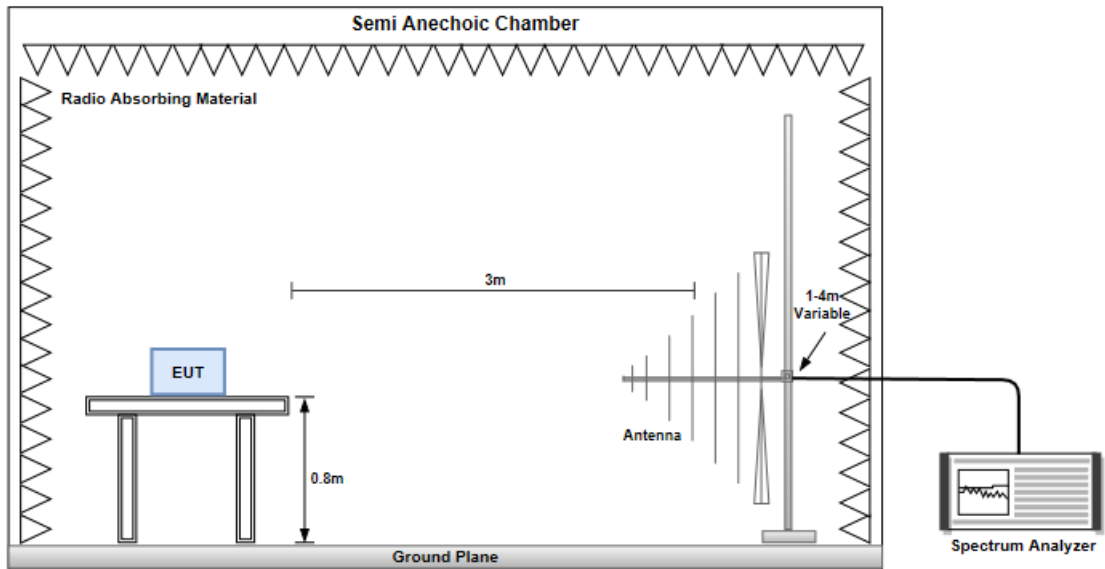

#### Radiated Emissions above 1 GHz

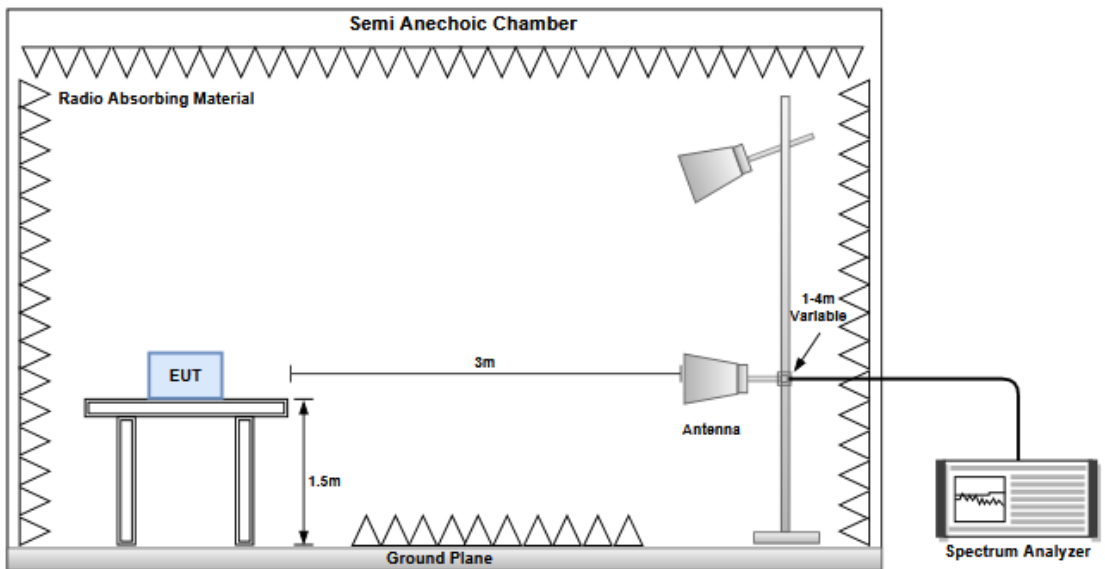


### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)
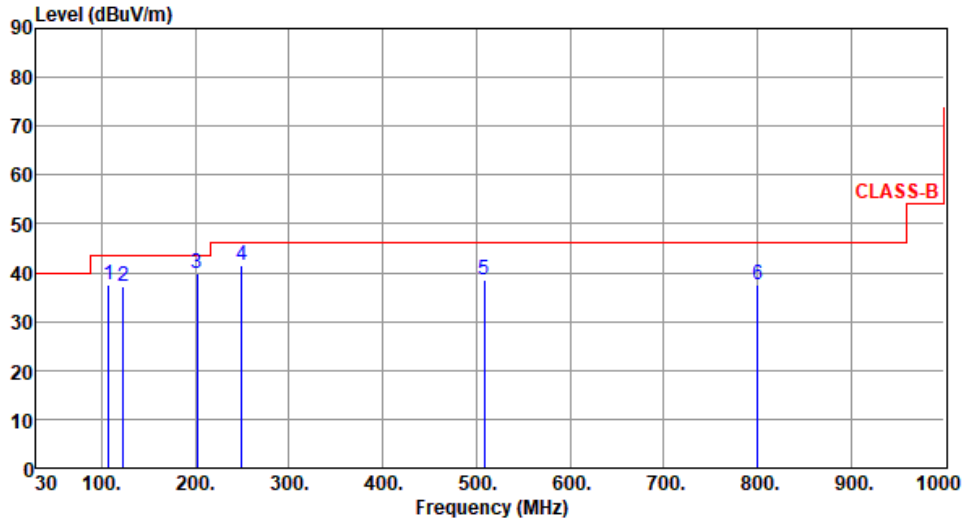
<b>Modulation</b>	BT-LE (2Mbps)	<b>Test Freq. (MHz)</b>	2402																																																																				
<b>Polarization</b>	Horizontal																																																																						
Test By : Roger Lu      Temperature(°C):25      Humidity(%):63																																																																							
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the CLASS-B limit, which is constant at 40 dBuV/m from 30 MHz to 100 MHz, then steps up to 45 dBuV/m from 100 MHz to 1000 MHz. Six blue vertical lines indicate emission peaks at 107.45 MHz, 123.26 MHz, 201.69 MHz, 249.22 MHz, 508.21 MHz, and 800.29 MHz. The peak levels are 37.46, 37.29, 40.00, 41.40, 38.46, and 37.45 dBuV/m respectively.</p>																																																																							
	<table border="1"> <thead> <tr> <th></th> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>107.45</td> <td>37.46</td> <td>43.50</td> <td>-6.04</td> <td>49.62</td> <td>-12.16</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>123.26</td> <td>37.29</td> <td>43.50</td> <td>-6.21</td> <td>47.80</td> <td>-10.51</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>201.69</td> <td>40.00</td> <td>43.50</td> <td>-3.50</td> <td>51.96</td> <td>-11.96</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>249.22</td> <td>41.40</td> <td>46.00</td> <td>-4.60</td> <td>51.56</td> <td>-10.16</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>508.21</td> <td>38.46</td> <td>46.00</td> <td>-7.54</td> <td>41.63</td> <td>-3.17</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>800.29</td> <td>37.45</td> <td>46.00</td> <td>-8.55</td> <td>35.57</td> <td>1.88</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	107.45	37.46	43.50	-6.04	49.62	-12.16	Peak	---	---	2	123.26	37.29	43.50	-6.21	47.80	-10.51	Peak	---	---	3	201.69	40.00	43.50	-3.50	51.96	-11.96	Peak	---	---	4	249.22	41.40	46.00	-4.60	51.56	-10.16	Peak	---	---	5	508.21	38.46	46.00	-7.54	41.63	-3.17	Peak	---	---	6	800.29	37.45	46.00	-8.55	35.57	1.88	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																														
1	107.45	37.46	43.50	-6.04	49.62	-12.16	Peak	---	---																																																														
2	123.26	37.29	43.50	-6.21	47.80	-10.51	Peak	---	---																																																														
3	201.69	40.00	43.50	-3.50	51.96	-11.96	Peak	---	---																																																														
4	249.22	41.40	46.00	-4.60	51.56	-10.16	Peak	---	---																																																														
5	508.21	38.46	46.00	-7.54	41.63	-3.17	Peak	---	---																																																														
6	800.29	37.45	46.00	-8.55	35.57	1.88	Peak	---	---																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																							

<b>Modulation</b>	BT-LE (2Mbps)	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):63

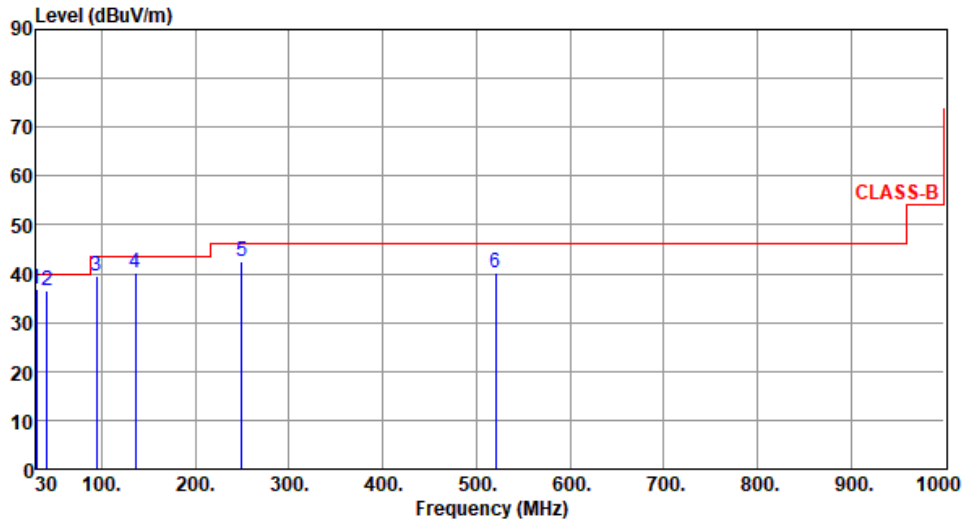

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	30.46	36.74	40.00	-3.26	46.75	-10.01	QP	100	6
2	41.69	36.61	40.00	-3.39	45.17	-8.56	QP	100	8
3	94.02	39.54	43.50	-3.96	53.89	-14.35	Peak	---	---
4	136.12	40.03	43.50	-3.47	49.54	-9.51	Peak	---	---
5	249.22	42.42	46.00	-3.58	52.58	-10.16	Peak	---	---
6	520.82	40.31	46.00	-5.69	43.32	-3.01	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)
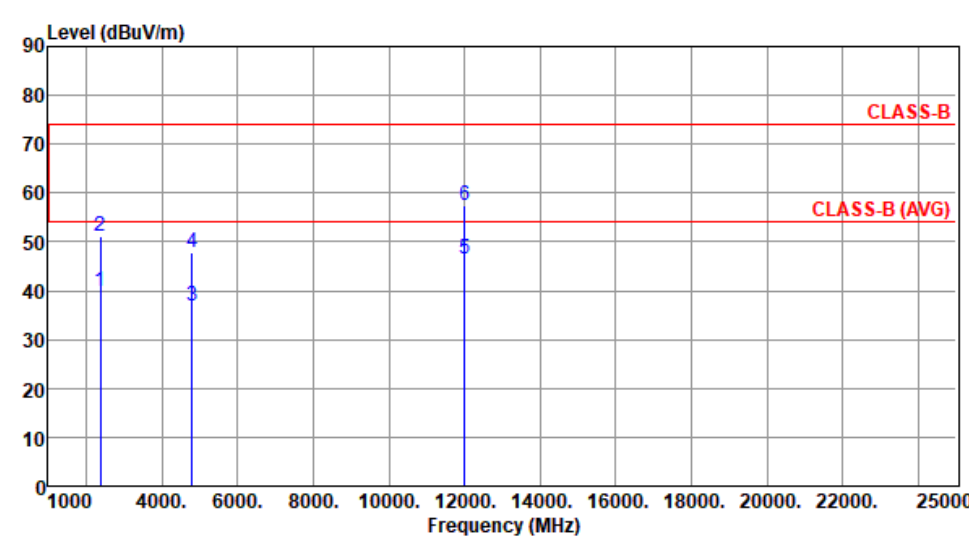
<b>Modulation</b>	BT-LE (1Mbps)	<b>Test Freq. (MHz)</b>	2402						
<b>Polarization</b>	Horizontal								
Test By : Roger Lu      Temperature(°C):25      Humidity(%):62									
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	2390.00	40.01	54.00	-13.99	42.80	-2.79	Average	236	269
2	2390.00	50.99	74.00	-23.01	53.78	-2.79	Peak	236	269
3	4804.00	36.71	54.00	-17.29	33.21	3.50	Average	100	255
4	4804.00	47.79	74.00	-26.21	44.29	3.50	Peak	100	255
5	12010.00	46.36	54.00	-7.64	32.09	14.27	Average	100	257
6	12010.00	57.34	74.00	-16.66	43.07	14.27	Peak	100	257
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)  *Factor includes antenna factor , cable loss and amplifier gain  Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	BT-LE (1Mbps)	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

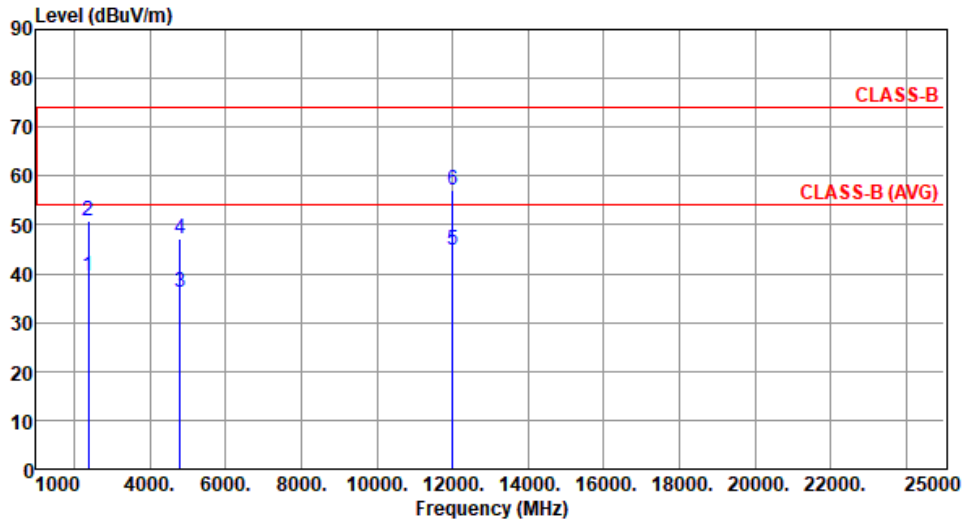



	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	39.66	54.00	-14.34	42.45	-2.79	Average	101	325
2	2390.00	50.72	74.00	-23.28	53.51	-2.79	Peak	101	325
3	4804.00	36.34	54.00	-17.66	32.84	3.50	Average	100	348
4	4804.00	47.28	74.00	-26.72	43.78	3.50	Peak	100	348
5	12010.00	44.97	54.00	-9.03	30.70	14.27	Average	100	359
6	12010.00	57.07	74.00	-16.93	42.80	14.27	Peak	100	359

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

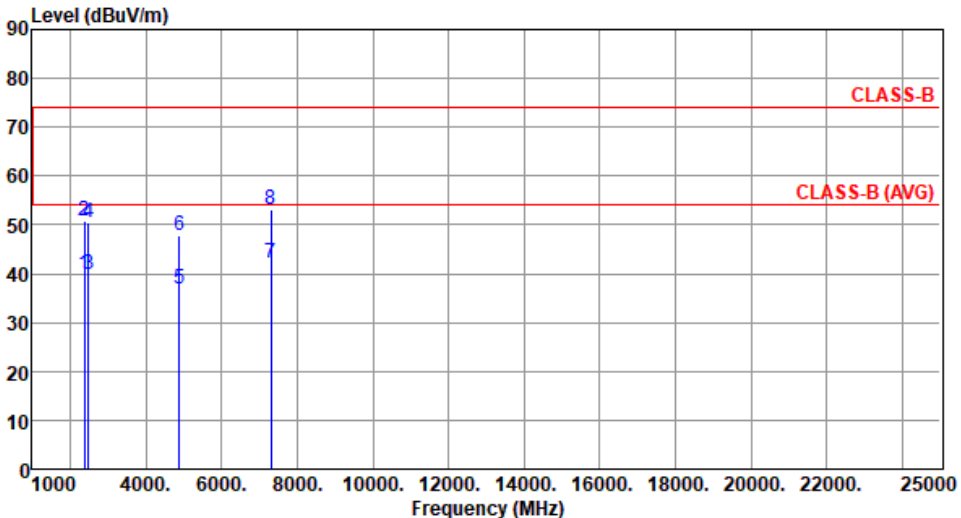
<b>Modulation</b>	BT-LE (1Mbps)	<b>Test Freq. (MHz)</b>	2440						
<b>Polarization</b>	Horizontal								
Test By : Roger Lu		Temperature(°C): 25	Humidity(%): 62						
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	2390.00	39.84	54.00	-14.16	42.63	-2.79	Average	238	267
2	2390.00	50.82	74.00	-23.18	53.61	-2.79	Peak	238	267
3	2483.50	39.73	54.00	-14.27	42.47	-2.74	Average	238	267
4	2483.50	50.63	74.00	-23.37	53.37	-2.74	Peak	238	267
5	4880.00	36.89	54.00	-17.11	33.42	3.47	Average	100	250
6	4880.00	47.98	74.00	-26.02	44.51	3.47	Peak	100	250
7	7320.00	42.01	54.00	-11.99	32.99	9.02	Average	100	271
8	7320.00	53.16	74.00	-20.84	44.14	9.02	Peak	100	271
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)          *Factor includes antenna factor , cable loss and amplifier gain          Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									
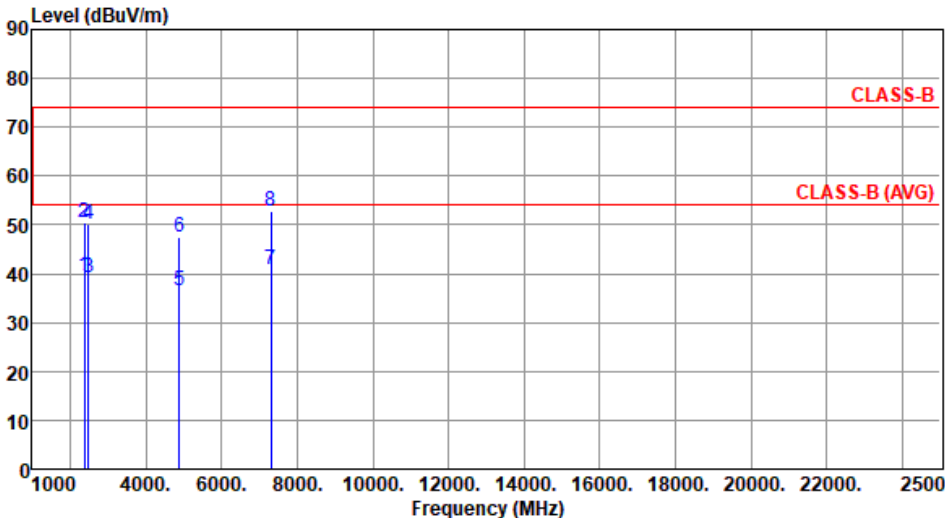
<b>Modulation</b>	BT-LE (1Mbps)	<b>Test Freq. (MHz)</b>	2440						
<b>Polarization</b>	Vertical								
Test By : Roger Lu		Temperature(°C): 25	Humidity(%): 62						
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	2390.00	39.51	54.00	-14.49	42.30	-2.79	Average	105	322
2	2390.00	50.45	74.00	-23.55	53.24	-2.79	Peak	105	322
3	2483.50	39.35	54.00	-14.65	42.09	-2.74	Average	105	322
4	2483.50	50.29	74.00	-23.71	53.03	-2.74	Peak	105	322
5	4880.00	36.53	54.00	-17.47	33.06	3.47	Average	100	345
6	4880.00	47.55	74.00	-26.45	44.08	3.47	Peak	100	345
7	7320.00	40.77	54.00	-13.23	31.75	9.02	Average	100	349
8	7320.00	52.84	74.00	-21.16	43.82	9.02	Peak	100	349
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)          *Factor includes antenna factor , cable loss and amplifier gain          Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									



<b>Modulation</b>	BT-LE (1Mbps)	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

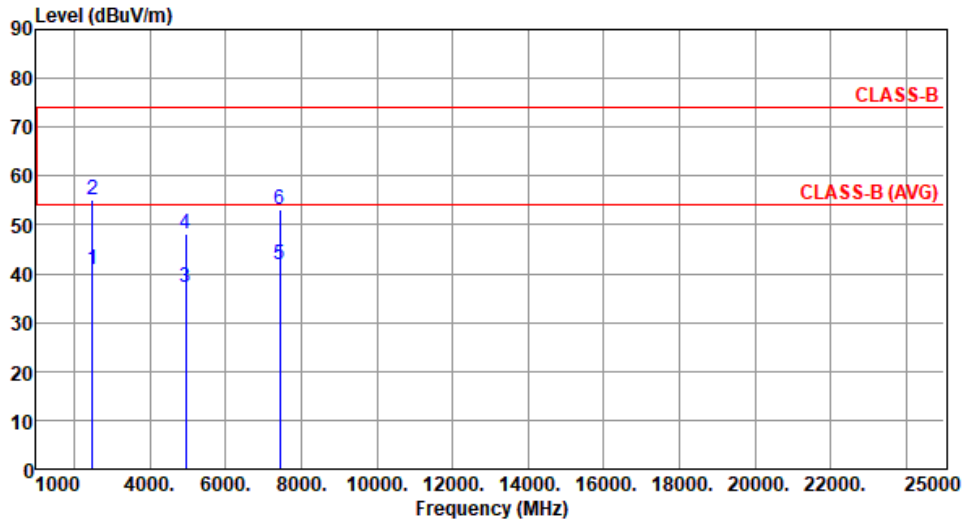

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	40.71	54.00	-13.29	43.45	-2.74	Average	232	273
2	2483.50	55.03	74.00	-18.97	57.77	-2.74	Peak	232	273
3	4960.00	37.24	54.00	-16.76	33.56	3.68	Average	100	254
4	4960.00	48.27	74.00	-25.73	44.59	3.68	Peak	100	254
5	7440.00	41.86	54.00	-12.14	32.88	8.98	Average	100	266
6	7440.00	53.00	74.00	-21.00	44.02	8.98	Peak	100	266


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	BT-LE (1Mbps)	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

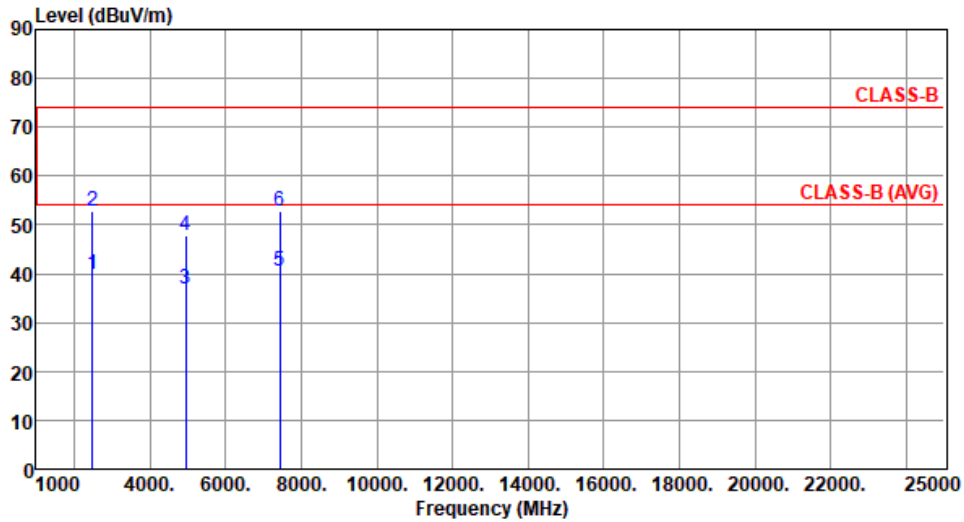


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	39.70	54.00	-14.30	42.44	-2.74	Average	102	323
2	2483.50	52.91	74.00	-21.09	55.65	-2.74	Peak	102	323
3	4960.00	36.81	54.00	-17.19	33.13	3.68	Average	100	342
4	4960.00	47.78	74.00	-26.22	44.10	3.68	Peak	100	342
5	7440.00	40.64	54.00	-13.36	31.66	8.98	Average	100	355
6	7440.00	52.68	74.00	-21.32	43.70	8.98	Peak	100	355

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
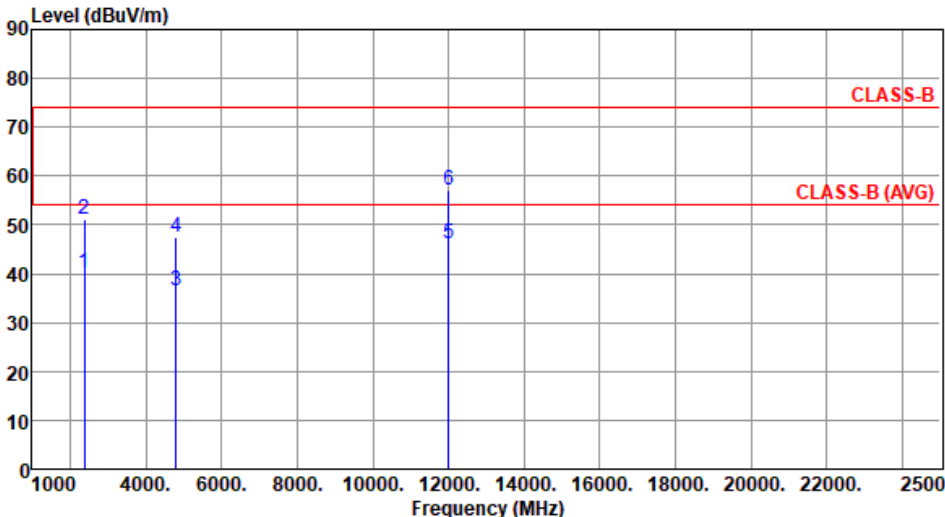
<b>Modulation</b>	BT-LE (2Mbps)	<b>Test Freq. (MHz)</b>	2402						
<b>Polarization</b>	Horizontal								
Test By :Roger Lu      Temperature(°C):25      Humidity(%):62									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	40.11	54.00	-13.89	42.90	-2.79	Average	243	278
2	2390.00	51.15	74.00	-22.85	53.94	-2.79	Peak	243	278
3	4804.00	36.44	54.00	-17.56	32.94	3.50	Average	100	253
4	4804.00	47.51	74.00	-26.49	44.01	3.50	Peak	100	253
5	12010.00	46.06	54.00	-7.94	31.79	14.27	Average	100	262
6	12010.00	57.07	74.00	-16.93	42.80	14.27	Peak	100	262
<p>Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)  *Factor includes antenna factor , cable loss and amplifier gain  Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).</p>									

<b>Modulation</b>	BT-LE (2Mbps)	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

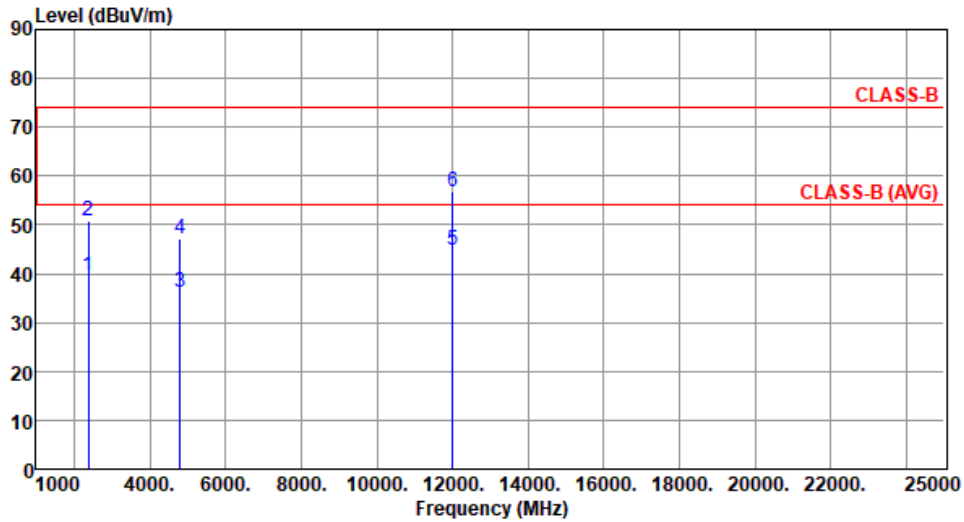

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	39.68	54.00	-14.32	42.47	-2.79	Average	100	323
2	2390.00	50.69	74.00	-23.31	53.48	-2.79	Peak	100	323
3	4804.00	36.08	54.00	-17.92	32.58	3.50	Average	100	347
4	4804.00	47.18	74.00	-26.82	43.68	3.50	Peak	100	347
5	12010.00	44.84	54.00	-9.16	30.57	14.27	Average	100	352
6	12010.00	56.73	74.00	-17.27	42.46	14.27	Peak	100	352


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	BT-LE (2Mbps)	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

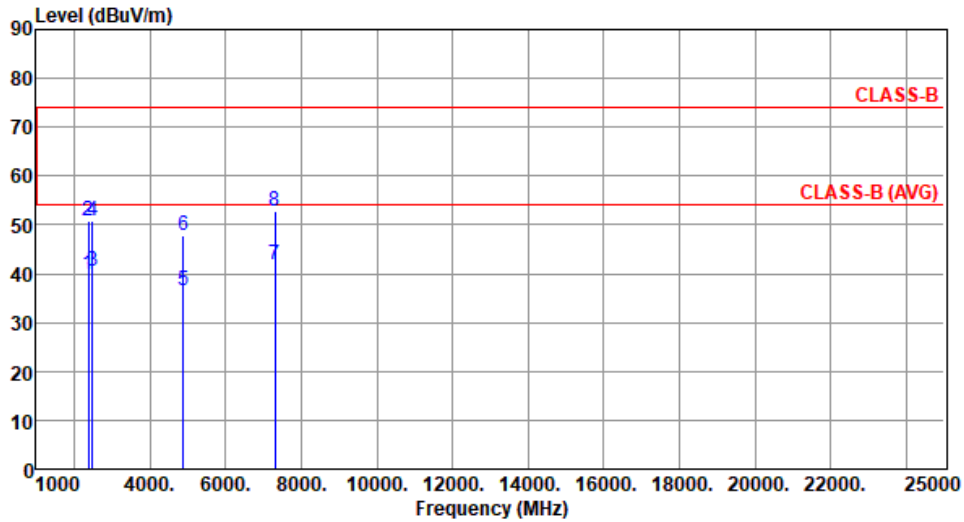

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	39.81	54.00	-14.19	42.60	-2.79	Average	243	269
2	2390.00	50.79	74.00	-23.21	53.58	-2.79	Peak	243	269
3	2483.50	40.62	54.00	-13.38	43.36	-2.74	Average	243	269
4	2483.50	50.68	74.00	-23.32	53.42	-2.74	Peak	243	269
5	4880.00	36.60	54.00	-17.40	33.13	3.47	Average	100	253
6	4880.00	47.71	74.00	-26.29	44.24	3.47	Peak	100	253
7	7320.00	41.93	54.00	-12.07	32.91	9.02	Average	100	254
8	7320.00	52.96	74.00	-21.04	43.94	9.02	Peak	100	254


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	BT-LE (2Mbps)	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

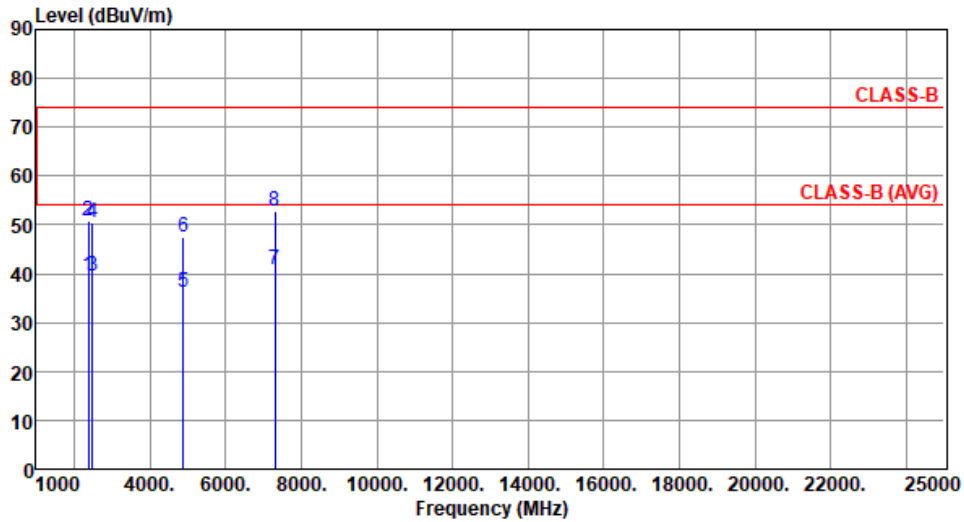

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	39.58	54.00	-14.42	42.37	-2.79	Average	100	325
2	2390.00	50.66	74.00	-23.34	53.45	-2.79	Peak	100	325
3	2483.50	39.51	54.00	-14.49	42.25	-2.74	Average	100	325
4	2483.50	50.46	74.00	-23.54	53.20	-2.74	Peak	100	325
5	4880.00	36.35	54.00	-17.65	32.88	3.47	Average	100	341
6	4880.00	47.43	74.00	-26.57	43.96	3.47	Peak	100	341
7	7320.00	40.74	54.00	-13.26	31.72	9.02	Average	100	356
8	7320.00	52.69	74.00	-21.31	43.67	9.02	Peak	100	356


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	BT-LE (2Mbps)	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

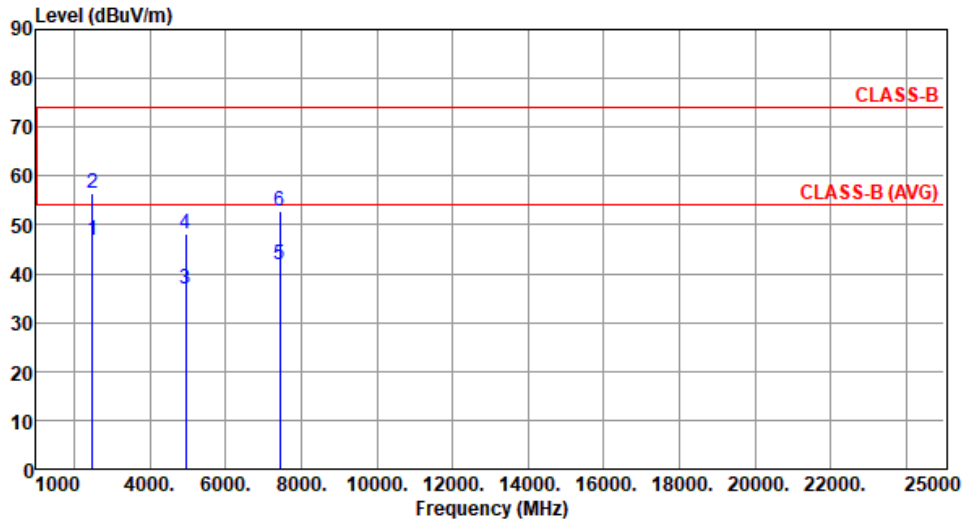

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	46.93	54.00	-7.07	49.67	-2.74	Average	239	273
2	2483.50	56.60	74.00	-17.40	59.34	-2.74	Peak	239	273
3	4960.00	36.98	54.00	-17.02	33.30	3.68	Average	100	250
4	4960.00	47.99	74.00	-26.01	44.31	3.68	Peak	100	250
5	7440.00	41.81	54.00	-12.19	32.83	8.98	Average	100	259
6	7440.00	52.80	74.00	-21.20	43.82	8.98	Peak	100	259


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

<b>Modulation</b>	BT-LE (2Mbps)	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

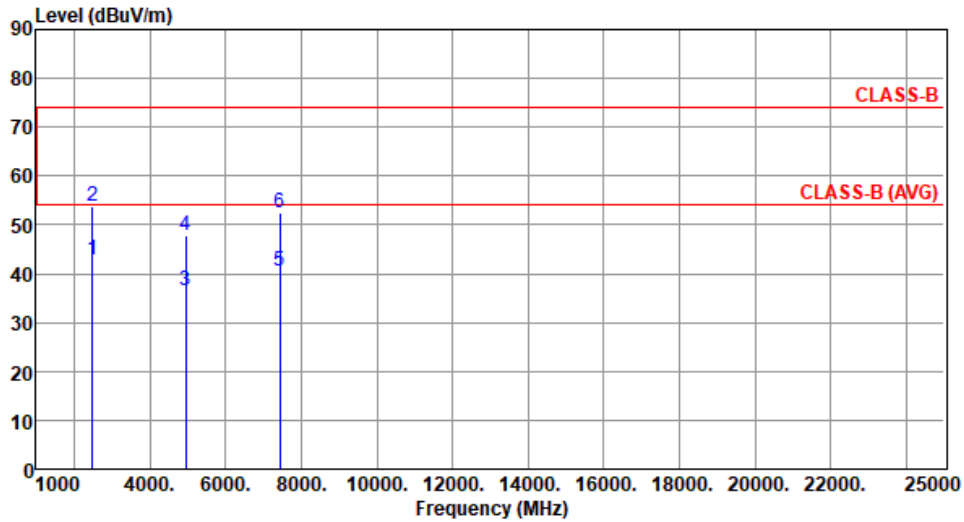

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	42.99	54.00	-11.01	45.73	-2.74	Average	100	324
2	2483.50	53.92	74.00	-20.08	56.66	-2.74	Peak	100	324
3	4960.00	36.64	54.00	-17.36	32.96	3.68	Average	100	345
4	4960.00	47.71	74.00	-26.29	44.03	3.68	Peak	100	345
5	7440.00	40.57	54.00	-13.43	31.59	8.98	Average	100	351
6	7440.00	52.54	74.00	-21.46	43.56	8.98	Peak	100	351

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



## 3.6 Emissions in non-restricted Frequency Bands

### 3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

### 3.6.2 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

#### Emission level measurement


1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

### 3.6.3 Test Setup

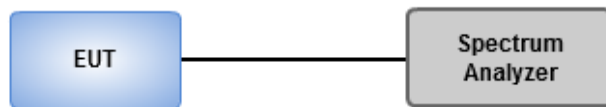

### 3.6.4 Test Result of Emissions in non-restricted Frequency Bands


<b>Ambient Condition</b>	24°C / 67%	<b>Tested By</b>	Aska Huang
--------------------------	------------	------------------	------------

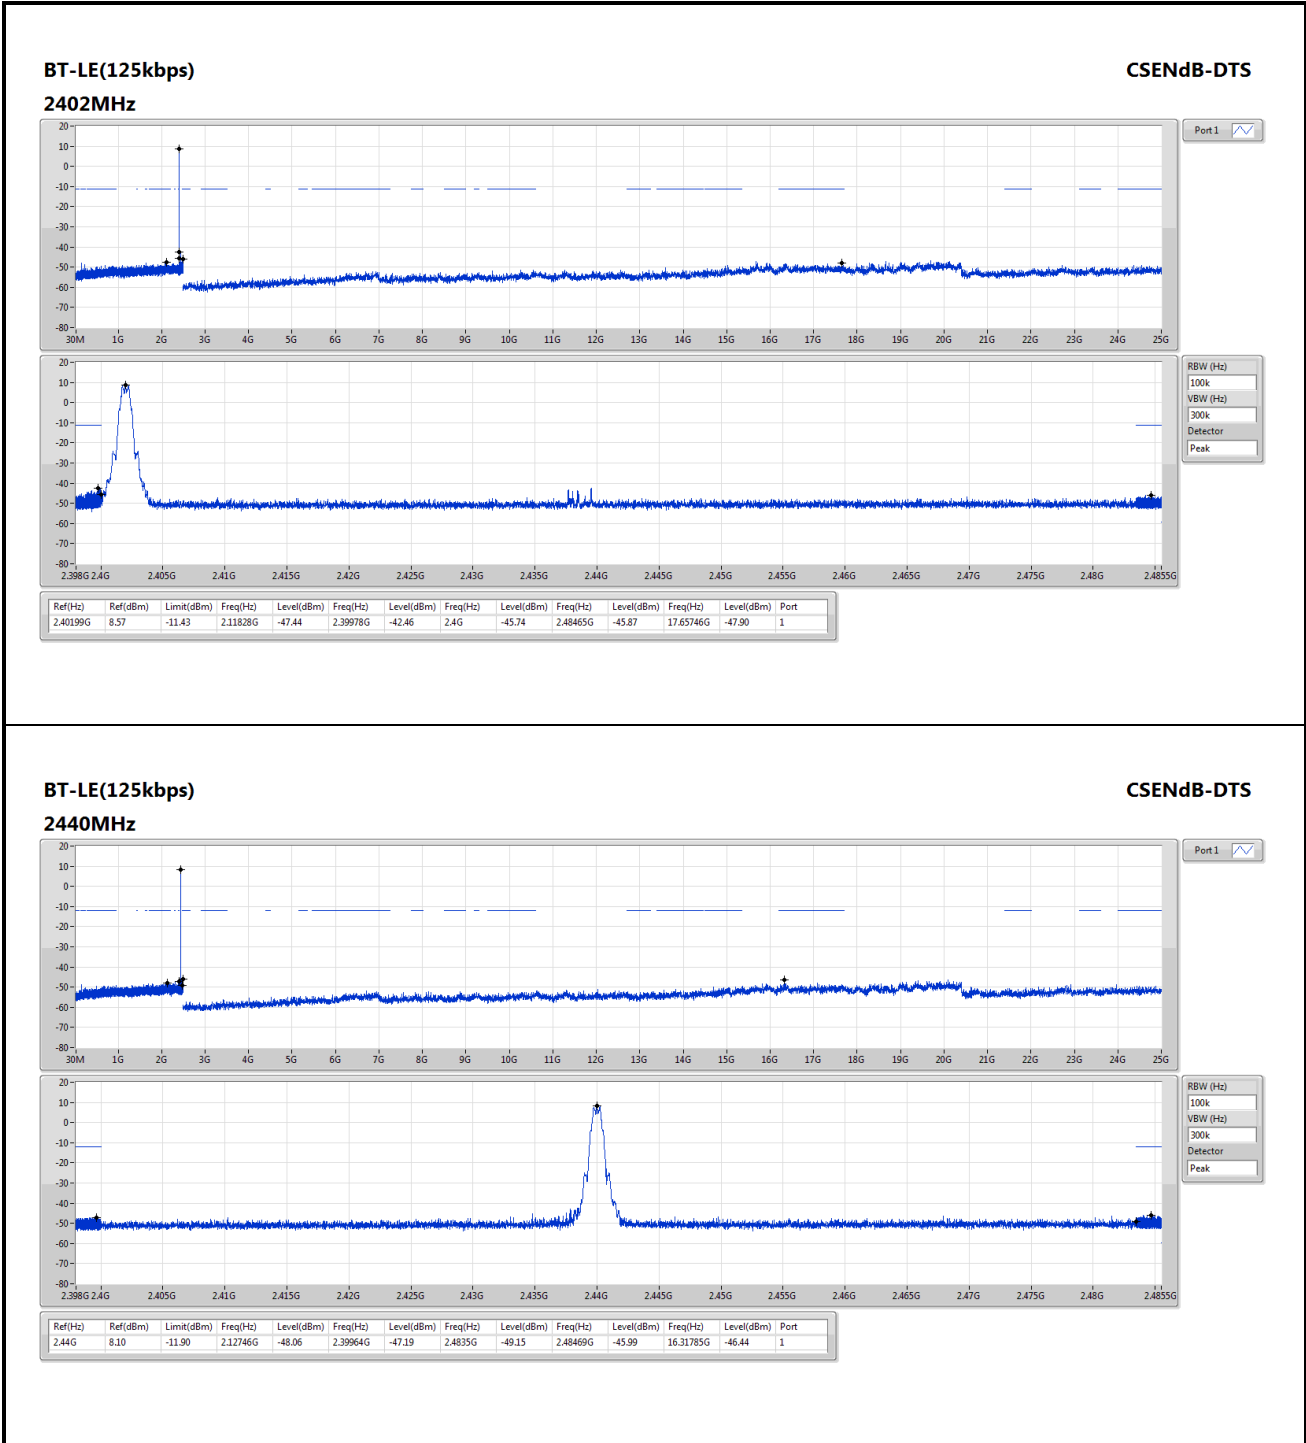

**BT-LE(125kbps)**

**CSENdB-DTS**


**2480MHz**

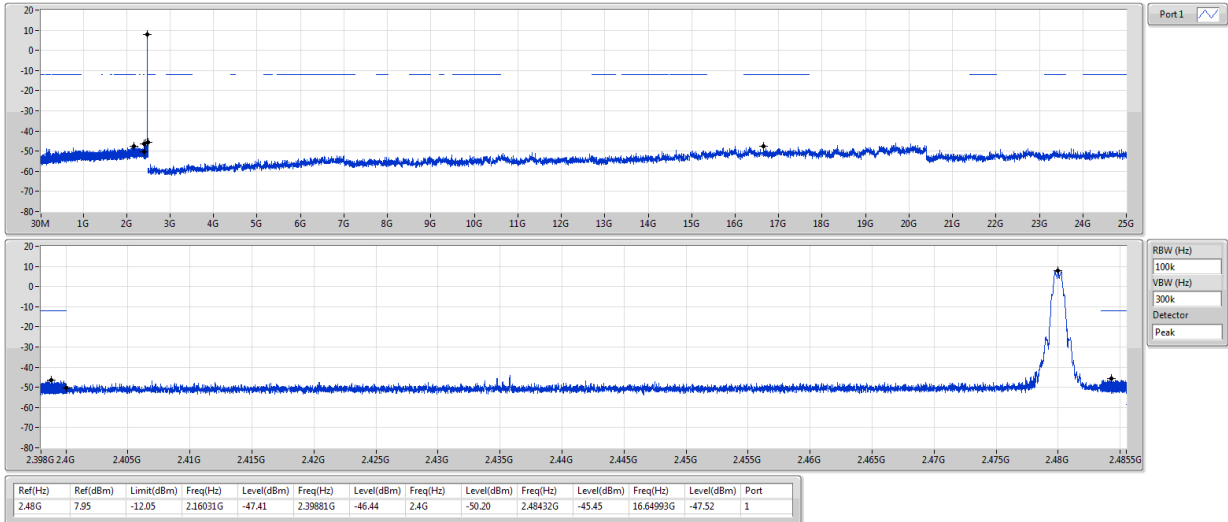

**BT-LE(500kbps)**

**CSENdB-DTS**


**2402MHz**

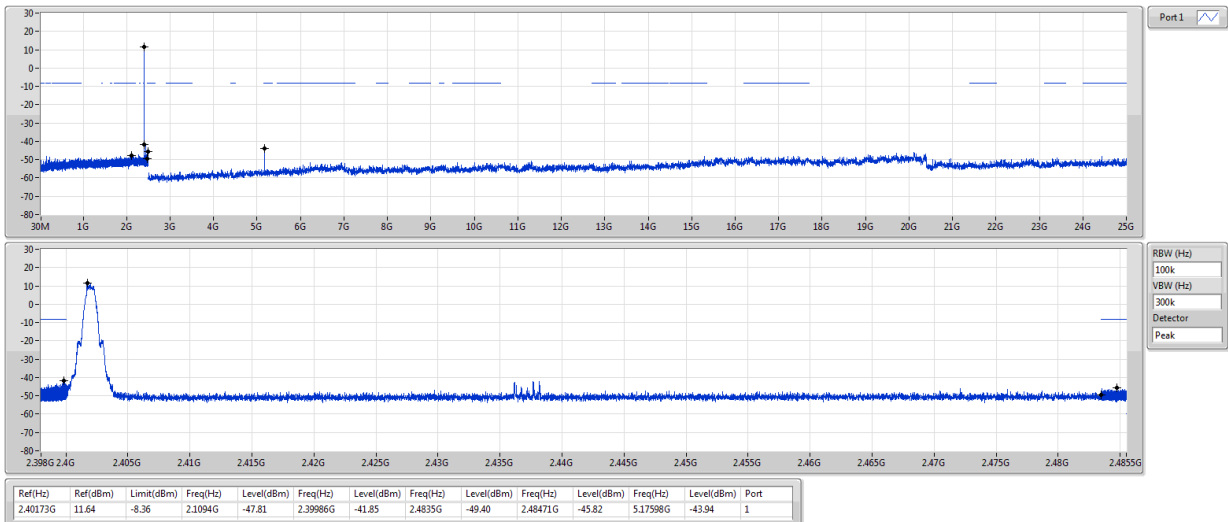

**BT-LE(500kbps)**

**CSENdB-DTS**


**2440MHz**


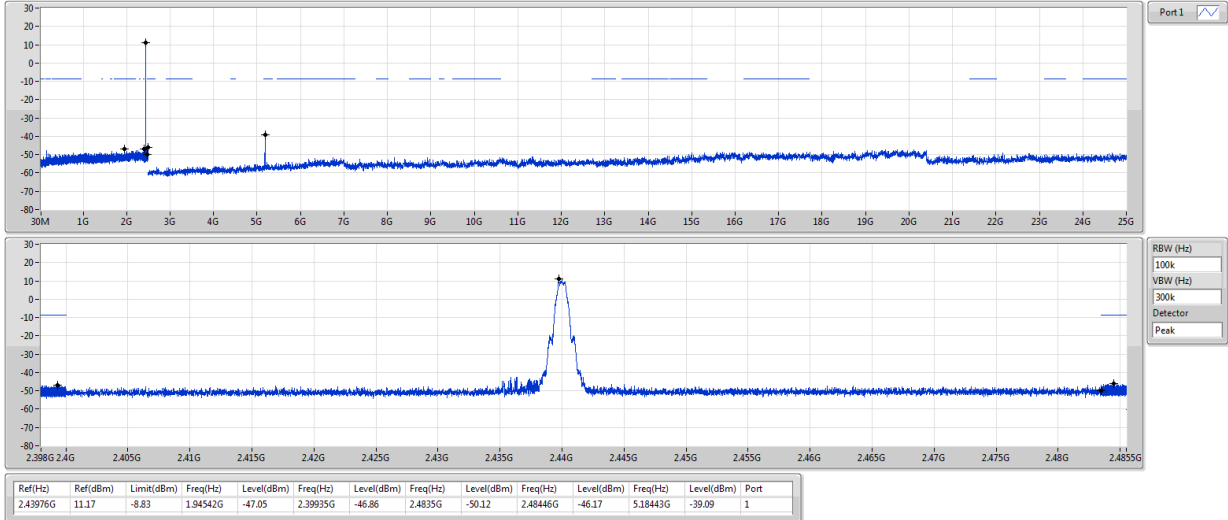




**BT-LE(500kbps)**

**CSENdB-DTS**

**2480MHz**

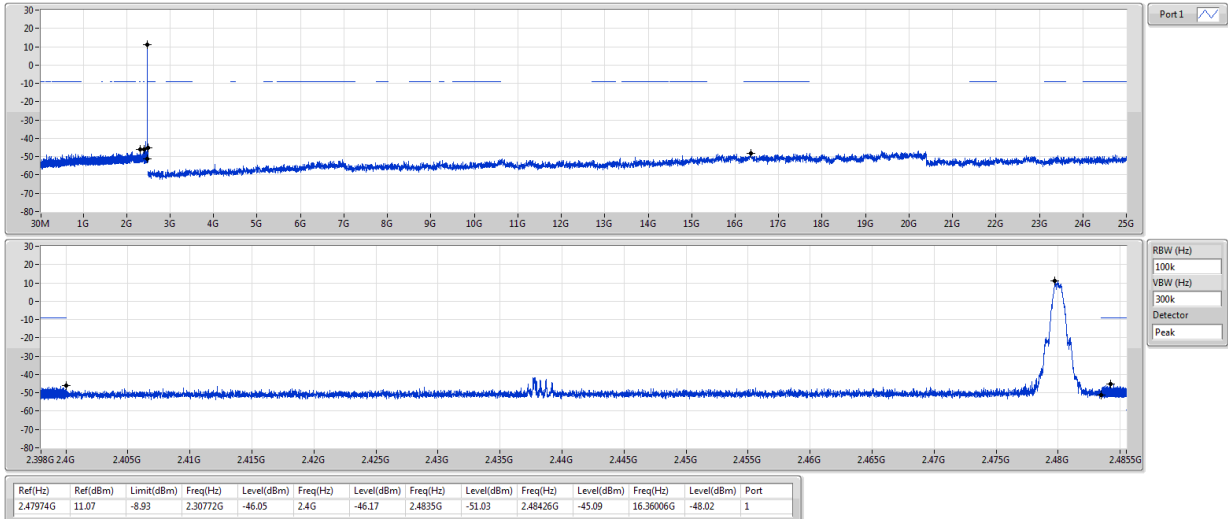

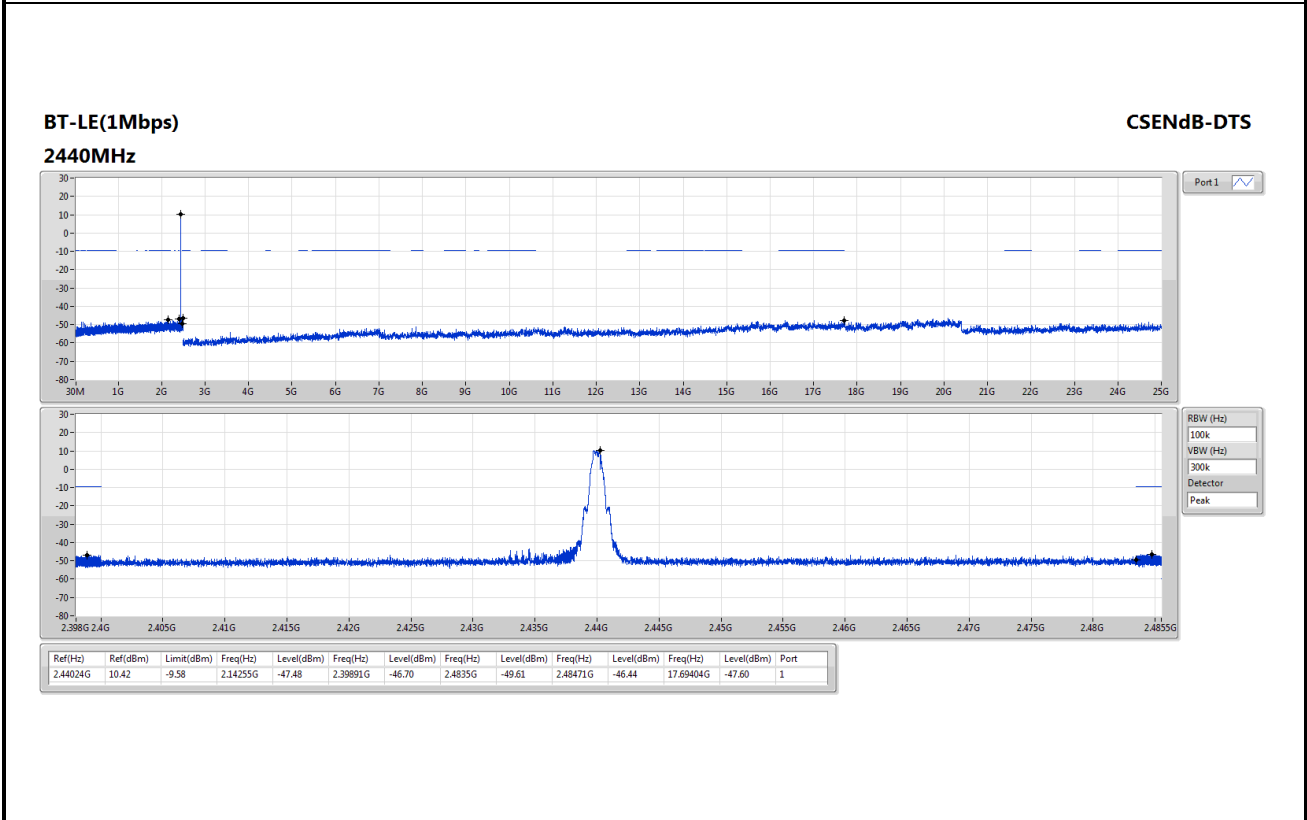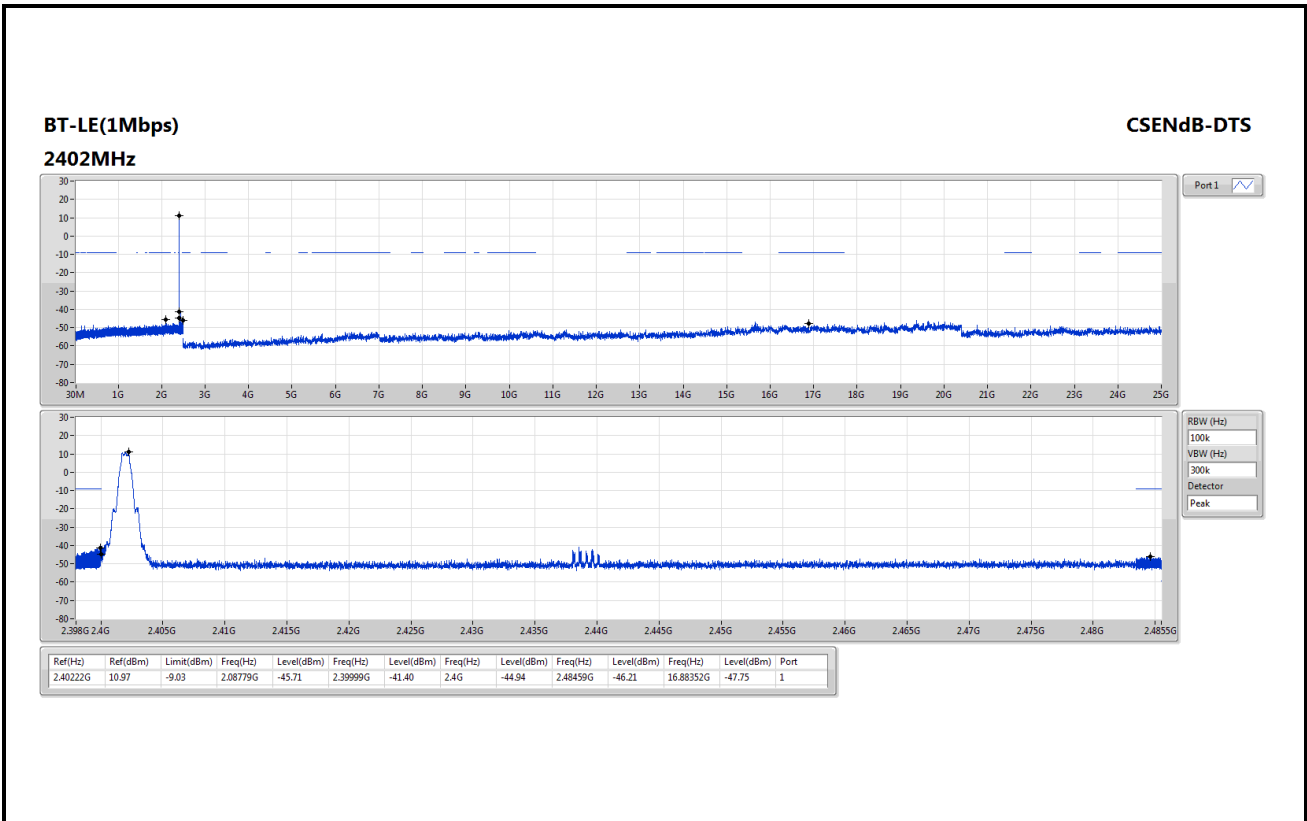


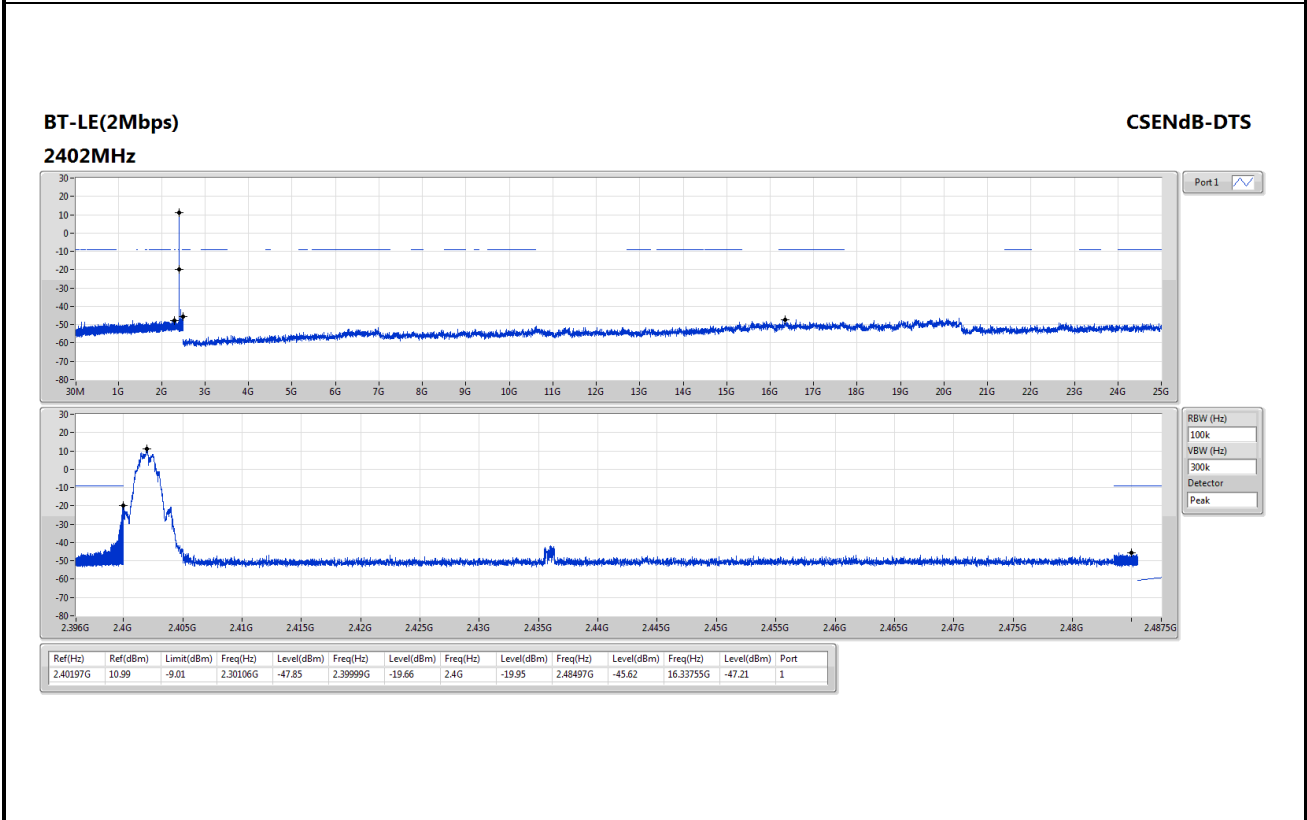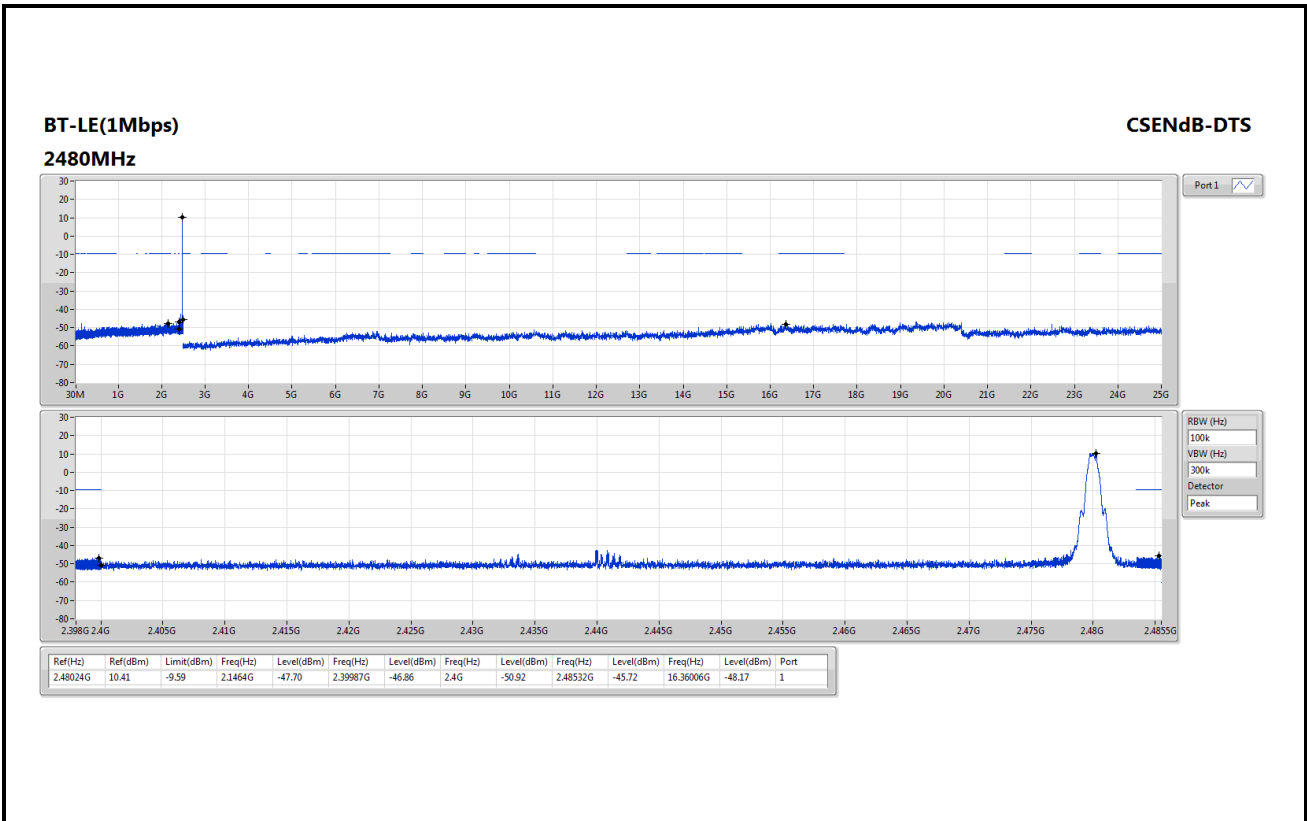

**BT-LE(2Mbps)**

**CSENdB-DTS**


**2440MHz**

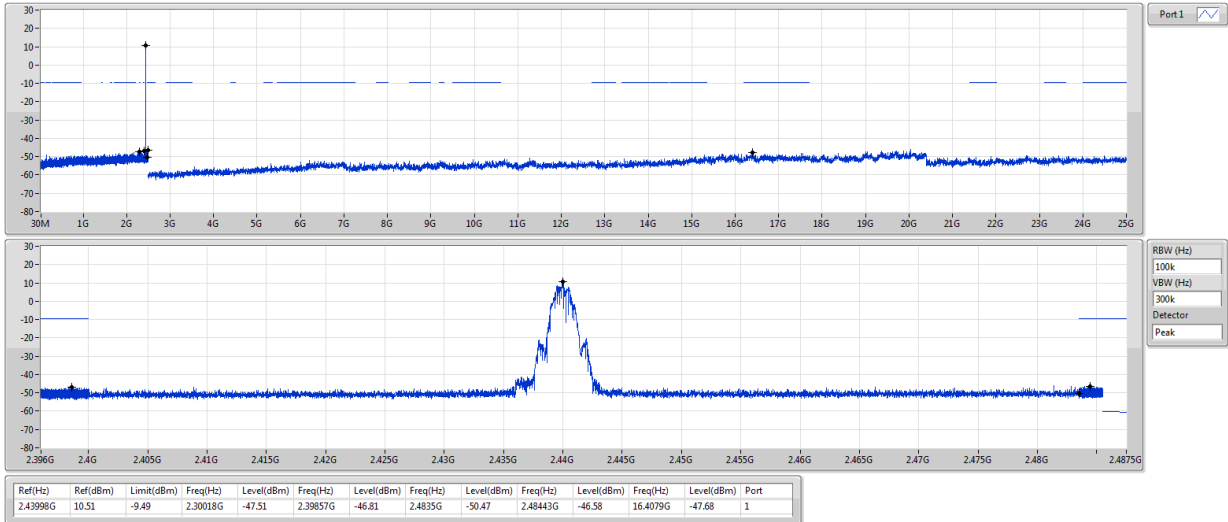

**BT-LE(2Mbps)**

**CSENdB-DTS**

**2480MHz**

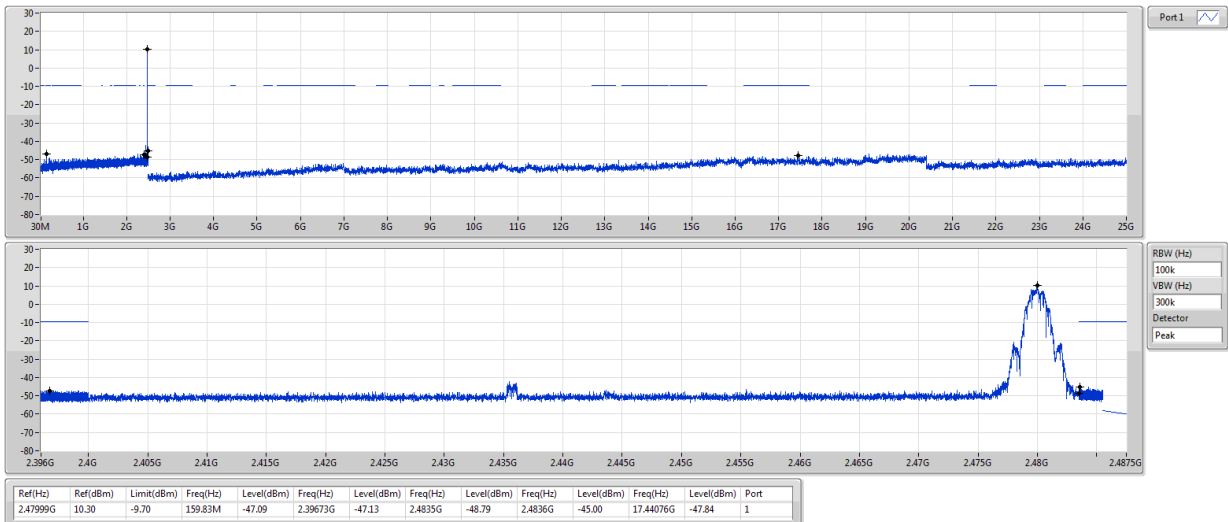

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan (R.O.C.)

### **Kwei Shan**

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

No.2-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC\_Service@icertifi.com.tw

==END==