



313 West 12800 South, Suite 311

Draper, UT 84020

(801) 260-4040

Test Report

Certification

FCC ID	SWX-ULTE
Equipment Under Test	U-LTE
Test Report Serial No	V045488_03
Date of Test	July 10 – 12, 2018, July 19, 2018, and September 19, 2018
Report Issue Date	September 20, 2018

Test Specifications:	Applicant:
FCC Part 15, Subpart C	Ubiquiti Networks, Inc. 685 Third Avenue, 27 th Floor New York, NY 10017 U.S.A.



Certification of Engineering Report

This report has been prepared by VPI Laboratories, Inc. to document compliance of the device described below with the requirements of Federal Communications Commission (FCC) Part 15, Subpart C. This report may be reproduced in full. Partial reproduction of this report may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

Applicant	Ubiquiti Networks, Inc.
Manufacturer	Ubiquiti Networks, Inc.
Brand Name	UniFi
Model Number	U-LTE
FCC ID	SWX-ULTE

On this 20th day of September 2018, I, individually and for VPI Laboratories, Inc., certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge, and are made in good faith.

Although NVLAP has accredited the VPI Laboratories, Inc. EMC testing facilities, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

VPI Laboratories, Inc.



Radiated Emissions Tested by: Norman P. Hansen



Antenna Port Emissions Tested by: Clay Allred



Reviewed by: Joseph W. Jackson

Revision History		
Revision	Description	Date
01	Original Report Release	September 20, 2018
02	Amend the Bluetooth Antenna Gain, Add FCC ID Number of LTE Module and Add Antenna Location Photo	October 2, 2018
03	Remove Photographs for TCB Submission	October 17, 2018

Table of Contents

1	Client Information.....	5
1.1	Applicant.....	5
1.2	Manufacturer.....	5
2	Equipment Under Test (EUT).....	6
2.1	Identification of EUT.....	6
2.2	Description of EUT.....	6
2.3	EUT and Support Equipment.....	7
2.4	Interface Ports on EUT.....	8
2.5	Modification Incorporated/Special Accessories on EUT.....	8
2.6	Deviation from Test Standard.....	8
3	Test Specification, Methods and Procedures.....	9
3.1	Test Specification.....	9
3.2	Methods & Procedures.....	9
3.3	Test Procedure.....	13
4	Operation of EUT During Testing.....	14
4.1	Operating Environment.....	14
4.2	Operating Modes.....	14
4.3	EUT Exercise Software.....	14
5	Summary of Test Results.....	15
5.1	FCC Part 15, Subpart C.....	15
5.2	Result.....	15
6	Measurements, Examinations and Derived Results.....	16
6.1	General Comments.....	16
6.2	Test Results – 802.11b Mode.....	16
6.3	Test Results – 802.11g Mode.....	27
6.4	Test Results – 802.11n(20) Mode.....	36
6.5	Test Results – 802.11n(40) Mode.....	45
6.6	Test Results – BLE Mode.....	55
7	Test Procedures and Test Equipment.....	66
7.1	Conducted Emissions at Mains Ports.....	66
7.2	Direct Connection at the Antenna Port Tests.....	67
7.3	Radiated Emissions.....	68
7.4	Equipment Calibration.....	70
7.5	Measurement Uncertainty.....	70
8	Photographs.....	71

1 Client Information

1.1 Applicant

Company Name	Ubiquiti Networks, Inc. 685 Third Avenue, 27 th Floor New York, NY 10017 U.S.A.
Contact Name	Mark Feil
Title	Compliance Manager

1.2 Manufacturer

Company Name	Ubiquiti Networks, Inc. 685 Third Avenue, 27 th Floor New York, NY 10017 U.S.A.
Contact Name	Mark Feil
Title	Compliance Manager

2 Equipment Under Test (EUT)

2.1 Identification of EUT

Brand Name	UniFi
Model Number	U-LTE
Serial Number	None
Dimensions (cm)	22.9 x 6.4 x 3.2

2.2 Description of EUT

The U-LTE is an LTE gateway for WAN failover as a LAN device. It provides Ethernet and POE passthrough ports as well as a 2.4 GHz WiFi and Bluetooth interface. A Sierra Wireless Inc. cell modem module, carrying FCC ID N7NWP76C, is incorporated in the U-LTE. Power was provided by either a Ubiquiti POE-48-24W-G-WH or Ubiquiti POE-24-12W-G PoE supply.

The WiFi transceiver of the U-LTE is an 802.11bgn that uses 11 channels in the 2400MHz to 2483.5 MHz frequency band. It uses a custom folded metal antenna with a maximum gain of 1.5 dBi. The channel assignments and maximum power settings to be allowed in firmware are shown below. Channels 1 and 11 are not used when the U-LTE is operating in 802.11n 40 MHz BW mode.

Channel	Frequency (MHz)	Maximum Power Setting			
		802.11b	802.11g	802.11n(20)	802.11n(40)
1	2412	TP14	TP16	TP16	Note 1
2	2417	TP14	TP16	TP16	TP16
3	2422	TP14	TP16	TP16	TP16
4	2427	TP14	TP16	TP16	TP16
5	2432	TP14	TP16	TP16	TP16
6	2437	TP14	TP16	TP16	TP16
7	2442	TP14	TP16	TP16	TP16
8	2447	TP14	TP16	TP16	TP16
9	2452	TP14	TP16	TP16	TP16
10	2457	TP14	TP16	TP16	TP11
11	2462	TP14	TP16	TP16	Note 1

Note 1: These channels are not used when the U-LTE is operating in 802.11n 40 MHz BW mode.

The U-LTE Bluetooth LE transmitter operates on 40 channels in the 2400 MHz to 2483.5 MHz frequency band. It uses a Cirotech Model DCAH000 chip antenna with a maximum gain of 1 dBi. The maximum power for the Bluetooth LE for all channels is a setting of 06. Testing was performed at this power setting. The channel assignments are shown below.

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	11	2422	21	2442	31	2462
2	2404	12	2424	22	2444	32	2464
3	2406	13	2426	23	2446	33	2466
4	2408	14	2428	24	2448	34	2468
5	2410	15	2430	25	2450	35	2470
6	2412	16	2432	26	2452	36	2472
7	2414	17	2434	27	2454	37	2474
8	2416	18	2436	28	2456	38	2476
9	2418	19	2438	29	2458	39	2478
10	2420	20	2440	30	2460	40	2480

This report covers the circuitry of the devices subject to FCC Part 15, Subpart C. The circuitry of the device subject to FCC Subpart B was found to be compliant and is covered in VPI Laboratories, Inc. report V045487.

2.3 EUT and Support Equipment

The EUT and support equipment used during the test are listed below.

Brand Name Model Number Serial Number	Description	Name of Interface Ports / Interface Cables
BN: UniFi MN: U-LTE (Note 1) SN: None	LTE gateway	See Section 2.4
BN: Ubiquiti MN: POE-48-24W-G-WH SN: None	48 V PoE Supply	AC In/3 conductor power cord Data/Shielded or Unshielded Cat 5e cable PoE/Shielded or Unshielded Cat 5e cable (Note 2)
BN: Ubiquiti MN: POE-24-12W-G SN: None	24 V PoE Supply	AC In/3 conductor power cord Data/Shielded or Unshielded Cat 5e cable PoE/Shielded or Unshielded Cat 5e cable (Note 2)
BN: UniFi MN: UC-CK SN: 1745K788A2074E493E- sc1Ca2	Cloud Key	PoE/Shielded or unshielded Cat 5e cable (Note 2)

Brand Name Model Number Serial Number	Description	Name of Interface Ports / Interface Cables
BN: EdgeMax MN: ER-X SN: 1627G802AA89E52AA	Router	PoE/Shielded or unshielded Cat 5e cable (Note 2)

Notes: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

2.4 Interface Ports on EUT

Name of Ports	No. of Ports Fitted to EUT	Cable Description/Length
PoE In/Ethernet	1	Shielded or Unshielded Cat 5e cable/7 meters
PoE Out/Ethernet	1	Unshielded or Shielded Cat 5e cable/ 2 meters
Cell Antenna	1	SMA connection from internal cell module to antenna/1 meter

2.5 Modification Incorporated/Special Accessories on EUT

The following modifications were made to the EUT by the Client during testing to comply with the specification. This report is not complete without an accompanying signed attestation, that the product will have all of the documented modifications incorporated into the product when manufactured and placed on the market.

- The maximum WiFi power settings were adjusted as shown in the table of Section 2.2.

2.6 Deviation from Test Standard

There were no deviations from the test specification.

3 Test Specification, Methods and Procedures

3.1 Test Specification

Title	FCC PART 15, Subpart C (47 CFR 15) 15.203, 15.207, and 15.247 Limits and methods of measurement of radio interference characteristics of radio frequency devices.
Purpose of Test	The tests were performed to demonstrate initial compliance

3.2 Methods & Procedures

3.2.1 §15.203 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

3.2.2 §15.207 Conducted Limits

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50*	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Table 1: Limits for conducted emissions at mains ports of Class B ITE.

3.2.3 §15.247 Operation within the bands 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz

- a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions.

- 1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 – 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.
 - i. For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
 - ii. Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.
 - iii. Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.
 - 2) Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
- b) The maximum peak output power of the intentional radiator shall not exceed the following:
- 1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
 - 2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

- 3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725 – 5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
 - 4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- c) Operation with directional antenna gains greater than 6 dBi.
- 1) Fixed point-to-point operation:
 - i. Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
 - ii. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.
 - iii. Fixed, point-to-point operation, as used in paragraphs (b)(4)(i) and (b)(4)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.
 - 2) In addition to the provisions in paragraphs (b)(1), (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:
 - i. Different information must be transmitted to each receiver.

- ii. If the transmitter employs an antenna system that emits multiple directional beams but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna /antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:
 - A. The directional gain shall be calculated as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.
 - B. A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.
 - iii. If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.
 - iv. Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.
- d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
 - e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
 - f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned off, shall have an

average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

- g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.
- h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hops to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.
- i) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Note: Spread spectrum systems are sharing these bands on a noninterference basis with systems supporting critical Government requirements that have been allocated the usage of these bands, secondary only to ISM equipment operated under the provisions of Part 18 of this Chapter. Many of these Government systems are airborne radiolocation systems that emit a high EIRP which can cause interference to other users. Also, investigations of the effect of spread spectrum interference to U. S. Government operations in the 902-928 MHz band may require a future decrease in the power limits allowed for spread spectrum operation.

3.3 Test Procedure

The testing was performed according to the procedures in ANSI C63.10-2013, KDB 558074, and 47 CFR Part 15. Testing was performed at the VPI Laboratories, Inc. Wanship Upper Open Area Test Site, located at 29145 Old Lincoln Highway, Wanship, UT. VPI Laboratories, Inc. is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Lab Code: 100272-0, which is effective until September 30, 2018. VPI Laboratories, Inc. carries FCC Accreditation Designation Number US5263.

4 Operation of EUT During Testing

4.1 Operating Environment

Power Supply	120 VAC/60 Hz to PoE supply 24 Vdc or 48 Vdc from PoE supply to EUT
---------------------	--

4.2 Operating Modes

The transmitter was tested while in a constant transmit mode at the upper, middle, and lower channels. Each mode of operation, data rate, and modulation type were tested. The voltage was varied as required by §15.31(e) with no change seen in the transmitter characteristics. The worst-case emissions were seen using 802.11b at 1 Mbps, 802.11g at 6 Mbps, 802.11n(20) at 6.5 Mbps, and 802.11n(40) at 13.5 Mbps (MSC0) and the worst-case data from testing with these data rates are shown in this report.

4.3 EUT Exercise Software

Unifi Version 3.9.42.9152 test software was used to exercise the EUT.

5 Summary of Test Results

5.1 FCC Part 15, Subpart C

5.1.1 Summary of Tests

Section	Environmental Phenomena	Frequency Range (MHz)	Result
15.203	Antenna Requirements	Structural requirement	Complied
15.207	Conducted Disturbance at Mains Ports	0.15 to 30	Complied
15.247(a)	Bandwidth Requirement	2400 to 2483.5	Complied
15.247(b)	Peak Output Power	2400 to 2483.5	Complied
15.247(d)	Antenna Conducted Spurious Emissions	0.009 – 25000	Complied
15.247(d)	Radiated Spurious Emissions	0.009 – 25000	Complied
15.247(e)	Peak Power Spectral Density	2400 to 2483.5	Complied

5.2 Result

In the configuration tested, the EUT complied with the requirements of the specification.

6 Measurements, Examinations and Derived Results

6.1 General Comments

This section contains the test results only. Details of the test methods used and a list of the test equipment used during the measurements can be found in Section 7 of this report.

6.2 Test Results – 802.11b Mode

6.2.1 §15.203 Antenna Requirements

The EUT uses a custom folded metal antenna with a maximum gain of 1.0 dBi that is not user replaceable.

Result

The EUT complied with the specification.

6.2.2 Conducted Emissions at Mains Ports Data

Using 24 V PoE for power source

Frequency (MHz)	AC Mains Lead	Detector	Measured Level (dB μ V)	Limit (dB μ V)	Margin (dB)
0.15	Hot Lead	Quasi-Peak (Note 2)	58.9	66.0	-7.1
0.15	Hot Lead	Average (Note 2)	39.9	56.0	-16.1
0.19	Hot Lead	Quasi-Peak (Note 2)	52.4	63.9	-11.5
0.19	Hot Lead	Average (Note 2)	34.1	53.9	-19.8
0.26	Hot Lead	Peak (Note 1)	45.6	51.5	-5.9
0.53	Hot Lead	Peak (Note 1)	41.2	46.0	-4.8
3.30	Hot Lead	Peak (Note 1)	37.9	46.0	-8.1
4.11	Hot Lead	Peak (Note 1)	39.2	46.0	-6.8
4.74	Hot Lead	Peak (Note 1)	40.2	46.0	-5.8
8.40	Hot Lead	Peak (Note 1)	41.4	50.0	-8.6
0.15	Neutral Lead	Quasi-Peak (Note 2)	58.5	66.0	-7.5
0.15	Neutral Lead	Average (Note 2)	39.2	56.0	-16.8
0.18	Neutral Lead	Quasi-Peak (Note 2)	53.6	64.3	-10.7
0.18	Neutral Lead	Average (Note 2)	34.3	54.3	-20.0
0.23	Neutral Lead	Peak (Note 1)	45.4	52.4	-7.0
0.51	Neutral Lead	Peak (Note 1)	41.5	46.0	-4.5
4.31	Neutral Lead	Peak (Note 1)	39.5	46.0	-6.5
8.50	Neutral Lead	Peak (Note 1)	40.1	50.0	-9.9
16.05	Neutral Lead	Peak (Note 1)	40.4	50.0	-9.6

Note 1: The reference detector used for the measurements was Quasi-Peak or Peak and the data was compared to the average limit; therefore, the EUT was deemed to meet both the average and quasi-peak limits.

Note 2: The reference detector used for the measurements was quasi-peak and average and the data was compared to the respective limits.

Using 48 V PoE for power source

Frequency (MHz)	AC Mains Lead	Detector	Measured Level (dB μ V)	Limit (dB μ V)	Margin (dB)
0.56	Hot Lead	Quasi-Peak (Note 2)	54.0	56.0	-2.0
0.56	Hot Lead	Average (Note 2)	48.1	46.0	2.1 (Note 3)
4.60	Hot Lead	Peak (Note 1)	46.6	56.0	-9.4
4.84	Hot Lead	Peak (Note 1)	49.9	46.0	3.9 (Note 3)
10.93	Hot Lead	Peak (Note 1)	46.9	50.0	-3.1
11.20	Hot Lead	Peak (Note 1)	47.6	50.0	-2.4
11.68	Hot Lead	Peak (Note 1)	48.6	50.0	-1.4
11.95	Hot Lead	Peak (Note 1)	46.6	50.0	-3.4
0.15	Neutral Lead	Peak (Note 1)	60.3	56.0	4.3 (Note 3)
0.23	Neutral Lead	Peak (Note 1)	51.0	52.5	-1.5
0.58	Neutral Lead	Peak (Note 1)	50.4	46.0	4.4 (Note 3)
4.84	Neutral Lead	Peak (Note 1)	46.1	46.0	0.1 (Note 3)
5.08	Neutral Lead	Peak (Note 1)	45.5	46.0	-0.5
12.18	Neutral Lead	Peak (Note 1)	44.1	50.0	-5.9

Note 1: The reference detector used for the measurements was Quasi-Peak or Peak and the data was compared to the average limit; therefore, the EUT was deemed to meet both the average and quasi-peak limits.

Note 2: The reference detector used for the measurements was quasi-peak and average and the data was compared to the respective limits.

Note 3: The device the transceiver is in is a class A device and the limits shown are from §15.207 which are the same as the limits for a class B device under §15.107. These emissions were investigated and were found to be at the same level regardless of whether the transceivers of the device were not powered, powered and idle, or powered and active, therefore, the conducted emissions of the transceivers were deemed compliant with the requirements of the standards.

Result


The EUT complied with the specification limit.

6.2.3 §15.247(a)(2)


Frequency (MHz)	Emissions 6 dB bandwidth (MHz)
2412	7.3
2437	7.2
2462	7.6

Result


In the configuration tested, the 6 dB bandwidth was greater than 500 kHz; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).

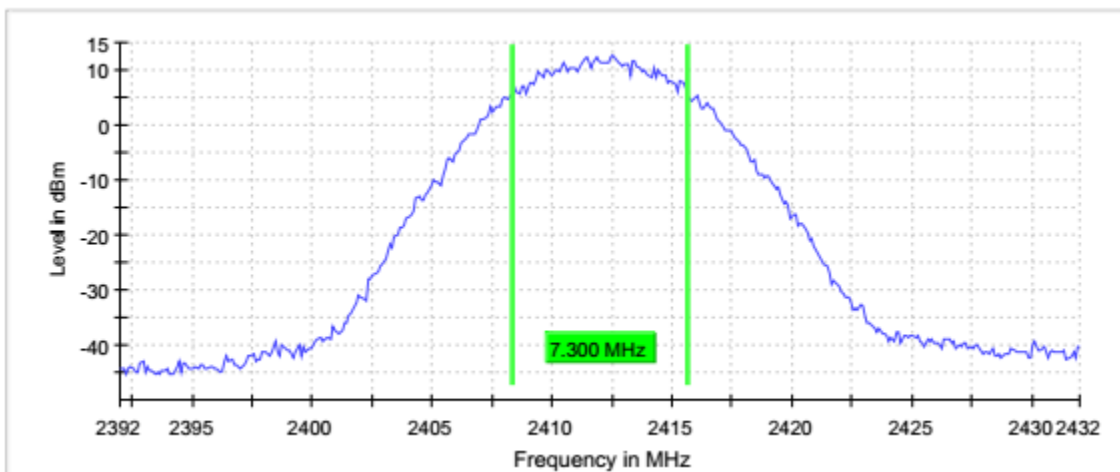

Graph 1: 2412 (B-Mode) 6dB Emissions Bandwidth

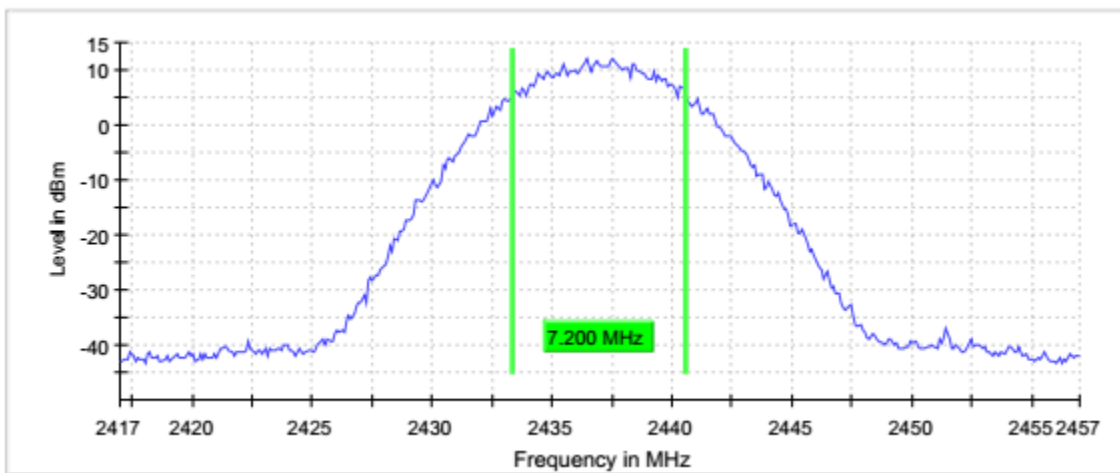

Graph 2: 2437 (B-Mode) 6dB Emissions Bandwidth

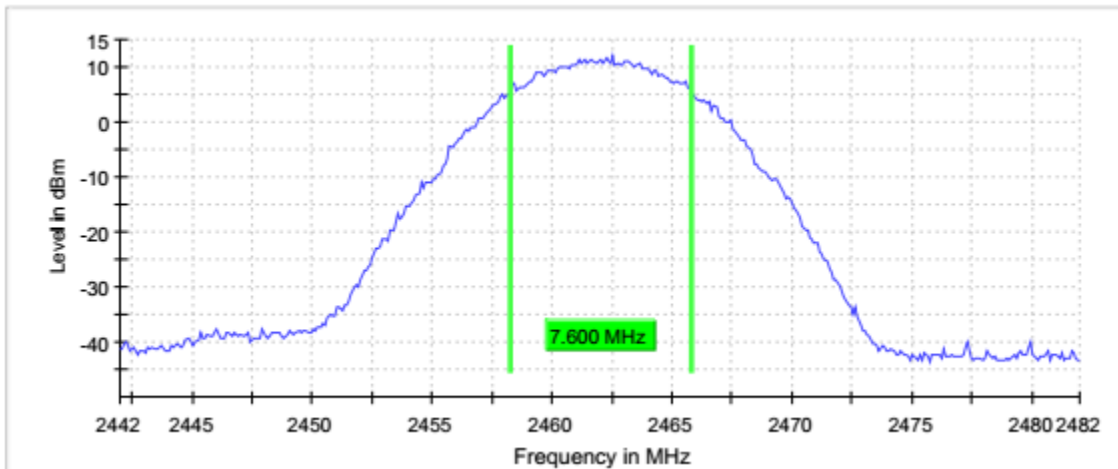

Graph 3: 2462 (B-Mode) 6dB Emissions Bandwidth


6.2.4 §15.247(b)(3) Maximum Average Output Power

The maximum average RF conducted output power measured for this device was 19.4 dBm or 87.5 mW. The limit is 30 dBm or 1 Watt when using antennas with 6 dBi or less gain. The antenna has a gain of 1.0 dBi.


Frequency (MHz)	Measured Output Power (dBm)	Output Power (mW)
2412	19.4	87.5
2437	18.8	76.5
2462	18.0	62.7

Result


In the configuration tested, the maximum average RF output power was less than 1 Watt; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).

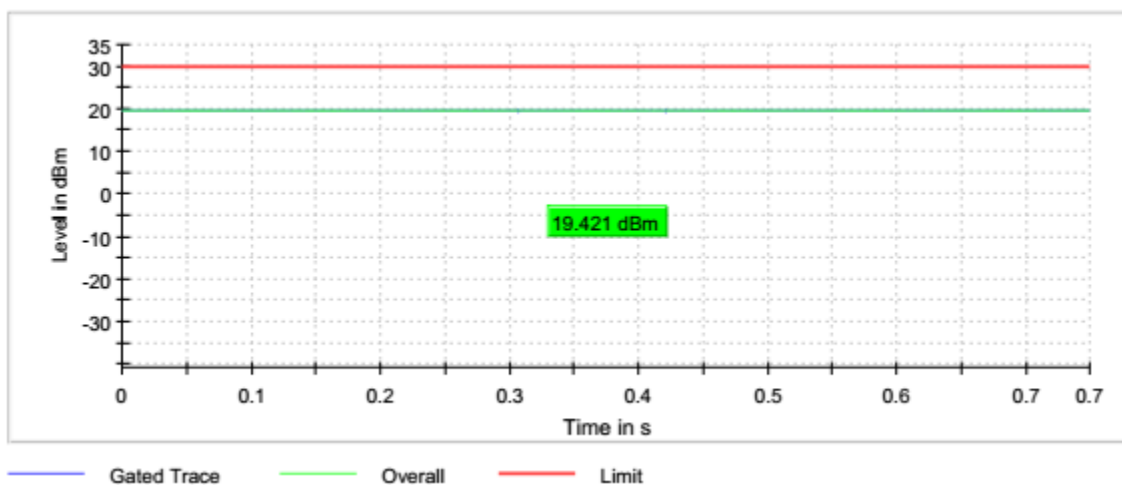

Graph 4: 2412 (B-Mode - 20MHz) Maximum Average Output Power

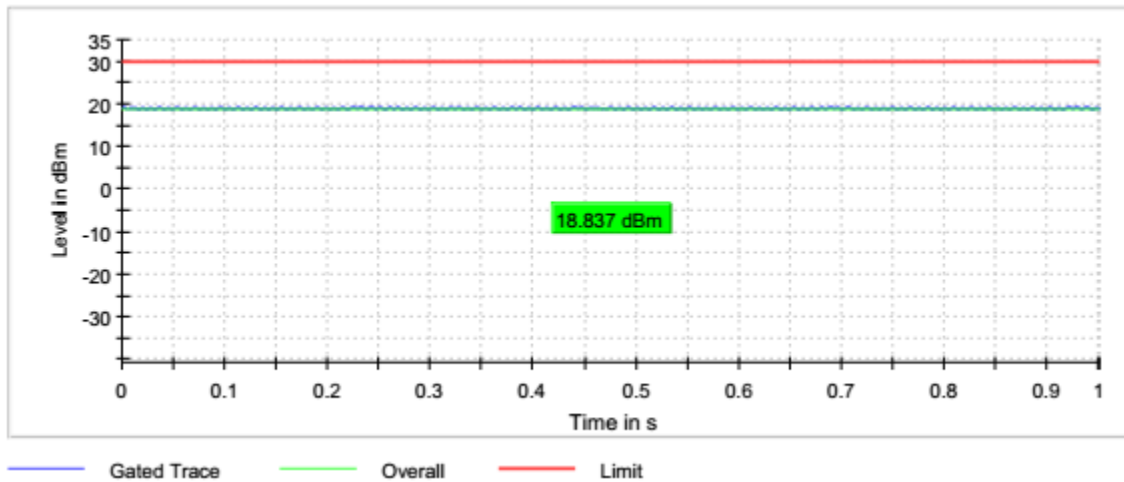

Graph 5: 2437 (B-Mode – 20MHz) Maximum Average Output Power

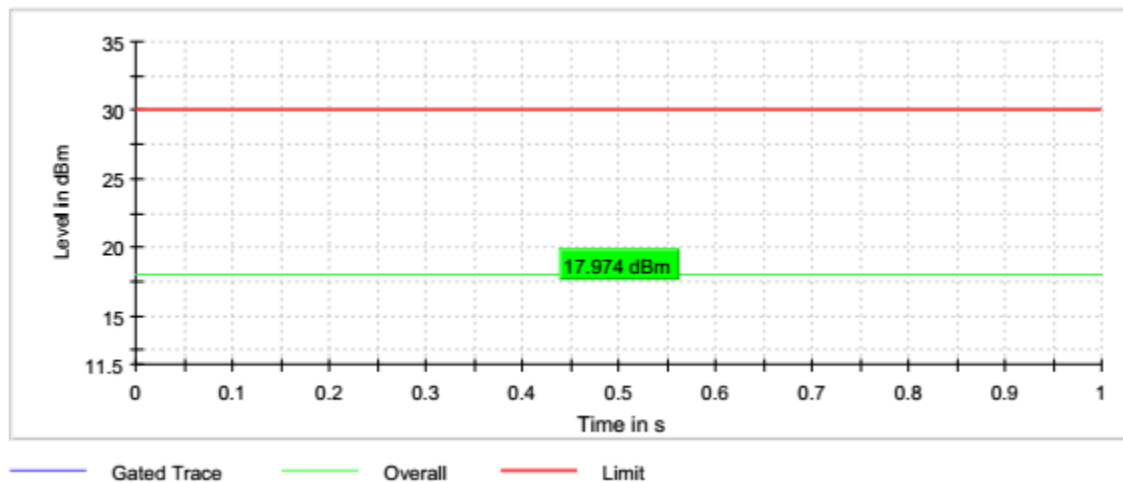

Graph 6: 2462 (B-Mode) Maximum Average Output Power

6.2.5 §15.247(d) Spurious Emissions

Conducted Spurious Emissions

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental frequency was investigated to measure any antenna-conducted emissions. The tables show the measurement data from spurious emissions noted across the frequency range when transmitting at the lowest frequency, middle frequency, and upper frequency. Shown below are plots with the EUT tuned to the upper and lower channels. These demonstrate compliance with the provisions of this section at the band edges.

The emissions must be attenuated 30 dB below the highest power spectral density level measured within the authorized band as measured with a 100 kHz RBW. The highest power measured power spectral density was 2.3 dBm; therefore, the criteria is $2.3 - 30 = -27.7$ dBm.

Result

Conducted spurious emissions were attenuated 30 dB or more below the fundamental; therefore, the EUT complies with the specification.

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
4824.75	-42.8	-27.7	-15.1


Table 2: 2412 (B-Mode – 20MHz) Transmitting on the Lowest Channel

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
4873.75	-40.3	-27.7	-12.6


Table 3: 2437 (B-Mode – 20MHz) Transmitting on the Middle Channel

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
4924.75	-49.8	-27.7	-22.1
7386.25	-61.1	-27.7	-33.4
12310.25	-53.3	-27.7	-25.6

Table 4: 2462 (B-Mode – 20MHz) Transmitting on the Highest Channel

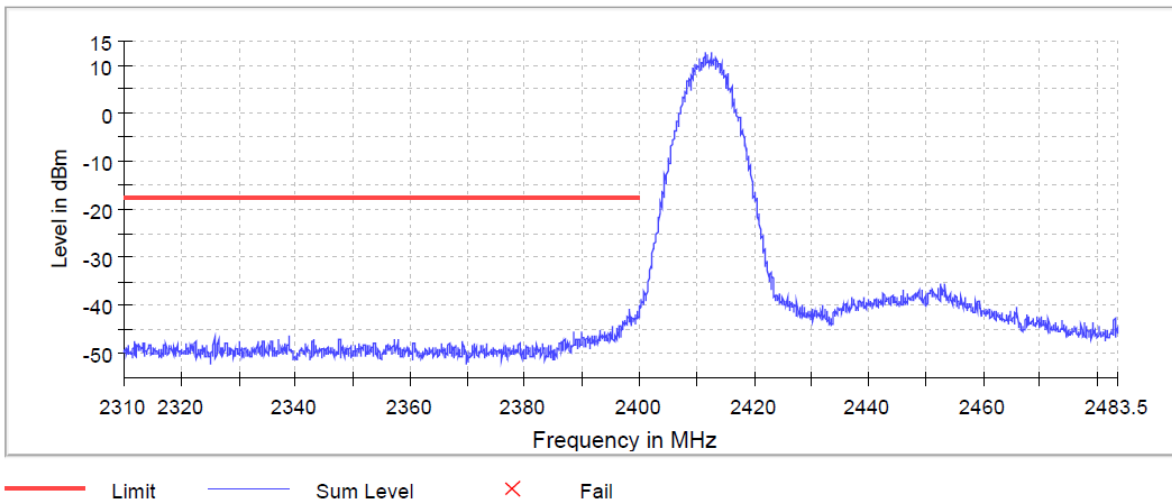

Graph 7: (B-Mode) Lower Band Edge Plot

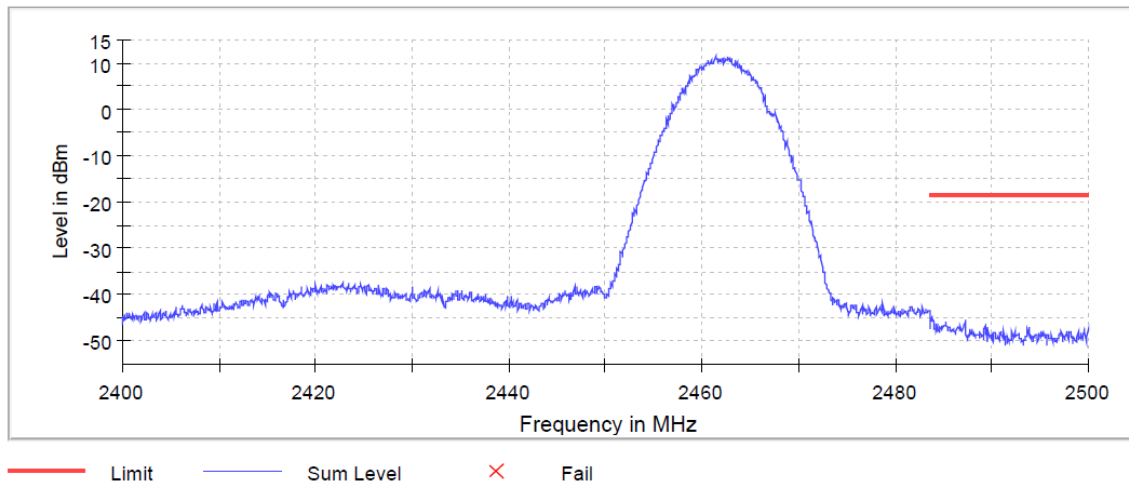

Graph 8: (B-Mode) Upper Band Edge Plot

Radiated Spurious Emissions in the Restricted Bands of §15.205

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental emission was investigated to measure any radiated emissions in the restricted bands. The following tables show measurements of any emission that fell into the restricted bands of §15.205. The tables show the worst-case emission measured from the EUT. For frequencies above 18.0 GHz, a measurement distance of 1 meter was used. The noise floor was a minimum of 6 dB below the limit. The emissions in the restricted bands must meet the limits specified in §15.209. Tabular data for each of the spurious emissions is shown below for each of the units. Plots of the band edges are also shown.

Result

All emissions in the restricted bands of §15.205 met the limits specified in §15.209; therefore, the EUT complies with the specification.

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBµV)	Correction Factor (dB)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4824.0	Peak	Vertical	7.1	39.6	46.7	74.0	-27.3
4824.0	Average	Vertical	0.7	39.6	40.3	54.0	-13.7
4824.0	Peak	Horizontal	7.2	39.6	46.8	74.0	-27.2
4824.0	Average	Horizontal	-2.1	39.6	37.5	54.0	-16.5
7236.0	Peak	Vertical	5.9	44.5	50.4	74.0	-23.6
7236.0	Average	Vertical	-6.3	44.5	38.2	54.0	-15.8
7236.0	Peak	Horizontal	6.3	44.5	50.8	74.0	-23.2
7236.0	Average	Horizontal	-6.1	44.5	38.4	54.0	-15.6
12060.0	Peak	Vertical	8.6	50.0	58.6	74.0	-15.4
12060.0	Average	Vertical	-3.8	50.0	46.2	54.0	-7.8
12060.0	Peak	Horizontal	8.0	50.0	58.0	74.0	-16.0
12060.0	Average	Vertical	-6.0	50.0	44.0	54.0	-10.0

Table 5: Transmitting at the Lowest Frequency


Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4874.0	Peak	Vertical	6.8	39.7	46.5	74.0	-27.5
4874.0	Average	Vertical	-0.6	39.7	39.1	54.0	-14.9
4874.0	Peak	Horizontal	6.4	39.7	46.1	74.0	-27.9
4874.0	Average	Horizontal	0.3	39.7	40.0	54.0	-14.0
7311.0	Peak	Vertical	6.7	44.7	51.4	74.0	-22.6
7311.0	Average	Vertical	-4.4	44.7	40.3	54.0	-13.7
7311.0	Peak	Horizontal	5.1	44.7	49.8	74.0	-24.2
7311.0	Average	Horizontal	-4.9	44.7	39.8	54.0	-14.2
12185.0	Peak	Vertical	7.3	49.9	57.2	74.0	-16.8
12185.0	Average	Vertical	-2.9	49.9	47.0	54.0	-7.0
12185.0	Peak	Horizontal	7.4	49.9	57.3	74.0	-16.7
12185.0	Average	Vertical	-2.6	49.9	47.3	54.0	-6.7

Table 6: Transmitting at the Middle Frequency

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4924.0	Peak	Vertical	17.2	39.8	57.0	74.0	-17.0
4924.0	Average	Vertical	14.0	39.8	53.8	54.0	-0.2
4924.0	Peak	Horizontal	16.2	39.8	56.0	74.0	-18.0
4924.0	Average	Horizontal	12.5	39.8	52.3	54.0	-1.7
7386.0	Peak	Vertical	5.7	44.9	50.6	74.0	-23.4
7386.0	Average	Vertical	-6.0	44.9	38.9	54.0	-15.1
7386.0	Peak	Horizontal	6.5	44.9	51.4	74.0	-22.6
7386.0	Average	Horizontal	-6.1	44.9	38.8	54.0	-15.2
12310.0	Peak	Vertical	7.3	49.9	57.2	74.0	-16.8
12310.0	Average	Vertical	-5.3	49.9	44.6	54.0	-9.4
12310.0	Peak	Horizontal	7.4	49.9	57.3	74.0	-16.7
12310.0	Average	Vertical	-5.2	49.9	44.7	54.0	-9.3


Table 7: Transmitting at the Highest Frequency

No other emissions were seen in the restricted bands.

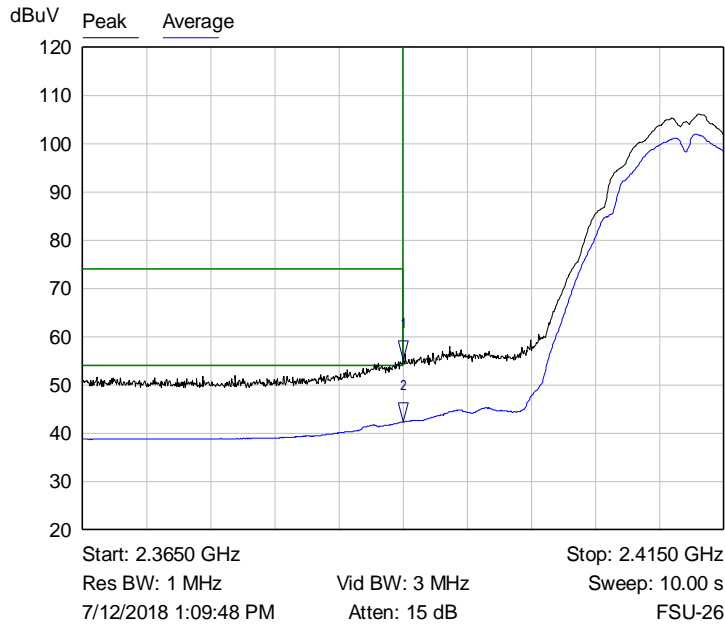

Mkr	Trace	X-Axis	Value	Notes
1 ▾	Peak	2.3900 GHz	55.18 dBuV	
2 ▾	Average	2.3900 GHz	42.39 dBuV	

Graph 9: Radiated Lower Band Edge Plot

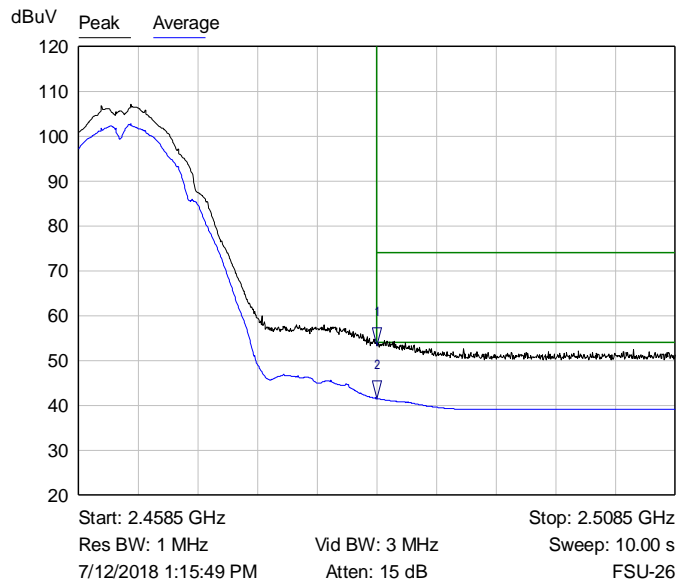

Mkr	Trace	X-Axis	Value	Notes
1 ▾	Peak	2.4835 GHz	53.39 dBuV	
2 ▾	Average	2.4835 GHz	41.51 dBuV	

Graph 10: Radiated Upper Band Edge Plot


6.2.6 §15.247(e) Maximum Average Power Spectral Density

The maximum average power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. Results of this testing are summarized.


Frequency (MHz)	Measurement (dBm)	Criteria (dBm)
2412	2.3	8.0
2437	2.0	8.0
2462	0.8	8.0

Result


The maximum average power spectral density was less than the limit of 8 dBm; therefore, the EUT complies with the specification.

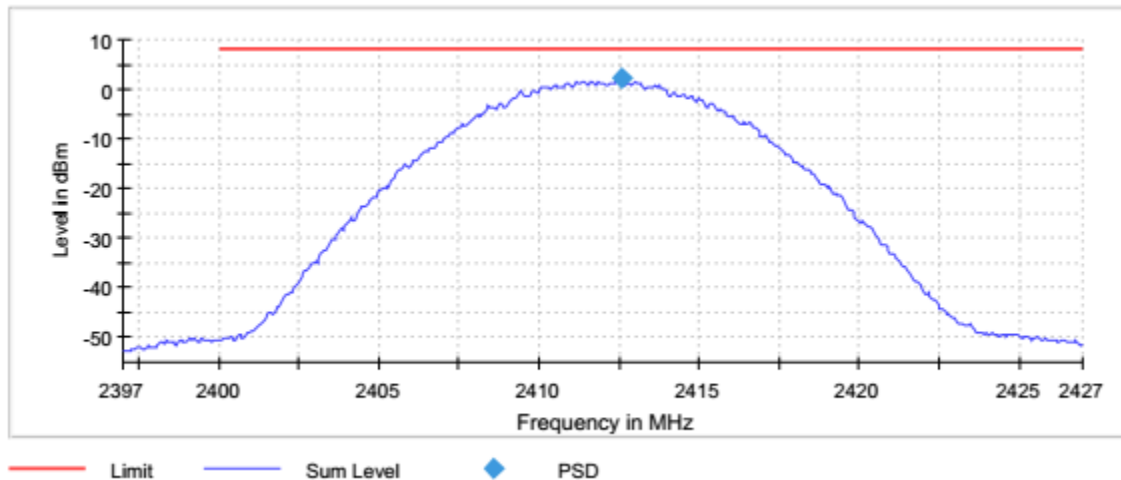

Graph 11: 2412 (B-Mode) Lowest Channel 3 kHz PSD Plot

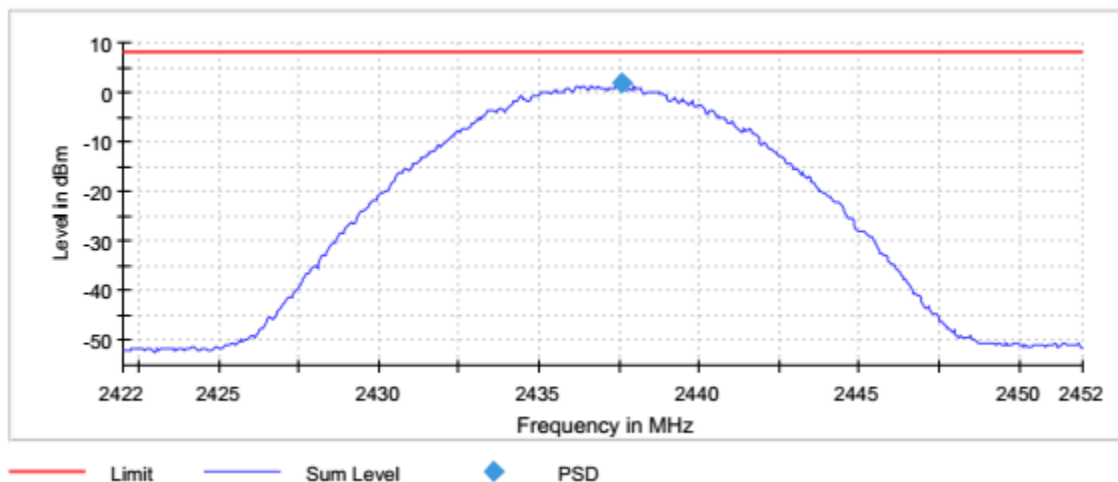

Graph 12: 2437 (B-Mode) Middle Channel 3 kHz PSD Plot

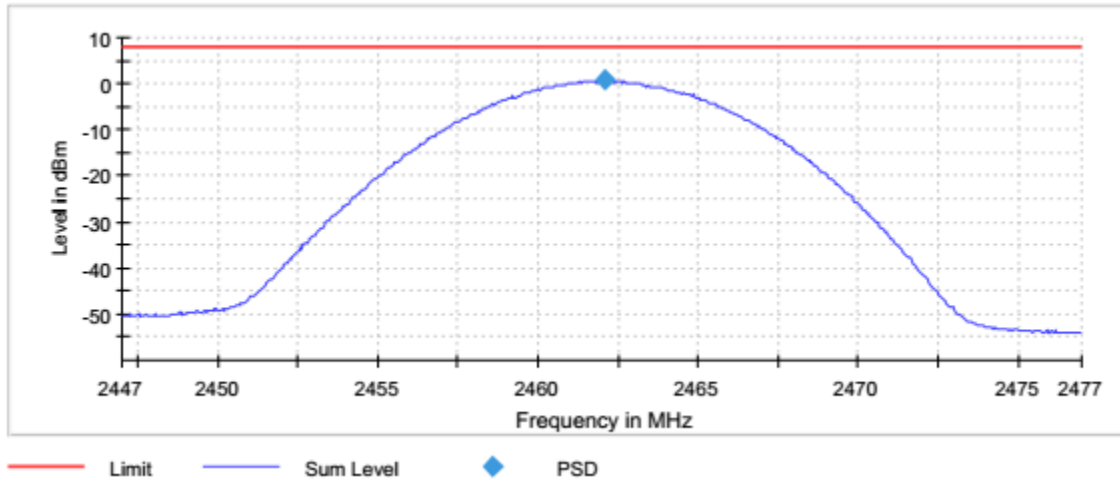

Graph 13: 2462 (B-Mode) Highest Channel Output 3 kHz PSD Plot

6.3 Test Results – 802.11g Mode

6.3.1 §15.203 Antenna Requirements

See Section 6.2.1.

Result

The EUT complied with the specification.

6.3.2 Conducted Emissions at Mains Ports Data (Hot Lead)

See Section 6.2.2.

Result


The EUT complied with the specification.

6.3.3 §15.247(a)(2) Emissions Bandwidth


Frequency (MHz)	Emissions 6 dB bandwidth (MHz)
2412	16.1
2437	15.5
2462	16.3

Result


In the configuration tested, the 6 dB bandwidth was greater than 500 kHz; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).

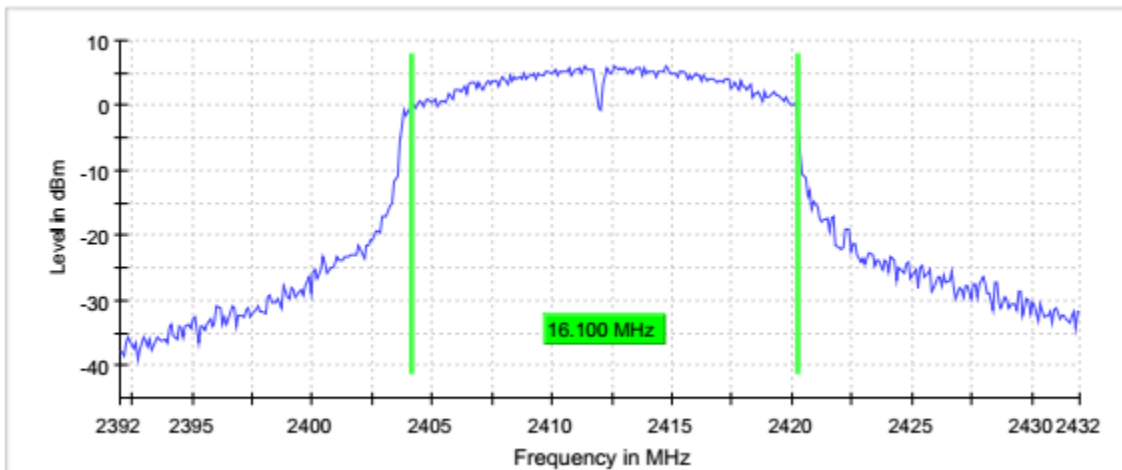

Graph 14: 2412 (G-Mode) 6dB Emissions Bandwidth

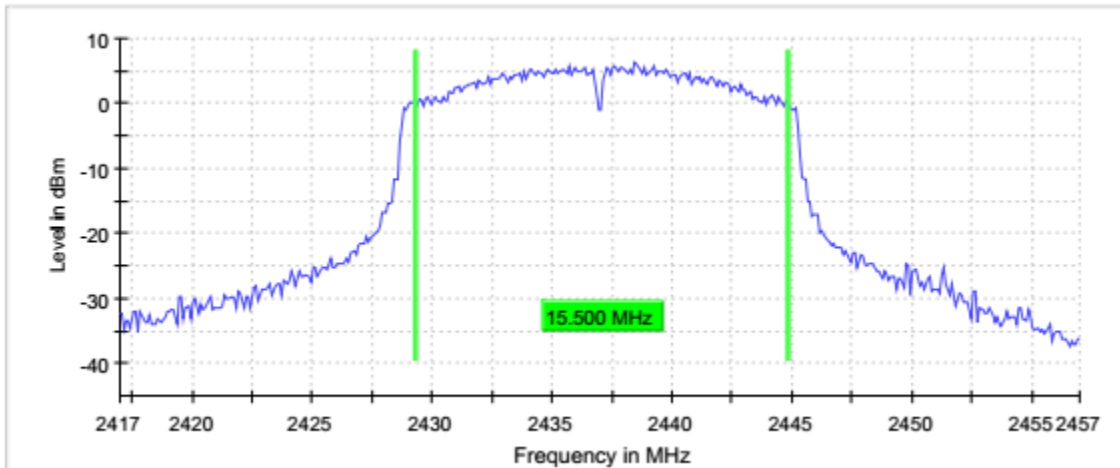

Graph 15: 2437 (G-Mode) 6dB Emissions Bandwidth

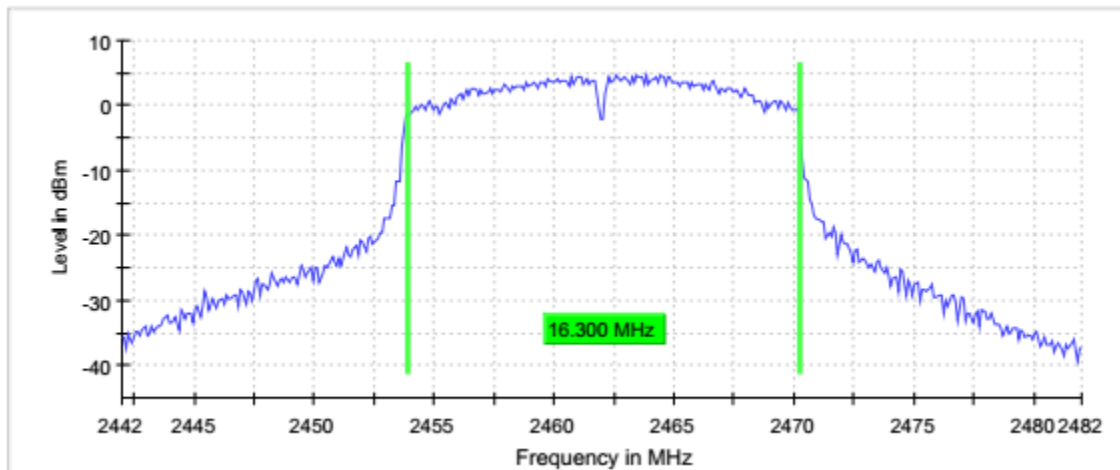

Graph 16: 2462 (G-Mode) 6dB Emissions Bandwidth


6.3.4 §15.247(b)(3) Maximum Average Output Power

The maximum average RF conducted output power measured for this device was 17.7 dBm or 59.1 mW. The limit is 30 dBm or 1 Watt when using antennas with 6 dBi or less gain. The antenna has a gain of 1.5 dBi.


Frequency (MHz)	Measured Output Power (dBm)	Output Power (mW)
2412	17.7	59.1
2437	17.4	54.9
2462	16.4	43.8

Result


In the configuration tested, the maximum average RF output power was less than 1 Watt; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).

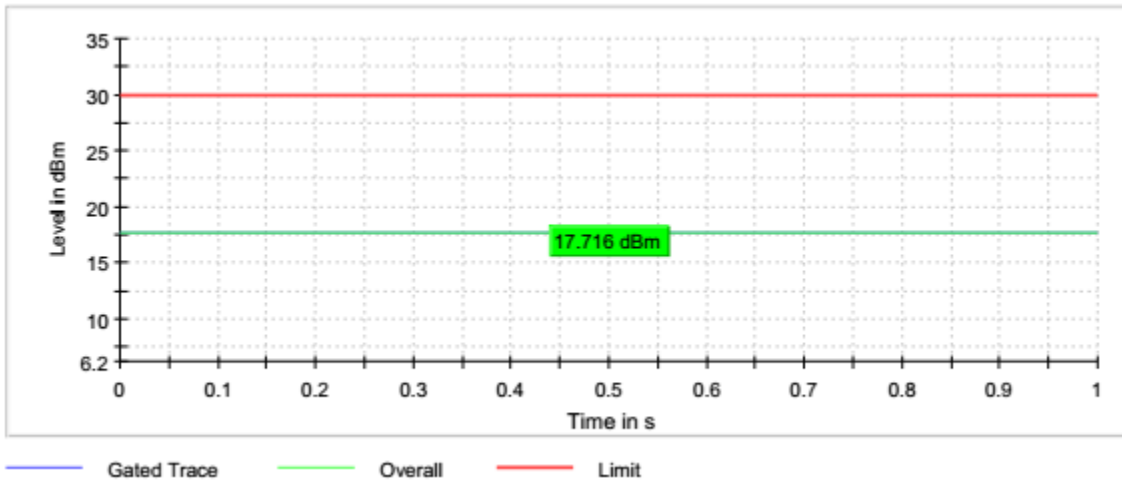

Graph 17: 2412 (G-Mode) Peak Output Power

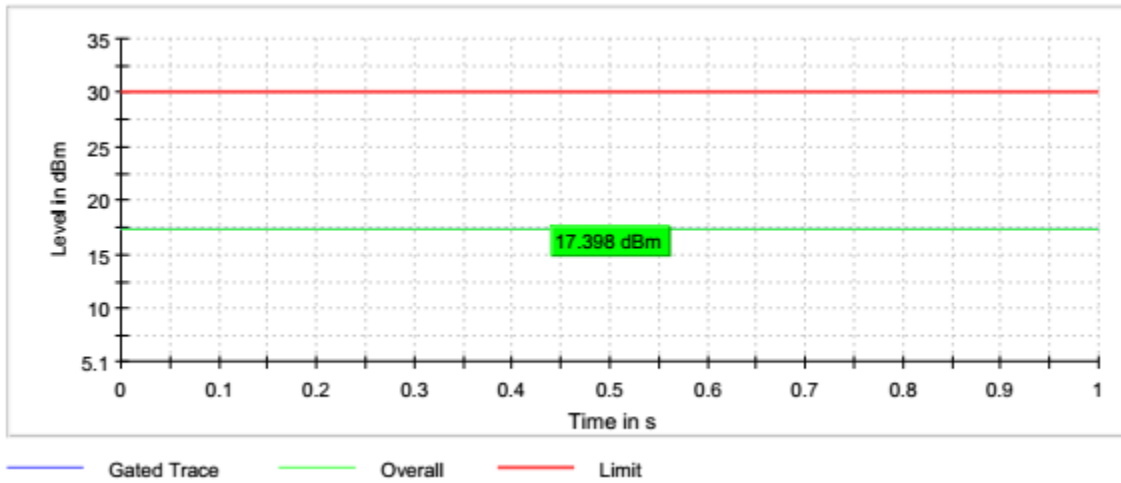

Graph 18: 2437 (G-Mode) Peak Output Power

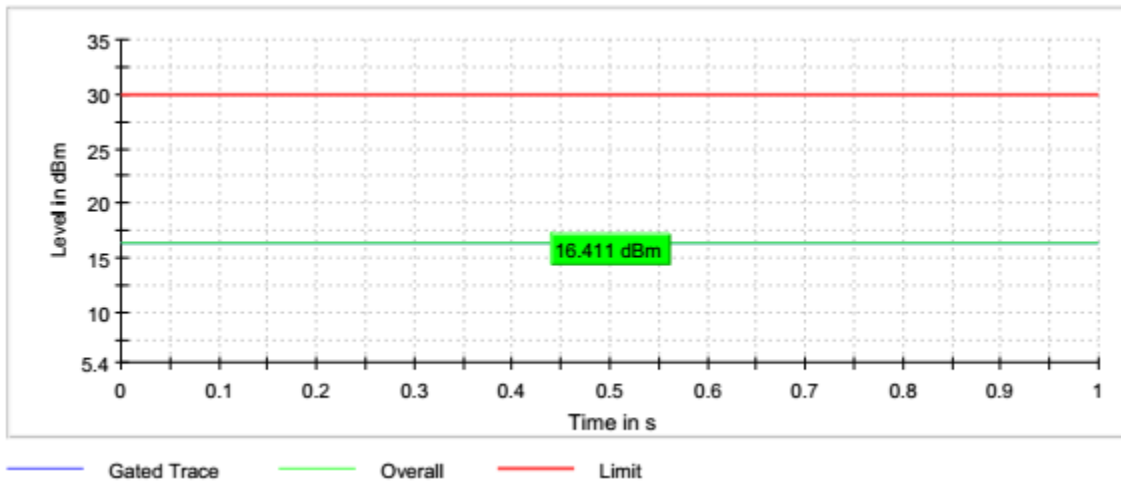

Graph 19: 2462 (G-Mode) Peak Output Power

6.3.5 §15.247(d) Spurious Emissions

Conducted Spurious Emissions

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental frequency was investigated to measure any antenna-conducted emissions. The tables show the measurement data from spurious emissions noted across the frequency range when transmitting at the lowest frequency, middle frequency, and upper frequency. Shown below are plots with the EUT tuned to the upper and lower channels. These demonstrate compliance with the provisions of this section at the band edges.

The emissions must be attenuated 30 dB below the highest power spectral density level measured within the authorized band as measured with a 100 kHz RBW. The highest power measured was -1.7 dBm; therefore, the criteria is $-1.7 - 30 = -31.7$ dBm.

Result

Conducted spurious emissions were attenuated 30 dB or more below the fundamental; therefore, the EUT complies with the specification.

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
4822.25	-46.5	-31.7	-14.8
7250.75	-61.7	-31.7	-30.0
12061.25	-58.6	-31.7	-26.9


Table 8: Transmitting on the Lowest Channel

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
4874.25	-40.2	-31.7	-8.5
7298.75	-61.3	-31.7	-29.6
12169.75	-59.5	-31.7	-27.8


Table 9: Transmitting on the Middle Channel

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
4928.250000	-54.2	-31.7	-22.5
7394.250000	-61.5	-31.7	-29.8
12315.750000	-56.9	-31.7	-25.2

Table 10: Transmitting on the Highest Channel

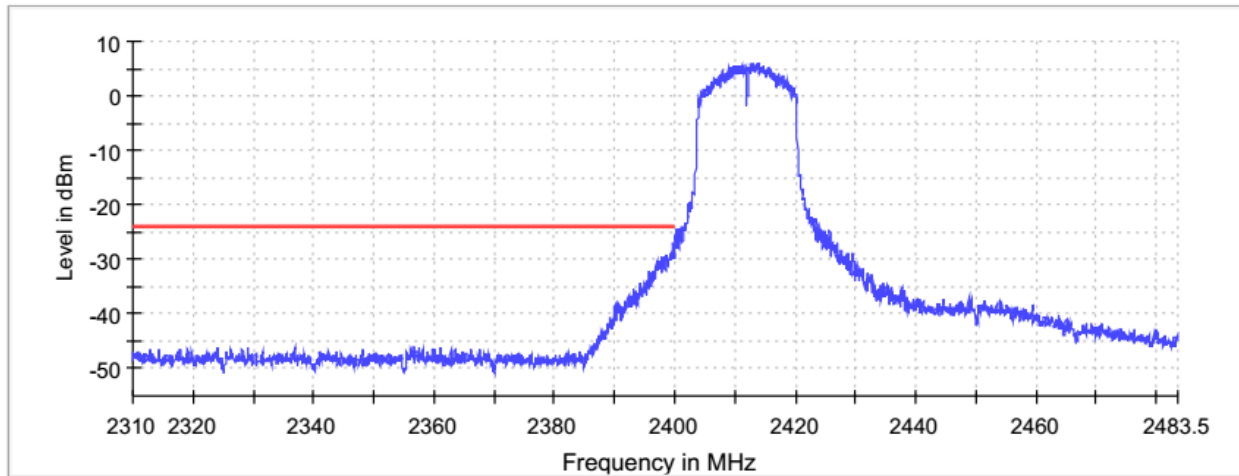

Graph 20: (G-Mode) Lower Band Edge Plot

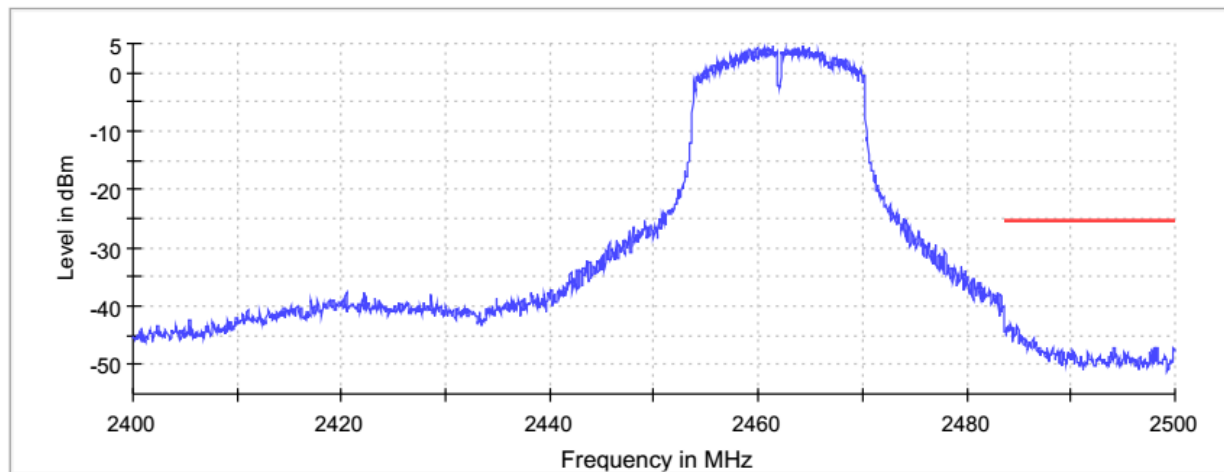

Graph 21: (G-Mode) Upper Band Edge Plot

Radiated Spurious Emissions in the Restricted Bands of §15.205

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental emission was investigated to measure any radiated emissions in the restricted bands. The following tables show measurements of any emission that fell into the restricted bands of §15.205. The tables show the worst-case emission measured from the EUT. For frequencies above 18.0 GHz, a measurement distance of 1 meter was used. The noise floor was a minimum of 6 dB below the limit. The emissions in the restricted bands must meet the limits specified in §15.209. Tabular data for each of the spurious emissions is shown below for each of the units. Plots of the band edges are also shown.

Result

All emissions in the restricted bands of §15.205 met the limits specified in §15.209; therefore, the EUT complies with the specification.

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4824.0	Peak	Vertical	7.5	39.6	47.1	74.0	-26.9
4824.0	Average	Vertical	-4.2	39.6	35.4	54.0	-18.6
4824.0	Peak	Horizontal	7.0	39.6	46.6	74.0	-27.4
4824.0	Average	Horizontal	-4.5	39.6	35.1	54.0	-18.9
7236.0	Peak	Vertical	7.7	44.5	52.2	74.0	-21.8
7236.0	Average	Vertical	-4.9	44.5	39.6	54.0	-14.4
7236.0	Peak	Horizontal	7.5	44.5	52.0	74.0	-22.0
7236.0	Average	Horizontal	-5.6	44.5	38.9	54.0	-15.1

Table 11: Transmitting at the Lowest Frequency


Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4874.0	Peak	Vertical	11.2	39.7	50.9	74.0	-23.1
4874.0	Average	Vertical	-1.3	39.7	38.4	54.0	-15.6
4874.0	Peak	Horizontal	9.9	39.7	49.6	74.0	-24.4
4874.0	Average	Horizontal	-2.7	39.7	37.0	54.0	-17.0
7311.0	Peak	Vertical	7.5	44.7	52.2	74.0	-21.8
7311.0	Average	Vertical	-5.0	44.7	39.7	54.0	-14.3
7311.0	Peak	Horizontal	7.4	44.7	52.1	74.0	-21.9
7311.0	Average	Horizontal	-5.1	44.7	39.6	54.0	-14.4

Table 12: Transmitting at the Middle Frequency

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4924.0	Peak	Vertical	20.9	39.8	60.7	74.0	-13.3
4924.0	Average	Vertical	7.7	39.8	47.5	54.0	-6.5
4924.0	Peak	Horizontal	23.6	39.8	63.4	74.0	-10.6
4924.0	Average	Horizontal	9.9	39.8	49.7	54.0	-4.3
7386.0	Peak	Vertical	6.9	44.9	51.8	74.0	-22.2
7386.0	Average	Vertical	-4.5	44.9	40.4	54.0	-13.6
7386.0	Peak	Horizontal	8.8	44.9	53.7	74.0	-20.3
7386.0	Average	Horizontal	-4.4	44.9	40.5	54.0	-13.5


Table 13: Transmitting at the Highest Frequency

No other emissions were seen in the restricted bands

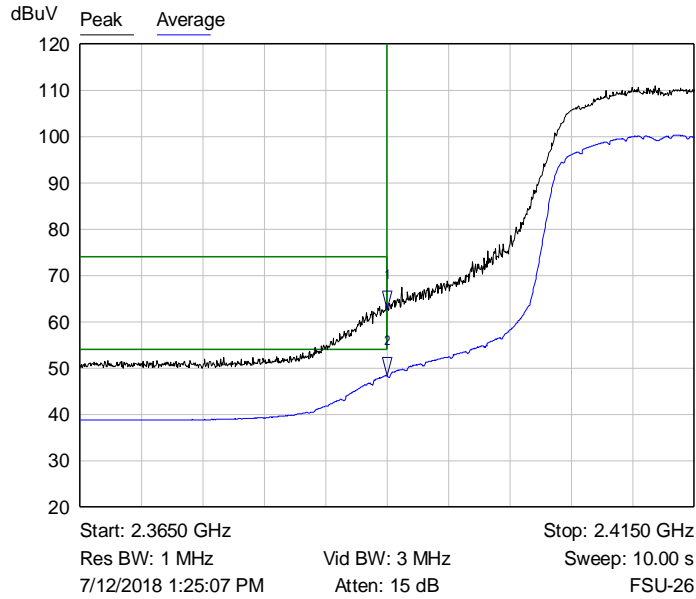

Mkr	Trace	X-Axis	Value	Notes
1 ▾	Peak	2.3900 GHz	62.66 dBuV	
2 ▾	Average	2.3900 GHz	48.26 dBuV	

Graph 22: Radiated Lower Band Edge Plot

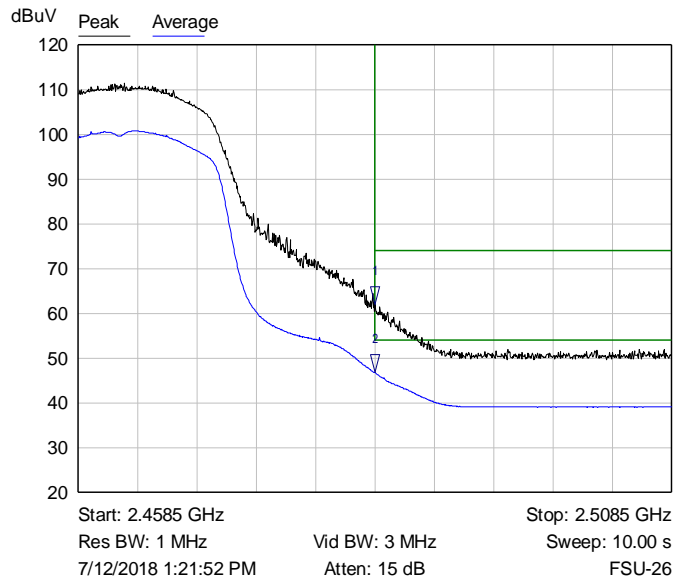

Mkr	Trace	X-Axis	Value	Notes
1 ▾	Peak	2.4835 GHz	61.94 dBuV	
2 ▾	Average	2.4835 GHz	46.76 dBuV	

Graph 23: Radiated Upper Band Edge Plot


6.3.6 §15.247(e) Maximum Average Power Spectral Density

The maximum average power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. Results of this testing are summarized.


Frequency (MHz)	Measurement (dBm)	Criteria (dBm)
2412	-1.7	8.0
2437	-2.0	8.0
2462	-3.3	8.0

Result


The maximum average power spectral density was less than the limit of 8 dBm; therefore, the EUT complies with the specification.

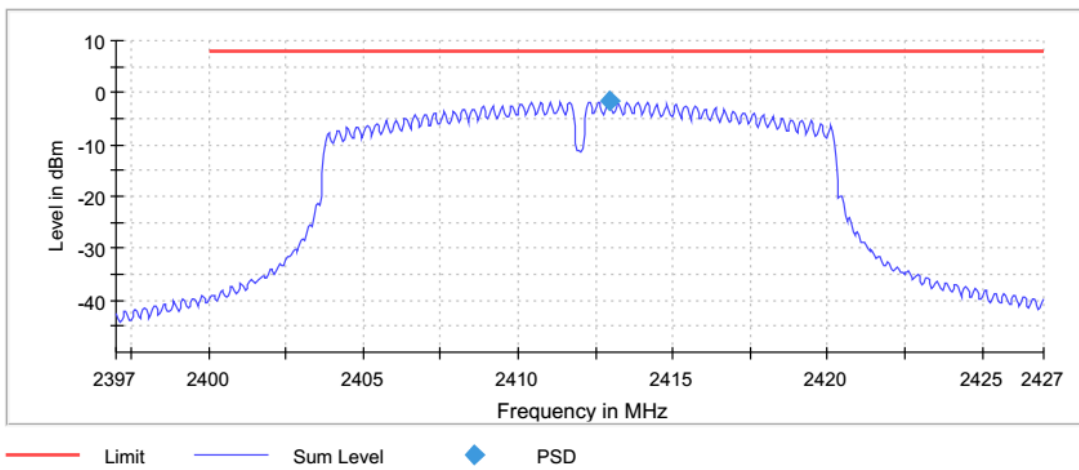

Graph 24: 2412 (G-Mode) Lowest Channel 3 kHz PSD Plot

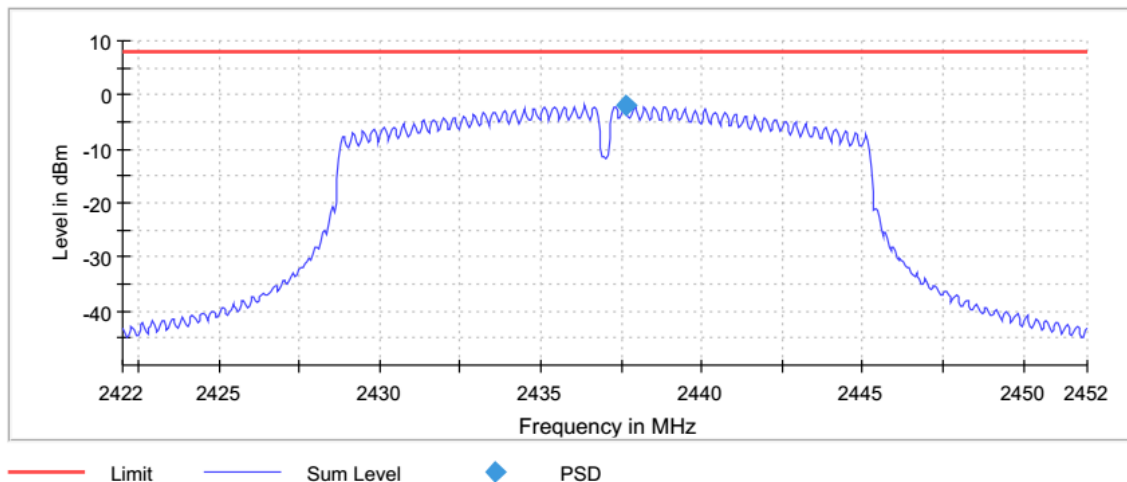

Graph 25: 2437 (G-Mode) Middle Channel 3 kHz PSD Plot

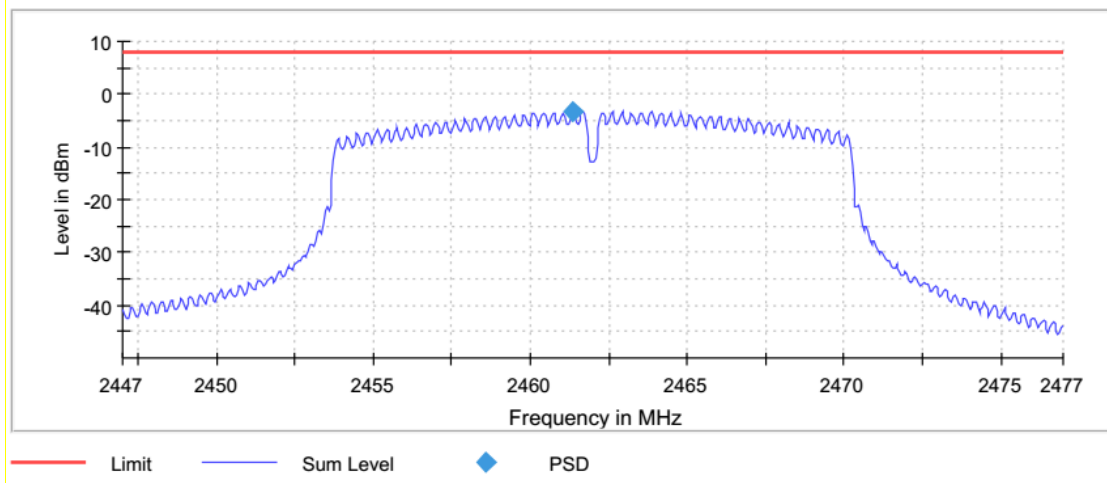

Graph 26: 2462 (G-Mode) Highest Channel Output 3 kHz PSD Plot

6.4 Test Results – 802.11n(20) Mode

6.4.1 §15.203 Antenna Requirements

See Section 6.2.1.

Result

The EUT complied with the specification.

6.4.2 Conducted Emissions at Mains Ports Data (Hot Lead)

See Section 6.2.2.

Result


The EUT complied with the specification.

6.4.3 §15.247(a)(2) Emissions Bandwidth


Frequency (MHz)	Emissions 6 dB bandwidth (MHz)
2412	15.3
2437	15.3
2462	15.3

Result


In the configuration tested, the 6 dB bandwidth was greater than 500 kHz; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).

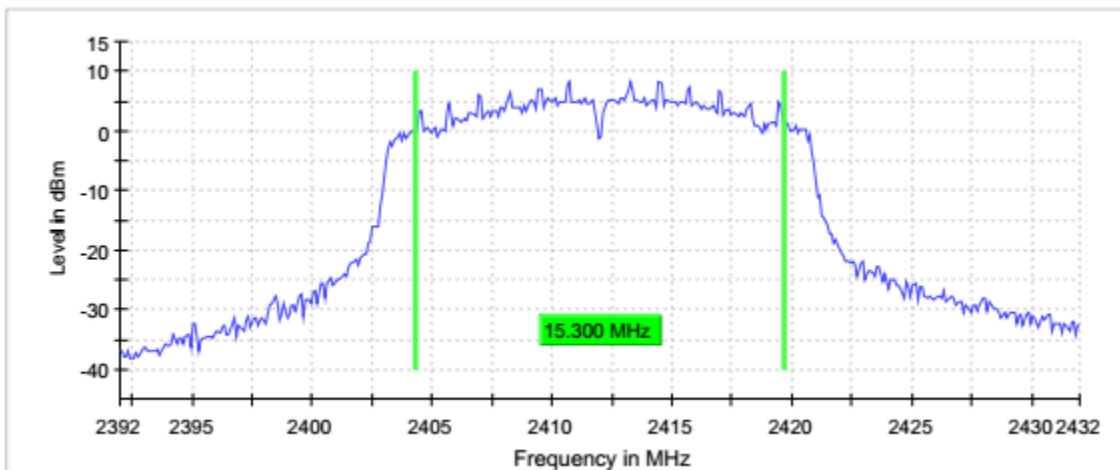

Graph 27: 2412 (N-Mode – 20MHz) 6dB Emissions Bandwidth

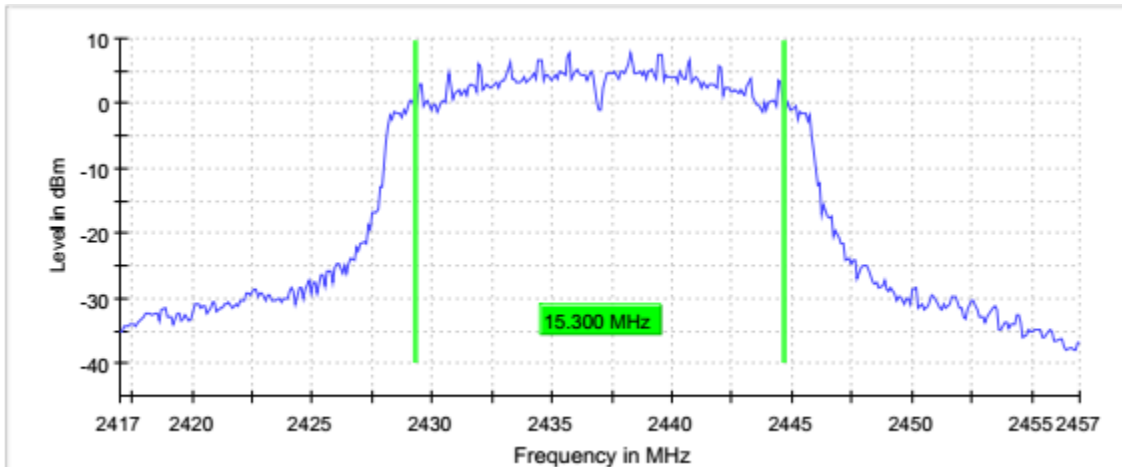

Graph 28: 2437 (N-Mode – 20MHz) 6dB Emissions Bandwidth

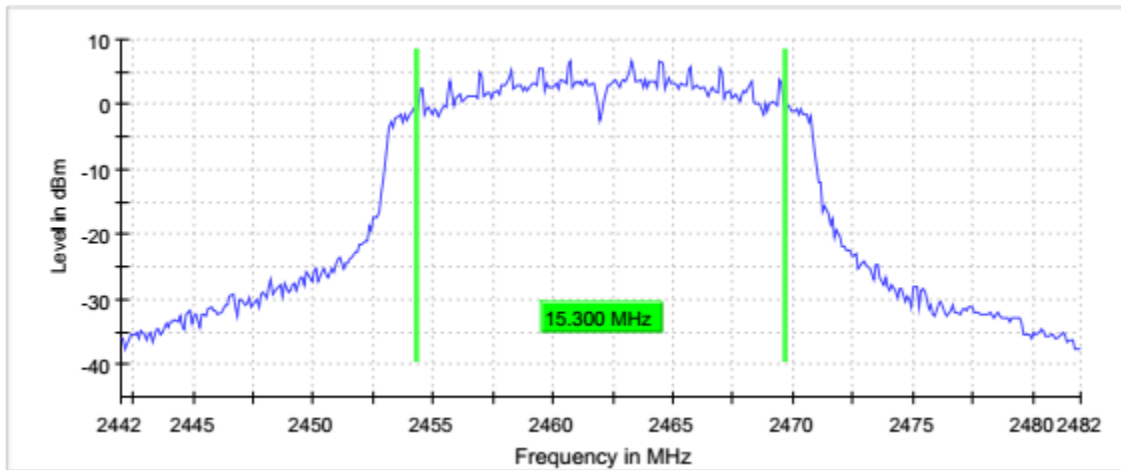

Graph 29: 2462 (N-Mode – 20MHz) 6dB Emissions Bandwidth


6.4.4 §15.247(b)(3) Maximum Average Output Power

The maximum average RF conducted output power measured for this device was 17.4 dBm or 55.0 mW. The limit is 30 dBm or 1 Watt when using antennas with 6 dBi or less gain. The antenna has a gain of 1.5 dBi.

Frequency (MHz)	Measured Output Power (dBm)	Output Power (mW)
2412	17.4	55.0
2437	16.9	49.0
2462	15.9	38.6


Result

In the configuration tested, the maximum average RF output power was less than 1 Watt; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).

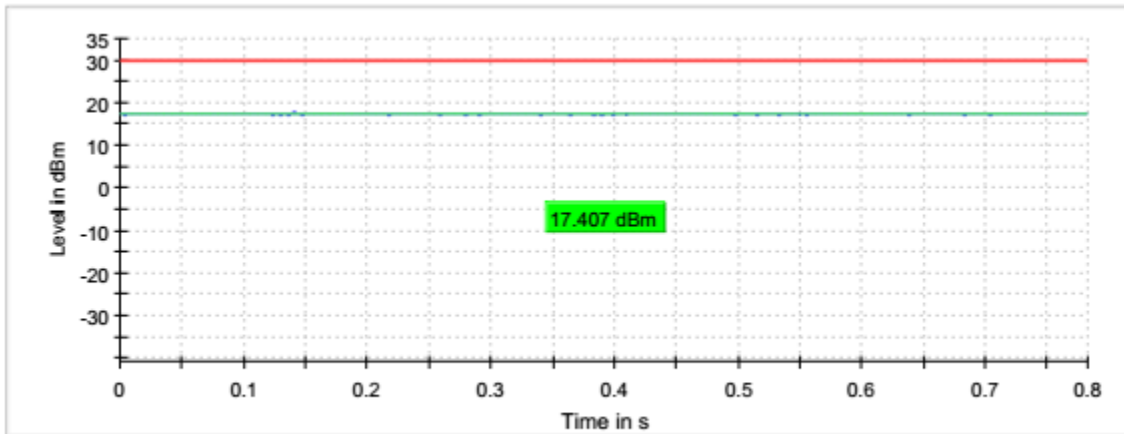


— Gated Trace — Overall — Limit

Graph 30: 2412 (N-Mode – 20MHz) Peak Output Power

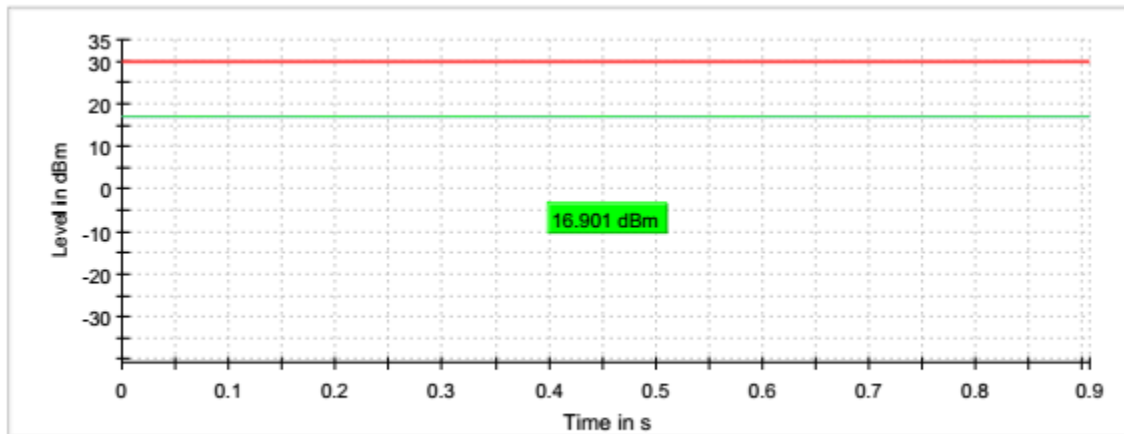

— Gated Trace — Overall — Limit

Graph 31: 2437 (N-Mode – 20MHz) Peak Output Power

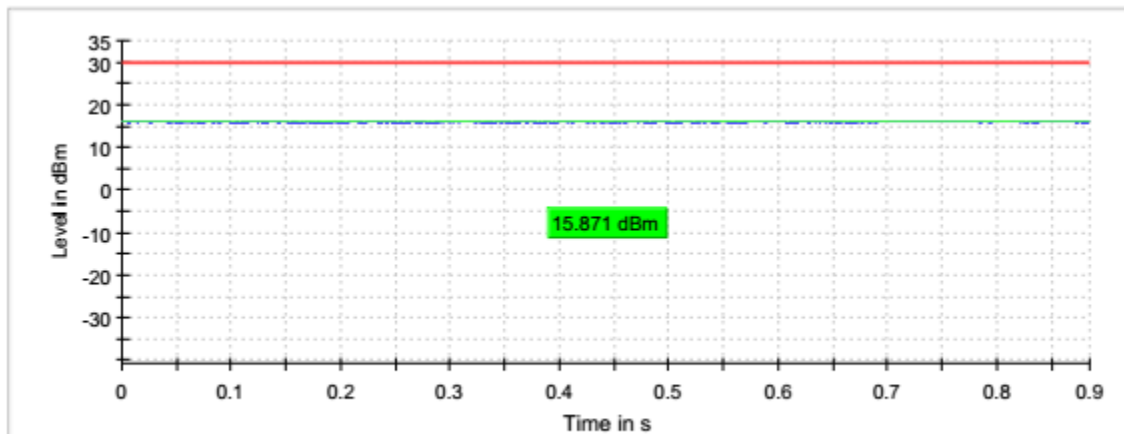

— Gated Trace — Overall — Limit

Graph 32: 2462 (N-Mode – 20MHz) Peak Output Power

6.4.5 §15.247(d) Spurious Emissions

Conducted Spurious Emissions

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental frequency was investigated to measure any antenna-conducted emissions. The tables show the measurement data from spurious emissions noted across the frequency range when transmitting at the lowest frequency, middle frequency, and upper frequency. Shown below are plots with the EUT tuned to the upper and lower channels. These demonstrate compliance with the provisions of this section at the band edges.

The emissions must be attenuated 30 dB below the highest power spectral density level measured within the authorized band as measured with a 100 kHz RBW. The highest power measured in was -2.6 dBm; therefore, the criteria is $-2.6 - 30 = -32.6$ dBm.

Result

Conducted spurious emissions were attenuated 30 dB or more below the fundamental; therefore, the EUT complies with the specification.

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
4823.25	-48.4	-32.6	-15.8
7250.75	-61.8	-32.6	-29.2
12065.75	-58.9	-32.6	-26.3


Table 14: Transmitting on the Lowest Channel

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
4872.25	-52.5	-32.6	-19.9
7296.75	-61.5	-32.6	-28.9
12170.75	-59.5	-32.6	-26.9

Table 15: Transmitting on the Middle Channel


Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
4935.75	-59.1	-32.6	-26.5
7392.75	-61.6	-32.6	-29.0
12323.75	-57.6	-32.6	-25.0

Table 16: Transmitting on the Highest Channel

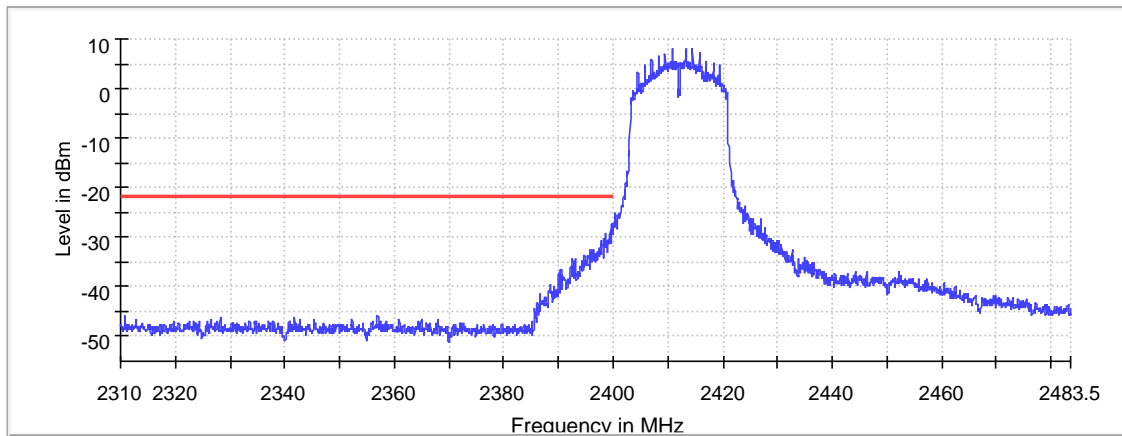

— Limit — Sum Level × Fail

Graph 33: (N-Mode – 20MHz) Lower Band Edge Plot

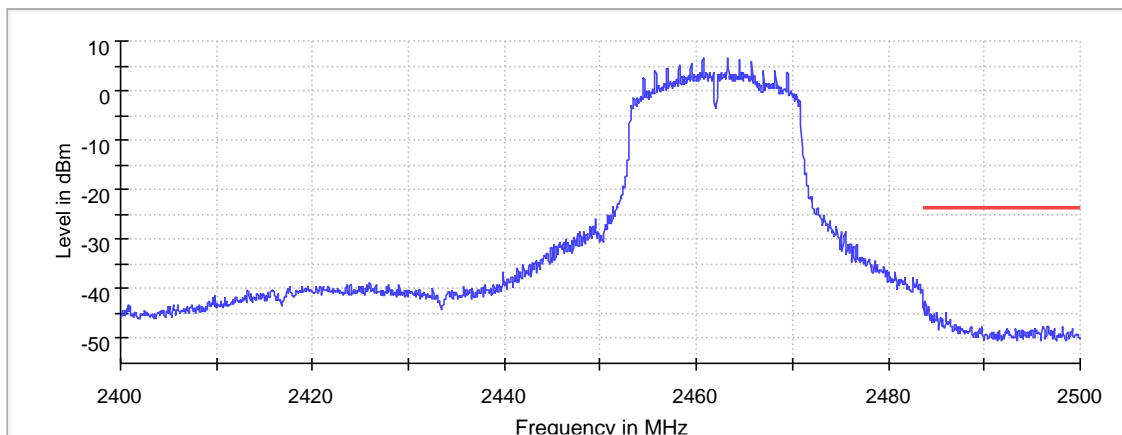

— Limit — Sum Level × Fail

Graph 34: (N-Mode – 20MHz) Upper Band Edge Plot

Radiated Spurious Emissions in the Restricted Bands of §15.205

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental emission was investigated to measure any radiated emissions in the restricted bands. The following tables show measurements of any emission that fell into the restricted bands of §15.205. The tables show the worst-case emission measured from the EUT. For frequencies above 18.0 GHz, a measurement distance of 1 meter was used. The noise floor was a minimum of 6 dB below the limit. The emissions in the restricted bands must meet the limits specified in §15.209. Tabular data for each of the spurious emissions is shown below for each of the units. Plots of the band edges are also shown.

Result

All emissions in the restricted bands of §15.205 met the limits specified in §15.209; therefore, the EUT complies with the specification.

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBµV)	Correction Factor (dB)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4824.0	Peak	Vertical	10.5	39.6	50.1	74.0	-23.9

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4824.0	Average	Vertical	-0.4	39.6	39.2	54.0	-14.8
4824.0	Peak	Horizontal	9.3	39.6	48.9	74.0	-25.1
4824.0	Average	Horizontal	-1.6	39.6	38.0	54.0	-16.0
7236.0	Peak	Vertical	8.8	44.5	53.3	74.0	-20.7
7236.0	Average	Vertical	-4.5	44.5	40.0	54.0	-14.0
7236.0	Peak	Horizontal	6.7	44.5	51.2	74.0	-22.8
7236.0	Average	Horizontal	-4.3	44.5	40.2	54.0	-13.8

Table 17: Transmitting at the Lowest Frequency


Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4874.0	Peak	Vertical	9.3	39.7	49.0	74.0	-25.0
4874.0	Average	Vertical	-1.6	39.7	38.1	54.0	-15.9
4874.0	Peak	Horizontal	9.8	39.7	49.5	74.0	-24.5
4874.0	Average	Horizontal	2.9	39.7	42.6	54.0	-11.4
7311.0	Peak	Vertical	7.4	44.7	52.1	74.0	-21.9
7311.0	Average	Vertical	-4.9	44.7	39.8	54.0	-14.2
7311.0	Peak	Horizontal	7.0	44.7	51.7	74.0	-22.3
7311.0	Average	Horizontal	-4.9	44.7	39.8	54.0	-14.2

Table 18: Transmitting at the Middle Frequency


Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBμV)	Correction Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4924.0	Peak	Vertical	21.4	39.8	61.2	74.0	-12.8
4924.0	Average	Vertical	8.2	39.8	48.0	54.0	-6.0
4924.0	Peak	Horizontal	21.9	39.8	61.7	74.0	-12.3
4924.0	Average	Horizontal	8.6	39.8	48.4	54.0	-5.6
7386.0	Peak	Vertical	7.1	44.9	52.0	74.0	-22.0
7386.0	Average	Vertical	-4.7	44.9	40.2	54.0	-13.8
7386.0	Peak	Horizontal	8.1	44.9	53.0	74.0	-21.0
7386.0	Average	Horizontal	-4.6	44.9	40.3	54.0	-13.7

Table 19: Transmitting at the Highest Frequency

No other emissions were seen in the restricted bands

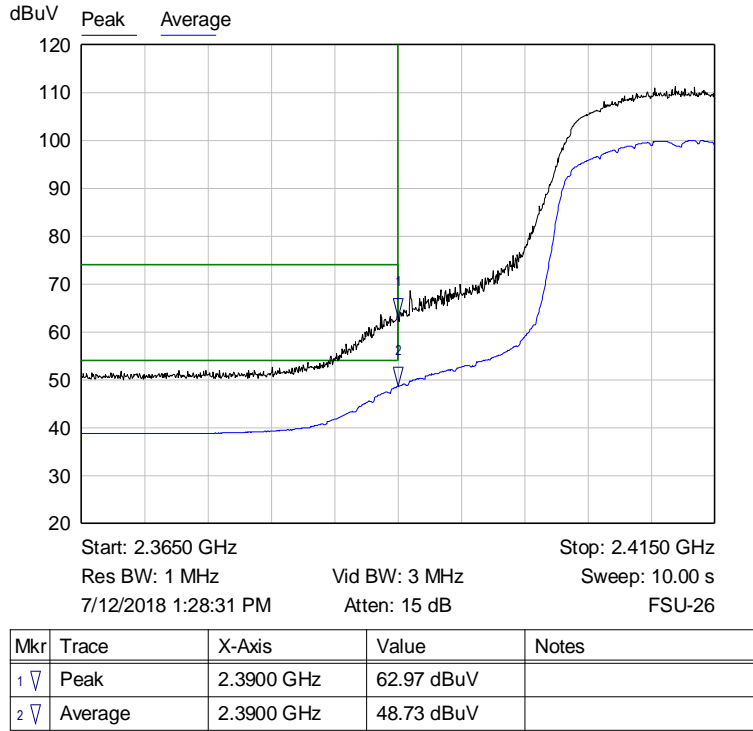

Graph 35: Radiated Lower Band Edge Plot

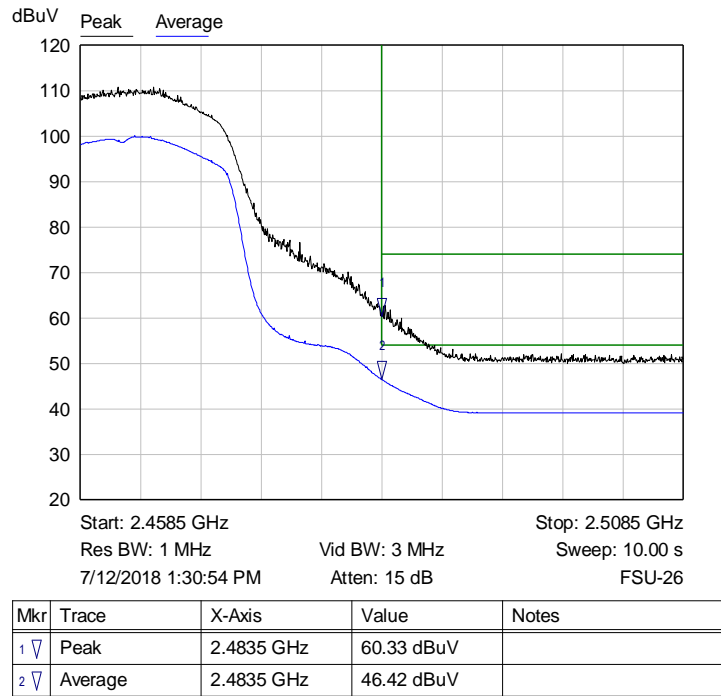

Graph 36: Radiated Upper Band Edge Plot


6.4.6 §15.247(e) Maximum Average Power Spectral Density

The maximum average power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. Results of this testing are summarized.


Frequency (MHz)	Measurement (dBm)	Criteria (dBm)
2412	-2.6	8.0
2437	-3.0	8.0
2462	-4.3	8.0

Result


The maximum average power spectral density was less than the limit of 8 dBm; therefore, the EUT complies with the specification.

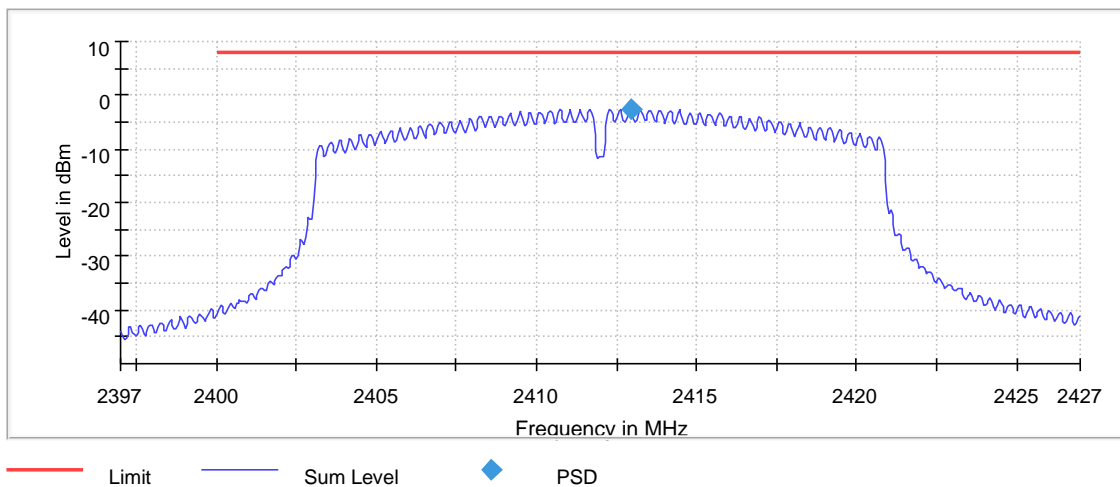

Graph 37: 2412 (N-Mode - 20MHz) Lowest Channel 3 kHz PSD Plot

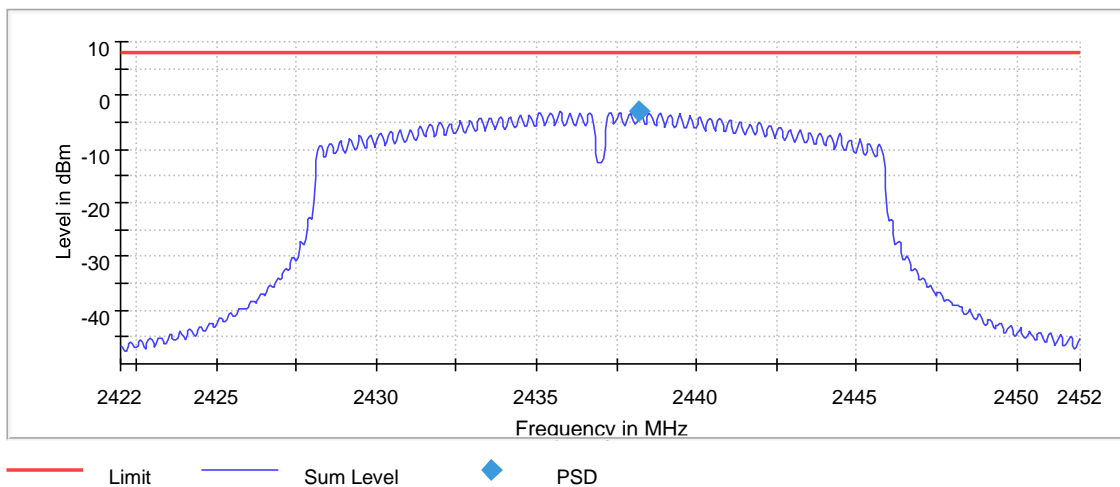

Graph 38: 2437 (N-Mode - 20MHz) Middle Channel 3 kHz PSD Plot

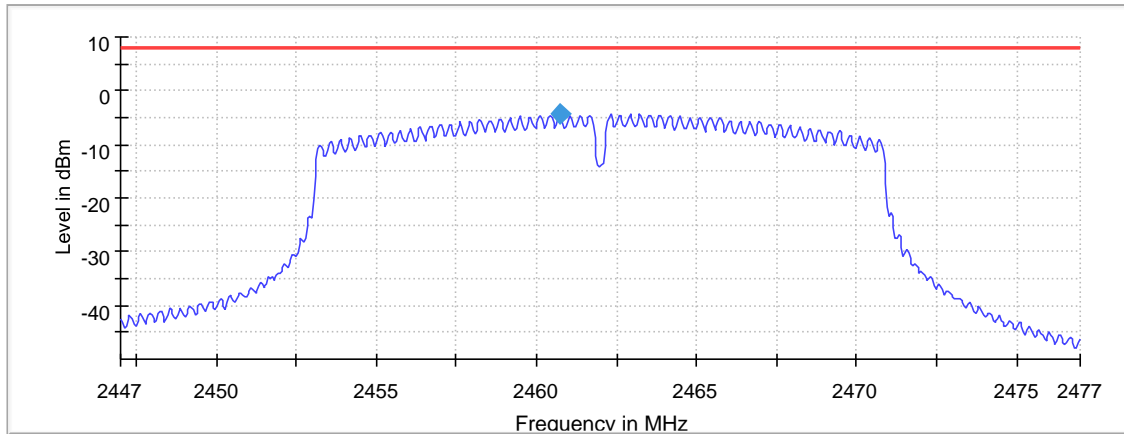

— Limit — Sum Level ◆ PSD

Graph 39: 2462 (N-Mode – 20MHz) Highest Channel Output 3 kHz PSD Plot

6.5 Test Results – 802.11n(40) Mode

6.5.1 §15.203 Antenna Requirements

See Section 6.2.1.

Result

The EUT complied with the specification.

6.5.2 Conducted Emissions at Mains Ports Data (Hot Lead)

See Section 6.2.2.

Result


The EUT complied with the specification.

6.5.3 §15.247(a)(2) Emissions Bandwidth


Frequency (MHz)	Emissions 6 dB bandwidth (MHz)
2422	27.8
2437	29.0
2452	35.2

Result


In the configuration tested, the 6 dB bandwidth was greater than 500 kHz; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).

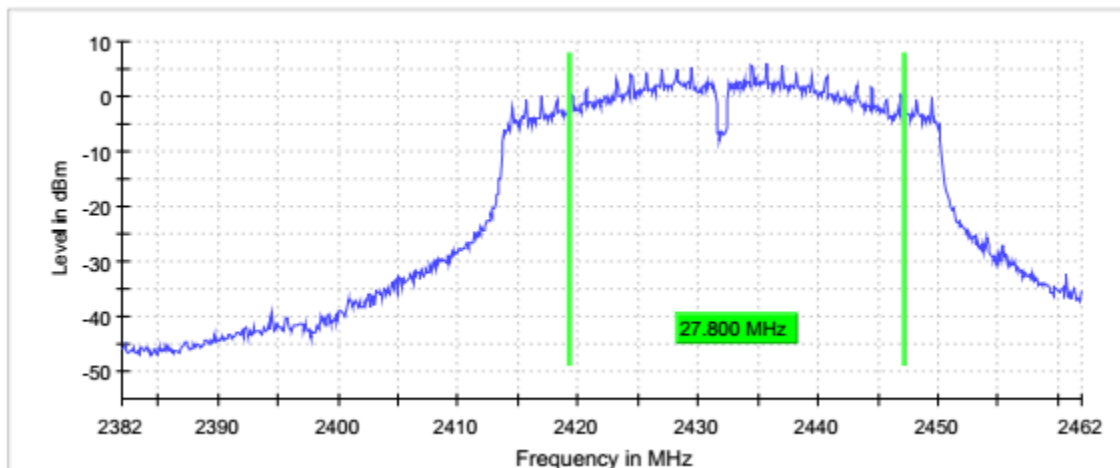

Graph 40: 2422 (N-Mode – 40MHz) 6dB Emissions Bandwidth

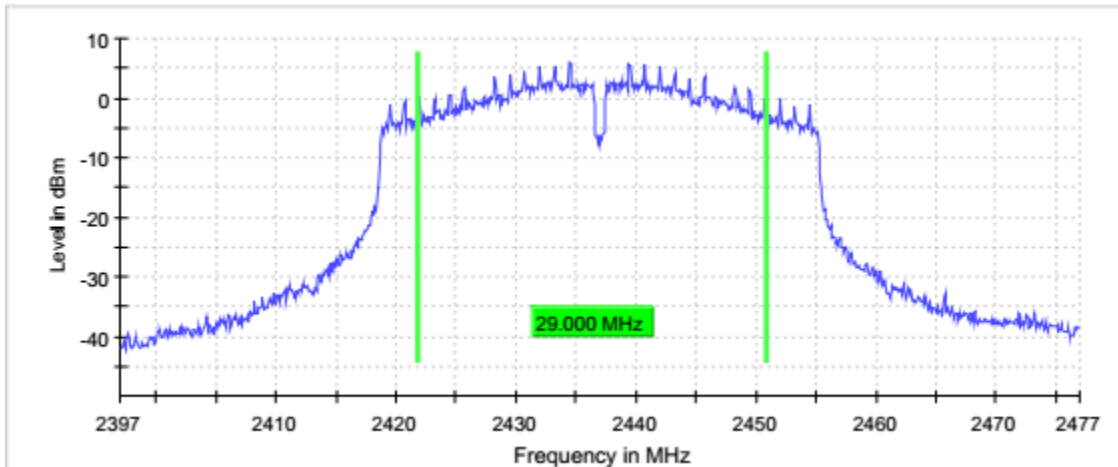

Graph 41: 2437 (N-Mode - 40MHz) 6dB Emissions Bandwidth

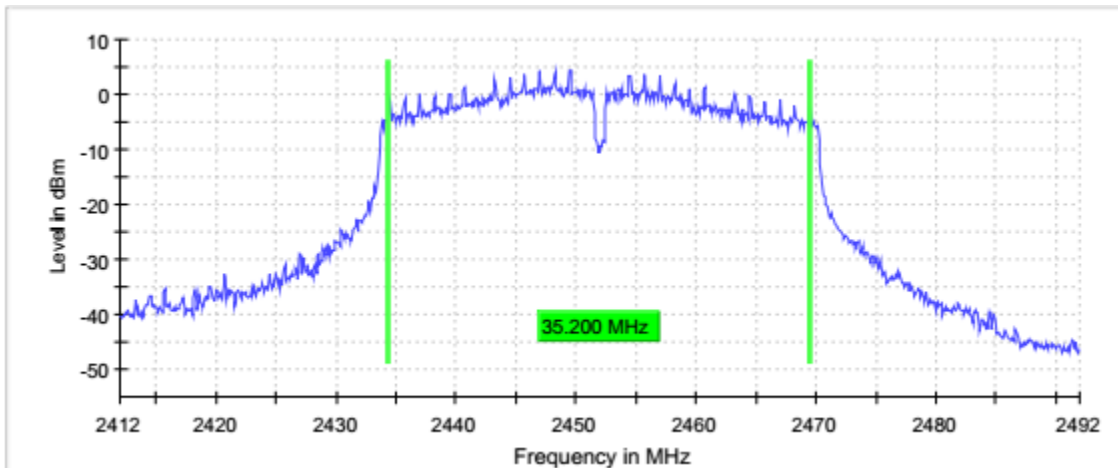

Graph 42: 2452 (N-Mode - 40MHz) 6dB Emissions Bandwidth


6.5.4 §15.247(b)(3) Maximum Average Output Power

The maximum average RF conducted output power measured for this device was 17.0 dBm or 49.6 mW. The limit is 30 dBm or 1 Watt when using antennas with 6 dBi or less gain. The antenna has a gain of 1.5 dBi.


Frequency (MHz)	Measured Output Power (dBm)	Output Power (mW)
2422	17.0	49.6
2437	16.9	49.4
2452	15.5	35.6

Result


In the configuration tested, the maximum average RF output power was less than 1 Watt; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).

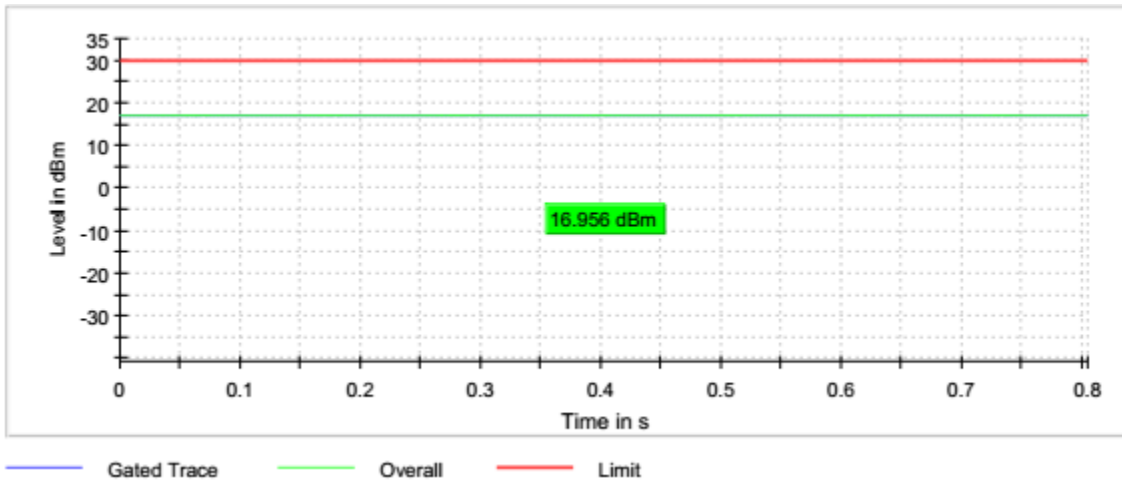

Graph 43: 2422 (N-Mode – 40MHz) Maximum Average Output Power

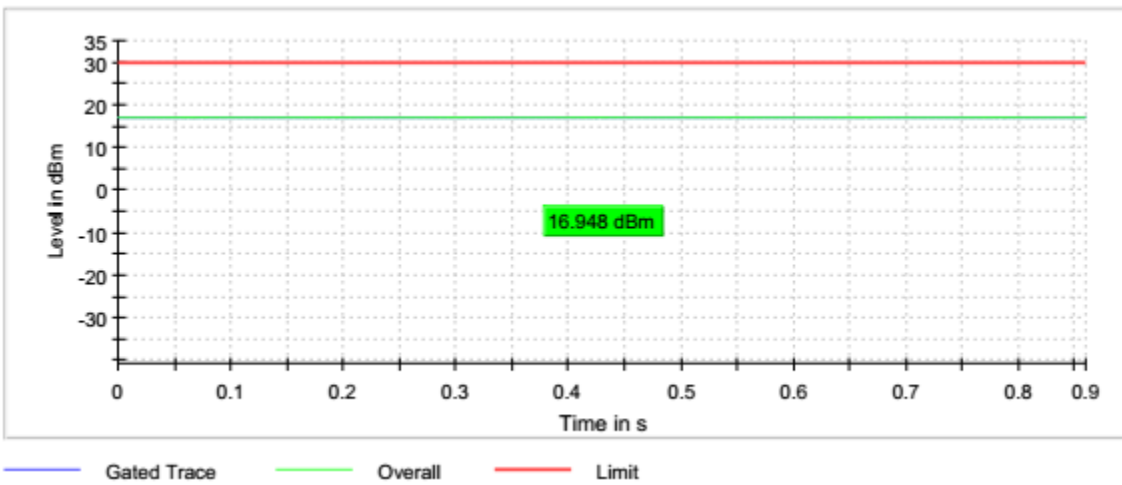

Graph 44: 2437 (N-Mode – 40MHz) Maximum Average Output Power

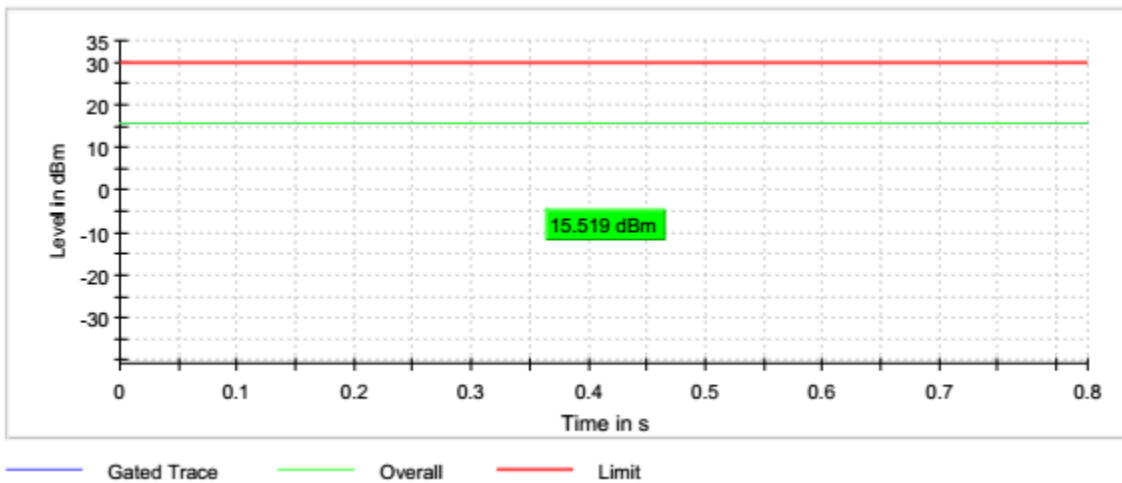

Graph 45: 2452 (N-Mode – 40MHz) Maximum Average Output Power

6.5.5 §15.247(d) Spurious Emissions

Conducted Spurious Emissions

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental frequency was investigated to measure any antenna-conducted emissions. The tables show the measurement data from spurious emissions noted across the frequency range when transmitting at the lowest frequency, middle frequency, and upper frequency. Shown below are plots with the EUT tuned to the upper and lower channels. These demonstrate compliance with the provisions of this section at the band edges.

The emissions must be attenuated 30 dB below the highest power spectral density level measured within the authorized band as measured with a 100 kHz RBW. The highest power measured in was -5.3 dBm; therefore, the criteria is $5.3 - 30 = -35.3$ dBm.

Result

Conducted spurious emissions were attenuated 30 dB or more below the fundamental; therefore, the EUT complies with the specification.

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
4868.25	-55.2	-35.5	-19.7
7309.25	-61.6	-35.5	-26.1
12170.25	-59.5	-35.5	-24.0


Table 20: Transmitting on the Lowest Channel

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
4867.25	-55.4	-35.5	-19.9
7293.25	-61.6	-35.5	-26.1


Table 21: Transmitting on the Middle Channel

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
4912.25	-58.6	-35.5	-23.1

Table 22: Transmitting on the Highest Channel

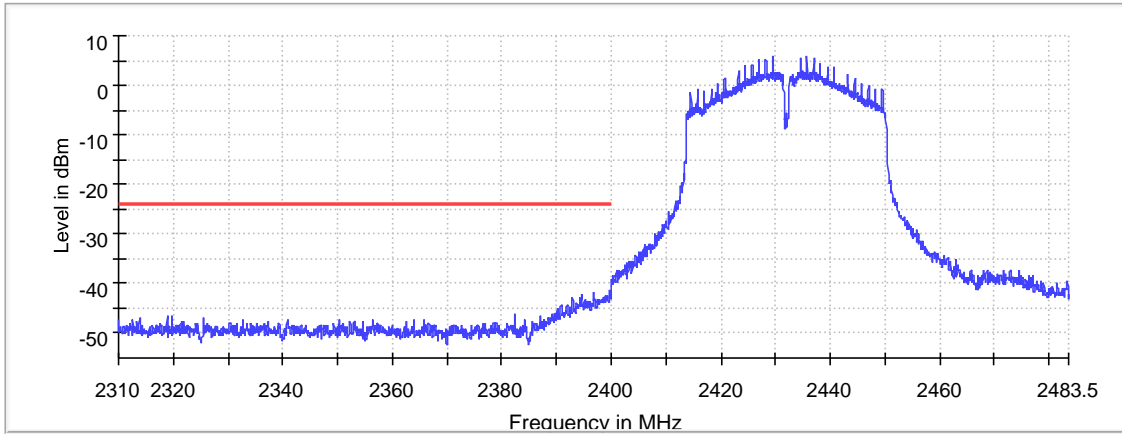

Graph 46: (N-Mode - 40MHz) Lower Band Edge Plot

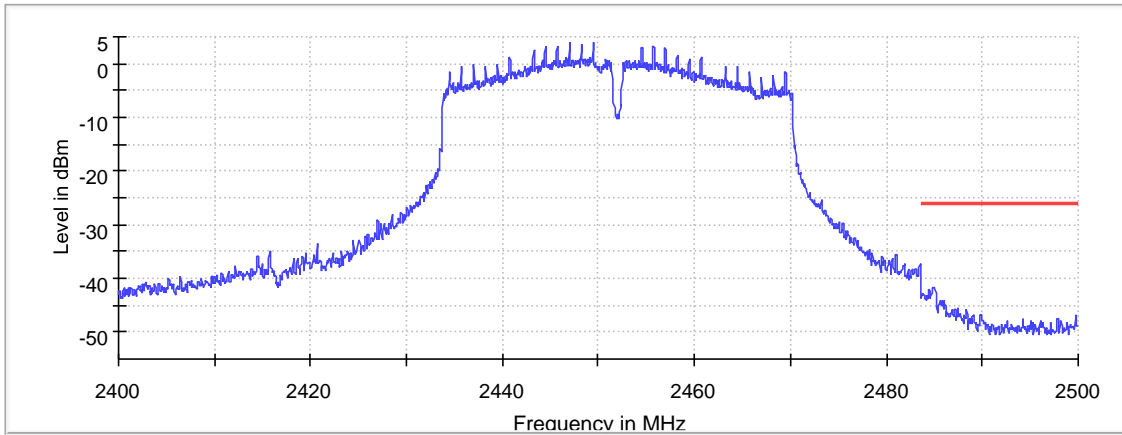

Graph 47: (N-Mode - 40MHz) Upper Band Edge Plot

Radiated Spurious Emissions in the Restricted Bands of §15.205

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental emission was investigated to measure any radiated emissions in the restricted bands. The following tables show measurements of any emission that fell into the restricted bands of §15.205. The tables show the worst-case emission measured from the EUT. For frequencies above 18.0 GHz, a measurement distance of 1 meter was used. The noise floor was a minimum of 6 dB below the limit. The emissions in the restricted bands must meet the limits specified in §15.209. Tabular data for each of the spurious emissions is shown below for each of the units. Channels 1 and 11 are not used in this mode of operation. Testing was performed at the lowest channel use (Channel 2), the middle channel, and the highest channel used (Channel 10) when operated at TP16 power setting. Plots of the band edges at the lowest channel used (Channel 2) and Channel 19 are shown when operating at power level TP16. The highest channel used (Channel 10) with the reduced maximum power allowed of TP11 is also shown.

Result

All emissions in the restricted bands of §15.205 met the limits specified in §15.209; therefore, the EUT complies with the specification.

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBµV)	Correction Factor (dB)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4834.0	Peak	Vertical	9.4	39.6	49.0	74.0	-25.0
4834.0	Average	Vertical	-1.6	39.6	38.0	54.0	-16.0
4834.0	Peak	Horizontal	8.5	39.6	48.1	74.0	-25.9
4834.0	Average	Horizontal	-2.9	39.6	36.7	54.0	-17.3
7251.0	Peak	Vertical	7.4	44.5	51.9	74.0	-22.1
7251.0	Average	Vertical	-4.1	44.5	40.4	54.0	-13.6
7251.0	Peak	Horizontal	7.6	44.5	52.1	74.0	-21.9
7251.0	Average	Horizontal	-4.0	44.5	40.5	54.0	-13.5

Table 23: Transmitting at the Lowest Frequency (Channel 2)


Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBµV)	Correction Factor (dB)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4874.0	Peak	Vertical	9.0	39.7	48.7	74.0	-25.3
4874.0	Average	Vertical	-1.1	39.7	38.6	54.0	-15.4
4874.0	Peak	Horizontal	7.5	39.7	47.2	74.0	-26.8
4874.0	Average	Horizontal	-2.3	39.7	37.4	54.0	-16.6
7311.0	Peak	Vertical	7.6	44.7	52.3	74.0	-21.7
7311.0	Average	Vertical	-3.9	44.7	40.8	54.0	-13.2
7311.0	Peak	Horizontal	7.4	44.7	52.1	74.0	-21.9
7311.0	Average	Horizontal	-4.3	44.7	40.4	54.0	-13.6

Table 24: Transmitting at the Middle Frequency

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4914.0	Peak	Vertical	18.9	39.8	58.7	74.0	-15.3
4914.0	Average	Vertical	6.7	39.8	46.5	54.0	-7.5
4914.0	Peak	Horizontal	9.0	39.8	48.8	74.0	-25.2
4914.0	Average	Horizontal	6.6	39.8	46.4	54.0	-7.6
7371.0	Peak	Vertical	7.2	44.9	52.1	74.0	-21.9
7371.0	Average	Vertical	-3.6	44.9	41.3	54.0	-12.7
7371.0	Peak	Horizontal	8.0	44.9	52.9	74.0	-21.1
7371.0	Average	Horizontal	-3.8	44.9	41.1	54.0	-12.9


Table 25: Transmitting at the Highest Frequency (Channel 10)

No other emissions were seen in the restricted bands

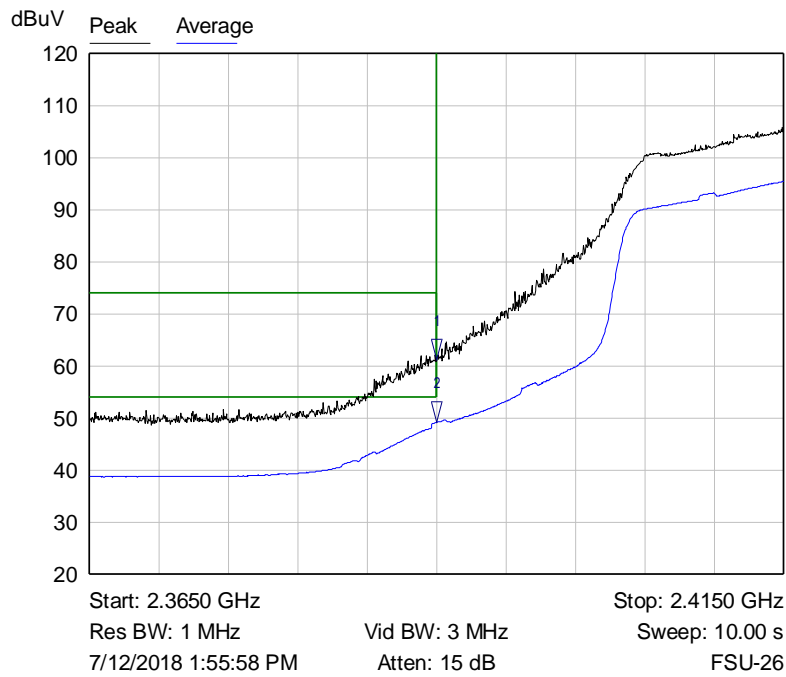


Mkr	Trace	X-Axis	Value	Notes
1	Peak	2.3900 GHz	61.11 dBuV	
2	Average	2.3900 GHz	49.22 dBuV	

Graph 48: Radiated Lower Band Edge Plot (Channel 2)

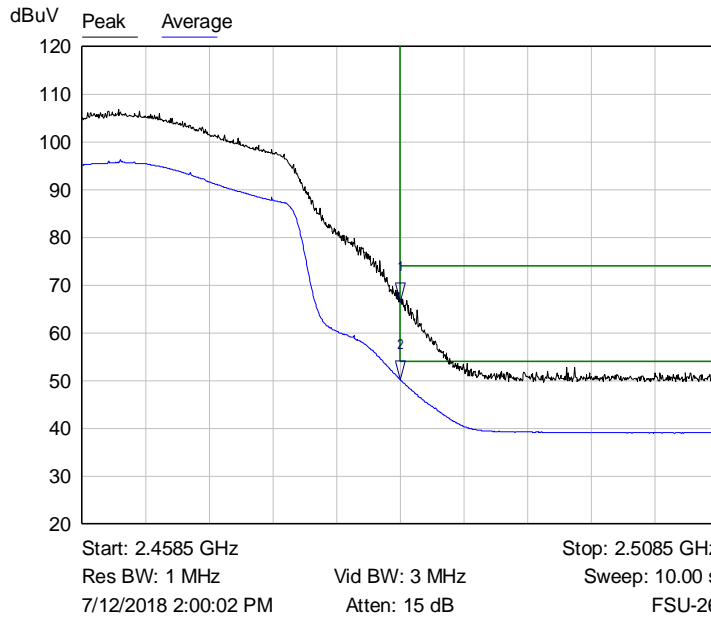

Mkr	Trace	X-Axis	Value	Notes
1 ▾	Peak	2.4835 GHz	66.44 dBuV	
2 ▾	Average	2.4835 GHz	50.25 dBuV	

Graph 49: Radiated Band Edge Plot (Channel 9)

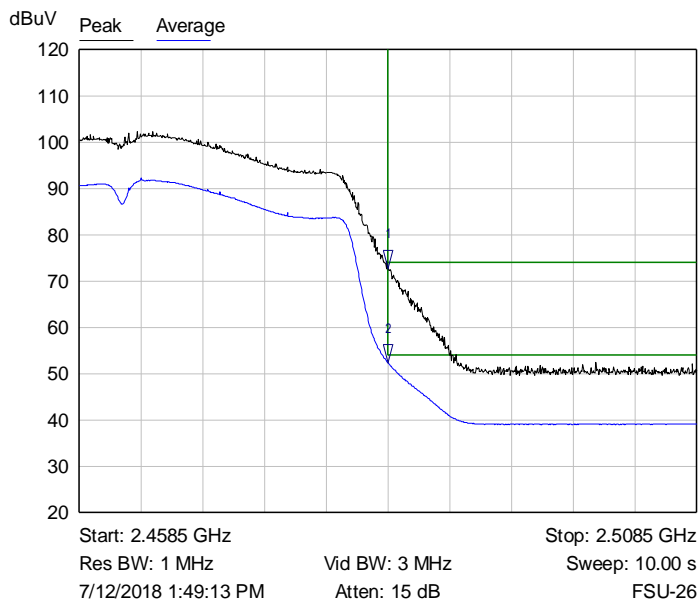

Mkr	Trace	X-Axis	Value	Notes
1 ▾	Peak	2.4835 GHz	72.59 dBuV	
2 ▾	Average	2.4835 GHz	52.38 dBuV	

Graph 50: Radiated Upper Band Edge Plot (Channel 10)


6.5.6 §15.247(e) Maximum Average Power Spectral Density

The maximum average power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. Results of this testing are summarized.


Frequency (MHz)	Measurement (dBm)	Criteria (dBm)
2422	-5.3	8.0
2437	-5.3	8.0
2452	-6.9	8.0

Result


The maximum average power spectral density was less than the limit of 8 dBm; therefore, the EUT complies with the specification.

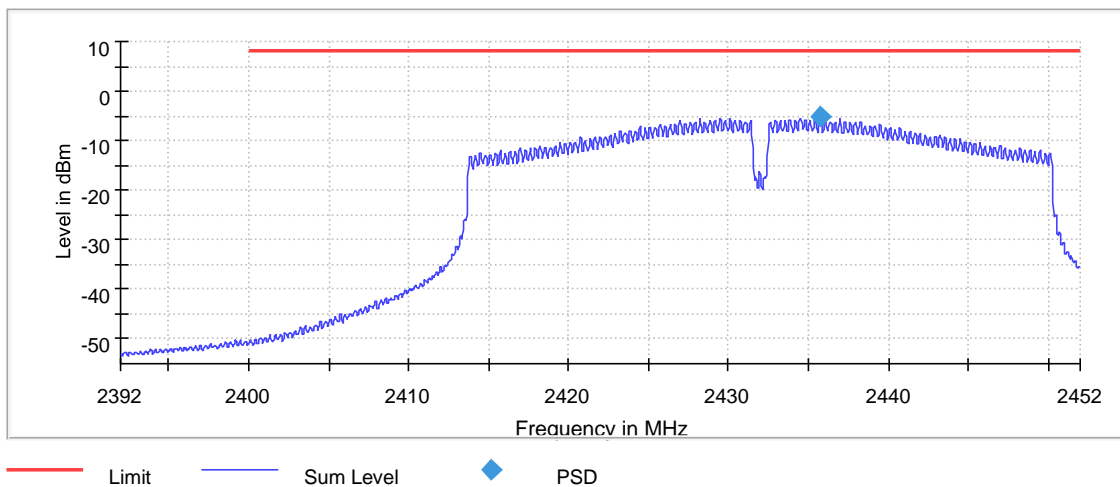

Graph 51: 2422 (N-Mode - 40MHz) Lowest Channel 3 kHz PSD Plot

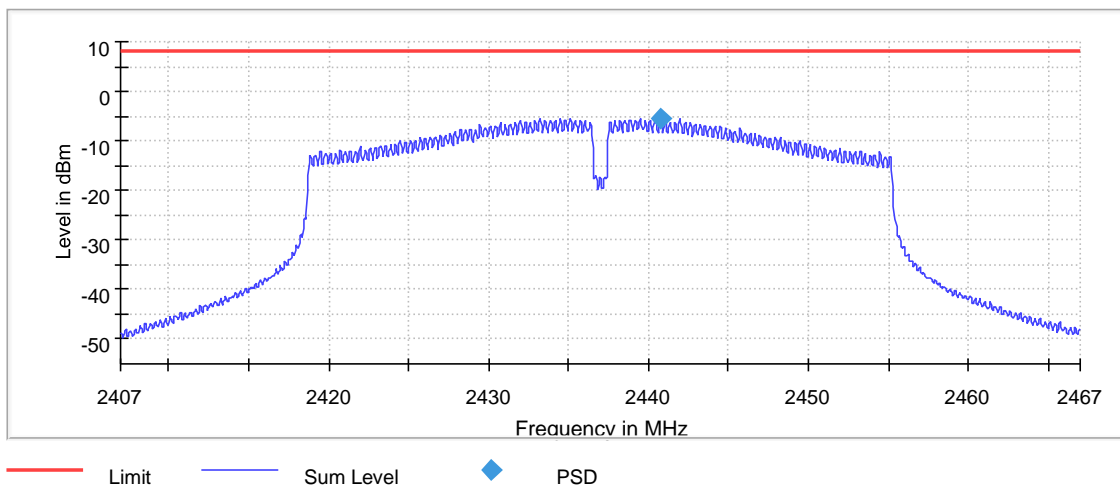

Graph 52: 2437 (N-Mode - 40MHz) Middle Channel 3 kHz PSD Plot

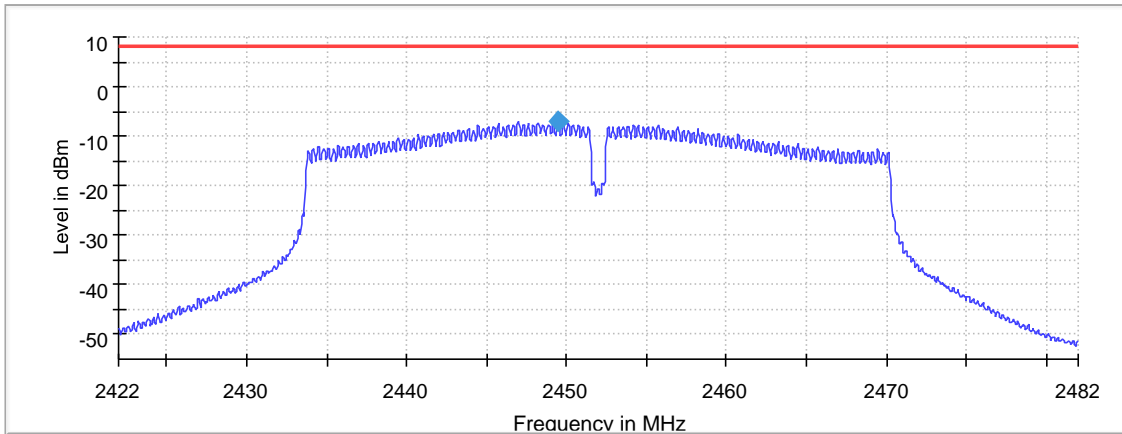

Graph 53: 2452 (N-Mode – 40MHz) Highest Channel Output 3 kHz PSD Plot

6.6 Test Results – BLE Mode

6.6.1 §15.203 Antenna Requirements

The EUT uses a Cirotech Model DCAH000 chip antenna with a maximum gain of 1.0 dBi.

Result

The EUT complied with the specification.

6.6.2 Conducted Emissions at Mains Ports Data

See Section 6.2.2.

Result


The EUT complied with the specification.

6.6.3 §15.247(a)(2) Emissions Bandwidth


Frequency (MHz)	Emissions 6 dB bandwidth (kHz)
2402	693
2440	693
2480	693

Result


In the configuration tested, the 6 dB bandwidth was greater than 500 kHz; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).

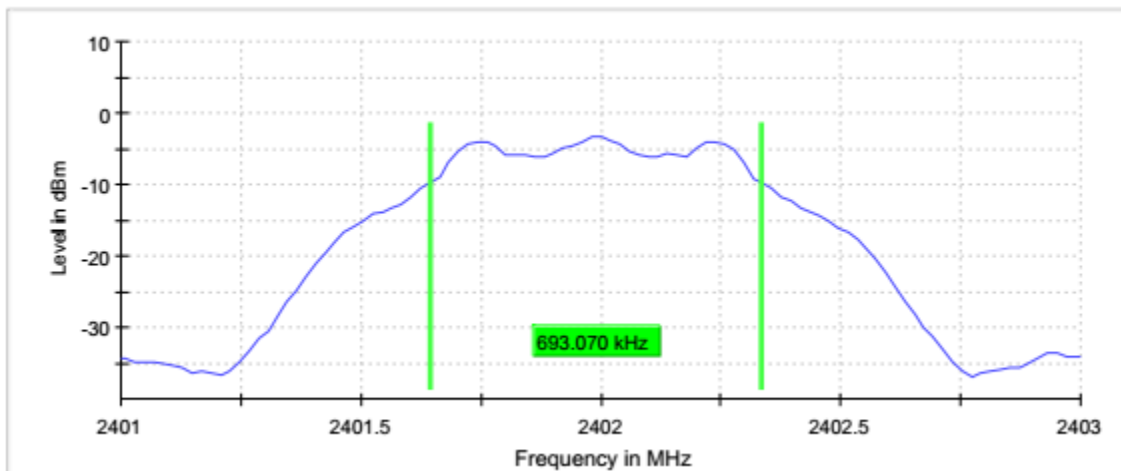

Graph 54: 2402 (BLE-Mode) Lowest Channel Bandwidth

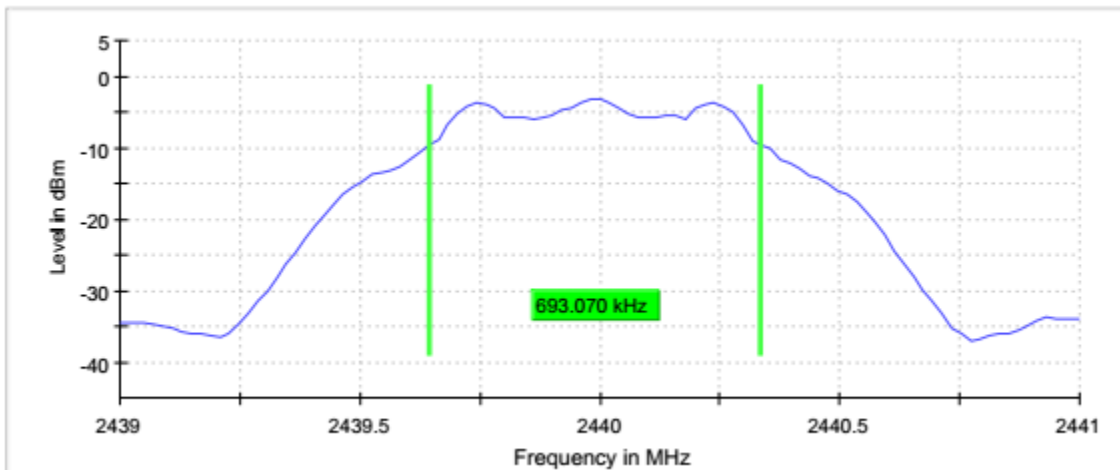

Graph 55: 2440 (BLE-Mode) Middle Channel Bandwidth

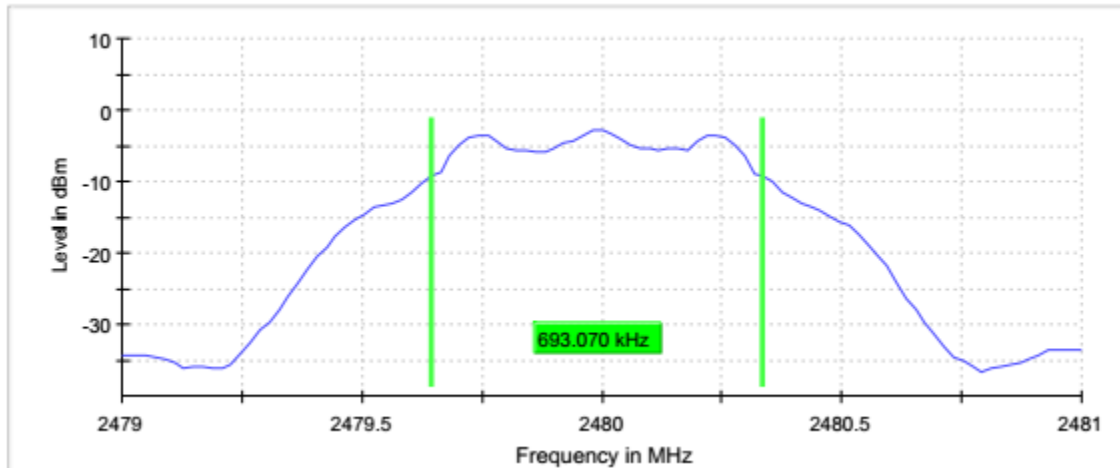

Graph 56: 2480 (BLE-Mode) Highest Channel Bandwidth


6.6.4 §15.247(b)(3) Peak Output Power

The maximum peak RF conducted output power measured for this device was -2.8 dBm or 0.52 mW. The limit is 30 dBm or 1 Watt when using antennas with 6 dBi or less gain. The antenna has a gain of 1 dBi.

Frequency (MHz)	Measured Output Power (dBm)	Output Power (mW)
2402	-3.0	0.50
2440	-2.9	0.51
2480	-2.8	0.52


Result

In the configuration tested, the RF peak output power was less than 1 Watt; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).

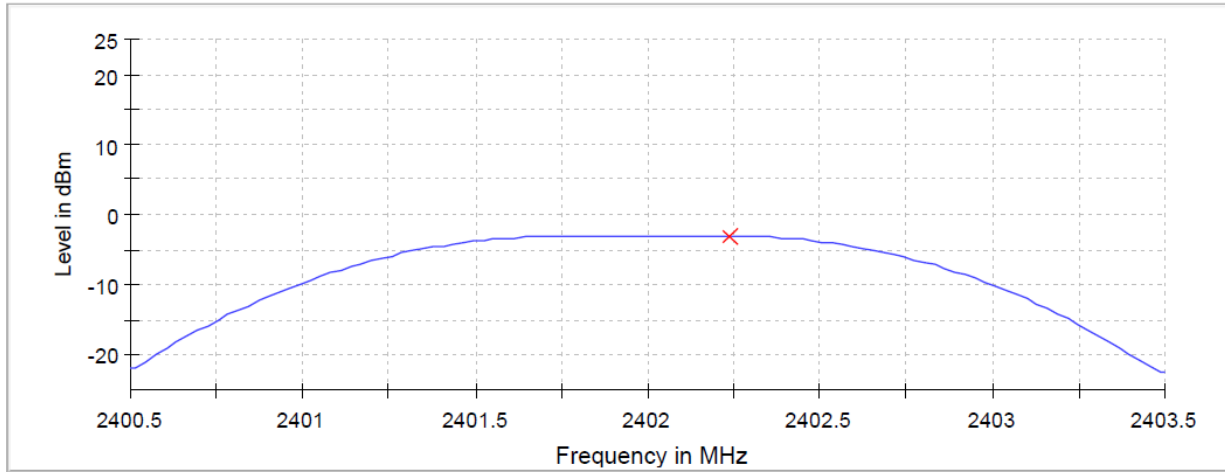


— Connector 1 × Peak Connector 1

Graph 57: 2402 (BLE-Mode) Lowest Channel Output Power Plot

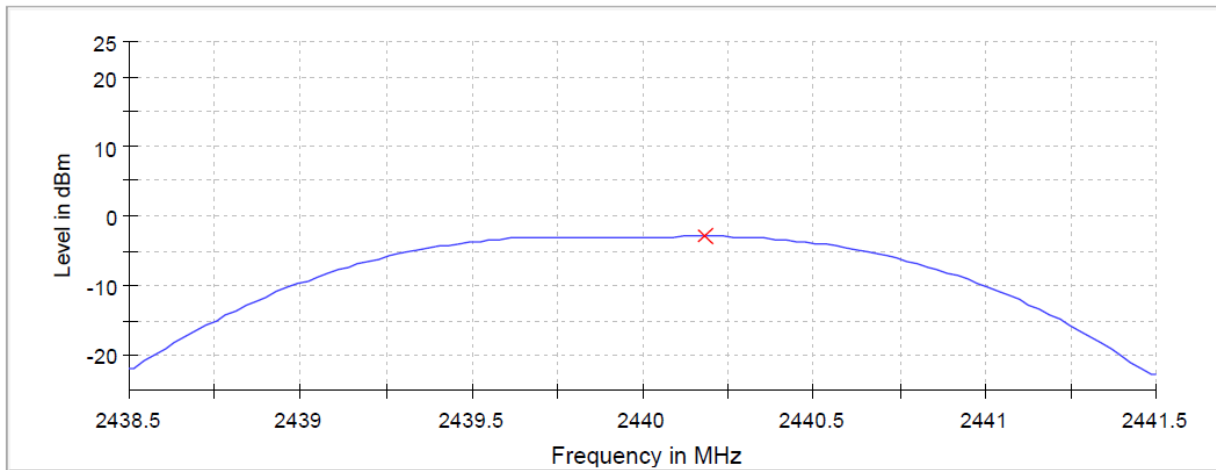

— Connector 1 × Peak Connector 1

Graph 58: 2440 (BLE-Mode) Middle Channel Output Power

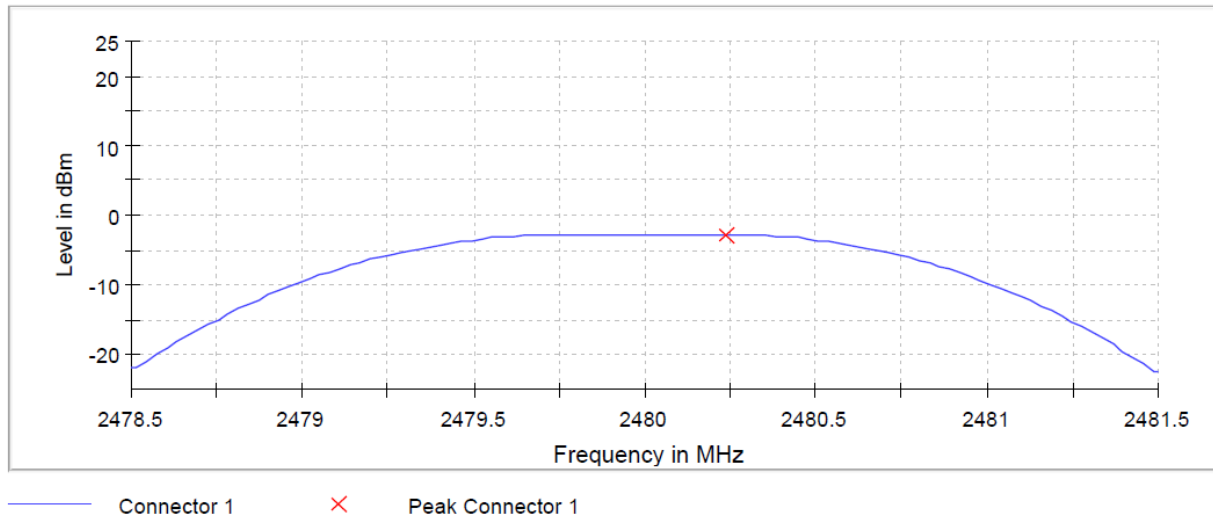

Graph 59: 2480 (BLE-Mode) Highest Channel Output Power Plot

6.6.5 §15.247(d) Spurious Emissions

Conducted Spurious Emissions

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental frequency was investigated to measure any antenna-conducted emissions. The tables show the measurement data from spurious emissions noted across the frequency range when transmitting at the lowest frequency, middle frequency, and upper frequency. Shown below are plots with the EUT tuned to the upper and lower channels. These demonstrate compliance with the provisions of this section at the band edges.

The emissions must be attenuated 30 dB below the highest power level measured within the authorized band as measured with a 100 kHz RBW. The highest power measured in was -2.8 dBm; therefore, the criteria is $-2.8 - 20 = -22.8$ dBm.

Result

Conducted spurious emissions were attenuated 20 dB or more below the fundamental; therefore, the EUT complies with the specification.

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
-	-	-	-

No significant emissions were seen outside the allowed band. See graphs below



Table 26: Transmitting on the Lowest Channel


Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
-	-	-	-

No significant emissions were seen outside the allowed band. See graphs below


Table 27: Transmitting on the Middle Channel

Frequency (MHz)	Corrected Level (dBm)	Criteria (dBm)	Margin (dB)
-	-	-	-
No significant emissions were seen outside the allowed band. See graphs below			

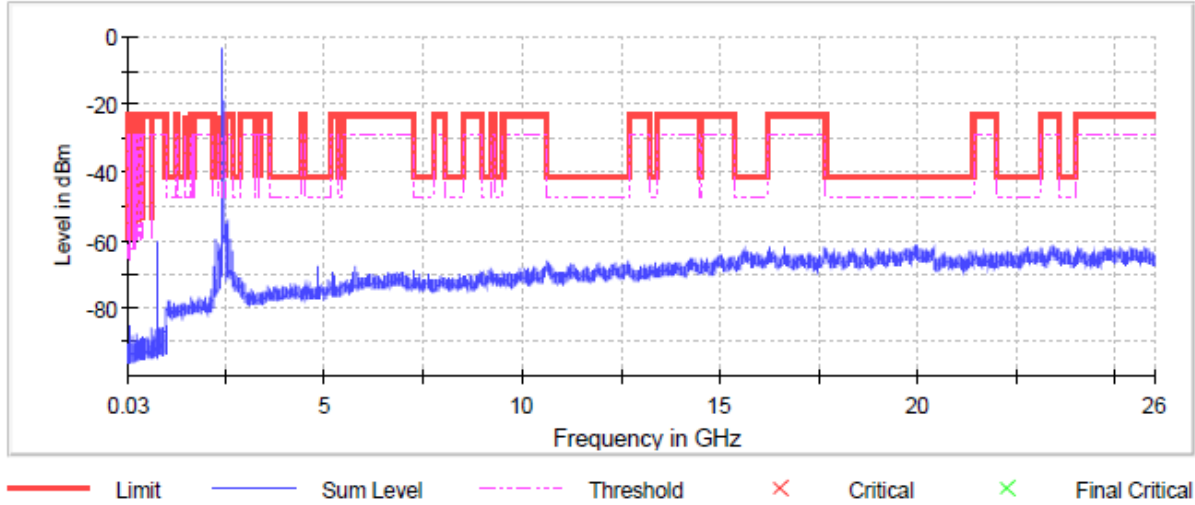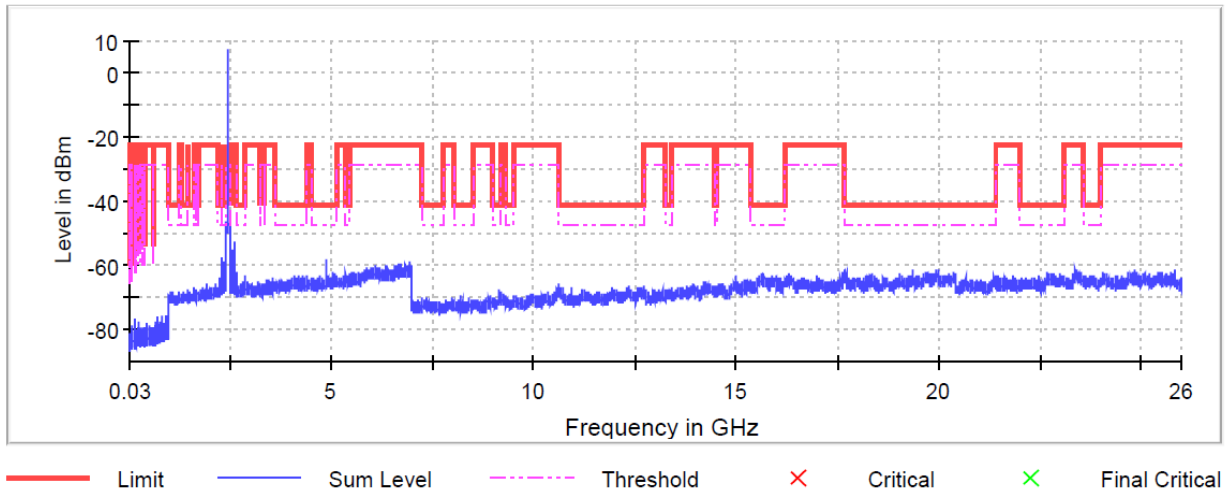
Table 28: Transmitting on the Highest Channel

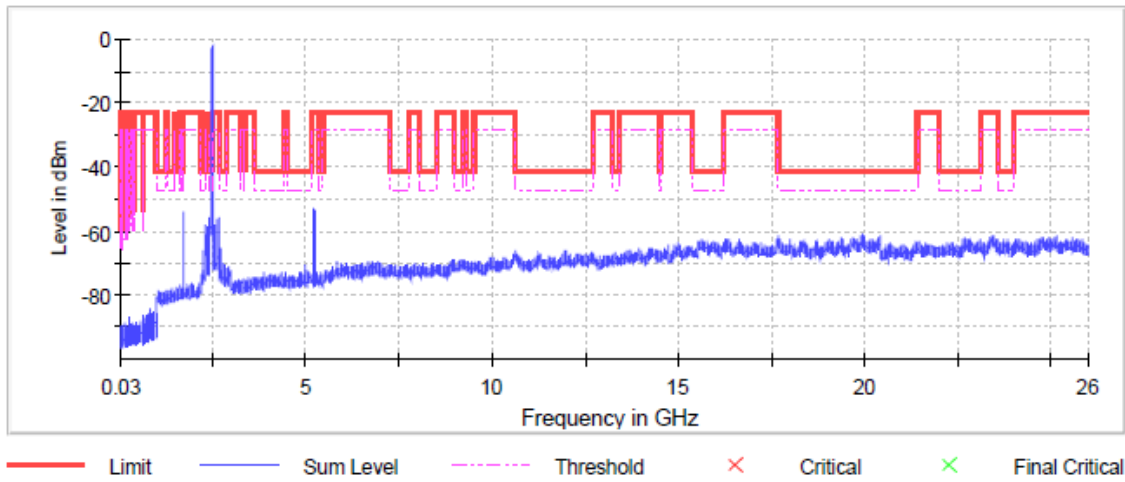Graph 60: 2402 (BLE-Mode) Spurious Emissions Plot

Graph 61: 2440 (BLE-Mode) Spurious Emissions Plot

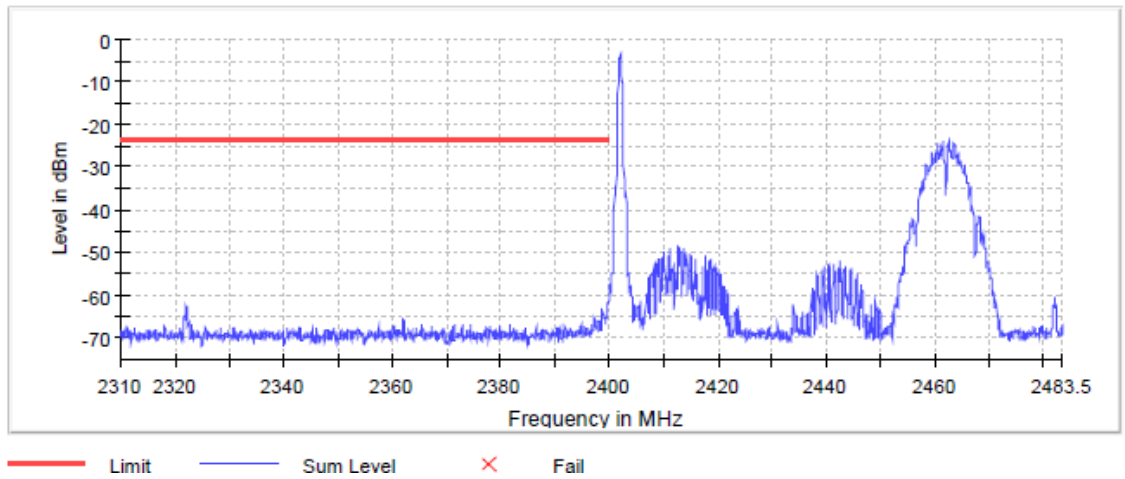

Graph 62: 2480 (BLE-Mode) Spurious Emissions Plot

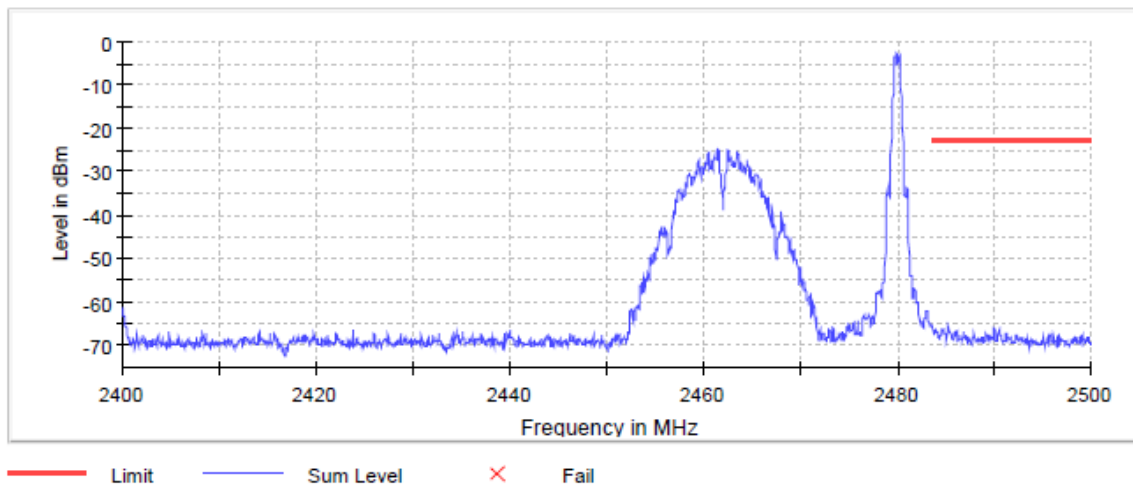

Graph 63: 2402 (BLE-Mode) Lower Band Edge Plot



Graph 64: 2480 (BLE-Mode) Upper Band Edge Plot

Radiated Spurious Emissions in the Restricted Bands of §15.205

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental emission was investigated to measure any radiated emissions in the restricted bands. The following tables show measurements of any emission that fell into the restricted bands of §15.205. The tables show the worst-case emission measured from the EUT. For frequencies above 18.0 GHz, a measurement distance of 1 meter was used. The noise floor was a minimum of 6 dB below the limit. The emissions in the restricted bands must meet the limits specified in §15.209. Tabular data for each of the spurious emissions is shown below for each of the units. Plots of the band edges are also shown.

Result

All emissions in the restricted bands of §15.205 met the limits specified in §15.209; therefore, the EUT complies with the specification.

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBµV)	Correction Factor (dB)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4804.0	Peak	Vertical	8.0	39.5	47.5	74.0	-26.5
4804.0	Average	Vertical	-0.8	39.5	38.7	54.0	-15.3
4804.0	Peak	Horizontal	6.6	39.5	46.1	74.0	-27.9
4804.0	Average	Horizontal	-3.7	39.5	35.8	54.0	-18.2
7206.0	Peak	Vertical	7.0	44.4	51.4	74.0	-22.6
7206.0	Average	Vertical	-4.3	44.4	40.1	54.0	-13.9
7206.0	Peak	Horizontal	6.8	44.4	51.2	74.0	-22.8
7206.0	Average	Horizontal	-4.3	44.4	40.1	54.0	-13.9
12010.0	Peak	Vertical	10.2	50.0	60.2	74.0	-13.8
12010.0	Average	Vertical	-1.6	50.0	48.4	54.0	-5.6
12010.0	Peak	Horizontal	9.5	50.0	59.5	74.0	-14.5
12010.0	Average	Vertical	-1.8	50.0	48.2	54.0	-5.8

Table 29: Transmitting at the Lowest Frequency

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dBµV)	Correction Factor (dB)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4880.0	Peak	Vertical	7.1	39.7	46.8	74.0	-27.2
4880.0	Average	Vertical	-0.7	39.7	39.0	54.0	-15.0
4880.0	Peak	Horizontal	5.5	39.7	45.2	74.0	-28.8
4880.0	Average	Horizontal	-0.6	39.7	39.1	54.0	-14.9
7320.0	Peak	Vertical	7.0	44.7	51.7	74.0	-22.3
7320.0	Average	Vertical	-3.7	44.7	41.0	54.0	-13.0
7320.0	Peak	Horizontal	6.5	44.7	51.2	74.0	-22.8
7320.0	Average	Horizontal	-3.7	44.7	41.0	54.0	-13.0


Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
12200.0	Peak	Vertical	8.3	49.9	58.2	74.0	-15.8
12200.0	Average	Vertical	-1.8	49.9	48.1	54.0	-5.9
12200.0	Peak	Horizontal	8.2	49.9	58.1	74.0	-15.9
12200.0	Average	Vertical	-2.0	49.9	47.9	54.0	-6.1

Table 30: Transmitting at the Middle Frequency

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4960.0	Peak	Vertical	8.0	39.9	47.9	74.0	-26.1
4960.0	Average	Vertical	0.2	39.9	40.1	54.0	-13.9
4960.0	Peak	Horizontal	6.8	39.9	46.7	74.0	-27.3
4960.0	Average	Horizontal	-4.0	39.9	35.9	54.0	-18.1
7440.0	Peak	Vertical	7.0	45.1	52.1	74.0	-21.9
7440.0	Average	Vertical	-4.0	45.1	41.1	54.0	-12.9
7440.0	Peak	Horizontal	7.0	45.1	52.1	74.0	-21.9
7440.0	Average	Horizontal	-4.1	45.1	41.0	54.0	-13.0
12400.0	Peak	Vertical	7.2	49.8	57.0	74.0	-17.0
12400.0	Average	Vertical	-3.5	49.8	46.3	54.0	-7.7
12400.0	Peak	Horizontal	7.3	49.8	57.1	74.0	-16.9
12400.0	Average	Vertical	-3.3	49.8	46.5	54.0	-7.5


Table 31: Transmitting at the Highest Frequency

No other emissions were seen in the restricted bands

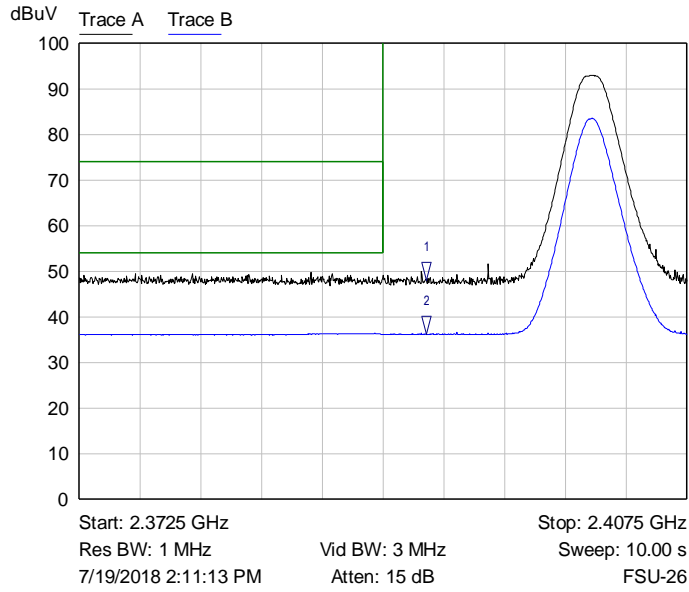

Mkr	Trace	X-Axis	Value	Notes
1 ▾	Trace A	2.3925 GHz	48.00 dBuV	
2 ▾	Trace B	2.3925 GHz	36.20 dBuV	

Graph 65: Radiated Lower Band Edge Plot

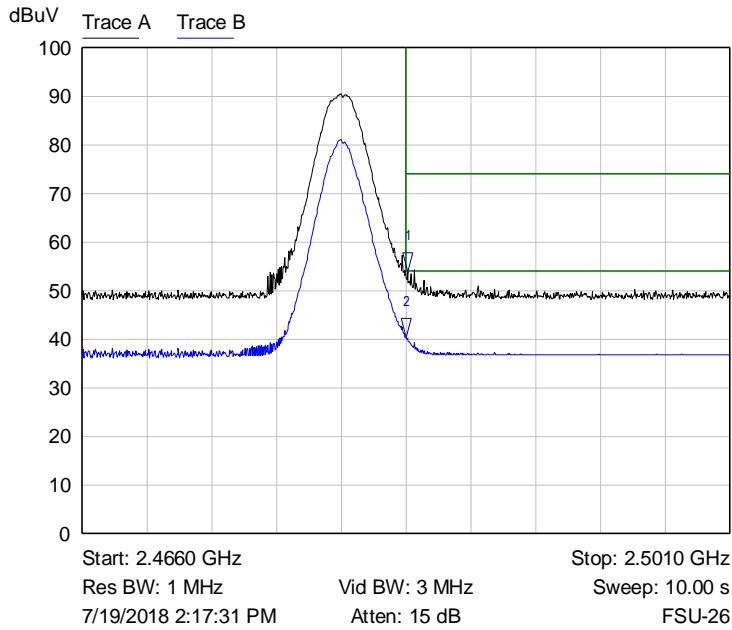

Mkr	Trace	X-Axis	Value	Notes
1 ▾	Trace A	2.4836 GHz	53.78 dBuV	
2 ▾	Trace B	2.4835 GHz	40.30 dBuV	

Graph 66: Radiated Upper Band Edge Plot


6.6.6 §15.247(e) Peak Power Spectral Density

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. Results of this testing are summarized.


Frequency (MHz)	Measurement (dBm)	Criteria (dBm)
2402	-19.9	8.0
2440	-19.8	8.0
2480	-19.6	8.0

Result


The maximum peak power spectral density was less than the limit of 8 dBm; therefore, the EUT complies with the specification.

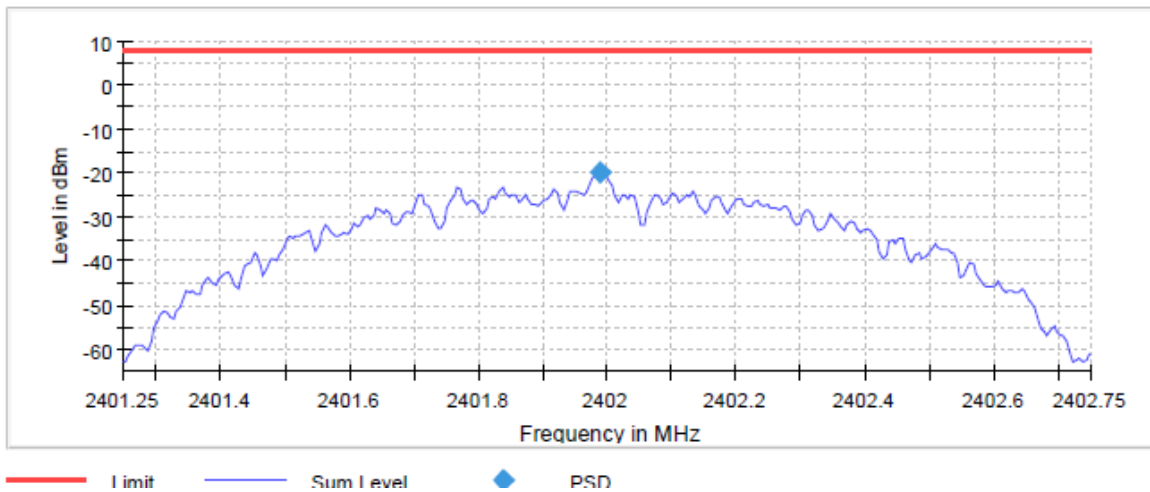

Graph 67: 2402 (BLE-Mode) Lowest Channel 3 kHz PSD Plot

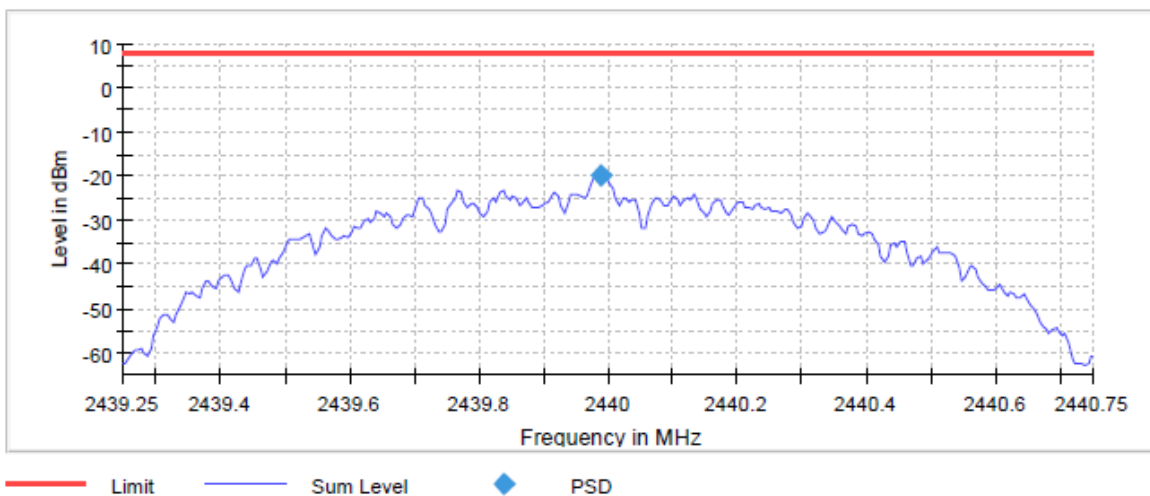

Graph 68: 2440 (BLE-Mode) Middle Channel 3 kHz PSD Plot

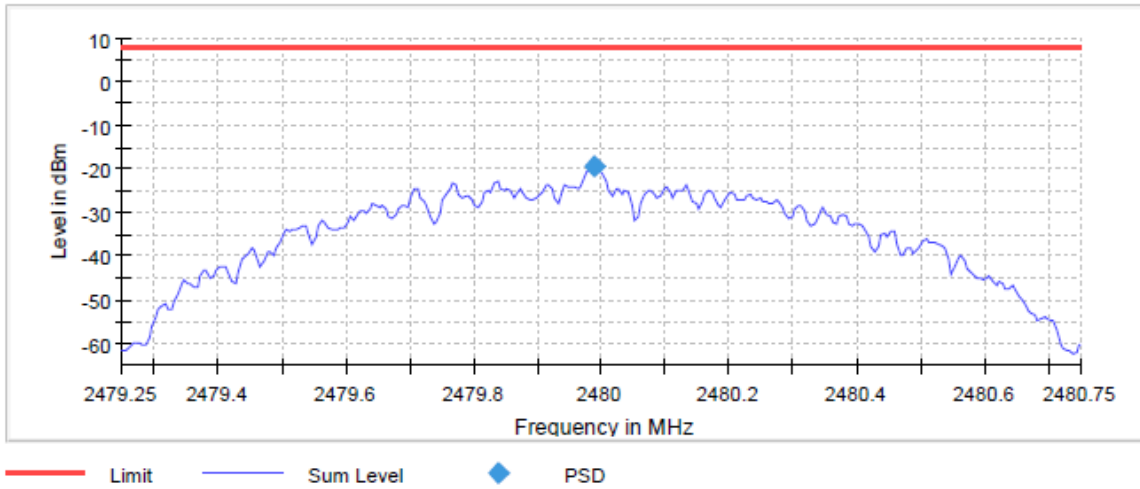

Graph 69: 2480 (BLE-Mode) Highest Channel Output 3 kHz PSD Plot

7 Test Procedures and Test Equipment

7.1 Conducted Emissions at Mains Ports

The conducted emissions at mains and telecommunications ports from the EUT were measured using a spectrum analyzer with a quasi-peak adapter for peak, quasi-peak and average readings. The quasi-peak adapter uses a bandwidth of 9 kHz, with the spectrum analyzer's resolution bandwidth set at 100 kHz, for readings in the 150 kHz to 30 MHz frequency ranges.

The conducted emissions at mains ports measurements are performed in a screen room using a (50 Ω/50 μH) Line Impedance Stabilization Network (LISN).

Where mains flexible power cords are longer than 1 m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

Where the EUT is a collection of devices with each device having its own power cord, the point of connection for the LISN is determined from the following rules:

- Each power cord, which is terminated in a mains supply plug, shall be tested separately.
- Power cords, which are not specified by the manufacturer to be connected via a host unit, shall be tested separately.
- Power cords which are specified by the manufacturer to be connected via a host unit or other power supplying equipment shall be connected to that host unit and the power cords of that host unit connected to the LISN and tested.
- Where a special connection is specified, the necessary hardware to effect the connection is supplied by the manufacturer for the testing purpose.
- When testing equipment with multiple mains cords, those cords not under test are connected to an artificial mains network (AMN) different than the AMN used for the mains cord under test.

For testing, desktop EUT are placed on a non-conducting table at least 0.8 meters from the metallic floor and placed 40 cm from the vertical coupling plane (copper plating in the wall behind EUT table). Floor standing equipment is placed directly on the earth grounded floor.

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	Hewlett Packard	8566B	V034141	03/05/2018	03/05/2019
Quasi-Peak Detector	Hewlett Packard	85650A	V039474	05/02/2018	05/02/2020
LISN	VPI Labs	LISN-COMM-50	V034431	10/13/2017	10/13/2018
Conductance Cable Wanship Upper Site	VPI Labs	Cable J	V034832	01/09/2018	01/09/2019
Transient Limiter	Hewlett Packard	11947A	V033591	01/09/2018	01/09/2019
Test Software (AC)	VPI Labs	Revision 01	V035674	N/A	N/A

Table 32: List of equipment used for conducted emissions testing at mains ports.

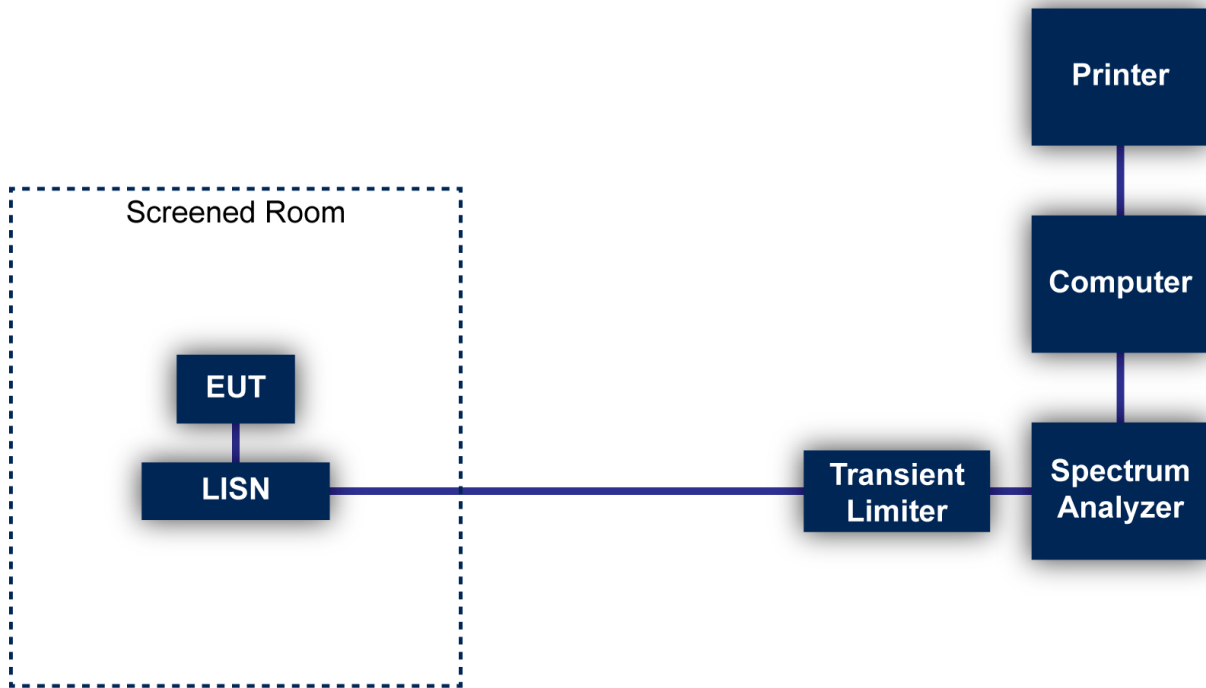


Figure 1: Conducted Emissions Test

7.2 Direct Connection at the Antenna Port Tests

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	Rohde & Schwarz	FSU40	V044352	09/19/2017	09/19/2018
Signal Generator	Rohde & Schwarz	SMB100A	V044485	09/21/2017	09/21/2018
Vector Signal Generator	Rohde & Schwarz	SMBV100A	V044217	03/02/2018	03/02/2019
40GHz Switch Extension	Rohde & Schwarz	OSP-150	V044486	01/25/2018	01/25/2019
40GHz Switch Base Unite	Rohde & Schwarz	OSP-120	V044487	10/27/2017	10/27/2018

7.2.1 Test Configuration Block Diagram

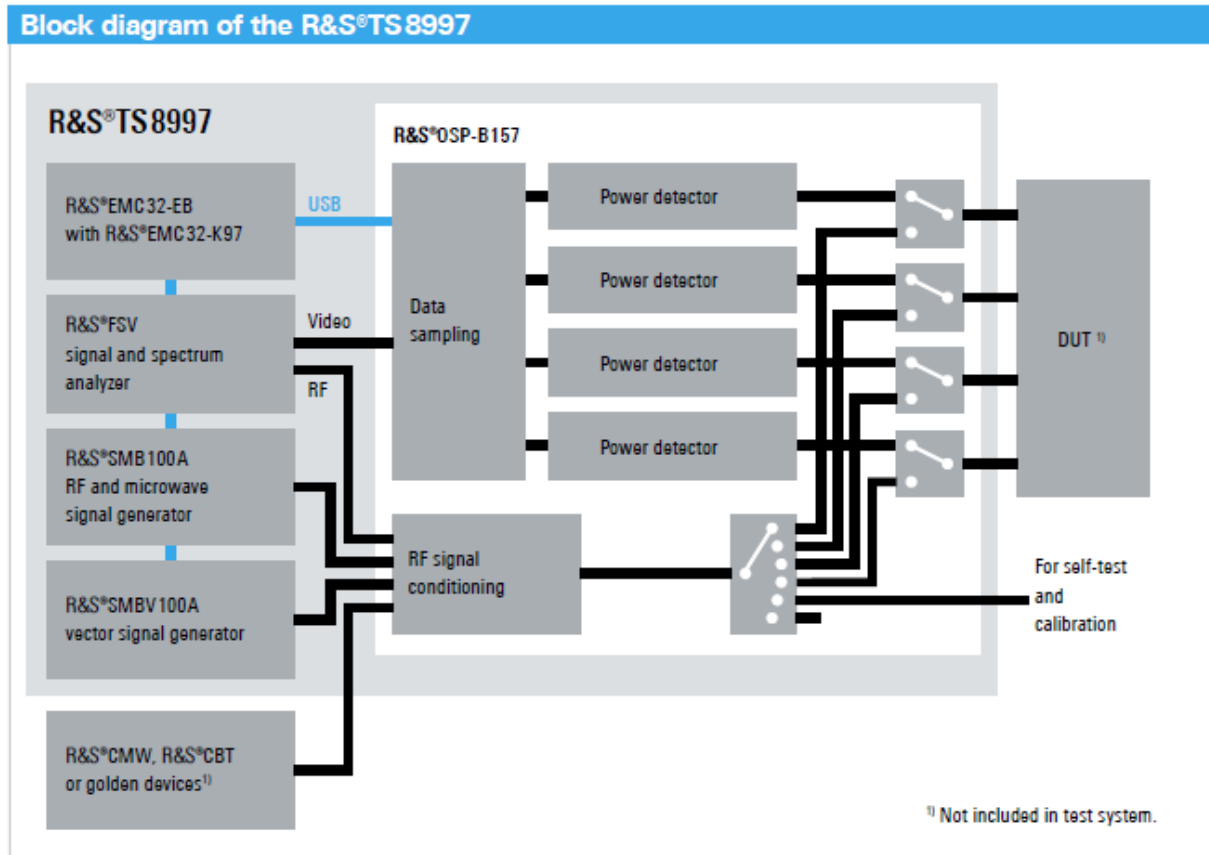


Figure 2: Direct Connection at the Antenna Port Test

7.3 Radiated Emissions

The radiated emissions from the EUT were measured using a spectrum analyzer with a quasi-peak adapter for peak and quasi-peak readings.

A preamplifier with a fixed gain of 51 dB was used to increase the sensitivity of the measuring instrumentation. The quasi-peak adapter uses a bandwidth of 120 kHz, with the spectrum analyzer's resolution bandwidth set at 1 MHz, for readings in the 30 to 1000 MHz frequency ranges. For frequencies below 30 MHz, a 9 kHz resolution Bandwidth was used. For frequencies above 1000 MHz a 1 MHz RBW was used.

A loop antenna was used to measure frequencies below 30 MHz. A biconilog antenna was used to measure the frequency range of 30 to 1000 MHz, at a distance of 3 meters from the EUT. The readings obtained by these antennas are correlated to the levels obtained with a tuned dipole antenna by adding antenna factors. A double-ridged guide or standard gain horn antenna was used to measure the emissions at frequencies above 1000 MHz at a distance of 3 and/or 1 meter from the EUT.

The configuration of the EUT was varied to find the maximum radiated emission. The EUT was connected to the peripherals listed in Section 2.3 via the interconnecting cables listed in Section 2.4. A technician manually manipulated these interconnecting cables to obtain worst-case radiated emissions. The EUT was rotated 360 degrees, and the antenna height was varied from 1 to 4 meters to find the maximum radiated

emission. Where there were multiple interface ports all of the same type, cables are either placed on all of the ports or cables added to these ports until the emissions do not increase by more than 2 dB.

Desktop EUT are measured on a non-conducting table 0.8 meters above the ground plane. For frequencies above 1000 MHz, the EUT is placed on a table 1.5 meters above the ground plane. The table is placed on a turntable, which is level with the ground plane. For equipment normally placed on floors, the equipment shall be placed directly on the turntable.

For radiated emissions testing that is performed at distances closer than the specified distance; an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer/Receiver	Rohde & Schwarz	ESU40	V033119	07/16/2018	07/16/2019
Spectrum Analyzer	Hewlett Packard	8566B	V034141	03/05/2018	03/05/2019
Quasi-Peak Detector	Hewlett Packard	85650A	V039474	05/02/2018	05/02/2020
Loop Antenna	EMCO	6502	V034216	01/25/2017	01/25/2019
Biconilog Antenna	EMCO	3142E-PA	V035736	07/05/2018	07/05/2020
Double Ridged Guide Antenna	EMCO	3115	V034194	03/08/2017	03/08/2019
Standard Gain Horn	ETS-Lindgren	3160-09	V034223	ICO	ICO
High Frequency Amplifier	Miteq	AFS4-001018000-35-10P-4	V033997	01/09/2018	01/09/2019
2.4 GHz Notch Filter	Micro-Tronics	BRM50702-03	V034213	01/09/2018	01/09/2019
6' High Frequency Cable	Microcoax	UFB197C-0-0720-000000	V033638	01/09/2018	01/09/2019
20' High Frequency Cable	Microcoax	UFB197C-1-3120-000000	V033979	01/09/2018	01/09/2019
3 Meter Radiated Emissions Cable Wanship Upper Site	Microcoax	UFB205A-0-4700-000000	V033639	01/09/2018	01/09/2019
Test Software (FCC)	VPI Labs	Revision 01	V035673	N/A	N/A

Table 33: List of equipment used for radiated emissions testing.

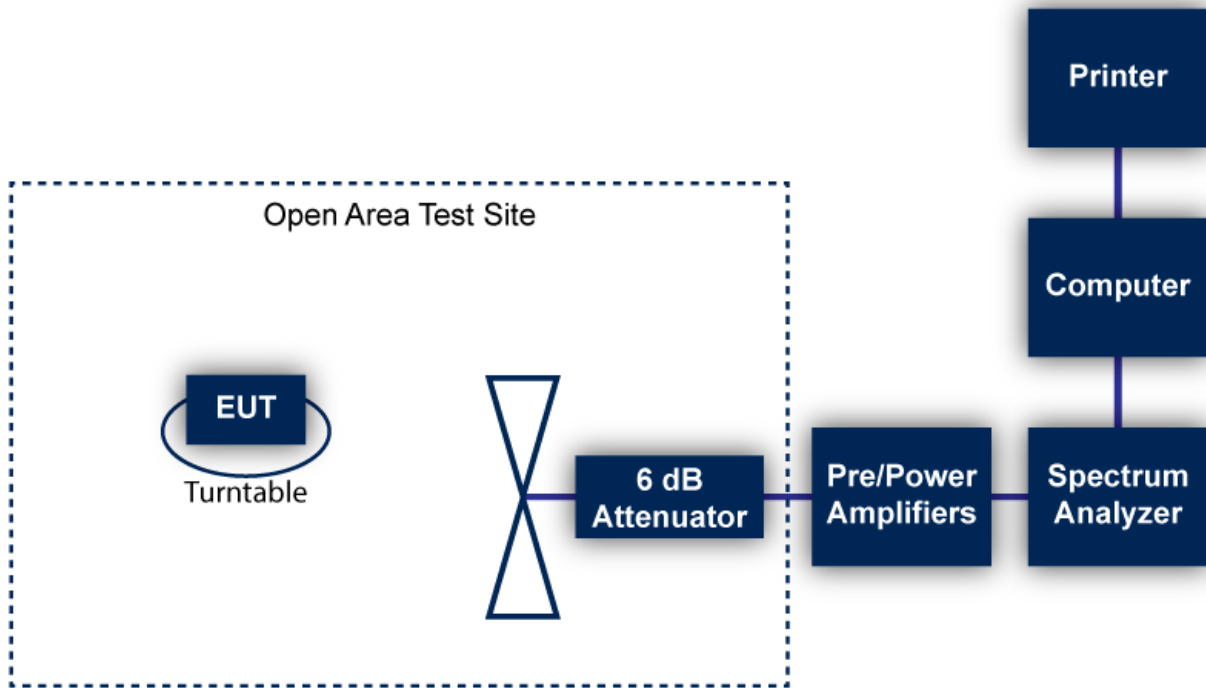


Figure 3: Radiated Emissions Test

7.4 Equipment Calibration

All applicable equipment is calibrated using either an independent calibration laboratory or VPI Laboratories, Inc. personnel at intervals defined in ANSI C63.4:2014 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.

7.5 Measurement Uncertainty

Test	Uncertainty (\pm dB)	Confidence (%)
Conducted Emissions	2.8	95
Radiated Emission (9 kHz to 30 MHz)	3.3	95
Radiated Emissions (30 MHz to 1 GHz)	3.4	95
Radiated Emissions (1 GHz to 18 GHz)	5.0	95
Radiated Emissions (18 GHz to 40 GHz)	4.1	95
Direct Connection Tests	K Factor	Value
Emissions Bandwidth	2	2.0 %
Output Power	2	1.0 dB
Peak Power Spectral Density	2	1.3 dB
Band edge	2	0.8 dB
Transmitter Spurious Emissions	2	1.8 dB

8 Photographs

Photographs Removed. See TCB Submission.

--- End of Report ---