



# FCC RADIO TEST REPORT

Applicant : Ubiquiti Inc.  
Address : 685 Third Avenue, New York, New York 10017, USA  
Equipment : UniFi PowerAmp  
Model No. : UPL-Amp-W, UPL-Amp-B  
Trade Name : UBIQUITI  
FCC ID. : SWX-UPLA

## I HEREBY CERTIFY THAT:

The sample was received on Dec. 07, 2023 and the testing was completed on Mar. 01, 2024 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





## CONTENTS

1.	Summary of Test Procedure and Test Results .....	5
1.1.	Applicable Standards .....	5
2.	Test Configuration of Equipment under Test .....	6
2.1.	Feature of Equipment under Test.....	6
2.2.	Carrier Frequency of Channels .....	7
2.3.	Test Mode and Test Software.....	9
2.4.	Description of Test System.....	10
2.5.	General Information of Test .....	11
2.6.	Measurement Uncertainty .....	11
3.	Test Equipment and Ancillaries Used for Tests .....	12
4.	Antenna Requirements .....	15
4.1.	Standard Applicable .....	15
4.2.	Antenna Construction and Directional Gain.....	15
5.	Test of AC Power Line Conducted Emission .....	16
5.1.	Test Limit .....	16
5.2.	Test Procedures .....	16
5.3.	Typical Test Setup .....	17
5.4.	Test Result and Data.....	18
5.5.	Test Photographs .....	20
6.	Test of Spurious Emission (Radiated).....	21
6.1.	Test Limit .....	21
6.2.	Test Procedures .....	22
6.3.	Typical Test Setup .....	23
6.4.	Test Result and Data (9kHz ~ 30MHz).....	24
6.5.	Test Result and Data (30MHz ~ 1GHz) .....	24
6.6.	Test Result and Data (1GHz ~ 40GHz).....	26
6.7.	Restricted Bands of Operation .....	110
6.8.	Test Photographs (30MHz ~ 1GHz) .....	111
6.9.	Test Photographs (1GHz ~ 40GHz) .....	112
7.	On Time, Duty Cycle and Measurement methods .....	114
7.1.	Test Limit .....	114
7.2.	Test Procedure .....	114
7.3.	Test Setup Layout .....	114
7.4.	Test Result and Data.....	114
7.5.	Measurement Methods .....	114
8.	6dB Bandwidth & 99% Occupied Bandwidth .....	116
8.1.	Test Limit .....	116
8.2.	Test Procedure .....	116
8.3.	Test Setup Layout .....	116
8.4.	Test Result and Data.....	117
9.	26dB Bandwidth & 99% Occupied Bandwidth .....	134
9.1.	Test Limit .....	134



---

9.2. Test Procedure .....	134
9.3. Test Setup Layout .....	134
9.4. Test Result and Data.....	134
10. Average Power.....	180
10.1. Test Limit .....	180
10.2. Test Procedure .....	181
10.3. Test Setup Layout .....	181
10.4. Test Result and Data.....	182
11. Power Spectral Density.....	189
11.1. Test Limit .....	189
11.2. Test Procedure .....	189
11.3. Test Setup Layout .....	189
11.4. Test Result and Data.....	190
12. Radio Frequency Exposure .....	219
12.1. Applicable Standards .....	219
12.2. EUT Specification.....	220
12.3. Test Result.....	221



## History of this test report



## 1. Summary of Test Procedure and Test Results

### 1.1. Applicable Standards

**ANSI C63.10:2013**

**FCC Rules and Regulations Part 15 Subpart E §15.407**

**KDB 789033**

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207(a)	AC Power Line Conducted Emission	PASS
15.407(b) 15.209	Radiated Spurious Emission	PASS
15.407(a)	26 dB & Occupied Bandwidth	PASS
15.407	6 dB Bandwidth	PASS
15.407 (a) & (a)(3)	Average Power	PASS
15.407(a)	Power Spectral Density	PASS

\*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.

\*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report (23100292-TEFV01).



## 2. Test Configuration of Equipment under Test

### 2.1. Feature of Equipment under Test

Frequency Range	BT / BLE: 2400-2483.5MHz 802.11b/g/n: 2400-2483.5MHz 802.11a/n/ac: 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
Center Frequency Range	BT / BLE: 2402-2480MHz 802.11b/g/n: 2412MHz~2462MHz 802.11a/n/ac: 5180-5240MHz, 5260-5320MHz, 5500-5720MHz, 5745-5825MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK WLAN: 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM, 5GHz: 802.11n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Modulation Technology	FHSS, DTS, DSSS, OFDM
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80
Antenna Type	PIFA Antenna
Antenna Gain	For BT / BLE: 2400MHz~2483.5MHz: ANT A: 3.00dBi For WLAN: 2400MHz~2483.5MHz: ANT A: 3.00dBi, ANT B: 3.00dBi 5150MHz~5250MHz: ANT A: 7.00dBi, ANT B: 7.00dBi 5250MHz~5350MHz: ANT A: 7.00dBi, ANT B: 7.00dBi 5470MHz~5725MHz: ANT A: 7.00dBi, ANT B: 7.00dBi 5725MHz~5850MHz: ANT A: 7.00dBi, ANT B: 7.00dBi

Note:

1. EUT support TPC Function.
2. WLAN and BT can simultaneously transmission.
3. EUT supports DFS Client Mode, without radar detection.
4. For more details, please refer to the User's manual of the EUT.

Difference Description:
The difference of model no. is the color of EUT.



## 2.2. Carrier Frequency of Channels

Band: 5150MHz-5250MHz

802.11a, 802.11n HT20, 802.11ac VHT20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*36</b>	<b>5180</b>	44	5220
<b>*40</b>	<b>5200</b>	<b>*48</b>	<b>5240</b>

802.11n HT40, 802.11ac VHT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*38</b>	<b>5190</b>	<b>*46</b>	<b>5230</b>

802.11ac VHT80

Channel	Frequency(MHz)
<b>*42</b>	<b>5210</b>

Band: 5250MHz-5350MHz

802.11a, 802.11n HT20, 802.11ac VHT20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*52</b>	<b>5260</b>	<b>*60</b>	<b>5300</b>
56	5280	<b>*64</b>	<b>5320</b>

802.11n HT40, 802.11ac VHT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*54</b>	<b>5270</b>	<b>*62</b>	<b>5310</b>

802.11ac VHT80

Channel	Frequency(MHz)
<b>*58</b>	<b>5290</b>

Band: 5470MHz-5725MHz

802.11a, 802.11n HT20, 802.11ac VHT20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*100</b>	<b>5500</b>	124	5620
104	5520	128	5640
108	5540	132	5660
112	5560	136	5680
116	5580	<b>*140</b>	<b>5700</b>
<b>*120</b>	<b>5600</b>		

802.11n HT40, 802.11ac VHT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*102</b>	<b>5510</b>	126	5630
110	5550	<b>*134</b>	<b>5670</b>
<b>*118</b>	<b>5590</b>		

802.11ac VHT80

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*106</b>	<b>5530</b>	<b>*122</b>	<b>5610</b>



Band 3: Straddle Channel

802.11a, 802.11n HT20, 802.11ac VHT20

Channel	Frequency(MHz)
<b>*144</b>	<b>5720</b>

802.11n HT40, 802.11ac VHT40

Channel	Frequency(MHz)
<b>*142</b>	<b>5710</b>

802.11ac VHT80

Channel	Frequency(MHz)
<b>*138</b>	<b>5690</b>

Band: 5725MHz-5850MHz

802.11a, 802.11n HT20, 802.11ac VHT20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*149</b>	<b>5745</b>	161	5805
153	5765	<b>*165</b>	<b>5825</b>
<b>*157</b>	<b>5785</b>		

802.11n HT40, 802.11ac VHT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*151</b>	<b>5755</b>	<b>*159</b>	<b>5795</b>

802.11ac VHT80

Channel	Frequency(MHz)
<b>*155</b>	<b>5775</b>

Note: Channels remarked \* are selected to perform test.



### 2.3. Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. An executive program, "Qualcomm Radio Control Tool ver: 4.0.00192.0" under Windows 10 system was executed to transmit and receive data via WLAN.
- c. The following test modes were performed for the test:

<b>Conducted Emissions from the AC mains power ports</b>	
Test Mode 1	802.11ac VHT40 (13.5Mbps), TX Mode, Power from System (AC 120V/60Hz)
Test Mode 2	802.11ac VHT40 (13.5Mbps), TX Mode, Power from System (AC 240V/60Hz)
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
<b>Radiated Emissions (30MHz ~ 1GHz)</b>	
Test Mode 1	802.11ac VHT40 (13.5Mbps), TX Mode, Power from System (AC 120V/60Hz)
Test Mode 2	802.11ac VHT40 (13.5Mbps), TX Mode, Power from System (AC 240V/60Hz)
caused "Test Mode 2" generated the worst case, it was reported as the final data.	
<b>Radiated Emissions (1GHz ~ 40GHz)</b>	
Test Mode 1	802.11a (6Mbps), TX Mode, Power from System (AC 120V/60Hz)
Test Mode 2	802.11ac VHT20 (6.5Mbps), TX Mode, Power from System (AC 120V/60Hz)
Test Mode 3	802.11ac VHT40 (13.5Mbps), TX Mode, Power from System (AC 120V/60Hz)
Test Mode 4	802.11ac VHT80 (29.3Mbps), TX Mode, Power from System (AC 120V/60Hz)
caused "Test Mode 1,2,3,4" were the worst case, these were reported as the final data.	

The EUT incorporates a MIMO function

Modulation Type	TX CONFIGURATION
802.11a	2TX
802.11n HT20	2TX
802.11n HT40	2TX
802.11ac VHT20	2TX
802.11ac VHT40	2TX
802.11ac VHT80	2TX



## 2.4. Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	lenovo	S1GL2W	N/A	N/A
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A

Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
RJ45 Cable	TE CONNECTIVITY	CAT5E	15m / NS	N/A
Notebook	Lenovo	S2292L	N/A	Adapter / 1.8m / NS

AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	Lenovo	S2292L	N/A	Adapter / 1.8m / NS
RJ45 Cable*2	TE CONNECTIVITY	CAT5E	15m / NS	N/A



## 2.5. General Information of Test

<input checked="" type="checkbox"/> Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881			
	FCC	TW1439, TW1079		
	IC	4934E-1, 4934E-2		
	Frequency Range Investigated Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 40,000MHz			
Test Distance	The test distance of radiated emission from antenna to EUT is 3 M.			

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2024/01/12~2024/01/13	21.2~23.8°C / 41~42%	Leon Huang
Radiated Emissions	3M02-NK	2024/01/09 ~ 2024/01/16	18.2~20.4°C / 42~48%	Leon Huang
Radiated Emissions	3M02-NK	2024/03/01	18.5°C / 53%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2024/03/01	20°C / 59%	Park Chen

## 2.6. Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2).

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.12dB
Radiated Spurious Emission(9KHz~30MHz)	±3.5dB
Radiated Spurious Emission(30MHz~1GHz)	±5.1dB
Radiated Spurious Emission(1GHz~40GHz)	±5.2dB
6dB Bandwidth	±5.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.5%
Peak Output Power(Conducted Power Meter)	±1.1dB
Power Spectral Density	±2.0dB
Duty Cycle	±3.5%
Frequency Stability	±0.23KHz



### 3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions (2024/01/09 ~ 2024/01/16)				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2023/03/15	2024/03/14
Active Loop Antenna	Schwarzbeck	FMZB 1513	414	2023/02/03	2024/02/02
Horn Antenna	EMCO	3115	31589	2023/03/23	2024/03/22
Horn Antenna	EMCO	3116	31970	2023/03/03	2024/03/02
EMI Receiver	R&S	ESCI	101423	2023/07/05	2024/07/04
Spectrum Analyzer	R&S	FSP 40	100047	2023/02/24	2024/02/23
Preamplifier	Agilent	8449B	3008A01954	2023/03/08	2024/03/07
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2023/10/13	2024/10/12
Preamplifier	EM Electronics corp.	EM330	60659	2023/03/10	2024/03/09
Cable-6m (9k~300M)	NA	EMC5D-BM-BM-6	130606	2023/03/13	2024/03/12
Cable-3in1 (30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2023/02/25	2024/02/24
Cable-0.5m (1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2023/03/07	2024/03/06
Cable-3m (1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2023/03/07	2024/03/06
Cable-8m (1G-26.5G)	WOKEN	WCBA-WCA203 SM	CCE1374	2023/03/07	2024/03/06
Cable-1m (1G-40G)	HUBER SUHNER	HUBER SUHNER / SF102	552450	2023/06/08	2024/06/07
Cable-3m (1G-40G)	HUBER SUHNER	HUBER SUHNER / SF102	552451	2023/06/08	2024/06/07
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	Warison	WFIL-H3000-18000F-03	WRJ5CFWC2J1	2023/07/03	2024/07/02
Notch Filter	Warison	WFIL-N5925-7125F-04	WRQ4BFWC4M1	2023/03/13	2024/03/12
Hipass Filter	Warison	WFIL-H7500-18000F	WRQ4BFWC2J1	2023/03/13	2024/03/12



Test Item	Radiated Emissions (2024/03/01)				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2023/03/15	2024/03/14
Active Loop Antenna	Schwarzbeck	FMZB 1513	414	2024/01/16	2025/01/15
Horn Antenna	EMCO	3115	31601	2023/10/18	2024/10/17
Horn Antenna	EMCO	3116	31974	2023/10/16	2024/10/15
EMI Receiver	R&S	ESCI	101423	2023/07/05	2024/07/04
Spectrum Analyzer	R&S	FSV 40-N	102151	2023/08/15	2024/08/14
Preamplifier	EM Electronics corp.	EMC118A45V1SEE	980993	2023/10/16	2024/10/15
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2023/10/13	2024/10/12
Preamplifier	EM Electronics corp.	EM330	60659	2024/02/17	2025/02/16
Cable-4m (9k-3G)	EMEC	RG-223	18274M	2023/07/31	2024/07/30
Cable-3in1 (30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2023/02/25	2024/02/24
Cable-0.5m (1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2023/03/07	2024/03/06
Cable-3m (1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2023/03/07	2024/03/06
Cable-8m (1G-26.5G)	WOKEN	WCBA-WCA203SM	CCE1374	2023/03/07	2024/03/06
Cable-1m (1G-40G)	HUBER SUHNER	HUBER SUHNER / SF102	552450	2023/06/08	2024/06/07
Cable-3m (1G-40G)	HUBER SUHNER	HUBER SUHNER / SF102	552451	2023/06/08	2024/06/07
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	Warison	WFIL-H3000-18000F-03	WRJ5CFWC2J1	2023/07/03	2024/07/02
Notch Filter	Warison	WFIL-N5925-7125F-04	WRQ4BFWC4M1	2023/03/13	2024/03/12
Hipass Filter	Warison	WFIL-H7500-18000F	WRQ4BFWC2J1	2023/03/13	2024/03/12



Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2023/11/06	2024/11/05
Power Meter	Anritsu	ML2495A	1224005	2023/03/07	2024/03/06
Power Sensor	Anritsu	MA2411B	1207295	2023/03/07	2024/03/06
Attenuator	KEYSIGHT	8491B	MY39250703	2023/03/08	2024/03/07

Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	R&S	ESR 7	101906	2023/05/08	2024/05/07
TWO-LINE V-NETWORK	R&S	ENV216	102185	2023/08/29	2024/08/28
Cable-4m (9k-3G)	EMEC	RG-223	18274M	2023/07/31	2024/07/30
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA



## 4. Antenna Requirements

### 4.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.2. Antenna Construction and Directional Gain

Antenna Type	PIFA Antenna
Antenna Gain	5150MHz~5250MHz: ANT A: 7.00dBi, ANT B: 7.00dBi 5250MHz~5350MHz: ANT A: 7.00dBi, ANT B: 7.00dBi 5470MHz~5725MHz: ANT A: 7.00dBi, ANT B: 7.00dBi 5725MHz~5850MHz: ANT A: 7.00dBi, ANT B: 7.00dBi

5150-5250MHz:

For Power directional gain=  $G_{ant} = 7.00 \text{ dBi}$

For PSD directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 10.01 \text{ dBi}$

5250-5350MHz:

For Power directional gain=  $G_{ant} = 7.00 \text{ dBi}$

For PSD directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 10.01 \text{ dBi}$

5470-5725MHz:

For Power directional gain=  $G_{ant} = 7.00 \text{ dBi}$

For PSD directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 10.01 \text{ dBi}$

5725-5850MHz:

For Power directional gain=  $G_{ant} = 7.00 \text{ dBi}$

For PSD directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 10.01 \text{ (dBi)}$

\*MIMO type: Cyclic Delay Diversity (CDD) mode.



## 5. Test of AC Power Line Conducted Emission

### 5.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


\*Decreases with the logarithm of the frequency.

### 5.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.





### 5.3. Typical Test Setup

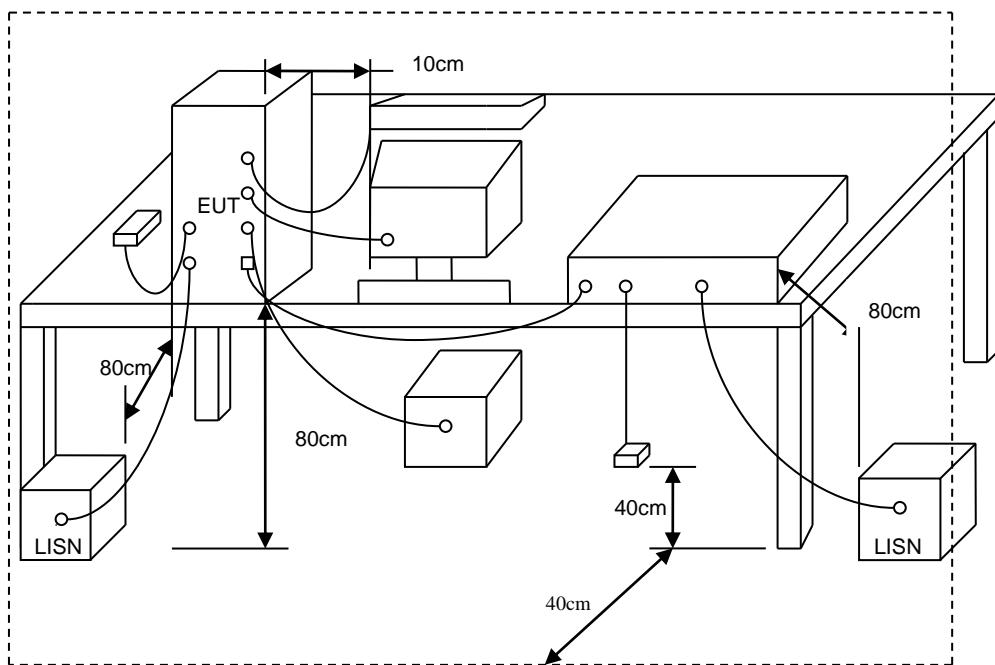



## 5.4. Test Result and Data

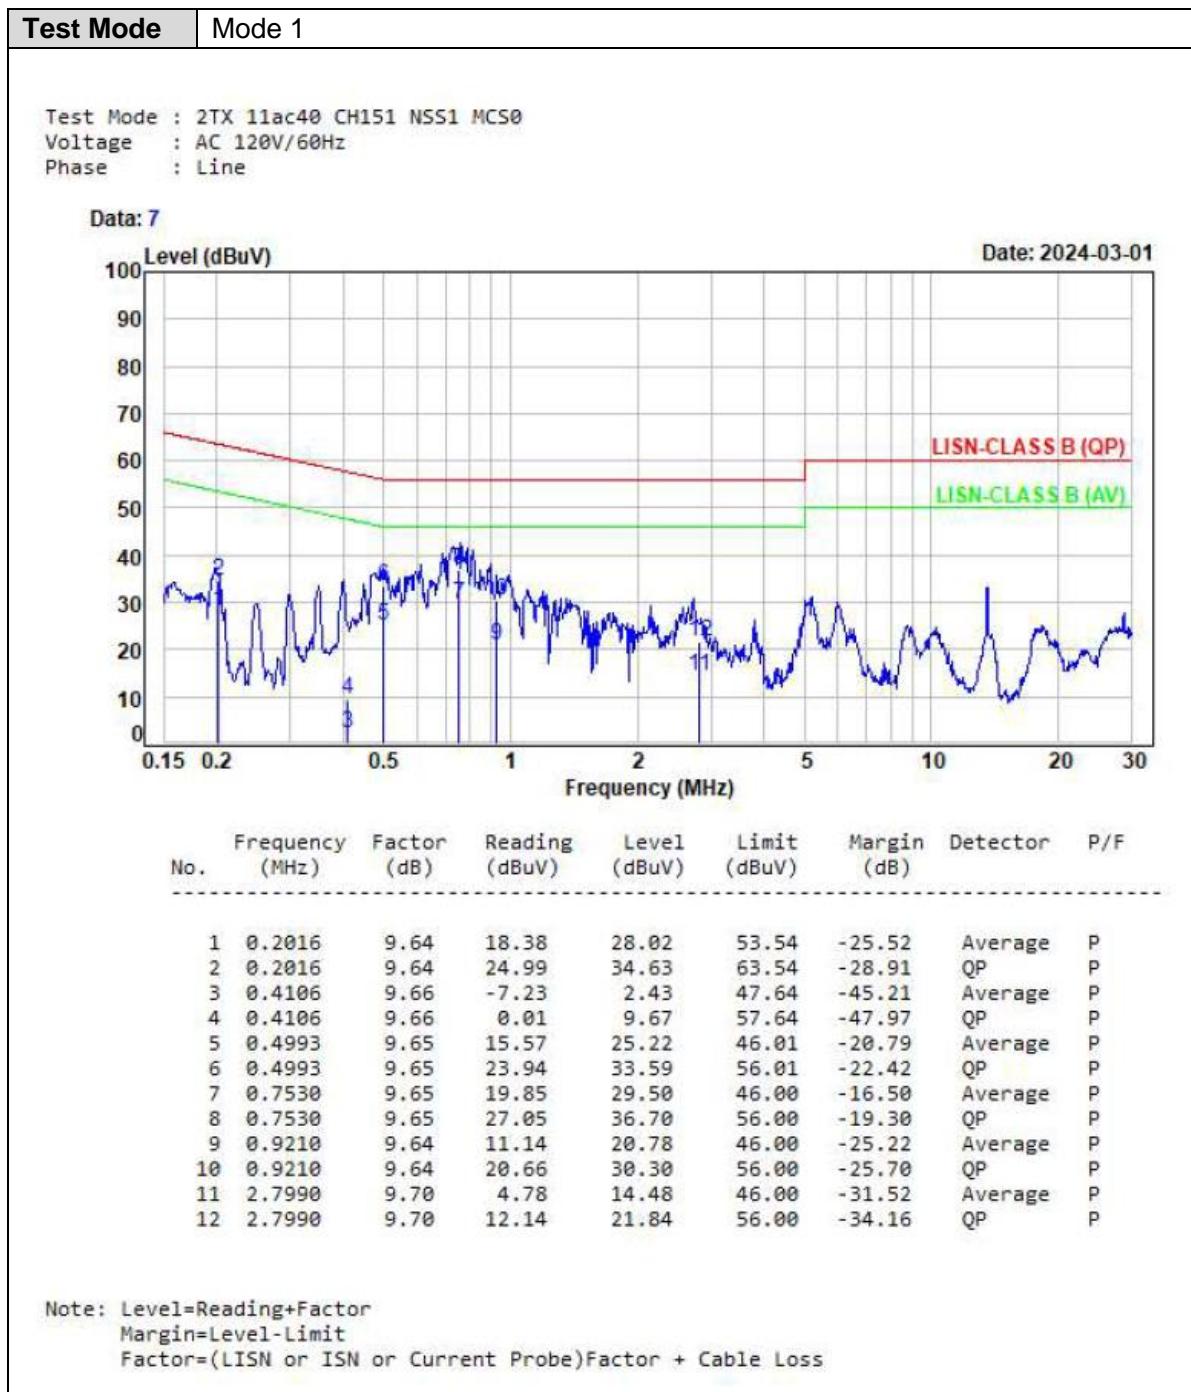

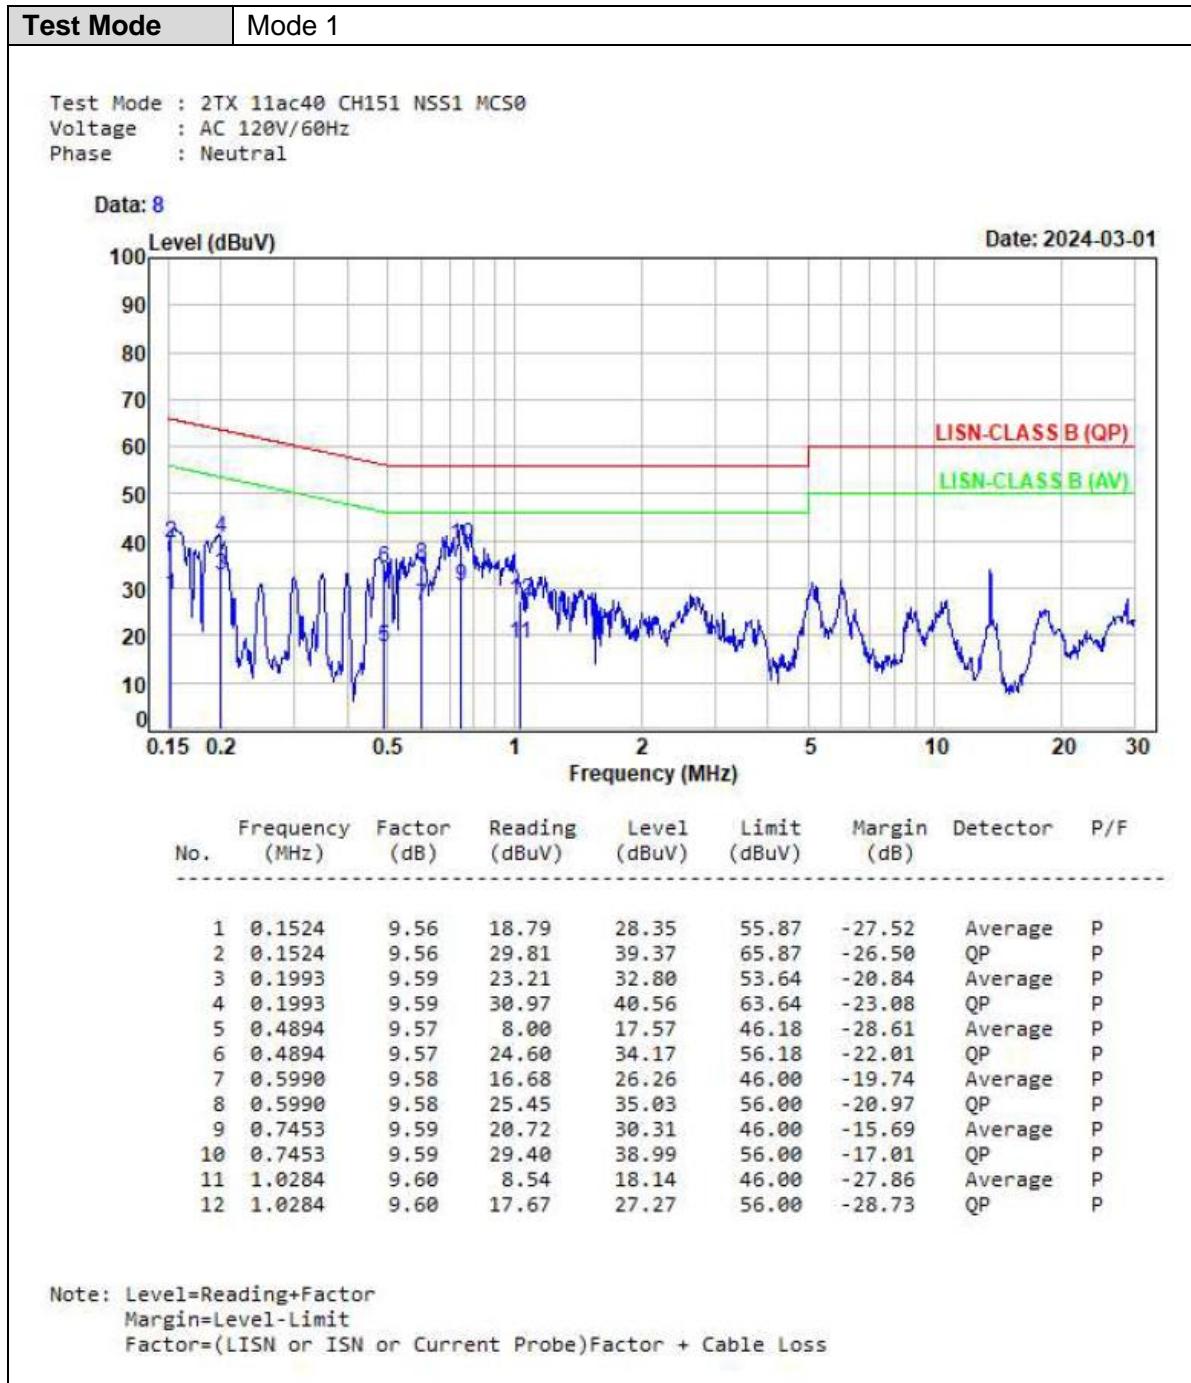



## 6. Test of Spurious Emission (Radiated)

### 6.1. Test Limit

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:  
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.



## 6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
- 2.Due to the test software function limit the operation band setting(200dBuV/m). There's no corresponding limitation in the actual test item.




### 6.3. Typical Test Setup


Below 30MHz test setup

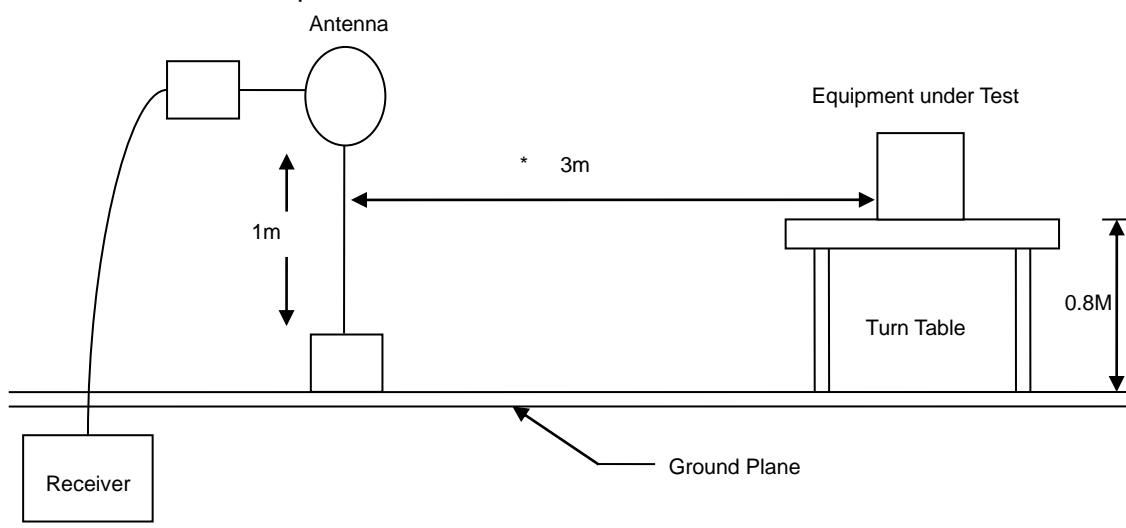

30MHz- 1GHz Test Setup

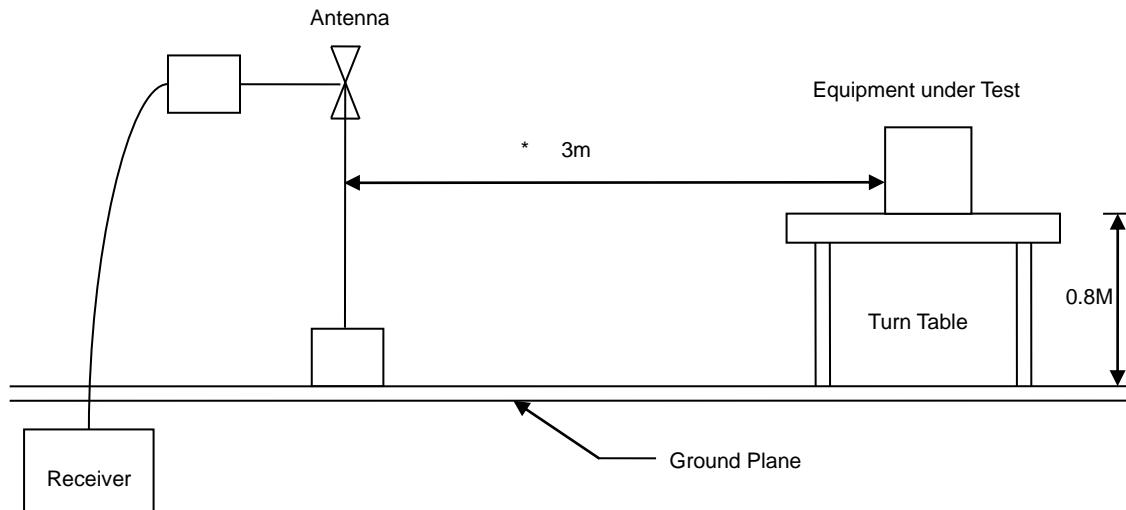

Above 1GHz Test Setup

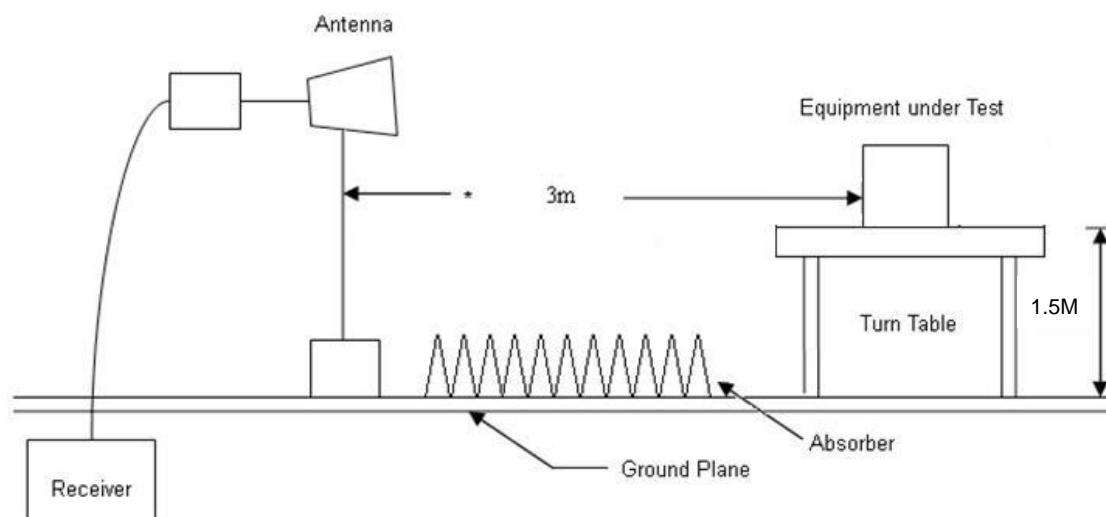





## 6.4. Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.


## 6.5. Test Result and Data (30MHz ~ 1GHz)

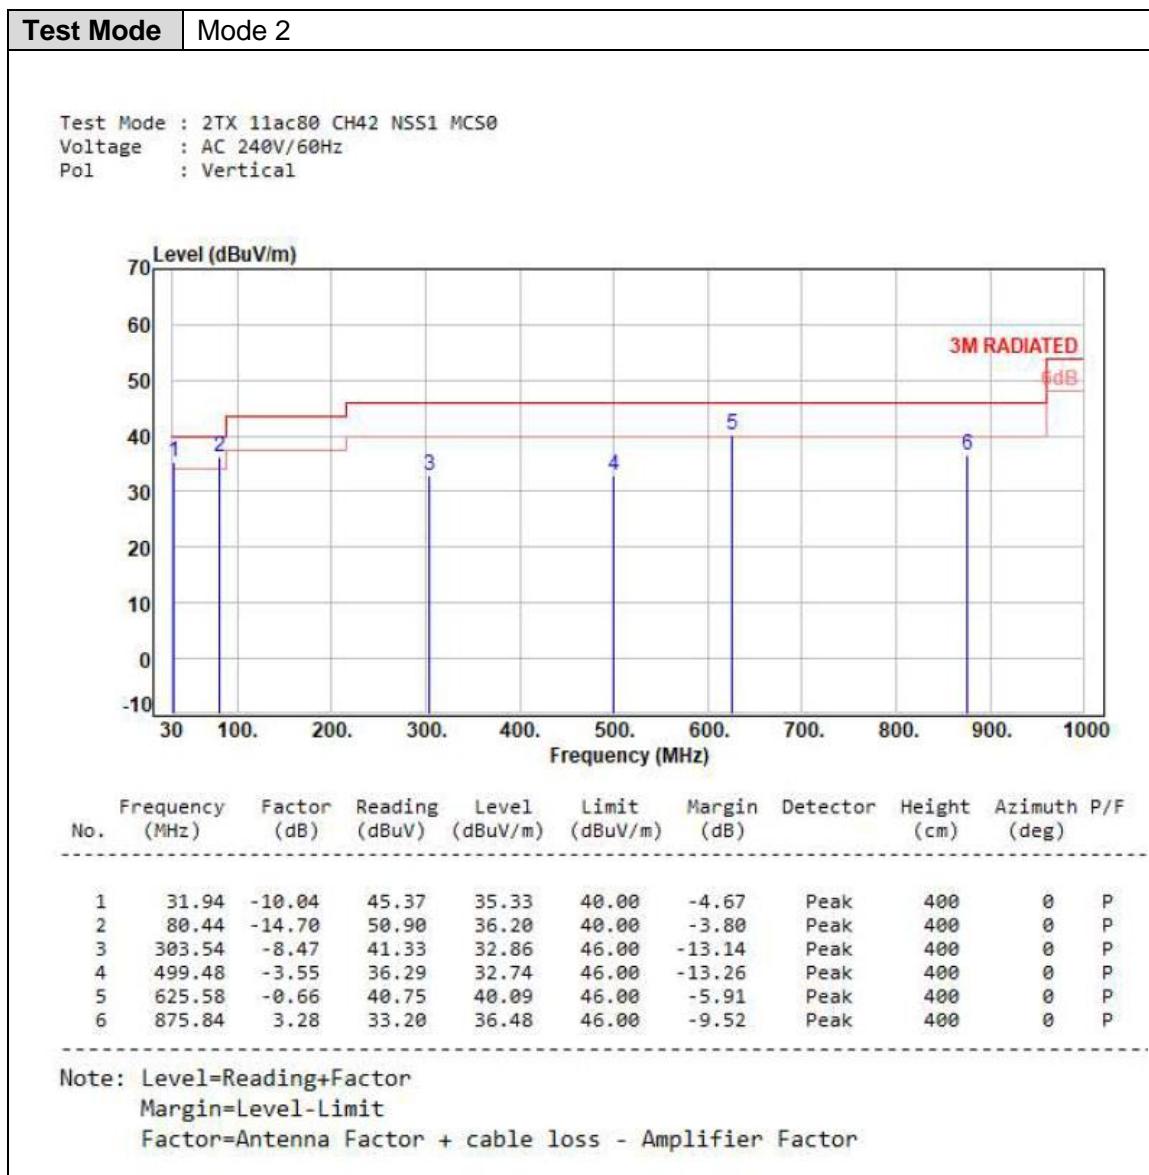


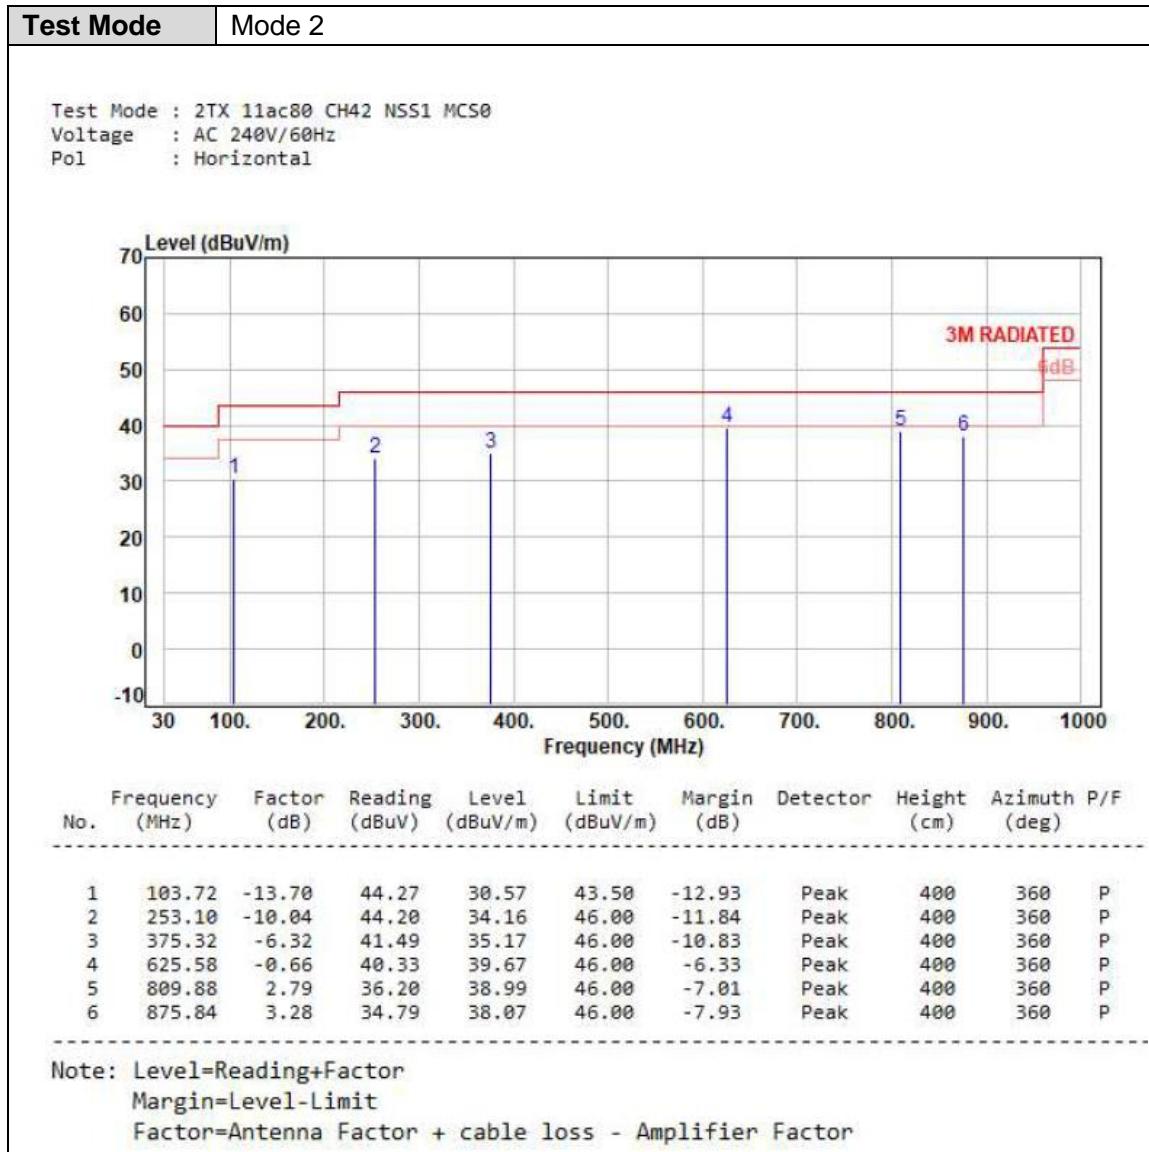





## 6.6. Test Result and Data (1GHz ~ 40GHz)

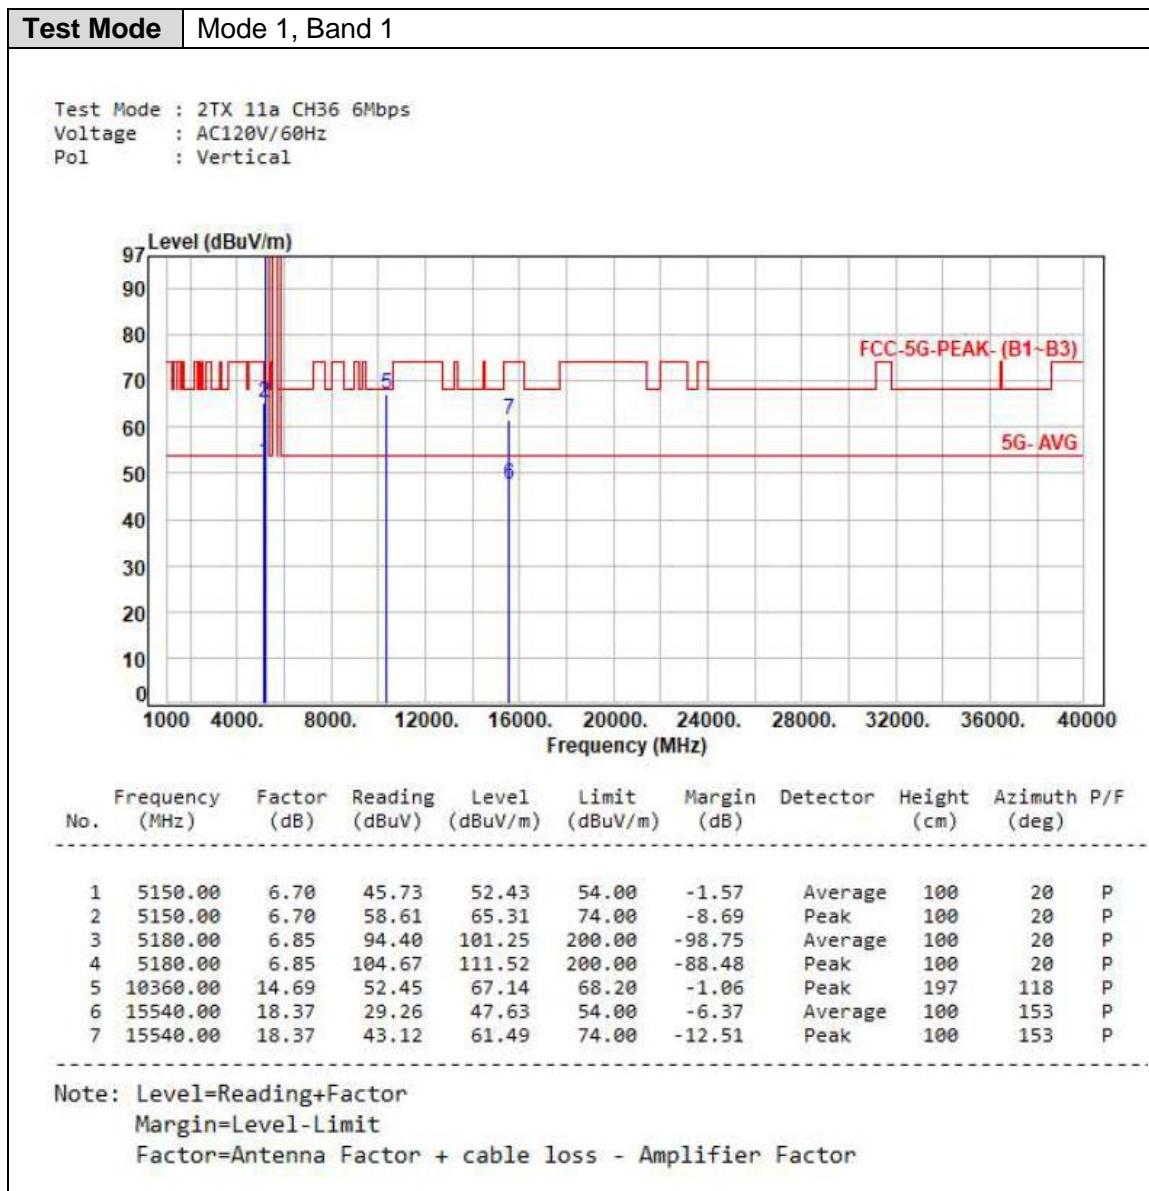

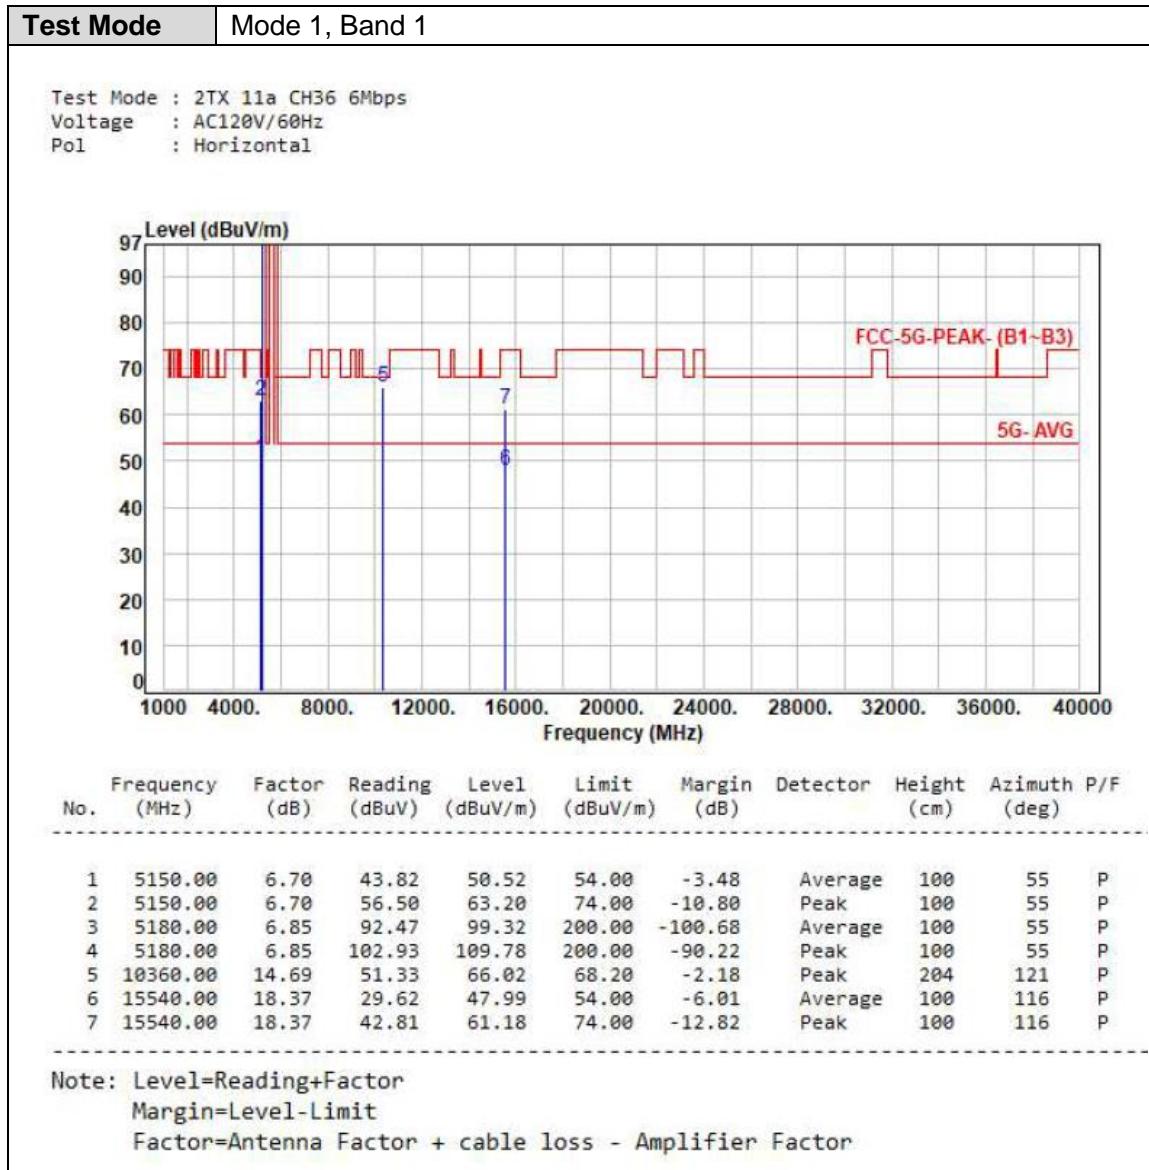


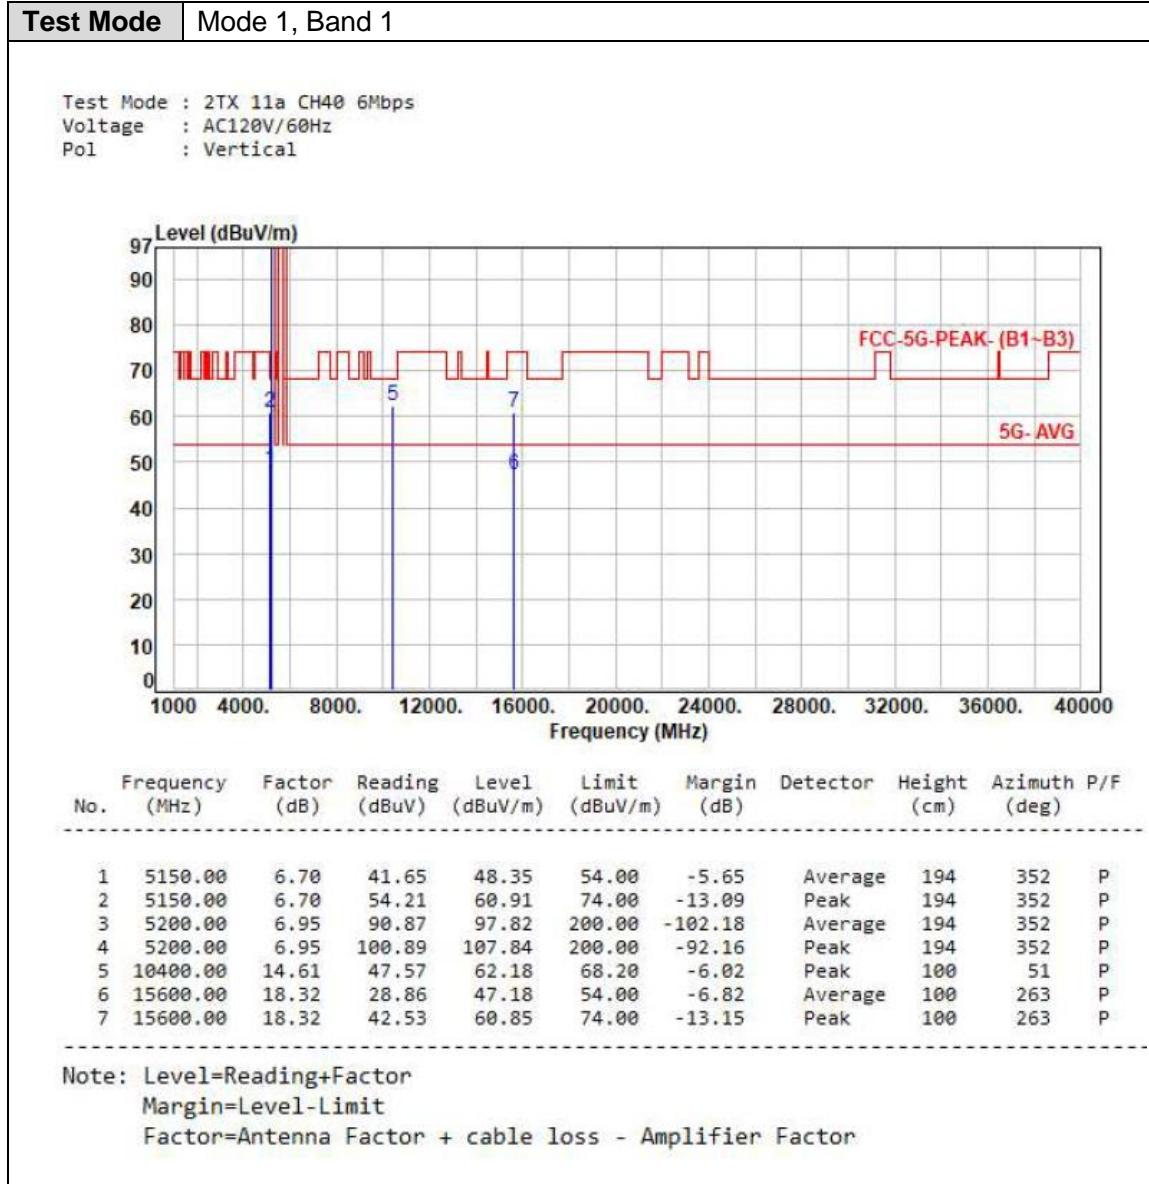

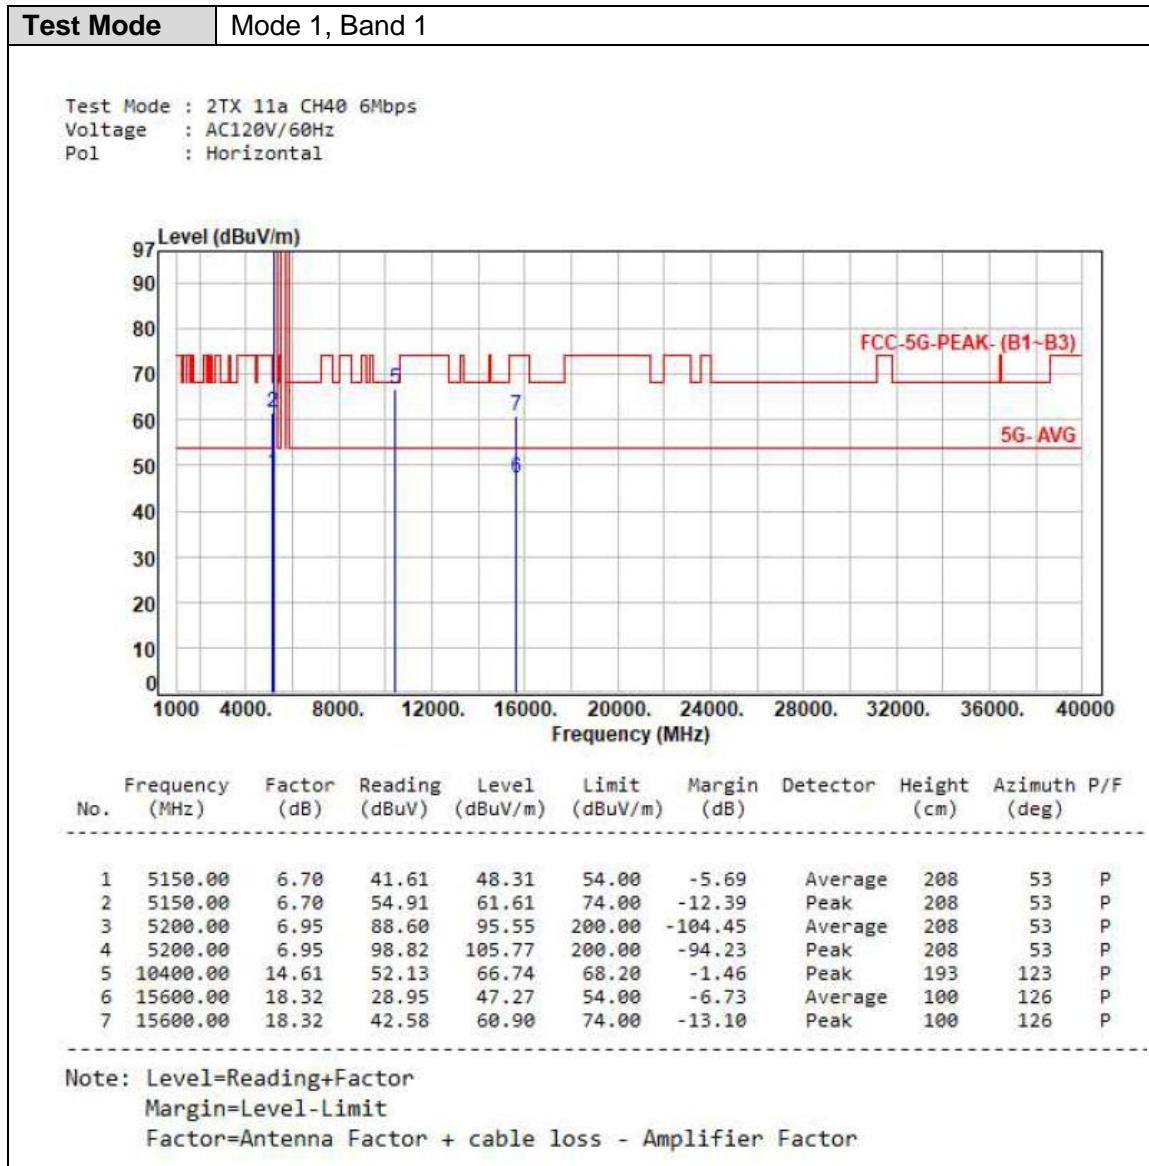

**Test Mode** | Mode 1, Band 1

Test Mode : 2TX 11a CH48 6Mbps  
Voltage : AC120V/60Hz  
Pol : Vertical

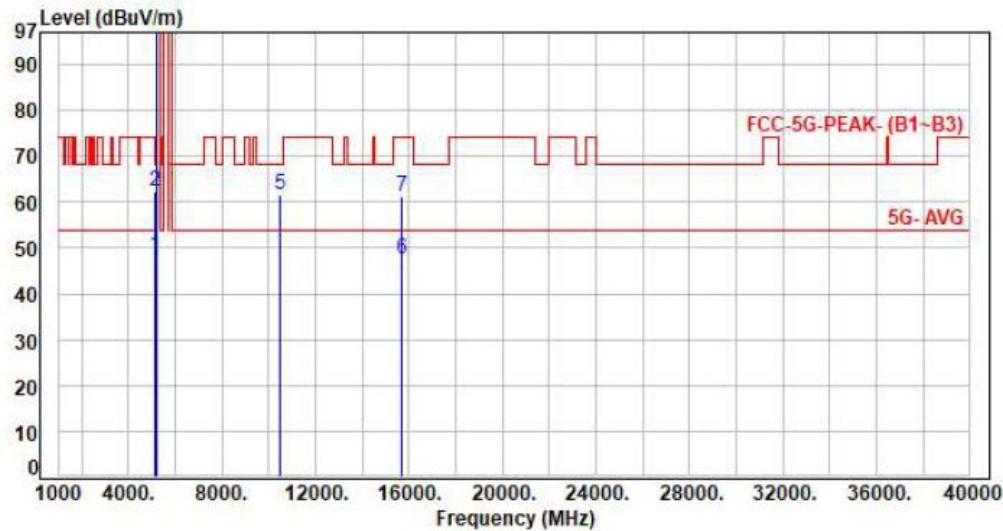


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.70	41.57	48.27	54.00	-5.73	Average	100	18	P
2	5150.00	6.70	55.55	62.25	74.00	-11.75	Peak	100	18	P
3	5240.00	7.00	92.30	99.30	200.00	-100.70	Average	100	18	P
4	5240.00	7.00	102.17	109.17	200.00	-90.83	Peak	100	18	P
5	10480.00	14.74	46.80	61.54	68.20	-6.66	Peak	100	51	P
6	15720.00	17.93	29.58	47.51	54.00	-6.49	Average	100	163	P
7	15720.00	17.93	43.45	61.38	74.00	-12.62	Peak	100	163	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

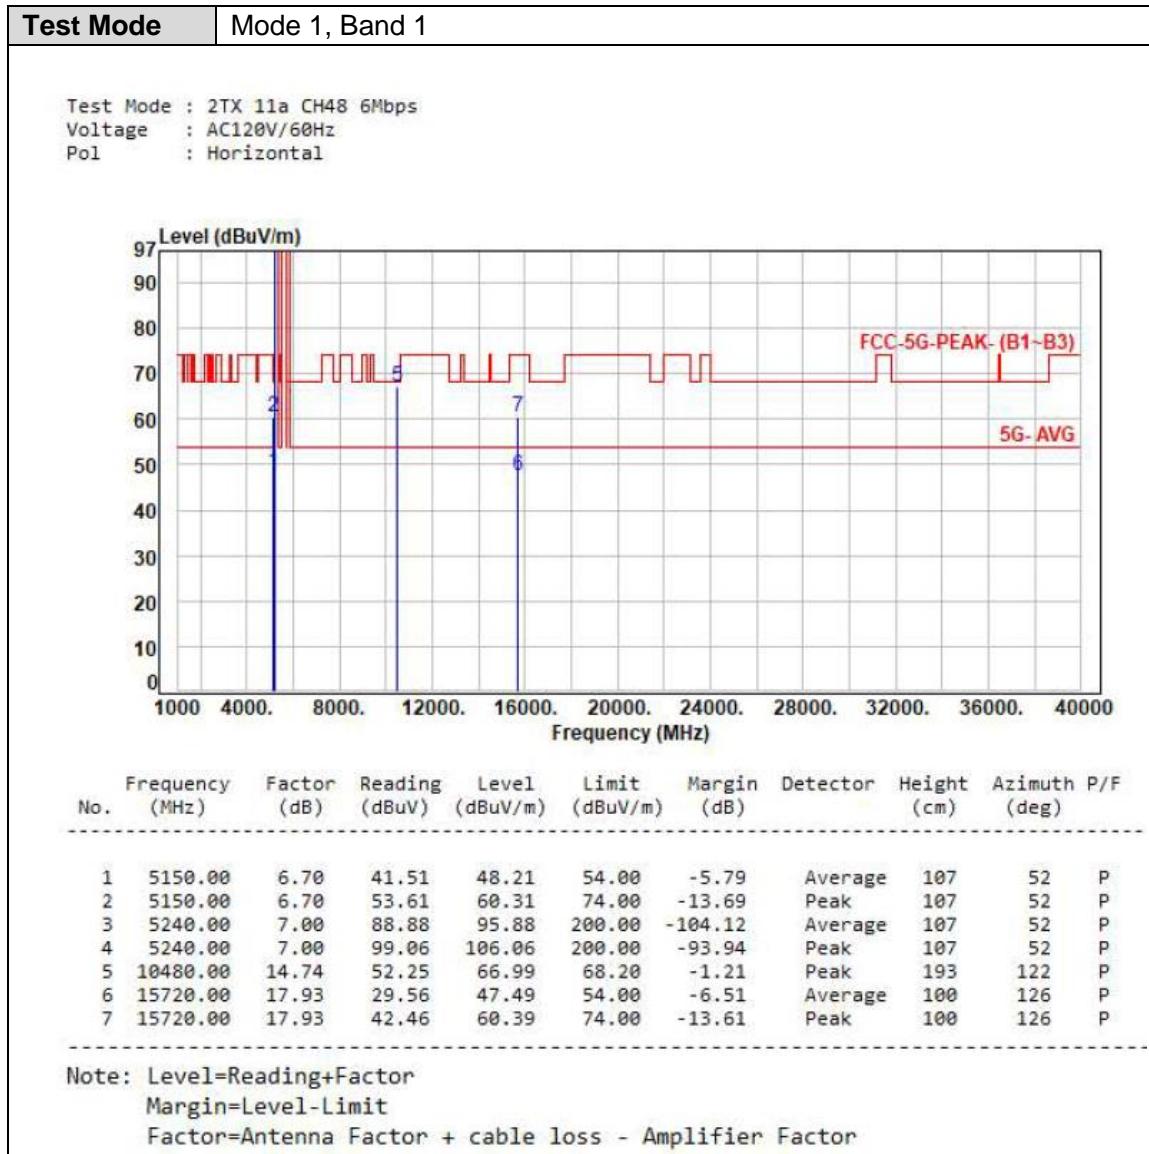

**Test Mode** Mode 2, Band 1

Test Mode : 2TX 11ac20 CH36 NSS1 MCS0  
Voltage : AC120V/60Hz  
Pol : Vertical

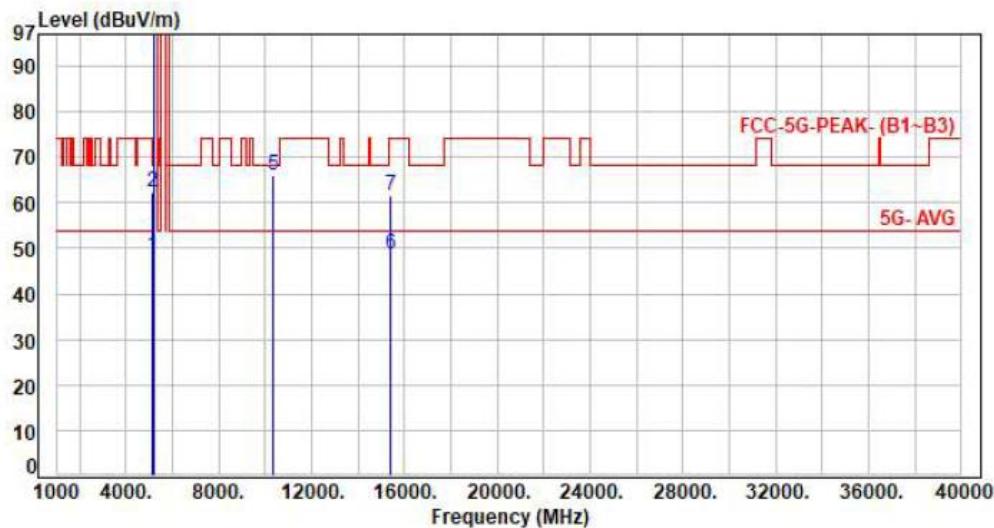



No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)
1	5150.00	6.70	41.54	48.24	54.00	-5.76	Average	177	360 P
2	5150.00	6.70	55.54	62.24	74.00	-11.76	Peak	177	360 P
3	5180.00	6.85	91.70	98.55	200.00	-101.45	Average	177	360 P
4	5180.00	6.85	101.74	108.59	200.00	-91.41	Peak	177	360 P
5	10360.00	14.69	51.32	66.01	68.20	-2.19	Peak	186	98 P
6	15400.00	19.24	29.44	48.68	54.00	-5.32	Average	100	256 P
7	15400.00	19.24	42.40	61.64	74.00	-12.36	Peak	100	256 P


Note: Level=Reading+Factor


Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor

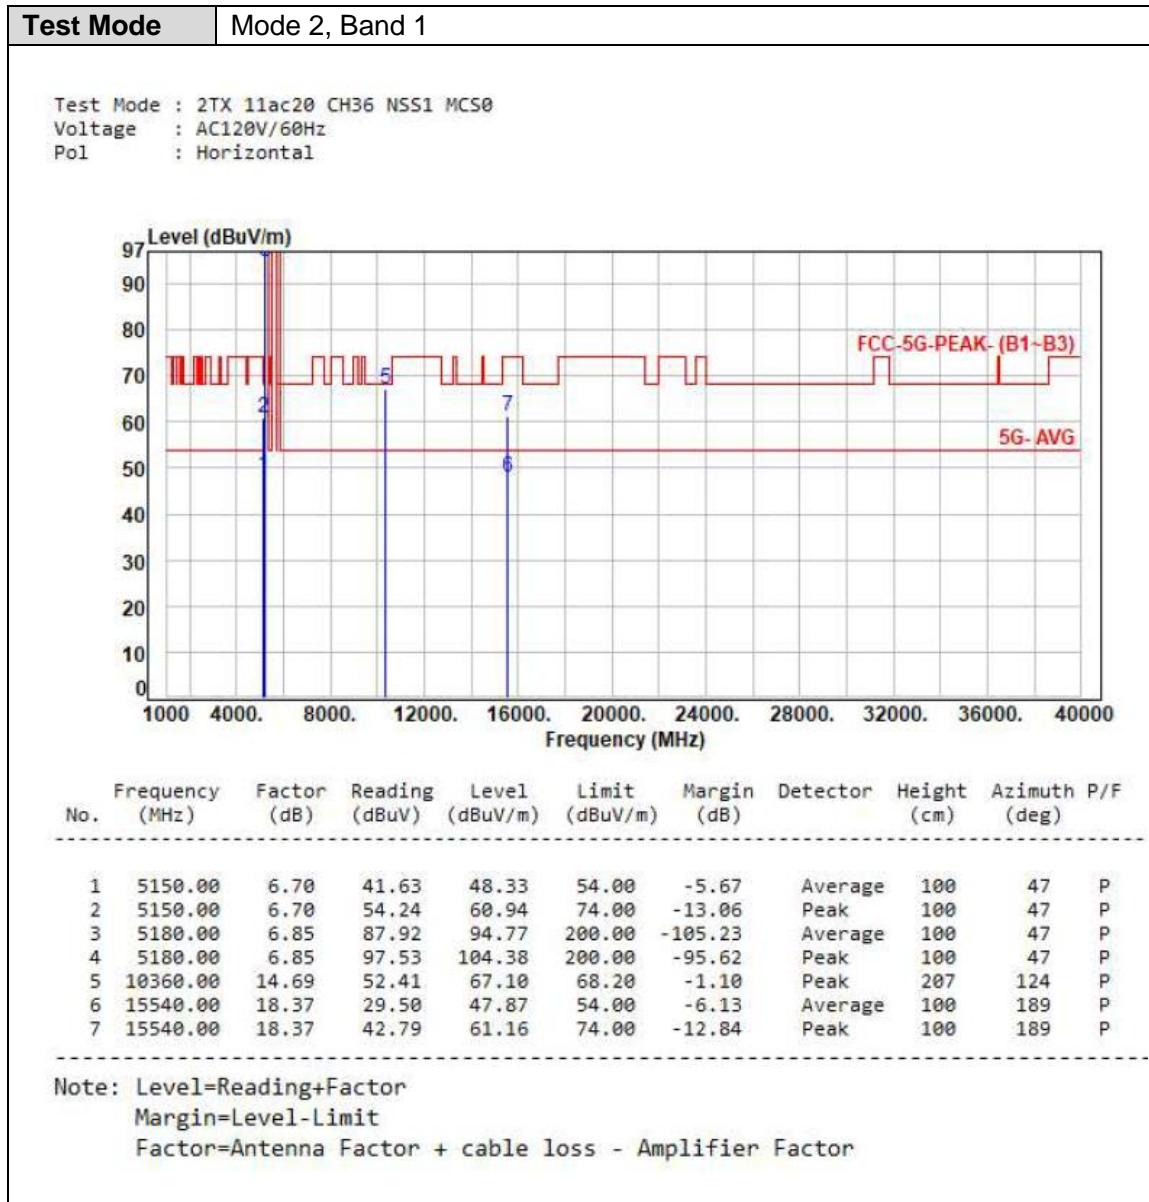


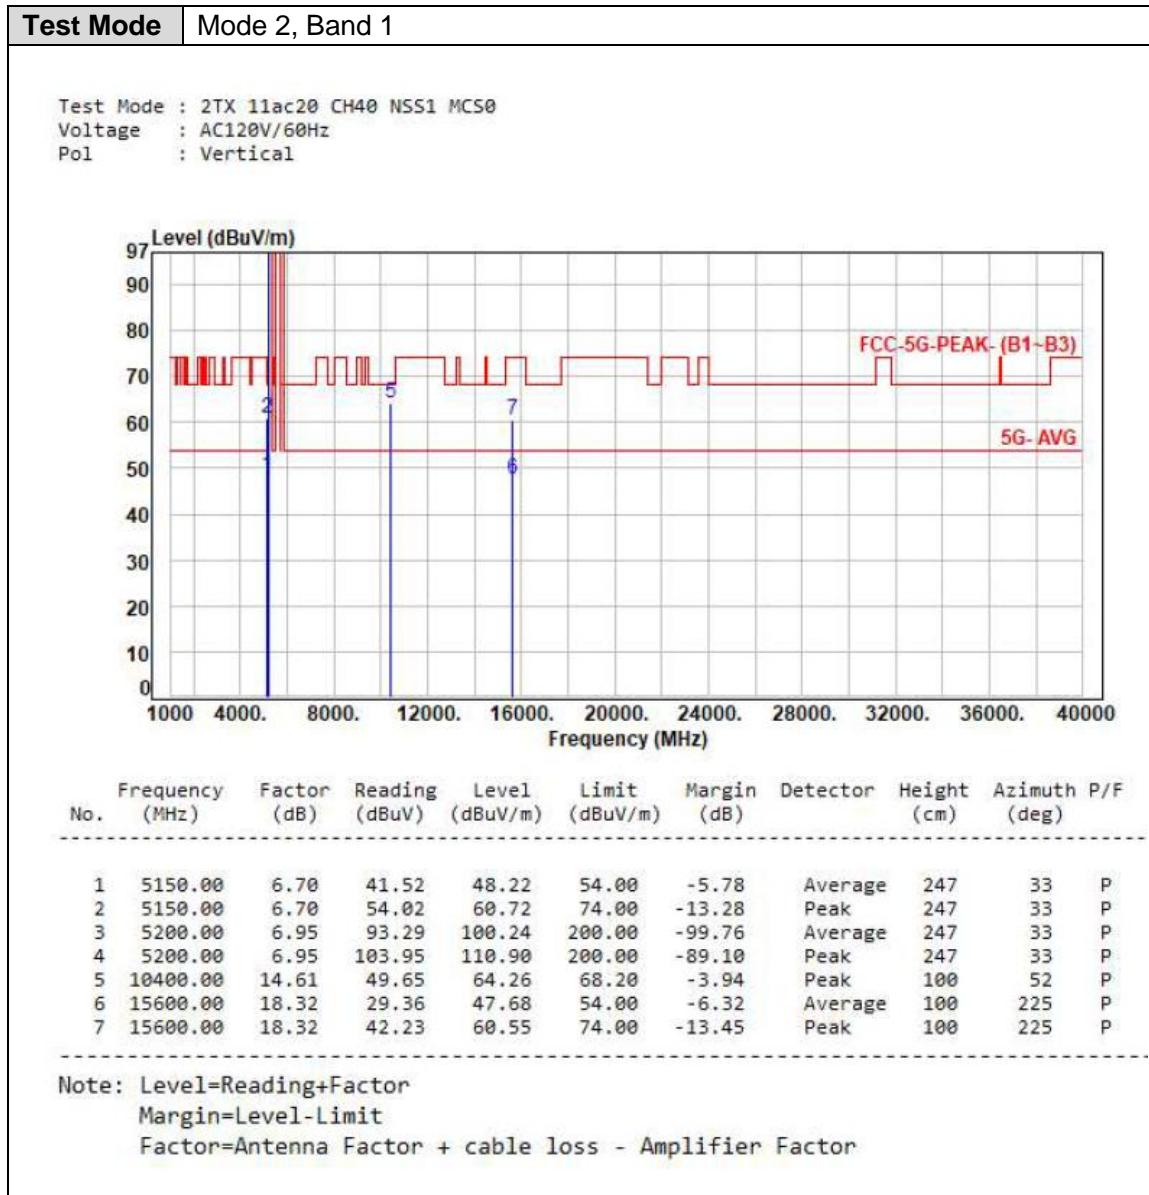


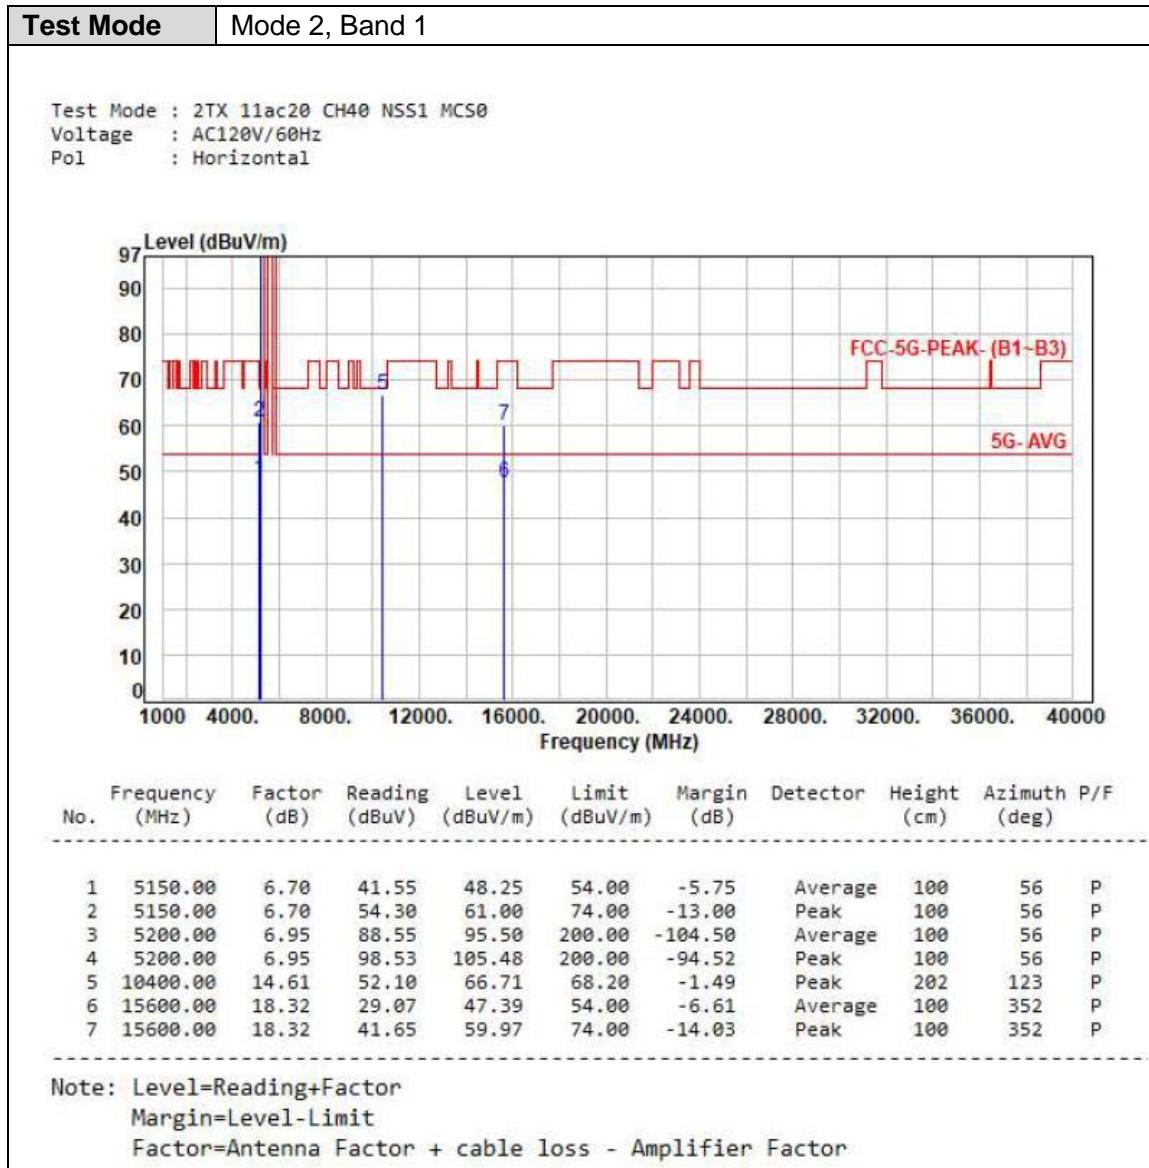


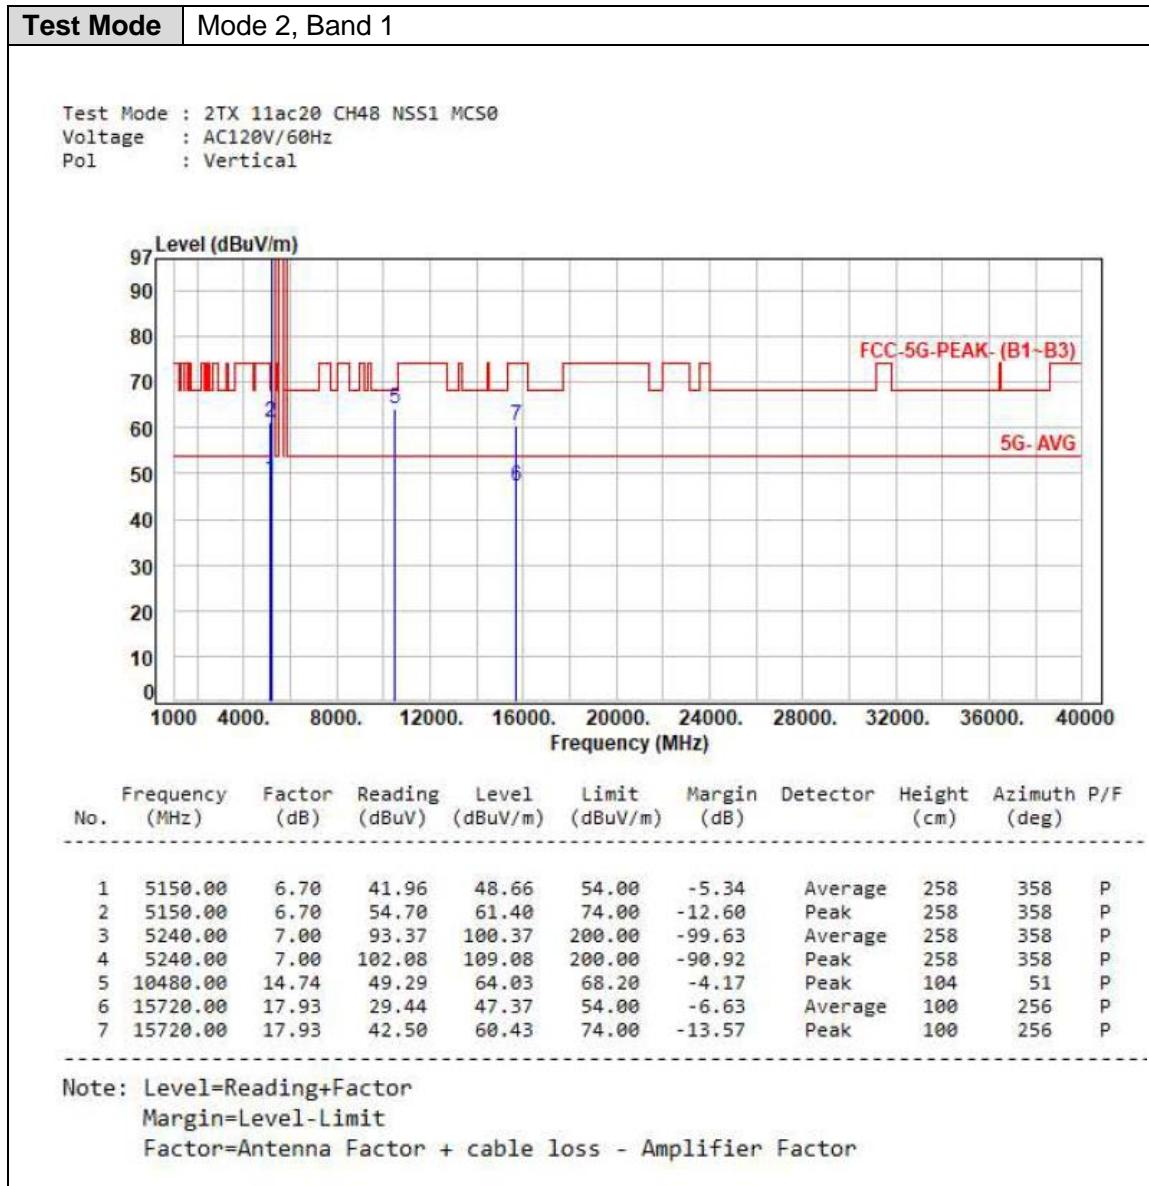


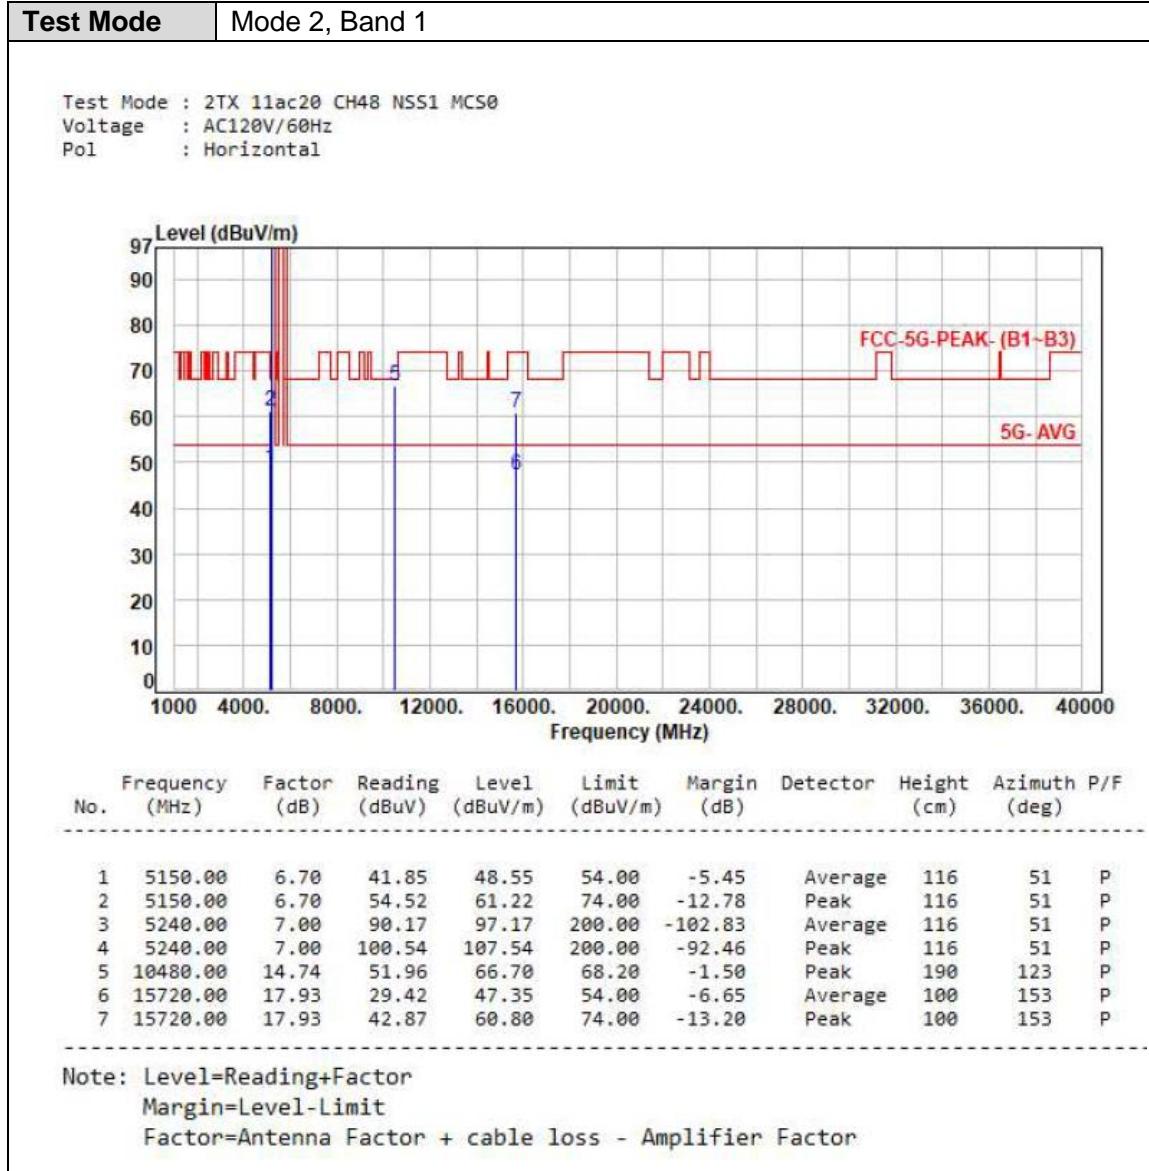


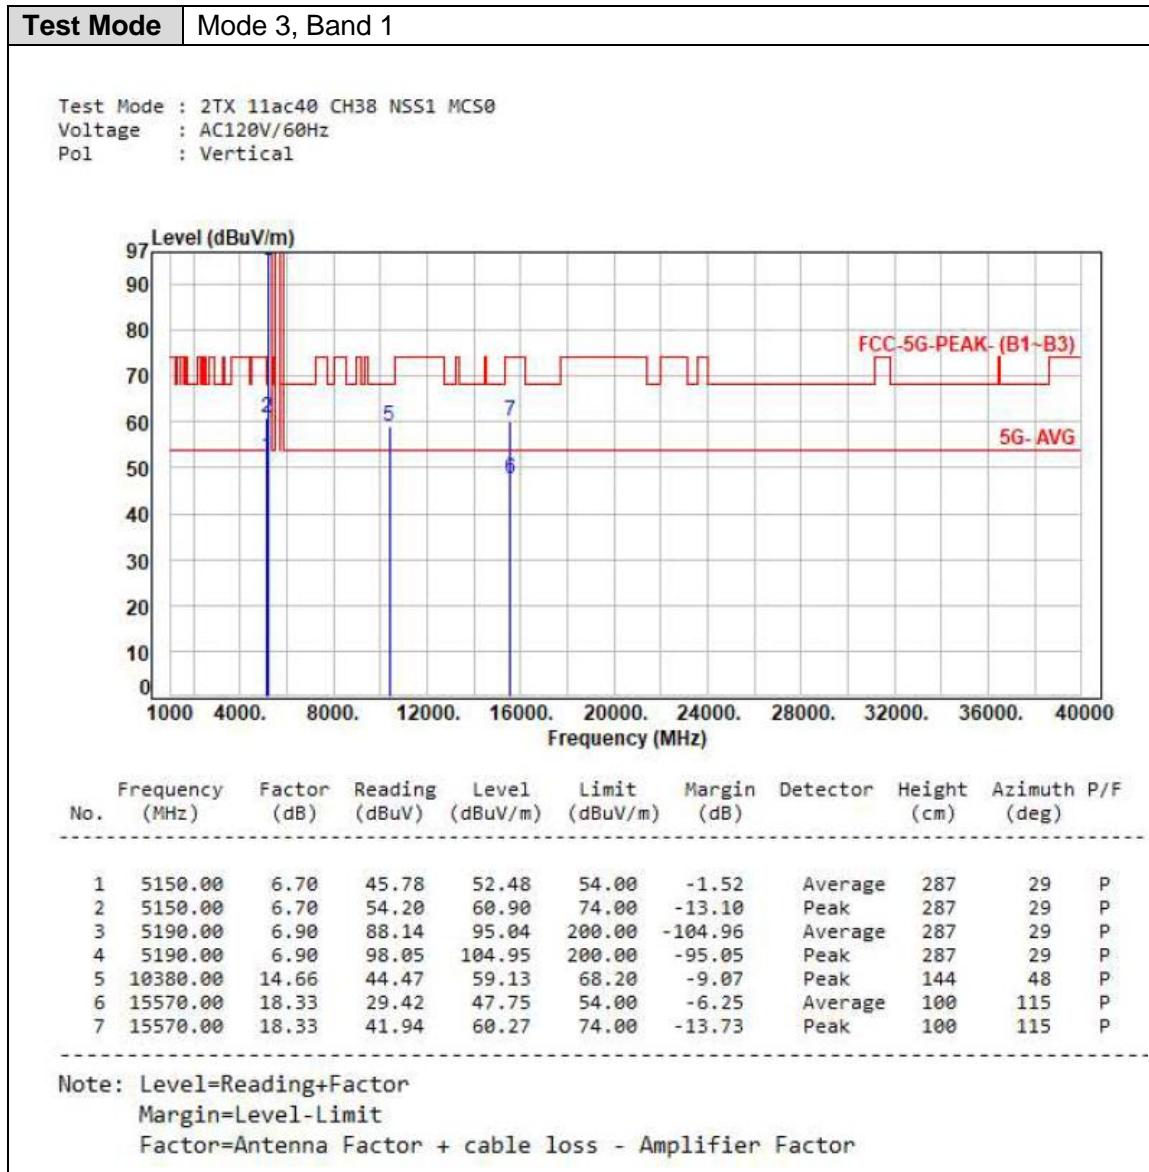


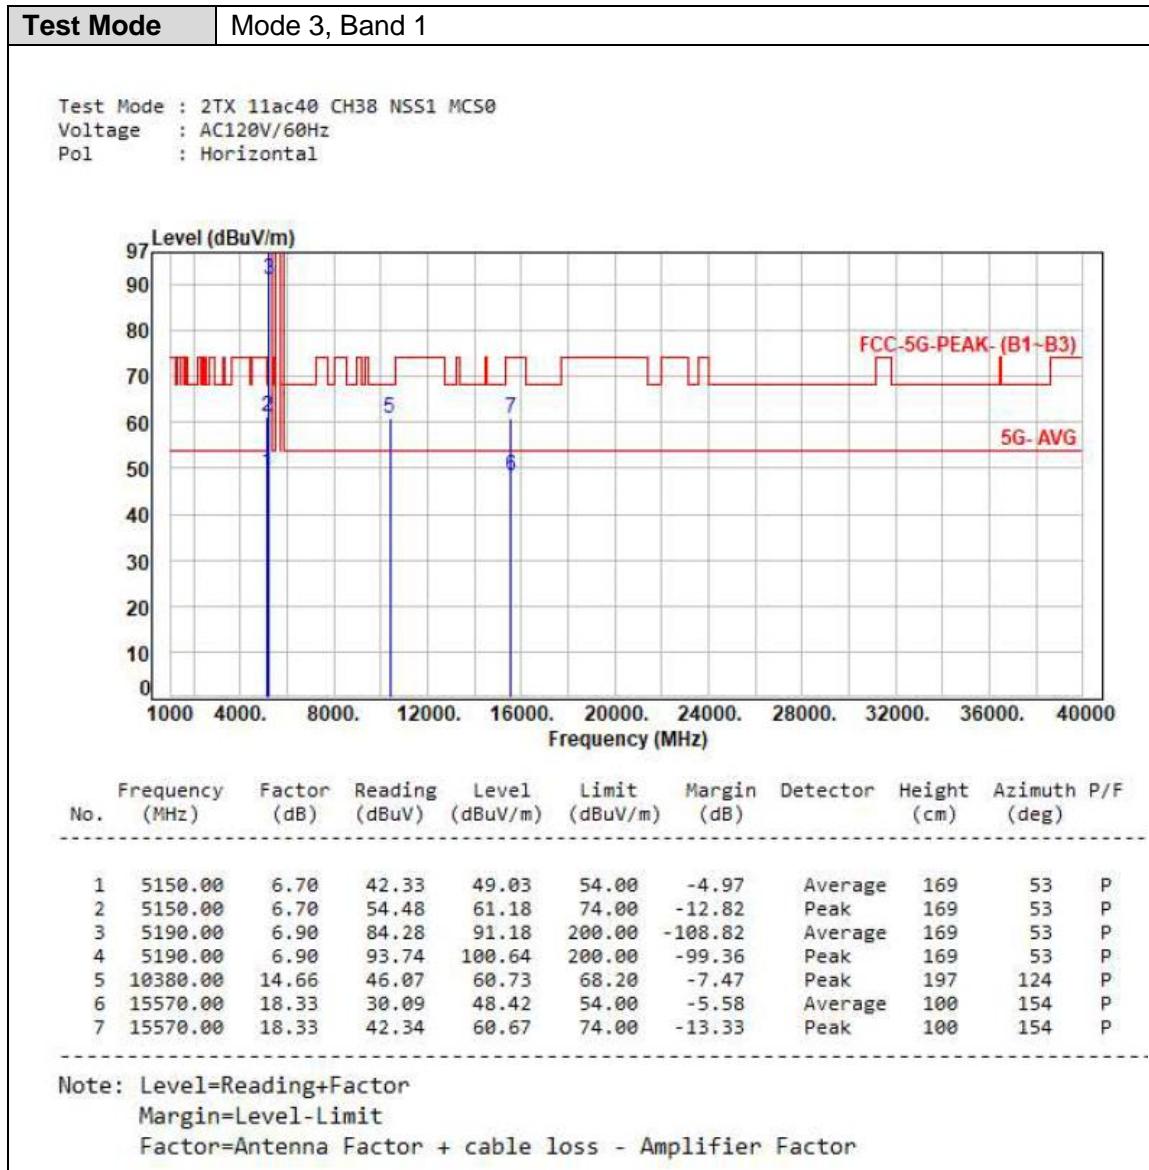


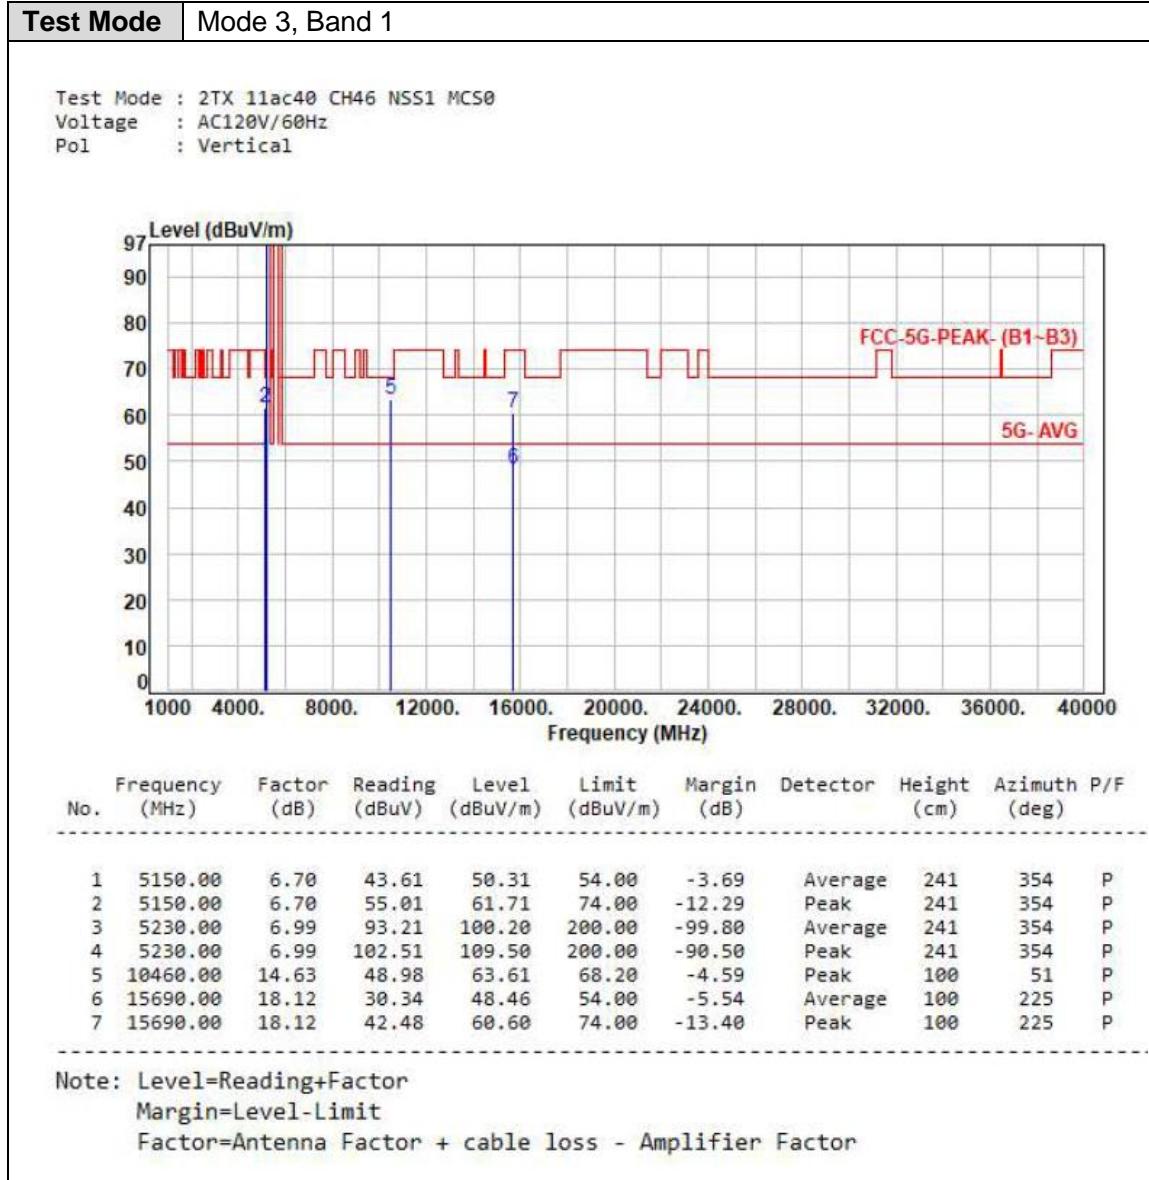


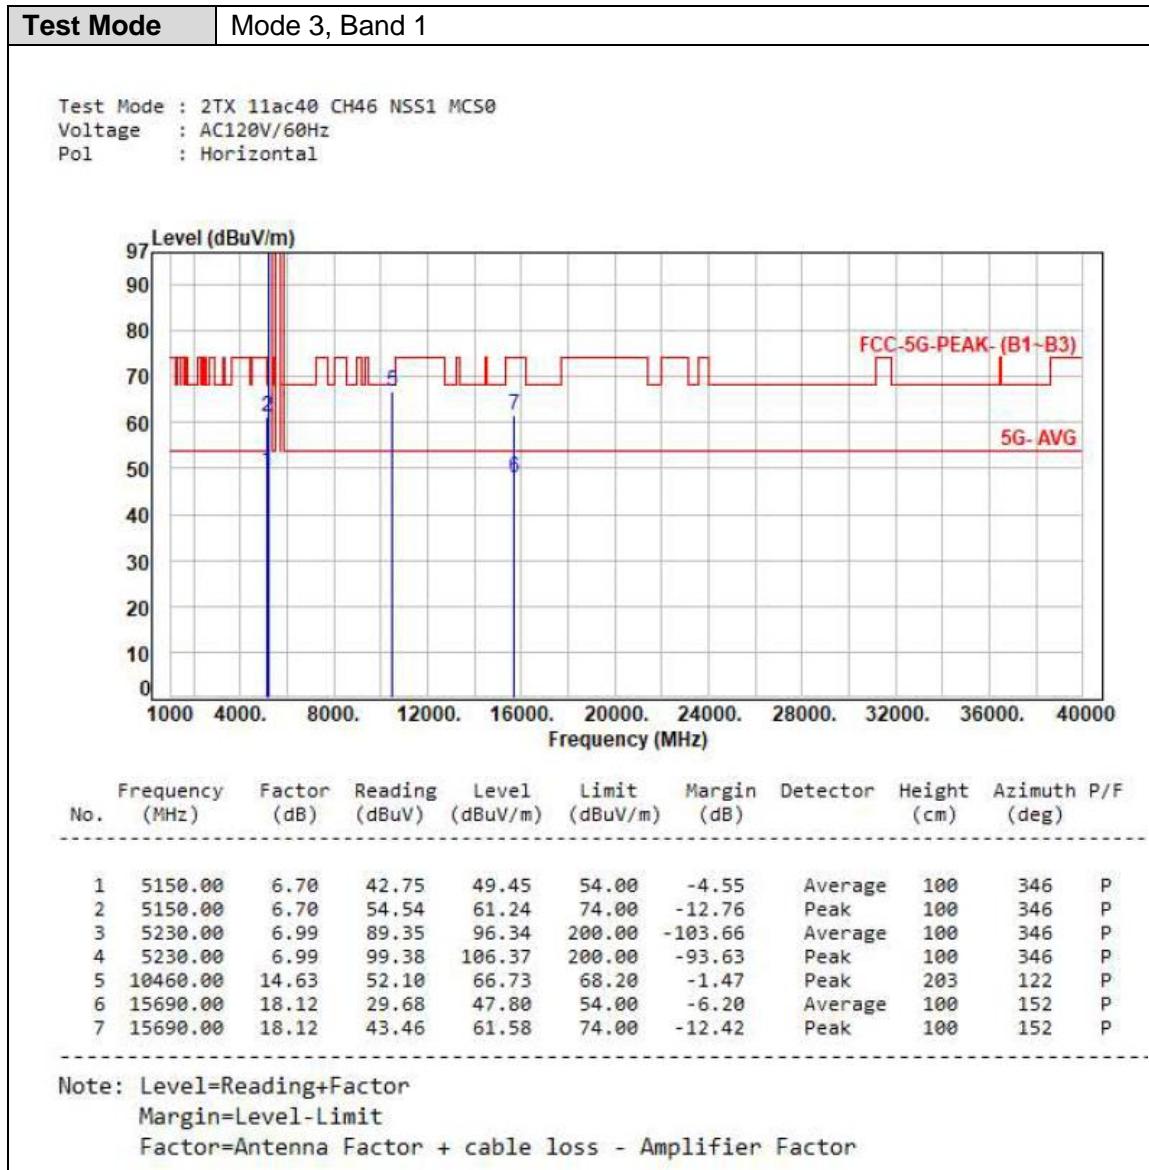


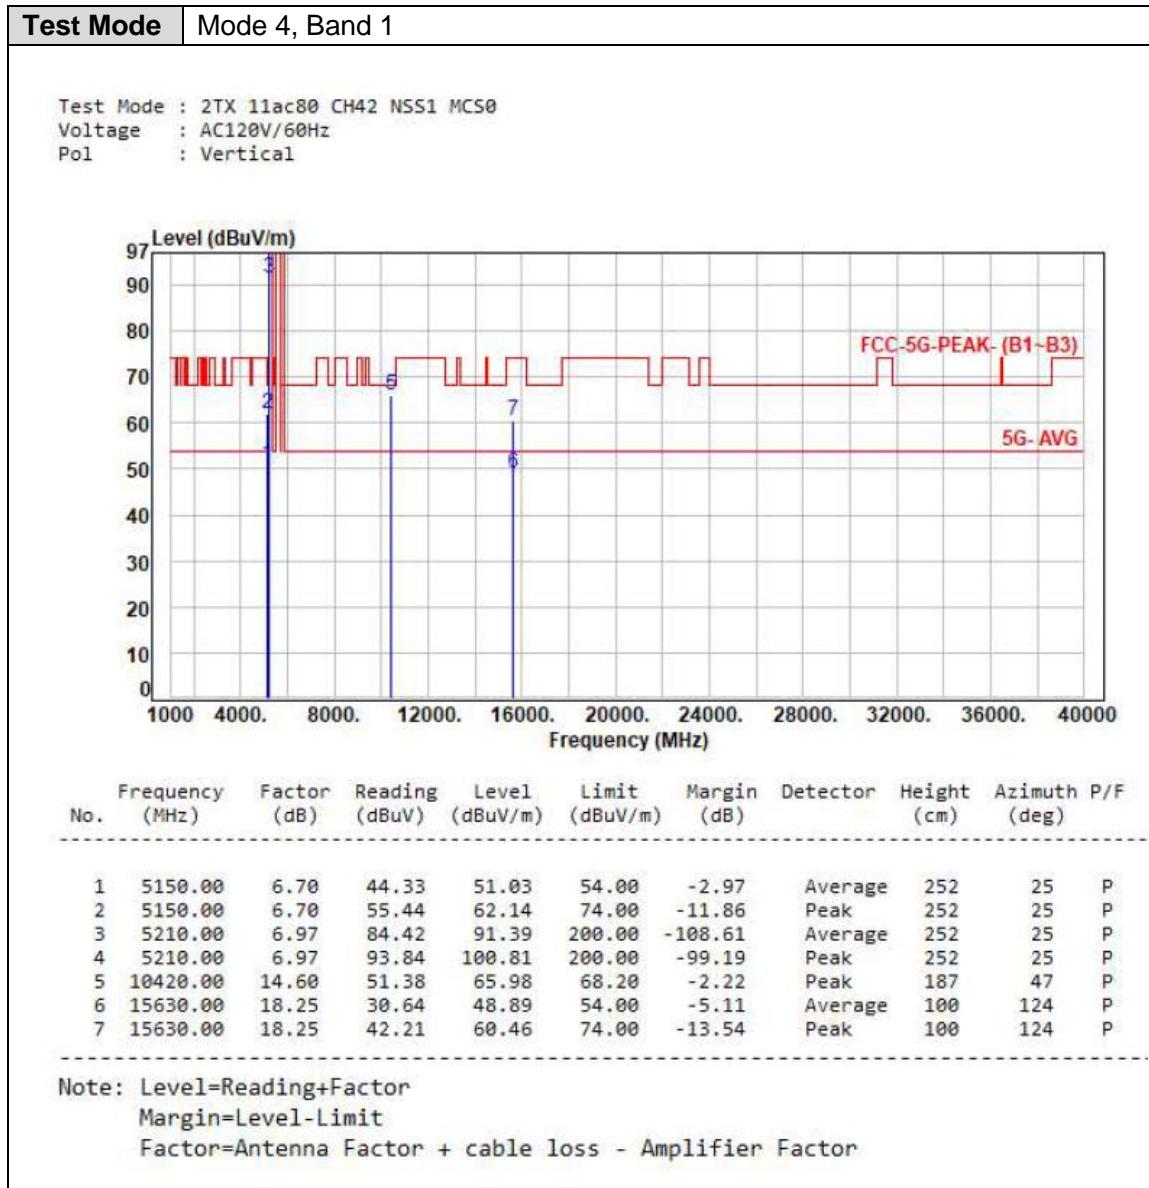


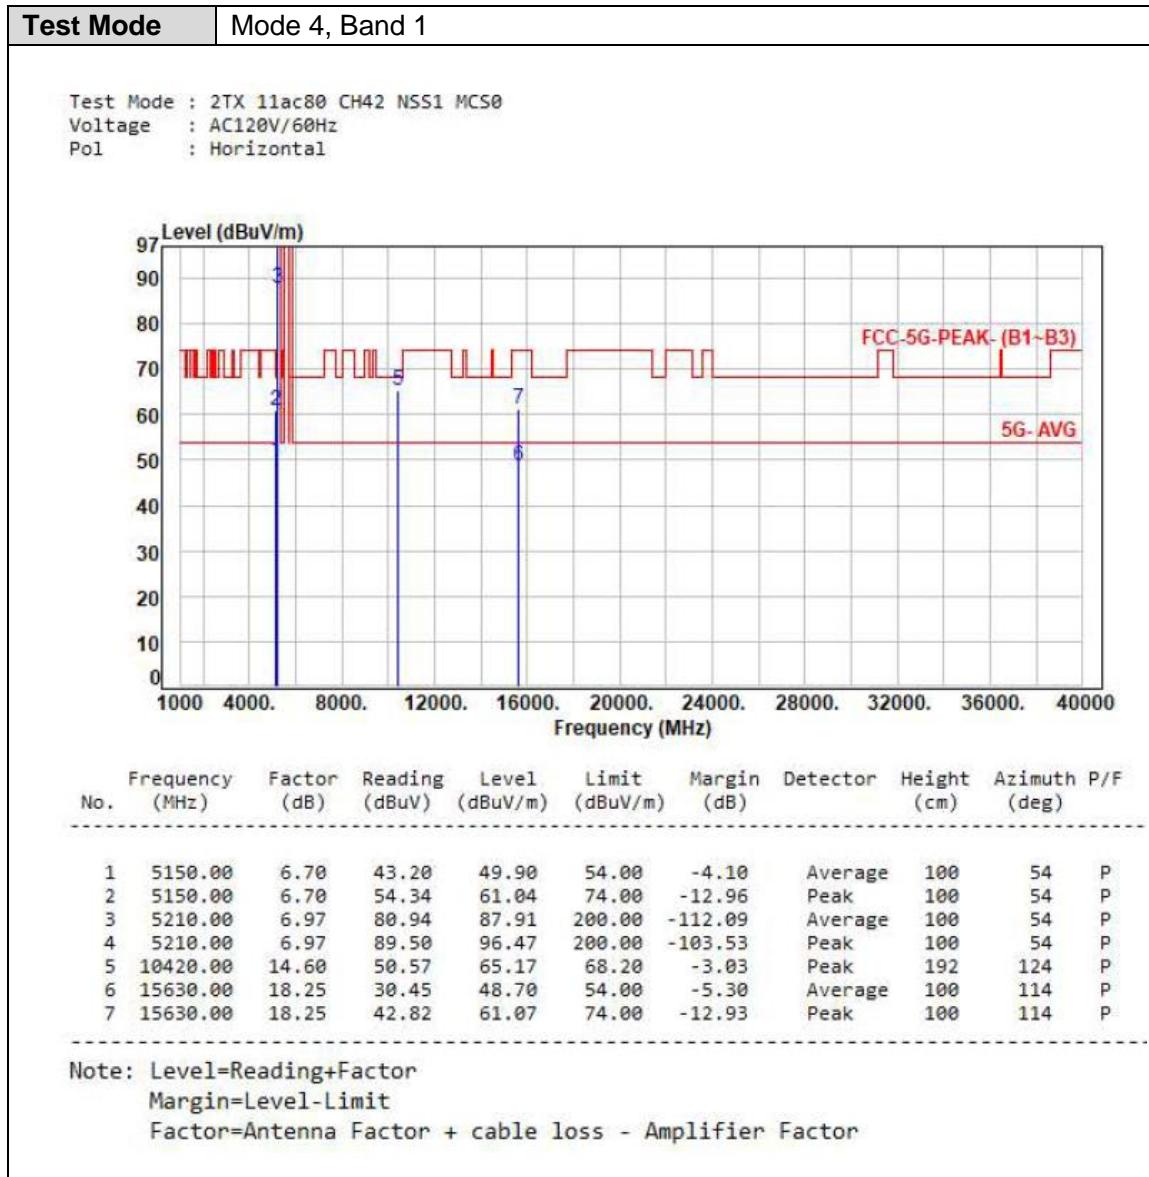

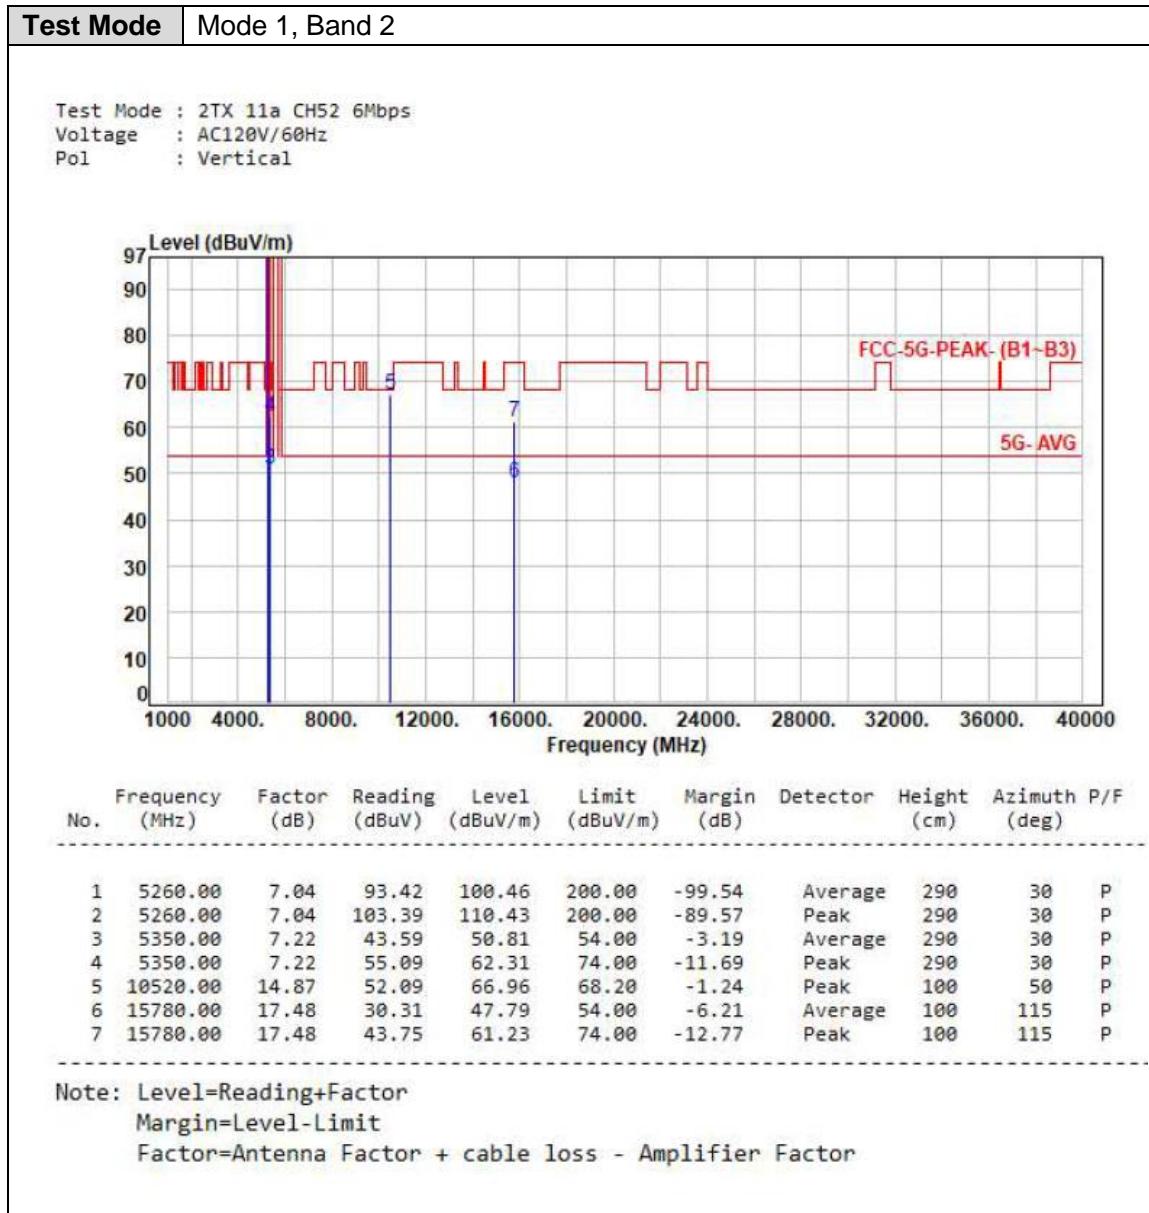

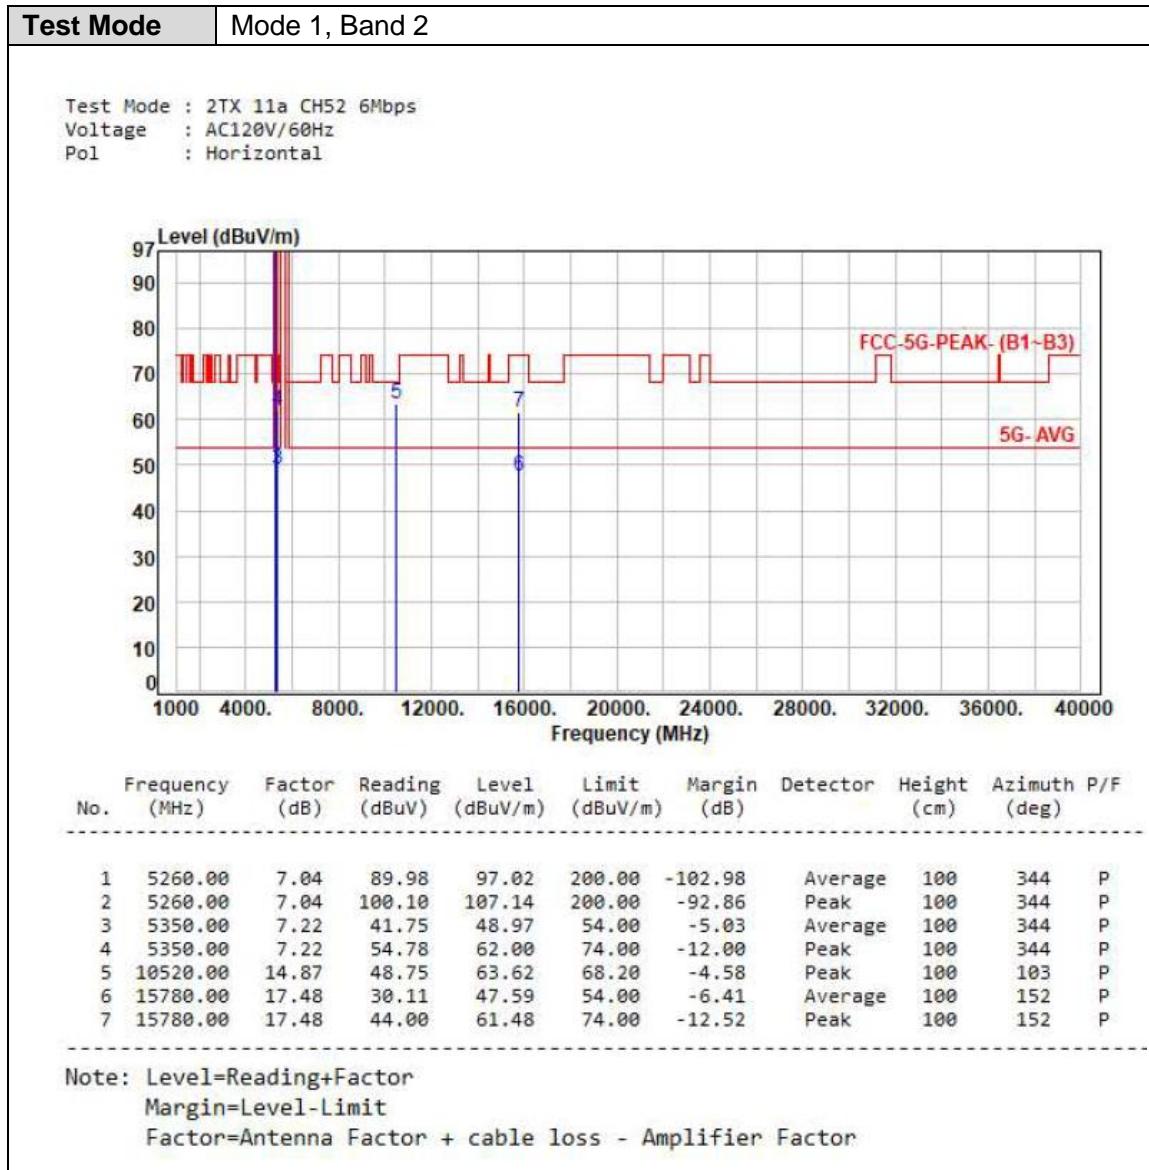


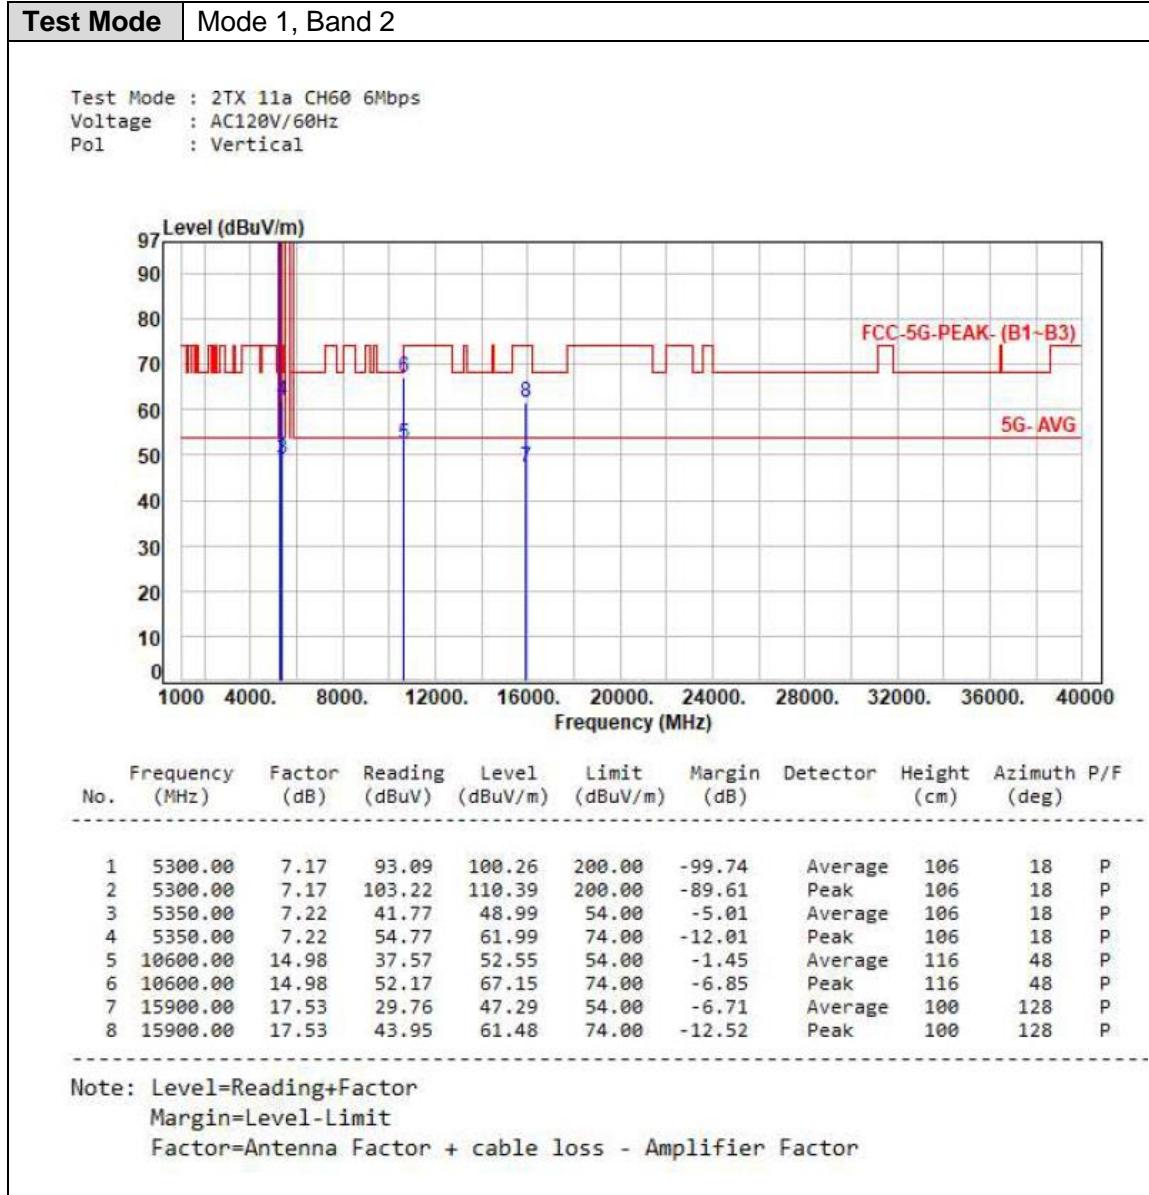

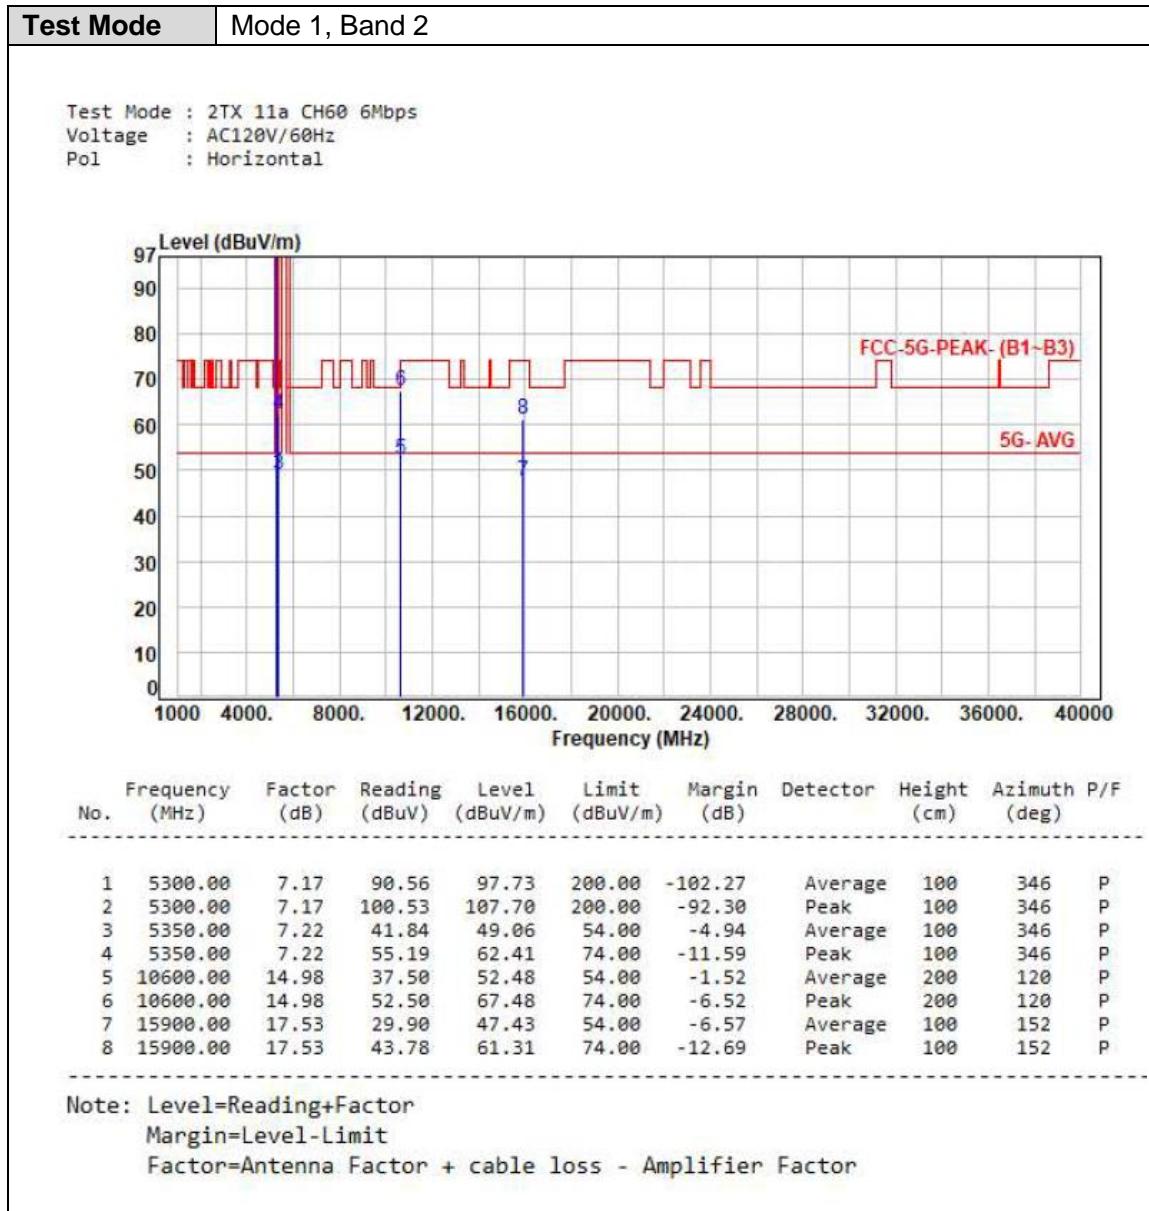


**Test Mode** | Mode 1, Band 2


Test Mode : 2TX 11a CH64 6Mbps  
Voltage : AC120V/60Hz  
Pol : Vertical

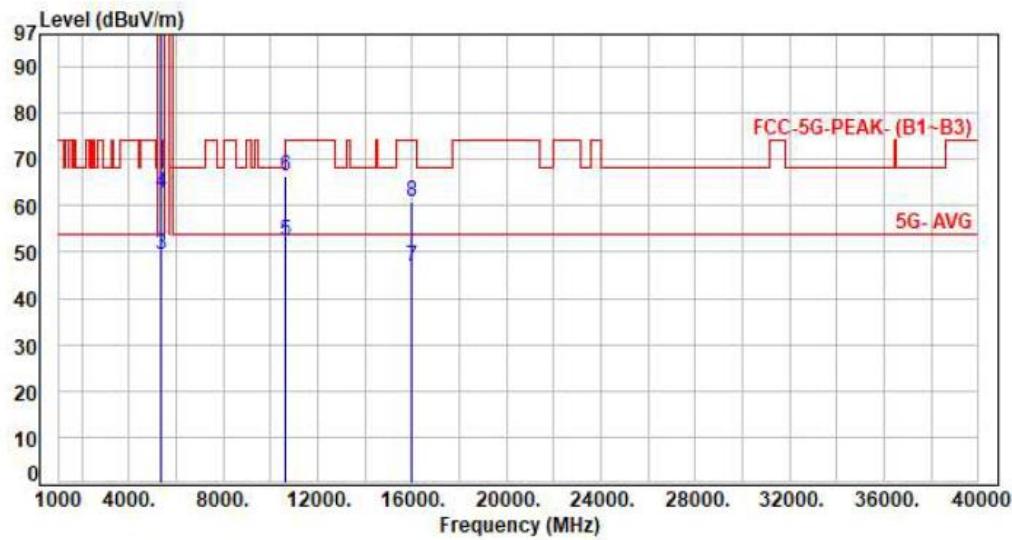



No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.19	92.54	99.73	200.00	-100.27	Average	100	23	P
2	5320.00	7.19	103.60	110.79	200.00	-89.21	Peak	100	23	P
3	5350.00	7.22	42.35	49.57	54.00	-4.43	Average	100	23	P
4	5350.00	7.22	55.51	62.73	74.00	-11.27	Peak	100	23	P
5	10640.00	15.10	37.40	52.50	54.00	-1.50	Average	124	47	P
6	10640.00	15.10	51.42	66.52	74.00	-7.48	Peak	124	47	P
7	15960.00	17.56	29.39	46.95	54.00	-7.05	Average	100	125	P
8	15960.00	17.56	43.19	60.75	74.00	-13.25	Peak	100	125	P


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

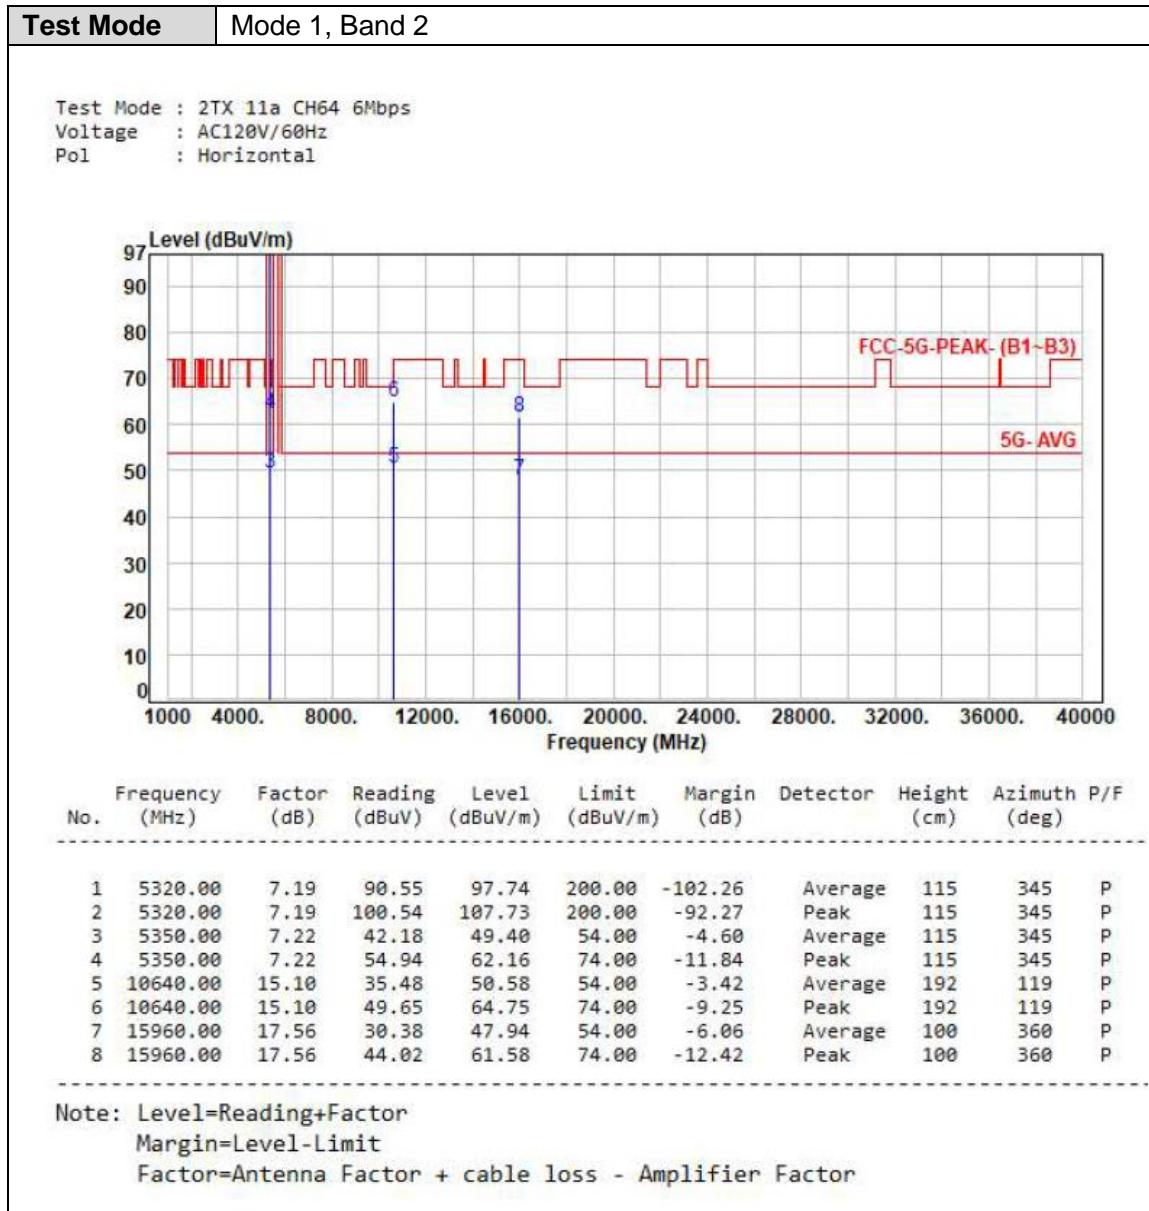


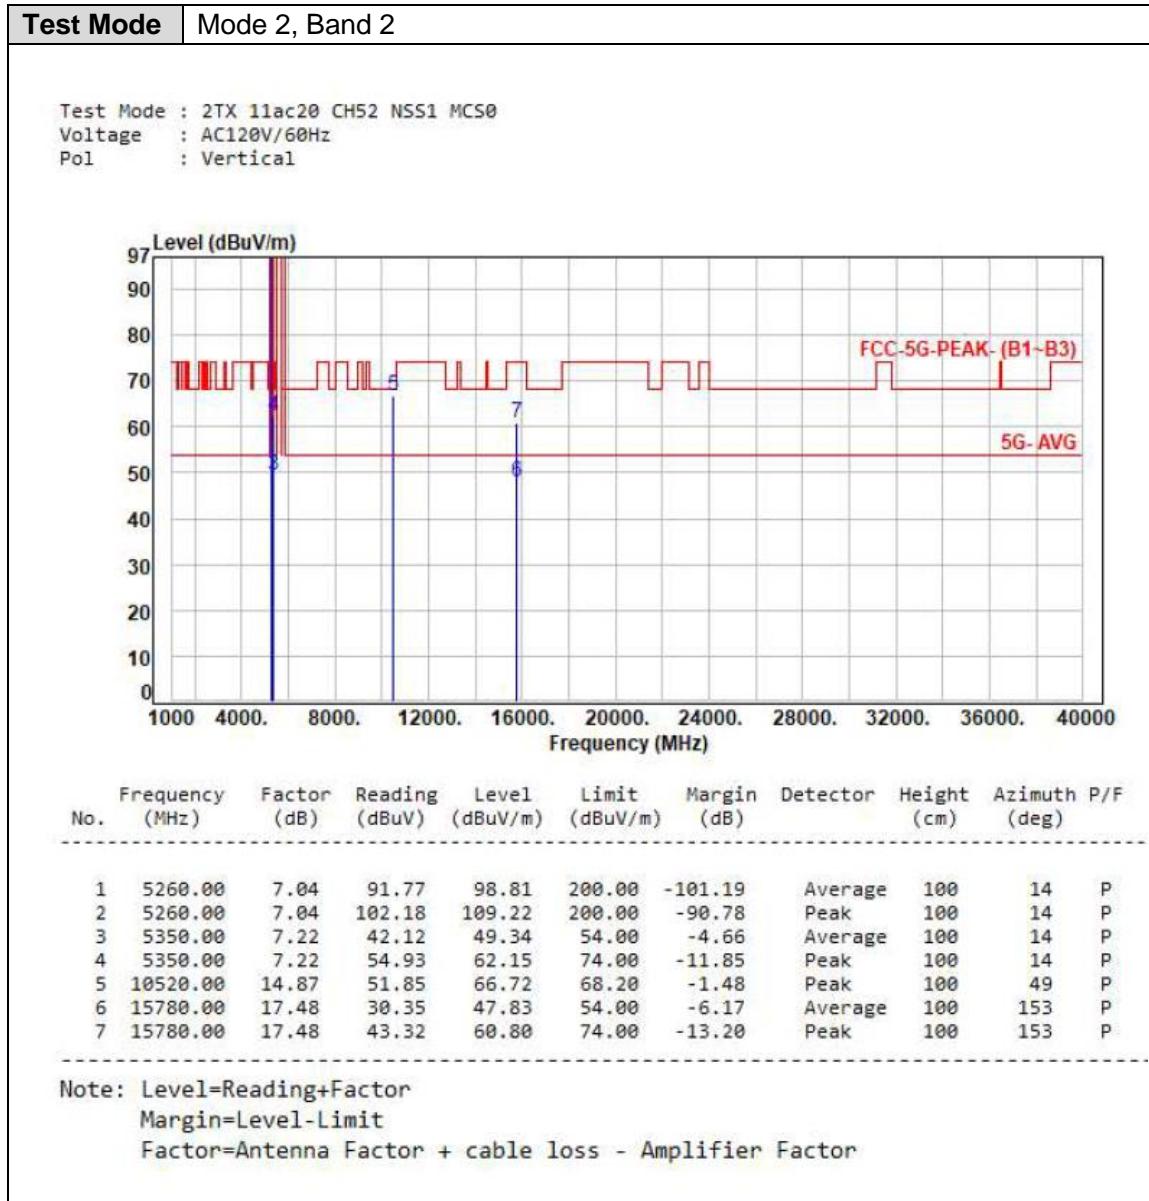


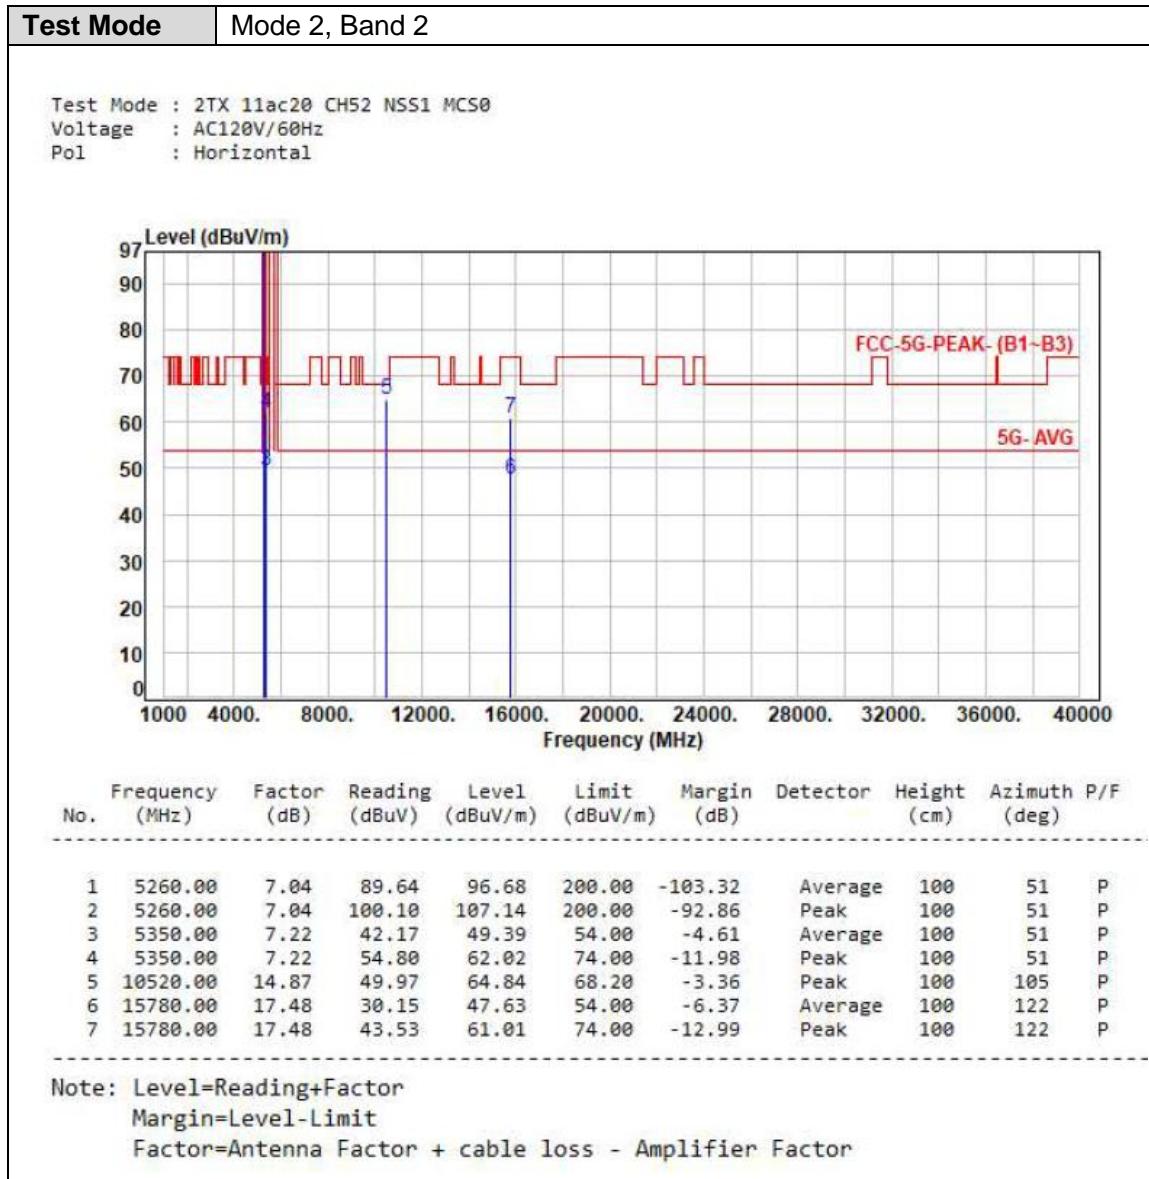


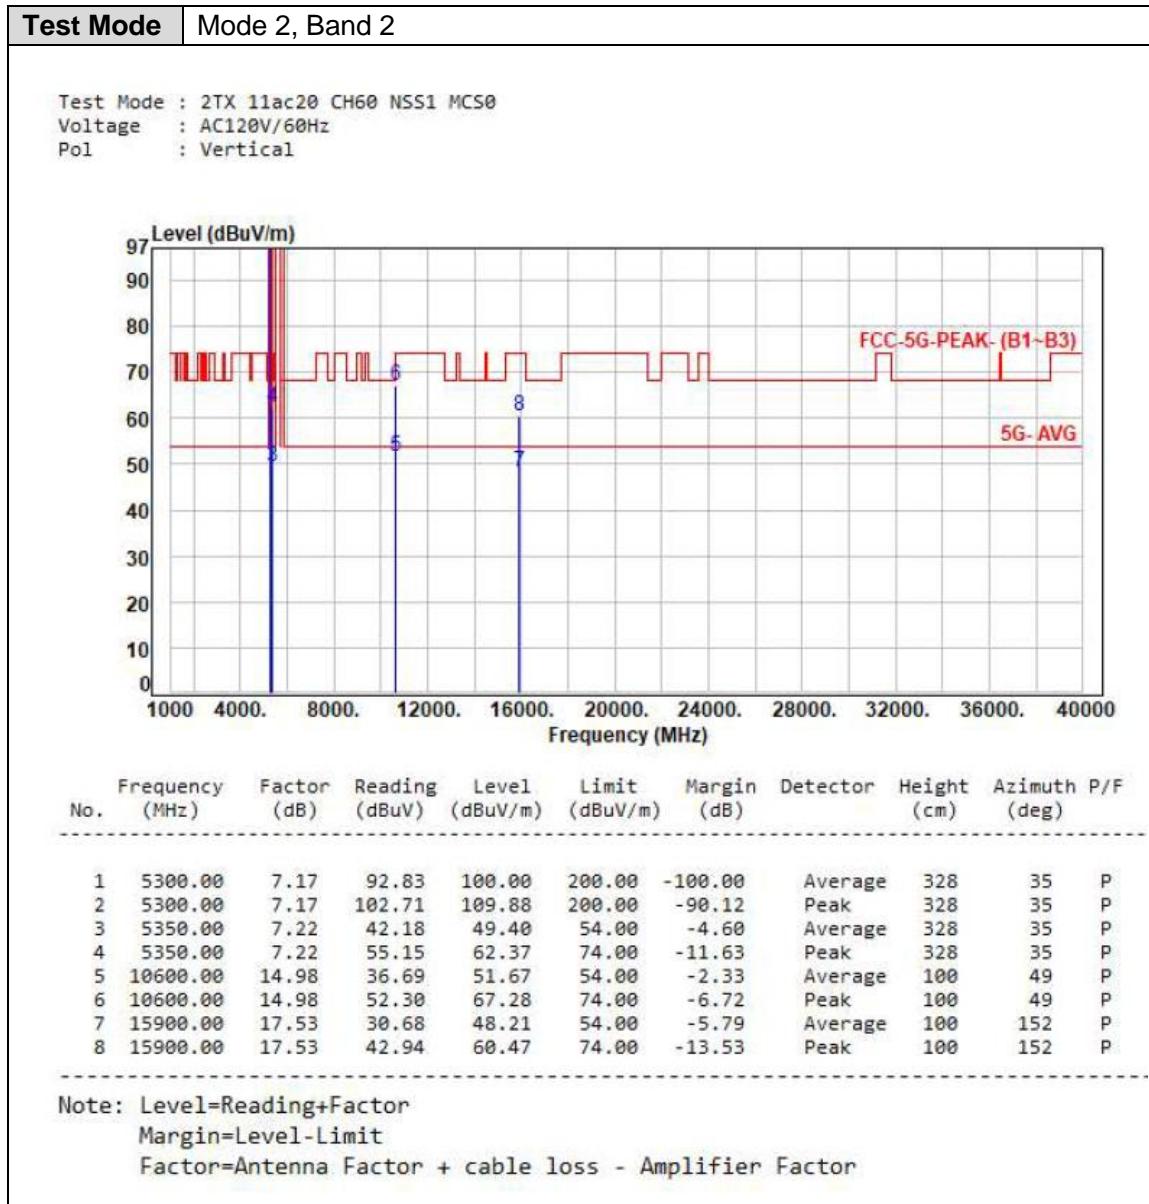


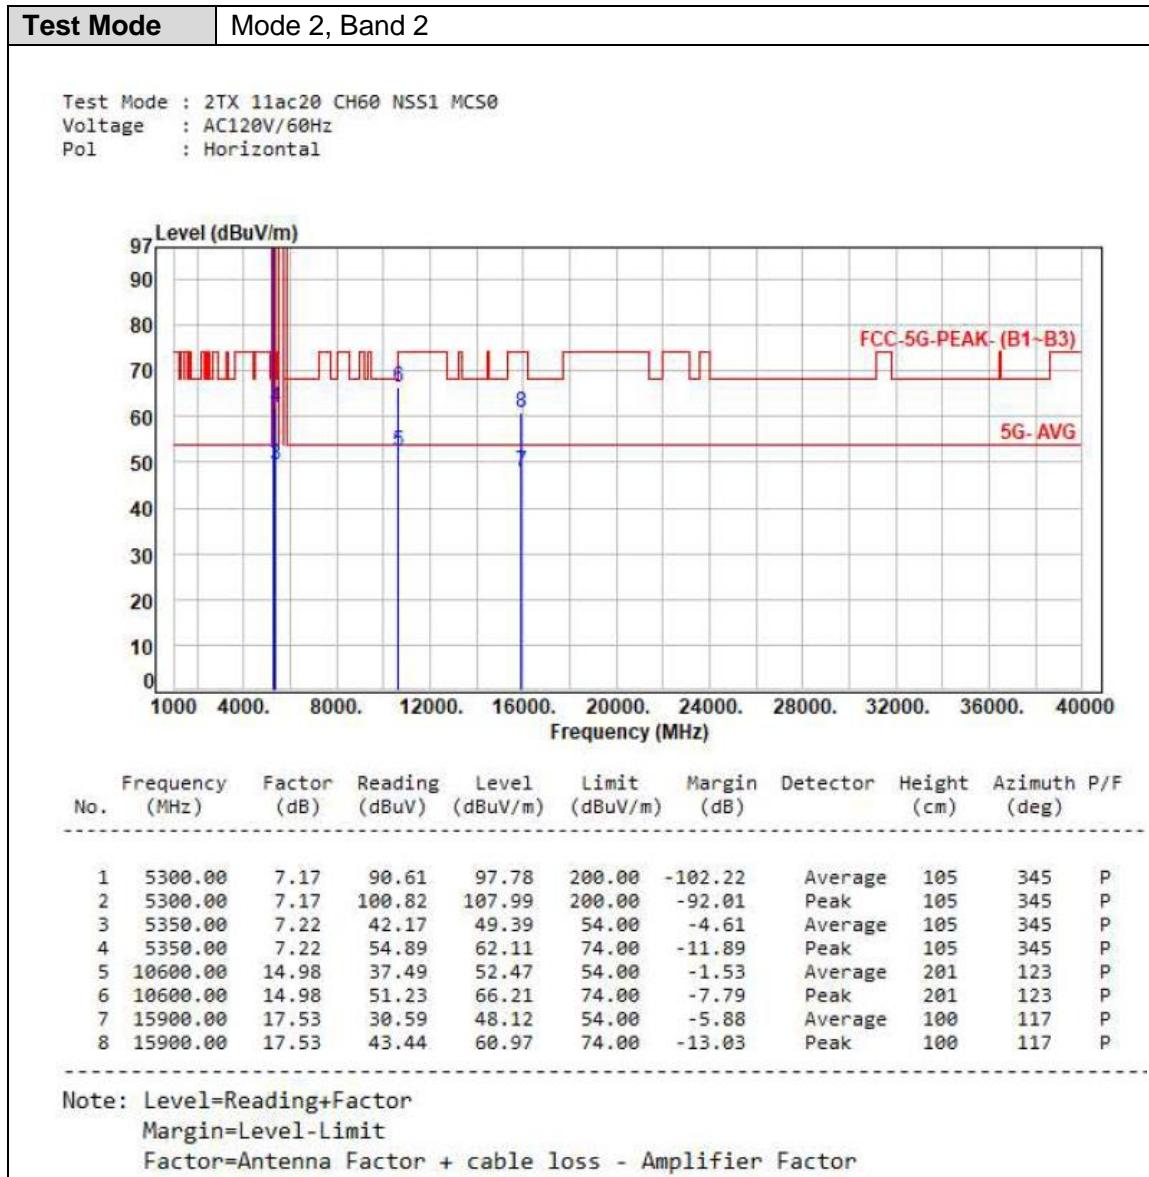


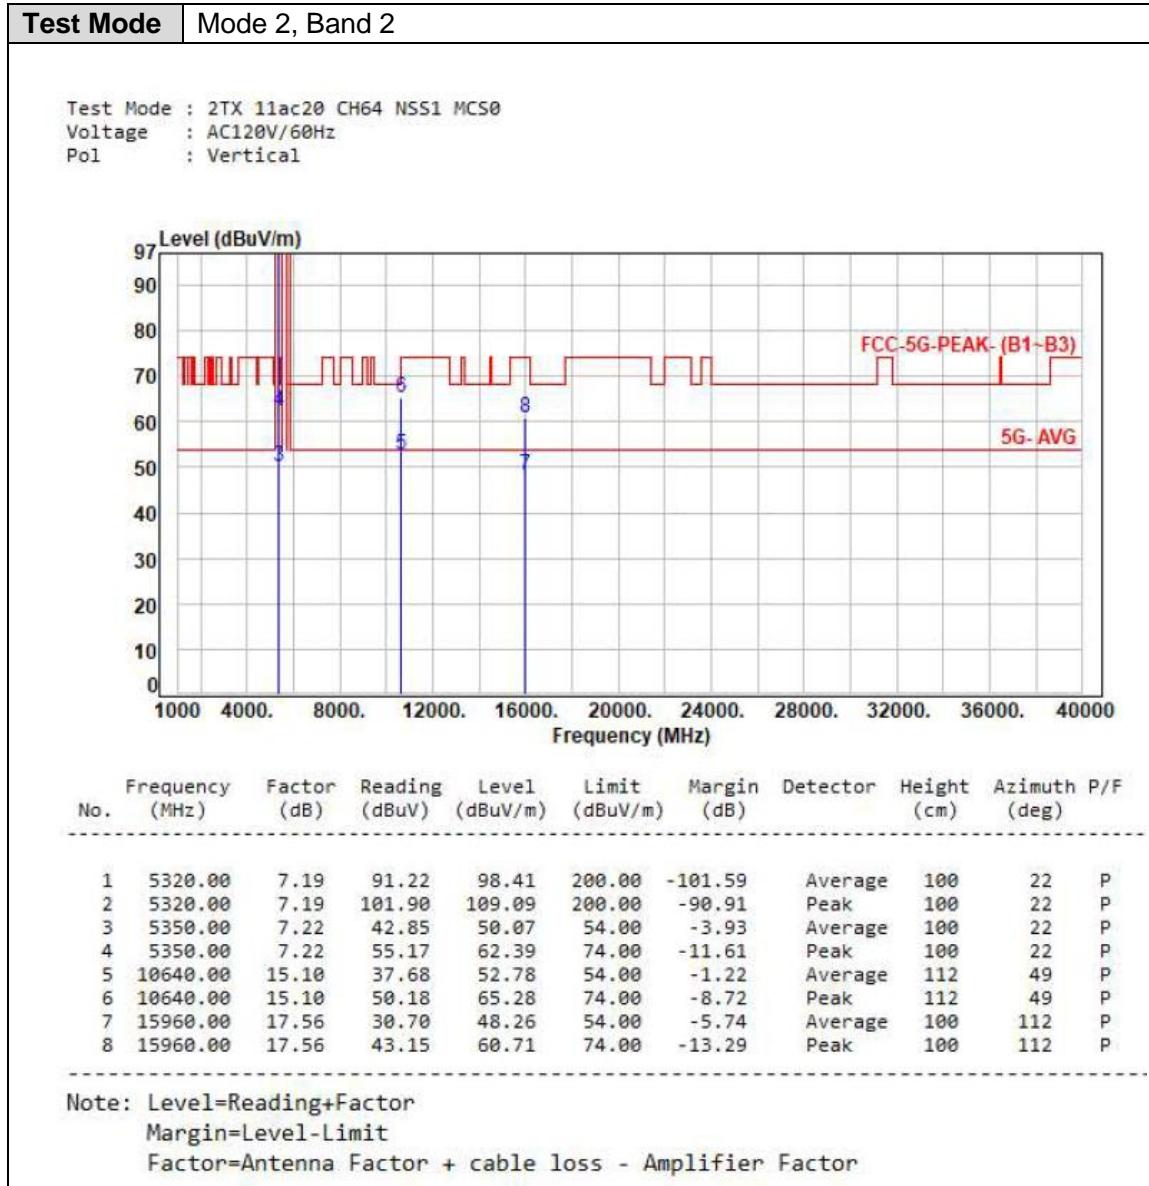


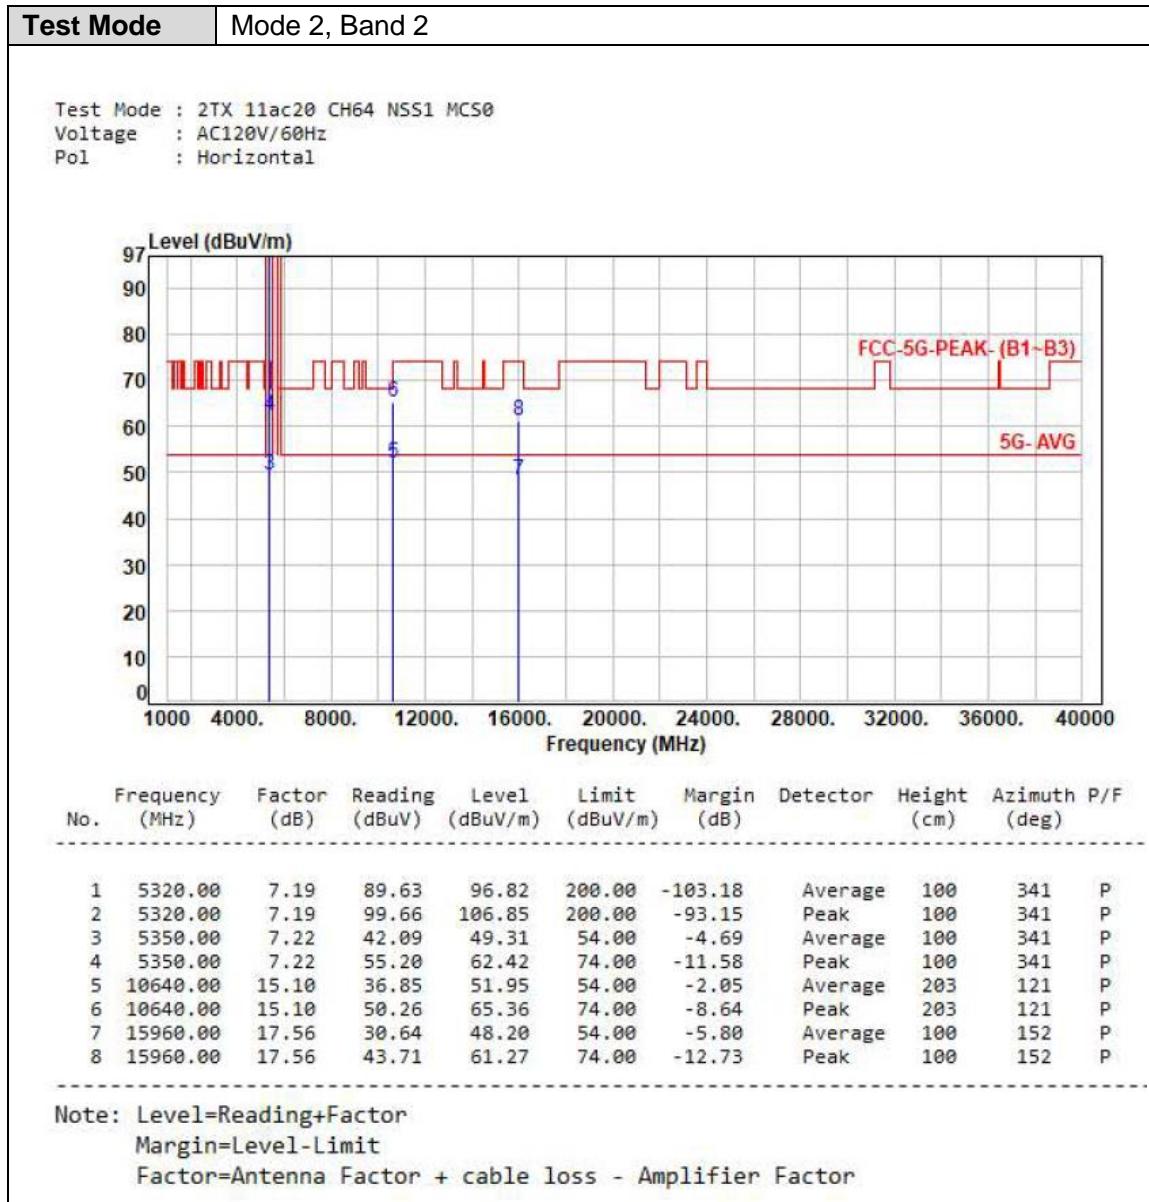


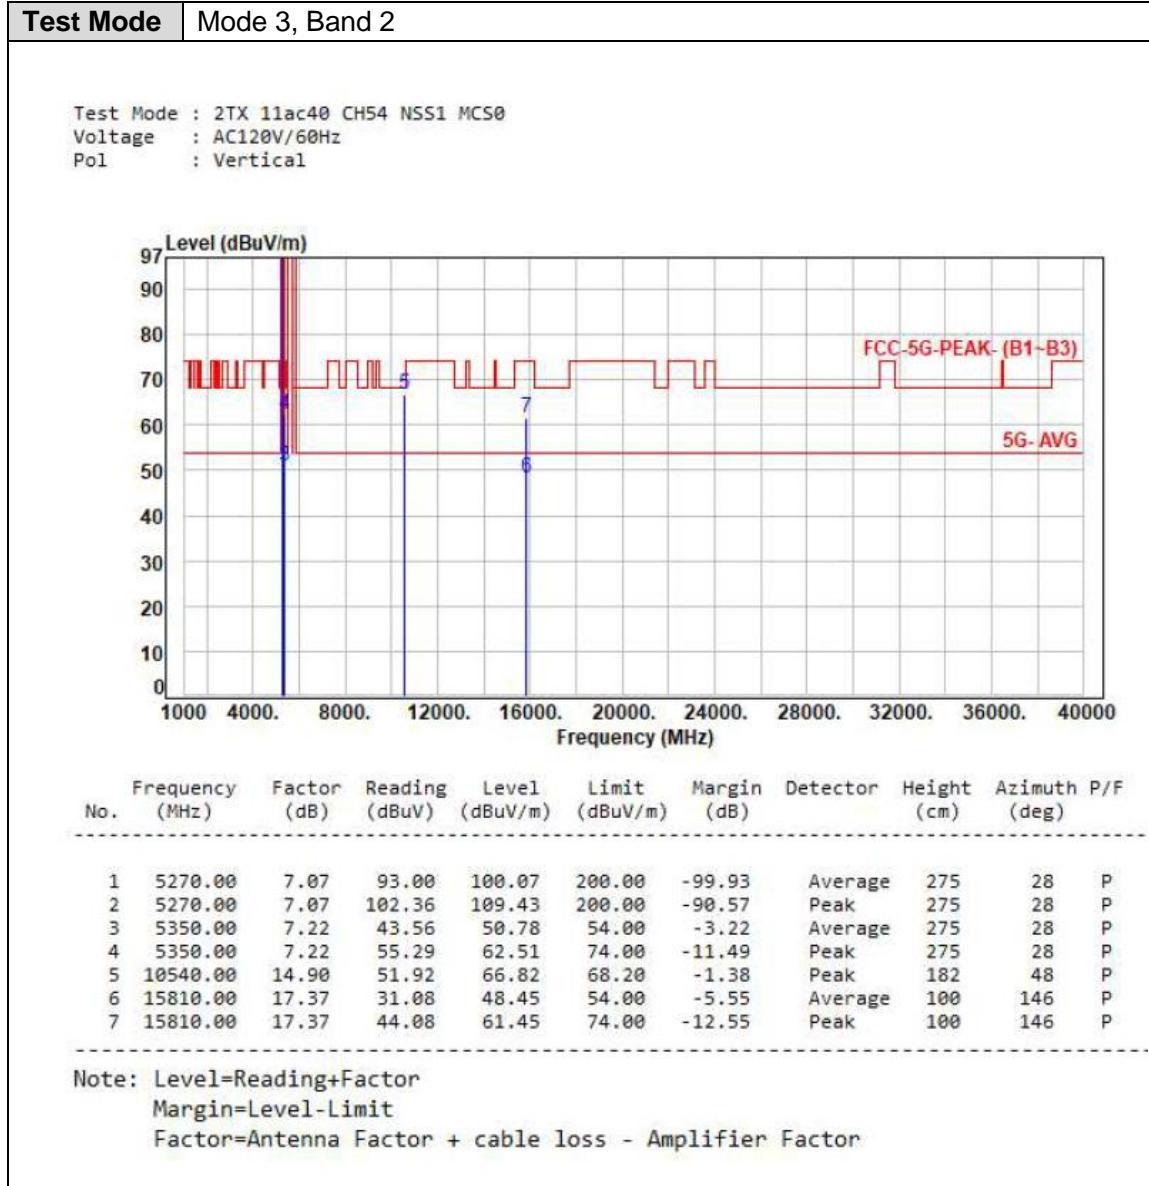


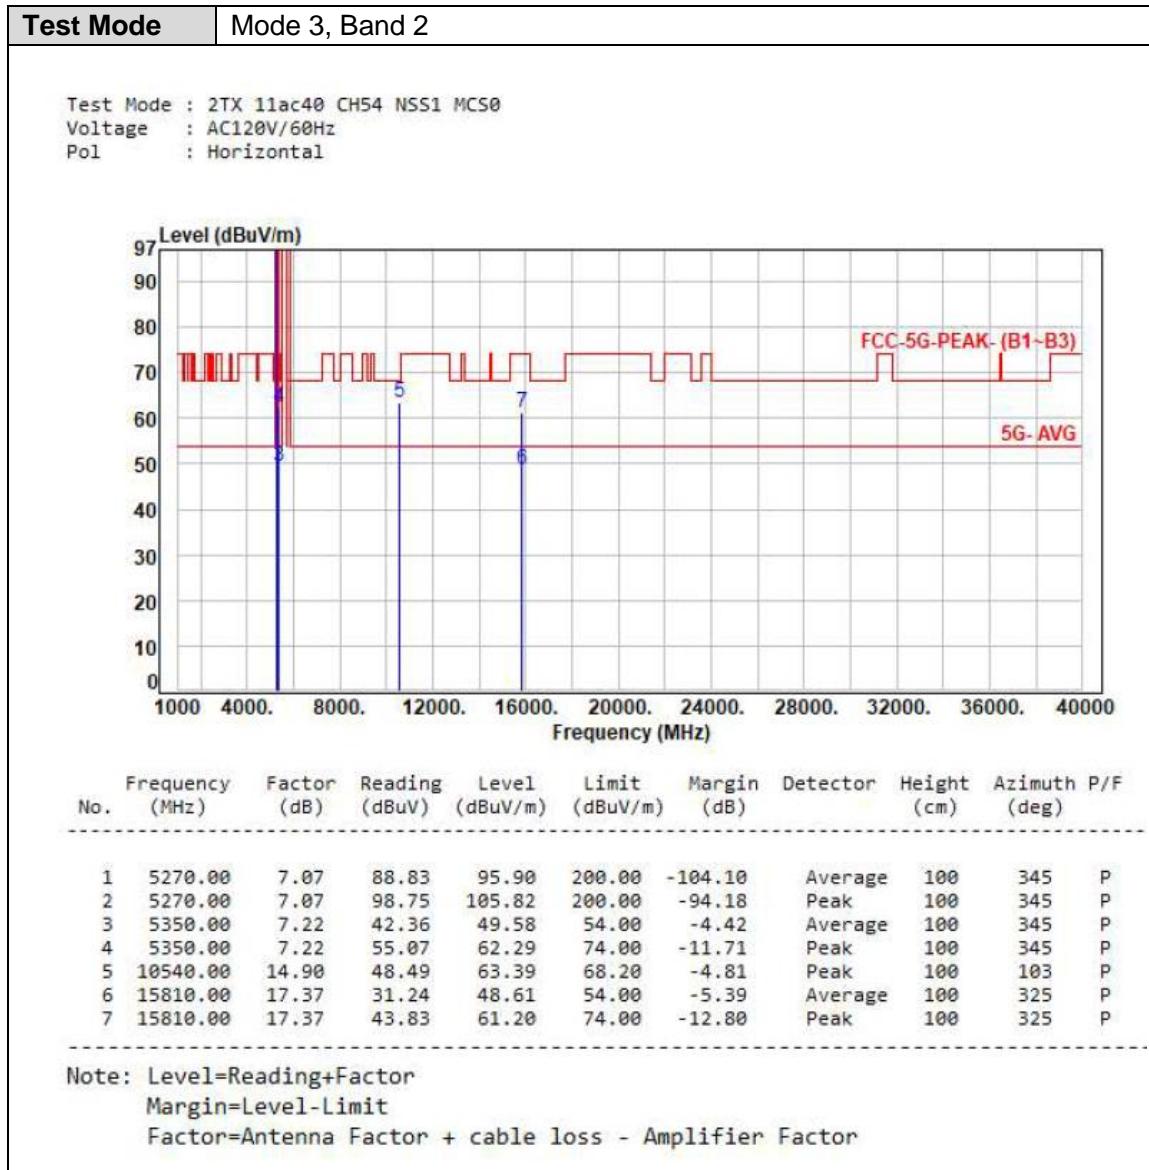


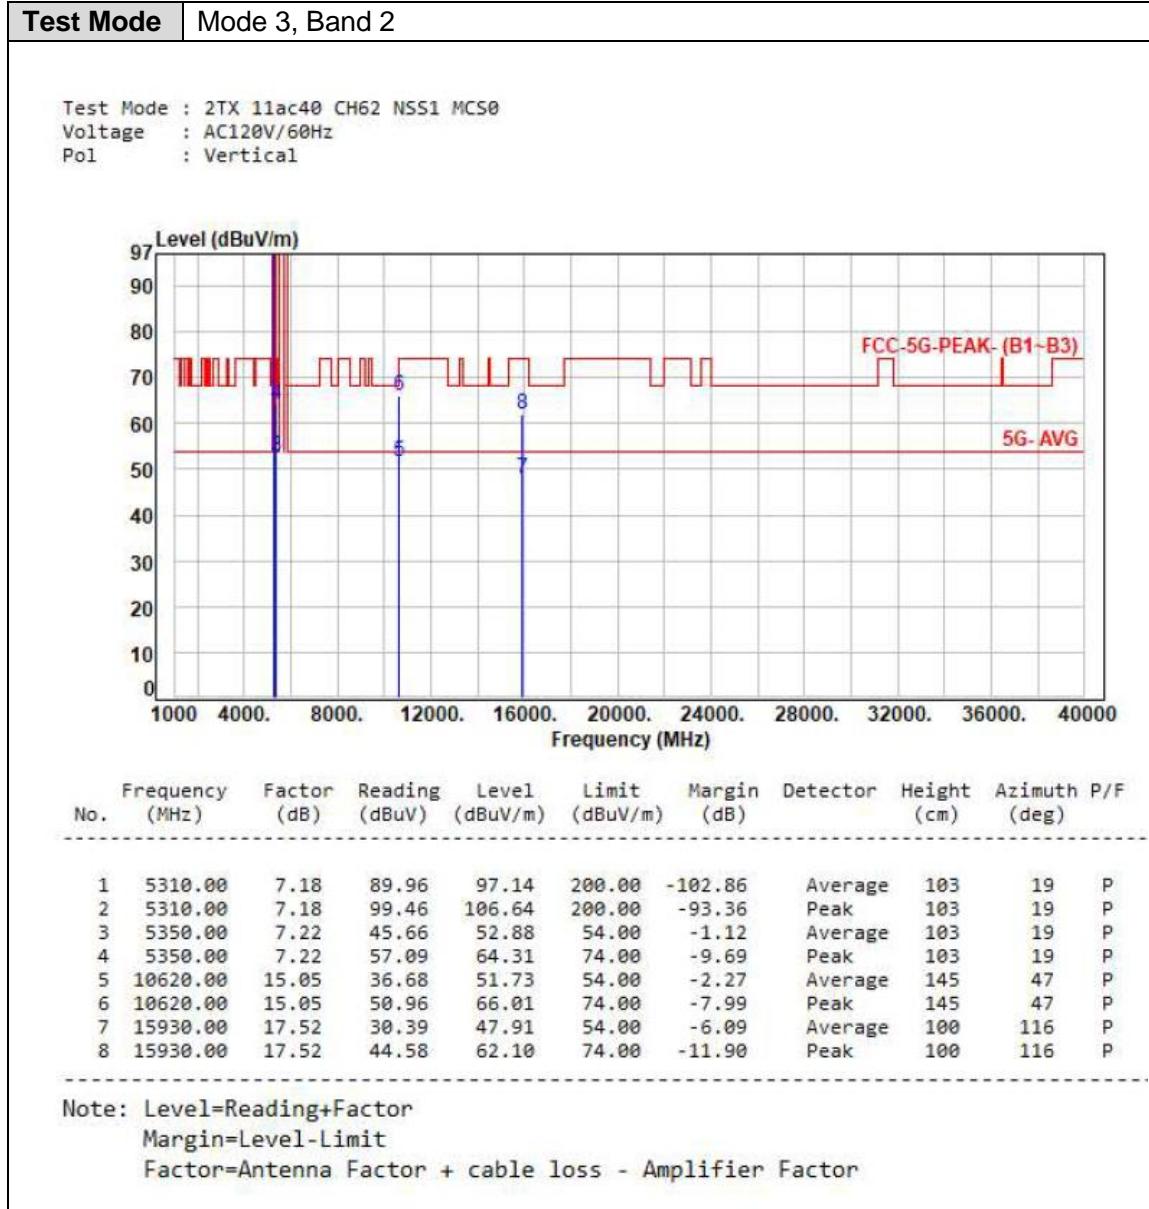


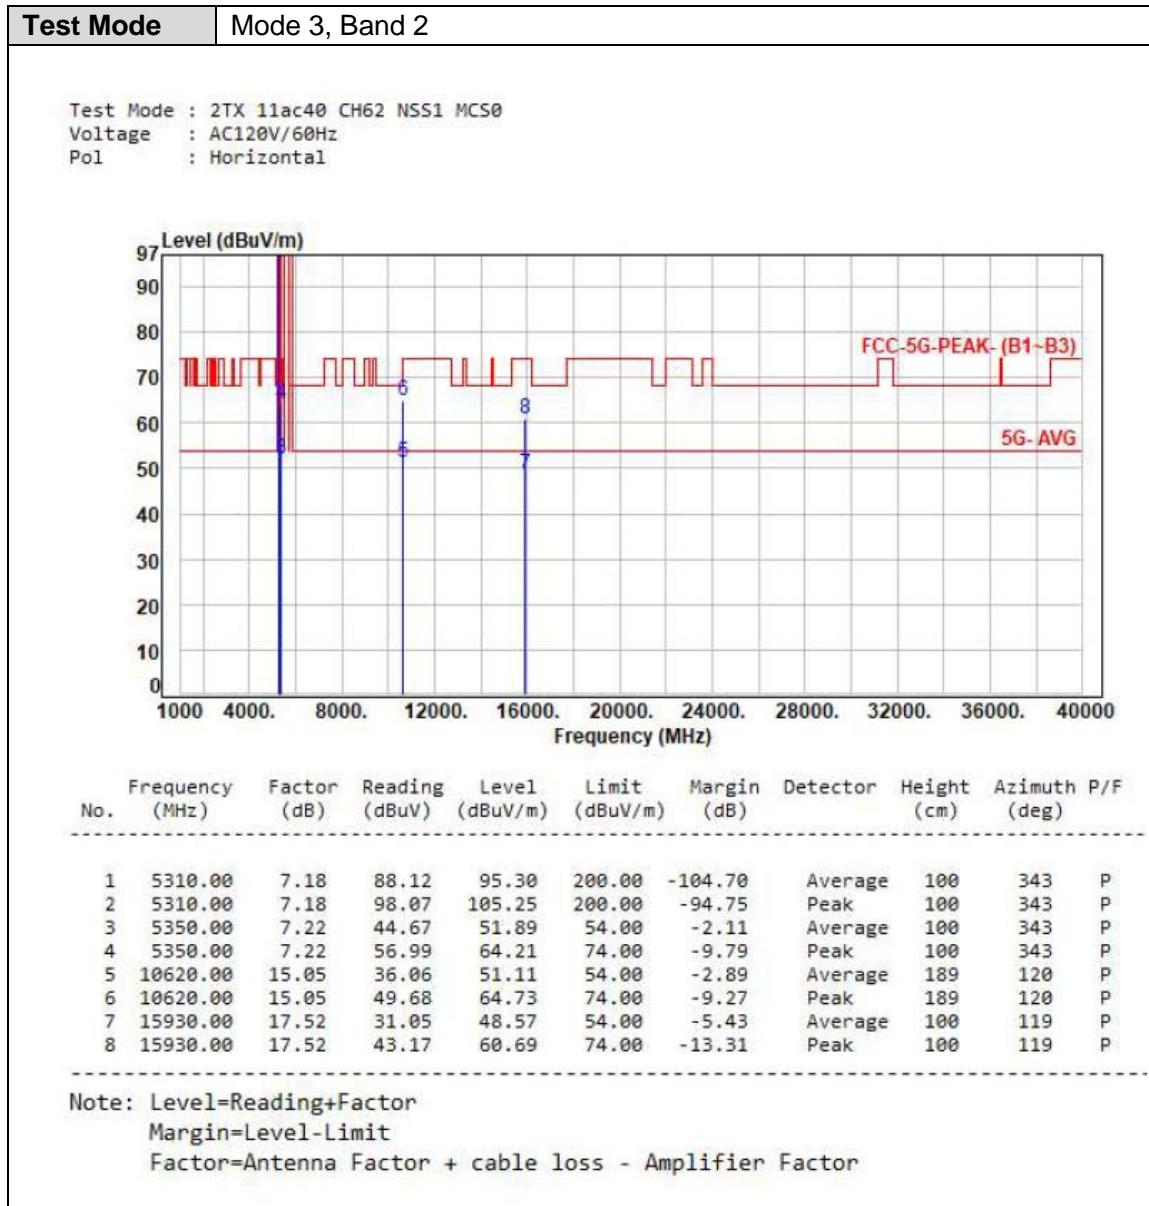

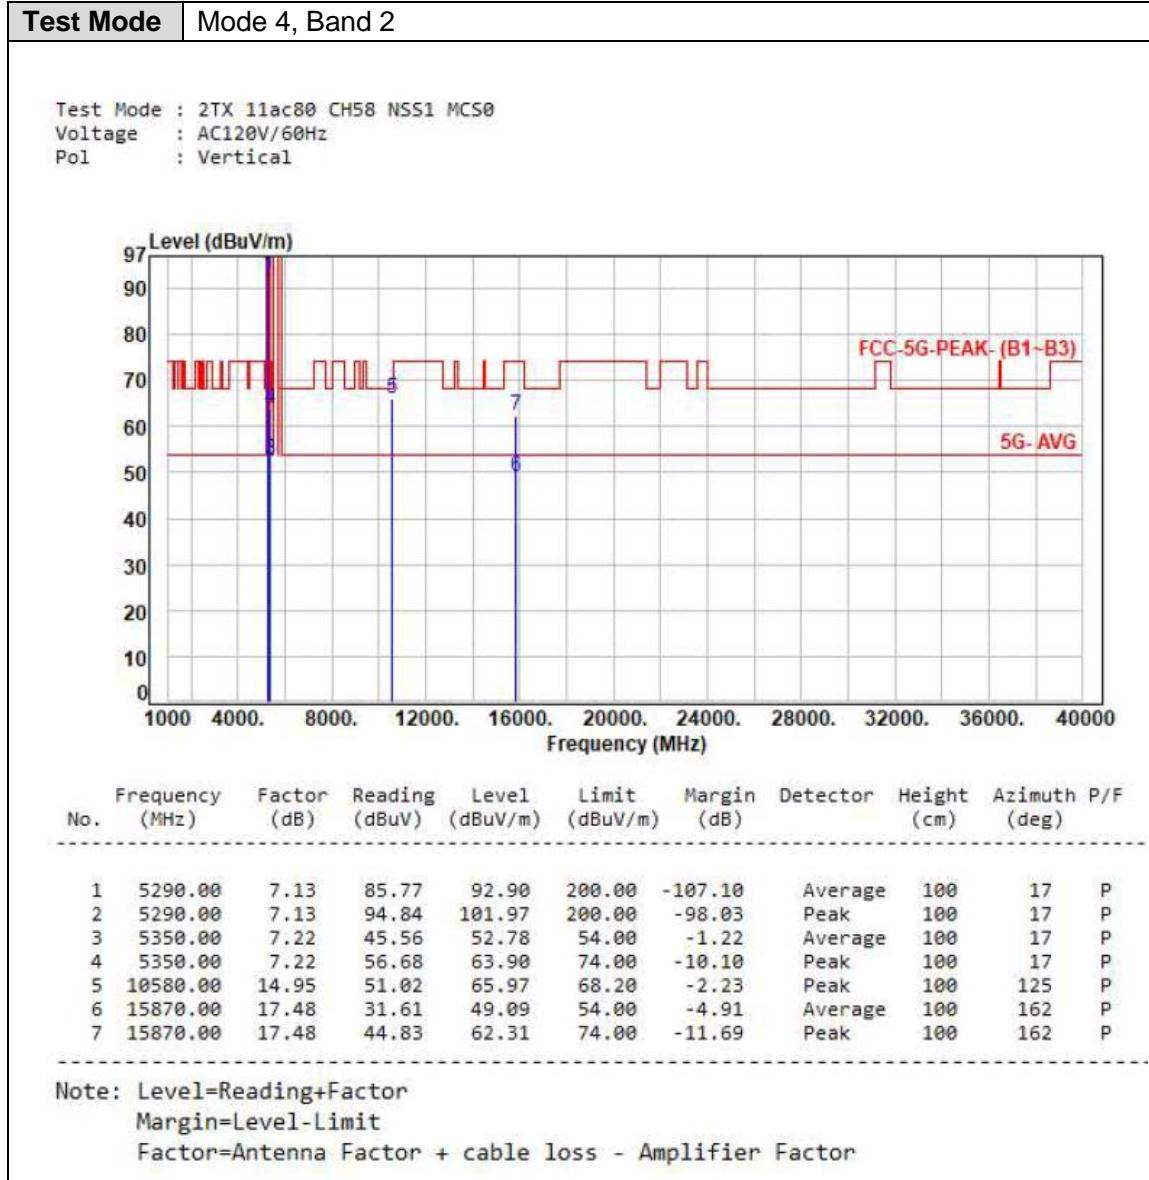

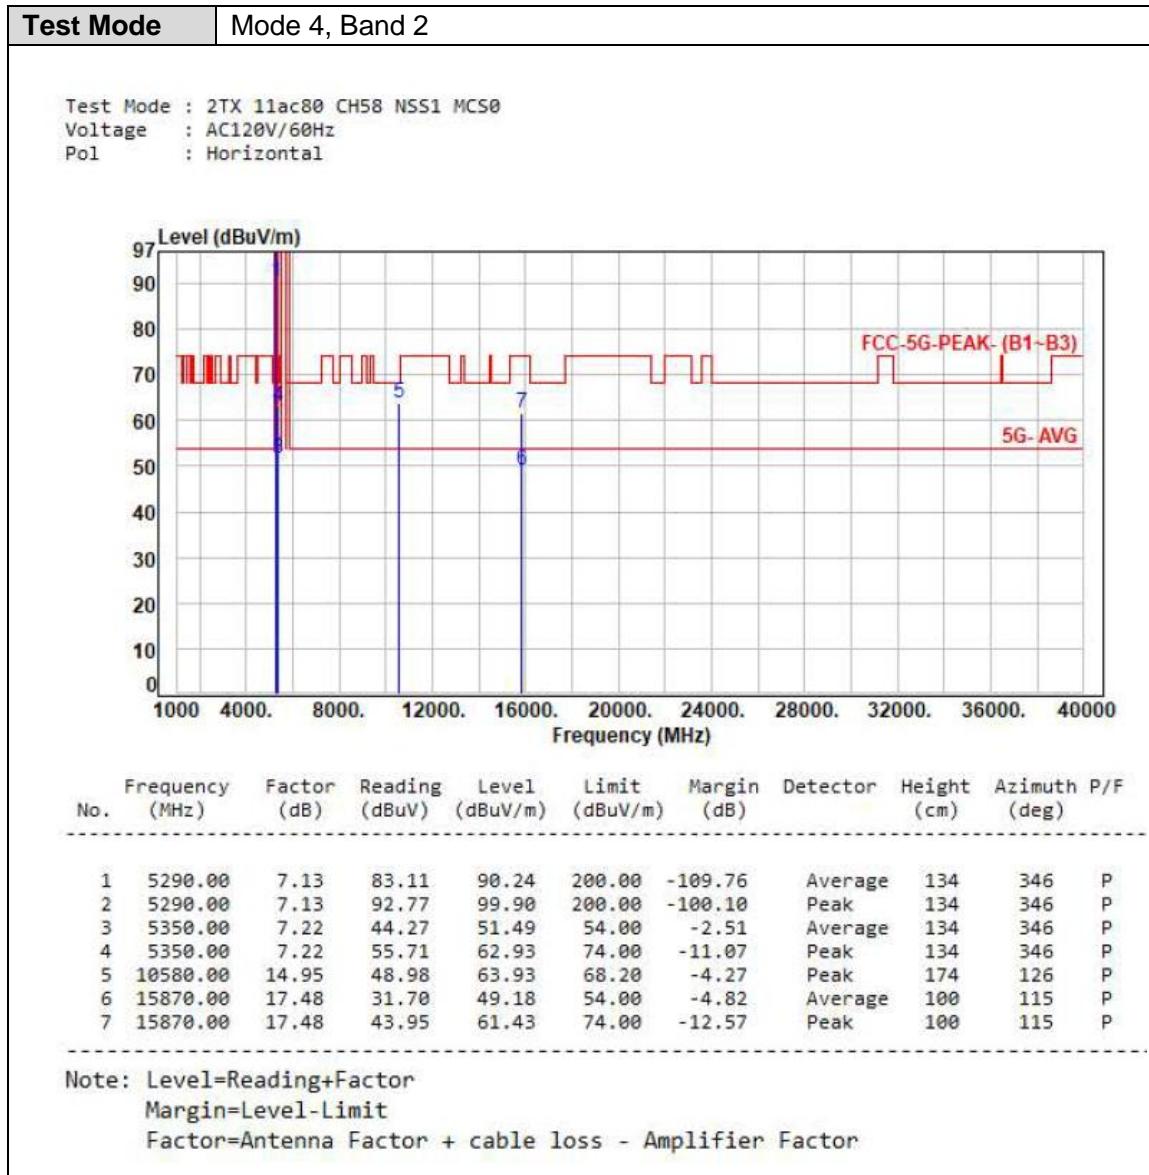


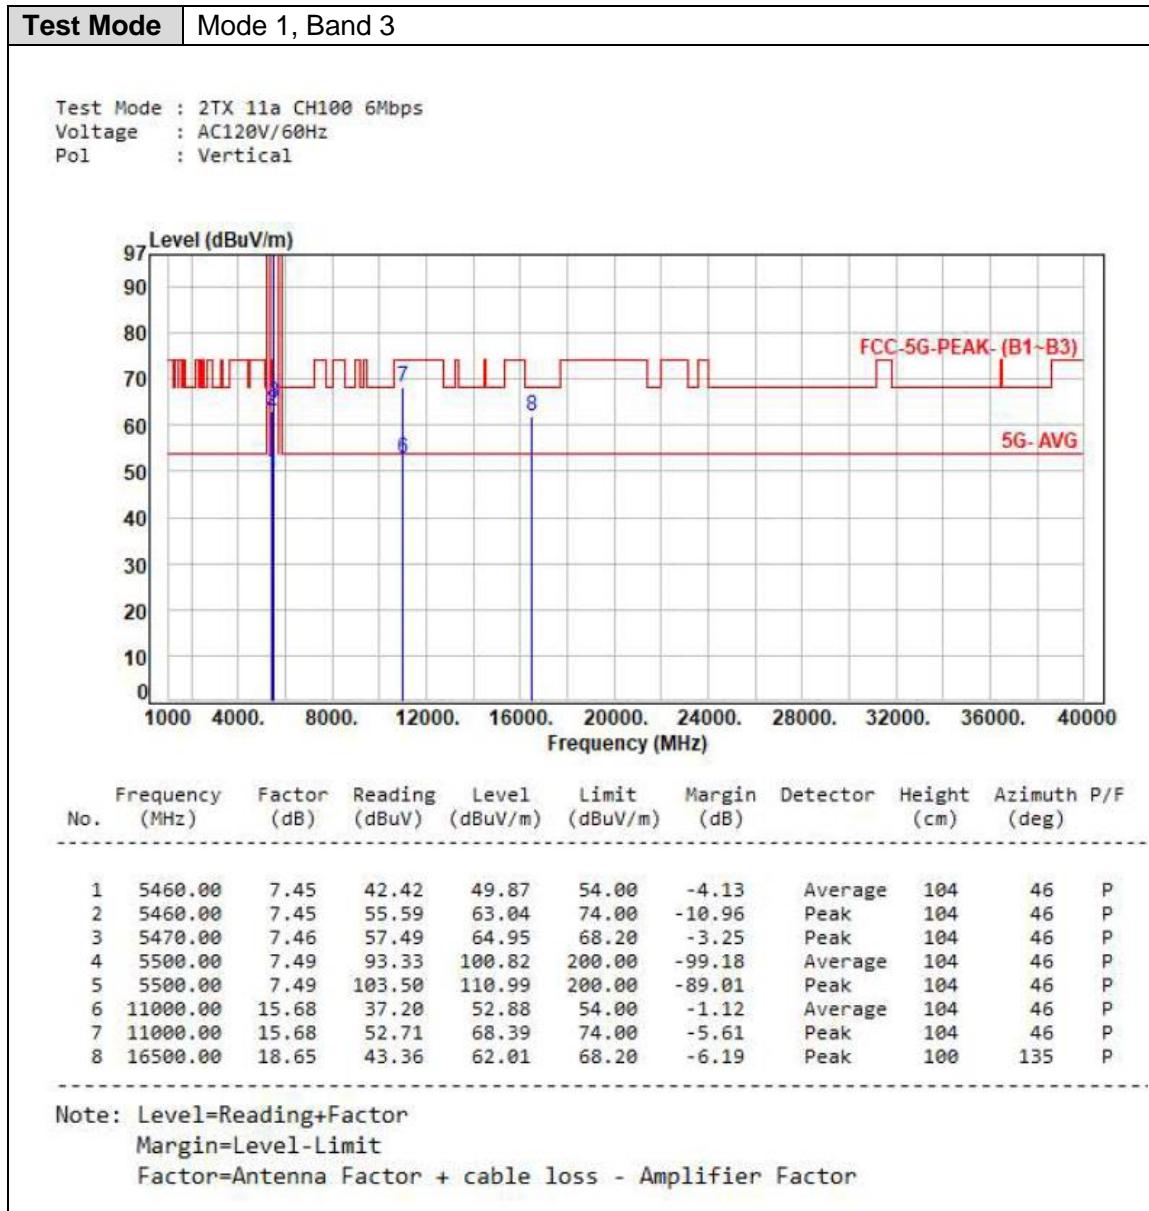

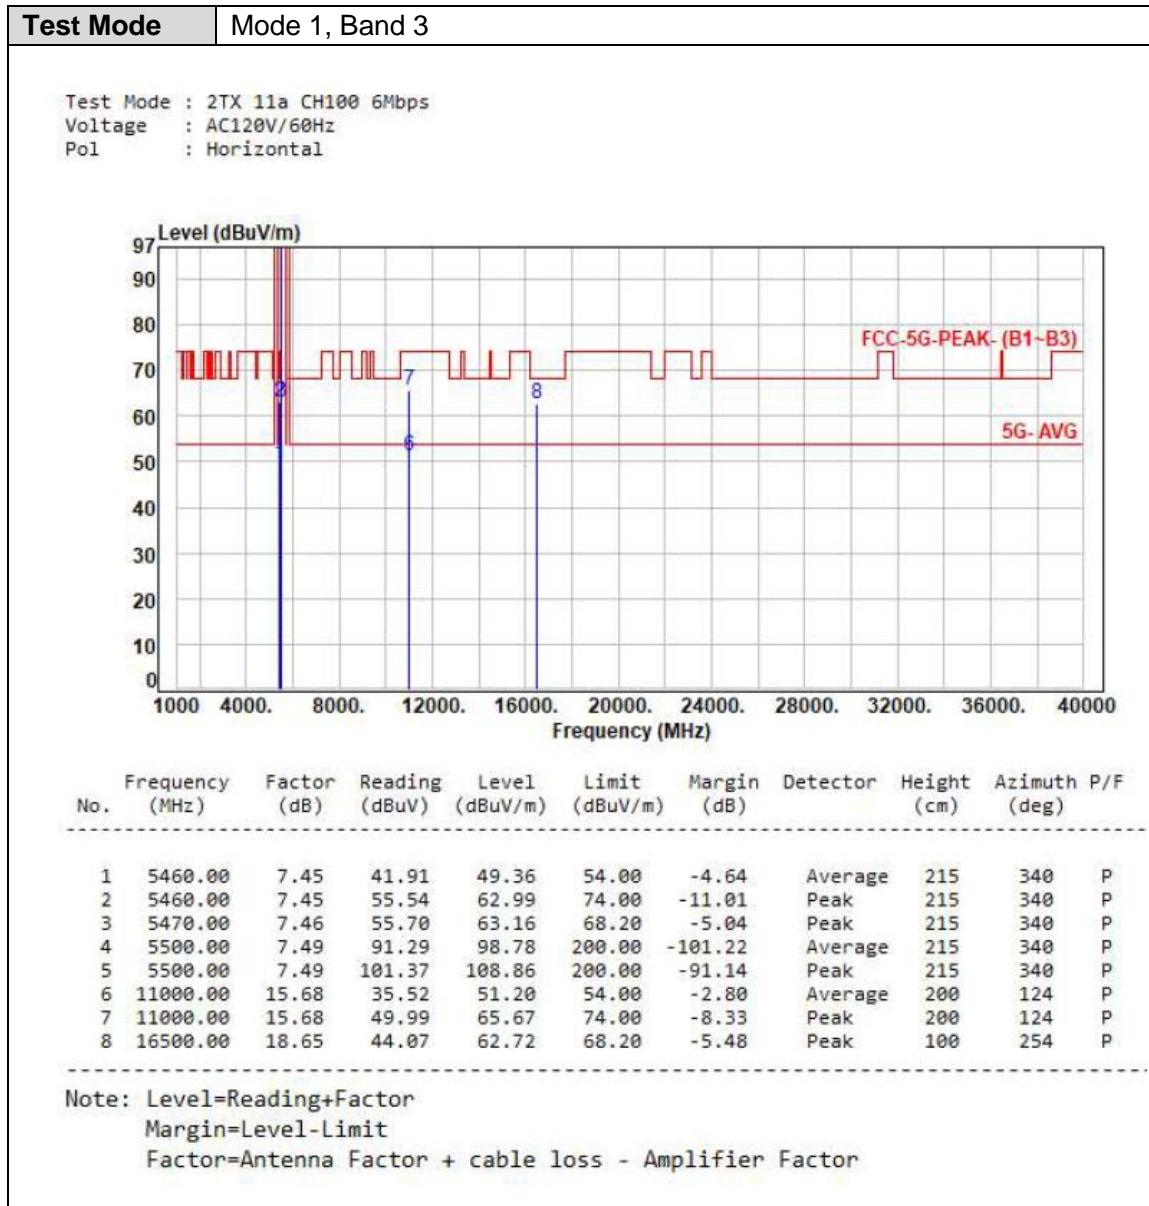

**Test Mode** | Mode 1, Band 3

Test Mode : 2TX 11a CH120 6Mbps  
Voltage : AC120V/60Hz  
Pol : Vertical

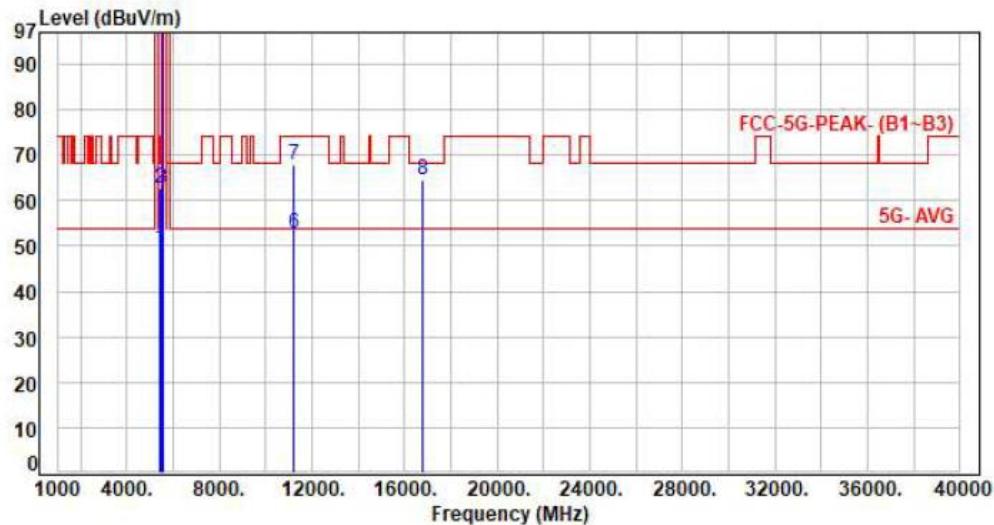


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	41.89	49.34	54.00	-4.66	Average	100	29	P
2	5460.00	7.45	55.08	62.53	74.00	-11.47	Peak	100	29	P
3	5470.00	7.46	55.17	62.63	68.20	-5.57	Peak	100	29	P
4	5600.00	7.43	94.91	102.34	200.00	-97.66	Average	100	29	P
5	5600.00	7.43	104.78	112.21	200.00	-87.79	Peak	100	29	P
6	11200.00	15.91	36.91	52.82	54.00	-1.18	Average	100	54	P
7	11200.00	15.91	51.99	67.90	74.00	-6.10	Peak	100	54	P
8	16800.00	20.49	44.06	64.55	68.20	-3.65	Peak	100	175	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

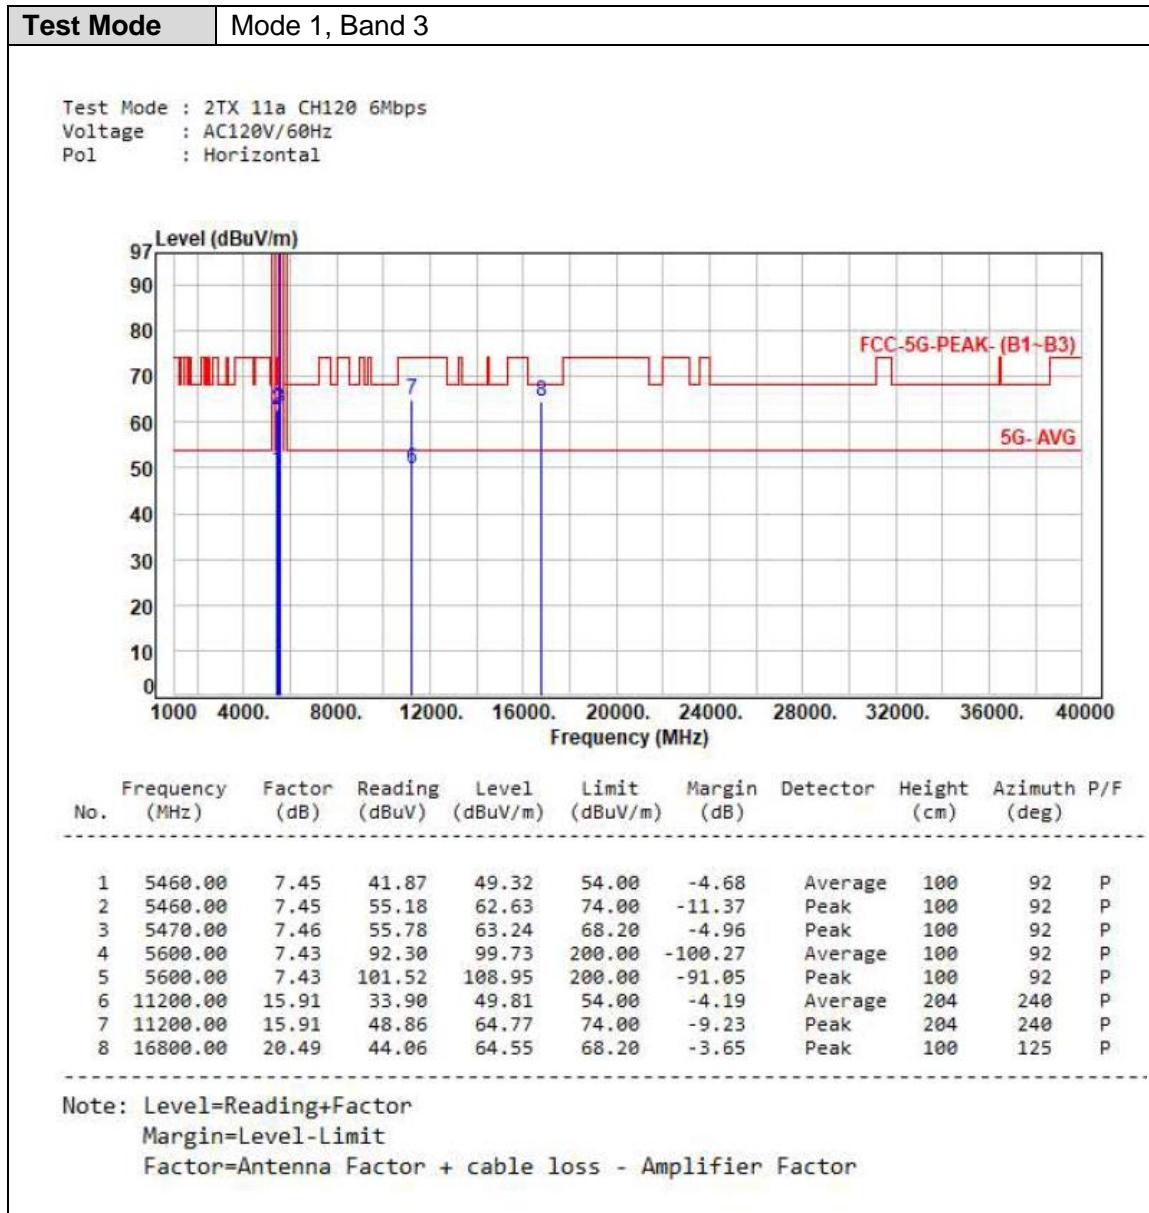

**Test Mode** | Mode 1, Band 3

Test Mode : 2TX 11a CH140 6Mbps  
Voltage : AC120V/60Hz  
Pol : Vertical

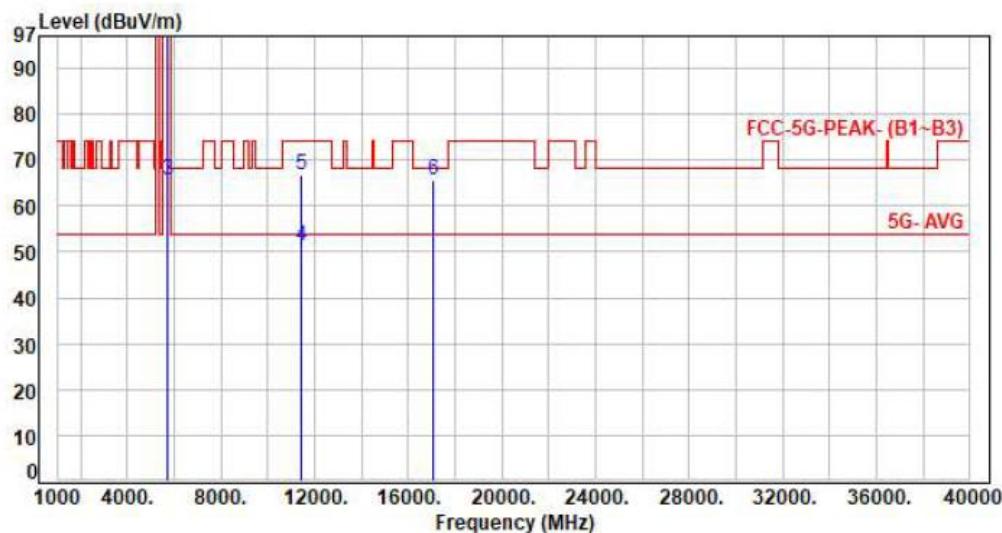

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.37	91.42	98.79	200.00	-101.21	Average	102	29	P
2	5700.00	7.37	101.75	109.12	200.00	-90.88	Peak	102	29	P
3	5725.00	7.33	58.23	65.56	68.20	-2.64	Peak	102	29	P
4	11400.00	16.14	35.29	51.43	54.00	-2.57	Average	104	53	P
5	11400.00	16.14	50.73	66.87	74.00	-7.13	Peak	104	53	P
6	17100.00	21.98	43.76	65.74	68.20	-2.46	Peak	104	125	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



