



FCC RADIO TEST REPORT

Applicant : Ubiquiti Inc
Address : 685 Third Avenue, New York, New York 10017,
USA
Equipment : UniFi Protect G4 Doorbell Pro
Model No. : UVC-G4 Doorbell Pro
Trade Name : UBIQUITI
FCC ID : SWX-UVCG4DP

I HEREBY CERTIFY THAT :

The sample was received on May. 10, 2021 and the testing was completed on Jul. 13, 2021 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Test Mode and Test Software.....	8
2.4 Description of Test System.....	9
2.5 General Information of Test.....	10
2.6 Measurement Uncertainty.....	10
3. Test Equipment and Ancillaries Used for Tests	11
4. Antenna Requirements.....	12
4.1 Antenna Construction and Directional Gain.....	12
5. Test of AC Power Line Conducted Emission	13
5.1 Test Limit	13
5.2 Test Procedures	13
5.3 Typical Test Setup	14
5.4 Test Result and Data.....	15
5.5 Test Photographs	17
6. Test of Radiated Spurious Emission.....	18
6.1 Test Limit	18
6.2 Test Procedures	19
6.3 Typical Test Setup	20
6.4 Test Result and Data (9KHz ~ 30MHz)	21
6.5 Test Result and Data (30MHz ~ 1GHz).....	21
6.6 Test Result and Data (1GHz ~ 25GHz).....	23
6.7 Restricted Bands of Operation	47
6.8 Test Photographs (30MHz ~ 1GHz).....	48
6.9 Test Photographs (1GHz ~ 25GHz).....	49
7. Test of Conducted Spurious Emission	51
7.1 Test Limit	51
7.2 Test Procedure	51
7.3 Test Setup Layout	51
7.4 Test Result and Data.....	51
8. On Time, Duty Cycle and Measurement methods	60
8.1 Test Limit	60
8.2 Test Procedure	60
8.3 Test Setup Layout	60
8.4 Test Result and Data.....	60
9. 6dB Bandwidth Measurement Data	62
9.1 Test Limit	62
9.2 Test Procedures	62
9.3 Test Setup Layout	62



9.4 Test Result and Data 62

10. Maximum Peak and Average Output Power 65

10.1 Test Limit 65

10.2 Test Procedures 65

10.3 Test Setup Layout 65

10.4 Test Result and Data 66

11. Power Spectral Density 67

11.1 Test Limit 67

11.2 Test Procedures 67

11.3 Test Setup Layout 67

11.4 Test Result and Data 67

12. Radio Frequency Exposure 70

12.1 Applicable Standards 70

12.2 EUT Specification 70

12.3 Test Results 71

12.4 Calculation 71

12.5 Maximum Permissible Exposure 72



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(2)	. 6dB Bandwidth	PASS
15.247(b)	. Maximum Peak and Average Output Power	PASS
15.247(e)	. Power Spectral Density	PASS
2.1091	. Radio Frequency Exposure	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.

*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(21050068-TEFV01).



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment

Frequency Range	NFC: 13.553MHz~13.567MHz BT / BLE: 2402MHz~2480MHz 802.11b/g/n: 2412MHz~2462MHzMHz 802.11a/n/ac: 5180-5240MHz, 5260-5320MHz, 5500-5720MHz, 5745-5825MHz
Modulation Type	NFC: ASK BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK WLAN: 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 5GHz: 802.11n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Modulation Technology	DSSS, OFDM, FHSS, DTS
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps, GFSK: 2Mbps WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS7, HT20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS7, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80
Antenna Type	Internal Antenna
Antenna Gain	For NFC: 13.553MHz~13.567MHz: 0.00dBi For BT / BLE: 2402MHz~2480MHz: 2.00dBi For WLAN: 2412MHz~2462MHz: 2.00dBi 5180-5240 MHz: 4.00dBi 5260-5320MHz: 4.00dBi 5500-5720MHz: 4.00dBi 5745-5825MHz: 4.00dBi
Firmware Number	4.37.45.67-fcddb.g.a12730a.210428.0858

Note:

1. EUT support TPC Function.
2. WLAN 5GHz and BT can simultaneously transmission.
3. EUT supports DFS Client Mode, without radar detection.
4. EUT support indoor / outdoor function.
5. For more details, please refer to the User's manual of the EUT.



2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT20 (2412MHz~2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	*11	2462
*06	2437	---	---

802.11n HT40 (2422MHz~2452MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
*03	2422	*09	2452
04	2427	---	---
05	2432	---	---
*06	2437	---	---

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included Remote workstation and EUT for RF test. The Remote workstation included Notebook.
- c. An executive program, " wl command" under Windows OS system was executed to transmit and receive data via WLAN.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)
caused "Test Mode 2" generated the worst case, it was reported as the final data.	
Radiation Emissions ((9KHz ~30MHz & 30MHz ~ 1GHz))	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)
caused "Test Mode 2" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)
caused "Test Mode 1~4" generated the worst case, they were reported as the final data.	

Modulation Type	TX CONFIGURATION
802.11b	1TX
802.11g	1TX
802.11n HT20	1TX
802.11n HT40	1TX



2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Serial No	Power cord/Length/Type
Transformer	N/A	2420	E345173	N/A

Radiated Emissions				
Equipment	Brand	Model	Serial No	Power cord/Length/Type
Transformer	N/A	2420	E345173	N/A

AC Power Line Conducted Emission				
Equipment	Brand	Model	Serial No	Power cord/Length/Type
Transformer	N/A	2420	E345173	N/A



2.5 General Information of Test

Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1079, TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2021/05/29~2021/07/13	26~28°C / 42~45%	Nick Guan
Radiated Emissions	3M02-NK	2021/05/12~2021/07/01	23~23.4°C / 42~43%	Nick Guan
AC Power Line Conducted Emission	CON01-NK	2021/07/03	26°C / 54%	Dian Chen

2.6 Measurement Uncertainty

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.63dB
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.6dB
Radiated Spurious Emission(1GHz~25GHz)	±6.6dB
Conducted Spurious Emission	±1.8dB
6dB Bandwidth	±4.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±1.2%
Power Spectral Density	±1.8dB
Duty Cycle	±1.2%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2021/04/26	2022/04/25
Active Loop Antenna	EMCO	6507	40855	2020/05/21	2021/05/20
Active Loop Antenna	EMCO	6507	40855	2021/06/10	2022/06/09
Horn Antenna	EMCO	3115	31601	2020/10/16	2021/10/15
Horn Antenna	EMCO	3116	31974	2020/09/24	2021/09/23
EMI Receiver	ROHDE & SCHWARZ	ESCI	101200	2020/09/11	2021/09/10
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2020/08/03	2021/08/02
Preamplifier	EM Electronics corp.	EM330	60658	2020/10/20	2021/10/19
Preamplifier	EM Electronics corp.	EM330	60660	2021/03/18	2022/03/17
Preamplifier	Agilent	8449B	3008A01954	2021/03/22	2022/03/21
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2020/11/06	2021/11/05
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2021/04/19	2022/04/18
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2021/04/12	2022/04/11
Cable-0.5m(1G-18G)	EMEC	EM104-SMSM-0.5M	CCE1354	2021/05/06	2022/05/05
Cable-3m(1G-18G)	EMEC	EM104-SMSM-3M	CCE1355	2021/05/06	2022/05/05
Cable-8m(1G-18G)	EMEC	EM104-SMSM-8M	CCE1356	2021/05/06	2022/05/05
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2021/04/03	2022/04/02
Cable-3m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	MY2608/2	2021/04/09	2022/04/08
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50314	2021/04/08	2022/04/07
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2020/09/18	2021/09/17
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2020/08/03	2021/08/02
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2021/04/19	2022/04/18
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2020/12/25	2021/12/24
Attenuator	KEYSIGHT	8491B	MY39250703	2021/04/09	2022/04/08
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2020/08/25	2021/08/24
Power Meter	Anritsu	ML2495A	1224005	2021/04/14	2022/04/13
Power Sensor	Anritsu	MA2411B	1207295	2021/04/14	2022/04/13

Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	100821	2020/09/11	2021/09/10
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-516	2020/09/26	2021/09/25
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101933	2020/09/17	2021/09/16
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2020/09/18	2021/09/17
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Antenna Requirements

4.1 Antenna Construction and Directional Gain

Antenna Type	Internal Antenna
Antenna Gain	2412MHz~2462MHz: 2.00dBi

2412-2462MHz

For Power directional gain= $G_{ant}= 2.00$ dBi

For PSD directional gain = $G_{ant}= 2.00$ dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

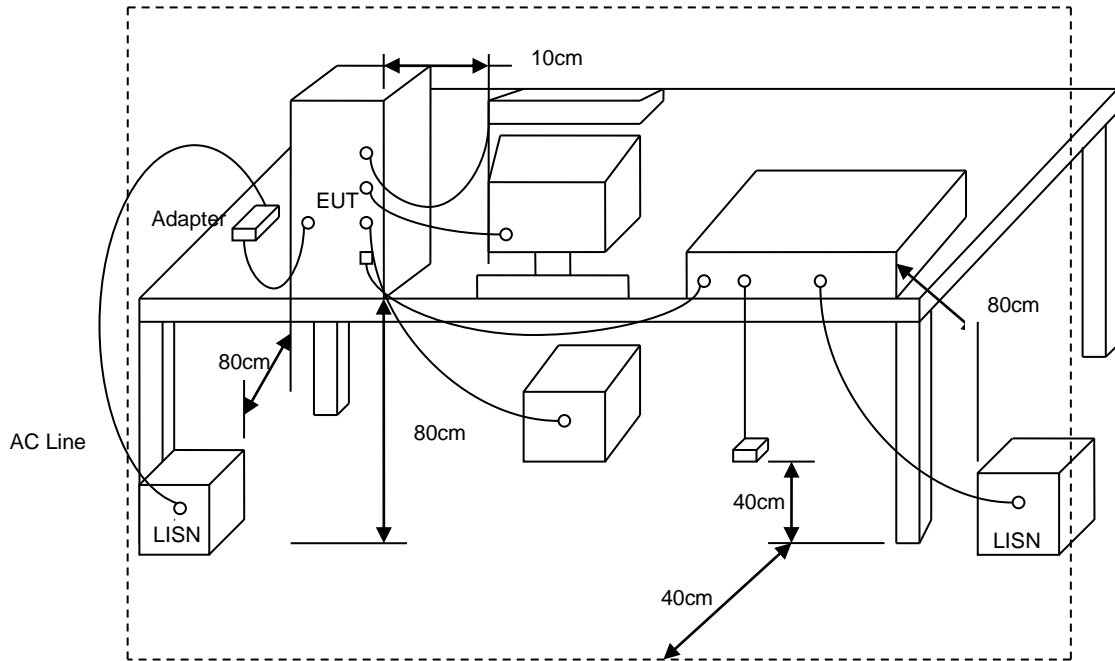



5.4 Test Result and Data

Power	: AC 120V / 60Hz	Pol/Phase	: LINE
Test Mode	: Mode 2		

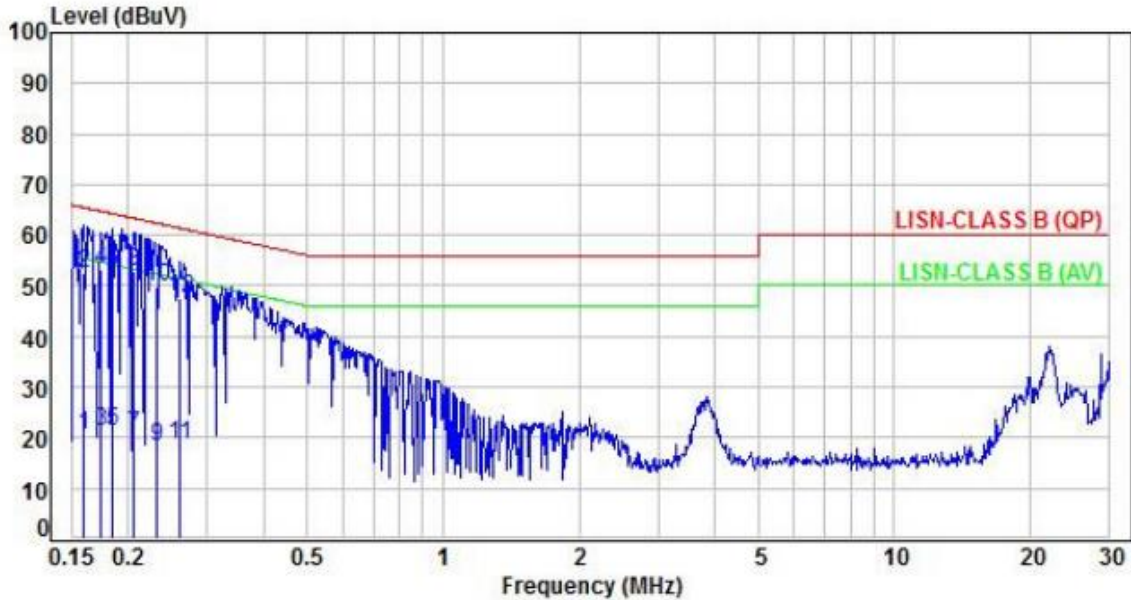


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.16	9.96	10.69	20.65	55.47	-34.82	Average	P
2	0.16	9.96	42.67	52.63	65.47	-12.84	QP	P
3	0.17	9.96	11.28	21.24	54.77	-33.53	Average	P
4	0.17	9.96	43.30	53.26	64.77	-11.51	QP	P
5	0.19	9.96	11.36	21.32	54.24	-32.92	Average	P
6	0.19	9.96	43.02	52.98	64.24	-11.26	QP	P
7	0.21	9.96	10.66	20.62	53.40	-32.78	Average	P
8	0.21	9.96	42.95	52.91	63.40	-10.49	QP	P
9	0.23	9.96	8.19	18.15	52.36	-34.21	Average	P
10	0.23	9.96	39.87	49.83	62.36	-12.53	QP	P
11	0.26	9.96	8.64	18.60	51.42	-32.82	Average	P
12	0.26	9.96	37.74	47.70	61.42	-13.72	QP	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	: AC 120V / 60Hz	Pol/Phase	: NEUTRAL
Test Mode	: Mode 2		

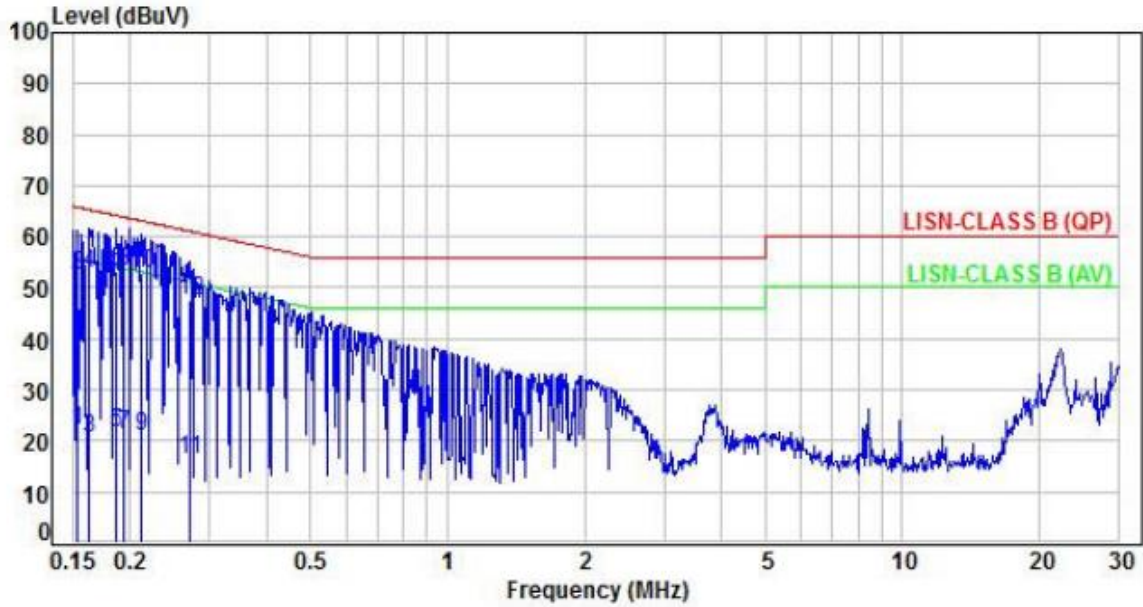

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.97	12.24	22.21	55.82	-33.61	Average	P
2	0.15	9.97	42.60	52.57	65.82	-13.25	QP	P
3	0.16	9.97	10.54	20.51	55.30	-34.79	Average	P
4	0.16	9.97	42.74	52.71	65.30	-12.59	QP	P
5	0.19	9.97	11.73	21.70	54.20	-32.50	Average	P
6	0.19	9.97	43.41	53.38	64.20	-10.82	QP	P
7	0.19	9.97	11.41	21.38	53.87	-32.49	Average	P
8	0.19	9.97	43.41	53.38	63.87	-10.49	QP	P
9	0.21	9.97	10.91	20.88	53.14	-32.26	Average	P
10	0.21	9.97	42.85	52.82	63.14	-10.32	QP	P
11	0.27	9.97	6.35	16.32	51.12	-34.80	Average	P
12	0.27	9.97	37.48	47.45	61.12	-13.67	QP	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.

(Y -AXIS is the worst.)




6.3 Typical Test Setup


Below 30MHz test setup

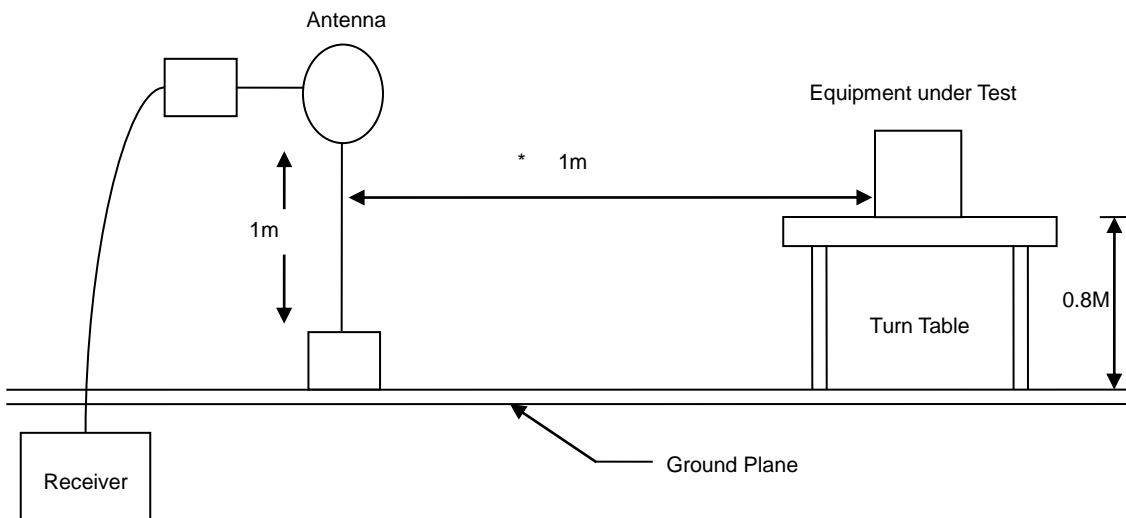

30MHz- 1GHz Test Setup

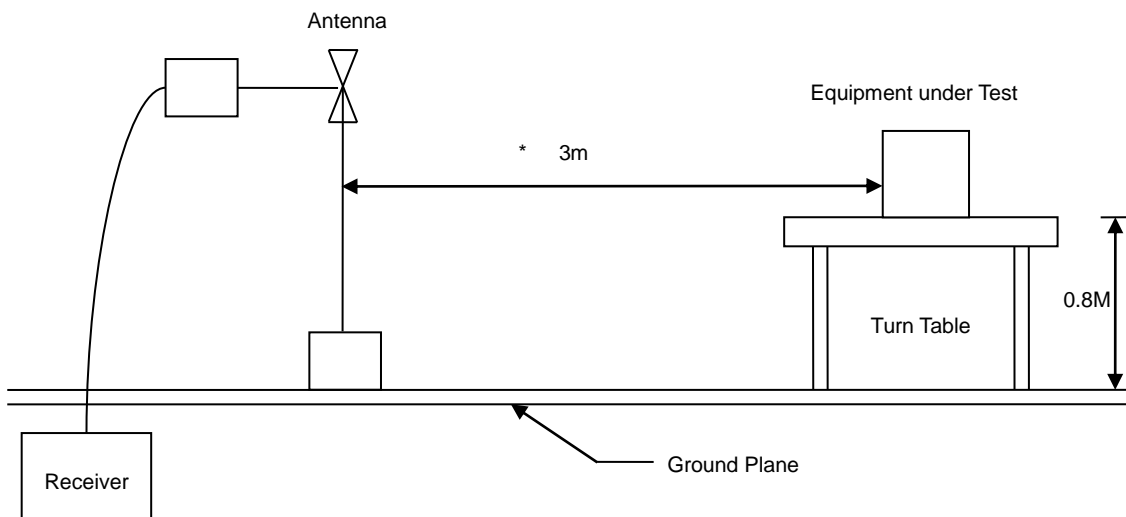

Above 1GHz Test Setup

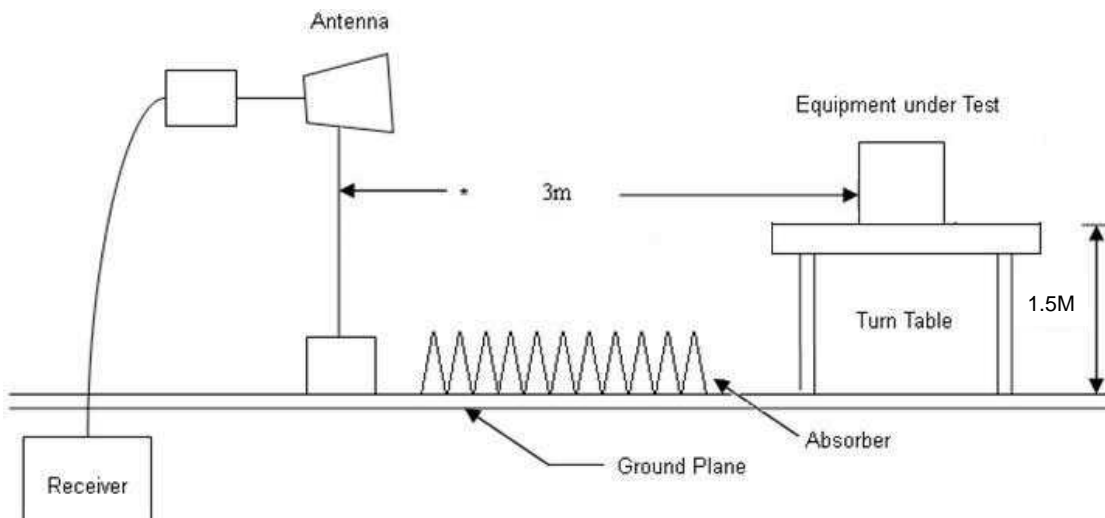




6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2		:

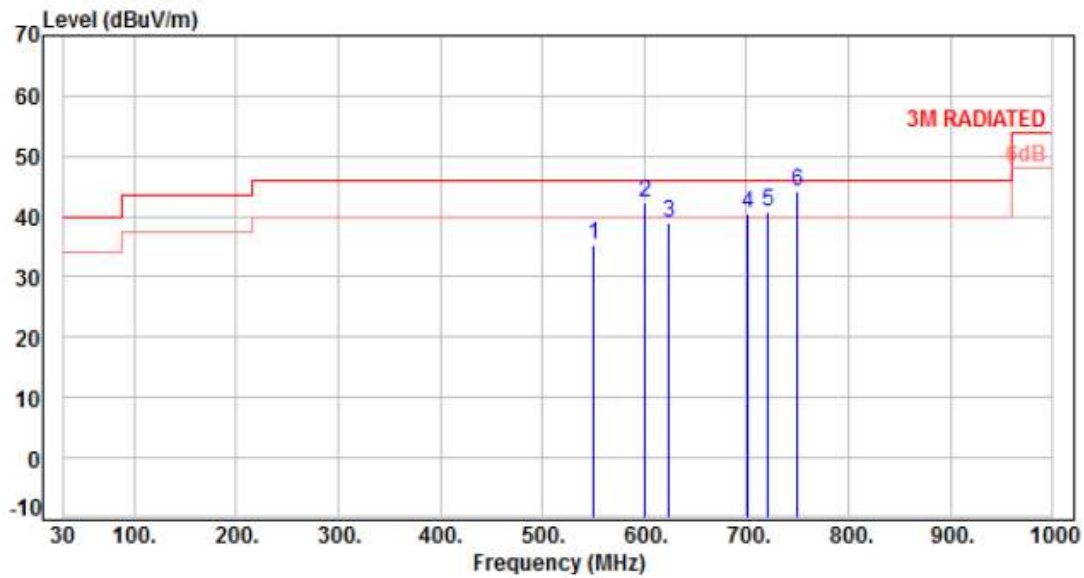


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	549.92	-3.70	39.13	35.43	46.00	-10.57	Peak	400	360	P
2	600.36	-2.61	44.93	42.32	46.00	-3.68	Peak	400	360	P
3	623.64	-2.09	41.01	38.92	46.00	-7.08	Peak	400	360	P
4	701.24	-1.10	41.47	40.37	46.00	-5.63	Peak	400	360	P
5	720.64	-0.93	41.71	40.78	46.00	-5.22	Peak	400	360	P
6	749.74	-0.24	44.40	44.16	46.00	-1.84	QP	125	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2		:

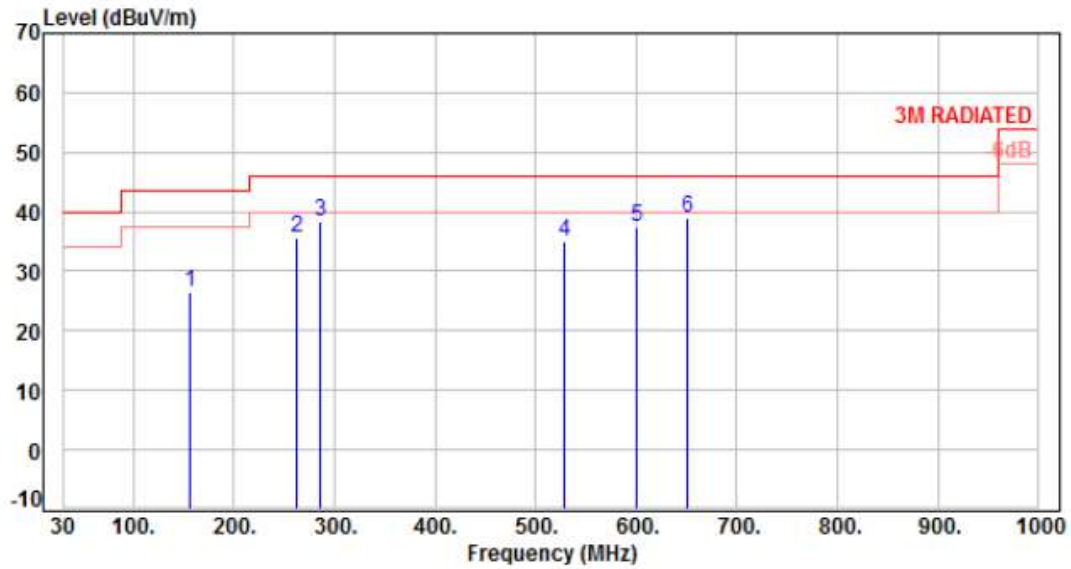


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	157.07	-10.70	37.12	26.42	43.50	-17.08	Peak	400	360	P
2	262.80	-11.06	46.83	35.77	46.00	-10.23	Peak	400	360	P
3	286.08	-10.05	48.30	38.25	46.00	-7.75	Peak	400	360	P
4	528.58	-4.15	39.13	34.98	46.00	-11.02	Peak	400	360	P
5	600.36	-2.61	40.04	37.43	46.00	-8.57	Peak	400	360	P
6	650.80	-1.92	40.82	38.90	46.00	-7.10	Peak	400	360	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH01		:

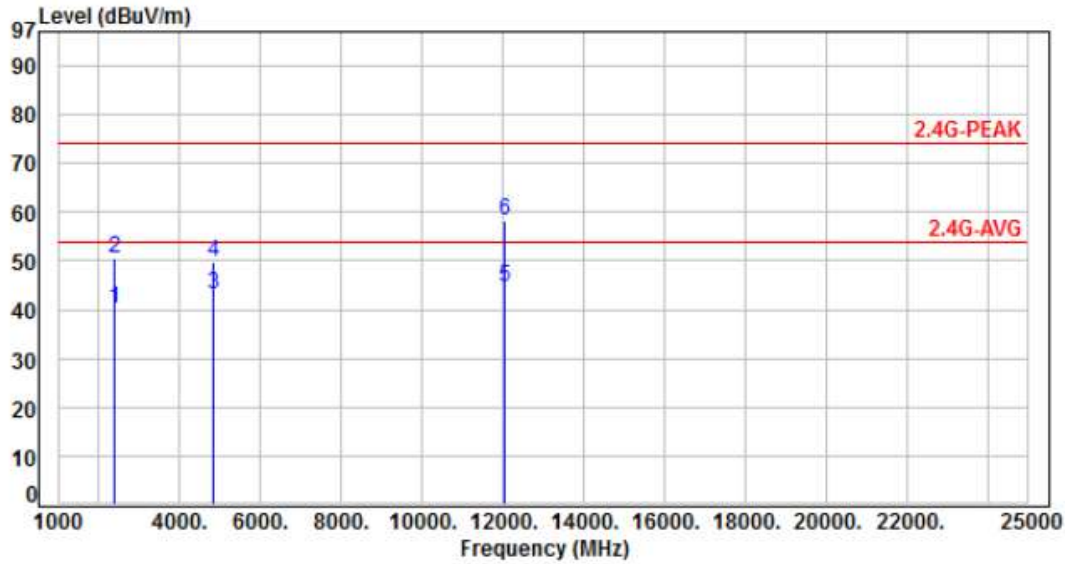


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	43.15	40.17	54.00	-13.83	Average	240	153	P
2	2390.00	-2.98	53.45	50.47	74.00	-23.53	Peak	240	153	P
3	4824.00	4.63	38.47	43.10	54.00	-10.90	Average	110	358	P
4	4824.00	4.63	45.26	49.89	74.00	-24.11	Peak	110	358	P
5	12060.00	14.56	30.24	44.80	54.00	-9.20	Average	100	176	P
6	12060.00	14.56	43.66	58.22	74.00	-15.78	Peak	100	176	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH01		:

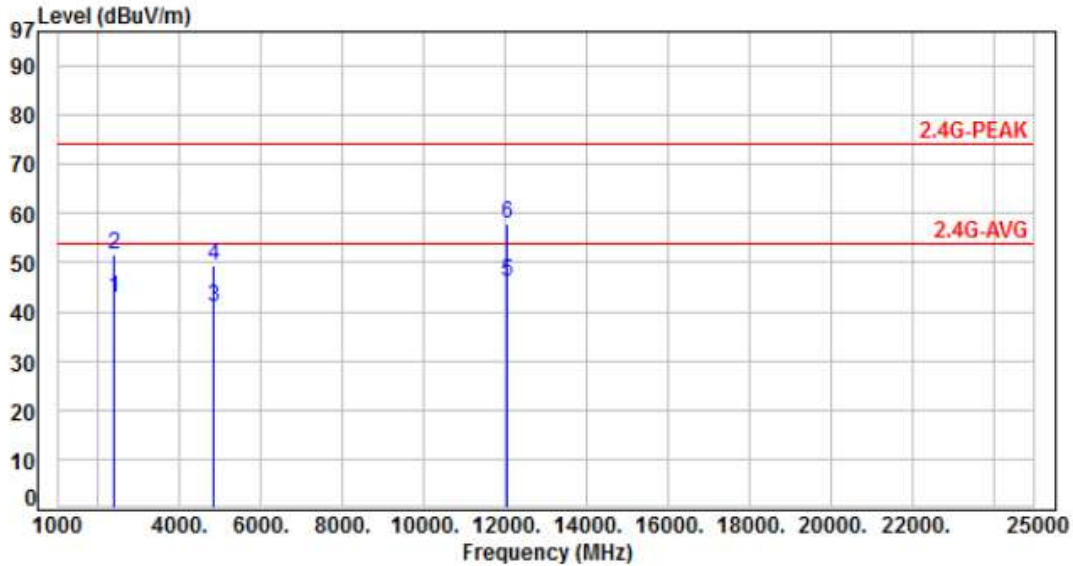


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	45.94	42.96	54.00	-11.04	Average	100	217	P
2	2390.00	-2.98	54.64	51.66	74.00	-22.34	Peak	100	217	P
3	4824.00	4.63	36.13	40.76	54.00	-13.24	Average	100	205	P
4	4824.00	4.63	44.67	49.30	74.00	-24.70	Peak	100	205	P
5	12060.00	14.56	31.37	45.93	54.00	-8.07	Average	100	248	P
6	12060.00	14.56	43.43	57.99	74.00	-16.01	Peak	100	248	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH06		:

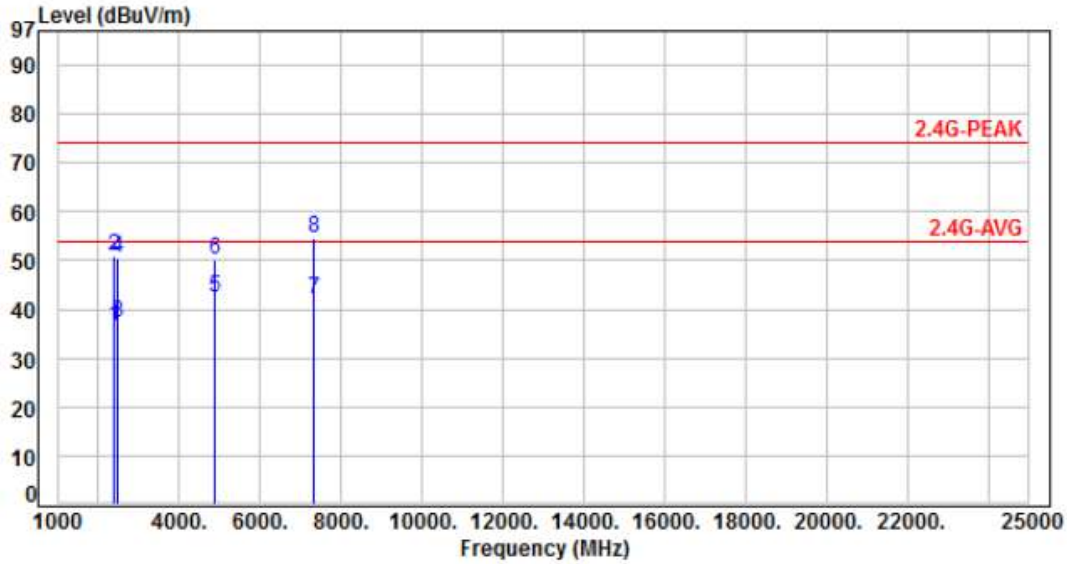


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	39.66	36.68	54.00	-17.32	Average	398	22	P
2	2390.00	-2.98	53.74	50.76	74.00	-23.24	Peak	398	22	P
3	2483.50	-2.75	40.00	37.25	54.00	-16.75	Average	398	22	P
4	2483.50	-2.75	53.12	50.37	74.00	-23.63	Peak	398	22	P
5	4874.00	4.79	37.48	42.27	54.00	-11.73	Average	100	351	P
6	4874.00	4.79	45.48	50.27	74.00	-23.73	Peak	100	351	P
7	7311.00	9.68	32.22	41.90	54.00	-12.10	Average	168	256	P
8	7311.00	9.68	44.83	54.51	74.00	-19.49	Peak	168	256	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH06		:

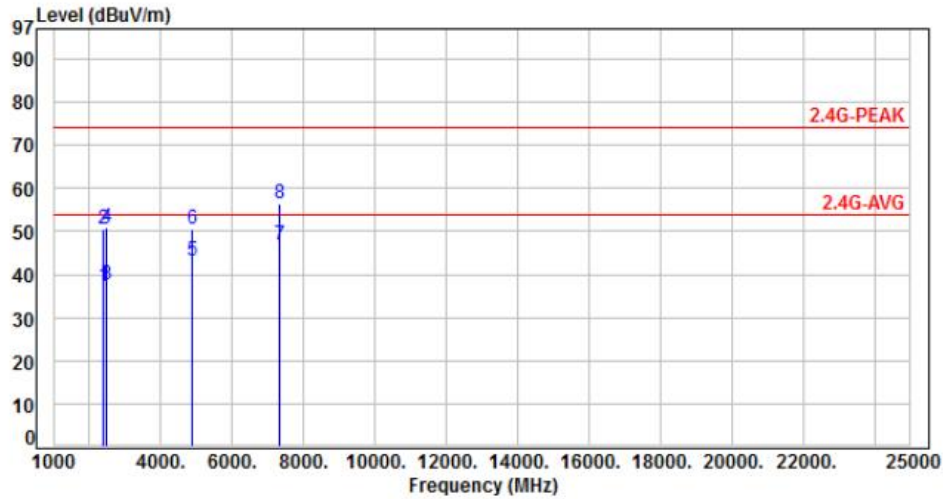


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	40.15	37.17	54.00	-16.83	Average	100	214	P
2	2390.00	-2.98	53.66	50.68	74.00	-23.32	Peak	100	214	P
3	2483.50	-2.75	40.32	37.57	54.00	-16.43	Average	100	214	P
4	2483.50	-2.75	53.47	50.72	74.00	-23.28	Peak	100	214	P
5	4874.00	4.79	38.42	43.21	54.00	-10.79	Average	178	357	P
6	4874.00	4.79	45.87	50.66	74.00	-23.34	Peak	178	357	P
7	7311.00	9.68	37.27	46.95	54.00	-7.05	Average	294	283	P
8	7311.00	9.68	46.67	56.35	74.00	-17.65	Peak	294	283	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH11		:

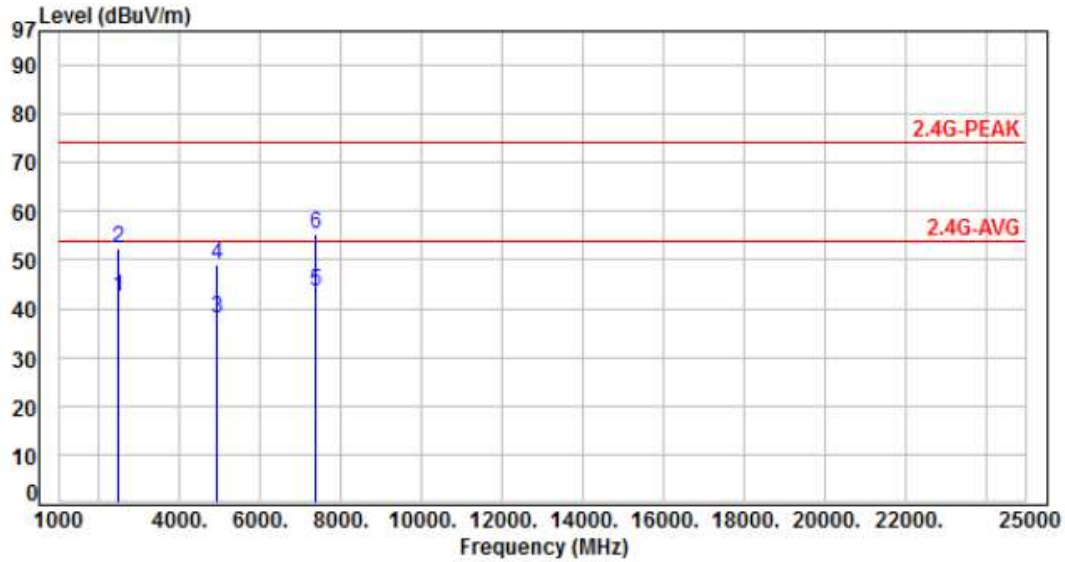


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.75	45.25	42.50	54.00	-11.50	Average	387	357	P
2	2483.50	-2.75	55.09	52.34	74.00	-21.66	Peak	387	357	P
3	4924.00	4.99	32.83	37.82	54.00	-16.18	Average	100	158	P
4	4924.00	4.99	43.88	48.87	74.00	-25.13	Peak	100	158	P
5	7386.00	9.81	33.77	43.58	54.00	-10.42	Average	176	343	P
6	7386.00	9.81	45.38	55.19	74.00	-18.81	Peak	176	343	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH11		:

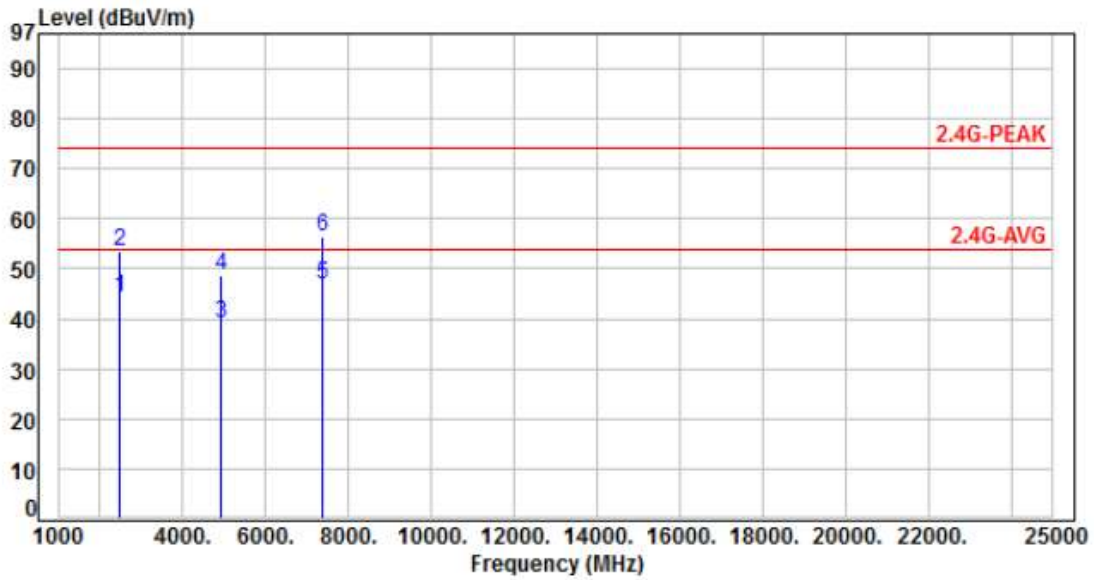


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.75	47.11	44.36	54.00	-9.64	Average	142	218	P
2	2483.50	-2.75	56.34	53.59	74.00	-20.41	Peak	142	218	P
3	4924.00	4.99	33.93	38.92	54.00	-15.08	Average	162	358	P
4	4924.00	4.99	43.64	48.63	74.00	-25.37	Peak	162	358	P
5	7386.00	9.81	37.18	46.99	54.00	-7.01	Average	173	285	P
6	7386.00	9.81	46.72	56.53	74.00	-17.47	Peak	173	285	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH01		:

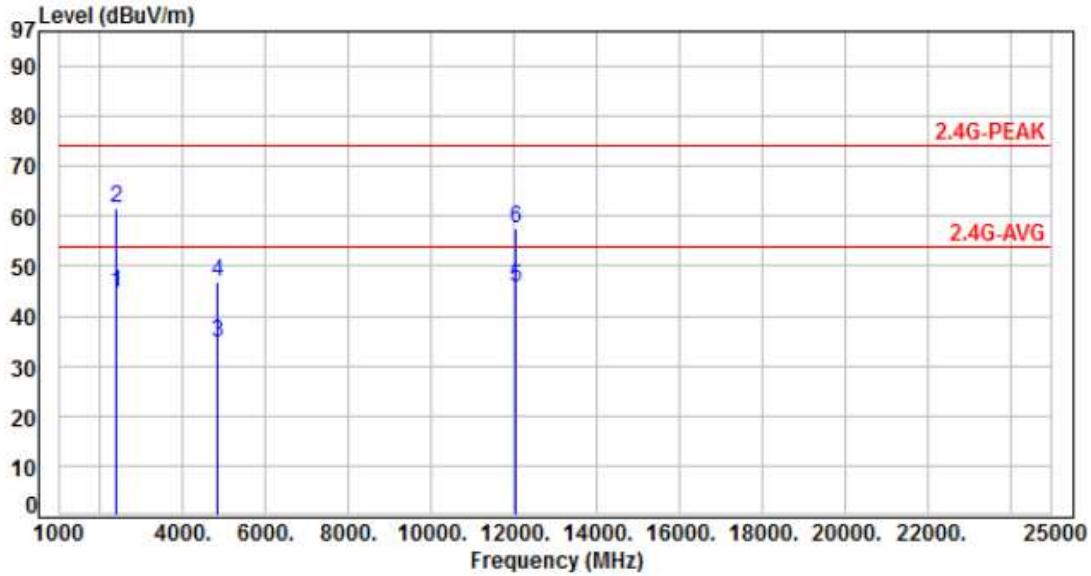


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	47.44	44.46	54.00	-9.54	Average	301	163	P
2	2390.00	-2.98	64.58	61.60	74.00	-12.40	Peak	301	163	P
3	4824.00	4.63	30.13	34.76	54.00	-19.24	Average	100	139	P
4	4824.00	4.63	42.33	46.96	74.00	-27.04	Peak	100	139	P
5	12060.00	14.56	31.19	45.75	54.00	-8.25	Average	100	173	P
6	12060.00	14.56	43.13	57.69	74.00	-16.31	Peak	100	173	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH01		:

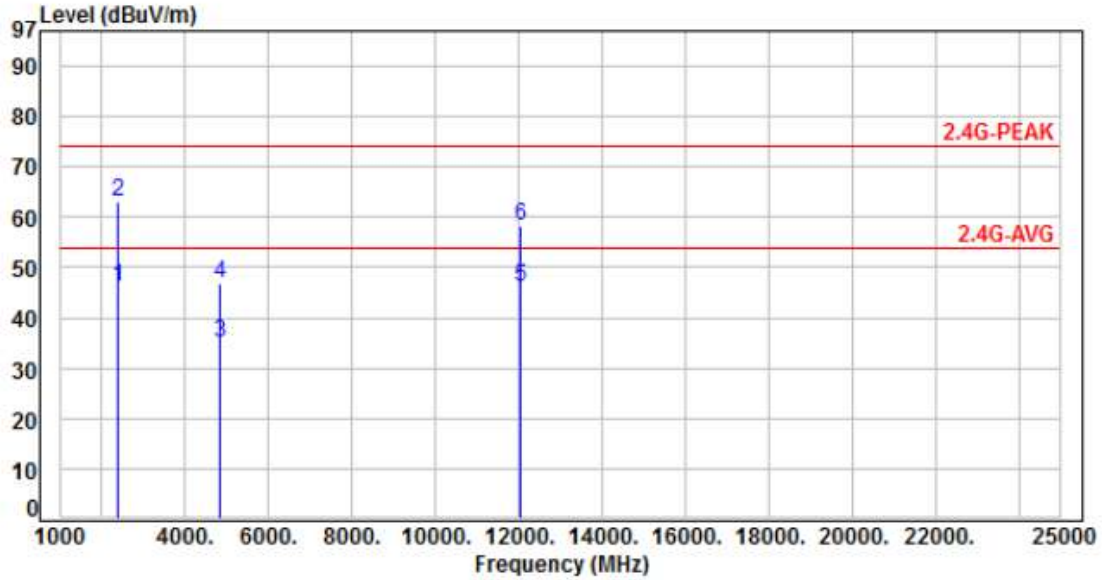


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	49.25	46.27	54.00	-7.73	Average	100	235	P
2	2390.00	-2.98	65.93	62.95	74.00	-11.05	Peak	100	235	P
3	4824.00	4.63	30.44	35.07	54.00	-18.93	Average	100	267	P
4	4824.00	4.63	42.38	47.01	74.00	-26.99	Peak	100	267	P
5	12060.00	14.56	31.49	46.05	54.00	-7.95	Average	100	198	P
6	12060.00	14.56	43.53	58.09	74.00	-15.91	Peak	100	198	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH06		:

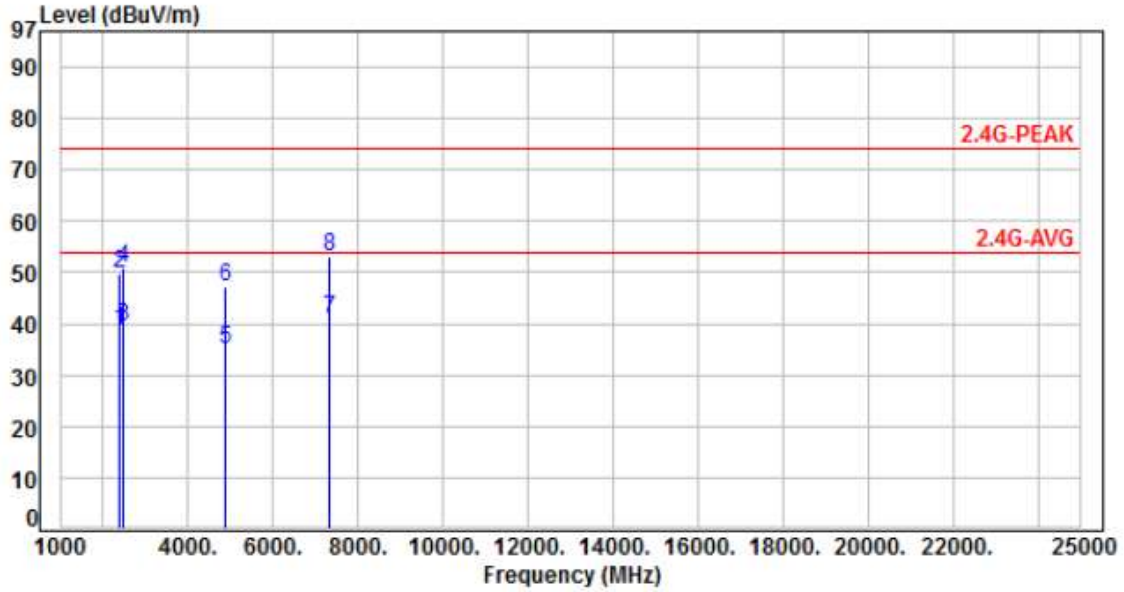


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	41.78	38.80	54.00	-15.20	Average	400	27	P
2	2390.00	-2.98	52.73	49.75	74.00	-24.25	Peak	400	27	P
3	2483.50	-2.75	42.16	39.41	54.00	-14.59	Average	400	27	P
4	2483.50	-2.75	53.69	50.94	74.00	-23.06	Peak	400	27	P
5	4874.00	4.79	30.35	35.14	54.00	-18.86	Average	100	98	P
6	4874.00	4.79	42.43	47.22	74.00	-26.78	Peak	100	98	P
7	7311.00	9.68	31.35	41.03	54.00	-12.97	Average	100	76	P
8	7311.00	9.68	43.53	53.21	74.00	-20.79	Peak	100	76	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH06		:

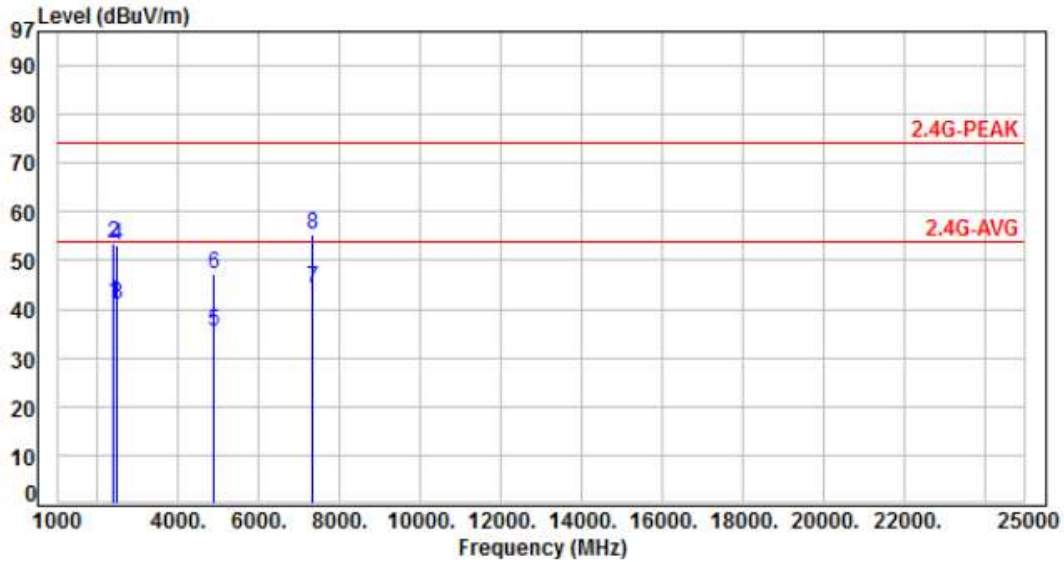


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	44.27	41.29	54.00	-12.71	Average	112	224	P
2	2390.00	-2.98	56.44	53.46	74.00	-20.54	Peak	112	224	P
3	2483.50	-2.75	43.77	41.02	54.00	-12.98	Average	112	224	P
4	2483.50	-2.75	55.87	53.12	74.00	-20.88	Peak	112	224	P
5	4874.00	4.79	30.44	35.23	54.00	-18.77	Average	100	177	P
6	4874.00	4.79	42.30	47.09	74.00	-26.91	Peak	100	177	P
7	7311.00	9.68	34.51	44.19	54.00	-9.81	Average	100	261	P
8	7311.00	9.68	45.78	55.46	74.00	-18.54	Peak	100	261	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH11		:

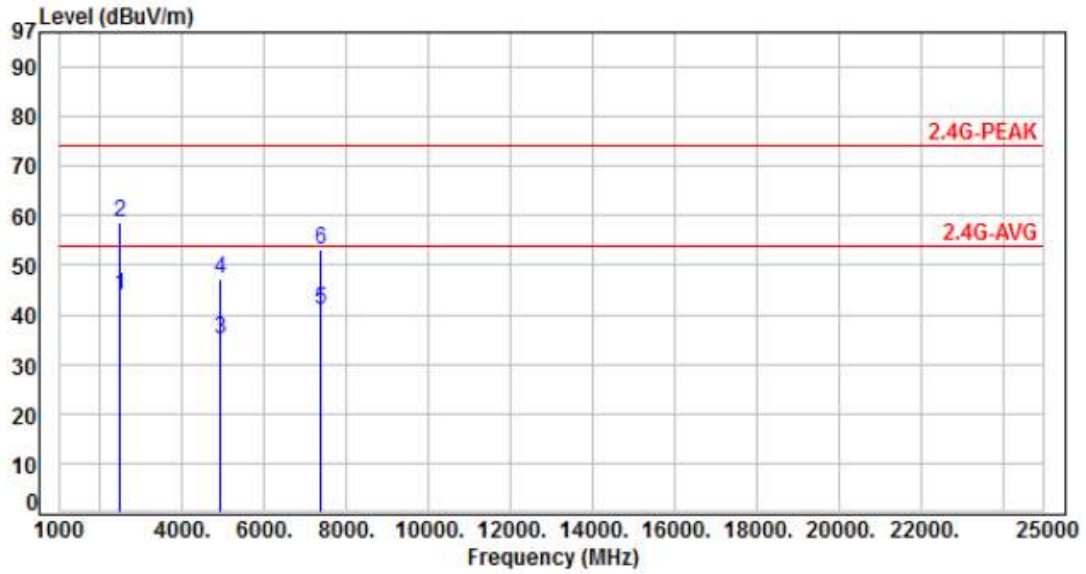


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.75	46.52	43.77	54.00	-10.23	Average	387	358	P
2	2483.50	-2.75	61.56	58.81	74.00	-15.19	Peak	387	358	P
3	4924.00	4.99	30.06	35.05	54.00	-18.95	Average	100	287	P
4	4924.00	4.99	42.31	47.30	74.00	-26.70	Peak	100	287	P
5	7386.00	9.81	30.97	40.78	54.00	-13.22	Average	100	324	P
6	7386.00	9.81	43.12	52.93	74.00	-21.07	Peak	100	324	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH11		:

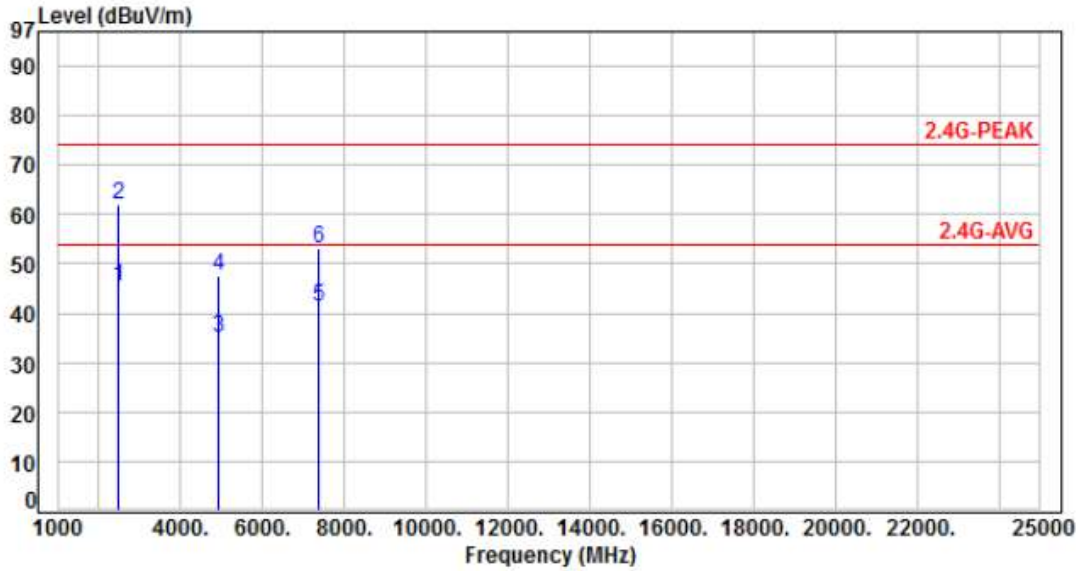


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.75	48.02	45.27	54.00	-8.73	Average	100	227	P
2	2483.50	-2.75	64.59	61.84	74.00	-12.16	Peak	100	227	P
3	4924.00	4.99	30.12	35.11	54.00	-18.89	Average	100	187	P
4	4924.00	4.99	42.67	47.66	74.00	-26.34	Peak	100	187	P
5	7386.00	9.81	31.32	41.13	54.00	-12.87	Average	100	266	P
6	7386.00	9.81	43.21	53.02	74.00	-20.98	Peak	100	266	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH01		:

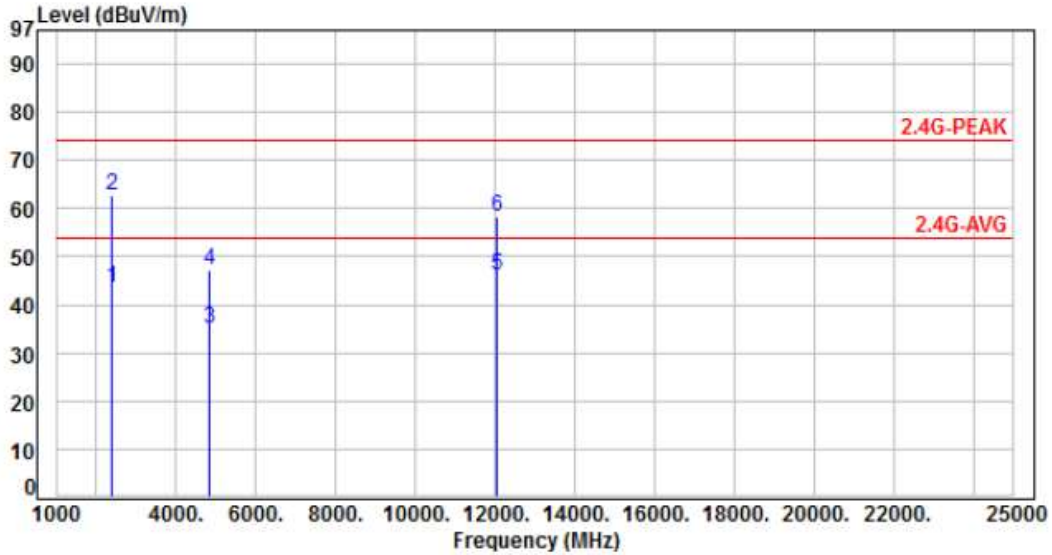


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	46.51	43.53	54.00	-10.47	Average	163	240	P
2	2390.00	-2.98	65.55	62.57	74.00	-11.43	Peak	163	240	P
3	4824.00	4.63	30.33	34.96	54.00	-19.04	Average	100	287	P
4	4824.00	4.63	42.56	47.19	74.00	-26.81	Peak	100	287	P
5	12060.00	14.56	31.47	46.03	54.00	-7.97	Average	100	219	P
6	12060.00	14.56	43.66	58.22	74.00	-15.78	Peak	100	219	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH01		:

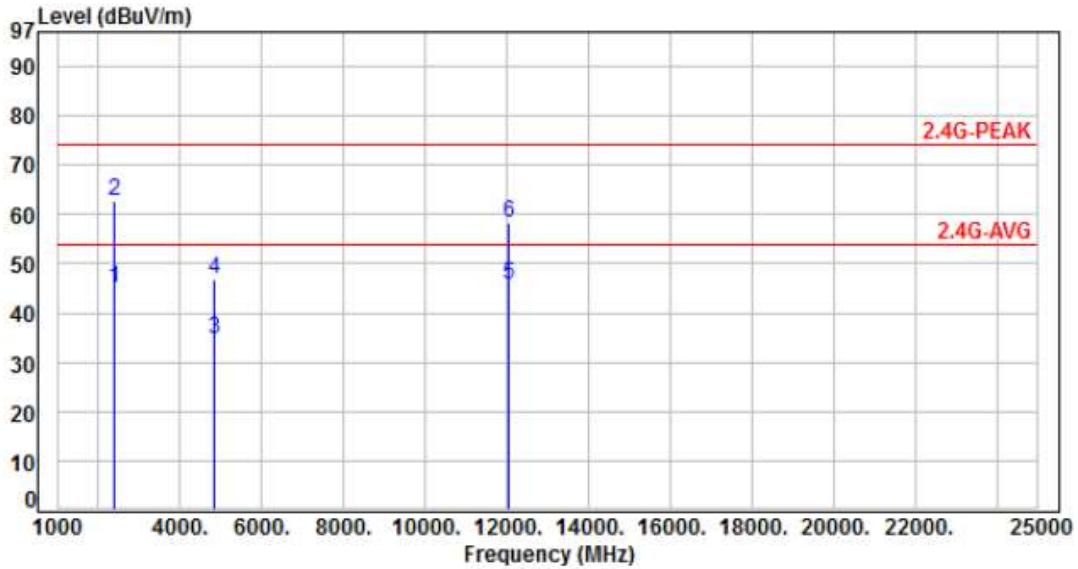


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	48.13	45.15	54.00	-8.85	Average	100	65	P
2	2390.00	-2.98	65.68	62.70	74.00	-11.30	Peak	100	65	P
3	4824.00	4.63	30.21	34.84	54.00	-19.16	Average	100	79	P
4	4824.00	4.63	42.31	46.94	74.00	-27.06	Peak	100	79	P
5	12060.00	14.56	31.34	45.90	54.00	-8.10	Average	100	97	P
6	12060.00	14.56	43.67	58.23	74.00	-15.77	Peak	100	97	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH06		:

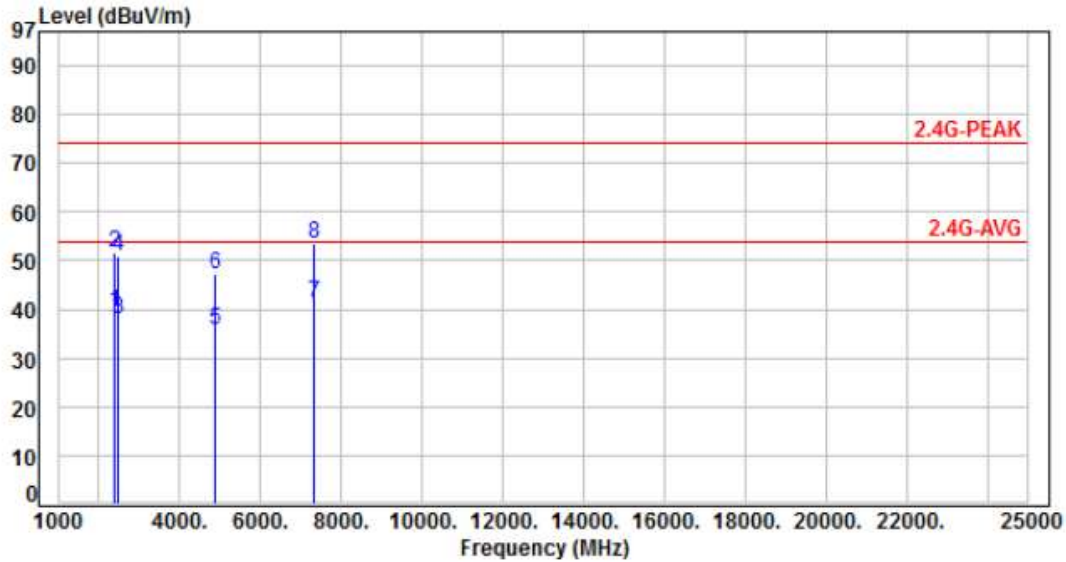


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	42.38	39.40	54.00	-14.60	Average	100	139	P
2	2390.00	-2.98	54.62	51.64	74.00	-22.36	Peak	100	139	P
3	2483.50	-2.75	40.72	37.97	54.00	-16.03	Average	100	139	P
4	2483.50	-2.75	53.62	50.87	74.00	-23.13	Peak	100	139	P
5	4874.00	4.79	30.90	35.69	54.00	-18.31	Average	100	113	P
6	4874.00	4.79	42.36	47.15	74.00	-26.85	Peak	100	113	P
7	7311.00	9.68	31.62	41.30	54.00	-12.70	Average	100	167	P
8	7311.00	9.68	43.75	53.43	74.00	-20.57	Peak	100	167	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH06		:

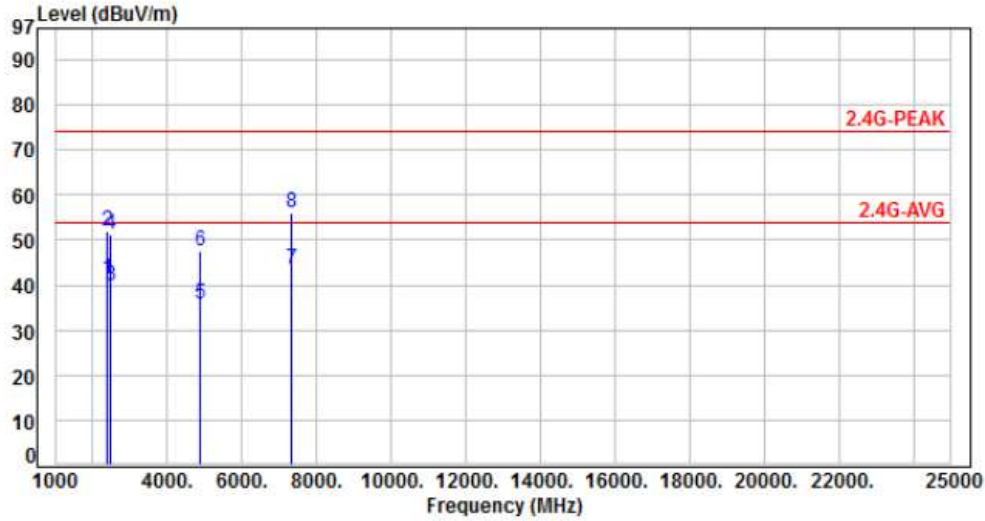


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	44.28	41.30	54.00	-12.70	Average	100	64	P
2	2390.00	-2.98	54.81	51.83	74.00	-22.17	Peak	100	64	P
3	2483.50	-2.75	42.45	39.70	54.00	-14.30	Average	100	64	P
4	2483.50	-2.75	53.85	51.10	74.00	-22.90	Peak	100	64	P
5	4874.00	4.79	30.85	35.64	54.00	-18.36	Average	100	87	P
6	4874.00	4.79	42.75	47.54	74.00	-26.46	Peak	100	87	P
7	7311.00	9.68	33.92	43.60	54.00	-10.40	Average	100	281	P
8	7311.00	9.68	46.41	56.09	74.00	-17.91	Peak	100	281	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH11		:

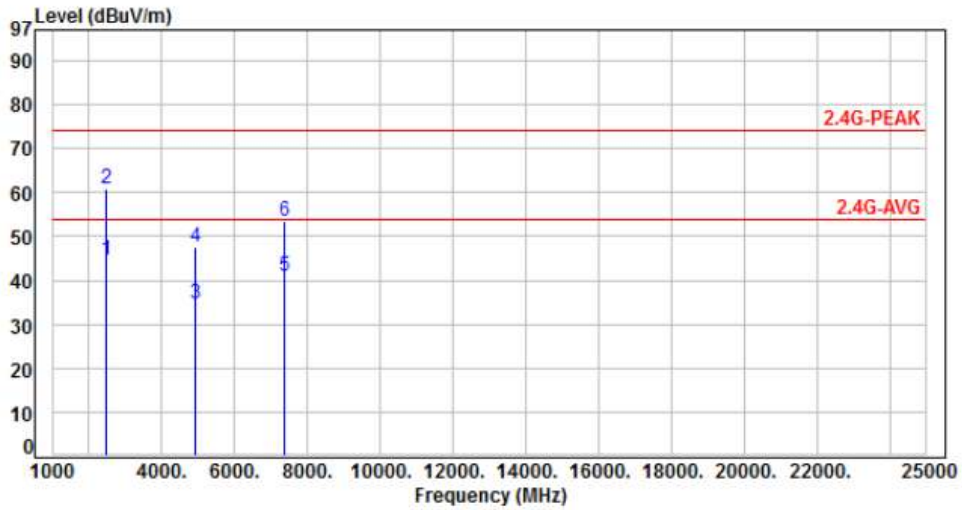


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.75	47.31	44.56	54.00	-9.44	Average	100	357	P
2	2483.50	-2.75	63.72	60.97	74.00	-13.03	Peak	100	357	P
3	4924.00	4.99	29.84	34.83	54.00	-19.17	Average	100	284	P
4	4924.00	4.99	42.54	47.53	74.00	-26.47	Peak	100	284	P
5	7386.00	9.81	30.95	40.76	54.00	-13.24	Average	100	327	P
6	7386.00	9.81	43.62	53.43	74.00	-20.57	Peak	100	327	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH11		:

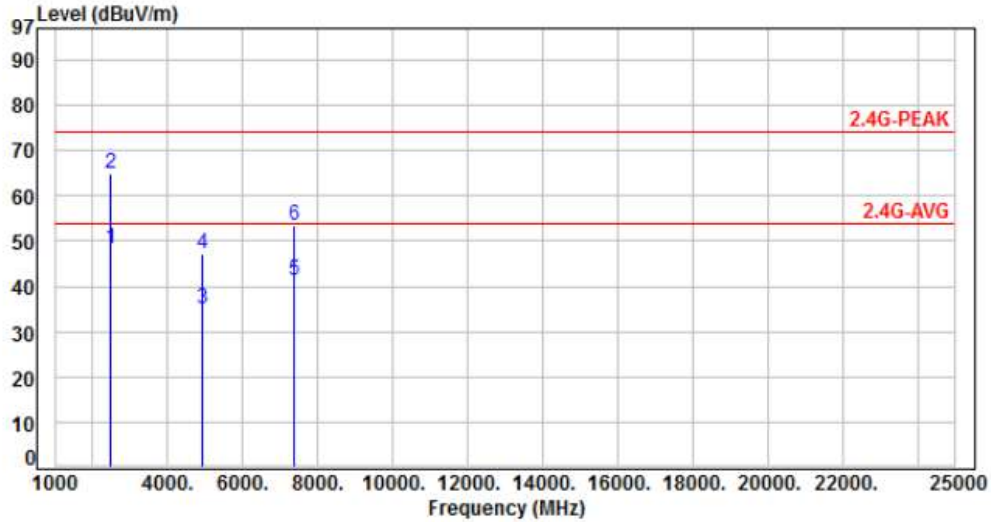


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.75	50.98	48.23	54.00	-5.77	Average	121	219	P
2	2483.50	-2.75	67.60	64.85	74.00	-9.15	Peak	121	219	P
3	4924.00	4.99	29.92	34.91	54.00	-19.09	Average	100	249	P
4	4924.00	4.99	42.33	47.32	74.00	-26.68	Peak	100	249	P
5	7386.00	9.81	31.33	41.14	54.00	-12.86	Average	100	187	P
6	7386.00	9.81	43.55	53.36	74.00	-20.64	Peak	100	187	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH03		:

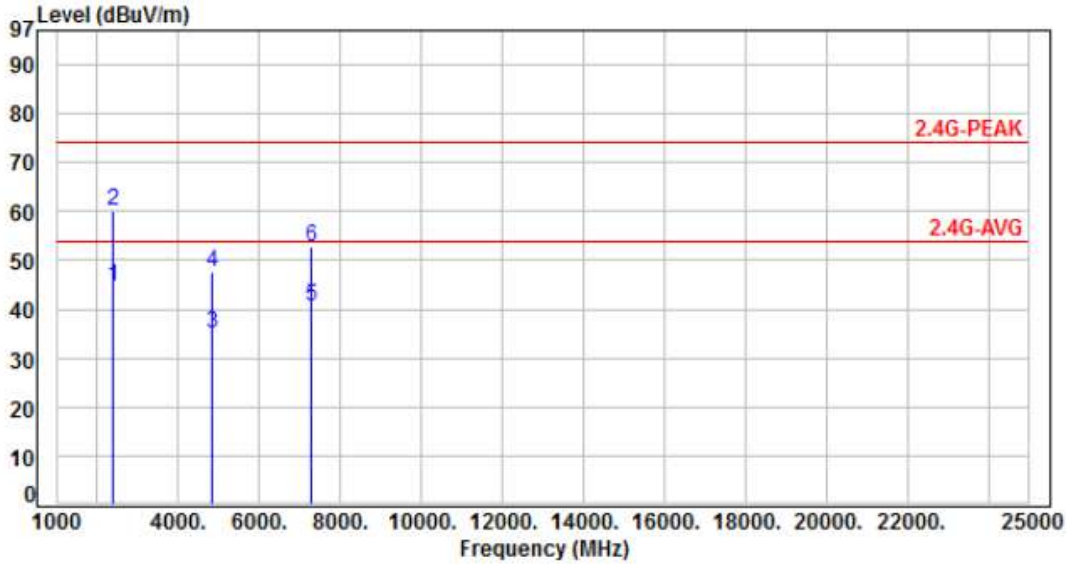


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	47.50	44.52	54.00	-9.48	Average	239	160	P
2	2390.00	-2.98	63.27	60.29	74.00	-13.71	Peak	239	160	P
3	4844.00	4.70	30.24	34.94	54.00	-19.06	Average	100	189	P
4	4844.00	4.70	42.78	47.48	74.00	-26.52	Peak	100	189	P
5	7266.00	9.50	31.23	40.73	54.00	-13.27	Average	100	134	P
6	7266.00	9.50	43.25	52.75	74.00	-21.25	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH03		:

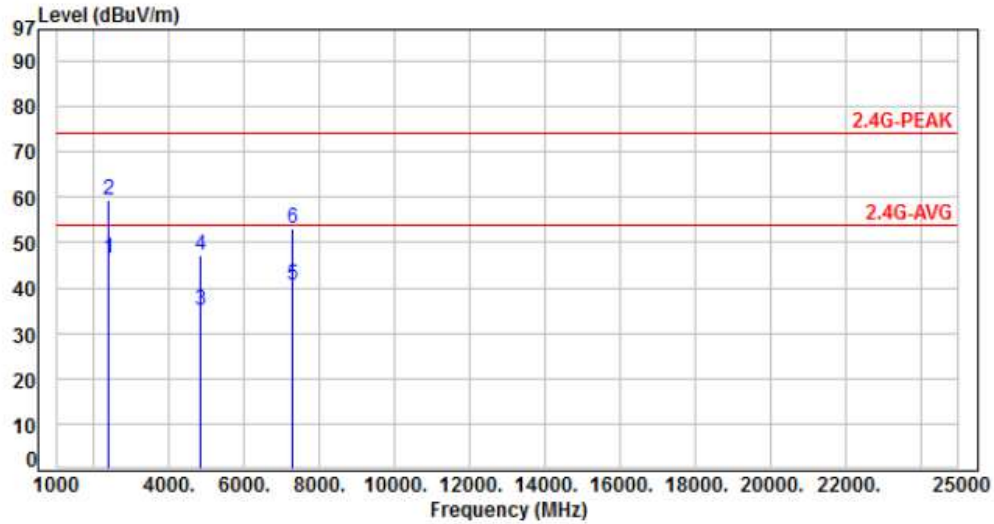


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	49.32	46.34	54.00	-7.66	Average	100	64	P
2	2390.00	-2.98	62.41	59.43	74.00	-14.57	Peak	100	64	P
3	4844.00	4.70	30.17	34.87	54.00	-19.13	Average	100	43	P
4	4844.00	4.70	42.67	47.37	74.00	-26.63	Peak	100	43	P
5	7266.00	9.50	31.11	40.61	54.00	-13.39	Average	100	92	P
6	7266.00	9.50	43.78	53.28	74.00	-20.72	Peak	100	92	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH06		:

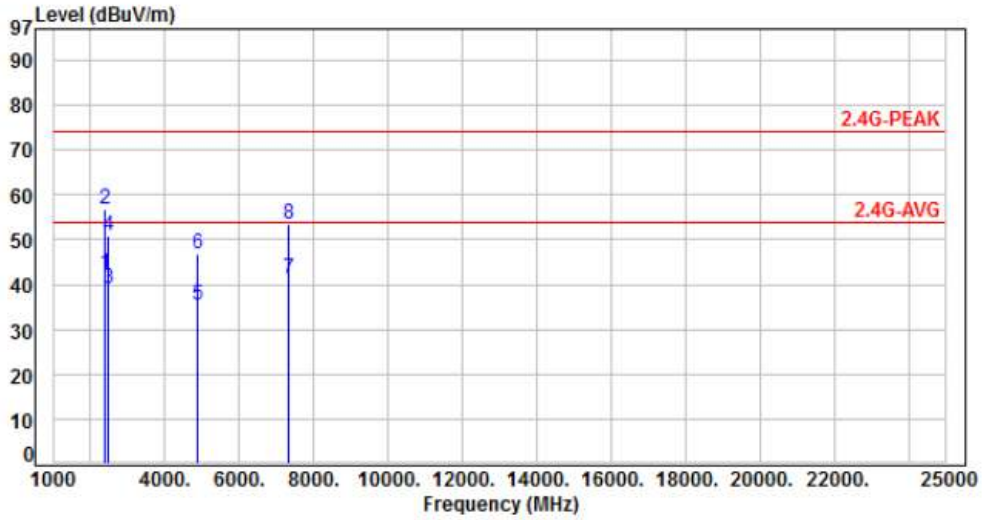


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	45.52	42.54	54.00	-11.46	Average	239	161	P
2	2390.00	-2.98	59.64	56.66	74.00	-17.34	Peak	239	161	P
3	2483.50	-2.75	41.87	39.12	54.00	-14.88	Average	239	161	P
4	2483.50	-2.75	53.72	50.97	74.00	-23.03	Peak	239	161	P
5	4874.00	4.79	30.70	35.49	54.00	-18.51	Average	100	129	P
6	4874.00	4.79	42.18	46.97	74.00	-27.03	Peak	100	129	P
7	7311.00	9.68	31.72	41.40	54.00	-12.60	Average	100	173	P
8	7311.00	9.68	43.69	53.37	74.00	-20.63	Peak	100	173	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH06		:

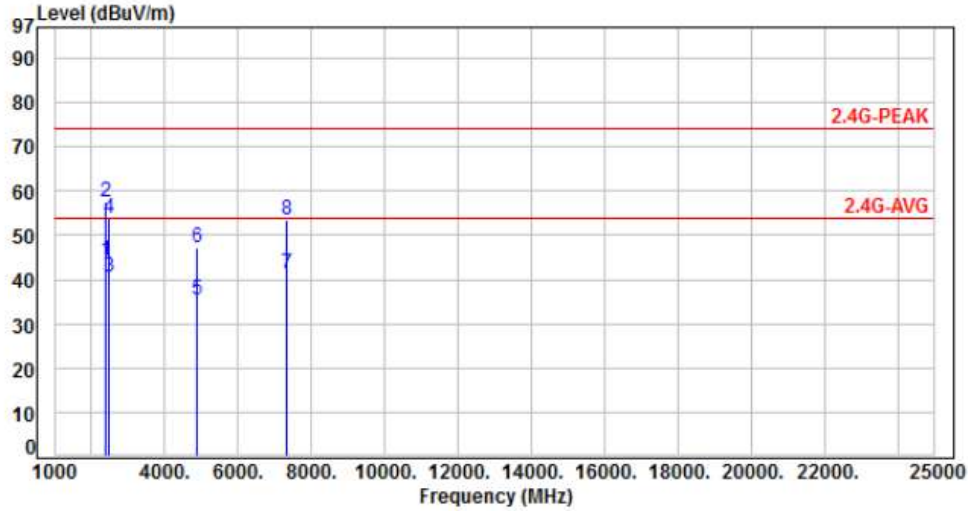


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.98	47.37	44.39	54.00	-9.61	Average	100	65	P
2	2390.00	-2.98	60.41	57.43	74.00	-16.57	Peak	100	65	P
3	2483.50	-2.75	43.47	40.72	54.00	-13.28	Average	100	65	P
4	2483.50	-2.75	56.44	53.69	74.00	-20.31	Peak	100	65	P
5	4874.00	4.79	30.57	35.36	54.00	-18.64	Average	100	86	P
6	4874.00	4.79	42.30	47.09	74.00	-26.91	Peak	100	86	P
7	7311.00	9.68	31.65	41.33	54.00	-12.67	Average	100	103	P
8	7311.00	9.68	43.75	53.43	74.00	-20.57	Peak	100	103	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH09		:

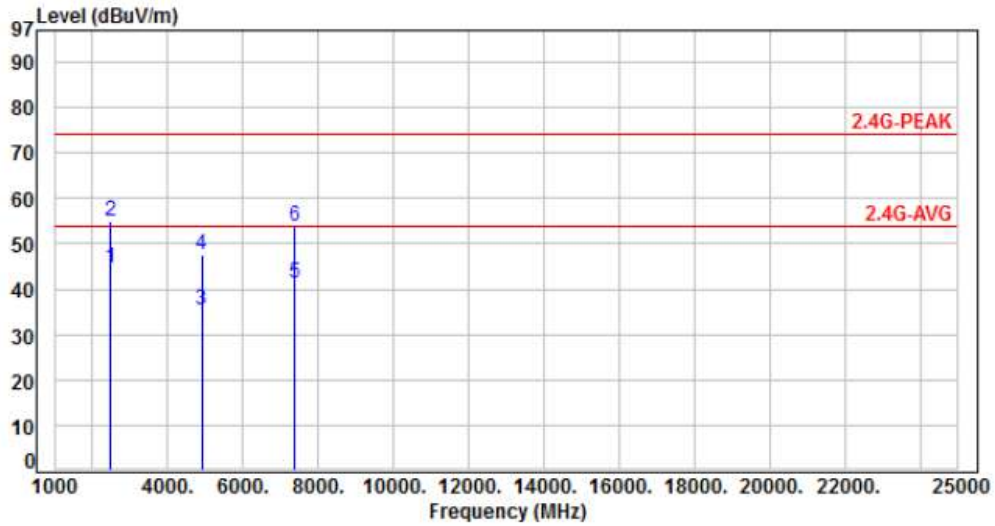


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.75	47.55	44.80	54.00	-9.20	Average	100	359	P
2	2483.50	-2.75	57.85	55.10	74.00	-18.90	Peak	100	359	P
3	4904.00	4.89	30.59	35.48	54.00	-18.52	Average	100	299	P
4	4904.00	4.89	42.67	47.56	74.00	-26.44	Peak	100	299	P
5	7356.00	9.78	31.53	41.31	54.00	-12.69	Average	100	327	P
6	7356.00	9.78	43.94	53.72	74.00	-20.28	Peak	100	327	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH09		:

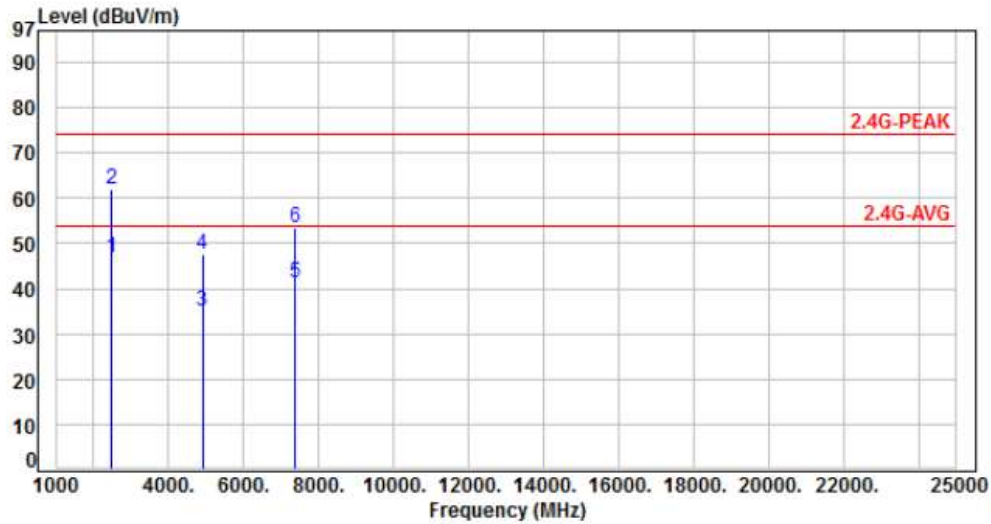

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-2.75	49.67	46.92	54.00	-7.08	Average	123	221	P
2	2483.50	-2.75	64.88	62.13	74.00	-11.87	Peak	123	221	P
3	4904.00	4.89	30.08	34.97	54.00	-19.03	Average	100	237	P
4	4904.00	4.89	42.59	47.48	74.00	-26.52	Peak	100	237	P
5	7356.00	9.78	31.44	41.22	54.00	-12.78	Average	100	177	P
6	7356.00	9.78	43.57	53.35	74.00	-20.65	Peak	100	177	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Conducted Spurious Emission


7.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

7.3 Test Setup Layout



7.4 Test Result and Data

Note: Test plots refers to the following pages.



Modulation Type: 802.11b, CH 01



Modulation Type: 802.11b, CH 06





Modulation Type: 802.11b, CH 11





Modulation Type: 802.11g, CH 01



Modulation Type: 802.11g, CH 06





Modulation Type: 802.11g, CH 11







Modulation Type: 802.11n HT20, CH01




Modulation Type: 802.11n HT20, CH06

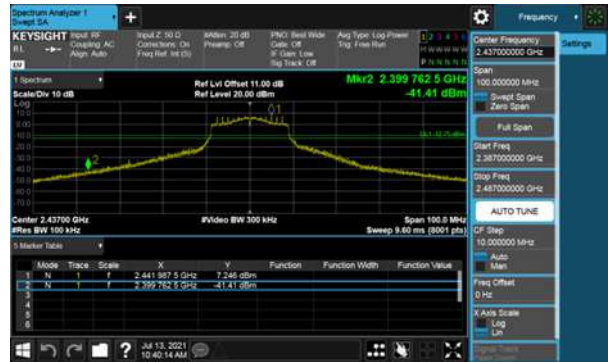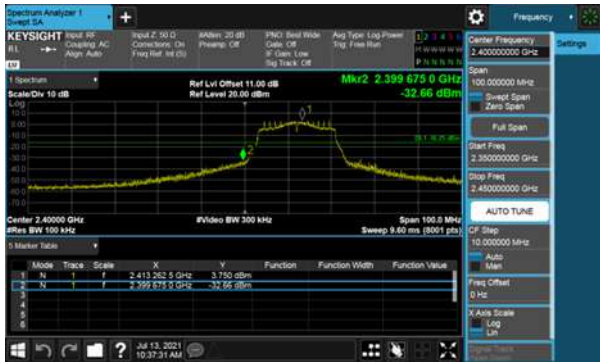



Modulation Type: 802.11n HT20, CH11

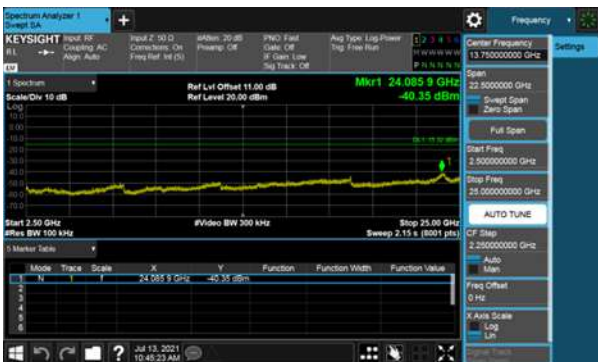



Modulation Type: 802.11n HT40, CH03




Modulation Type: 802.11n HT40, CH06





Modulation Type: 802.11n HT40, CH09

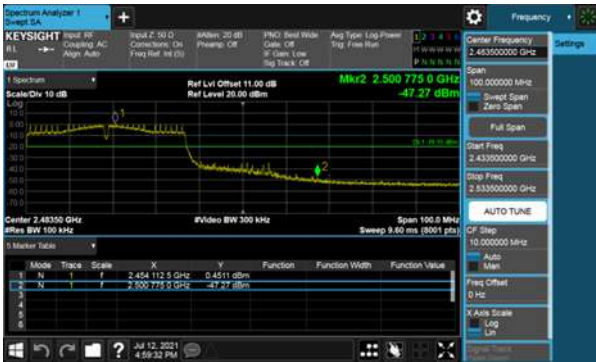



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout



8.4 Test Result and Data

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
11b,1M	8.40	8.50	98.82%
11g,6M	1.40	1.50	93.33%
11n HT20	1.31	1.41	92.89%
11n HT40	0.65	0.75	86.26%



Modulation Type: 802.11b(1Mbps)



Modulation Type: 802.11n HT20(6.5Mbps)



Modulation Type: 802.11g(6Mbps)



Modulation Type: 802.11n HT40(13.5Mbps)





9. 6dB Bandwidth Measurement Data


9.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout



9.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
			ANT A	
11b	1	2412	8.04	0.5
	6	2437	8.04	0.5
	11	2462	8.55	0.5
11g	1	2412	15.18	0.5
	6	2437	15.18	0.5
	11	2462	15.15	0.5
11n HT20	1	2412	15.18	0.5
	6	2437	15.18	0.5
	11	2462	15.18	0.5
11n HT40	3	2422	35.16	0.5
	6	2437	35.16	0.5
	9	2452	35.16	0.5



Modulation Type: 802.11b
CH01



Modulation Type: 802.11g
CH01



CH06



CH06



CH11



CH11





Modulation Type: 802.11n HT20 CH01



Modulation Type: 802.11n HT40 CH03



CH06



CH06



CH11



CH09





10. Maximum Peak and Average Output Power

10.1 Test Limit


The Maximum Peak Output Power Measurement is 30dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

10.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout



**10.4 Test Result and Data**

Setting	Modulation Mode	Channel	Frequency (MHz)	Conducted(peak) output power (dBm)	Total PK power (dBm)	Total PK power (mW)	Powe Limit (dBm)
				ANT A			
64	11b	1	2412	21.34	21.34	136.144	30.00
64		6	2437	22.04	22.04	159.956	30.00
61		11	2462	20.83	20.83	121.060	30.00
51	11g	1	2412	22.76	22.76	188.799	30.00
68		6	2437	23.40	23.40	218.776	30.00
53		11	2462	23.02	23.02	200.447	30.00
51	11n HT20	1	2412	22.78	22.78	189.671	30.00
66		6	2437	23.01	23.01	199.986	30.00
53		11	2462	22.11	22.11	162.555	30.00
42	11n HT40	3	2422	22.04	22.04	159.956	30.00
50		6	2437	22.92	22.92	195.884	30.00
43		9	2452	22.73	22.73	187.499	30.00

Setting	Modulation Mode	Channel	Frequency (MHz)	Conducted(average) output power (dBm)	Total AV power (dBm)	Total AV power (mW)	Powe Limit (dBm)
				ANT A			
64	11b	1	2412	18.41	18.41	69.343	NA
64		6	2437	18.77	18.77	75.336	NA
61		11	2462	17.74	17.74	59.429	NA
51	11g	1	2412	14.82	14.82	30.339	NA
68		6	2437	18.86	18.86	76.913	NA
53		11	2462	15.74	15.74	37.497	NA
51	11n HT20	1	2412	14.88	14.88	30.761	NA
66		6	2437	18.49	18.49	70.632	NA
53		11	2462	15.71	15.71	37.239	NA
42	11n HT40	3	2422	13.44	13.44	22.080	NA
50		6	2437	15.64	15.64	36.644	NA
43		9	2452	13.79	13.79	23.933	NA

Note: Average power is for reference only.



11. Power Spectral Density

11.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

11.2 Test Procedures

- a. The transmitter output was connected to spectrum analyzer.
- b. The spectrum analyzer’s resolution bandwidth were set at 3kHz RBW and 10KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- c. The power spectral density was measured and recorded.

11.3 Test Setup Layout

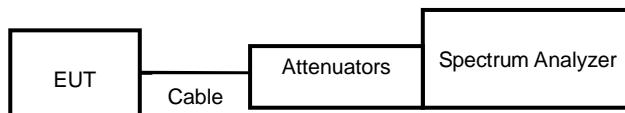

11.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)	Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit (dBm)
			ANT A				
11b	1	2412	-0.55	-0.55	0.00	-0.55	8.00
	6	2437	-1.96	-1.96	0.00	-1.96	8.00
	11	2462	-1.49	-1.49	0.00	-1.49	8.00
11g	1	2412	-5.40	-5.40	0.00	-5.40	8.00
	6	2437	-4.97	-4.97	0.00	-4.97	8.00
	11	2462	-5.27	-5.27	0.00	-5.27	8.00
11n HT20	1	2412	-8.98	-8.98	0.00	-8.98	8.00
	6	2437	-4.12	-4.12	0.00	-4.12	8.00
	11	2462	-8.15	-8.15	0.00	-8.15	8.00
11n HT40	3	2422	-8.74	-8.74	0.00	-8.74	8.00
	6	2437	-9.35	-9.35	0.00	-9.35	8.00
	9	2452	-8.48	-8.48	0.00	-8.48	8.00



Modulation Type: 802.11b
CH01




Modulation Type: 802.11g
CH01

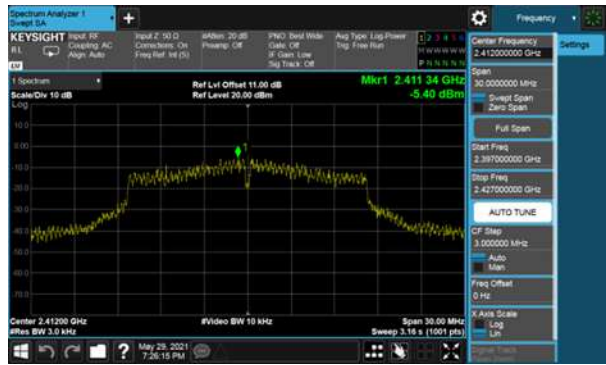

CH06



CH06

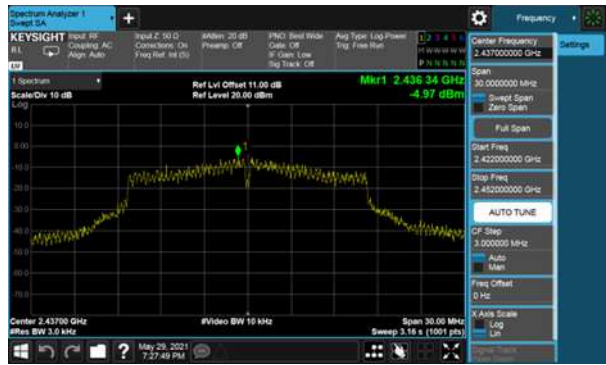

CH11




CH11






Modulation Type: 802.11n HT20 CH01

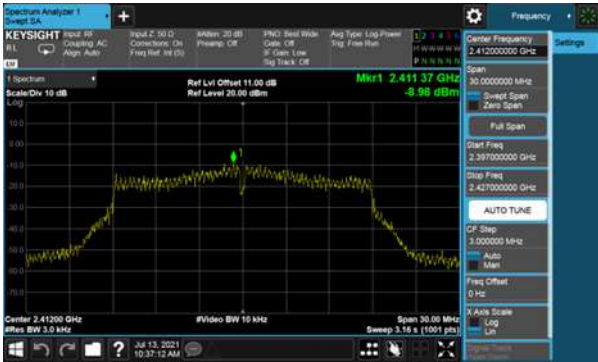

Modulation Type: 802.11n HT40 CH03




CH06

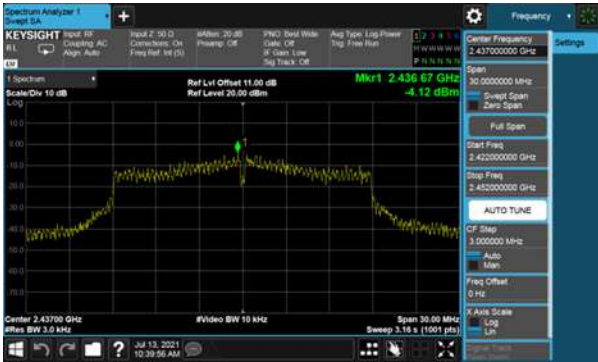

CH06



CH11

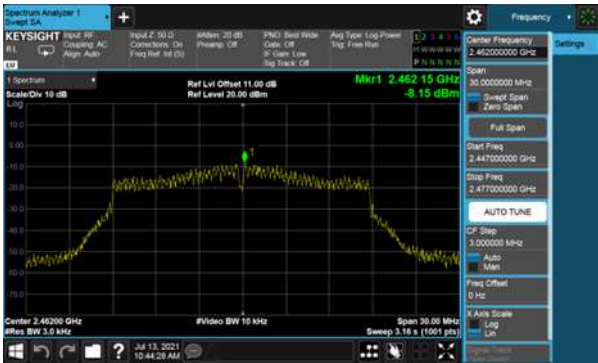

CH09

