



**MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*  
33439 WESTERN AVENUE ! UNION CITY, CALIFORNIA 94587 ! PHONE (510) 489-6300 ! FAX (510) 489-6372

---

## **Electromagnetic Compatibility Criteria Test Report**

For the

**Ubiquiti Networks  
Model XR3**

Tested under

**The FCC Verification Rules  
Contained in Title 47 of the CFR, Part 90, Subpart Z  
for Private Land Mobile Radio Services  
and Part 15, Subpart B for a Class B Digital Device**

**MET Report: EMCS80375D-FCC90**

January 29, 2008

**Prepared For:  
Ubiquiti Networks  
495 Montague Expressway  
Milpitas, CA 95035**

**Prepared By:  
MET Laboratories, Inc.  
3162 Belick Street  
Santa Clara, CA 95054**



Ubiquiti Networks  
XR3

Electromagnetic Compatibility  
Cover Page  
CFR Title 47 Part 90 Subpart Z & Part 15 Subpart B

## Electromagnetic Compatibility Criteria Test Report

For the

**Ubiquiti Networks  
Model XR3**


Tested under

**The FCC Verification Rules  
Contained in Title 47 of the CFR, Part 90, Subpart Z  
for Private Land Mobile Radio Services  
and Part 15, Subpart B for a Class B Digital Device**

**MET Report: EMCS80375D-FCC90**



Minh Ly  
Electromagnetic Compatibility Lab

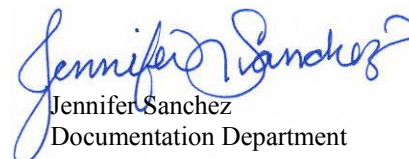

Jennifer Sanchez  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is / is not capable of operation in accordance with the requirements of Part 90, Subpart Z and Part 15, Subpart B of the FCC Rules under normal use and maintenance.



Shawn McMillen, Wireless Lab Manager  
Electromagnetic Compatibility Lab



Ubiquiti Networks  
XR3

Electromagnetic Compatibility  
Report Status  
CFR Title 47 Part 90 Subpart Z & Part 15 Subpart B

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	January 29, 2008	Initial Issue.



## Table of Contents

<b>1. Executive Summary .....</b>	<b>1</b>
1.1. Testing Summary .....	2
<b>2. Equipment Configuration.....</b>	<b>3</b>
2.1. Overview .....	4
2.2. Test Site .....	5
2.3. Description of Test Sample .....	5
2.4. Equipment Configuration .....	6
2.5. Support Equipment .....	6
2.6. Ports and Cabling Information .....	7
2.7. Method of Monitoring EUT Operation .....	11
2.8. Modifications .....	11
2.8.1. Modifications to EUT .....	11
2.8.2. Modifications to Test Standard .....	11
2.9. Disposition of EUT .....	11
<b>3. Electromagnetic Compatibility Criteria for Unintentional Radiators .....</b>	<b>12</b>
3.1. Conducted Emissions Limits.....	13
3.2. Radiated Emissions Limits.....	17
<b>4. Electromagnetic Compatibility Criteria for Intentional Radiators .....</b>	<b>20</b>
4.1. Peak Power Output.....	27
4.2. Occupied Bandwidth.....	33
4.3. Spurious Emissions at Antenna Terminals.....	38
4.4. Radiated Emissions (Substitution Method).....	53
4.5. Frequency Stability .....	59
<b>5. Test Equipment .....</b>	<b>61</b>
<b>6. Certification Label &amp; User's Manual Information .....</b>	<b>63</b>
6.1. Verification Information .....	64
6.2. Label and User's Manual Information .....	68

All references to section numbers are taken directly from the standard/specification used. Only sections requiring testing or evaluation are included.



## List of Tables

Table 1. EUT Specifications .....	4
Table 2. Equipment Configuration .....	6
Table 3. Support Equipment.....	6
Table 4. Ports and Cabling Information .....	7
Table 5. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b) .....	13
Table 6. Conducted Emissions - Voltage, AC Power, Phase Line 120V/60Hz.....	14
Table 7. Conducted Emissions - Voltage, AC Power, Neutral Line 120V/60Hz .....	14
Table 8. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b) .....	17
Table 9. Radiated Emissions Limits Test Results .....	18
Table 10. RF Output Power.....	22
Table 11. Peak Power Spectral Density.....	28
Table 12. Temperature Vs. Frequency Test Results.....	60
Table 13. Frequency vs. Voltage Test Results .....	60

## List of Figures

Figure 1. Block Diagram of Test Configuration (Unintentional) .....	8
Figure 2. Block Diagram of Test Configuration (Conducted Emission).....	9
Figure 3. Block Diagram of Test Configuration (Spurious Emission) .....	10
Figure 4. RF Power Output Test Setup .....	21
Figure 5. PPSD Test Setup .....	27
Figure 6. Occupied Bandwidth Test Setup.....	33
Figure 7. Spurious Emissions at Antenna Terminals Test Setup.....	38



## List of Plots

Plot 1. Radiated Emissions Test Plot.....	18
Plot 2. RF Channel Power 5MHz BW Low Ch.....	23
Plot 3. RF Channel Power 5MHz BW Mid Ch .....	23
Plot 4. RF Channel Power 5MHz BW High Ch .....	24
Plot 5. RF Channel Power 10MHz BW Low Ch.....	24
Plot 6. RF Channel Power 10MHz BW Mid Ch .....	25
Plot 7. RF Channel Power 10MHz BW High Ch.....	25
Plot 8. RF Channel Power 20MHz BW.....	26
Plot 9. PPSD 5 MHz BW Low Ch .....	29
Plot 10. PPSD 5 MHz BW Mid Ch .....	29
Plot 11. PPSD 5 MHz BW High Ch.....	30
Plot 12. PPSD 10 MHz Low Ch.....	30
Plot 13. PPSD 10 MHz Mid Ch.....	31
Plot 14. PPSD 10 MHz High Ch .....	31
Plot 15. PPSD 20 MHz Mid Ch.....	32
Plot 16. Occupied Bandwidth 5MHz Low Ch.....	34
Plot 17. Occupied Bandwidth 5 MHz Mid Ch .....	34
Plot 18. Occupied Bandwidth 5 MHz High Ch .....	35
Plot 19. Occupied Bandwidth 10 MHz Low Ch.....	35
Plot 20. Occupied Bandwidth 10 MHz Mid Ch .....	36
Plot 21. Occupied Bandwidth 10 MHz High Ch .....	36
Plot 22. Occupied Bandwidth 20 MHz.....	37
Plot 23. Conducted Spurious Emissions 5 MHz Low Ch (30 MHz - 18GHz).....	39
Plot 24. Conducted Spurious Emissions 5 MHz Low Ch (18 GHz – 26.5 GHz) .....	39
Plot 25. Conducted Spurious Emissions 5 MHz Low Ch (26.5 GHz – 40 GHz) .....	40
Plot 26. Conducted Spurious Emissions 5 MHz Mid Ch (30 MHz - 18GHz).....	40
Plot 27. Conducted Spurious Emissions 5 MHz Mid Ch (18 GHz – 26.5 GHz).....	41
Plot 28. Conducted Spurious Emissions 5 MHz Mid Ch (26.5 GHz – 40 GHz).....	41
Plot 29. Conducted Spurious Emissions 5 MHz Hi Ch (30 MHz - 18GHz).....	42
Plot 30. Conducted Spurious Emissions 5 MHz Hi Ch (18 GHz – 26.5 GHz).....	42
Plot 31. Conducted Spurious Emissions 5 MHz Hi Ch (26.5 GHz – 40 GHz).....	43
Plot 32. Conducted Spurious Emissions 10 MHz Low Ch (30 MHz - 18GHz) .....	43
Plot 33. Conducted Spurious Emissions 10 MHz Low Ch (18 GHz – 26.5 GHz) .....	44
Plot 34. Conducted Spurious Emissions 10 MHz Low Ch (26.5 GHz – 40 GHz) .....	44
Plot 35. Conducted Spurious Emissions 10 MHz Mid Ch (30 MHz - 18GHz).....	45
Plot 36. Conducted Spurious Emissions 10 MHz Mid Ch (18 GHz – 26.5 GHz).....	45
Plot 37. Conducted Spurious Emissions 10 MHz Mid Ch (26.5 GHz – 40 GHz).....	46
Plot 38. Conducted Spurious Emissions 10 MHz Hi Ch (30 MHz - 18GHz).....	46
Plot 39. Conducted Spurious Emissions 10 MHz Hi Ch (18 GHz – 26.5 GHz).....	47
Plot 40. Conducted Spurious Emissions 10 MHz Hi Ch (26.5 GHz – 40 GHz).....	47
Plot 41. Conducted Spurious Emissions 20 MHz (30 MHz - 18GHz).....	48
Plot 42. Conducted Spurious Emissions 20 MHz (18 GHz – 26.5 GHz).....	48
Plot 43. Conducted Spurious Emissions 20 MHz (26.5 GHz – 40 GHz) .....	49
Plot 44. Lower Band Edge 5MHz Low Channel.....	50
Plot 45. Upper Band Edge 5MHz High Channel.....	50
Plot 46. Lower Band Edge 10MHz Low Channel.....	51
Plot 47. Upper Band Edge 10MHz High Channel.....	51
Plot 48. Lower Band Edge 20MHz low Channel.....	52
Plot 49. Upper Band Edge 20MHz High Channel.....	52



## List of Photographs

Photograph 1. Ubiquiti Networks XR3 .....	5
Photograph 2. Conducted Emissions Test Setup .....	16
Photograph 3. Radiated Emission Limits Test Setup .....	19
Photograph 4. Radiated Emission Spurious Test Setup .....	57



## List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB $\mu$ A	Decibels above one microamp
dB $\mu$ V	Decibels above one microvolt
dB $\mu$ A/m	Decibels above one microamp per meter
dB $\mu$ V/m	Decibels above one microvolt per meter
DC	Direct Current $\mu$
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GR-1089-CORE	( <i>GR</i> ) General Requirement(s) imposed by the NEBS standard, ( <i>CORE</i> ) Central Office Recovery Express (AT&T), ( <i>1089</i> ) specifies various parts of the General Requirements under Bellcore Technical Standard, Requirements for Electromagnetic Compatibility and Electrical Safety - Generic Criteria for Network Telecommunications Equipment
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
$\mu$ H	microhenry
$\mu$	microfarad
$\mu$ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane





# Executive Summary



## 1. Testing Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 90, Subpart Z. All tests were conducted using measurement procedure ANSI TIA/EIA-603-A-2004.

Title 47 of the CFR, Part 90, Subpart Z, Reference and Test Description	Conformance			Comments
	Yes	No	N/A	
	<i>Yes - Equipment complies with the Requirement</i> <i>No - Equipment does not comply with the Requirement</i> <i>N/A - Not applicable to the equipment under tests</i>			
90.1319(b) Policies governing the use of the 3650–3700 MHz band.	√			Compliant
2.1046; 90.1321(a) RF Power Output	√			Compliant
2.1046; 90.1321(a) Peak Power Spectral Density	√			Compliant
2.1049 Occupied Bandwidth	√			Compliant
2.1051; 90.1323(a) Spurious Emissions at Antenna Terminals	√			Compliant
2.1053; 15.209 Radiated Spurious Emissions	√			Compliant
RF exposure 90.1335	√			Compliant
Frequency Stability §2.1055, 90.213	√			Compliant
15.107	√			AC Power Line Conducted Emissions for intentional radiators
15.109	√			Radiated Spurious Emissions for unintentional radiators



# Equipment Configuration



## 2. Equipment Configuration

### 2.1. Overview

MET Laboratories, Inc. was contracted by Ubiquiti Networks to perform testing on the XR3.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Ubiquiti Networks., XR3.

An EMC evaluation to determine compliance of the TB 4.9 with the requirements of Part 90, Subpart Z, was conducted. (All references are to the most current version of Title 47 of the Code of Federal Regulations in effect). In accordance with §2.1033, the following data is presented in support of the Certification of the TB4.9. Ubiquiti Networks. should retain a copy of this document and it should be kept on file for at least five years after the manufacturing of the EUT has been **permanently** discontinued. The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	XR3			
<b>Model(s) Covered:</b>	XR3			
<b>EUT Specifications:</b>	Primary Power Source: Laptop			
	FCC ID: SWX-XR3B			
	Type of Modulations:	OFDM		
	Emission Designators:	<b>5MHz</b>	<b>10MHz</b>	<b>20MHz</b>
		4M24D7D	8M44D7D	17M2D7D
	RF Output Power:	18.73dBm	18.79dBm	18.46dBm
	Equipment Code:	TNB		
	EUT Frequency Ranges:	3650–3675MHz		
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.			
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C			
	Relative Humidity: 30-60%			
	Barometric Pressure: 860-1060 mbar			
<b>Evaluated by:</b>	Shawn McMillen			
<b>Date(s):</b>	August 17, 2007			

Table 1. EUT Specifications



## 2.2. Test Site

All testing was performed at MET Laboratories, Inc., 3162 Belick Street, Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories. In accordance with §2.948(d), MET Laboratories has been accredited by A2LA (Certificate Number 591.02)

## 2.3. Description of Test Sample

The Ubiquiti Networks XR3, is a 3GHz Wireless PCMCIA Module.

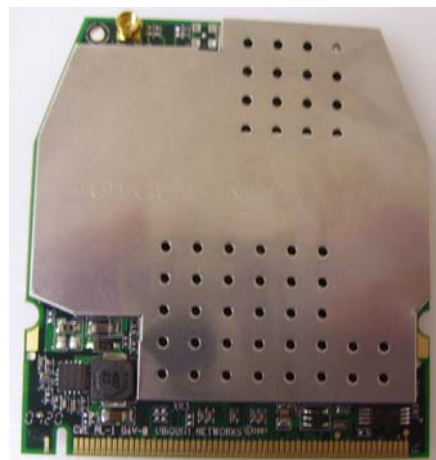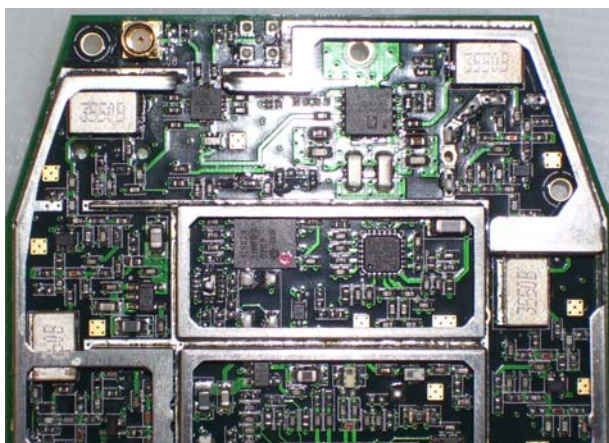

Photograph 1. Ubiquiti Networks XR3



## 2.4. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
A	3.7 GHz PCMCIA	XR3	

**Table 2. Equipment Configuration**

## 2.5. Support Equipment

Ubiquiti Networks supplied support equipment necessary for the operation and testing of the XR3. All support equipment supplied is listed in the following Support Equipment List.

Ref. ID	Name / Description	Manufacturer	Model Number
B	PCMCIA Extension Card	Accurite Technologies	307507
C	Laptop	Dell	Latitude
D	AC-DC PWR Adaptor	Dell	PA-2
E	50 ohm load	-	-
F	Spectrum Analyzer	HP	E4407B
G	50ohms terminator	N/A	N/A
H	Printer	HP	DeskJet 932C
I	USB Mouse	Microsoft	IntelliMouse 3.0A

**Table 3. Support Equipment**



## 2.6. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded (Y/N)	Termination Box ID & Port ID
<b>Conducted Measurement</b>						
1	A, Antenna	Coax	1	1.5	Yes	F, Input
2	C, PWR	DC Power Cord	1	1.5	No	D, DC Output
3	D, AC Input	AC Cable	1	1.5	No	AC PWR Outlet
<b>Spurious Emission</b>						
1	A, Antenna	Coax	1	0.5	Yes	E, Antenna
2	C, PWR	DC Power Cord	1	1.5	No	D, DC Output
3	D, AC Input	AC Cable	1	1.5	No	AC PWR Outlet
<b>15.107 &amp; 15.109</b>						
1	C, PWR	DC Power Cord	1	1.5	No	D, DC Output
2	D, AC Input	AC Cable	1	1.5	No	AC PWR Outlet
3	C, Printer	DB25	1	2	Yes	H
4	C,USB	USB	1	2	Yes	I

**Table 4. Ports and Cabling Information**

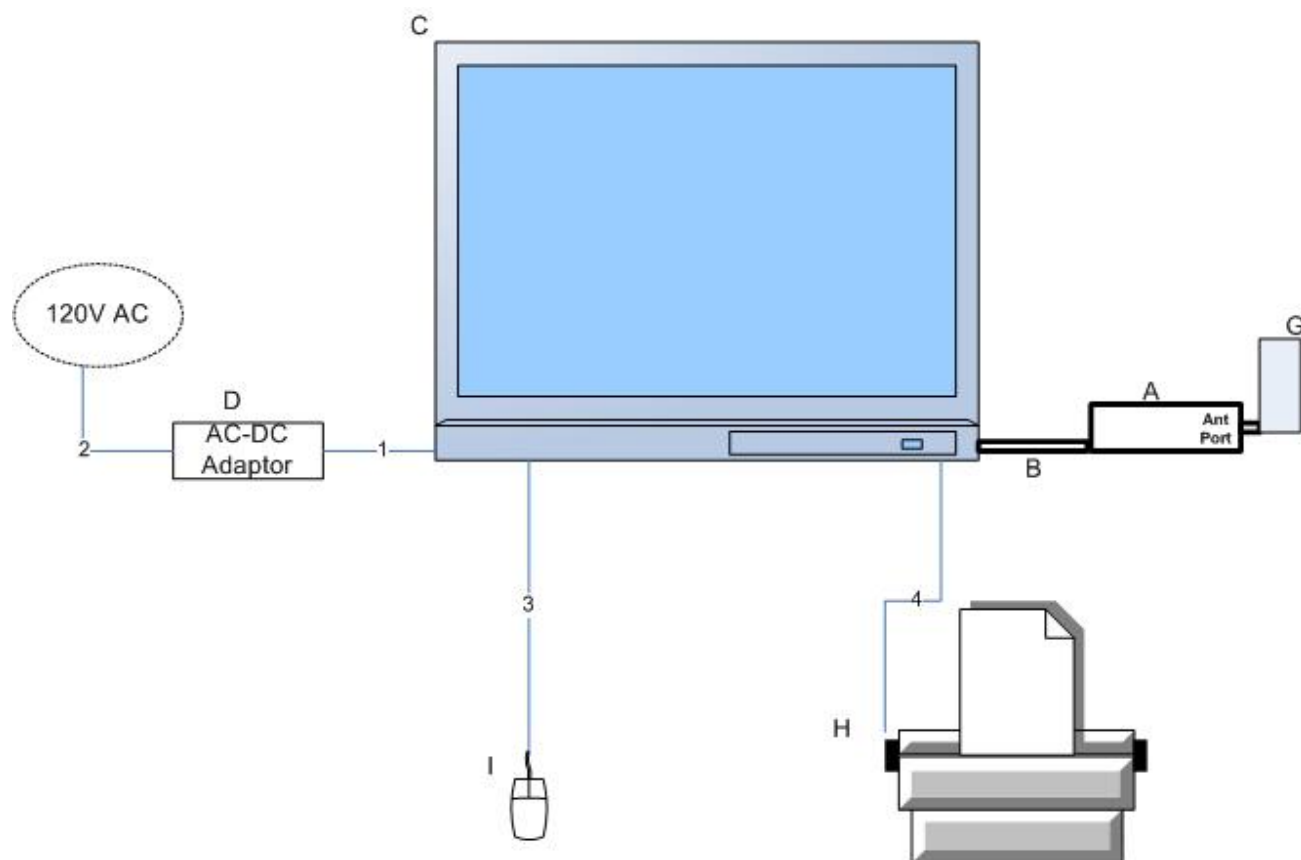


Figure 1. Block Diagram of Test Configuration (Unintentional)




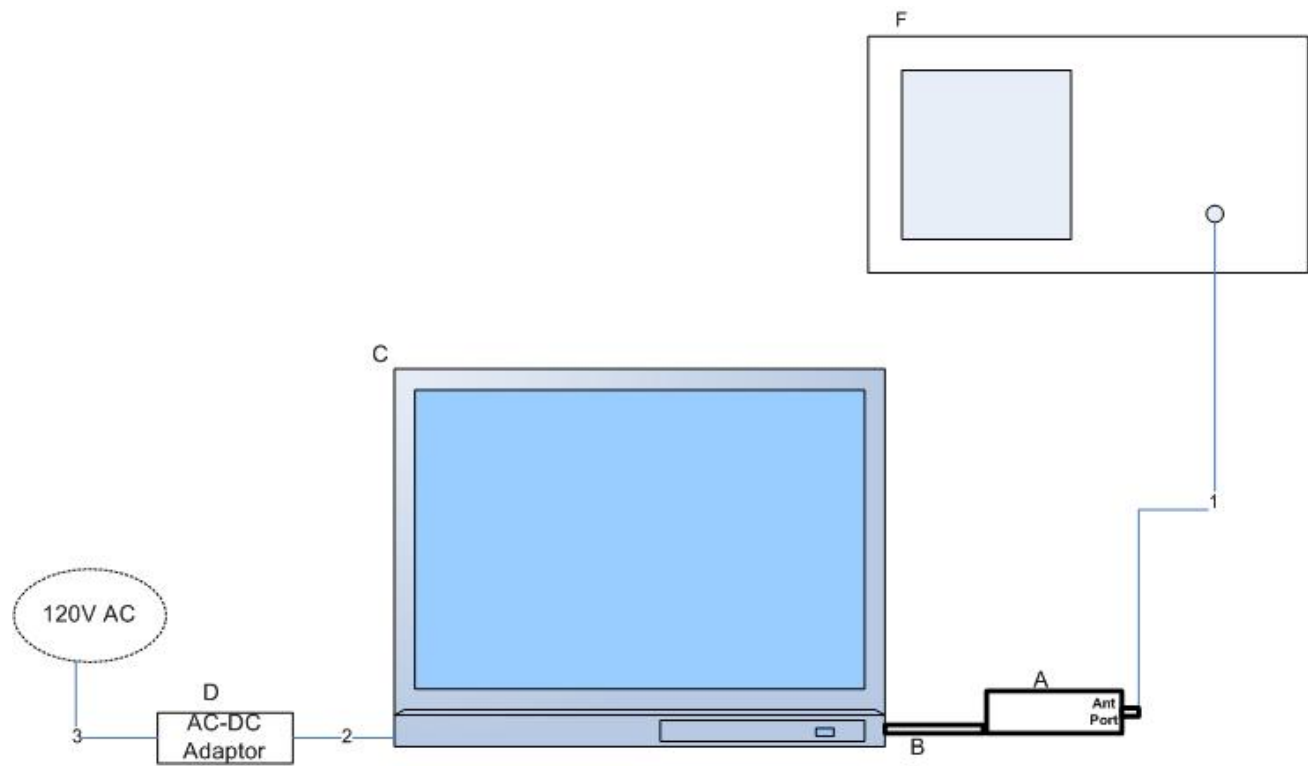


Figure 2. Block Diagram of Test Configuration (Conducted Emission)



**Figure 3. Block Diagram of Test Configuration (Spurious Emission)**

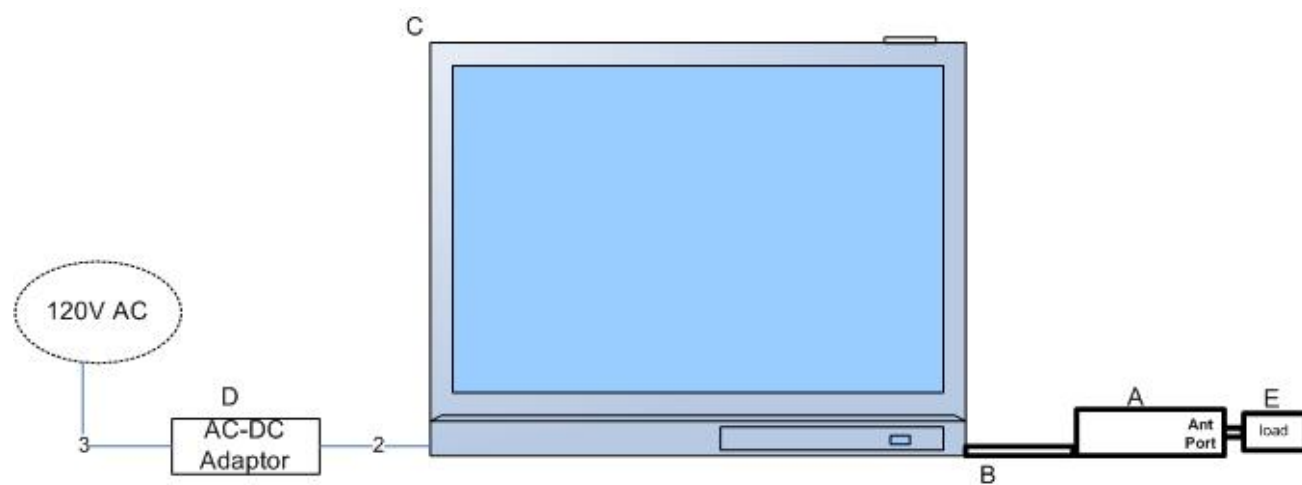

## **2.7. Method of Monitoring EUT Operation**

A Spectrum Analyzer and a Power Meter was use to monitor the EUT's transmitter channel and power output.

## **2.8. Modifications**

### **2.8.1. Modifications to EUT**

No modifications were made to the EUT.

### **2.8.2. Modifications to Test Standard**

No modifications were made to the EUT.

## **2.9. Disposition of EUT**

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Ubiquiti Networks upon completion of testing.



# Electromagnetic Compatibility Criteria for Unintentional Radiators



### 3. Electromagnetic Compatibility Criteria for Unintentional Radiators

#### 3.1. Conducted Emissions Limits

**Test Requirement(s):** **15.107 (a)** “Except for Class B digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 5. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.”

**15.107 (b)** “For a Class B digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 5. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.”

Frequency range (MHz)	15.107(b), Class A Limits (dB $\mu$ V)		15.107(a), Class B Limits (dB $\mu$ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15- 0.5	79	66	66 - 56	56 - 46
0.5 – 5.0	73	60	56	46
5.0 - 30	73	60	60	50
Note — The lower limit shall apply at the transition frequencies.				

**Table 5. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b)**

**Test Procedures:** The EUT was placed on a 0.8m-high wooden table inside a semi-anechoic chamber. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT was powered through a 50 $\Omega$ /50 $\mu$ H LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were re-measured using a quasi-peak and/or average detector as appropriate.

**Test Results:** The EUT was found compliant with the Class B requirement(s) of this section. Measured emissions below applicable limits.

**Test Engineer(s):** Minh Ly & Mashood Noor

**Test Date(s):** August 13, 2007



### Conducted Emissions - Voltage, AC Power

FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.17	44.57	64.96	PASS	-20.39	26.52	54.96	PASS	-28.44
0.197	41.56	63.74	PASS	-22.18	22.74	53.74	PASS	-31
0.229	39.3	62.49	PASS	-23.19	25.34	52.49	PASS	-27.15


Table 6. Conducted Emissions - Voltage, AC Power, Phase Line 120V/60Hz

FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.161	45.98	65.41	PASS	-19.43	26.7	55.41	PASS	-28.71
0.205	40.16	63.41	PASS	-23.25	24.67	53.41	PASS	-28.74
0.243	37.46	61.99	PASS	-24.53	18.73	51.99	PASS	-33.26


Table 7. Conducted Emissions - Voltage, AC Power, Neutral Line 120V/60Hz



## Conducted Emissions - Voltage, Worst Case Emissions, AC Power

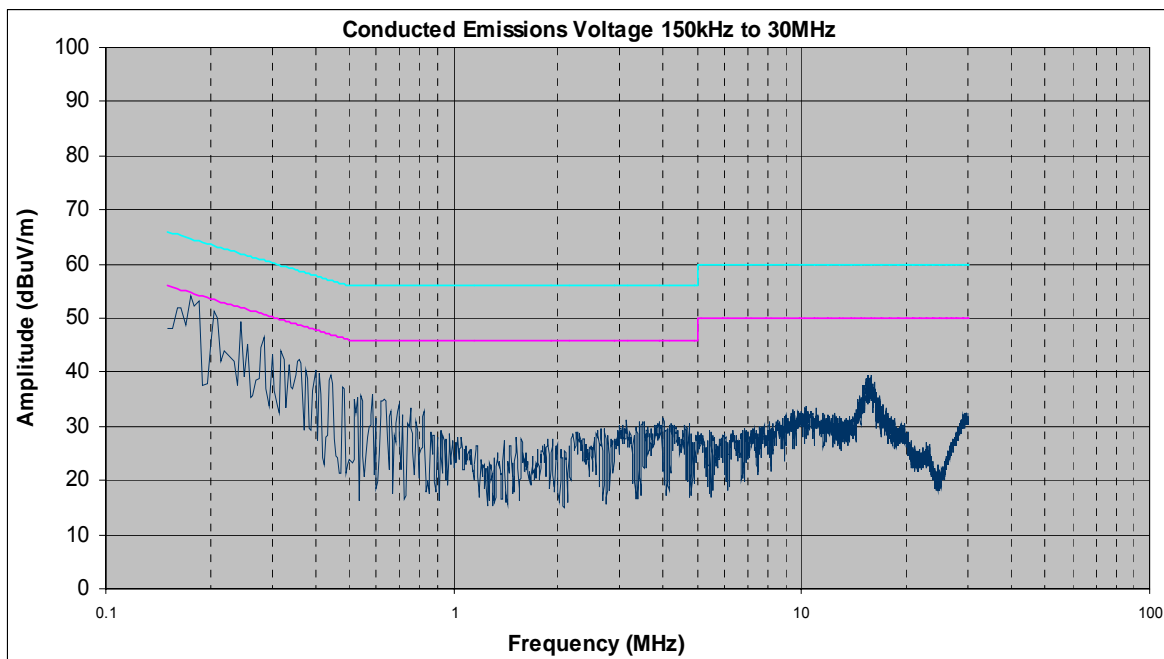

Conducted Emission, Phase Line Plots

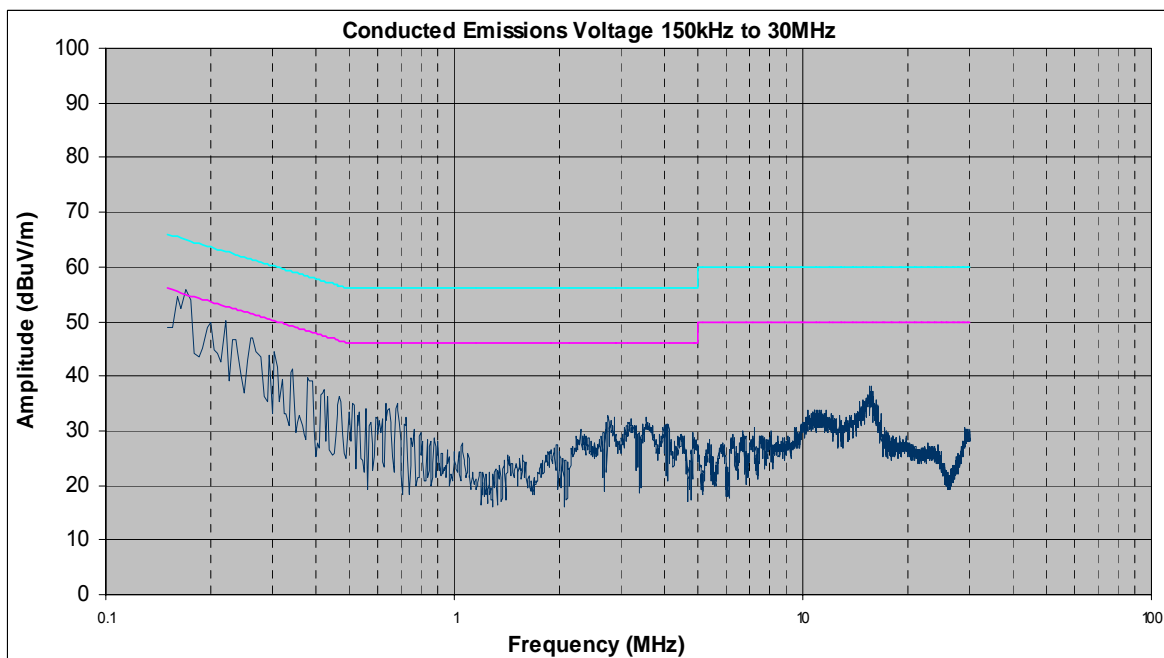

Conducted Emission, Neutral Line Plots

## Conducted Emission Limits Test Setup



Photograph 2. Conducted Emissions Test Setup





### 3.2. Radiated Emissions Limits

**Test Requirement(s):** **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 8.

**15.109 (b)** The field strength of radiated emissions from a Class B digital device, as determined at a distance of 10 meters, shall not exceed the Class B limits expressed in Table 8.

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	
	§15.109 (b), Class A Limit (dB $\mu$ V) @ 10m	§15.109 (a), Class B Limit (dB $\mu$ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

**Table 8. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)**

**Test Procedures:** The EUT was placed on a 0.8m-high wooden table inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 10 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

**Test Results:** The EUT was found compliant with the Class B requirement(s) of this section. Measured emissions below applicable limits.

**Test Engineer(s):** Minh Ly


**Test Date(s):** August 13, 2007



## Radiated Emissions Limits Test Results, Class B


Frequency (MHz)	Antenna Polarity (H/V)	EUT Azimuth (Degrees)	Antenna Height (m)	Uncorrected Amplitude QP Detector (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
198.28	V	315	2.55	18.19	10.10	2.52	30.81	43.50	-12.69
199.08	H	220	1.67	24.00	10.39	2.53	36.92	43.50	-6.59
233.16	H	217	1.21	22.50	11.52	2.57	36.59	46.00	-9.41
433	H	35	1	17.65	17.22	3.67	38.54	46.00	-7.47
452.96	V	0	1.3	11.26	17.48	3.77	32.51	46.00	-13.50
499.6	H	11	1	15.41	18.10	4.03	37.54	46.00	-8.46

Table 9. Radiated Emissions Limits Test Results

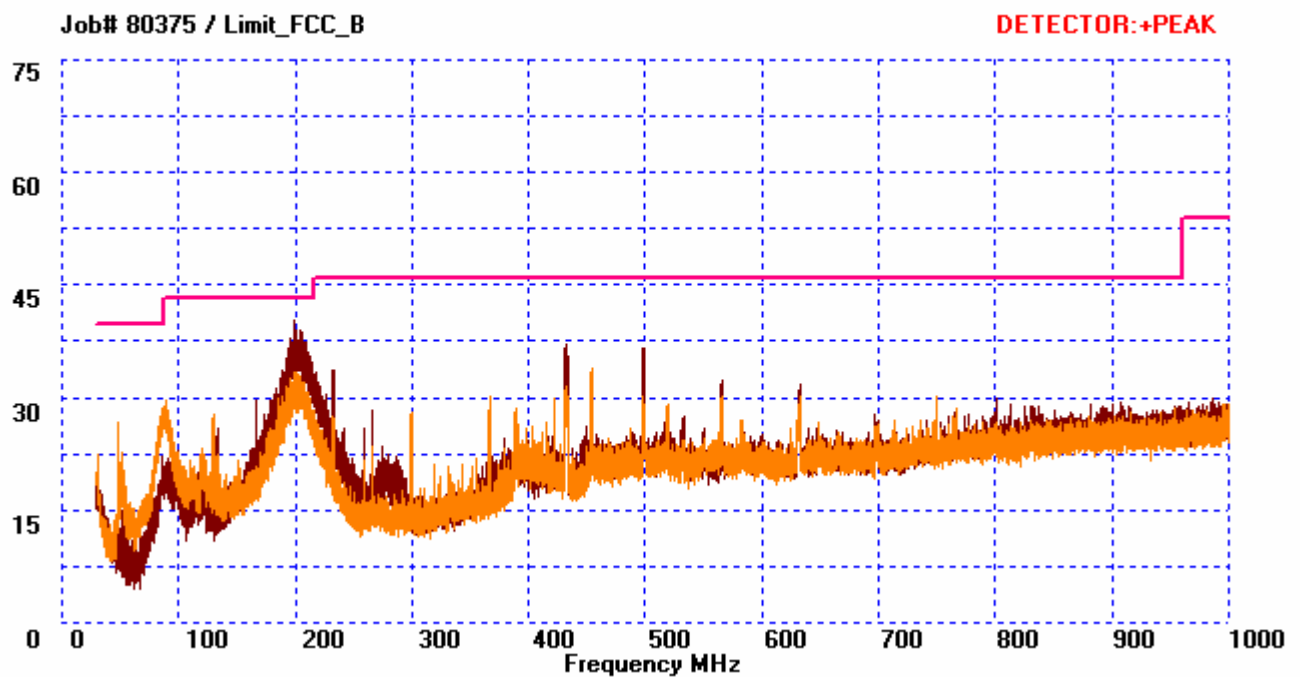

Plot 1. Radiated Emissions Test Plot

## Radiated Emission Limits Test Setup

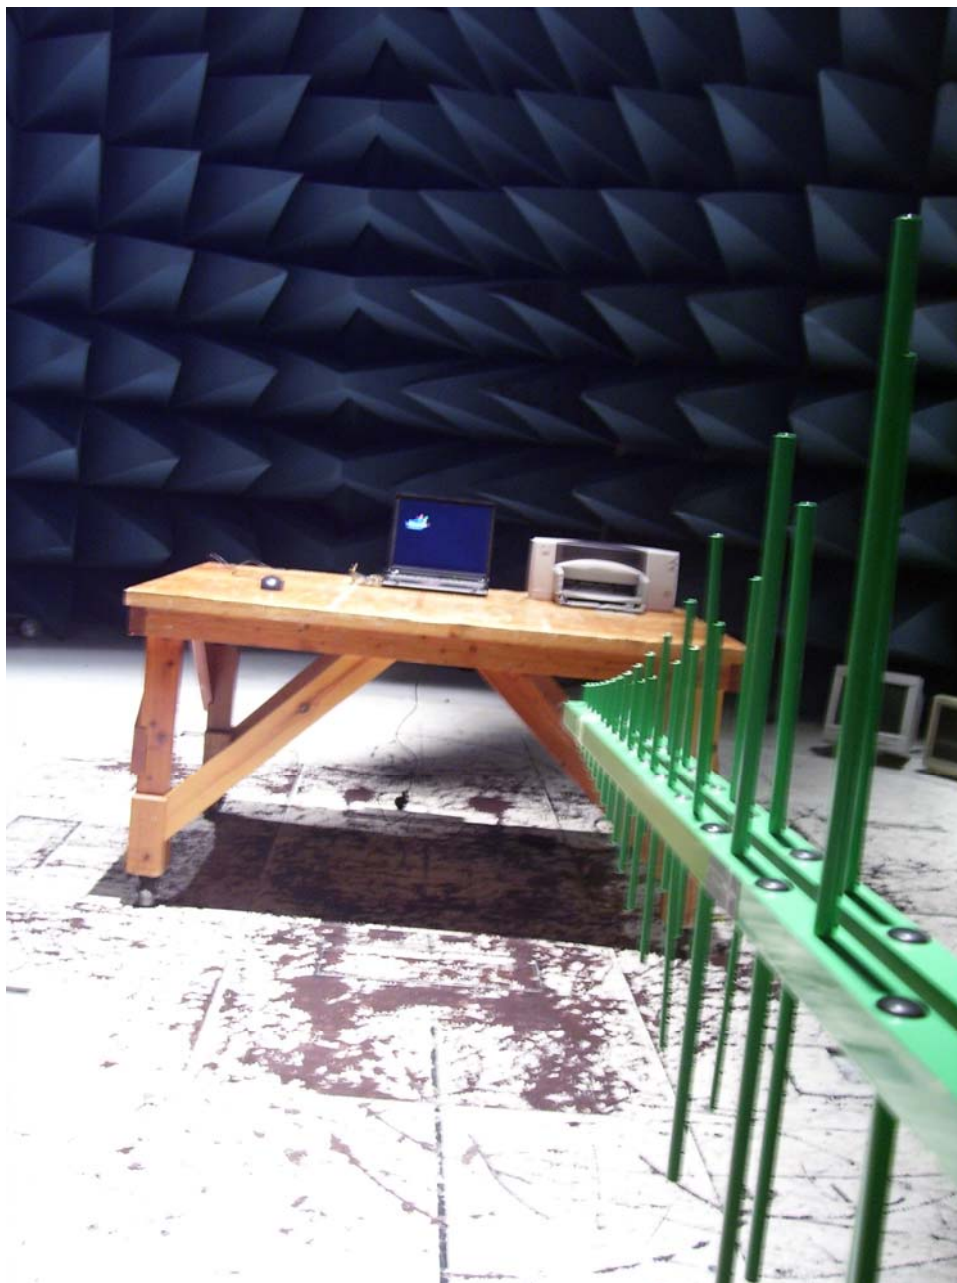

Photograph 3. Radiated Emission Limits Test Setup



# Electromagnetic Compatibility Criteria for Intentional Radiators



## 4. Electromagnetic Compatibility RF Power Output Requirements

### 4.1. RF Power Output

**Test Requirement(s):** §2.1046, §90.1321 (a) and §90.1321 (c)

**Test Procedures:** A laptop was connected to EUT to control the RF power output and frequency. The EUT was connected to a Spectrum Analyzer through a Directional Coupler. A calibrated power meter capable of measuring a broad band modulated carrier was connected to the coupling port. The spectrum analyzer's channel power measuring option was used. Both the spectrum analyzer and power meter were compared to insure they both indicated the same output power for the EUT. The EUT power was adjusted to produce maximum output power as specified in the owner's manual. Measurements were performed at the low, mid and high channels for each of the EUT's bandwidths and modulations.


**Limits:** For Base and Fixed stations the EIRP limit is 25W / 25MHz.

For mobile and portable stations the EIRP limit is 1W / 25MHz.

**Test Results:** Equipment complies with 90.1321(a) for Base and Fixed Stations

**Test Engineer(s):** Shawn McMillen

**Test Date(s):** August 9, 2007

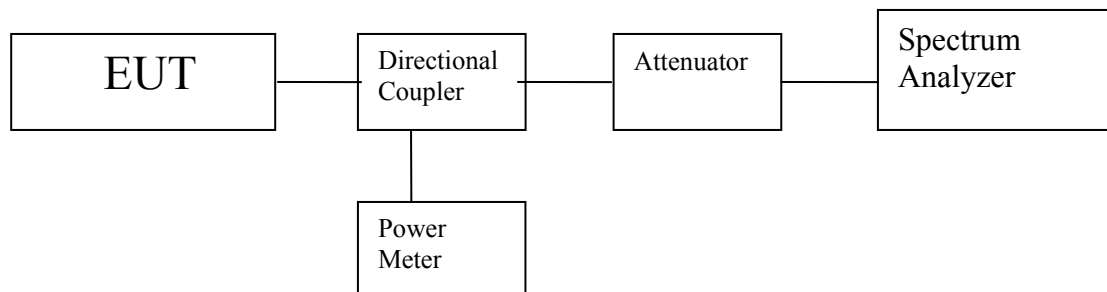


**Figure 4. RF Power Output Test Setup**




RF Power Output				
Frequency (MHz)	Channel Bandwidth (MHz)	Measured RF Output Power (dBm)	Max Antenna Gain (dBi)	EIRP (dBm)
3658.2	5	18.73	18	36.73
3663.2	5	18.29	18	36.29
3668.2	5	17.57	18	35.57
3658.2	10	18.79	18	36.79
3663.2	10	18.49	18	36.49
3668.2	10	17.62	18	35.62
3663.2	20	18.46	18	36.46


Table 10. RF Output Power

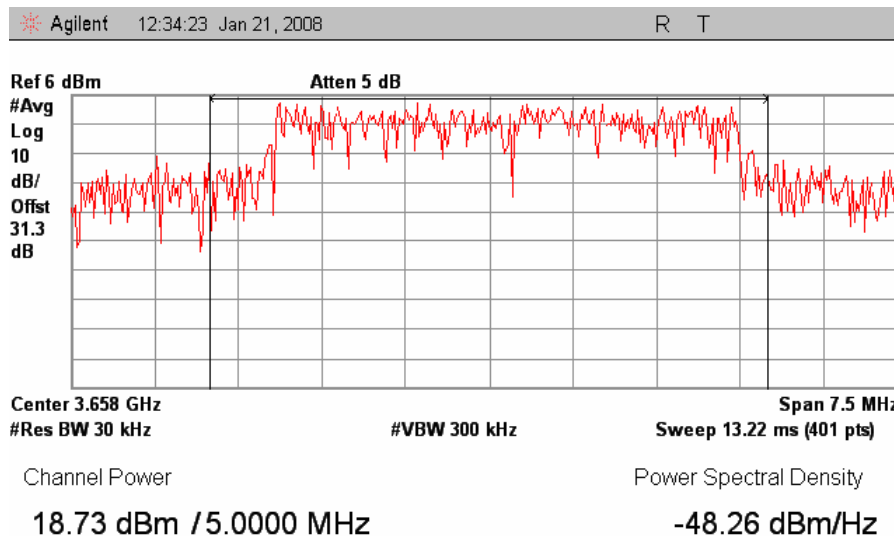


Plot 2. RF Channel Power 5MHz BW Low Ch

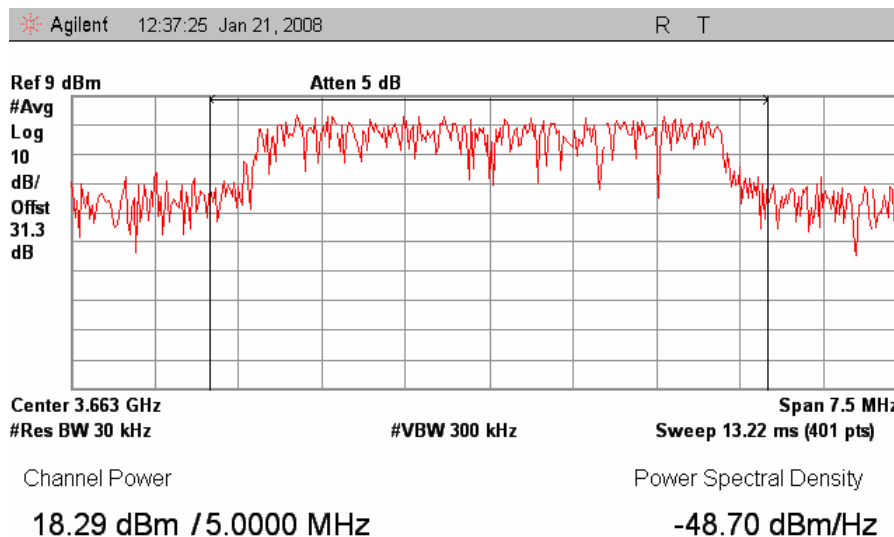

Plot 3. RF Channel Power 5MHz BW Mid Ch

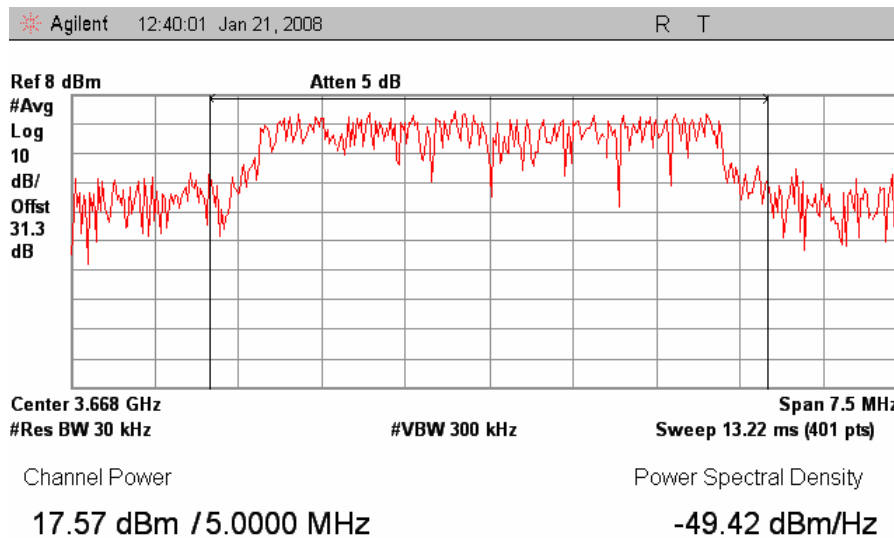


Plot 4. RF Channel Power 5MHz BW High Ch

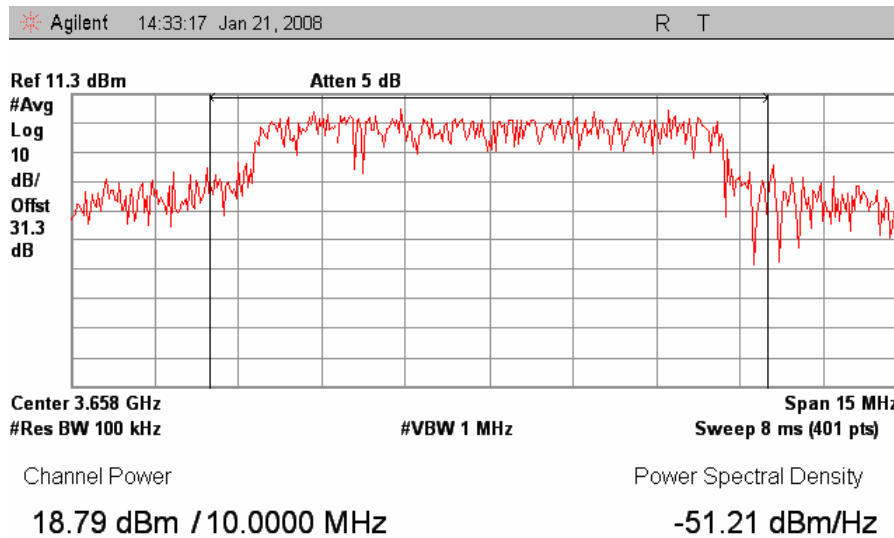


Plot 5. RF Channel Power 10MHz BW Low Ch




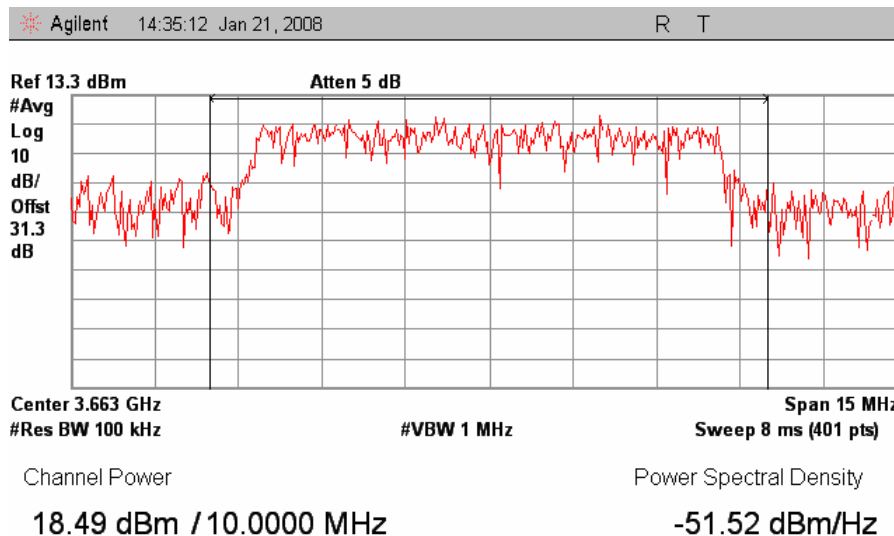

Plot 6. RF Channel Power 10MHz BW Mid Ch

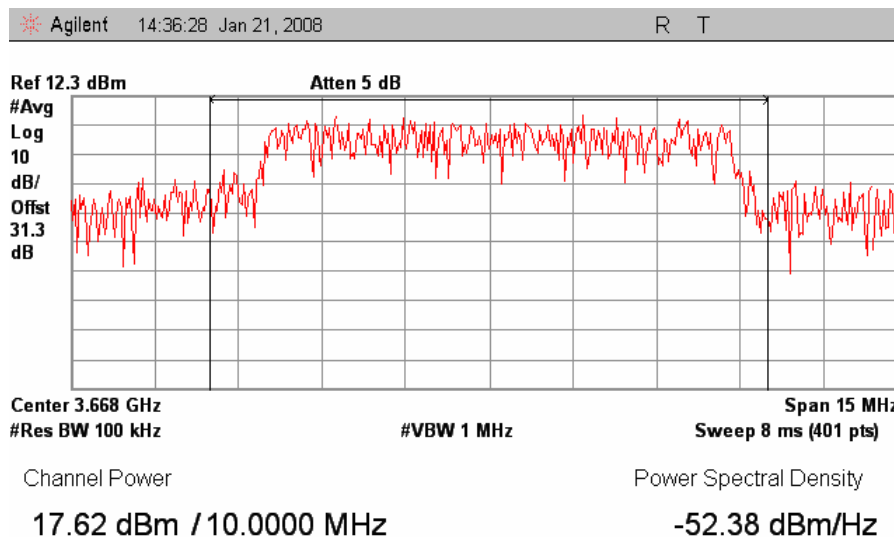

Plot 7. RF Channel Power 10MHz BW High Ch

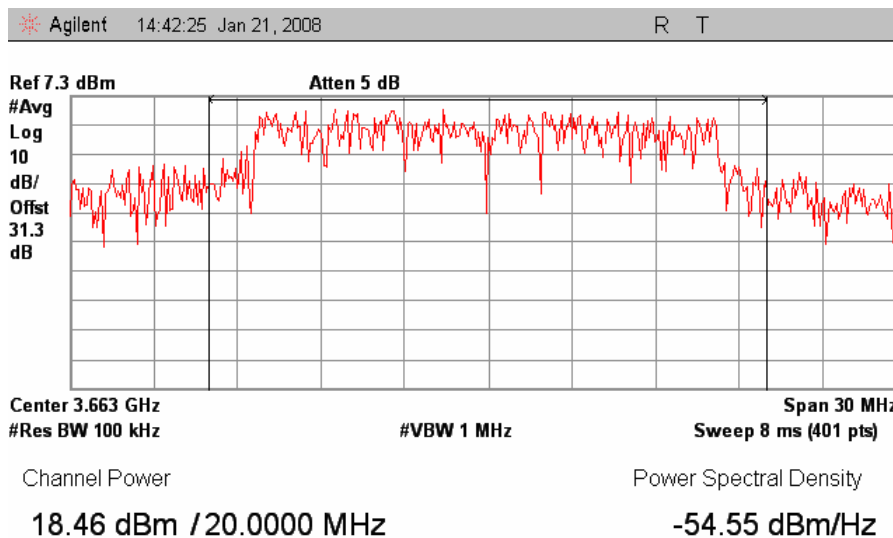

Plot 8. RF Channel Power 20MHz BW

---

## 4.2. Peak Power Spectral Density

**Test Requirement(s):** §90.1321 (a) and §90.1321 (c)


**Test Procedures:** laptop was connected to EUT to control the RF power output and frequency. The EUT was connected to a Spectrum Analyzer through a directional coupler. A calibrated power meter capable of measuring a broad band modulated carrier was connected to the coupling port. The power meter was used to insure the EUT was operating at the required power level for the Spectral Density test. The Spectrum Analyzer was set to a RBW = 1 MHz and a VBW > 1MHz. A sample detector was selected on the spectrum analyzer along with power averaging. The Peak Power Spectral Density was determined by detecting the highest emission within the EUT's occupied bandwidth. Measurements were performed at the low, mid and high channels for each of the EUT's bandwidths and modulations.

**Limits:** For Base and Fixed stations the radiated Peak Power Spectral Density limit is 30dBm or 1000mW.  
For mobile and portable stations the radiated Peak Power Spectral Density limit is 16dBm or 40mW

**Test Results:** Equipment complies with 90.1321(a) for Base and Fixed Stations.

**Test Engineer(s):** Minh Ly

**Test Date(s):** January 21, 2008

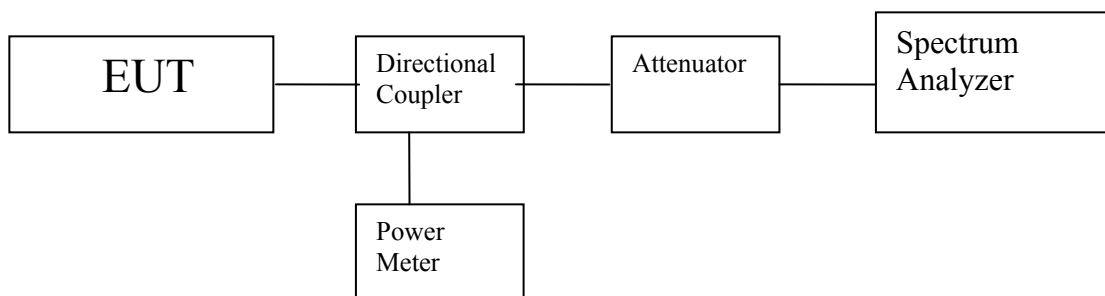


**Figure 5. PPSD Test Setup**




Peak Power Spectral Density				
Frequency (MHz)	Channel Bandwidth (MHz)	Measured Power Density (dBm)	Max Antenna Gain (dBi)	EIRP (dBm)
3658.2	5	11.62	18	29.62
3663.2	5	11.29	18	29.29
3668.2	5	11.37	18	29.37
3658.2	10	9.803	18	27.803
3663.2	10	8.975	18	26.975
3668.2	10	9.085	18	27.085
3663.2	20	6.768	18	24.768


Table 11. Peak Power Spectral Density

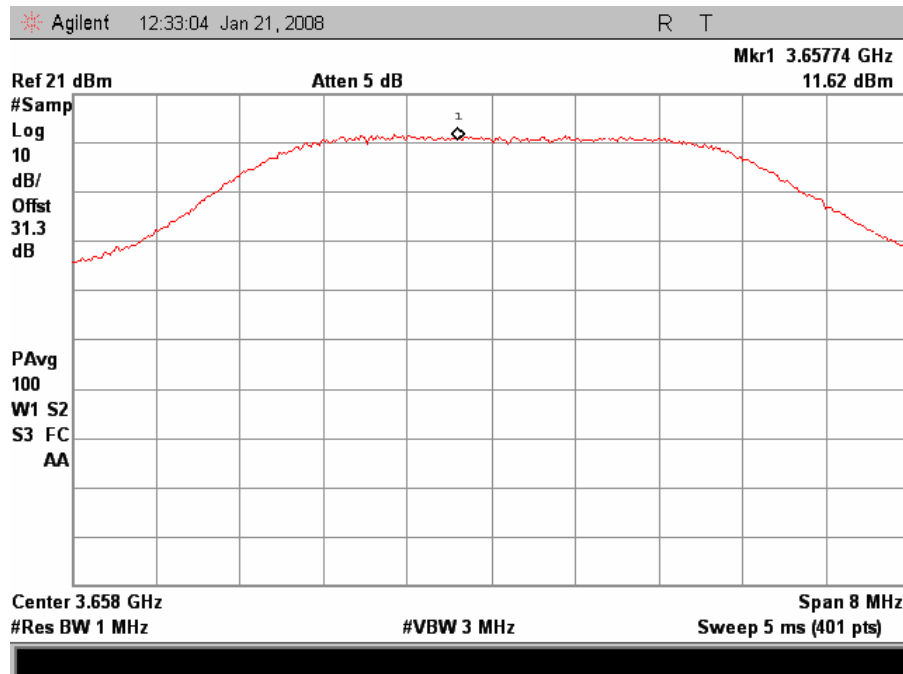


Plot 9. PPSD 5 MHz BW Low Ch

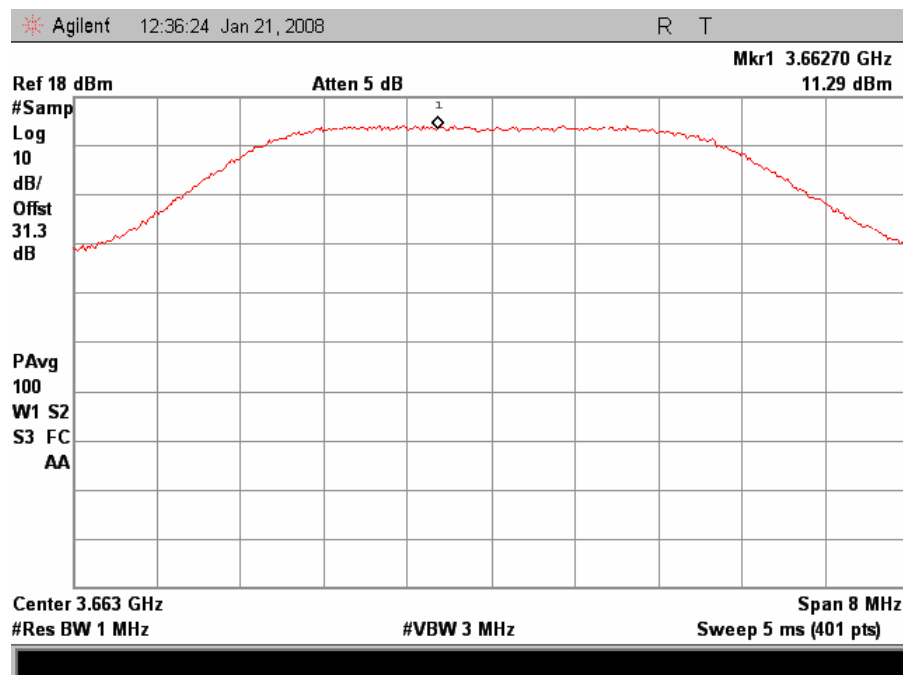


Plot 10. PPSD 5 MHz BW Mid Ch

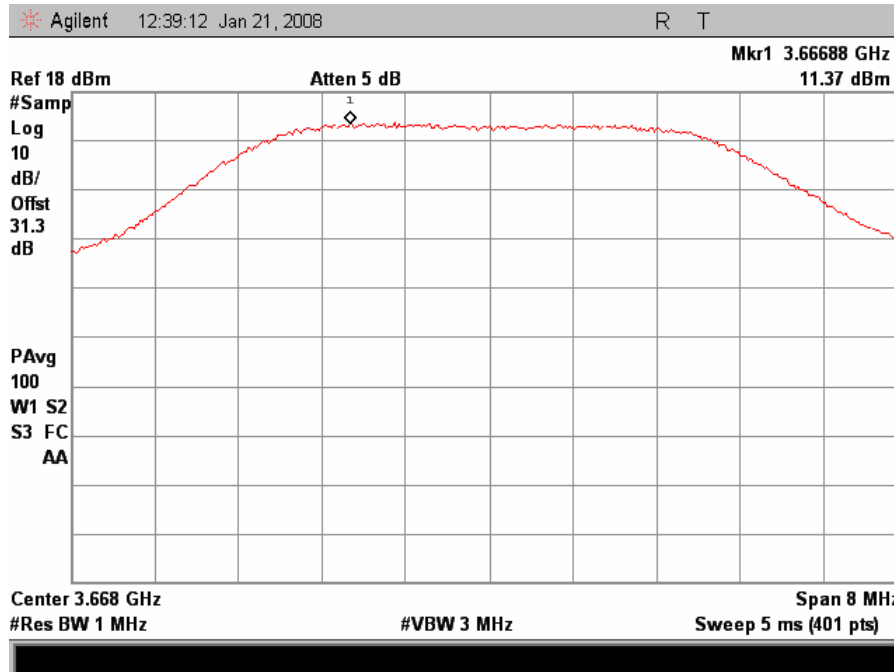


Plot 11. PPSD 5 MHz BW High Ch

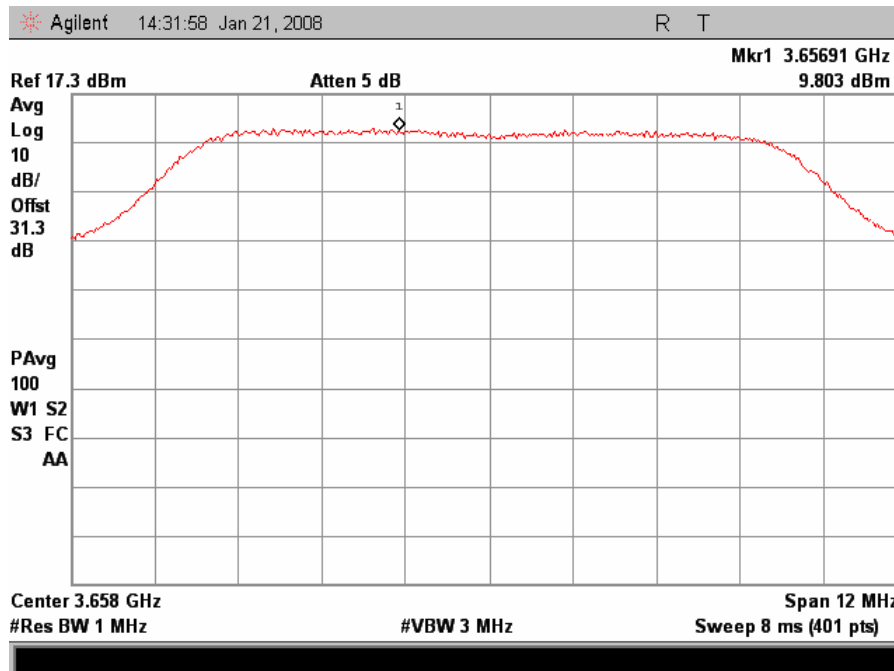


Plot 12. PPSD 10 MHz Low Ch

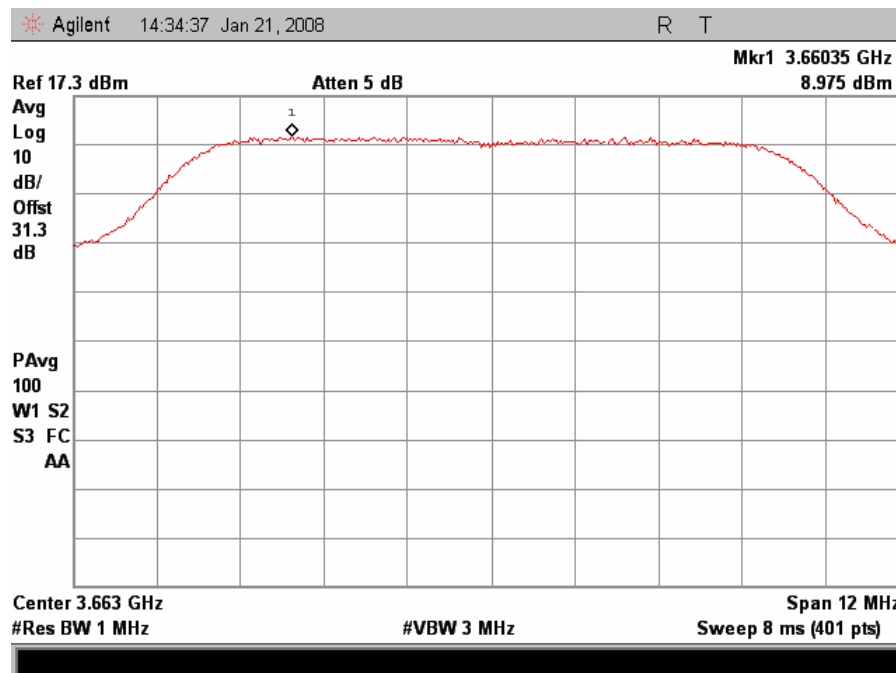

Plot 13. PPSD 10 MHz Mid Ch

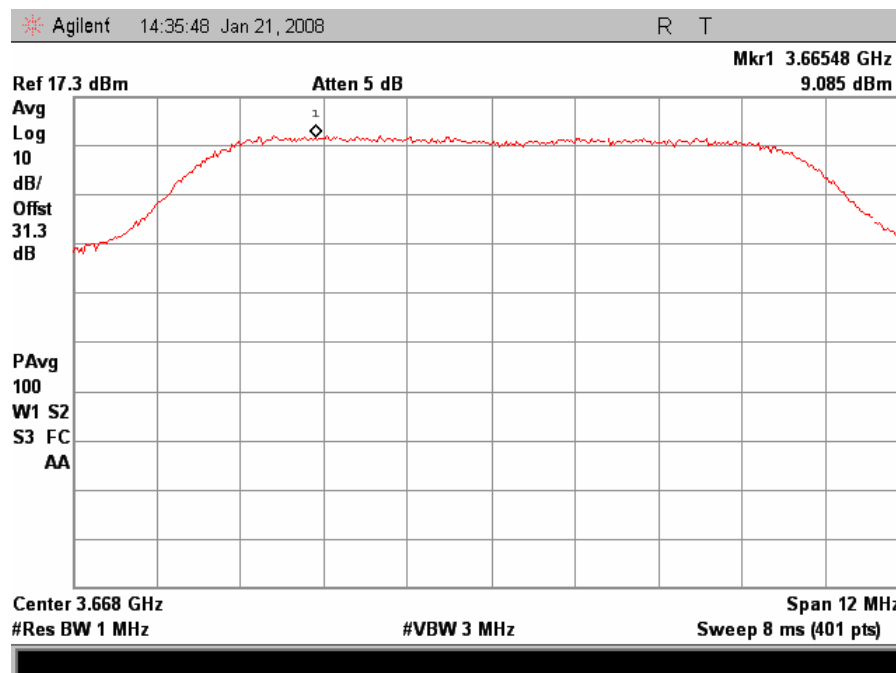

Plot 14. PPSD 10 MHz High Ch

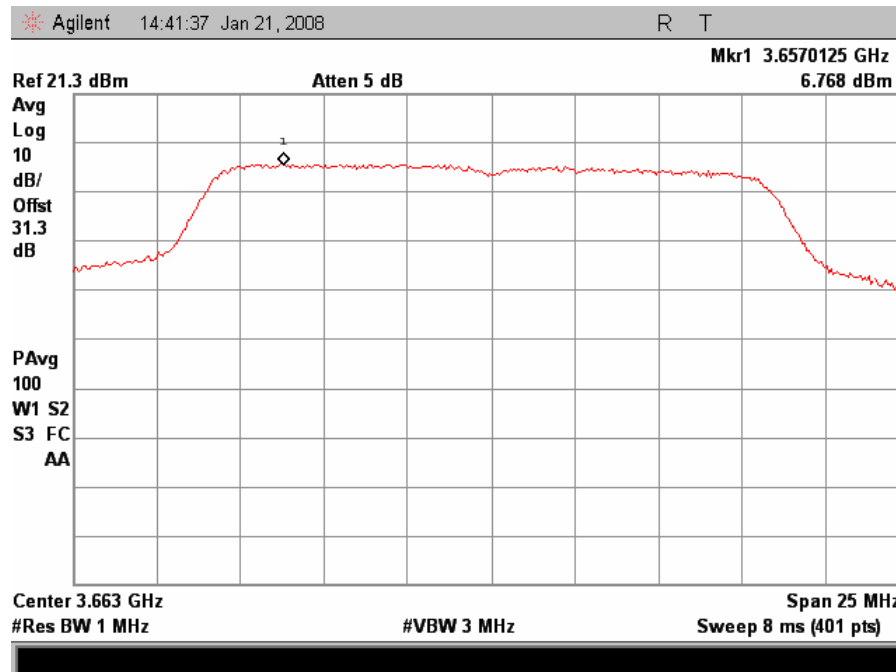

Plot 15. PPSD 20 MHz Mid Ch





## 5. Electromagnetic Compatibility Occupied Bandwidth Requirements

### 5.1. Occupied Bandwidth


**Test Requirement(s):** §2.1049

**Test Procedures:** A laptop was connected to EUT to control the RF power output and frequency. The EUT was connected to a Spectrum Analyzer through a directional coupler. A calibrated power meter capable of measuring a broad band modulated carrier was connected to the coupling port. The power meter was used to insure the EUT was operating at the required power level for the Occupied Bandwidth test. The Spectrum Analyzer's channel bandwidth measurement option was used to measure the EUT's occupied bandwidth. Measurements were performed at the low, mid and high channels for each of the EUT's bandwidths and modulations.


**Test Results:** Equipment complies with Section 2.1049.

**Test Engineer(s):** Minh Ly


**Test Date(s):** January 21, 2008

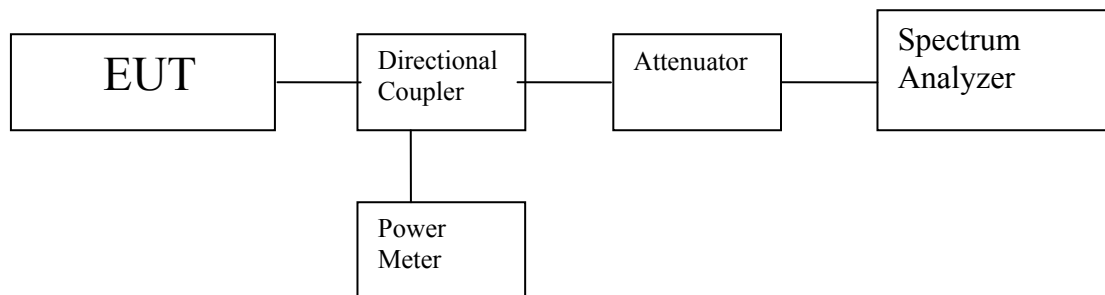


**Figure 6. Occupied Bandwidth Test Setup**

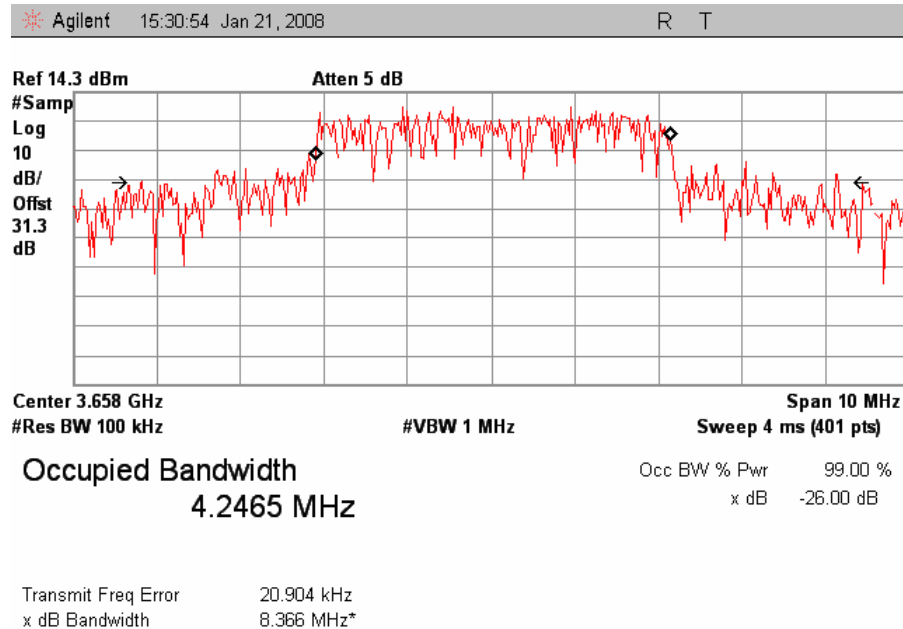


Plot 16. Occupied Bandwidth 5MHz Low Ch

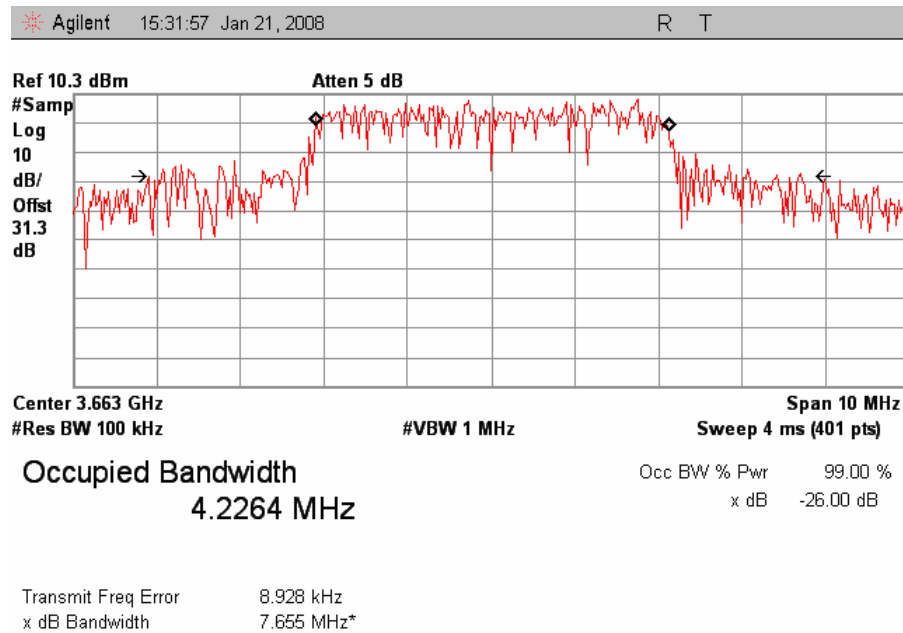


Plot 17. Occupied Bandwidth 5 MHz Mid Ch

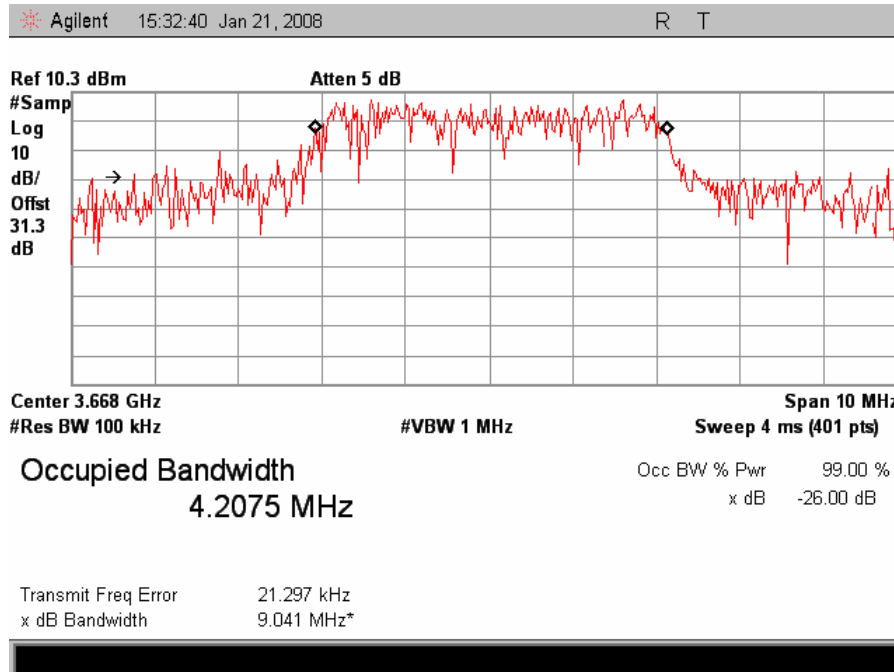


Plot 18. Occupied Bandwidth 5 MHz High Ch

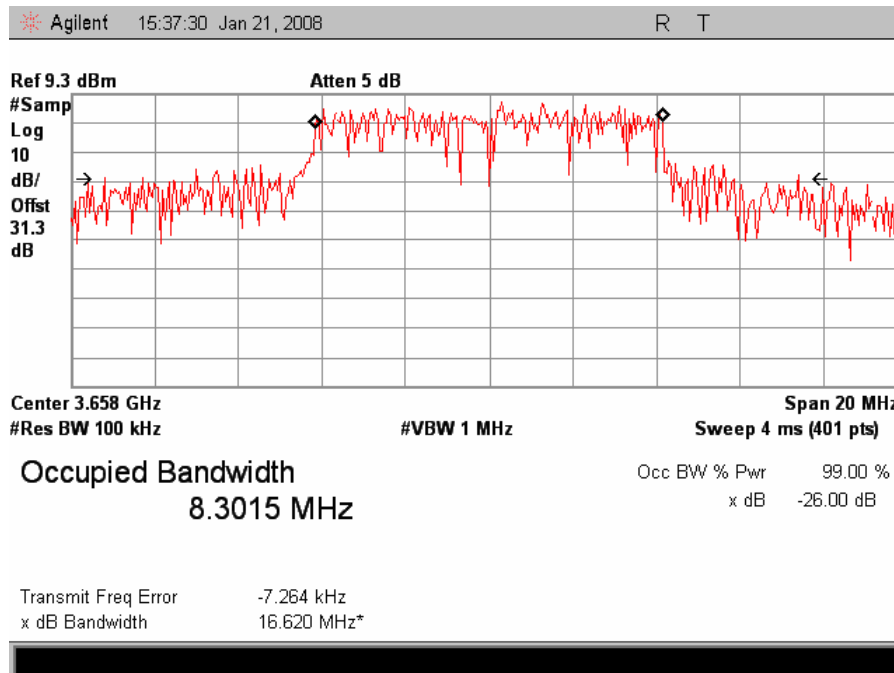


Plot 19. Occupied Bandwidth 10 MHz Low Ch

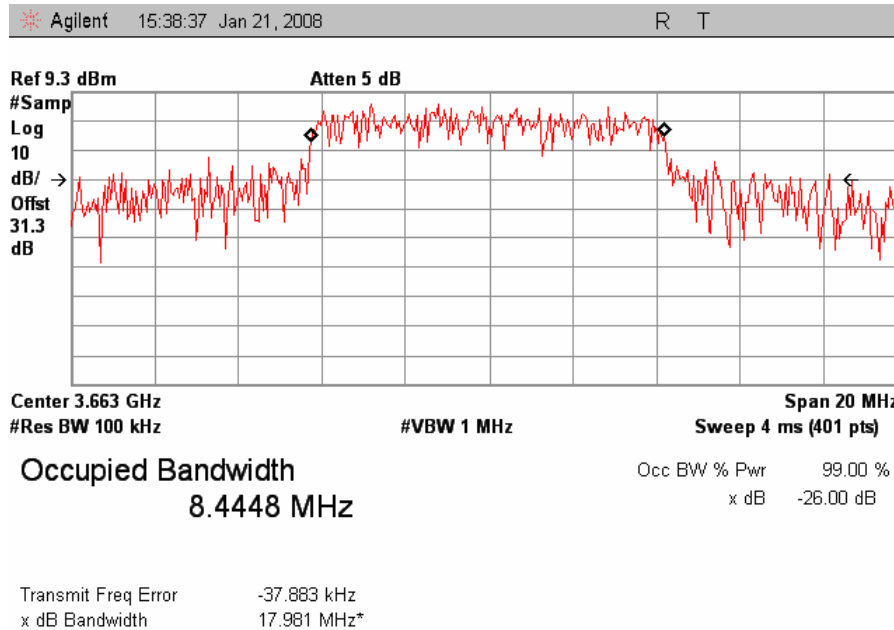

Plot 20. Occupied Bandwidth 10 MHz Mid Ch

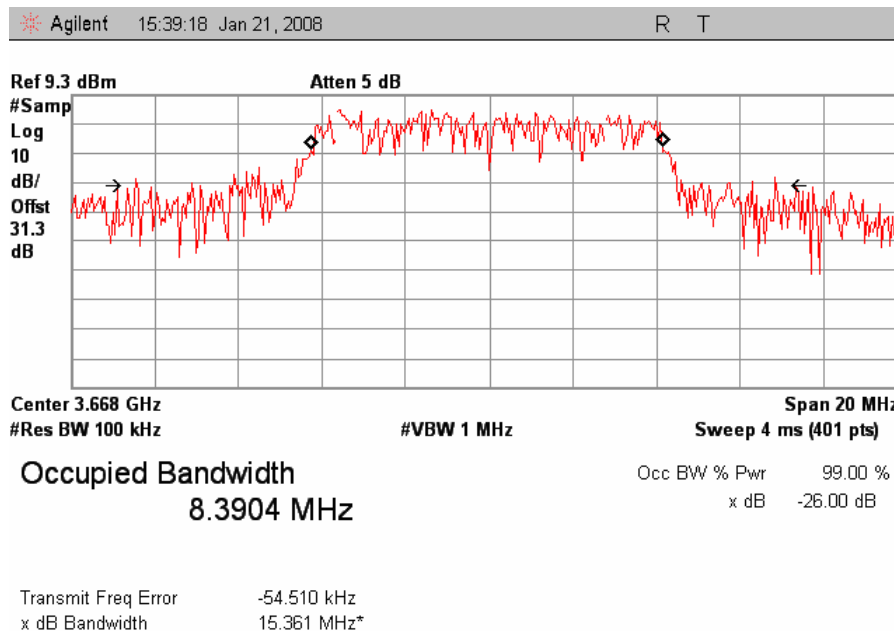

Plot 21. Occupied Bandwidth 10 MHz High Ch

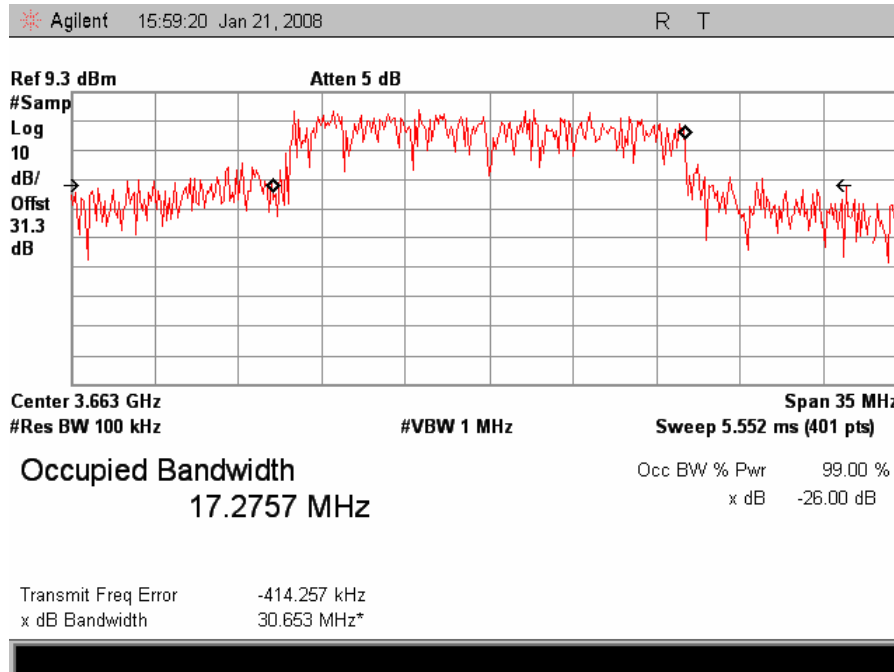

Plot 22. Occupied Bandwidth 20 MHz



## 6. Electromagnetic Compatibility Spurious Emissions at Antenna Terminal Requirements

### 6.1. Spurious Emissions at Antenna Terminals

**Test Requirement(s):** §2.1051 and §90.1323(a)

**Test Procedures:** A laptop was connected to EUT to control the RF power output and frequency channel. The EUT was connected to a Spectrum Analyzer through a broad band attenuator. The Spectrum Analyzer was set to sweep 30 MHz and up to 10<sup>th</sup> harmonic of the fundamental or 40GHz which ever is the lesser. The Spectrum Analyzer was set to a RBW = 1 MHz and a VBW > 1MHz. Measurements were made at the low, mid and high channels. Measurement were also carried out at the band edges of the band of operation.


For frequencies 18-40GHz a HP11970A and HP11970K harmonic mixer was used. Each harmonic mixer was fed with a SMA to wave guide adapter.

**Limits:** The power of any emission outside the licensee's frequency band of operation shall be attenuated below the transmitters power (P) by at least  $43 + 10\log(P)$  dB.


**Test Results:** Equipment complies with Section 2.1051 and 90.1323(a).

**Test Engineer(s):** Minh Ly


**Test Date(s):** January 21, 2008

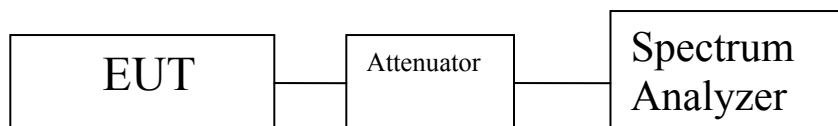


**Figure 7. Spurious Emissions at Antenna Terminals Test Setup**

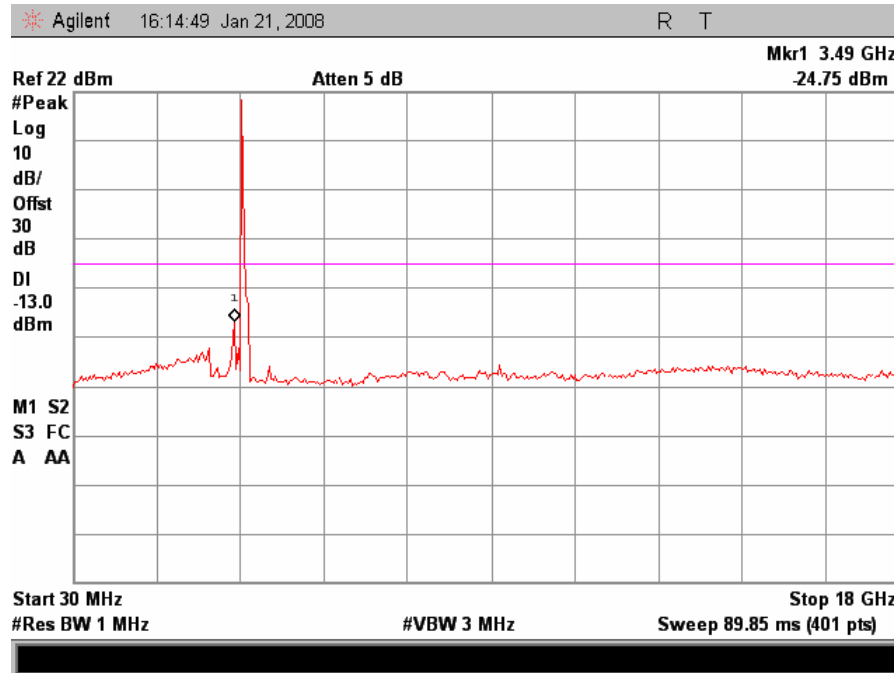


Plot 23. Conducted Spurious Emissions 5 MHz Low Ch (30 MHz - 18GHz)

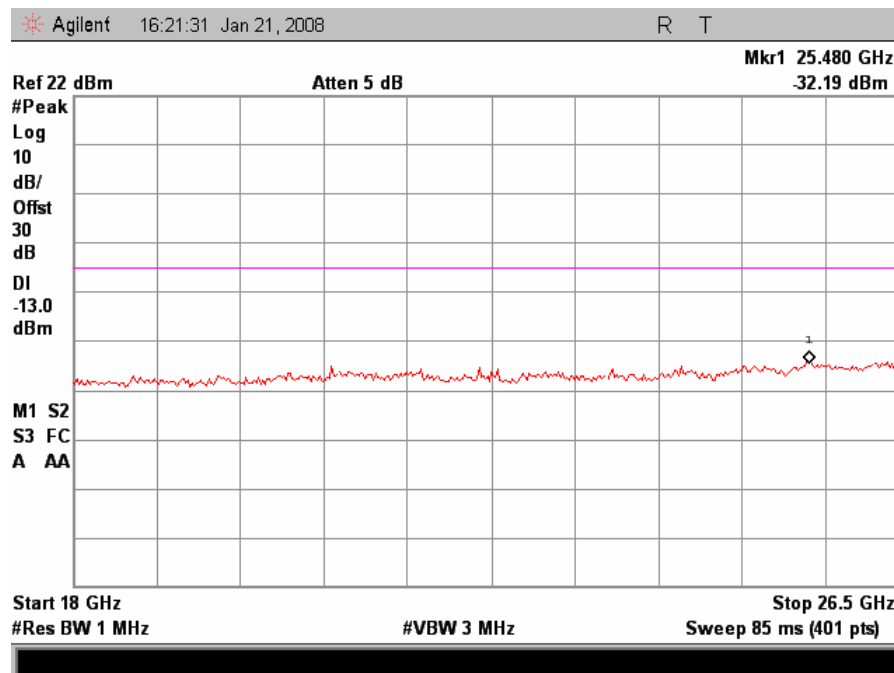

Plot 24. Conducted Spurious Emissions 5 MHz Low Ch (18 GHz – 26.5 GHz)

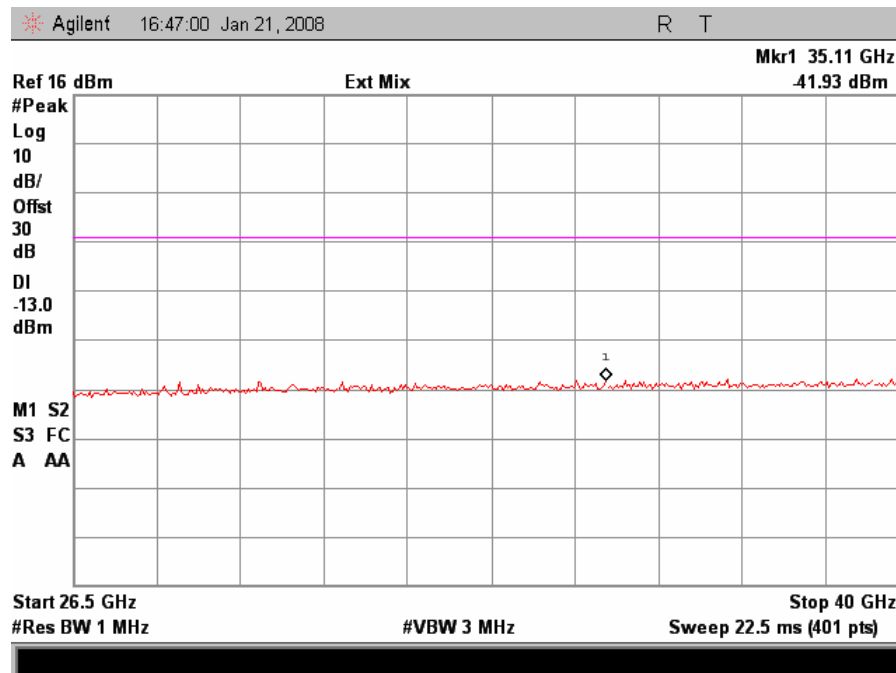


Plot 25. Conducted Spurious Emissions 5 MHz Low Ch (26.5 GHz – 40 GHz)

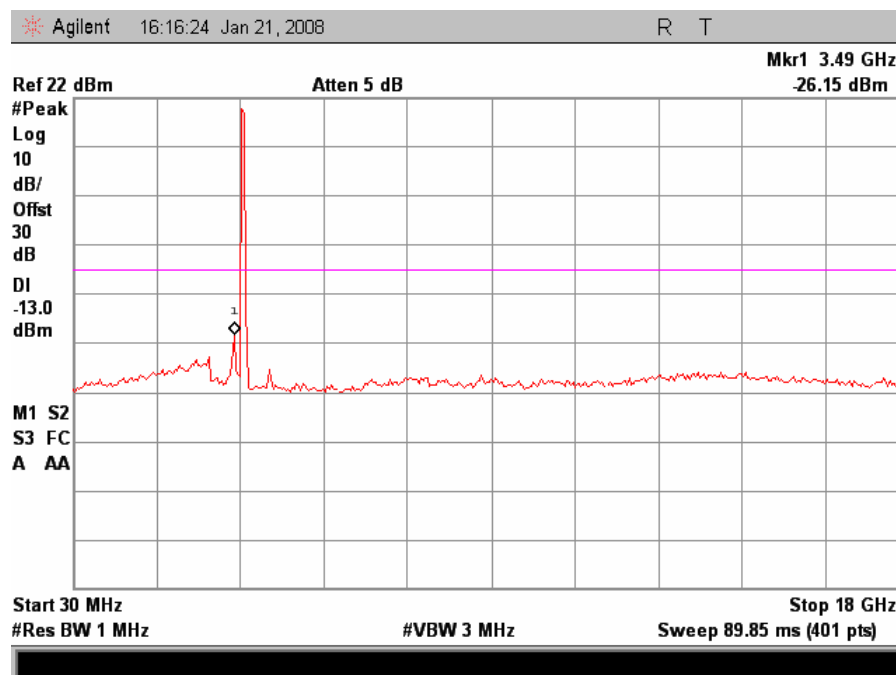


Plot 26. Conducted Spurious Emissions 5 MHz Mid Ch (30 MHz - 18GHz)




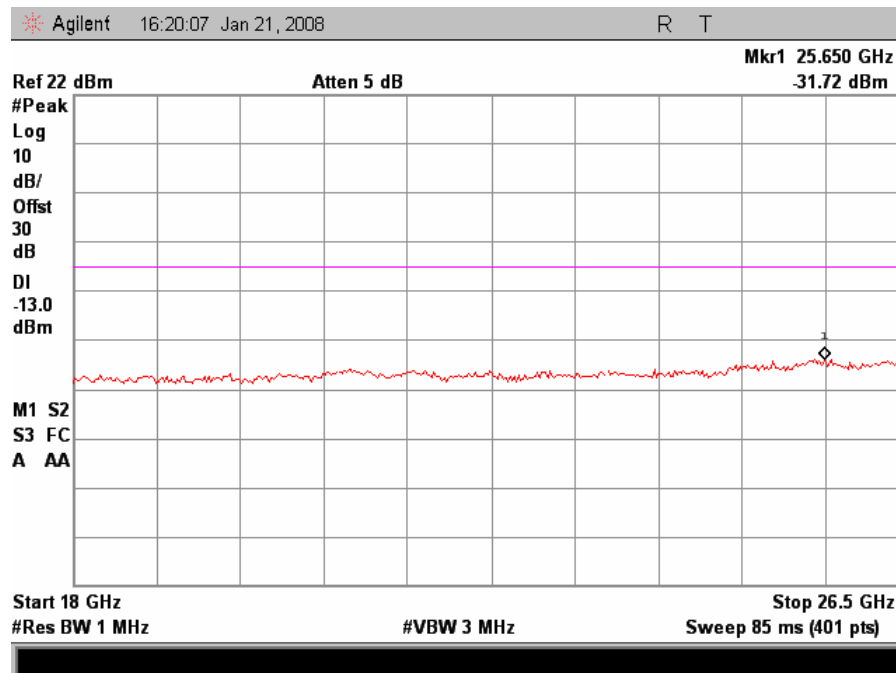


Plot 27. Conducted Spurious Emissions 5 MHz Mid Ch (18 GHz – 26.5 GHz)

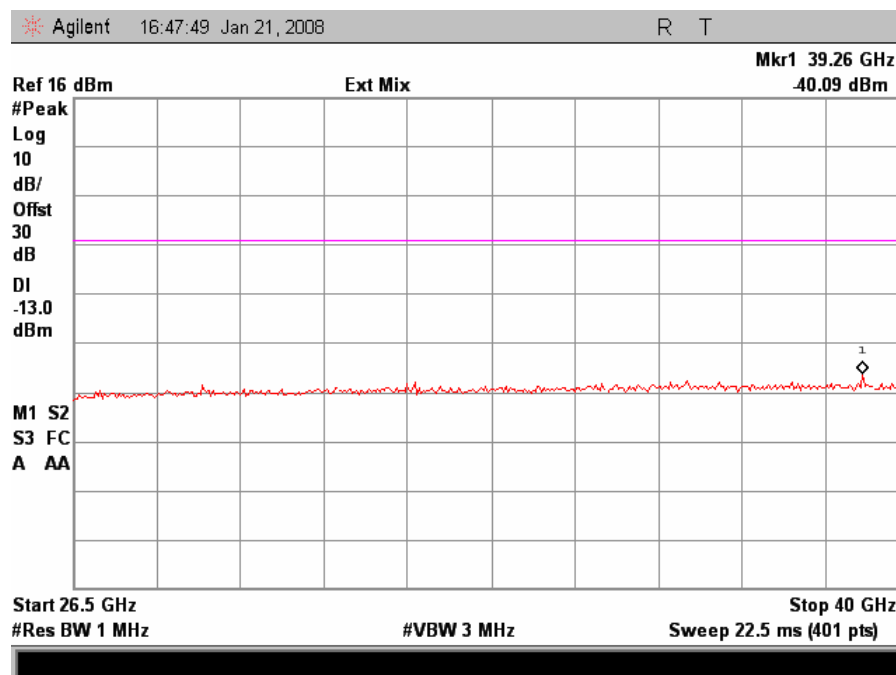


Plot 28. Conducted Spurious Emissions 5 MHz Mid Ch (26.5 GHz – 40 GHz)

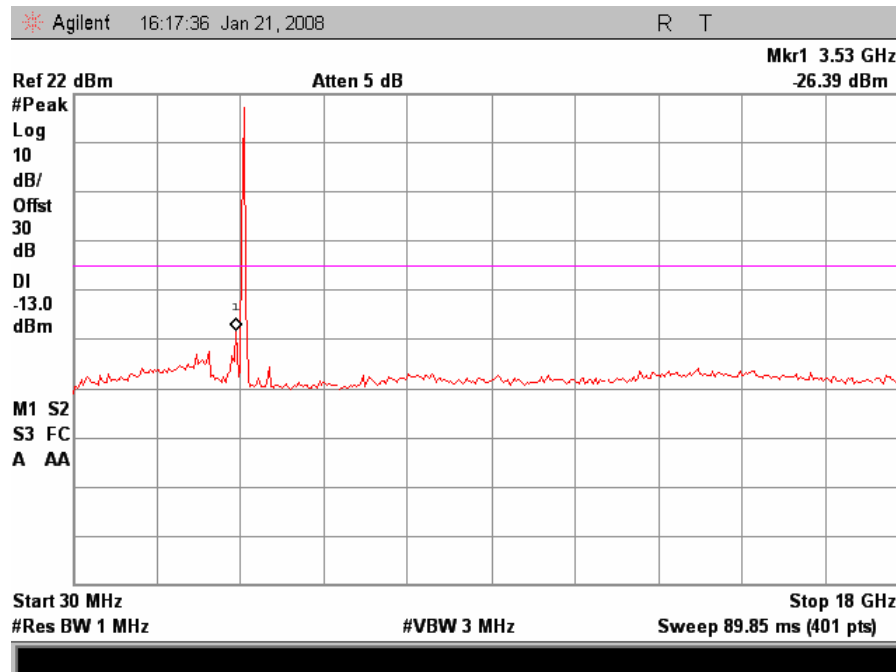

Plot 29. Conducted Spurious Emissions 5 MHz Hi Ch (30 MHz - 18GHz)

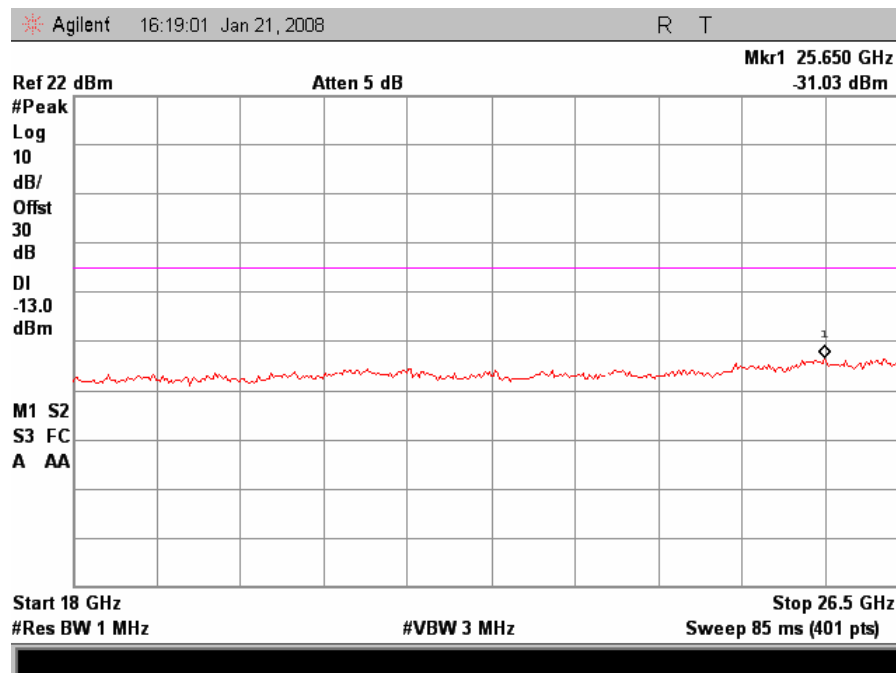


Plot 30. Conducted Spurious Emissions 5 MHz Hi Ch (18 GHz - 26.5 GHz)

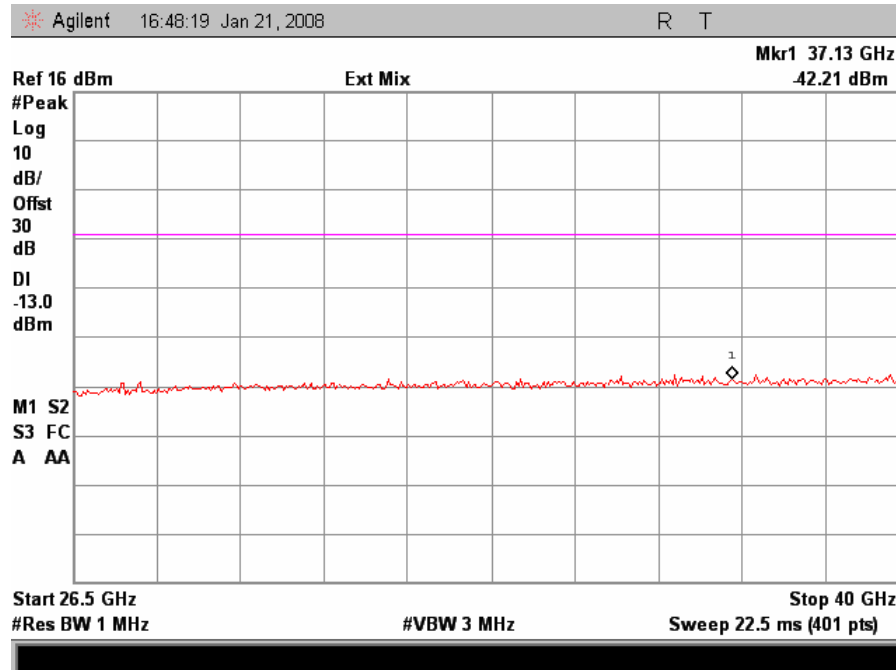


Plot 31. Conducted Spurious Emissions 5 MHz Hi Ch (26.5 GHz – 40 GHz)




Plot 32. Conducted Spurious Emissions 10 MHz Low Ch (30 MHz - 18GHz)

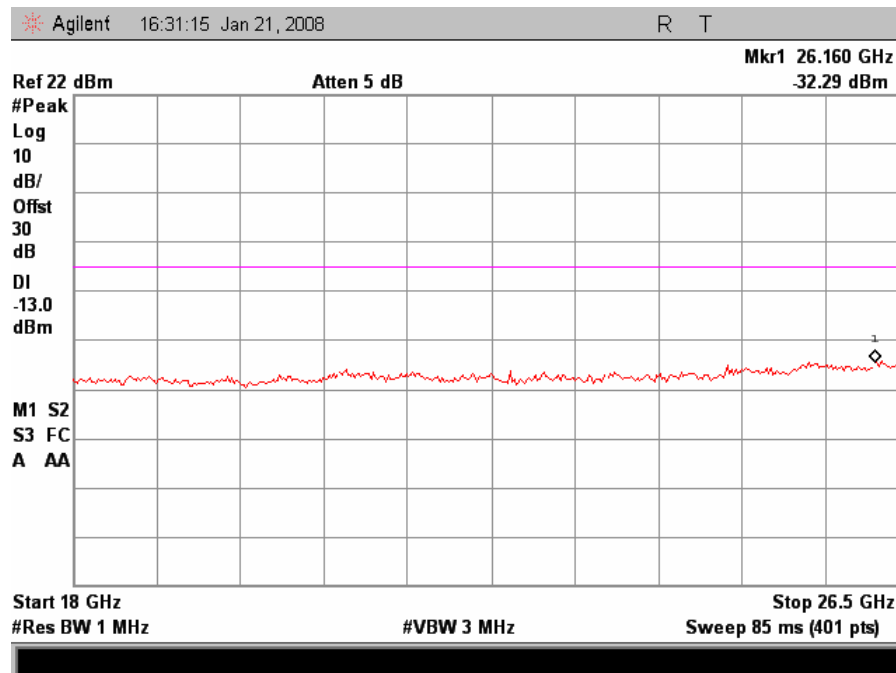


Plot 33. Conducted Spurious Emissions 10 MHz Low Ch (18 GHz – 26.5 GHz)

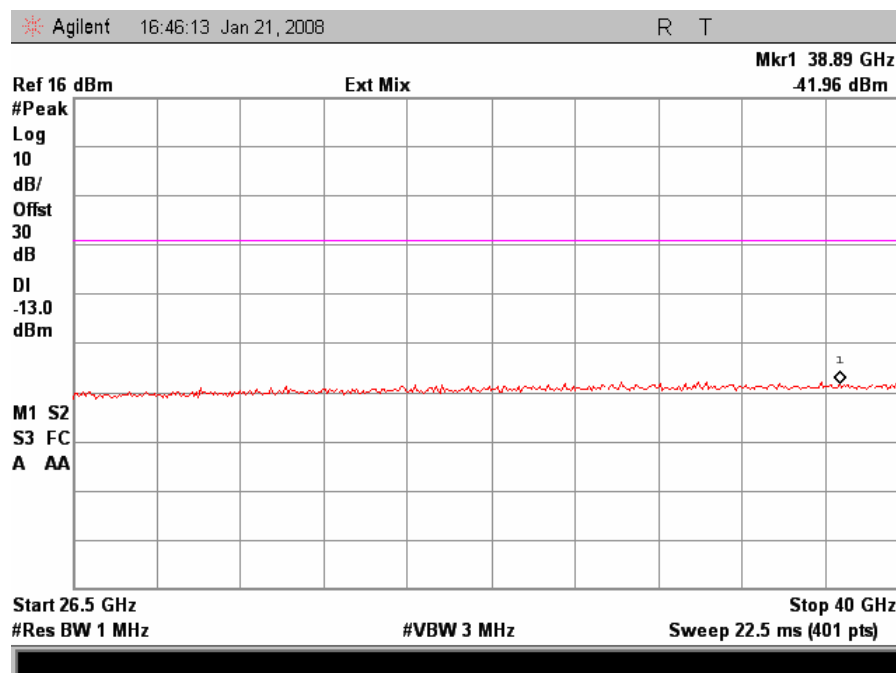


Plot 34. Conducted Spurious Emissions 10 MHz Low Ch (26.5 GHz – 40 GHz)

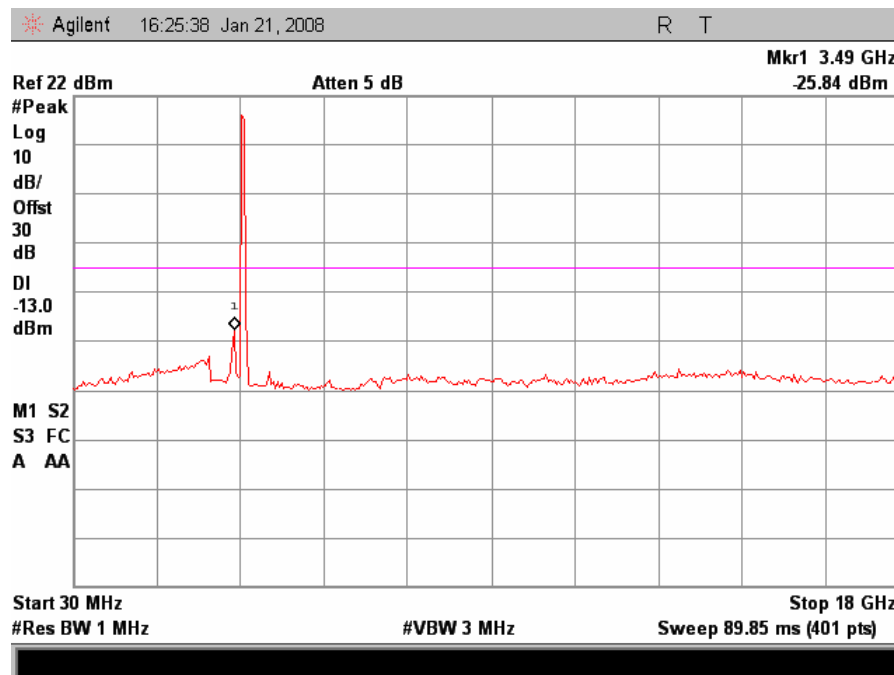


Plot 35. Conducted Spurious Emissions 10 MHz Mid Ch (30 MHz - 18GHz)

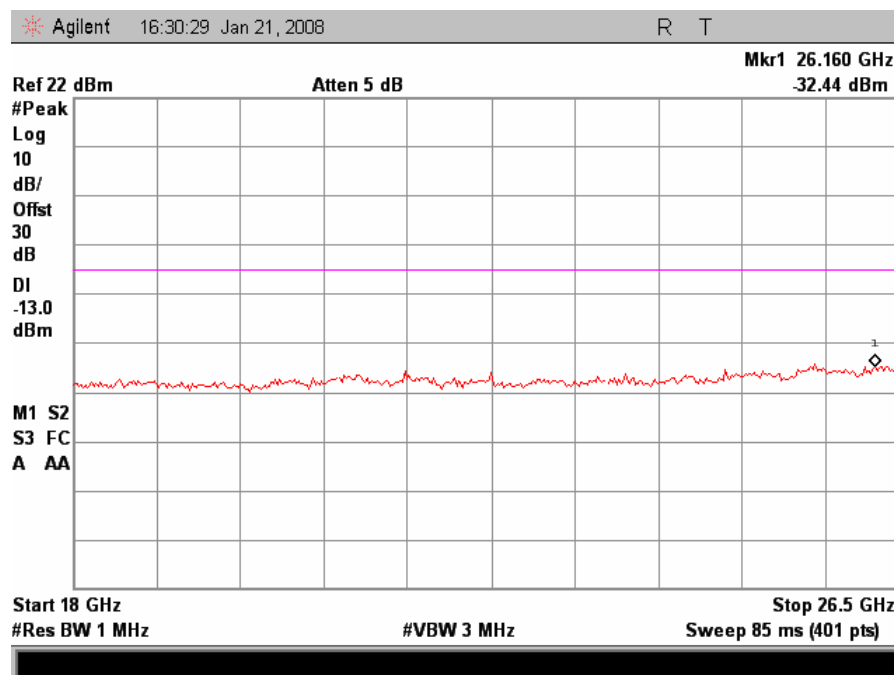


Plot 36. Conducted Spurious Emissions 10 MHz Mid Ch (18 GHz – 26.5 GHz)

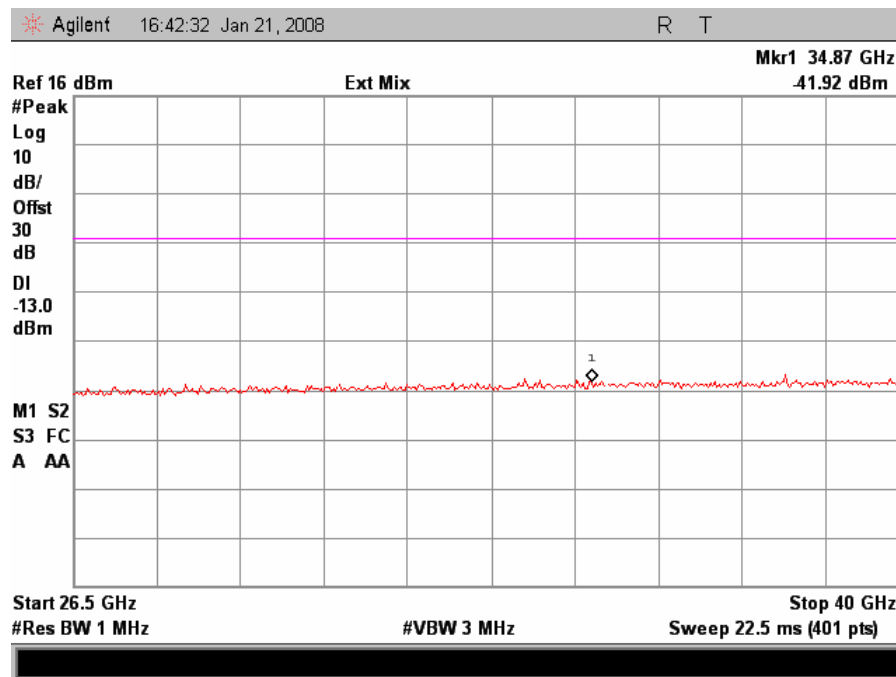


Plot 37. Conducted Spurious Emissions 10 MHz Mid Ch (26.5 GHz – 40 GHz)

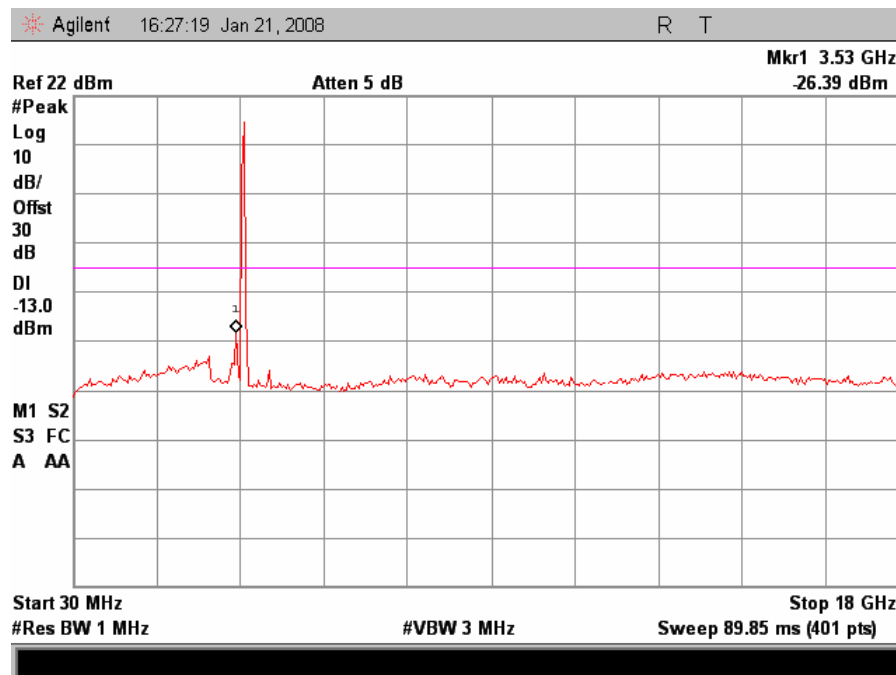


Plot 38. Conducted Spurious Emissions 10 MHz Hi Ch (30 MHz - 18GHz)

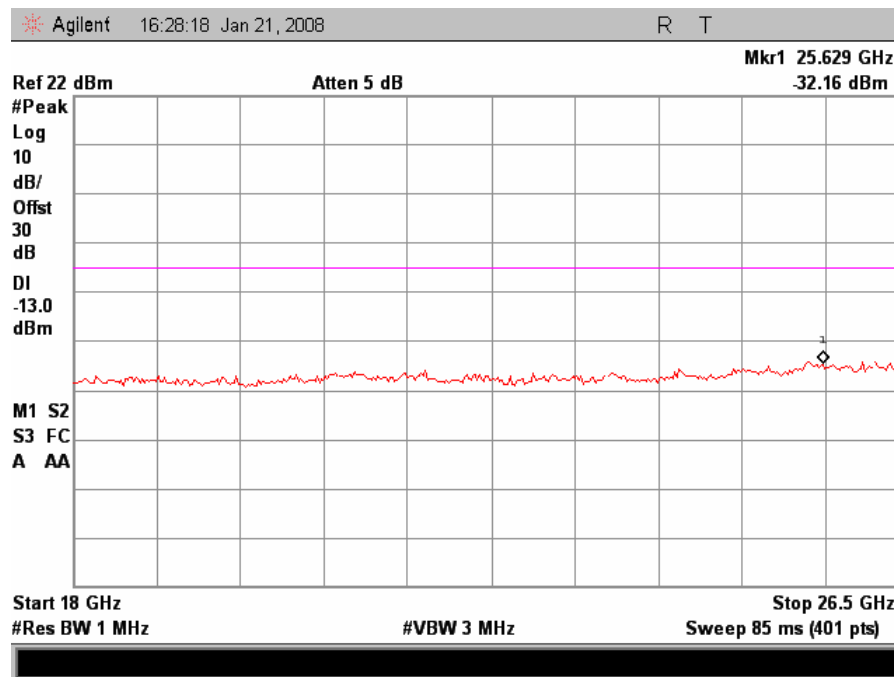


Plot 39. Conducted Spurious Emissions 10 MHz Hi Ch (18 GHz – 26.5 GHz)

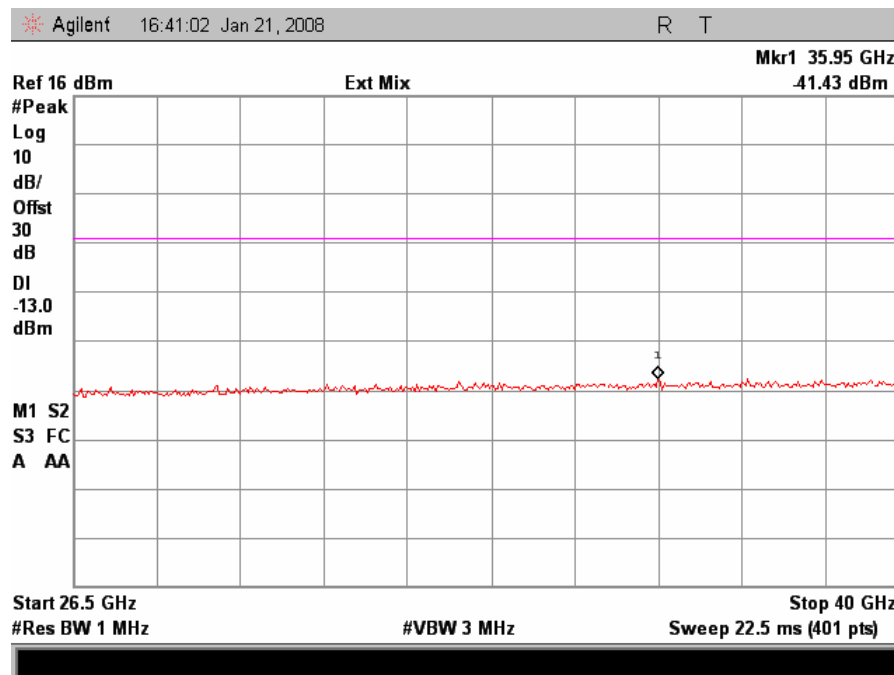

Plot 40. Conducted Spurious Emissions 10 MHz Hi Ch (26.5 GHz – 40 GHz)

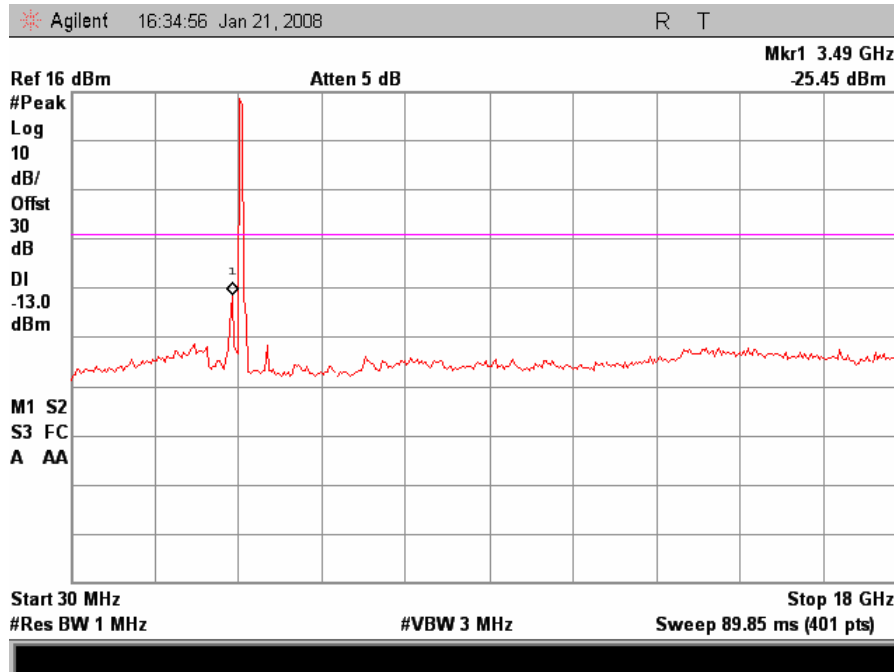


Plot 41. Conducted Spurious Emissions 20 MHz (30 MHz - 18GHz)

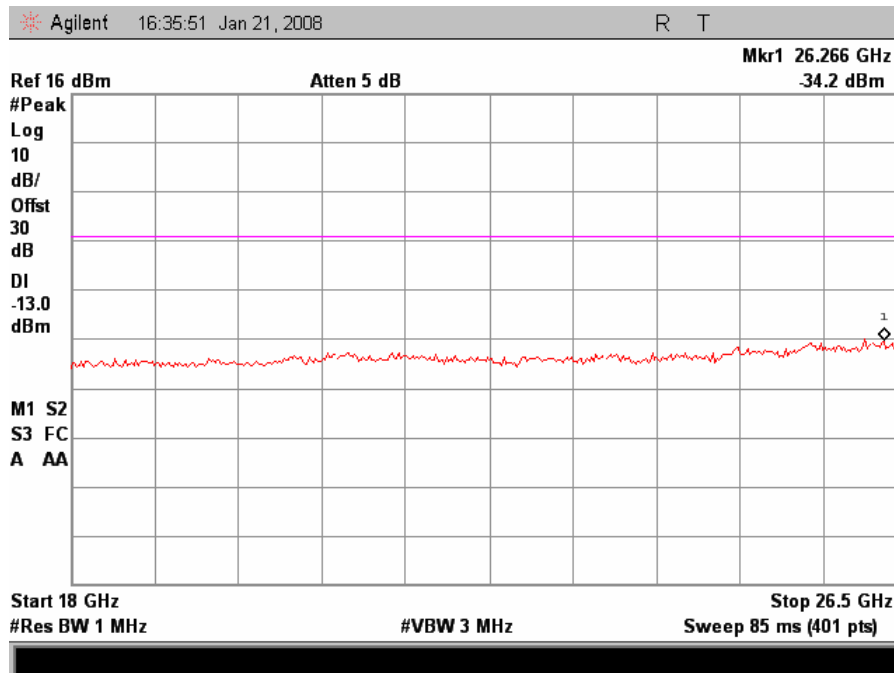


Plot 42. Conducted Spurious Emissions 20 MHz (18 GHz - 26.5 GHz)




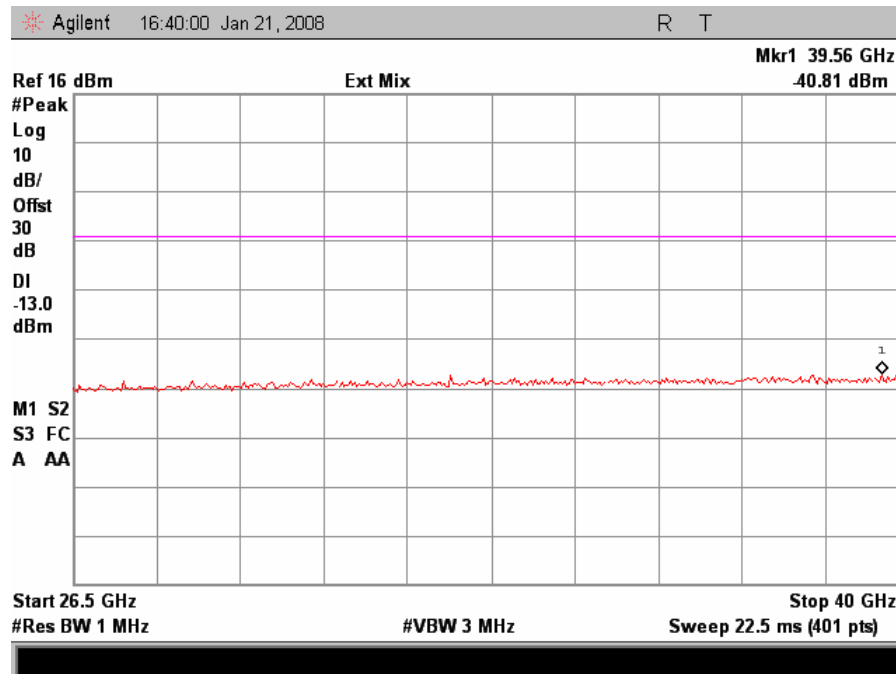


Plot 43. Conducted Spurious Emissions 20 MHz (26.5 GHz – 40 GHz)

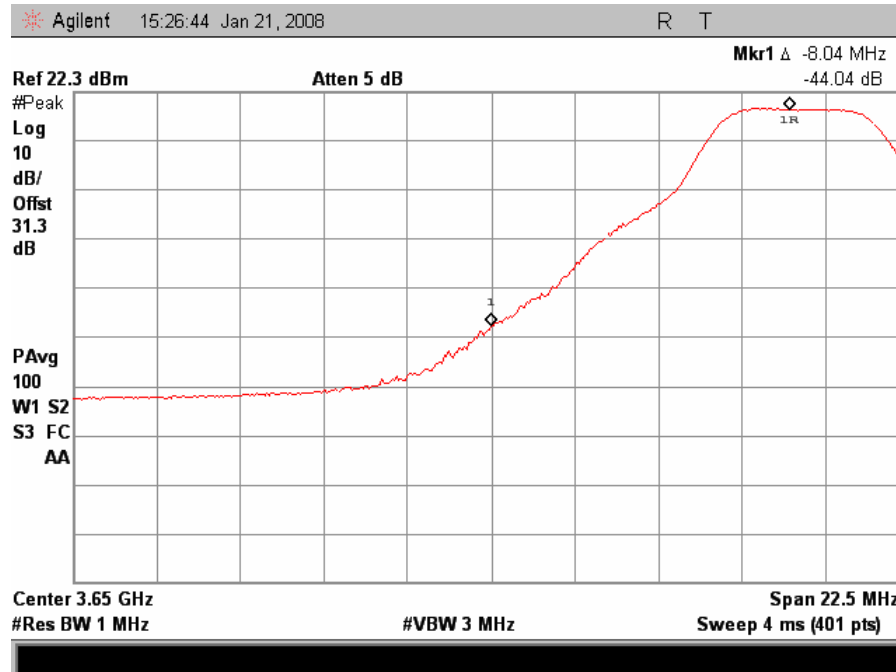


Plot 44. Lower Band Edge 5MHz Low Channel

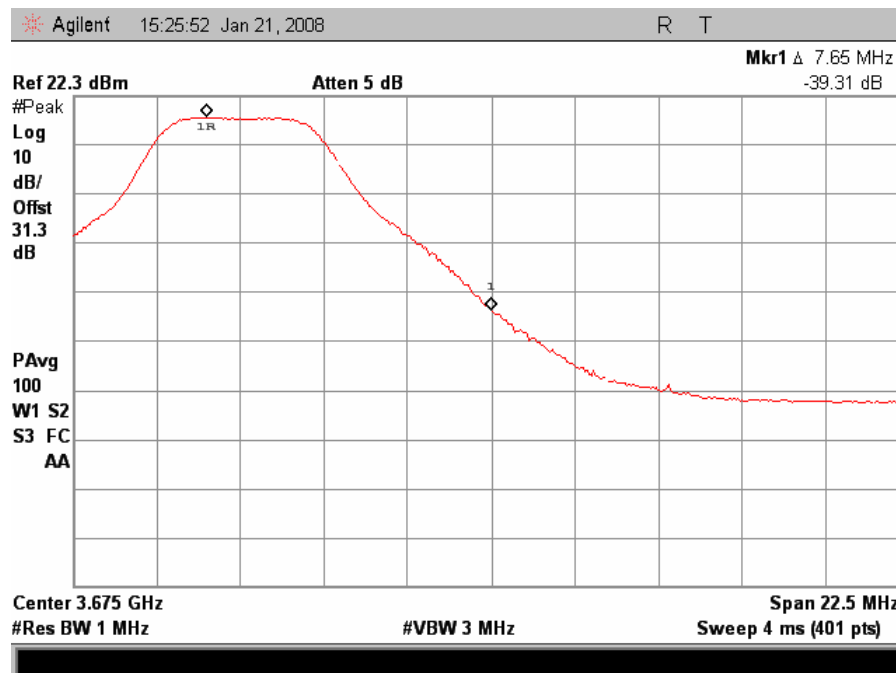


Plot 45. Upper Band Edge 5MHz High Channel

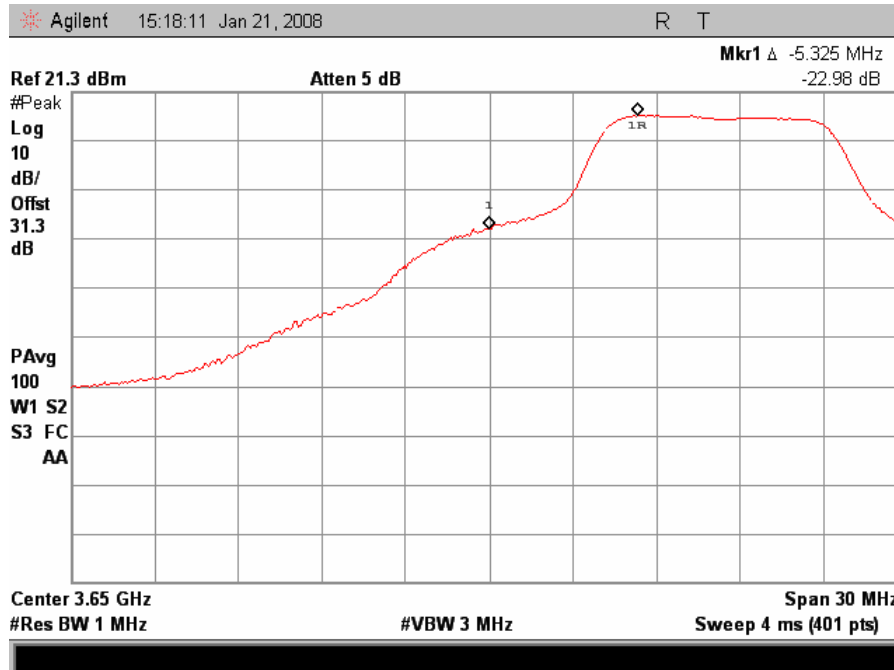


Plot 46. Lower Band Edge 10MHz Low Channel

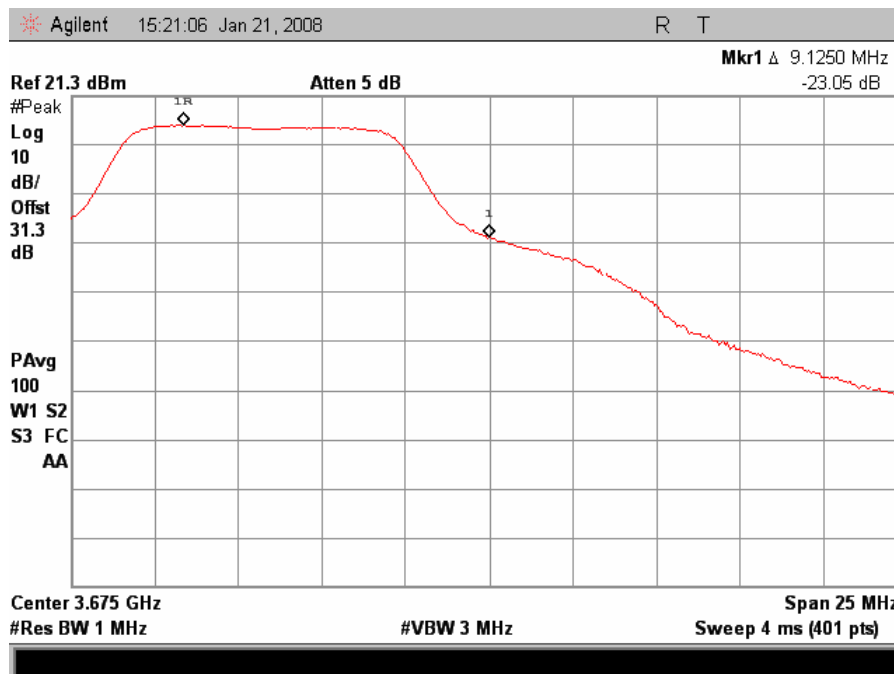

Plot 47. Upper Band Edge 10MHz High Channel

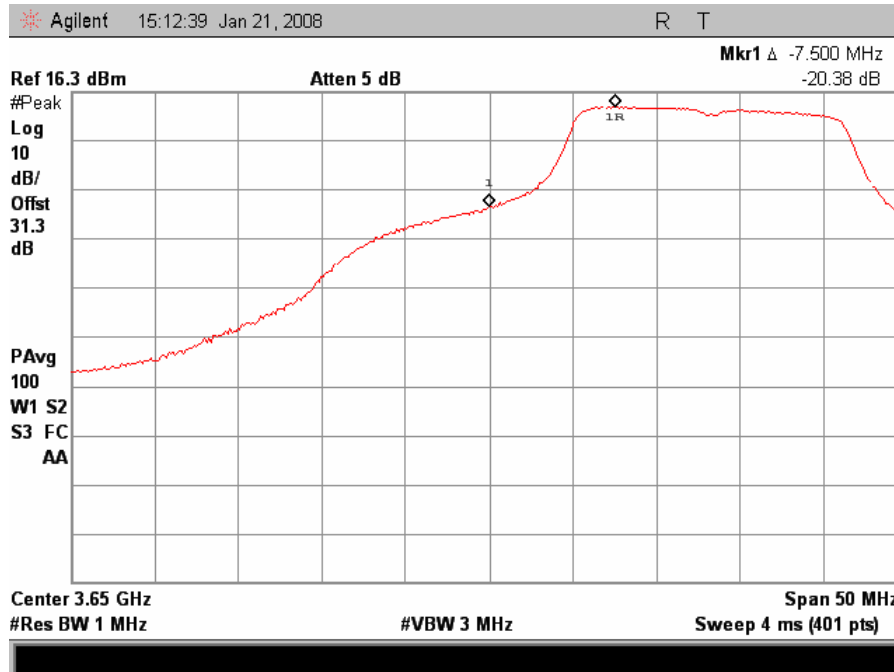

Plot 48. Lower Band Edge 20MHz low Channel

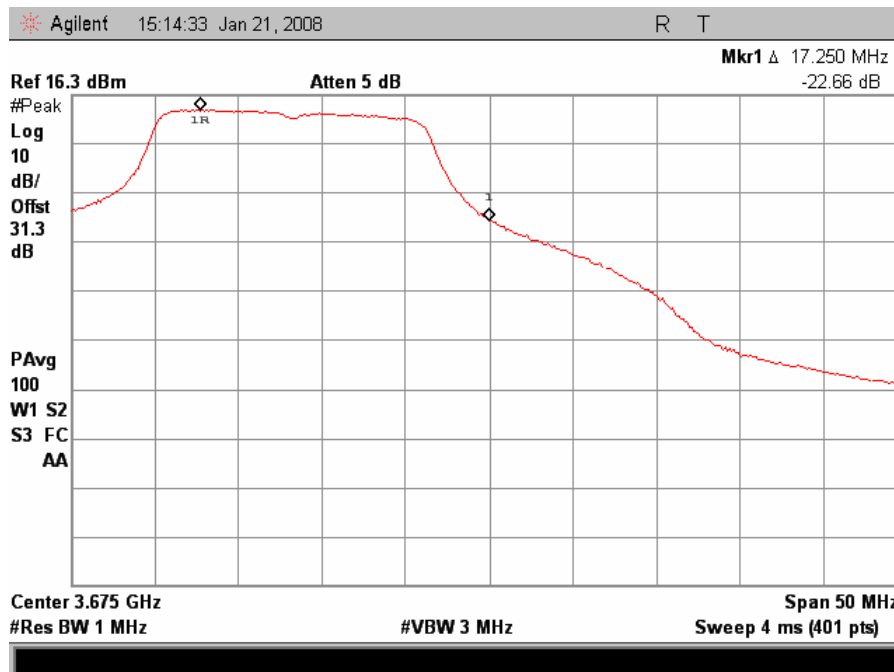

Plot 49. Upper Band Edge 20MHz High Channel



---

## 6.2. Radiated Emissions (Substitution Method)

**Test Requirement(s):** §2.1053 and TIA/EIA-603-A-2001

**Test Procedures:** As required by 47 CFR 2.1053, *field strength of radiated spurious measurements* were made in accordance with the procedures of TIA/EIA-603-A-2001 "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards".

Radiated emission measurements were performed inside a 10 meter semi-anechoic chamber. The EUT was set at a distance of 3m from the receiving antenna. The EUT's RF ports were terminated to 50ohm load. The EUT was set to transmit at the low, mid and high channels of the transmitter frequency range at its maximum power level. The EUT was rotated about 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. For harmonic frequencies falling in restricted bands the corrected field strength was performed using antenna factor and cable loss method. For all other notable spurious emissions a calibrated antenna source was positioned in place of the EUT and the previously recorded signal was duplicated. The maximum EIRP of the emission was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. Harmonic emissions up to the 10<sup>th</sup> or 40GHz, whichever was the lesser, were investigated.

**Test Results:** Equipment complies with Section 2.1053 and TIA/EIA-603-A-2001.

**Test Engineer(s):** Minh Ly

**Test Date(s):** January 21, 2008



Ubiquiti Networks  
XR3

Electromagnetic Compatibility  
Spurious Emissions at Antenna Terminal  
CFR Title 47, Part 90, Subpart Z & Part 15 Subpart B

## Radiated Emissions Test Results, 5MHz

Frequency (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3m	P.Amp (dB)	Ant.Cor. Factor (dB)	Cable Loss (dB)	Dist.Cor Factor (dB)	Corrected Field Strength (dB $\mu$ V/m)	Corrected Field Strength (dBm)	Limit @ 3m (dBm)	Margin (dB)
7316.40	V	40.79	35.2	35.6	6.4	0	47.6	-59.4	-13	46.4
7316.40	V	29.58	35.2	35.6	6.4	0	36.4	-70.6	-13	57.6
10974.60	V	41.38	34.8	38.7	8.2	0	53.6	-53.4	-13	40.4
10974.60	V	28.58	34.8	38.7	8.2	0	40.8	-66.2	-13	53.2
14632.80	V	40.05	33.4	42.1	11.0	0	59.7	-47.3	-13	34.3
Low Channel 3658.2MHz										
Frequency (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3m	P.Amp (dB)	Ant.Cor. Factor (dB)	Cable Loss (dB)	Dist.Cor Factor (dB)	Corrected Field Strength (dB $\mu$ V/m)	Corrected Field Strength (dBm)	Limit @ 3m (dBm)	Margin (dB)
7326.40	V	39.63	35.2	35.6	6.4	0	46.4	-60.6	-13	47.6
7326.40	V	29.56	35.2	35.6	6.4	0	36.4	-70.6	-13	57.6
10989.60	V	39.95	34.8	38.7	8.2	0	52.1	-54.9	-13	41.9
10989.60	V	28.6	34.8	38.7	8.2	0	40.8	-66.2	-13	53.2
14652.80	V	39.35	33.4	42.1	11.0	0	59.0	-48.0	-13	35.0
Mid Channel 3663.2MHz										
Frequency (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3m	P.Amp (dB)	Ant.Cor. Factor (dB)	Cable Loss (dB)	Dist.Cor Factor (dB)	Corrected Field Strength (dB $\mu$ V/m)	Corrected Field Strength (dBm)	Limit @ 3m (dBm)	Margin (dB)
7336.40	V	40.7	35.2	35.6	6.4	0	47.5	-59.5	-13	46.5
7336.40	V	29.6	35.2	35.6	6.4	0	36.4	-70.6	-13	57.6
11004.60	V	39.48	34.8	38.7	8.2	0	51.7	-55.3	-13	42.3
11004.60	V	28.3	34.8	38.7	8.2	0	40.5	-66.5	-13	53.5
14672.80	V	39.98	33.4	42.1	11.0	0	59.6	-47.4	-13	34.4
High Channel 3668.2MHz										

Notes: All other emissions were measured at the noise floor of the spectrum analyzer.



Ubiquiti Networks  
XR3

Electromagnetic Compatibility  
Spurious Emissions at Antenna Terminal  
CFR Title 47, Part 90, Subpart Z & Part 15 Subpart B

## Radiated Emissions Test Results, 10MHz

Frequency (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3m	P.Amp (dB)	Ant.Cor. Factor (dB)	Cable Loss (dB)	Dist.Cor Factor (dB)	Corrected Field Strength (dBμV/m)	Corrected Field Strength (dBm)	Limit @ 3m (dBm)	Margin (dB)
7316.40	V	40.14	35.2	35.6	6.4	0	46.9	-60.1	-13	47.1
7316.40	V	29.11	35.2	35.6	6.4	0	35.9	-71.1	-13	58.1
10974.60	V	39.43	34.8	38.7	8.2	0	51.6	-55.4	-13	42.4
10974.60	V	27.97	34.8	38.7	8.2	0	40.2	-66.9	-13	53.9
14632.80	V	38.5	33.4	42.1	11.0	0	58.2	-48.9	-13	35.9
Low Channel 3658.2MHz										
Frequency (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3m	P.Amp (dB)	Ant.Cor. Factor (dB)	Cable Loss (dB)	Dist.Cor Factor (dB)	Corrected Field Strength (dBμV/m)	Corrected Field Strength (dBm)	Limit @ 3m (dBm)	Margin (dB)
7326.40	V	39.27	35.2	35.6	6.4	0	46.1	-61.0	-13	48.0
7326.40	V	29.28	35.2	35.6	6.4	0	36.1	-70.9	-13	57.9
10989.60	V	39.37	34.8	38.7	8.2	0	51.6	-55.5	-13	42.5
10989.60	V	28.1	34.8	38.7	8.2	0	40.3	-66.7	-13	53.7
14652.80	V	39.06	33.4	42.1	11.0	0	58.7	-48.3	-13	35.3
Mid Channel 3663.2MHz										
Frequency (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3m	P.Amp (dB)	Ant.Cor. Factor (dB)	Cable Loss (dB)	Dist.Cor Factor (dB)	Corrected Field Strength (dBμV/m)	Corrected Field Strength (dBm)	Limit @ 3m (dBm)	Margin (dB)
7336.40	V	40.99	35.2	35.6	6.4	0	47.8	-59.2	-13	46.2
7336.40	V	29.39	35.2	35.6	6.4	0	36.2	-70.8	-13	57.8
11004.60	V	39.16	34.8	38.7	8.2	0	51.3	-55.7	-13	42.7
11004.60	V	27.99	34.8	38.7	8.2	0	40.2	-66.8	-13	53.8
14672.80	V	40.36	33.4	42.1	11.0	0	60.0	-47.0	-13	34.0
High Channel 3668.2MHz										

Notes: All other emissions were measured at the noise floor of the spectrum analyzer.



Ubiquiti Networks  
XR3

Electromagnetic Compatibility  
Spurious Emissions at Antenna Terminal  
CFR Title 47, Part 90, Subpart Z & Part 15 Subpart B

### Radiated Emissions Test Results, 20MHz

Frequency (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3m	P.Amp (dB)	Ant.Cor. Factor (dB)	Cable Loss (dB)	Dist.Cor Factor (dB)	Corrected Field Strength (dB $\mu$ V/m)	Corrected Field Strength (dBm)	Limit @ 3m (dBm)	Margin (dB)
7326.40	V	41.83	35.2	35.6	6.4	0	48.6	-58.4	-13	45.4
7326.40	V	29.71	35.2	35.6	6.4	0	36.5	-70.5	-13	57.5
10989.60	V	39.32	34.8	38.7	8.2	0	51.5	-55.5	-13	42.5
10989.60	V	28.2	34.8	38.7	8.2	0	40.4	-66.6	-13	53.6
14652.80	V	39.45	33.4	42.1	11.0	0	59.1	-47.9	-13	34.9
High Channel 3663.2MHz										

Notes: All other emissions were measured at the noise floor of the spectrum analyzer.





Ubiquiti Networks  
XR3

Electromagnetic Compatibility  
Spurious Emissions at Antenna Terminal  
CFR Title 47, Part 90, Subpart Z & Part 15 Subpart B

## Radiated Emissions Spurious Test Setup



Photograph 4. Radiated Emission Spurious Test Setup



## 7. RF Exposure Requirements

**RF Exposure Requirements:** §90.1335, §1.1307(b), 2.1091, 2.1093: Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

**RF Radiation Exposure Limit:** §1.1307: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 3650–3675 MHz; highest conducted power = 18.79dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm<sup>2</sup> or 10 W/m<sup>2</sup>**

EUT maximum antenna gain = 18 dBi.

Equation from page 18 of OET 65, Edition 97-01

### EUT with 18dBi Antenna

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm<sup>2</sup>)  
P = Power Input to antenna (75.68mW)  
G = Antenna Gain (63.09 numeric)

$$S = (75.68 * 63.09 / 4 * 3.14 * 20^2) = (4775.293 / 5024) = \mathbf{0.95 \text{ mW/cm}^2}$$



---

## 8. Electromagnetic Compatibility Frequency Stability Requirements

### 8.1. Frequency Stability

**Test Requirement(s):** §2.1055 and §90.213

**Test Procedures:** As required by 47 CFR 2.1055, *Frequency Stability measurements* were made at the RF output terminals using a Directional Coupler through a Spectrum Analyzer and Power Meter.

The EUT was placed in the Environmental Chamber and support equipments are outside the chamber on a table. The EUT was set to transmitter at a data rate corresponding to 20MHz BW. The frequency counter option on the Spectrum Analyzer was used to measure frequency deviations. The frequency drift was investigated for every 10<sup>C</sup> increment until the unit is stabilized then recorded the reading in tabular format with the temperature range of -30 to 50<sup>C</sup>.

Voltage supplied to EUT is 120 VAC reference temperature was done at 20<sup>C</sup>. The voltage was varied by ± 15 % of nominal

**Test Results:** Equipment complies with Section 2.1055 and 90.213

**Test Engineer(s):** Shawn McMillen

**Test Date(s):** September 26, 2007



---

## Frequency Stability Test Results

**Reference Freq.:** 3671.000000MHz at 20°C

Temperature (C)	Drift ppm
50	0.10
40	0.04
30	1.24
20	Ref
10	-1.85
0	-3.89
-10	2.28
-20	-4.67
-30	-6.43

**Table 12. Temperature Vs. Frequency Test Results**

**Reference:** 120Vac at 20°C **Freq.** = 3671.000000MHz

Measured Voltage +/-15% of nominal	Drift ppm
102	2.03
138	2.17

**Table 13. Frequency vs. Voltage Test Results**



Ubiquiti Networks  
XR3

Electromagnetic Compatibility  
Test Equipment  
CFR Title 47 Part 90 Subpart Z & Part 15 Subpart B

---

# Test Equipment



## 9. Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2421	EMI RECEIVER	ROHDE&SCHWARZ	ESIB 7	03/27/2007	03/27/2008
1S2184	BILOG ANTENNA	CHASE	CBL6112A	01/03/2007	01/03/2008
1S2121	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	10/25/2007	10/25/2008
1S2198	ANTENNA, HORN	EMCO	3115	08/31/2007	08/31/2008
1S2202	ANTENNA, HORN, 1 METER	EMCO	3116	04/10/2007	04/10/2010
N/A	HIGH PASS FILTER	MICRO-TRONICS	HPM13146	SEE NOTE	
1S2481	CHAMBER, 10 METER	ETS-LINDGREN	N2-14	12/26/2007	12/26/2008
1S2041	COUPLER, BI DIRECTIONAL COAXIAL	NARDA	N/A	SEE NOTE	
1S2460	Analyzer, Spectrum 9 kHz-40GHz	Agilent	E4407B	07/06/2005	07/06/2008
1S2430	WIDEBAND POWER METER	ANRITSU COMPANY	ML2488A	03/12/2007	03/12/2008
1S2432	WIDEBAND POWER SENSOR	ANRITSU COMPANY	MA2491A	03/12/2007	03/12/2008
1S2034	COUPLER, DIRECTIONAL 1-20 GHz	KRYTAR	101020020	SEE NOTE	
1S2041	COUPLER, BI DIRECTIONAL COAXIAL	NARDA	N/A	SEE NOTE	
1S2128	Harmonic Mixer	Hewlett Packard	11970A	10/26/2006	10/26/2008
1S2129	Harmonic Mixer	Hewlett Packard	11970K	10/26/2006	10/26/2008

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



# Certification & User's Manual Information



---

## 10. Certification Label & User's Manual Information

### 10.1. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.





- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
  - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
  - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a provision that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



---

**The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart Y — Equipment Authorization Procedures:**

**§ 2.901 Basis and Purpose**

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant, whichever is applicable.

**§ 2.902 Certification.**

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



---

**§ 2.948 Description of measurement facilities.**

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
  - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



---

## 10.2. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.



---

**§ 15.21 Information to user.**

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

**§ 15.105 Information to the user.**

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Ubiquiti Networks  
XR3

Electromagnetic Compatibility  
End of Report  
CFR Title 47 Part 90 Subpart Z & Part 15 Subpart B

---

# End of Report