
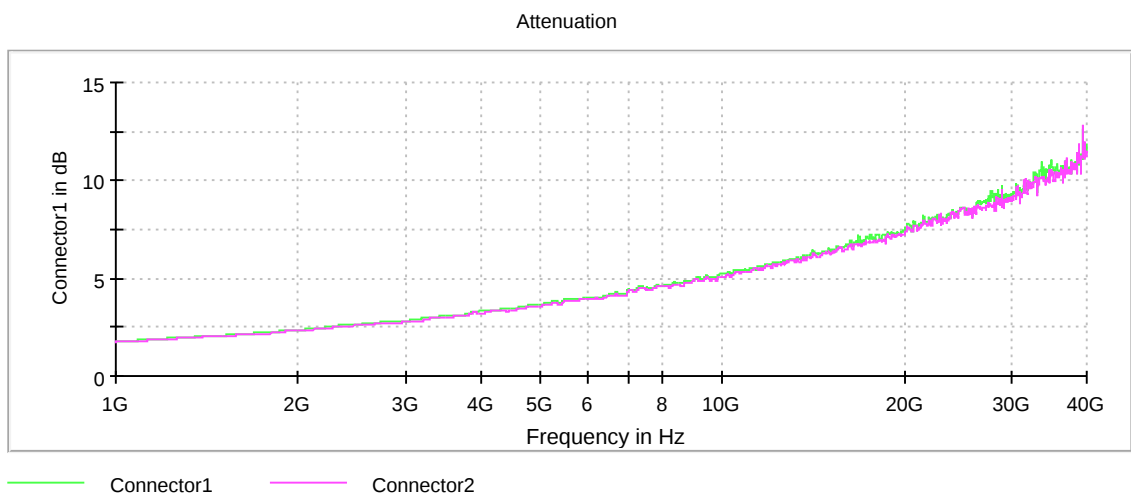
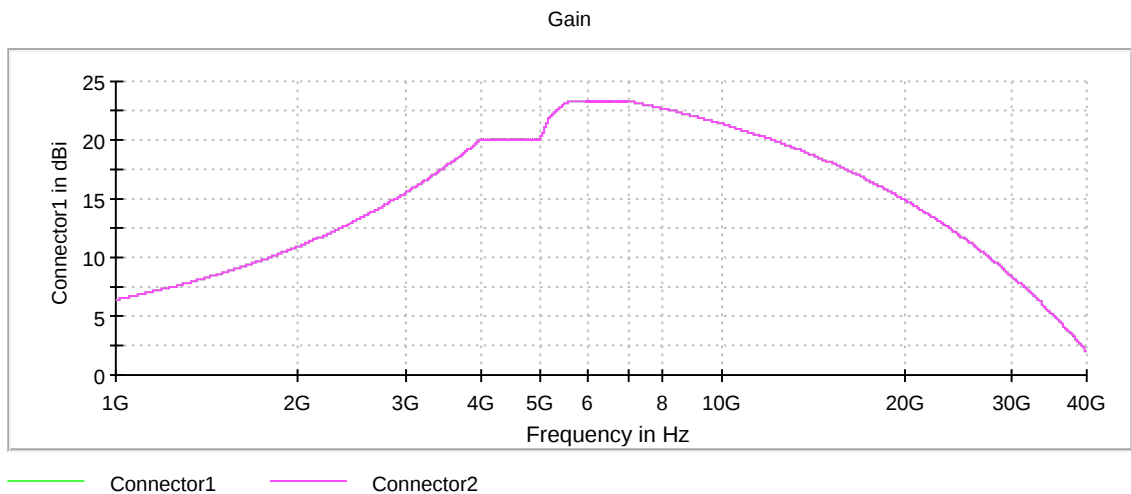


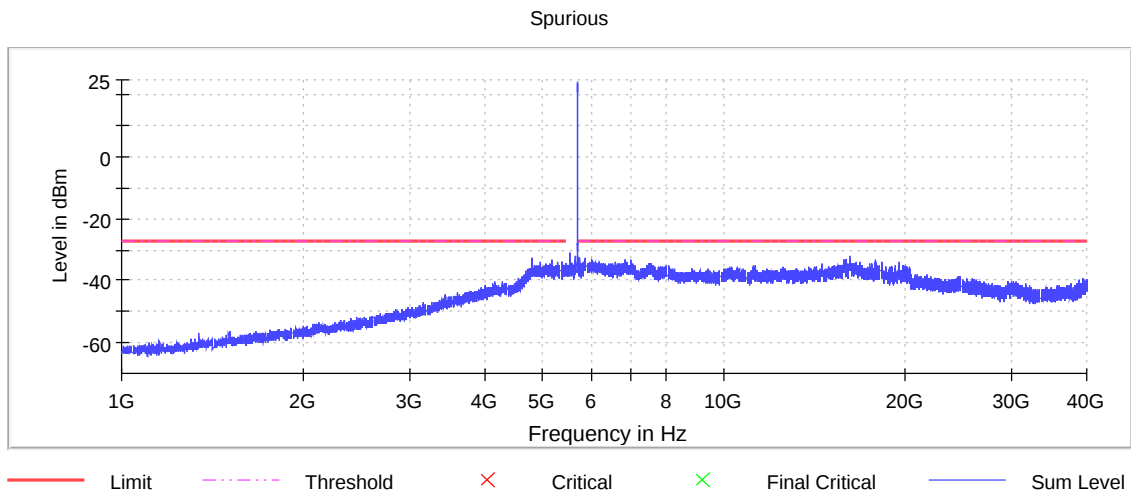

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	8300	~ 8300
SweepTime	8.300 ms	AUTO
Reference Level	0.000 dBm	AUTO
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5715 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5715.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
17865.250000	-44.4	3.2	-41.2
17901.250000	-44.5	3.3	-41.2
15844.750000	-44.8	3.6	-41.2
15907.250000	-44.9	3.7	-41.2
15882.250000	-44.9	3.7	-41.2
15884.750000	-44.9	3.7	-41.2
15910.250000	-45.0	3.8	-41.2
15796.750000	-45.0	3.8	-41.2
15805.250000	-45.0	3.8	-41.2
15878.750000	-45.1	3.9	-41.2
15857.750000	-45.2	4.0	-41.2
17887.750000	-45.3	4.1	-41.2
15912.750000	-45.4	4.2	-41.2
15813.250000	-45.4	4.2	-41.2
15800.750000	-45.4	4.2	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1

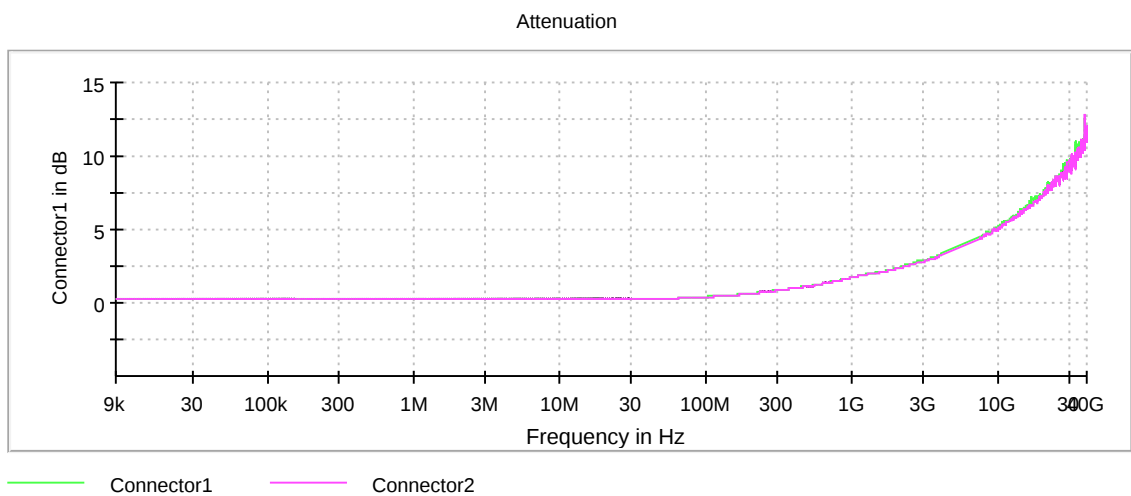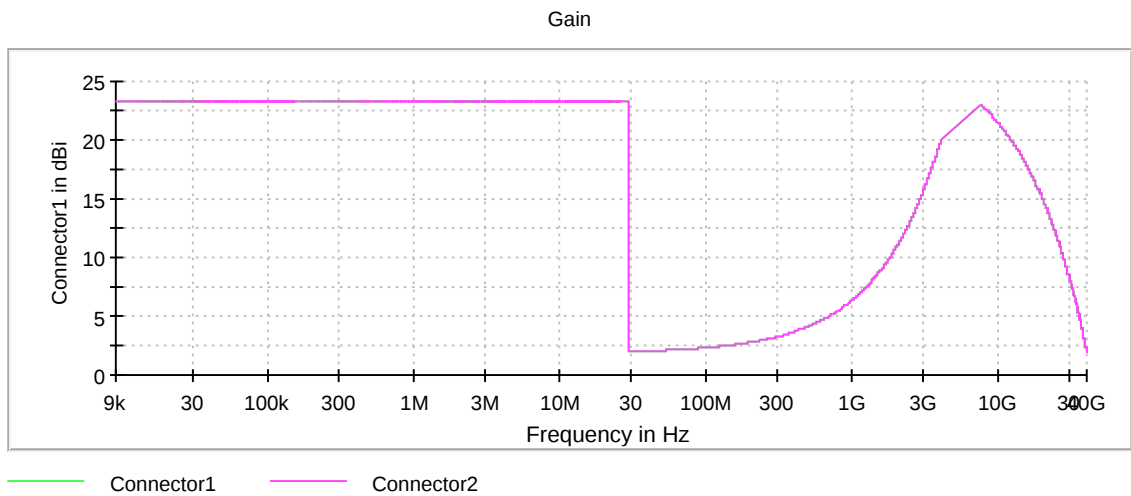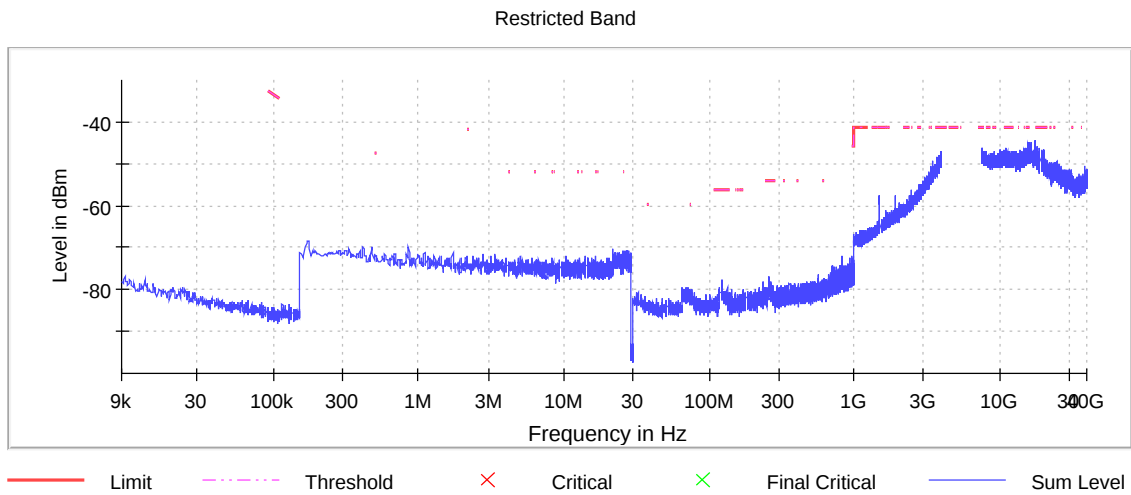

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
SweepTime	6.312 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5715 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5715.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5149.750000	-35.6	14.4	-21.2
5149.250000	-36.0	14.8	-21.2
4838.750000	-36.3	15.1	-21.2
5440.250000	-36.4	15.2	-21.2
4838.250000	-36.4	15.2	-21.2
5440.750000	-36.5	15.3	-21.2
5398.750000	-36.8	15.6	-21.2
4998.750000	-36.8	15.6	-21.2
4843.250000	-36.8	15.6	-21.2
4805.750000	-36.8	15.6	-21.2
4800.250000	-36.9	15.7	-21.2
5017.750000	-36.9	15.7	-21.2
5398.250000	-37.0	15.8	-21.2
5397.750000	-37.0	15.8	-21.2
5012.750000	-37.1	15.9	-21.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2

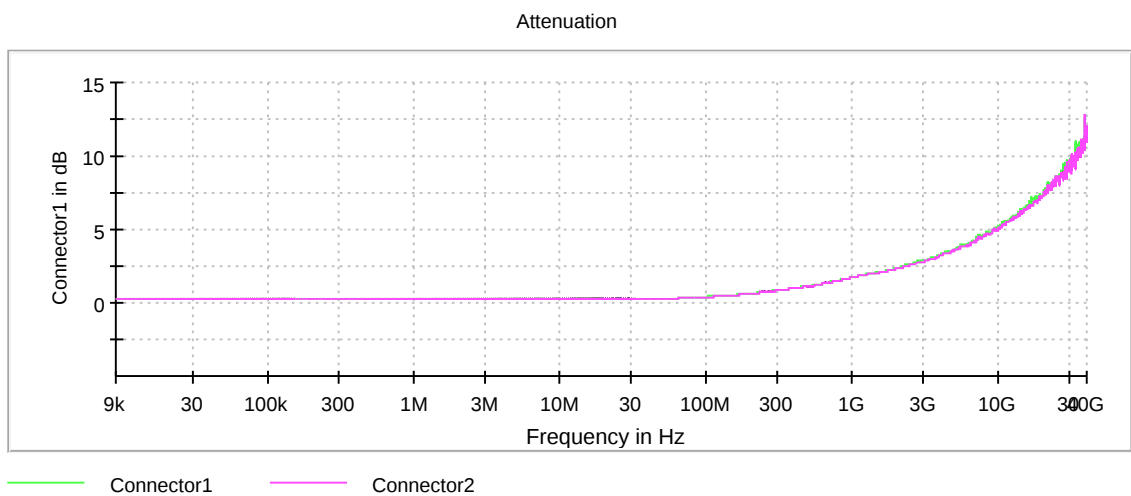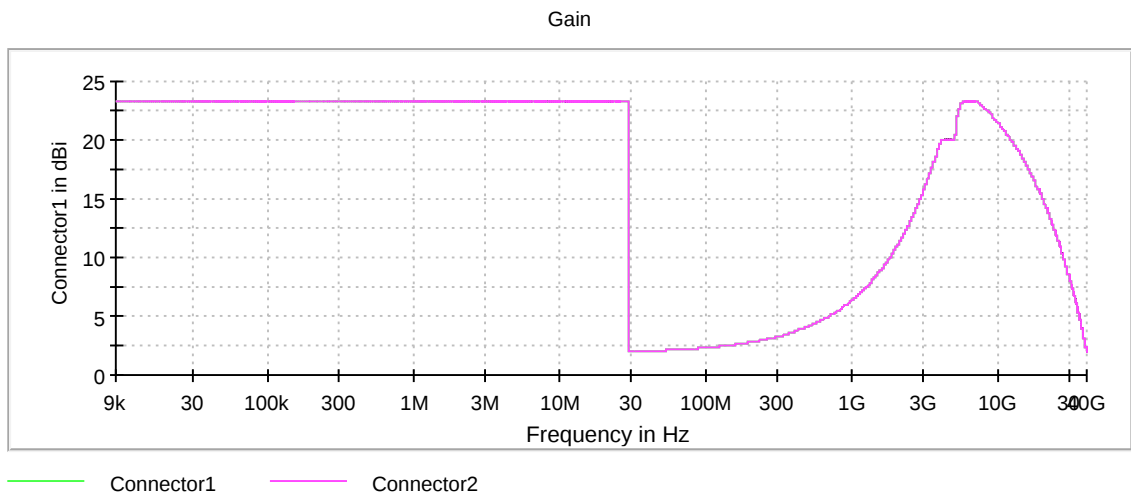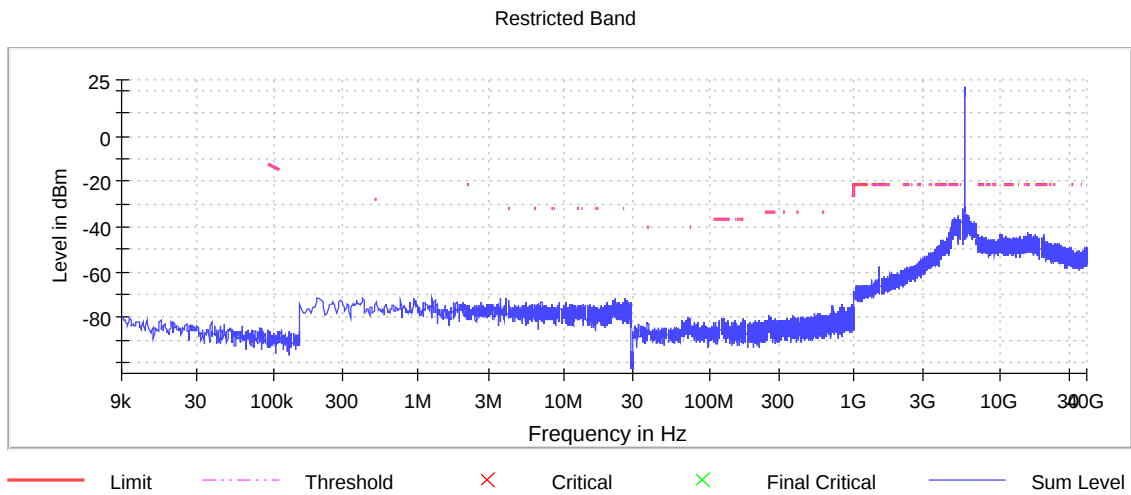

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5485 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5485.000000	20.800000	---	---	5474.650000	5495.450000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5485.000000	-8.5	PASS

26 dB Bandwidth

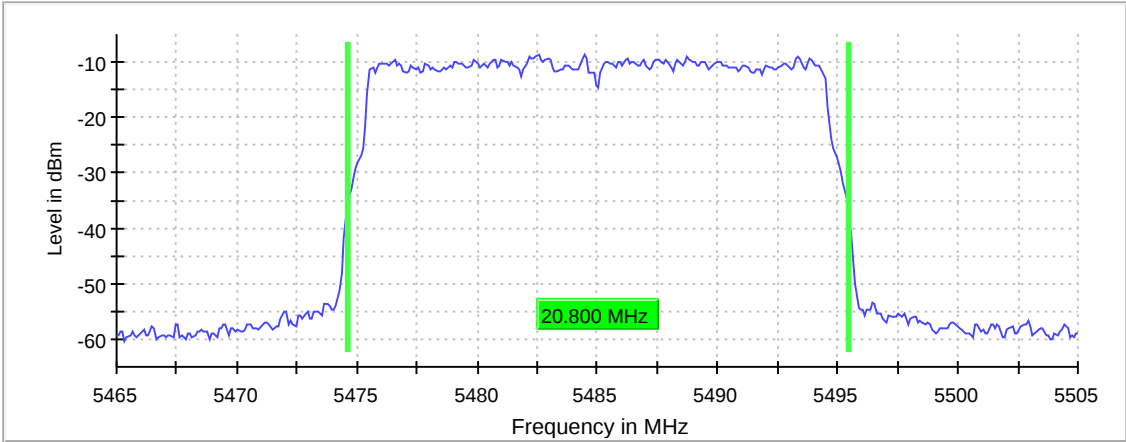

Bandwidth



Date: 2.AUG.2019 02:55:56

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.46500 GHz	5.46500 GHz
Stop Frequency	5.50500 GHz	5.50500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweeptime	28.477 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

RF output power (5485 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5485.000000	30.0	---	30.0	99.412	PASS

Power Spectral Density (5485 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5485.000000	5480.643564	-7.776	-6.0	PASS

Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.47500 GHz	5.47500 GHz
Stop Frequency	5.49500 GHz	5.49500 GHz
Span	20.000 MHz	20.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 40
SweepTime	2.020 ms	2.020 ms
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5485 MHz; 20 MHz)

Customized settings.


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5485.000000	18.900000	---	---	5475.550000	5494.450000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5485.000000	PASS

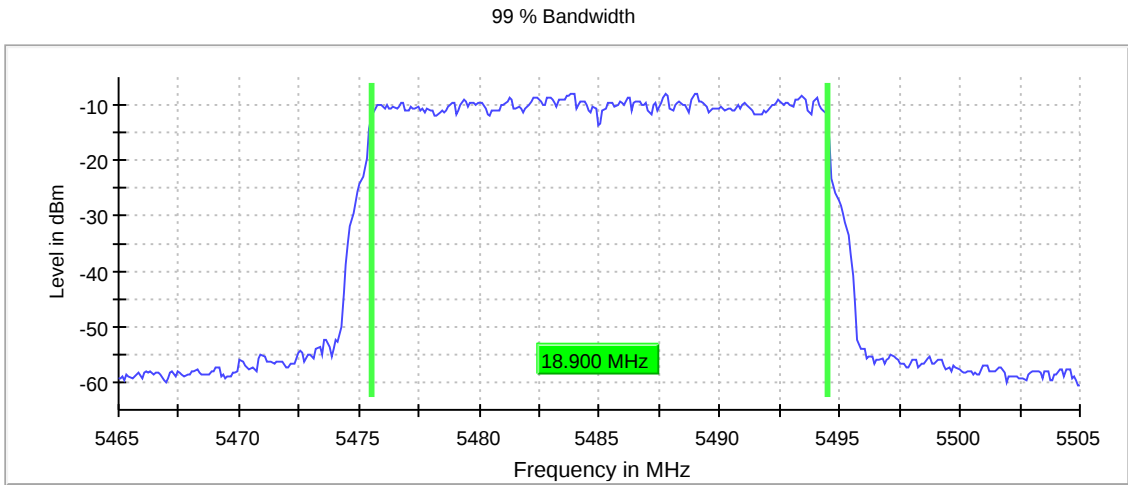

Bandwidth

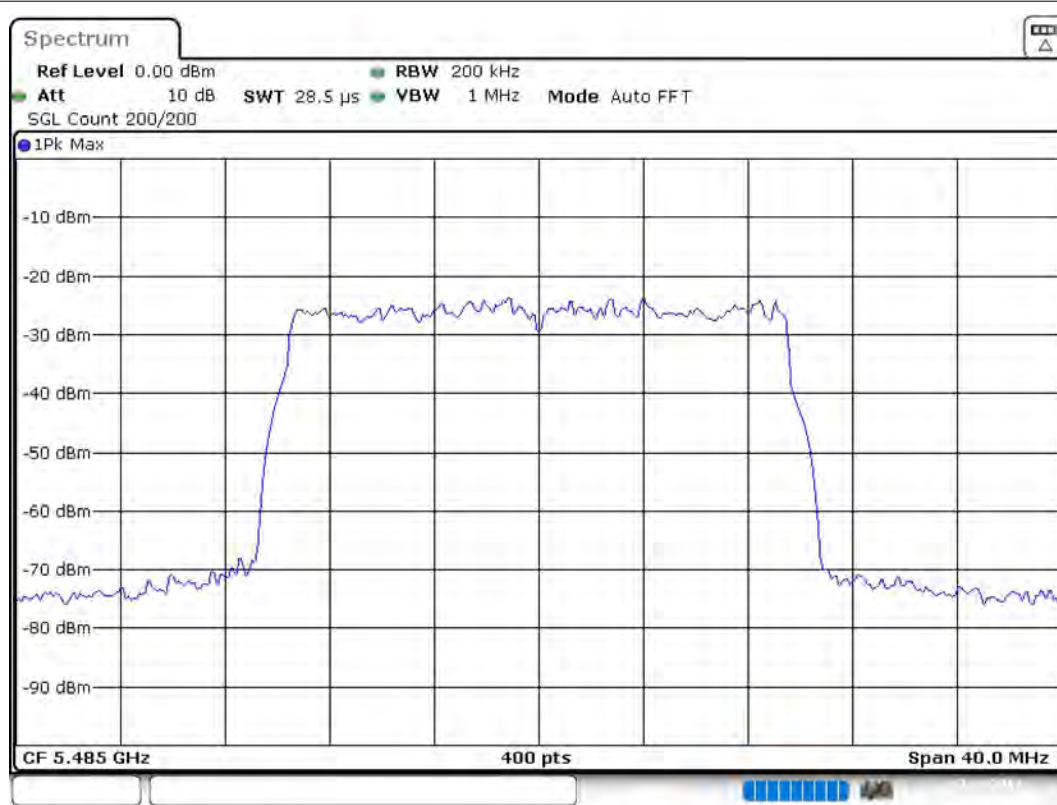

Date: 2.AUG.2019 02:56:47

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.46500 GHz	5.46500 GHz
Stop Frequency	5.50500 GHz	5.50500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	≥ 200.000 kHz
VBW	1.000 MHz	≥ 600.000 kHz
SweepPoints	400	~ 400
Sweeptime	28.477 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5485 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.4&5 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5485.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5469.750000	-27.6	0.6	-27.0
2480.250000	-28.1	1.1	-27.0
2479.750000	-28.2	1.2	-27.0
5469.250000	-28.3	1.3	-27.0
5438.250000	-28.5	1.5	-27.0
2480.750000	-28.8	1.8	-27.0
5438.750000	-28.9	1.9	-27.0
5467.750000	-29.0	2.0	-27.0
5468.250000	-29.0	2.0	-27.0
5433.750000	-29.1	2.1	-27.0
5468.750000	-29.2	2.2	-27.0
5437.750000	-29.2	2.2	-27.0
5433.250000	-29.3	2.3	-27.0
5434.250000	-29.6	2.6	-27.0
5441.750000	-30.0	3.0	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	18000.000000	2	2
18000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

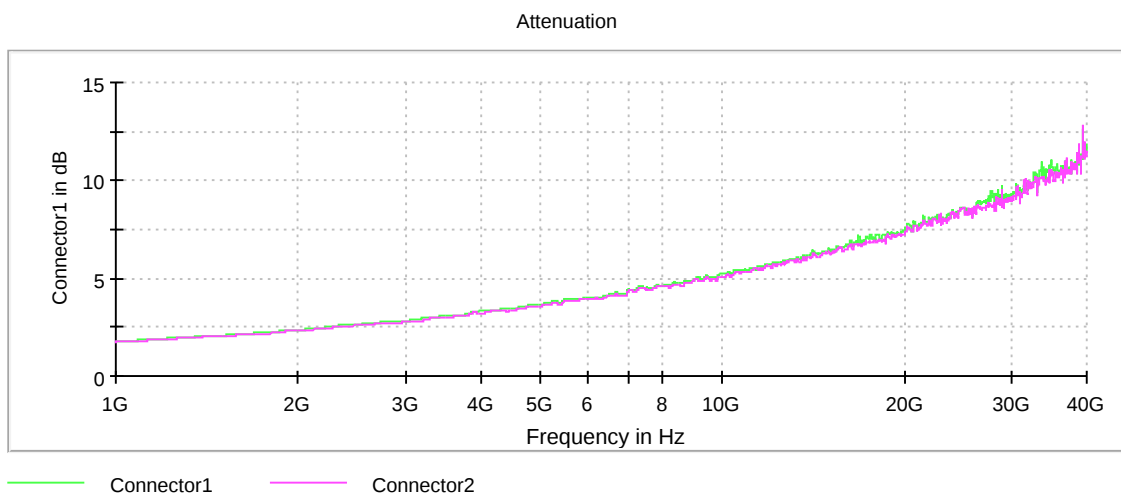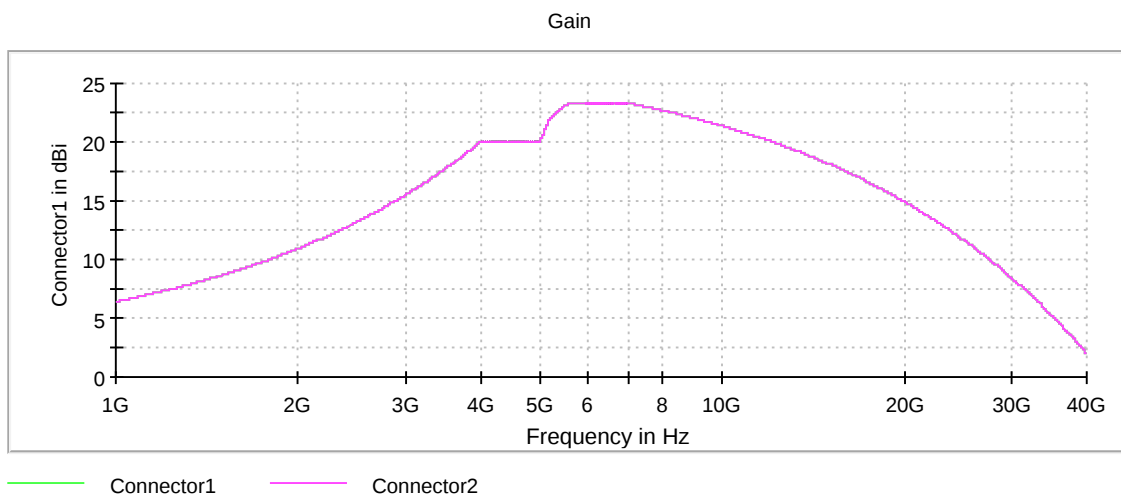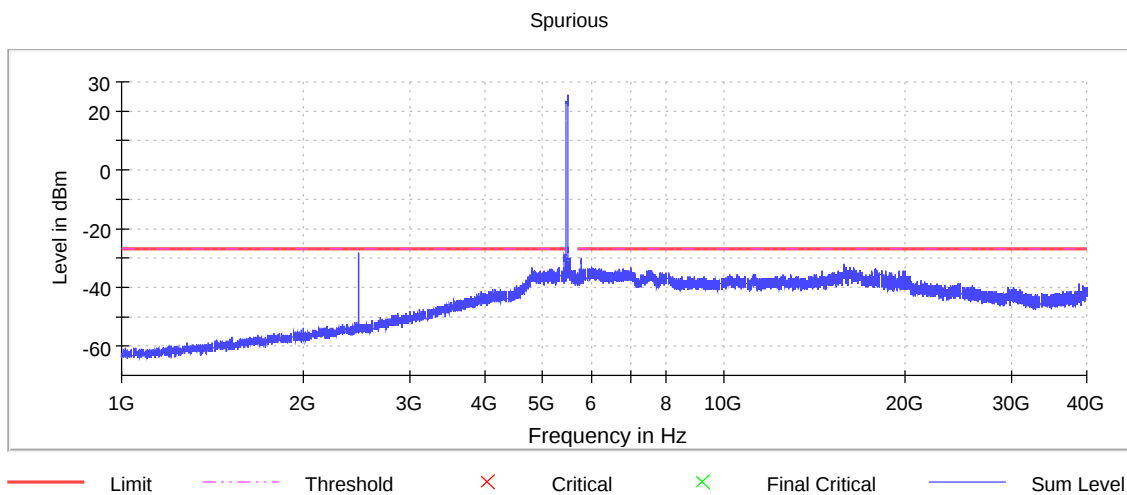

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	8300	~ 8300
SweepTime	8.300 ms	AUTO
Reference Level	0.000 dBm	AUTO
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5485 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5485.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
15870.750000	-44.7	3.5	-41.2
15800.250000	-44.8	3.6	-41.2
16187.250000	-45.0	3.8	-41.2
15827.250000	-45.1	3.9	-41.2
15894.250000	-45.3	4.1	-41.2
15877.750000	-45.3	4.1	-41.2
16179.750000	-45.4	4.2	-41.2
16140.250000	-45.5	4.3	-41.2
16160.250000	-45.5	4.3	-41.2
15884.250000	-45.5	4.3	-41.2
15829.750000	-45.5	4.3	-41.2
15798.250000	-45.5	4.3	-41.2
15891.750000	-45.6	4.4	-41.2
15809.750000	-45.6	4.4	-41.2
17877.750000	-45.6	4.4	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1

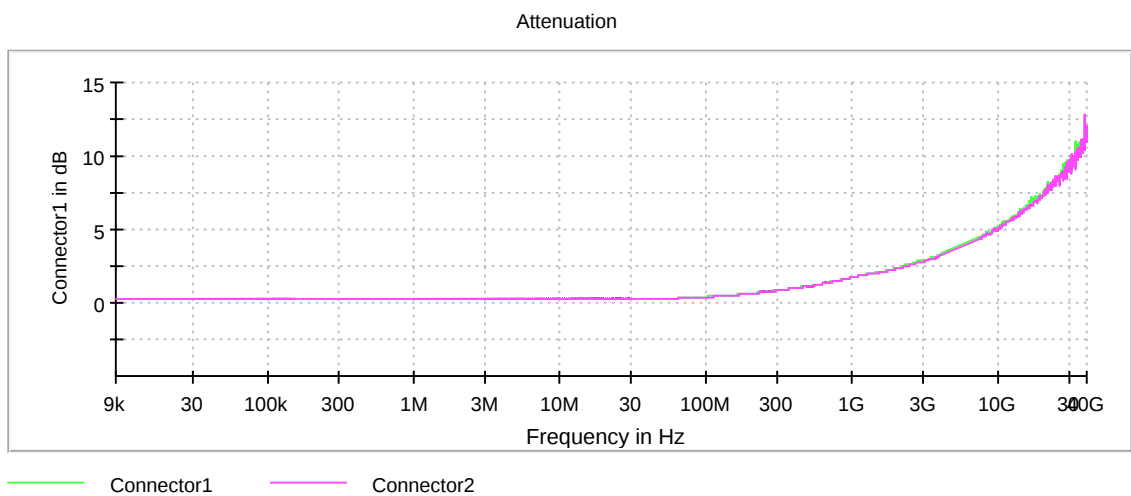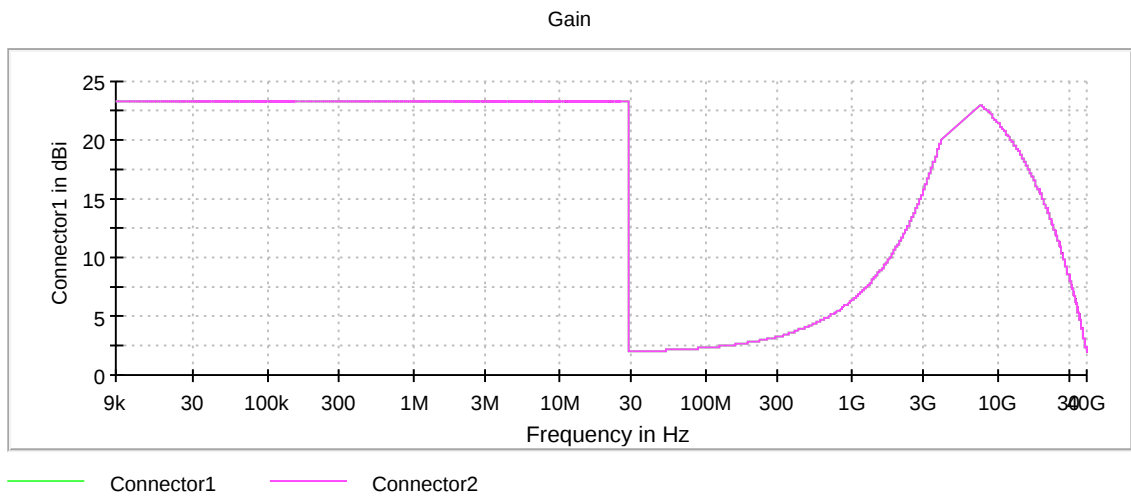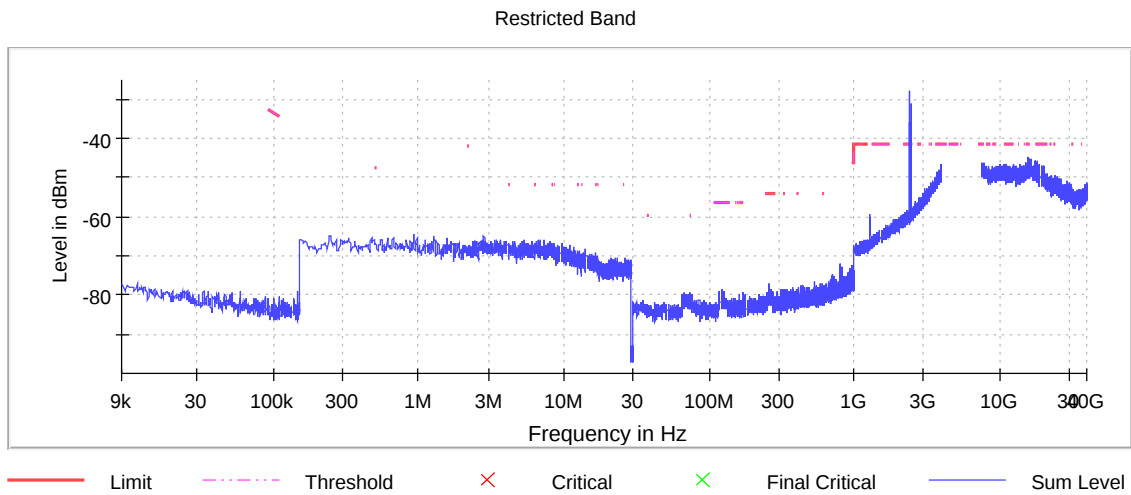

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
SweepTime	6.312 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5485 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5485.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5447.250000	-31.6	10.4	-21.2
5446.750000	-31.7	10.5	-21.2
5447.750000	-32.3	11.1	-21.2
5442.750000	-32.4	11.2	-21.2
5434.750000	-32.5	11.3	-21.2
5446.250000	-32.6	11.4	-21.2
5434.250000	-32.7	11.5	-21.2
5435.250000	-33.1	11.9	-21.2
5445.750000	-33.3	12.1	-21.2
5441.250000	-33.3	12.1	-21.2
5433.750000	-33.4	12.2	-21.2
5445.250000	-33.6	12.4	-21.2
5439.250000	-33.6	12.4	-21.2
5435.750000	-33.6	12.4	-21.2
5436.750000	-33.7	12.5	-21.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2

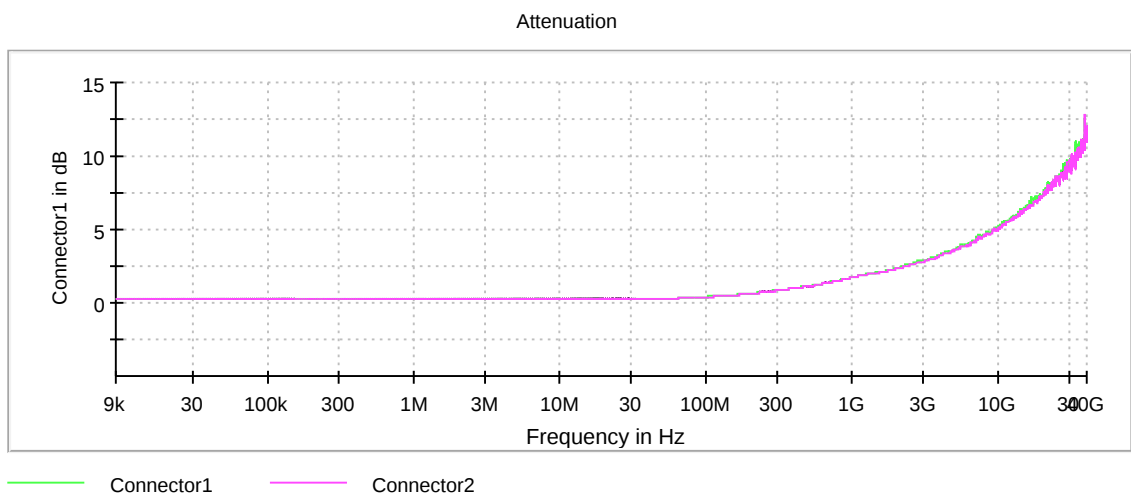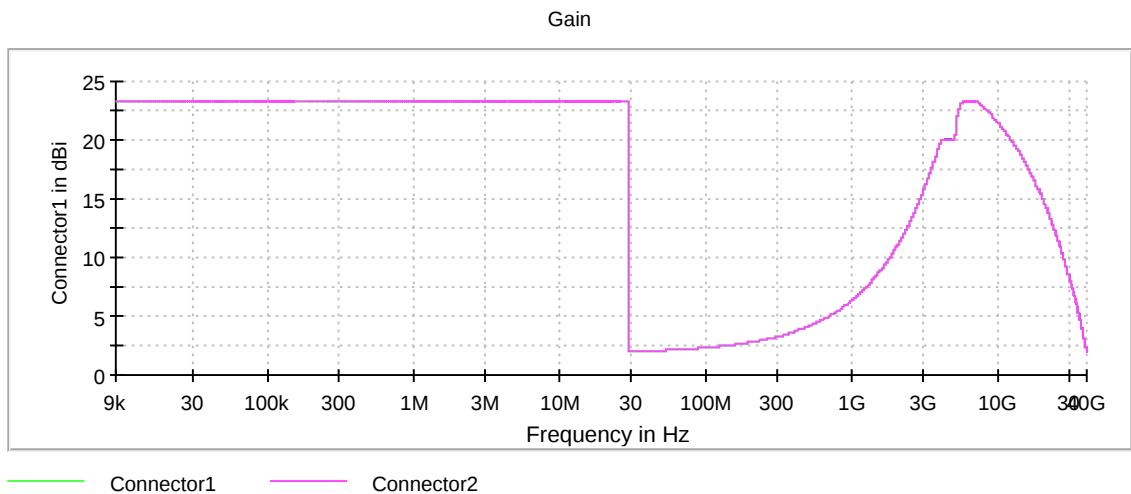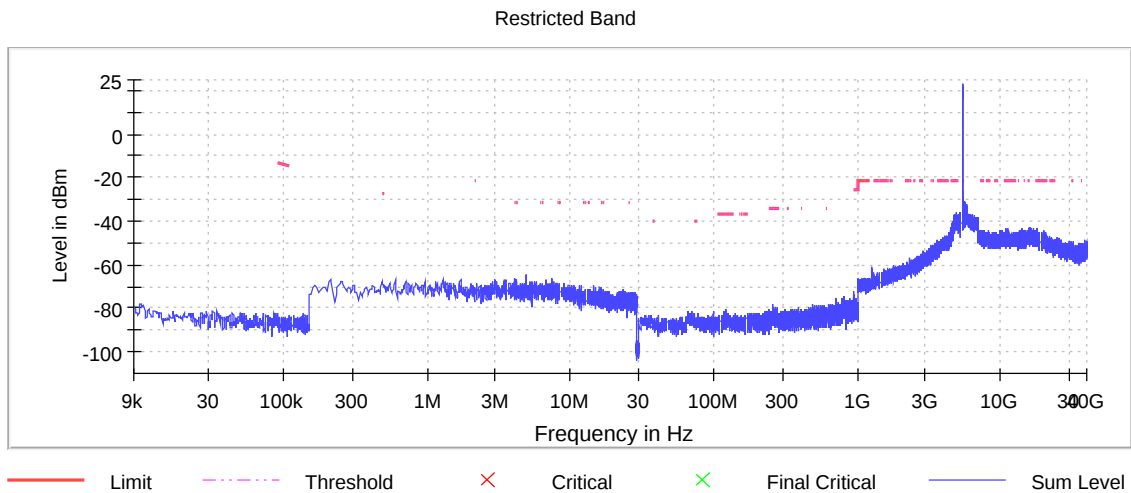

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5600 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5600.000000	20.500000	---	---	5589.650000	5610.150000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5600.000000	-7.0	PASS

26 dB Bandwidth

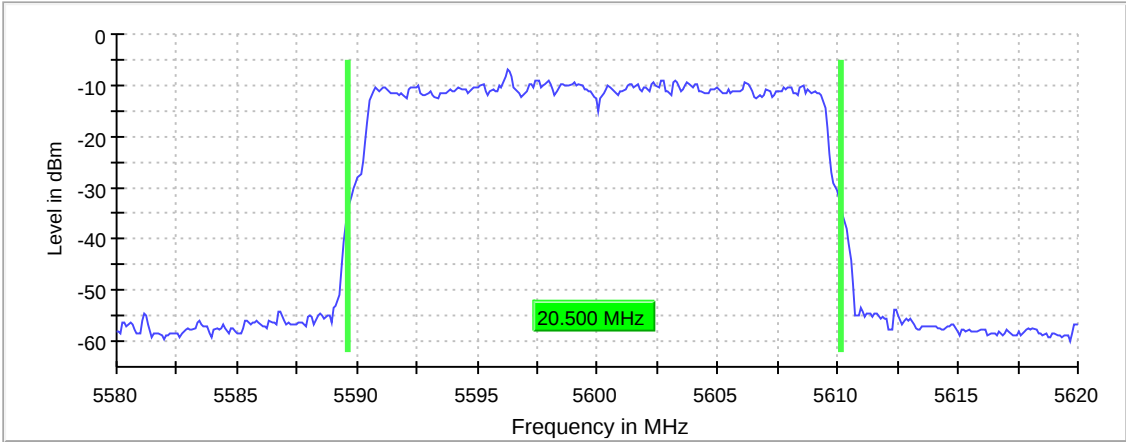

Bandwidth



Date: 2.AUG.2019 03:12:29

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.58000 GHz	5.58000 GHz
Stop Frequency	5.62000 GHz	5.62000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweeptime	28.477 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

RF output power (5600 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5600.000000	29.9	---	29.9	99.413	PASS

Power Spectral Density (5600 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5600.000000	5598.811881	-7.093	-6.3	PASS

Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.59000 GHz	5.59000 GHz
Stop Frequency	5.61000 GHz	5.61000 GHz
Span	20.000 MHz	20.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 40
SweepTime	2.020 ms	2.020 ms
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5600 MHz; 20 MHz)

Customized settings.


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5600.000000	18.800000	---	---	5590.550000	5609.350000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5600.000000	PASS

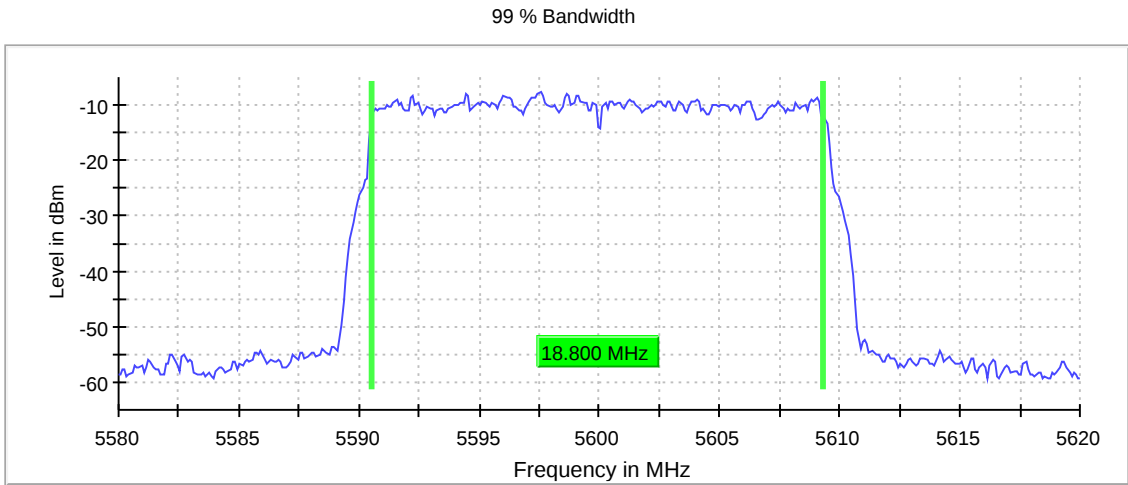

Bandwidth

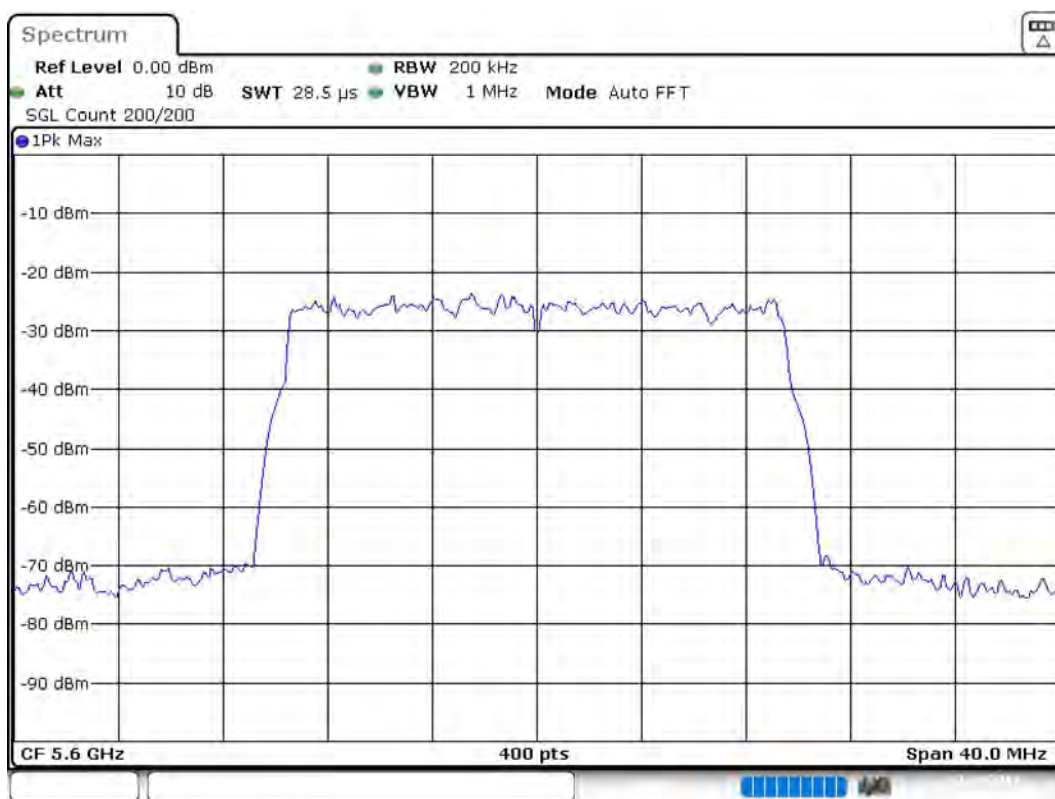

Date: 2.AUG.2019 03:13:19

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.58000 GHz	5.58000 GHz
Stop Frequency	5.62000 GHz	5.62000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	≥ 200.000 kHz
VBW	1.000 MHz	≥ 600.000 kHz
SweepPoints	400	~ 400
Sweeptime	28.477 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5600 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5600.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
15825.750000	-44.4	3.2	-41.2
15842.750000	-45.2	4.0	-41.2
15901.250000	-45.3	4.1	-41.2
15780.250000	-45.3	4.1	-41.2
18221.250000	-45.3	4.1	-41.2
15854.750000	-45.3	4.1	-41.2
15875.250000	-45.3	4.1	-41.2
15798.750000	-45.3	4.1	-41.2
17887.250000	-45.3	4.1	-41.2
15807.250000	-45.4	4.2	-41.2
15888.250000	-45.4	4.2	-41.2
17884.750000	-45.4	4.2	-41.2
15905.750000	-45.5	4.3	-41.2
15868.750000	-45.5	4.3	-41.2
15830.250000	-45.5	4.3	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1

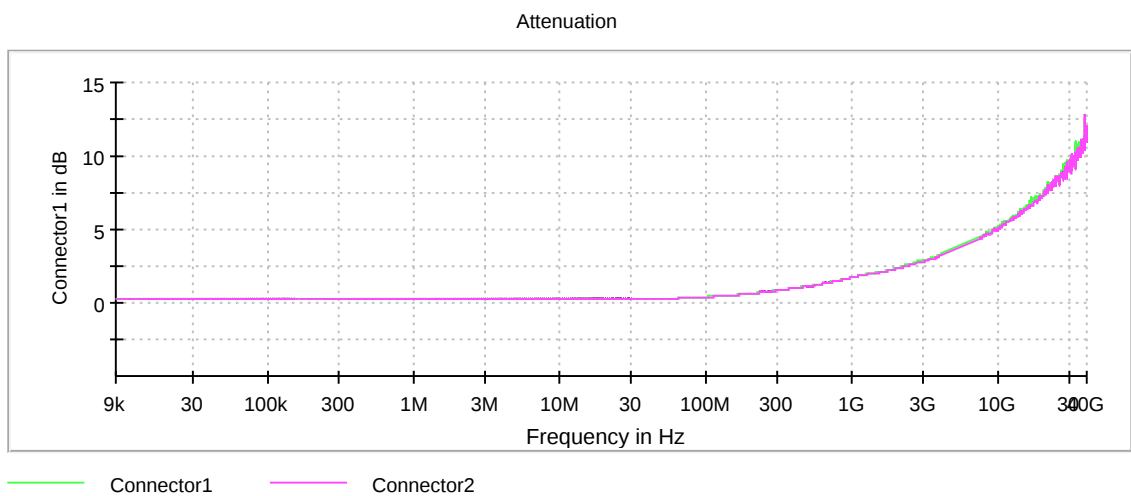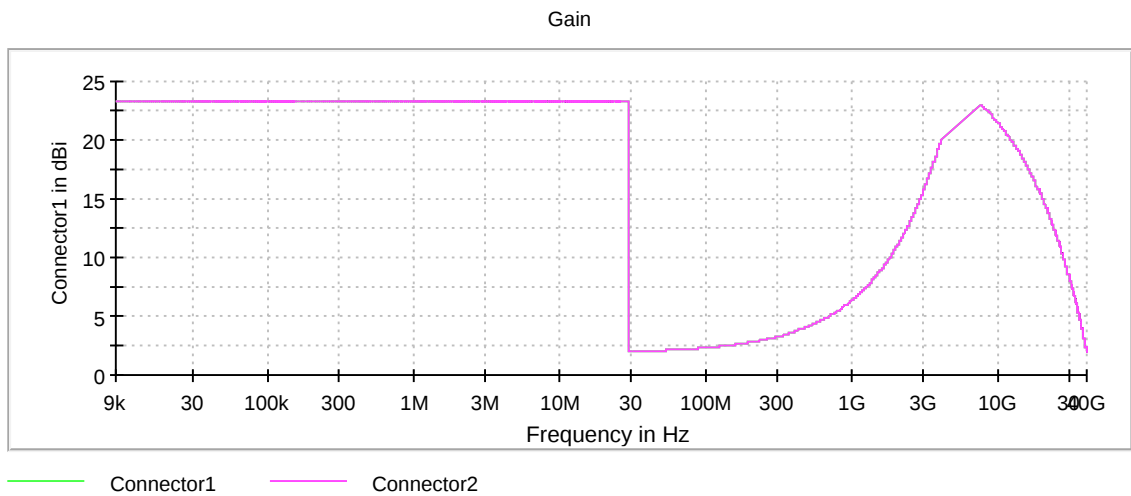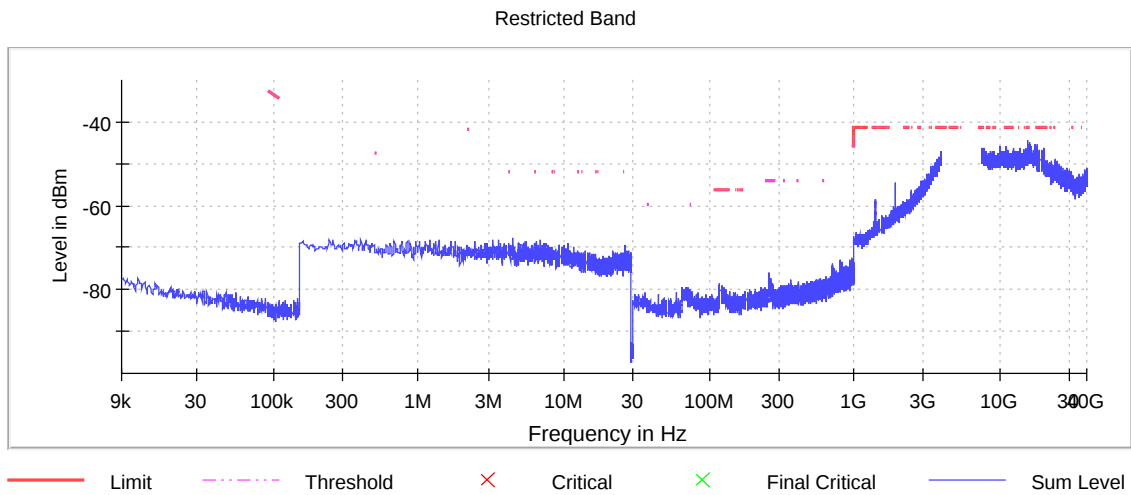

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
SweepTime	6.312 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5600 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5600.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5435.250000	-35.4	14.2	-21.2
4838.750000	-35.5	14.3	-21.2
4800.250000	-35.8	14.6	-21.2
5435.750000	-35.8	14.6	-21.2
4899.250000	-35.9	14.7	-21.2
5421.250000	-36.0	14.8	-21.2
4800.750000	-36.2	15.0	-21.2
4899.750000	-36.2	15.0	-21.2
5434.750000	-36.3	15.1	-21.2
4799.750000	-36.4	15.2	-21.2
5420.750000	-36.4	15.2	-21.2
5120.750000	-36.5	15.3	-21.2
5428.750000	-36.5	15.3	-21.2
5150.000000	-36.6	15.4	-21.2
5421.750000	-36.7	15.5	-21.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2

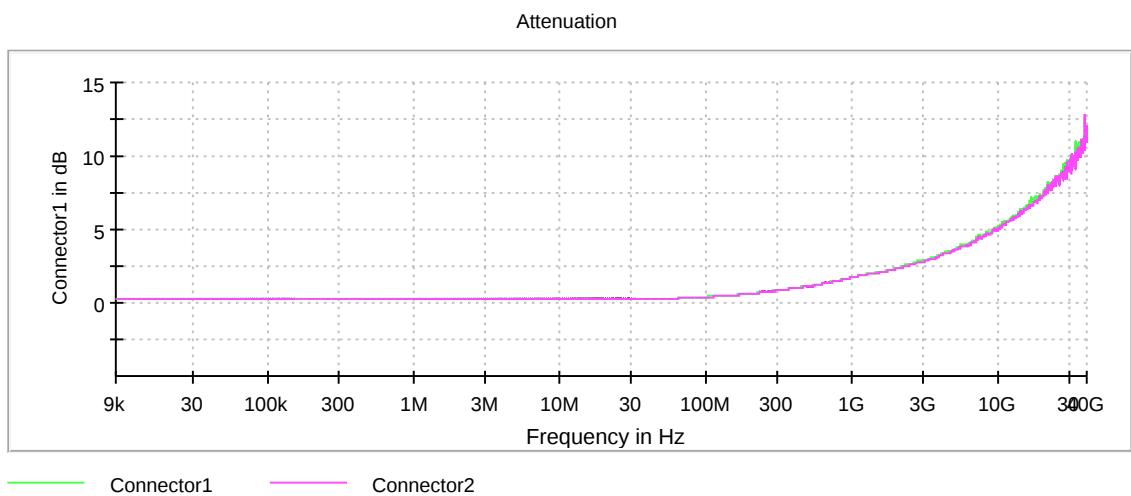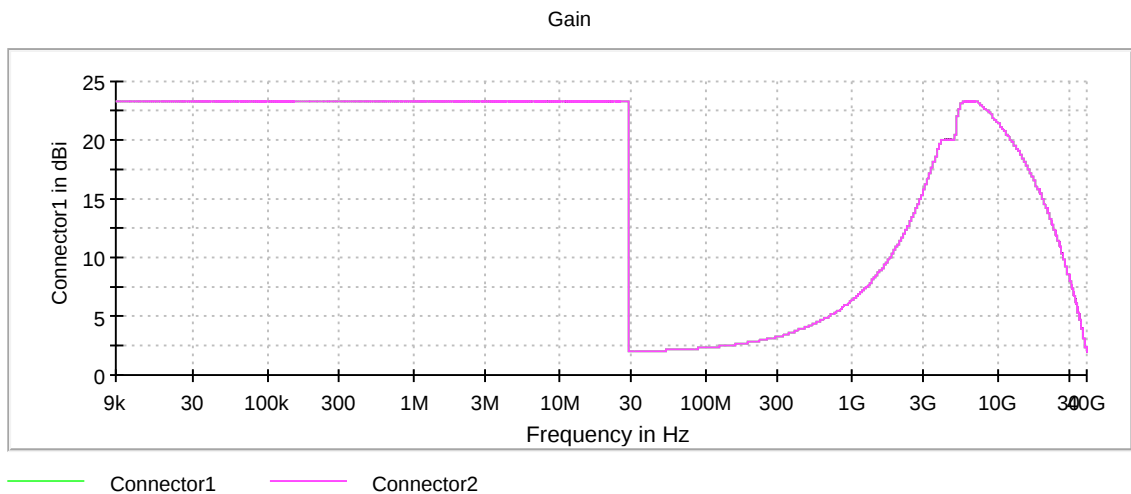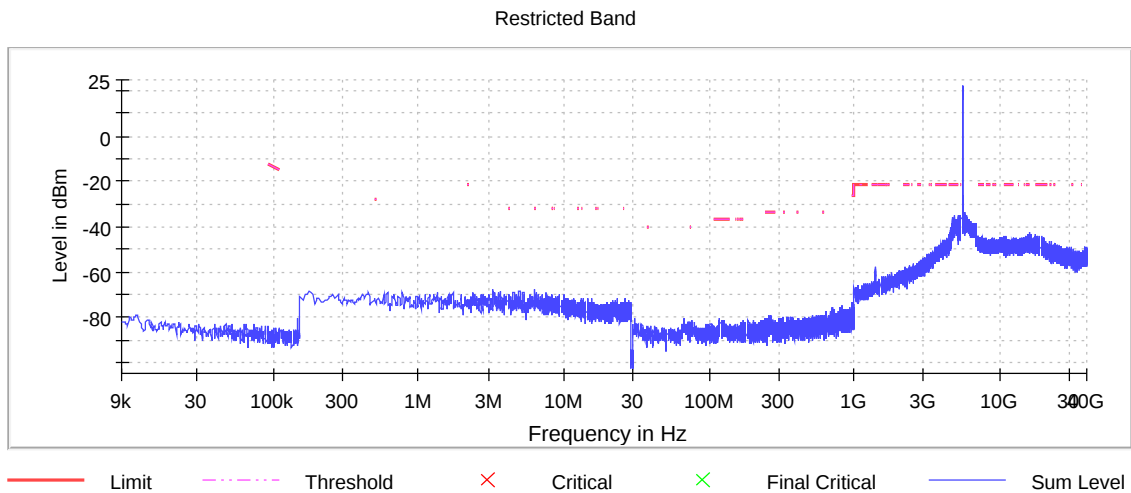

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5710 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Bandwidth U-NII 2C (MHz)	Bandwidth U-NII 3 (MHz)	Limit Min (MHz)	Limit Max (MHz)
5710.000000	20.800000	20.800000	0.000000	---	---

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5710.000000	5699.550000	5720.350000	-8.5	PASS

26 dB Bandwidth

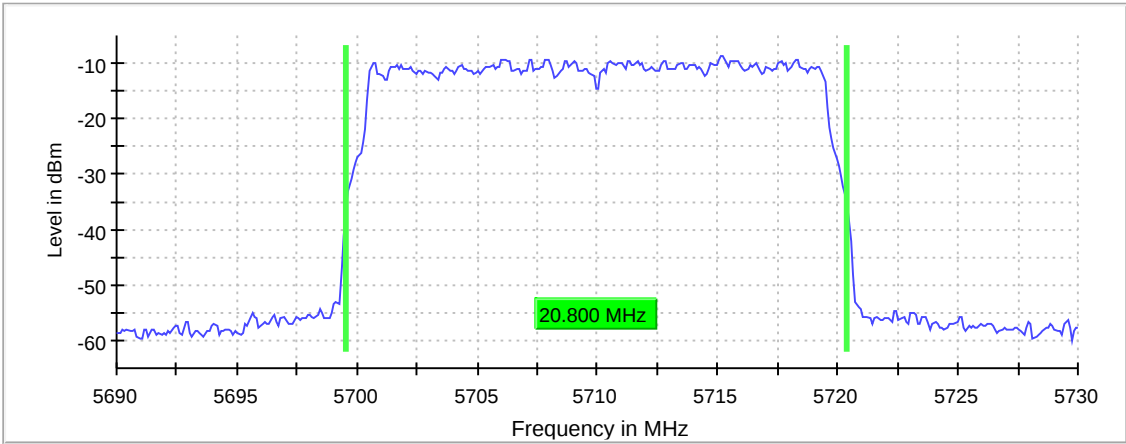

Bandwidth



Date: 2.AUG.2019 03:27:13

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.69000 GHz	5.69000 GHz
Stop Frequency	5.73000 GHz	5.73000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweeptime	28.477 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

RF output power (5710 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5710.000000	29.8	---	29.8	99.415	PASS

Power Spectral Density (5710 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5710.000000	5711.386139	-8.046	-6.3	PASS

Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.70000 GHz	5.70000 GHz
Stop Frequency	5.72000 GHz	5.72000 GHz
Span	20.000 MHz	20.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 40
SweepTime	2.020 ms	2.020 ms
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5710 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Bandwidth U-NII 2C (MHz)	Bandwidth U-NII 3 (MHz)	Limit Min (MHz)	Limit Max (MHz)
5710.000000	18.900000	18.900000	0.000000	---	---

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5710.000000	5700.550000	5719.450000	PASS

99 % Bandwidth

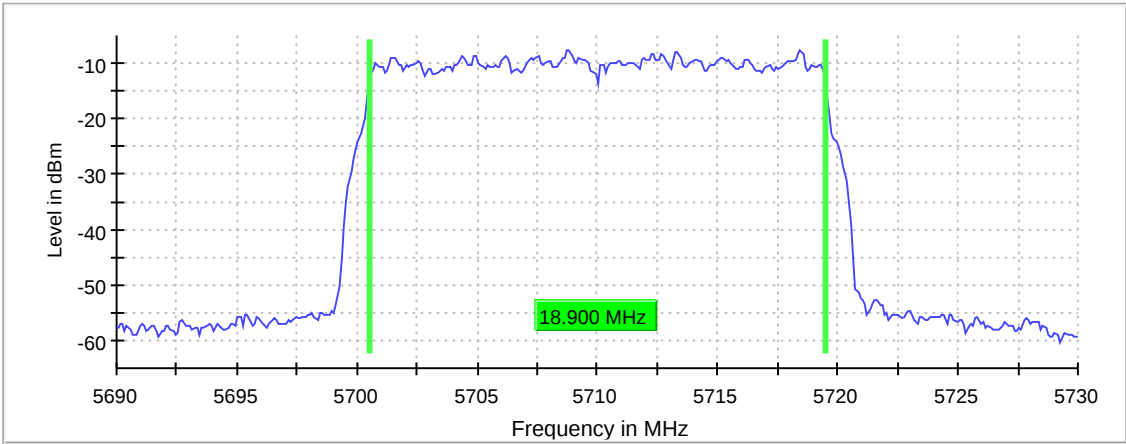

Bandwidth



Date: 2.AUG.2019 03:28:03

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.69000 GHz	5.69000 GHz
Stop Frequency	5.73000 GHz	5.73000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	≥ 200.000 kHz
VBW	1.000 MHz	≥ 600.000 kHz
SweepPoints	400	~ 400
Sweeptime	28.477 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5710 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.4&5 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5710.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5726.250000	-27.7	0.7	-27.0
5725.750000	-27.8	0.8	-27.0
5727.750000	-28.6	1.6	-27.0
5727.250000	-28.6	1.6	-27.0
5725.250000	-28.9	1.9	-27.0
5726.750000	-29.2	2.2	-27.0
5728.250000	-30.1	3.1	-27.0
5753.750000	-30.4	3.4	-27.0
5761.750000	-30.4	3.4	-27.0
5755.750000	-30.5	3.5	-27.0
5756.250000	-30.6	3.6	-27.0
5751.250000	-30.8	3.8	-27.0
5750.750000	-30.9	3.9	-27.0
5753.250000	-30.9	3.9	-27.0
5728.750000	-31.0	4.0	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	18000.000000	2	2
18000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

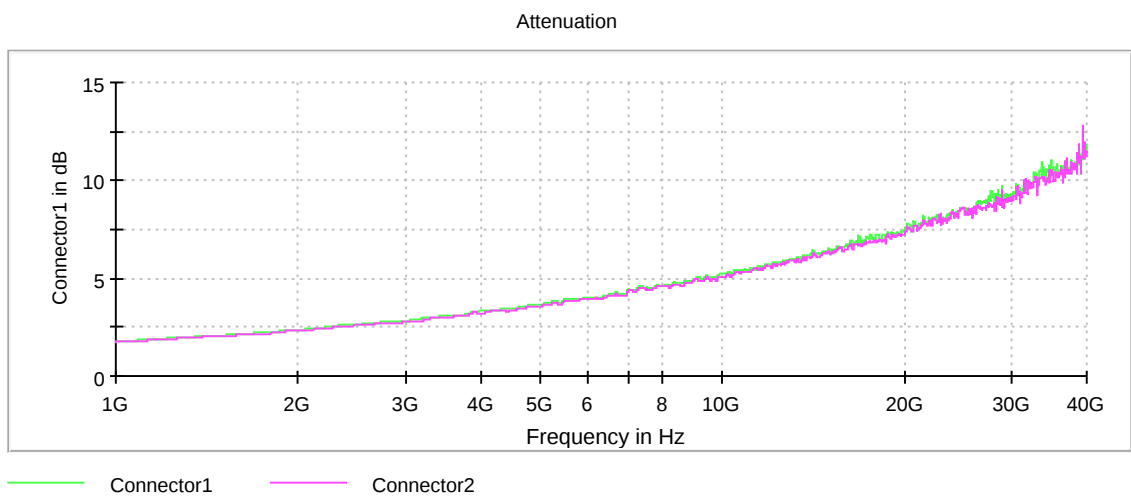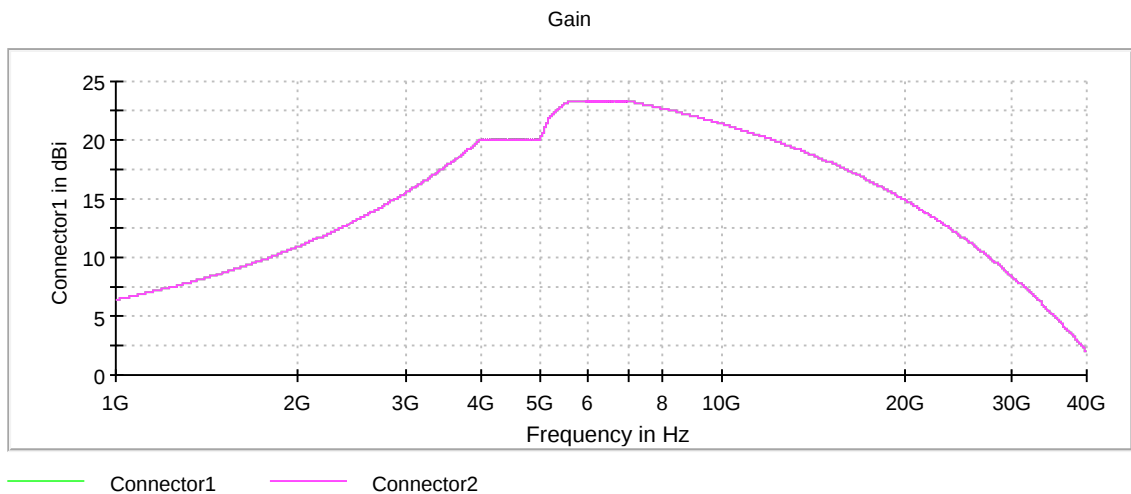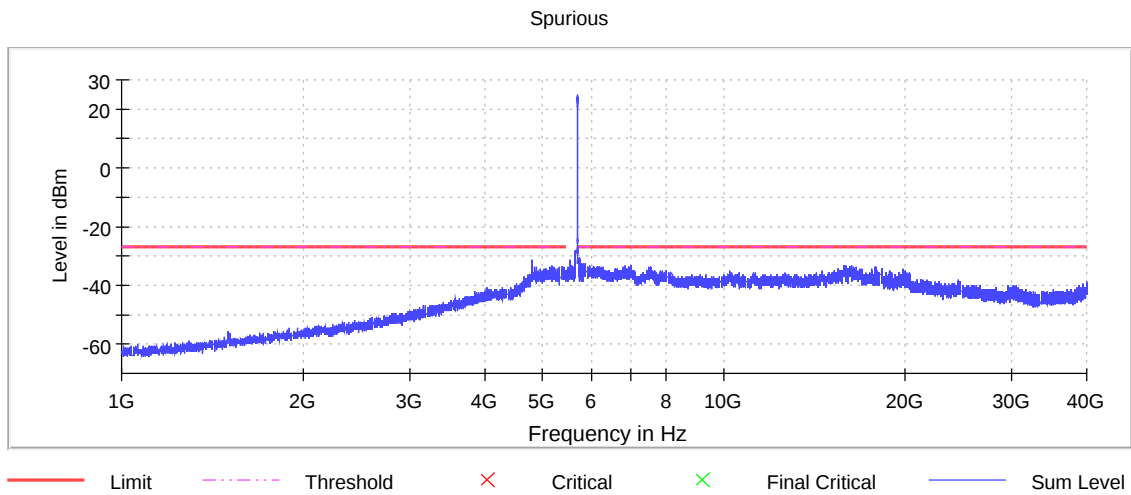

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	8300	~ 8300
SweepTime	8.300 ms	AUTO
Reference Level	0.000 dBm	AUTO
Attenuation	10.000 dB	11.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5710 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5710.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
16173.250000	-44.3	3.1	-41.2
15876.750000	-44.4	3.2	-41.2
15825.250000	-44.7	3.5	-41.2
15898.250000	-45.1	3.9	-41.2
15835.250000	-45.2	4.0	-41.2
15850.250000	-45.2	4.0	-41.2
15831.250000	-45.2	4.0	-41.2
15874.750000	-45.2	4.0	-41.2
11204.750000	-45.3	4.1	-41.2
15905.250000	-45.3	4.1	-41.2
15864.750000	-45.3	4.1	-41.2
15851.750000	-45.4	4.2	-41.2
16141.750000	-45.4	4.2	-41.2
15848.750000	-45.4	4.2	-41.2
15838.250000	-45.4	4.2	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1

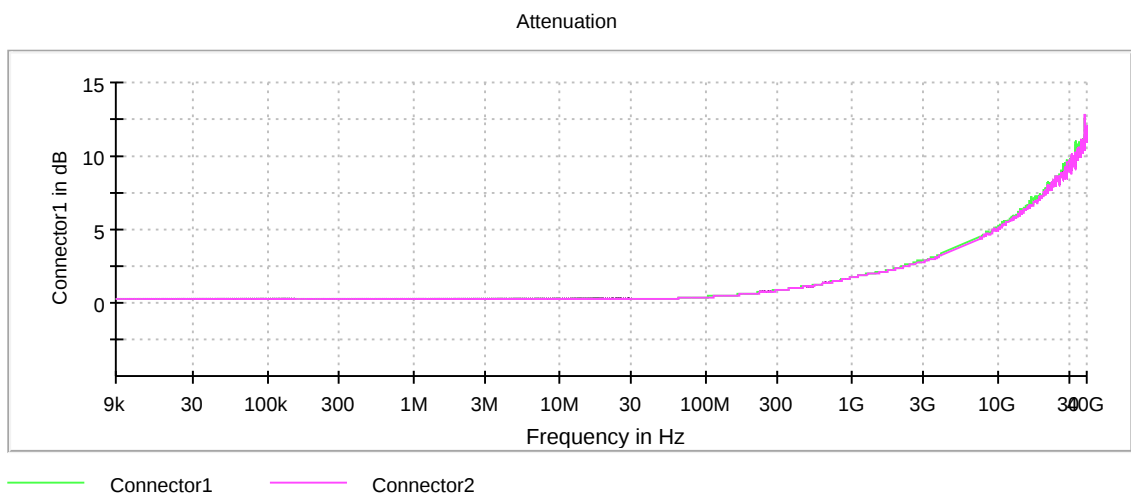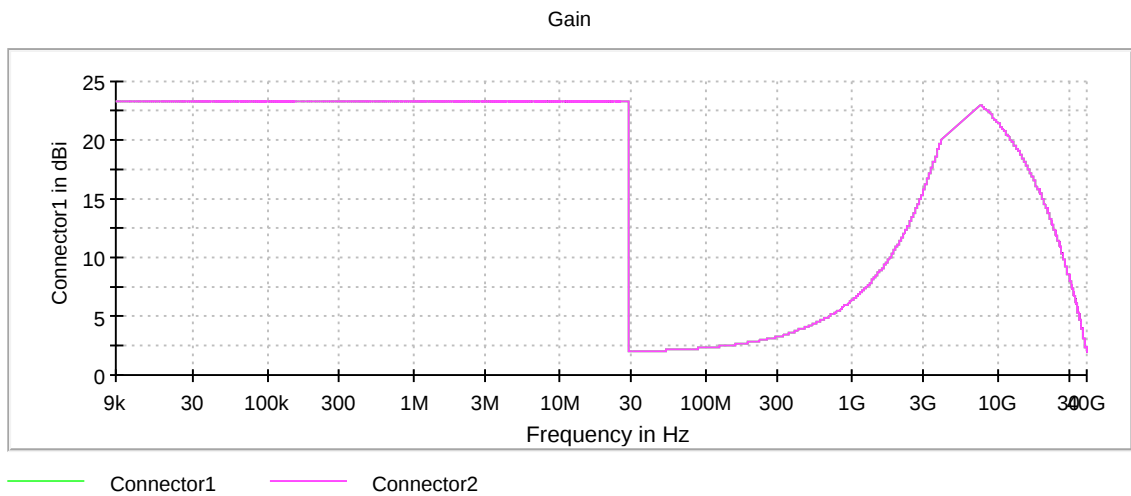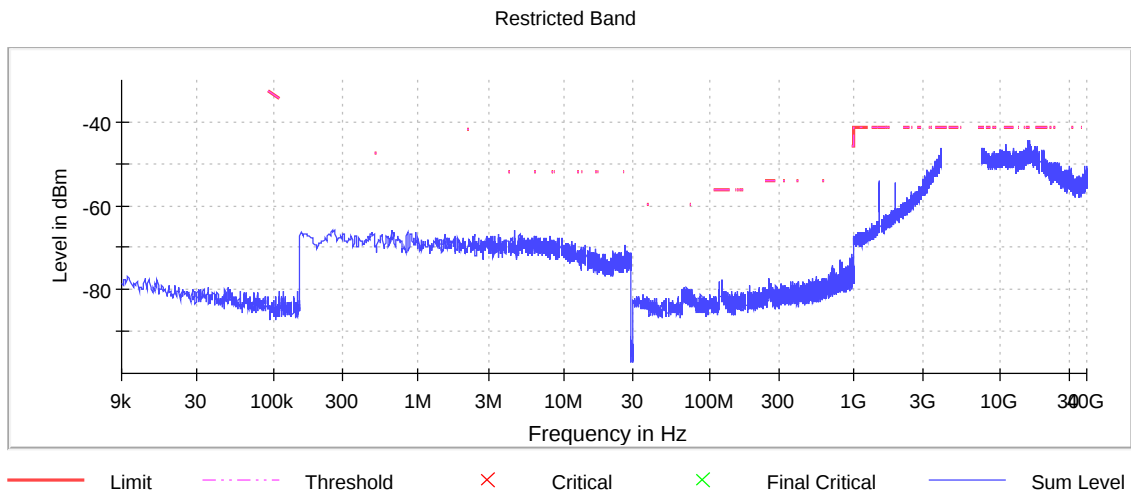

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
SweepTime	6.312 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5710 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5710.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5120.250000	-35.1	13.9	-21.2
5120.750000	-35.2	14.0	-21.2
4839.250000	-35.3	14.1	-21.2
4838.250000	-35.4	14.2	-21.2
4800.250000	-35.4	14.2	-21.2
5073.250000	-35.5	14.3	-21.2
4838.750000	-35.6	14.4	-21.2
4839.750000	-35.7	14.5	-21.2
5072.750000	-36.1	14.9	-21.2
5397.750000	-36.1	14.9	-21.2
4949.250000	-36.2	15.0	-21.2
5384.250000	-36.2	15.0	-21.2
5439.750000	-36.3	15.1	-21.2
5382.250000	-36.4	15.2	-21.2
5095.750000	-36.4	15.2	-21.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2

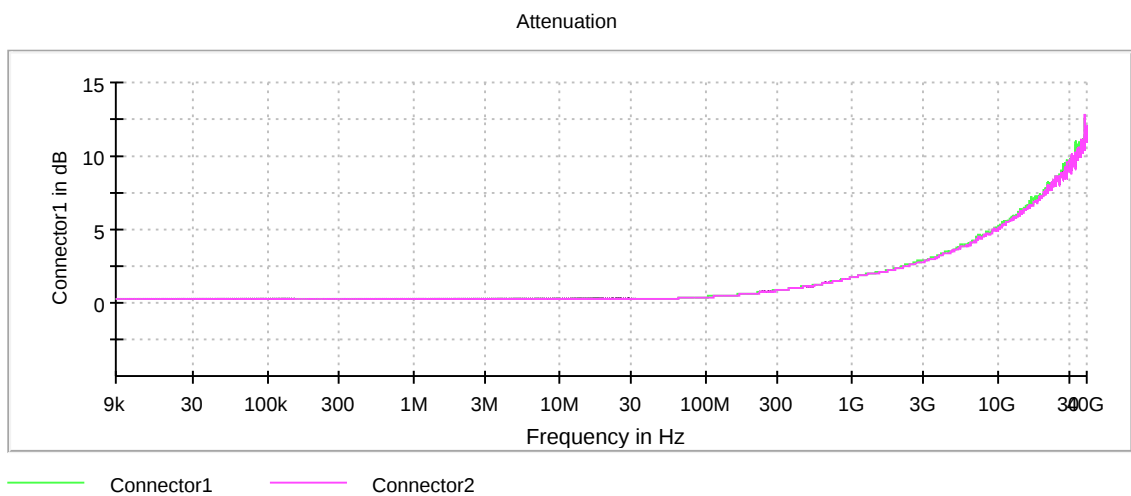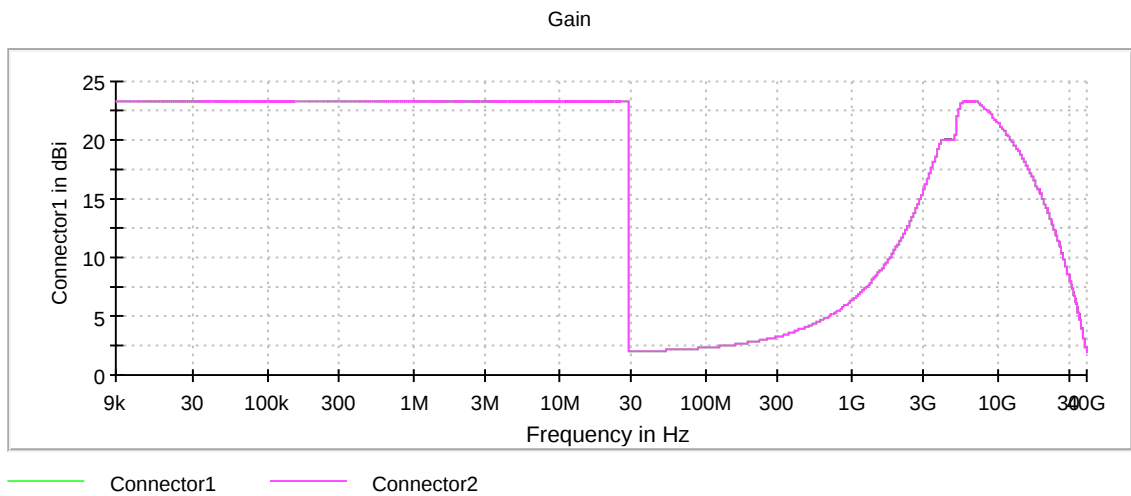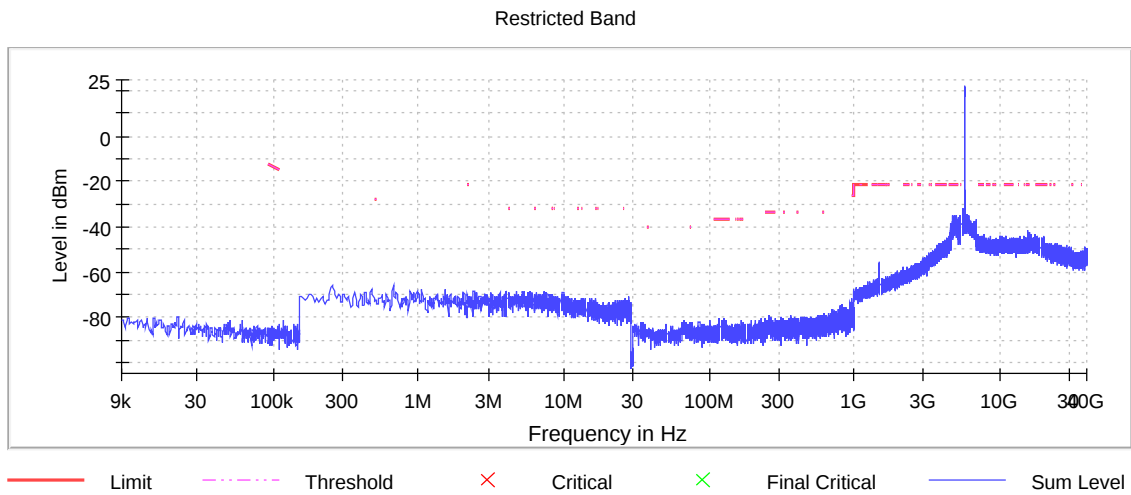

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5490 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5490.000000	31.050000	---	---	5474.475000	5505.525000


(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5490.000000	-8.6	PASS

26 dB Bandwidth

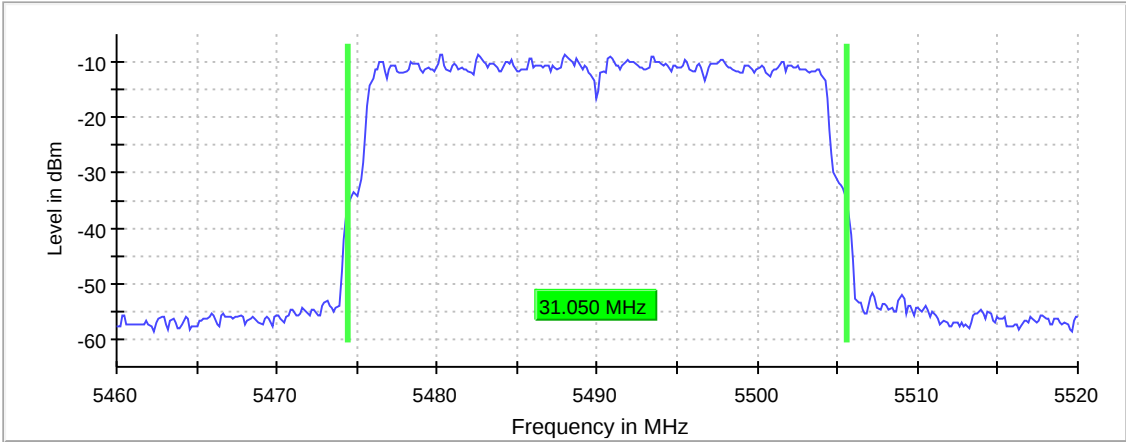

Bandwidth

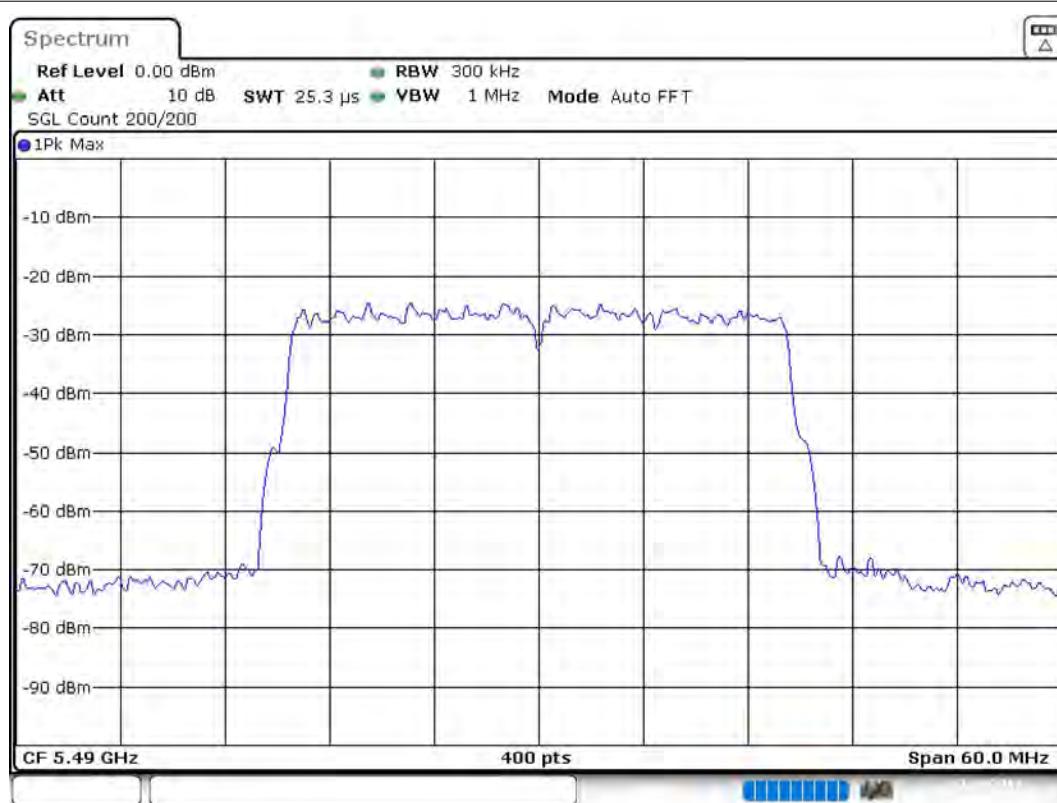

Date: 2.AUG.2019 09:23:51

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.46000 GHz	5.46000 GHz
Stop Frequency	5.52000 GHz	5.52000 GHz
Span	60.000 MHz	60.000 MHz
RBW	300.000 kHz	~ 300.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	400	~ 400
Sweeptime	25.313 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

RF output power (5490 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5490.000000	29.7	---	29.7	99.600	PASS

Power Spectral Density (5490 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5490.000000	5491.188119	-7.802	-6.0	PASS

Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.47500 GHz	5.47500 GHz
Stop Frequency	5.50500 GHz	5.50500 GHz
Span	30.000 MHz	30.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 60
SweepTime	2.020 ms	2.020 ms
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5490 MHz; 30 MHz)

Customized settings.


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5490.000000	28.350000	---	---	5475.825000	5504.175000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5490.000000	PASS

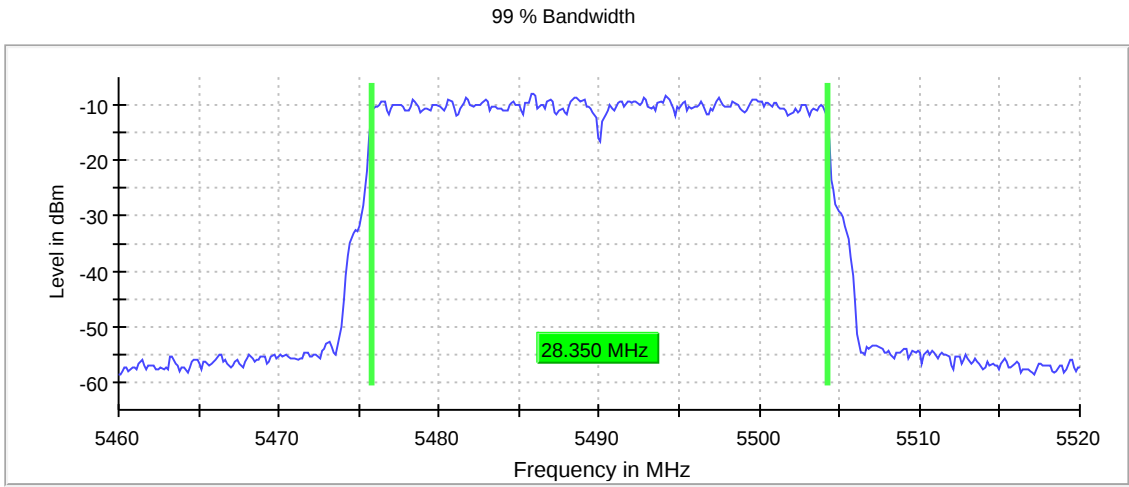

Bandwidth



Date: 2.AUG.2019 09:24:43

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.46000 GHz	5.46000 GHz
Stop Frequency	5.52000 GHz	5.52000 GHz
Span	60.000 MHz	60.000 MHz
RBW	300.000 kHz	≥ 300.000 kHz
VBW	1.000 MHz	≥ 900.000 kHz
SweepPoints	400	~ 400
Sweeptime	25.313 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5490 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.4&5 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5490.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5469.750000	-27.8	0.8	-27.0
5464.750000	-27.8	0.8	-27.0
5468.750000	-27.8	0.8	-27.0
5464.250000	-27.9	0.9	-27.0
5469.250000	-28.0	1.0	-27.0
5468.250000	-28.5	1.5	-27.0
5465.250000	-28.5	1.5	-27.0
5467.250000	-28.8	1.8	-27.0
5467.750000	-28.8	1.8	-27.0
5466.750000	-28.9	1.9	-27.0
5463.250000	-29.1	2.1	-27.0
5466.250000	-29.2	2.2	-27.0
5465.750000	-29.5	2.5	-27.0
5463.750000	-29.6	2.6	-27.0
5462.750000	-29.7	2.7	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	18000.000000	2	2
18000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

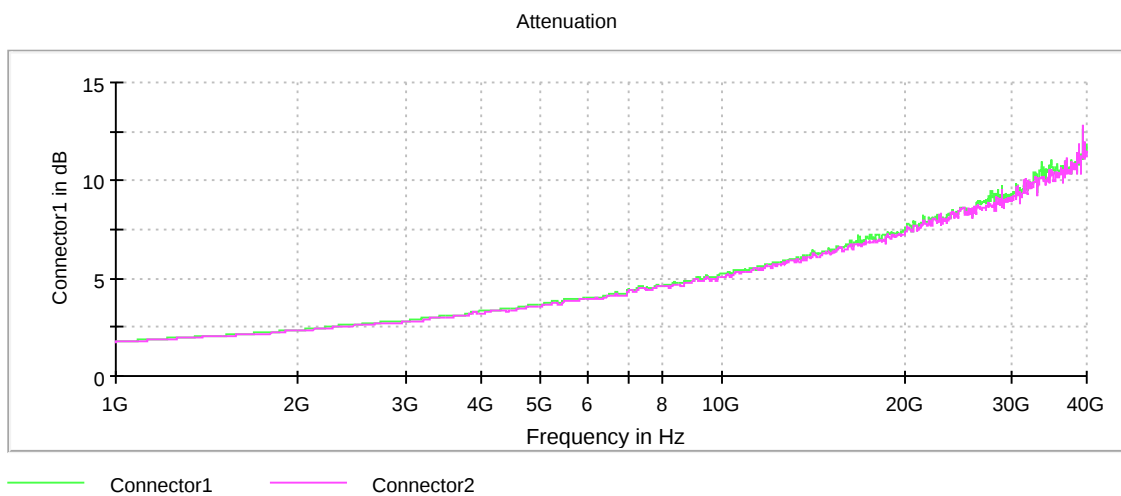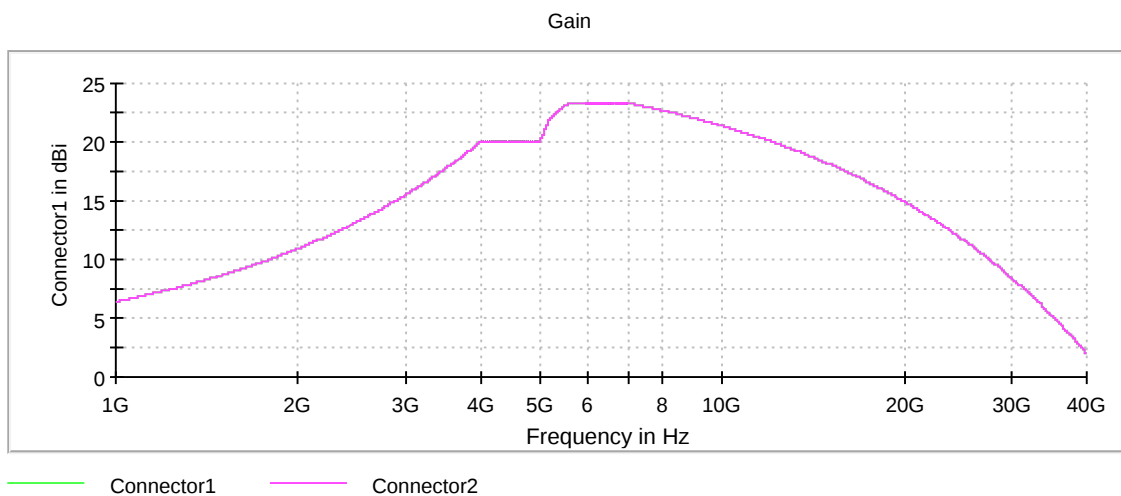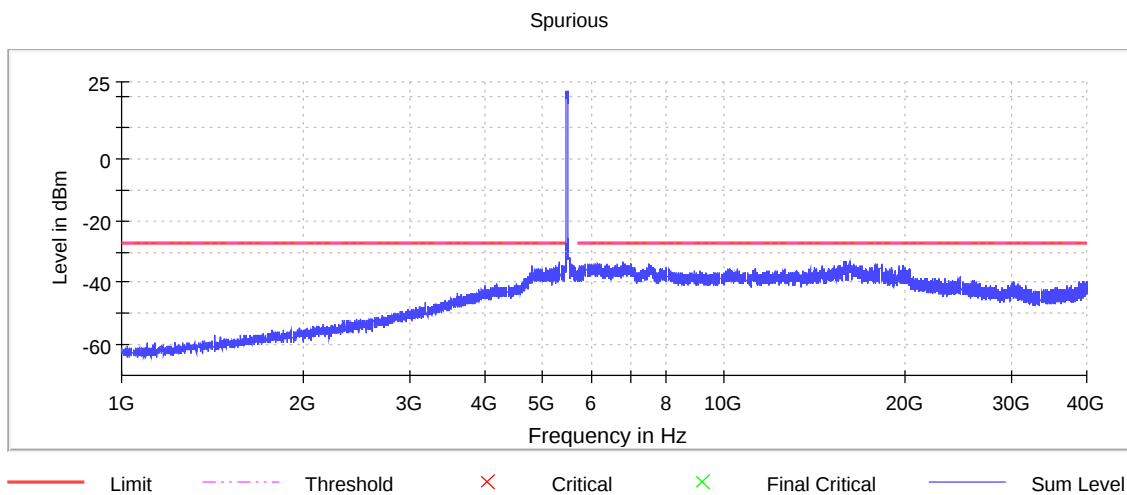

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	8300	~ 8300
SweepTime	8.300 ms	AUTO
Reference Level	0.000 dBm	AUTO
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5490 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5490.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
15800.750000	-44.9	3.7	-41.2
15865.750000	-44.9	3.7	-41.2
15914.250000	-45.2	4.0	-41.2
15900.250000	-45.2	4.0	-41.2
15875.750000	-45.2	4.0	-41.2
15917.250000	-45.3	4.1	-41.2
15844.250000	-45.3	4.1	-41.2
15858.250000	-45.3	4.1	-41.2
16153.750000	-45.3	4.1	-41.2
15827.250000	-45.3	4.1	-41.2
16196.250000	-45.4	4.2	-41.2
18202.750000	-45.4	4.2	-41.2
16190.250000	-45.4	4.2	-41.2
17862.250000	-45.5	4.3	-41.2
15842.250000	-45.5	4.3	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1

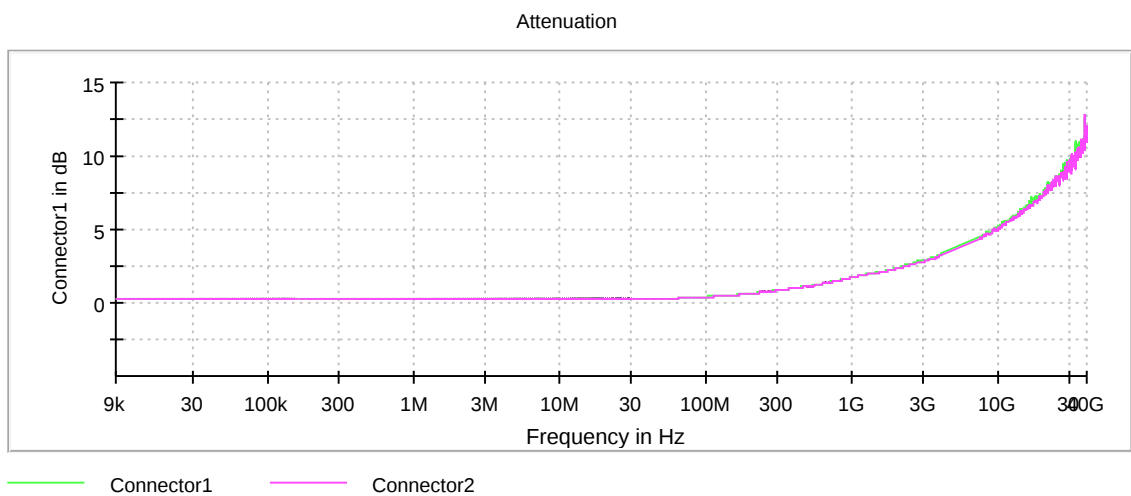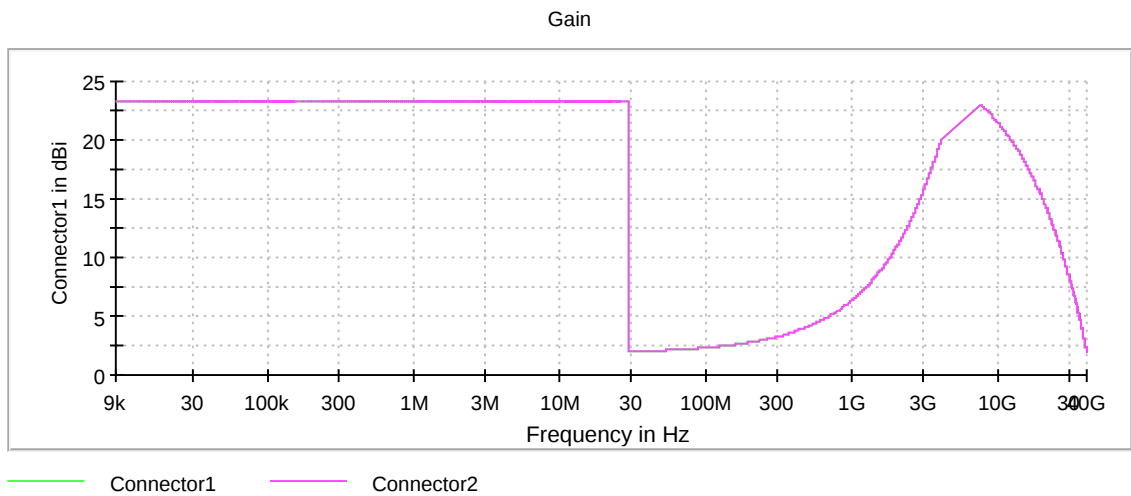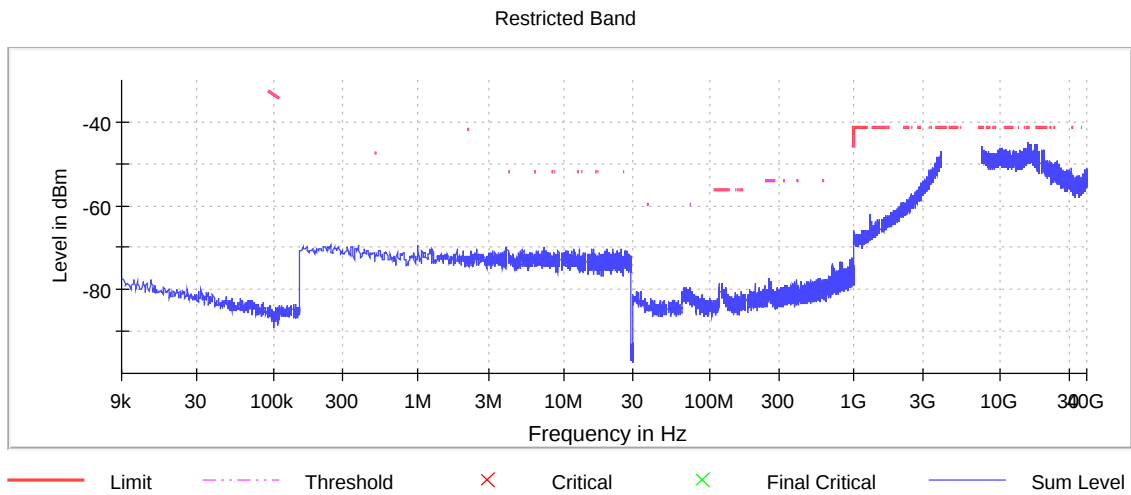

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
SweepTime	6.312 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5490 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5490.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5458.250000	-33.1	11.9	-21.2
5457.750000	-33.4	12.2	-21.2
5454.750000	-34.3	13.1	-21.2
5458.750000	-34.4	13.2	-21.2
5454.250000	-34.5	13.3	-21.2
5448.250000	-35.2	14.0	-21.2
5448.750000	-35.2	14.0	-21.2
5444.250000	-35.3	14.1	-21.2
5455.250000	-35.3	14.1	-21.2
5456.250000	-35.3	14.1	-21.2
5456.750000	-35.6	14.4	-21.2
5444.750000	-35.9	14.7	-21.2
5453.750000	-36.0	14.8	-21.2
5443.750000	-36.2	15.0	-21.2
5457.250000	-36.4	15.2	-21.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2

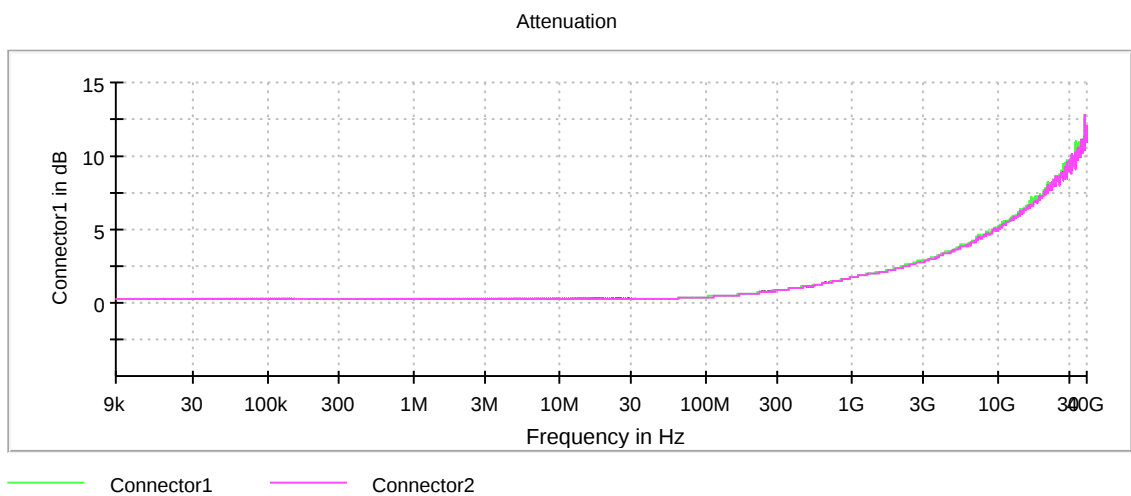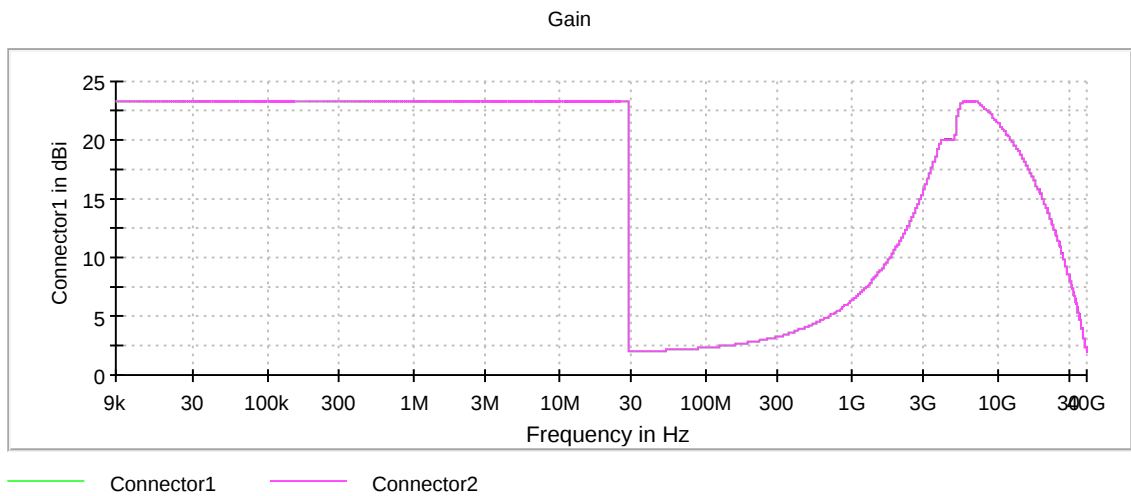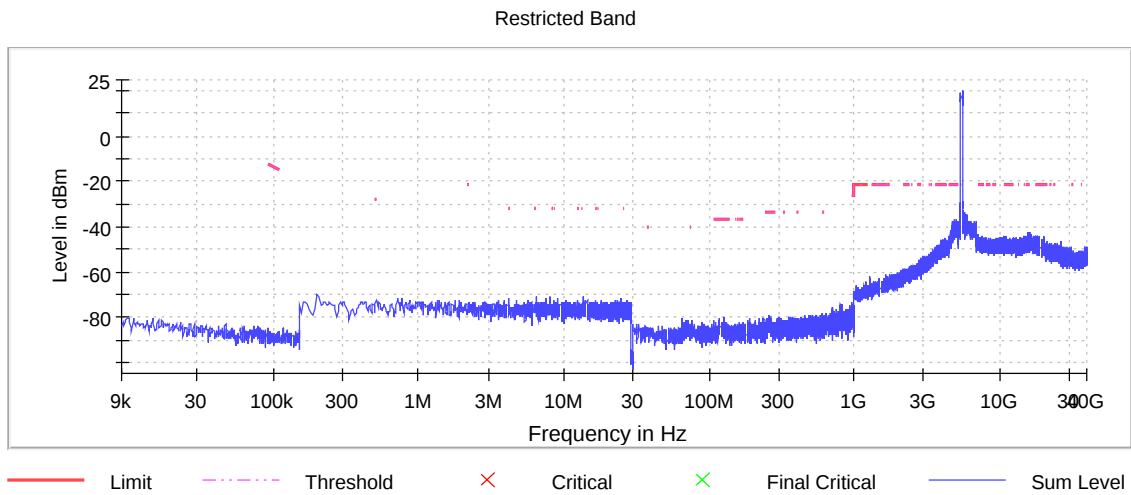

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5600 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5600.000000	31.050000	---	---	5584.475000	5615.525000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5600.000000	-8.8	PASS

26 dB Bandwidth

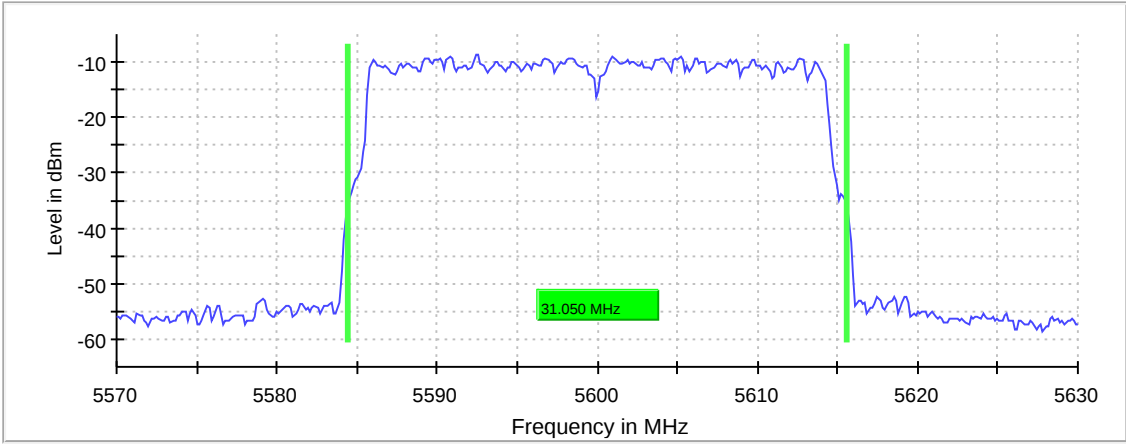

Bandwidth



Date: 2.AUG.2019 14:40:30

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.57000 GHz	5.57000 GHz
Stop Frequency	5.63000 GHz	5.63000 GHz
Span	60.000 MHz	60.000 MHz
RBW	300.000 kHz	~ 300.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	400	~ 400
Sweeptime	25.313 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

RF output power (5600 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5600.000000	29.7	---	29.7	99.601	PASS

Power Spectral Density (5600 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5600.000000	5589.900990	-7.552	-6.3	PASS

Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.58500 GHz	5.58500 GHz
Stop Frequency	5.61500 GHz	5.61500 GHz
Span	30.000 MHz	30.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 60
SweepTime	2.020 ms	2.020 ms
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5600 MHz; 30 MHz)

Customized settings.


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5600.000000	28.050000	---	---	5585.975000	5614.025000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5600.000000	PASS

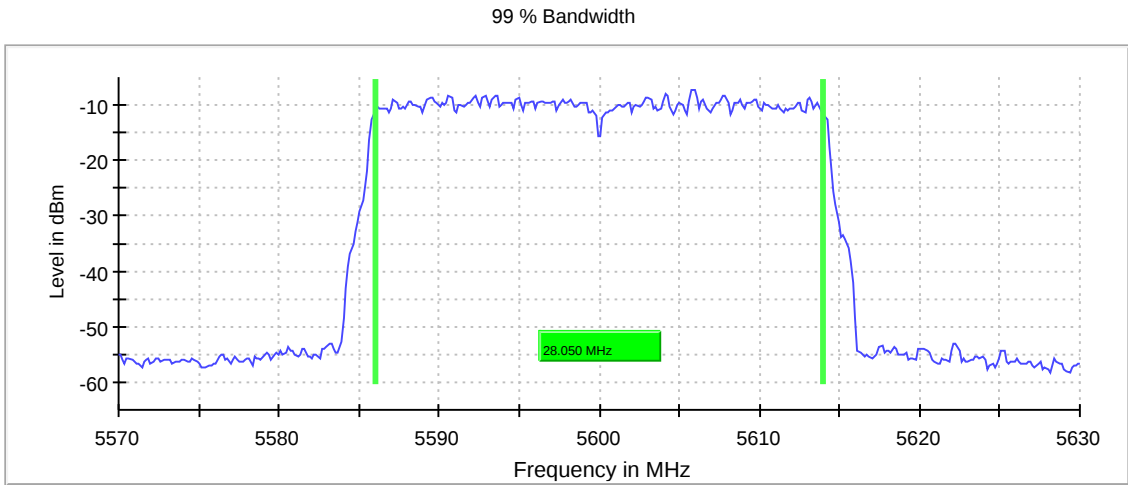

Bandwidth

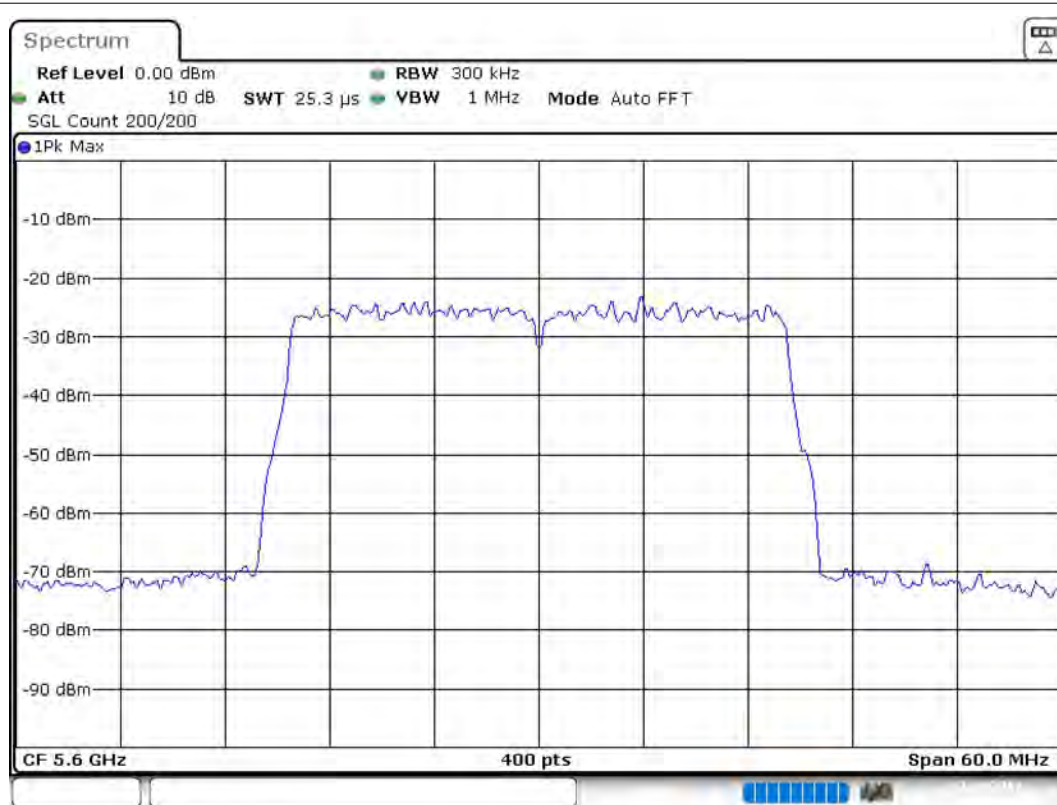

Date: 2.AUG.2019 14:41:24

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.57000 GHz	5.57000 GHz
Stop Frequency	5.63000 GHz	5.63000 GHz
Span	60.000 MHz	60.000 MHz
RBW	300.000 kHz	≥ 300.000 kHz
VBW	1.000 MHz	≥ 900.000 kHz
SweepPoints	400	~ 400
Sweeptime	25.313 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5600 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5600.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
15792.250000	-44.6	3.4	-41.2
15858.750000	-44.9	3.7	-41.2
15899.750000	-44.9	3.7	-41.2
16154.250000	-45.1	3.9	-41.2
15898.750000	-45.1	3.9	-41.2
16184.750000	-45.2	4.0	-41.2
15807.750000	-45.2	4.0	-41.2
15903.250000	-45.2	4.0	-41.2
15787.250000	-45.2	4.0	-41.2
11188.750000	-45.3	4.1	-41.2
15900.250000	-45.4	4.2	-41.2
15852.250000	-45.4	4.2	-41.2
15849.250000	-45.4	4.2	-41.2
15791.750000	-45.4	4.2	-41.2
15818.750000	-45.4	4.2	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1

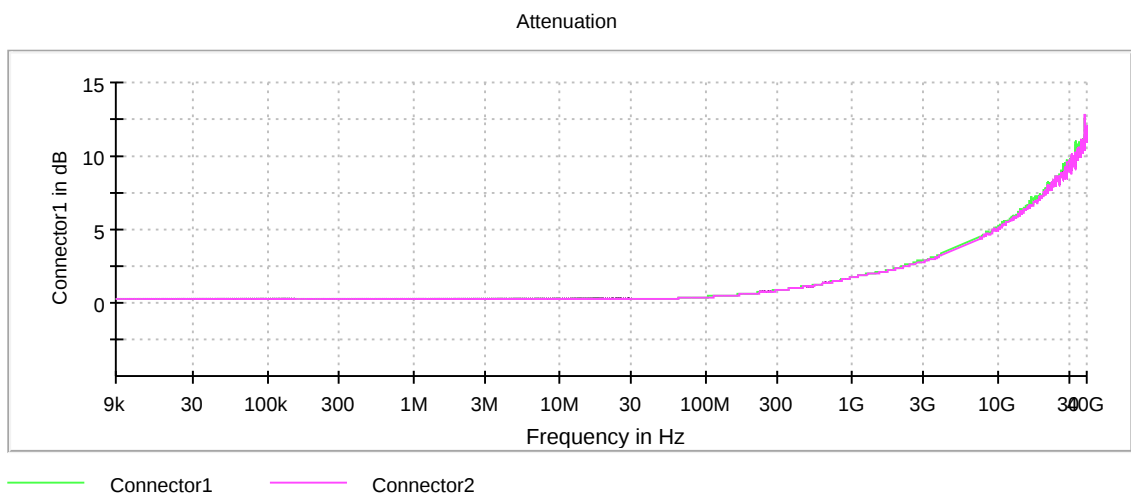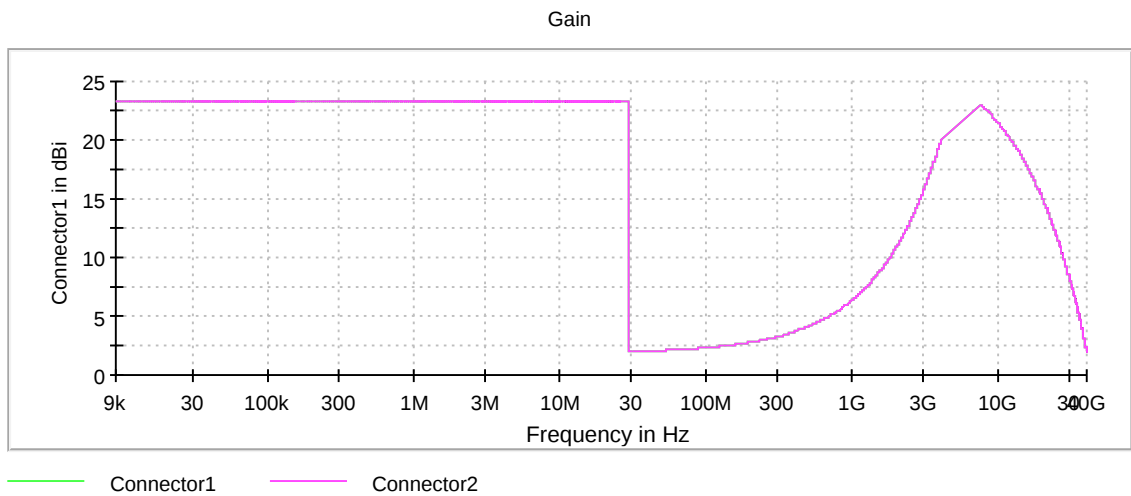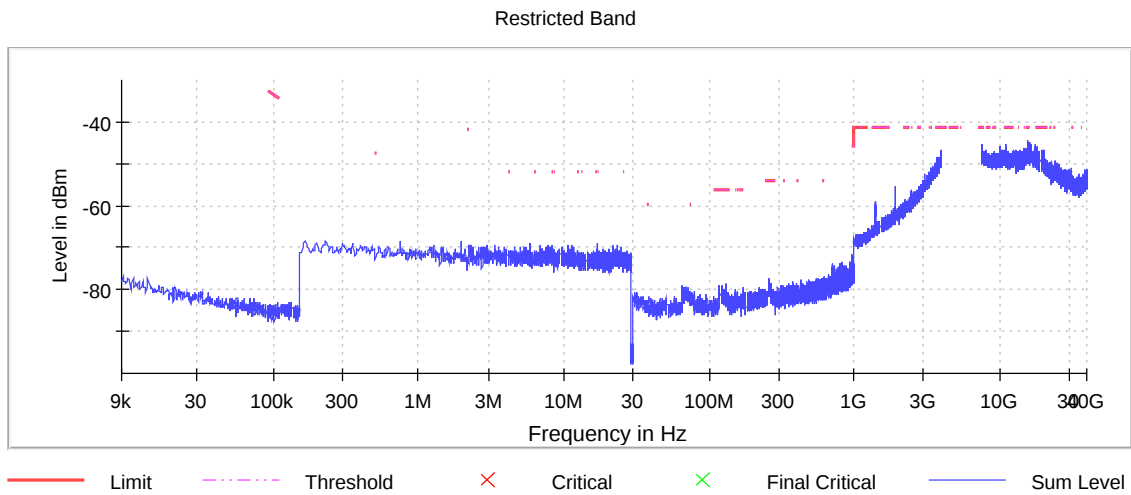

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
SweepTime	6.312 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5600 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5600.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
4800.750000	-35.0	13.8	-21.2
4800.250000	-35.5	14.3	-21.2
5107.250000	-35.7	14.5	-21.2
5445.750000	-35.8	14.6	-21.2
5446.250000	-36.1	14.9	-21.2
4894.250000	-36.2	15.0	-21.2
5437.250000	-36.4	15.2	-21.2
5433.750000	-36.6	15.4	-21.2
5437.750000	-36.6	15.4	-21.2
5125.250000	-36.6	15.4	-21.2
4840.250000	-36.6	15.4	-21.2
5434.250000	-36.7	15.5	-21.2
4907.250000	-36.7	15.5	-21.2
4901.250000	-36.7	15.5	-21.2
5452.250000	-36.7	15.5	-21.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2

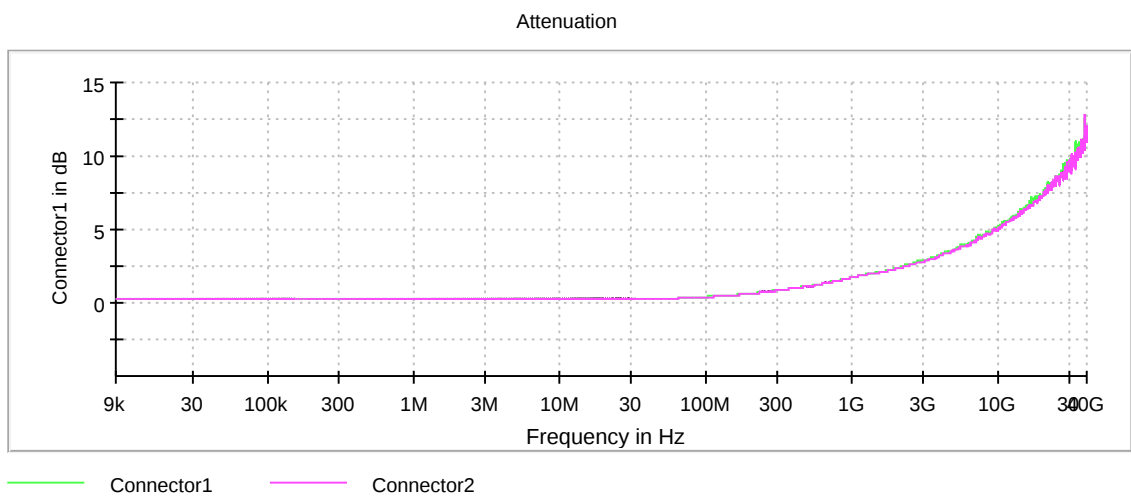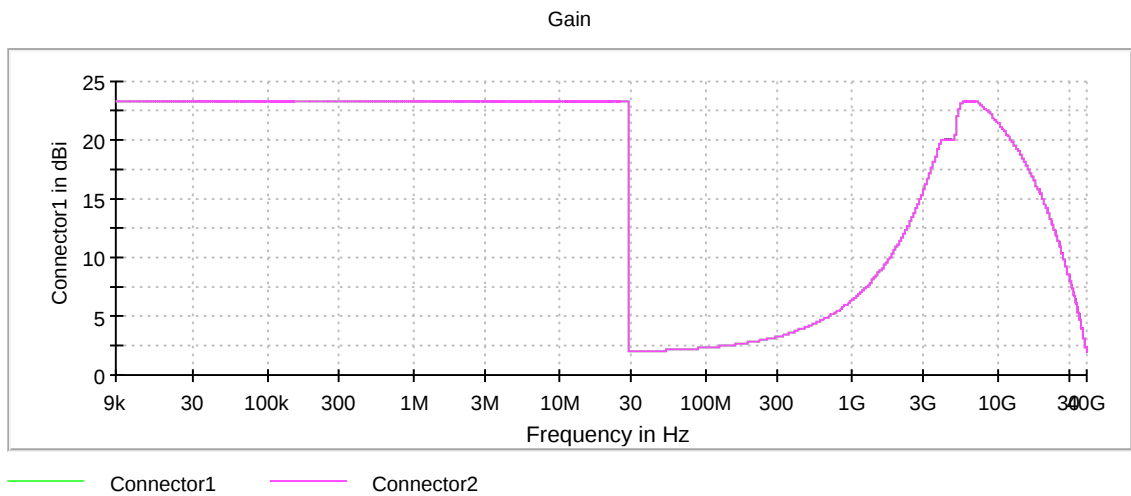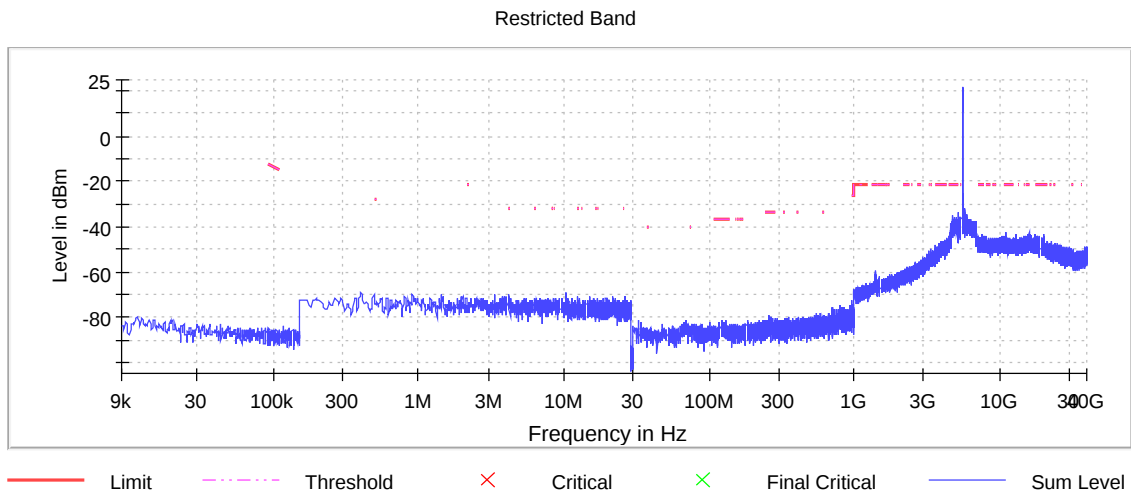

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5705 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Bandwidth U-NII 2C (MHz)	Bandwidth U-NII 3 (MHz)	Limit Min (MHz)	Limit Max (MHz)
5705.000000	30.900000	30.900000	0.000000	---	---


(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5705.000000	5689.775000	5720.675000	-10.0	PASS

26 dB Bandwidth

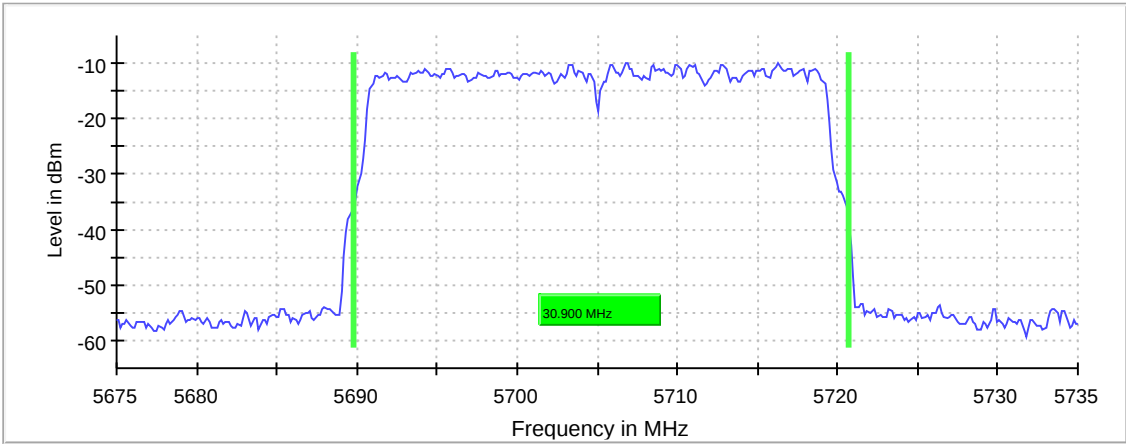

Bandwidth

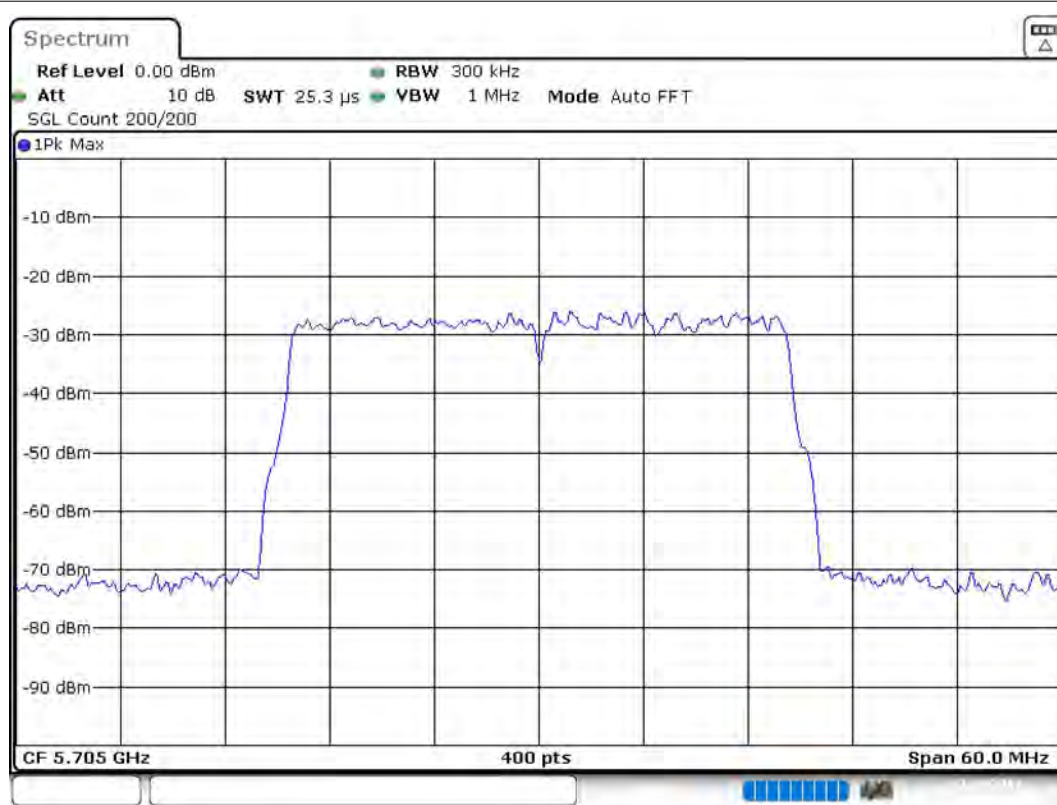

Date: 2.AUG.2019 16:26:23

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.67500 GHz	5.67500 GHz
Stop Frequency	5.73500 GHz	5.73500 GHz
Span	60.000 MHz	60.000 MHz
RBW	300.000 kHz	~ 300.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	400	~ 400
Sweeptime	25.313 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

RF output power (5705 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5705.000000	28.5	---	28.5	99.603	PASS

Power Spectral Density (5705 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5705.000000	5698.465347	-9.609	-6.3	PASS

Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.69000 GHz	5.69000 GHz
Stop Frequency	5.72000 GHz	5.72000 GHz
Span	30.000 MHz	30.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 60
SweepTime	2.020 ms	2.020 ms
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5705 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Bandwidth U-NII 2C (MHz)	Bandwidth U-NII 3 (MHz)	Limit Min (MHz)	Limit Max (MHz)
5705.000000	28.200000	28.200000	0.000000	---	---


(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5705.000000	5690.825000	5719.025000	PASS

99 % Bandwidth

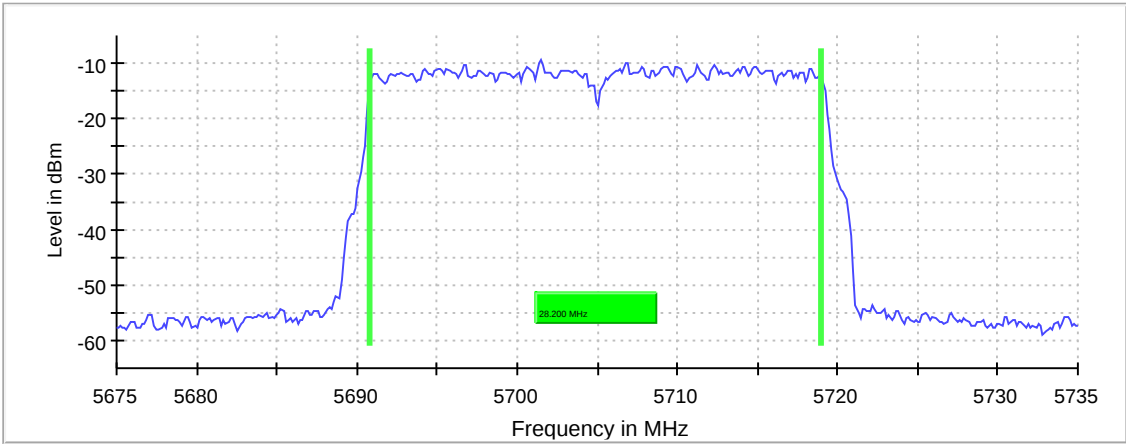

Bandwidth

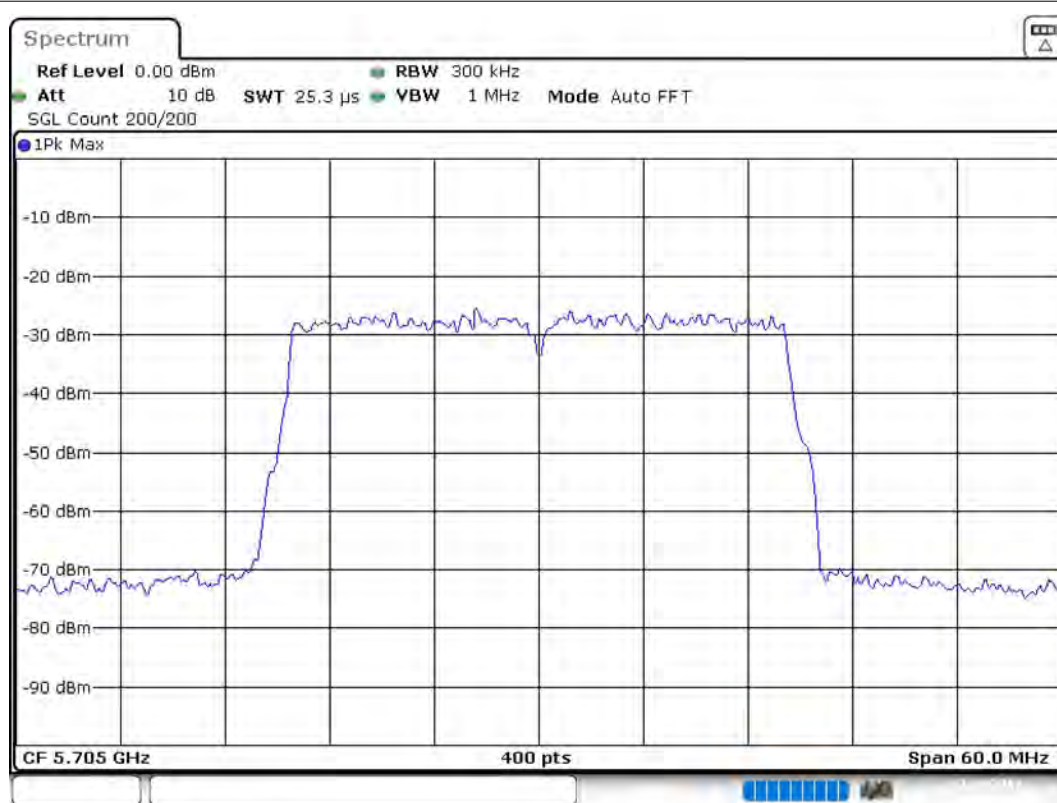

Date: 2.AUG.2019 16:27:13

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.67500 GHz	5.67500 GHz
Stop Frequency	5.73500 GHz	5.73500 GHz
Span	60.000 MHz	60.000 MHz
RBW	300.000 kHz	≥ 300.000 kHz
VBW	1.000 MHz	≥ 900.000 kHz
SweepPoints	400	~ 400
Sweeptime	25.313 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5705 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.4&5 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5705.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5725.250000	-27.7	0.7	-27.0
5725.750000	-27.9	0.9	-27.0
5726.250000	-27.9	0.9	-27.0
5726.750000	-28.4	1.4	-27.0
5727.750000	-29.2	2.2	-27.0
5727.250000	-29.2	2.2	-27.0
5729.250000	-29.5	2.5	-27.0
5728.750000	-29.5	2.5	-27.0
5728.250000	-30.1	3.1	-27.0
5729.750000	-30.3	3.3	-27.0
5732.250000	-31.0	4.0	-27.0
5731.750000	-31.1	4.1	-27.0
5731.250000	-31.1	4.1	-27.0
5732.750000	-31.2	4.2	-27.0
5736.250000	-31.2	4.2	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	18000.000000	2	2
18000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

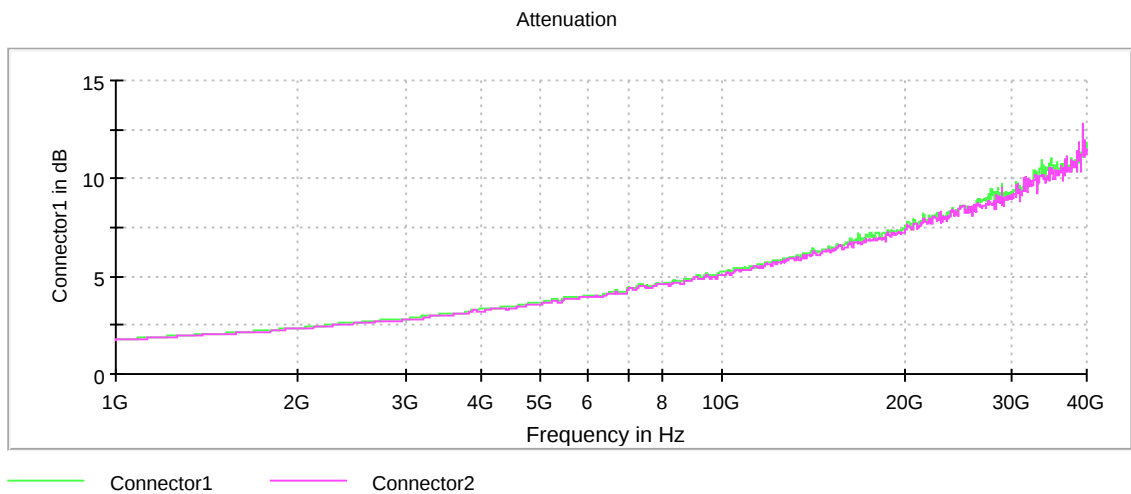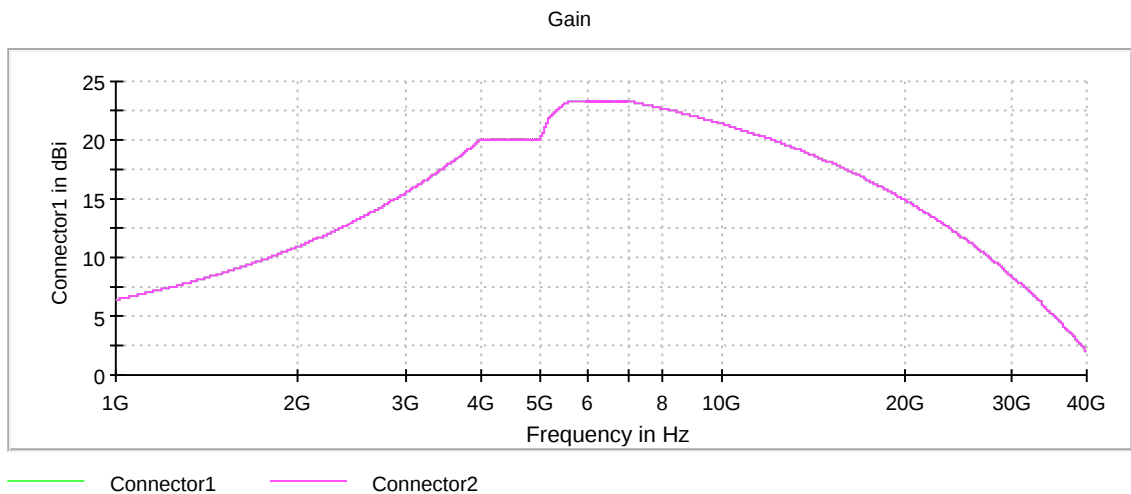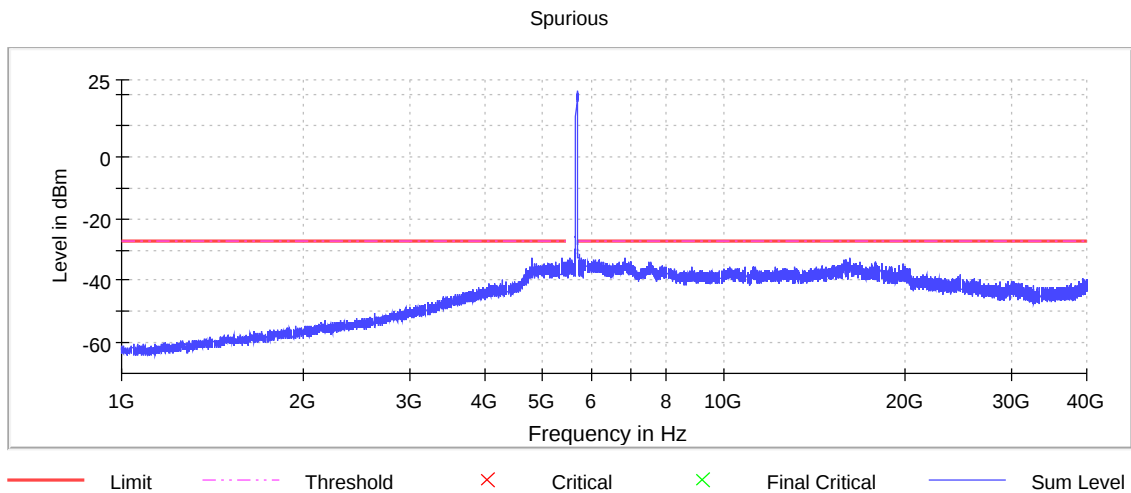

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	8300	~ 8300
SweepTime	8.300 ms	AUTO
Reference Level	0.000 dBm	AUTO
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5705 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5705.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
15896.750000	-44.8	3.6	-41.2
15872.250000	-44.8	3.6	-41.2
15881.250000	-44.9	3.7	-41.2
16195.750000	-45.1	3.9	-41.2
15861.750000	-45.1	3.9	-41.2
17884.250000	-45.3	4.1	-41.2
15888.250000	-45.3	4.1	-41.2
15919.750000	-45.3	4.1	-41.2
15871.750000	-45.4	4.2	-41.2
15898.250000	-45.4	4.2	-41.2
15820.750000	-45.4	4.2	-41.2
16144.250000	-45.4	4.2	-41.2
15899.250000	-45.4	4.2	-41.2
16190.250000	-45.4	4.2	-41.2
16150.750000	-45.4	4.2	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1

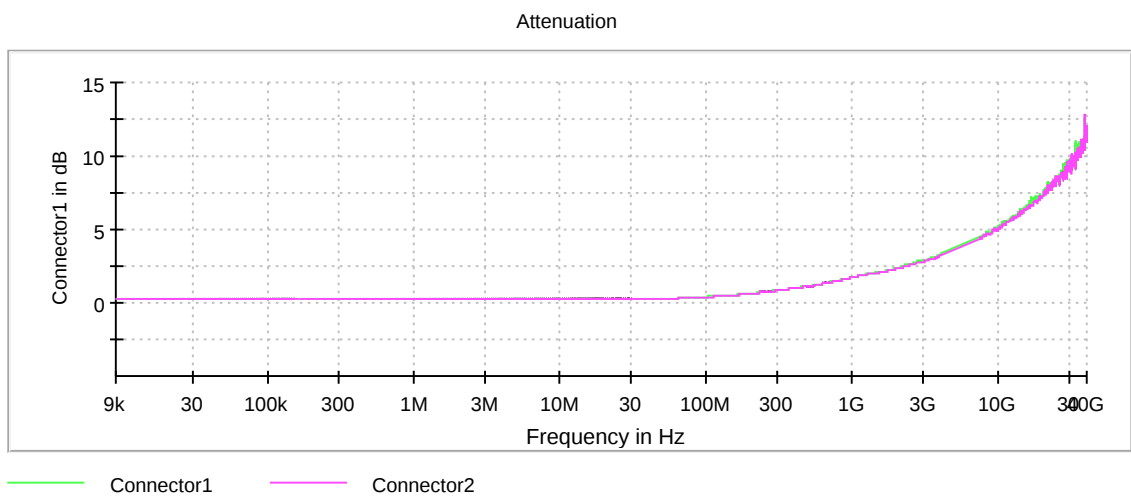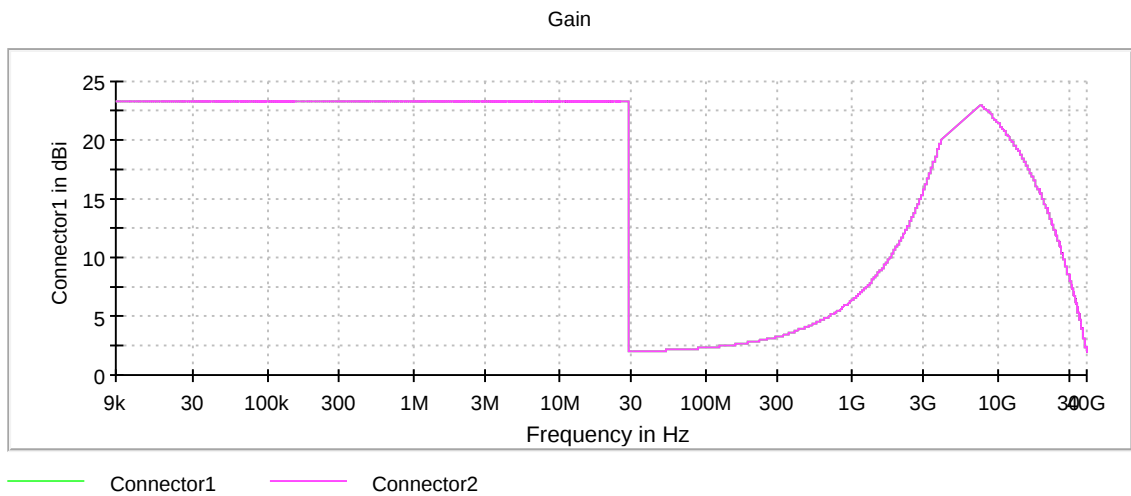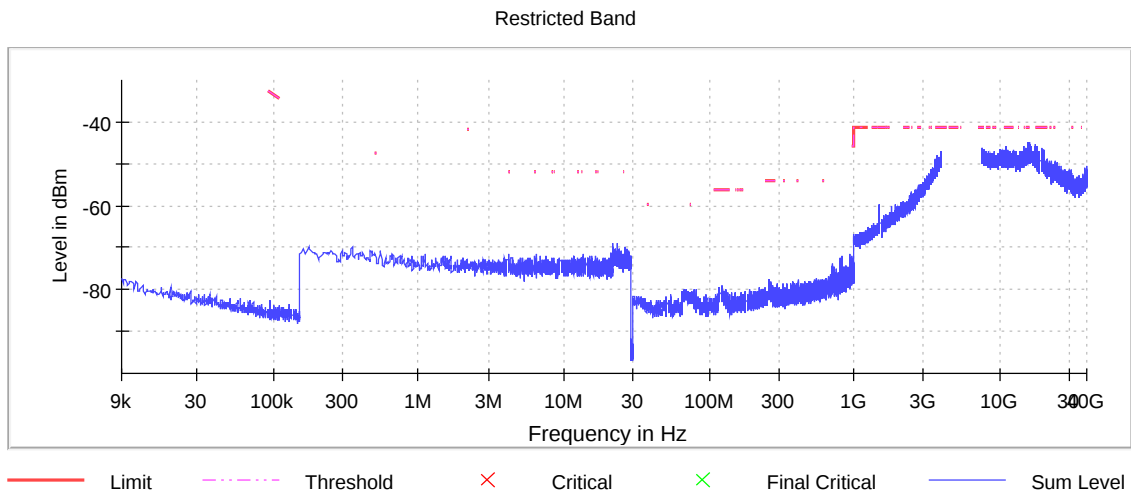

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
SweepTime	6.312 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5705 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5705.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
4799.750000	-34.0	12.8	-21.2
4917.250000	-34.7	13.5	-21.2
4800.250000	-35.0	13.8	-21.2
5120.750000	-35.9	14.7	-21.2
5434.250000	-35.9	14.7	-21.2
5393.250000	-36.3	15.1	-21.2
4800.750000	-36.4	15.2	-21.2
4866.750000	-36.4	15.2	-21.2
5434.750000	-36.5	15.3	-21.2
5393.750000	-36.7	15.5	-21.2
5392.750000	-36.8	15.6	-21.2
5433.750000	-36.8	15.6	-21.2
5031.750000	-37.0	15.8	-21.2
5350.250000	-37.0	15.8	-21.2
5350.000000	-37.0	15.8	-21.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2

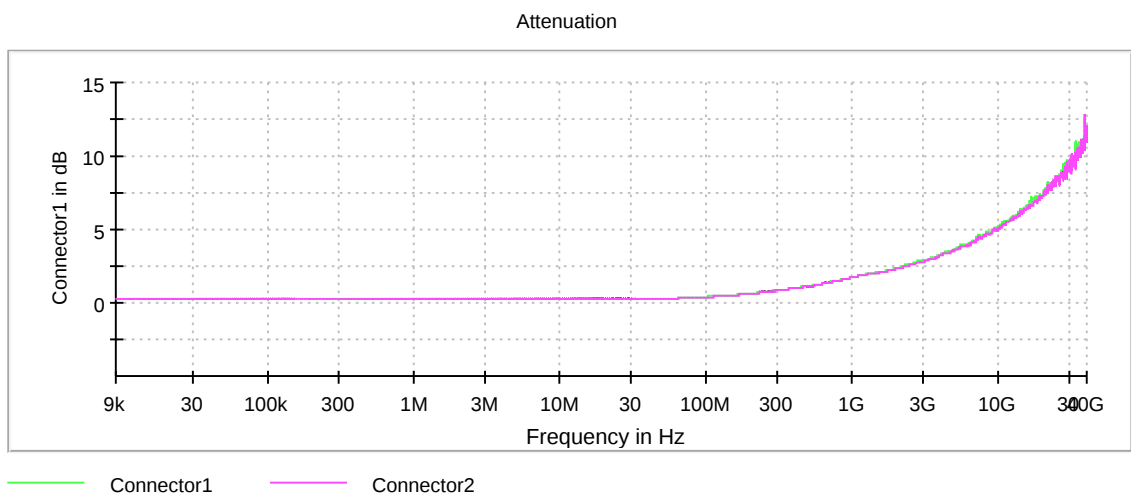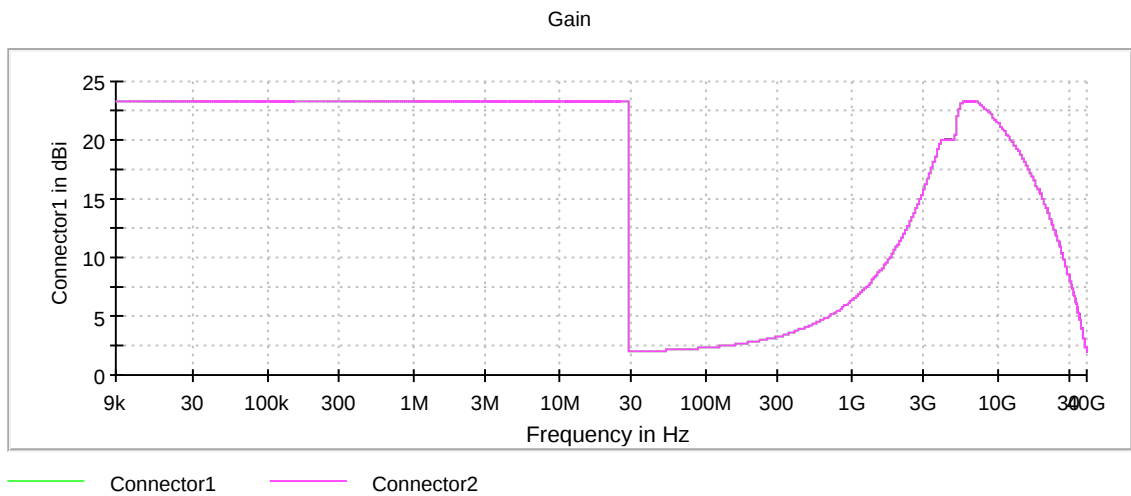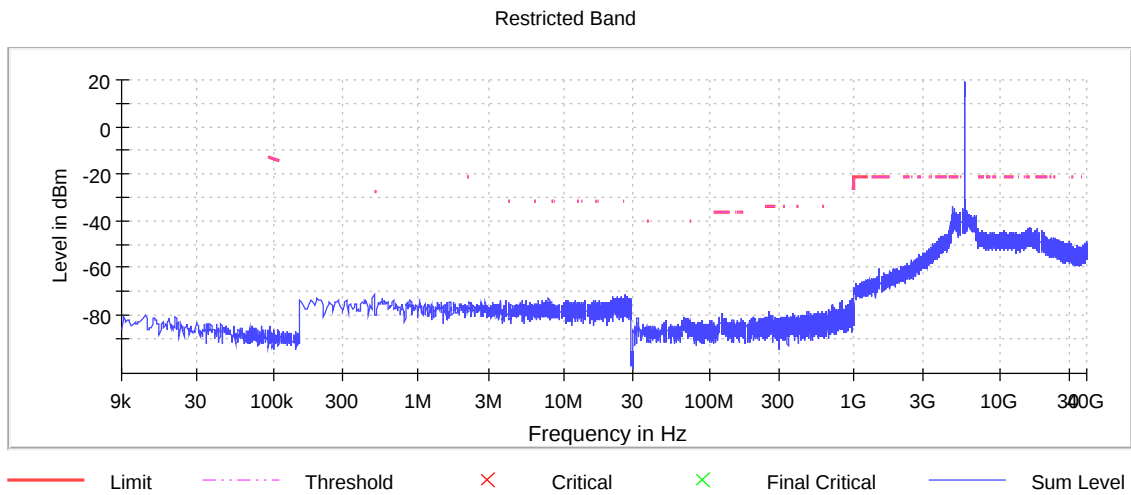

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5495 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5495.000000	41.275798	---	---	5474.287054	5515.562852


(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5495.000000	-10.1	PASS

26 dB Bandwidth

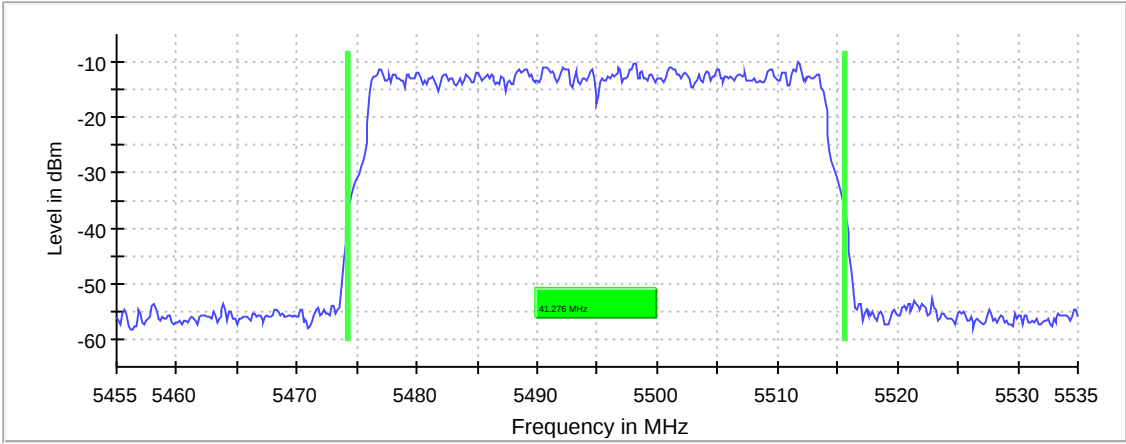

Bandwidth

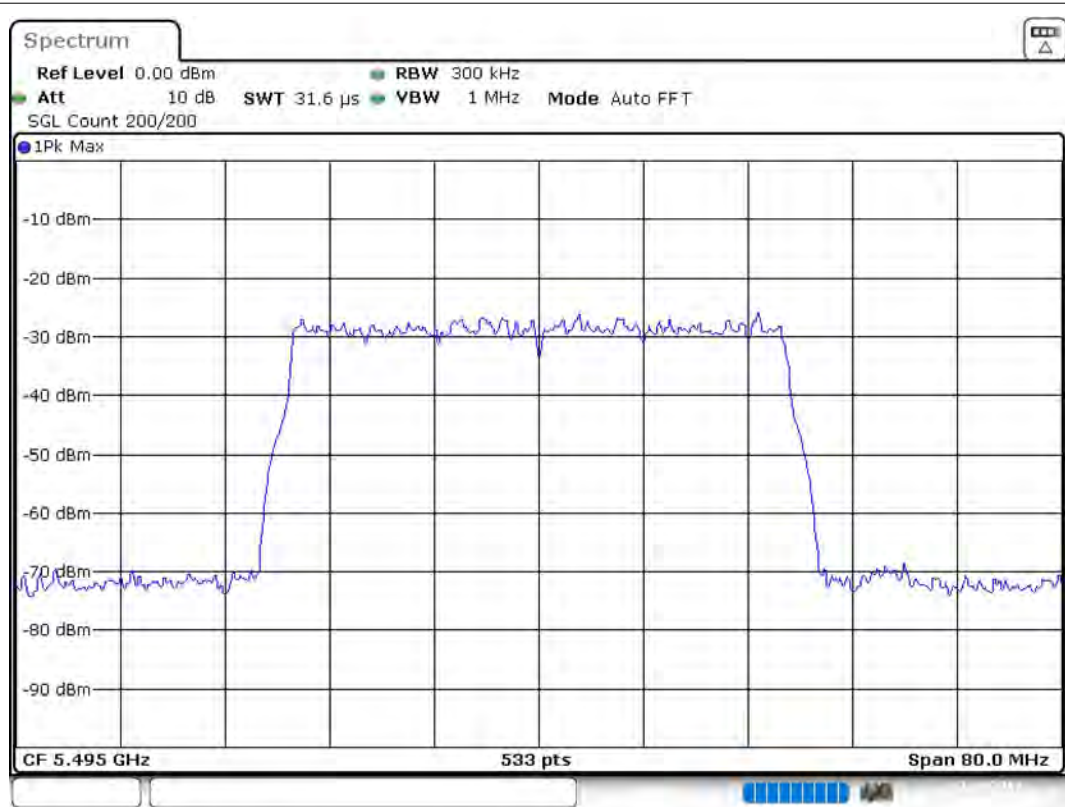

Date: 2.AUG.2019 19:40:13

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.45500 GHz	5.45500 GHz
Stop Frequency	5.53500 GHz	5.53500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	533	~ 533
Sweeptime	31.621 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

RF output power (5495 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5495.000000	29.6	---	29.6	99.489	PASS

Power Spectral Density (5495 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5495.000000	5497.376238	-9.272	-6.0	PASS

Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.47500 GHz	5.47500 GHz
Stop Frequency	5.51500 GHz	5.51500 GHz
Span	40.000 MHz	40.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 80
SweepTime	2.020 ms	2.020 ms
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5495 MHz; 40 MHz)

Customized settings.


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5495.000000	37.750000	---	---	5476.125000	5513.875000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5495.000000	PASS

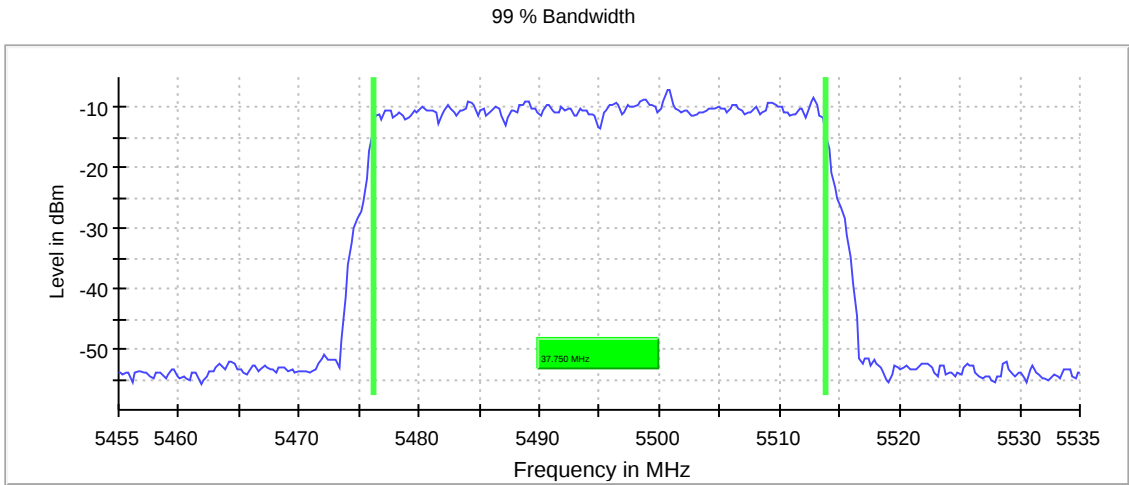

Bandwidth

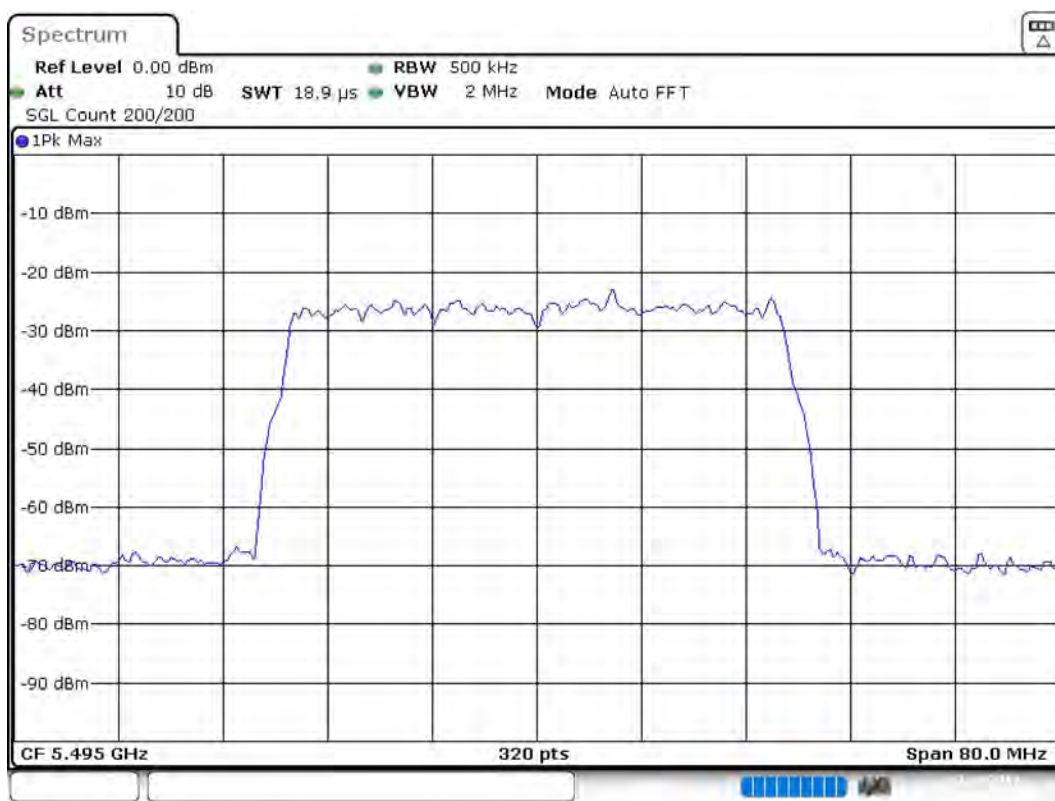

Date: 2.AUG.2019 19:41:04

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.45500 GHz	5.45500 GHz
Stop Frequency	5.53500 GHz	5.53500 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	≥ 400.000 kHz
VBW	2.000 MHz	≥ 1.500 MHz
SweepPoints	320	~ 320
Sweeptime	18.906 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5495 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.4&5 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5495.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
2426.250000	-27.4	0.4	-27.0
5469.250000	-27.4	0.4	-27.0
5469.750000	-27.7	0.7	-27.0
5467.250000	-27.7	0.7	-27.0
2426.750000	-27.8	0.8	-27.0
5466.750000	-28.2	1.2	-27.0
5467.750000	-28.2	1.2	-27.0
5466.250000	-28.4	1.4	-27.0
5460.250000	-28.5	1.5	-27.0
5468.750000	-28.5	1.5	-27.0
5465.750000	-28.7	1.7	-27.0
5468.250000	-28.7	1.7	-27.0
5459.750000	-28.7	1.7	-27.0
5465.250000	-28.9	1.9	-27.0
5455.250000	-29.0	2.0	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	18000.000000	2	2
18000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

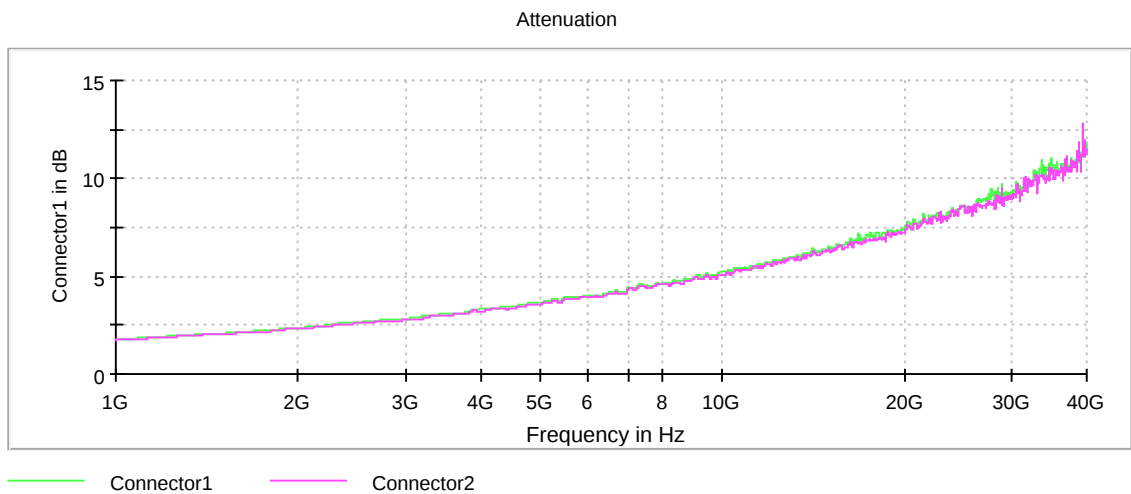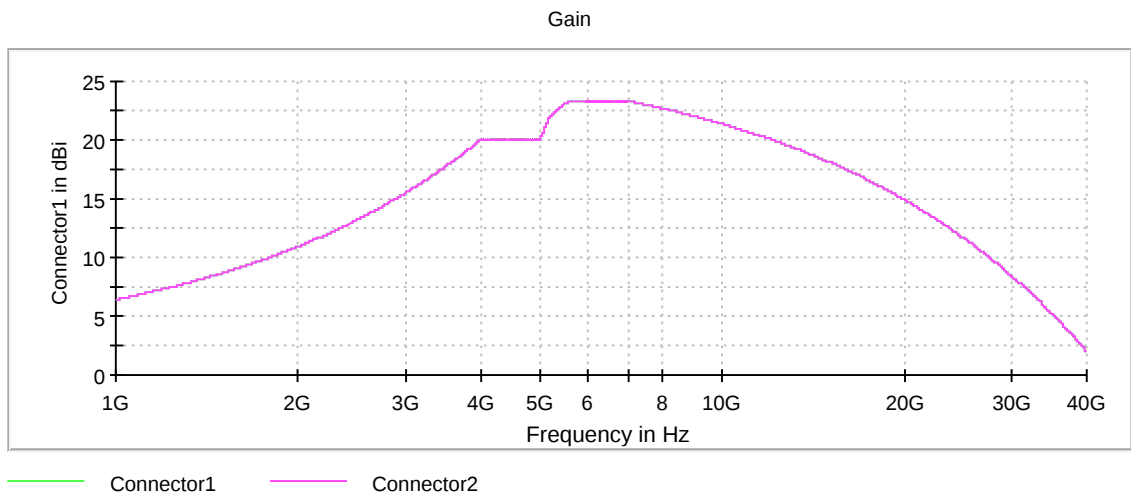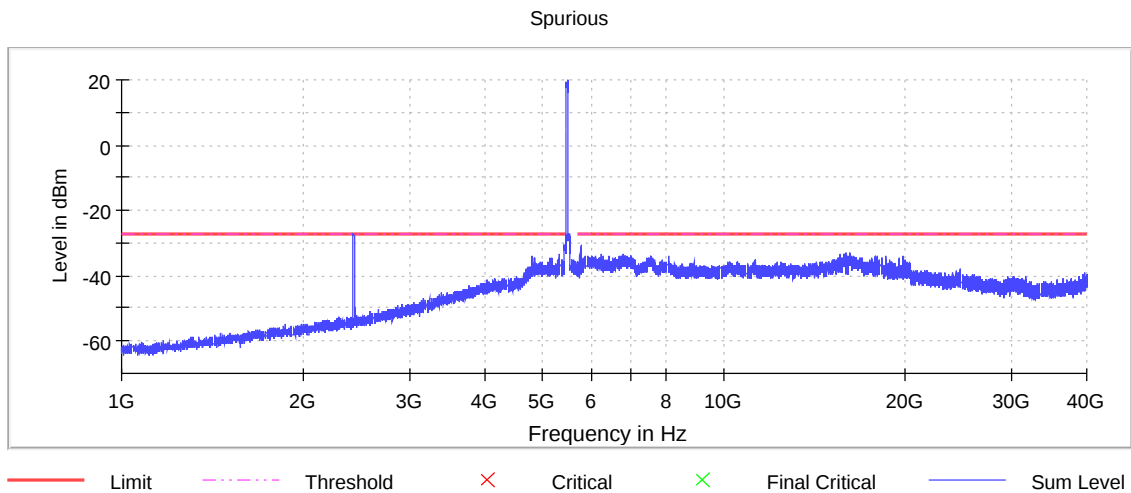

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	8300	~ 8300
SweepTime	8.300 ms	AUTO
Reference Level	0.000 dBm	AUTO
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5495 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5495.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
15873.750000	-44.5	3.3	-41.2
15859.250000	-44.5	3.3	-41.2
15831.250000	-44.5	3.3	-41.2
15833.750000	-44.9	3.7	-41.2
15906.750000	-45.0	3.8	-41.2
16184.250000	-45.1	3.9	-41.2
15771.250000	-45.1	3.9	-41.2
15826.750000	-45.2	4.0	-41.2
16151.250000	-45.3	4.1	-41.2
15785.750000	-45.3	4.1	-41.2
15832.250000	-45.3	4.1	-41.2
15890.750000	-45.4	4.2	-41.2
15808.750000	-45.4	4.2	-41.2
15901.250000	-45.5	4.3	-41.2
16183.250000	-45.5	4.3	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1

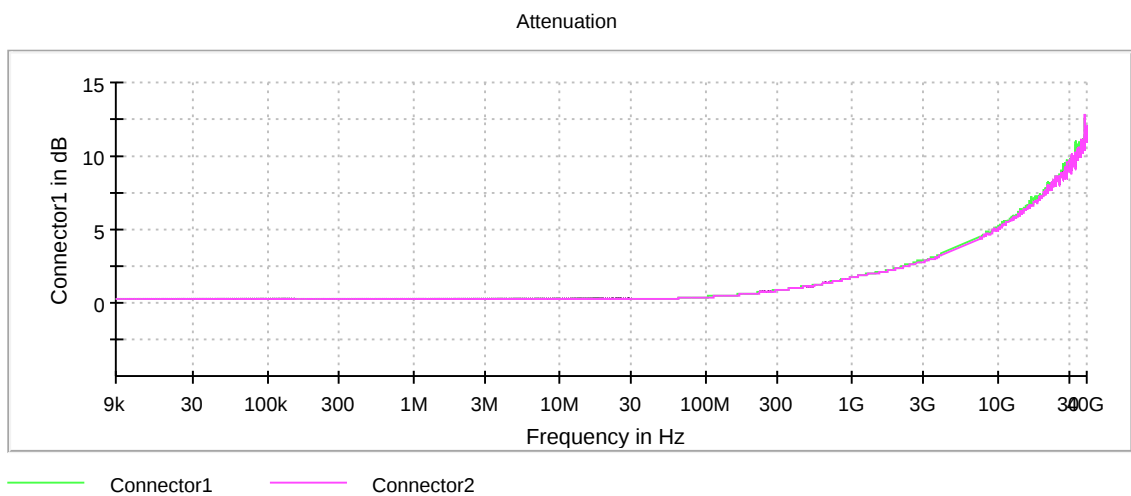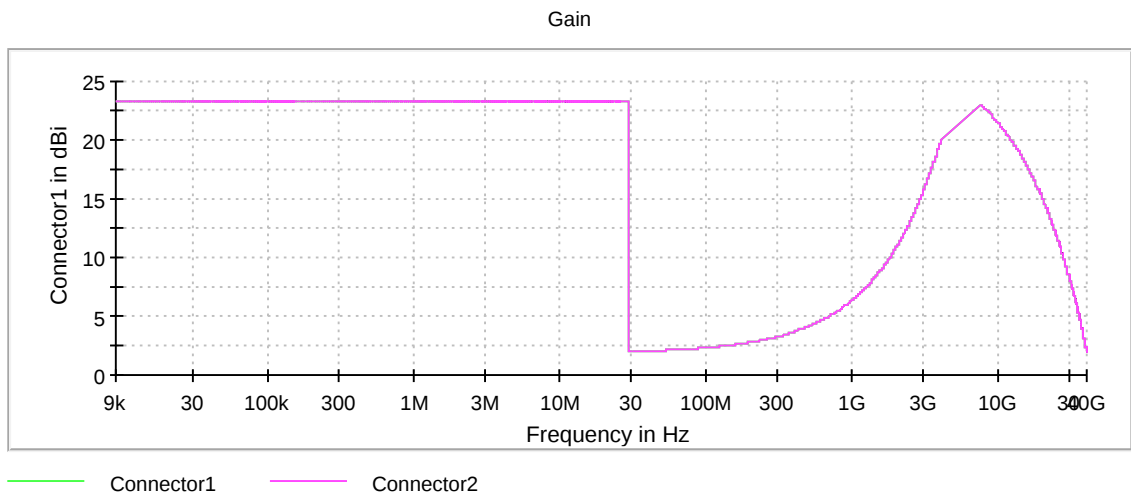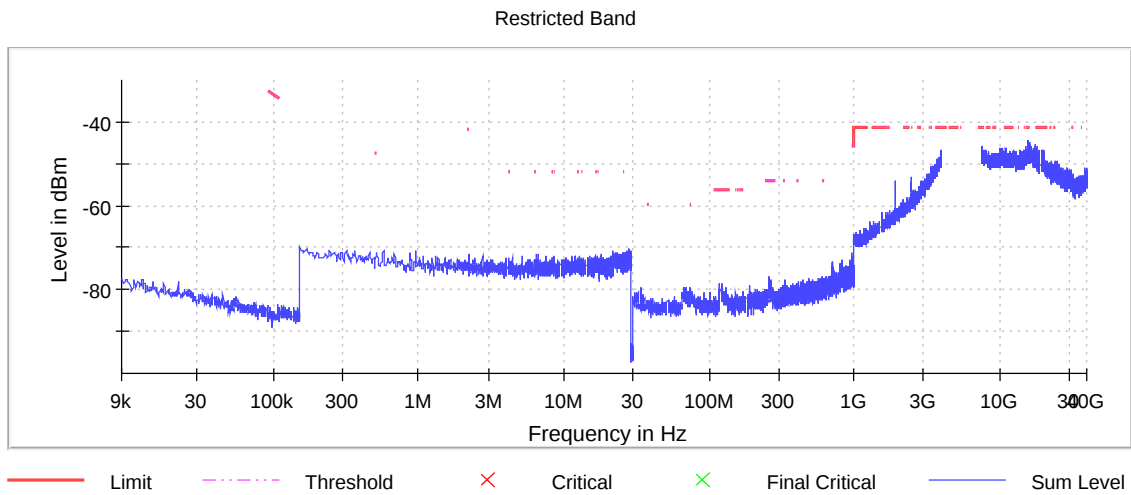

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
SweepTime	6.312 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5495 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5495.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5446.750000	-31.3	10.1	-21.2
5440.250000	-31.6	10.4	-21.2
5440.750000	-31.6	10.4	-21.2
5450.250000	-31.9	10.7	-21.2
5447.250000	-32.1	10.9	-21.2
5446.250000	-32.1	10.9	-21.2
5449.750000	-32.5	11.3	-21.2
5456.750000	-32.5	11.3	-21.2
5450.750000	-32.8	11.6	-21.2
5432.250000	-33.1	11.9	-21.2
5435.750000	-33.1	11.9	-21.2
5432.750000	-33.2	12.0	-21.2
5439.750000	-33.4	12.2	-21.2
5437.250000	-33.6	12.4	-21.2
5448.250000	-33.6	12.4	-21.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2

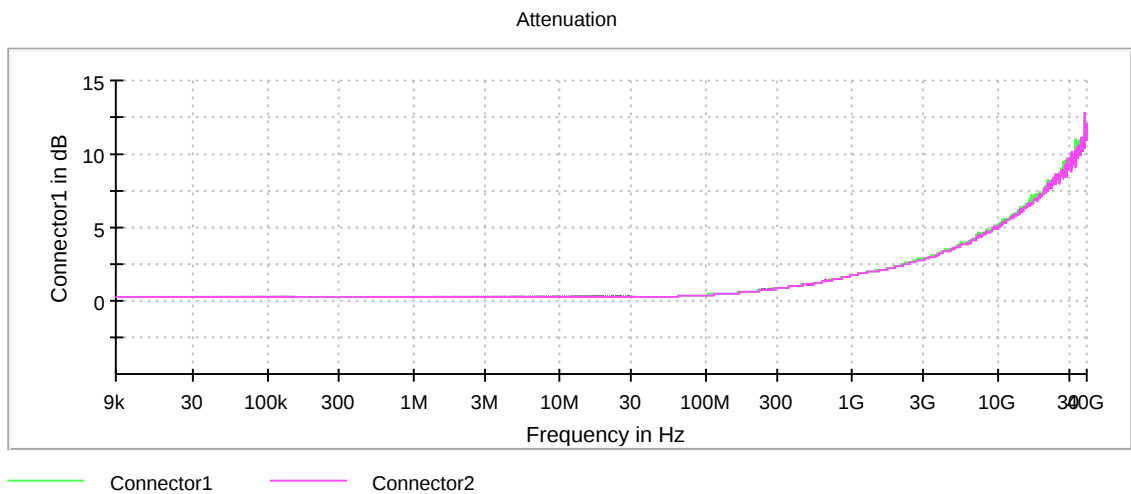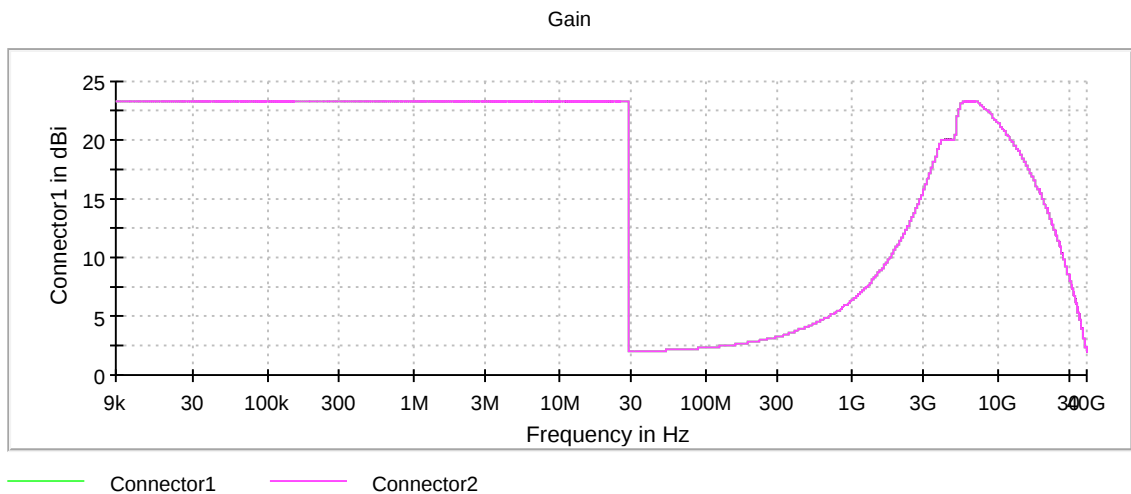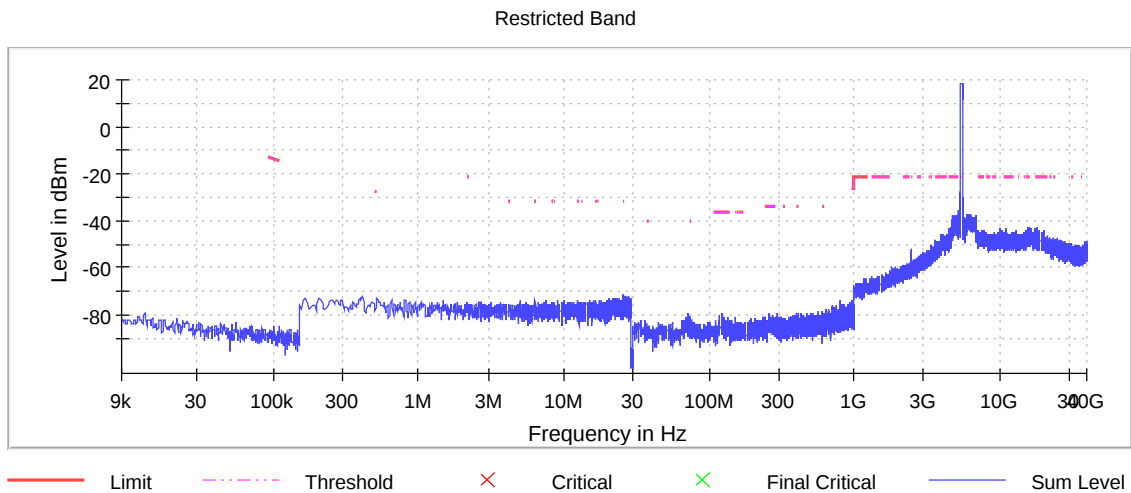

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5600 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5600.000000	41.125704	---	---	5579.437148	5620.562852


(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5600.000000	-11.3	PASS

26 dB Bandwidth

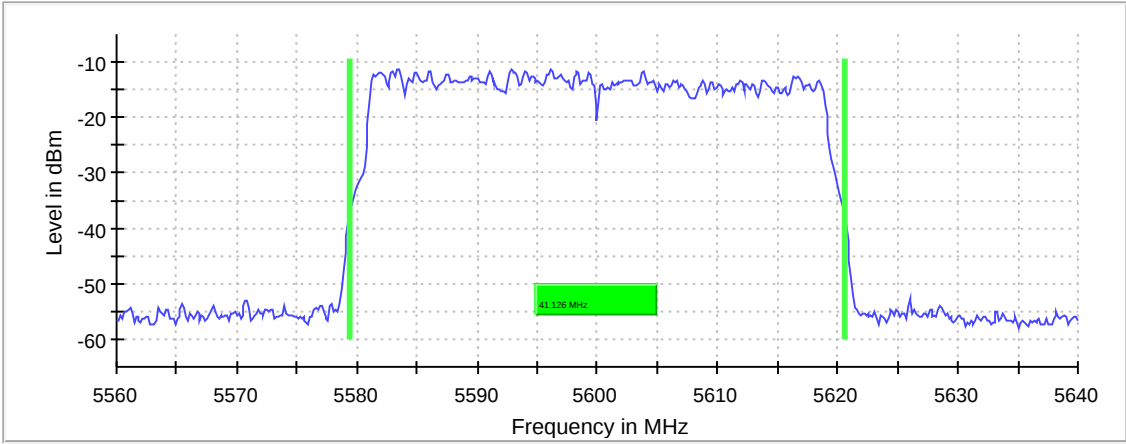

Bandwidth

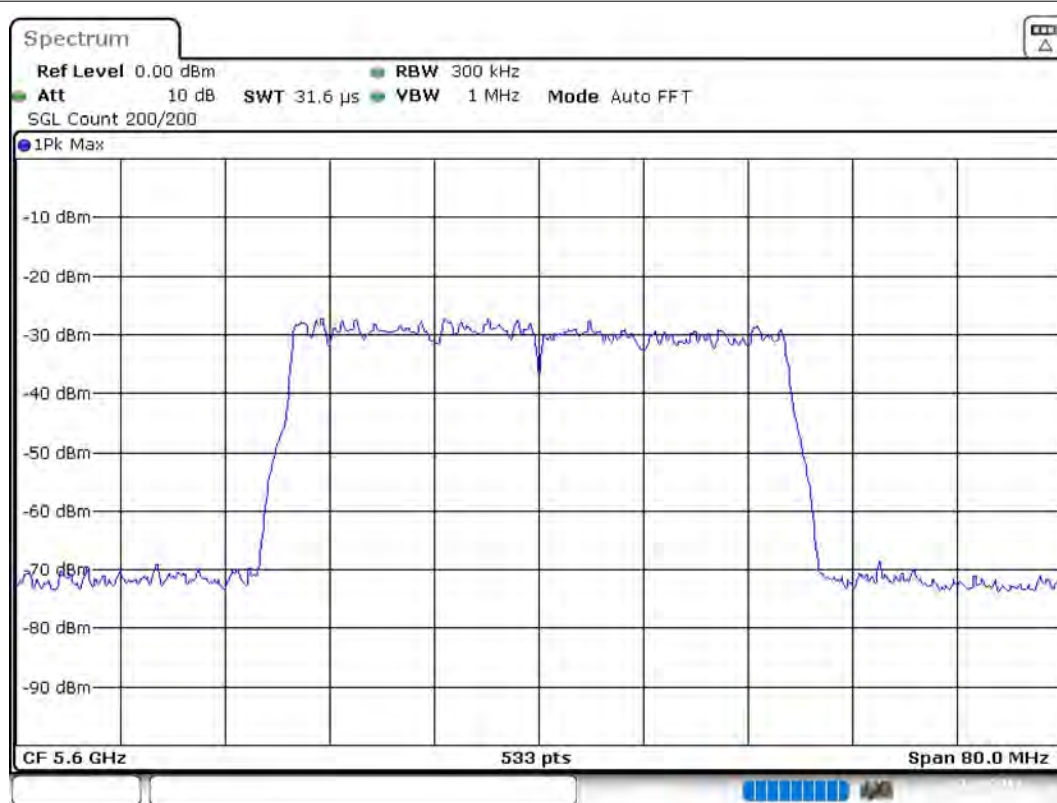

Date: 2.AUG.2019 20:43:37

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.56000 GHz	5.56000 GHz
Stop Frequency	5.64000 GHz	5.64000 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	533	~ 533
Sweeptime	31.621 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

RF output power (5600 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5600.000000	29.3	---	29.3	99.491	PASS

Power Spectral Density (5600 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5600.000000	5595.247525	-8.840	-6.3	PASS

Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.58000 GHz	5.58000 GHz
Stop Frequency	5.62000 GHz	5.62000 GHz
Span	40.000 MHz	40.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 80
SweepTime	2.020 ms	2.020 ms
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5600 MHz; 40 MHz)

Customized settings.


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5600.000000	37.750000	---	---	5581.125000	5618.875000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5600.000000	PASS

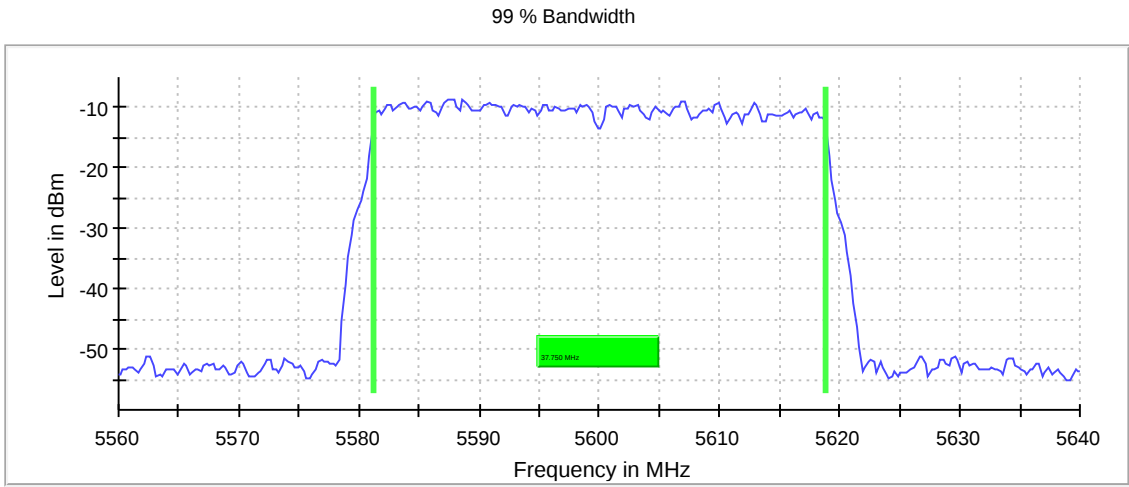

Bandwidth



Date: 2.AUG.2019 20:44:29

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.56000 GHz	5.56000 GHz
Stop Frequency	5.64000 GHz	5.64000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	≥ 400.000 kHz
VBW	2.000 MHz	≥ 1.500 MHz
SweepPoints	320	~ 320
Sweeptime	18.906 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5600 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5600.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
15890.750000	-45.0	3.8	-41.2
15805.750000	-45.1	3.9	-41.2
16178.250000	-45.2	4.0	-41.2
15832.750000	-45.2	4.0	-41.2
15838.250000	-45.3	4.1	-41.2
17868.250000	-45.3	4.1	-41.2
15820.750000	-45.3	4.1	-41.2
15859.750000	-45.3	4.1	-41.2
16175.250000	-45.4	4.2	-41.2
15853.250000	-45.4	4.2	-41.2
15887.250000	-45.4	4.2	-41.2
15856.250000	-45.5	4.3	-41.2
17896.250000	-45.5	4.3	-41.2
15829.750000	-45.5	4.3	-41.2
15865.750000	-45.5	4.3	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1

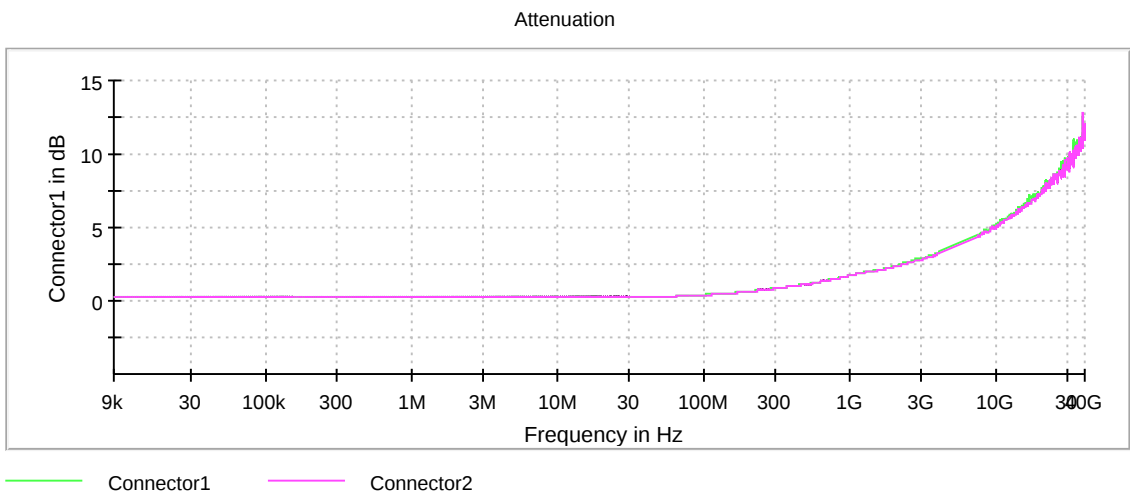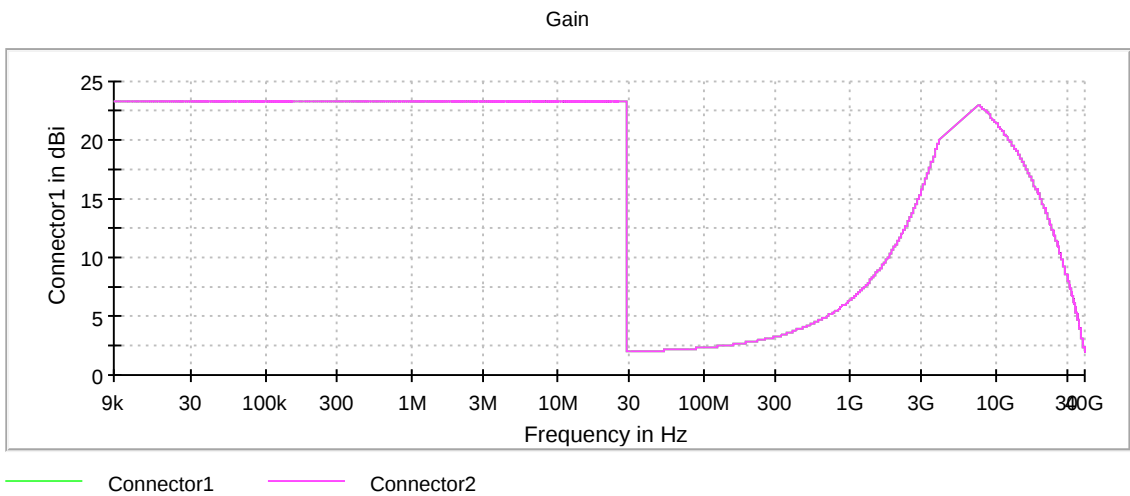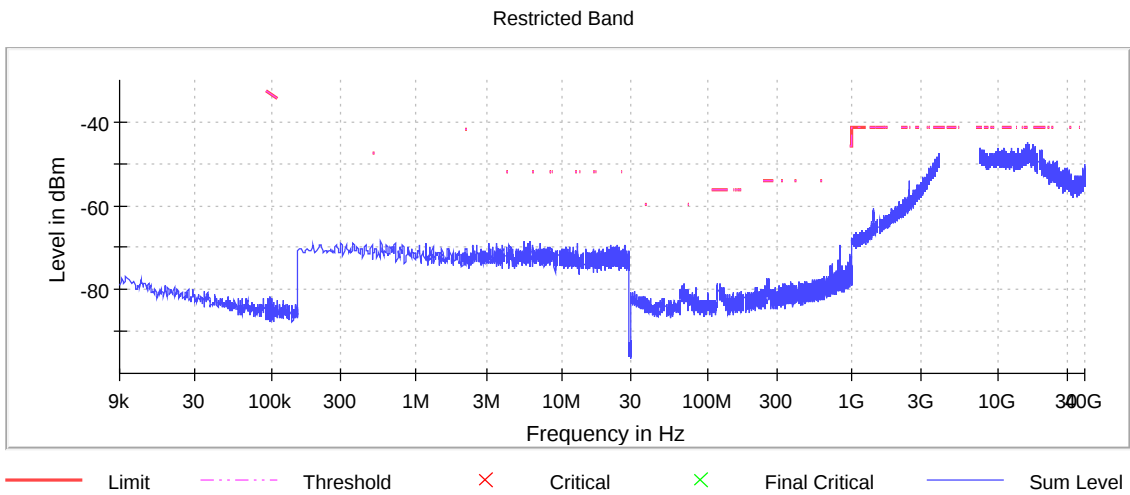

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
SweepTime	6.312 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5600 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5600.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
4801.250000	-34.7	13.5	-21.2
5120.750000	-35.1	13.9	-21.2
5437.750000	-36.2	15.0	-21.2
5359.250000	-36.2	15.0	-21.2
5120.250000	-36.2	15.0	-21.2
5437.250000	-36.4	15.2	-21.2
5358.750000	-36.7	15.5	-21.2
5420.750000	-36.7	15.5	-21.2
5115.250000	-36.8	15.6	-21.2
4838.250000	-36.8	15.6	-21.2
5397.750000	-37.0	15.8	-21.2
4908.250000	-37.0	15.8	-21.2
5062.250000	-37.1	15.9	-21.2
5398.250000	-37.2	16.0	-21.2
5000.250000	-37.3	16.1	-21.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2

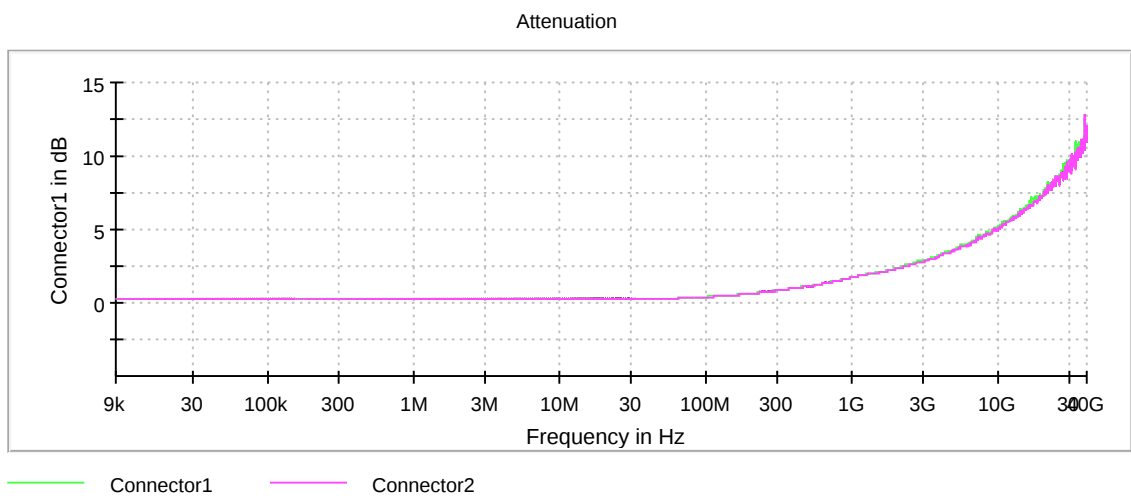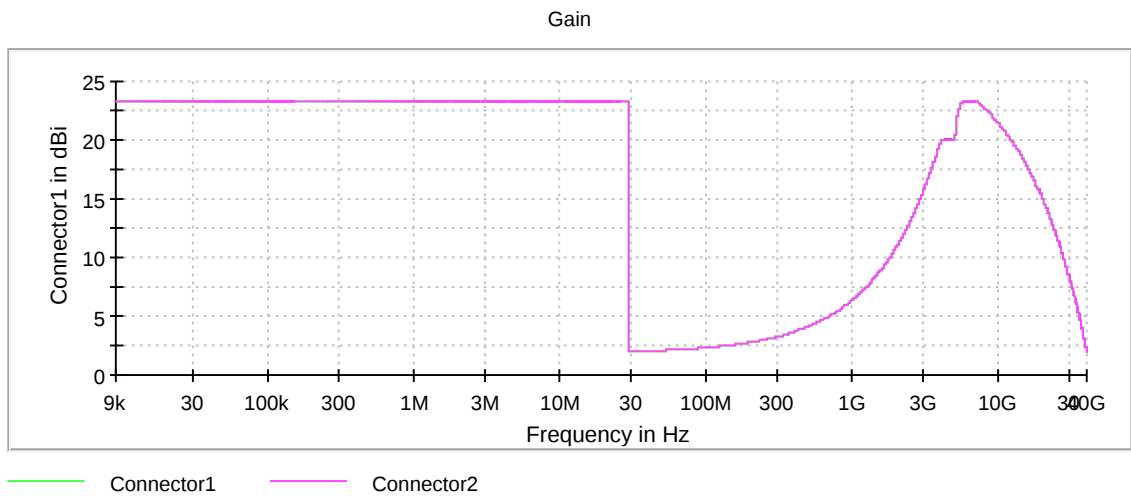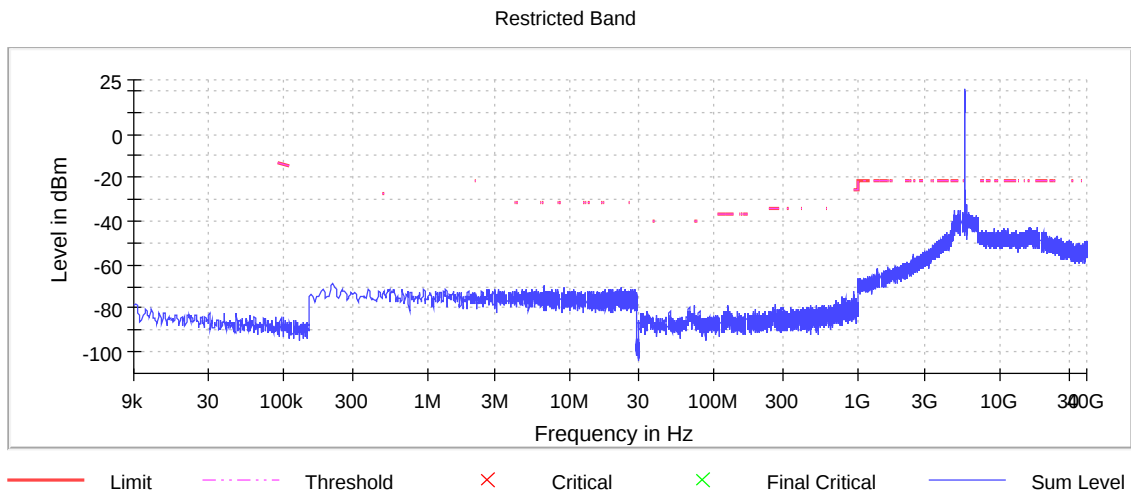

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5705 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Bandwidth U-NII 2C (MHz)	Bandwidth U-NII 3 (MHz)	Limit Min (MHz)	Limit Max (MHz)
5705.000000	41.575985	41.575985	0.000000	---	---

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5705.000000	5679.183865	5720.759850	-13.0	PASS

26 dB Bandwidth

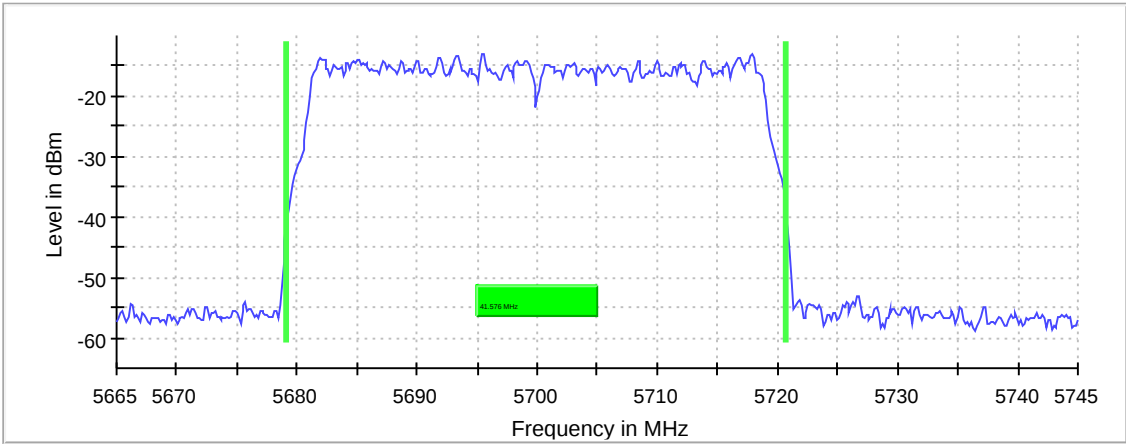

Bandwidth



Date: 2.AUG.2019 21:44:29

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.66500 GHz	5.66500 GHz
Stop Frequency	5.74500 GHz	5.74500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	533	~ 533
Sweeptime	31.621 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

RF output power (5705 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5705.000000	27.7	---	27.7	99.495	PASS

Power Spectral Density (5705 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5705.000000	5695.495050	-11.791	-6.3	PASS

Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.68500 GHz	5.68500 GHz
Stop Frequency	5.72500 GHz	5.72500 GHz
Span	40.000 MHz	40.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 80
SweepTime	2.020 ms	2.020 ms
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5705 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Bandwidth U-NII 2C (MHz)	Bandwidth U-NII 3 (MHz)	Limit Min (MHz)	Limit Max (MHz)
5705.000000	37.750000	37.750000	0.000000	---	---


(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5705.000000	5681.125000	5718.875000	PASS

99 % Bandwidth

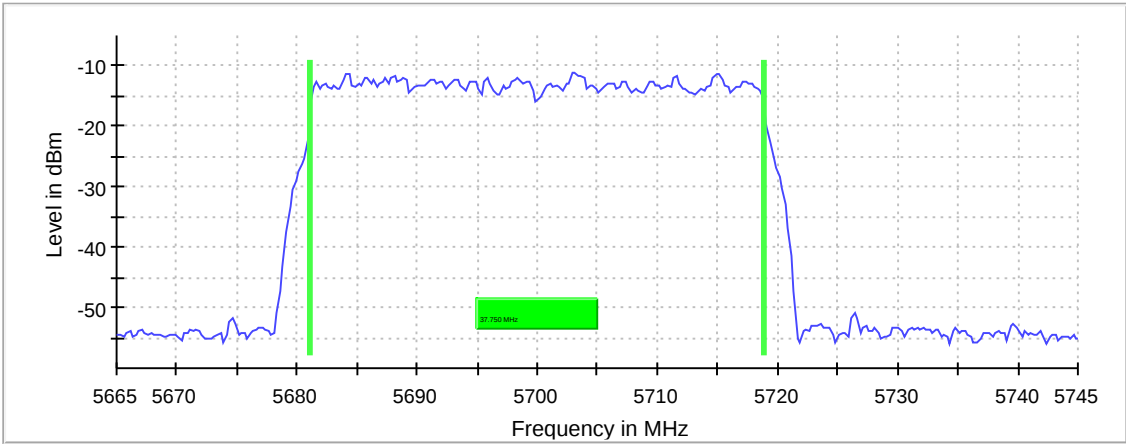

Bandwidth

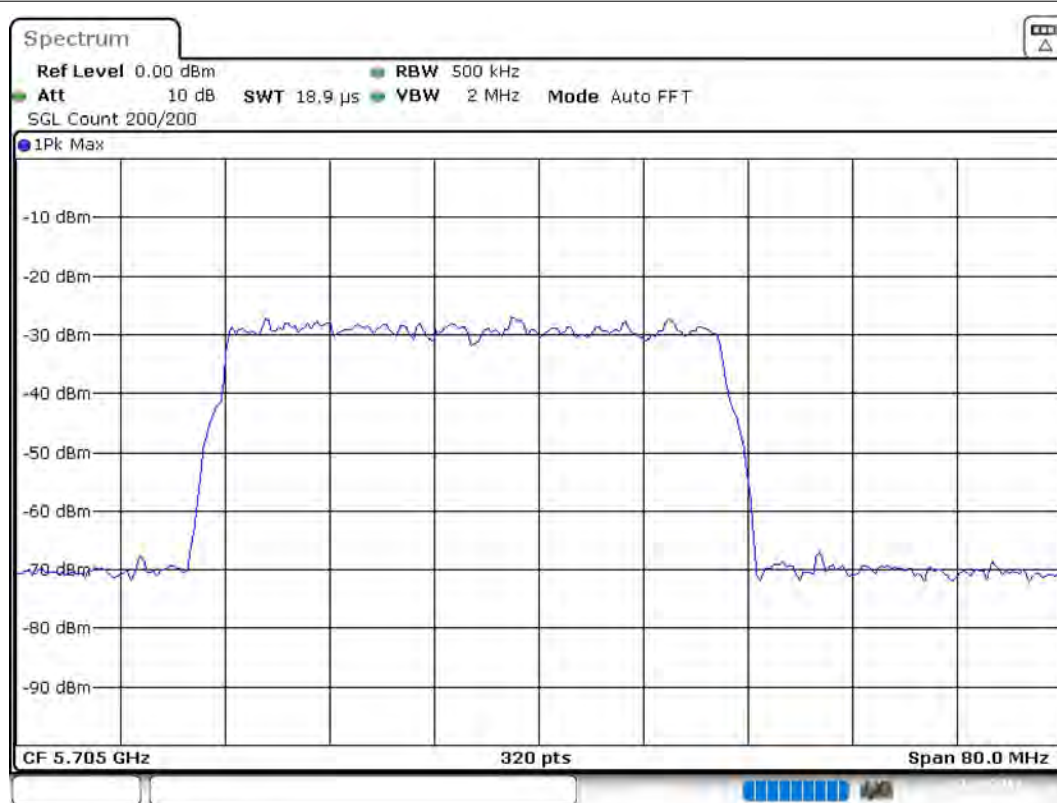

Date: 2.AUG.2019 21:45:19

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.66500 GHz	5.66500 GHz
Stop Frequency	5.74500 GHz	5.74500 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	≥ 400.000 kHz
VBW	2.000 MHz	≥ 1.500 MHz
SweepPoints	320	~ 320
Sweeptime	18.906 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5705 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.4&5 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5705.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5727.750000	-27.5	0.5	-27.0
5729.250000	-27.7	0.7	-27.0
5728.750000	-27.9	0.9	-27.0
5727.250000	-27.9	0.9	-27.0
5725.250000	-28.0	1.0	-27.0
5728.250000	-28.1	1.1	-27.0
5726.250000	-28.3	1.3	-27.0
5725.750000	-28.3	1.3	-27.0
5729.750000	-28.5	1.5	-27.0
5726.750000	-28.7	1.7	-27.0
5734.750000	-29.1	2.1	-27.0
5737.250000	-29.2	2.2	-27.0
5737.750000	-29.3	2.3	-27.0
5735.250000	-29.6	2.6	-27.0
5733.250000	-29.8	2.8	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	18000.000000	2	2
18000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

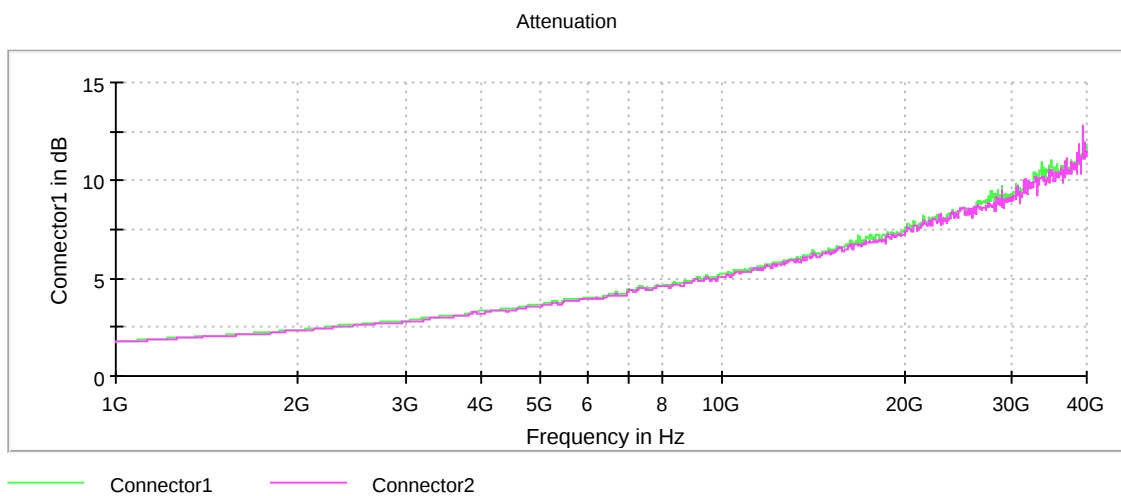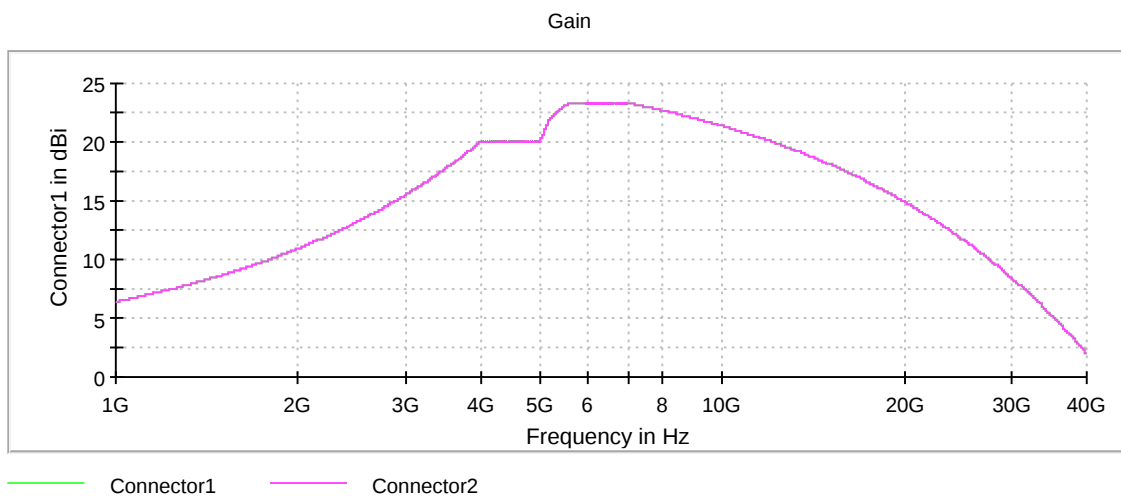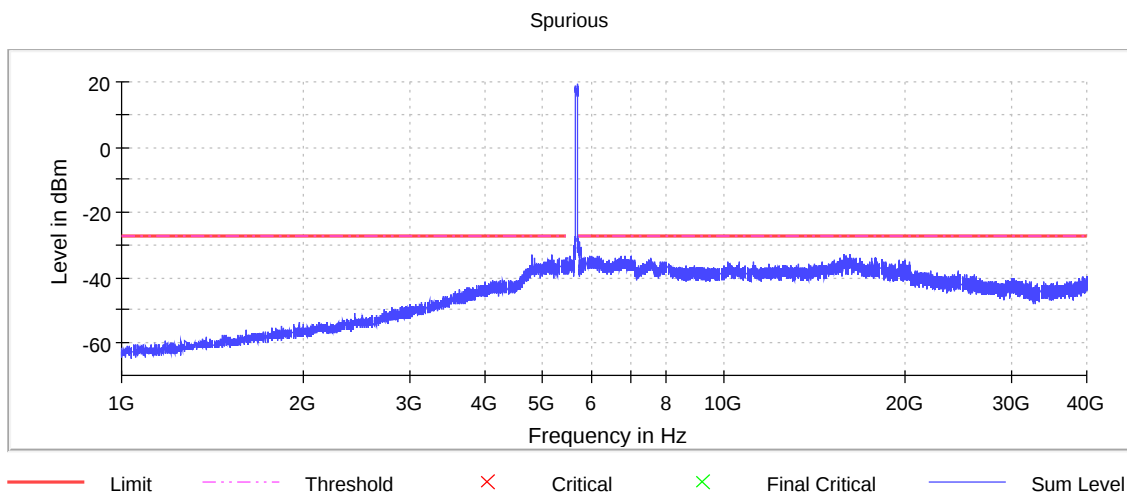

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	8300	~ 8300
SweepTime	8.300 ms	AUTO
Reference Level	0.000 dBm	AUTO
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5705 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5705.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
16167.750000	-44.6	3.4	-41.2
16157.750000	-45.1	3.9	-41.2
15893.250000	-45.2	4.0	-41.2
15820.750000	-45.2	4.0	-41.2
15874.750000	-45.2	4.0	-41.2
15825.250000	-45.2	4.0	-41.2
15880.750000	-45.3	4.1	-41.2
16168.750000	-45.3	4.1	-41.2
15912.750000	-45.3	4.1	-41.2
16168.250000	-45.3	4.1	-41.2
15894.250000	-45.4	4.2	-41.2
15878.750000	-45.4	4.2	-41.2
15820.250000	-45.5	4.3	-41.2
15867.250000	-45.5	4.3	-41.2
16147.250000	-45.6	4.4	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1

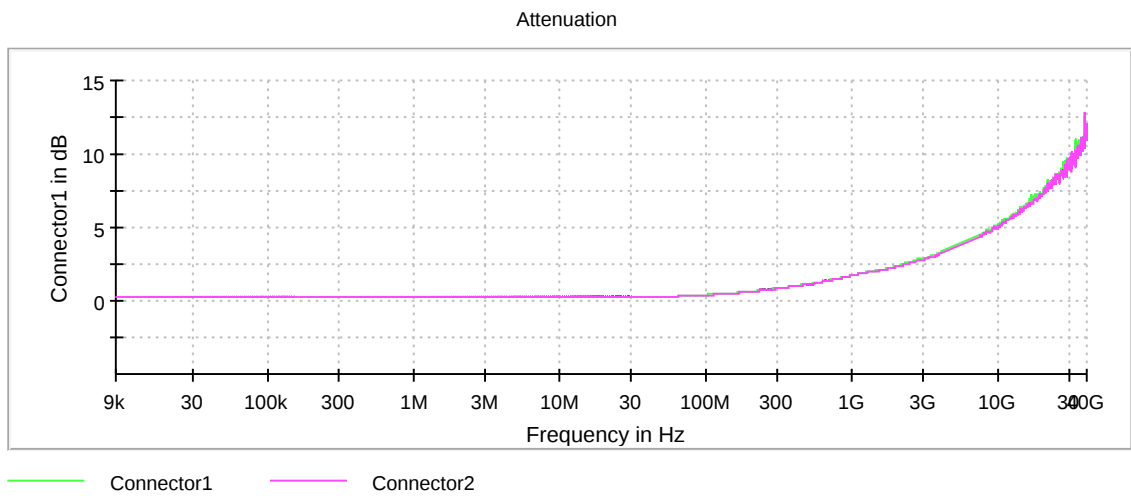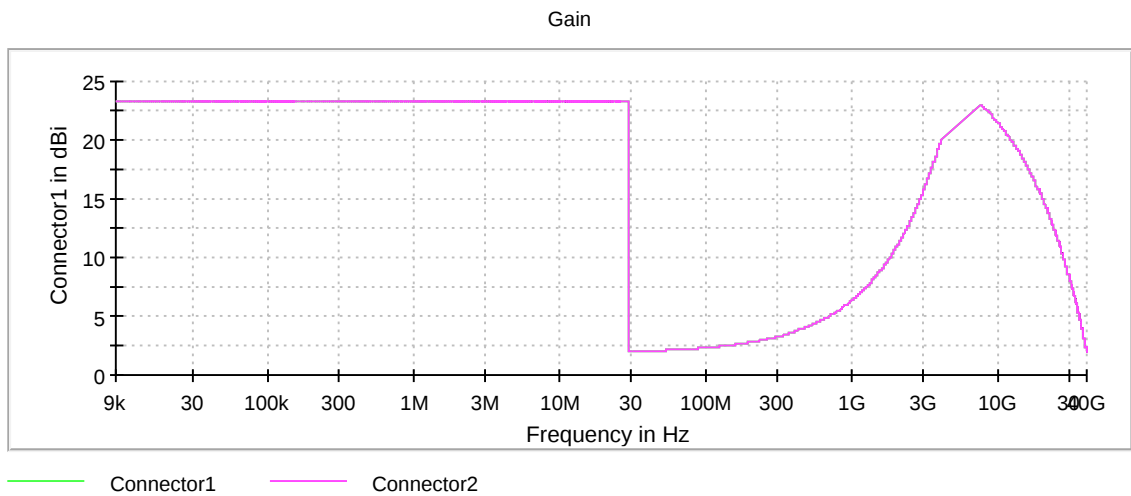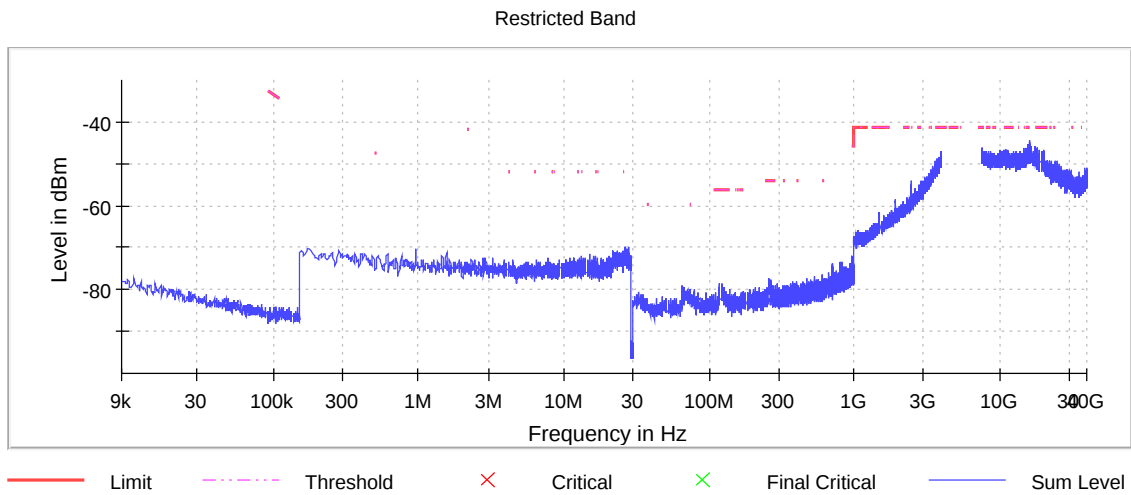

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
SweepTime	6.312 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5705 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5705.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
4800.250000	-34.4	13.2	-21.2
4800.750000	-35.9	14.7	-21.2
5420.750000	-36.3	15.1	-21.2
5113.250000	-36.4	15.2	-21.2
5421.250000	-36.5	15.3	-21.2
5062.750000	-37.0	15.8	-21.2
5459.750000	-37.1	15.9	-21.2
4820.250000	-37.2	16.0	-21.2
5059.250000	-37.3	16.1	-21.2
5139.250000	-37.3	16.1	-21.2
4799.750000	-37.3	16.1	-21.2
4870.750000	-37.4	16.2	-21.2
5139.750000	-37.4	16.2	-21.2
5459.250000	-37.4	16.2	-21.2
5117.750000	-37.4	16.2	-21.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2