

sensity
RHP324K-SL0
DC OUTPUT:
Regulated voltage 54.5 V
Maximum power 71 W
Maximum current 1.3 A
+ RED
- BLACK
Constant Voltage
LED Power Supply
Max case temperature $t_c = 90^\circ\text{C}$
Class 2 output - Suitable for damp location

AC INPUT:
120-277 V - 900 mA Max
 $\lambda = 0.9\text{C}$
50/60 Hz
N-WHITE
L-BLACK


324KSL00B64614A500092


ic
e us

TYPE: 250V
RATING: 250V 50/60Hz
MILV: 1330V
Z: 1260V
RoHS

1448


2

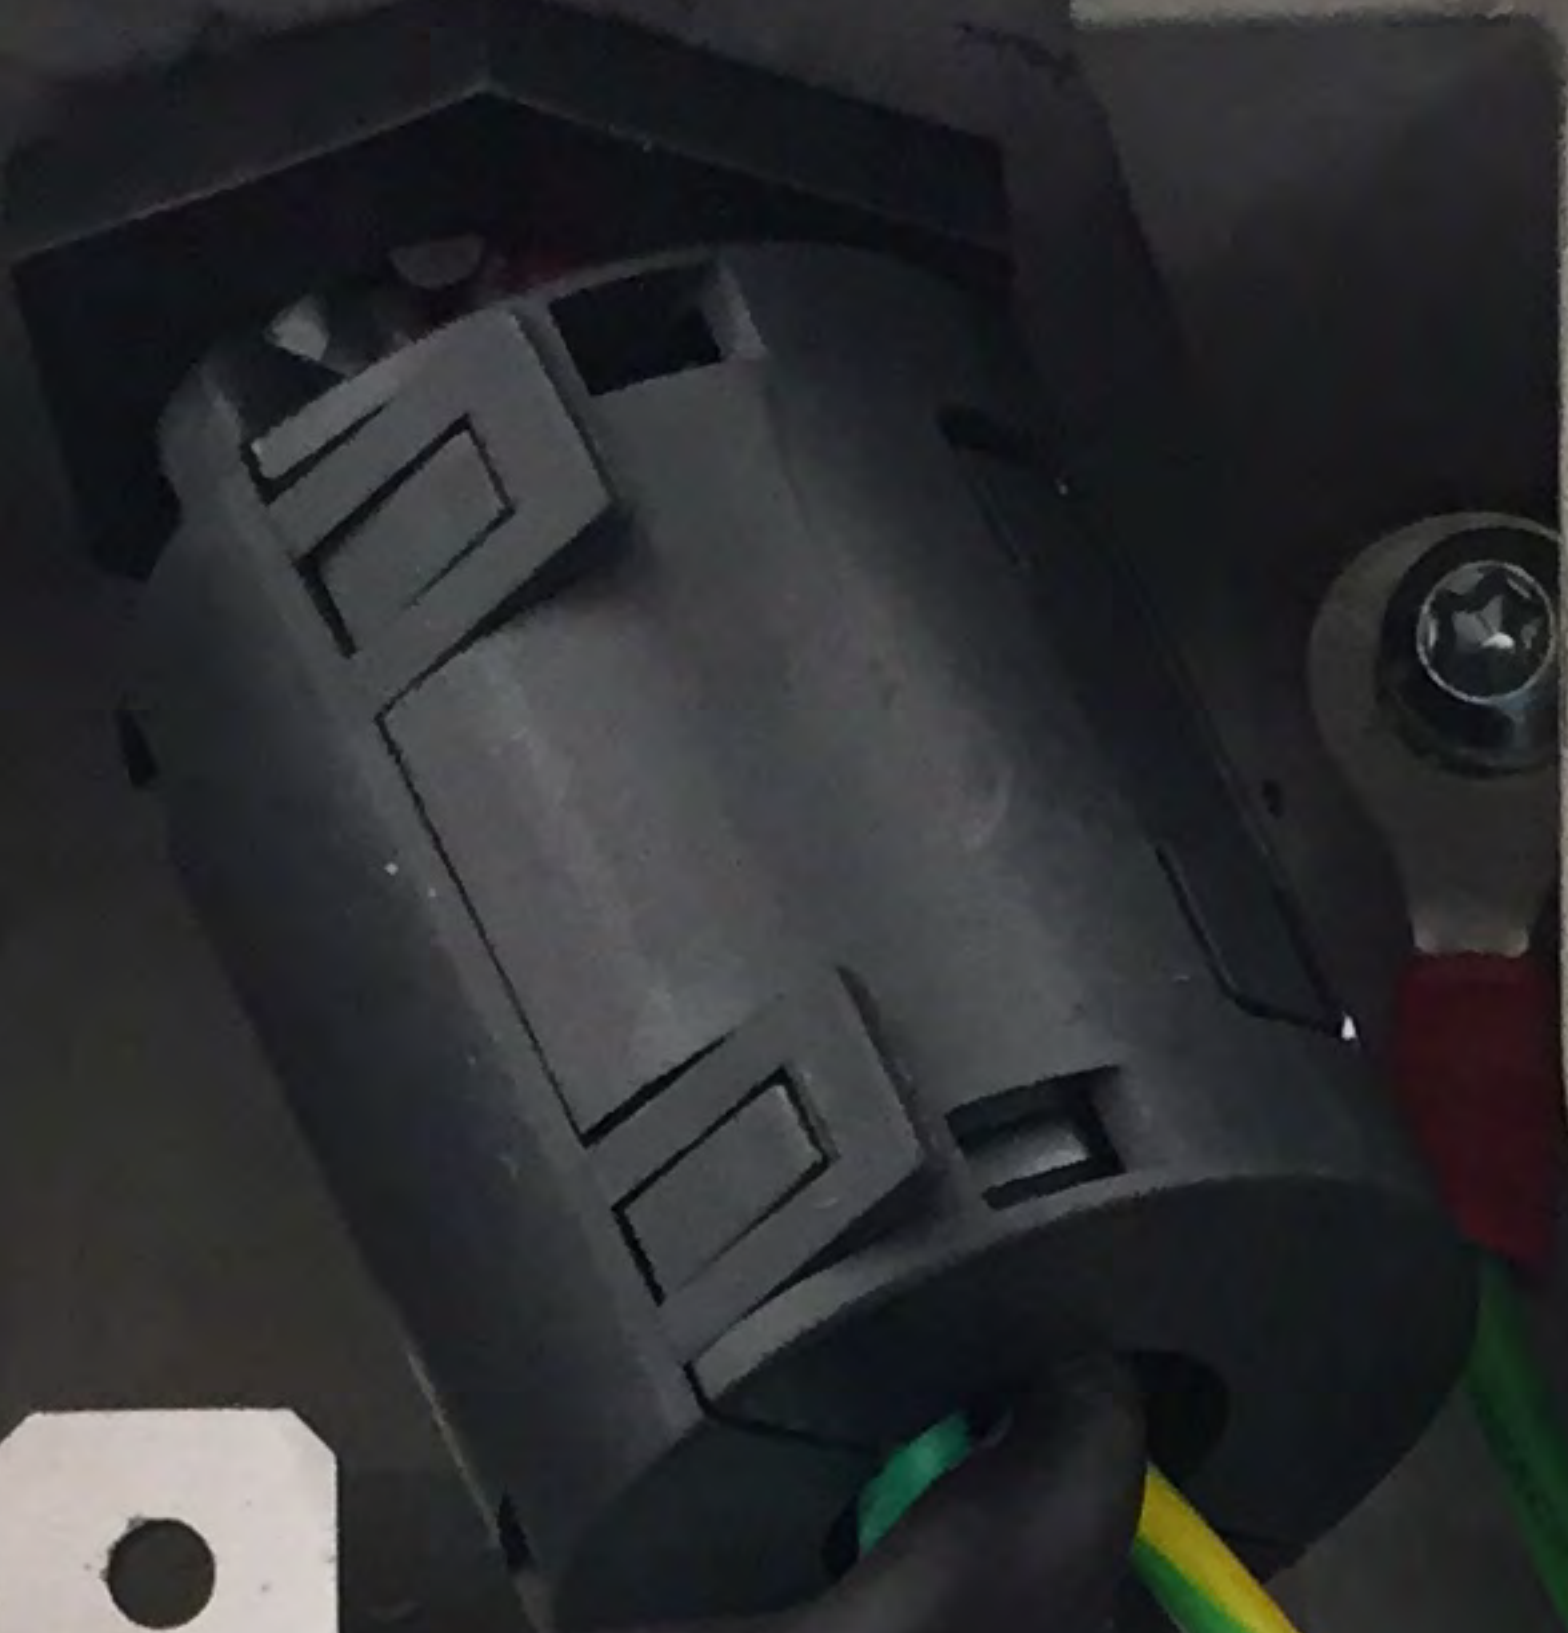

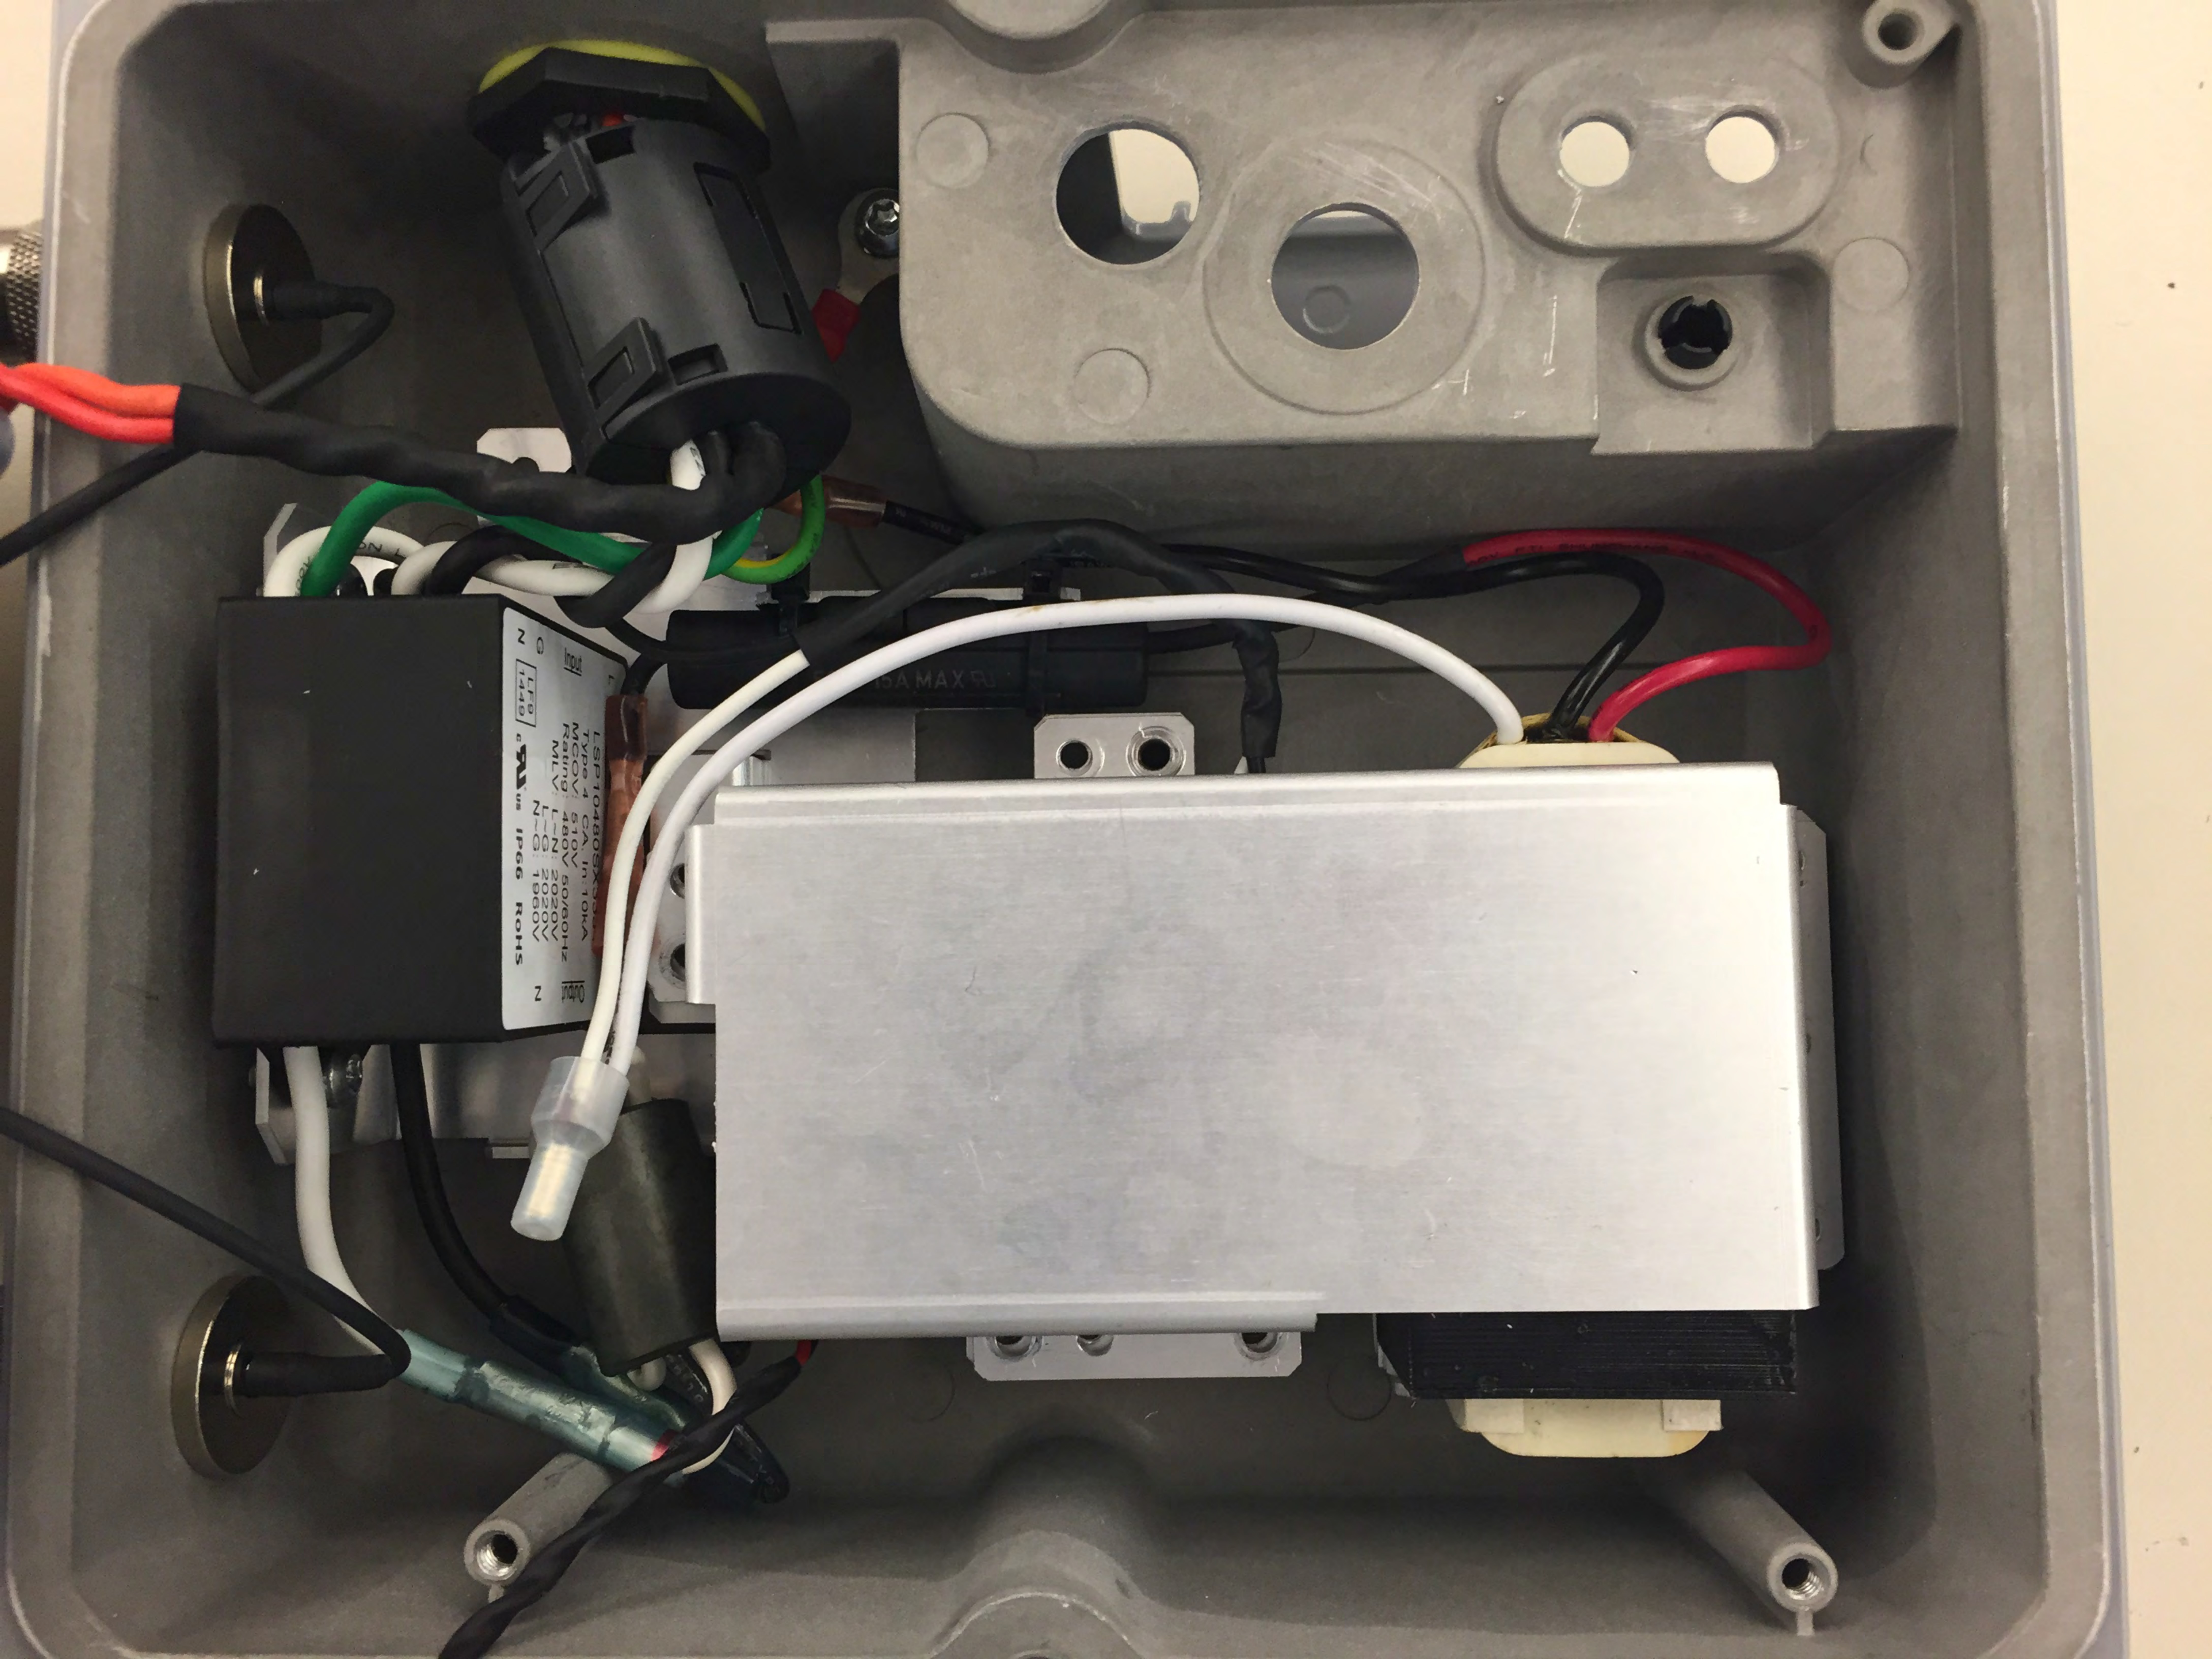

LSP10480SX3
Type 4
510V
50/60Hz
1.52
2020V
2020V
1960V
2
1449
IP66
ROHS

5A MAX FU

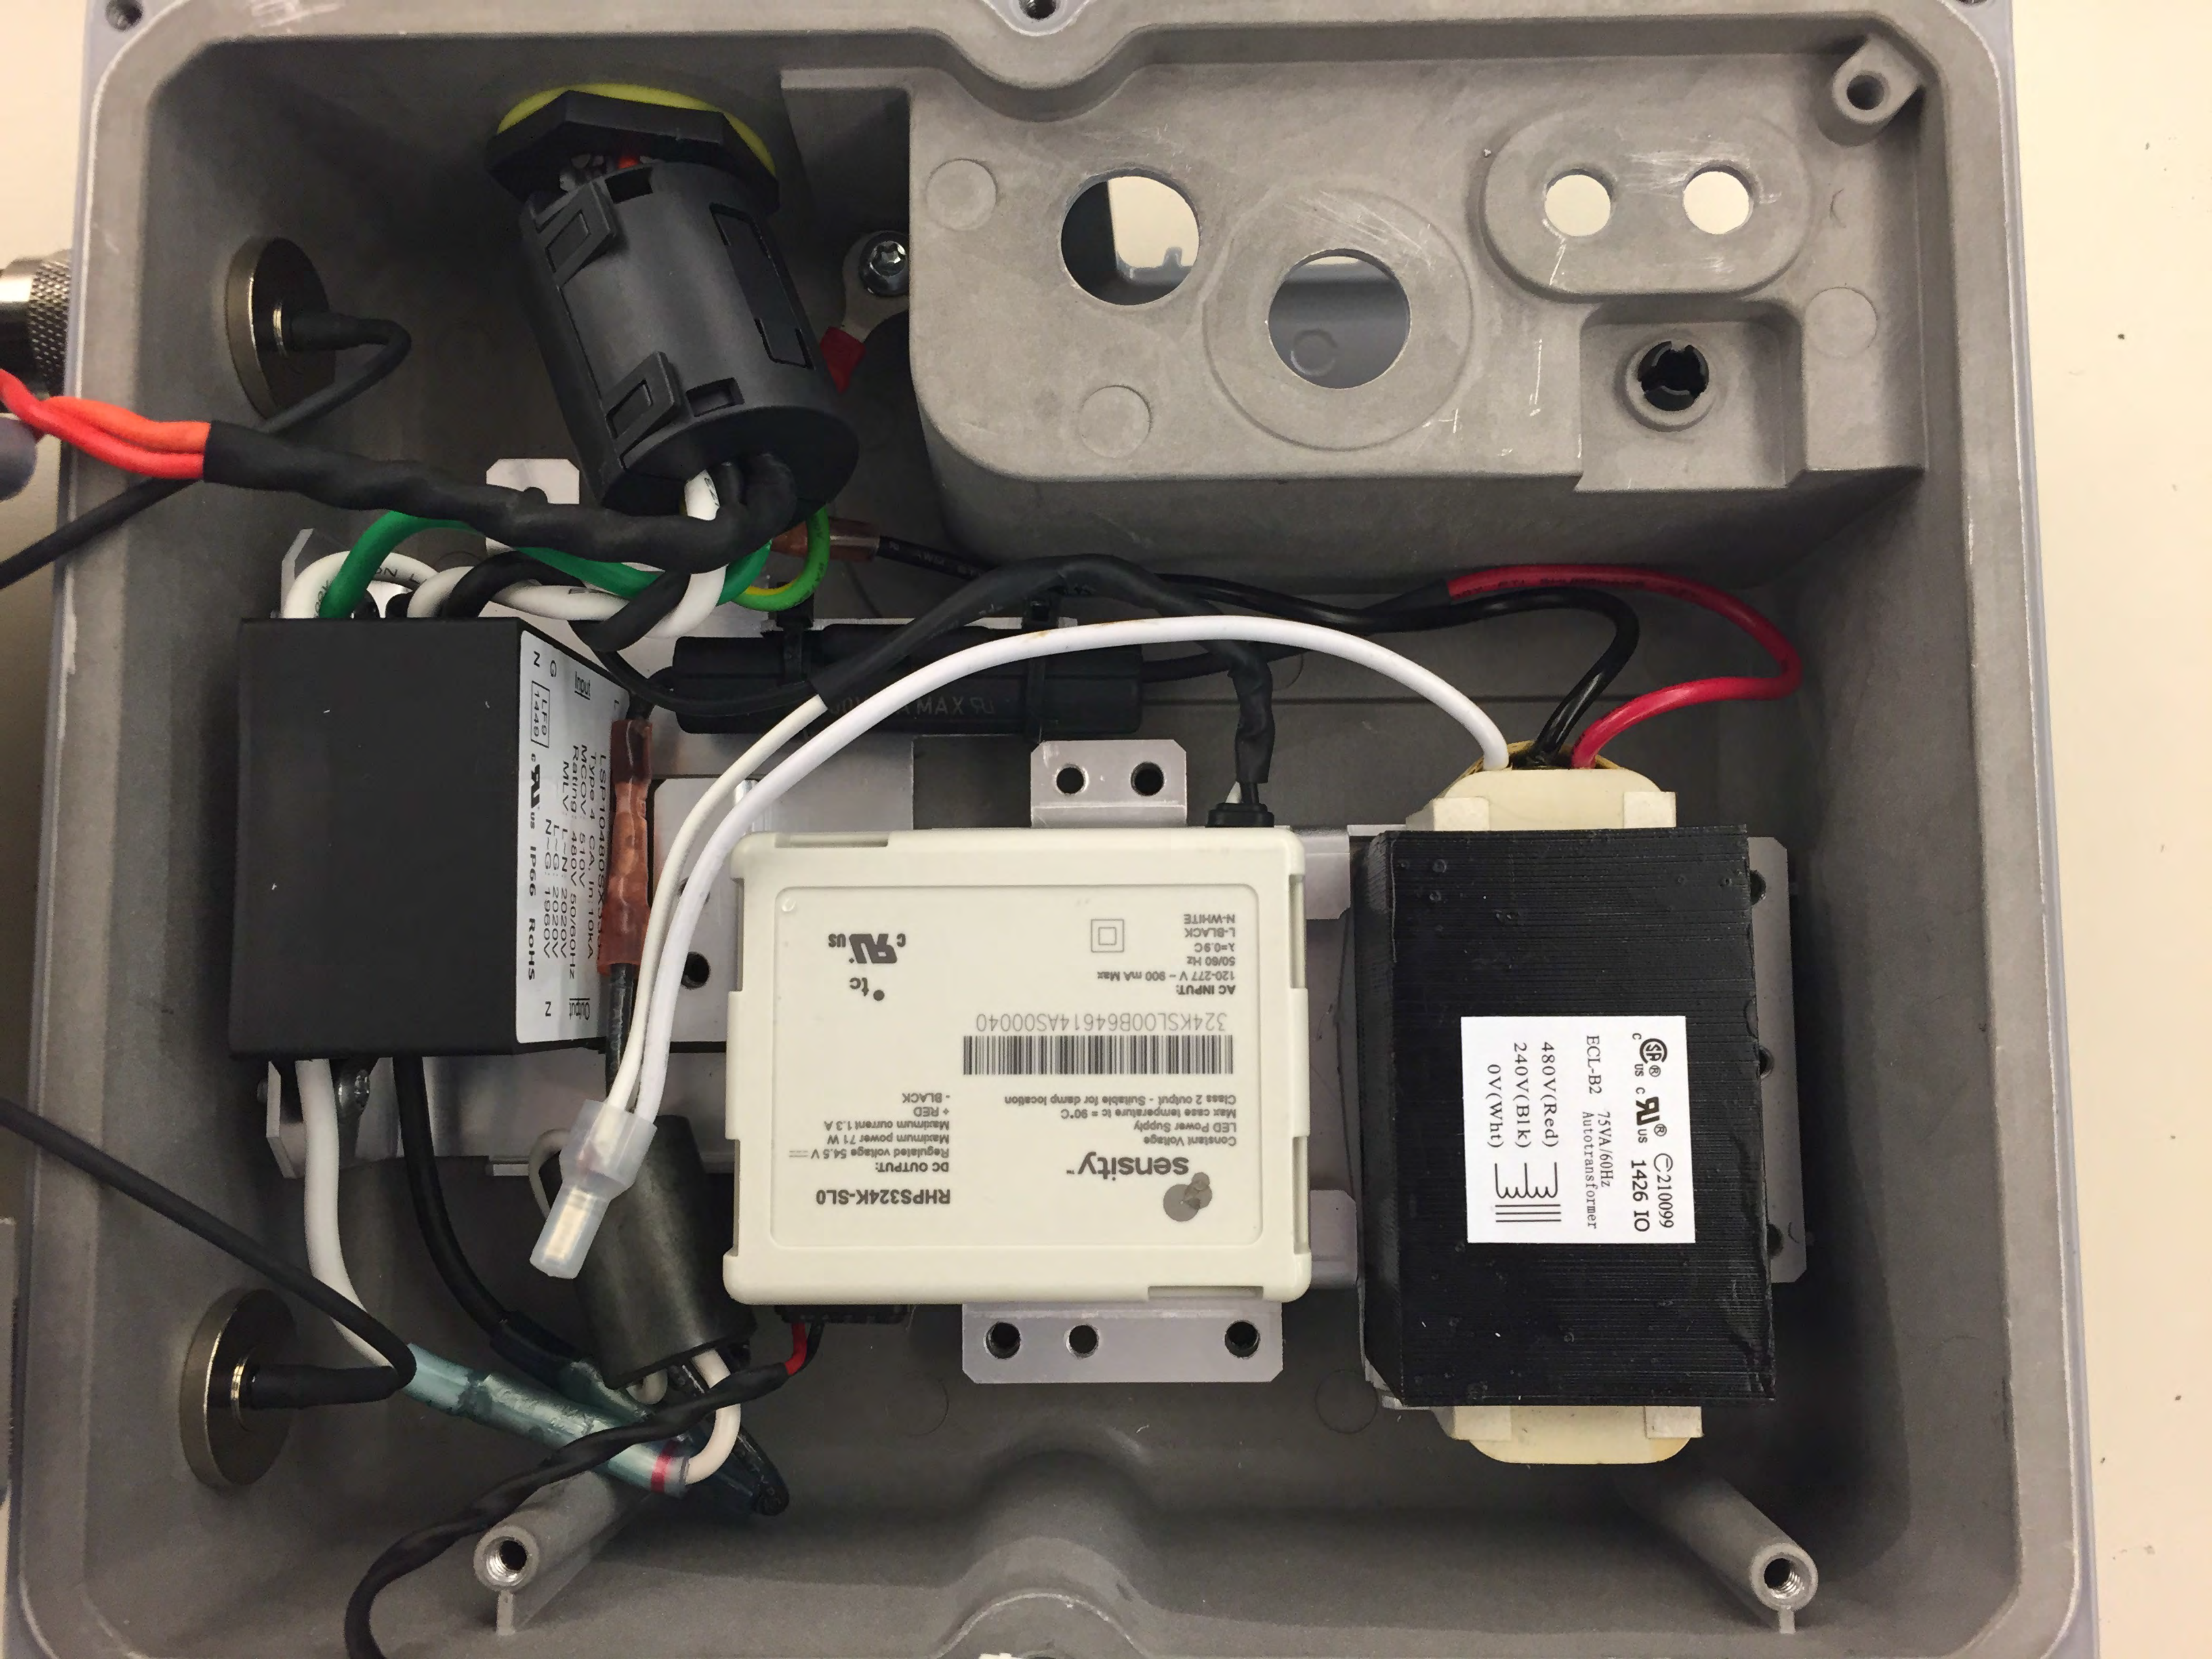

ECL-B2 75VA/60Hz
Autotransformer
©210099
1426 IO
UL
480V (Red)
240V (Blk)
0V (Whit)

RHPs324K-SL0
Constant Voltage
LED Power Supply
Regulated voltage 54.5 V
Maximum power 71 W
Maximum current 1.3 A
DC OUTPUT:
+ RED
- BLACK
324KSL00B64614AS00040
Sensity
Class 2 output - Suitable for damp location
Max case temperature $t_c = 90^\circ\text{C}$
AC INPUT:
120-277 V - 900 mA Max
 $\lambda = 0.9\text{C}$
50/60 Hz
UL
N-WHITE
L-BLACK

LSP104803
TYPE 4 50VA/100VA
RATING 480V 50/60Hz
MVA 0.05
19960
IP66 RoHS
UL

