


SK TECH CO., LTD.

Page 1 of 37

Certificate of Compliance

Test Report No.:	SKTTRT-050126-002		
NVLAP CODE:	200220-0		
Applicant:	Inscape Data Co.		
Applicant Address:	1613 South Main St. Suite#105, Milpitas, CA 95035 USA		
Device Under Test:	Network Video Camera		
FCC ID:	SXRAGNVC110W	Model No.:	AirGoggle NVC110W
Receipt No.:	SKTEU05-0031	Date of receipt:	January 19, 2005
Date of Issue:	January 26, 2005		
Location of Testing:	SK TECH CO., LTD. 820-2, Wolmoon-Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea		
Test Procedure:	ANSI C63.4 / 2003		
Test Specification:	47CFR, Part 15 Rules		
Equipment Class:	DTS - Digital Transmission System		
Test Result:	The above-mentioned device has been tested and passed.		

Tested & Reported by: Jong-Soo, Yoon

Approved by: Jae-Kyung, Bae

2005. 01 .26

2005. 01 .26

Signature

Date

Signature

Date

Other Aspects:	
Abbreviations:	· OK, Pass = passed · Fail = failed · N/A = not applicable

- This test report is not permitted to copy partly without our permission.
- This test result is dependent on only equipment to be used.
- This test result is based on a single evaluation of one sample of the above mentioned.
- This test report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.
- We certify that this test report has been based on the measurement standards that is traceable to the national or International standards.

NVLAP Lab. Code: 200220-0

**>> CONTENTS <<**

1. GENERAL	4
2. TEST SITE	4
2.1 Location	4
2.2 List of Test and Measurement Instruments	5
2.3 Test Date	5
2.4 Test Environment	5
3. DESCRIPTION OF THE EQUIPMENT UNDER TEST	6
3.1 Rating and Physical Characteristics	6
3.2 Equipment Modifications	6
3.3 Submitted Documents	6
4. MEASUREMENT CONDITIONS	7
4.1 Description of test configuration	7
4.2 List of Peripherals	7
4.3 Uncertainty	7
5. TEST AND MEASUREMENTS	8
5.1 ANTENNA REQUIREMENT	8
5.1.1 Regulation	8
5.1.2 Result	8
5.2 6dB BANDWIDTH	9
5.2.1 Regulation	9
5.2.2 Test Procedure	9
5.2.3 Test Results	9
Table 1: Measured values of the 6dB Bandwidth	9
Figure 1: Plot of the 6dB Bandwidth	10
5.3 MAXIMUM PEAK OUTPUT POWER	12
5.3.1 Regulation	12
5.3.2 Test Procedure	12
5.3.3 Test Results	13
Table 2: Measured values of the Maximum Conducted Output Power	13
Figure 2: Plot of the Maximum Conducted Output Power	14
5.4 SPURIOUS EMISSION, BAND EDGE, AND RESTRICTED BANDS	17
5.4.1 Regulation	17
5.4.2 Test Procedure	17
5.4.3 Test Results	19
Table 3: Measured values of RF antenna port emission	19
Table 4: Measured values of the field strength of spurious emission (Radiated)	20
Figure 3: Plot of the RF antenna port emission	21



Figure 4: Plot of the Band Edge	24
Figure 5: Plot of the Band Edge (Radiated)	25
5.5 PEAK POWER SPECTRAL DENSITY	27
5.5.1 Regulation	27
5.5.2 Test Procedure	27
5.5.3 Test Results	27
Table 5: Measured values of the Peak Power Spectral Density	27
Figure 6: Plot of the Peak Power Spectral Density	28
5.6 CONDUCTED EMISSIONS	30
5.6.1 Regulation	30
5.6.2 Test Procedure	30
5.6.3 Test Results	31
Table 6: Measured values of the Conducted Emissions	31
Figure 7: Plot of the Conducted Emissions	34
5.7 RF EXPOSURE	37
5.7.1 Regulation	37
5.7.2 RF Exposure Compliance Issue	37

**SK TECH CO., LTD.***Page 4 of 37*

1. GENERAL

These tests were performed using the test procedure outlined in ANSI C63.4, 2003 for intentional radiators, and in accordance with the limits set forth in FCC Part 15.247 for Digital Transmission System. The EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards.

We attest to the accuracy of data. All measurements reported herein were performed by SK Tech Co., Ltd. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. TEST SITE

SK TECH Co., Ltd.

2.1 Location

820-2, Wolmoon Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea

This test site is in compliance with ISO/IEC 17025 for general requirements for the competence of testing and calibration laboratories.

This laboratory is accredited by NVLAP for NVLAP Lab. Code: 200220-0 and DATech for DAR-Registration No.: TTI-P-G155/97-10



2.2 List of Test and Measurement Instruments

Description	Manufacturer	Model #	Serial #	
Spectrum Analyzer	Agilent	E4405B	US40520856	<input checked="" type="checkbox"/>
EMC Spectrum Analyzer	Agilent	E7405A	US40240203	<input checked="" type="checkbox"/>
EMI Test Receiver	Rohde&Schwarz	ESVS10	825120/013	<input checked="" type="checkbox"/>
EMI Test Receiver	Rohde&Schwarz	ESVS10	834468/008	<input checked="" type="checkbox"/>
EMI Test Receiver	Rohde&Schwarz	ESHS10	825120/013	<input checked="" type="checkbox"/>
EMI Test Receiver	Rohde&Schwarz	ESHS10	834468/008	<input checked="" type="checkbox"/>
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	836679/018	<input checked="" type="checkbox"/>
Pre-amplifier	HP	8447F	3113A05153	<input checked="" type="checkbox"/>
Pre-amplifier	HP	8349B	2644A03250	<input checked="" type="checkbox"/>
Power Meter	Agilent	E4418B	3318A13916	
Power Sensor	HP	8485A	3318A13916	
VHF Precision Dipole Antenna	Schwarzbeck	VHAP	1014	
VHF Precision Dipole Antenna	Schwarzbeck	VHAP	1015	
UHF Precision Dipole Antenna	Schwarzbeck	UHAP	989	
UHF Precision Dipole Antenna	Schwarzbeck	UHAP	990	
Loop Antenna	Schwarzbeck	HFH2-Z2	863048/019	
TRILOG Broadband Antenna	Schwarzbeck	VULB9160	3141	<input checked="" type="checkbox"/>
Biconical Antenna	Schwarzbeck	VHA9103	2265	<input checked="" type="checkbox"/>
Log-Periodic Antenna	Schwarzbeck	UHALP9107	1819	<input checked="" type="checkbox"/>
Horn Antenna	AH Systems	SAS-200/571	304	<input checked="" type="checkbox"/>
Horn Antenna	Electro Metrics	EM-6961	6297	
Horn Antenna	Electro Metrics	EM-6961	6298	
Vector Signal Generator	Agilent	E4438C	MY42080359	
Signal Generator	HP	8349B	2644A03250	
DC Power Supply	HP	6634A	2926A-01078	
DC Power Supply	HP	6268B	2542A-07856	
Digital Multimeter	HP	HP3458A	2328A14389	
PCS Interface	HP	83236B	3711J00881	
CDMA Mobile Test Set	HP	8924C	US35360253	
Hygro/Thermo Graph	SATO	PC-5000TRH-II	-	<input checked="" type="checkbox"/>
Temperature/Humidity Chamber	All Three	ATH-50M	20030425	

2.3 Test Date

Date of Application : January 19, 2005

Date of Test : January 19, 2005 ~ January 21, 2005

2.4 Test Environment

See each test item's description.



3. DESCRIPTION OF THE EQUIPMENT UNDER TEST

The product specification described herein was obtained from the product data sheet or user's manual.

3.1 Rating and Physical Characteristics

Type / Model No.	Network Video Camera / AirGoggle NVC110W
Power source	DC 12V from AC/DC Adaptor
Local Oscillator or X-Tal	X-Tal: 32.768kHz, 2.048MHz, 3.6864MHz, 20.0MHz, 24.576MHz, 27.0 MHz 19.069928MHz, 14.31818MHz
Transmit Frequency	2412 ~ 2462 MHz (11 channels, 5MHz step)
Antenna Type **	External (Model: W4E-WO-31, 50Ω, Max. 5.47dBi, WKE-2460, 50Ω, Max. 3dBi)
Type of Modulation	DSSS (DBPSK - 1Mbps, DQPSK - 2Mbps, CCK - 5.5/11 Mbps)
RF Output power	23 dBm
External Ports	MIC/LINE-IN (Stereo Jack), LINE-OUT (Stereo Jack for speaker out), Video IN (BNC), ETHERNET (RJ-45), DC-Iris (standard DC Iris lens) RS-485 & Alarm IN/OUT, RS-232C (3Pin for debugging)

** The EUT uses FCC certificated RF module, FCC ID: NI3-2511CD-PLUS3, except for the antenna that was used for the certification process.

3.2 Equipment Modifications

None.

3.3 Submitted Documents

Block diagram

Schematic diagram

Antenna Specification

Part List

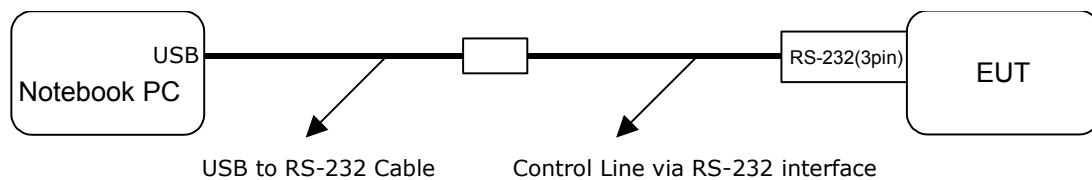
User manual



4. MEASUREMENT CONDITIONS

4.1 Description of test configuration

The measurements were taken in continuous transmitting mode. The operating frequency and modulation types of the EUT were controlled by the Notebook PC via RS-232 interface.



4.2 List of Peripherals

Equipment Type	Manufacturer	Model	Cable Description
AC Adaptor used for EUT	SAMSUNG	AD-4512L	1.8m, Unshielded Power Line AC input: 100 ~ 240V, 50~60Hz DC output: 12V, 3.75A
Notebook PC	Trigem	Dreambook	1.8m, Shielded, USB to RS-232 Cable
Control Line**	--	--	1.0m, Unshielded

** For control of RF module via RS-232 interface in the EUT.

4.3 Uncertainty

Measurement Item	Combined Standard Uncertainty U_c	Expanded Uncertainty $U = KU_c (K = 2)$
Conducted RF power	± 1.49 dB	± 2.98 dB
Radiated disturbance	± 2.37 dB	± 4.74 dB
Conducted disturbance	± 1.47 dB	± 2.94 dB



5. TEST AND MEASUREMENTS

Summary of Test Results

Requirement	CFR 47 Section	Report Section	Test Result
Antenna Requirement	15.203, 15.247(b)(4)	5.1	PASS
6dB Bandwidth	15.247(a)(2)	5.2	PASS
Maximum Peak Output Power	15.247(b)(3), (4)	5.3	PASS
Spurious Emission, Band Edge, and Restricted bands	15.247(d), 15.205(a), 15.209(a)	5.4	PASS
Peak Power Spectral Density	15.247(e)	5.5	PASS
Conducted Emissions	15.207(a)	5.6	PASS
RF Exposure	15.247(i), 1.1307(b)(1)	5.7	PASS

5.1 ANTENNA REQUIREMENT

5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.1.2 Result:

PASS

The transmitter has a unique antenna connector, reverse polarity SMA type. The directional gain of the antenna is maximum 5.47 dBi for model W4E-WO-31 and 3 dBi for model WKE-2460.



5.2 6dB BANDWIDTH

5.2.1 Regulation

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

5.2.2 Test Procedure

1. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable.
2. Set the spectrum analyzer as RBW = 100 kHz, VBW = 100 kHz, Span = 20 MHz, Sweep = AUTO.
3. Set the spectrum analyzer to MAX HOLD mode and then set a reference level on it equal to the highest peak value.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

5.2.3 Test Results:

PASS

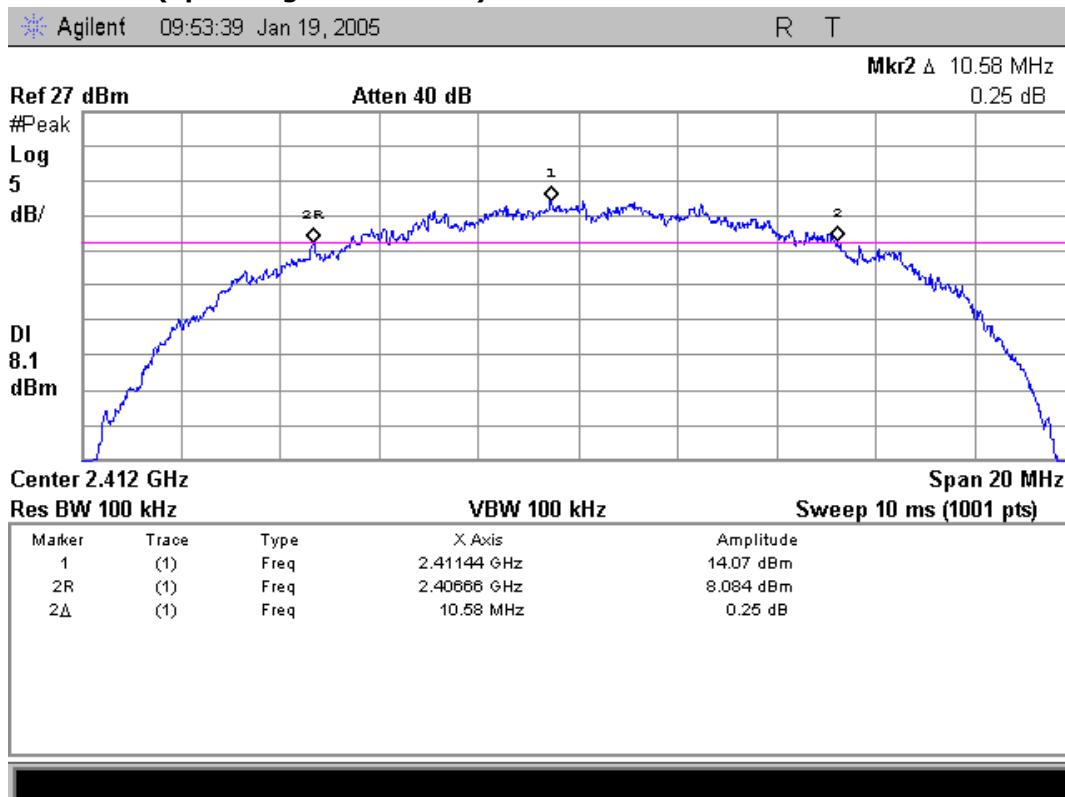
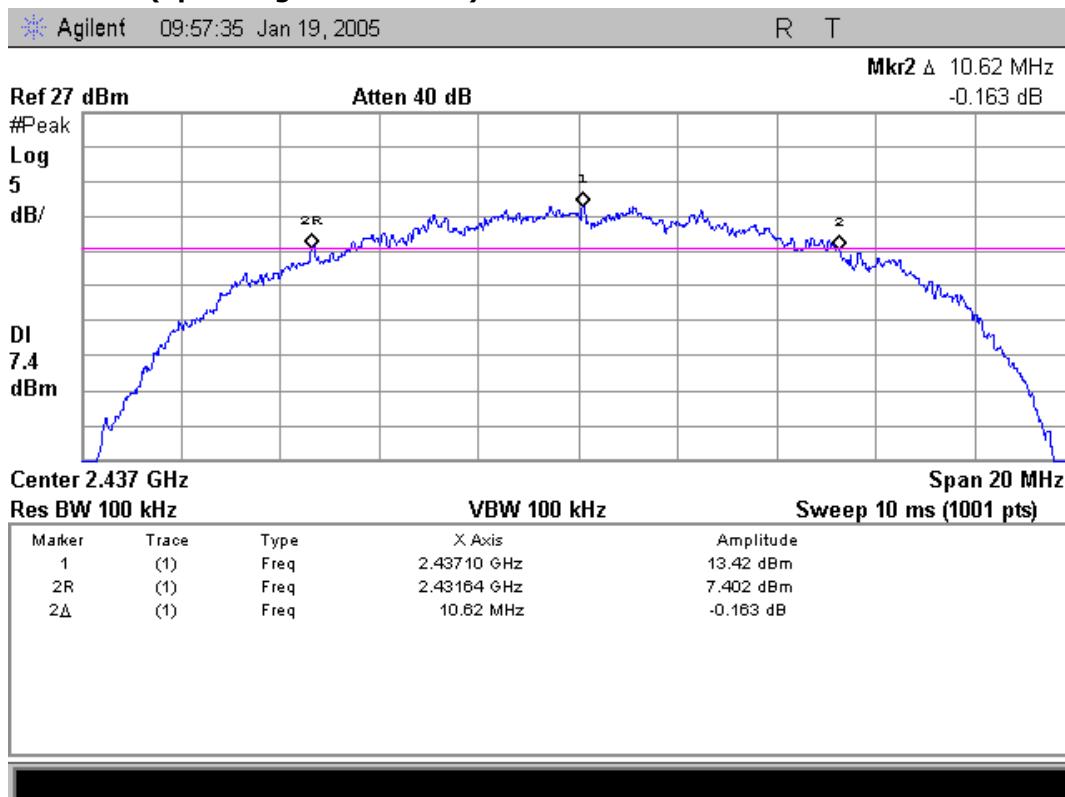
Table 1: Measured values of the 6dB Bandwidth (Conducted)

Operating frequency	6dB Bandwidth	Limit
2412 MHz	10.58 MHz	≥ 500 kHz
2437 MHz	10.62 MHz	≥ 500 kHz
2462 MHz	10.62 MHz	≥ 500 kHz

Initial investigations were performed with three modulation types: (DBPSK, DQPSK and CCK). No significant differences in 6dB bandwidth were observed. Final testing was performed while the transmitter continuously operating with the modulation rate of 11 Mbps (CCK).

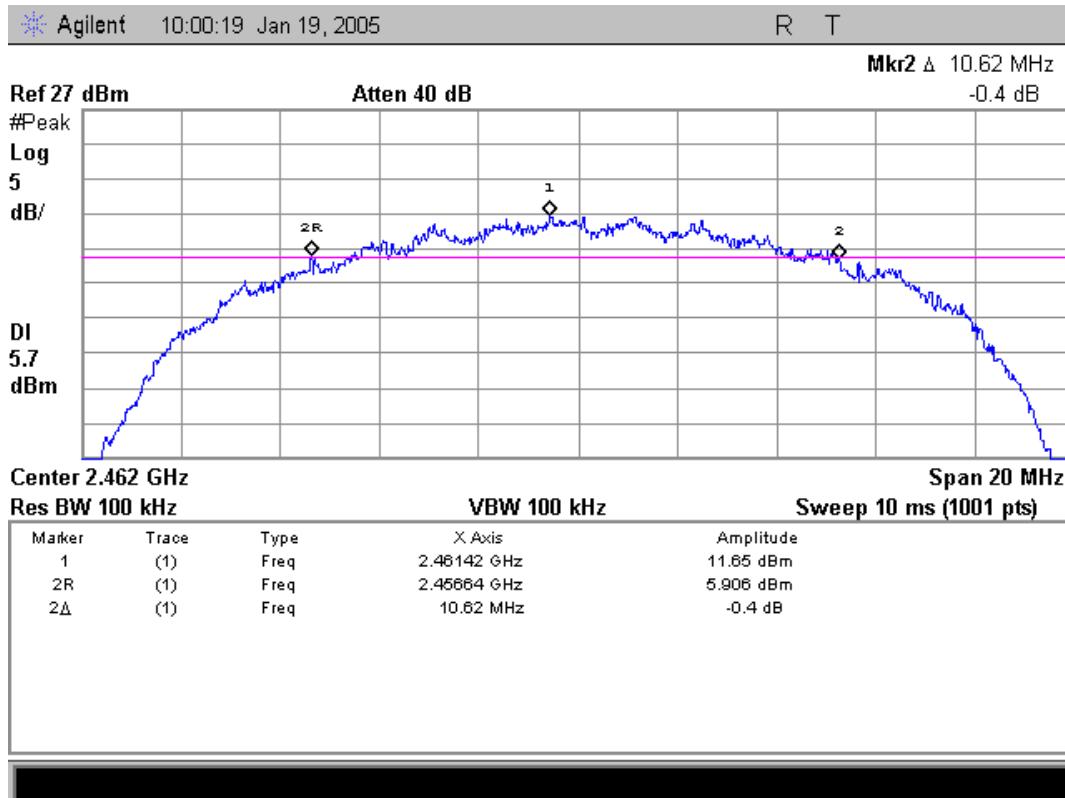

SK TECH CO., LTD.

Page 10 of 37

Figure 1. Plot of the 6dB Bandwidth (Conducted)
Lowest Channel (operating at 2412 MHz)

Middle Channel (operating at 2437 MHz)


**SK TECH CO., LTD.**

Page 11 of 37

Highest Channel (operating at 2462 MHz)



5.3 MAXIMUM PEAK OUTPUT POWER

5.3.1 Regulation

According to §15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3.2 Test Procedure - Maximum Conducted Output Power

Power Output Option 1: Set the RBW > 6dB bandwidth of the emission or use a peak power meter.

Power Output Option 2: Public Notice 30August2002 - Measurement Procedure Updated for Peak Transmit Power in the Unlicensed National Information Infrastructure (U-NII) Bands.

1. Measure the transmission pulse duration (T) over which the transmitter is on and transmitting at its maximum power control level.
2. Measure entire emission bandwidth (EBW) that is 26 dB down from the peak of the emission.
3. Select the measurement method as following:

Sweep time	\leq	T	Method #1 -- spectral trace averaging -- and sum the power across the band. (Method #1 may be used only if it results in averaging over intervals during which the transmitter is operating at its maximum power control level; intervals during which the transmitter is off or is transmitting at a reduced power level must not be included in the average)
Sweep time	$>$	T	Method #2 --zero-span mode with trace averaging -- and find the temporal peak. (Method #2 may be used only if it results in averaging over intervals during which the transmitter is operating at its maximum power control level; intervals during which the transmitter is off or is transmitting at a reduced power level must not be included in the average)
EBW	\leq	Largest available RBW	Method #3 -- video averaging with max hold -- and sum power across the band.

**3.1 Method #1:**

- 3.1.1 Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 3.1.2 Set RBW = 1 MHz, VBW \geq 3 MHz, and Sweep time = AUTO.
- 3.1.3 Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode.
- 3.1.4 Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to "free run".
- 3.1.5 Trace average 100 traces in power averaging mode.
- 3.1.6 Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges.

3.2 Method #2:

- 3.2.1 Set zero span mode. Set center frequency to the midpoint between the -26 dB points of the signal.
- 3.2.2 Set RBW \geq EBW, VBW \geq 3 RBW. [If VBW \geq 3 RBW is not available, use highest available VBW, but VBW must be \geq RBW], and Sweep time = T
- 3.2.3 Use sample detector mode.
- 3.2.4 Use a video trigger with the trigger level set to enable triggering only on full power pulses.
- 3.2.5 Trace average 100 traces in power averaging mode.
- 3.2.6 Find the peak of the resulting average trace.

3.3 Method #3:

- 3.3.1 Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 3.3.2 Set sweep trigger to "free run", Set RBW = 1 MHz, VBW \geq 1/T, and Sweep time = AUTO.
- 3.3.3 Use linear display mode.
- 3.3.4 Use sample detector mode if bin width (i.e., span/number of points in spectrum) < 0.5 RBW. Otherwise use peak detector mode.
- 3.3.5 Set max hold.
- 3.3.6 Allow max hold to run for 60 seconds.
- 3.3.7 Compute power by integrating the spectrum across the 26 dB EBW or apply a bandwidth correction factor of $10 \log(\text{EBW}/1 \text{ MHz})$ to the spectral peak of the emission. The integration can be performed using the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges.

5.3.3 Test Results:**PASS****Table 2: Measured values of the Maximum Conducted Output Power (Conducted)**

Operating Frequency	RBW	VBW	Detector	Cable Loss	Reading (Band Power)	Limit
2412 MHz	1 MHz	1 kHz	Sample	1.0 dB	22.11 dBm	0.163 W
2437 MHz	1 MHz	1 kHz	Sample	1.0 dB	21.36 dBm	0.137 W
2462 MHz	1 MHz	1 kHz	Sample	1.0 dB	19.75 dBm	0.095 W

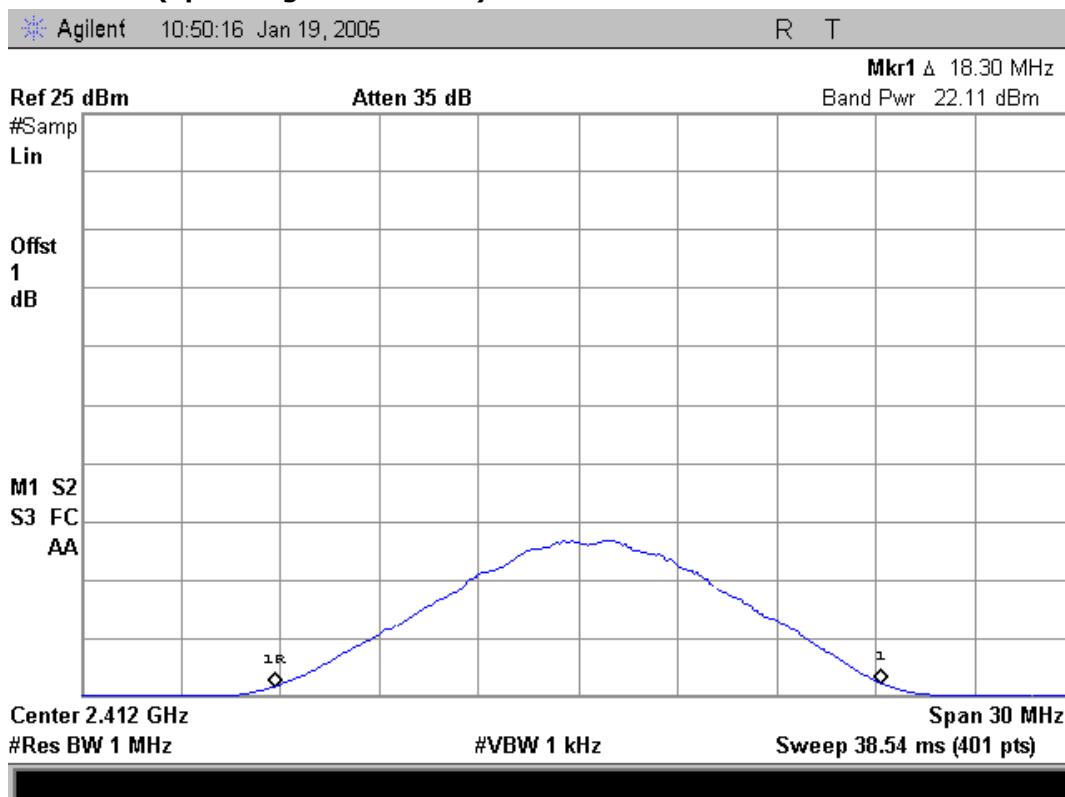
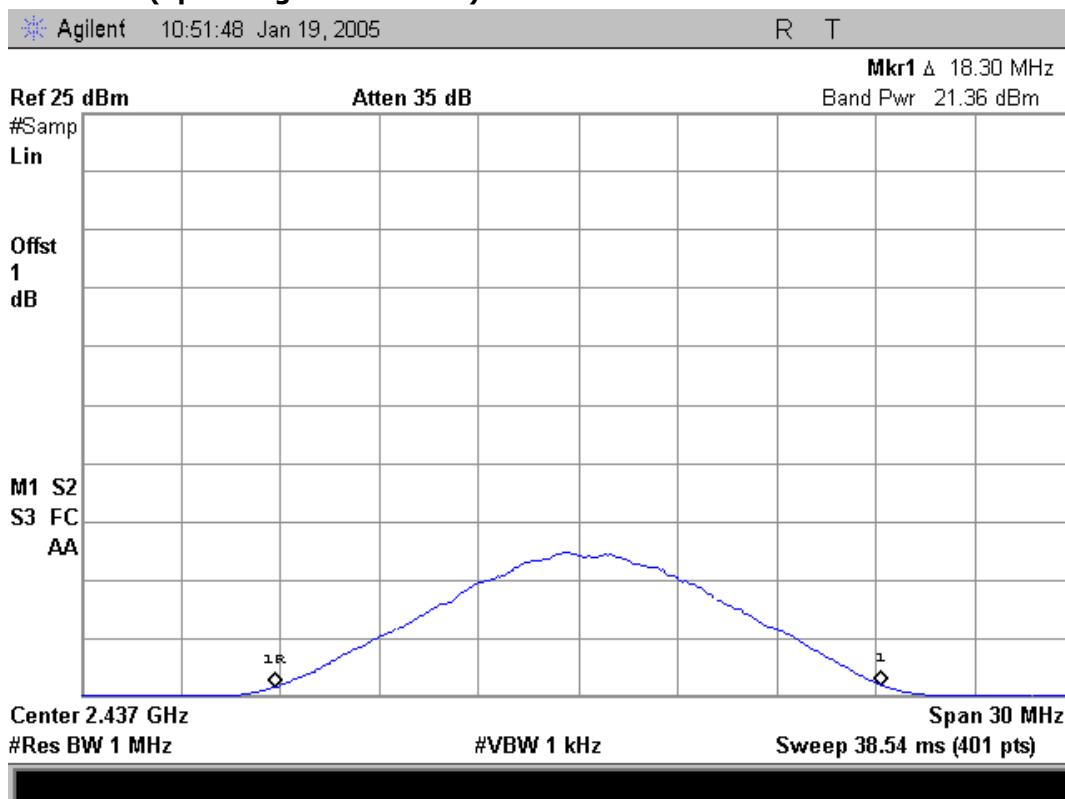
Cable Loss was included in Reading as Offset.**Transmission time (T) = 1.085 ms, 1/T = 922 Hz****Entire emission bandwidth (EBW) \leq 18.3 MHz**

Initial investigations were performed with three modulation types: (DBPSK, DQPSK and CCK). No significant differences in power were observed. Final testing was performed while the transmitter continuously operating with the modulation rate of 11 Mbps (CCK).

NOTE: Since the directional gain of the external antenna declared by manufacturer ($G_{\text{ANT}} = 5.47$ dBi and 3 dBi) does not exceed 6.0 dBi, there was no need to reduce the output power.

**SK TECH CO., LTD.**

Page 14 of 37

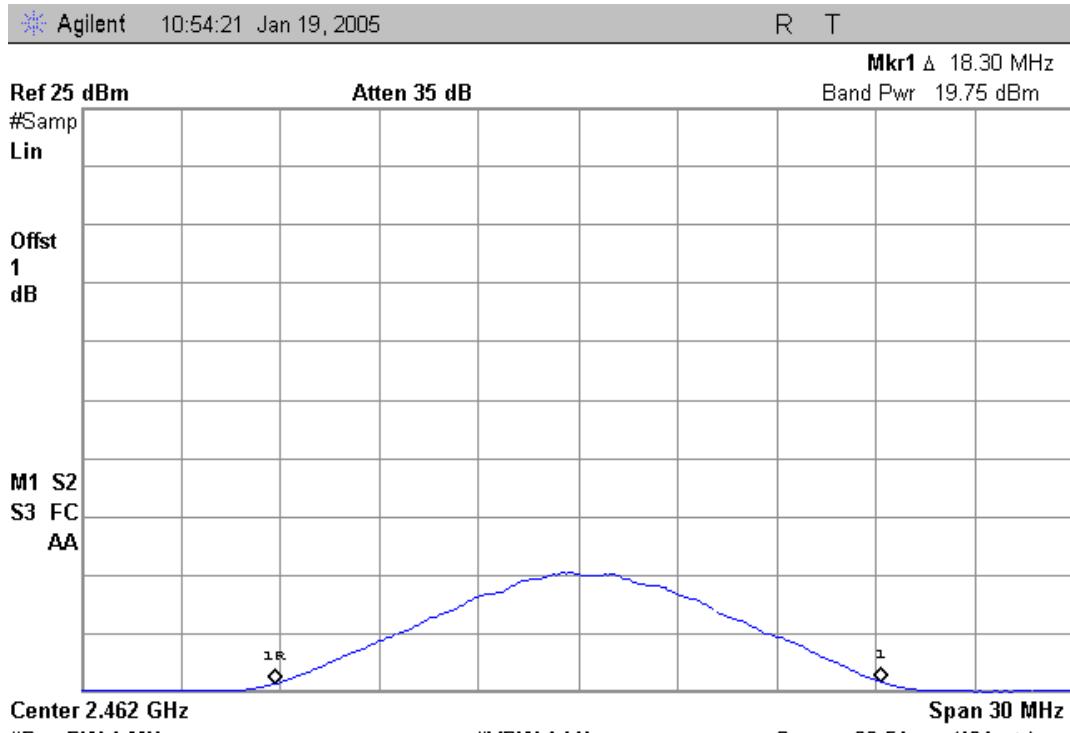
**Figure 2. Plot of the Maximum Conducted Output Power (Conducted)
Lowest Channel (operating at 2412 MHz)****Middle Channel (operating at 2437 MHz)**



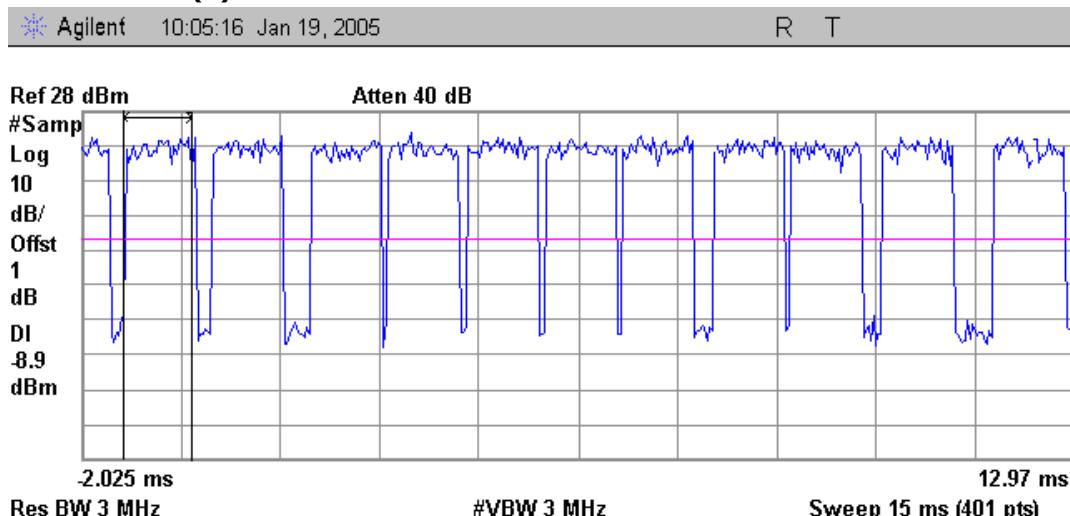
SK TECH CO., LTD.

Page 15 of 37

Highest Channel (operating at 2462 MHz)



Transmission time (T)



Output Power

(Measured Burst Width)

17.21 dBm

Amplitude Threshold

-30.00 dB

Full Burst Width: 1.085 ms

Current Data

Output Pwr	Max Pt	Min Pt
17.21 dBm	19.62 dBm	13.13 dBm



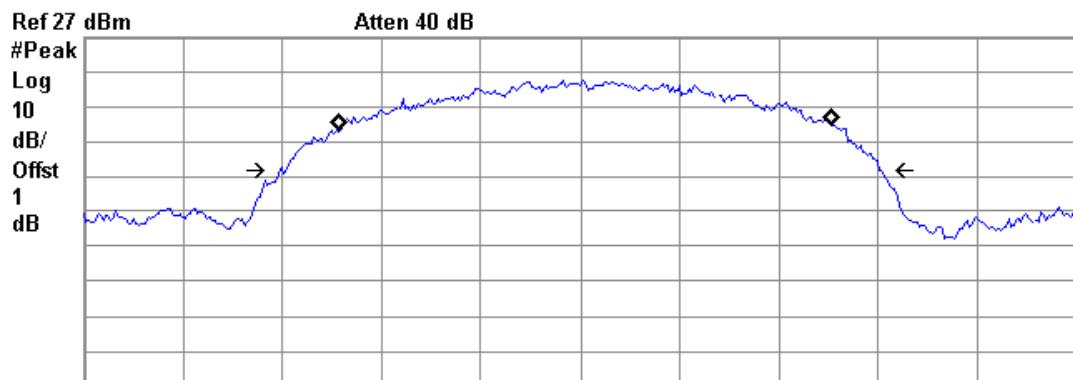
SK TECH CO., LTD.

Page 16 of 37

Entire emission bandwidth (EBW) - operating at 2412 MHz

* Agilent 10:11:21 Jan 19, 2005

R T



Center 2.412 GHz
#Res BW 100 kHz

VBW 100 kHz

Span 30 MHz
Sweep 4 ms (401 pts)

Occupied Bandwidth

14.8445 MHz

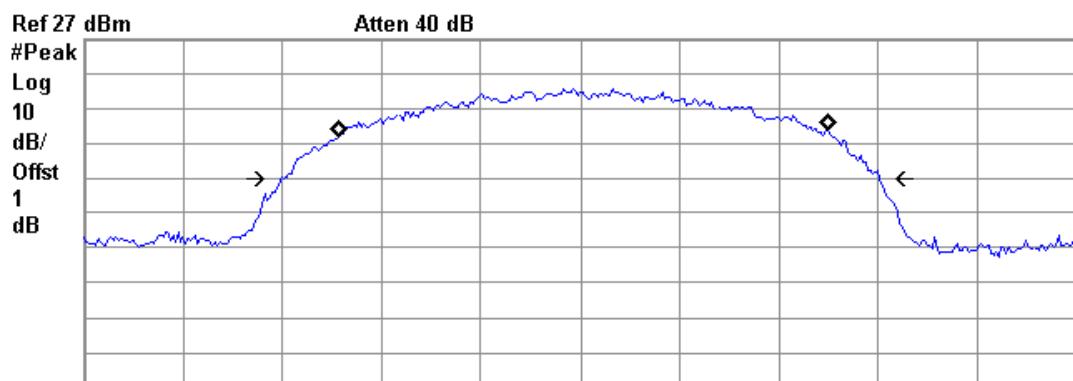
Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 171.712 kHz
x dB Bandwidth 18.187 MHz

Entire emission bandwidth (EBW) - operating at 2462 MHz

* Agilent 10:13:55 Jan 19, 2005

R T



Center 2.462 GHz
#Res RW 100 kHz

VRW 100 kHz

Span 30 MHz
Sweep 4 ms (401 pts)

Occupied Bandwidth

14.7711 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 103.388 kHz
Occupied Bandwidth 18.164 MHz

Page 1 of 1



5.4 SPURIOUS EMISSIONS, BAND EDGE, AND RESTRICTED BANDS

5.4.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Field strength (μ V/m @ 3m)	Field strength (dB μ V/m @ 3m)
30–88	100	40.0
88–216	150	43.5
216–960	200	46.0
Above 960	500	54.0

According to §15.109(a), for an unintentional device, except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the above table.

** The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector and above 1000 MHz are based on the average value of measured emissions.

5.4.2 Test Procedure

1) Spurious RF Conducted Emissions:

1. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable.
2. Turn on the EUT and set it to any one measured frequency within its operating range by controlling and make sure the spectrum analyzer is operated in its linear range.
3. Set the spectrum analyzer to MAX HOLD mode with RBW = 100kHz, VBW = 100kHz and wide SPAN enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
4. Set the marker on the peak of any spurious emission, and then measure the peak level of the emissions marked, using the spectrum analyzer with RBW = 100kHz, VBW = 100kHz, and SPAN = 100MHz.
5. Repeat above procedures until all frequencies measured were complete.

**2) Spurious Radiated Emissions:**

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters.
2. The EUT was placed on the top of the 0.8-meter height, 1 × 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 30 to 1000 MHz using the TRILOG broadband antenna, and from 1000 MHz to 18000 MHz using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4 × 4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
6. The EUT was operated in transmitting mode and tested in three orthogonal planes. The measurements were performed at the operating frequency: 1 near top, 1 near middle and 1 near bottom.
7. The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT.
8. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW = 1MHz, VBW = 1MHz, and Sweep = AUTO
 - (b) AVERAGE: RBW = 1MHz, VBW = 30Hz, and Sweep = AUTO



5.4.3 Test Results:

PASS

Table 3: Measured values of the RF antenna port emissions (Conducted)

Frequency [MHz]	Reading [dBm]	Cable Loss [dB]	Actual [dBm]	Limit [dBm]	Margin [dB]
Lowest Channel (operating at 2412 MHz)					
2412.0	+14.91	1.0	+15.91	-	-
2400.0	-20.56	1.0	-19.56	-14.09	5.47
2398.5	-20.66	1.0	-19.66	-14.09	5.57
4824.8	-34.74	1.3	-33.44	-14.09	19.35
Middle Channel (operating at 2437 MHz)					
2437.0	+13.69	1.0	+14.69	-	-
4874.0	-32.73	1.3	-31.43	-15.31	16.12
Highest Channel (operating at 2462 MHz)					
2462.0	+12.27	1.0	+13.27	-	-
2483.5	-40.92	1.0	-39.92	-16.73	23.19
2485.5	-40.15	1.0	-39.15	-16.73	22.42
2403.4	-29.84	1.0	-28.84	+13.27	42.11
4925.3	-29.00	1.3	-27.70	-16.73	10.97

Actual = Reading + Cable Loss

Remark "---" means the emission level was too low to be measured or in the noise floor.

NOTE: All the Reading values were taken using Spectrum Analyzer with RBW=100 kHz, VBW=100 kHz, and SPAN=100 MHz. If the EUT complies with the use of Power Output Option 2, all harmonics/spurs shall be at least 30 dB down from the highest emission level within the authorized band.


SK TECH CO., LTD.

Page 20 of 37

Table 4: Measured values of the Field strength of spurious emission (Radiated)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Antenna Height [m]	Table Angle [°]	Reading [dB(μV)]	Amp Gain [dB]	AF / CL [dB(1/m)]	Actual [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Quasi-peak data, emissions below 1000 MHz										
229.30**	120	H	1.0	85	42.6	27.2	17.2/2.5	35.1	46.0	11.9
297.50**	120	H	1.0	93	39.5	27.2	19.4/3.1	34.8	46.0	12.2
310.30**	120	H	1.0	93	43.9	27.3	16.5/3.1	36.2	46.0	10.8
324.50	120	H	1.0	93	40.5	27.2	16.7/3.2	33.2	46.0	13.8
378.50**	120	H	1.0	85	39.9	27.6	17.7/3.6	33.6	46.0	13.4
405.50	120	H	1.0	93	40.8	27.8	17.9/4.4	35.3	46.0	11.7
432.50**	120	H	1.0	93	41.1	28.0	17.6/4.1	34.8	46.0	12.2
** Does not fall in the restricted bands specified in Section 15.205										
AVERAGE data, emissions above 1000 MHz										
2412.0	1000	H	1.0	93	91.37	30.1	29.2/7.4	97.87	-	-
2390.0	1000	H	1.0	93	40.20	30.1	29.2/7.4	46.70	54.00	7.30
2370.8	1000	H	1.0	93	43.28	30.1	29.2/7.4	49.78	54.00	4.22
2462.0	1000	H	1.0	87	89.25	30.1	29.2/7.4	96.65	-	-
2483.5	1000	H	1.0	87	39.23	30.1	29.2/7.4	45.73	54.00	8.27
2485.5	1000	H	1.0	87	39.05	30.1	29.2/7.4	45.55	54.00	8.45
PEAK data, emissions above 1000 MHz										
2412.0	1000	H	1.0	93	107.90	30.1	29.2/7.4	114.40	-	-
2390.0	1000	H	1.0	93	65.65	30.1	29.2/7.4	72.15	74.00	1.85
2370.8	1000	H	1.0	93	64.00	30.1	29.2/7.4	70.50	74.00	3.50
2462.0	1000	H	1.0	87	106.40	30.1	29.2/7.4	112.90	-	-
2483.5	1000	H	1.0	87	65.22	30.1	29.2/7.4	71.72	74.00	2.28
2485.5	1000	H	1.0	87	65.15	30.1	29.2/7.4	71.65	74.00	2.35

Margin (dB) = Limit – Actual**[Actual = Reading – Amp Gain + AF + CL]**

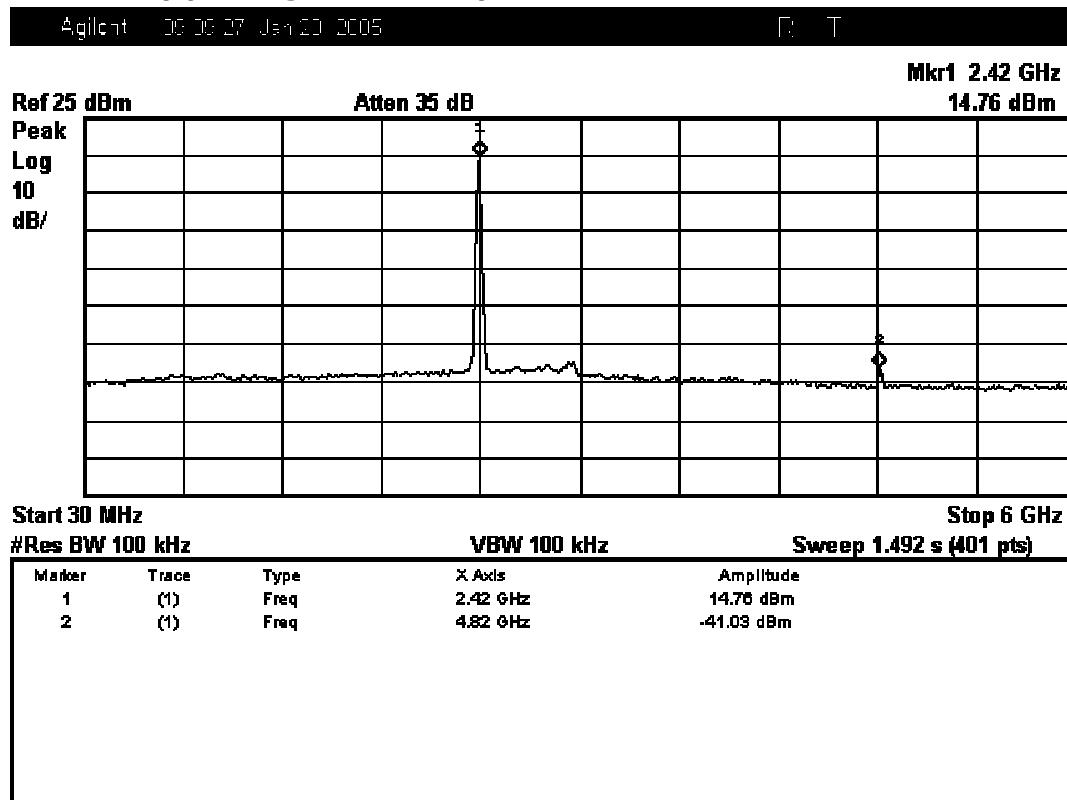
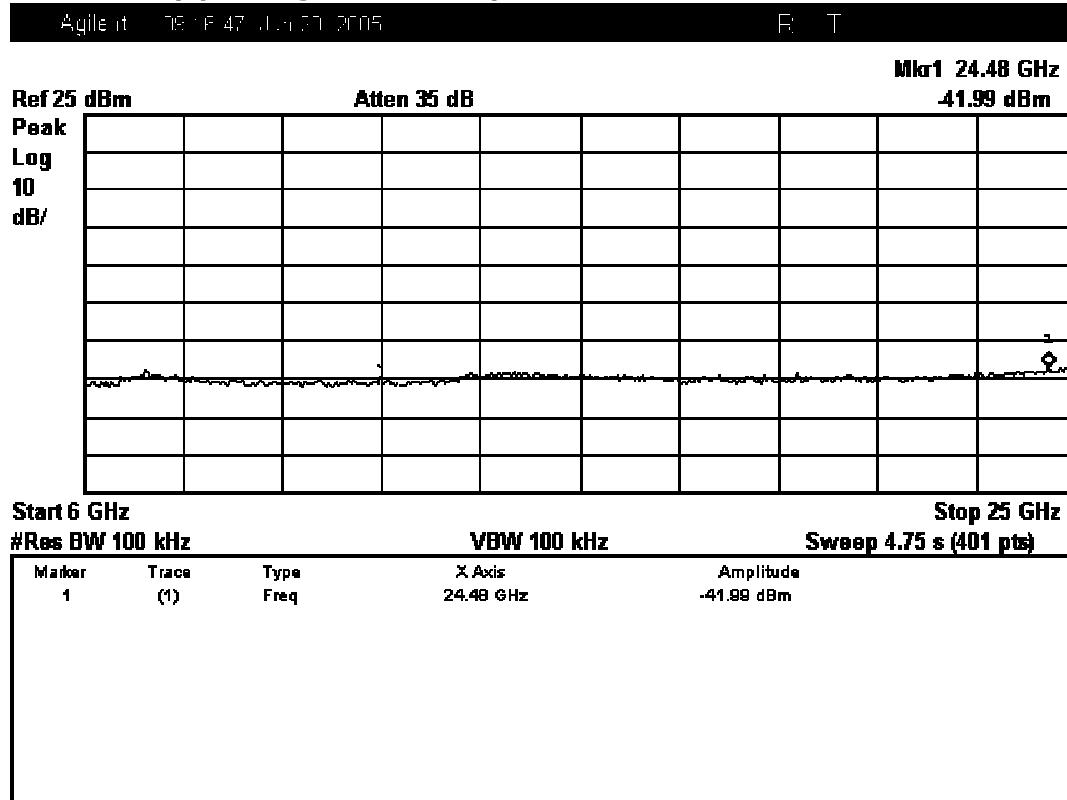
1. H = Horizontal, V = Vertical Polarization

2. AF/CL = Antenna Factor and Cable Loss

NOTE: The spectrum was scanned from 30 MHz to 18 GHz. All emissions not reported were more than 20 dB below the specified limit or in the noise floor. The measured data in the above table include the spurious radiated emissions that do not fall in the restricted bands.


SK TECH CO., LTD.

Page 21 of 37

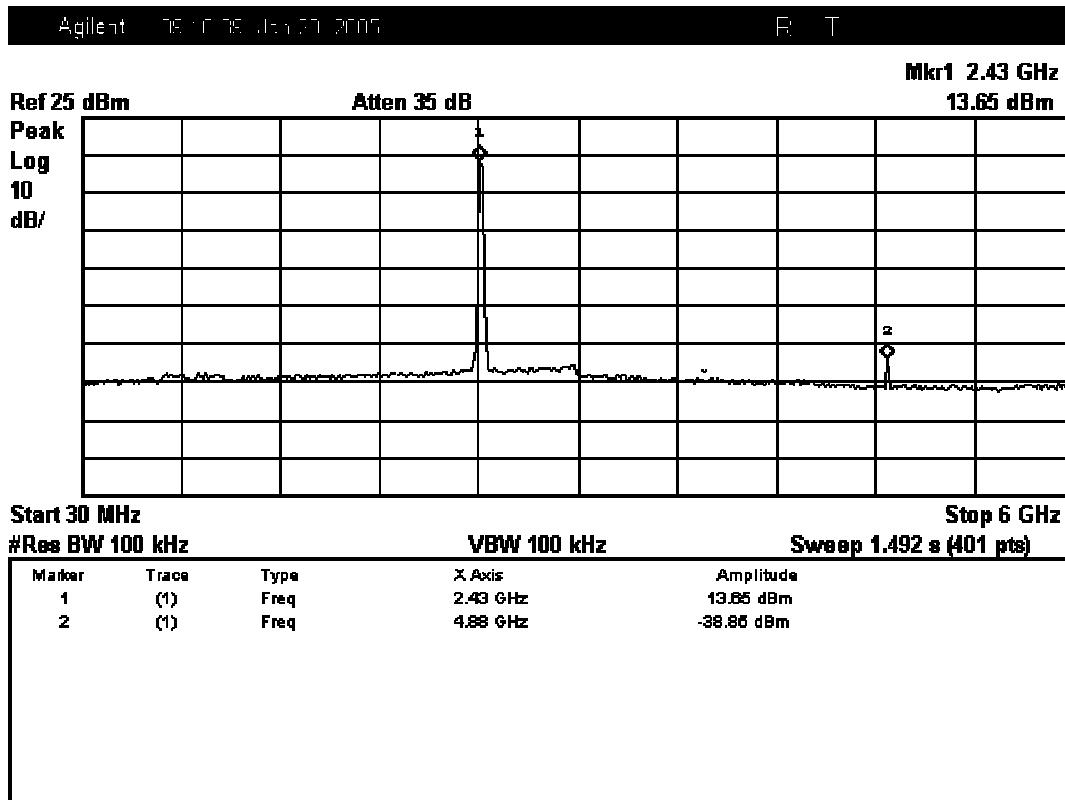
Figure 3. Plot of the RF antenna port emissions (Conducted)
Lowest Channel (operating at 2412 MHz): 30MHz ~ 6GHz

Lowest Channel (operating at 2412 MHz): 6GHz ~ 25GHz




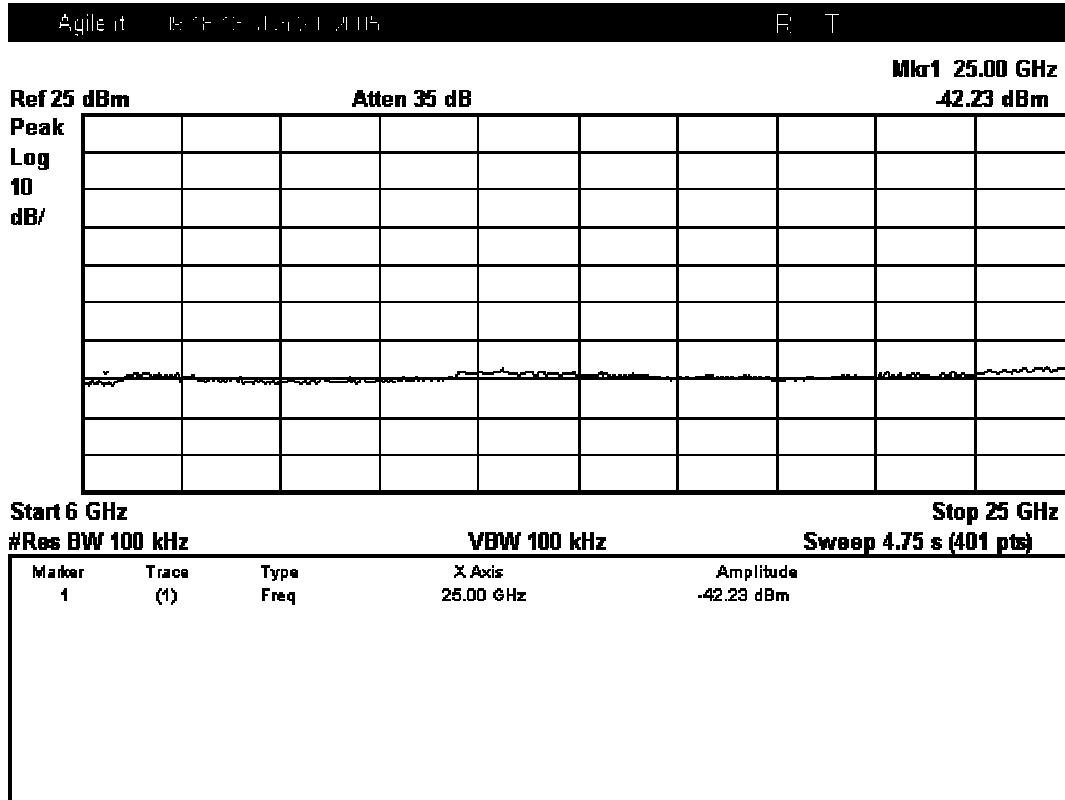
SK TECH CO., LTD.

Page 22 of 37

Middle Channel (operating at 2437 MHz): 30MHz ~ 6GHz

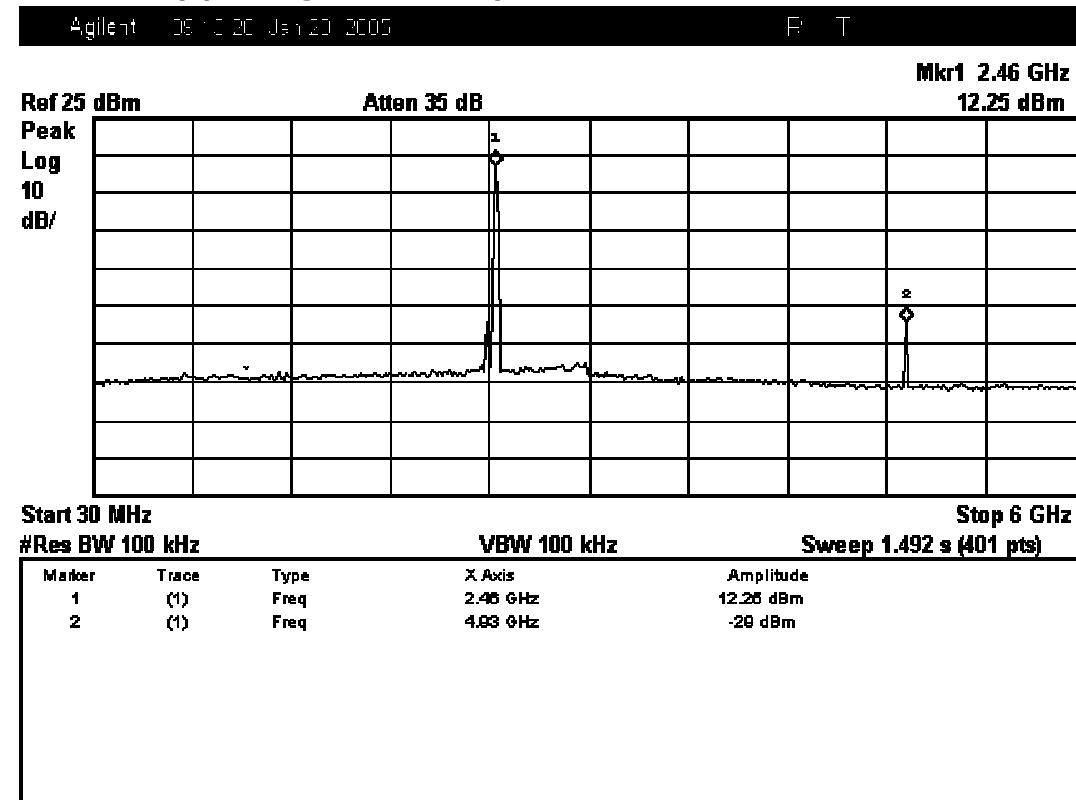
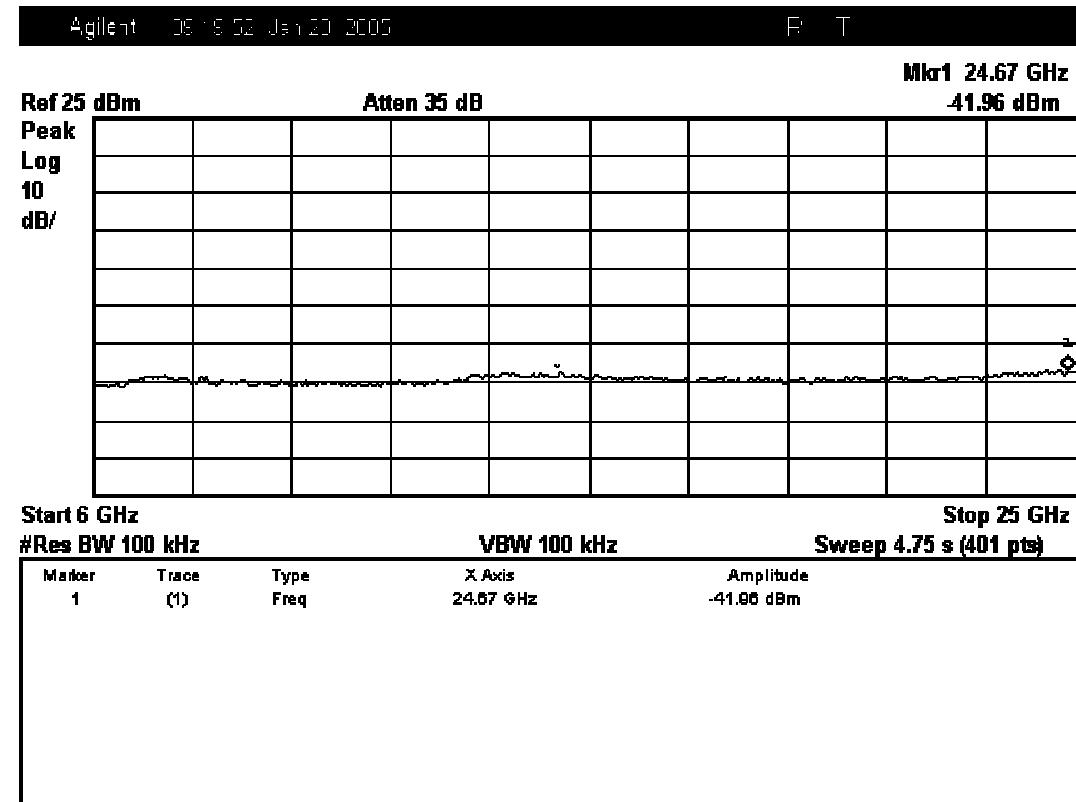


Middle Channel (operating at 2437 MHz): 6GHz ~ 25GHz



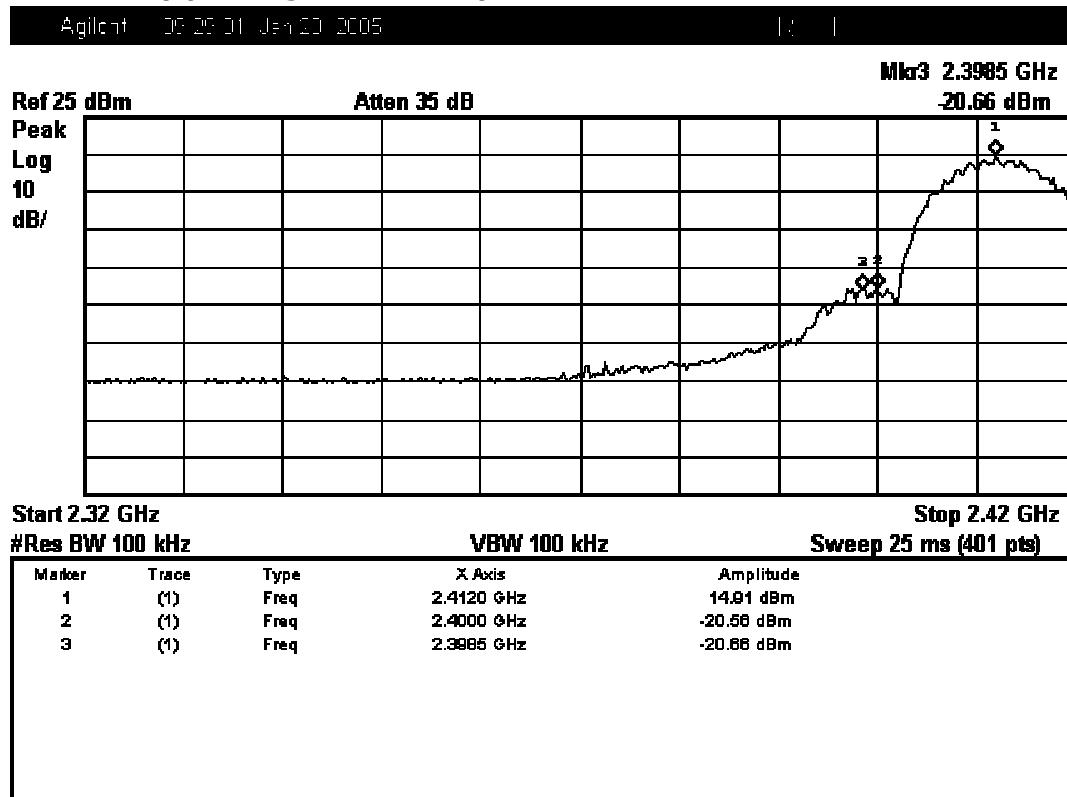
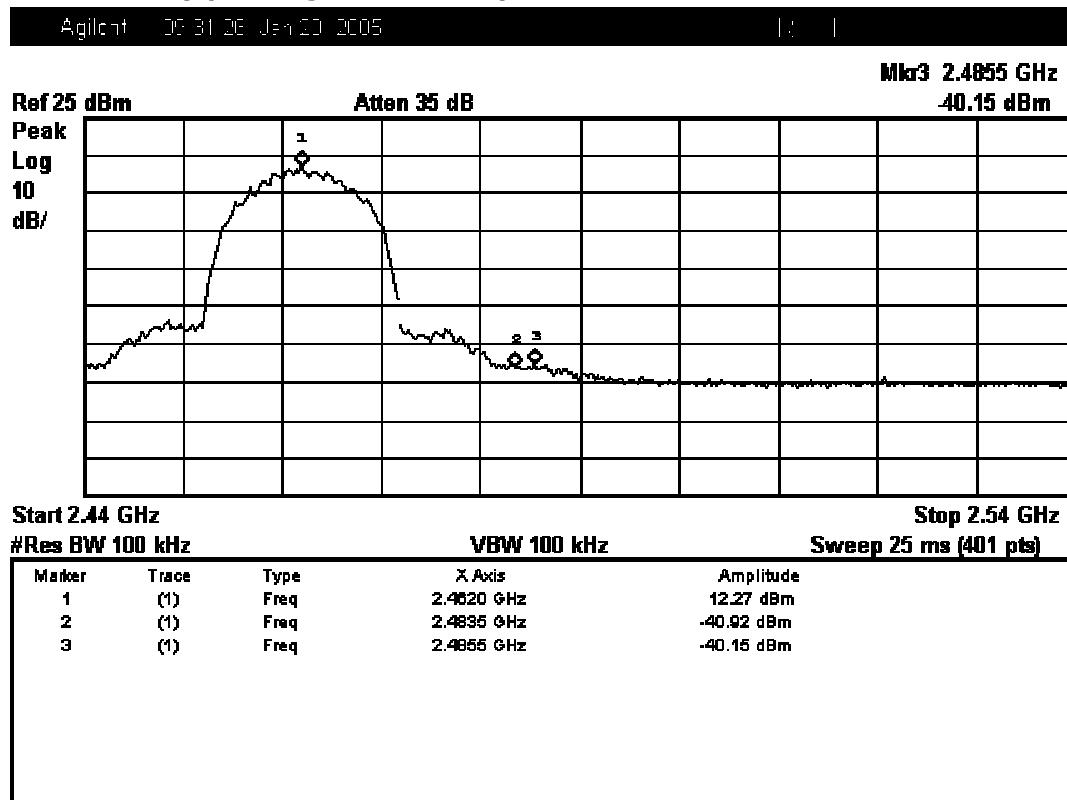

SK TECH CO., LTD.

Page 23 of 37

Highest Channel (operating at 2462 MHz): 30MHz ~ 6GHz

Highest Channel (operating at 2462 MHz): 6GHz ~ 25GHz



SK TECH CO., LTD.

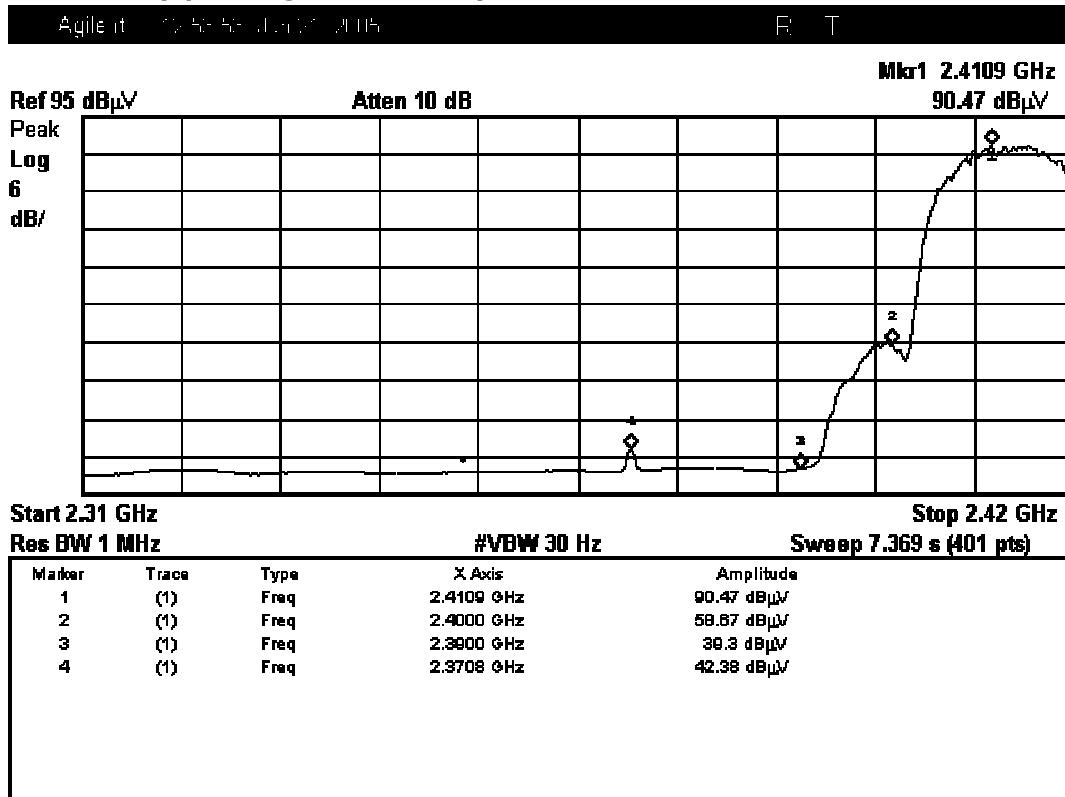
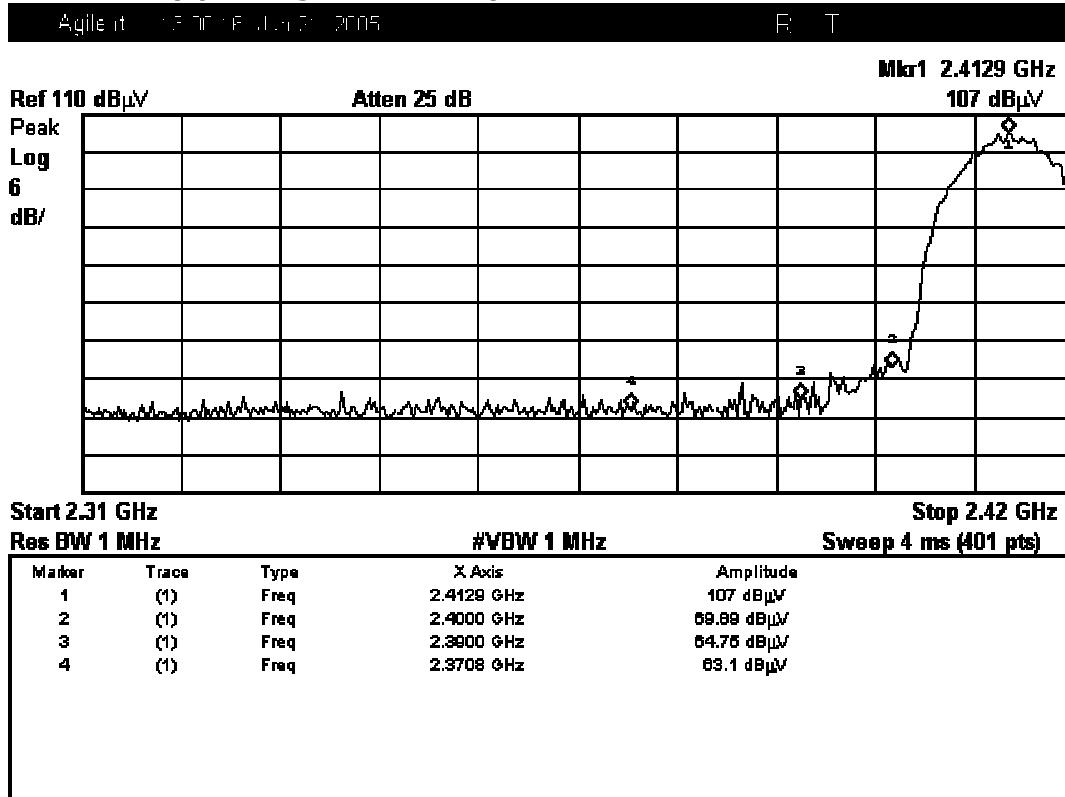
Page 24 of 37

Figure 4. Plot of the Band Edge (Conducted)
Lowest Channel (operating at 2412 MHz)

Highest Channel (operating at 2462 MHz)




SK TECH CO., LTD.

Page 25 of 37

Figure 5. Plot of the Band Edge (Radiated)**Lowest Channel (operating at 2412 MHz): 2310 ~ 2390 MHz, AVERAGE****Lowest Channel (operating at 2412 MHz): 2310 ~ 2390 MHz, PEAK**



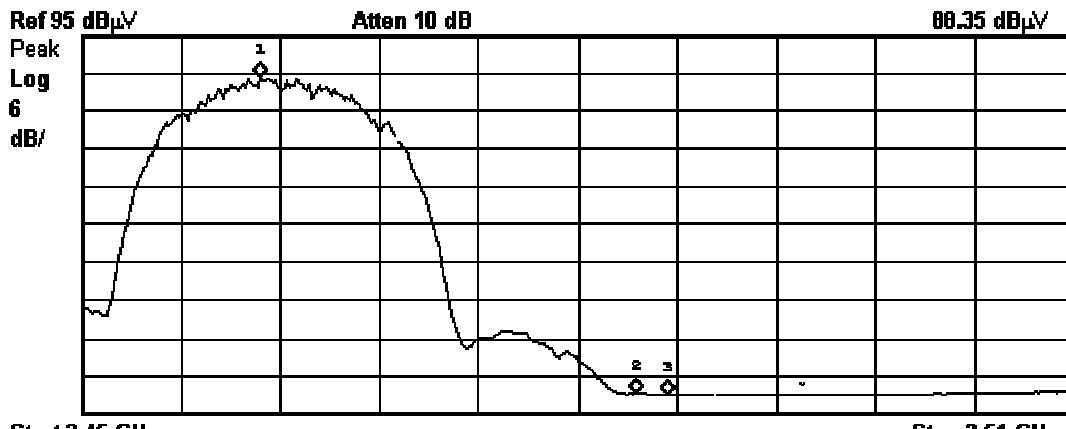
SK TECH CO., LTD.

Page 26 of 37

Highest Channel (operating at 2462 MHz): 2483.5 ~ 2500MHz, AVERAGE

Agilent 1251 DE Jan 2 2005

R T

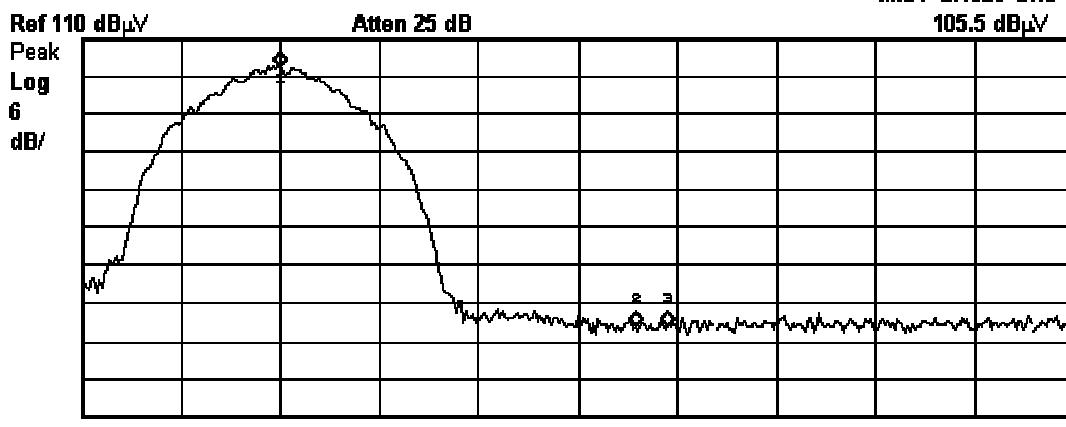
Mkr1 2.4608 GHz
88.35 dB μ V

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.4608 GHz	88.35 dB μ V
2	(1)	Freq	2.4835 GHz	88.33 dB μ V
3	(1)	Freq	2.4855 GHz	88.15 dB μ V

Highest Channel (operating at 2462 MHz): 2483.5 ~ 2500MHz, PEAK

Agilent 1251 DE Jan 2 2005

R T

Mkr1 2.4620 GHz
105.5 dB μ V

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.4620 GHz	105.5 dB μ V
2	(1)	Freq	2.4835 GHz	84.92 dB μ V
3	(1)	Freq	2.4855 GHz	84.25 dB μ V



5.5 PEAK POWER SPECTRAL DENSITY

5.5.1 Regulation

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.5.2 Test Procedure

1. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable.
2. Locate and zoom in on emission peak(s) within the passband.
3. Set RBW = 3kHz, VBW = 10kHz, Span = 1.5MHz, and Sweep = 500 seconds.
4. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
5. Repeat above procedures until all frequencies measured were complete.

5.5.3 Test Results:

PASS

Table 5: Measured values of the Peak Power Spectral Density (Conducted)

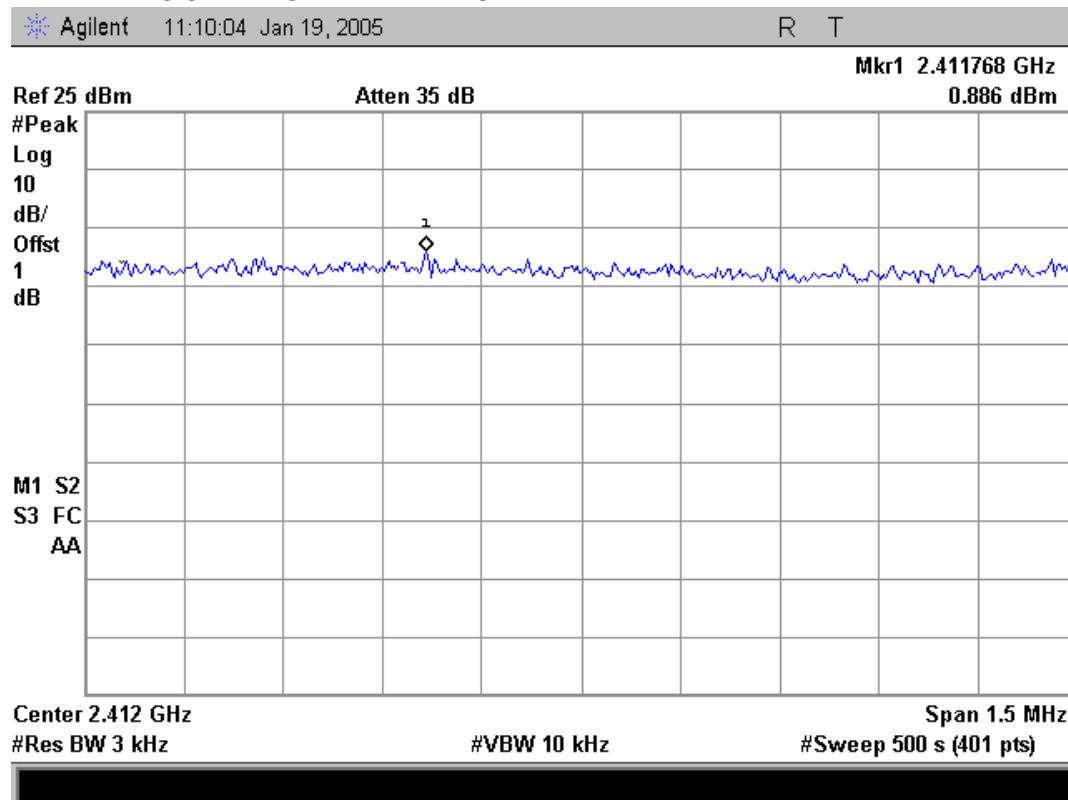
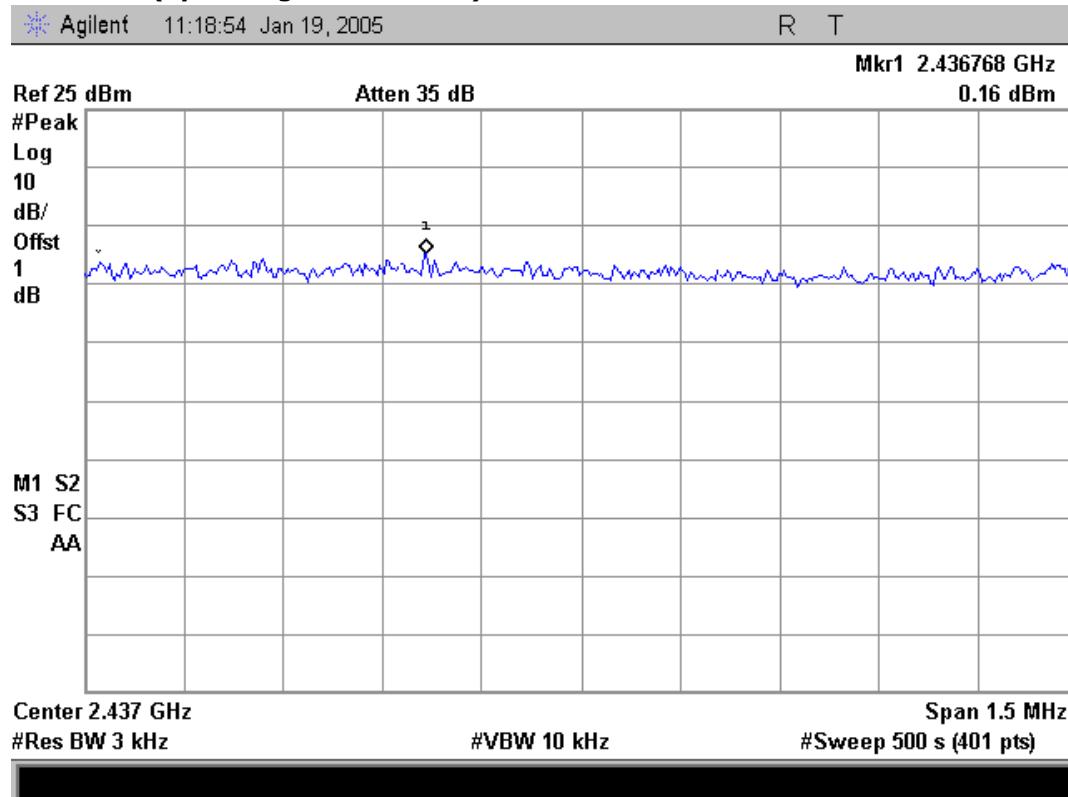
Operating frequency	Cable Loss	Reading (PPSD)	Limit
2412 MHz	1.0 dB	+0.886 dBm	8.0 dBm
2437 MHz	1.0 dB	+0.160 dBm	8.0 dBm
2462 MHz	1.0 dB	-1.514 dBm	8.0 dBm

Cable Loss was included in Reading as Offset.

Initial investigations were performed with three modulation types: (DBPSK, DQPSK and CCK). No significant differences in power were observed. Final testing was performed while the transmitter continuously operating with the modulation rate of 11Mbps (CCK).

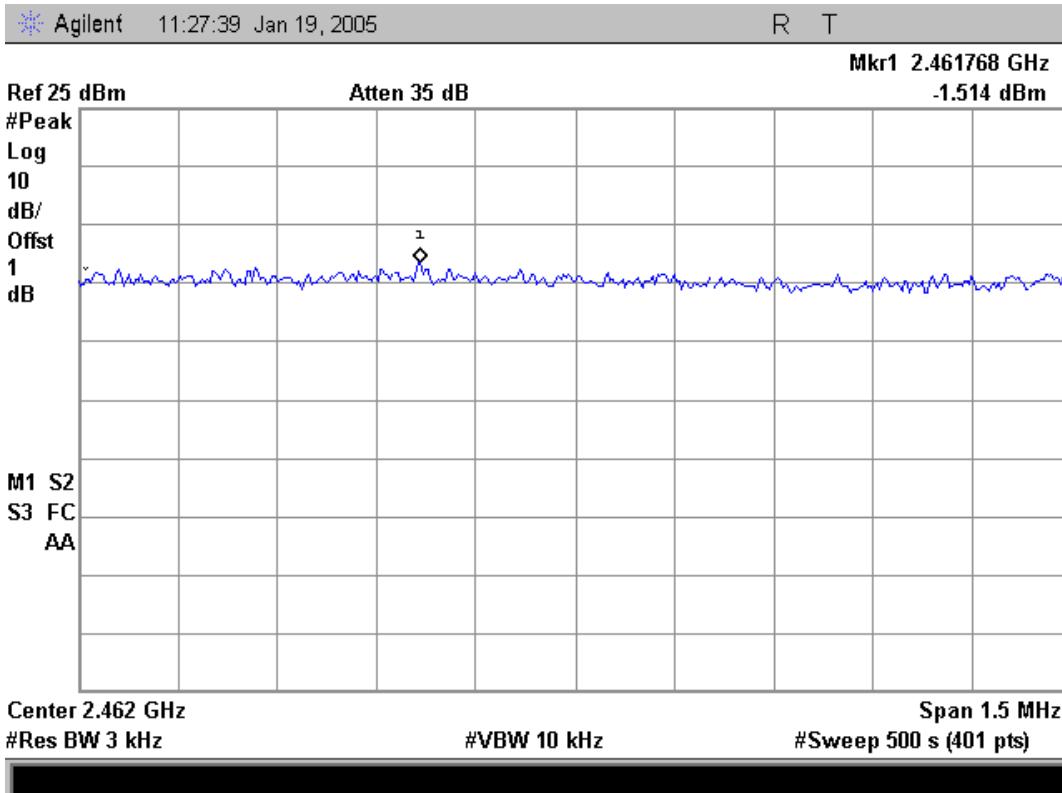
**SK TECH CO., LTD.**

Page 28 of 37

Figure 6. Plot of the Peak Power Spectral Density (Conducted)**Lowest Channel (operating at 2412 MHz)****Middle Channel (operating at 2437 MHz)**

**SK TECH CO., LTD.**

Page 29 of 37

Highest Channel (operating at 2462 MHz)



5.6 CONDUCTED EMISSIONS

5.6.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.

5.6.2 Test Procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.



5.6.3 Test Results:

PASS

Table 6: Measured values of the Conducted Emissions

Lowest Channel (operating at 2412 MHz)									
Frequency [MHz]	Reading [dB μ V]		CF/CL [dB]	Actual [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Qp	Avg		Qp	Avg	Qp	Avg	Qp	Avg
LINE – PE									
0.21	46.10	---	0.08/0.1	46.28	---	63.21	53.21	16.93	---
0.31	40.15	---	0.08/0.1	40.33	---	59.97	49.97	19.64	---
0.52	36.13	---	0.09/0.1	36.32	---	56.00	46.00	19.68	---
0.62	35.49	---	0.13/0.1	35.72	---	56.00	46.00	20.28	---
0.73	34.38	---	0.13/0.1	34.61	---	56.00	46.00	21.39	---
0.83	40.48	---	0.13/0.1	40.71	---	56.00	46.00	15.29	---
12.17	35.73	---	0.67/0.6	37.00	---	60.00	50.00	23.00	---
23.89	40.26	---	0.88/0.7	41.84	---	60.00	50.00	18.16	---
24.00	46.84	---	0.88/0.7	48.42	---	60.00	50.00	11.58	---
24.11	40.86	---	0.88/0.7	42.44	---	60.00	50.00	17.56	---
NEUTRAL – PE									
0.21	46.80	---	0.13/0.1	47.03	---	63.21	53.21	16.18	---
0.31	41.90	---	0.13/0.1	42.13	---	59.97	49.97	17.84	---
0.42	33.71	---	0.15/0.1	33.96	---	57.45	47.45	23.49	---
0.52	37.03	---	0.15/0.1	37.28	---	56.00	46.00	18.72	---
0.62	34.11	---	0.15/0.1	34.36	---	56.00	46.00	21.64	---
0.83	33.38	---	0.15/0.1	33.63	---	56.00	46.00	22.37	---
8.32	35.79	---	0.30/0.5	36.59	---	60.00	46.00	23.41	---
24.00	46.54	---	0.63/0.7	47.87	---	60.00	46.00	12.13	---

Margin (dB) = Limit – Actual**[Actual = Reading + CF + CL]**

1. Remark “---” means the level is undetectable or the Quasi-peak value is lower than the limit of Average.

2. CF/CL = Correction Factor and Cable Loss

3. Qp = Quasi-peak, Avg = Average value

NOTE: The frequency range was scanned from 150 kHz to 30 MHz. All emissions not reported were more than 20 dB below the specified limit.

**Table 6: Measured values of the Conducted Emissions (Continued)****Middle Channel (operating at 2437 MHz)**

Frequency [MHz]	Reading [dB μ V]		CF/CL [dB]	Actual [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Qp	Avg		Qp	Avg	Qp	Avg	Qp	Avg
LINE – PE									
0.21	42.88	---	0.08/0.1	43.06	---	63.21	53.21	20.15	---
0.31	38.20	---	0.08/0.1	38.38	---	59.97	49.97	21.59	---
0.52	32.97	---	0.09/0.1	33.16	---	56.00	46.00	22.84	---
0.62	32.47	---	0.13/0.1	32.70	---	56.00	46.00	23.30	---
0.73	32.30	---	0.13/0.1	32.53	---	56.00	46.00	23.47	---
0.83	39.32	---	0.13/0.1	39.55	---	56.00	46.00	16.45	---
11.75	32.55	---	0.67/0.6	33.82	---	60.00	50.00	26.18	---
23.89	38.94	---	0.88/0.7	40.52	---	60.00	50.00	19.48	---
24.00	45.32	---	0.88/0.7	46.90	---	60.00	50.00	13.10	---
24.11	38.71	---	0.88/0.7	40.29	---	60.00	50.00	19.71	---
NEUTRAL – PE									
0.21	42.90	---	0.13/0.1	43.13	---	63.21	53.21	20.08	---
0.31	34.64	---	0.13/0.1	34.87	---	59.97	49.97	25.10	---
0.62	29.99	---	0.15/0.1	30.24	---	56.00	46.00	25.76	---
0.83	34.60	---	0.15/0.1	34.85	---	56.00	46.00	21.15	---
11.75	36.34	---	0.50/0.6	37.44	---	60.00	50.00	22.56	---
11.96	35.99	---	0.50/0.6	37.09	---	60.00	50.00	22.91	---
12.06	35.79	---	0.50/0.6	36.89	---	60.00	50.00	23.11	---
23.89	38.63	---	0.63/0.7	39.96	---	60.00	50.00	20.04	---
24.00	45.04	---	0.63/0.7	46.37	---	60.00	50.00	13.63	---
24.11	38.35	---	0.63/0.7	39.68	---	60.00	50.00	20.32	---

Margin (dB) = Limit – Actual**[Actual = Reading + CF + CL]**

1. Remark “---” means the level is undetectable or the Quasi-peak value is lower than the limit of Average.

2. CF/CL = Correction Factor and Cable Loss

3. Qp = Quasi-peak, Avg = Average value

NOTE: The frequency range was scanned from 150 kHz to 30 MHz. All emissions not reported were more than 20 dB below the specified limit.

**Table 6: Measured values of the Conducted Emissions (Continued)****Highest Channel (operating at 2462 MHz)**

Frequency [MHz]	Reading [dB μ V]		CF/CL [dB]	Actual [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Qp	Avg		Qp	Avg	Qp	Avg	Qp	Avg
LINE – PE									
0.21	41.12	---	0.08/0.1	41.30	---	63.21	53.21	21.91	---
0.31	37.03	---	0.08/0.1	37.21	---	59.97	49.97	22.76	---
0.52	32.47	---	0.09/0.1	32.66	---	56.00	46.00	23.34	---
0.62	32.65	---	0.13/0.1	32.88	---	56.00	46.00	23.12	---
0.73	31.39	---	0.13/0.1	31.62	---	56.00	46.00	24.38	---
0.83	38.73	---	0.13/0.1	38.96	---	56.00	46.00	17.04	---
11.75	32.47	---	0.67/0.6	33.74	---	60.00	50.00	26.26	---
23.89	38.39	---	0.88/0.7	39.97	---	60.00	50.00	20.03	---
24.00	44.80	---	0.88/0.7	46.38	---	60.00	50.00	13.62	---
24.11	38.08	---	0.88/0.7	39.66	---	60.00	50.00	20.34	---
NEUTRAL – PE									
0.21	44.64	---	0.13/0.1	44.87	---	63.21	53.21	18.34	---
0.31	38.63	---	0.13/0.1	38.86	---	59.97	49.97	21.11	---
0.42	32.71	---	0.15/0.1	32.96	---	57.45	47.45	24.49	---
0.52	33.73	---	0.15/0.1	33.98	---	56.00	46.00	22.02	---
0.62	30.58	---	0.15/0.1	30.83	---	56.00	46.00	25.17	---
0.83	36.05	---	0.15/0.1	36.30	---	56.00	46.00	19.70	---
11.75	37.26	---	0.50/0.6	38.36	---	60.00	50.00	21.64	---
23.89	39.85	---	0.63/0.7	41.18	---	60.00	50.00	18.82	---
24.00	45.74	---	0.63/0.7	47.07	---	60.00	50.00	12.93	---
24.11	39.61	---	0.63/0.7	40.94	---	60.00	50.00	19.06	---

Margin (dB) = Limit – Actual**[Actual = Reading + CF + CL]**

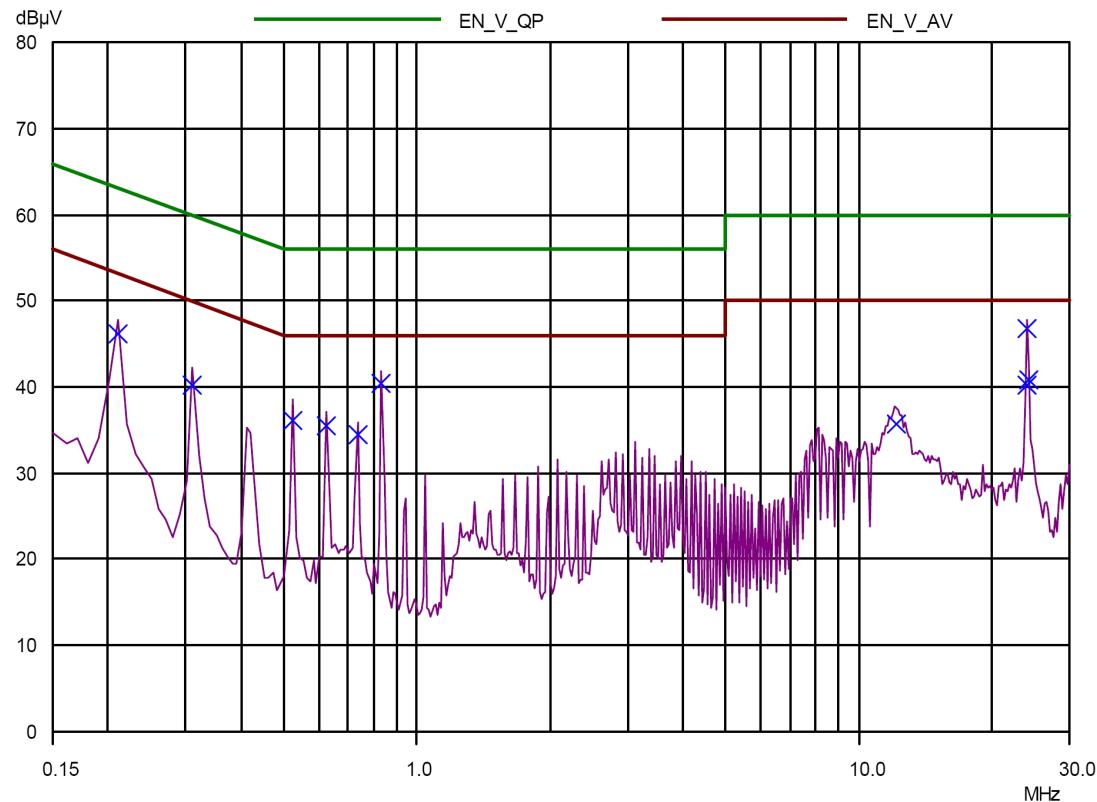
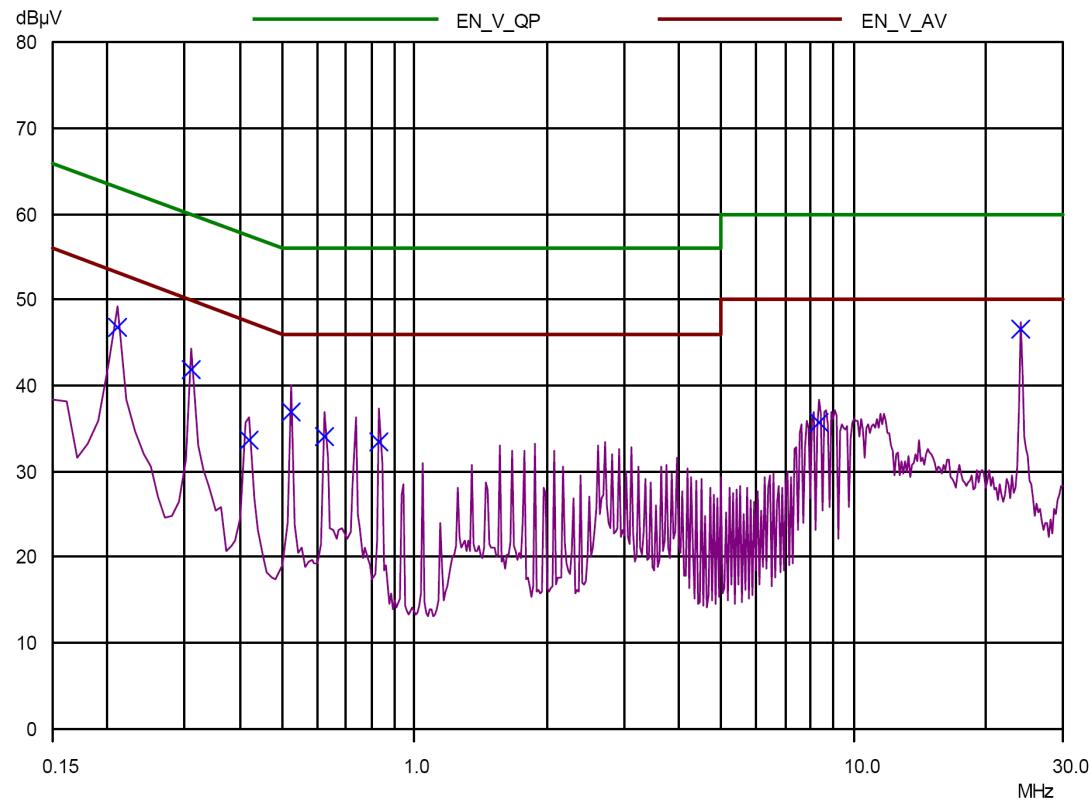
1. Remark “---” means the level is undetectable or the Quasi-peak value is lower than the limit of Average.
2. CF/CL = Correction Factor and Cable Loss
3. Qp = Quasi-peak, Avg = Average value

NOTE: The frequency range was scanned from 150 kHz to 30 MHz. All emissions not reported were more than 20 dB below the specified limit.



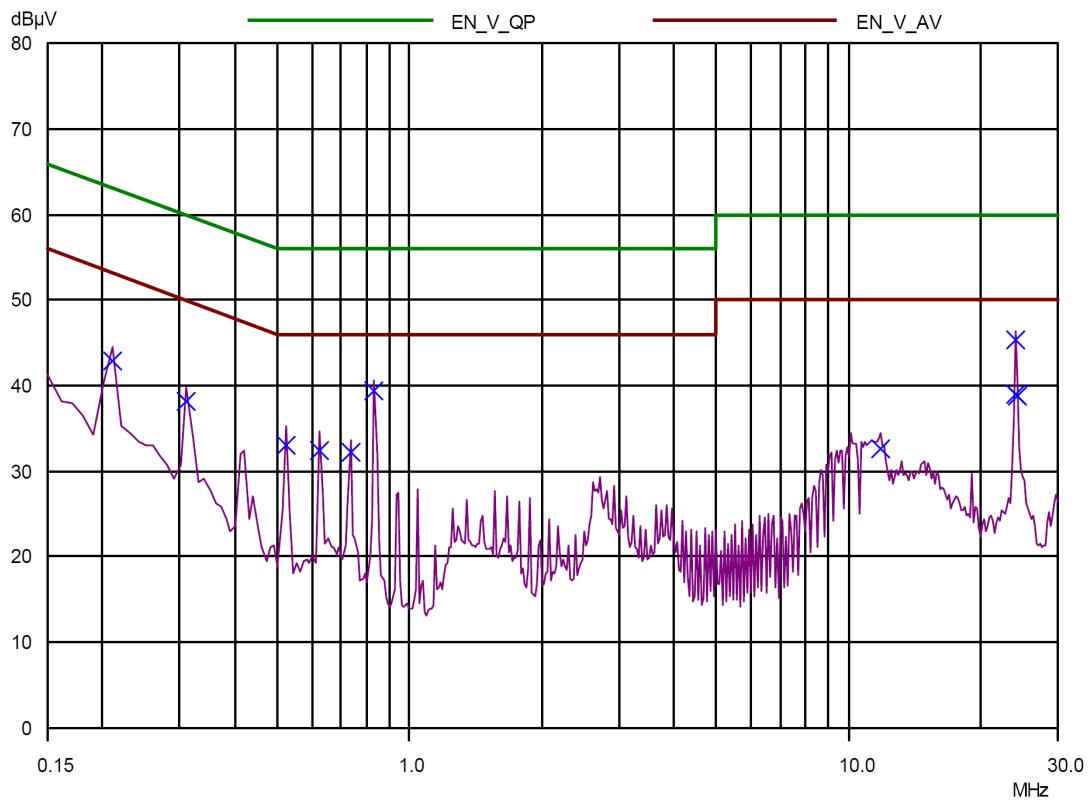
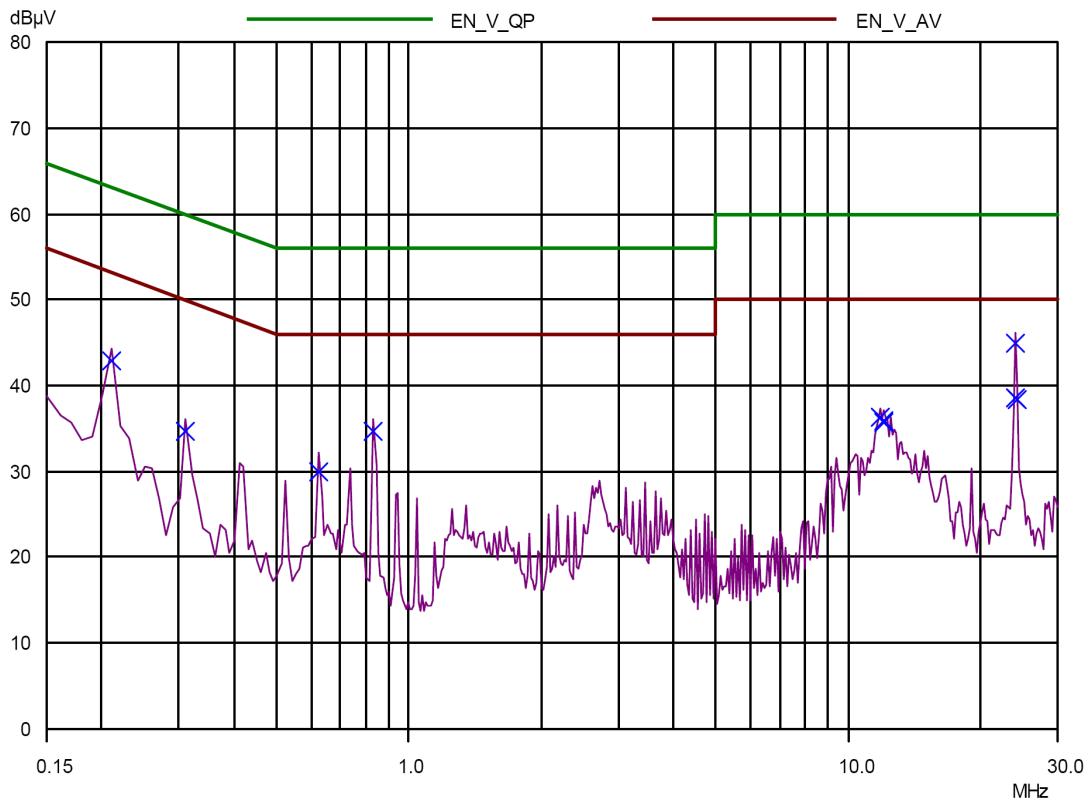
SK TECH CO., LTD.

Page 34 of 37

Figure 7. Plot of the Conducted Emissions**Lowest Channel (operating at 2412 MHz): LINE - PE****Lowest Channel (operating at 2412 MHz): Neutral - PE**

**SK TECH CO., LTD.**

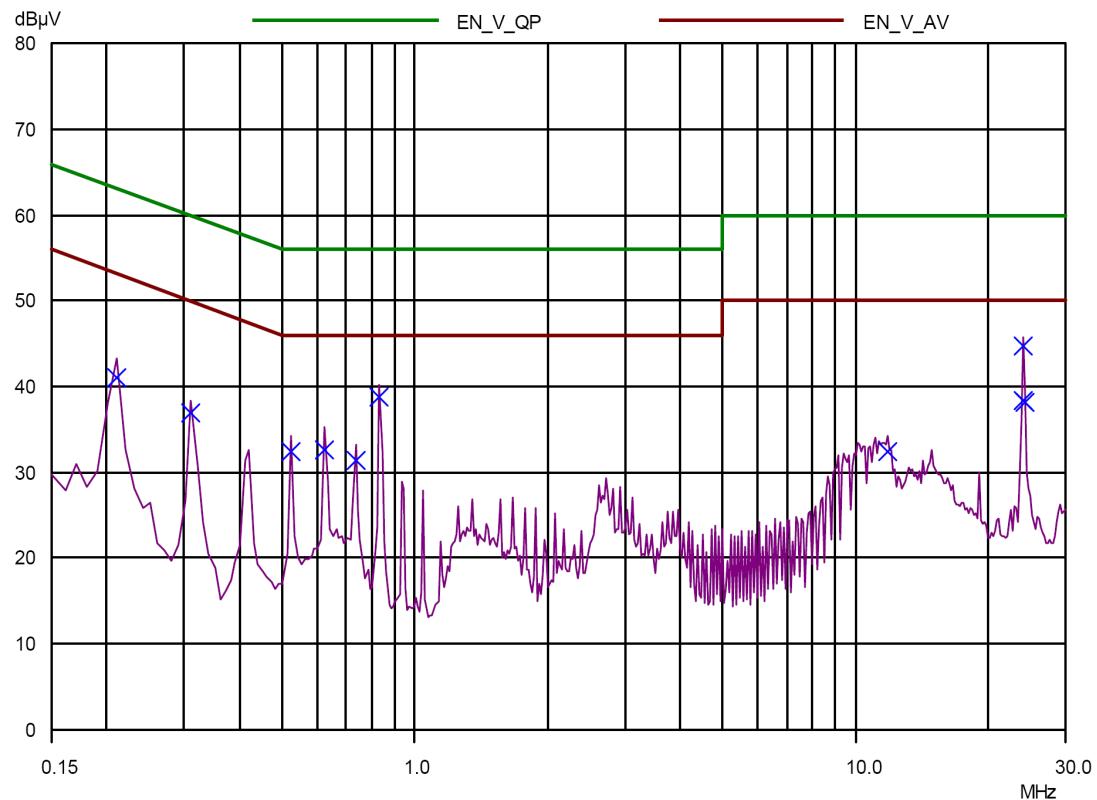
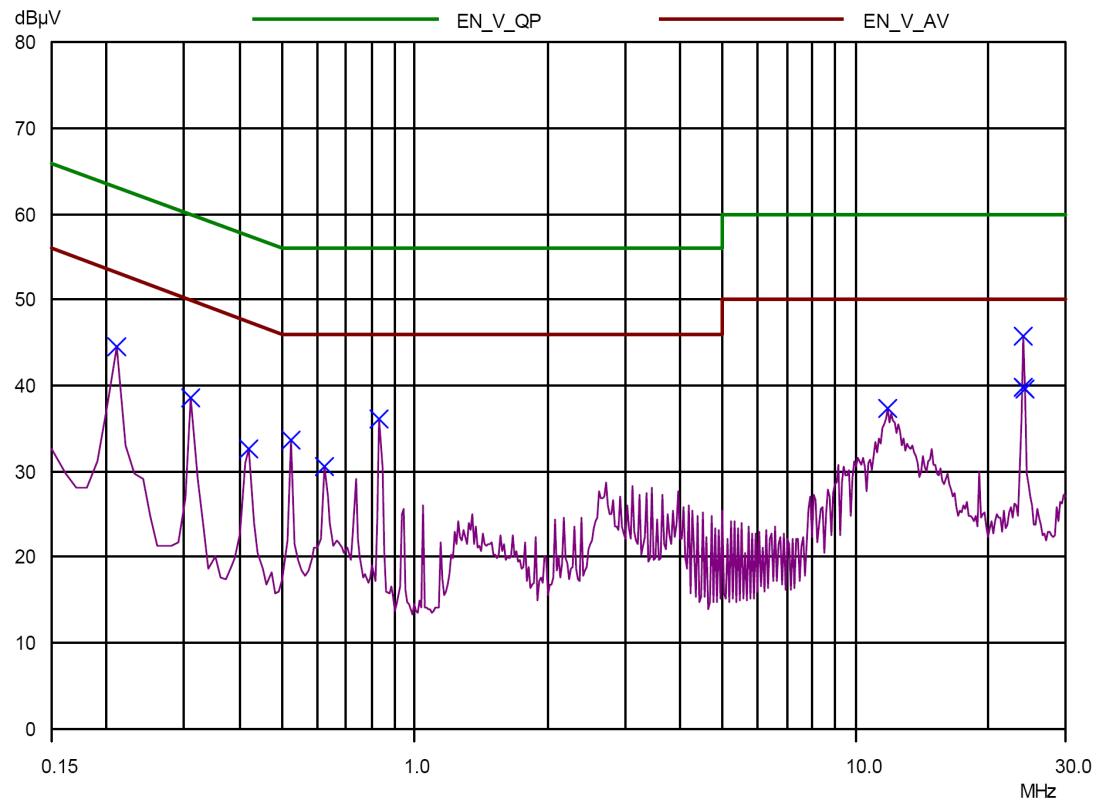
Page 35 of 37

Middle Channel (operating at 2437 MHz): LINE - PE**Middle Channel (operating at 2437 MHz): Neutral - PE**



SK TECH CO., LTD.

Page 36 of 37

Highest Channel (operating at 2462 MHz): LINE - PE**Highest Channel (operating at 2462 MHz): Neutral - PE**



5.7 RF Exposure

5.7.1 Regulation

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Limits for Maximum Permissive Exposure: According to §1.1310 and §2.1093, RF exposure is calculated.

Frequency Range	Electric Field Strength [V/m]	Magnetic Field Strength [A/m]	Power Density [mW/cm ²]	Averaging Time [minute]
Limits for General Population/Uncontrolled Exposure				
0.3 ~ 1.34	614	1.63	^{*(100)}	30
1.34 ~ 30	824/f	2.19/f	^{*(180/f²)}	30
30 ~ 300	27.5	0.073	0.2	30
300 ~ 1500	/	/	f/1500	30
1500 ~ 15000	/	/	<u>1.0</u>	<u>30</u>

f = frequency in MHz,

* = Plane-wave equivalent power density

MPE (Maximum Permissive Exposure) Prediction

Predication of MPE limit at a given distance: Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2 \quad S = \text{power density [mW/cm}^2\text{]}$$

P = power input to antenna [mW]

$(\Rightarrow R = \sqrt{PG/4\pi S})$ G = power gain of the antenna in the direction of interest
relative to an isotropic radiator

R = distance to the center of radiation of the antenna [cm]

EUT: Maximum peak output power = 22.11[dBm] (= 163 [mW]) & Antenna gain = 5.47[dBi]	
100mW, at 20cm from an antenna 6[dBi]	$S = PG/4\pi R^2 = 100 \times 3.98 / (4 \times \pi \times 400) = 0.0792 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
163mW, at 20cm from the antenna 5.47[dBi]	$S = PG/4\pi R^2 = 0.1143 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
163mW, at 20cm from the antenna 3[dBi]	$S = PG/4\pi R^2 = 0.0647 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
163mW, at 7cm from the antenna 5.47[dBi]	$S = PG/4\pi R^2 = 0.9328 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$

NOTE: The calculated values of MPE for the EUT show that MPE is safe beyond 7 cm from the antenna.

5.7.2 RF Exposure Compliance Issue

This information should be included in the user's manual:

1. *This appliance and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.*
2. *A minimum separation distance of 20 cm must be maintained between the antenna and the person for this appliance to satisfy the RF exposure requirements.*