

FCC Part 15 Subpart C Test Report

for DSSS System

Product Name : GNSS receiver
Model Name : i80 WXYZ

Prepared for:

Shanghai Huace Navigation Technology LTD.
Building C, 599 Gaojing Road, Qingpu District, Shanghai
TEL: 021-51508100-1242
FAX: 021-64851208

Prepared by:

Unilab (Shanghai) Co., Ltd
FCC 2.948 register number is 714465
No.1350, Lianxi Rd. Pudong New District, Shanghai, China
TEL: +86-21-50275125
FAX: +86-21-50275126

Report Number : UL41320150312CE/FCC002-4
Date of Report : 07-30-2015
Date of Test : 06-08-2015~07-30-2015

Notes :

The test results only relate to these samples which have been tested.
Partly using this report will not be admitted unless been allowed by Unilab.
Unilab is only responsible for the complete report with the reported stamp of Unilab.

Applicant: Shanghai Huace Navigation Technology LTD.
Building C, 599 Gaojing Road, Qingpu District, Shanghai

Manufacturer: Shanghai Huace Navigation Technology LTD.
Building C, 599 Gaojing Road, Qingpu District, Shanghai

Product Name: GNSS receiver

Brand Name:



Model Name: i80 WXYZ

Model Description: See Part1.1 Note.

FCC ID: SY4-A01004

Serial Number: N/A

EUT Voltage: MIN: 8V, NOR:12V, MAX: 36V

Date of Receipt: 03-12-2015

Test Standard: FCC CFR Title 47 Part 15 Subpart C
ANSI C 63.4: 2009
KDB 558074 D01 v03r03

Test Result: PASS

Date of Test: 06-08-2015~07-30-2015

Tested by : Jeffrey Wang
(Test Engineer: Jeffrey Wang)

Reviewed by : Forest Cao
(Senior Engineer: Forest Cao)

Approved by : Eva Wang
(Supervisor: Eva Wang)

TABLE OF CONTENTS

1.	GENERAL INFORMATION	5
1.1	EUT DESCRIPTION	5
1.2	TEST MODE	5
2.	TEST METHODOLOGY	6
2.1	EUT CONFIGURATION	6
2.2	EUT EXERCISE	6
2.3	GENERAL TEST PROCEDURES	6
2.4	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
2.5	DESCRIPTION OF TEST MODES	7
3.	TECHNICAL SUMMARY	9
3.1	SUMMARY OF STANDARDS AND TEST RESULTS	9
3.2	TEST UNCERTAINTY	9
3.3	TEST EQUIPMENT LIST	10
3.4	TEST FACILITY	10
3.5	TEST SETUP CONFIGURATION	10
4.	OCCUPIED BANDWIDTH	11
4.1	TEST SETUP	11
4.2	LIMITS	11
4.3	TEST PROCEDURE	11
4.4	TEST RESULTS	12
5.	6 DB BANDWIDTH	17
5.1	TEST SETUP	17
5.2	LIMITS	17
5.3	TEST PROCEDURE	17
5.4	RESULTS & PERFORMANCE	18
6.	POWER SPECTRAL DENSITY	23
6.1	TEST SETUP	23
6.2	LIMITS	23
6.3	TEST PROCEDURE	23
6.4	RESULTS & PERFORMANCE	24
7.	PEAK OUTPUT POWER (CONDUCTION)	29
7.1	TEST SETUP	29
7.2	LIMITS	29
7.3	TEST PROCEDURE	29
7.4	RESULTS & PERFORMANCE	30
8.	SPURIOUS EMISSIONS (CONDUCTION)	31
8.1	TEST SETUP	31
8.2	LIMITS	31
8.3	TEST PROCEDURE	31
8.4	RESULTS & PERFORMANCE	32
9.	BAND EDGE MEASUREMENT	55
9.1	TEST SETUP	55
9.2	LIMITS	55
9.3	TEST PROCEDURE	55
9.4	RESULTS & PERFORMANCE	56
10.	SPURIOUS EMISSIONS (RADIATION)	83
10.1	TEST SETUP	83

10.2	LIMITS	84
10.3	TEST PROCEDURE	84
10.4	RESULTS & PERFORMANCE	86
11.	AC POWER LINE CONDUCTED EMISSIONS	109
11.1	TEST SETUP	109
11.2	LIMITS	109
11.3	TEST PROCEDURE	109
11.4	RESULTS & PERFORMANCE	110
APPENDIX 1	PHOTOGRAPHS OF TEST SETUP.....	128
APPENDIX 2	PHOTOGRAPHS OF EUT	128

1. GENERAL INFORMATION

1.1 EUT DESCRIPTION

Product Name:	GNSS receiver
Model Name:	i80 WXYZ
Hardware Version:	V1.3
Software Version:	V1.1.8
RF Exposure Environment:	Uncontrolled
WIFI	
Frequency Range:	2412MHz~2462MHz
Type of Modulation:	DSSS(BPSK/QPSK/CCK) OFDM(BPSK/QPSK/16QAM/64QAM) MIMO-OFDM(BPSK/QPSK/16QAM/64QAM)
Channel Number:	11
Antenna Type:	Internal
Antenna Peak Gain:	1.0dBi
Component	
AC Adapter:	Input: AC 100-240V 50/60Hz 0.4A
	Output: DC 5V 2A

Note: Model i80 WXYZ, W is variable, it indicated A-Z or 0-9 or blank , X is variable, it indicated A-Z or 0-9 or blank , Y is variable, it indicated A-Z, 0-9 or blank. Z is variable, it indicated A-Z, 0-9 or blank. Due to sales purpose in different countries or regions. The internal PCB design are no difference , but only distinct in colours and model names. This test model name is i80.

1.2 TEST MODE

Unilab has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: 802.11b CH1
Mode 2: 802.11b CH6
Mode 3: 802.11b CH11
Mode 4: 802.11g CH1
Mode 5: 802.11g CH6
Mode 6: 802.11g CH11
Mode 7: 802.11n20 CH1
Mode 8: 802.11n20 CH6
Mode 9: 802.11n20 CH11

Note:

1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

2. For the radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application

2.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2009.

2.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

2.5 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below

IEEE802.11b mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 11Mbps data rate were chosen for full testing.

IEEE802.11g mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 54Mbps data rate were chosen for full testing.

IEEE802.11n20 mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 65Mbps data rate were chosen for full testing.

3. TECHNICAL SUMMARY

3.1 SUMMARY OF STANDARDS AND TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below:

Test Item	FCC	Result
Occupied Bandwidth	§15.247 (a)	P
6 dB bandwidth	§15.247 (a)	P
Power spectral density	§15.247 (e)	P
Peak Output Power (Conduction)	§15.247 (b)	P
Spurious Emissions (Conduction)	§15.247 (d)	P
Band edge measurement	§15.247 (d)	P
Spurious Emissions (Radiation)	§15.247 (d) §15.35 (b) §15.209 (a)	P
AC Power Line Conducted Emissions	§15.207 (a)	P

Note: P means pass, F means failure, N/A means not applicable

3.2 TEST UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Value (dB)
Conducted disturbance	3.4
Radiated disturbance	4.2

3.3 TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Cal. Interval	Due Date
Receiver	Agilent	N9038A	MY51210142	1 year	11/11/2015
Power meter	R&S	NRP2	101607	1 year	02/18/2016
Loop Antenna	Schwarzbeck	FMZB1519	1519-020	1 year	03/25/2016
LISN	R&S	ENV216	100069	2 years	07/27/2016
3m Chamber & Accessory Equipment	ETS-LINDGREN	FACT-3	CT-0000336	3 years	11/26/2017
Microwave Preamplifier	EM Electronics	EM30180	3008A02425	1 years	02/27/2016
Power Splitter	Agilent	11667C/ 52401	MY53806148	2 years	02/27/2016
Biconilog Antenna	Schwarzbeck	VULB 9160	3316	3 years	09/19/2016
Horn Antenna	Schwarzbeck	BBHA9120D	942	3 years	09/19/2016
Horn Antenna	Schwarzbeck	BBHA9120D	943	3 years	09/19/2016
Horn Antenna(18-40GHz)	ETS	3116	00070497	3 years	07/18/2016

3.4 TEST FACILITY

All test facilities used to collect the test data are located at No.1350, Lianxi Rd. Pudong New District, Shanghai, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4: 2009, CISPR 16-1-1 and other equivalent standards. The laboratory is compliance with the requirements of the ISO/IEC/E 17025.


3.5 TEST SETUP CONFIGURATION

The information contained within this report is intended to show verification of compliance of the EUT to the requirements of CFR 47 FCC Part 15.247.

Unilab has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report.

4. OCCUPIED BANDWIDTH

4.1 TEST SETUP

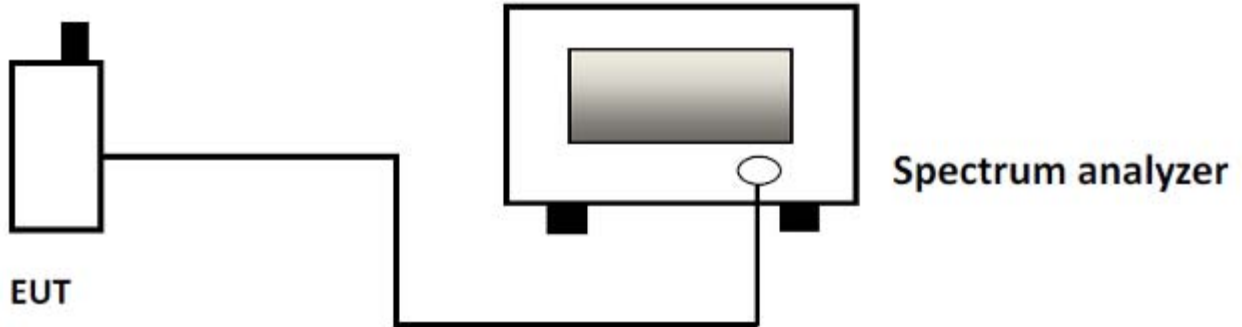

4.2 LIMITS

Limits	≥ 25 kHz or 2 to 3 times the 20 dB bandwidth
--------	---

4.3 TEST PROCEDURE

Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum analyzer. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels.

WiFi: Low(1), Middle(6) and High (11).

Using occupied BW measurement function of spectrum analyzer and settings are:

XdB = -20dB

RBW = 100KHz

VBW $\geq 3 \times$ RBW

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a channel

Sweep = auto


Detector function = peak

Trace = max hold


4.4 TEST RESULTS

Channel	20dB bandwidth (MHz)	99% bandwidth (MHz)
802.11b		
802.11b CH1	14.15	12.343
802.11b CH6	14.03	12.322
802.11b CH11	14.12	12.220
802.11g		
802.11g CH1	17.28	16.306
802.11g CH6	17.10	16.318
802.11g CH11	17.28	16.322
802.11n20		
802.11n CH1	18.08	17.532
802.11n CH6	17.95	17.500
802.11n CH11	18.08	17.514


802.11b
 802.11b channel 1

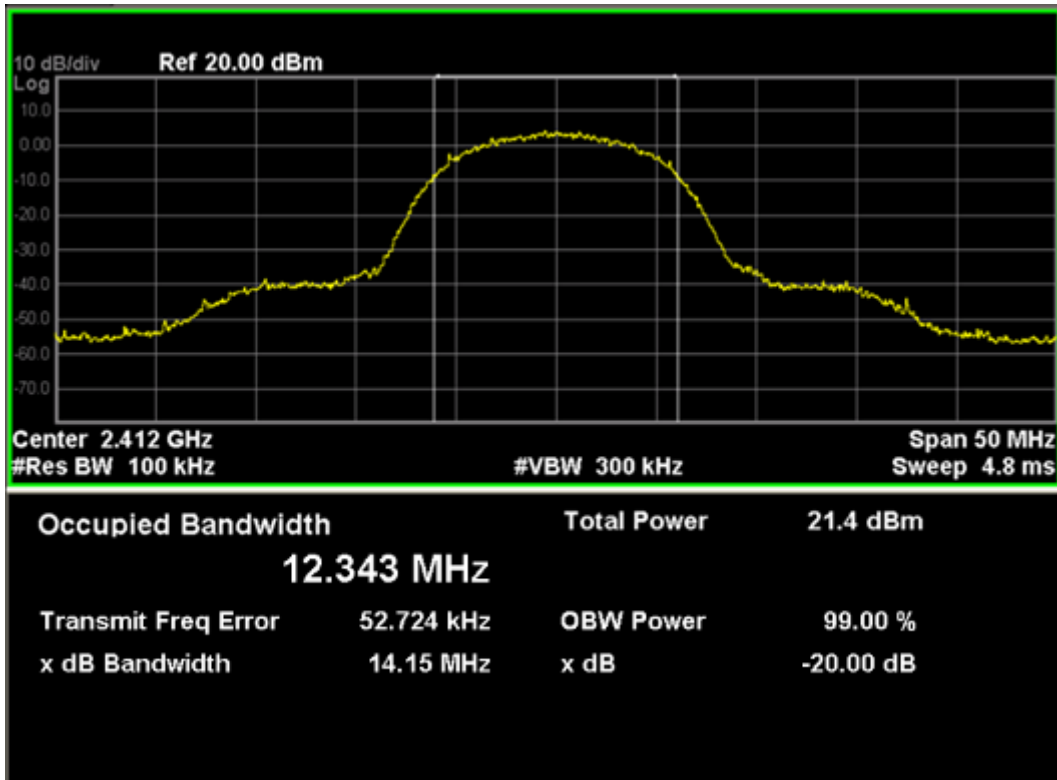


802.11b channel 6

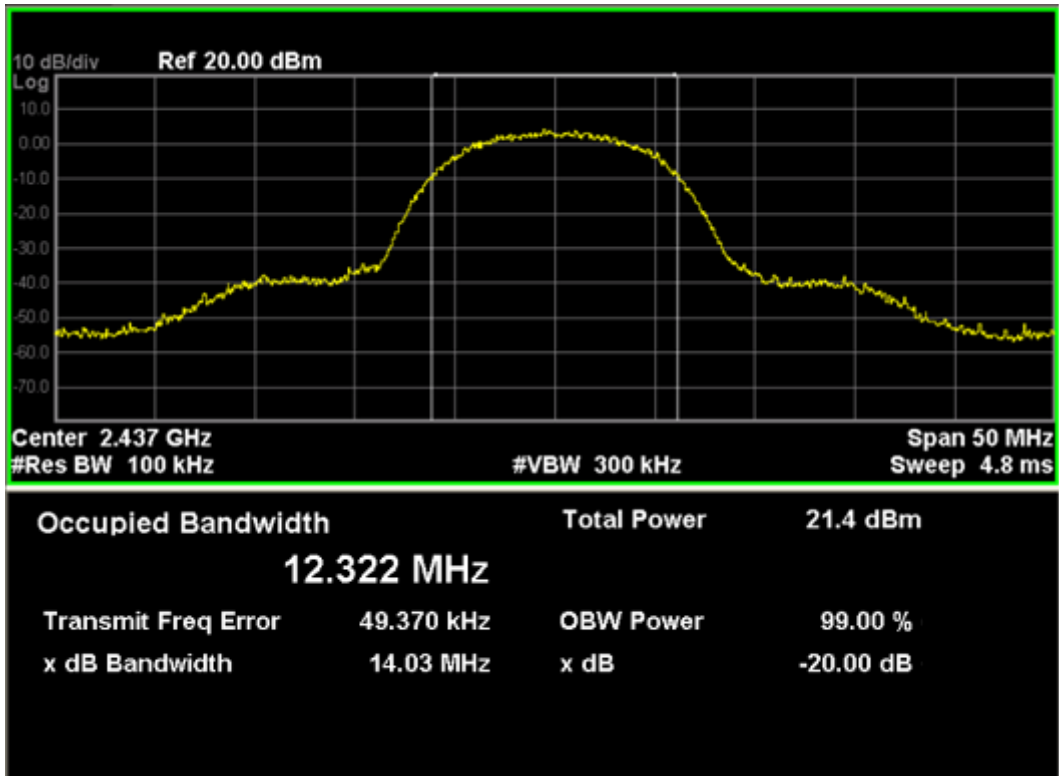


802.11b channel 11

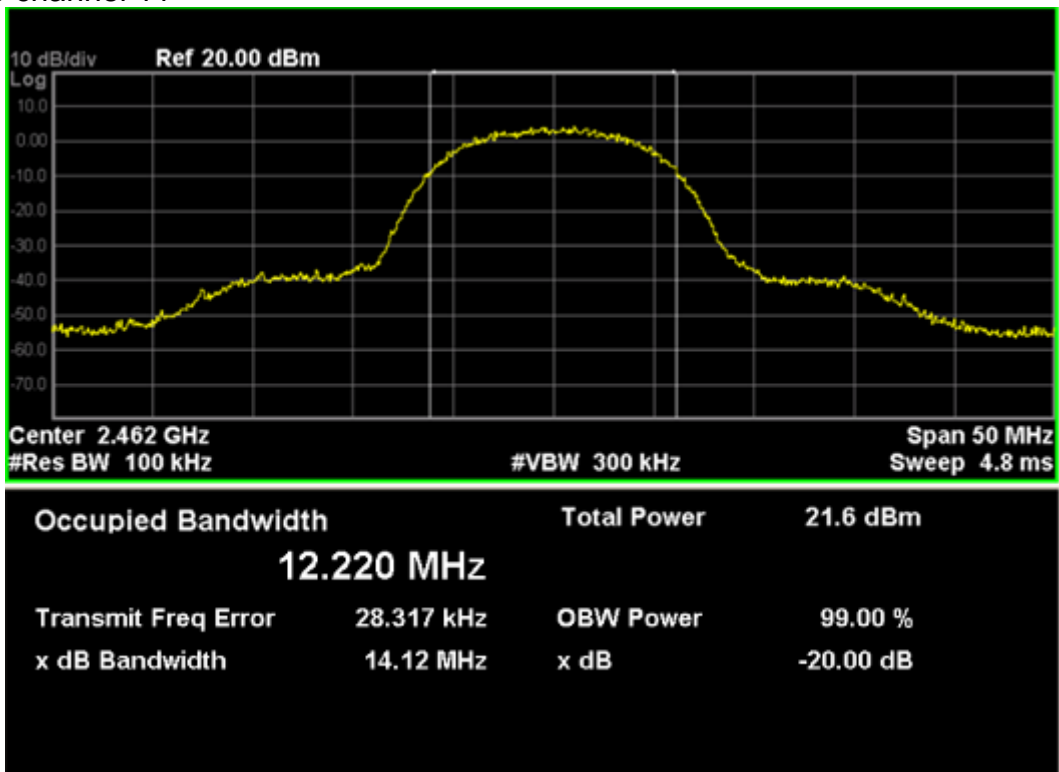


802.11g
802.11g channel 1

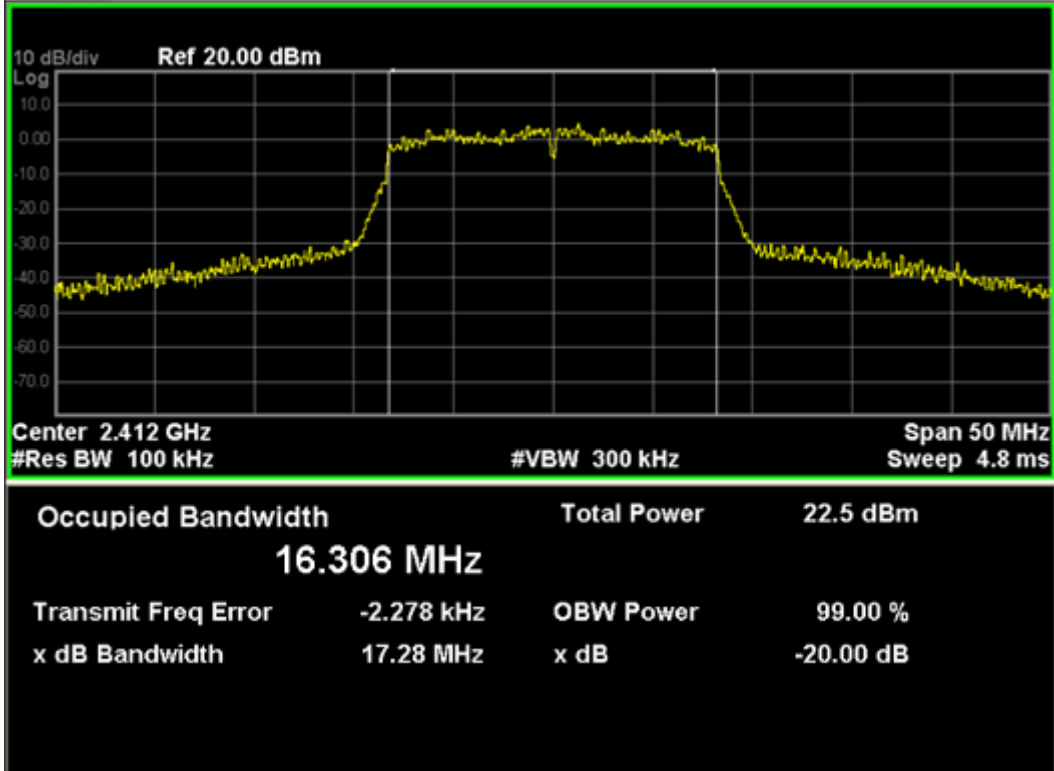


802.11g channel 6

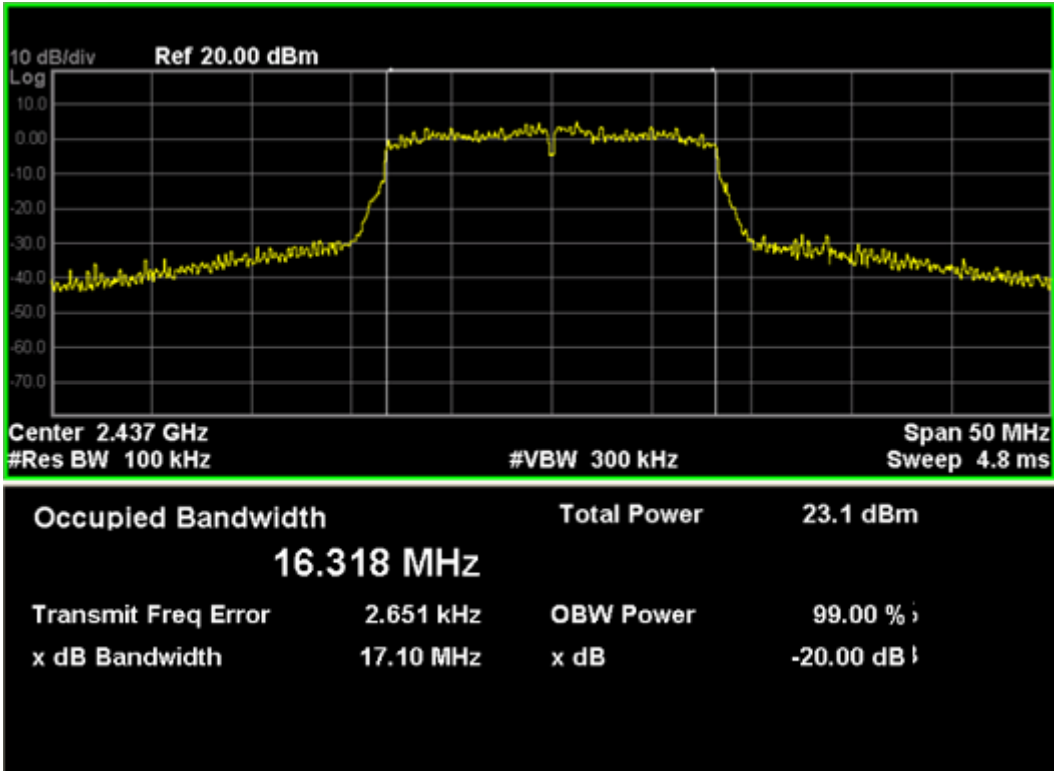


802.11g channel 11

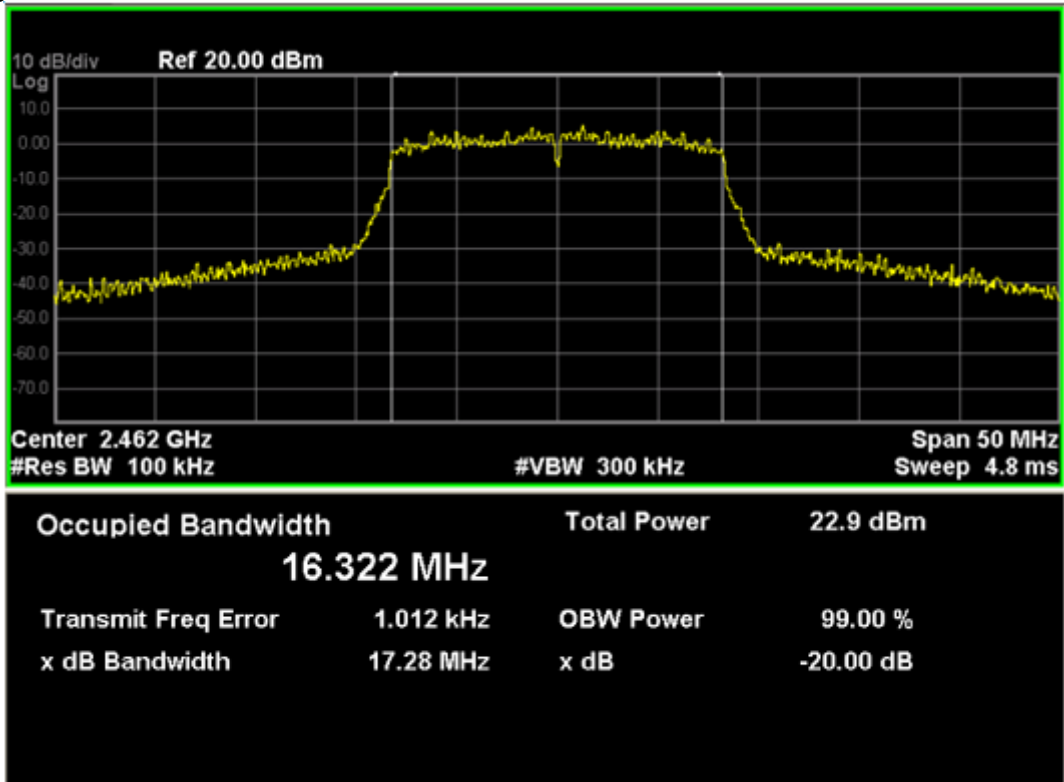


802.11n20
802.11n channel 1

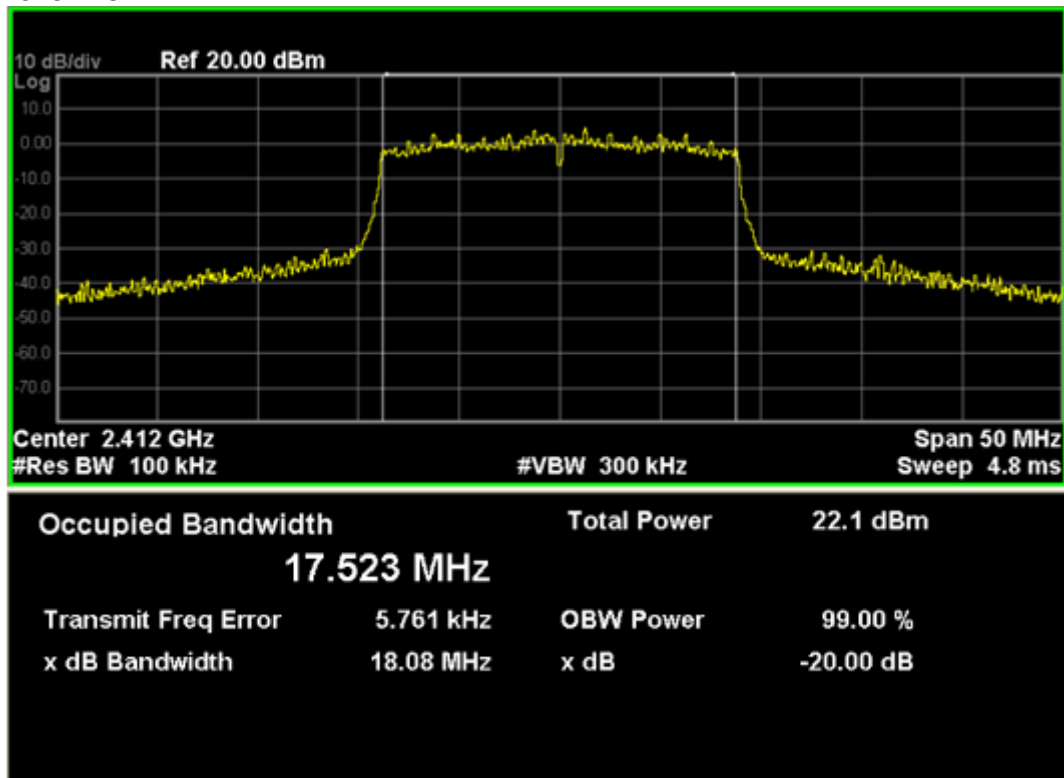

802.11n channel 6

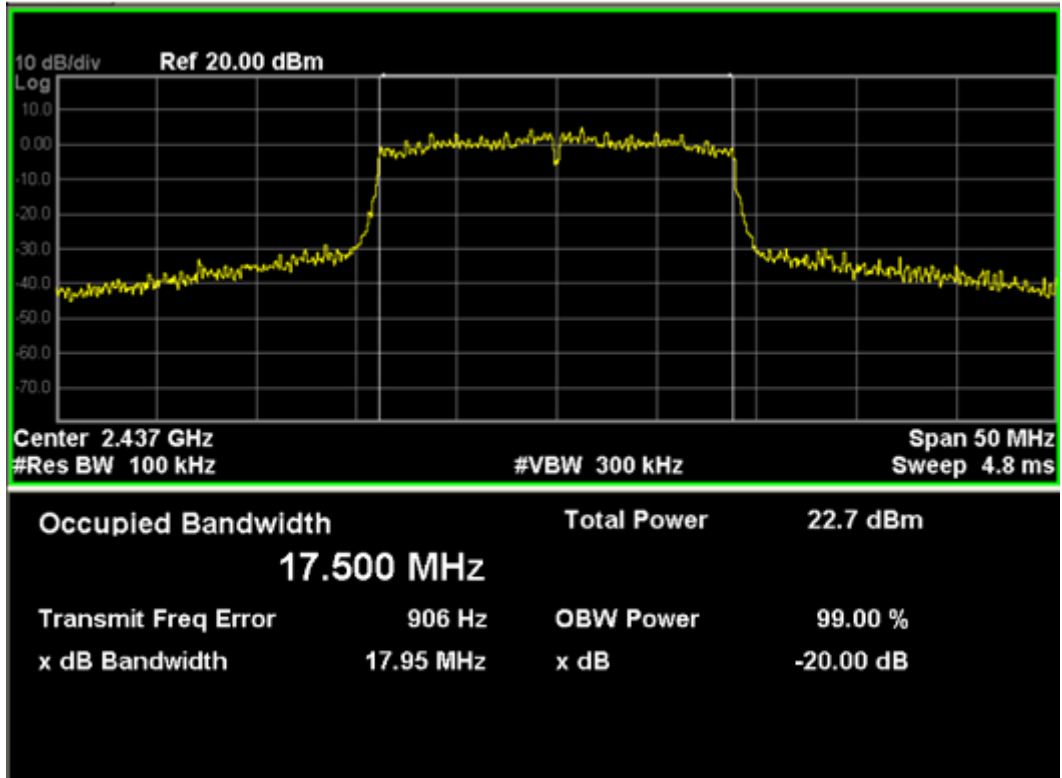


802.11n channel 11

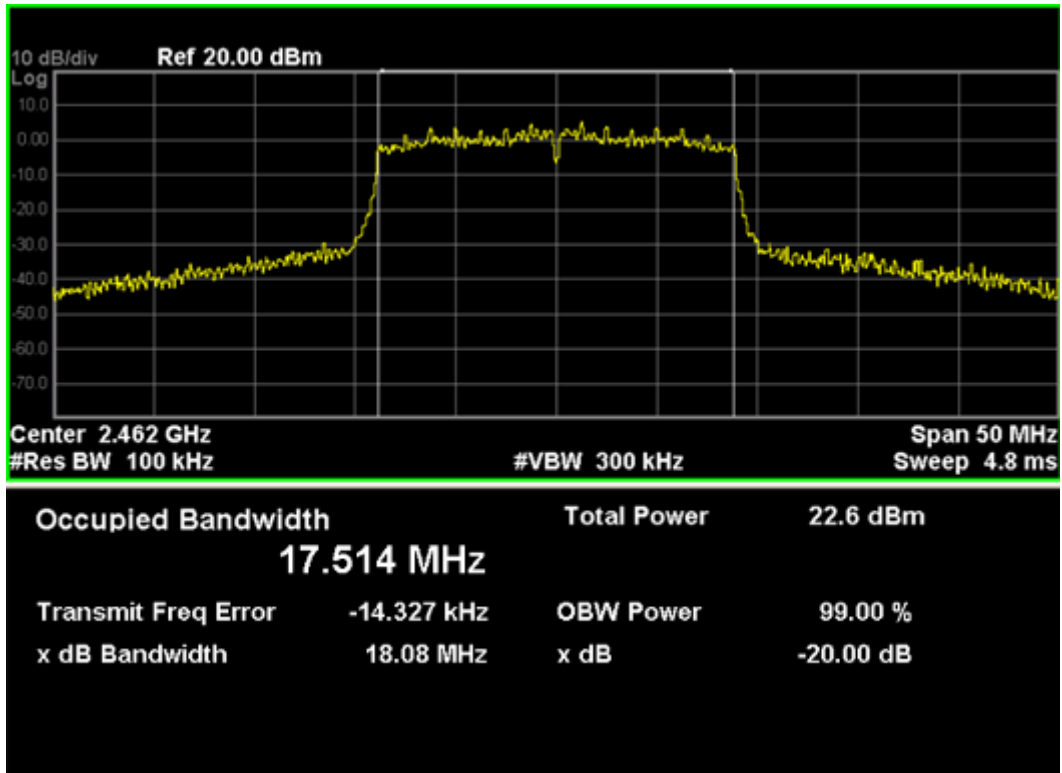

5. 6 DB BANDWIDTH

5.1 TEST SETUP

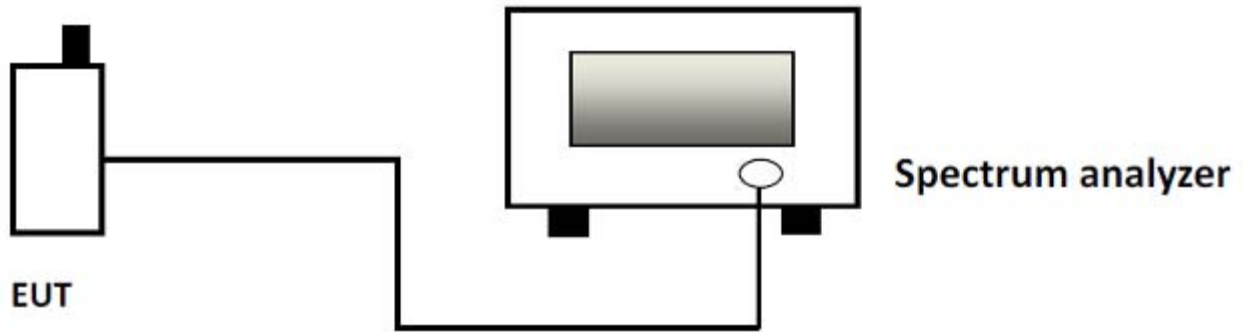

5.2 LIMITS

Limit	≥ 500 kHz
-------	----------------

5.3 TEST PROCEDURE

Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum analyzer. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels.

WiFi: Low(1), Middle(6) and High (11).

Using occupied BW measurement function of spectrum analyzer and settings are:

XdB = -6dB

RBW = 100KHz

VBW $\geq 3 \times$ RBW

Span = approximately 2 to 3 times the 6 dB bandwidth, centered on a channel

Sweep = auto


Detector function = peak

Trace = max hold


5.4 RESULTS & PERFORMANCE

Channel	Measured 6dB bandwidth (MHz)	Limit (MHz)	Result
802.11b			
802.11b CH1	7.28	≥0.5	PASS
802.11b CH6	8.50	≥0.5	PASS
802.11b CH11	7.59	≥0.5	PASS
802.11g			
802.11g CH1	15.45	≥0.5	PASS
802.11g CH6	15.16	≥0.5	PASS
802.11g CH11	15.47	≥0.5	PASS
802.11n20			
802.11n CH1	17.24	≥0.5	PASS
802.11n CH6	17.21	≥0.5	PASS
802.11n CH11	16.57	≥0.5	PASS


802.11b
 802.11b channel 1

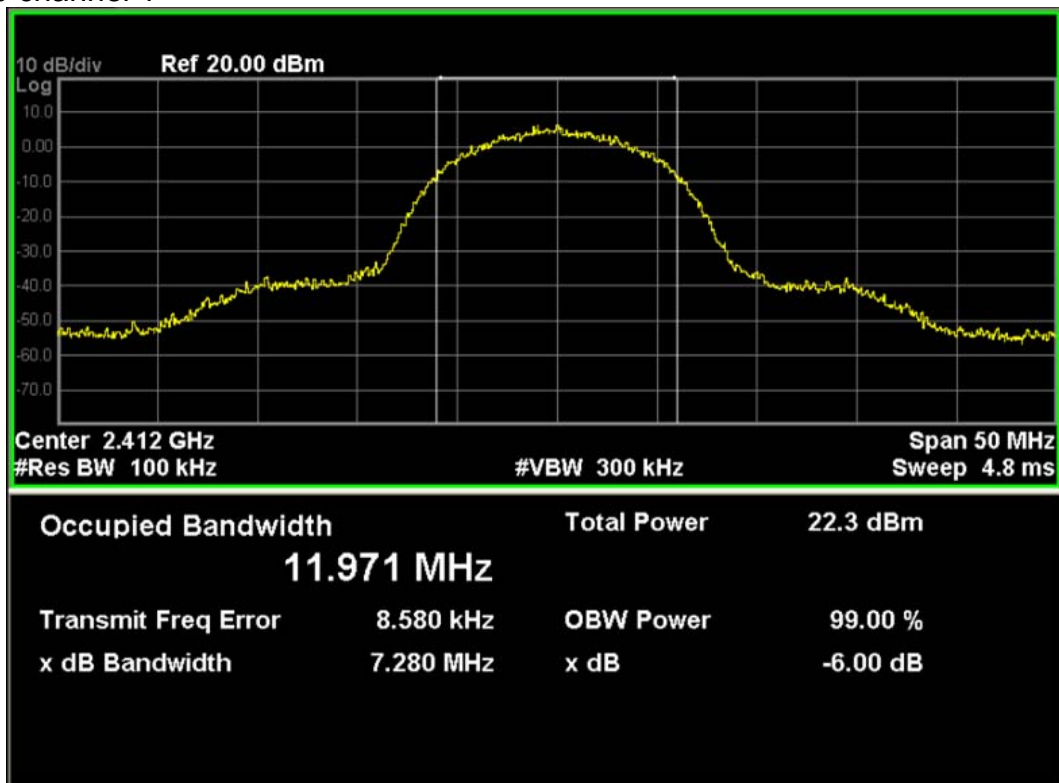


802.11b channel 6

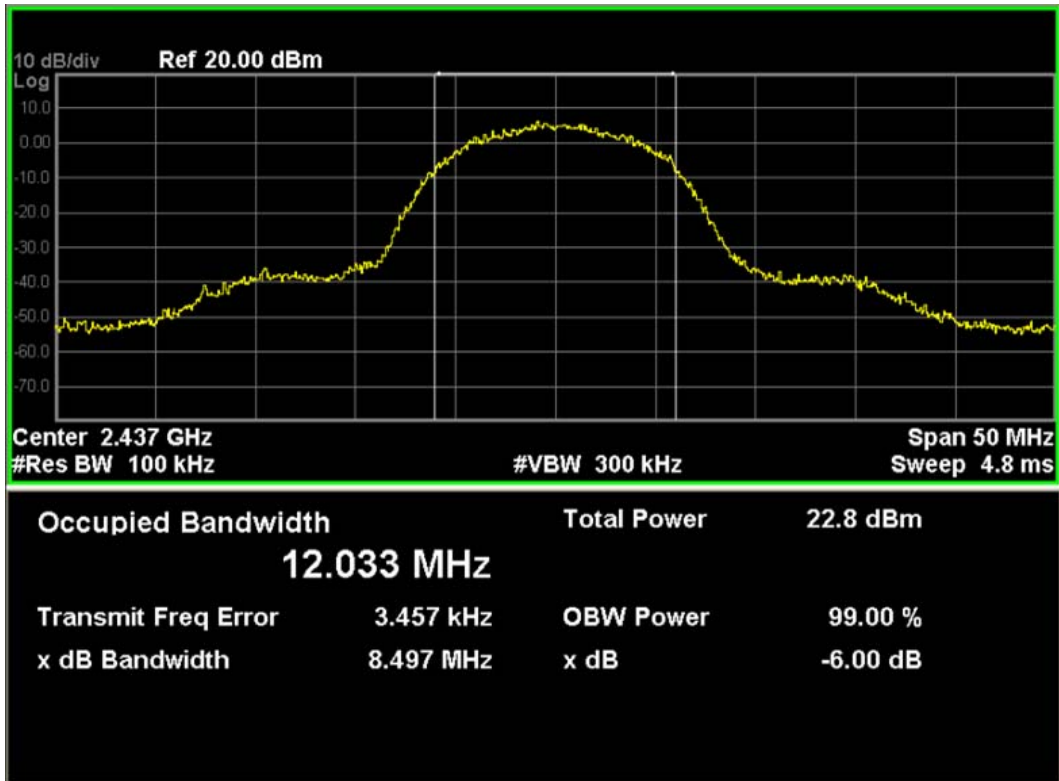


802.11b channel 11

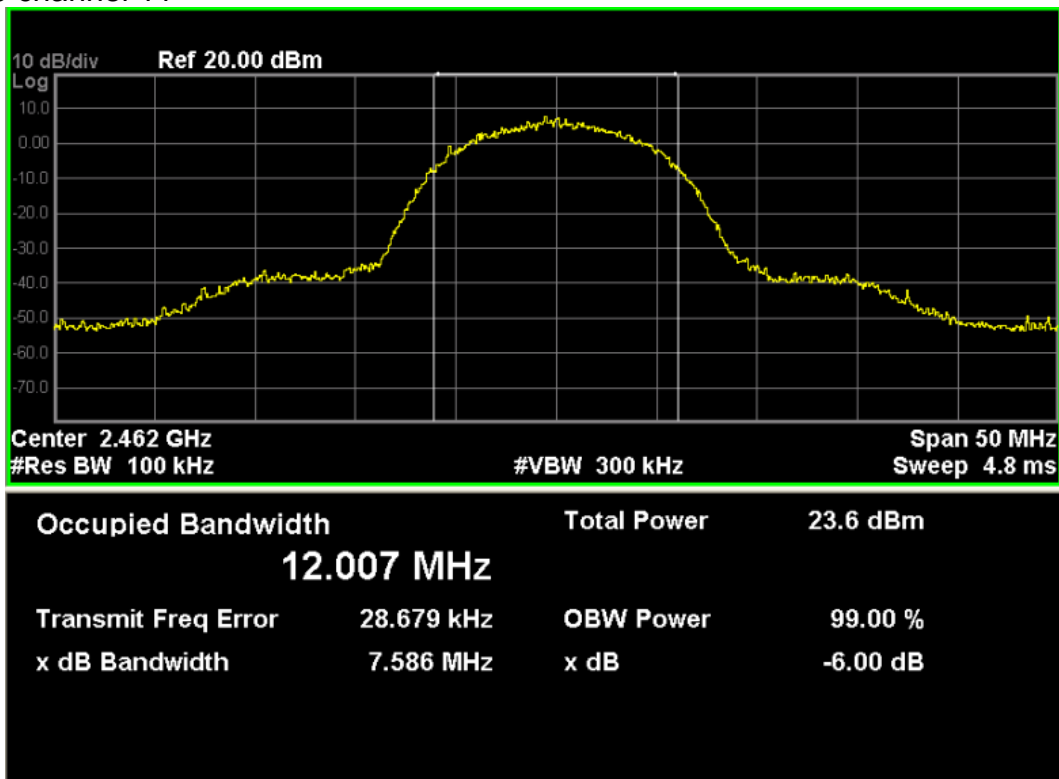


802.11g
802.11g channel 1

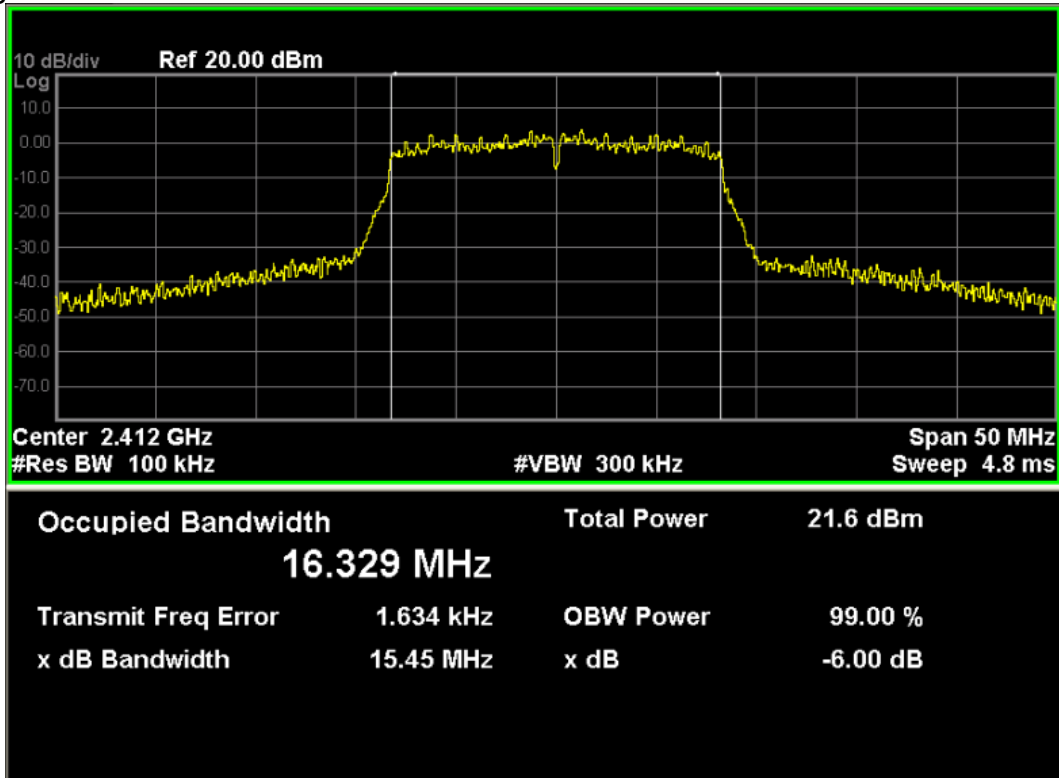


802.11g channel 6

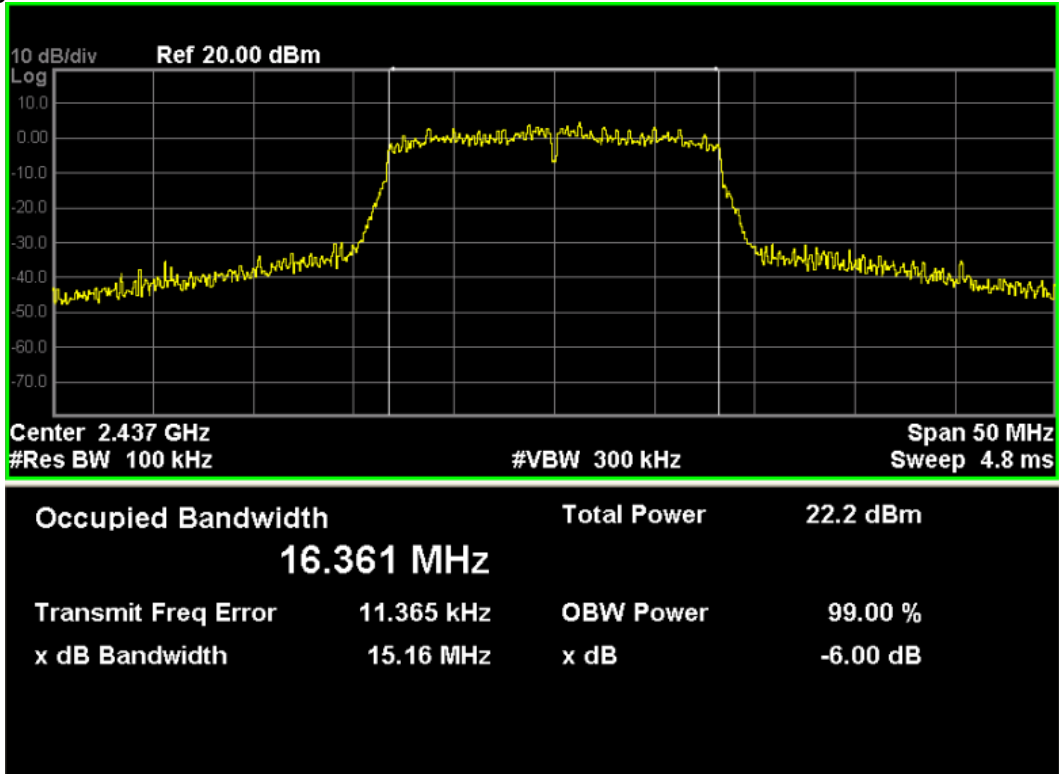


802.11g channel 11

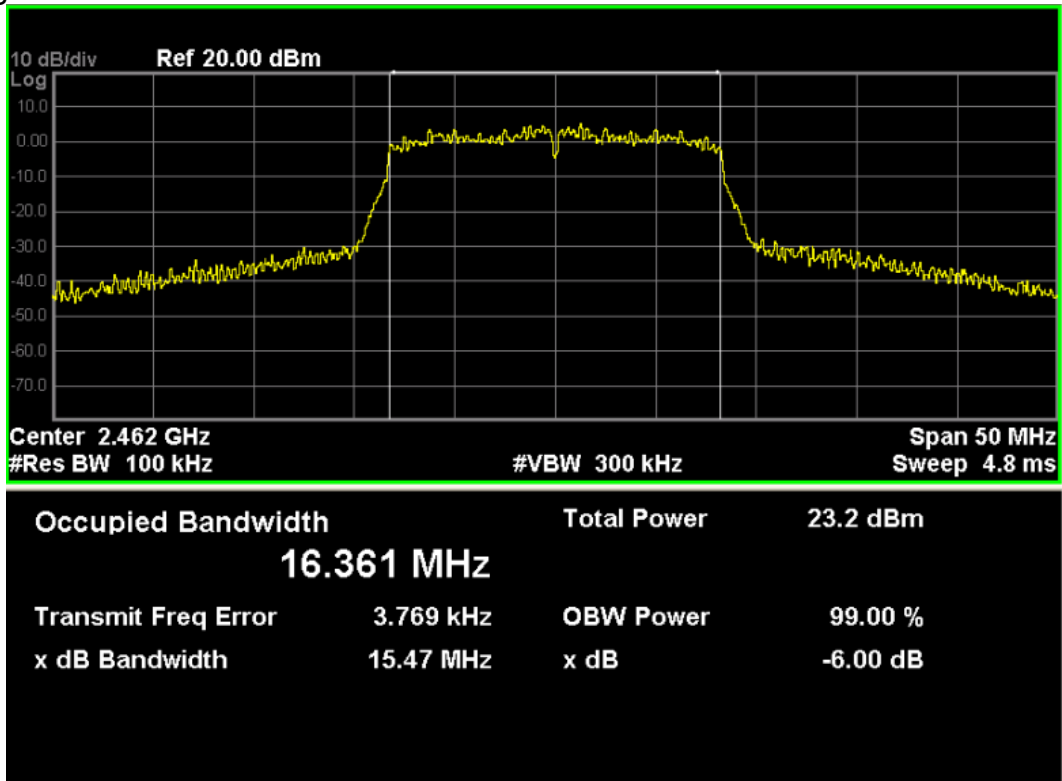


802.11n20 802.11n channel 1

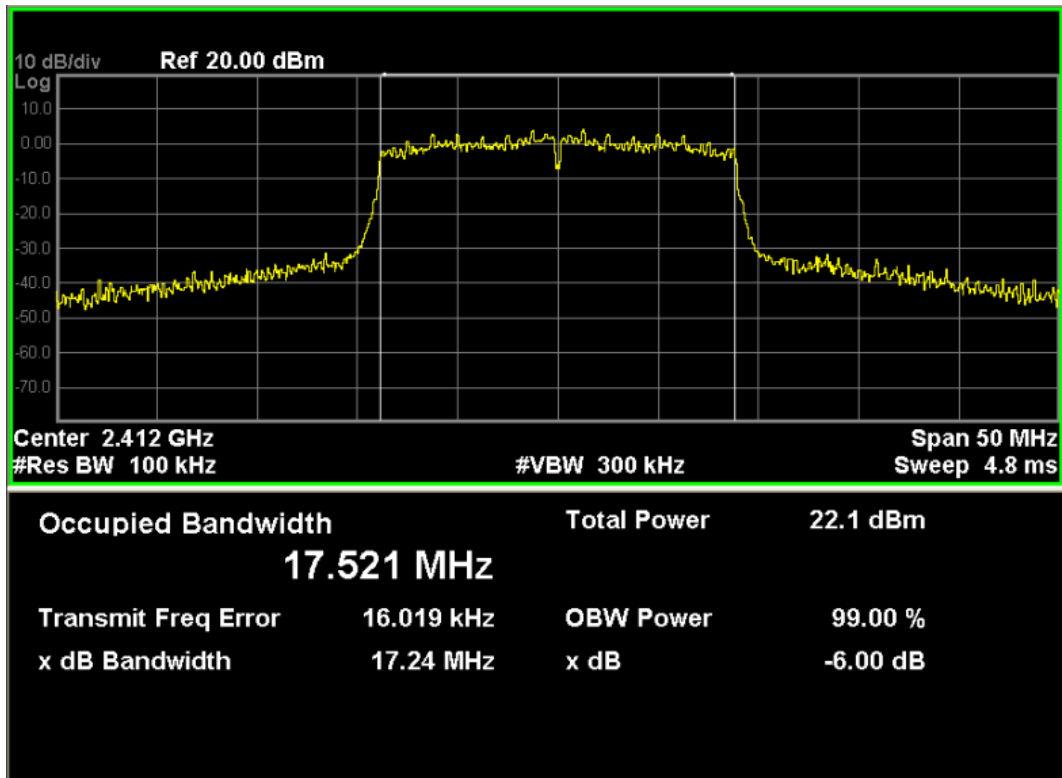

802.11n channel 6

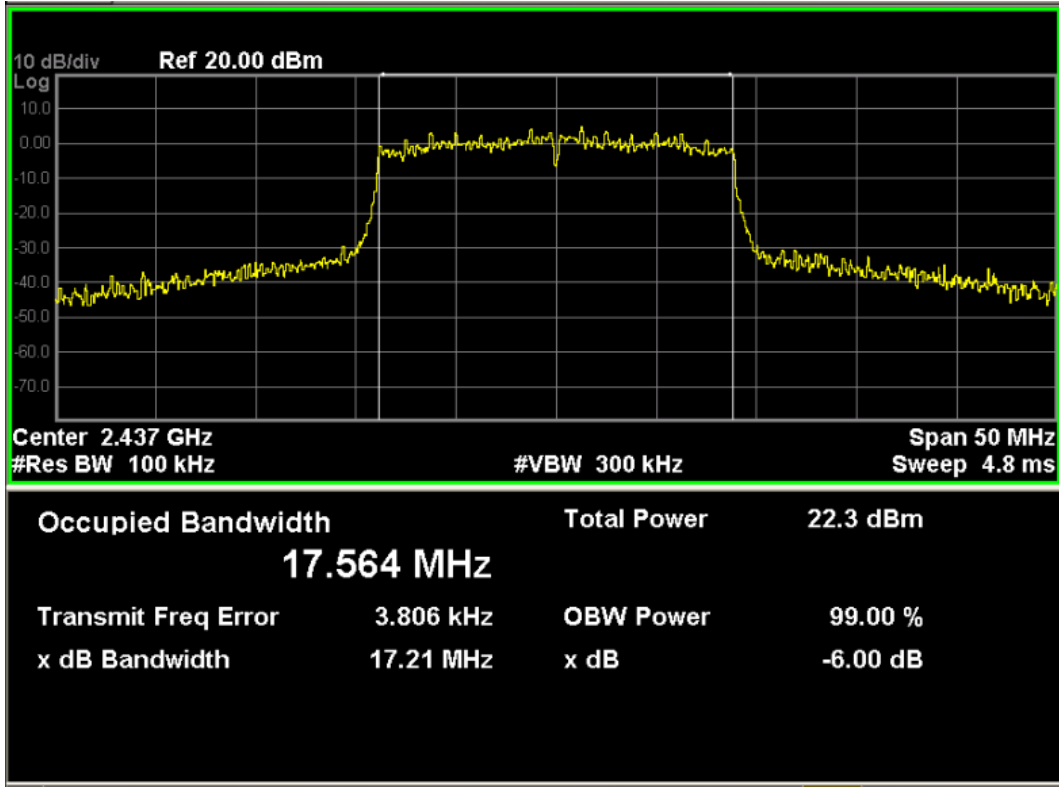


802.11n channel 11

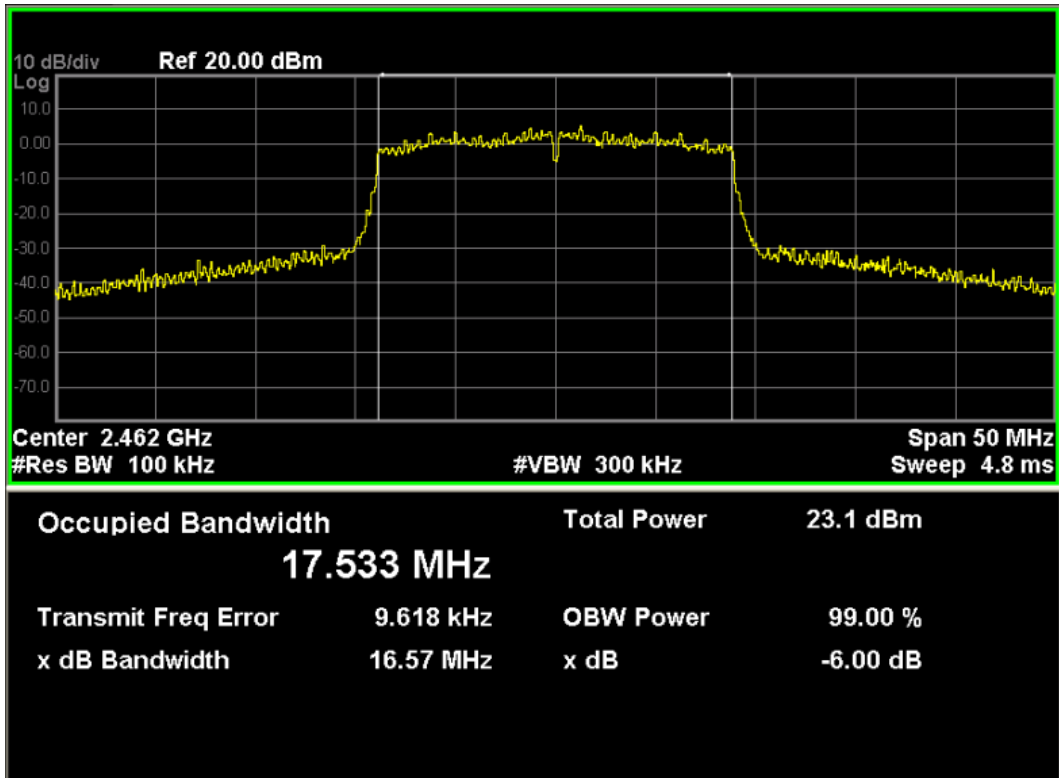

6. POWER SPECTRAL DENSITY

6.1 TEST SETUP

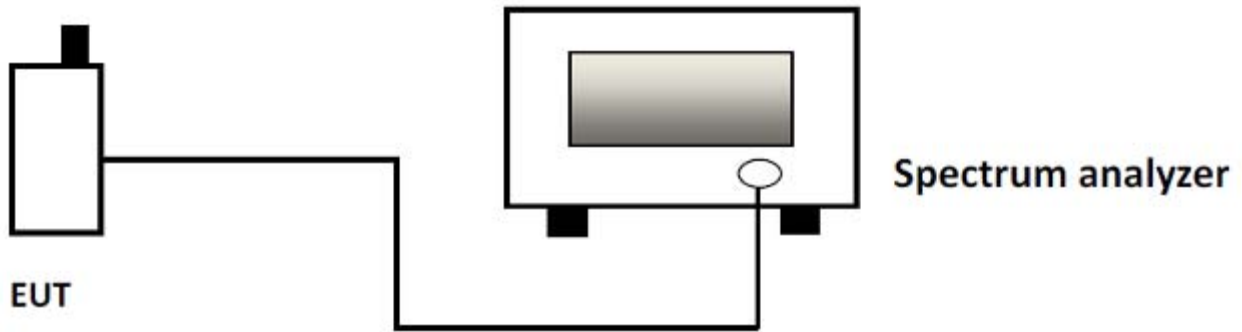

6.2 LIMITS

Limits	$\leq 8\text{dBm}/3\text{kHz}$
--------	--------------------------------

6.3 TEST PROCEDURE

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.

Set the VBW $\geq 3 \times \text{RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.


Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


6.4 RESULTS & PERFORMANCE

Mode	Channel	Measured level (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	CH1	-8.29	≤8.00	Pass
	CH6	-7.98	≤8.00	Pass
	CH11	-7.13	≤8.00	Pass
802.11g	CH1	-9.86	≤8.00	Pass
	CH6	-9.33	≤8.00	Pass
	CH11	-10.06	≤8.00	Pass
802.11n20	CH1	-10.92	≤8.00	Pass
	CH6	-9.88	≤8.00	Pass
	CH11	-10.12	≤8.00	Pass


802.11b 802.11b channel 1

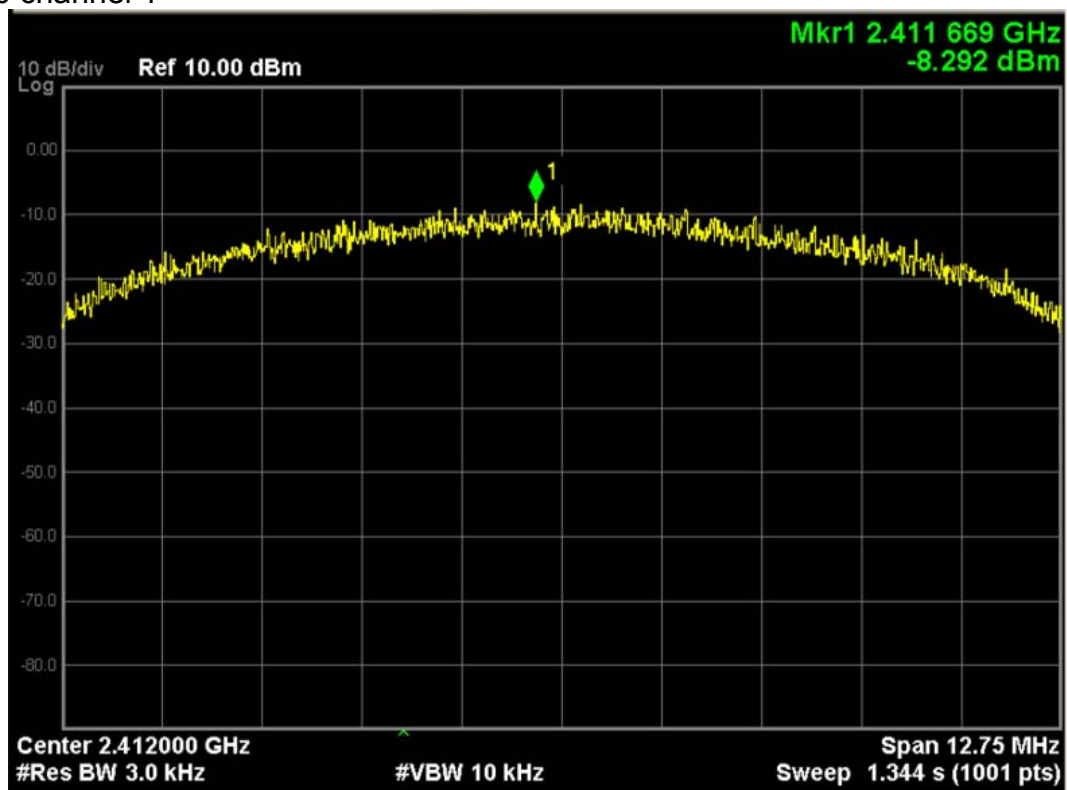


802.11b channel 6

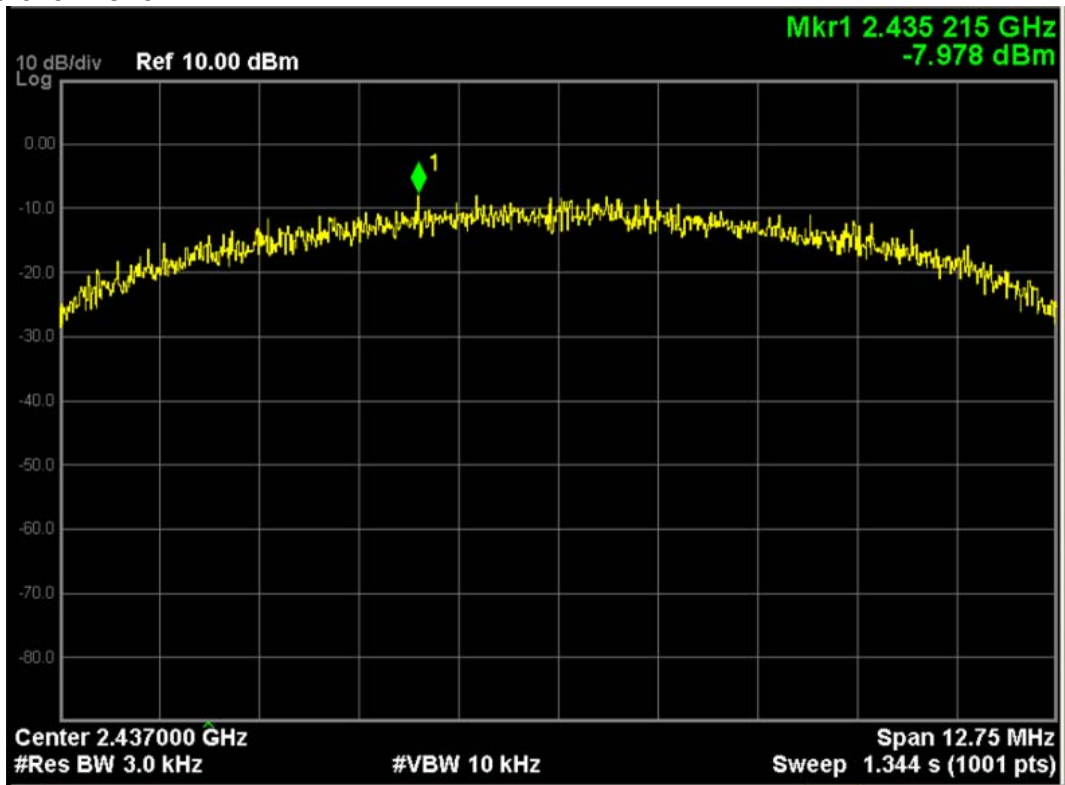


802.11b channel 11

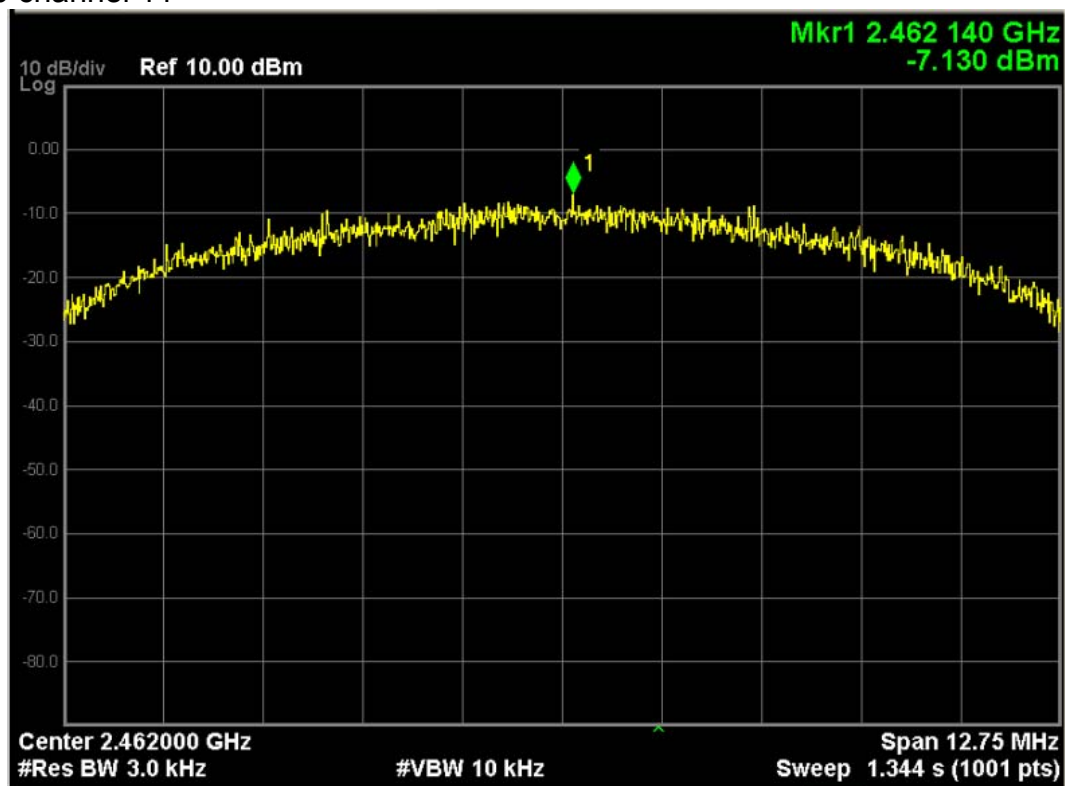


802.11g
802.11g channel 1

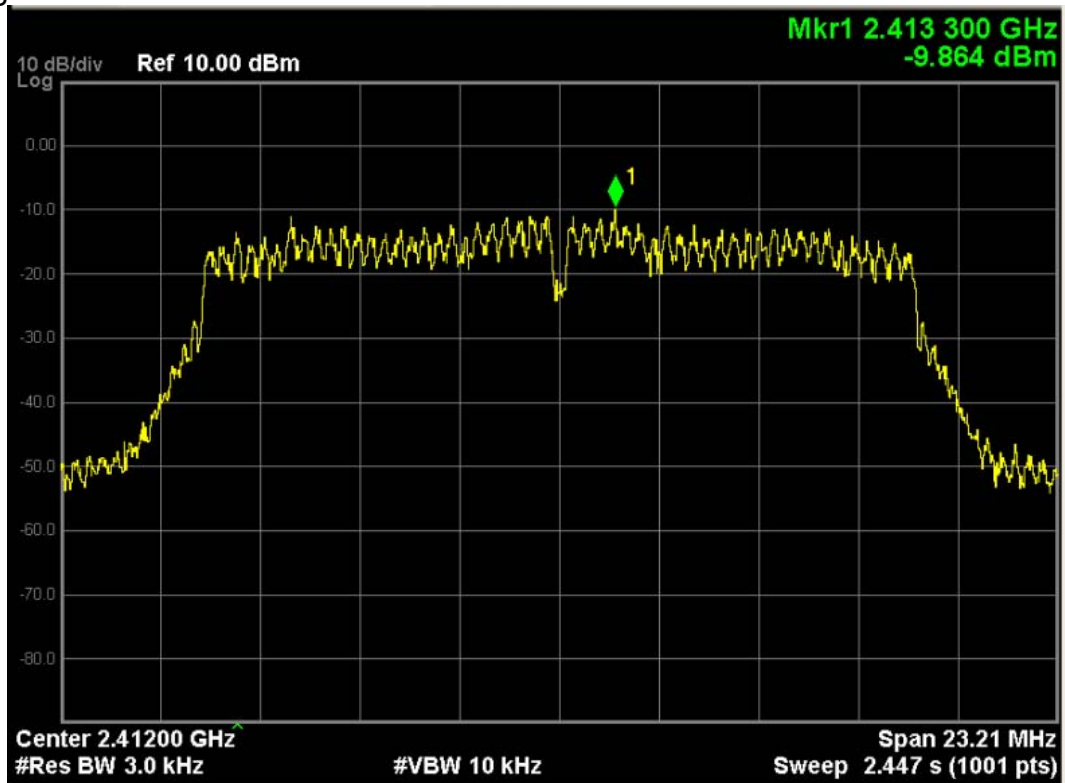


802.11g channel 6

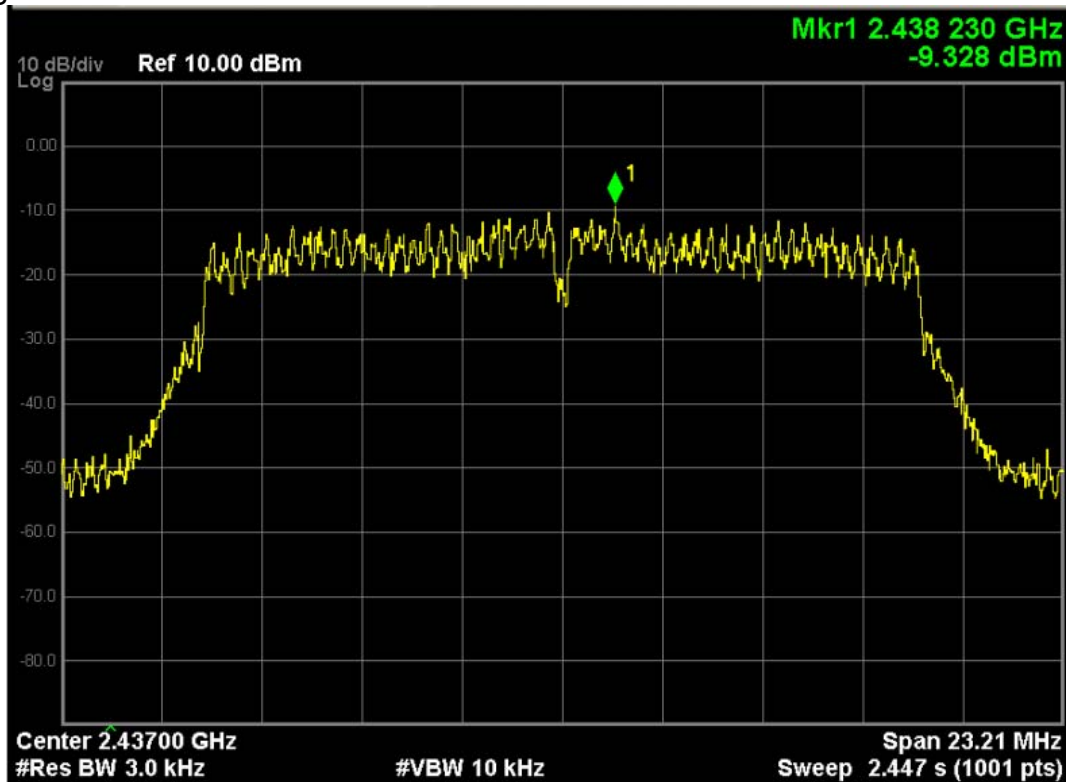


802.11g channel 11

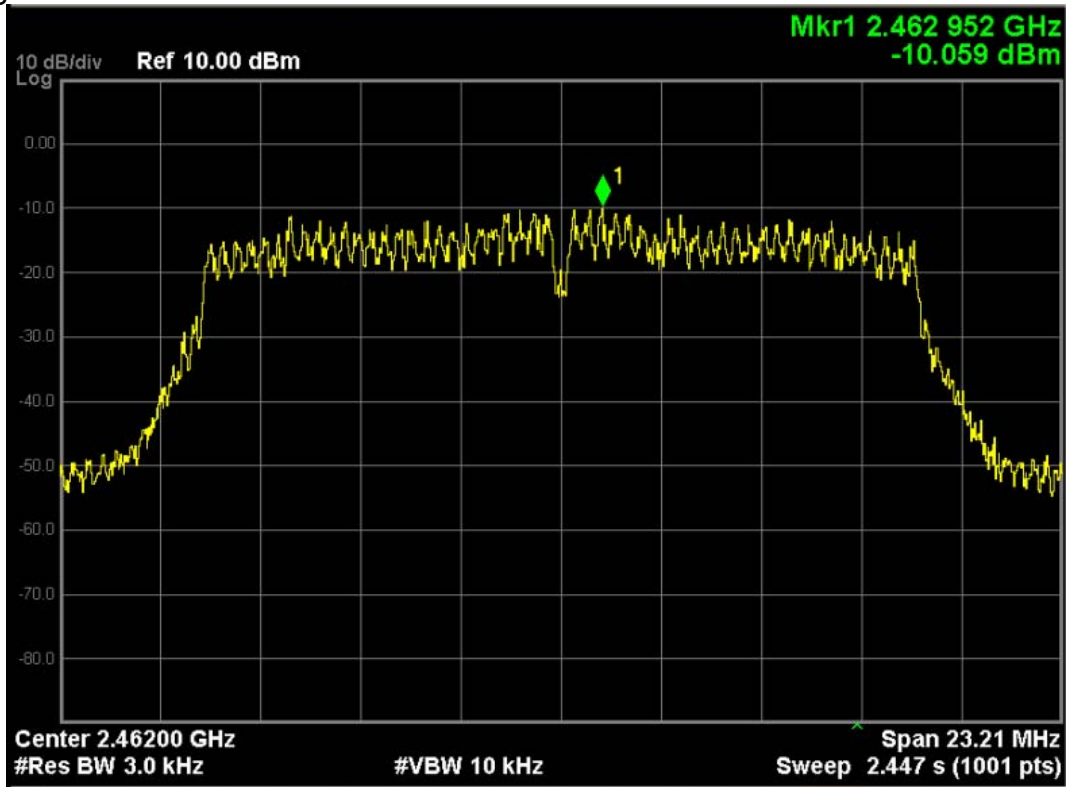


802.11n20
802.11n channel 1

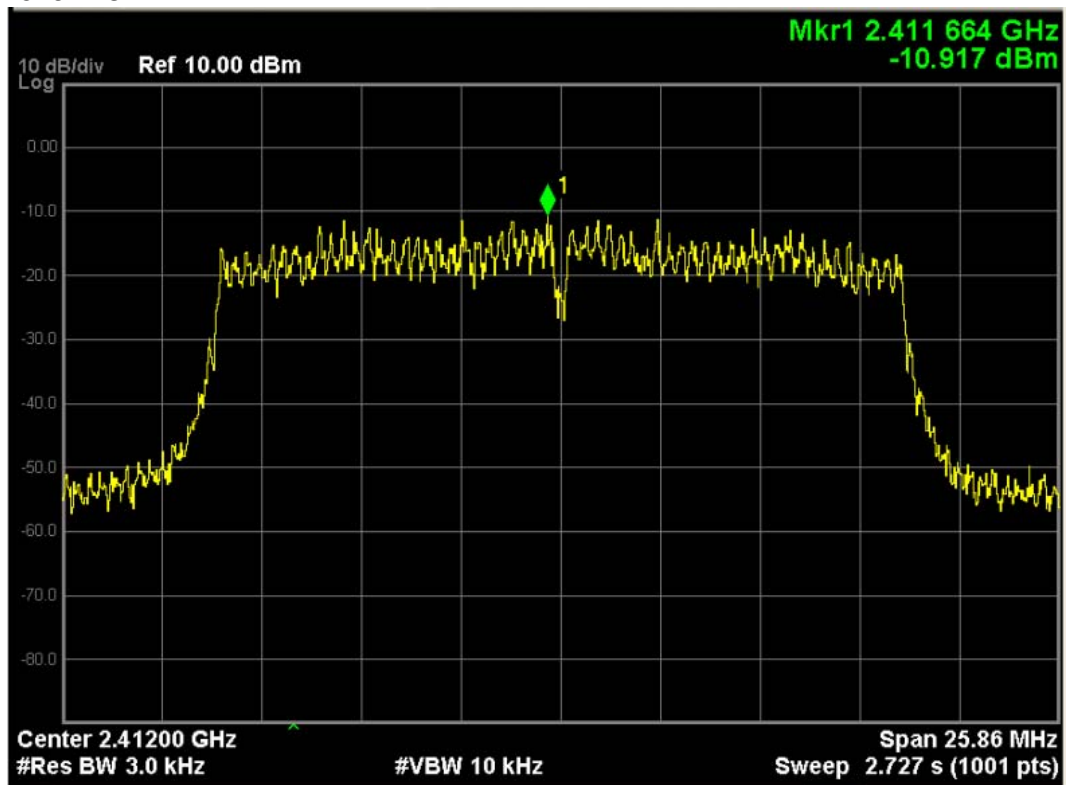

802.11n channel 6

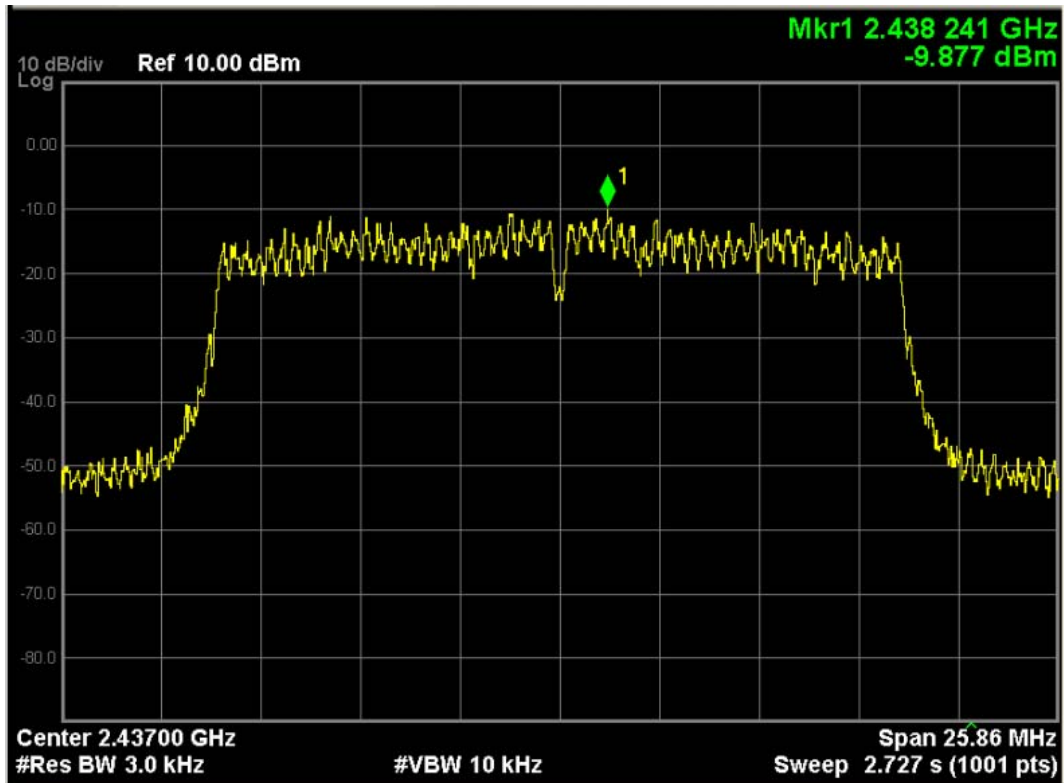


802.11n channel 11

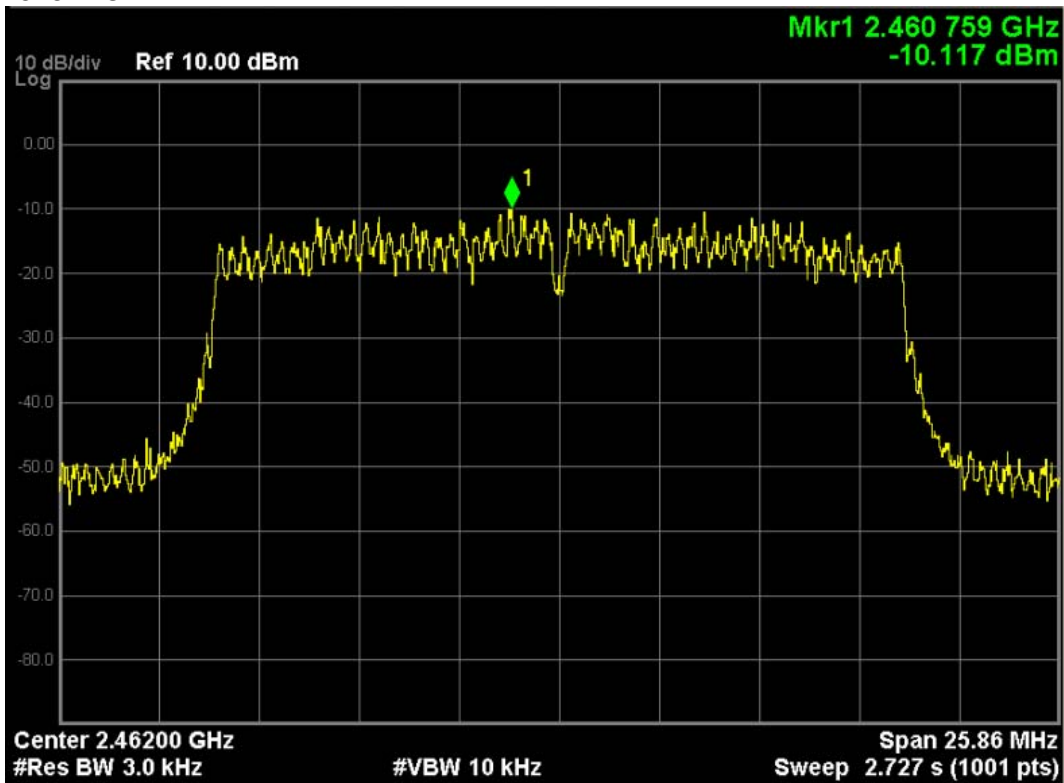

7. PEAK OUTPUT POWER (CONDUCTION)

7.1 TEST SETUP

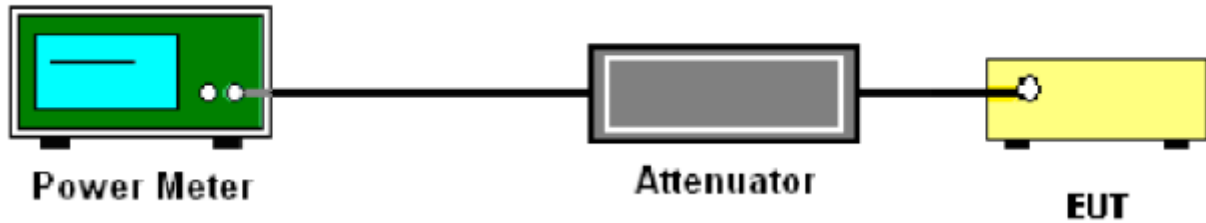

7.2 LIMITS

Limits	<30dBm
--------	--------

7.3 TEST PROCEDURE

Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum analyzer. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels.


WIFI: Low(1), middle(6) and High (11).

7.4 RESULTS & PERFORMANCE

802.11b			
Channel	Peak power (dBm)	Limit (dBm)	Margin (dB)
1 (2412MHz)	15.13	30	14.87
6 (2437MHz)	15.29	30	14.71
11 (2462MHz)	15.17	30	14.83
802.11g			
Channel	Peak power (dBm)	Limit (dBm)	Margin (dB)
1 (2412MHz)	15.04	30	14.96
6 (2437MHz)	15.15	30	14.85
11 (2462MHz)	14.95	30	15.05
802.11n20			
Channel	Peak power (dBm)	Limit (dBm)	Margin (dB)
1 (2412MHz)	15.06	30	14.94
6 (2437MHz)	15.25	30	14.75
11 (2462MHz)	15.13	30	14.87

8. SPURIOUS EMISSIONS (CONDUCTION)

8.1 TEST SETUP

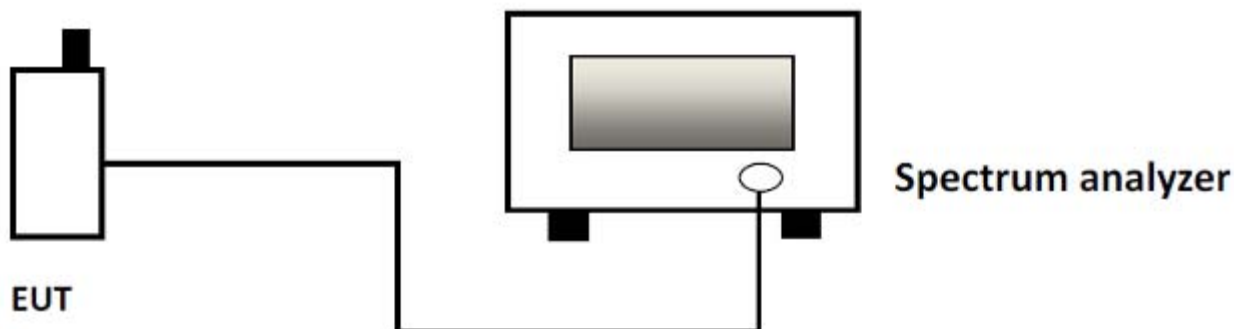

8.2 LIMITS

Limit	<(P-20dB)
Note: P is the highest level of the desired power	

8.3 TEST PROCEDURE

The EUT was connected to Spectrum Analyzer and Base Station via power divider. Use the following spectrum analyzer settings:



Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.



RBW = 100 kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

The level displayed must comply with the limit specified in this Section.


8.4 RESULTS & PERFORMANCE

802.11b, traffic mode; Channel 1

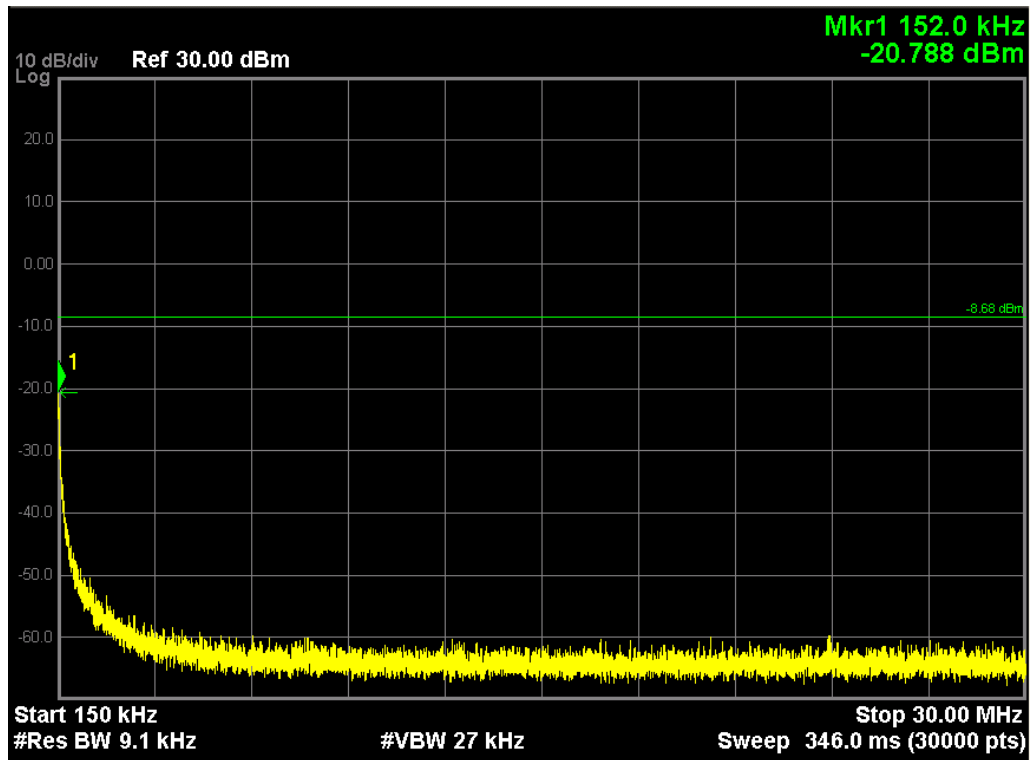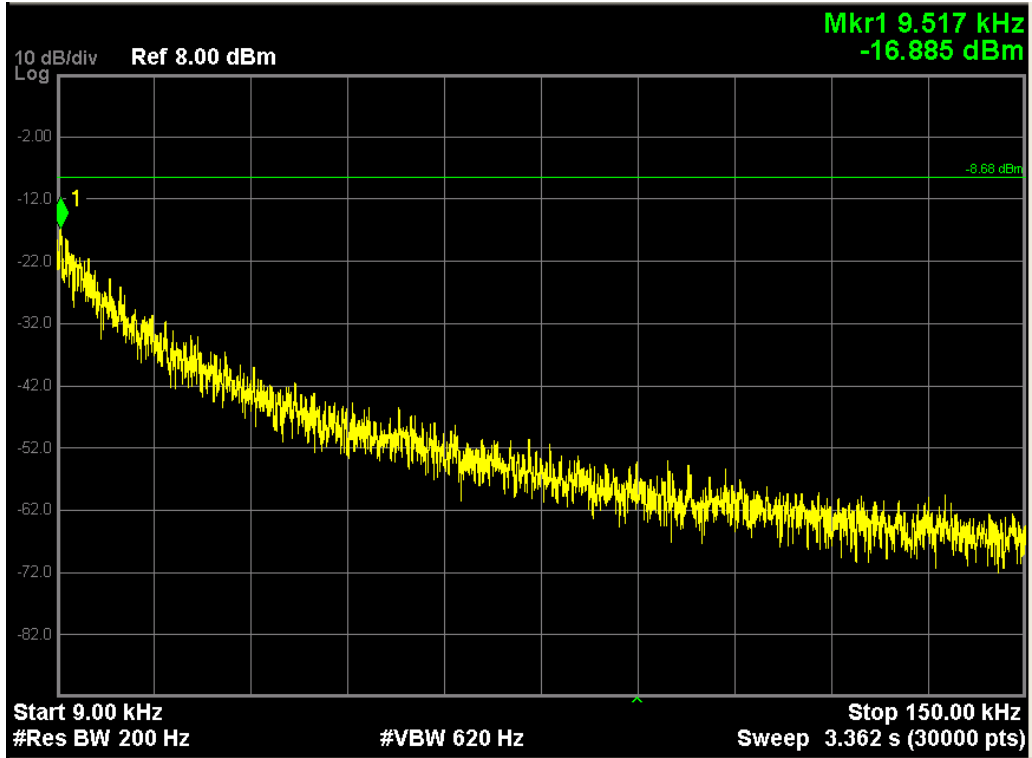


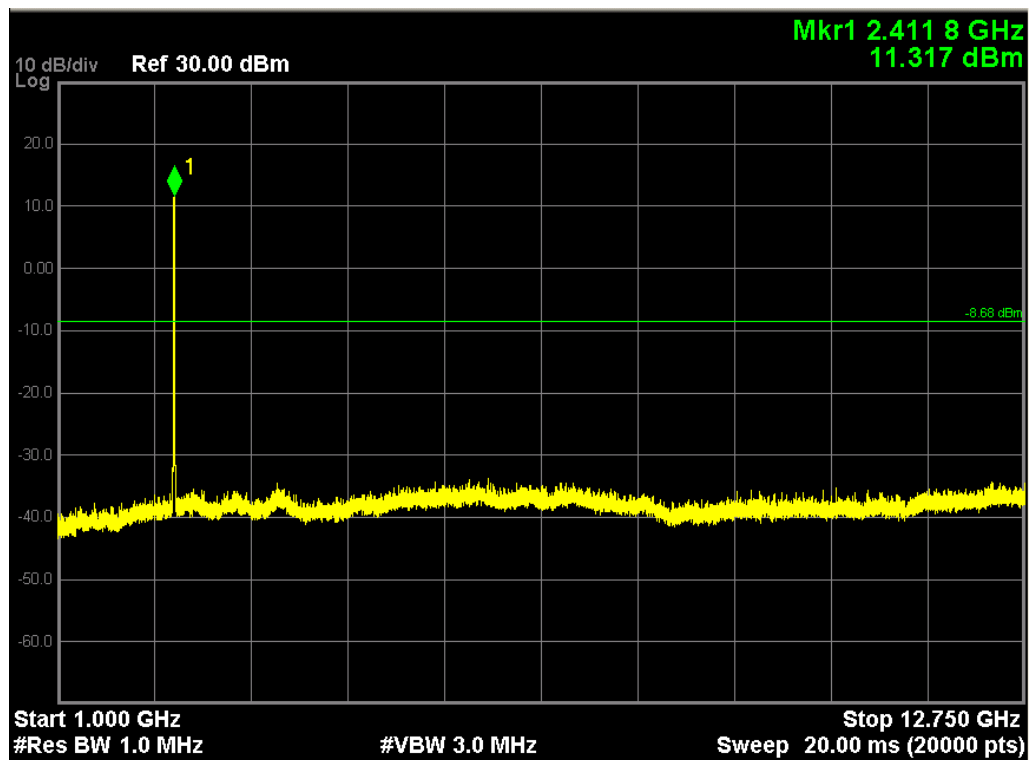
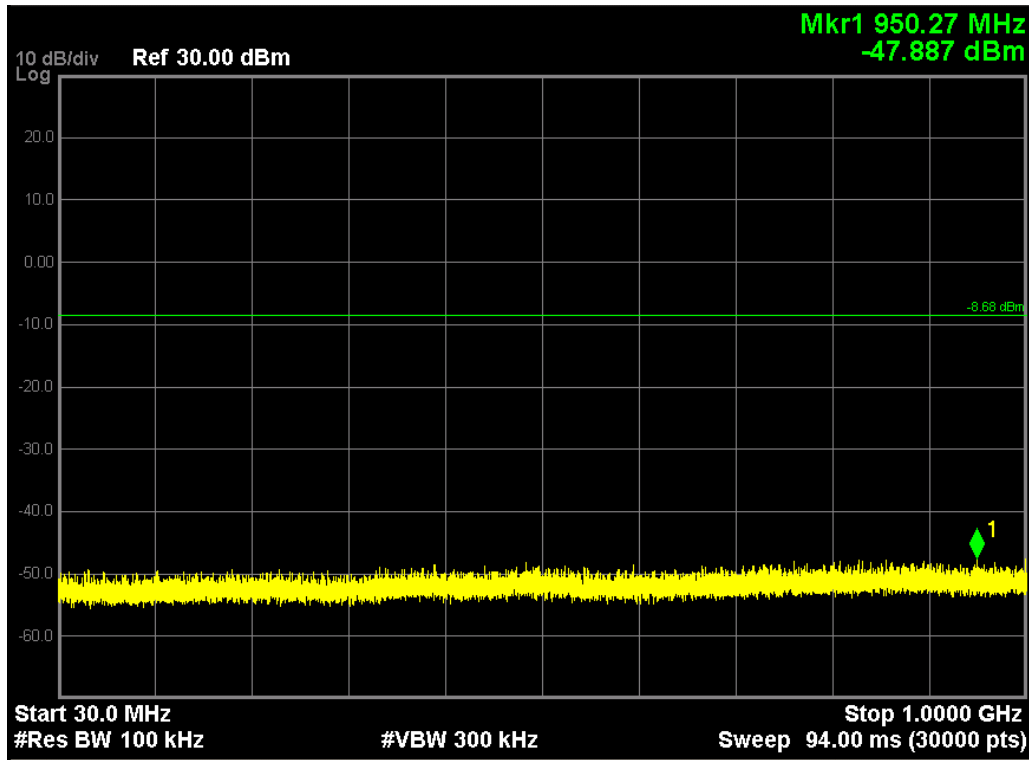




Note: The point mark1 is carrier.

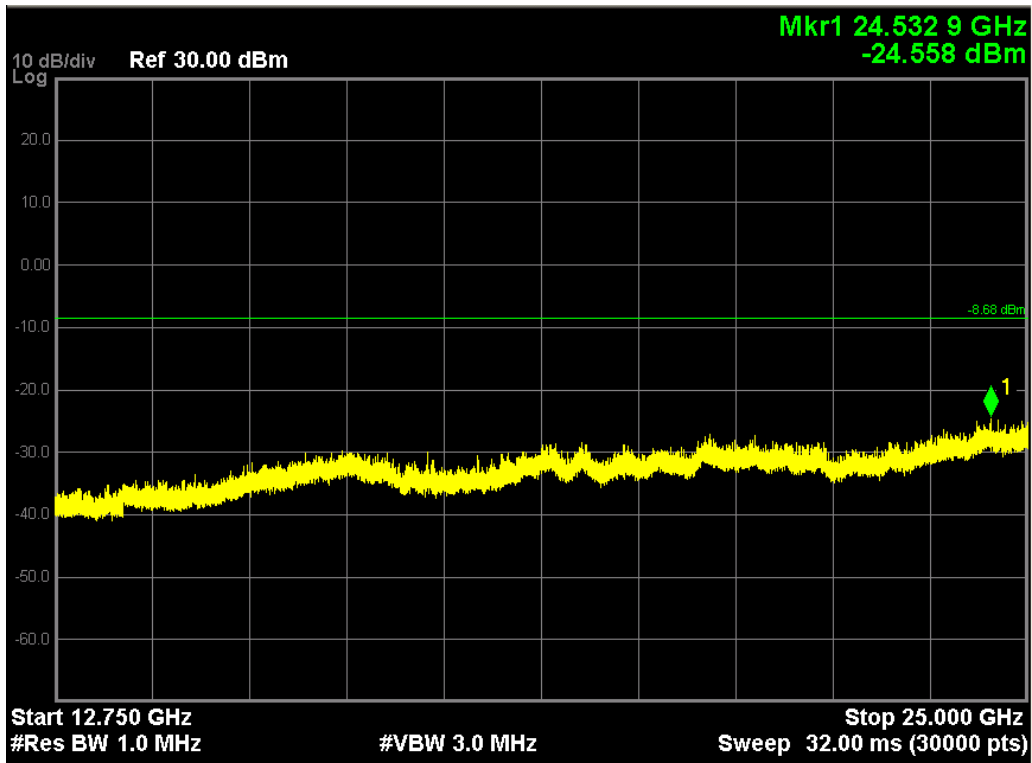



802.11b, traffic mode; Channel 6


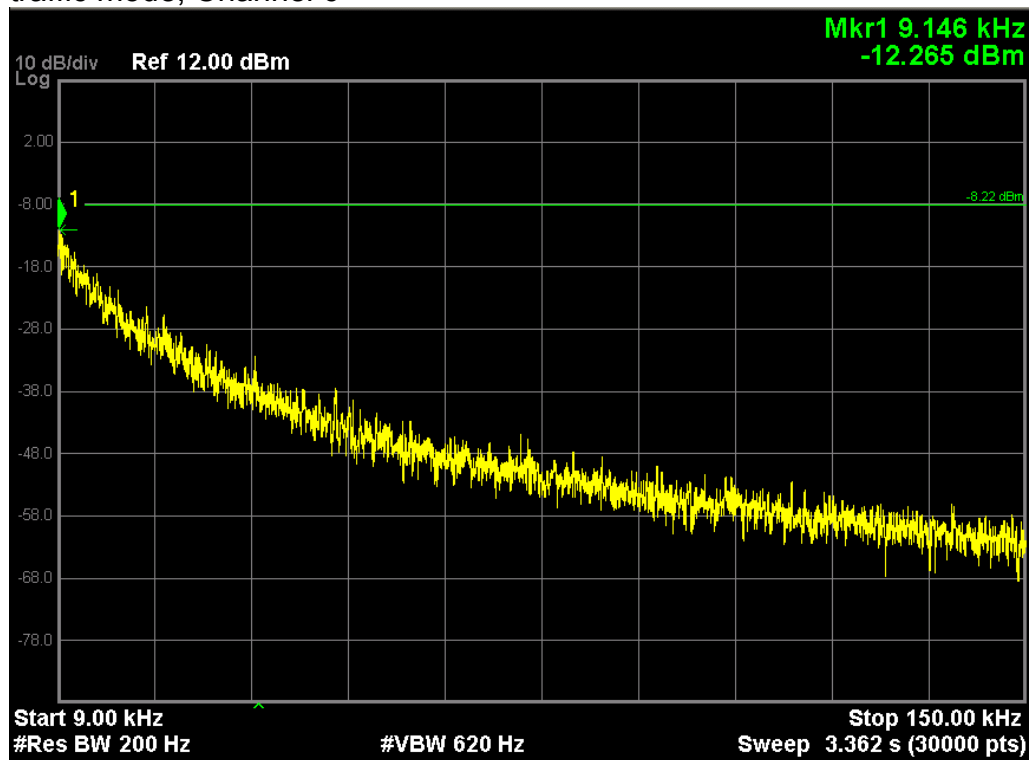


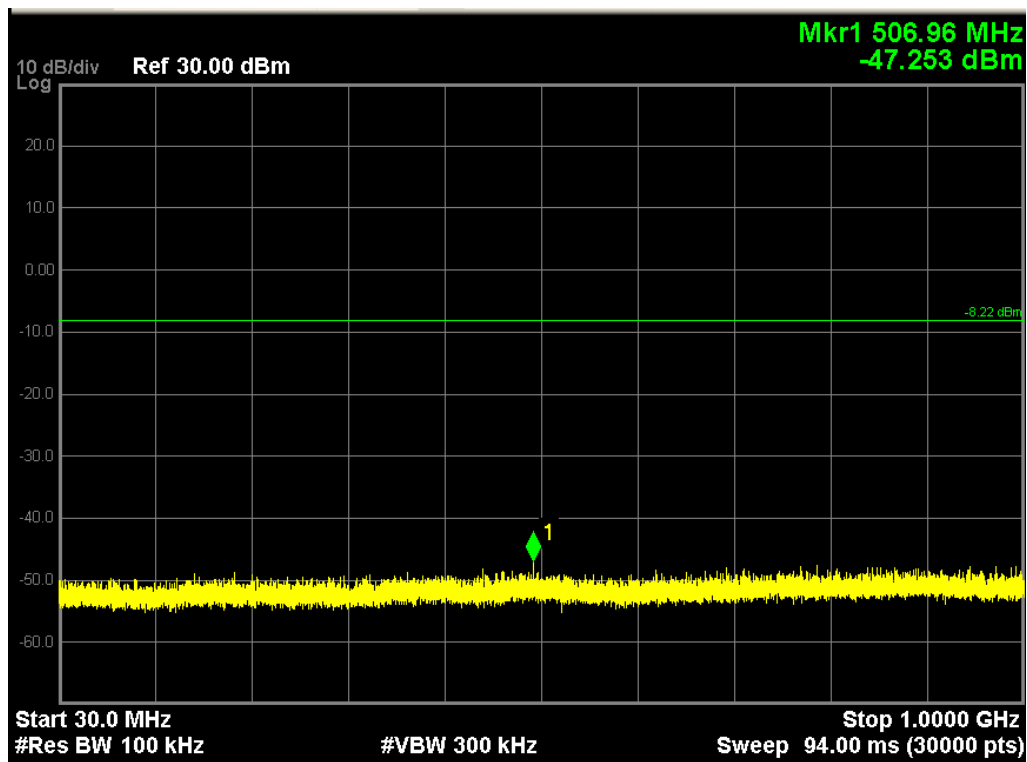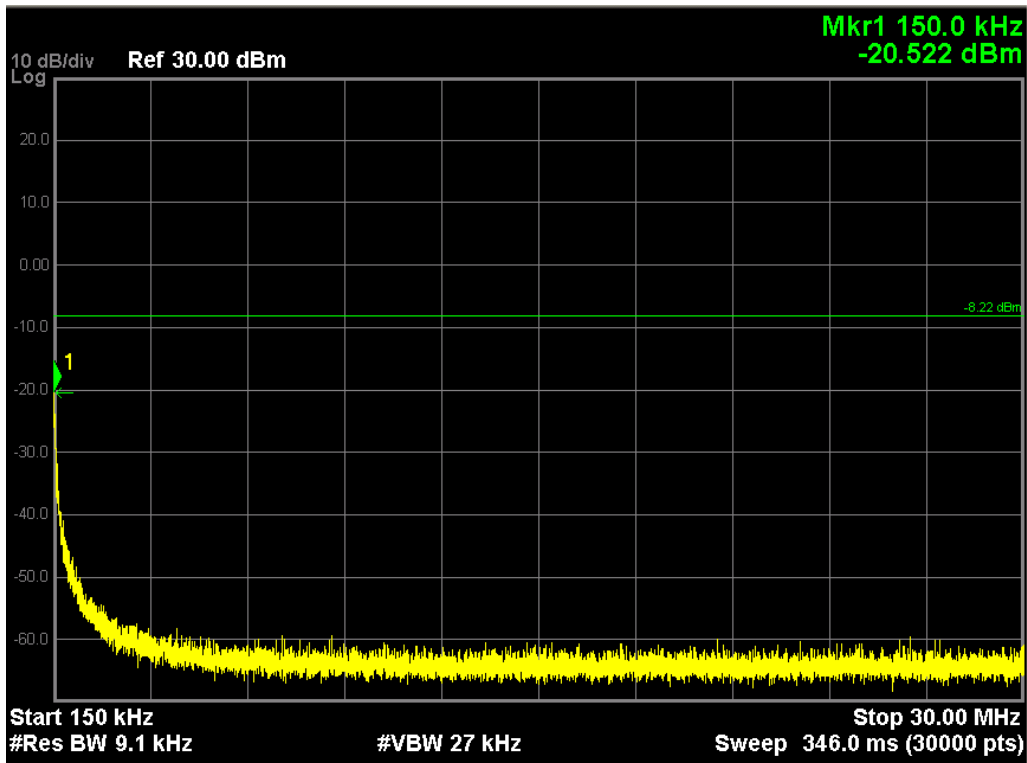

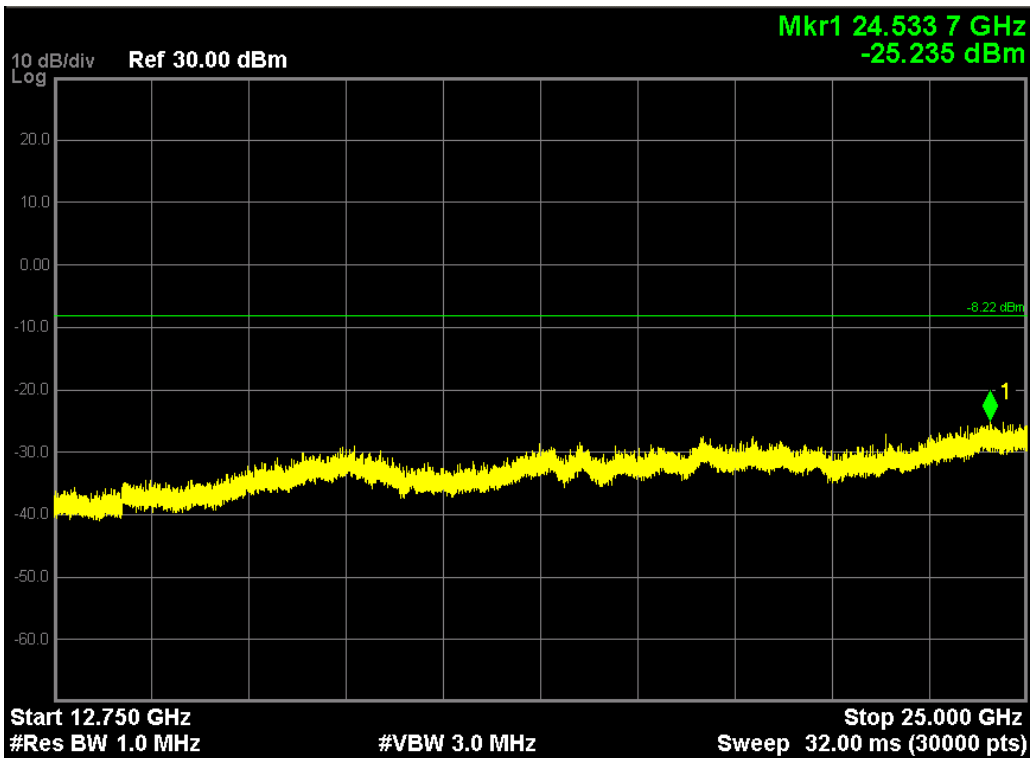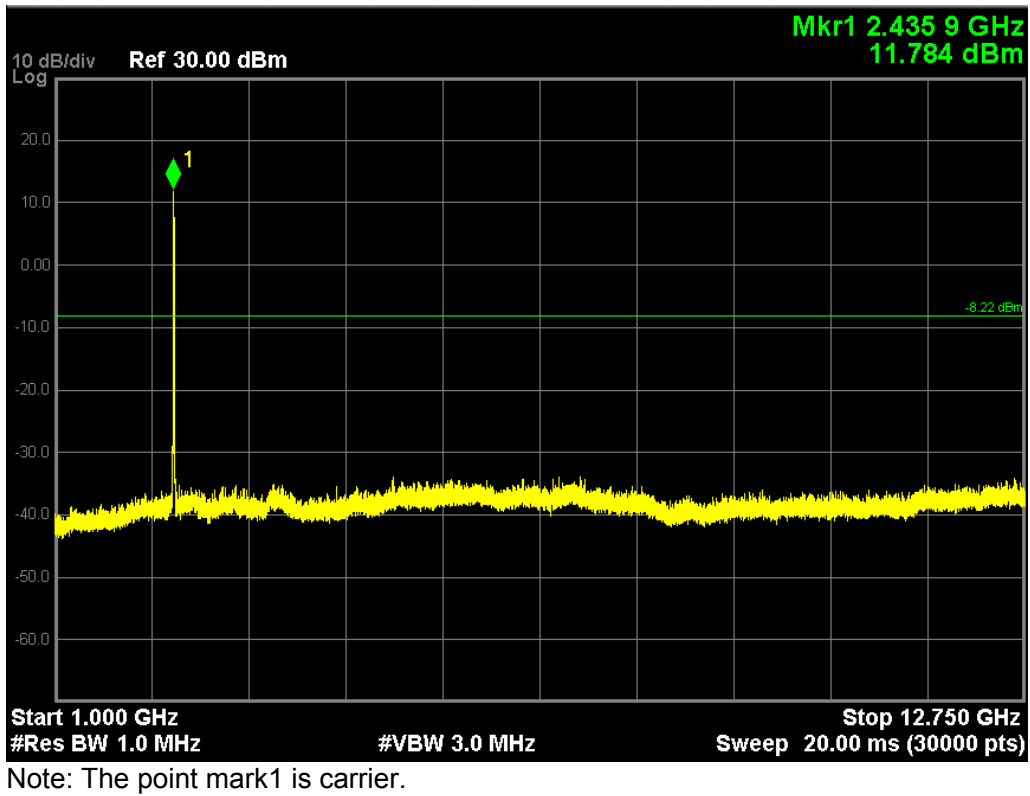


802.11b, traffic mode; Channel 11

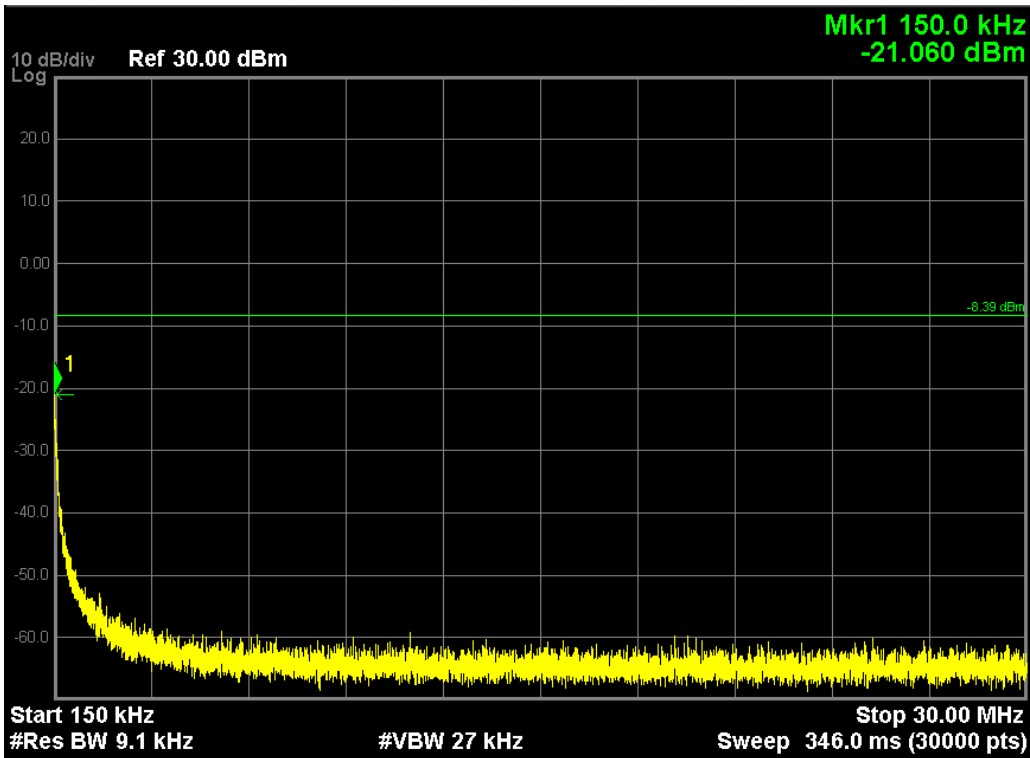
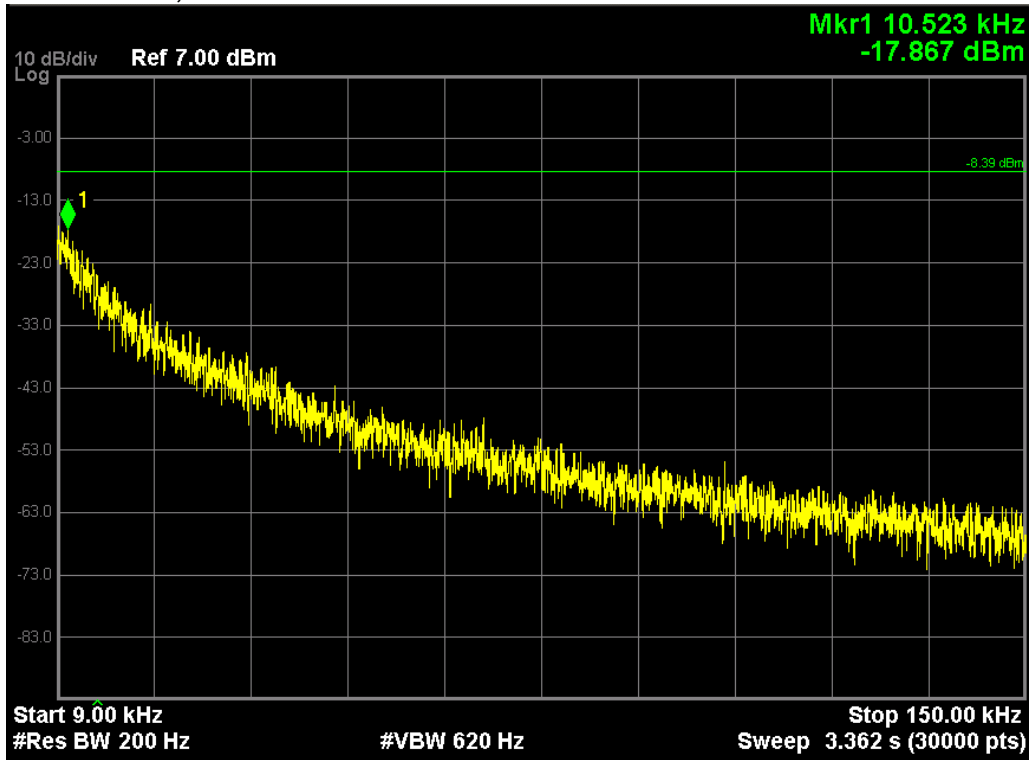


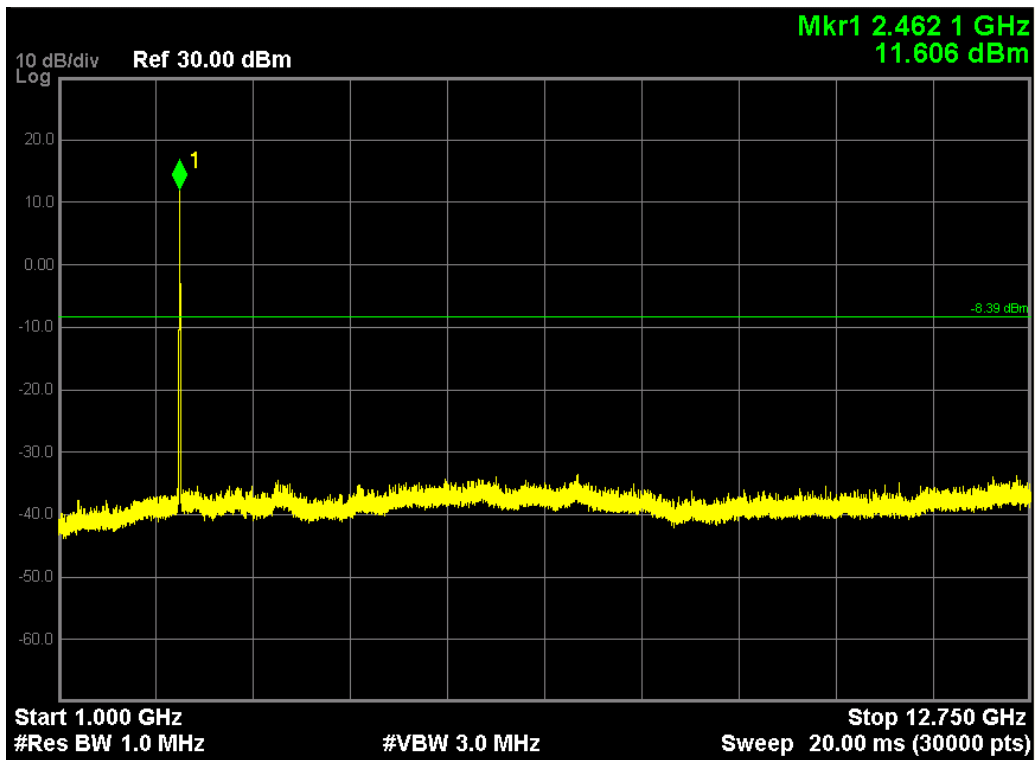
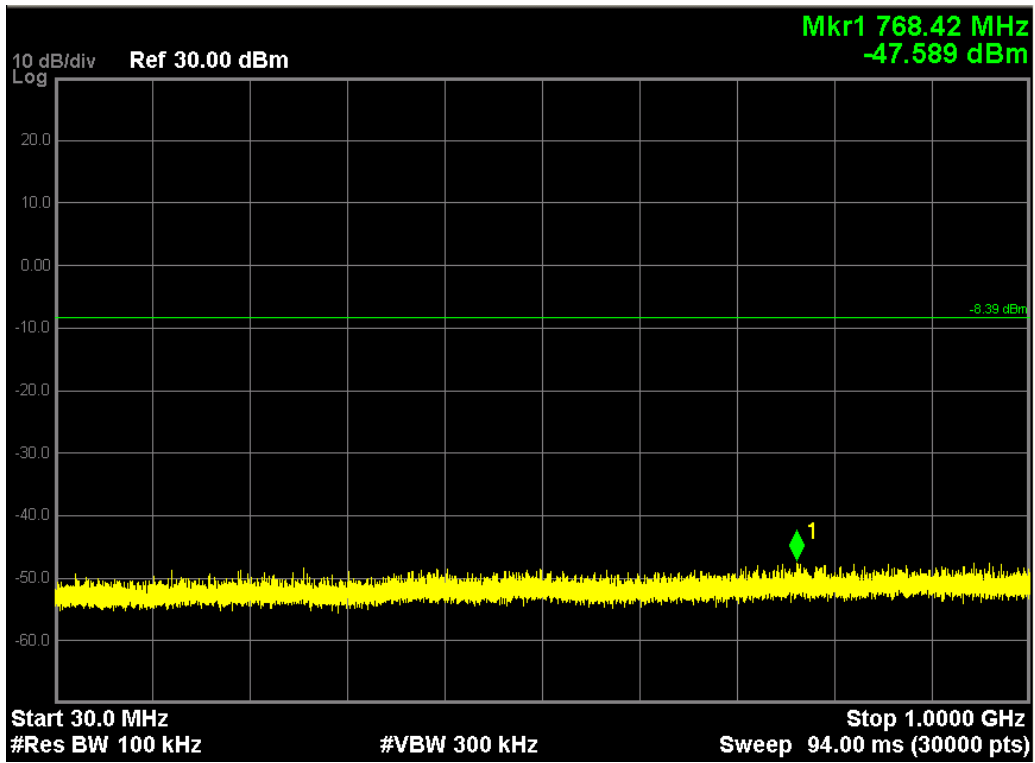


Note: The Mark1 point is carrier.

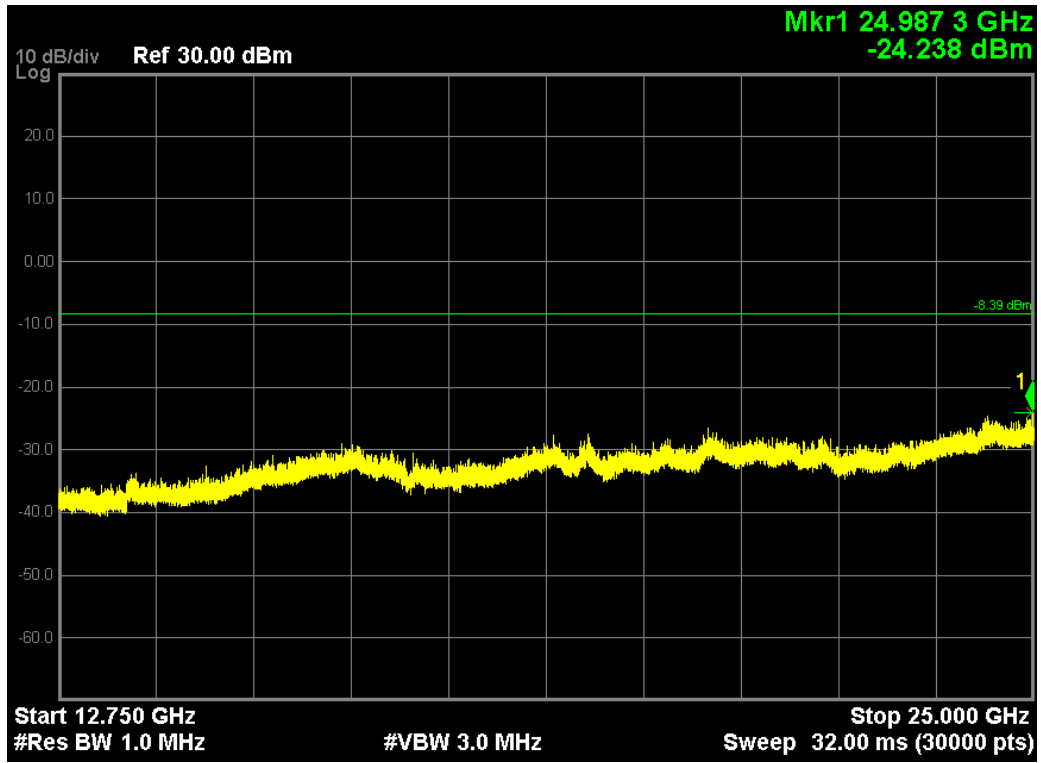


802.11g, traffic mode; Channel 1

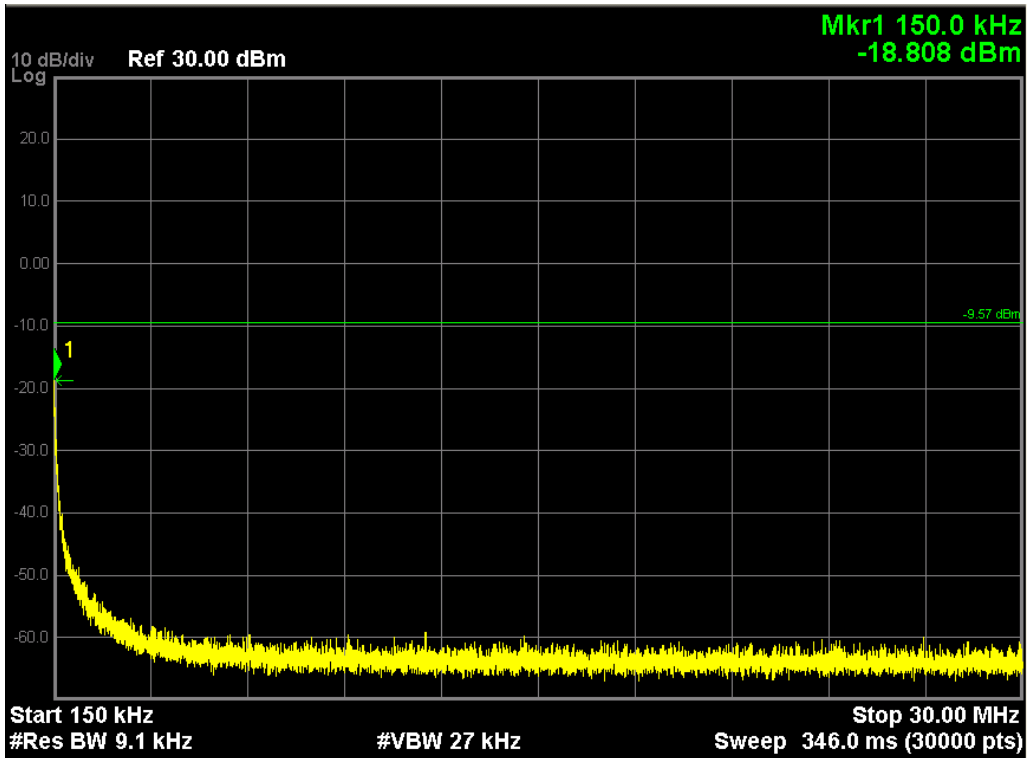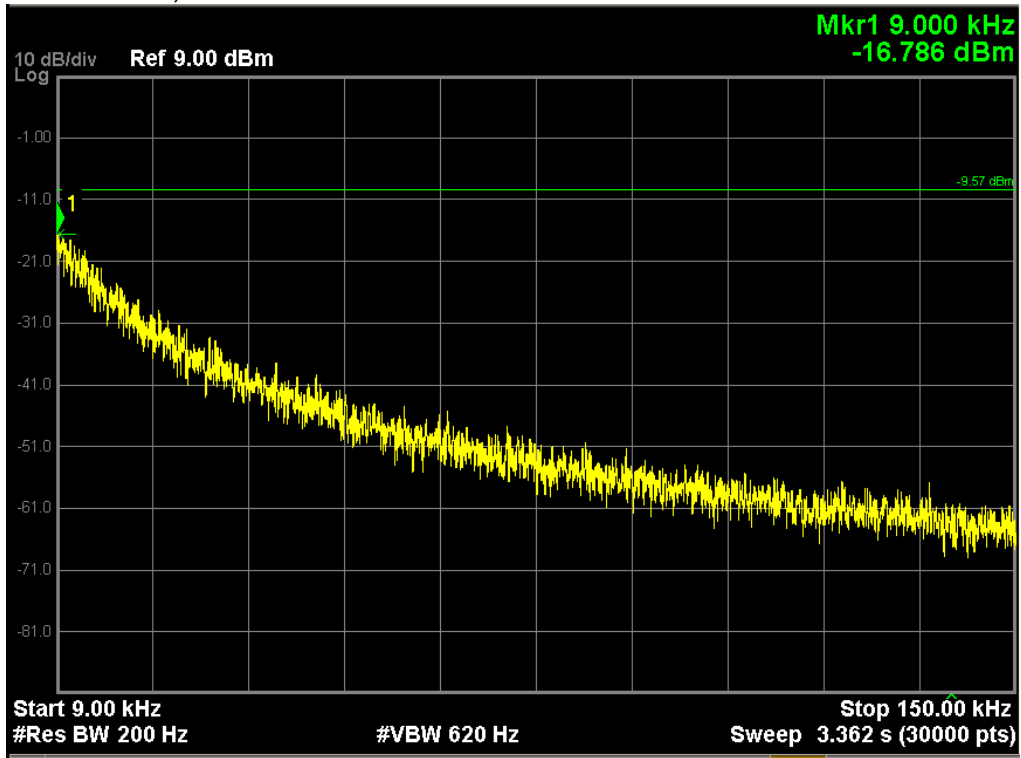


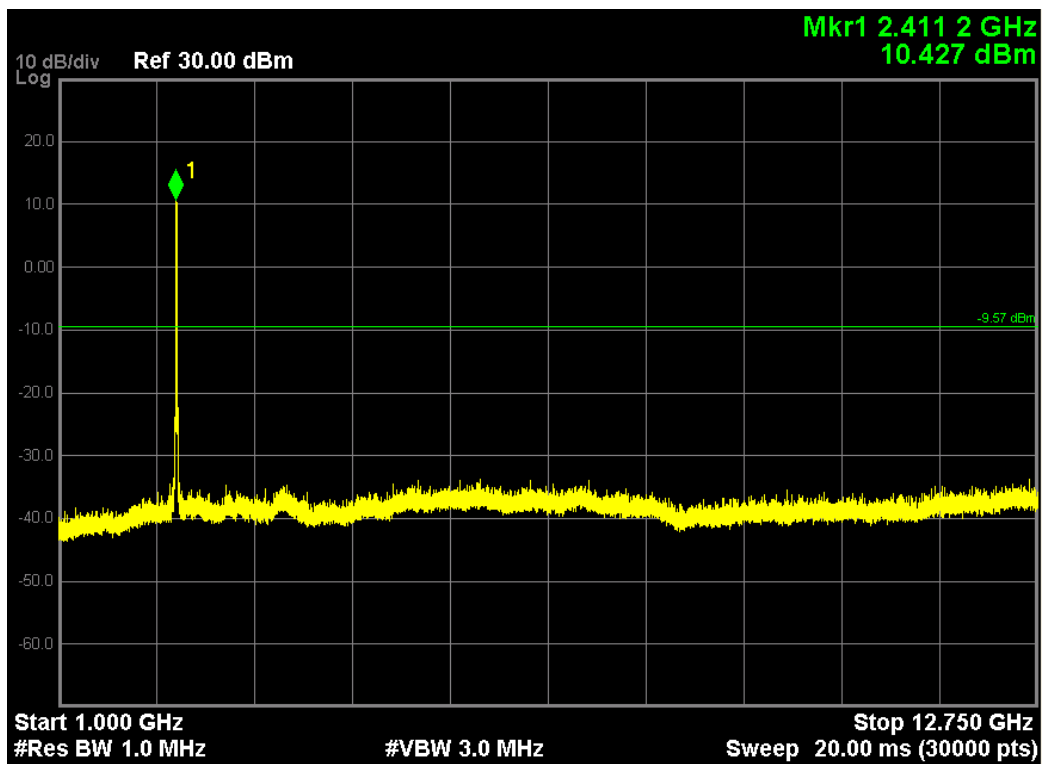
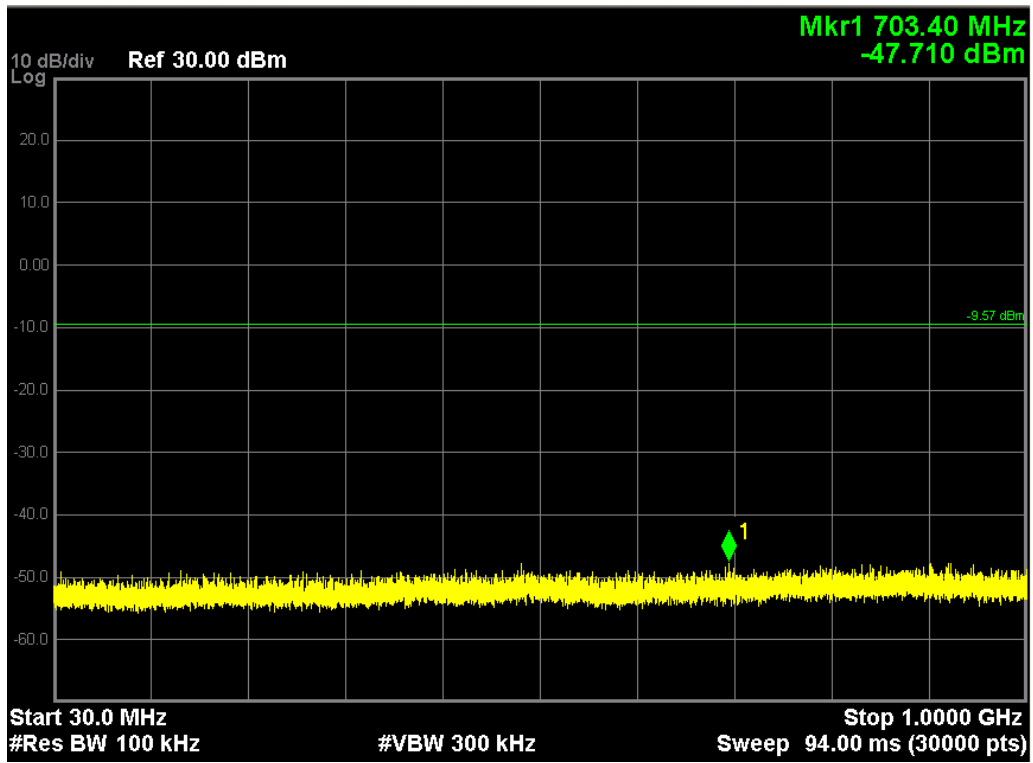



Note: The Mark1 point is carrier.

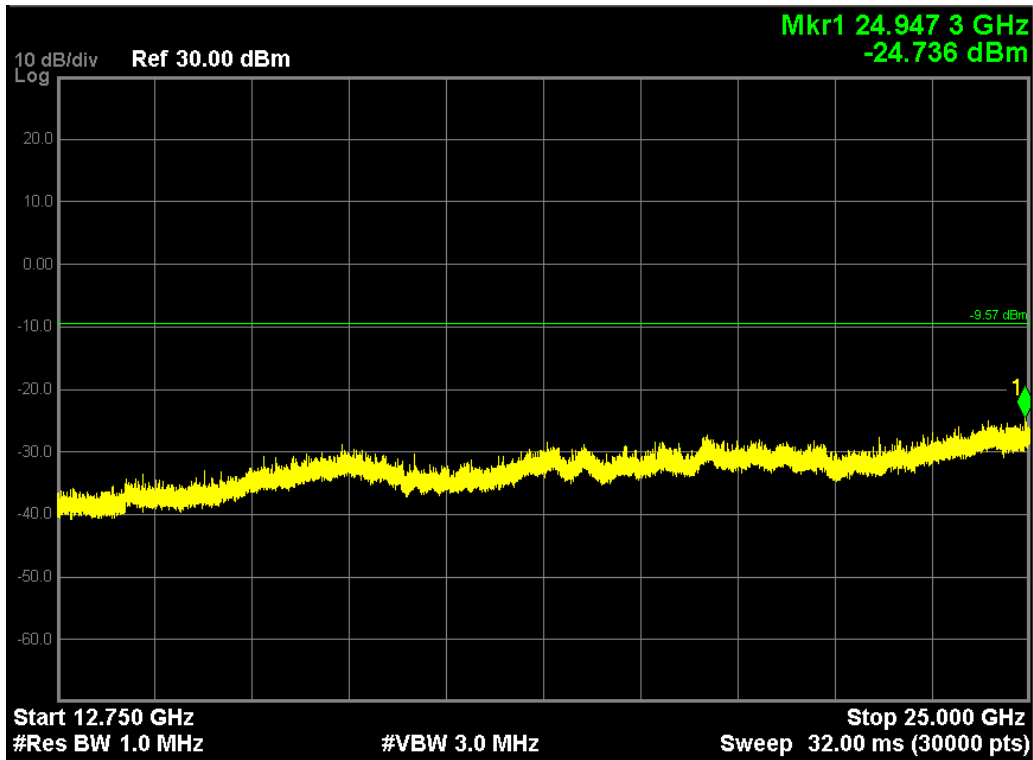


802.11g, traffic mode; Channel 6

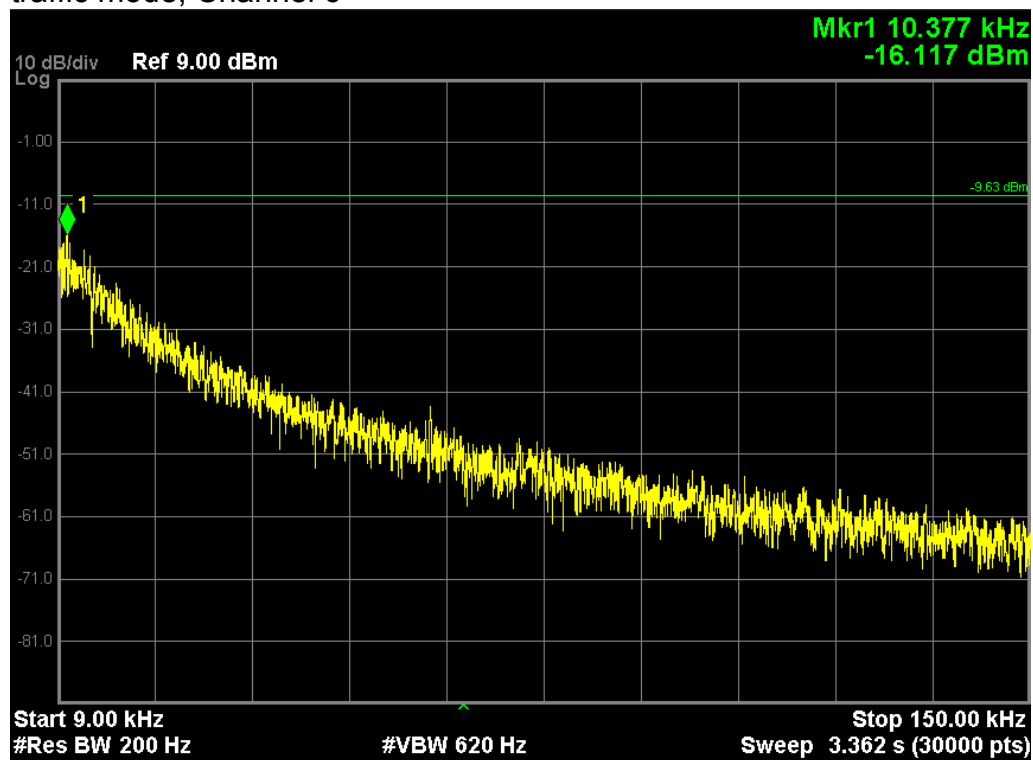

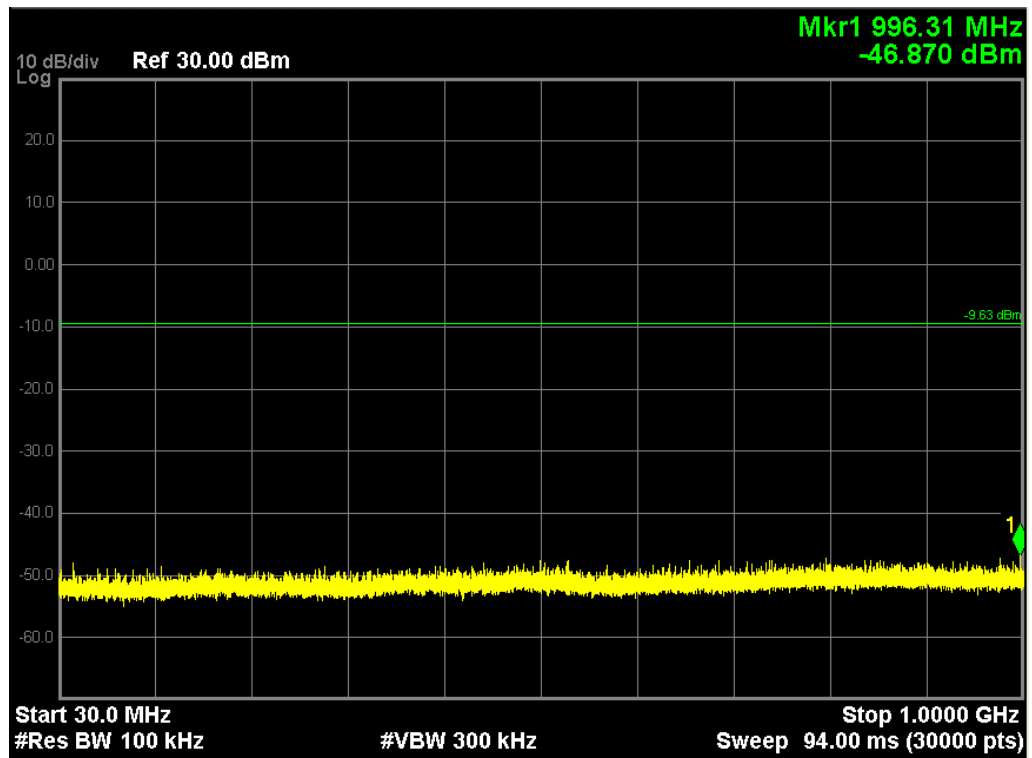
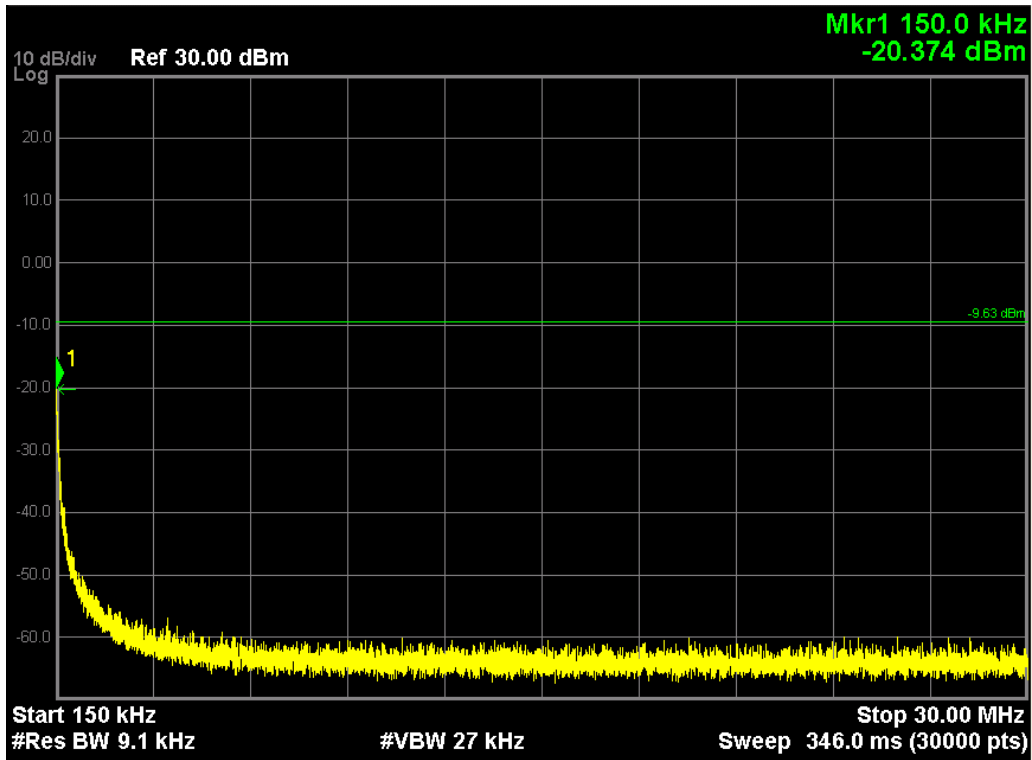



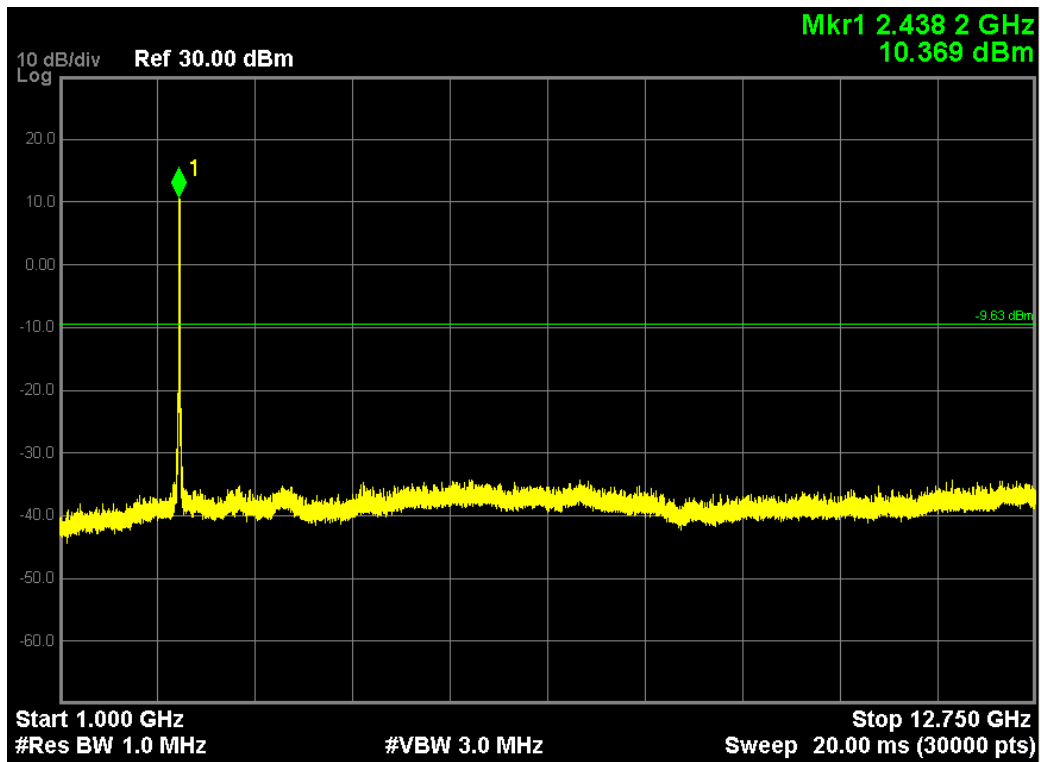


Note: The Mark1 point is carrier

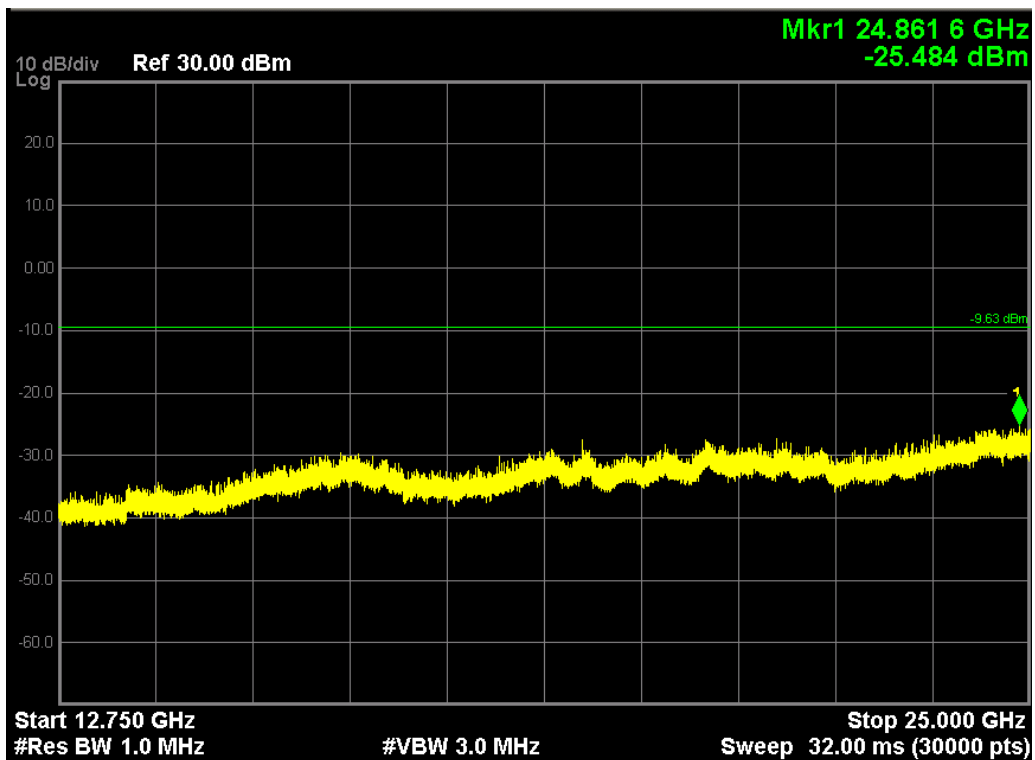


802.11g, traffic mode; Channel 11

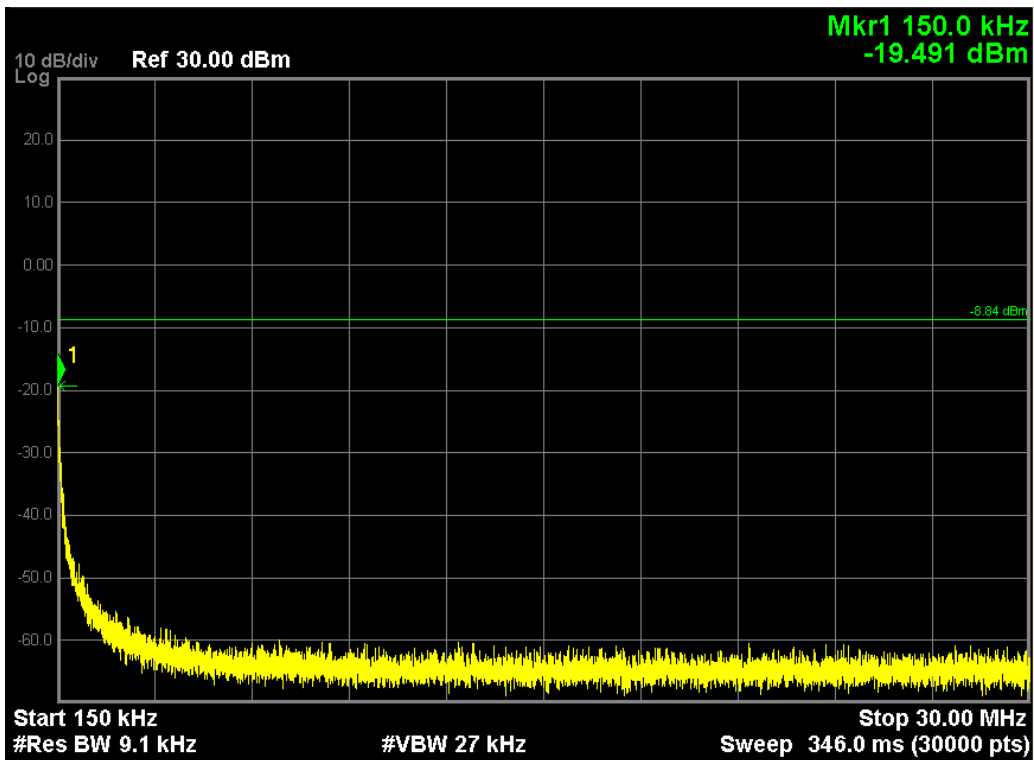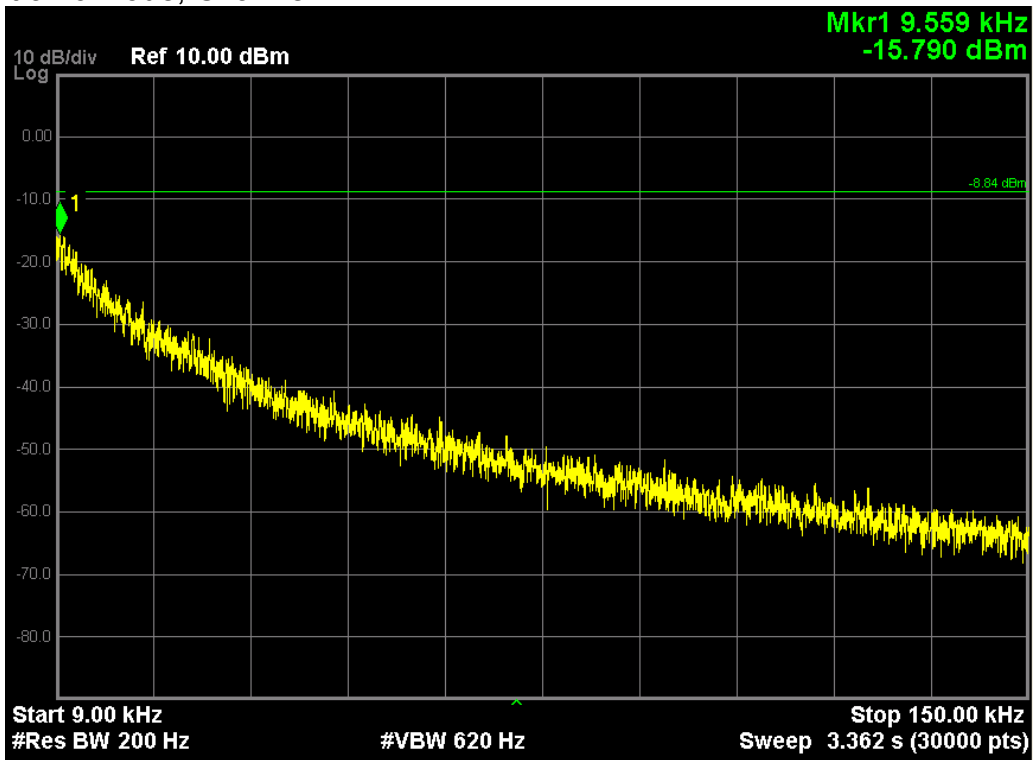


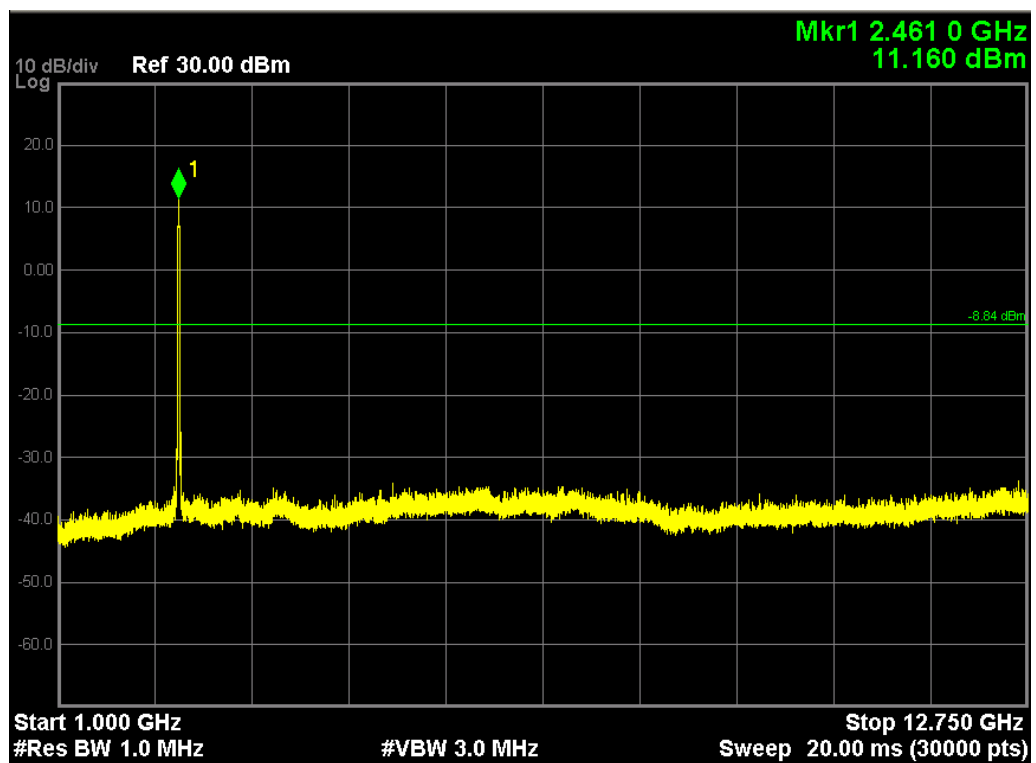
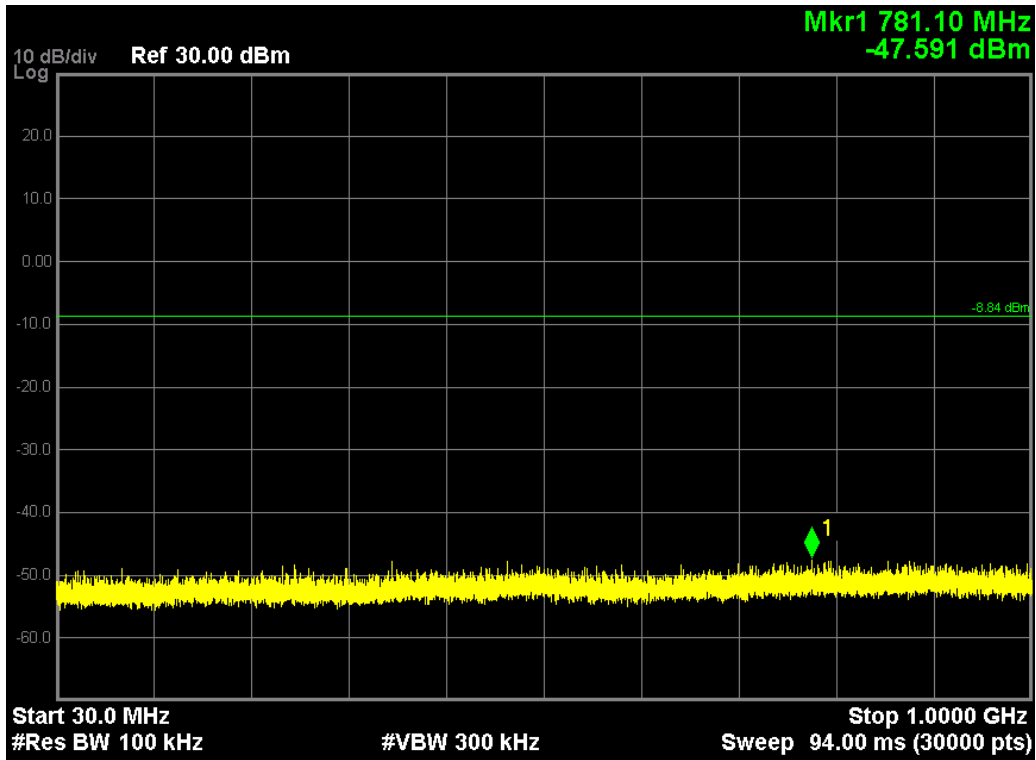



Note: The Mark1 point is carrier

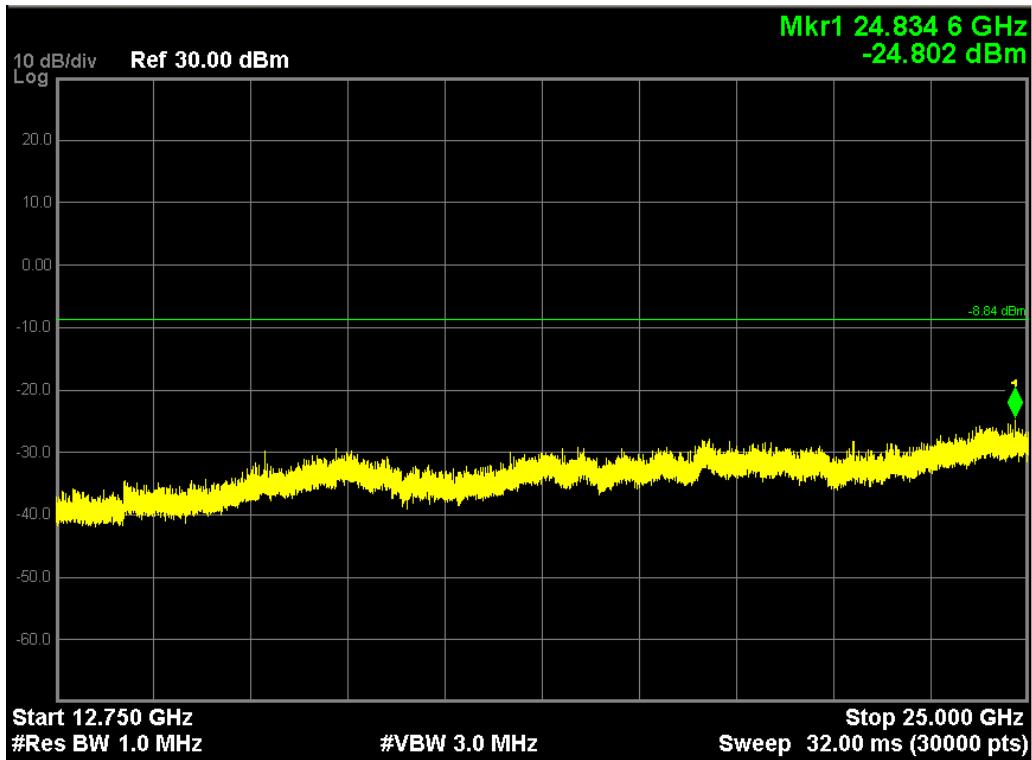


802.11n20, traffic mode; Channel 1

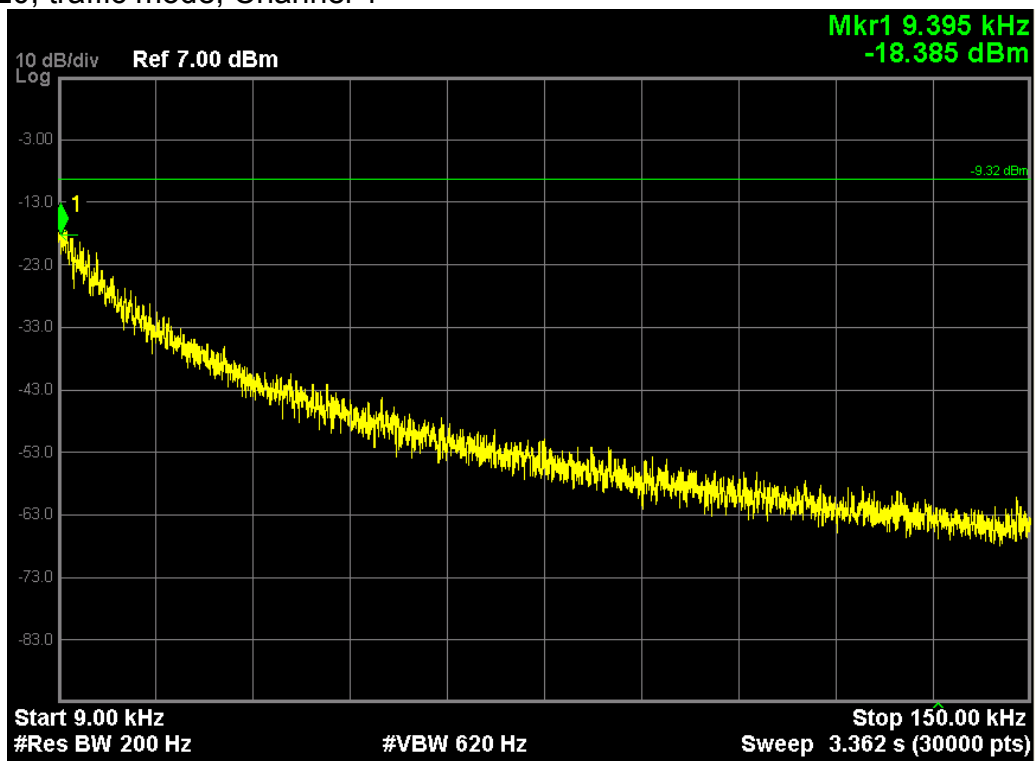

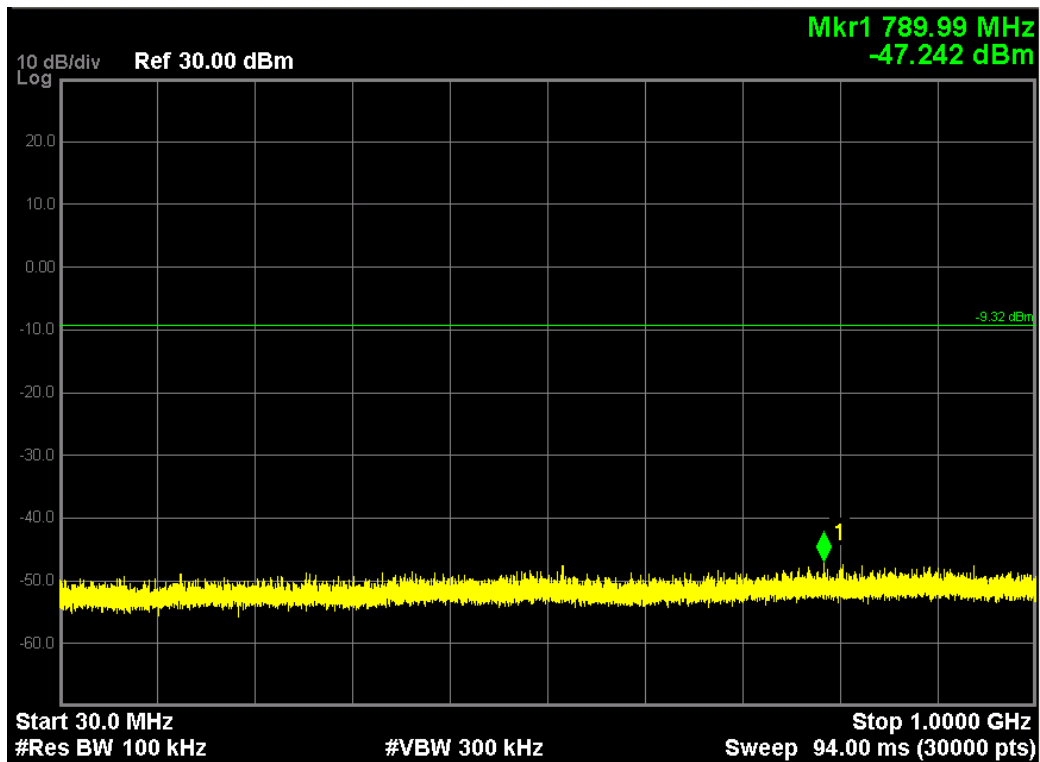
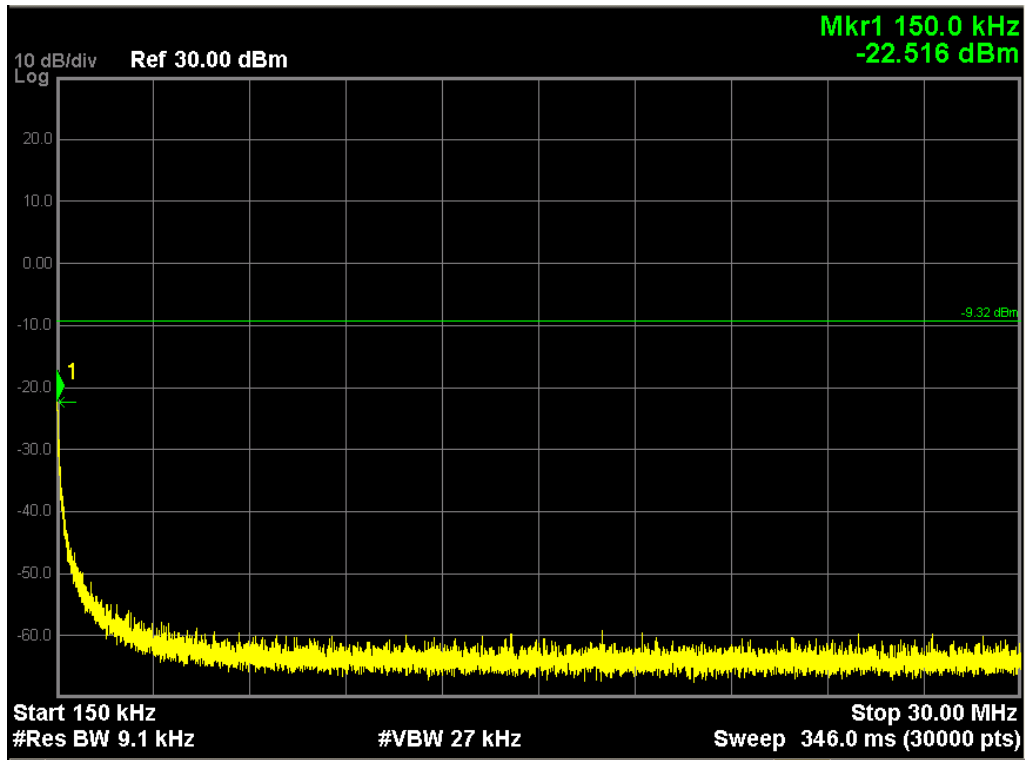



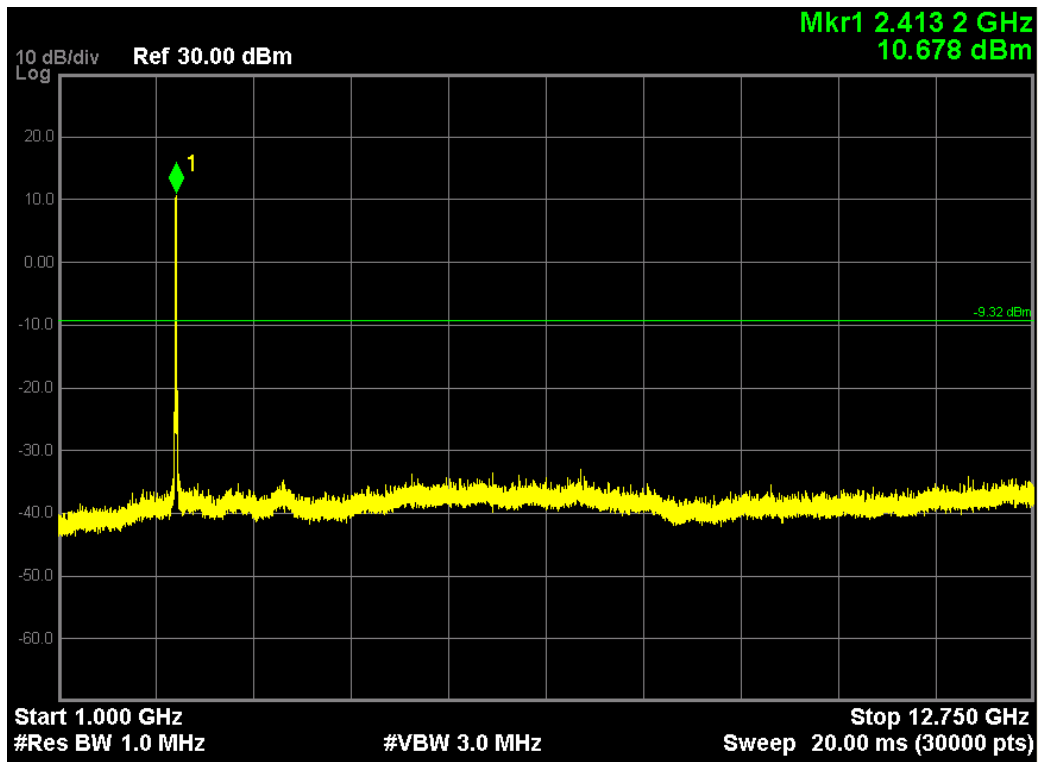


Note: The Mark1 point is carrier.

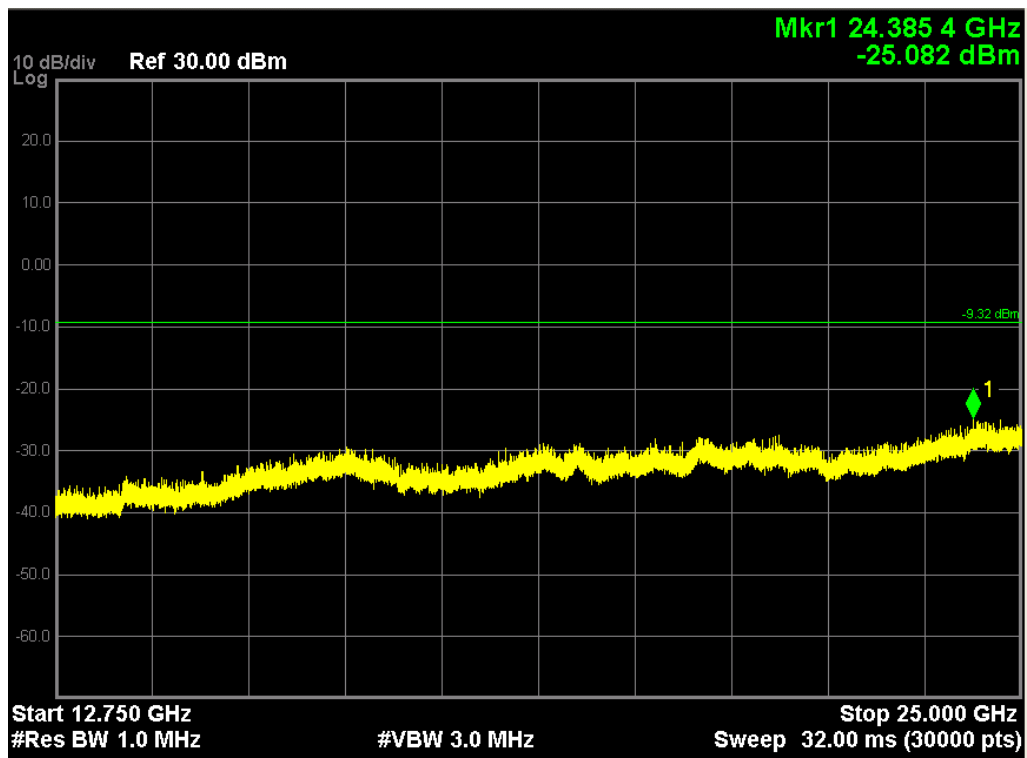


802.11n20, traffic mode; Channel 6

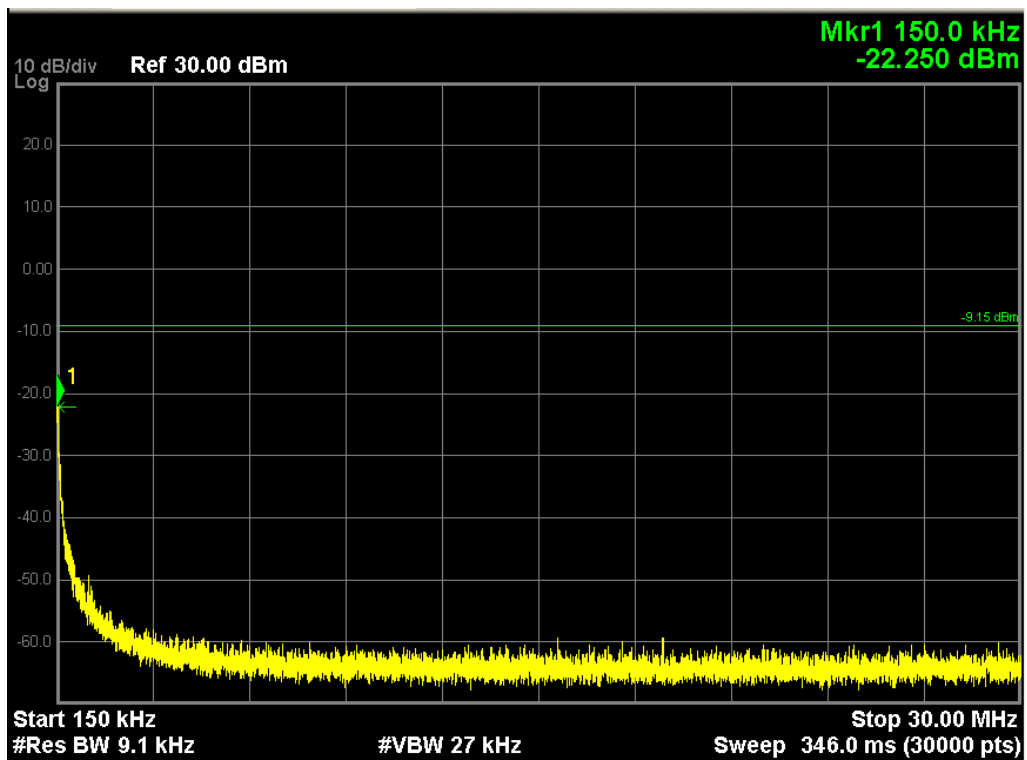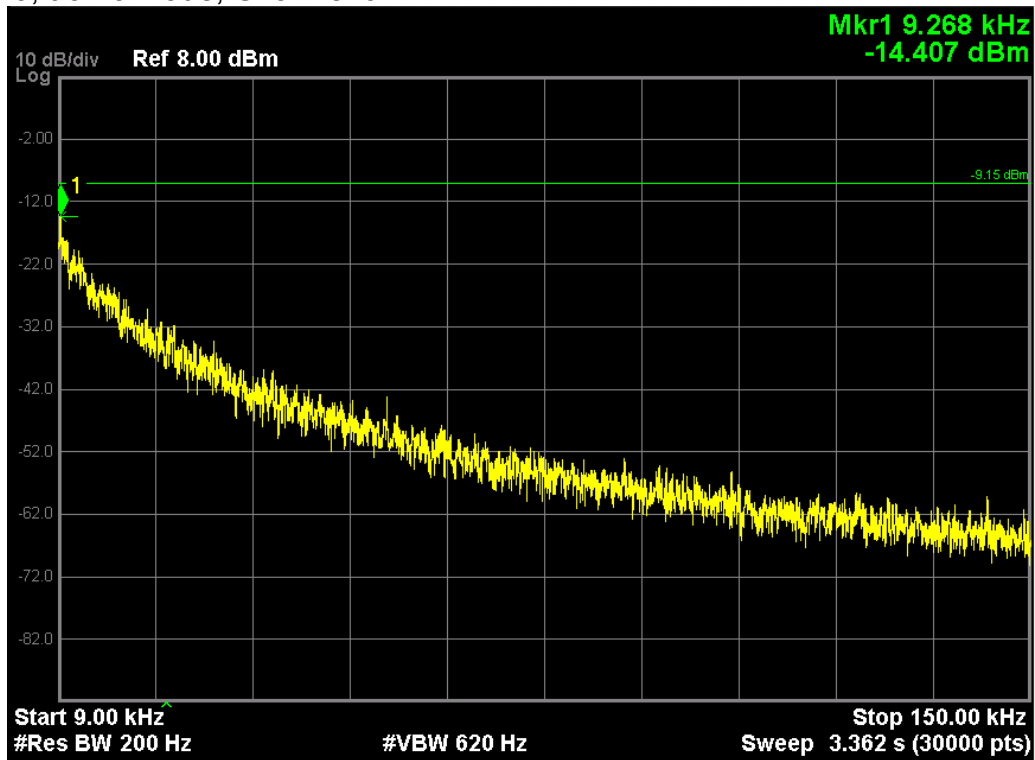


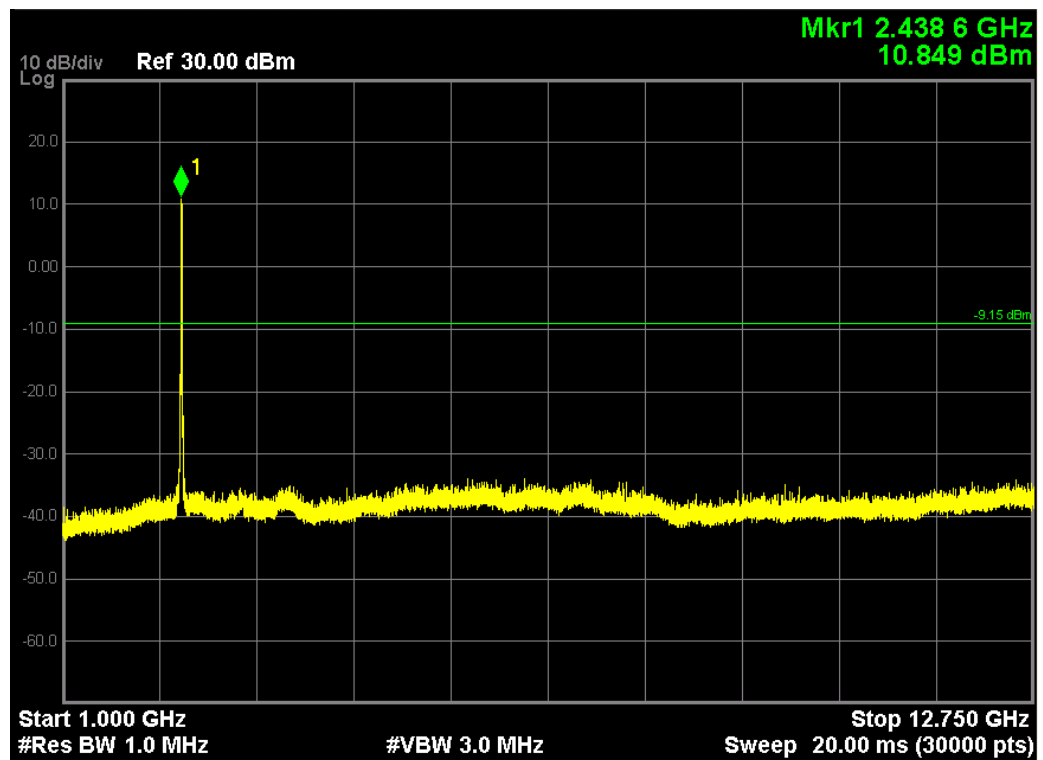
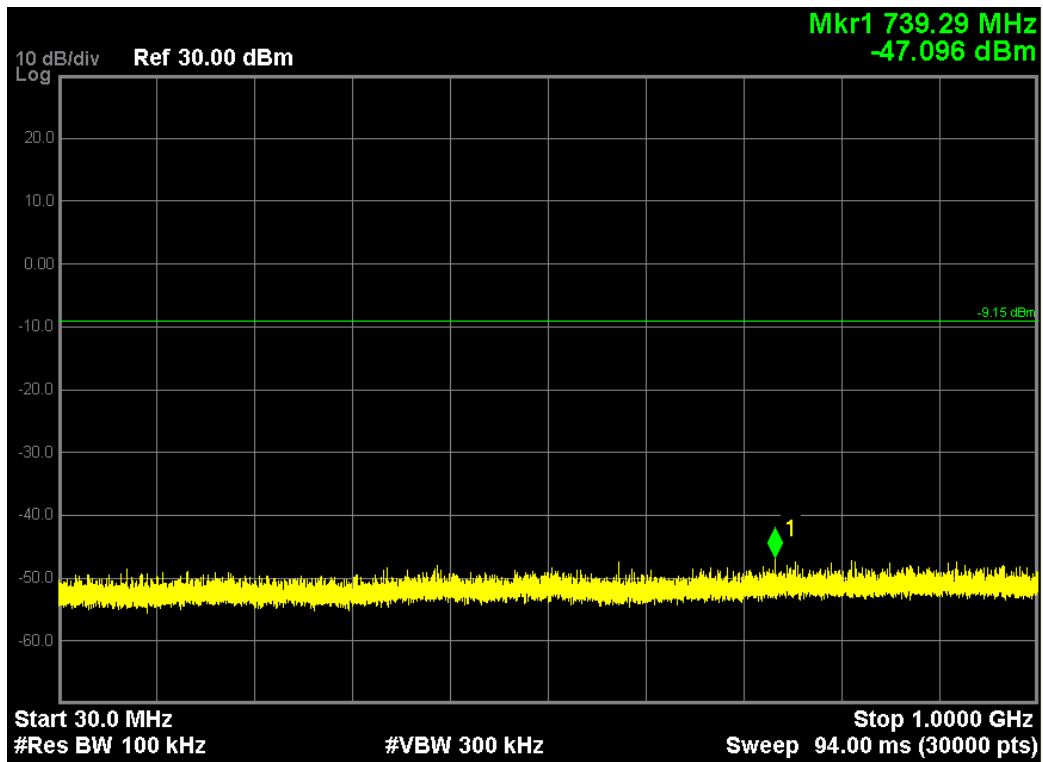



Note: The Mark1 point is carrier.

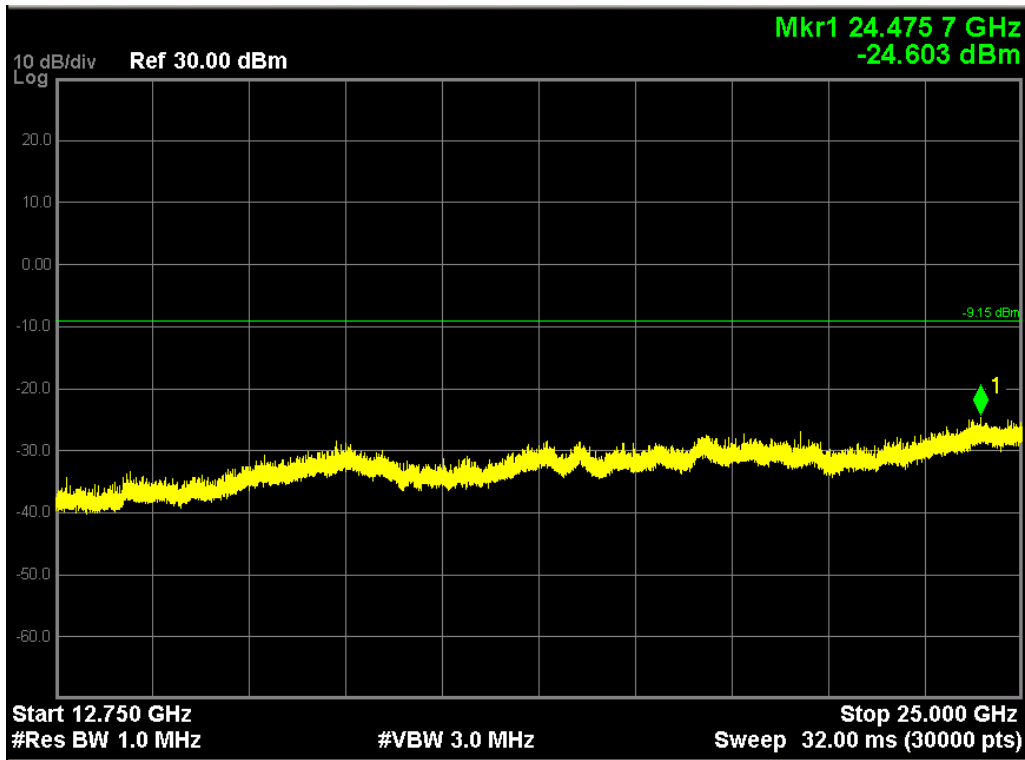


802.11n20, traffic mode; Channel 11

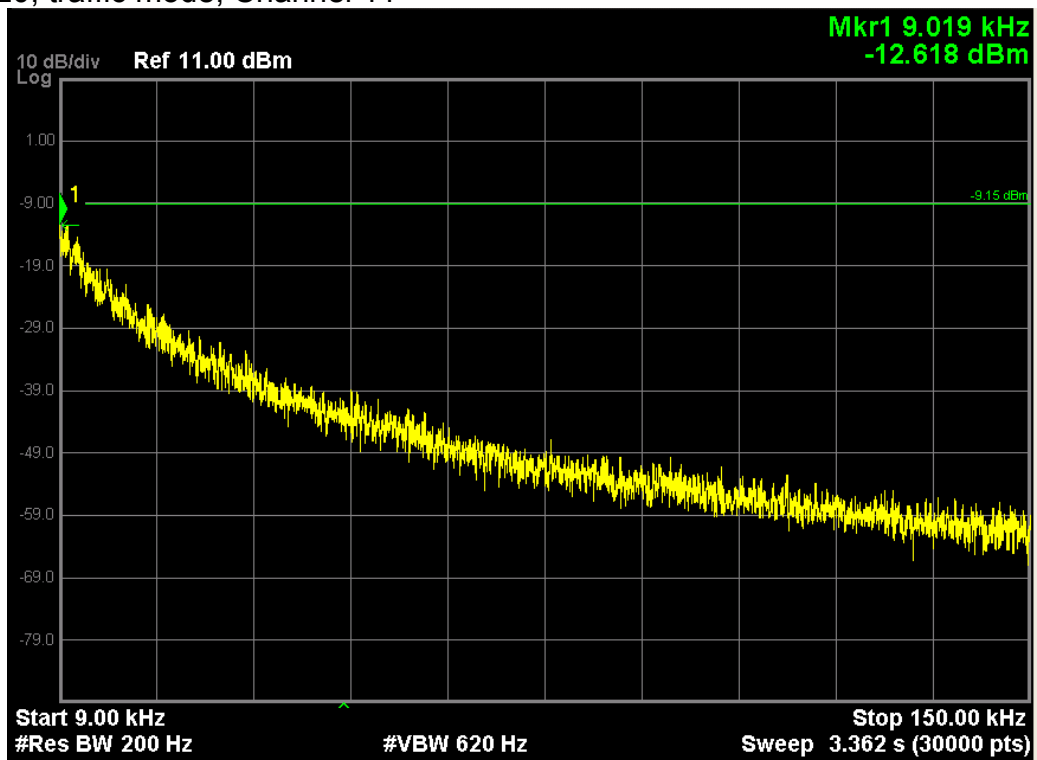

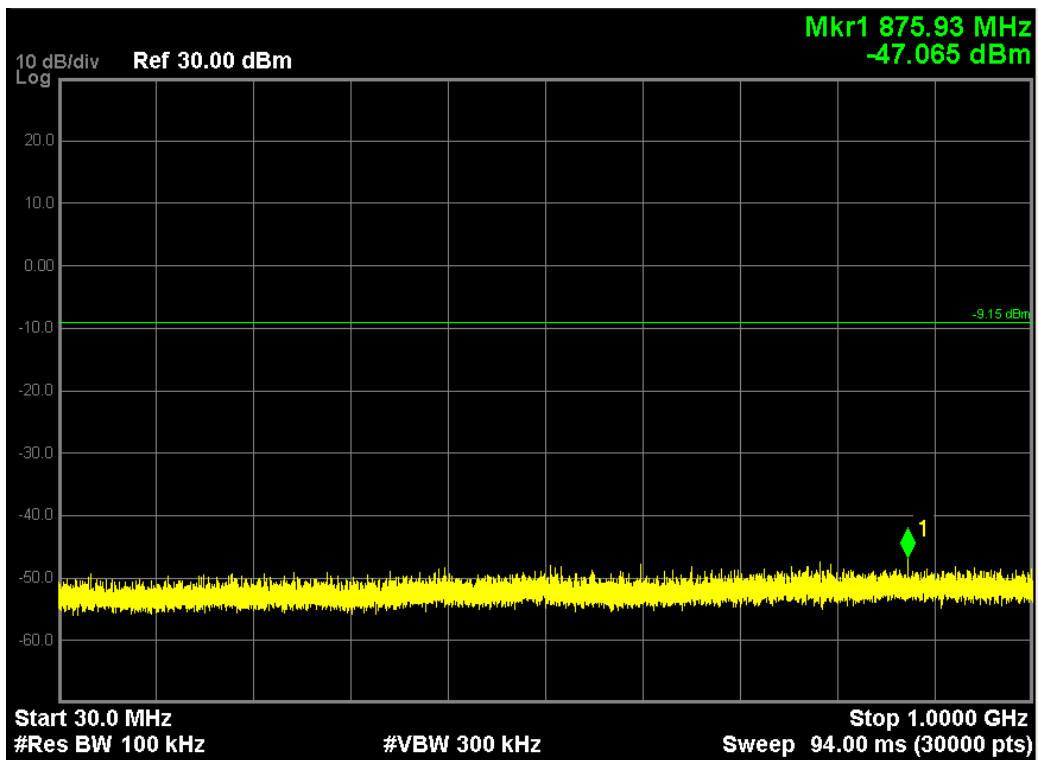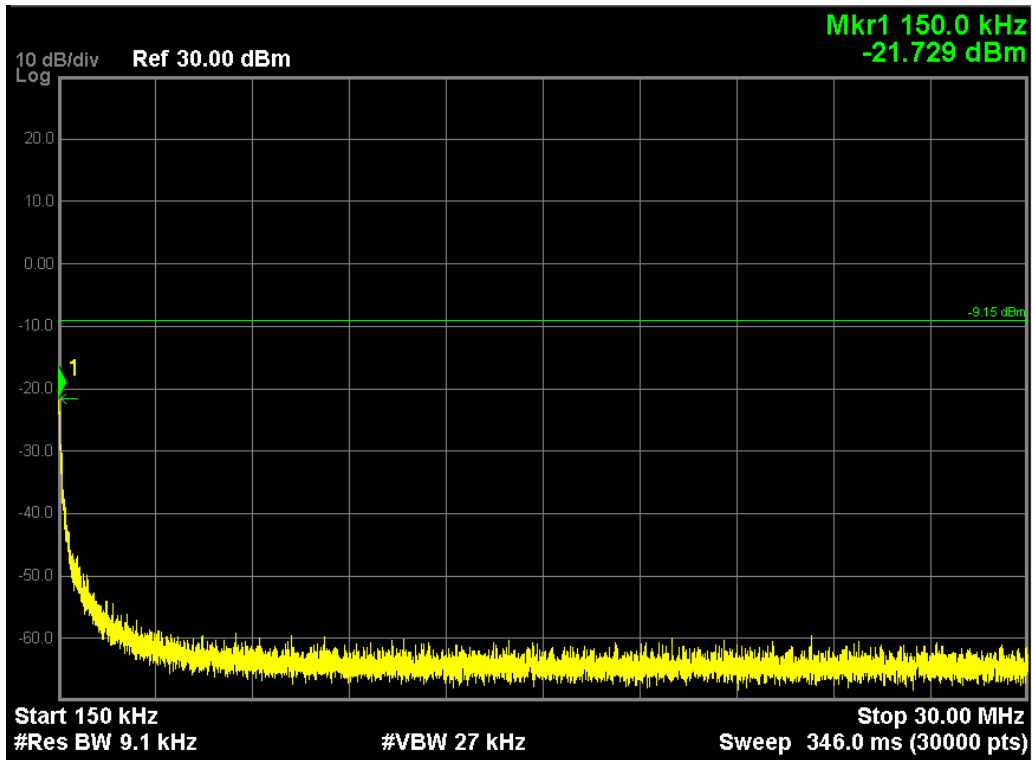

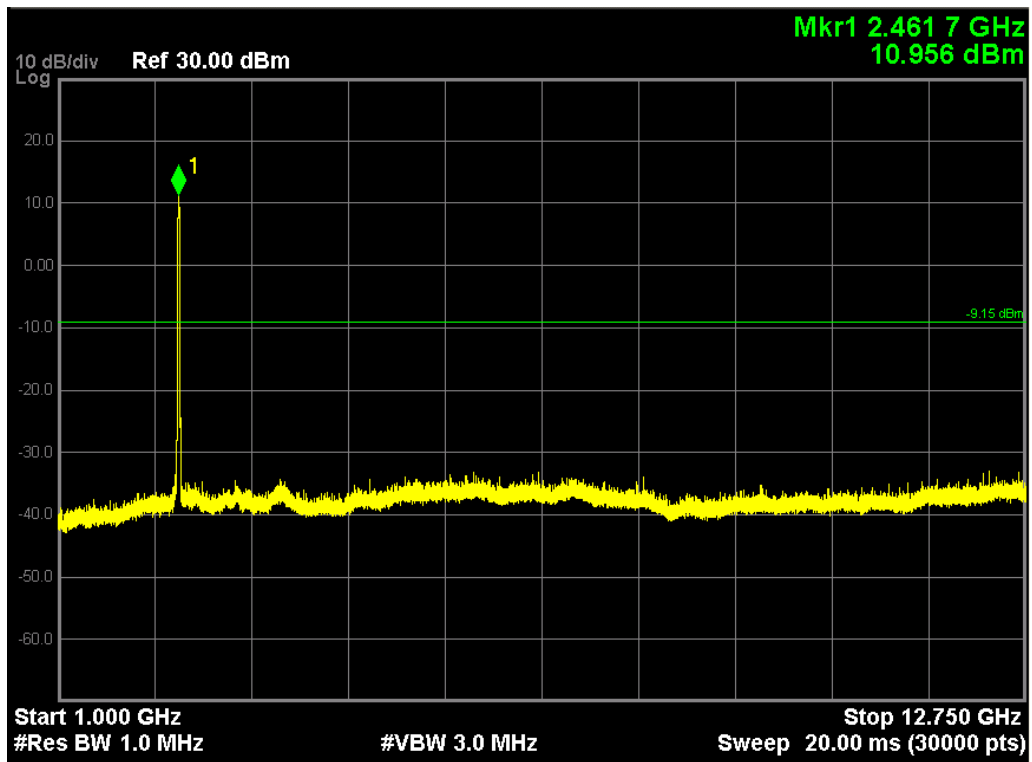


Note: The Mark1 point is carrier.

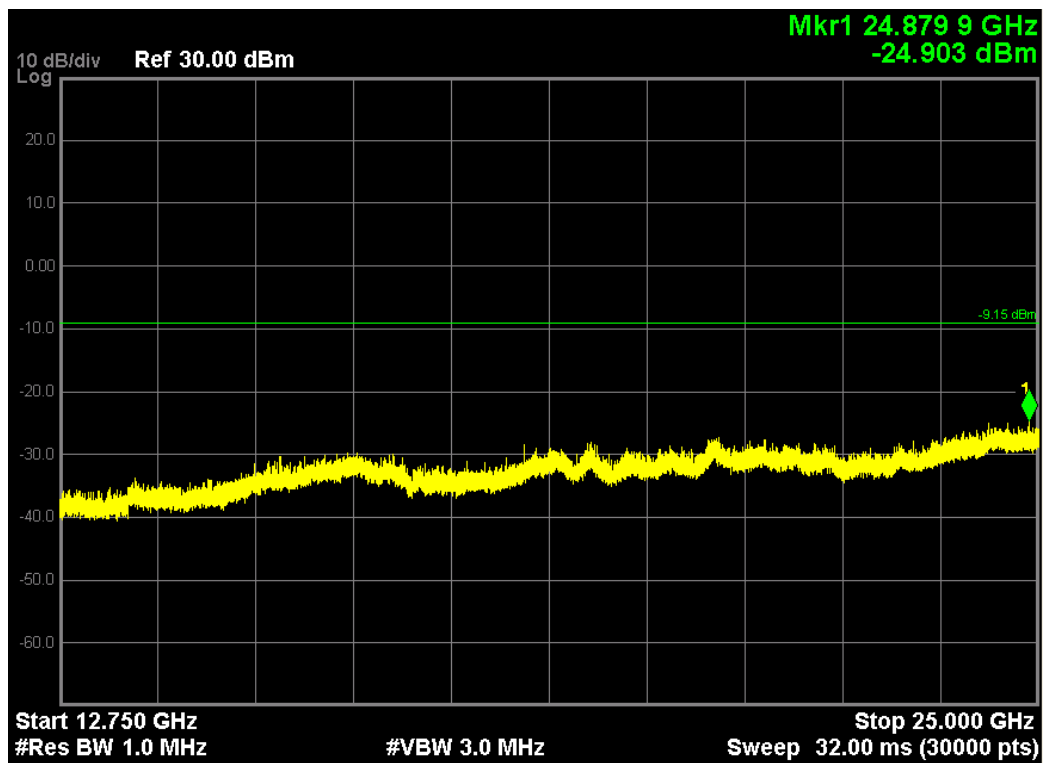

9. BAND EDGE MEASUREMENT

9.1 TEST SETUP

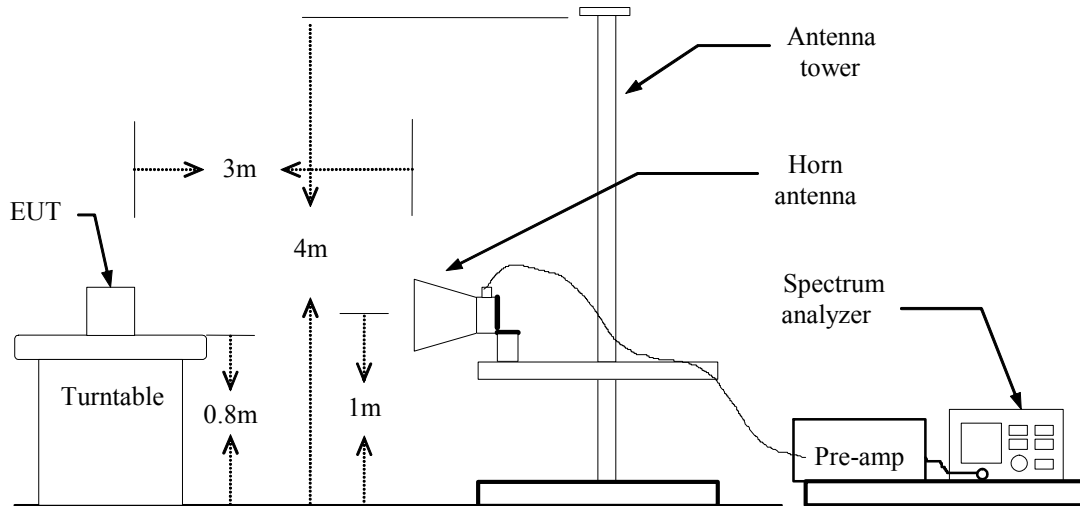

9.2 LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.3 TEST PROCEDURE

The EUT is placed on a turntable, which is 0.8m above the ground plane.

The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

PEAK: RBW=VBW=1MHz / Sweep=AUTO

AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.


9.4 RESULTS & PERFORMANCE

Radiated Band Edge:

802.11b (Ch1)

Detector mode: Peak

Polarity: Horizontal

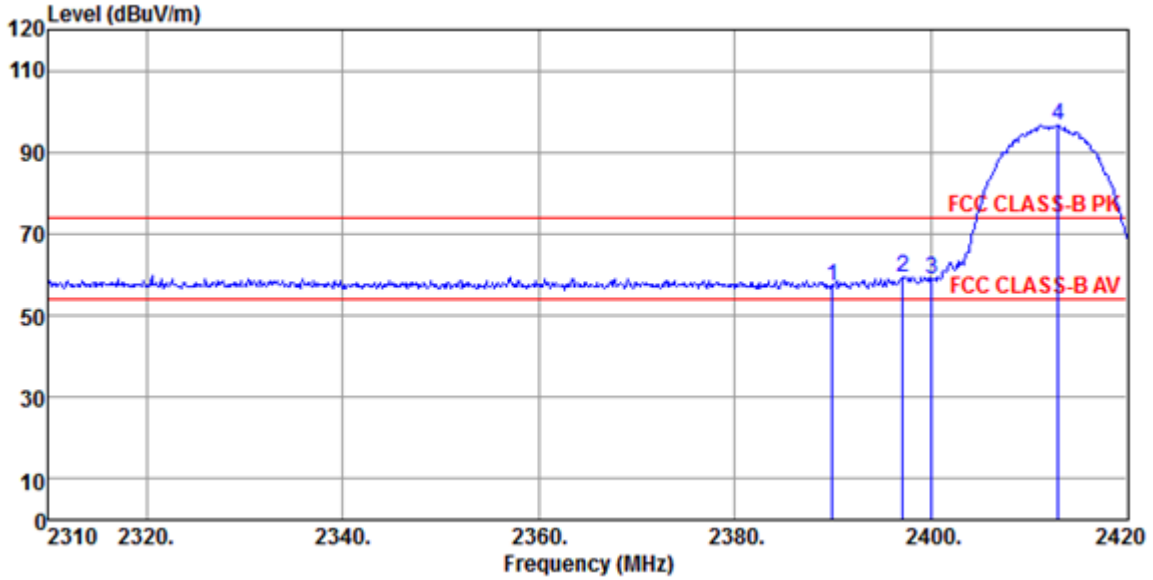


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11b CH1
 Memo :

	ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2389.97	60.85	27.58	7.13	38.34	57.22	74.00	-16.78	Peak
2	2397.12	63.04	27.58	7.13	38.34	59.41	74.00	-14.59	Peak
3	2400.09	62.32	27.58	7.13	38.34	58.69	74.00	-15.31	Peak
4 pp	2412.96	100.19	27.54	7.21	38.34	96.60	74.00	22.60	Peak

Detector mode: Average

Polarity: Horizontal

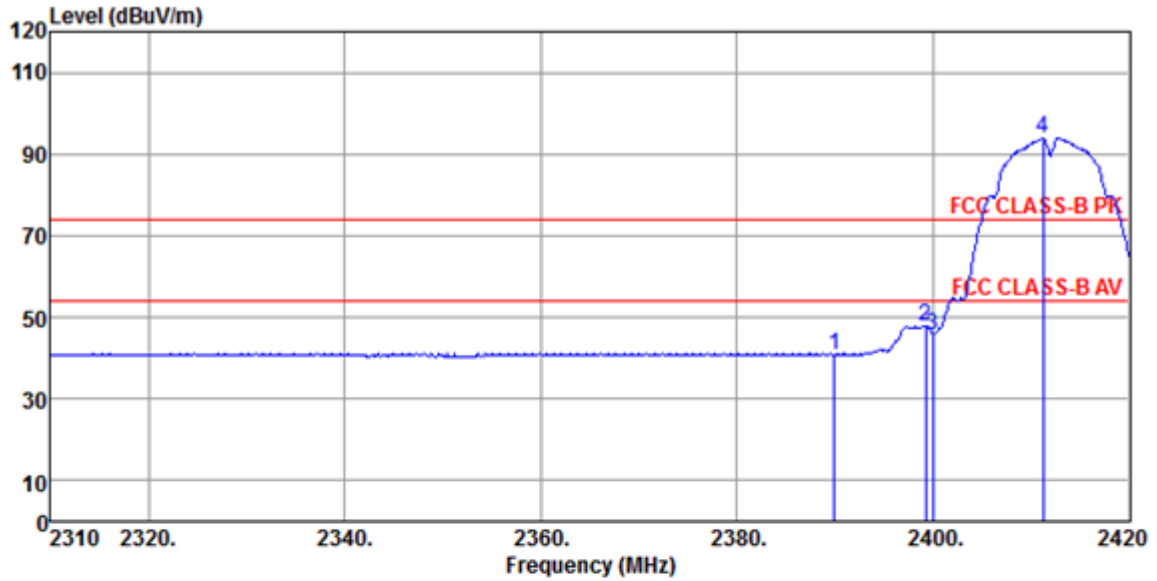


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11b CH1
 Memo :

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2389.97	44.52	27.58	7.13	38.34	40.89	54.00	-13.11	Average
2	2399.21	51.56	27.58	7.13	38.34	47.93	54.00	-6.07	Average
3	2399.98	49.25	27.58	7.13	38.34	45.62	54.00	-8.38	Average
4 pp	2411.20	97.55	27.54	7.21	38.34	93.96	54.00	39.96	Average

Detector mode: Peak

Polarity: Vertical

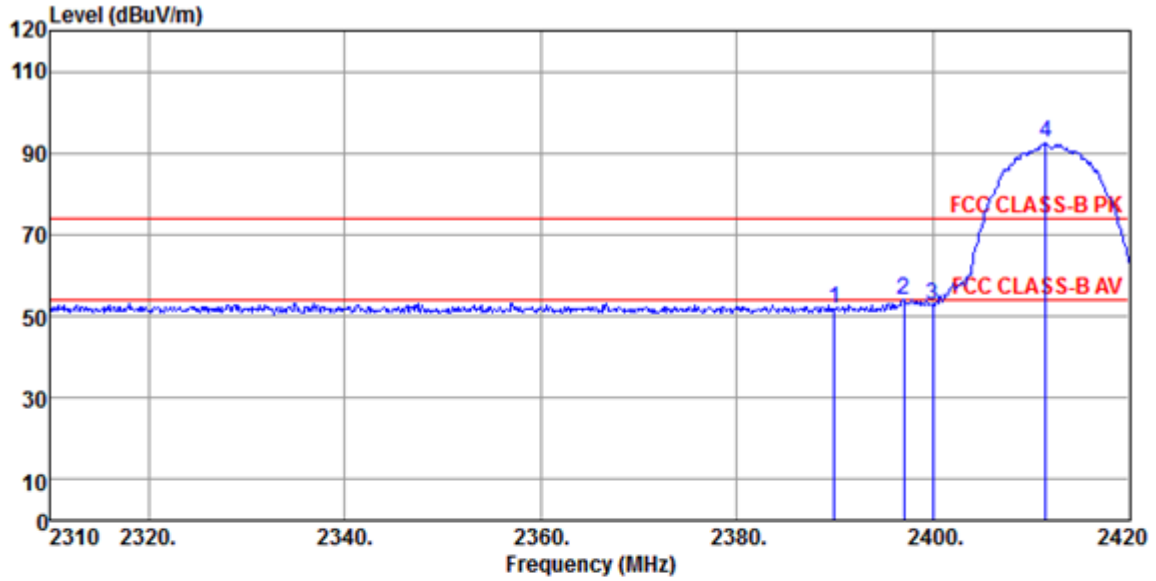


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11b CH1
 Memo :

	ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2389.97	55.46	27.58	7.13	38.34	51.83	74.00	-22.17 Peak
2	2397.01	57.62	27.58	7.13	38.34	53.99	74.00	-20.01 Peak
3	2399.98	56.54	27.58	7.13	38.34	52.91	74.00	-21.09 Peak
4 pp	2411.53	95.95	27.54	7.21	38.34	92.36	74.00	18.36 Peak

Detector mode: Average

Polarity: Vertical

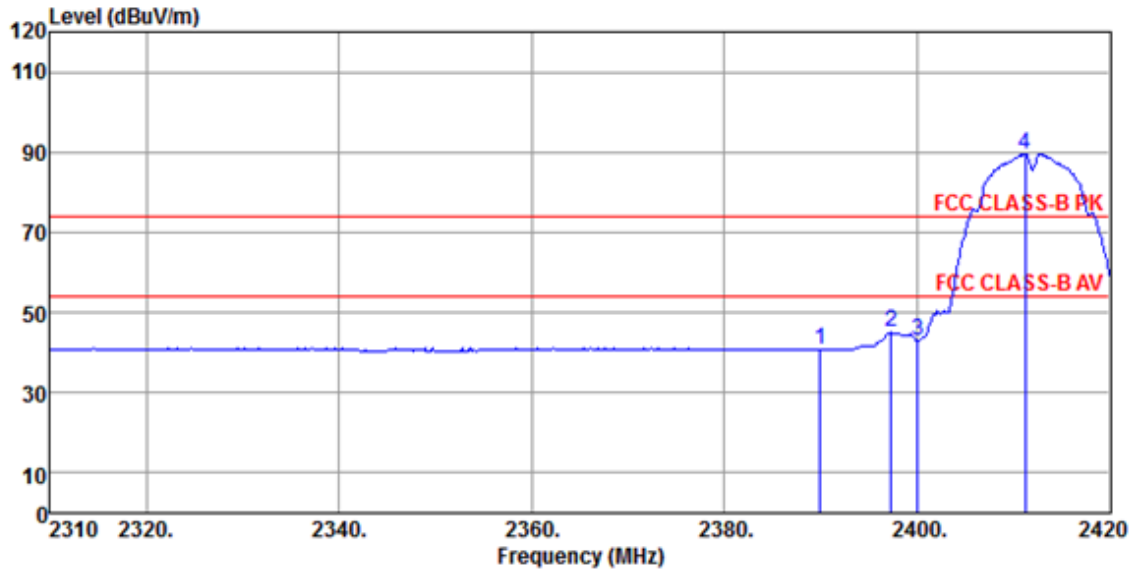


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11b CH1
 Memo :

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2389.97	44.39	27.58	7.13	38.34	40.76	54.00	-13.24	Average
2	2397.34	48.66	27.58	7.13	38.34	45.03	54.00	-8.97	Average
3	2400.09	46.50	27.58	7.13	38.34	42.87	54.00	-11.13	Average
4	pp 2411.20	93.25	27.54	7.21	38.34	89.66	54.00	35.66	Average

802.11b (Ch11)

Detector mode: Peak

Polarity: Horizontal

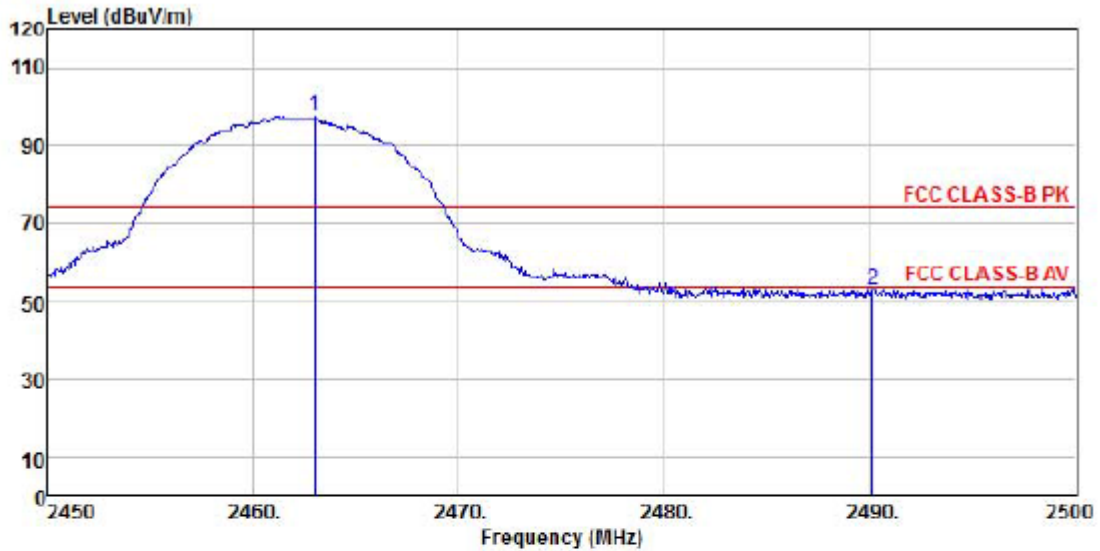


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11b CH11
 Memo :

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	pp 2463.00	100.84	27.49	7.39	38.32	97.40	74.00	23.40	Peak
2	2490.20	56.66	27.52	7.43	38.30	53.31	74.00	-20.69	Peak

Detector mode: Average

Polarity: Horizontal

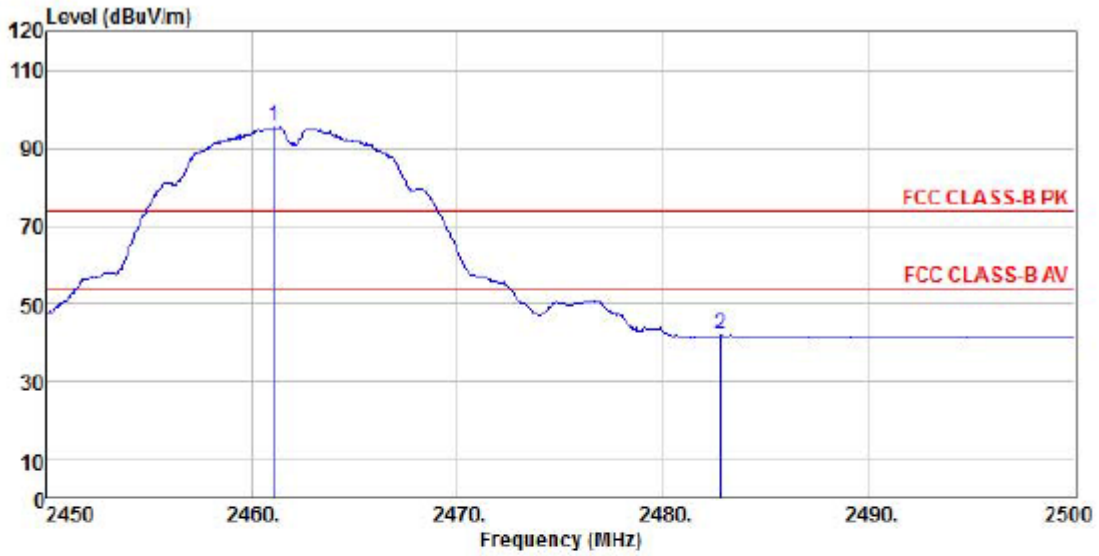


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11b CH11
 Memo :

	Freq	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	pp 2461.05	99.09	27.49	7.39	38.32	95.65	54.00	41.65	Average
2	2482.80	45.62	27.52	7.41	38.31	42.24	54.00	-11.76	Average

Detector mode: Peak

Polarity: Vertical

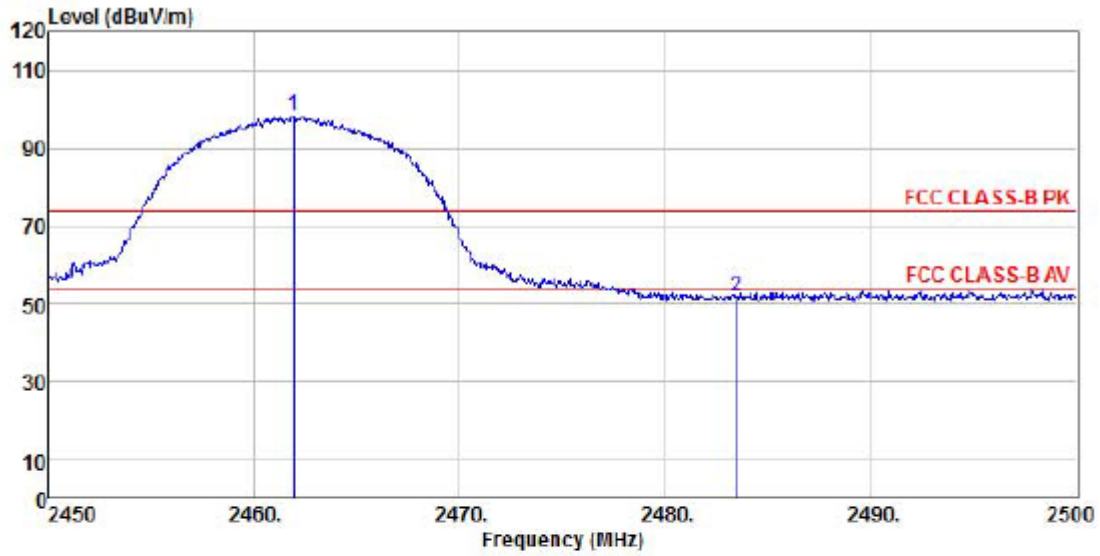


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11b CH11
 Memo :

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	pp 2461.90	101.88	27.49	7.39	38.32	98.44	74.00	24.44	Peak
2	2483.50	55.26	27.52	7.41	38.31	51.88	74.00	-22.12	Peak

Detector mode: Average

Polarity: Vertical

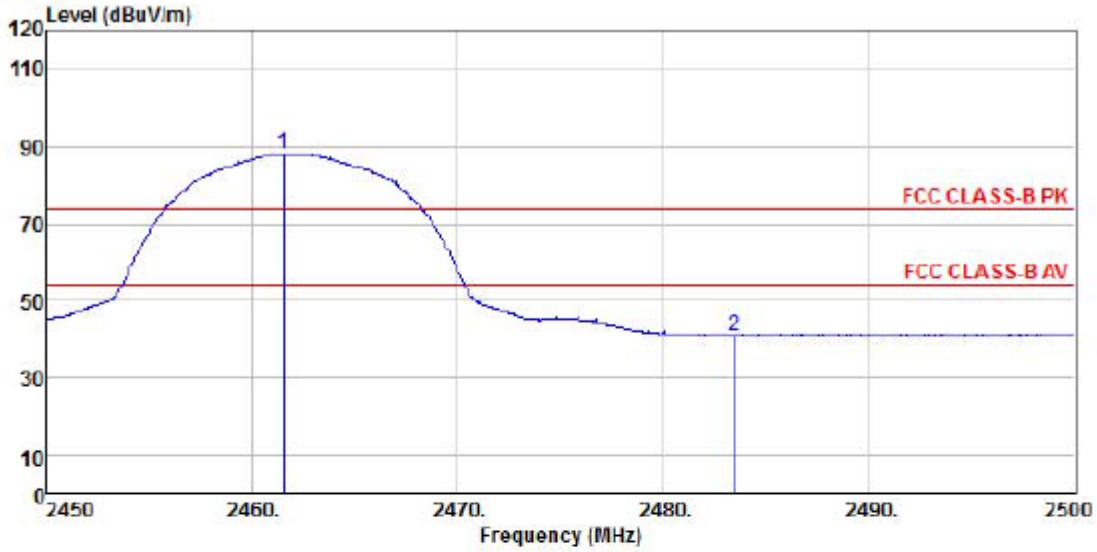


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11b CH11
 Memo :

	Freq	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Limit Level	Over Line	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	pp 2461.50	91.76	27.49	7.39	38.32	88.32	54.00	34.32		Average
2	2483.50	44.33	27.52	7.41	38.31	40.95	54.00	-13.05		Average

802.11g (Ch1)

Detector mode: Peak

Polarity: Horizontal

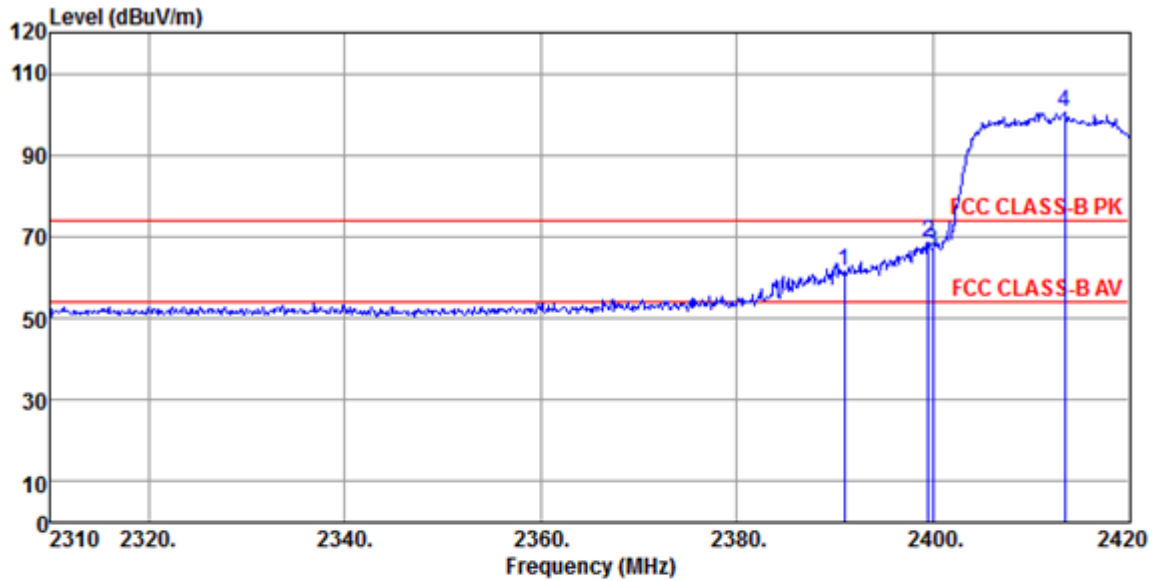


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11g CH1
 Memo :

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.96	65.23	27.58	7.13	38.34	61.60	74.00	-12.40	Peak
2	2399.54	72.43	27.58	7.13	38.34	68.80	74.00	-5.20	Peak
3	2399.98	70.20	27.58	7.13	38.34	66.57	74.00	-7.43	Peak
4 pp	2413.40	104.13	27.54	7.21	38.34	100.54	74.00	26.54	Peak

Detector mode: Average

Polarity: Horizontal

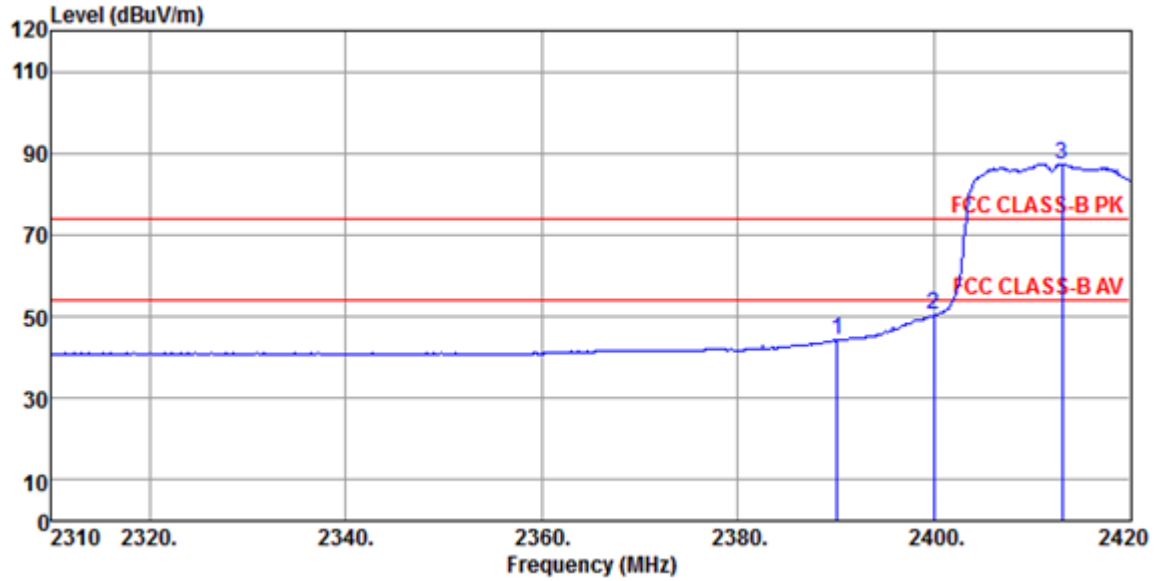


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11g CH1
 Memo :

	ReadAntenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.08	47.79	27.58	7.13	38.34	44.16	54.00	-9.84 Average
2	2399.98	53.91	27.58	7.13	38.34	50.28	54.00	-3.72 Average
3 pp	2413.07	91.00	27.54	7.21	38.34	87.41	54.00	33.41 Average

Detector mode: Peak

Polarity: Vertical

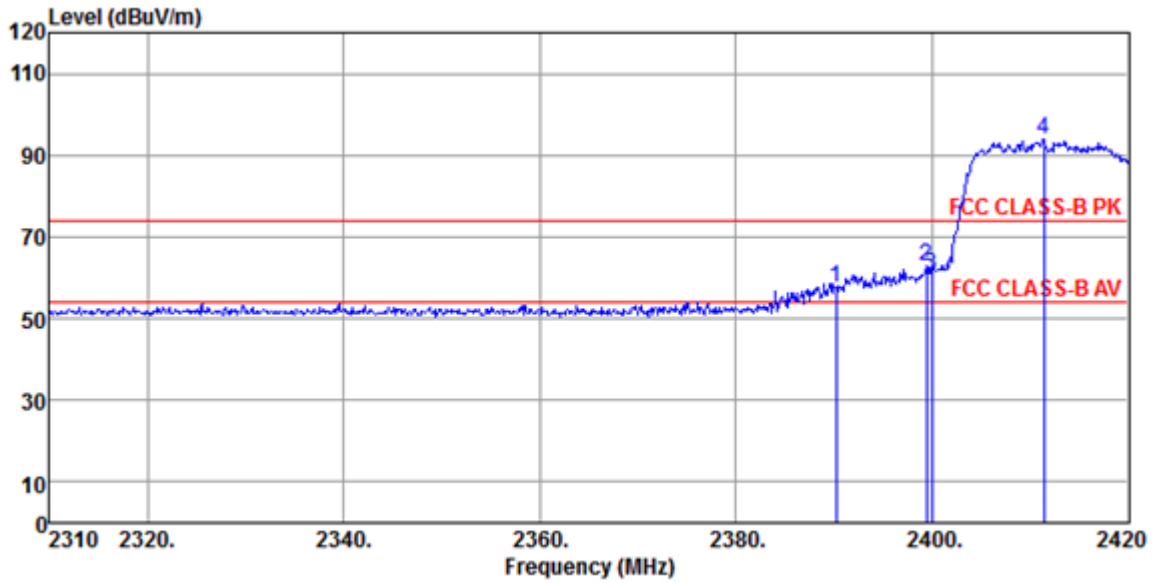


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11g CH1
 Memo :

	ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.19	61.40	27.58	7.13	38.34	57.77	74.00	-16.23 Peak
2	2399.43	66.54	27.58	7.13	38.34	62.91	74.00	-11.09 Peak
3	2399.98	64.29	27.58	7.13	38.34	60.66	74.00	-13.34 Peak
4 pp	2411.42	97.39	27.54	7.21	38.34	93.80	74.00	19.80 Peak

Detector mode: Average

Polarity: Vertical

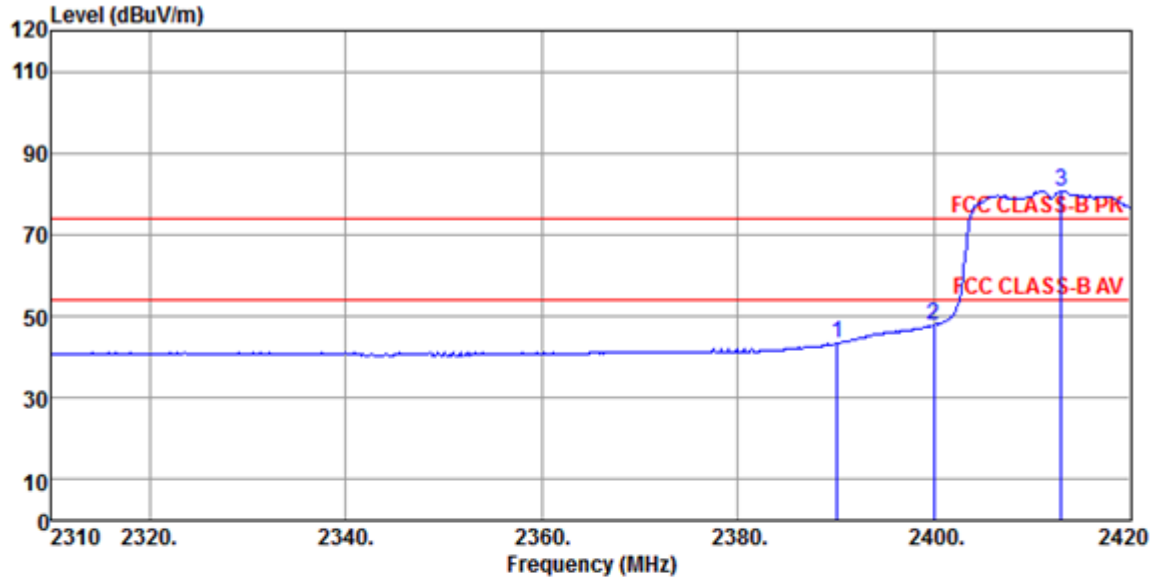


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11g CH1
 Memo :

	ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2390.08	46.95	27.58	7.13	38.34	43.32	54.00	-10.68 Average	
2	2399.98	51.37	27.58	7.13	38.34	47.74	54.00	-6.26 Average	
3 pp	2412.96	84.22	27.54	7.21	38.34	80.63	54.00	26.63 Average	

802.11g (Ch11)

Detector mode: Peak

Polarity: Horizontal

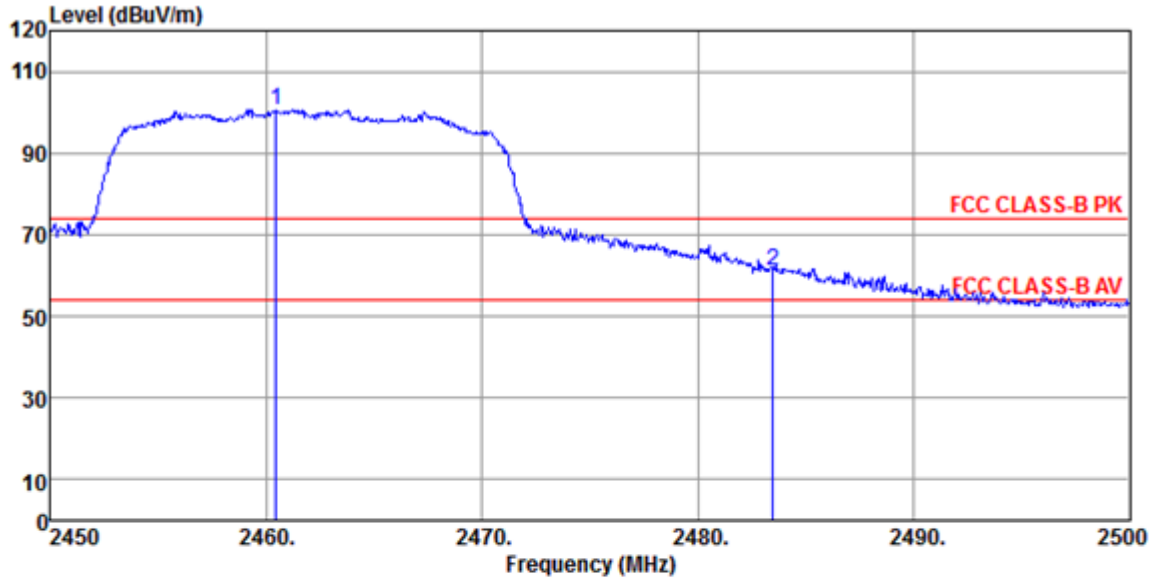


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11g CH11
 Memo :

	ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 pp 2460.45	104.09	27.49	7.39	38.32	100.65	74.00	26.65	Peak	
2 2483.50	64.63	27.52	7.41	38.31	61.25	74.00	-12.75	Peak	

Detector mode: Average

Polarity: Horizontal

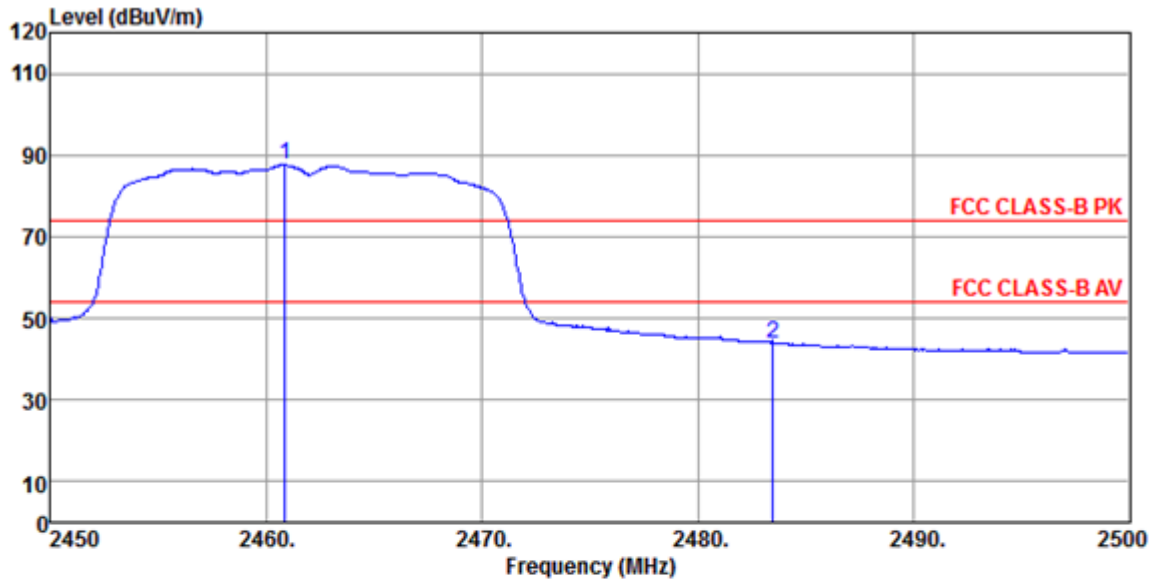


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11g CH11
 Memo :

	ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 2460.85	91.00	27.49	7.39	38.32	87.56	54.00	33.56	Average
2 2483.50	47.34	27.52	7.41	38.31	43.96	54.00	-10.04	Average

Detector mode: Peak

Polarity: Vertical

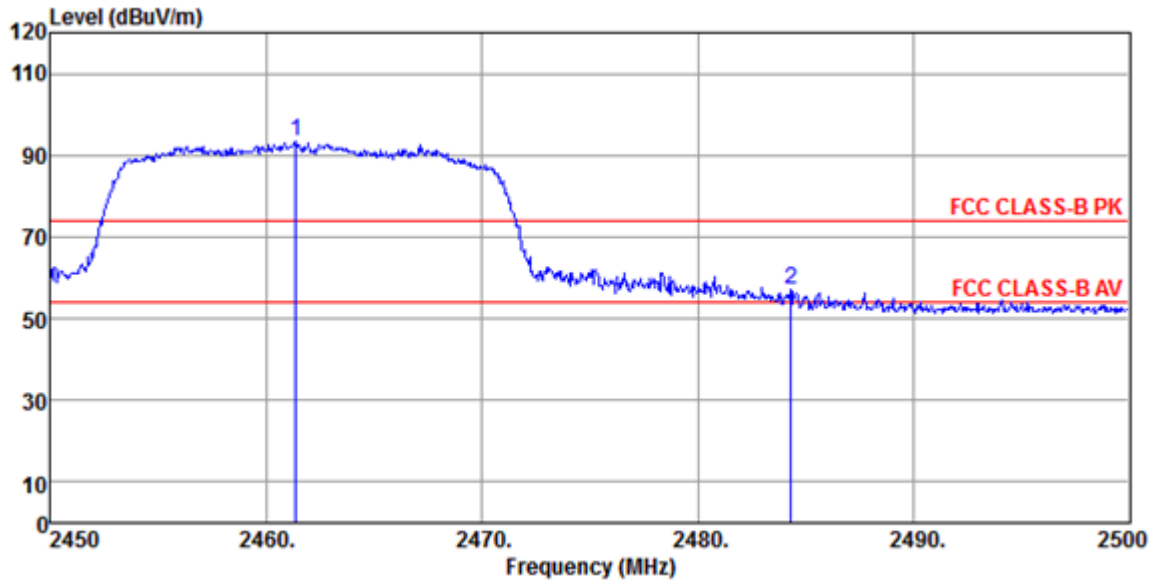


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11g CH11
 Memo :

	ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 2461.35	96.65	27.49	7.39	38.32	93.21	74.00	19.21	Peak
2 2484.30	60.31	27.52	7.41	38.31	56.93	74.00	-17.07	Peak

Detector mode: Average

Polarity: Vertical

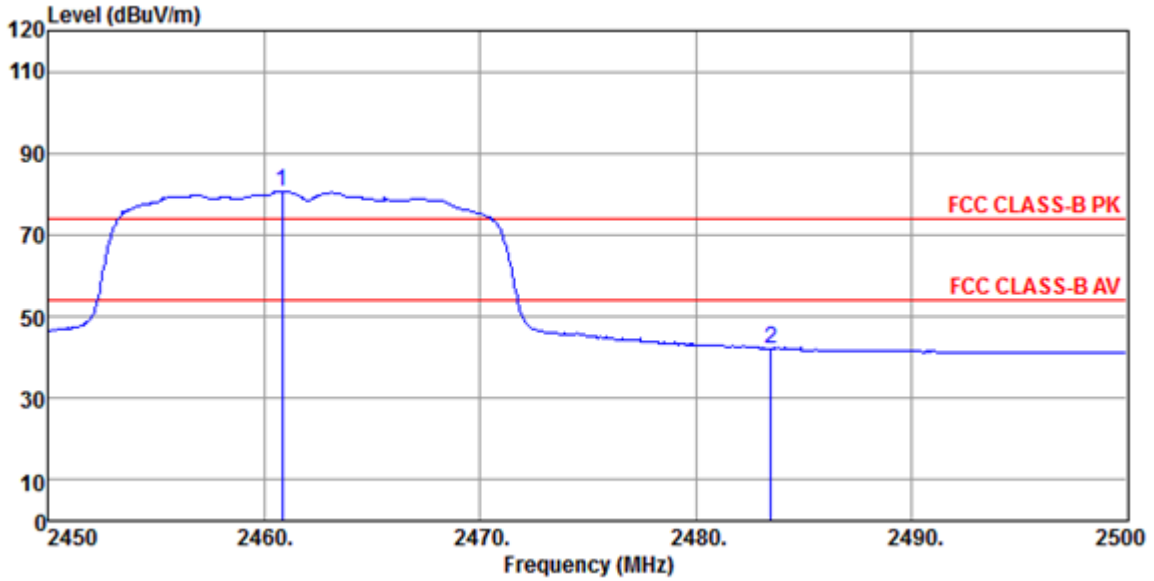


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11g CH11
 Memo :

	ReadAntenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 2460.80	84.20	27.49	7.39	38.32	80.76	54.00	26.76	Average
2 2483.50	45.56	27.52	7.41	38.31	42.18	54.00	-11.82	Average

802.11n20 (Ch1)

Detector mode: Peak

Polarity: Horizontal

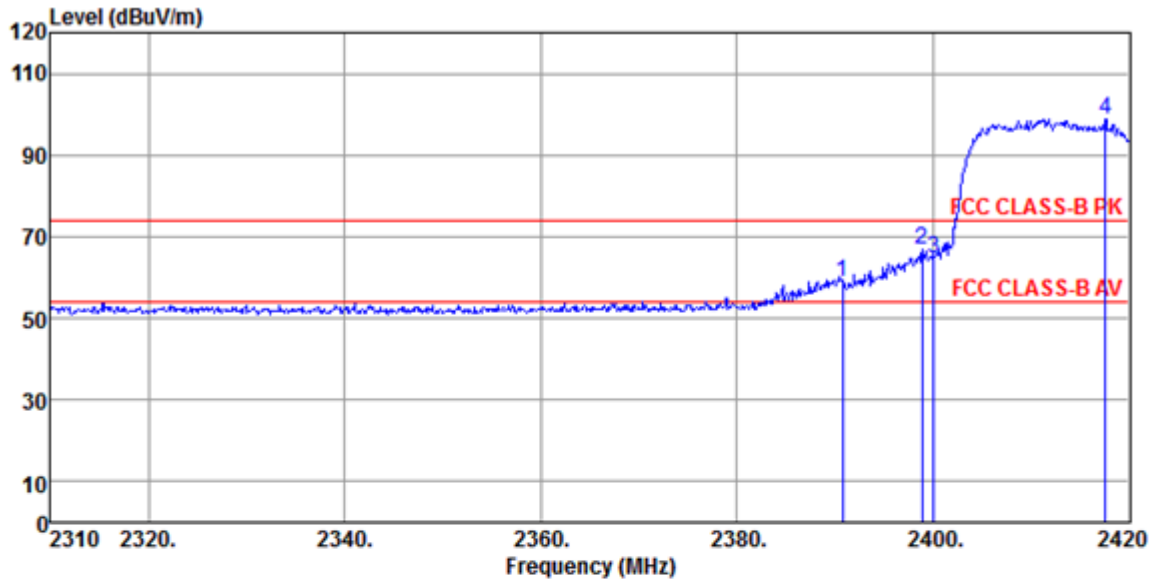


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11n20 CH1
 Memo :

	Freq	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.74	62.38	27.58	7.13	38.34	58.75	74.00	-15.25	Peak
2	2398.88	70.37	27.58	7.13	38.34	66.74	74.00	-7.26	Peak
3	2400.09	68.32	27.58	7.13	38.34	64.69	74.00	-9.31	Peak
4 pp	2417.58	102.45	27.54	7.21	38.34	98.86	74.00	24.86	Peak

Detector mode: Average

Polarity: Horizontal

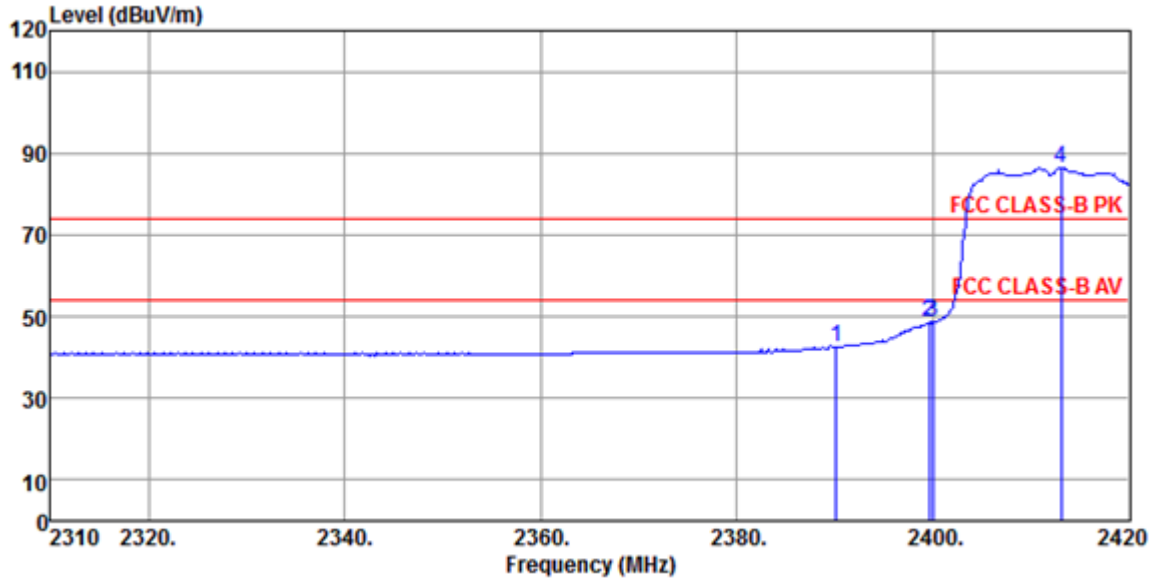


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11n20 CH1
 Memo :

	ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2390.08	46.05	27.58	7.13	38.34	42.42	54.00	-11.58 Average	
2	2399.65	52.36	27.58	7.13	38.34	48.73	54.00	-5.27 Average	
3	2399.98	52.21	27.58	7.13	38.34	48.58	54.00	-5.42 Average	
4 pp	2413.07	89.96	27.54	7.21	38.34	86.37	54.00	32.37 Average	

Detector mode: Peak

Polarity: Vertical

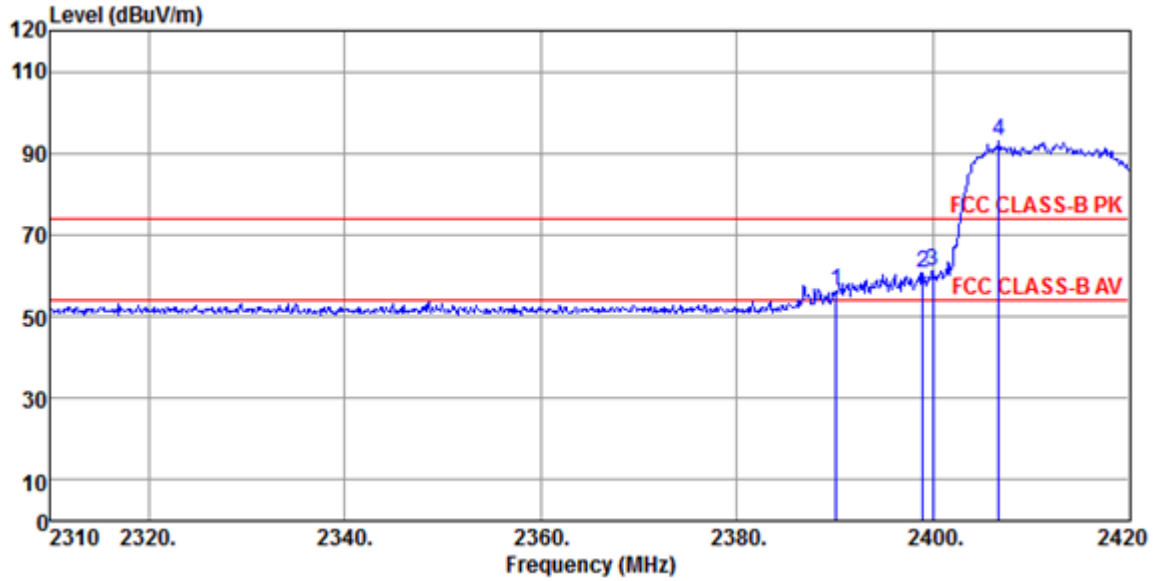


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11n20 CH1
 Memo :

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.08	59.98	27.58	7.13	38.34	56.35	74.00	-17.65	Peak
2	2398.99	64.38	27.58	7.13	38.34	60.75	74.00	-13.25	Peak
3	2399.98	64.59	27.58	7.13	38.34	60.96	74.00	-13.04	Peak
4 pp	2406.69	96.39	27.54	7.21	38.34	92.80	74.00	18.80	Peak

Detector mode: Average

Polarity: Vertical

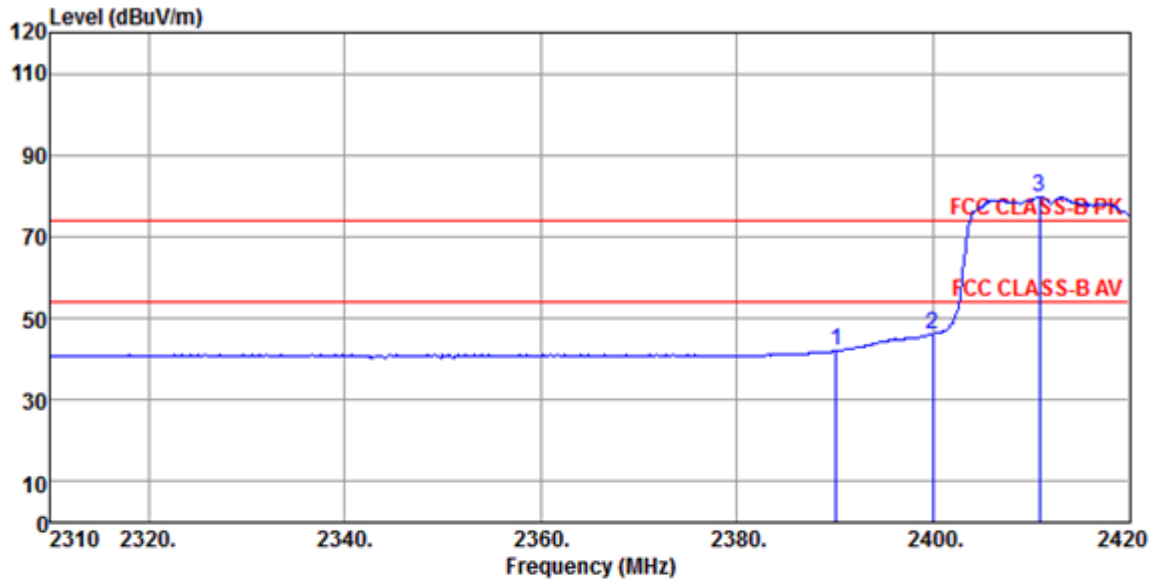


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11n20 CH1
 Memo :

	ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2390.08	45.58	27.58	7.13	38.34	41.95	54.00	-12.05 Average	
2	2399.98	49.76	27.58	7.13	38.34	46.13	54.00	-7.87 Average	
3 pp	2410.87	83.32	27.54	7.21	38.34	79.73	54.00	25.73 Average	

802.11n20 (Ch11)

Detector mode: Peak

Polarity: Horizontal

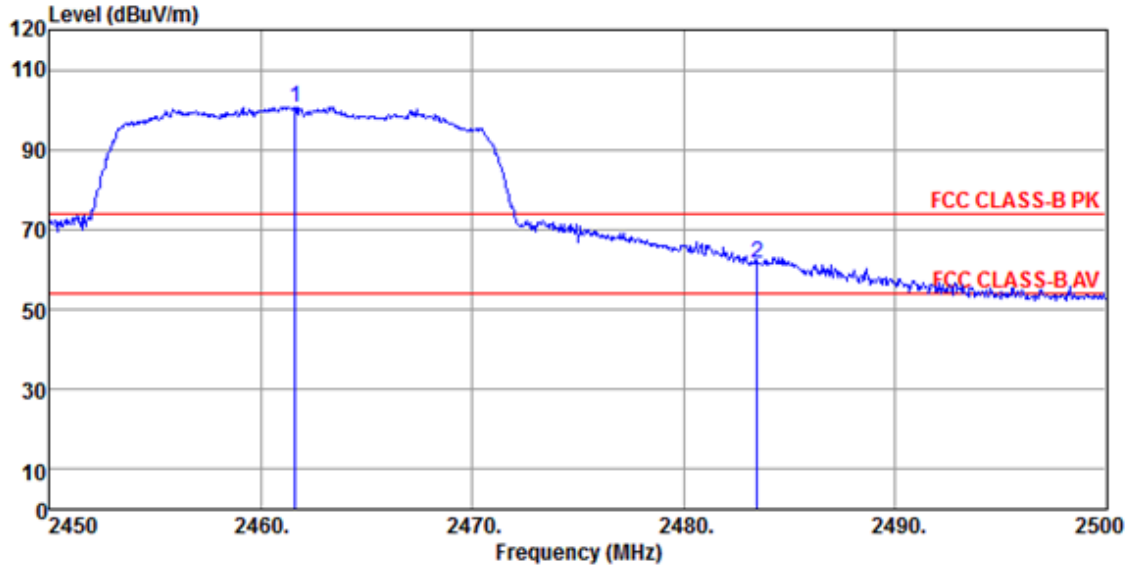


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11n20 CH11
 Memo :

	ReadAntenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp	2461.60	104.14	27.49	7.39	38.32	100.70	74.00	26.70 Peak
2	2483.50	64.75	27.52	7.41	38.31	61.37	74.00	-12.63 Peak

Detector mode: Average

Polarity: Horizontal

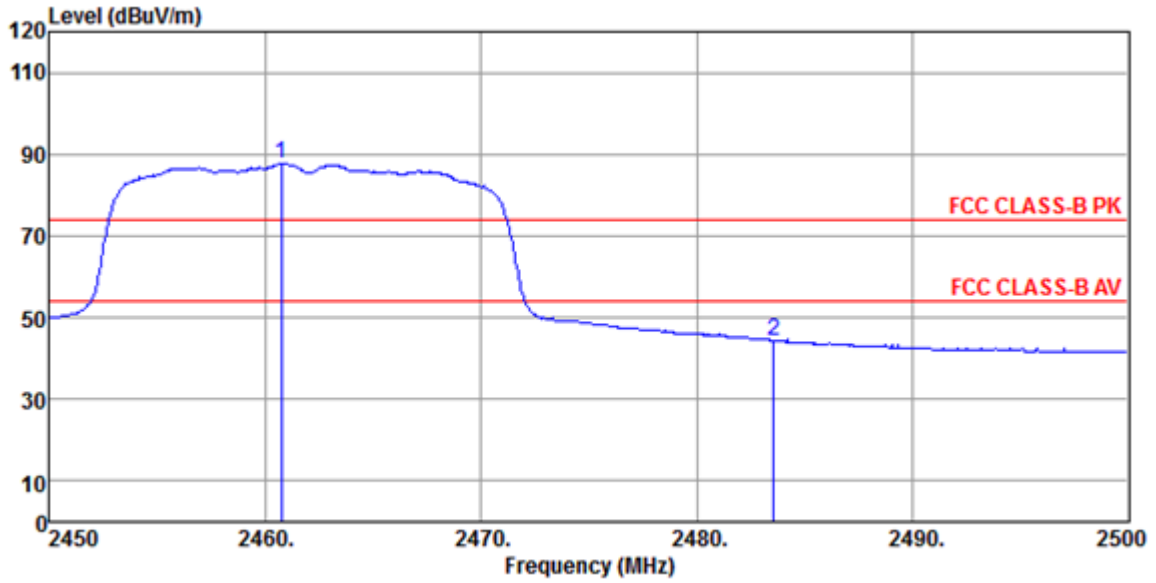


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11n20 CH11
 Memo :

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp	2460.75	91.09	27.49	7.39	38.32	87.65	54.00	33.65	Average
2	2483.55	47.78	27.52	7.41	38.31	44.40	54.00	-9.60	Average

Detector mode: Peak

Polarity: Vertical

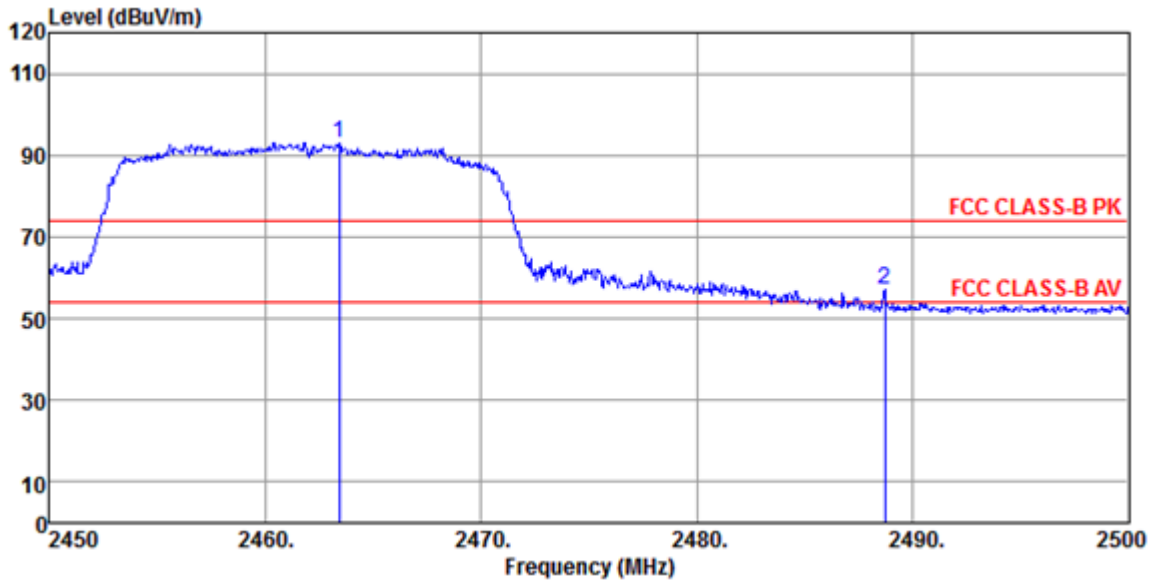


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11n20 CH11
 Memo :

	Freq	ReadAntenna Level	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	
1 pp	2463.40	96.55	27.49	7.39	38.32	93.11	74.00 19.11 Peak
2	2488.70	60.60	27.52	7.43	38.30	57.25	74.00 -16.75 Peak

Detector mode: Average

Polarity: Vertical

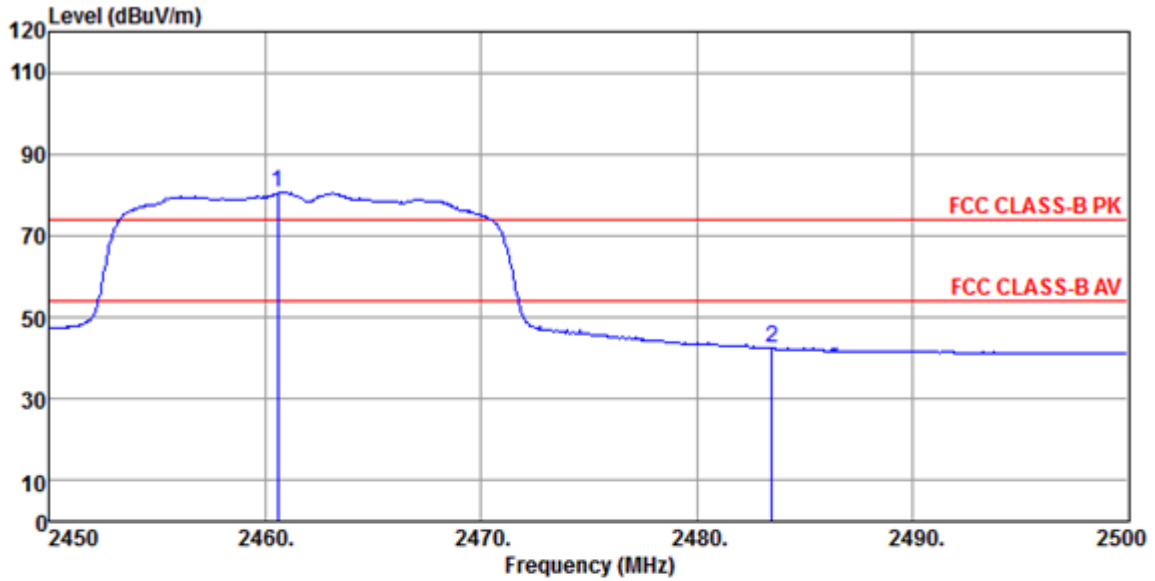

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name :
 Temp/Humi : 23 °C / 54 %
 Power Rating: AC 120V/60Hz
 Mode : 11n20 CH11
 Memo :

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp	2460.55	84.07	27.49	7.39	38.32	80.63	54.00	26.63	Average
2	2483.50	45.75	27.52	7.41	38.31	42.37	54.00	-11.63	Average

