



FCC TEST REPORT

FCC ID: SY4-A01014

On Behalf of

Shanghai Huace Navigation Technology LTD.

Geodetic GNSS Receiver (i50U)

Model No.: 1150322131145

Prepared for : Shanghai Huace Navigation Technology LTD.
Address : Building D, 599 Gaojing Road, Qingpu District, Shanghai, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

Report Number : T1881531 05
Date of Receipt : September 25, 2018
Date of Test : September 25, 2018-November 21, 2018
Date of Report : November 21, 2018
Version Number : REV0

Contents

Page

1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
2.1	GENERAL DESCRIPTION OF EUT	6
2.2	RELATED SUBMITTAL(S) / GRANT (S).....	8
2.3	TEST METHODOLOGY.....	8
2.4	TEST FACILITY.....	8
3	TEST INSTRUMENTS LIST.....	9
4	SYSTEM TEST CONFIGURATION.....	10
4.1	TEST MODE	10
4.2	CONFIGURATION OF TESTED SYSTEM.....	11
4.3	CONDUCTED PEAK OUTPUT POWER	12
4.4	PEAK-TO-AVERAGE RATIO	14
4.5	OCCUPY BANDWIDTH.....	18
4.6	MODULATION CHARACTERISTIC	23
4.7	OUT OF BAND EMISSION AT ANTENNA TERMINALS	23
4.8	ERP, EIRP MEASUREMENT	33
4.9	FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	41
4.10	FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	49
4.11	FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT.....	53
5	TEST SETUP PHOTO.....	56
6	EUT CONSTRUCTIONAL DETAILS.....	57

TEST REPORT DECLARATION

Applicant : Shanghai Huace Navigation Technology LTD.
 Address : Building D, 599 Gaojing Road, Qingpu District, Shanghai, China
 Manufacturer : Shanghai Huace Navigation Technology LTD.
 Address : Building D, 599 Gaojing Road, Qingpu District, Shanghai, China
 EUT Description : Geodetic GNSS Receiver (i50U)
 (A) Model No. : 1150322131145
 (B) Trademark : 

Measurement Standard Used:

FCC CFR Title 47 Part 2


FCC CFR Title 47 Part22 Subpart H


FCC CFR Title 47 Part24 Subpart E

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Reak Yang
 Project Engineer 

Approved by (name + signature).....: Simple Guan
 Project Manager 

Date of issue.....: November 21, 2018

Revision History

Revision	Issue Date	Revisions	Revised By
00	November 21, 2018	Initial released Issue	Simple Guan




1 Test Summary

Test Item	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Pass* (Please refer to SAR Report)
RF Output Power	Part 2.1046 Part 22.913 (a)(2) Part 24.232 (c)	Pass
Peak-to-Average Ratio	Part 2.1046 Part 24.232 (d)	Pass
Modulation Characteristics	Part 2.1047	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917 Part 24.238	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 (a) Part 24.238 (a)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a)	Pass
Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a)	Pass
Frequency stability vs. temperature	Part 2.1055(a)(1)(b)	Pass
Frequency stability vs. voltage	Part 2.1055(d)(1)(2)	Pass

Pass: The EUT complies with the essential requirements in the standard.

2 General Information

2.1 General Description of EUT

Description	: Geodetic GNSS Receiver (i50U)
Model Number	: 1150322131145
Note	: The model name "1150322131145" corresponding client's internal model is "Geodetic GNSS Receiver (i50U)."
Trademark	: 
Test Voltage	: 12-36V  , 2A (for DC port) or 7.4V  , 3400mAh (for replaceable lithium battery)
Support Networks	GPRS, EGPRS, WCDMA
Support Bands	GSM850, PCS1900, WCDMA Band V, WCDMA Band II
TX Frequency	GSM850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz WCDMA Band V: 826.40MHz -846.60MHz WCDMA Band II: 1852.40MHz -1907.60MHz
GPRS Class	12
EGPRS Class	10
Modulation type	GPRS: GMSK EGPRS: GMSK/8PSK WCDMA Band II/V: QPSK
Antenna type	Internal antenna
Antenna gain	1dBi(max.) For GSM 850 & Band V 2.5dBi(max.) For DCS 1900 & Band II
Software version	: V1.0.2ST
Hardware version	: V2.2

Operation Frequency List:

GSM 850		PCS1900		WCDMA Band V		WCDMA Band II	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20	4132	826.40	9262	1852.40
129	824.40	513	1850.40	4133	826.60	9263	1852.60
· ∴	· ∴	· ∴	· ∴	· ∴	· ∴	· ∴	· ∴
189	836.40	660	1879.80	4181	836.20	9399	1879.80
190	836.60	661	1880.00	4182	836.40	9400	1880.00
191	836.80	662	1880.20	4183	836.60	9401	1880.20
· ∴	· ∴	· ∴	· ∴	· ∴	· ∴	· ∴	· ∴
250	848.60	809	1909.60	4232	846.40	9537	1907.40
251	848.80	810	1909.80	4233	846.60	9538	1907.60

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Final test channel:

GSM 850		PCS1900		WCDMA Band V		WCDMA Band II	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20	4132	826.40	9262	1852.40
190	836.60	661	1880.00	4183	836.60	9400	1880.00
251	848.80	810	1909.80	4233	846.60	9538	1907.60

2.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

2.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on TIA/EIA 603 and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

2.4 Test Facility

Shenzhen Alpha Product Testing Co., Ltd
Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
Registration Number: 293961

July 25, 2017 Certificated by IC
Registration Number: 12135A

3 Test Instruments list

Equipment	Manufacturer	Model No.	Serial No.	Last cal.	Cal Interval
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2018.04.13	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2018.04.13	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2018.09.28	2Year
Filter	KANGMAI	ZLPF-LDC- 1000-1959	1209002075	2018.09.21	1Year
Filter	WAINWRIGHT	WHKX2.80 /18G-12SS	SN1	2018.09.21	1Year
Filter	WAINWRIGHT	WHKX1.0G/15G -10SS	SN40	2018.09.21	1Year
RF Cable	Resenberger	Cable 4	N/A	2018.09.21	1Year
CMU200	ROHDE&SCHW ARZ	CMU200	116785	2018.09.11	1Year
CMW500	ROHDE&SCHW ARZ	CMW500	1201.0002K50- 117239-sM	2018.09.21	1Year
Signal Analyzer	Agilent	N9020A	MY499100060	2018.09.11	1Year
vector Signal Generator	Agilent	N5182A	MY49060042	2018.09.11	1Year
vector Signal Generator	Agilent	E4438C	US44271917	2018.09.11	1Year
Amplifier	Agilent	8449B	3008A02664	2018.09.21	1Year
Test Receiver	ROHDE&SCHW ARZ	ESR	1316.3003K03- 102082-Wa	2018.09.21	1Year
9*6*6 anechoic	CHENYU	9*6*6	N/A	/	/
RF Cable	Resenberger	Cable 1	N/A	2018.09.21	1Year
RF Cable	Resenberger	Cable 2	N/A	2018.09.21	1Year
RF Cable	Resenberger	Cable 3	N/A	2018.09.21	1Year
Power Sensor	Power Radio	RPR3006W	15100041SNO91	2018.09.21	1Year
20dB Attenuator	ICPROBING	IATS1	82347	2018.09.21	1Year
L.I.S.N.#1	SCHWARZBECK	NSLK8126	8126-466	2018.09.21	1Year
L.I.S.N.#2	ROHDE&SCHWA RZ	ENV216	101043	2018.09.21	1Year
POWER DIVIDER	Mini-circuits	PD-2SF-0010	N/A	2018.09.21	1Year
POWER DIVIDER	Mini-circuits	PD-2SF-0010	N/A	2018.09.21	1Year
Temperature& Humidity test chamber	GZGONGWEN	GDS-250	080821	2018.10.21	1Year

4 System test configuration

4.1 Test mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Test modes		
Band	Radiated	Conducted
GSM 850	<ul style="list-style-type: none"> ■ GPRS 1 link ■ EPRS 1 link 	<ul style="list-style-type: none"> ■ GPRS 1 link ■ EGPRS 1 link
PCS 1900	<ul style="list-style-type: none"> ■ GPRS 1 link ■ EGPRS 1 link 	<ul style="list-style-type: none"> ■ GPRS 1 link ■ EGPRS 1 link
WCDMA II	<ul style="list-style-type: none"> ■ RMC 12.2Kbps link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps link
WCDMA Band V	<ul style="list-style-type: none"> ■ RMC 12.2Kbps link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps link


Note: The maximum power levels are GSM mode for GMSK link, GPRS multi-slot class 8 mode for GMSK link, EGPRS multi-slot class 8 mode for 8PSK link, RMC12.2Kbps mode for WCDMA Band V/II. only these modes were used for all tests.

The conducted power tables are as follows:


Conducted Power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency	824.20	836.60	848.80	1850.20	1880.00	1909.80
GPRS (GMSK, 1 TX slot)	33.27	32.73	32.66	29.36	29.29	28.12
GPRS (GMSK, 2 TX slot)	32.43	32.42	31.52	29.08	27.31	27.55
GPRS (GMSK, 3 TX slot)	30.25	29.38	30.57	27.53	27.01	25.72
GPRS (GMSK, 4 TX slot)	28.36	28.80	29.04	25.66	25.13	25.54
EGPRS (8PSK, 1 TX slot)	30.35	29.61	29.73	27.09	26.13	25.88
EGPRS (8PSK, 2 TX slot)	29.16	29.91	29.60	26.11	26.23	26.26
EGPRS (8PSK, 3 TX slot)	27.49	27.24	27.39	24.39	23.32	22.78
EGPRS (8PSK, 4 TX slot)	27.59	26.63	26.93	22.53	23.33	22.63

Conducted Power (dBm)						
Band	WCDMA Band II			WCDMA Band V		
Channel	9262	9400	9538	4132	4183	4233
Frequency	1852.4	1880.0	1907.6	826.4	836.6	846.6
RMC 12.2Kbps	19.73	20.09	19.72	22.51	22.00	23.05
HSDPA Subtest-1	20.13	20.34	20.89	21.07	21.13	21.66
HSDPA Subtest-2	20.53	20.75	19.73	21.97	21.12	21.58
HSDPA Subtest-3	20.32	19.56	19.82	21.74	21.50	21.39
HSDPA Subtest-4	20.42	20.56	20.42	22.05	22.31	21.22
HSUPA Subtest-1	19.95	20.37	19.57	22.16	21.48	21.70
HSUPA Subtest-2	20.57	20.40	19.23	22.41	21.41	22.00
HSUPA Subtest-3	20.72	19.74	19.31	21.82	21.85	21.58
HSUPA Subtest-4	20.06	19.62	19.70	21.93	20.90	21.92
HSUPA Subtest-5	19.94	21.04	19.88	21.55	21.41	21.91
AMR	20.42	20.59	19.70	22.02	21.23	21.88

4.2 Configuration of Tested System

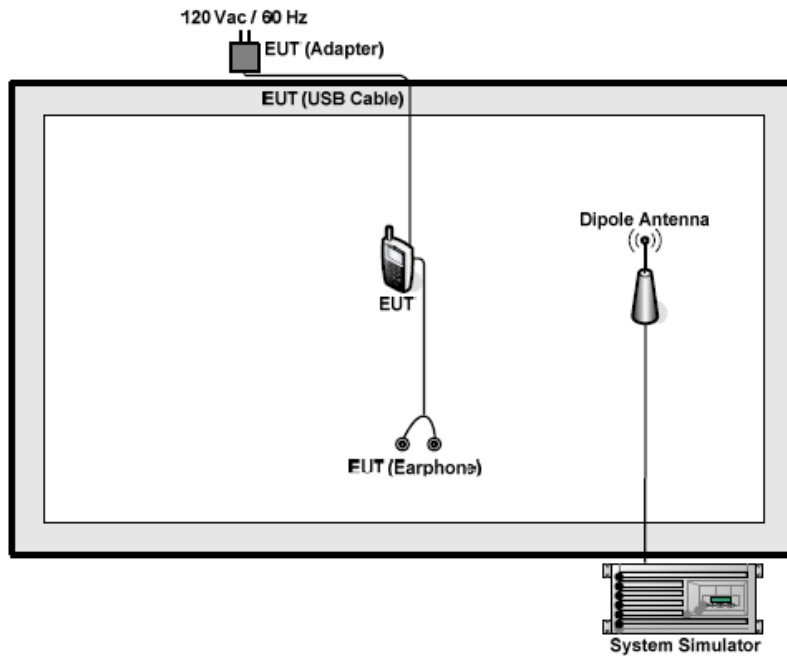

4.3 Conducted AV Output Power

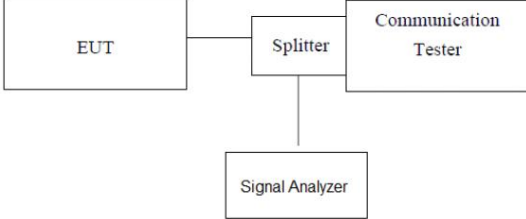
Test Requirement:	FCC part22.913(a) and FCC part24.232(b)
Test Method:	FCC part2.1046
Limit:	GSM850, WCDMA Band V: 7W PCS1900, WCDMA Band II: 2W
Test setup:	 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- CT[Communication Tester] Splitter --- SA[Signal Analyzer] </pre> <p><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Procedure:	<ol style="list-style-type: none"> 1. The transmitter output port was connected to base station. 2. The RF output of EUT was connected to the Signal Analyzer by RF cable and attenuator, the path loss was compensated to the results for each measurement. 3. Set EUT at maximum power through base station. 4. Select lowest, middle, and highest channels for each band and different modulation. 5. Measure the maximum burst average power.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GPRS (GMSK, 1-Slot)	33.03	32.92	32.72	29.25	28.97	28.04
GPRS (GMSK, 2-Slot)	32.05	31.92	31.83	28.41	27.67	27.36
GPRS (GMSK, 3-Slot)	29.92	30.18	30.49	27.26	26.50	26.28
GPRS (GMSK, 4-Slot)	27.83	28.74	29.41	25.37	25.63	25.44
EGPRS (8PSK, 1-Slot)	30.71	30.01	29.99	27.22	26.91	25.95
EGPRS (8PSK, 2-Slot)	29.93	29.97	27.91	26.45	25.77	25.67
EGPRS (8PSK, 3-Slot)	28.09	27.43	27.55	24.56	23.29	22.69
EGPRS (8PSK, 4-Slot)	27.72	26.85	26.62	22.17	23.07	22.39

Fram Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GPRS (GMSK, 1-Slot)	24.02	23.62	23.49	20.27	20.30	19.63
GPRS (GMSK, 2-Slot)	25.96	26.13	25.36	22.62	22.09	21.97
GPRS (GMSK, 3-Slot)	25.50	24.56	26.05	23.10	22.54	21.52
GPRS (GMSK, 4-Slot)	25.22	26.23	26.25	22.50	21.83	22.87
EGPRS (8PSK, 1-Slot)	21.45	21.41	21.38	18.89	17.82	16.55
EGPRS (8PSK, 2-Slot)	24.08	24.15	23.49	19.53	20.03	20.08
EGPRS (8PSK, 3-Slot)	23.95	23.03	13.05	20.12	19.04	18.76
EGPRS (8PSK, 4-Slot)	24.83	23.83	13.26	19.88	19.93	18.87

4.4 Peak-to-Average Ratio

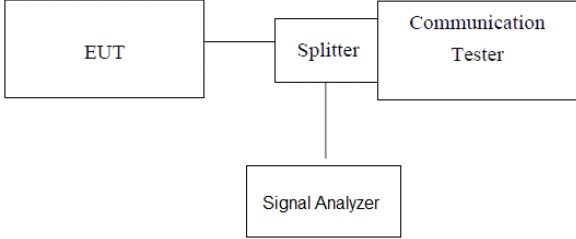Test Requirement:	FCC part24.232(d)
Test Method:	FCC part2.1046
Limit:	13db
Test setup:	 <p style="text-align: center;"><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Procedure:	<ol style="list-style-type: none"> 1. The transmitter output port was connected to base station. 2. The RF output of EUT was connected to the Signal Analyzer by RF cable and attenuator, the path loss was compensated to the results for each measurement. 3. Set EUT at maximum power through base station. 4. Select lowest, middle, and highest channels for each band and different modulation. 5. Measure the maximum burst average power. 6. Record the maximum peak-to-average ratio value.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement data

Test mode	Peak to Average Ratio (dB)			Limit (dB)	Result
	Low Ch.	Middle Ch.	High Ch.		
GSM/TM1/GSM850(GPRS)	9.46	9.32	9.70	13	PASS
GSM/TM1/GSM1900(GPRS)	9.27	9.27	9.62	13	PASS



Test mode	Peak to Average Ratio (dB)			Limit (dB)	Result
	Low Ch.	Middle Ch.	High Ch.		
GSM/TM1/GSM850(EGPRS)	9.35	9.26	9.61	13	PASS
GSM/TM1/GSM1900(EGPRS)	9.69	10.09	9.93	13	PASS

Test mode	Peak to Average Ratio (dB)			Limit (dB)	Result
	Low Ch.	Middle Ch.	High Ch.		
WCDMA Band II	3.08	2.97	3.00	13	PASS
WCDMA Band V	3.34	2.92	3.30		

Peak-to-Average Ratio (PAR)



GSM/TM1/GSM850(GPRS)

GSM/TM1/GSM1900(GPRS)

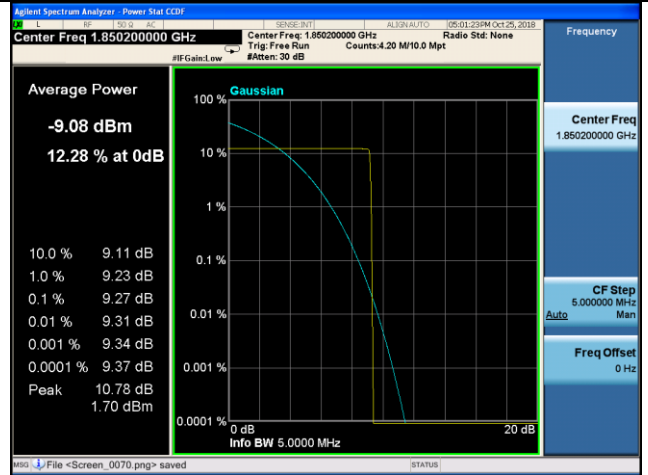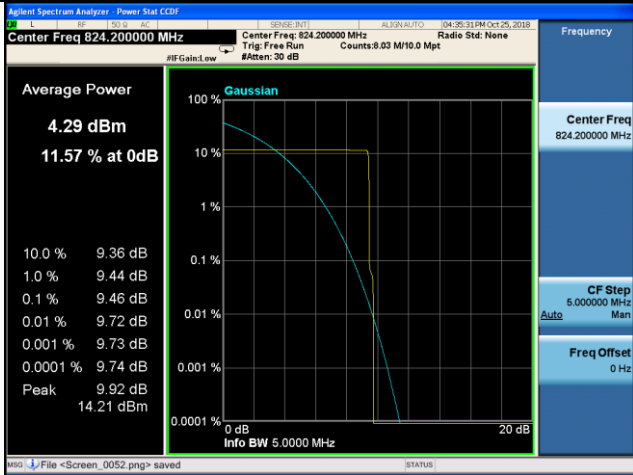



Channel 128/ 824.2 MHz

Channel 512 / 1850.20 MHz

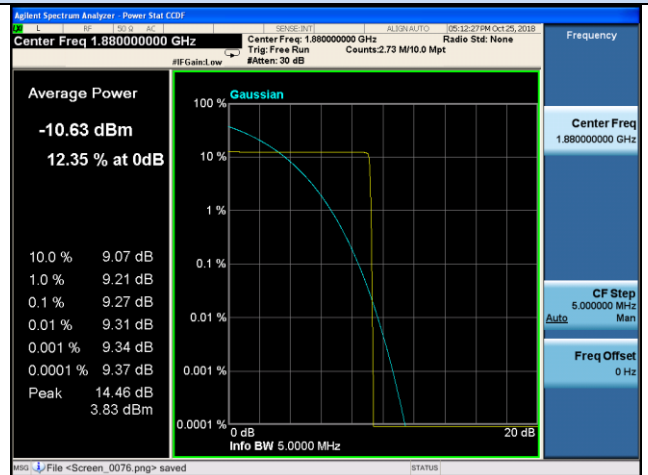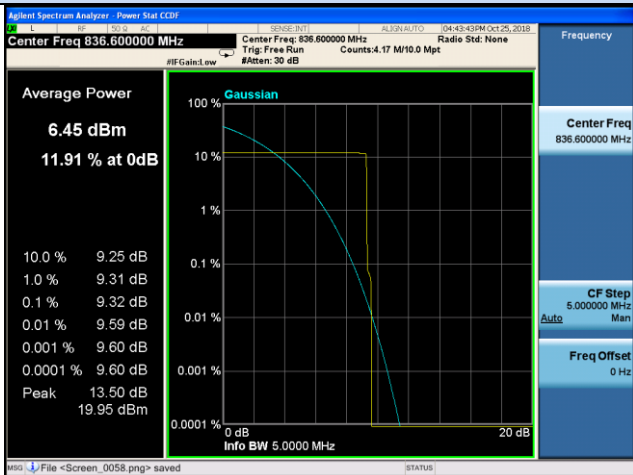

Channel 190/ 836.6 MHz

Channel 661 / 1880.00 MHz

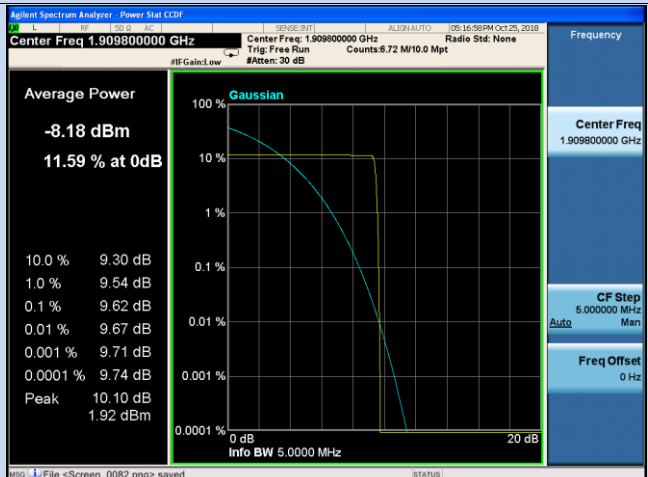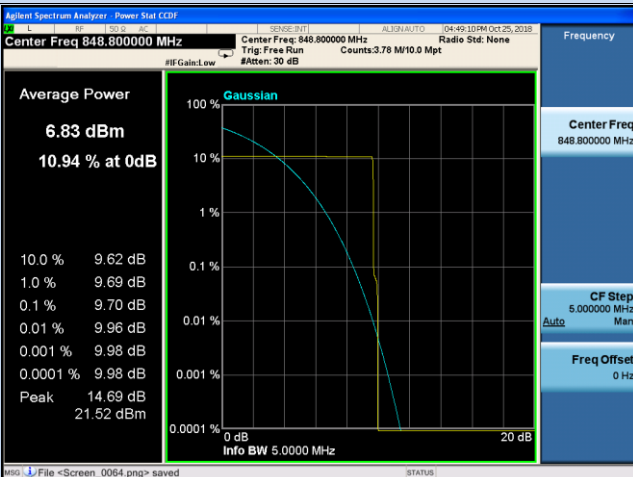



Channel 251/ 848.8 MHz

Channel 810 1909.8 MHz

Peak-to-Average Ratio (PAR)



GSM/TM1/GSM850(EGPRS)

GSM/TM1/GSM1900(EGPRS)

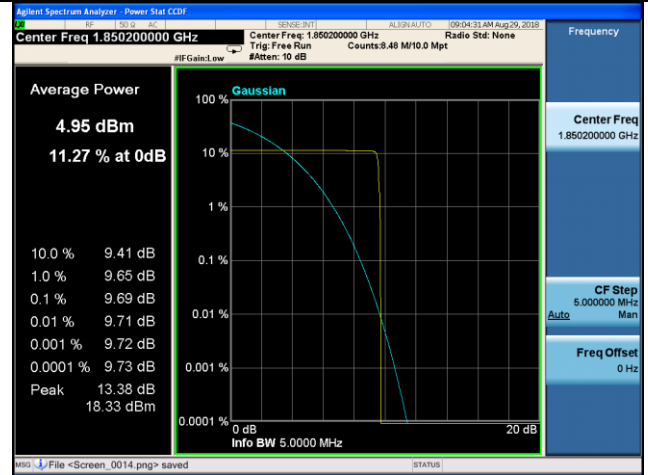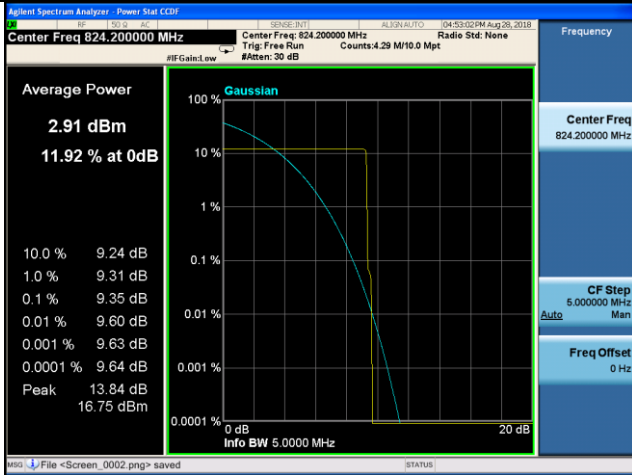



Channel 128/ 824.2 MHz

Channel 512 / 1850.20 MHz

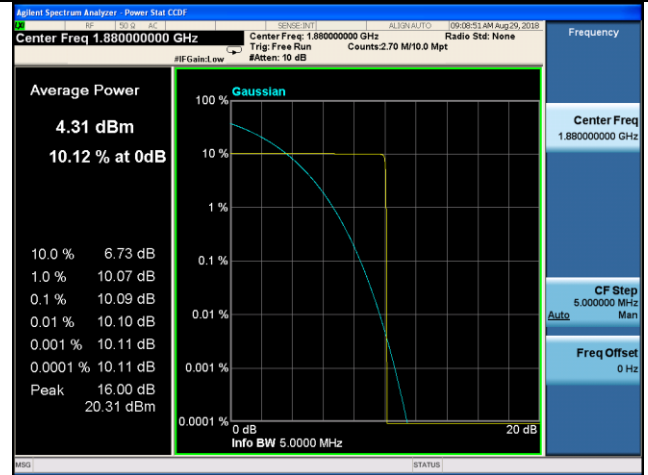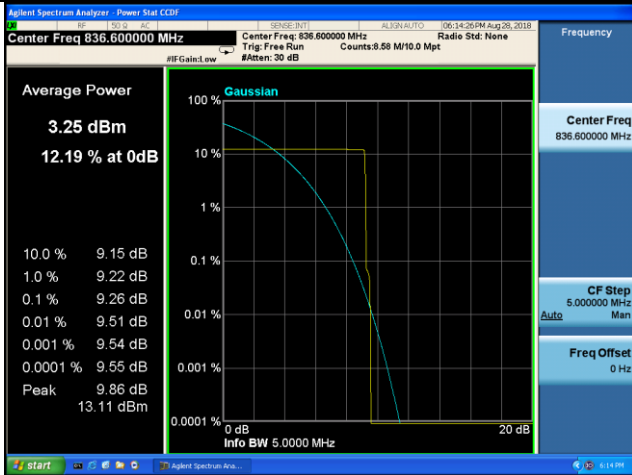

Channel 190/ 836.6 MHz

Channel 661 / 1880.00 MHz

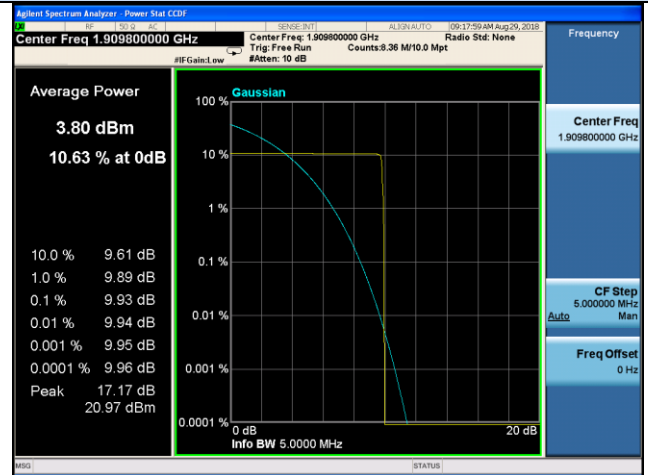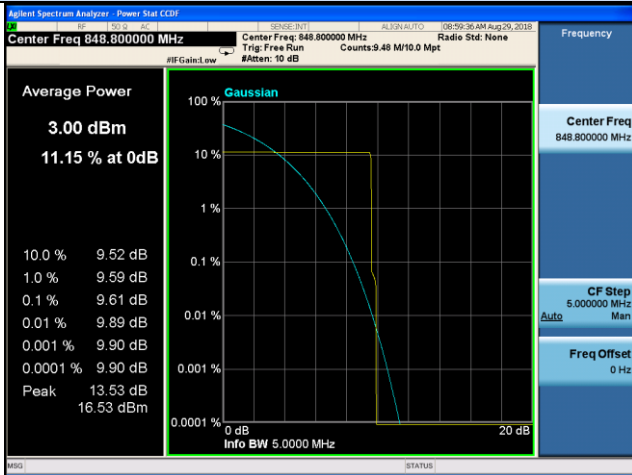



Channel 251/ 848.8 MHz

Channel 810 1909.8 MHz

Peak-to-Average Ratio (PAR)



UMTS/TM1/ WCDMA Band II

UMTS/TM1/ WCDMA Band V

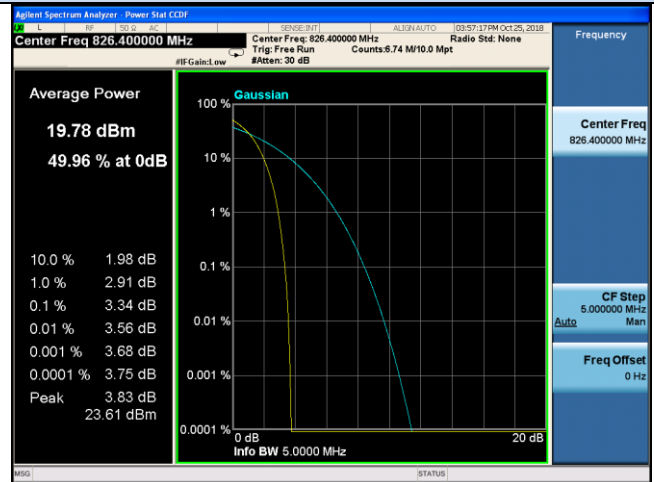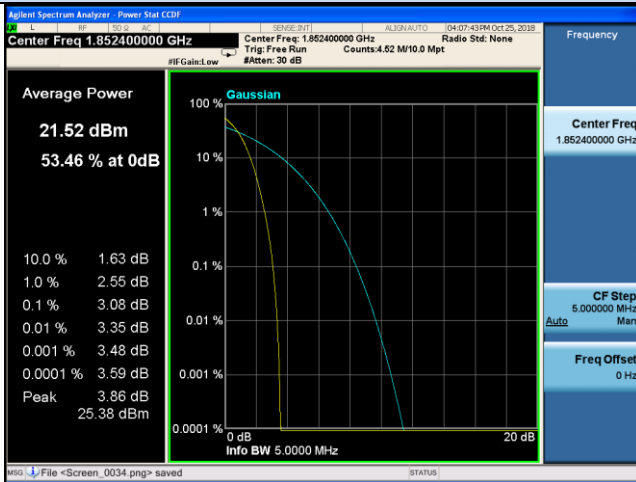


Channel 9262 / 1852.4 MHz

Channel 4132/ 826.4 MHz

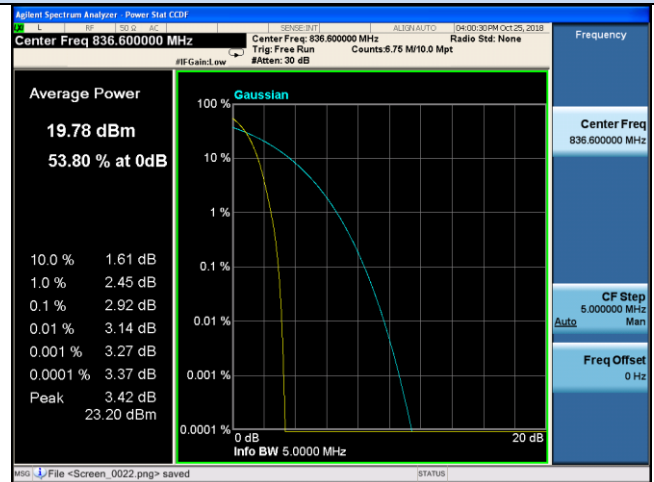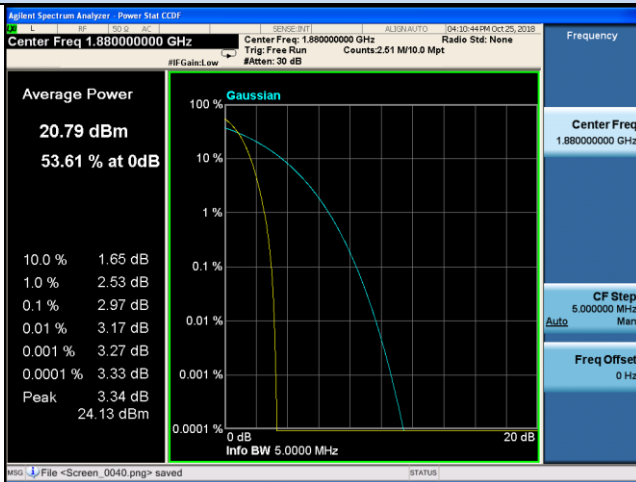

Channel 9400 / 1880.0 MHz


Channel 4183/ 836.6 MHz

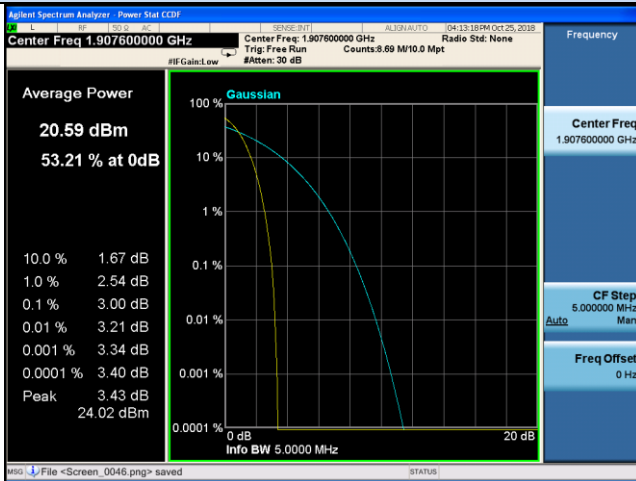

Channel 9538 / 1907.6 MHz

Channel 4233/ 846.6 MHz

4.5 Occupy Bandwidth

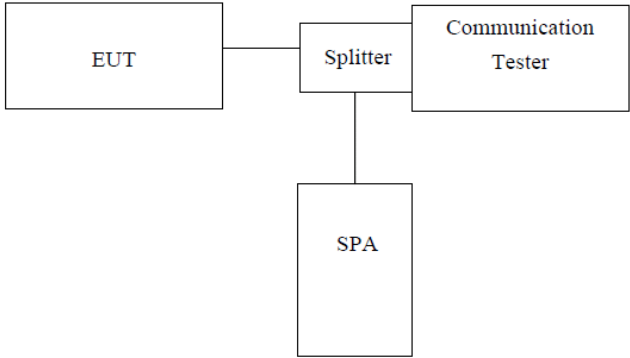
Test Requirement:	FCC part22.913(a) and FCC part24.232(b)
Test Method:	FCC part2.1049
Test setup:	 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- CT[Communication Tester] Splitter --- SPA[SPA] </pre> <p><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
GSM 850 (GPRS 1 link)	128	824.20	251.031	321.669
	190	836.60	248.410	325.493
	251	848.80	249.672	321.962
GSM 850 (EGPRS 1 link)	128	824.20	250.047	321.669
	190	836.60	246.960	325.493
	251	848.80	252.582	323.289
PCS 1900 (GPRS 1 link)	512	1850.20	248.911	315.744
	661	1880.00	244.277	298.557
	810	1909.80	236.325	314.766
PCS 1900 (EGPRS 1 link)	512	1850.20	248.336	310.982
	661	1880.00	251.903	321.623
	810	1909.80	257.234	327.878
WCDMA Band V (RMC 12.2Kbps link)	4132	826.40	4248.6	6437.0
	4183	836.60	4187.8	4842.0
	4233	846.60	4189.2	6150.0
WCDMA Band II (RMC 12.2Kbps link)	9262	1852.4	4153.8	4809.0
	9400	1880.0	4176.0	5851.0
	9538	1907.6	4179.8	5650.0

Test plot as follows:


GSM 850 (GPRS 1 link)	GSM 850 (EGPRS 1 link)
------------------------------	-------------------------------

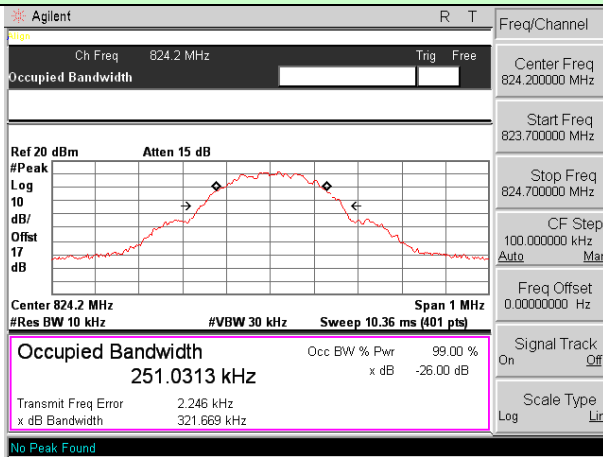


Lowest channel

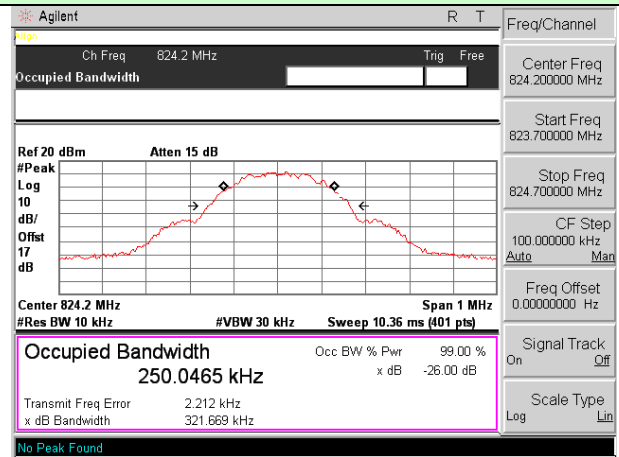


Lowest channel

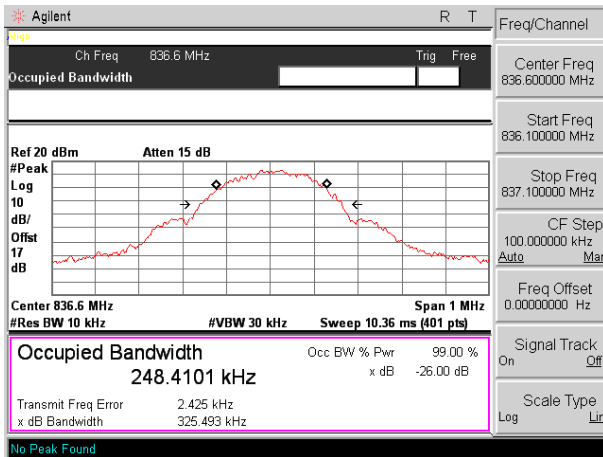


Middle channel

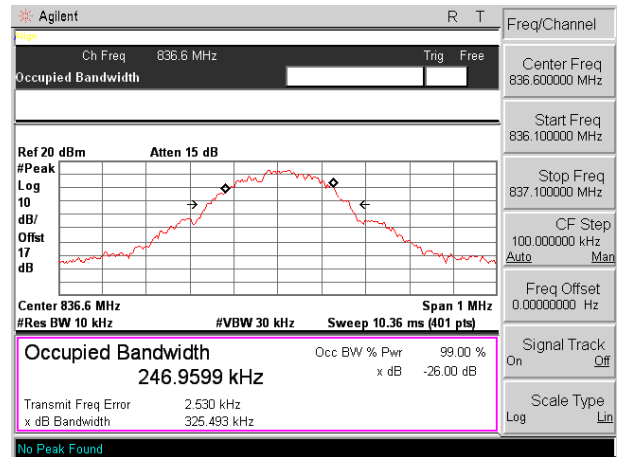

Middle channel

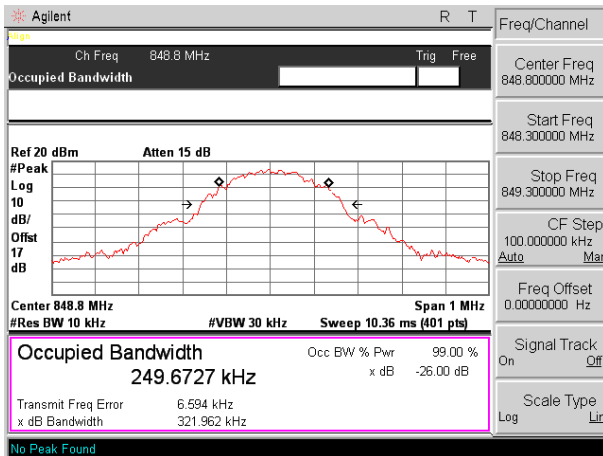


Highest channel

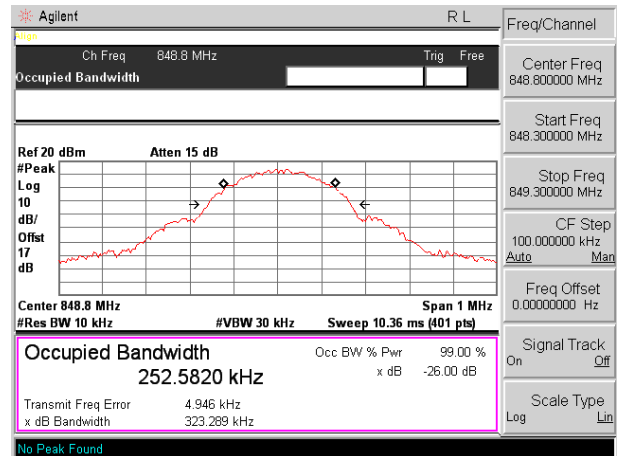


Highest channel


PCS 1900 (GPRS 1 link) PCS 1900 (EGPRS 1 link)

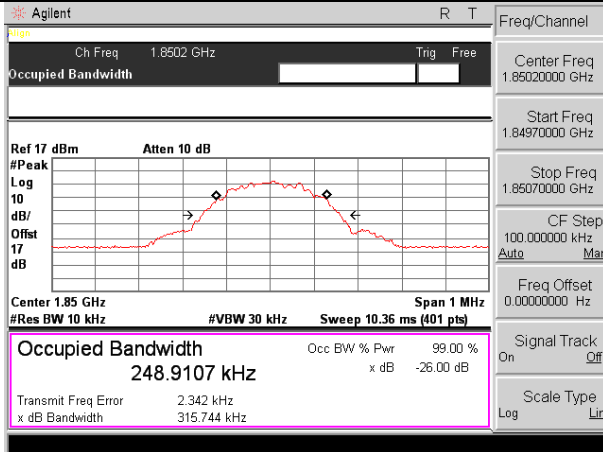


Lowest channel

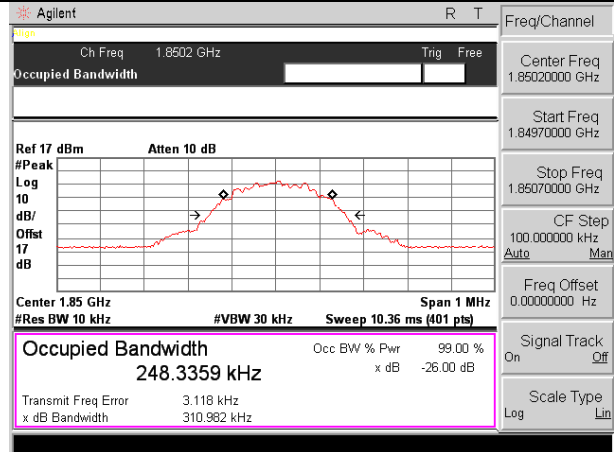


Lowest channel

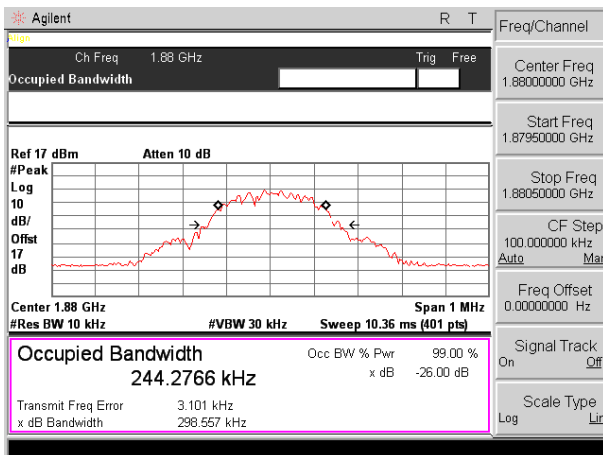


Middle channel

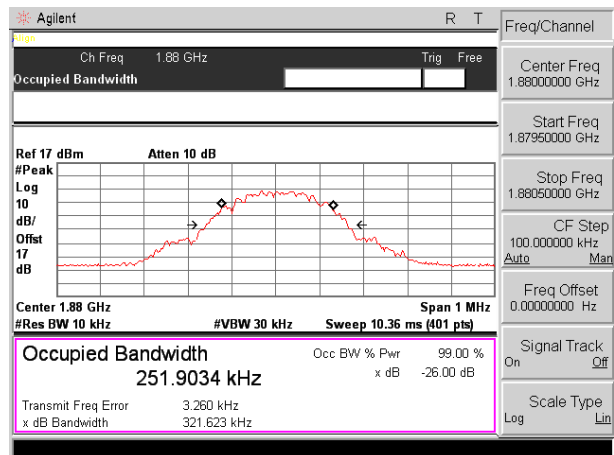

Middle channel

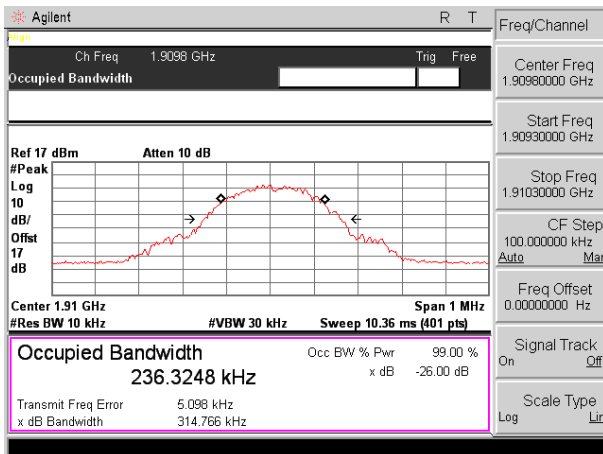


Highest channel

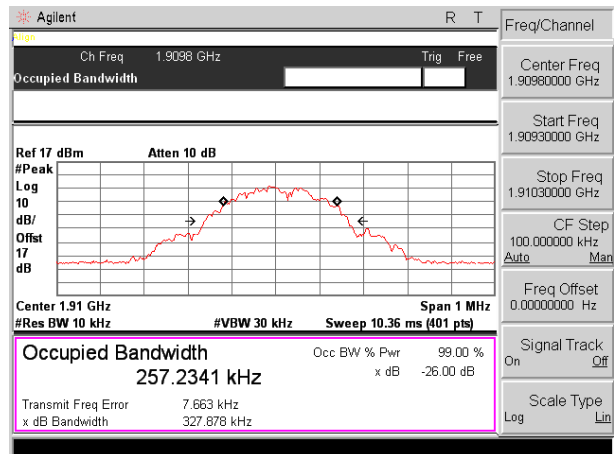


Highest channel


WCDMA Band V (RMC 12.2Kbps link) | WCDMA Band II (RMC 12.2Kbps link)

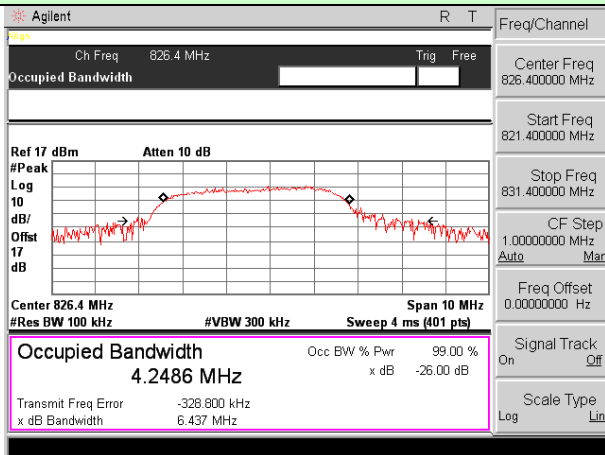


Lowest channel

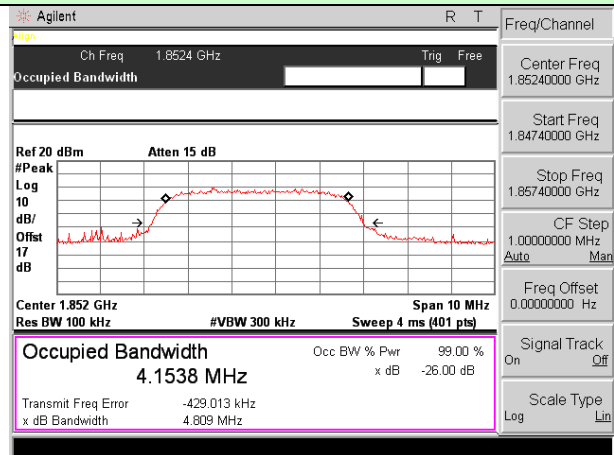


Lowest channel

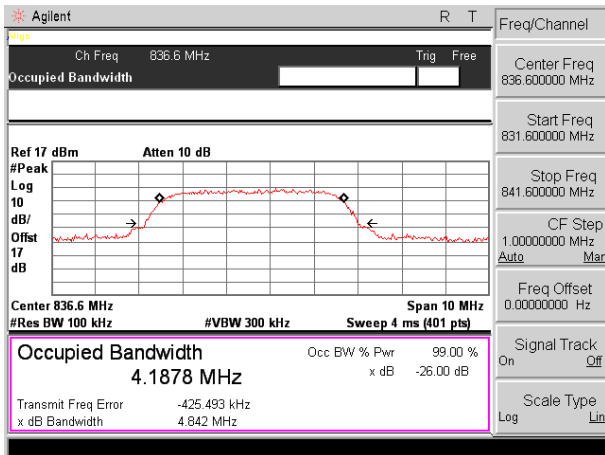


Middle channel

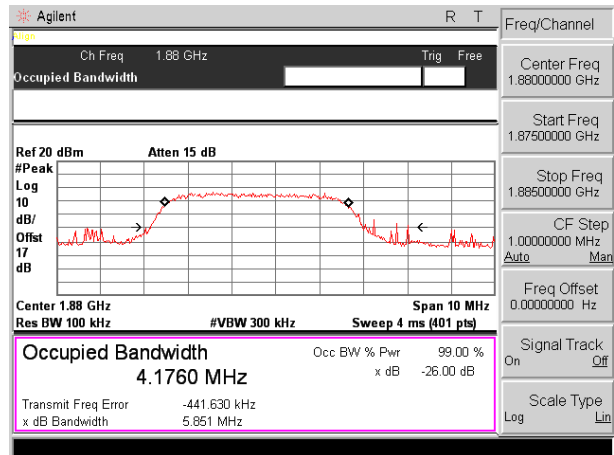

Middle channel

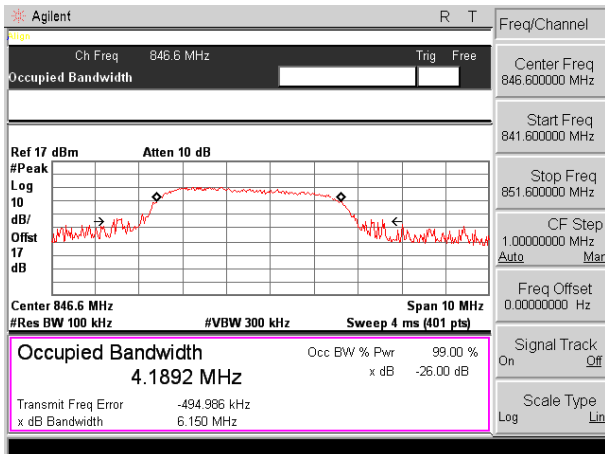

Highest channel

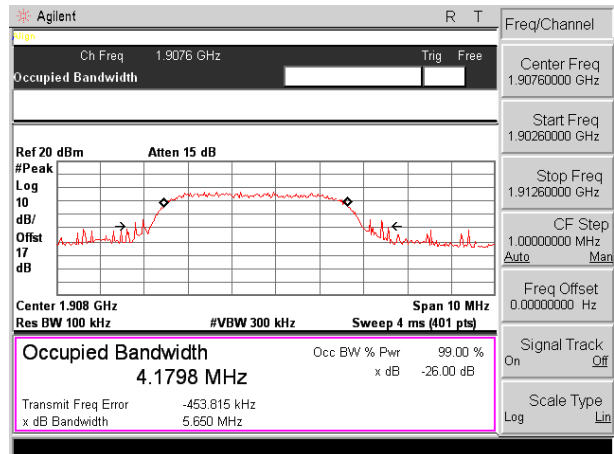


Highest channel

4.6 MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.



4.7 Out of band emission at antenna terminals

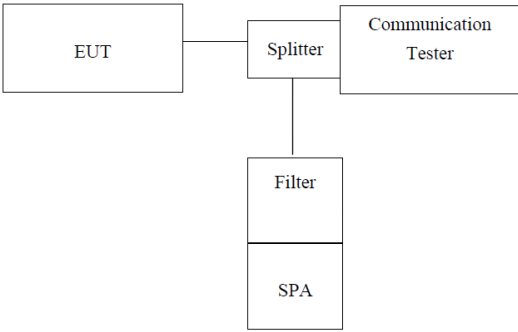Test Requirement:	FCC part22.917(a) and FCC part24.238(a)
Test Method:	FCC part2.1051
Limit:	-13dBm
Test setup:	 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- CT[Communication Tester] Splitter --- Filter[Filter] Filter --- SPA[SPA] </pre> <p><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Procedure:	<ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass



Test plot as follows:

Note: During the conducted spurious emission test, a band filter was used. The information of the filter is reported at section 6.0 (refer to item 24, 25).



Test Mode: Traffic mode GSM 850 (GPRS 1 link)

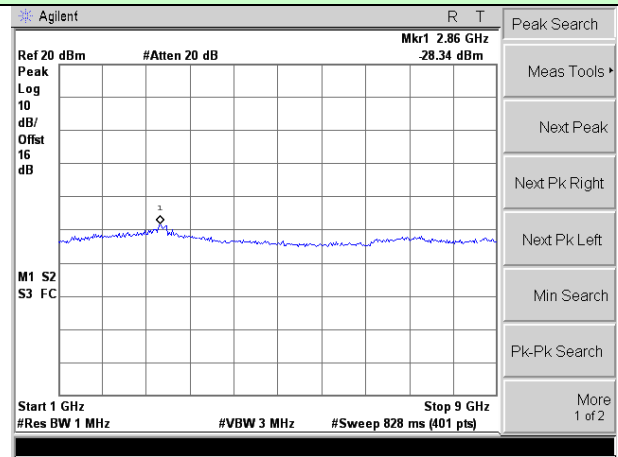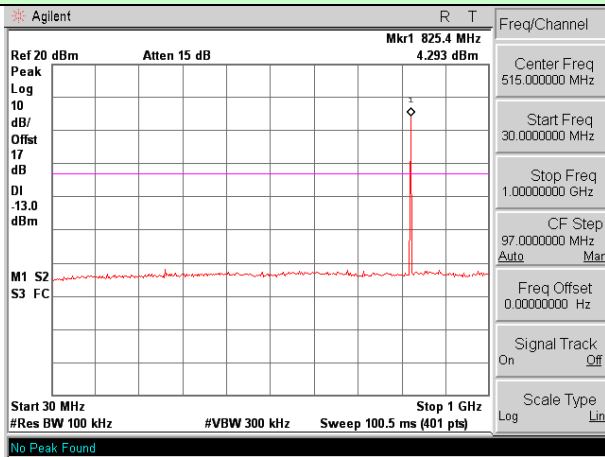

Lowest channel

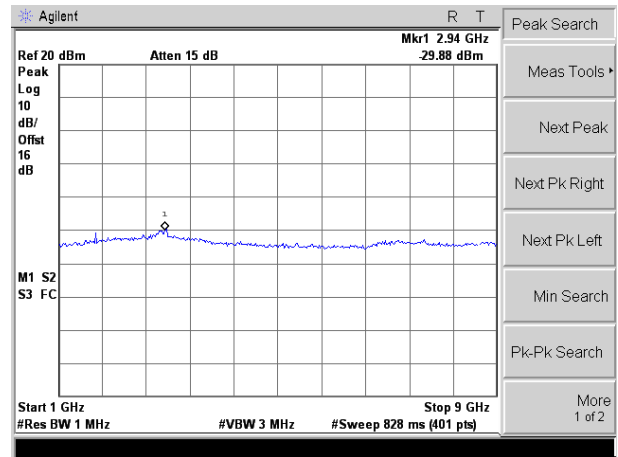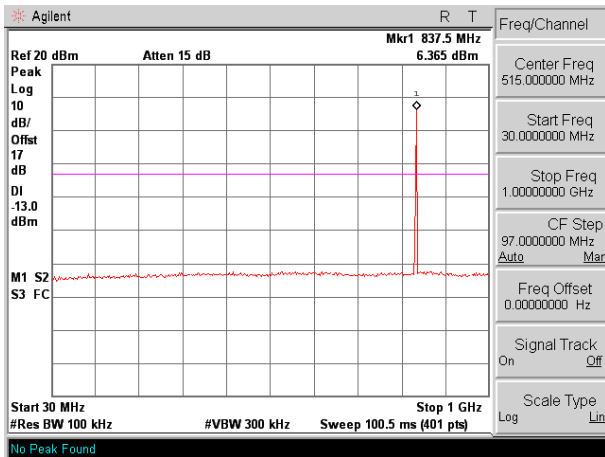



Middle channel

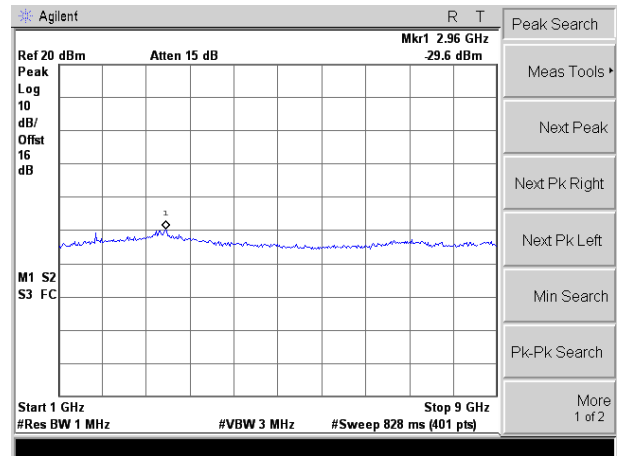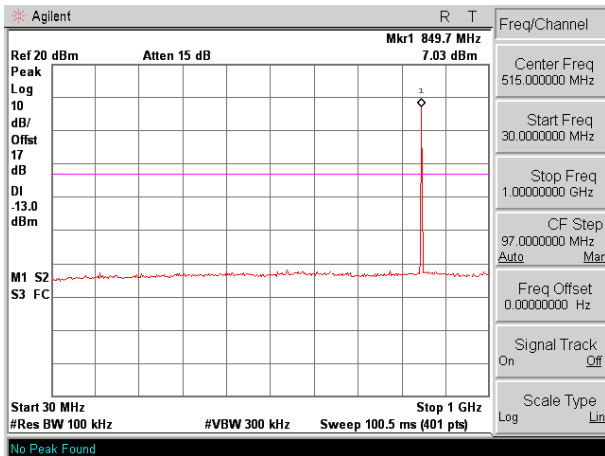



Highest channel

Test Mode: Traffic mode



GSM 850 (EGPRS 1 link)

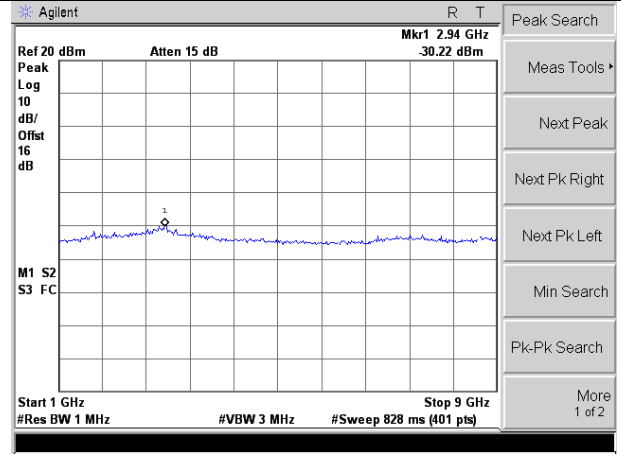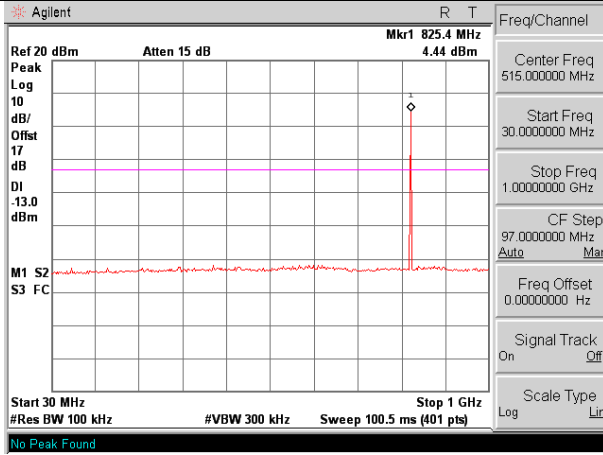

Lowest channel

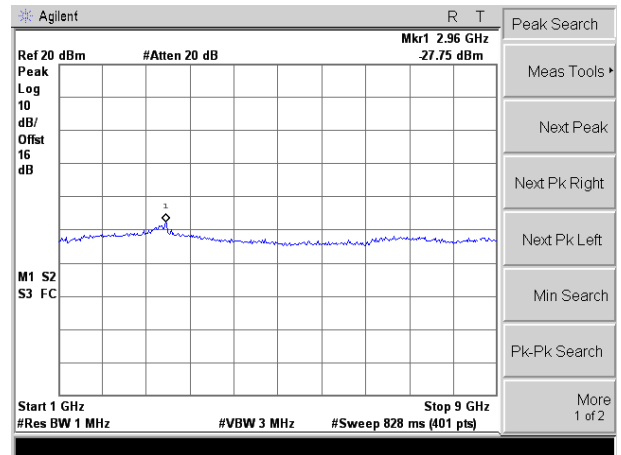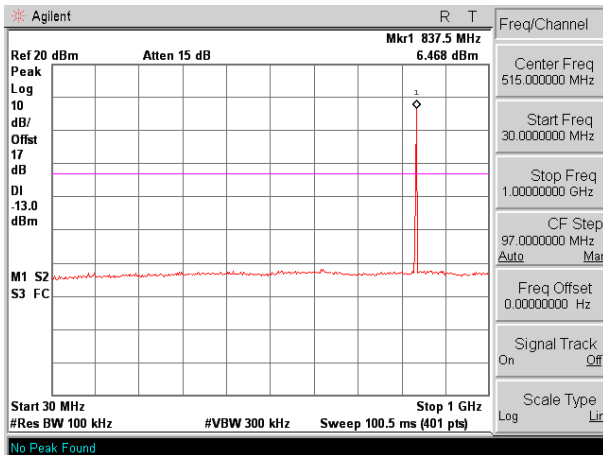



Middle channel

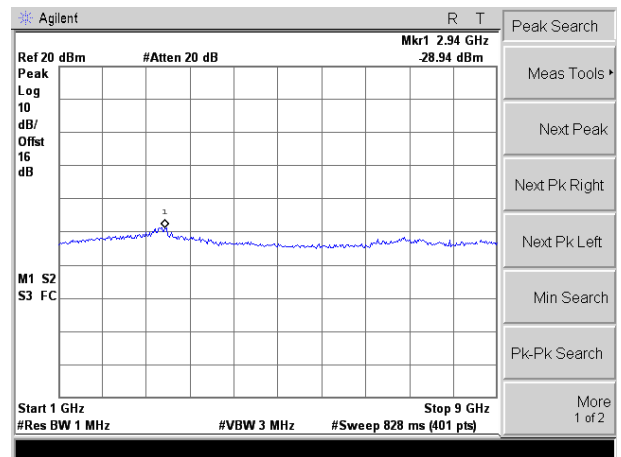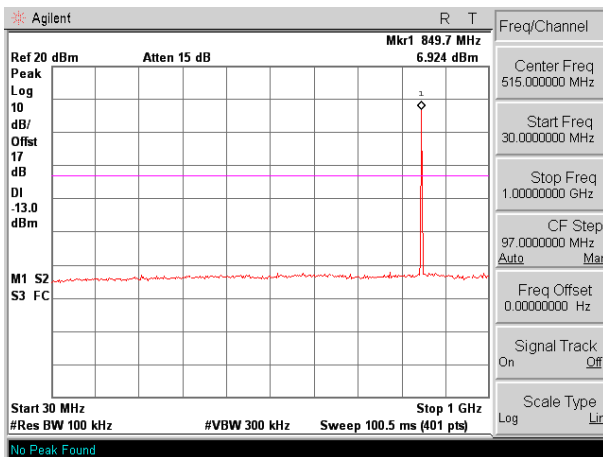



Highest channel

Test Mode: Traffic mode



PCS1900 (GPRS 1 link)

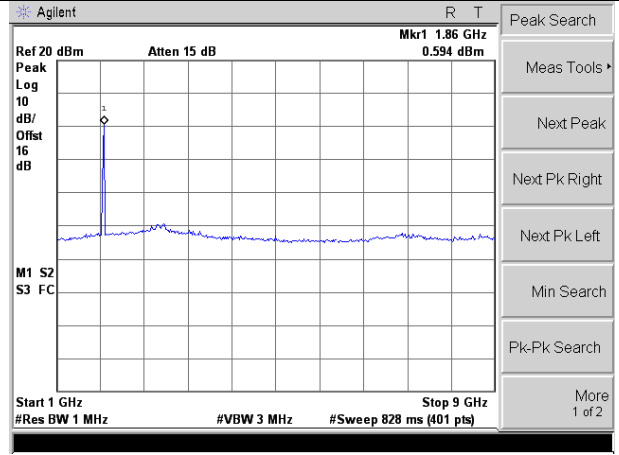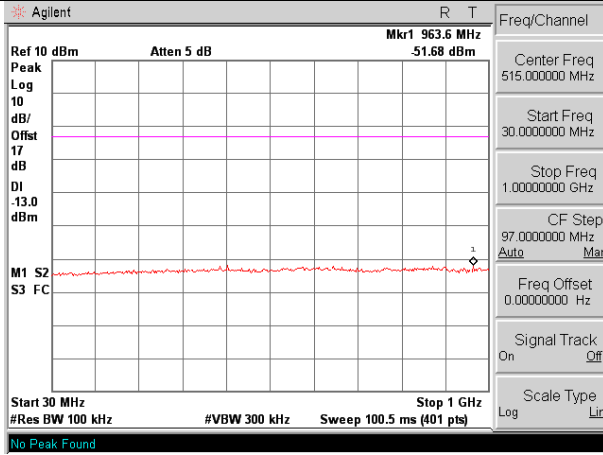

Lowest channel

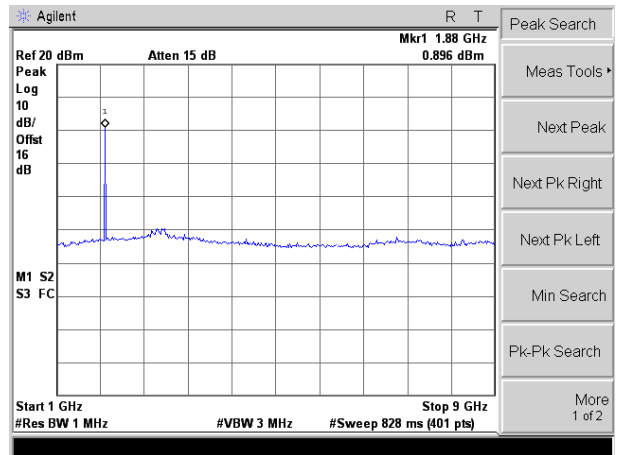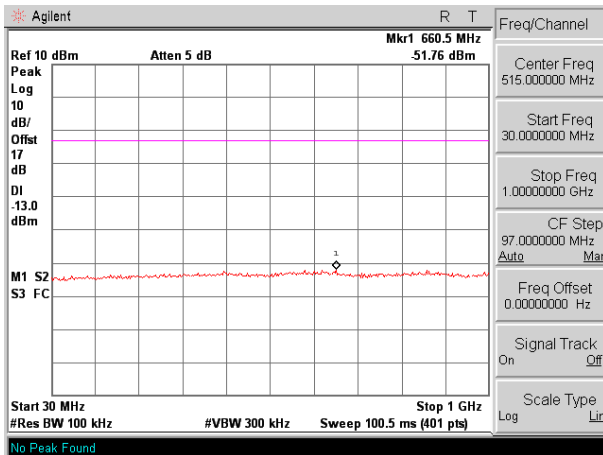



Middle channel

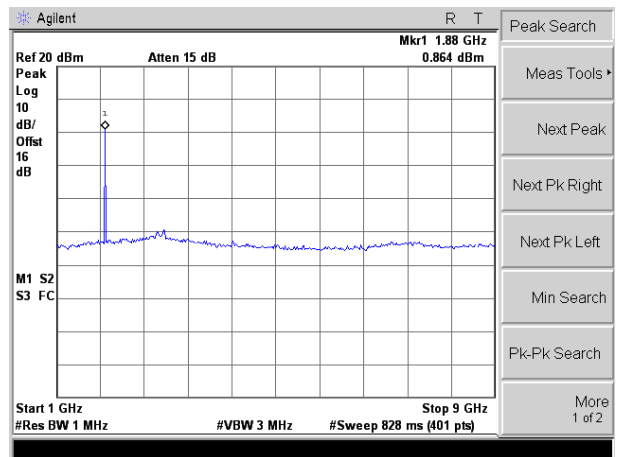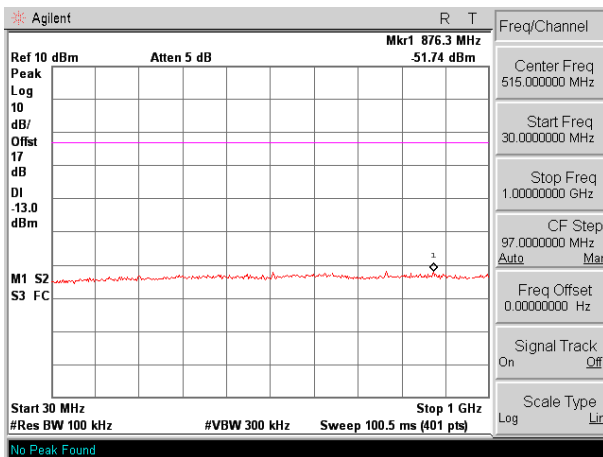



Highest channel

Test Mode: Traffic mode



PCS1900 (EGPRS 1 link)

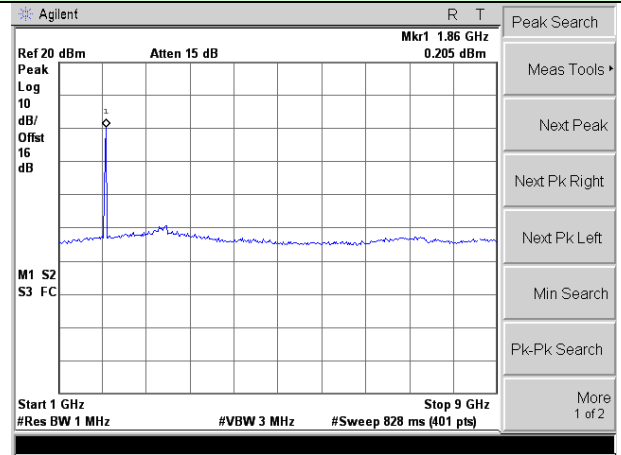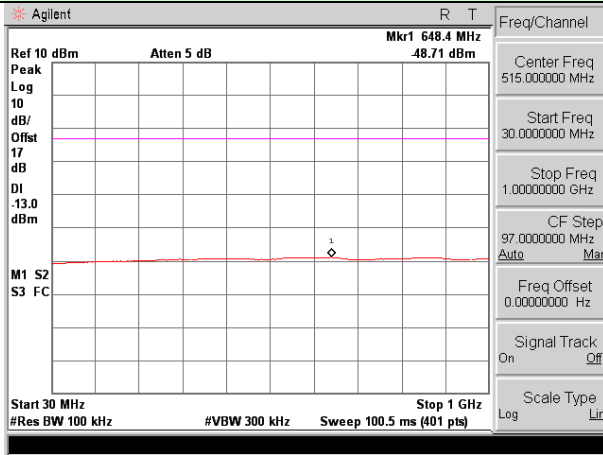

Lowest channel

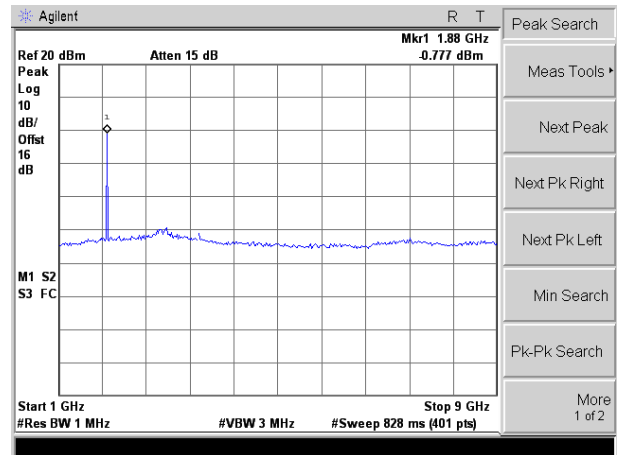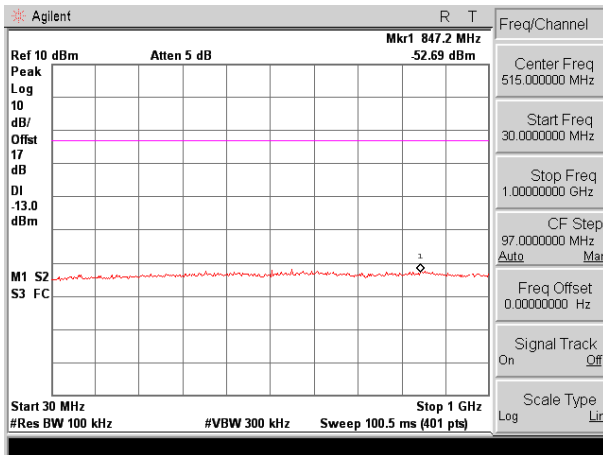



Middle channel

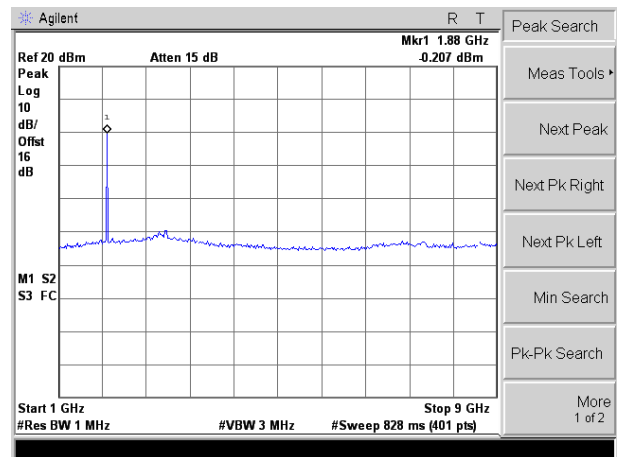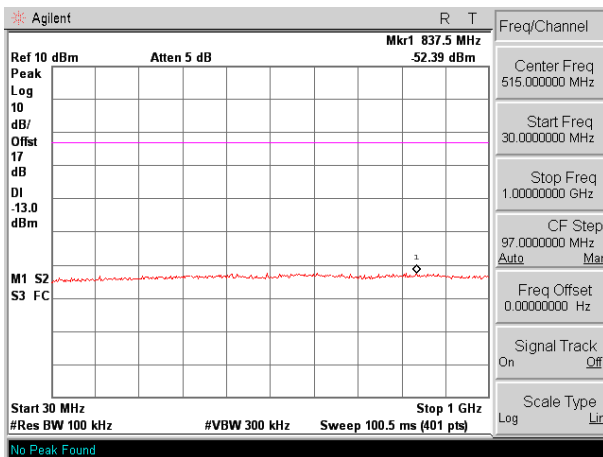



Highest channel

Test Mode: Traffic mode



WCDMA Band V (RMC 12.2Kbps link)

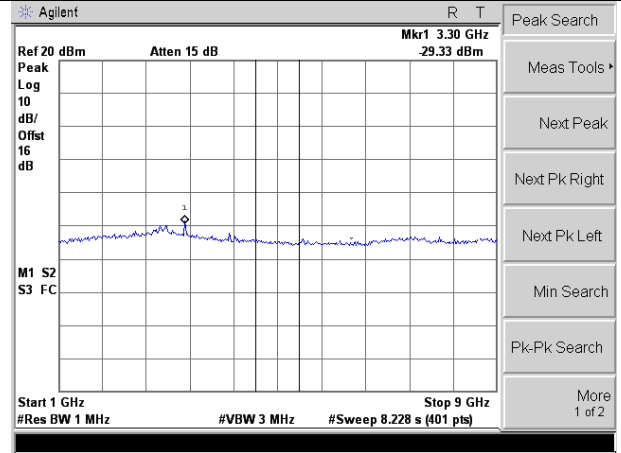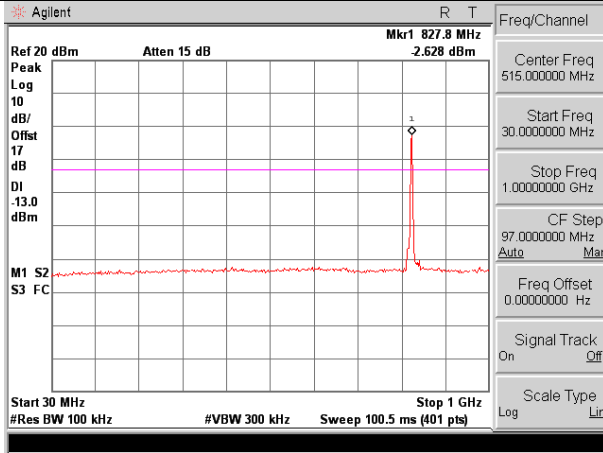

Lowest channel

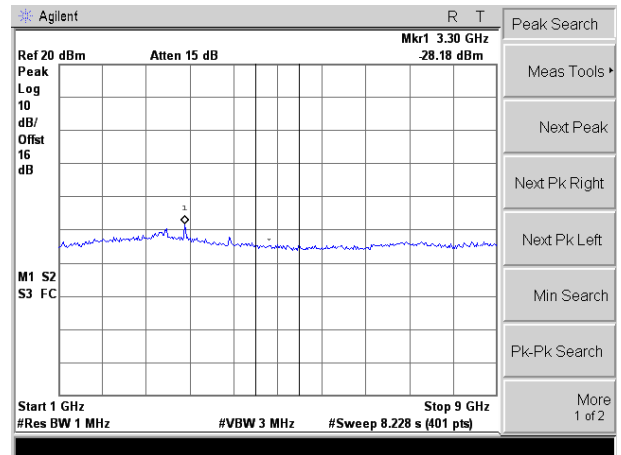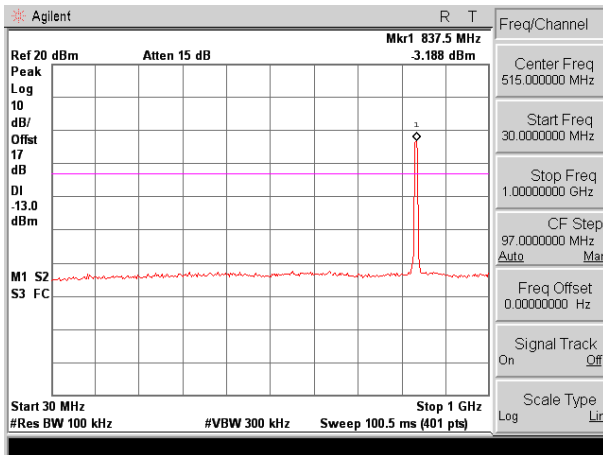



Middle channel

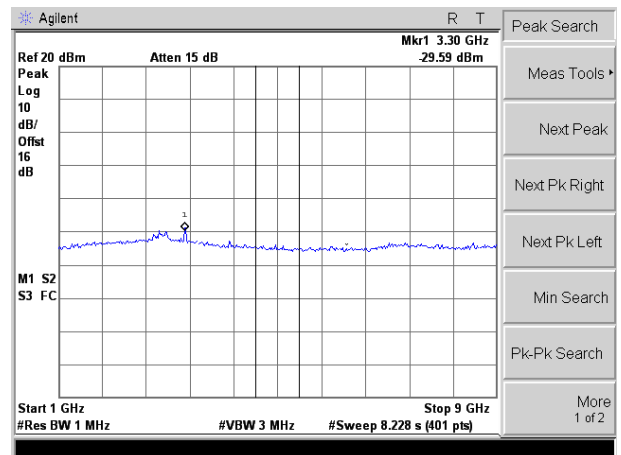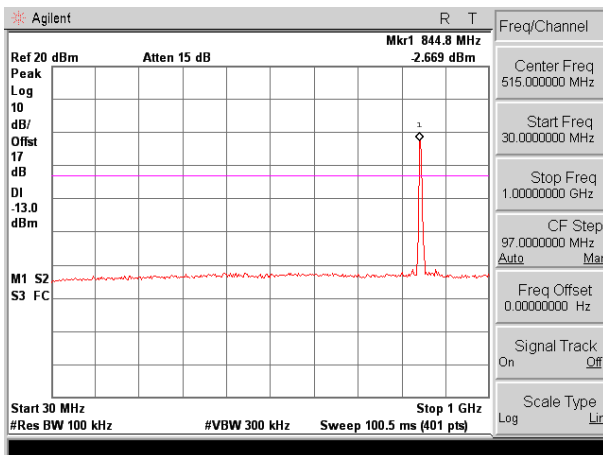



Highest channel

Test Mode: Traffic mode



WCDMA Band II (RMC 12.2Kbps link)

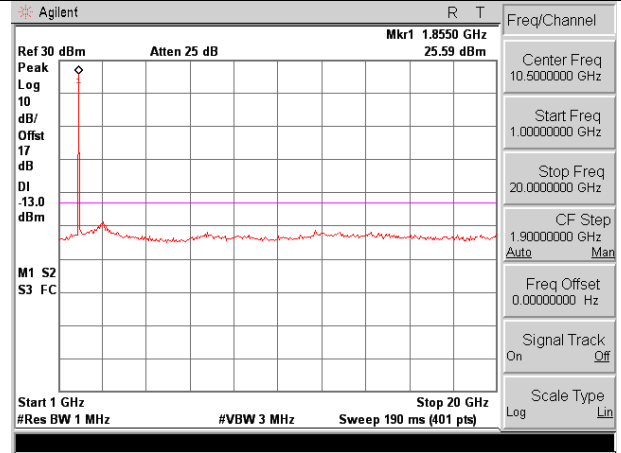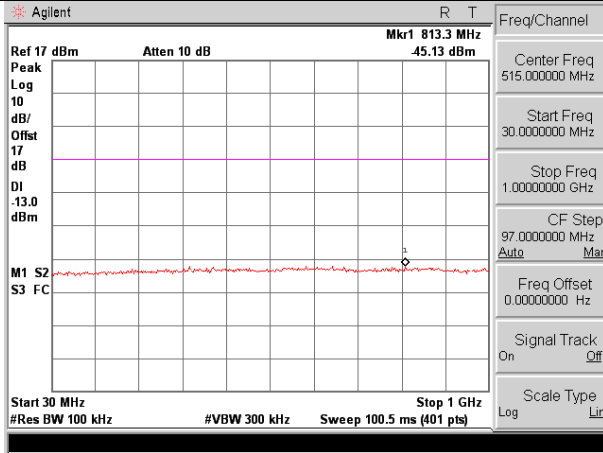

Lowest channel

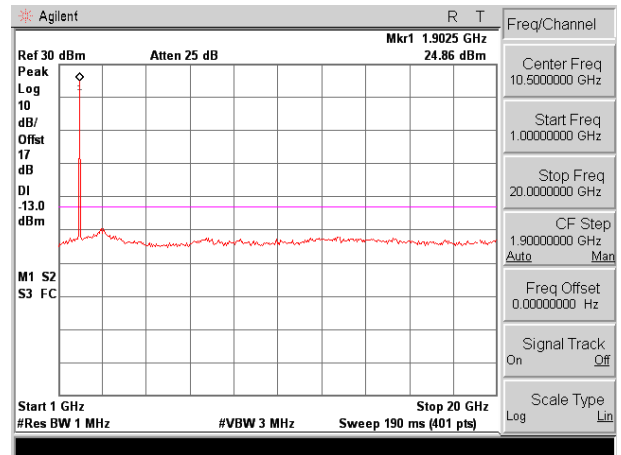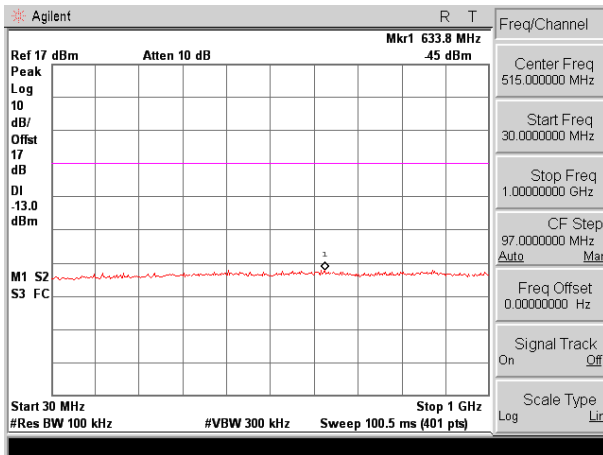


Middle channel

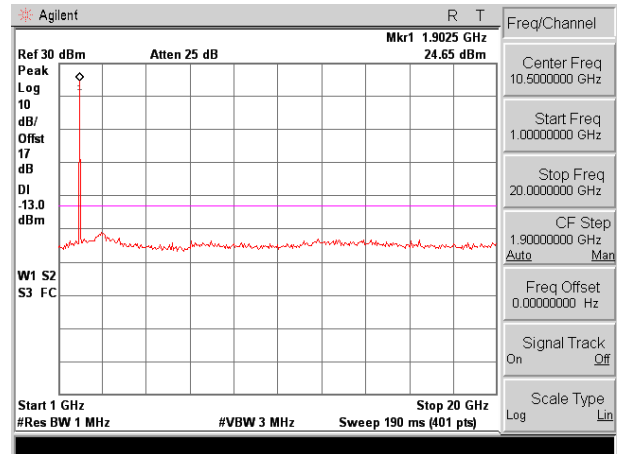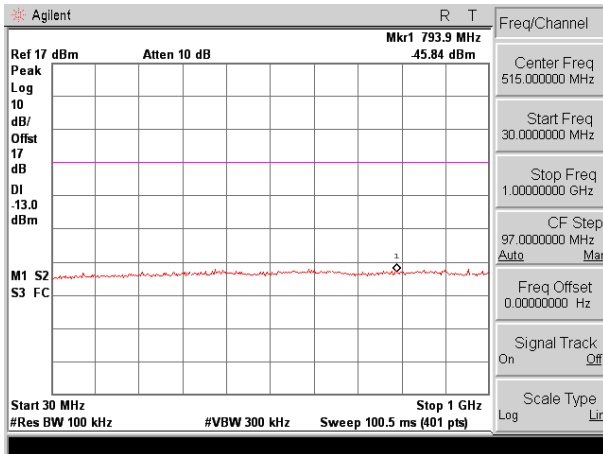


Highest channel

Band Edge:

Test Mode: Traffic mode GSM850 (GPRS 1 link)

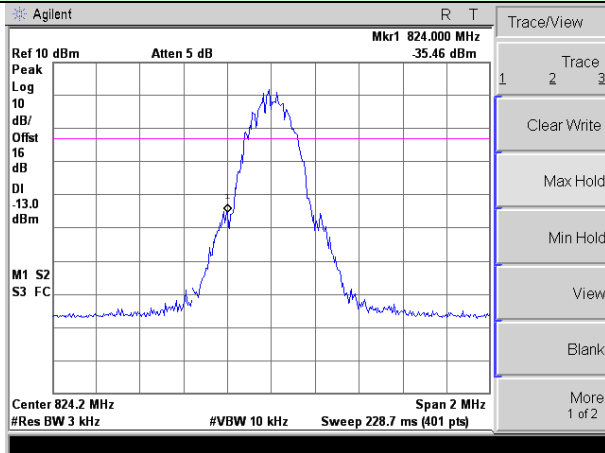


Lowest channel

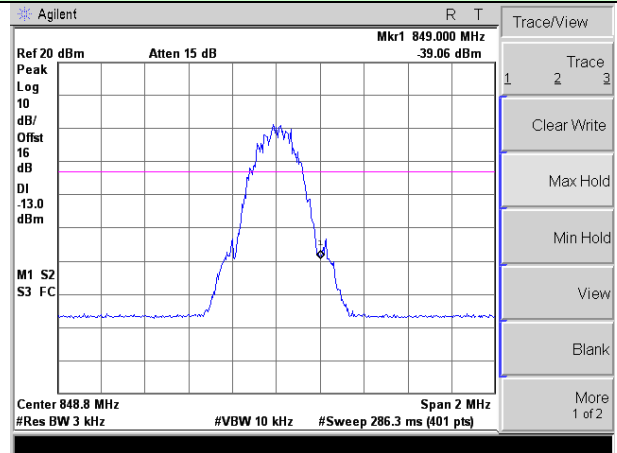


Highest channel

Test Mode: Traffic mode GSM850 (EGPRS 1 link)

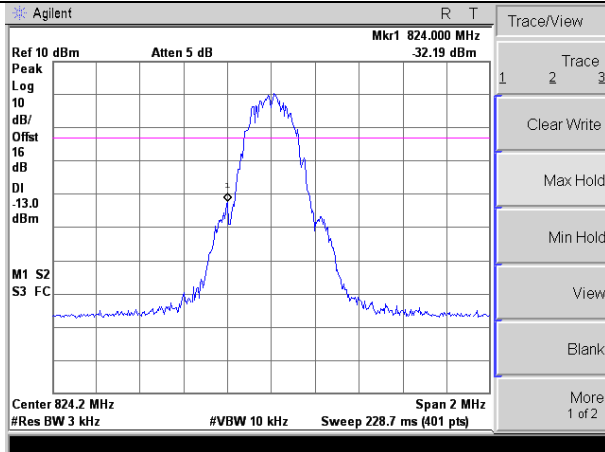


Lowest channel

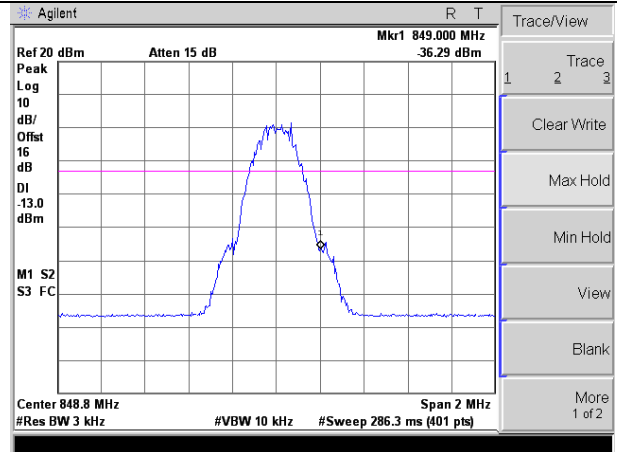


Highest channel

Test Mode: Traffic mode PCS1900 (GPRS 1 link)

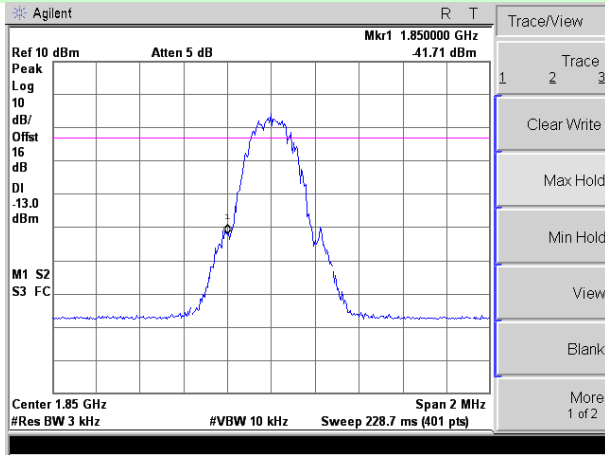


Lowest channel

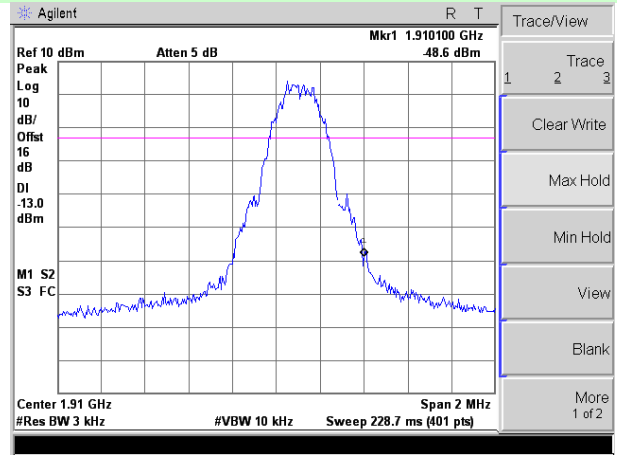


Highest channel

Test Mode: Traffic mode PCS1900 (EGPRS 1 link)

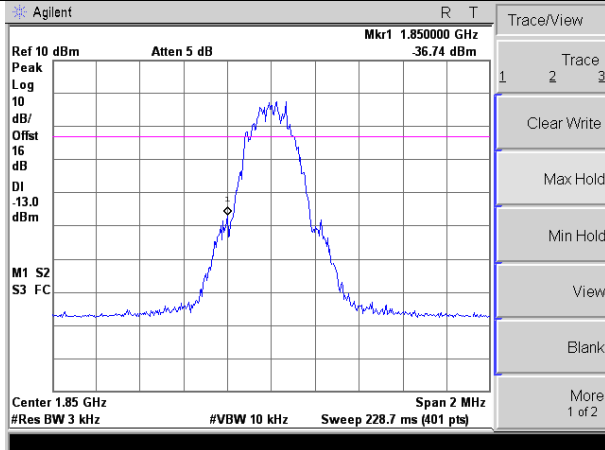


Lowest channel

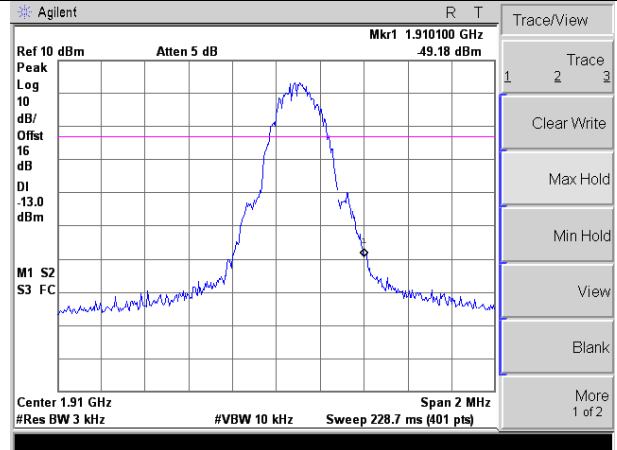


Highest channel

Test Mode: Traffic mode WCDMA Band V (RMC 12.2Kbps link)

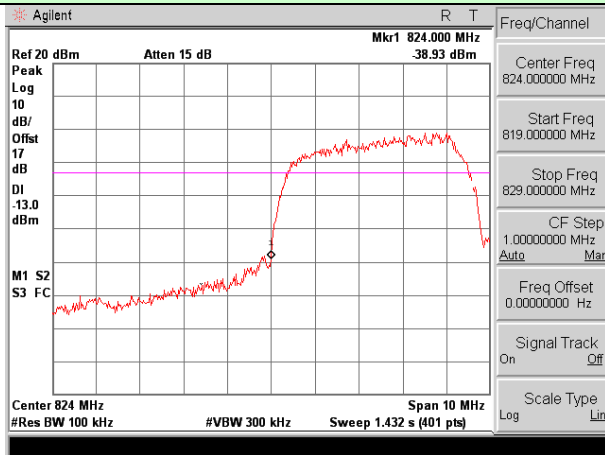


Lowest channel

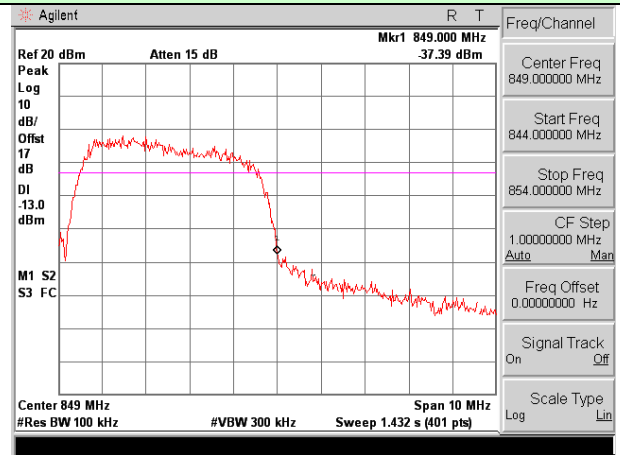


Highest channel

Test Mode: Traffic mode WCDMA Band II (RMC 12.2Kbps link)



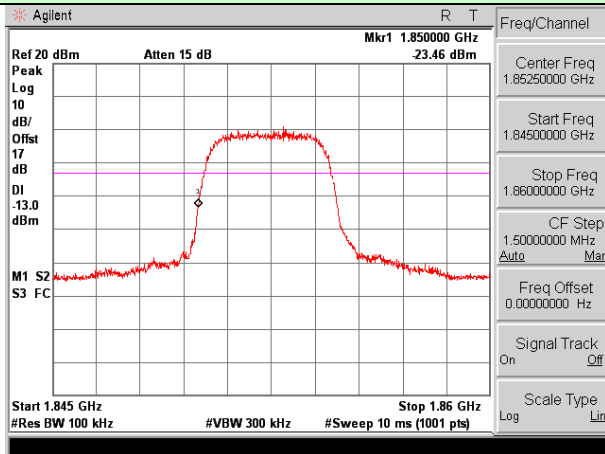


Lowest channel

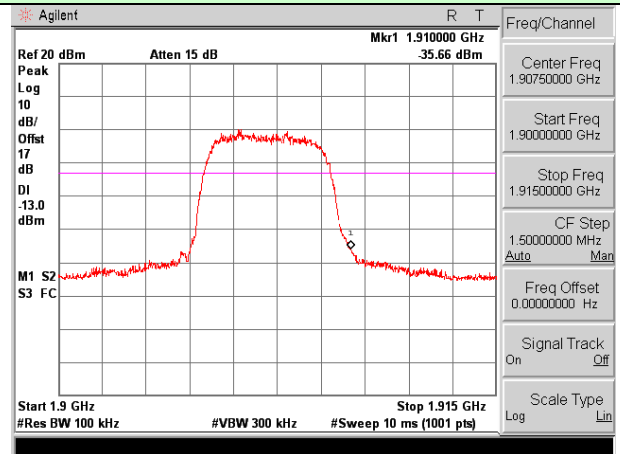

Highest channel

4.8 ERP, EIRP Measurement

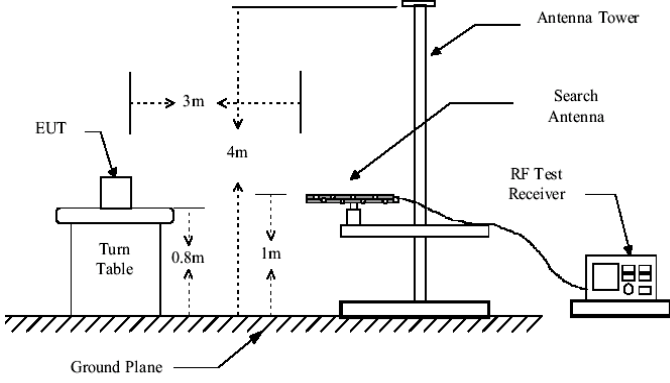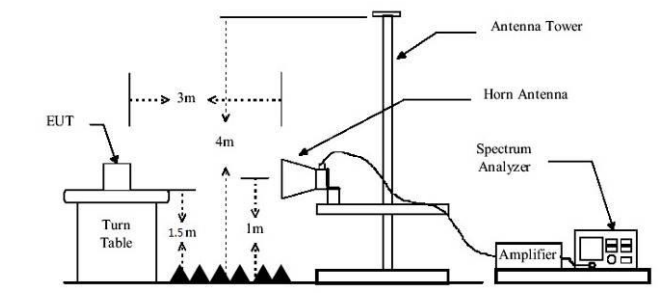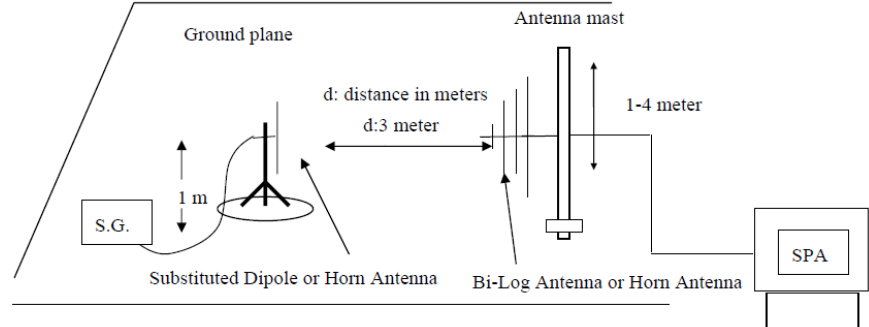Test Requirement:	FCC part22.913(a) and FCC part24.232(b)
Test Method:	FCC part2.1046
Limit:	GSM850, WCDMA Band V: 7W PCS1900, WCDMA Band II: 2W
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>  <p>Substituted method:</p> 

Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated. 3. ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows: $\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$ 4. EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows: $\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850 (GPRS 1 link)	Lowest	H	V	27.12	38.45	Pass
			H	31.36		
		E1	V	26.54		
			H	29.92		
		E2	V	25.99		
			H	31.09		
	Middle	H	V	26.97	38.45	Pass
			H	30.95		
		E1	V	26.65		
			H	29.82		
		E2	V	25.36		
			H	29.66		
	Highest	H	V	26.42	38.45	Pass
			H	31.09		
		E1	V	26.40		
			H	30.43		
		E2	V	26.70		
			H	30.30		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850 (EGPRS 1 link)	Lowest	H	V	27.39	38.45	Pass
			H	30.12		
		E1	V	27.62		
			H	30.68		
		E2	V	27.02		
			H	29.18		
	Middle	H	V	26.37	38.45	Pass
			H	30.32		
		E1	V	25.74		
			H	29.49		
		E2	V	25.54		
			H	28.18		
	Highest	H	V	27.74	38.45	Pass
			H	30.49		
		E1	V	27.00		
			H	29.86		
		E2	V	25.54		
			H	28.63		




EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP (dBm)	Limit (dBm)	Result
PCS1900 (GPRS 1 link)	Lowest	H	V	23.92	33.01	Pass
			H	23.70		
		E1	V	23.16		
			H	23.64		
		E2	V	23.68		
			H	26.62		
	Middle	H	V	23.75	33.01	Pass
			H	26.01		
		E1	V	23.53		
			H	24.99		
		E2	V	23.46		
			H	23.74		
	Highest	H	V	23.12	33.01	Pass
			H	26.96		
		E1	V	24.32		
			H	27.34		
		E2	V	23.63		
			H	25.89		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP (dBm)	Limit (dBm)	Result
PCS1900 (EGPRS 1 link)	Lowest	H	V	23.38	33.01	Pass
			H	26.41		
		E1	V	22.88		
			H	25.87		
		E2	V	23.88		
			H	26.23		
	Middle	H	V	23.03	33.01	Pass
			H	26.30		
		E1	V	23.85		
			H	25.63		
		E2	V	23.07		
			H	24.48		
	Highest	H	V	23.75	33.01	Pass
			H	26.47		
		E1	V	23.96		
			H	26.39		
		E2	V	23.34		
			H	26.97		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
WCDMA Band V	Lowest	H	V	23.64	38.45	Pass
			H	26.20		
		E1	V	22.86		
			H	26.01		
		E2	V	23.50		
			H	25.87		
	Middle	H	V	23.07	38.45	Pass
			H	26.23		
		E1	V	23.92		
			H	25.91		
		E2	V	23.76		
			H	25.05		
	Highest	H	V	23.90	38.45	Pass
			H	26.27		
		E1	V	23.47		
			H	27.00		
		E2	V	23.50		
			H	27.13		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
WCDMA Band II	Lowest	H	V	23.16	33.01	Pass
			H	26.02		
		E1	V	23.00		
			H	26.23		
		E2	V	23.15		
			H	25.86		
	Middle	H	V	23.24	33.01	Pass
			H	26.06		
		E1	V	23.19		
			H	25.57		
		E2	V	23.40		
			H	24.65		
	Highest	H	V	23.97	33.01	Pass
			H	26.85		
		E1	V	23.70		
			H	26.87		
		E2	V	23.98		
			H	27.01		

4.9 Field strength of spurious radiation measurement

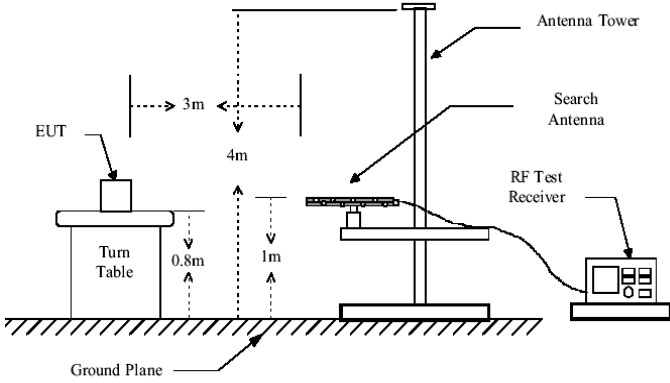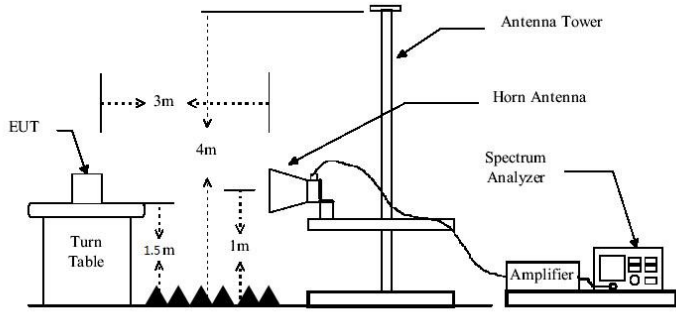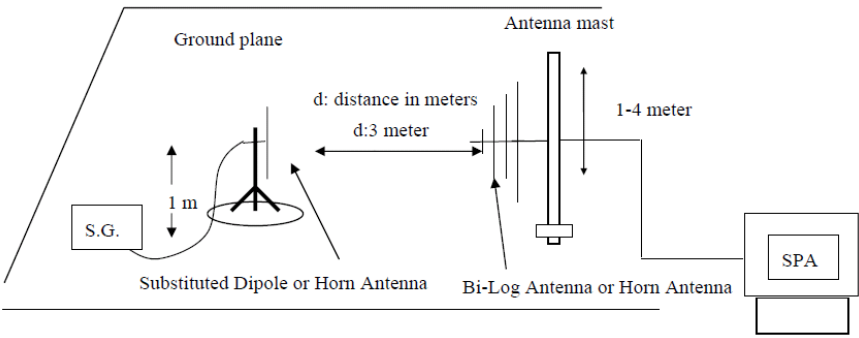Test Requirement:	FCC part22.917(a) and FCC part24.238(a)
Test Method:	FCC part2.1053
Limit:	-13dBm
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>  <p>Substituted method:</p> 

Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $\text{ERP / EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

Test mode:	GSM850 (GPRS)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1648.40	Vertical	-37.19	-13.00	Pass
2472.60	V	-40.31		
3296.80	V	-42.82		
4121.00	V	-44.21		
4945.20	V	--		
1648.40	Horizontal	-43.20	-13.00	Pass
2472.60	H	-46.20		
3296.80	H	-49.11		
4121.00	H	-50.36		
4945.20	H	---		
Test mode:	GSM850 (GPRS)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-38.52	-13.00	Pass
2509.80	V	-41.42		
3346.40	V	-43.51		
4183.00	V	-44.01		
5019.60	V	--		
1673.20	Horizontal	-43.32	-13.00	Pass
2509.80	H	-45.85		
3346.40	H	-47.60		
4183.00	H	-50.17		
5019.60	H	---		
Test mode:	GSM850 (GPRS)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1697.60	Vertical	-39.37	-13.00	Pass
2546.40	V	-40.84		
3395.20	V	-43.14		
4244.00	V	-43.68		
5092.80	V	--		
1697.60	Horizontal	-42.85	-13.00	Pass
2546.40	H	-45.87		
3395.20	H	-46.62		
4244.00	H	-49.11		
5092.80	H	---		

Remark :

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	GSM850 (EGPRS)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1648.40	Vertical	-37.64	-13.00	Pass
2472.60	V	-40.69		
3296.80	V	-42.09		
4121.00	V	-44.84		
4945.20	V	--		
1648.40	Horizontal	-43.05	-13.00	Pass
2472.60	H	-46.29		
3296.80	H	-48.99		
4121.00	H	-50.90		
4945.20	H	---		
Test mode:	GSM850 (EGPRS)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-38.58	-13.00	Pass
2509.80	V	-41.65		
3346.40	V	-43.53		
4183.00	V	-43.96		
5019.60	V	--		
1673.20	Horizontal	-42.68	-13.00	Pass
2509.80	H	-46.17		
3346.40	H	-47.18		
4183.00	H	-50.18		
5019.60	H	---		
Test mode:	GSM850 (EGPRS)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1697.60	Vertical	-38.81	-13.00	Pass
2546.40	V	-40.15		
3395.20	V	-42.99		
4244.00	V	-43.56		
5092.80	V	--		
1697.60	Horizontal	-42.78	-13.00	Pass
2546.40	H	-45.37		
3395.20	H	-47.08		
4244.00	H	-49.28		
5092.80	H	---		

Remark :

4. The emission behaviour belongs to narrowband spurious emission.
5. Remark"---" means that the emission level is too low to be measured
6. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	PCS1900 (GPRS)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3700.40	Vertical	-38.00	-13.00	Pass
5550.60	V	-39.62		
7400.80	V	-42.92		
9251.00	V	-43.59		
11101.20	V	--		
3700.40	Horizontal	-42.01	-13.00	Pass
5550.60	H	-46.08		
7400.80	H	-47.83		
9251.00	H	-49.94		
11101.20	H	---		
Test mode:	PCS1900 (GPRS)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-34.47	-13.00	Pass
5640.00	V	-38.03		
7520.00	V	-39.96		
9400.00	V	-42.24		
11280.00	V	--		
3760.00	Horizontal	-41.02	-13.00	Pass
5640.00	H	-44.28		
7520.00	H	-45.33		
9400.00	H	-47.27		
11280.00	H	---		
Test mode:	PCS1900 (GPRS)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3819.60	Vertical	-36.89	-13.00	Pass
5729.40	V	-39.69		
7639.20	V	-41.21		
9549.00	V	-43.41		
11458.80	V	--		
3819.60	Horizontal	-41.16	-13.00	Pass
5729.40	H	-44.80		
7639.20	H	-46.11		
9549.00	H	-48.77		
11458.80	H	---		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	PCS1900 (EGPRS)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3700.40	Vertical	-38.36	-13.00	Pass
5550.60	V	-41.17		
7400.80	V	-42.47		
9251.00	V	-44.22		
11101.20	V	--		
3700.40	Horizontal	-43.45	-13.00	Pass
5550.60	H	-46.47		
7400.80	H	-47.58		
9251.00	H	-50.38		
11101.20	H	---		
Test mode:	PCS1900 (EGPRS)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-35.59	-13.00	Pass
5640.00	V	-37.78		
7520.00	V	-40.55		
9400.00	V	-43.62		
11280.00	V	--		
3760.00	Horizontal	-41.31	-13.00	Pass
5640.00	H	-44.71		
7520.00	H	-45.82		
9400.00	H	-48.61		
11280.00	H	---		
Test mode:	PCS1900 (EGPRS)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3819.60	Vertical	-37.23	-13.00	Pass
5729.40	V	-39.86		
7639.20	V	-41.58		
9549.00	V	-43.84		
11458.80	V	--		
3819.60	Horizontal	-42.35	-13.00	Pass
5729.40	H	-45.49		
7639.20	H	-46.94		
9549.00	H	-49.36		
11458.80	H	---		

Remark:

4. The emission behaviour belongs to narrowband spurious emission.
5. Remark"---" means that the emission level is too low to be measured
6. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	WCDMA Band V		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1652.80	Vertical	-36.48	-13.00	Pass
2479.20	V	-40.65		
3305.60	V	-43.51		
4132.00	V	-40.61		
4958.40	V	--		
1652.80	Horizontal	-40.28	-13.00	Pass
2479.20	H	-42.66		
3305.60	H	-48.71		
4132.00	H	-51.46		
4958.40	H	---		
Test mode:	WCDMA Band V		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1672.80	Vertical	-38.78	-13.00	Pass
2509.20	V	-40.50		
3345.60	V	-44.65		
4182.00	V	-47.42		
5018.40	V	--		
1672.80	Horizontal	-41.80	-13.00	Pass
2509.20	H	-43.37		
3345.60	H	-48.38		
4182.00	H	-51.04		
5018.40	H	---		
Test mode:	WCDMA Band V		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1693.20	Vertical	-38.08	-13.00	Pass
2539.80	V	-39.92		
3386.40	V	-43.03		
4233.00	V	-46.69		
5079.60	V	--		
1693.20	Horizontal	-41.76	-13.00	Pass
2539.80	H	-43.64		
3386.40	H	-45.82		
4233.00	H	-51.19		
5079.60	H	---		

Remark :


1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	WCDMA Band II		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3704.80	Vertical	-39.56	-13.00	Pass
5557.20	V	-42.47		
7409.60	V	-45.53		
9262.00	V	-47.92		
11114.40	V	--		
3704.80	Horizontal	-46.31	-13.00	Pass
5557.20	H	-49.97		
7409.60	H	-51.51		
9262.00	H	-54.48		
11114.40	H	---		
Test mode:	WCDMA Band II		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-40.46	-13.00	Pass
5640.00	V	-42.23		
7520.00	V	-45.80		
9400.00	V	-47.87		
11280.00	V	--		
3760.00	Horizontal	-45.53	-13.00	Pass
5640.00	H	-49.77		
7520.00	H	-51.80		
9400.00	H	-54.75		
11280.00	H	---		
Test mode:	WCDMA Band II		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3815.20	Vertical	-40.68	-13.00	Pass
5722.80	V	-42.47		
7630.40	V	-44.82		
9538.00	V	-46.98		
11445.60	V	--		
3815.20	Horizontal	-44.57	-13.00	Pass
5722.80	H	-49.32		
7630.40	H	-49.28		
9538.00	H	-52.26		
11445.60	H	---		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

4.10 Frequency stability V.S. Temperature measurement

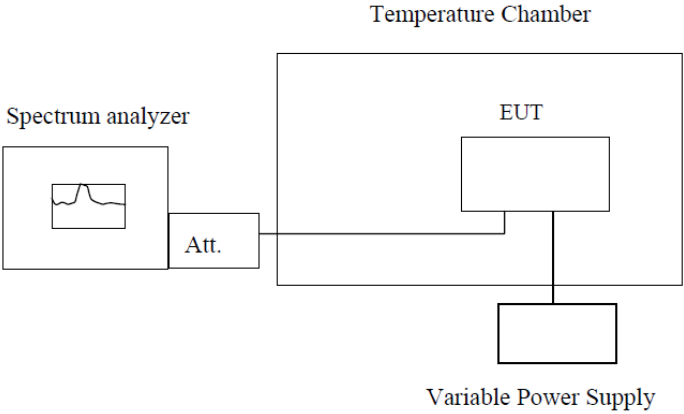Test Requirement:	FCC Part2.1055(a)(1)(b)
Test Method:	FCC Part2.1055(a)(1)(b)
Limit:	2.5ppm
Test setup:	 <p style="text-align: center;">Note : Measurement setup for testing on Antenna connector</p>
Test procedure:	<ol style="list-style-type: none"> 1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to –20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass


Measurement Data

Reference Frequency: GSM850 (GPRS 1 link) Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12.0	-30	15	0.0178	2.5	Pass
	-20	32	0.0385		
	-10	24	0.0290		
	0	22	0.0258		
	10	15	0.0174		
	20	15	0.0180		
	30	28	0.0335		
	40	26	0.0305		
	50	25	0.0305		
Reference Frequency: GSM850 (EGPRS 1 link) Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12.0	-30	48	0.0575	2.5	Pass
	-20	57	0.0678		
	-10	46	0.0550		
	0	41	0.0489		
	10	46	0.0554		
	20	34	0.0410		
	30	77	0.0923		
	40	67	0.0796		
	50	54	0.0649		

Reference Frequency: PCS1900 (GPRS 1 link) Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
12.0	-30	38	0.0204	2.5	Pass
	-20	55	0.0294		
	-10	36	0.0190		
	0	40	0.0214		
	10	29	0.0156		
	20	22	0.0118		
	30	48	0.0255		
	40	38	0.0202		
	50	35	0.0187		
Reference Frequency: PCS1900 (EGPRS 1 link) Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
12.0	-30	98	0.0523	2.5	Pass
	-20	98	0.0521		
	-10	95	0.0505		
	0	78	0.0416		
	10	104	0.0553		
	20	80	0.0427		
	30	138	0.0734		
	40	110	0.0586		
	50	124	0.0661		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12.0	-30	106	0.1262	2.5	Pass
	-20	135	0.1615		
	-10	160	0.1912		
	0	71	0.0844		
	10	116	0.1383		
	20	117	0.1401		
	30	189	0.2255		
	40	171	0.2048		
	50	206	0.2461		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880.0MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12.0	-30	86	0.0456	2.5	Pass
	-20	81	0.0433		
	-10	75	0.0400		
	0	73	0.0391		
	10	74	0.0392		
	20	64	0.0340		
	30	73	0.0388		
	40	81	0.0429		
	50	74	0.0396		

4.11 Frequency stability V.S. Voltage measurement

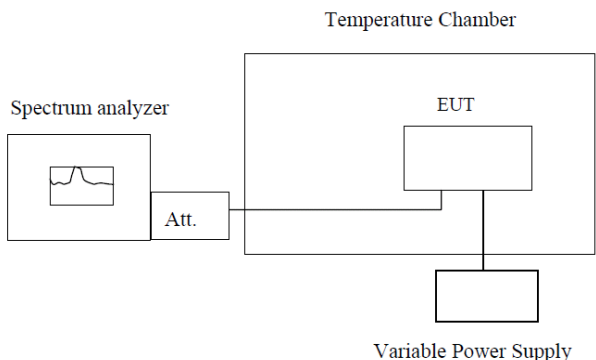Test Requirement:	FCC Part2.1055(d)(1)(2)
Test Method:	FCC Part2.1055(d)(1)(2)
Limit:	2.5ppm
Test setup:	 <p style="text-align: center;">Temperature Chamber</p> <p style="text-align: center;">Spectrum analyzer Att. EUT</p> <p style="text-align: center;">Variable Power Supply</p> <p>Note : Measurement setup for testing on Antenna connector</p>
Test procedure:	<ol style="list-style-type: none"> 1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data


Reference Frequency: GSM850 (GPRS 1 link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	13.80	38	0.0449	2.5	Pass
	12.00	30	0.0360		
	10.20	28	0.0333		
Reference Frequency: GSM850 (EGPRS 1 link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	13.80	42	0.0498	2.5	Pass
	12.00	37	0.0438		
	10.20	28	0.0341		

Reference Frequency: PCS1900 (GPRS 1 link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	13.80	47	0.0250	2.5	Pass
	12.00	38	0.0201		
	10.20	34	0.0178		
Reference Frequency: PCS1900 (EGPRS 1 link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	13.80	59	0.0311	2.5	Pass
	12.00	71	0.0378		
	10.20	70	0.0370		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	13.80	56	0.0664	2.5	Pass
	12.00	50	0.0599		
	10.20	57	0.0680		
Reference Frequency: WCDMA Band II Middle channel=940 channel=1880.0MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	13.80	9	0.0049	2.5	Pass
	12.00	13	0.0069		
	10.20	15	0.0082		

5 Test Setup Photo

Radiated Emission

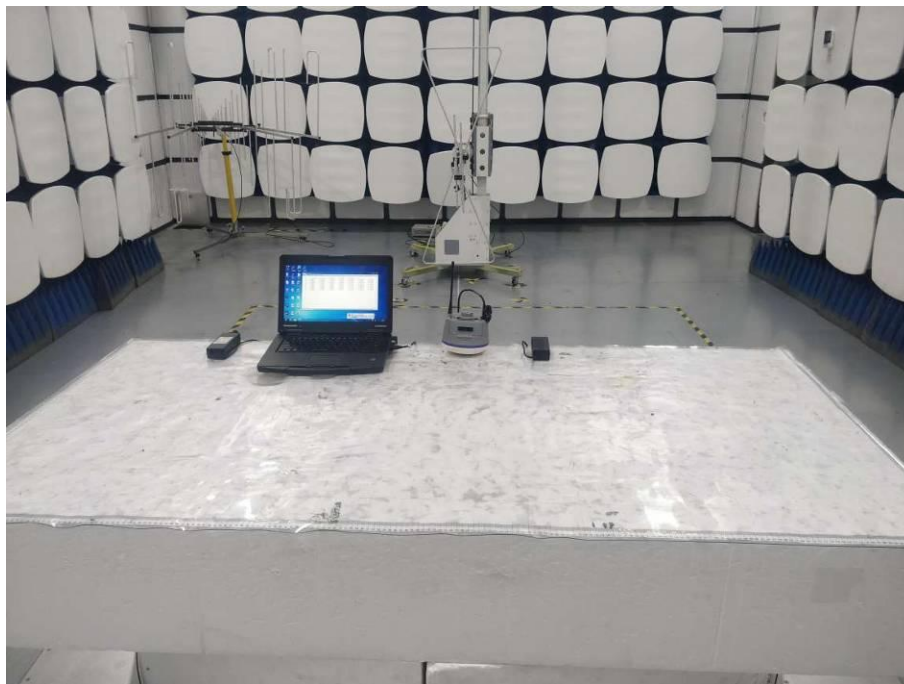

6 EUT Constructional Details

Please refer to report T1881531 01.

-----End-----