



# **FCC TEST REPORT**

**FCC ID: SY4-A02022**

On Behalf of

**Shanghai Huace Navigation Technology LTD.**

**Four-Rotor Drone Platform**

**Model No.: BB4**

Prepared for : Shanghai Huace Navigation Technology LTD.  
Address : 599 Gaojing Road, Building D, Shanghai 201702, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

Report Number : A2012073-C01-R05  
Date of Receipt : December 15, 2020  
Date of Test : December 15, 2020 –January 14, 2021  
Date of Report : January 14, 2021  
Version Number : V0

## TABLE OF CONTENTS

Description	Page
<b>1. Summary Of Standards And Results</b> -----	<b>6</b>
1.1. Description of Standards and Results -----	6
<b>2. General Information</b> -----	<b>7</b>
2.1. Description of Device (EUT)-----	7
2.2. Accessories of Device (EUT) -----	8
2.3. Tested Supporting System Details -----	8
2.4. Block Diagram of connection between EUT and simulators -----	8
2.5. Test Mode Description -----	8
2.6. Test Conditions -----	8
2.7. Test Facility -----	9
2.8. Measurement Uncertainty -----	9
2.9. Test Equipment List -----	10
<b>3. Spurious Emission</b> -----	<b>11</b>
3.1. Test Limits -----	11
3.2. Test Procedure -----	11
3.3. Test Setup -----	12
3.4. Test Results -----	13
<b>4. Power Line Conducted Emission</b> -----	<b>16</b>
4.1. Test Limits -----	16
4.2. Test Procedure -----	16
4.3. Test Setup -----	16
4.4. Test Results -----	16
<b>5. Conducted Maximum Output Power</b> -----	<b>18</b>
5.1. Test limits -----	18
5.2. Test Procedure -----	18
5.3. Test Setup -----	18
5.4. Test Results -----	18
<b>6. Power Spectral Density</b> -----	<b>19</b>
6.1. Test limits -----	19
6.2. Test Procedure -----	19
6.3. Test Setup -----	19
6.4. Test Results -----	19
<b>7. Bandwidth</b> -----	<b>20</b>
7.1. Test limits -----	22
7.2. Test Procedure -----	22
7.3. Test Setup -----	22
7.4. Test Results -----	22
<b>8. Band Edge Check</b> -----	<b>25</b>
8.1. Test limits -----	25
8.2. Test Procedure -----	25
8.3. Test Setup -----	25
8.4. Test Results -----	25
<b>9. Antenna Requirement</b> -----	<b>34</b>
9.1. Standard Requirement-----	34
9.2. Antenna Connected Construction-----	34

9.3. Results -----	34
<b>10. Test Setup Photo -----</b>	<b>35</b>
<b>11. Photographs Of The EUT-----</b>	<b>35</b>

### TEST REPORT DECLARATION

Applicant : Shanghai Huace Navigation Technology LTD.  
 Address : 599 Gaojing Road, Building D, Shanghai 201702, China  
 Manufacturer : Shanghai Huace Navigation Technology LTD.  
 Address : 599 Gaojing Road, Building D, Shanghai 201702, China  
 EUT Description : Four-Rotor Drone Platform

(A) Model No. : BB4

(B) Trademark : 

Measurement Standard Used:


**FCC Rules and Regulations Part 15 Subpart C Section 15.247**

**ANSI C63.10:2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Reak Yang  
 Project Engineer   
 .....

Approved by (name + signature).....: Simple Guan  
 Project Manager   
 .....

Date of issue..... : January 14, 2021

**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	January 14, 2021	Initial released Issue	Reak Yang

## 1. Summary Of Standards And Results

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

<b>Test Item</b>	<b>Standards Paragraph</b>	<b>Result</b>
Conducted Emission	FCC PART 15: 15.207 ANSI C63.10 :2013	P
6dB Bandwidth	FCC PART 15: 15.247 (a)(2) ANSI C63.10 :2013	P
Output Power	FCC PART 15: 15.247 (b)(3) ANSI C63.10 :2013	P
Radiated Spurious Emission	FCC PART 15: 15.247 (c) ANSI C63.10 :2013	P
Conducted Spurious & Band Edge Emission	FCC PART 15: 15.247 (d) ANSI C63.10 :2013	P
Power Spectral Density	FCC PART 15: 15.247 (e) ANSI C63.10 :2013	P
Radiated Band Edge Emission	FCC PART 15: 15.205 ANSI C63.10 :2013	P
Antenna Requirement	FCC PART 15: 15.203 ANSI C63.10 :2013	P
Note:	1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.	

## 2. General Information

### 2.1. Description of Device (EUT)

EUT Description : Four-Rotor Drone Platform

Trademark : 

Model Number : BB4

DIFF. : N/A

Test Voltage : DC 24V From Battery\*2

RF :

Radio Technology : 2.4GHz

Operation frequency : 2406.5-2476.5MHz

Channel No. : 8 Channels

Channel Separation : 10MHz

Modulation : OFDM

Antenna Type : 2\*External antenna, Maximum Gain is 2dBi for 2.4GHz.

Software version : 1.7.7.0

Hardware version : TCX-M 18


## 2.2. Accessories of Device (EUT)

Accessories1	:	N/A
Manufacturer	:	N/A
Model	:	N/A
Ratings	:	N/A

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
1.	N/A	N/A	N/A	N/A	N/A

## 2.4. Block Diagram of connection between EUT and simulators

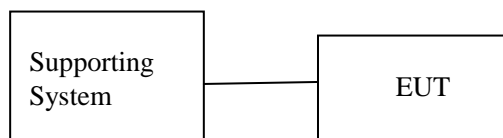

## 2.5. Test Mode Description

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
OFDM	Low :CH1	2406.5
	Middle: CH4	2446.5
	High: CH8	2476.5

## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa



## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd  
 Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
 Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission  
 Registration Number: 293961  
 Designation Number: CN1236

July 15, 2019 Certificated by IC  
 Registration Number: CN0085

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB(Polarize: H)
	4.13dB(Polarize: V)
Uncertainty for radio frequency	$5.4 \times 10^{-8}$
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

## 2.9.Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2020.09.02	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	102137	2020.09.02	1Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2020.09.02	1Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-10208 2-Wa	2020.09.02	1Year
Receiver	R&S	ESCI	101165	2020.09.02	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2020.04.12	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2020.04.12	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2019.09.07	2Year
Cable	Resenberger	N/A	No.1	2020.09.02	1Year
Cable	Resenberger	N/A	No.2	2020.09.02	1Year
Cable	Resenberger	N/A	No.3	2020.09.02	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2020.09.02	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2020.09.02	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2020.09.02	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2020.09.02	1Year
20db Attenuator	ICPROBING	IATS1	82347	2020.09.02	1Year
Horn Antenna	SCHWARZBECK	BBHA9170	00946	2019.09.07	2Year
Preamplifier	SKET	LNPA_1840-50	SK2018101801	2020.09.02	1Year
Power Meter	Agilent	E9300A	MY41496625	2020.09.02	1Year
Power Sensor	DARE	RPR3006W	15100041SNO91	2020.09.02	1Year
Temp. & Humid. Chamber	Weihuang	WHTH-1000-40-8 80	100631	2020.09.02	1Year
Switching Mode Power Supply	JUNKE	JK12010S	20140927-6	2020.09.02	1Year

### 3. Spurious Emission

#### 3.1. Test Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

**NOTE:**

- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(uv/m)

#### 3.2. Test Procedure


The measuring distance of 3m shall be used for measurements at frequency up to 1GH and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above1GHz testing, The table was rotated 360 degrees to determine the position of the highest radiation

The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set of make measurement.


The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Qusia Peak Detector mode premeasured

If Peak value comply with QP limit Below 1GHz.The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz. For the actual test configuration, please see the test setup photo.


### 3.3. Test Setup

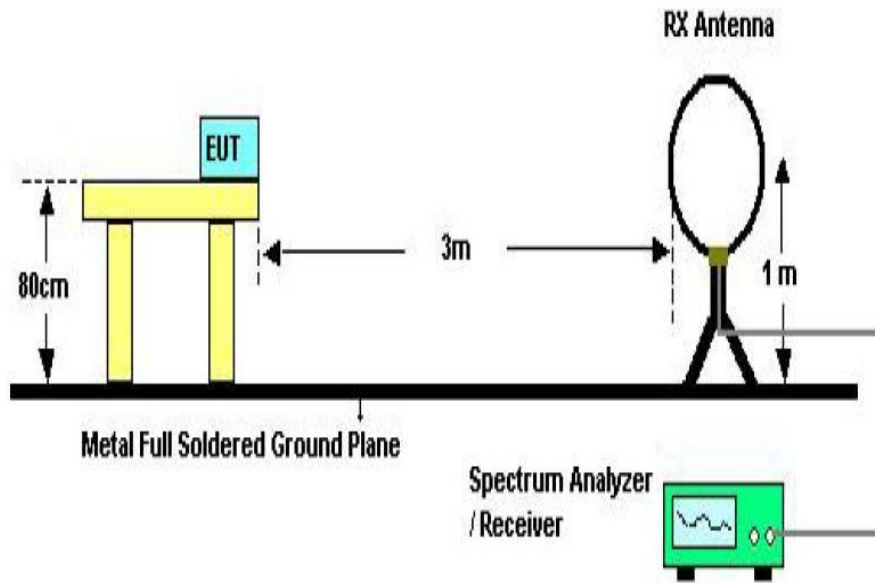

Below 30MHz Test Setup

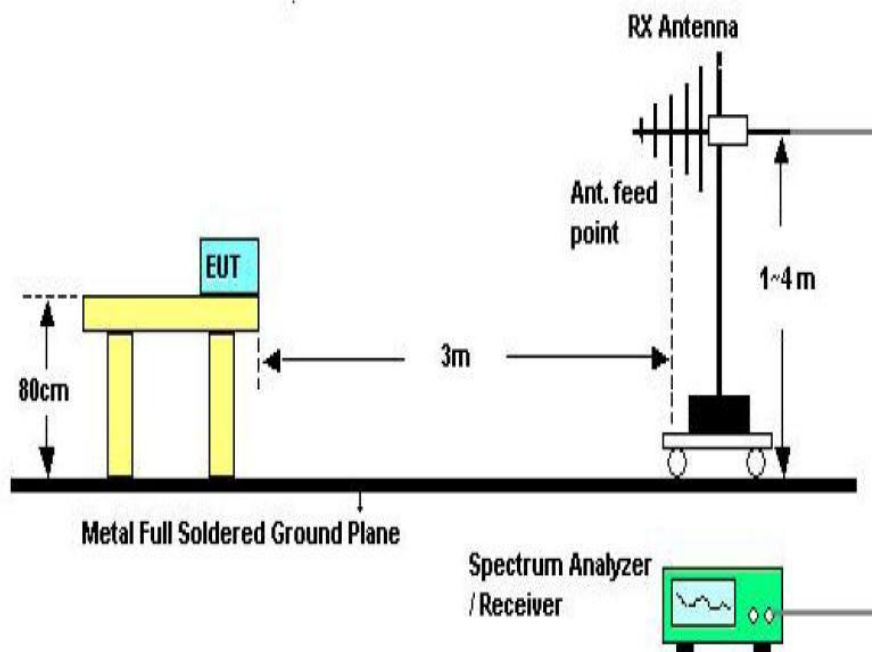

Above 30MHz Test Setup

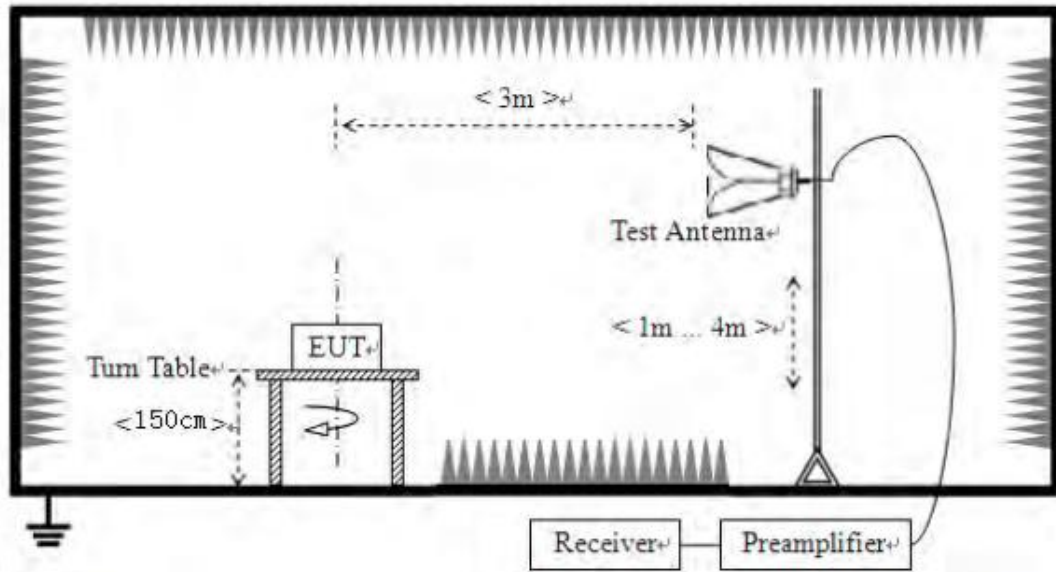

Above 1GHz Test Setup

### 3.4. Test Results

#### Test Condition

Continual Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHz~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

We have scanned the 10th harmonic from 9 kHz to the EUT.


Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


2. Only show the test data of the worst Channel in this report.

From 30MHz to 1000MHz: Conclusion: PASS			
<b>EUT Description</b>	Four-Rotor Drone Platform	<b>Model No.</b>	BB4
<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Pol</b>	Vertical	<b>Test date</b>	2020/12/17
<b>Test Voltage</b>	DC 24V from Battery	<b>Test mode</b>	OFDM (2406.5MHz)

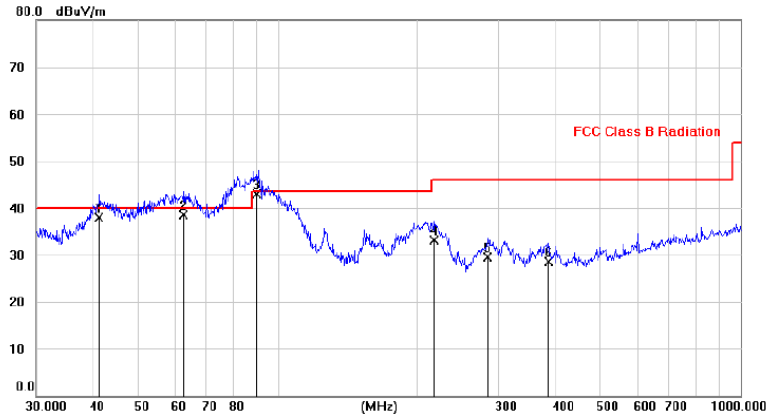

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		41.0168	23.56	14.34	37.90	40.00	-2.10	200	360	
2		62.5190	25.86	12.69	38.55	40.00	-1.45	200	0	
3	*	89.8336	32.94	10.04	42.98	43.50	-0.52	200	360	
4		217.6969	21.43	11.59	33.02	46.00	-12.98	200	360	
5		284.4775	15.78	13.70	29.48	46.00	-16.52	200	0	
6		384.6055	12.53	15.99	28.52	46.00	-17.48	200	0	

**Pol** Horizontal

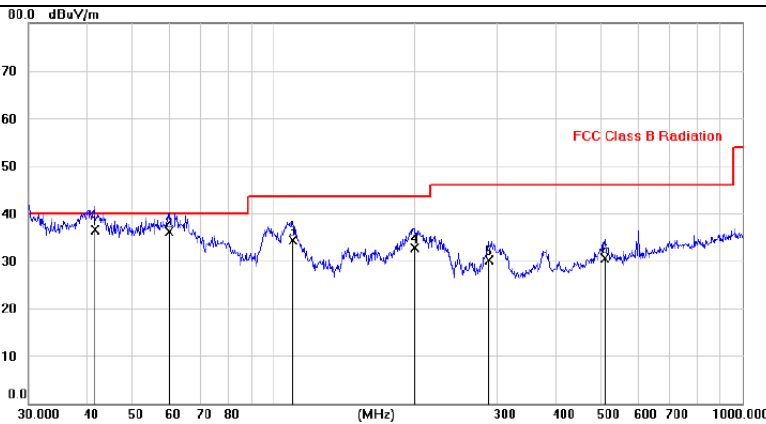

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	41.4215	22.20	14.34	36.54	40.00	-3.46	200	360	
2		59.9429	22.89	13.25	36.14	40.00	-3.86	200	360	
3		110.0272	22.53	11.83	34.36	43.50	-9.14	200	0	
4		199.4953	21.86	10.93	32.79	43.50	-10.71	200	0	
5		287.1837	16.35	13.79	30.14	46.00	-15.86	200	0	
6		508.6148	12.12	18.36	30.48	46.00	-15.52	200	360	

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data of OFDM (2406.5MHz) was listed in this report.

From 1G-25GHz

Test Mode: TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4813	44.13	V	33.95	10.18	34.26	54.00	74	-20.00	PK
4813	35.16	V	33.95	10.18	34.26	45.03	54	-8.97	AV
7219.5	/	/	/	/	/	/	/	/	/
9626	/	/	/	/	/	/	/	/	/
4813	42.26	H	33.95	10.18	34.26	52.13	74	-21.87	PK
4813	35.50	H	33.95	10.18	34.26	45.37	54	-8.63	AV
7219.5	/	/	/	/	/	/	/	/	/
9626	/	/	/	/	/	/	/	/	/
Test Mode: TX Mid									
4893	45.65	V	33.93	10.2	34.29	55.49	74	-18.51	PK
4893	35.15	V	33.93	10.2	34.29	44.99	54	-9.01	AV
7339.5	/	/	/	/	/	/	/	/	/
9786	/	/	/	/	/	/	/	/	/
4893	44.95	H	33.93	10.2	34.29	54.79	74	-19.21	PK
4893	34.14	H	33.93	10.2	34.29	43.98	54	-10.02	AV
7339.5	/	/	/	/	/	/	/	/	/
9786	/	/	/	/	/	/	/	/	/
Test Mode: TX High									
4953	43.88	V	33.98	10.22	34.25	53.83	74	-20.17	PK
4953	35.20	V	33.98	10.22	34.25	45.15	54	-8.85	AV
7429.5	/	/	/	/	/	/	/	/	/
9906	/	/	/	/	/	/	/	/	/
4953	47.32	H	33.98	10.22	34.25	57.27	74	-16.73	PK
4953	35.69	H	33.98	10.22	34.25	45.64	54	-8.36	AV
7429.5	/	/	/	/	/	/	/	/	/
9906	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

## 4. Power Line Conducted Emission

### 4.1. Test Limits

Frequency MHz	Limits dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50


Notes: 1. \*Decreasing linearly with logarithm of frequency.  
 2. The lower limit shall apply at the transition frequencies.  
 3. The limit decreases in line with the logarithm of the frequency in rang of 0.15 to 0.50 MHz.

### 4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.


### 4.3. Test Setup

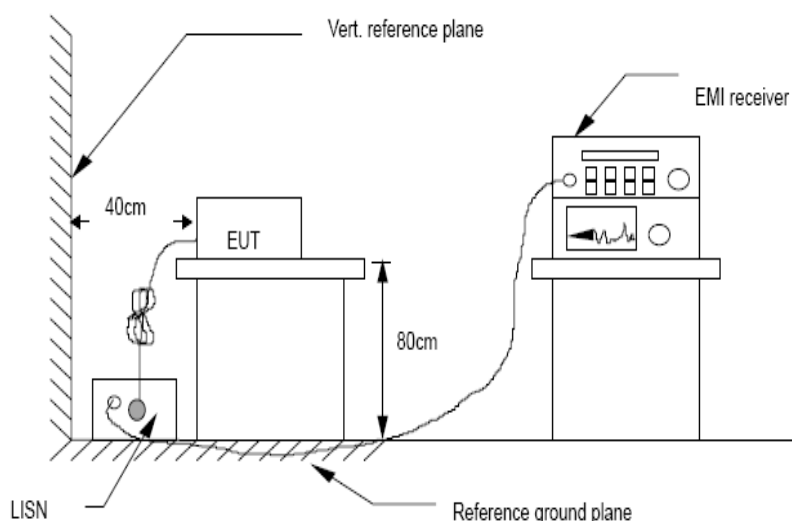

### 4.4. Test Results




<b>EUT Description</b>	Four-Rotor Drone Platform	<b>Model No.</b>	BB4
<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Pol</b>	Line	<b>Test date</b>	2020/12/18
<b>Test Voltage</b>	AC 120V/60Hz	<b>Test mode</b>	Charging battery

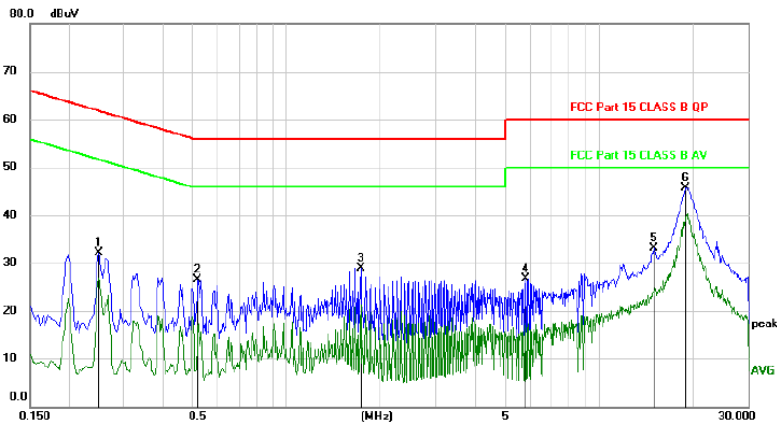

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2490	22.15	9.97	32.12	61.79	-29.67	peak	
2	0.5160	16.56	9.95	26.51	56.00	-29.49	peak	
3	1.7190	18.99	9.89	28.88	56.00	-27.12	peak	
4	5.8200	16.66	10.07	26.73	60.00	-33.27	peak	
5	14.9460	22.70	10.33	33.03	60.00	-26.97	peak	
6 *	18.9570	35.31	10.44	45.75	60.00	-14.25	peak	

<b>Pol</b>	Neutral
------------	---------

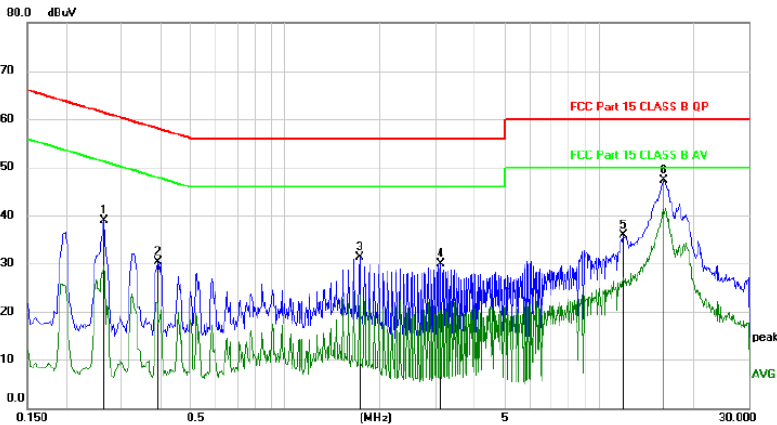

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2640	28.86	9.96	38.82	61.30	-22.48	peak	
2	0.3930	20.44	9.94	30.38	58.00	-27.62	peak	
3	1.7190	21.37	9.89	31.26	56.00	-24.74	peak	
4	3.1080	19.87	9.96	29.83	56.00	-26.17	peak	
5	11.9670	25.68	10.26	35.94	60.00	-24.06	peak	
6 *	16.0680	36.87	10.36	47.23	60.00	-12.77	peak	

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data of Charging Battery was listed in this report.

## 5. Conducted Maximum Output Power

### 5.1. Test limits

Please refer section RSS-247 & 15.247.

### 5.2. Test Procedure


Details see the KDB558074 D01 Meas Guidance v05r02

5.2.1 Place the EUT on the table and set it in transmitting mode.

5.2.2 Measure out each mode and each bands average output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

### 5.3. Test Setup

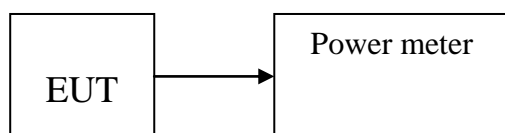

### 5.4. Test Results

Condition	Frequency (MHz)	Antenna	Conducted Power (dBm)			Limit (dBm)	Verdict
			Ant. 1	Ant. 2	Total		
NVNT	2406.5	Total	22.41	22.67	25.55	30	Pass
NVNT	2446.5	Total	22.13	22.28	25.22	30	Pass
NVNT	2476.5	Total	22.14	21.83	25.00	30	Pass

## 6. Power Spectral Density

### 6.1. Test limits

6.1.1 Please refer section RSS-247 & 15.247.

6.1.2 For direct sequence systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

6.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

### 6.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

6.2.1 Place the EUT on the table and set it in transmitting mode.


6.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3 Detector = RMS. Set the spectrum analyzer as RBW = 3kHz(Set the RBW to:  $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .), VBW = 10kHz(Set the VBW  $\geq 3 \times \text{RBW}$ ), span =  $1.5 \times \text{DTS}$  bandwidth., detail see the test plot.

6.2.4 Record the max reading.

6.2.5 Repeat the above procedure until the measurements for all frequencies are completed.


### 6.3. Test Setup

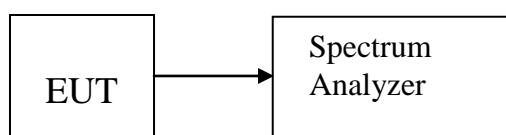

### 6.4. Test Results


Condition	Frequency (MHz)	Antenna	Conducted Power (dBm)			Limit (dBm) (dBm/3kHz)	Verdict
			Ant. 1	Ant. 2	Total		
NVNT	2406.5	Total	-11.78	-11.819	-8.790	8	Pass
NVNT	2446.5	Total	-11.242	-11.232	-8.227	8	Pass
NVNT	2476.5	Total	-11.388	-11.344	-8.356	8	Pass

### PSD NVNT 2406.5MHz Ant1

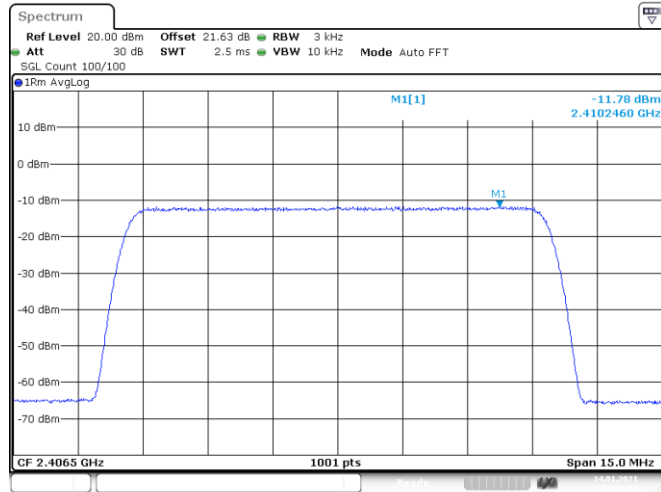


Date: 14.JAN.2021 07:53:32

### PSD NVNT 2446.5MHz Ant1

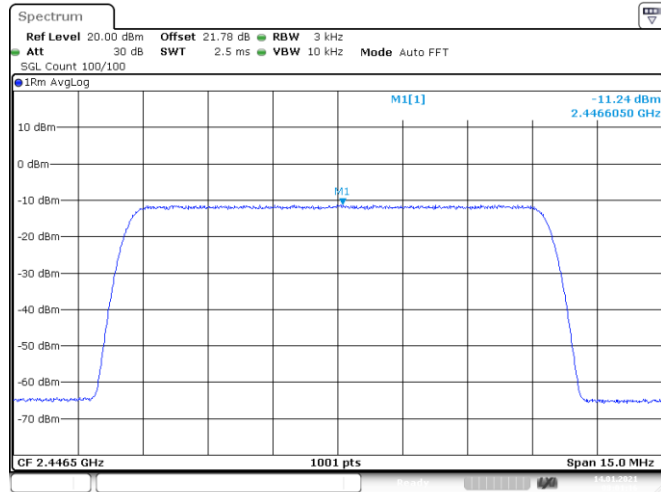


Date: 14.JAN.2021 08:01:16

### PSD NVNT 2476.5MHz Ant1

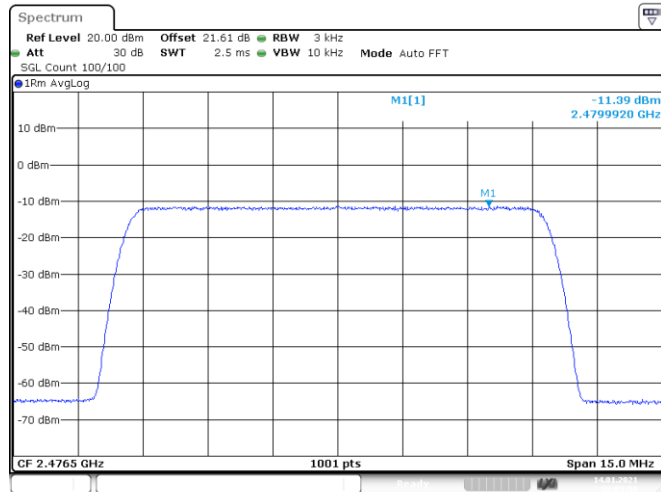


Date: 14.JAN.2021 08:03:50

### PSD NVNT 2406.5MHz Ant2

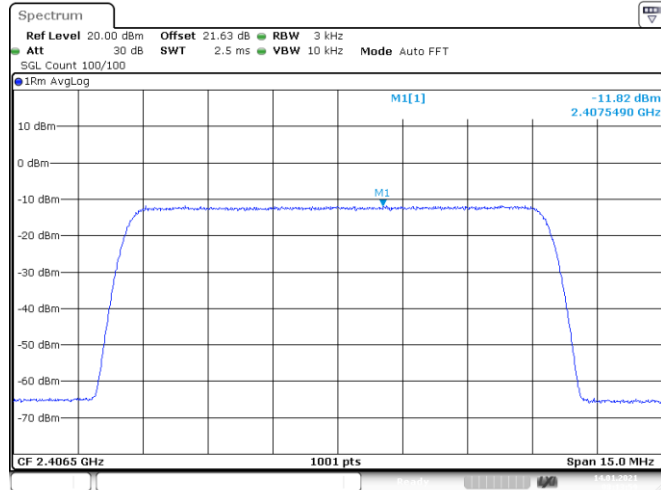


Date: 14.JAN.2021 08:13:59

### PSD NVNT 2446.5MHz Ant2

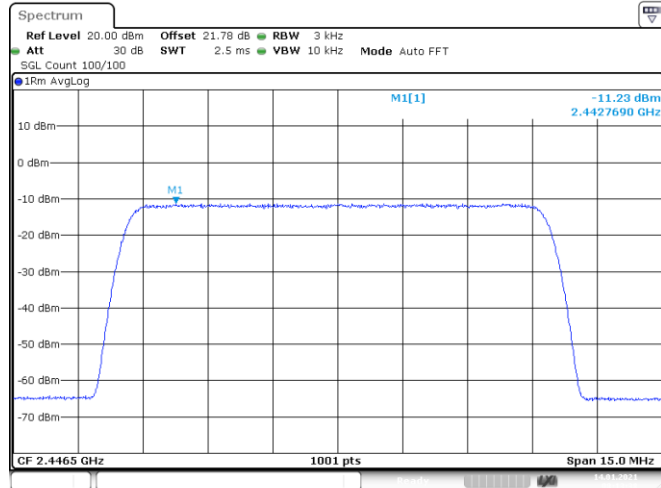

Date: 14.JAN.2021 08:13:38

### PSD NVNT 2476.5MHz Ant2

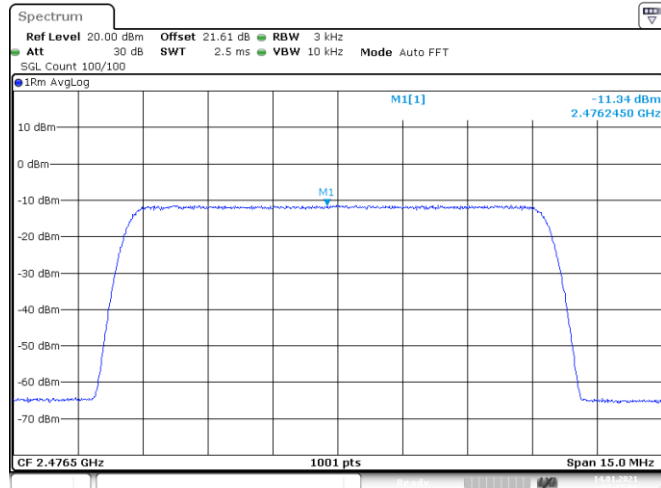

Date: 14.JAN.2021 08:13:00

## 7. Bandwidth

### 7.1. Test limits

Please refer section RSS-247 & 15.247

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.


### 7.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

b) The test receiver set RBW = 100kHz, VBW  $\geq 3 * RBW = 300kHz$ , Sweep time set auto, detail see the test plot.

### 7.3. Test Setup

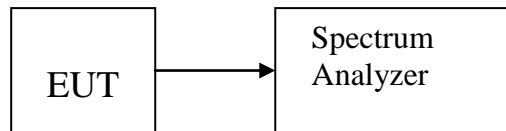

### 7.4. Test Results


Antenna 1:

Condition	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	2406.5	9.483	0.5	Pass
NVNT	2446.5	9.456	0.5	Pass
NVNT	2476.5	9.525	0.5	Pass

Antenna 2


Condition	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	2406.5	9.462	0.5	Pass
NVNT	2446.5	9.333	0.5	Pass
NVNT	2476.5	9.633	0.5	Pass

### -6 dB BW NVNT 2406.5MHz Ant1

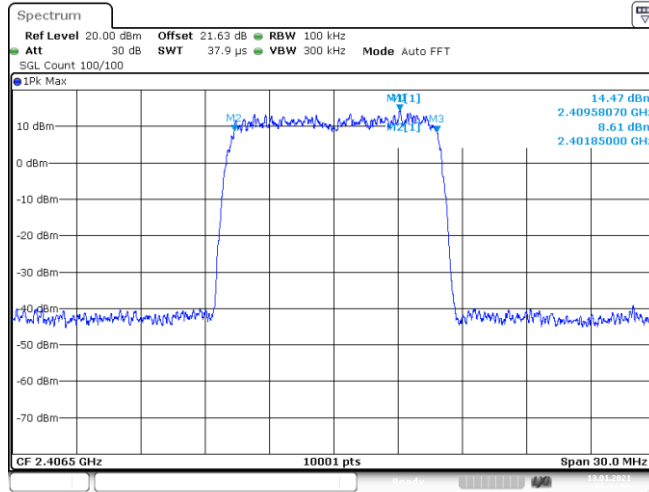


Date: 13.JAN.2021 08:34:54

### -6 dB BW NVNT 2446.5MHz Ant1

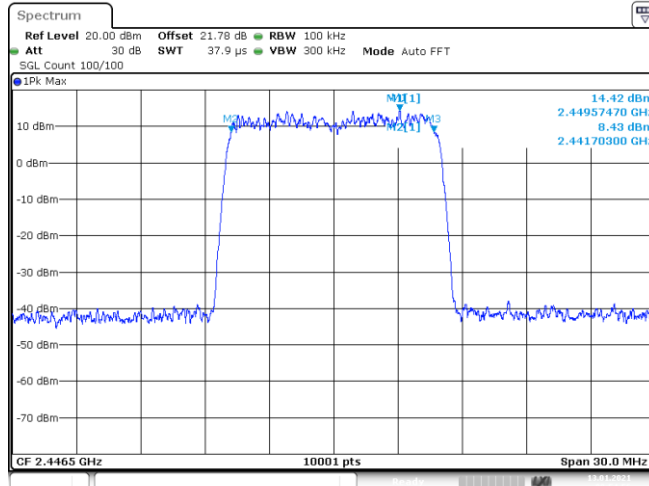


Date: 13.JAN.2021 08:54:55

### -6 dB BW NVNT 2476.5MHz Ant1

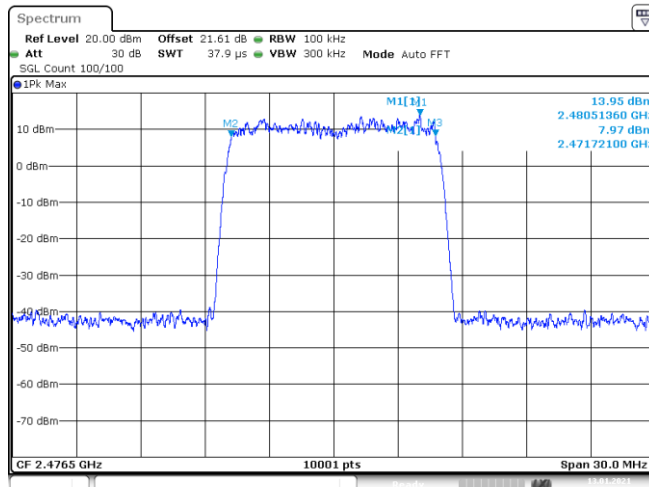


Date: 13.JAN.2021 08:57:59

### -6 dB BW NVNT 2406.5MHz Ant2

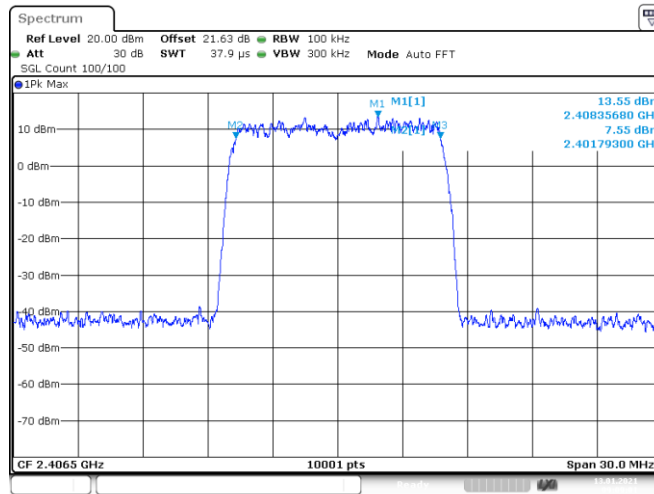


Date: 13.JAN.2021 09:09:00

### -6 dB BW NVNT 2446.5MHz Ant2

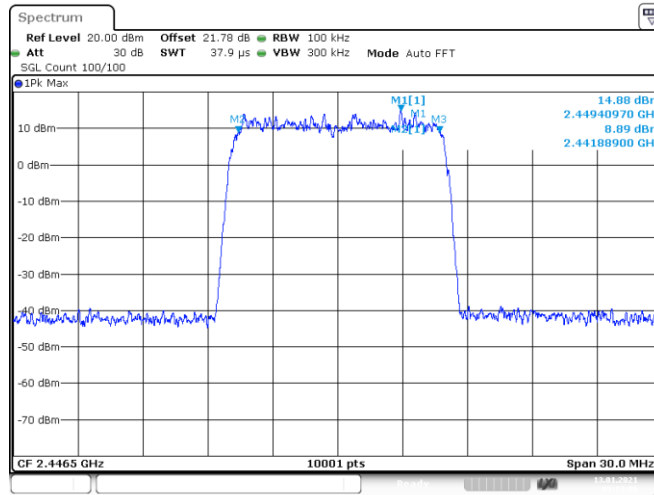

Date: 13.JAN.2021 09:13:06

### -6 dB BW NVNT 2476.5MHz Ant2

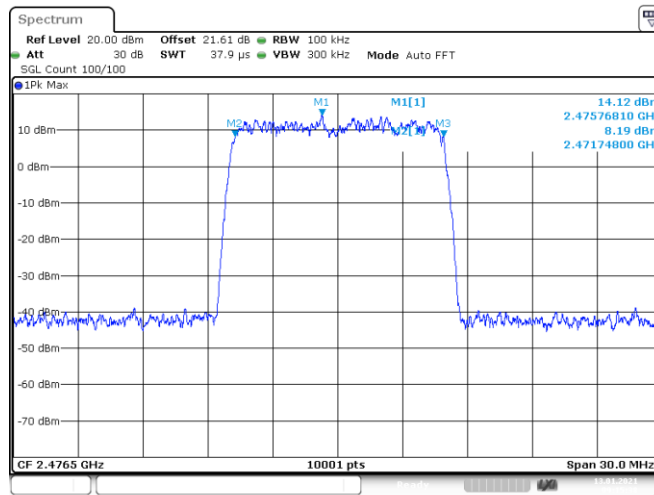

Date: 13.JAN.2021 09:15:38



## **8. Band Edge Check**

### **8.1. Test limits**

Please refer section RSS-GEN&15.247.

### **8.2. Test Procedure**

Details see the KDB558074 D01 Meas Guidance v05r02

8.2.1 Put the EUT on a 0.8m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

8.2.2 Check the spurious emissions out of band.

8.2.3 RBW 1MHz ,VBW 3MHz ,peak detector for peak value , RBW 1MHz ,VBW 3MHz ,RMS detector for AV value.

### **8.3. Test Setup**


Same as 5.2.2.

### **8.4. Test Results**

**Radiated Method:**


Test Mode: Low

Polarization: Vertical

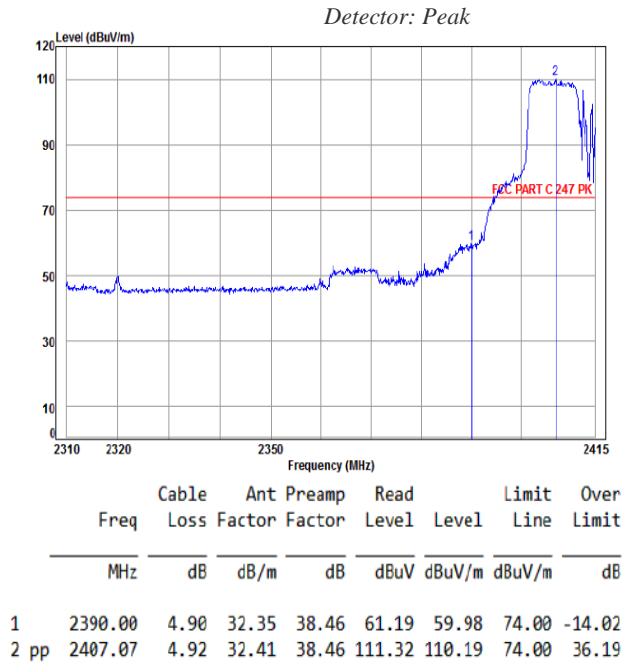


Test Mode: Low

Polarization: Horizontal

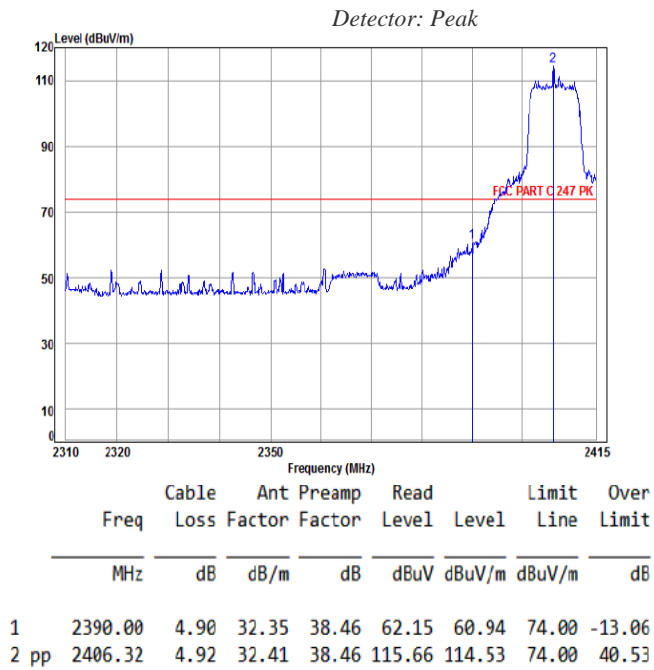


Radiated Method:  
Test Mode: Low

Polarization: Vertical

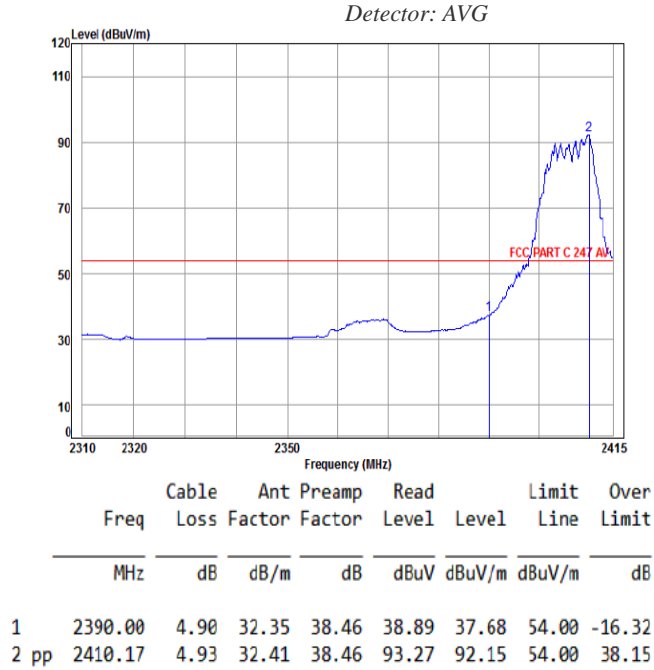


Test Mode: Low  
Polarization: Horizontal

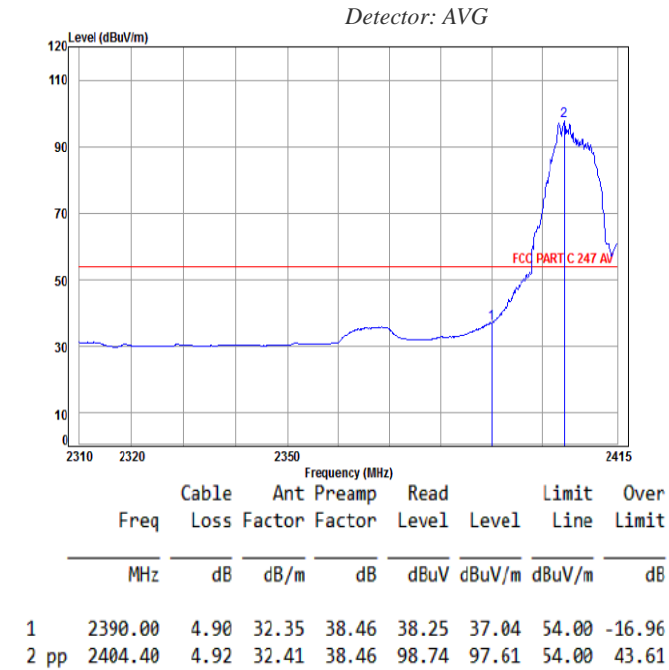

**Radiated Method:**

*Test Mode: High*

*Polarization: Vertical*

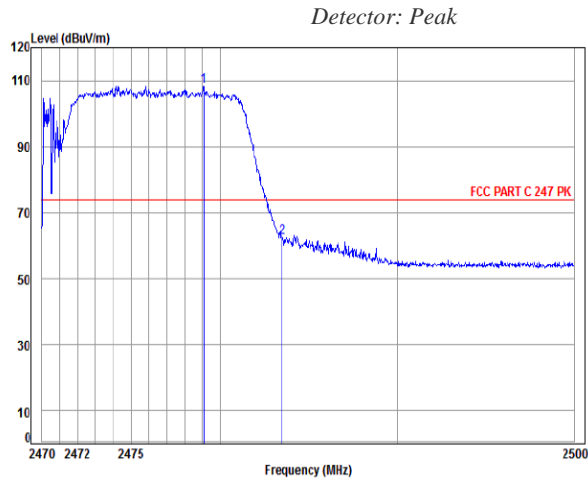


	Detector	Read Level	Limit Line	Over Limit
	Peak	dBuV	dBuV/m	dB
1	pp	2479.11	108.34	34.34
2		2483.50	62.43	-11.57

	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5.02	32.44	38.47	109.35	108.34	74.00	34.34
2	5.03	32.44	38.47	63.43	62.43	74.00	-11.57

*Test Mode: High*

*Polarization: Horizontal*

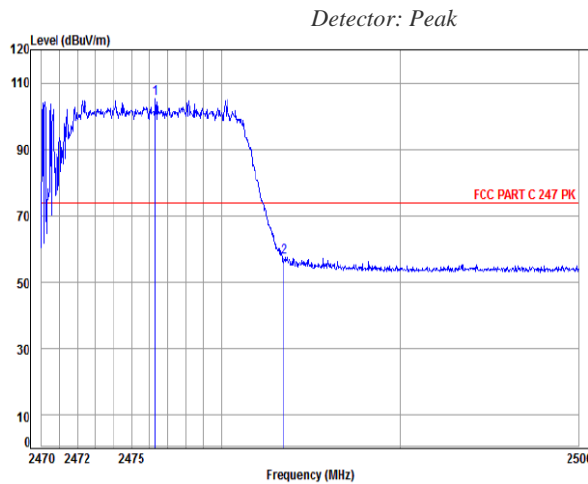

	Detector	Read Level	Limit Line	Over Limit
	Peak	dBuV	dBuV/m	dB
1	pp	2476.33	105.18	31.18
2		2483.50	57.44	-16.56


  

	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5.02	32.44	38.47	106.19	105.18	74.00	31.18
2	5.03	32.44	38.47	58.44	57.44	74.00	-16.56

**Radiated Method:**

*Test Mode: High*


*Polarization: Vertical*

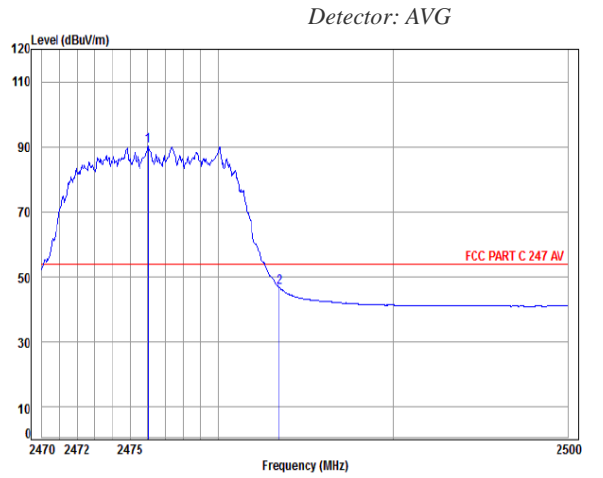

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2476.03	5.02	32.44	38.47	91.12	90.11	54.00	36.11
2	2483.50	5.03	32.44	38.47	47.70	46.70	54.00	-7.30

*Test Mode: High*


*Polarization: Horizontal*

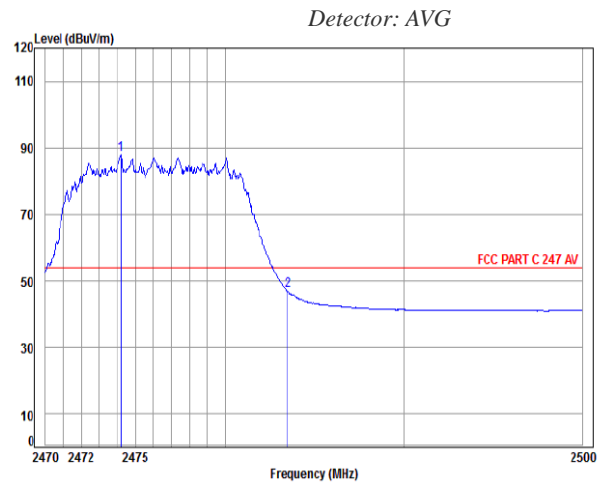

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2474.21	5.02	32.44	38.46	88.79	87.79	54.00	33.79
2	2483.50	5.03	32.44	38.47	48.00	47.00	54.00	-7.00


Conducted Method:

Band Edge NVNT 2406.5MHz Ant1 Ref

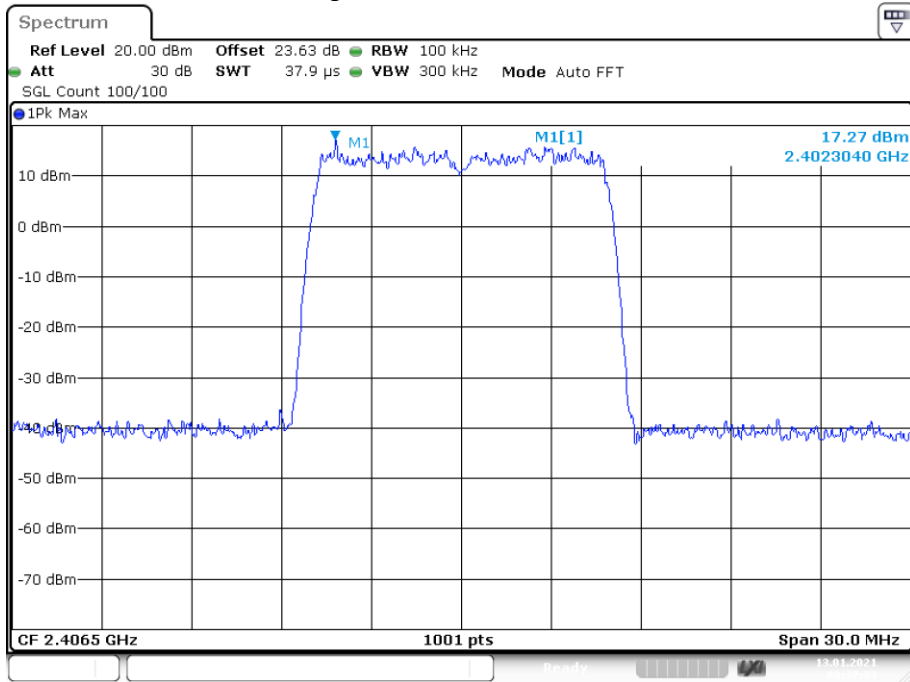


Date: 13.JAN.2021 08:37:03

Band Edge NVNT 2406.5MHz Ant1 Emission

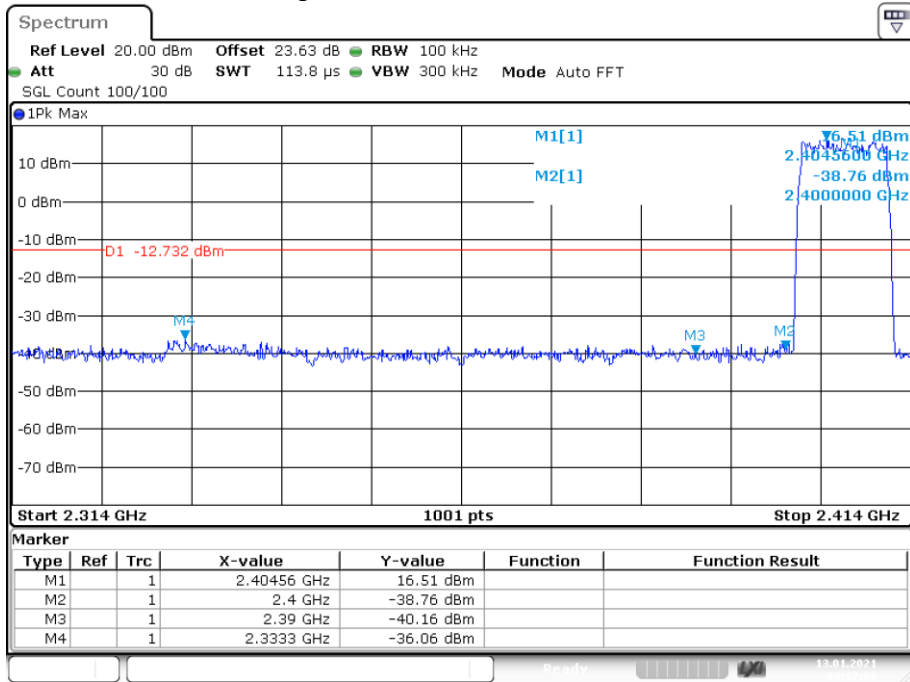


Date: 13.JAN.2021 08:37:09

### Band Edge NVNT 2476.5MHz Ant1 Ref

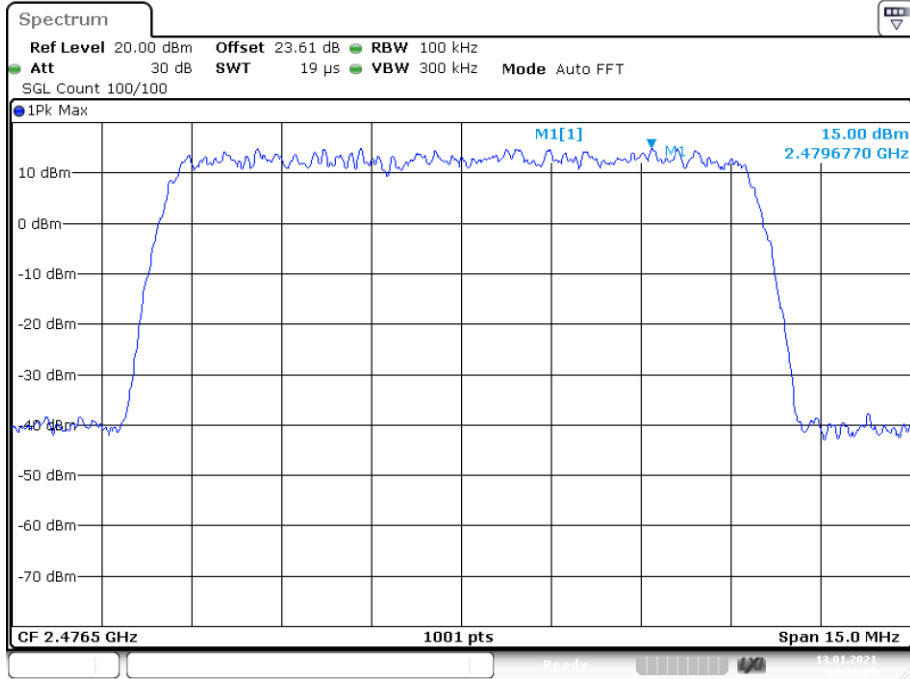


Date: 13.JAN.2021 08:59:03

### Band Edge NVNT 2476.5MHz Ant1 Emission

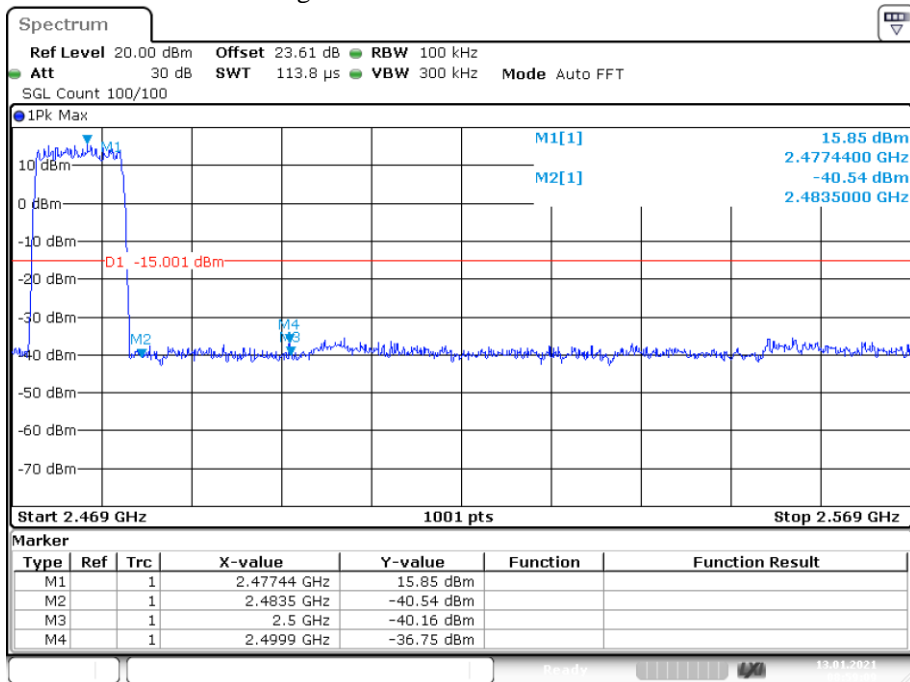


Date: 13.JAN.2021 08:59:09

### Band Edge NVNT 2406.5MHz Ant2 Ref

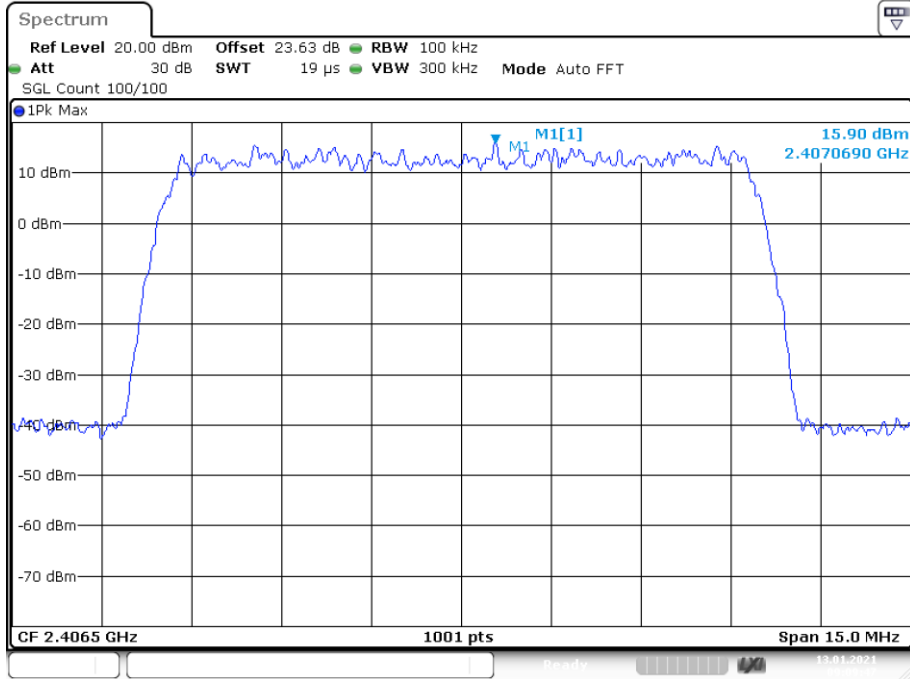

Date: 13.JAN.2021 09:09:47


### Band Edge NVNT 2406.5MHz Ant2 Emission

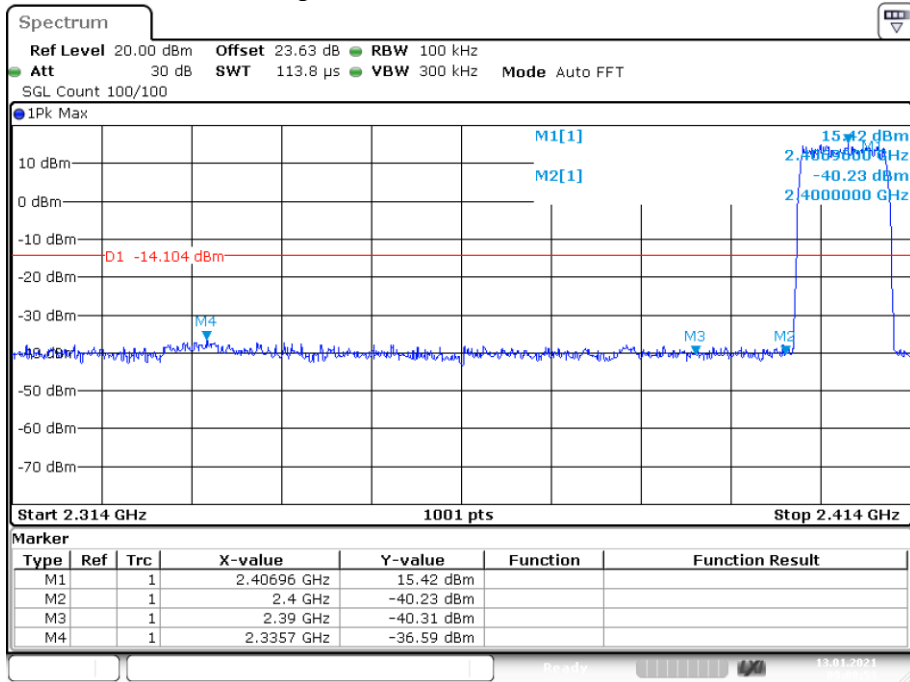

Date: 13.JAN.2021 09:09:52




### Band Edge NVNT 2476.5MHz Ant2 Ref

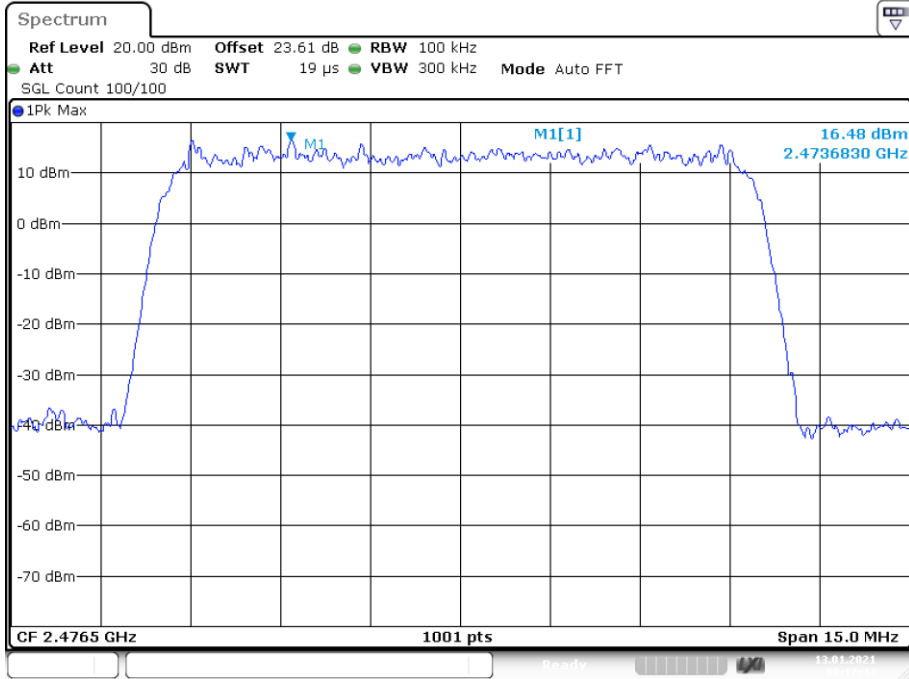

Date: 13.JAN.2021 09:17:44

### Band Edge NVNT 2476.5MHz Ant2 Emission

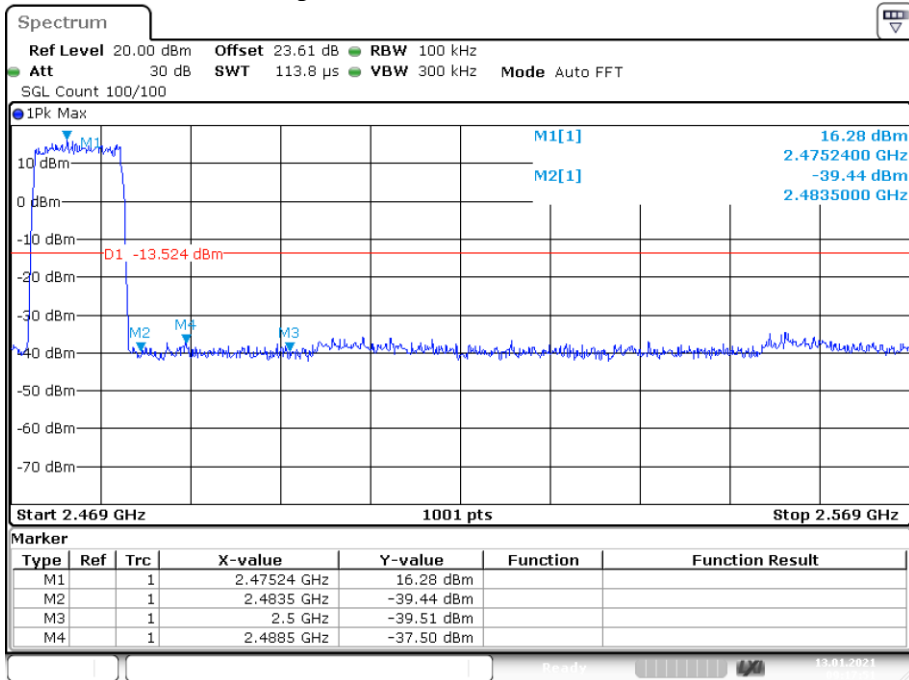

Date: 13.JAN.2021 09:17:50

## **9. Antenna Requirement**

### **9.1. Standard Requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **9.2. Antenna Connected Construction**

The antenna is external antenna with special connector and no consideration of replacement. Please see EUT photo for details.

### **9.3. Results**

The EUT antenna is external antenna with special connector. It complies with the standard requirement.

## **10. Test Setup Photo**

Please refer to separated files for Test Setup Photos of the EUT.

## **11. Photographs Of The EUT**

Please refer to separated files for External Photos of the EUT and Internal Photos of the EUT.

**----- END OF REPORT-----**