



# **FCC TEST REPORT**

**FCC ID: SY4-A02025**

On Behalf of

**Shanghai Huace Navigation Technology LTD.**

**Geodetic GNSS Receiver (P3DT)**

**Model No.: 1103906523**

Prepared for : Shanghai Huace Navigation Technology LTD.  
Address : Building C, 599 Gaojing Road, Qingpu District, Shanghai, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

Report Number : T1881484 02  
Date of Receipt : August 15, 2018  
Date of Test : September 15, 2018-November 02, 2018  
Date of Report : November 02, 2018  
Version Number : REV0


## TABLE OF CONTENTS

Description	Page
<b>1. Summary of Standards And Results.....</b>	<b>6</b>
1.1. Description of Standards and Results .....	6
<b>2. General Information.....</b>	<b>7</b>
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT) .....	8
2.3. Tested Supporting System Details .....	8
2.4. Block Diagram of connection between EUT and simulators.....	8
2.5. Test Mode Description.....	8
2.6. Test Conditions .....	9
2.7. Test Facility.....	9
2.8. Measurement Uncertainty.....	9
2.9. Test Equipment List .....	10
<b>3. Maximum Peak Output power .....</b>	<b>11</b>
3.1. Limit.....	11
3.2. Test Procedure.....	11
3.3. Test Setup.....	11
3.4. Test Result.....	11
<b>4. Bandwidth.....</b>	<b>12</b>
4.1. Limit.....	12
4.2. Test Procedure.....	12
4.3. Test Result.....	12
<b>5. Carrier Frequency Separation .....</b>	<b>15</b>
5.1. Limit.....	15
5.2. Test Procedure.....	15
5.3. Test Result.....	15
<b>6. Number Of Hopping Channel .....</b>	<b>17</b>
6.1. Limit.....	17
6.2. Test Procedure.....	17
6.3. Test Result.....	17
<b>7. Dwell Time .....</b>	<b>19</b>
7.1. Test limit .....	19
7.2. Test Procedure.....	19
7.3. Test Result.....	19
<b>8. Radiated emissions .....</b>	<b>23</b>
8.1. Limit.....	23
8.2. Block Diagram of Test setup.....	24
8.3. Test Procedure.....	25
8.4. Test Result.....	25
<b>9. Band Edge Compliance .....</b>	<b>31</b>

---

9.1. Block Diagram of Test Setup.....	31
9.2. Limit.....	31
9.3. Test Procedure.....	31
9.4. Test Result.....	31
<b>10. Power Line Conducted Emissions.....</b>	<b>47</b>
10.1. Block Diagram of Test Setup.....	47
10.2. Limit.....	47
10.3. Test Procedure.....	47
10.4. Test Result.....	47
<b>11. Antenna Requirements.....</b>	<b>50</b>
11.1. Limit.....	50
11.2. Result.....	50
<b>12. Test setup photo .....</b>	<b>51</b>
12.1. Photos of Radiated emission.....	51
12.2. Photos of Conducted Emission test .....	52
<b>13. Photos of EUT .....</b>	<b>53</b>

## TEST REPORT DECLARATION

Applicant : Shanghai Huace Navigation Technology LTD.  
Address : Building C, 599 Gaojing Road, Qingpu District, Shanghai, China  
Manufacturer : Shanghai Huace Navigation Technology LTD.  
Address : Building C, 599 Gaojing Road, Qingpu District, Shanghai, China  
EUT Description : Geodetic GNSS Receiver (P3DT)  
(A) Model No. : 1103906523  
(B) Trademark : 

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247: 2017,  
ANSI C63.10:2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Reak Yang  
Project Engineer 

Approved by (name + signature).....: Simple Guan  
Project Manager 

Date of issue.....: November 02, 2018

**Revision History**

Revision	Issue Date	Revisions	Revised By
00	November 02, 2018	Initial released Issue	Simple Guan

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	P
Antenna requirement	FCC Part 15: 15.203	P
Note:	1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.	


## 2. GENERAL INFORMATION


### 2.1. Description of Device (EUT)

Description : Geodetic GNSS Receiver (P3DT)

Model Number : 1103906523

Note : 1. The model name “1103906523” corresponding client’s internal model is “Geodetic GNSS Receiver (P3DT).”

Trademark : 

Test Voltage : Input: 9-36V  2A

Radio Technology : Bluetooth V2.1+EDR

Operation frequency : 2402-2480MHz

Channel No. : 79 Channels

Modulation type : GFSK,  $\pi/4$  DQPSK, 8- DPSK

Antenna Type : Internal Antenna, 0dBi(Max.)

Software version : V8.42

Hardware version : V1.2


## 2.2. Accessories of Device (EUT)

Accessories1 : /  
 Manufacturer : /  
 Model : /  
 Ratings : /

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
1.	Notebook	ACER	ZQT	N/A	DOC
2.	DC POWER	/	/	/	/

## 2.4. Block Diagram of connection between EUT and simulators



## 2.5. Test Mode Description

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
$\pi$ /4 DQPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
8- DPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480



## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35 °C	27 °C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission  
Registration Number: 293961

July 25, 2017 Certificated by IC  
Registration Number: 12135A

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB(Polarize: H)
	4.13dB(Polarize: V)
Uncertainty for radio frequency	$5.4 \times 10^{-8}$
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2 °C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

## 2.9. Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGRE N	N/A	SEL0017	2018.09.21	1 Year
Spectrum analyzer	Agilent	E4407B	MY46185649	2018.09.21	1 Year
Receiver	R&S	ESCI	1166.5950K03-1011	2018.09.21	1 Year
Receiver	R&S	ESCI	101202	2018.09.21	1 Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2018.04.13	2 Year
Horn Antenna	EMCO	3115	640201028-06	2018.04.13	2 Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2018.04.13	2 Year
Cable	Resenberger	N/A	No.1	2018.09.21	1 Year
Cable	SCHWARZBEC K	N/A	No.2	2018.09.21	1 Year
Cable	SCHWARZBEC K	N/A	No.3	2018.09.21	1 Year
Pre-amplifier	Schwarzbeck	BBV9743	9743-019	2018.09.21	1 Year
Pre-amplifier	R&S	AFS33-18002650-30-8P-44	SEL0080	2018.09.21	1 Year
Temperature controller	Terchy	MHQ	120	2018.09.21	1 Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2018.09.21	1 Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2018.09.21	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2018.09.21	1 Year
Horn Antenna	SCHWARZBEC K	BBHA 9170	BBHA 9170294	2018.04.13	2 Year
Power Meter	Anritsu	ML2487A	6K00001491	2018.09.21	1 Year

### 3. MAXIMUM PEAK OUTPUT POWER

#### 3.1.Limit


Please refer section 15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

#### 3.2.Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

#### 3.3.Test Setup

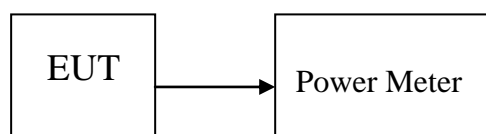

#### 3.4.Test Result

Mode	Freq (MHz)	PK Output Power (dBm)	PK Output Power (mW)	Limit (dBm)	Result
GFSK	2402	<b>-2.083</b>	0.619	30	Pass
	2441	-2.212	0.601	30	Pass
	2480	-2.206	0.602	30	Pass
$\pi$ /4 DQPSK	2402	-3.058	0.495	21	Pass
	2441	-3.303	0.467	21	Pass
	2480	-3.344	0.463	21	Pass
8- DPSK	2402	-3.864	0.411	21	Pass
	2441	-3.155	0.484	21	Pass
	2480	-3.299	0.468	21	Pass

Conclusion: PASS

## 4. BANDWIDTH

### 4.1.Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 4.2.Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### 4.3.Test Result


Mode	Freq (MHz)	20dB Bandwidth (KHz)	Conclusion
GFSK	2402	861.8	PASS
	2441	867.4	PASS
	2480	861.2	PASS
$\pi$ /4 DQPSK	2402	1217.0	PASS
	2441	1227.0	PASS
	2480	1217.0	PASS
8- DPSK	2402	1209.0	PASS
	2441	1201.0	PASS
	2480	1215.0	PASS

Original Test data For 20dB bandwidth


GFSK mode	$\pi$ /4 DQPSK
-----------	----------------

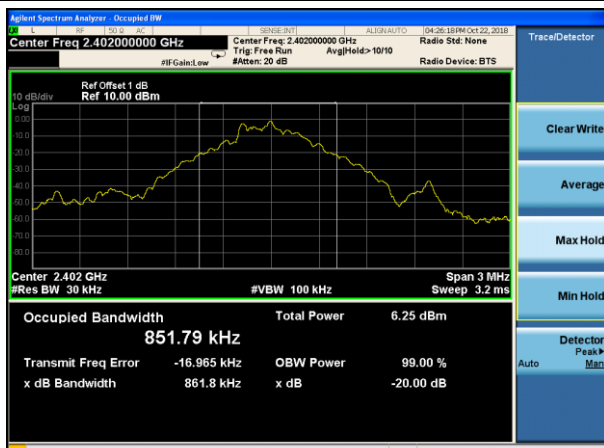


Lowest channel

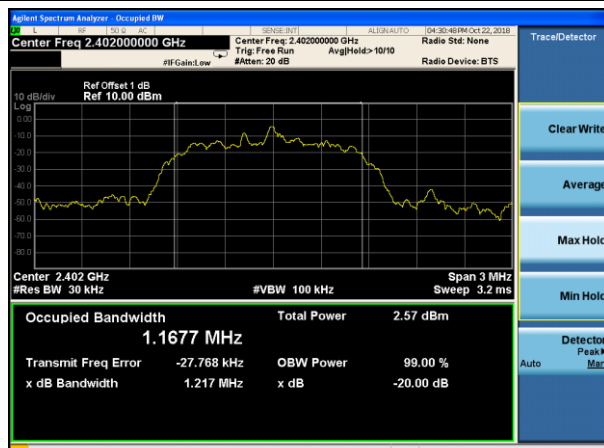

Lowest channel

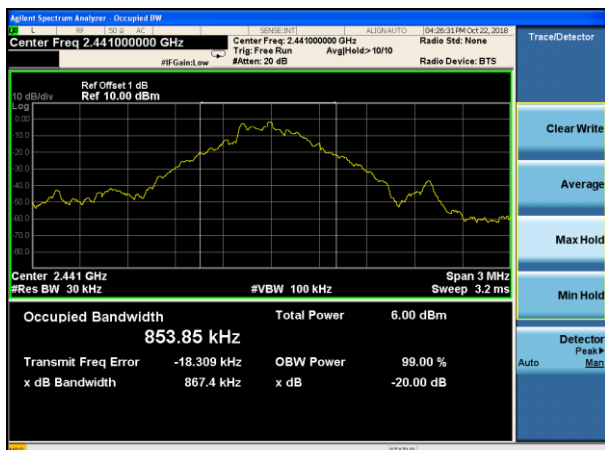


Middle channel

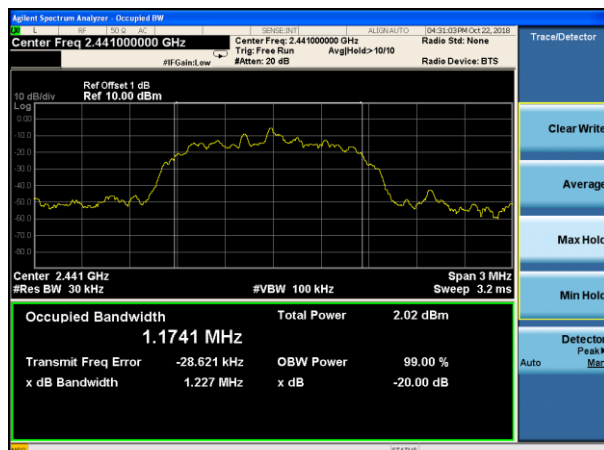

Middle channel




Highest channel

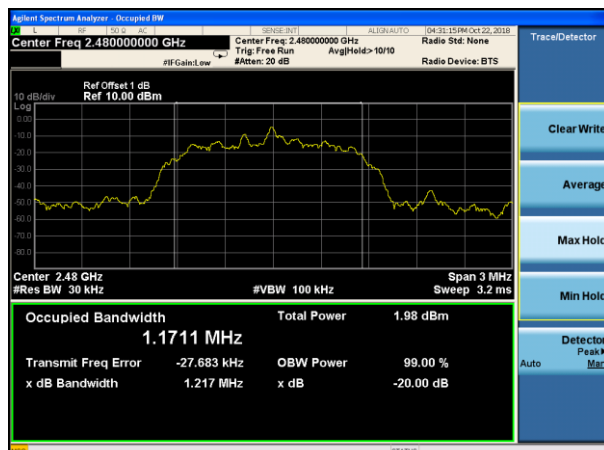

Highest channel


8- DPSK

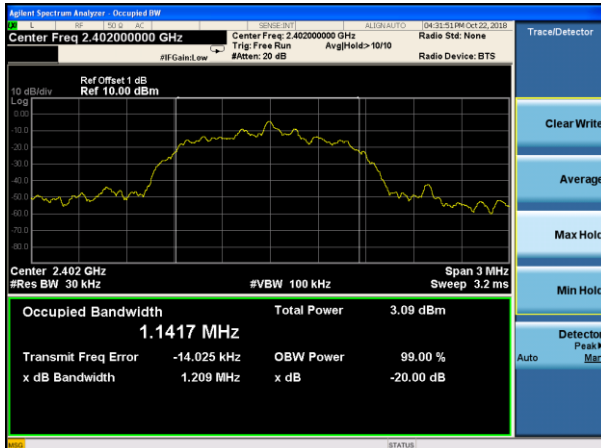

Lowest channel



Middle channel

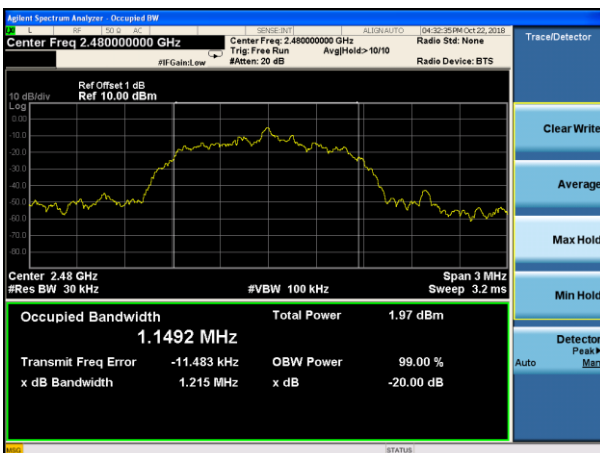

Highest channel

:

## 5. CARRIER FREQUENCY SEPARATION

### 5.1.Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


### 5.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 20kHz RBW and 62kHz VBW.


### 5.3.Test Result

Mode/Channel	Channel separation (MHz)	20dB Bandwidth (KHz)	Limit (KHz)	Conclusion
GFSK	1.002	867.4	578.27	PASS
$\pi$ /4 DQPSK	1.002	1227.0	818.00	PASS
8- DPSK	0.999	1215.0	810.00	PASS


Original test data for channel separation

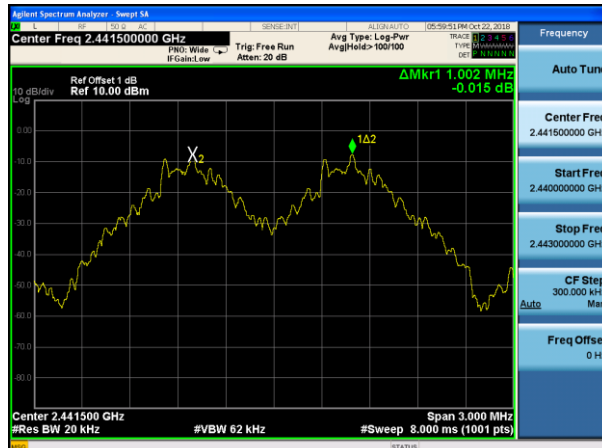

GFSK

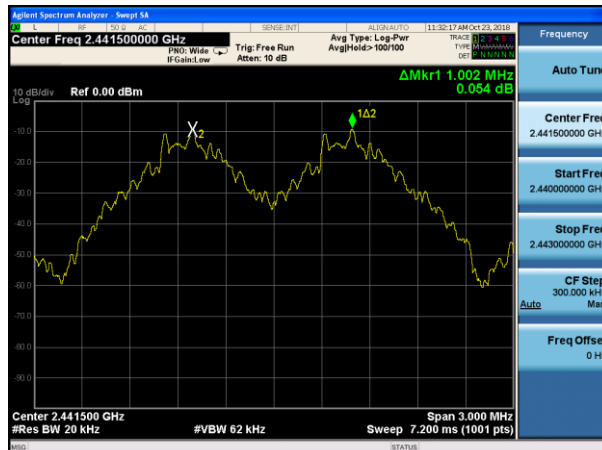

$\pi/4$  DQPSK

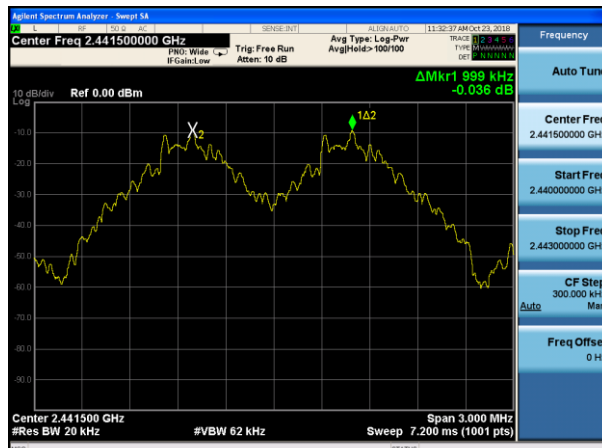

8- DPSK



## 6. NUMBER OF HOPPING CHANNEL

### 6.1.Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


### 6.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.


### 6.3.Test Result

Mode	Number of hopping channel	Limit	Conclusion
GFSK	79	>15	PASS
$\pi$ /4 DQPSK	79	>15	PASS
8- DPSK	79	>15	PASS


Original test data for hopping channel number

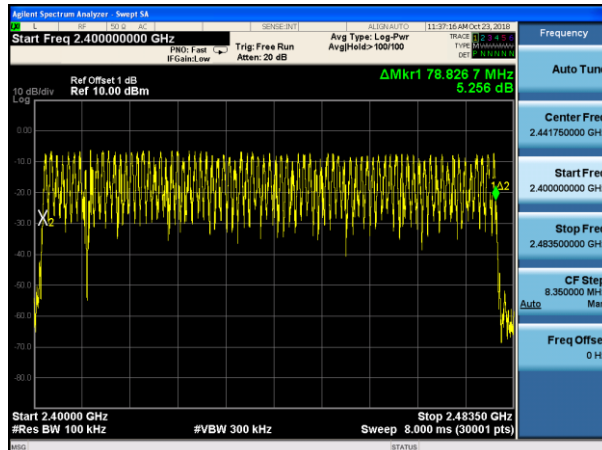

GFSK

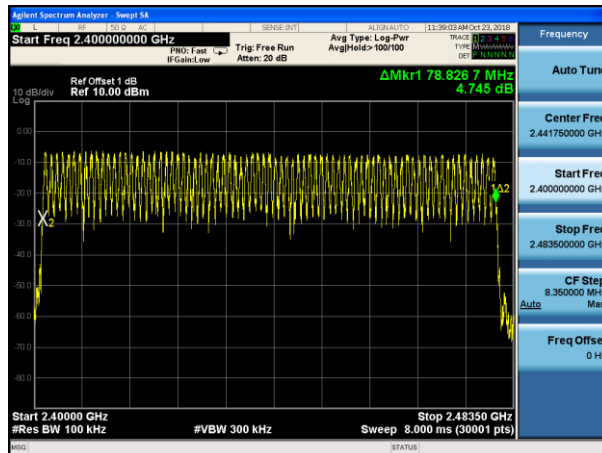

$\pi/4$  DQPSK

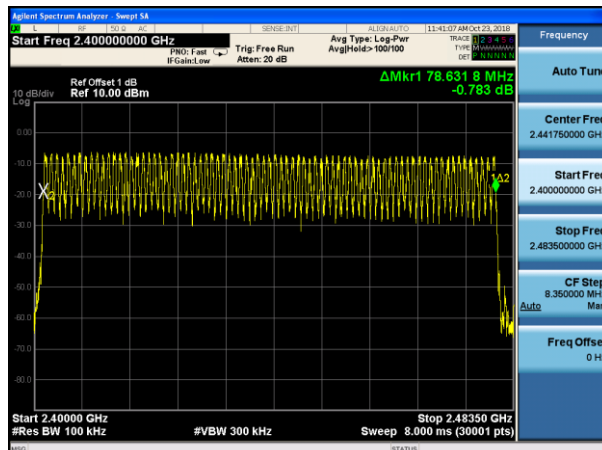

8- DPSK

## 7. DWELL TIME

### 7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channels employed.

### 7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

### 7.3. Test Result

PASS.

Detailed information please see the following page.

Mode	Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit (ms)	Conclusion
GFSK	DH1	2441	0.385	123.200	400	PASS
	DH3	2441	1.613	258.080		PASS
	DH5	2441	2.888	308.053		PASS
$\pi$ /4 DQPSK	DH1	2441	0.384	122.880	400	PASS
	DH3	2441	1.632	261.120		PASS
	DH5	2441	2.880	307.200		PASS
8- DPSK	DH1	2441	0.384	122.880	400	PASS
	DH3	2441	1.637	261.920		PASS
	DH5	2441	2.880	307.200		PASS

Note: 1 A period time =  $0.4 \text{ (s)} * 79 = 31.6 \text{ (s)}$

2 DH1 time slot =  $\text{Pulse Duration} * (1600 / (2 * 79)) * \text{A period time} / 1000$


DH3 time slot =  $\text{Pulse Duration} * (1600 / (4 * 79)) * \text{A period time} / 1000$

DH5 time slot =  $\text{Pulse Duration} * (1600 / (6 * 79)) * \text{A period time} / 1000$


Dwell time

GFSK


$\pi/4$ -DQPSK

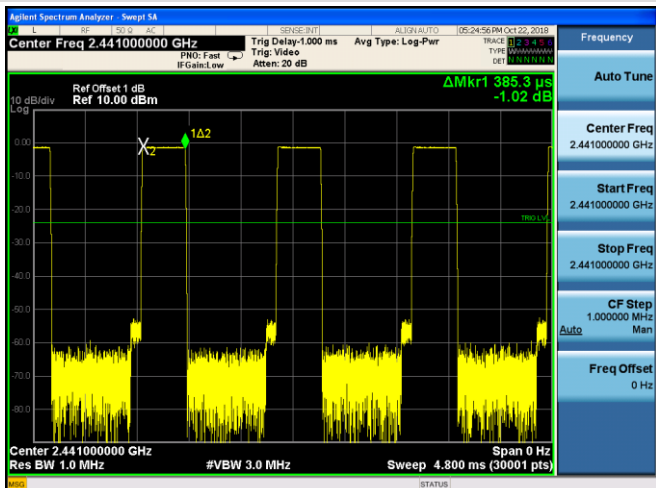


Channel 39 / 2441 MHz - DH1

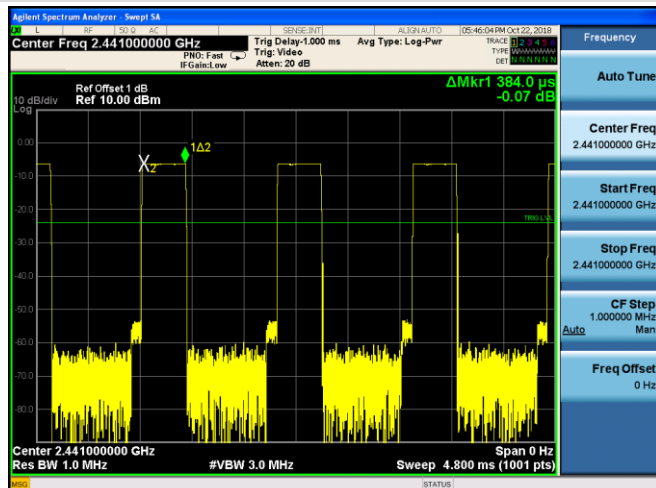


Channel 39 / 2441 MHz - 2DH1

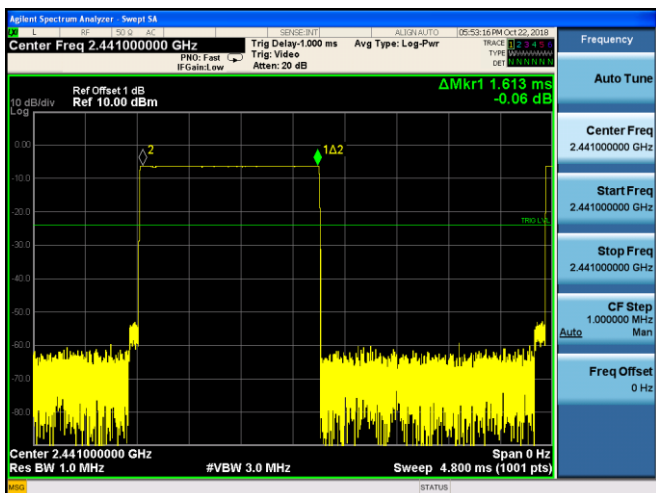


Channel 39 / 2441 MHz - DH3

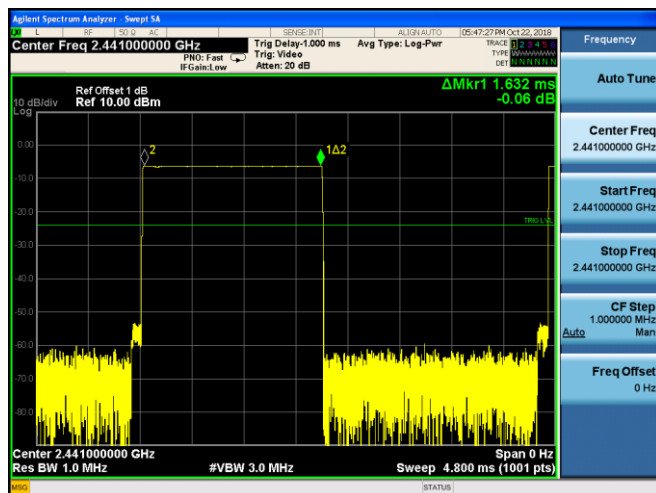

Channel 39 / 2441 MHz - 2DH3

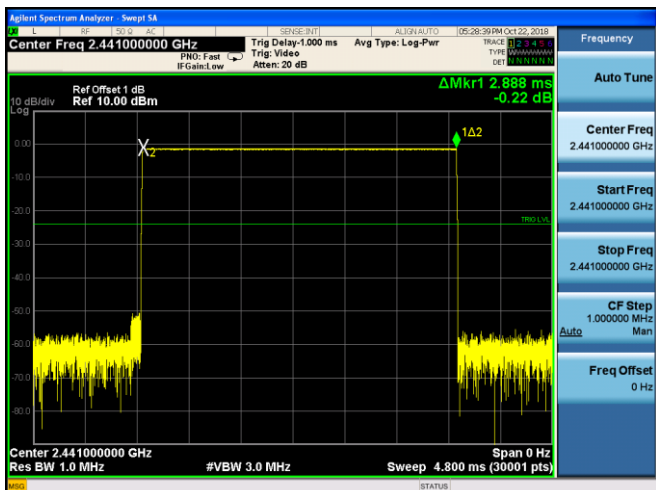


Channel 39 / 2441 MHz - DH5

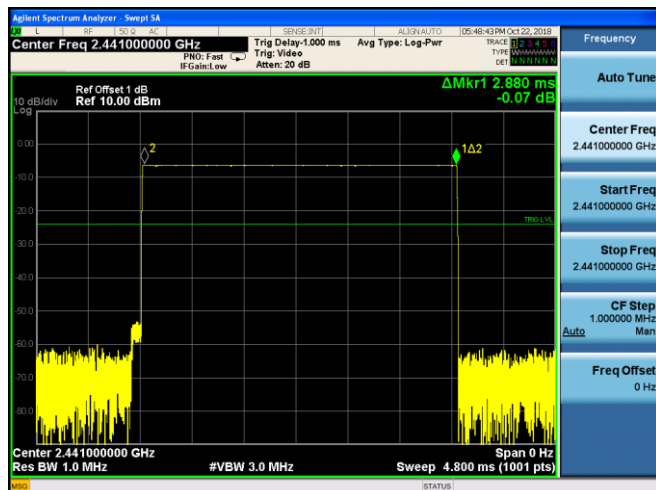


Channel 39 / 2441 MHz - 2DH5

Dwell time


8DPSK

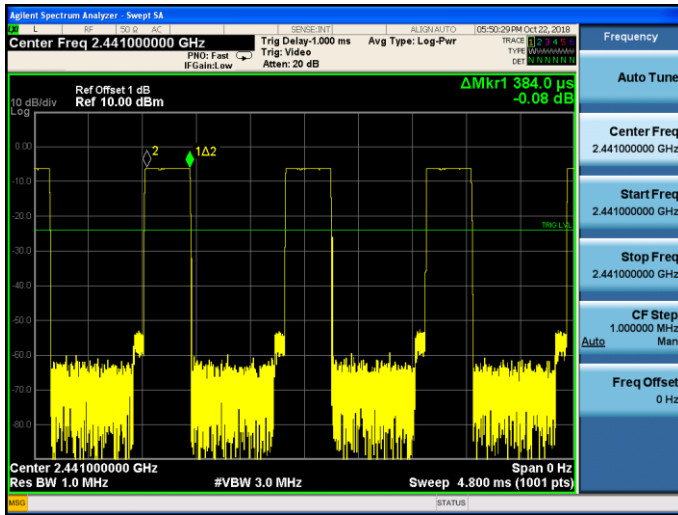

Channel 39 / 2441 MHz - 3DH1

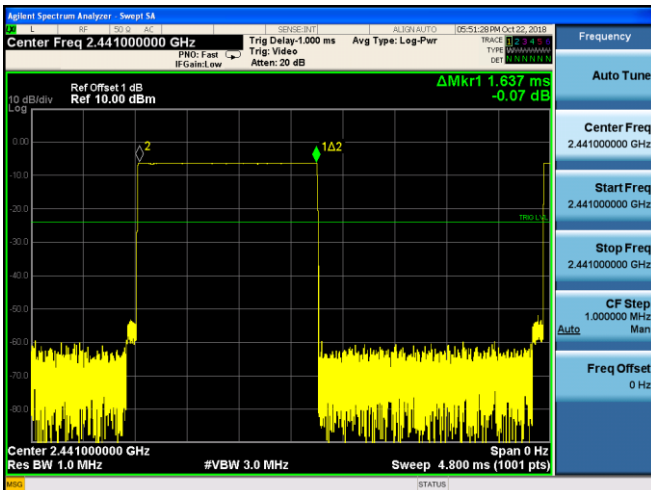

2 Channel 39 / 2441 MHz - 3DH3

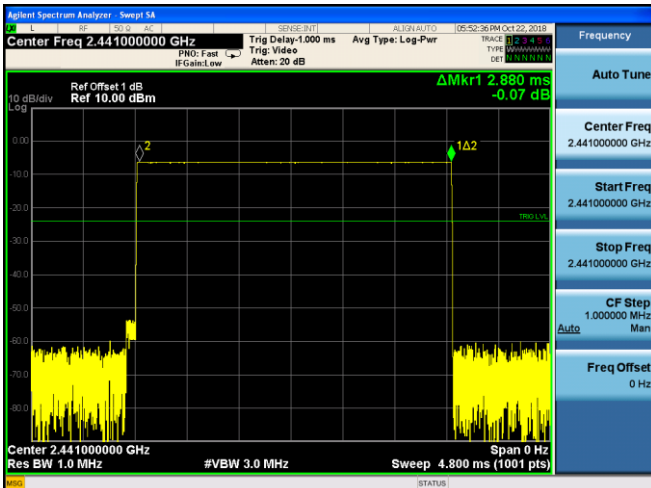

Channel 39 / 2441 MHz - 3DH5

## 8. RADIATED EMISSIONS

### 8.1.Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

#### 15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB( $\mu\text{V}$ )/m (Peak) 54.0 dB( $\mu\text{V}$ )/m (Average)	

## 8.2. Block Diagram of Test setup


### 8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

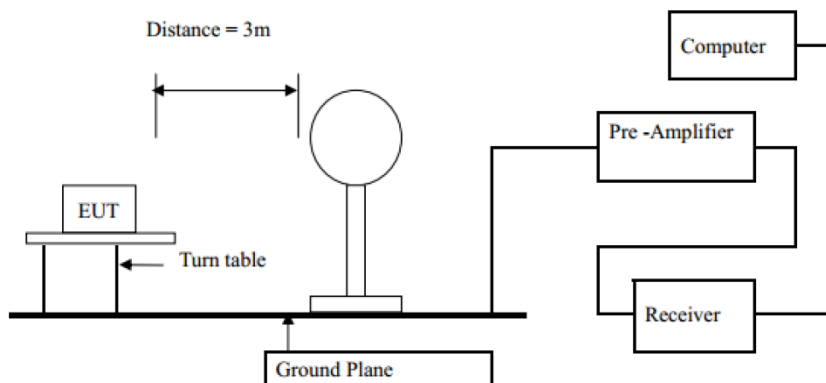

### 8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

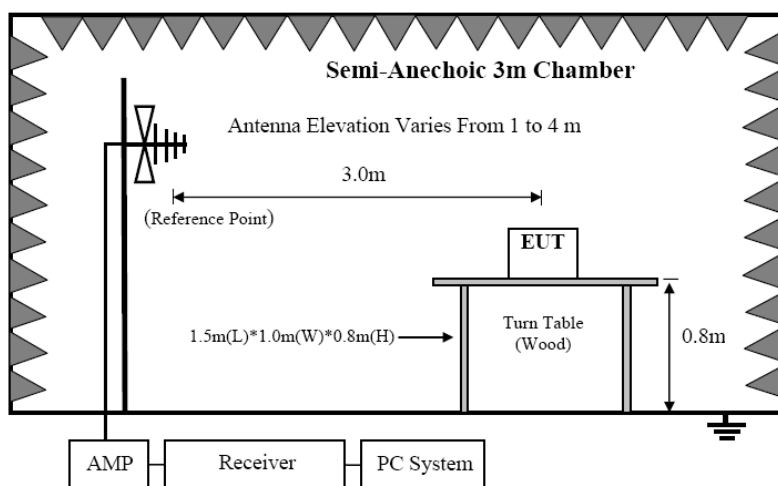

### 8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

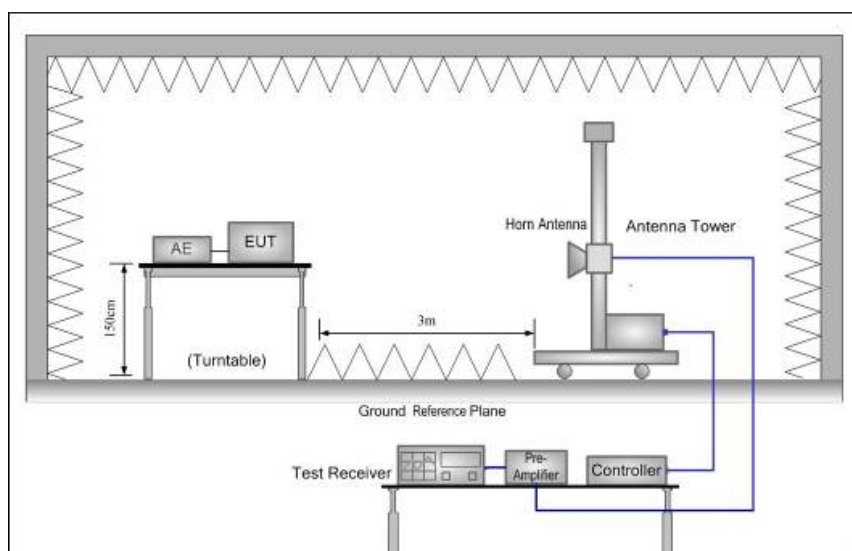

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.



### 8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
  - (a) Change work frequency or channel of device if practicable.
  - (b) Change modulation type of device if practicable.
  - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

### 8.4. Test Result

We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency..  
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS

Vertical:

**Radiated Emission Measurement**

File : Data :#10 Date: 2018/9/21 Time: 1:20:53

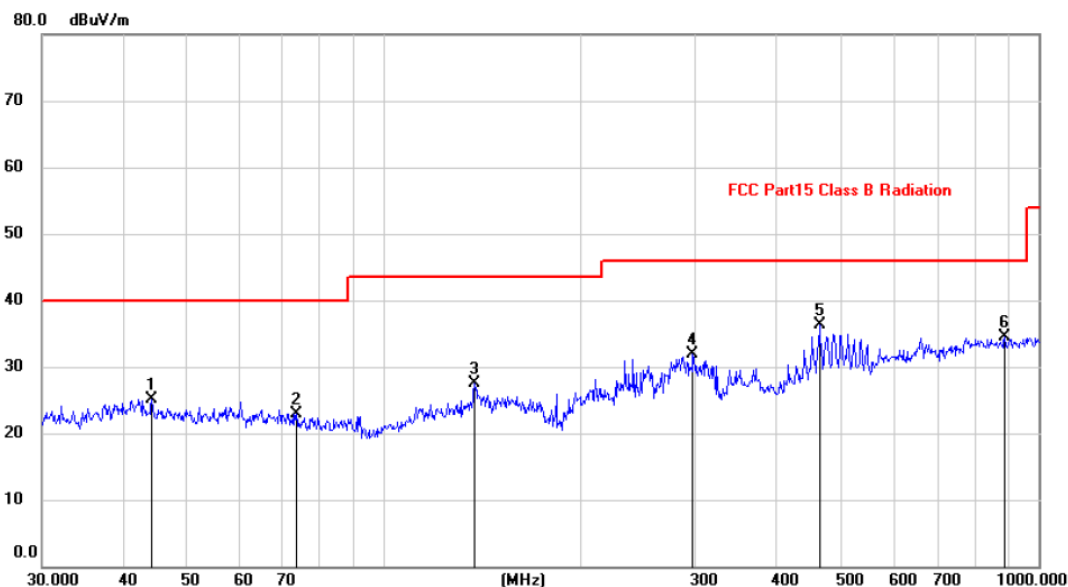


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		44.1200	11.30	13.85	25.15	40.00	-14.85			peak
2		73.3593	12.57	10.43	23.00	40.00	-17.00			peak
3		137.4201	13.90	13.67	27.57	43.50	-15.93			peak
4		296.1836	18.50	13.35	31.85	46.00	-14.15			peak
5	*	462.3455	19.26	17.10	36.36	46.00	-9.64			peak
6		890.7277	11.72	22.80	34.52	46.00	-11.48			peak

Note:1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

**Horizontal:**

**Radiated Emission Measurement**

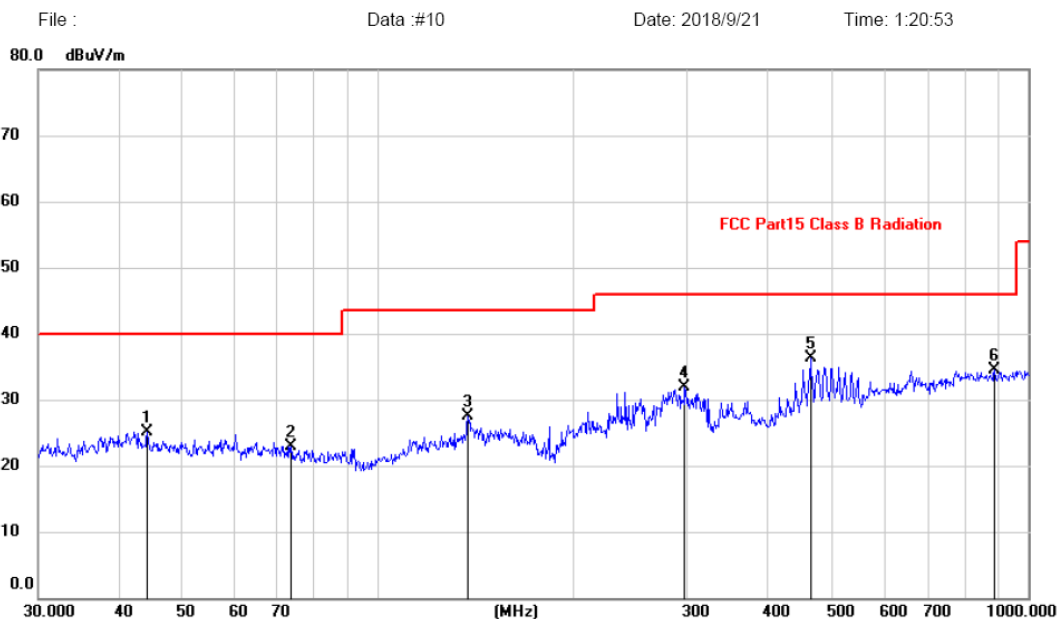

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		44.1200	11.30	13.85	25.15	40.00	-14.85	peak		
2		73.3593	12.57	10.43	23.00	40.00	-17.00	peak		
3		137.4201	13.90	13.67	27.57	43.50	-15.93	peak		
4		296.1836	18.50	13.35	31.85	46.00	-14.15	peak		
5	*	462.3455	19.26	17.10	36.36	46.00	-9.64	peak		
6		890.7277	11.72	22.80	34.52	46.00	-11.48	peak		

Note:1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz (AC 120V/60Hz) was listed in this report.

From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	44.24	V	33.95	10.18	34.26	54.11	74	19.89	PK
4804	34.26	V	33.95	10.18	34.26	44.13	54	9.87	AV
7206	/		/						
9608	/		/						
4824	45.28	H	33.95	10.18	34.26	55.15	74	18.85	PK
4824	33.15	H	33.95	10.18	34.26	43.02	54	10.98	AV
7206									
9608									
Test Mode: GFSK TX Mid									
4882	42.89	V	33.93	10.2	34.29	52.73	74	21.27	PK
4882	34.00	V	33.93	10.2	34.29	43.84	54	10.16	AV
7323	/								
9764	/								
4882	42.85	H	33.93	10.2	34.29	52.69	74	21.31	PK
4882	34.40	H	33.93	10.2	34.29	44.24	54	9.76	AV
7323									
9764									
Test Mode: GFSK TX High									
4960	42.93	V	33.98	10.22	34.25	52.88	74	21.12	PK
4960	33.15	V	33.98	10.22	34.25	43.10	54	10.90	AV
7440	/								
9920	/								
4960	43.99	H	33.98	10.22	34.25	53.94	74	20.06	PK
4960	33.27	H	33.98	10.22	34.25	43.22	54	10.78	AV
7440	/								
9920	/								
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

From 1G-25GHz


Test Mode: $\pi$ /4 DQPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	43.77	V	33.95	10.18	34.26	53.64	74	20.36	PK
4804	33.55	V	33.95	10.18	34.26	43.42	54	10.58	AV
7206	/		/						
9608	/		/						
4824	43.95	H	33.95	10.18	34.26	53.82	74	20.18	PK
4824	33.97	H	33.95	10.18	34.26	43.84	54	10.16	AV
7206									
9608									
Test Mode: $\pi$ /4 DQPSK TX Mid									
4882	45.11	V	33.93	10.2	34.29	54.95	74	19.05	PK
4882	32.89	V	33.93	10.2	34.29	42.73	54	11.27	AV
7323	/								
9764	/								
4882	45.42	H	33.93	10.2	34.29	55.26	74	18.74	PK
4882	34.61	H	33.93	10.2	34.29	44.45	54	9.55	AV
7323									
9764									
Test Mode: $\pi$ /4 DQPSK TX High									
4960	43.48	V	33.98	10.22	34.25	53.43	74	20.57	PK
4960	32.88	V	33.98	10.22	34.25	42.83	54	11.17	AV
7440	/								
9920	/								
4960	44.55	H	33.98	10.22	34.25	54.50	74	19.50	PK
4960	32.91	H	33.98	10.22	34.25	42.86	54	11.14	AV
7440	/								
9920	/								
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

From 1G-25GHz

Test Mode: 8- DQPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	43.51	V	33.95	10.18	34.26	53.38	74	20.62	PK
4804	32.97	V	33.95	10.18	34.26	42.84	54	11.16	AV
7206	/		/						
9608	/		/						
4824	41.71	H	33.95	10.18	34.26	51.58	74	22.42	PK
4824	33.35	H	33.95	10.18	34.26	43.22	54	10.78	AV
7206									
9608									
Test Mode: 8- DQPSK TX Mid									
4882	41.58	V	33.93	10.2	34.29	51.42	74	22.58	PK
4882	32.94	V	33.93	10.2	34.29	42.78	54	11.22	AV
7323	/								
9764	/								
4882	44.08	H	33.93	10.2	34.29	53.92	74	20.08	PK
4882	33.56	H	33.93	10.2	34.29	43.40	54	10.60	AV
7323									
9764									
Test Mode: 8- DQPSK TX High									
4960	44.09	V	33.98	10.22	34.25	54.04	74	19.96	PK
4960	33.53	V	33.98	10.22	34.25	43.48	54	10.52	AV
7440	/								
9920	/								
4960	44.46	H	33.98	10.22	34.25	54.41	74	19.59	PK
4960	33.28	H	33.98	10.22	34.25	43.23	54	10.77	AV
7440	/								
9920	/								
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

## 9. BAND EDGE COMPLIANCE

### 9.1. Block Diagram of Test Setup

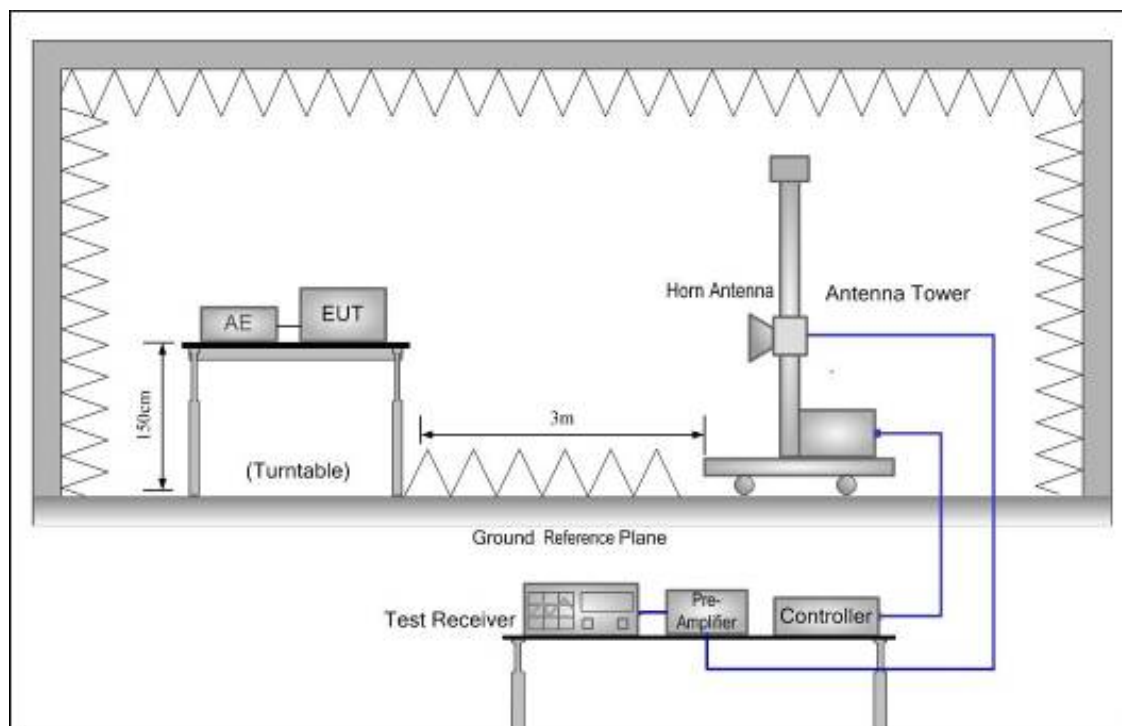

### 9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.


### 9.4. Test Result

PASS. (See below detailed test data)

Radiated Method:


Polarization: Vertical

Test Mode: GFSK-Low

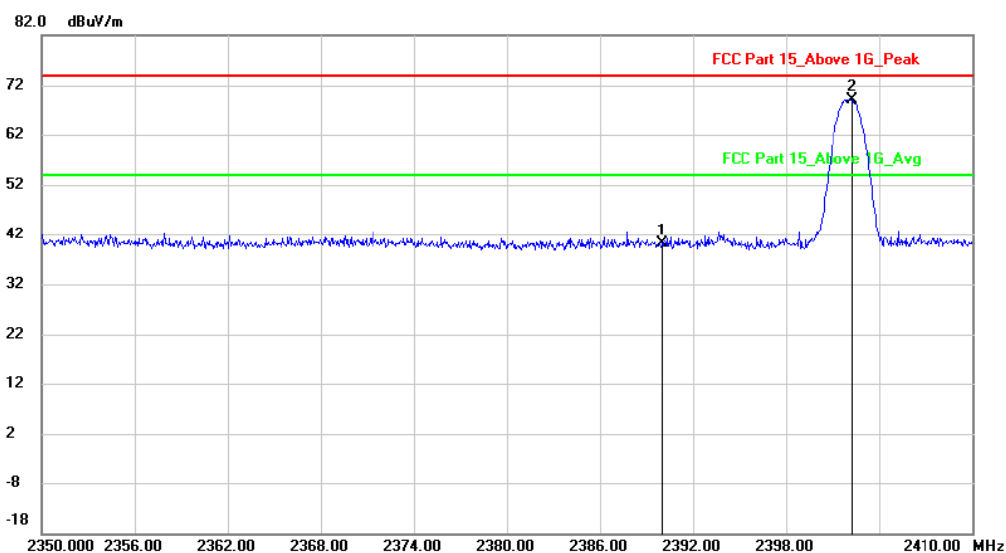

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		2390.000	43.61	-3.40	40.21	74.00	-33.79	peak			
2	*	2402.260	72.55	-3.41	69.14	74.00	-4.86	peak			

hopping-off

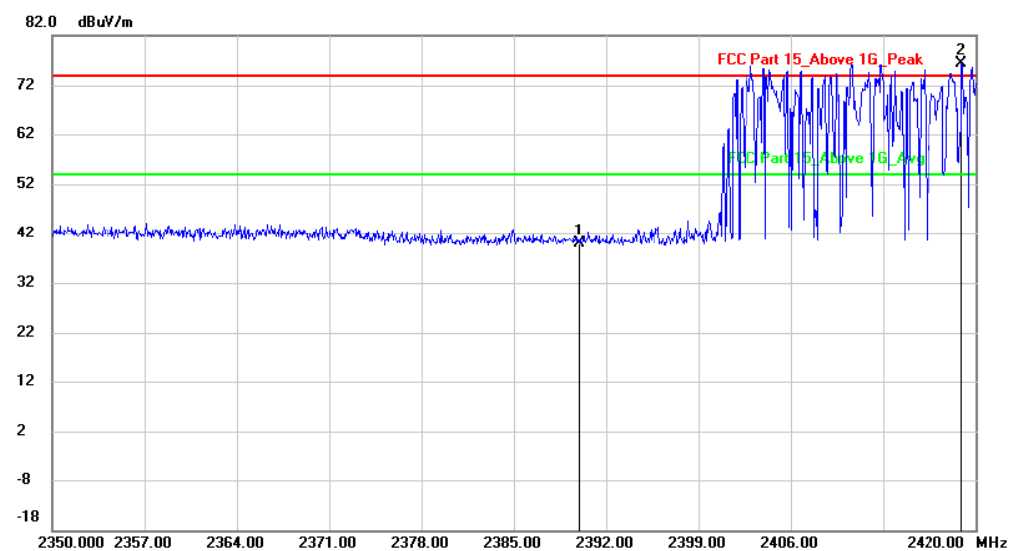

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		2390.000	43.22	-3.40	39.82	74.00	-34.18	peak			
2	*	2418.950	79.83	-3.41	76.42	74.00	2.42	peak			


hopping-on



Polarization: Horizontal:


Test Mode:

GFSK-Low

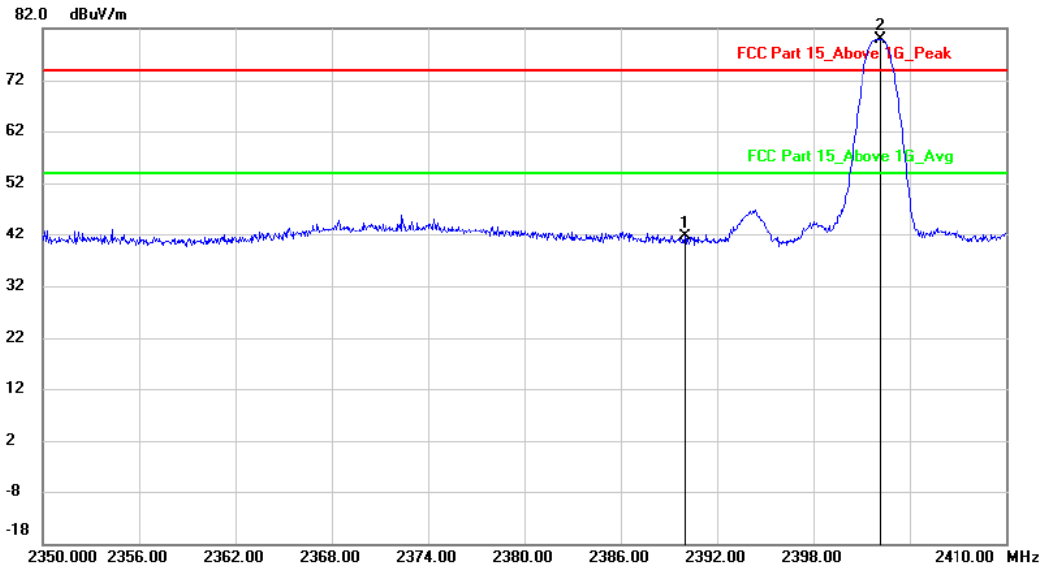

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	45.12	-3.40	41.72	74.00	-32.28	peak		
2	*	2402.200	83.38	-3.41	79.97	74.00	5.97	peak		

hopping-off

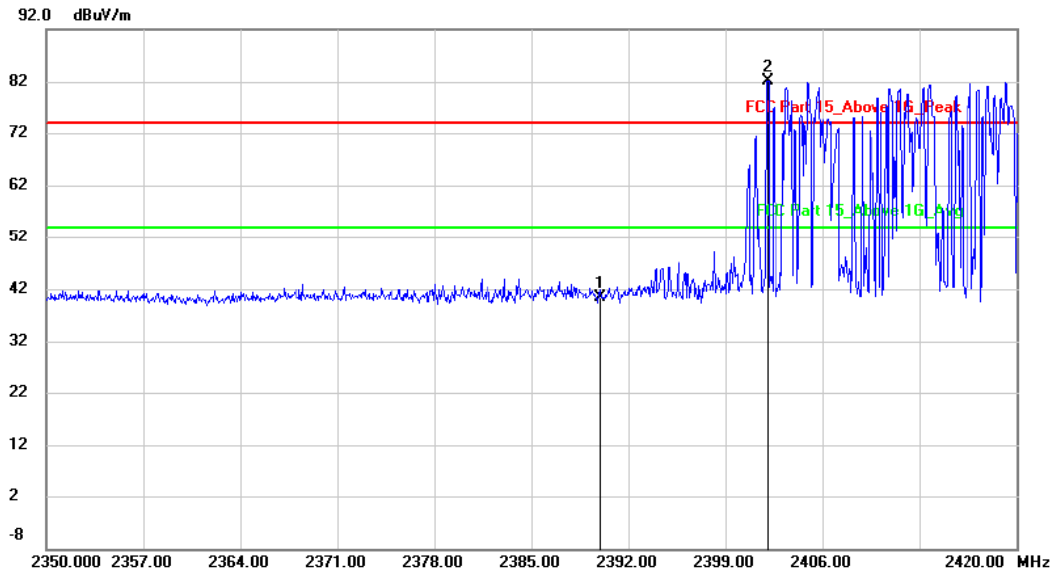


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	43.86	-3.40	40.46	74.00	-33.54	peak		
2	*	2402.010	85.58	-3.41	82.17	74.00	8.17	peak		

hopping-on

Polarization: Vertical


Test Mode:

GFSK-High

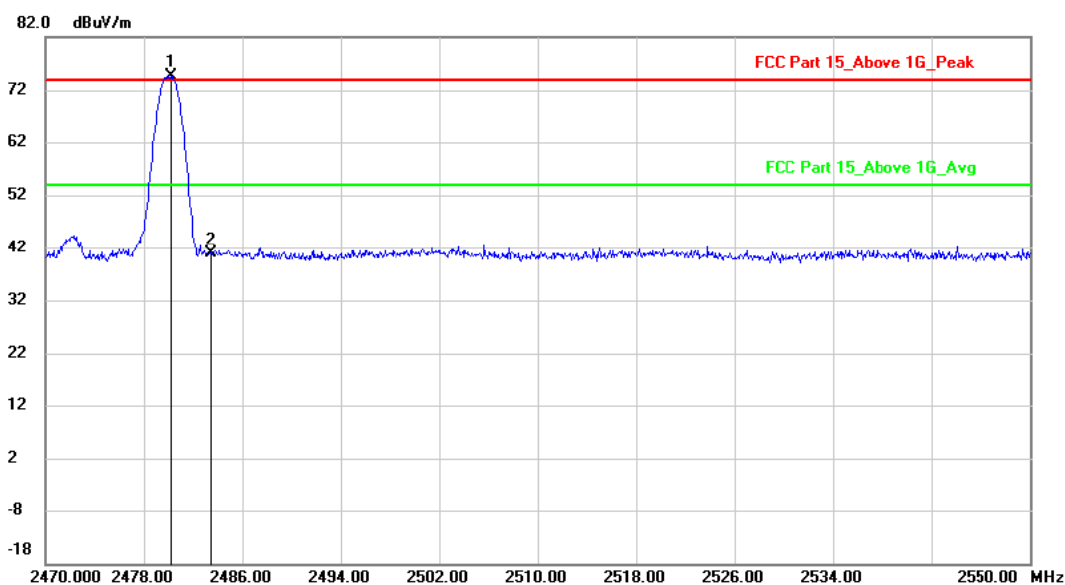

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2480.160	78.06	-3.38	74.68	74.00	0.68			peak
2		2483.500	44.18	-3.38	40.80	74.00	-33.20			peak

hopping-off

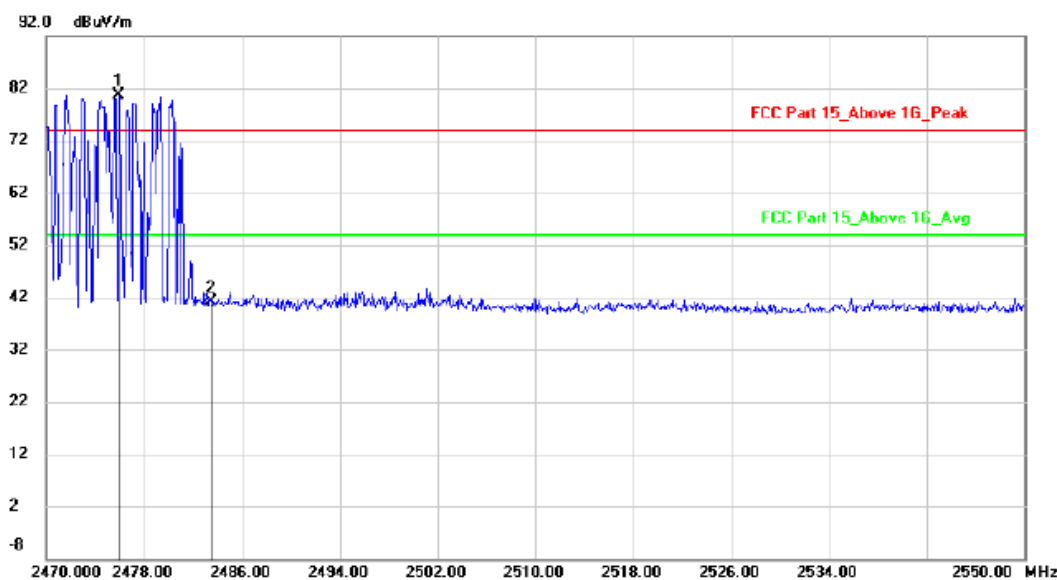


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2475.920	84.06	-3.39	80.67	74.00	6.67			peak
2		2483.500	44.63	-3.38	41.25	74.00	-32.75			peak


hopping-on

Polarization: Horizontal

Test Mode: GFSK-High

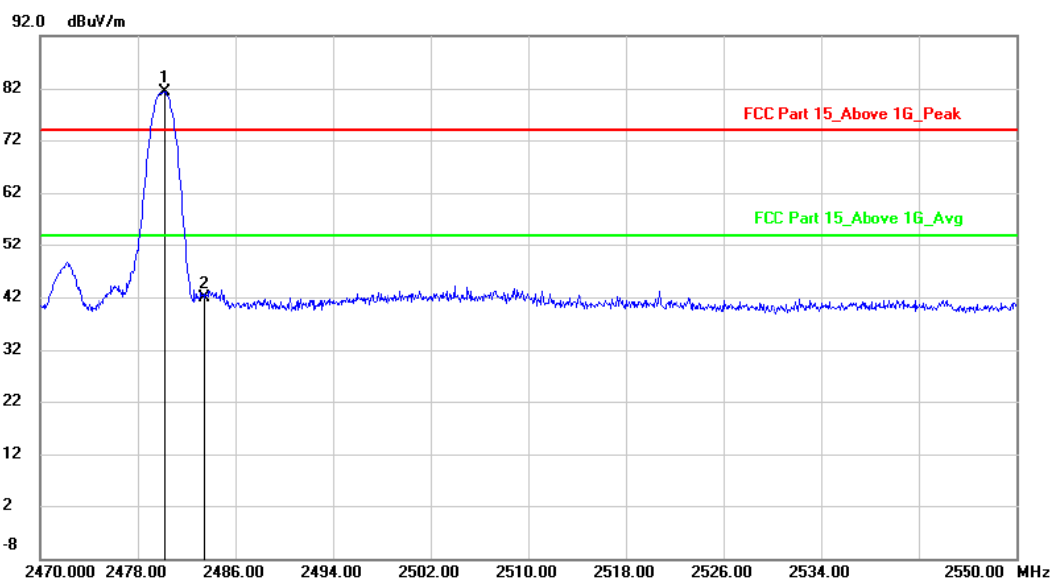

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2480.160	84.69	-3.38	81.31	74.00	7.31			peak
2		2483.500	45.36	-3.38	41.98	74.00	-32.02			peak hopping-off

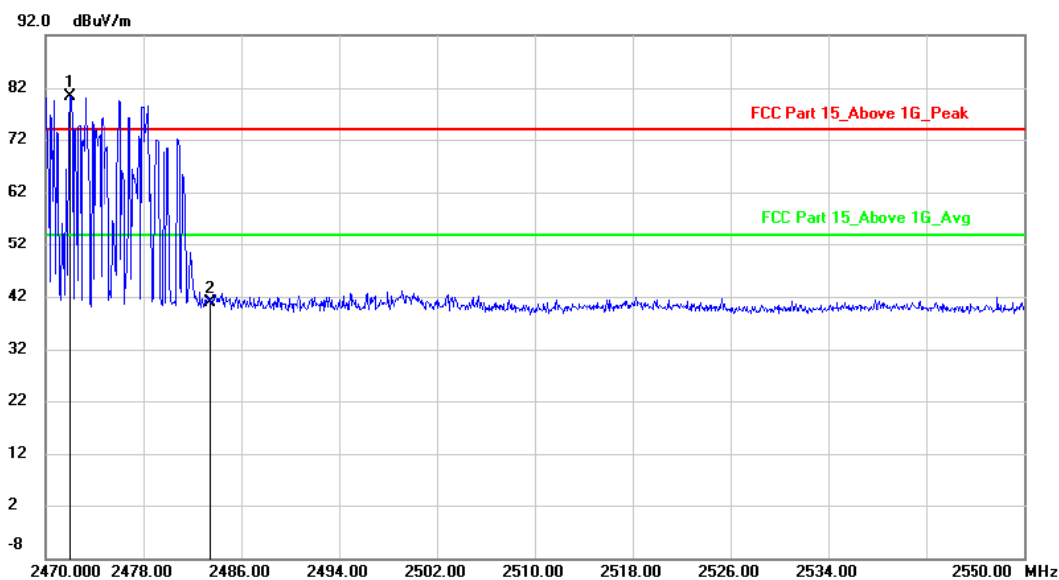


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2471.920	83.75	-3.39	80.36	74.00	6.36			peak
2		2483.500	44.34	-3.38	40.96	74.00	-33.04			peak hopping-on

Polarization: Vertical


Test Mode:

$\pi/4$  DQPSK-Low

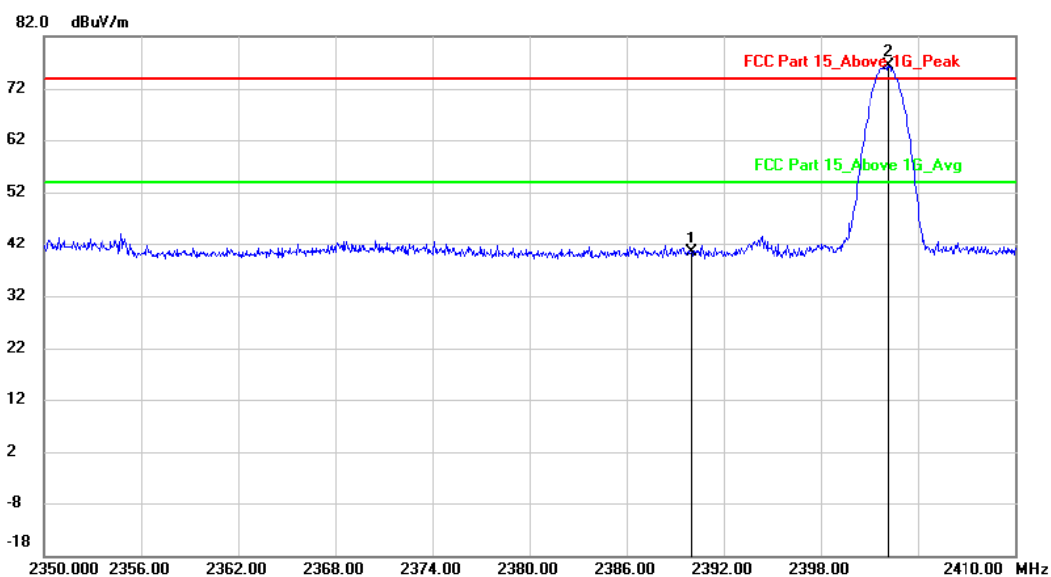

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	43.76	-3.40	40.36	74.00	-33.64			peak
2	*	2402.200	79.78	-3.41	76.37	74.00	2.37			peak

hopping-off

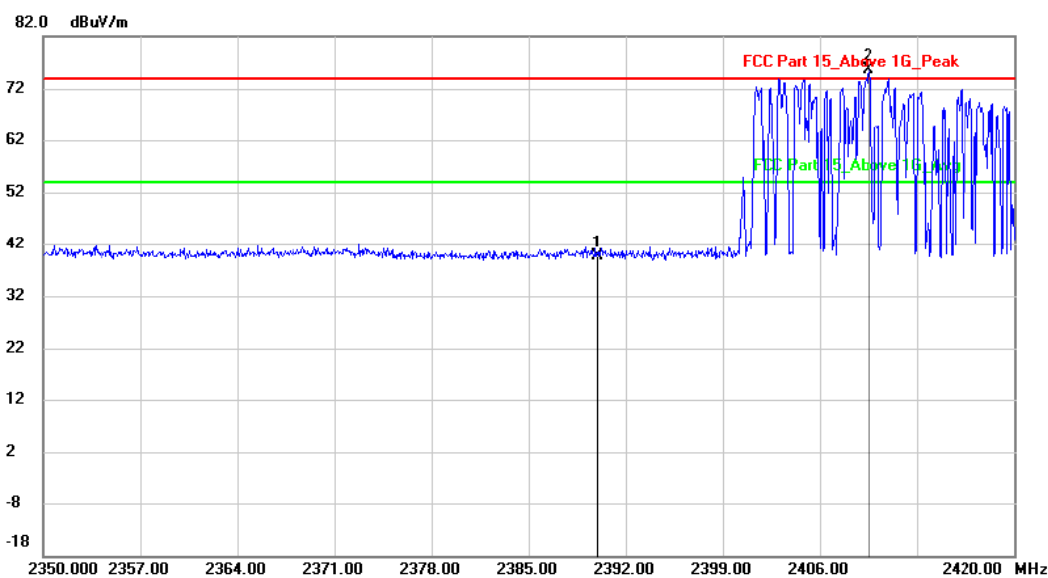


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	43.12	-3.40	39.72	74.00	-34.28			peak
2	*	2409.500	79.02	-3.40	75.62	74.00	1.62			peak

hopping-on

Polarization: Horizontal


Test Mode:

$\pi/4$  DQPSK-Low

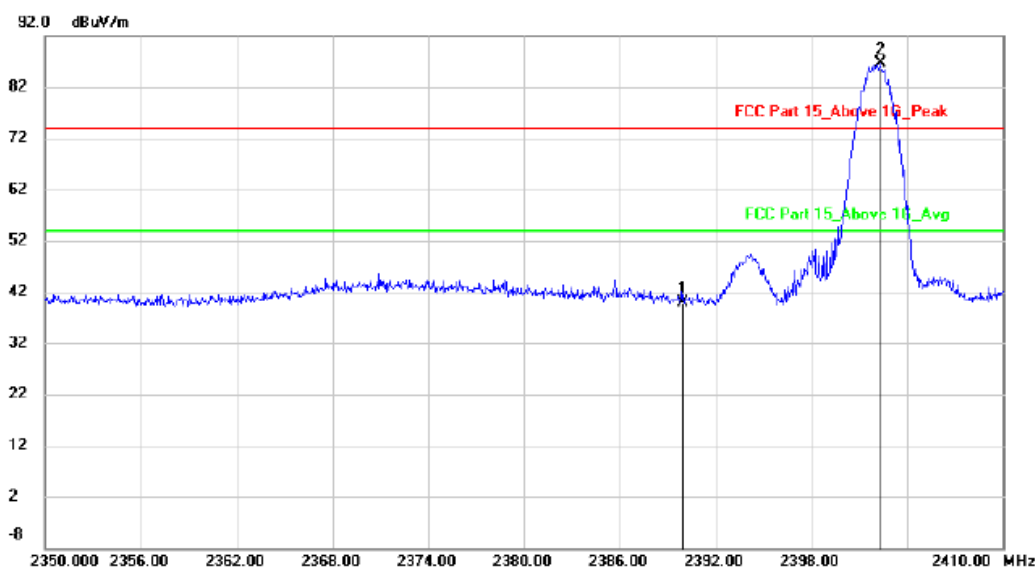

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	43.23	-3.40	39.83	74.00	-34.17			peak
2	*	2402.320	89.94	-3.41	86.53	74.00	12.53			peak

hopping-off

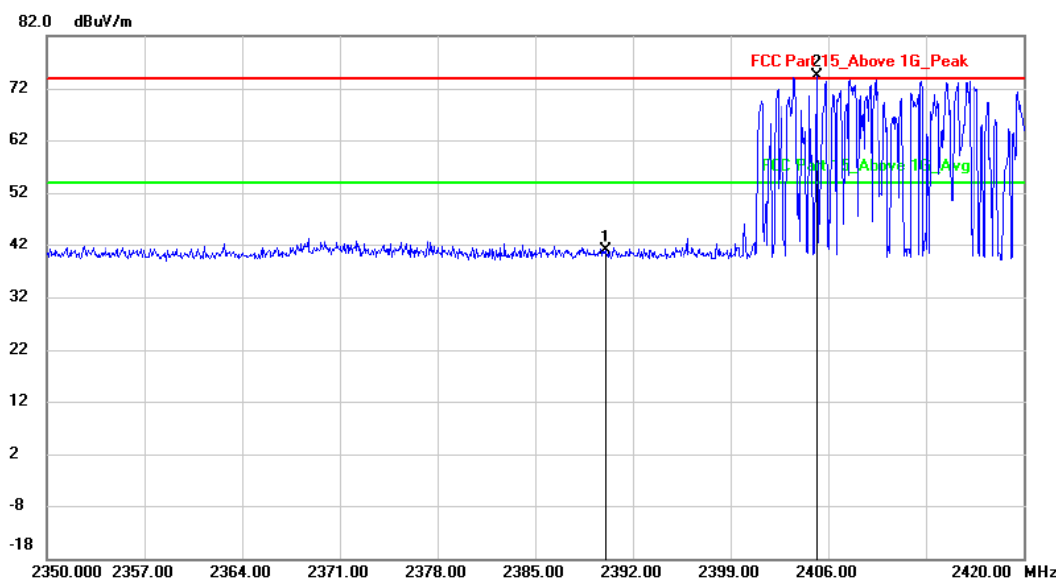


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	44.21	-3.40	40.81	74.00	-33.19			peak
2	*	2405.160	77.77	-3.41	74.36	74.00	0.36			peak

hopping-on

Polarization: Vertical


Test Mode:

$\pi/4$  DQPSK-High

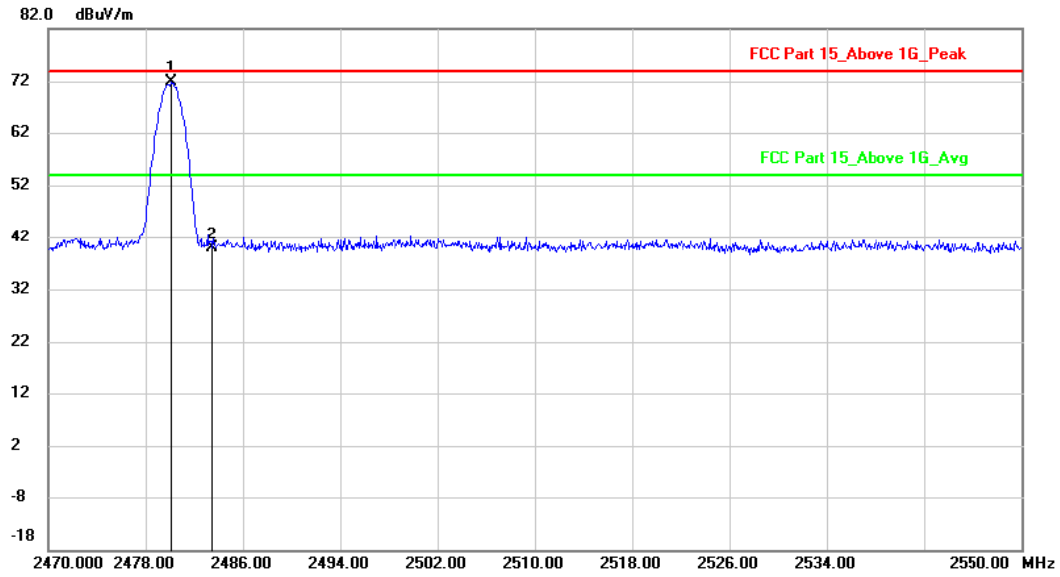

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	2480.080	75.22	-3.38	71.84	74.00	-2.16	peak	
2		2483.500	43.35	-3.38	39.97	74.00	-34.03	peak	

hopping-off

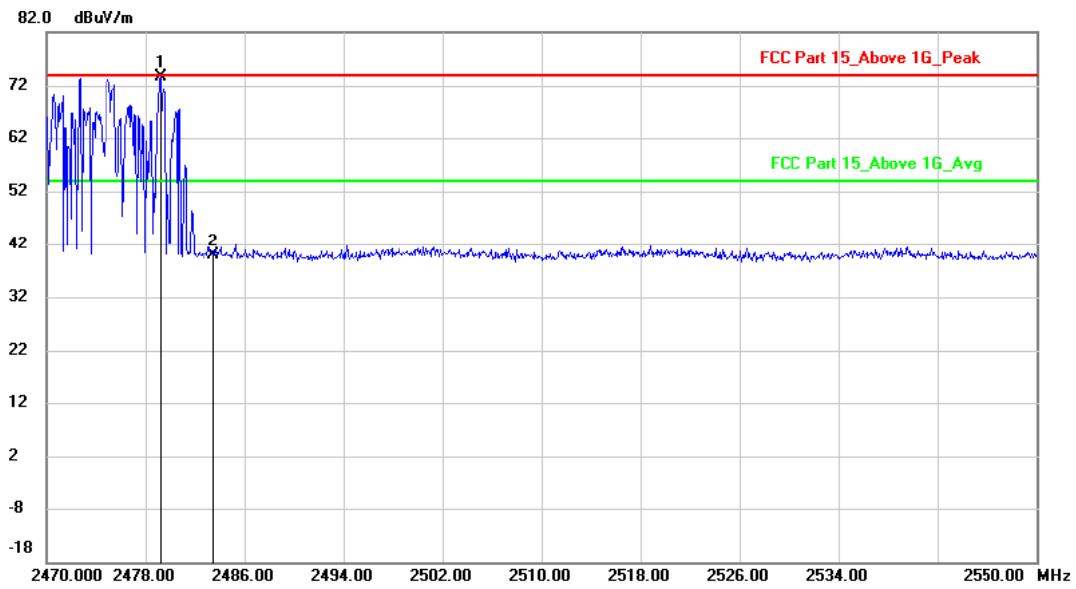


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	2479.200	77.11	-3.38	73.73	74.00	-0.27	peak	
2		2483.500	43.31	-3.38	39.93	74.00	-34.07	peak	

hopping-on

Polarization: Horizontal


Test Mode:

$\pi/4$  DQPSK-High

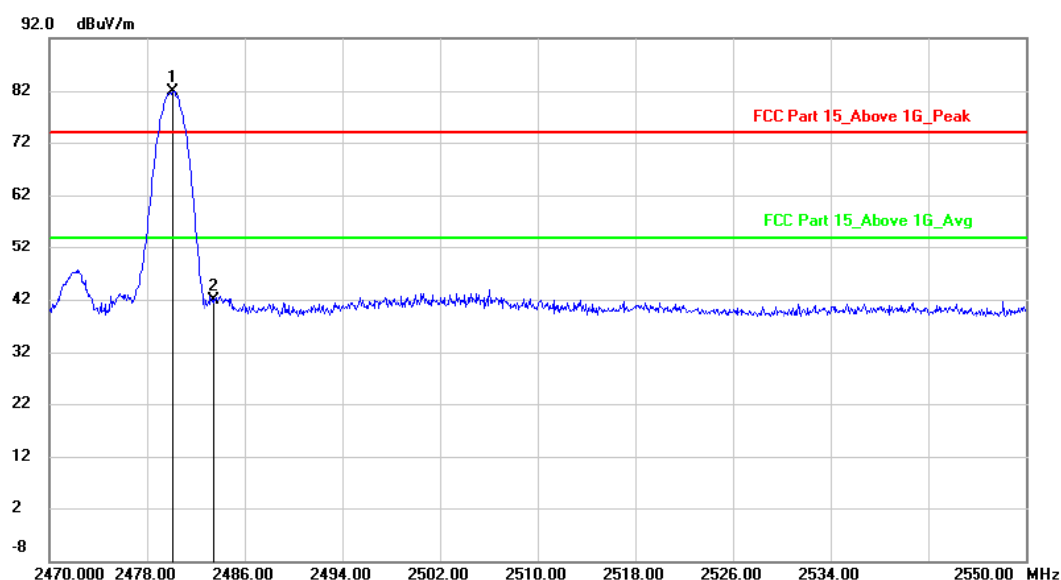

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2480.080	85.36	-3.38	81.98	74.00	7.98			peak
2		2483.500	45.24	-3.38	41.86	74.00	-32.14			peak

hopping-off

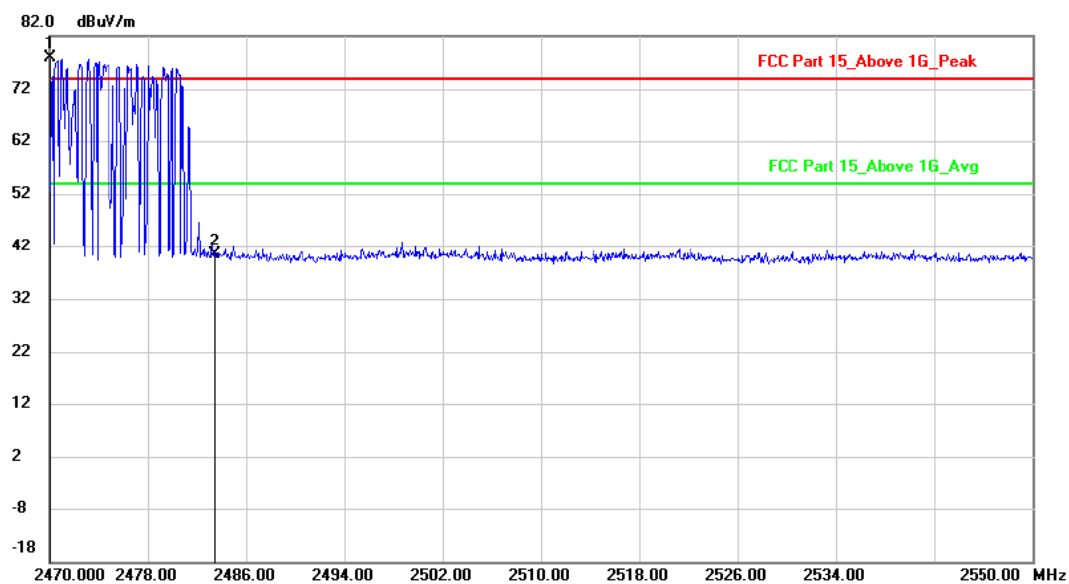


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2470.000	81.33	-3.39	77.94	74.00	3.94			peak
2		2483.500	43.78	-3.38	40.40	74.00	-33.60			peak

hopping-on


Polarization: Vertical

Test Mode:

8DPSK-Low

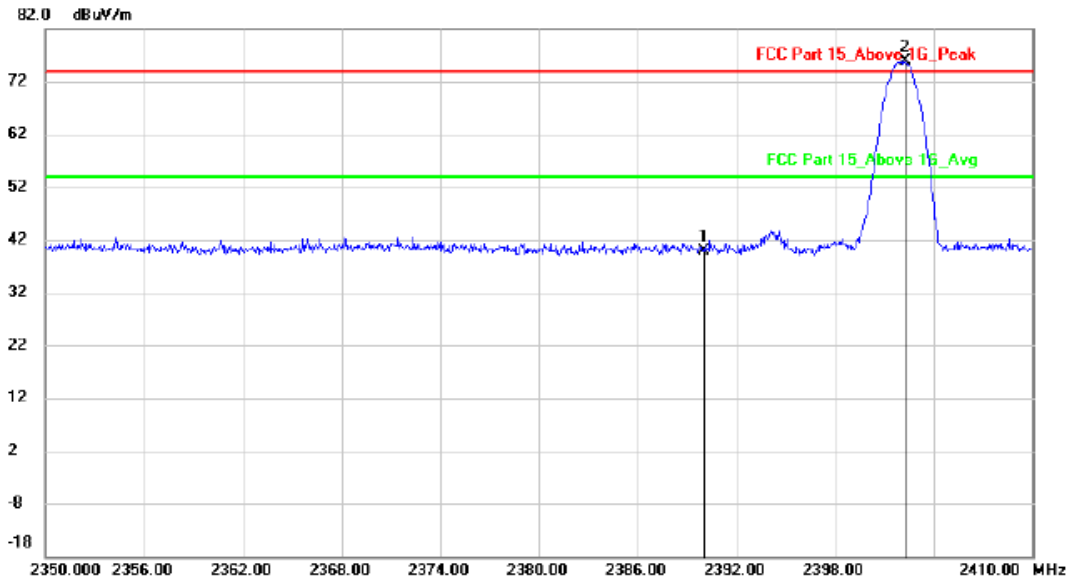

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		2390.000	43.33	-3.40	39.93	74.00	-34.07	peak		
2	*	2402.260	79.39	-3.41	75.98	74.00	1.98	peak		hopping-off

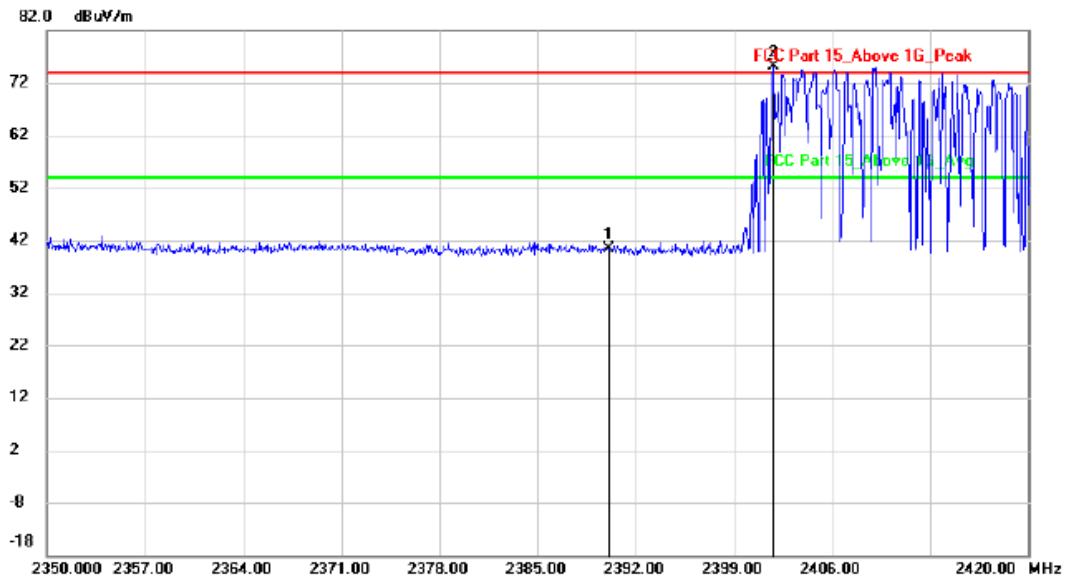


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		2390.000	43.75	-3.40	40.35	74.00	-33.65	peak		
2	*	2401.800	78.45	-3.41	75.04	74.00	1.04	peak		hopping-on




Polarization: Horizontal

Test Mode: 8DPSK-Low

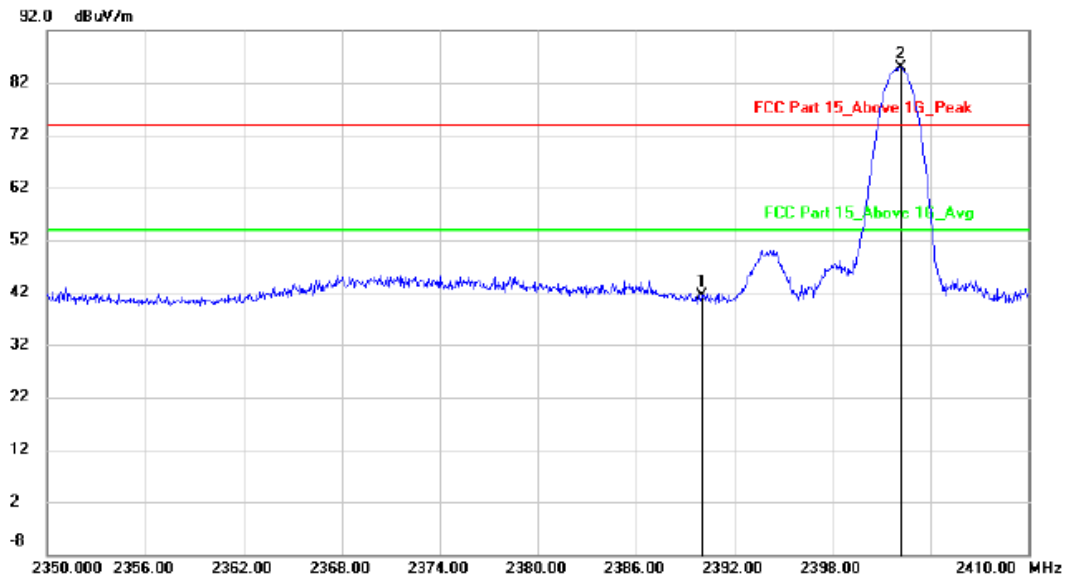

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		2390.000	44.74	-3.40	41.34	74.00	-32.66	peak	
2	*	2402.200	88.26	-3.41	84.85	74.00	10.85	peak	

hopping-off

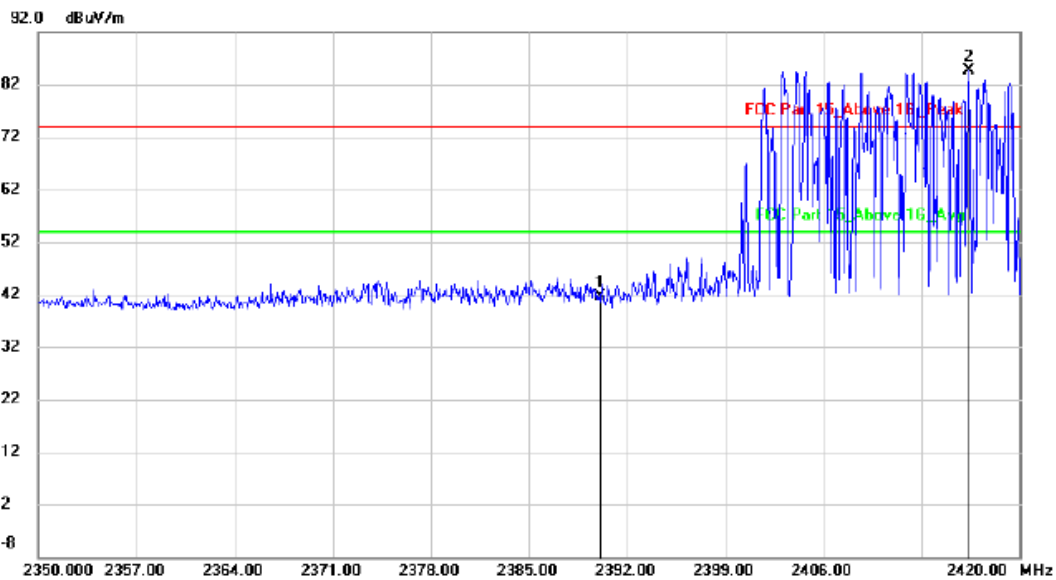


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		2390.000	44.95	-3.40	41.55	74.00	-32.45	peak	
2	*	2416.360	88.03	-3.41	84.62	74.00	10.62	peak	

hopping-on

Polarization: Vertical


Test Mode:

8DPSK-High

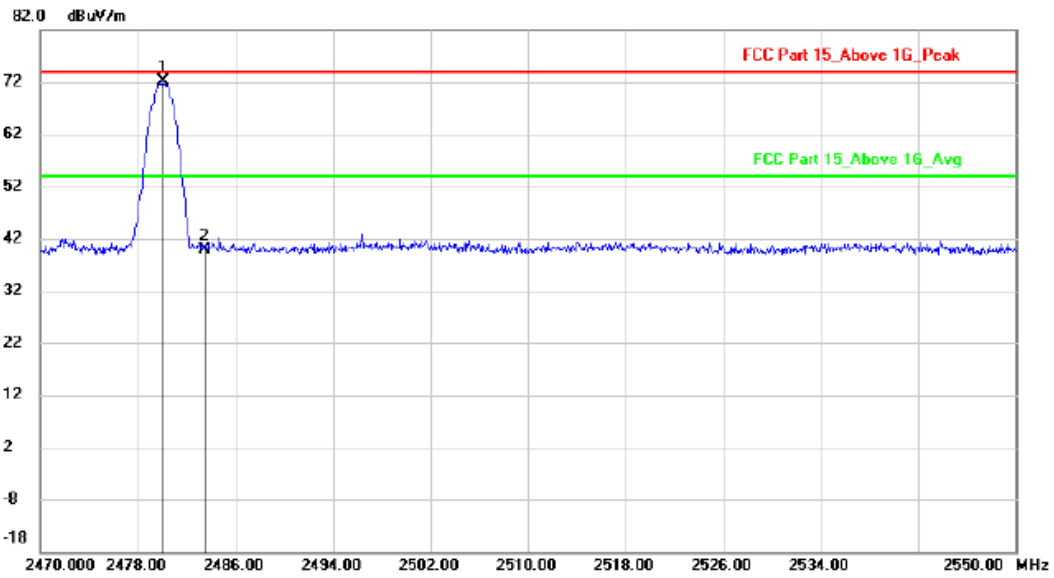

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	2480.080	75.43	-3.38	72.05	74.00	-1.95	peak			
2		2483.500	43.36	-3.38	39.98	74.00	-34.02	peak			

hopping-off

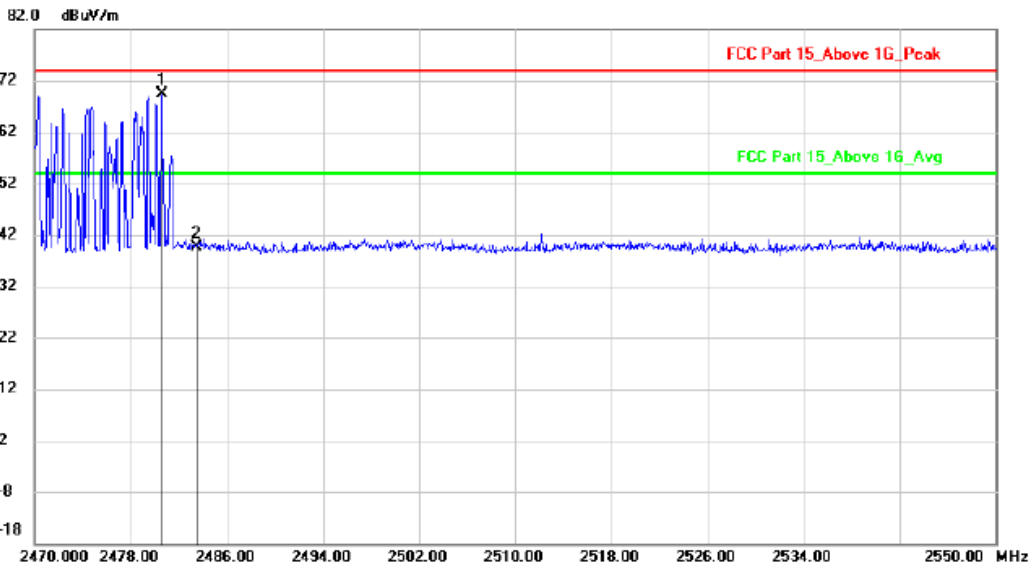


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	2480.560	72.71	-3.38	69.33	74.00	-4.67	peak			
2		2483.500	43.01	-3.38	39.63	74.00	-34.37	peak			

hopping-on


Polarization: Horizontal

Test Mode: 8DPSK-High

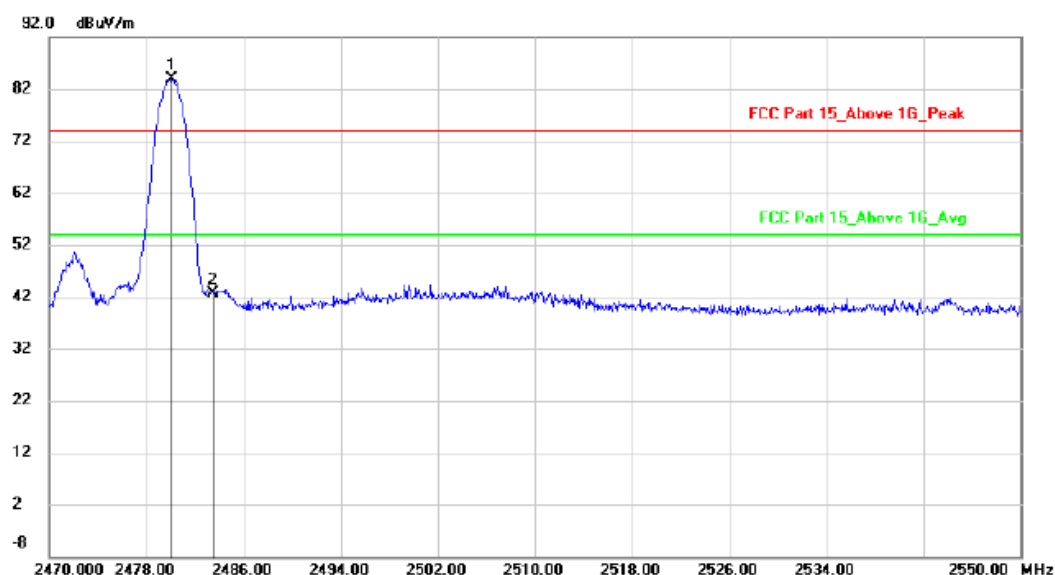

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	2480.080	87.29	-3.38	83.91	74.00	9.91	peak	
2		2483.500	45.93	-3.38	42.55	74.00	-31.45	peak	

hopping-off

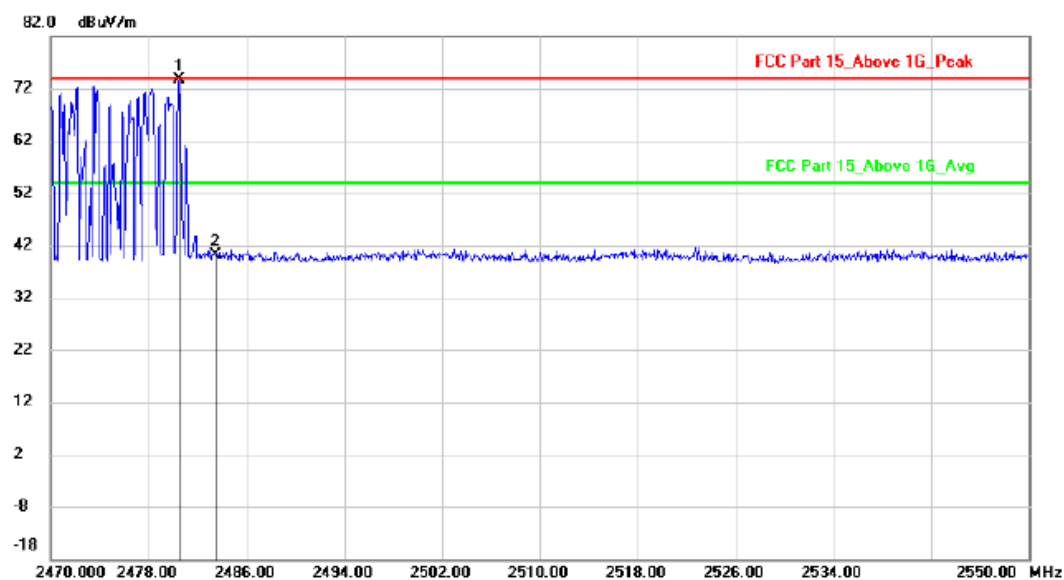

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	2480.480	76.89	-3.38	73.51	74.00	-0.49	peak	
2		2483.500	43.50	-3.38	40.12	74.00	-33.88	peak	

hopping-on


Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Conducted Method

GFSK Mode:

Test channel: Lowest channel

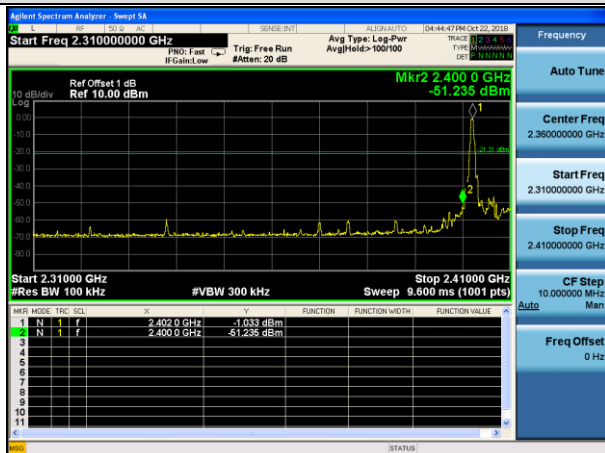


No-hopping mode

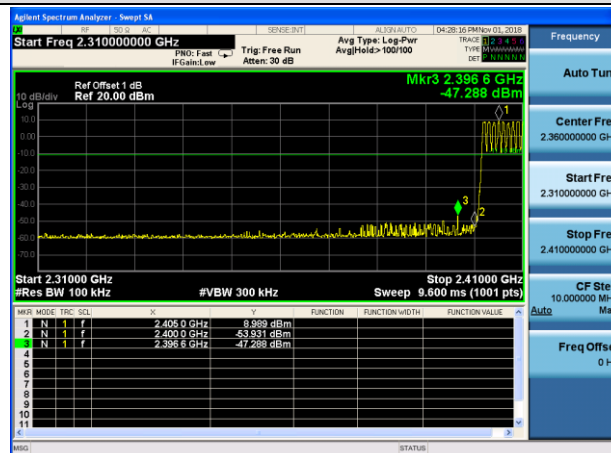


Hopping mode

Test channel: Highest channel

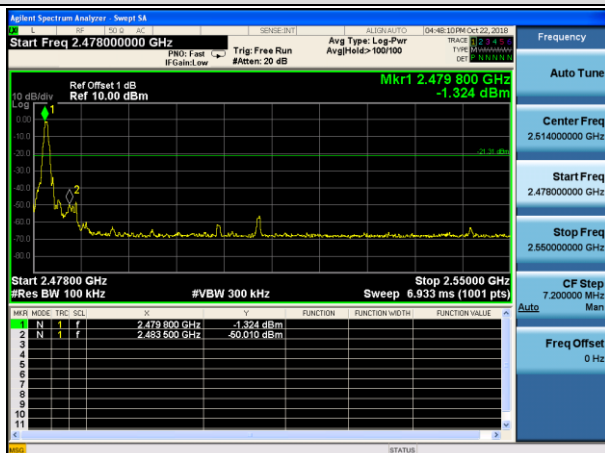


No-hopping mode

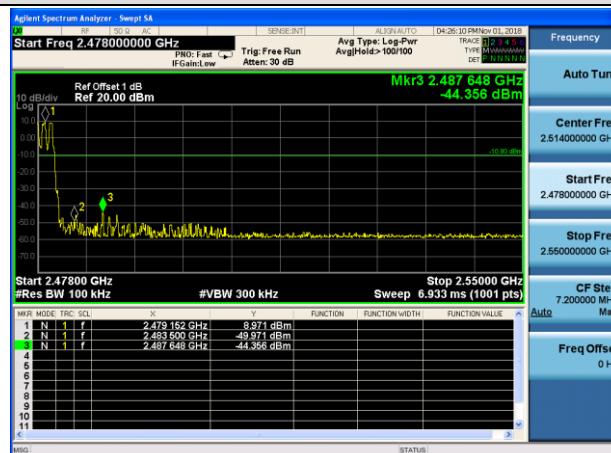


Hopping mode

Pi/4QPSK Mode:

Test channel: Lowest channel

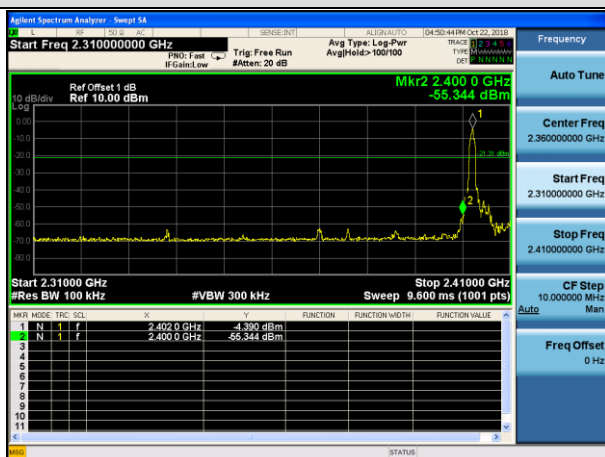


No-hopping mode

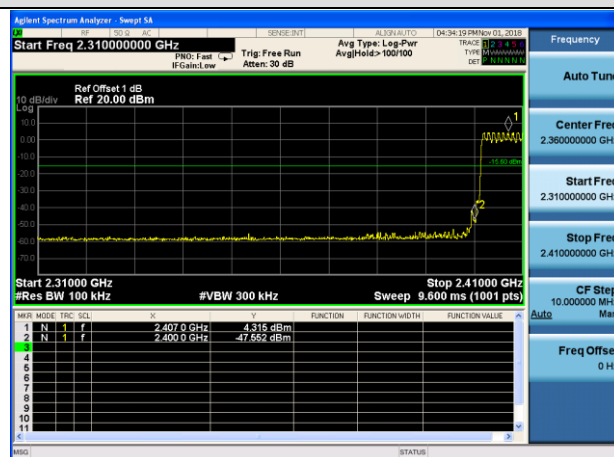


Hopping mode

Test channel: Highest channel

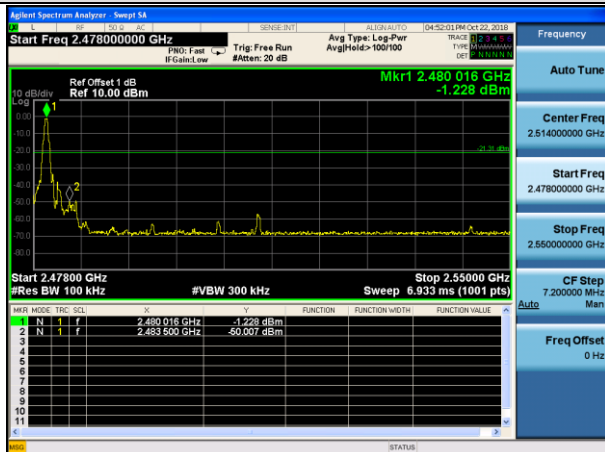

No-hopping mode

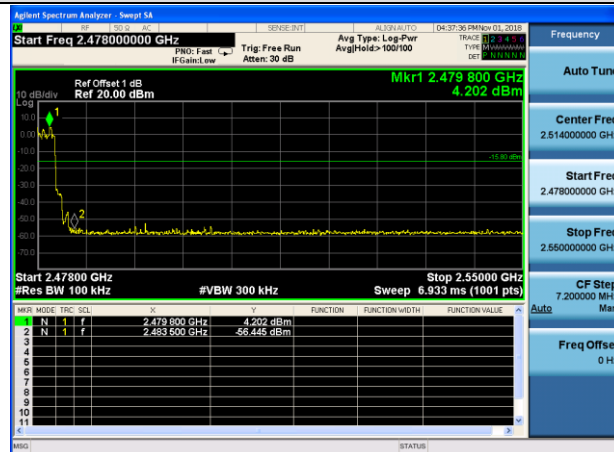


Hopping mode


8DPSK Mode:

Test channel:

Lowest channel

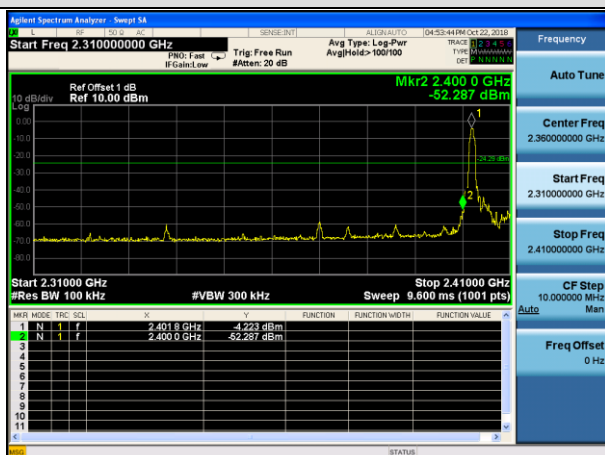


No-hopping mode

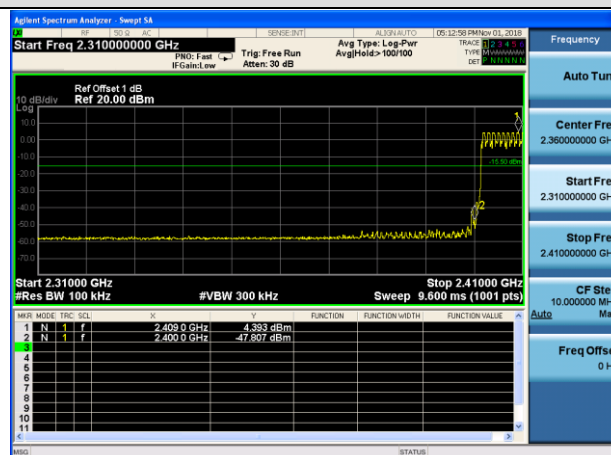


Hopping mode

Test channel:

Highest channel

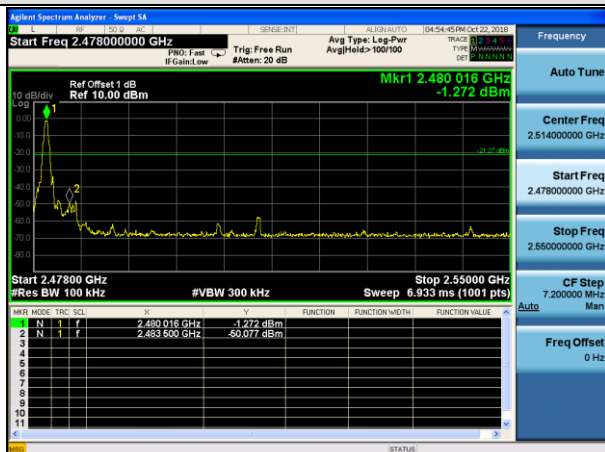


No-hopping mode

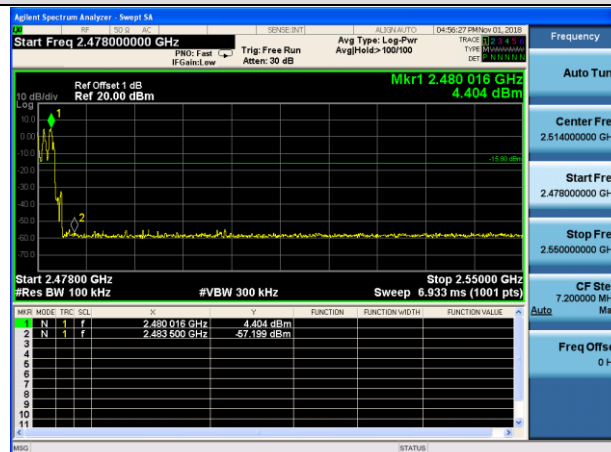

Hopping mode

## 10. POWER LINE CONDUCTED EMISSIONS

### 10.1. Block Diagram of Test Setup

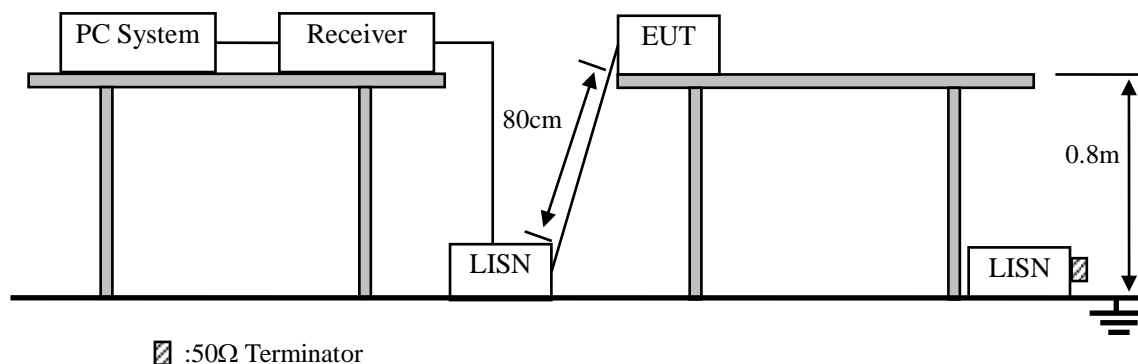

### 10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB( $\mu$ V)	Average Level dB( $\mu$ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

### 10.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

### 10.4. Test Result

PASS. (See below detailed test data)

Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Line:


Conducted Emission Measurement

File:11

Data:#1

Date: 2018-9-22

Time: 18:50:32

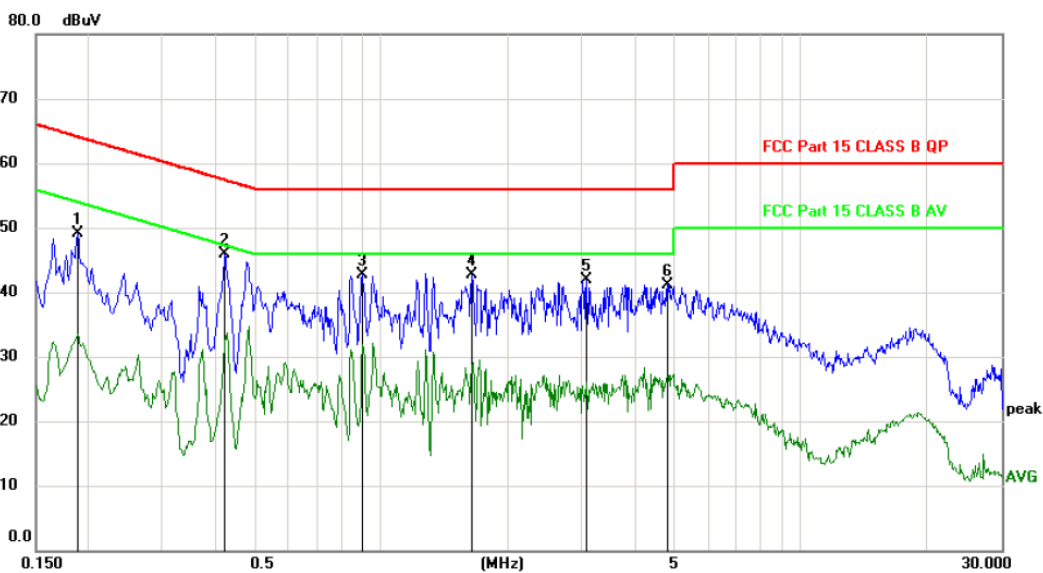

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1890	39.46	9.74	49.20	64.08	-14.88	peak	
2	*	0.4228	36.20	9.78	45.98	57.39	-11.41	peak	
3		0.9000	32.89	9.82	42.71	56.00	-13.29	peak	
4		1.6434	32.89	9.89	42.78	56.00	-13.22	peak	
5		3.0750	31.88	10.05	41.93	56.00	-14.07	peak	
6		4.8208	30.99	10.18	41.17	56.00	-14.83	peak	

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable



Neutral:


Conducted Emission Measurement

File :11

Data :#2

Date: 2018-9-22

Time: 18:53:08

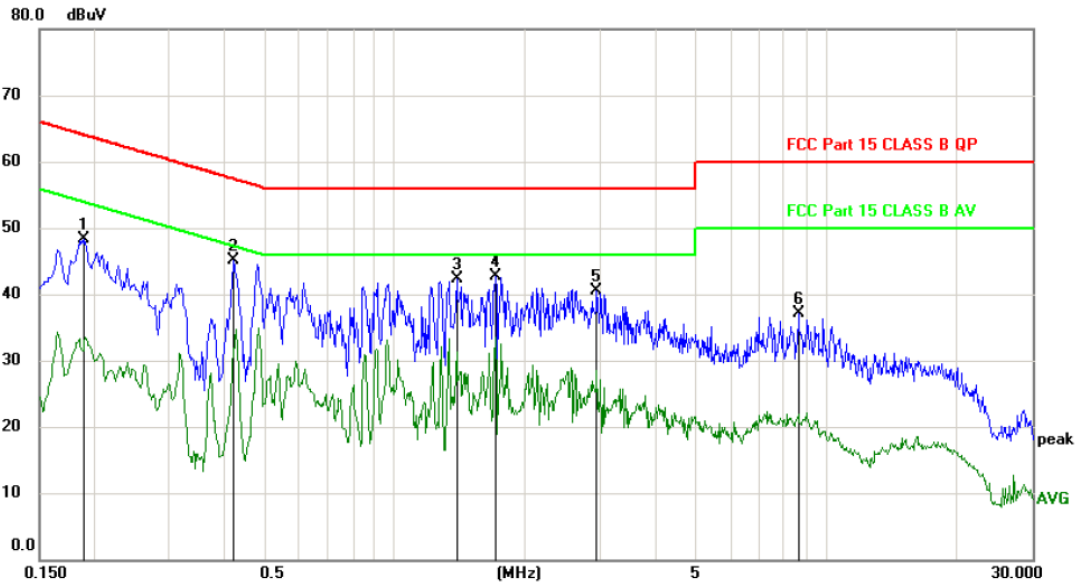

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1904	38.54	9.74	48.28	64.02	-15.74	peak	
2	*	0.4228	35.38	9.78	45.16	57.39	-12.23	peak	
3		1.3889	32.47	9.86	42.33	56.00	-13.67	peak	
4		1.7100	32.82	9.90	42.72	56.00	-13.28	peak	
5		2.9400	30.43	10.04	40.47	56.00	-15.53	peak	
6		8.6188	26.72	10.29	37.01	60.00	-22.99	peak	

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz (AC 120V/60Hz) was listed in this report.

## **11. ANTENNA REQUIREMENTS**

### **11.1. Limit**


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **11.2. Result**

The EUT antenna is Internal Antenna. It complies with the standard requirement.

## 12. TEST SETUP PHOTO

### 12.1. Photos of Radiated emission

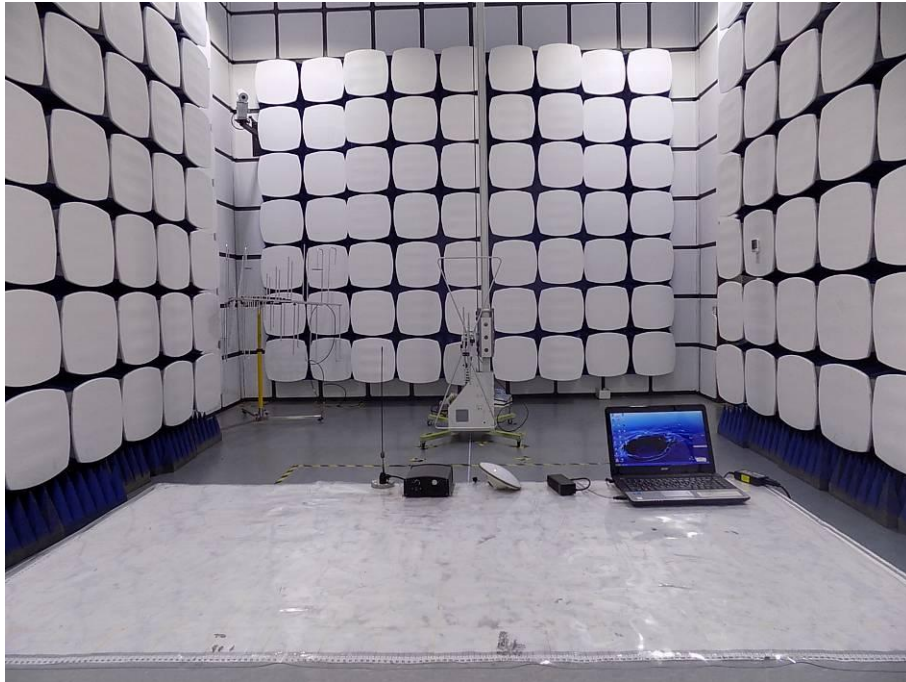

## 12.2.Photos of Conducted Emission test



### **13.PHOTOS OF EUT**

Please refer to the report T1881484 01.

**-----THE END OF REPORT-----**