

FCC Report (GSM&WCDMA)

Applicant: Shanghai Huace Navigation Technology LTD.
Address of Applicant: Building C, 599 Gaojing Road, Qingpu District, Shanghai, China
Manufacturer/Factory: Shanghai Huace Navigation Technology LTD.
Address of Manufacturer/Factory: Building C, 599 Gaojing Road, Qingpu District, Shanghai, China
Equipment Under Test (EUT)
Product Name: Handheld GNSS Data Collector
Model No.: LT700
Trade mark: 
FCC ID: SY4-B01012
Applicable standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part22 Subpart H
FCC CFR Title 47 Part24 Subpart E
Date of sample receipt: January 15, 2018
Date of Test: January 15, 2018-April 13, 2018
Date of report issued: April 13, 2018
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

1 Version

Version No.	Date	Description
00	April 13, 2018	Original

Prepared By:




Date:

April 13, 2018

Project Engineer

Check By:



Date:

April 13, 2018

Reviewer

2 Contents

Page

1	VERSION	2
2	CONTENTS	3
3	TEST SUMMARY	4
4	GENERAL INFORMATION	5
4.1	GENERAL DESCRIPTION OF EUT	5
4.2	RELATED SUBMITTAL(S) / GRANT (S).....	7
4.3	TEST METHODOLOGY.....	7
4.4	TEST FACILITY.....	7
4.5	TEST LOCATION.....	7
5	TEST INSTRUMENTS LIST	8
6	SYSTEM TEST CONFIGURATION	9
6.1	TEST MODE	9
6.2	CONFIGURATION OF TESTED SYSTEM.....	10
6.3	CONDUCTED OUTPUT POWER	11
6.4	PEAK-TO-AVERAGE RATIO	13
6.5	OCCUPY BANDWIDTH.....	14
6.6	MODULATION CHARACTERISTIC	20
6.7	OUT OF BAND EMISSION AT ANTENNA TERMINALS	20
6.8	ERP, EIRP MEASUREMENT	32
6.9	FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	42
6.10	FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	48
6.11	FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT.....	52
7	TEST SETUP PHOTO	56
8	EUT CONSTRUCTIONAL DETAILS	57

3 Test Summary

Test Item	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Pass* (Please refer to SAR Report)
RF Output Power	Part 2.1046 Part 22.913 (a)(2) Part 24.232 (c)	Pass
Peak-to-Average Ratio	Part 2.1046 Part 24.232 (d)	Pass
Modulation Characteristics	Part 2.1047	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917 Part 24.238	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 (a) Part 24.238 (a)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a)	Pass
Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a)	Pass
Frequency stability vs. temperature	Part 2.1055(a)(1)(b)	Pass
Frequency stability vs. voltage	Part 2.1055(d)(1)(2)	Pass

Pass: The EUT complies with the essential requirements in the standard.

4 General Information

4.1 General Description of EUT

Product Name:	Handheld GNSS Data Collector
Model No.:	LT700
Test Model No:	LT700
<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are color and model name for commercial purpose.</i>	
Sample(s) Status:	Engineer sample
Quantity of tested samples	1
Serial No.:	T180507
Tested Sample(s) ID:	N/A
Hardware Version:	A8001_MPCB_V3.0_0912
Software Version:	A8001_V1.0
Support Networks:	GSM, GPRS, EGPRS, WCDMA
Support Bands:	GSM850, PCS1900, WCDMA Band V, WCDMA Band II
TX Frequency:	GSM850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz WCDMA Band V: 826.40MHz -846.60MHz WCDMA Band II: 1852.40MHz -1907.60MHz
GPRS Class:	12
EGPRS Class	10
Modulation type:	GSM/GPRS: GMSK EGPRS: GMSK/8PSK WCDMA Band II/V: QPSK
Antenna type:	PIFA antenna
Antenna gain:	-1.66dBi(max.) For GSM 850/ WCDMA Band V 1.95dBi(max.) For DCS 1900/WCDMA Band II
Power supply:	DC 3.8V by battery or DC 5V from adapter input AC 120V, 60Hz

Operation Frequency List:

GSM 850		PCS1900		WCDMA Band V		WCDMA Band II	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20	4132	826.40	9262	1852.40
129	824.40	513	1850.40	4133	826.60	9263	1852.60
· ∴	· ∴	· ∴	· ∴	· ∴	· ∴	· ∴	· ∴
189	836.40	660	1879.80	4181	836.20	9399	1879.80
190	836.60	661	1880.00	4182	836.40	9400	1880.00
191	836.80	662	1880.20	4183	836.60	9401	1880.20
· ∴	· ∴	· ∴	· ∴	· ∴	· ∴	· ∴	· ∴
250	848.60	809	1909.60	4232	846.40	9537	1907.40
251	848.80	810	1909.80	4233	846.60	9538	1907.60

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Final test channel:

GSM 850		PCS1900		WCDMA Band V		WCDMA Band II	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20	4132	826.40	9262	1852.40
190	836.60	661	1880.00	4183	836.60	9400	1880.00
251	848.80	810	1909.80	4233	846.60	9538	1907.60

4.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

4.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on TIA/EIA 603 and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

4.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

4.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5 Test Instruments list

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
9	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
10	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
11	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
13	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
15	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018
16	Universal radio communication tester	Rohde & Schwarz	CMU200	GTS235	June 28 2017	June 27 2018
17	Signal Generator	Rohde & Schwarz	SML03	GTS236	June 28 2017	June 27 2018
18	Temp. Humidity/ Barometer	Oregon Scientific	BA-888	GTS248	June 28 2017	June 27 2018
19	D.C. Power Supply	Instek	PS-3030	GTS232	NA	NA
20	Splitter	Agilent	11636B	GTS237	June 28 2017	June 27 2018
21	Power meter	Rohde & Schwarz	NRVS	GTS238	June 28 2017	June 27 2018
22	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
23	Temp.&Humidity chamber	Chuang wei	GDS-225	GTS005-1	June 28 2017	June 27 2018
24	Highpass filter	Micro-Tronics	HPM50108	GTS549	June 28 2017	June 27 2018
25	Highpass filter	Micro-Tronics	HPM50111	GTS550	June 28 2017	June 27 2018
26	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS588	May 07 2017	May 06 2018
27	Signal Analyzer	Agilent	N9020A	GTS600	Sep 29, 2017	Sep 28, 2018

6 System test configuration

6.1 Test mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Test modes		
Band	Radiated	Conducted
GSM 850	<ul style="list-style-type: none"> ■ GSM link ■ GPRS 1 link ■ EPRS 1 link 	<ul style="list-style-type: none"> ■ GSM link ■ GPRS 1 link ■ EGPRS 1 link
PCS 1900	<ul style="list-style-type: none"> ■ GSM link ■ GPRS 1 link ■ EGPRS 1 link 	<ul style="list-style-type: none"> ■ GSM link ■ GPRS 1 link ■ EGPRS 1 link
WCDMA II	<ul style="list-style-type: none"> ■ RMC 12.2Kbps link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps link
WCDMA Band V	<ul style="list-style-type: none"> ■ RMC 12.2Kbps link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps link


Note: The maximum power levels are GSM mode for GMSK link, GPRS multi-slot class 8 mode for GMSK link, EGPRS multi-slot class 8 mode for 8PSK link, RMC12.2Kbps mode for WCDMA Band V/II. only these modes were used for all tests.

The conducted power tables are as follows:


Conducted Power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM (GMSK, 1 TX slot)	32.50	32.57	32.59	29.17	28.16	29.36
GPRS (GMSK, 1 TX slot)	32.51	32.58	32.55	29.19	29.18	28.38
GPRS (GMSK, 2 TX slot)	31.78	31.82	31.88	29.12	28.13	27.81
GPRS (GMSK, 3 TX slot)	29.75	29.93	30.05	27.23	26.40	26.20
GPRS (GMSK, 4 TX slot)	28.42	28.65	28.83	26.05	25.32	25.24
EGPRS (8PSK, 1 TX slot)	30.05	29.96	29.79	27.28	26.80	26.35
EGPRS (8PSK, 2 TX slot)	29.42	29.37	29.21	26.30	25.92	25.30
EGPRS (8PSK, 3 TX slot)	27.92	27.80	27.52	23.93	23.49	22.91
EGPRS (8PSK, 4 TX slot)	26.93	26.75	26.55	22.81	22.47	21.81

Band	Conducted Power (dBm)					
	WCDMA Band II			WCDMA Band V		
Channel	9262	9400	9538	4132	4183	4233
Frequency	1852.4	1880.0	1907.6	826.4	836.6	846.6
RMC 12.2Kbps	20.40	20.40	20.02	22.78	22.70	22.88
HSDPA Subtest-1	20.36	20.36	19.92	21.83	21.68	21.87
HSDPA Subtest-2	20.41	20.36	20.02	21.78	21.39	21.79
HSDPA Subtest-3	20.11	20.24	19.64	21.69	21.64	21.83
HSDPA Subtest-4	20.28	20.34	19.89	21.82	21.71	21.85
HSUPA Subtest-1	20.36	20.33	19.84	21.82	21.66	21.87
HSUPA Subtest-2	20.47	20.41	19.64	21.83	21.56	21.76
HSUPA Subtest-3	20.33	20.35	19.85	21.82	21.68	21.58
HSUPA Subtest-4	20.12	20.28	19.98	21.80	21.71	21.63
HSUPA Subtest-5	20.38	20.33	20.01	21.82	21.68	21.81
AMR	20.38	20.12	19.83	21.79	21.65	21.79

6.2 Configuration of Tested System

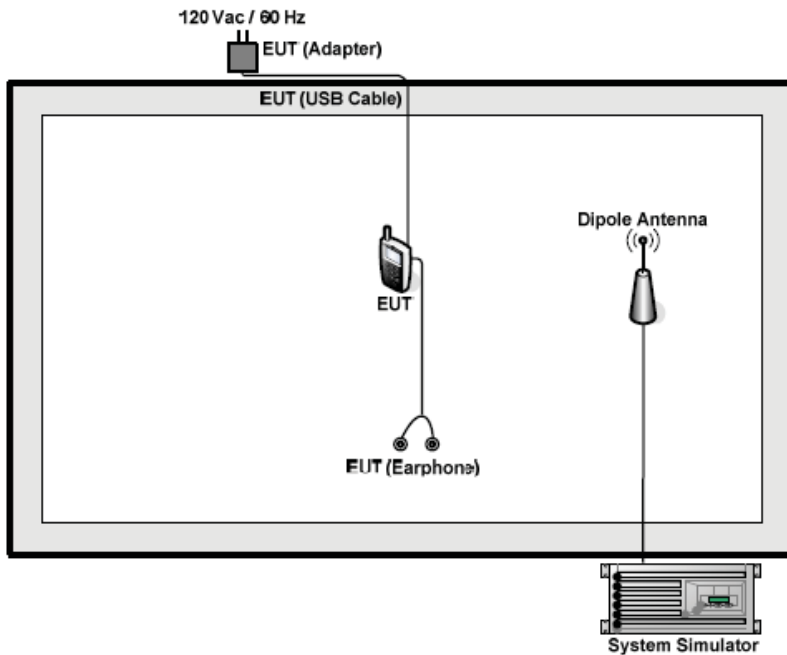

6.3 Conducted Output Power

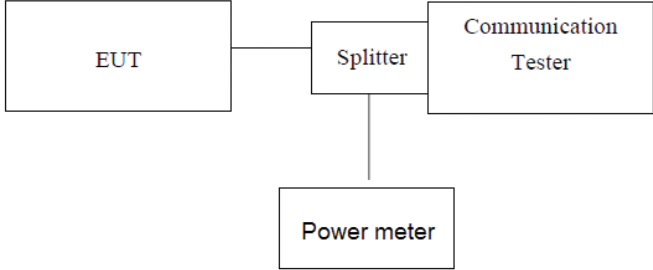
Test Requirement:	FCC part22.913(a) and FCC part24.232(b)
Test Method:	FCC part2.1046
Limit:	GSM850, WCDMA Band V: 7W PCS1900, WCDMA Band II: 2W
Test setup:	 <p style="text-align: center;"><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Procedure:	<ol style="list-style-type: none"> 1. The transmitter output port was connected to base station. 2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement. 3. Set EUT at maximum power through base station. 4. Select lowest, middle, and highest channels for each band and different modulation. 5. Measure the maximum burst average power.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	32.50	32.57	32.59	29.17	28.16	29.36
GPRS (GMSK, 1-Slot)	32.51	32.58	32.55	29.19	29.18	28.38
GPRS (GMSK, 2-Slot)	31.78	31.82	31.88	29.12	28.13	27.81
GPRS (GMSK, 3-Slot)	29.75	29.93	30.05	27.23	26.40	26.20
GPRS (GMSK, 4-Slot)	28.42	28.65	28.83	26.05	25.32	25.24
EGPRS(8PSK, 1-Slot)	30.05	29.96	29.79	27.28	26.80	26.35
EGPRS(8PSK, 2-Slot)	29.42	29.37	29.21	26.30	25.92	25.30
EGPRS(8PSK, 3-Slot)	27.92	27.80	27.52	23.93	23.49	22.91
EGPRS(8PSK, 4-Slot)	26.93	26.75	26.55	22.81	22.47	21.81

Fram- Average Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	23.47	23.54	23.56	20.14	19.13	20.33
GPRS (GMSK, 1-Slot)	23.48	23.55	23.52	20.16	20.15	19.35
GPRS (GMSK, 2-Slot)	25.76	25.80	25.86	23.10	22.11	21.79
GPRS (GMSK, 3-Slot)	25.49	25.67	25.79	22.97	22.14	21.94
GPRS (GMSK, 4-Slot)	25.41	25.64	25.82	23.04	22.31	22.23
EGPRS(8PSK, 1-Slot)	21.02	20.93	20.76	18.25	17.77	17.32
EGPRS(8PSK, 2-Slot)	23.40	23.35	23.19	20.28	19.90	19.28
EGPRS(8PSK, 3-Slot)	23.66	23.26	23.26	19.67	19.23	18.65
EGPRS(8PSK, 4-Slot)	23.92	23.74	23.54	19.80	19.46	18.80

6.4 Peak-to-Average Ratio

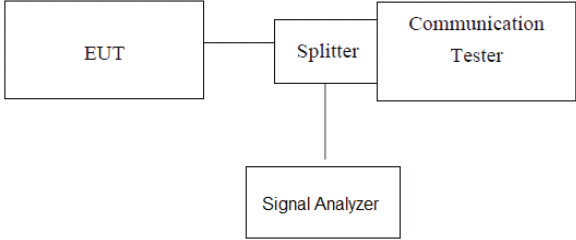
Test Requirement:	FCC part24.232(d)
Test Method:	FCC part2.1046
Limit:	13db
Test setup:	 <p><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Procedure:	<ol style="list-style-type: none"> 1. The transmitter output port was connected to base station. 2. The RF output of EUT was connected to the Signal Analyzer by RF cable and attenuator, the path loss was compensated to the results for each measurement. 3. Set EUT at maximum power through base station. 4. Select lowest, middle, and highest channels for each band and different modulation. 5. Measure the maximum burst average power. 6. Record the maximum peak-to-average ratio value.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement data

Test mode	Peak to Average Ratio (dB)			Limit (dB)	Result
	Low Ch.	Middle Ch.	High Ch.		
GSM/TM1/GSM1900	0.82	0.67	0.95	13	PASS
GSM/TM3/EDGE1900	3.63	3.85	3.79		

Test mode	Peak to Average Ratio (dB)			Limit (dB)	Result
	Low Ch.	Middle Ch.	High Ch.		
WCDMA Band II	3.15	2.78	2.66	13	PASS
WCDMA Band V	3.14	2.71	3.11		

6.5 Occupancy Bandwidth

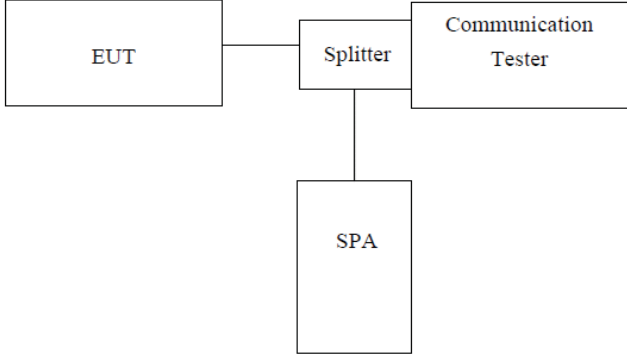Test Requirement:	FCC part22.913(a) and FCC part24.232(b)
Test Method:	FCC part2.1049
Test setup:	 <p><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
GSM 850 (GSM link)	128	824.20	247.24	322.5
	190	836.60	243.22	316.1
	251	848.80	245.02	323.7
GSM 850 (GPRS 1 link)	128	824.20	247.78	318.6
	190	836.60	244.01	315.2
	251	848.80	246.83	315.0
GSM 850 (EGPRS 1 link)	128	824.20	244.52	319.1
	190	836.60	246.87	321.7
	251	848.80	245.19	318.9
PCS 1900 (GSM link)	512	1850.20	243.01	320.4
	661	1880.00	246.06	318.2
	810	1909.80	247.10	322.4
PCS 1900 (GPRS 1 link)	512	1850.20	245.01	303.9
	661	1880.00	245.91	318.0
	810	1909.80	250.62	320.3
PCS 1900 (EGPRS 1 link)	512	1850.20	247.64	323.7
	661	1880.00	243.68	316.5
	810	1909.80	244.01	318.9
WCDMA Band V (RMC 12.2Kbps link)	4132	826.40	4103.3	4702.00
	4183	836.60	4133.4	4719.00
	4233	846.60	4098.3	4709.00
WCDMA Band II (RMC 12.2Kbps link)	9262	1852.4	4116.3	4719.00
	9400	1880.0	4116.0	4706.00
	9538	1907.6	4124.9	4700.00

Test plot as follows:

GSM 850 (GSM link)	GSM 850 (GPRS 1 link)
--------------------	-----------------------



Lowest channel



Lowest channel



Middle channel



Middle channel



Highest channel




Highest channel


GSM 850 (EGPRS 1 link)	PCS 1900 (GSM link)
------------------------	---------------------




Lowest channel

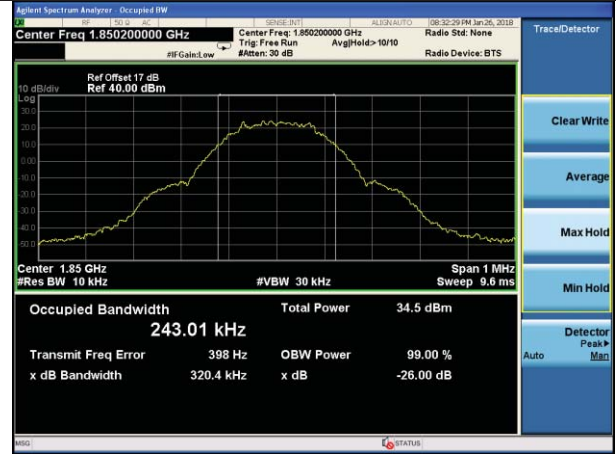


Lowest channel

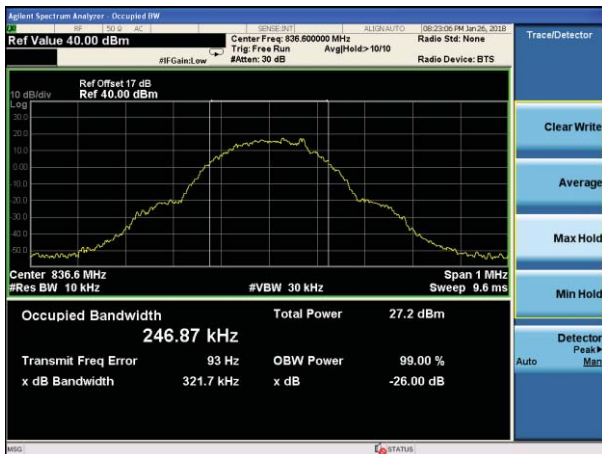

Middle channel

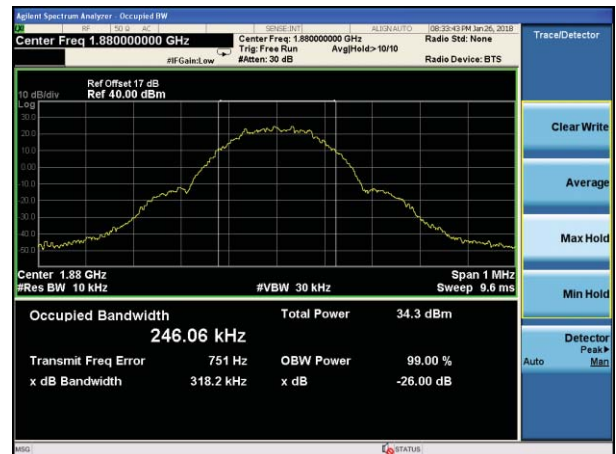

Middle channel

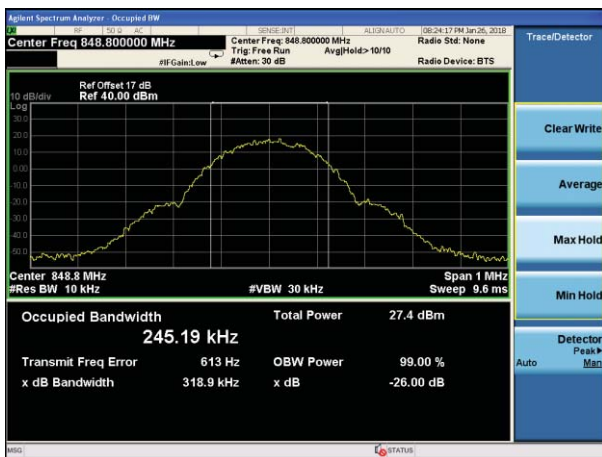

Highest channel



Highest channel


PCS 1900 (GPRS 1 link)	PCS 1900 (EGPRS 1 link)
------------------------	-------------------------




Lowest channel




Lowest channel

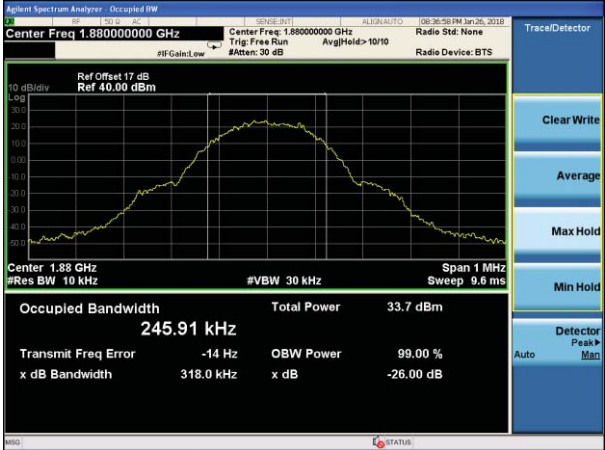


Middle channel

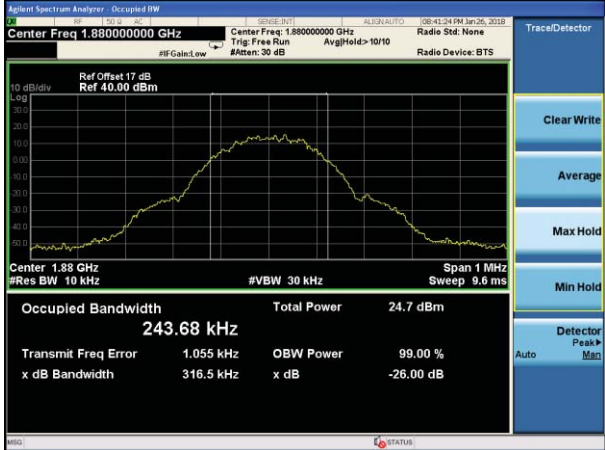

Middle channel

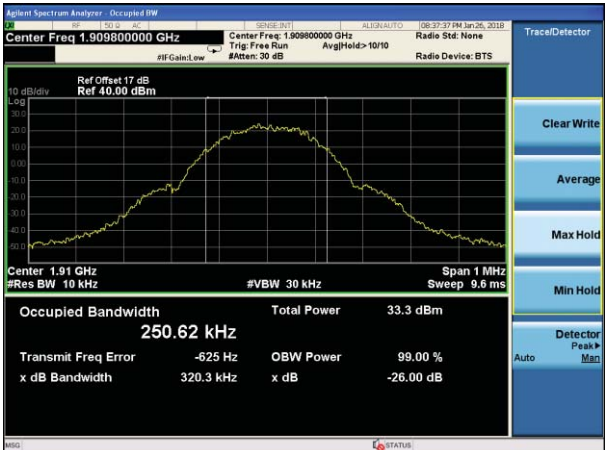


Highest channel

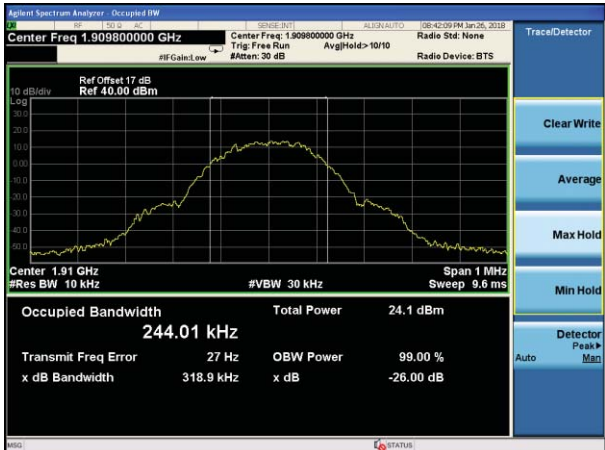

Highest channel

WCDMA Band V (RMC 12.2Kbps link)	WCDMA Band II (RMC 12.2Kbps link)
----------------------------------	-----------------------------------

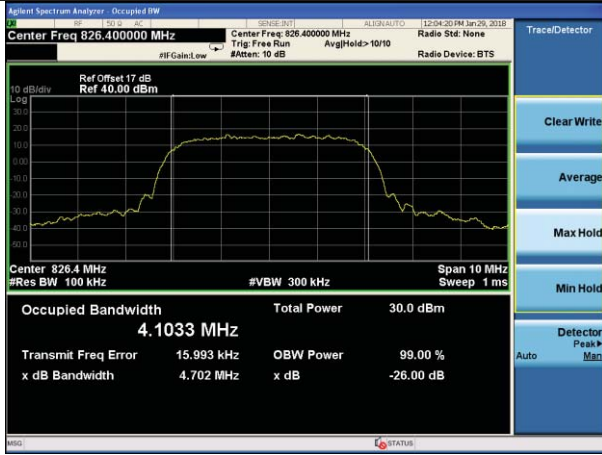


Lowest channel




Lowest channel



Middle channel

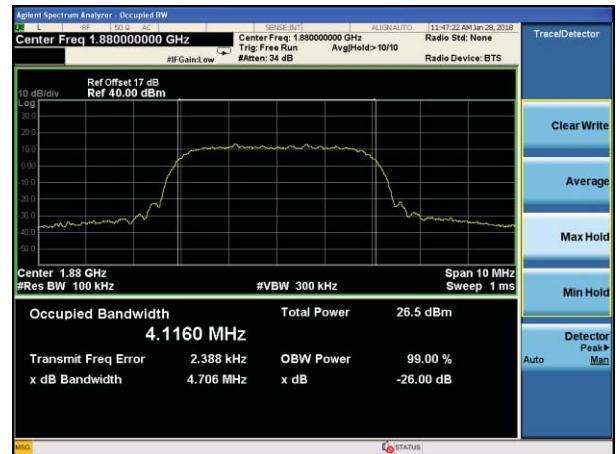

Middle channel

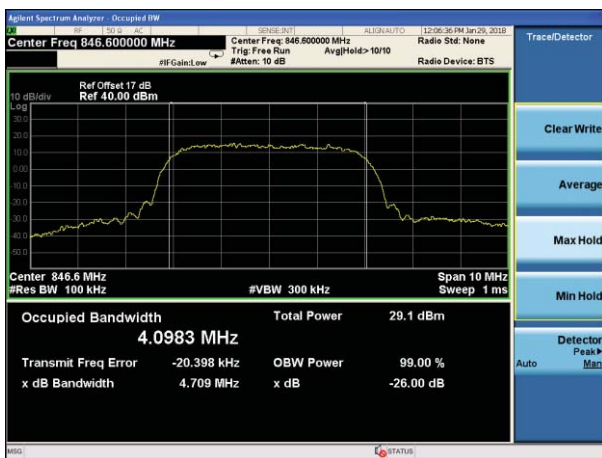

Highest channel



Highest channel

6.6 MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.


6.7 Out of band emission at antenna terminals

Test Requirement:	FCC part22.917(a) and FCC part24.238(a)
Test Method:	FCC part2.1051
Limit:	-13dBm
Test setup:	<pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- CT[Communication Tester] Splitter --- Filter[Filter] Filter --- SPA[SPA] </pre> <p><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Procedure:	<ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass


Test plot as follows:

Note: During the conducted spurious emission test, a band filter was used. The information of the filter is reported at section 6.0 (refer to item 24, 25).


Test Mode: Traffic mode GSM 850 (GSM link)

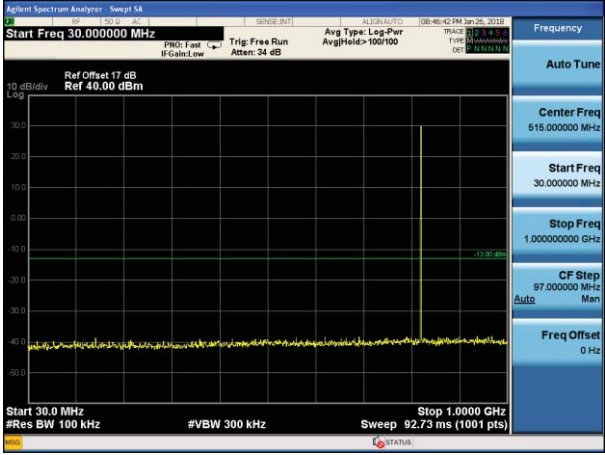

Lowest channel

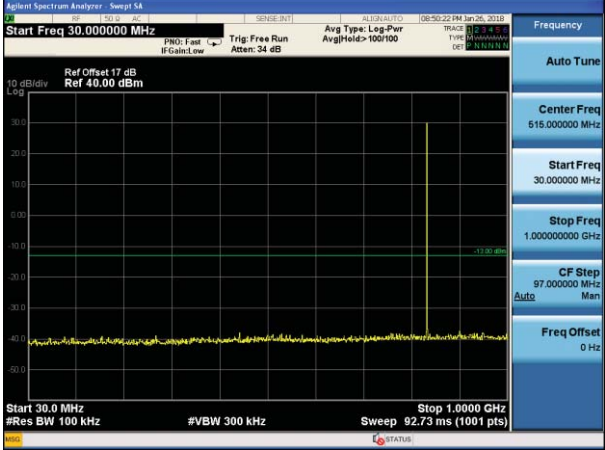


Middle channel

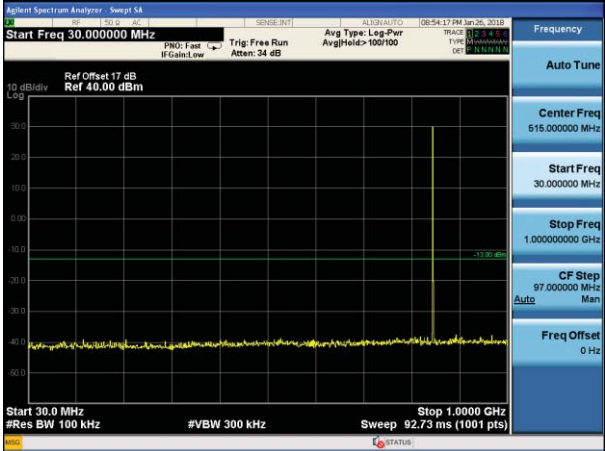



Highest channel

Test Mode: Traffic mode


GSM 850 (GPRS 1 link)

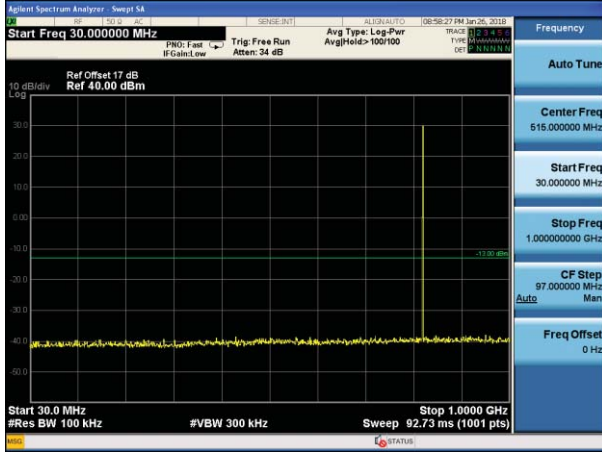

Lowest channel

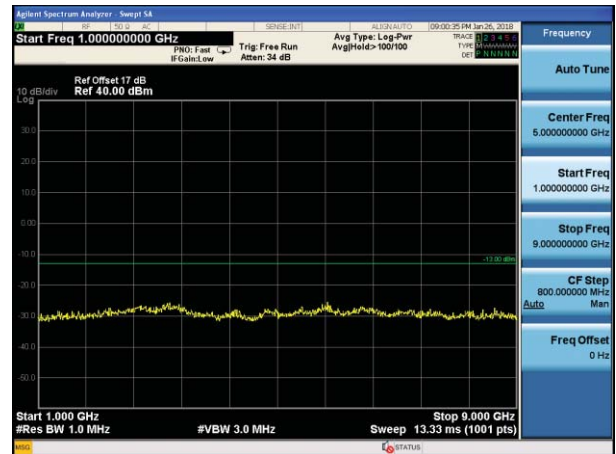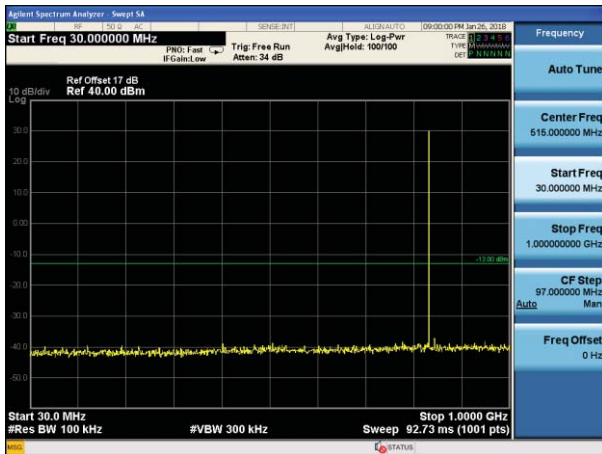


Middle channel

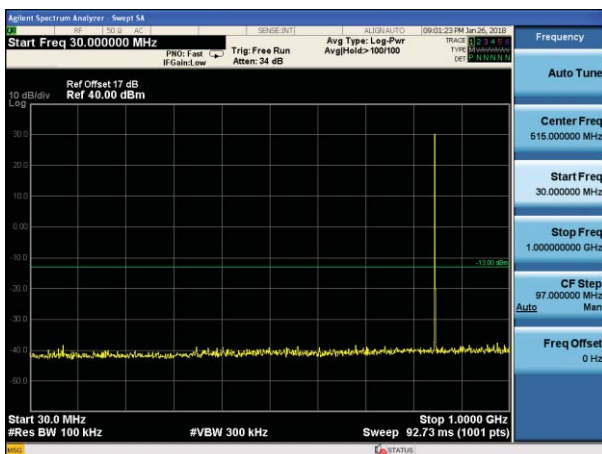


Highest channel


Test Mode: Traffic mode GSM 850 (EGPRS 1 link)

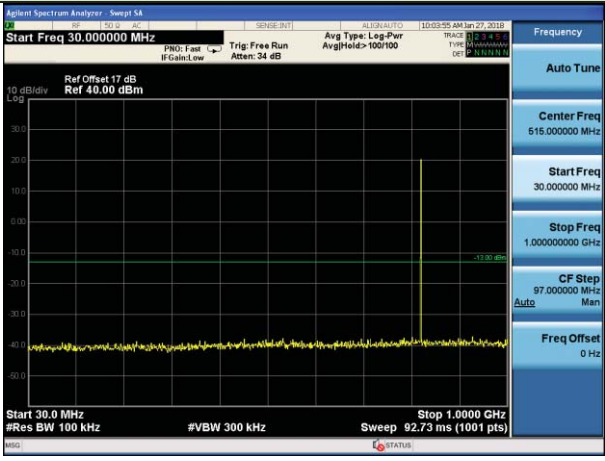

Lowest channel

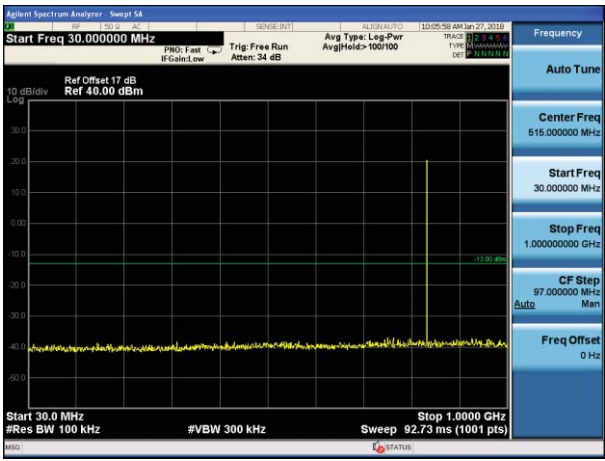


Middle channel


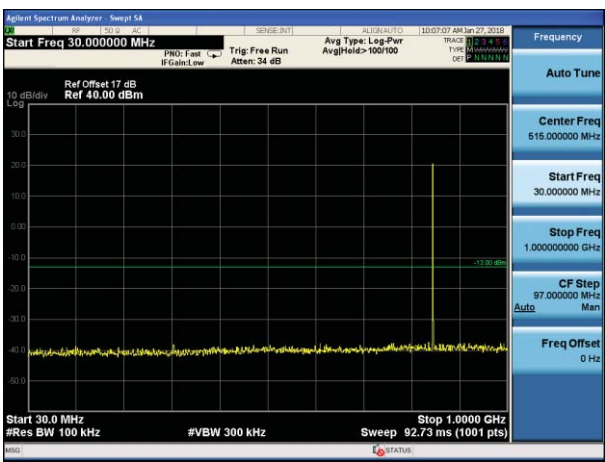


Highest channel


Test Mode: Traffic mode PCS1900 (GSM link)

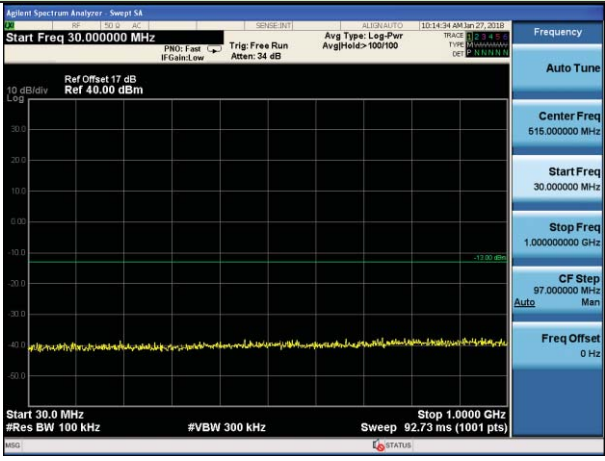

Lowest channel

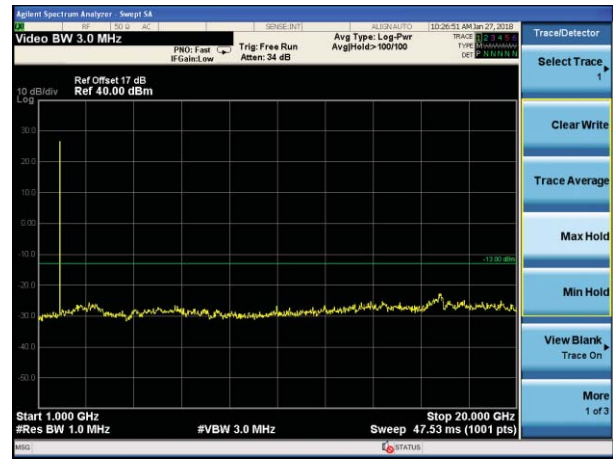
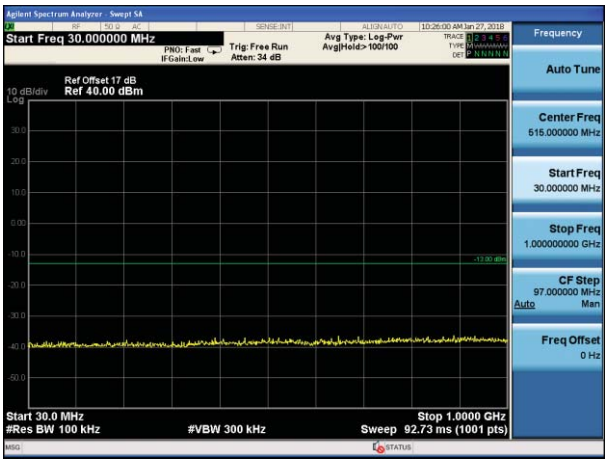


Middle channel


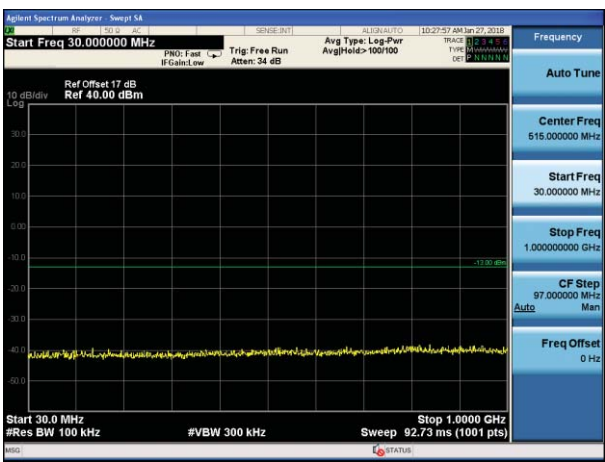


Highest channel


Test Mode: Traffic mode PCS1900 (GPRS 1 link)

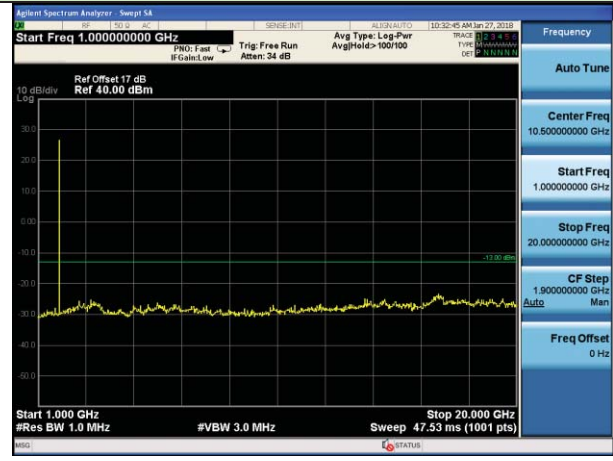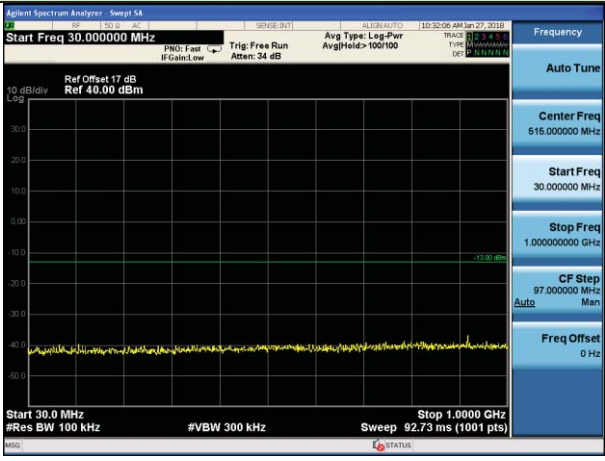

Lowest channel

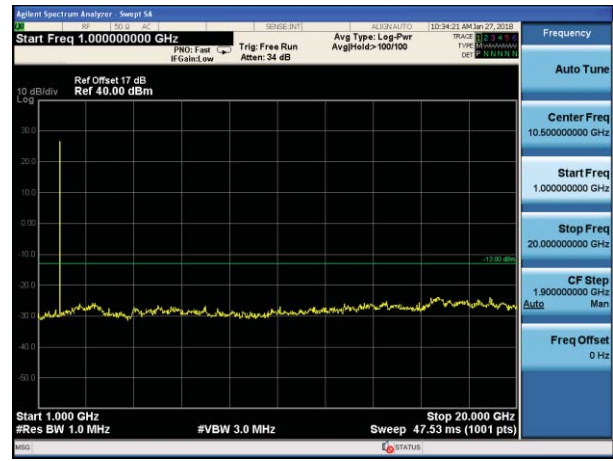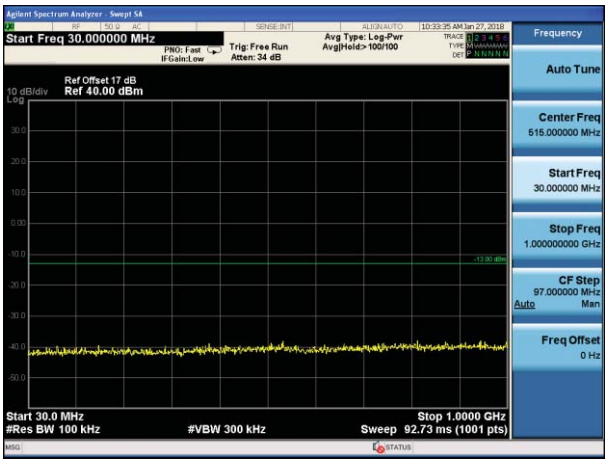



Middle channel

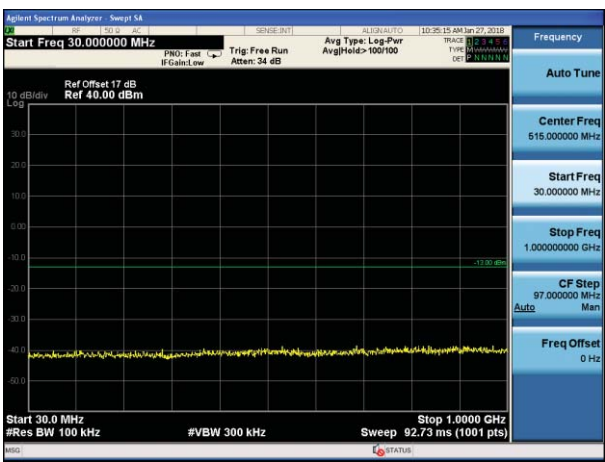



Highest channel

Test Mode: Traffic mode



PCS1900 (EGPRS 1 link)

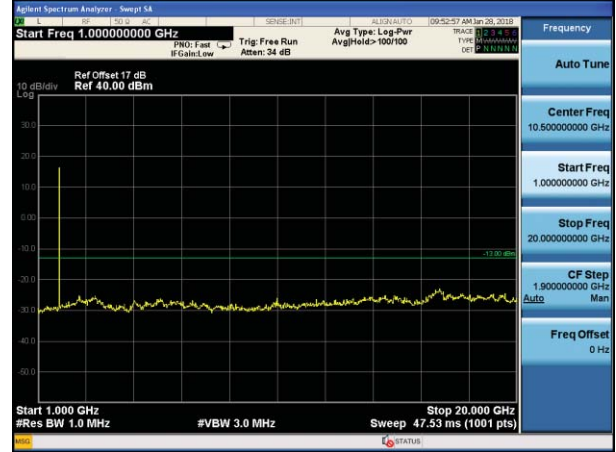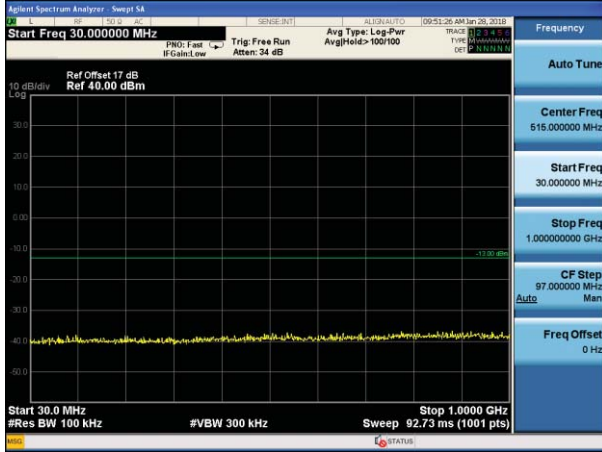

Lowest channel

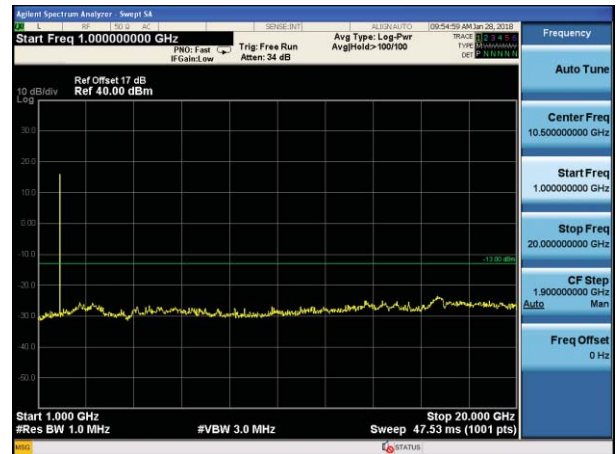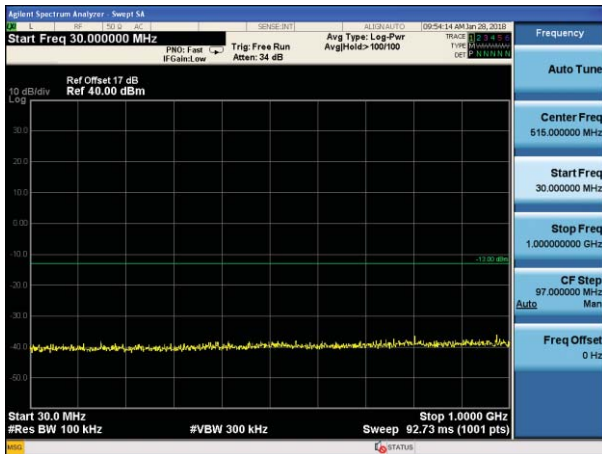


Middle channel

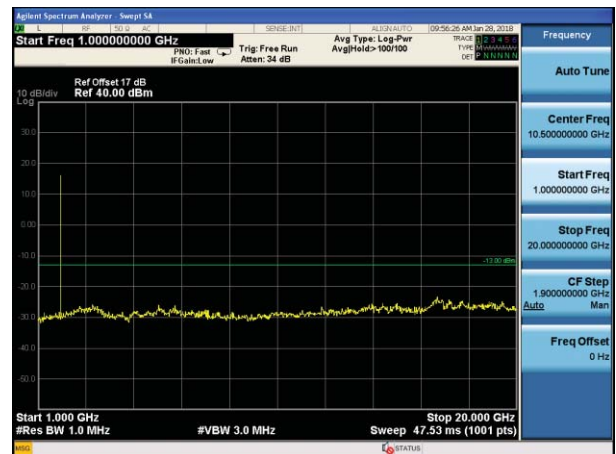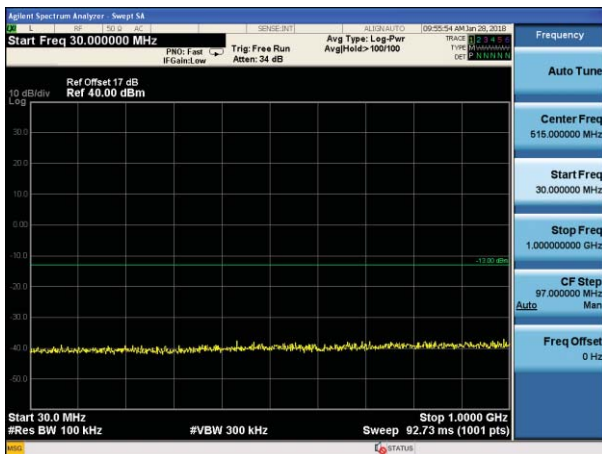


Highest channel

Test Mode: Traffic mode


WCDMA Band V (RMC 12.2Kbps link)

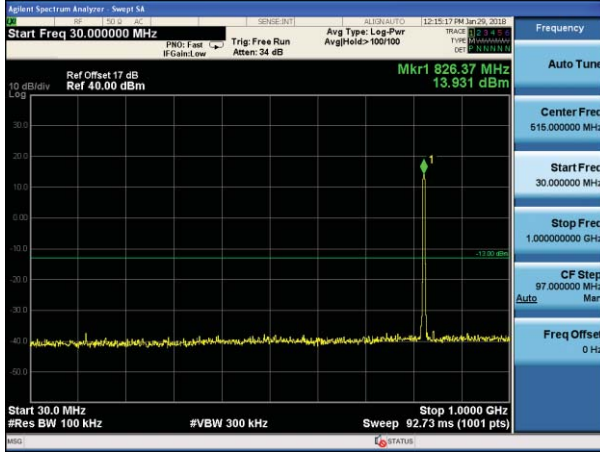

Lowest channel


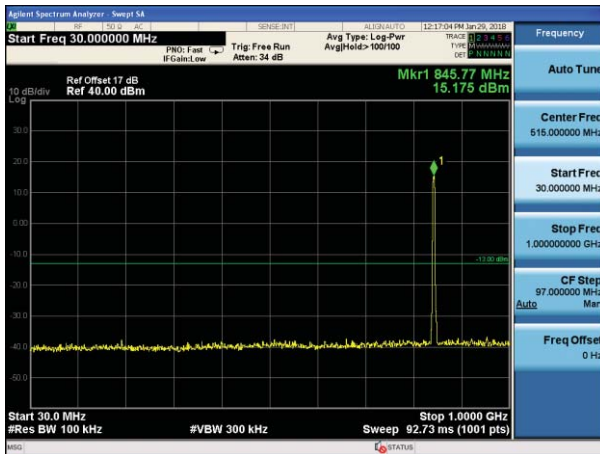


Middle channel


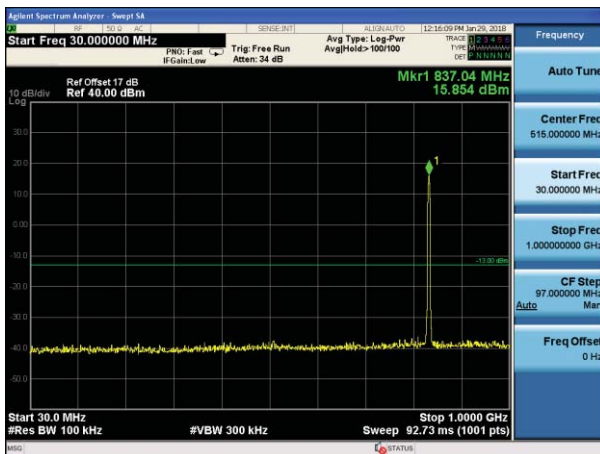


Highest channel



Test Mode: Traffic mode WCDMA Band II (RMC 12.2Kbps link)

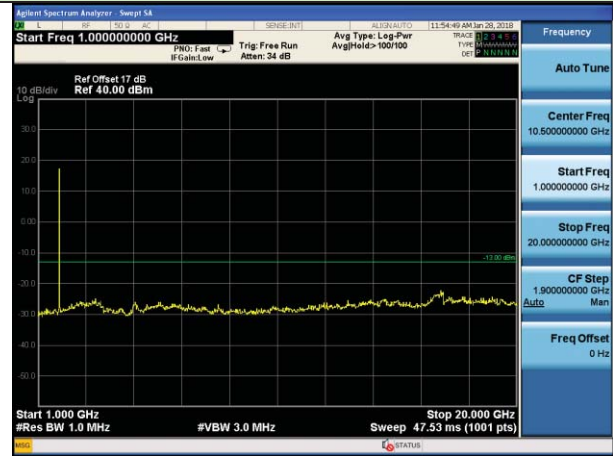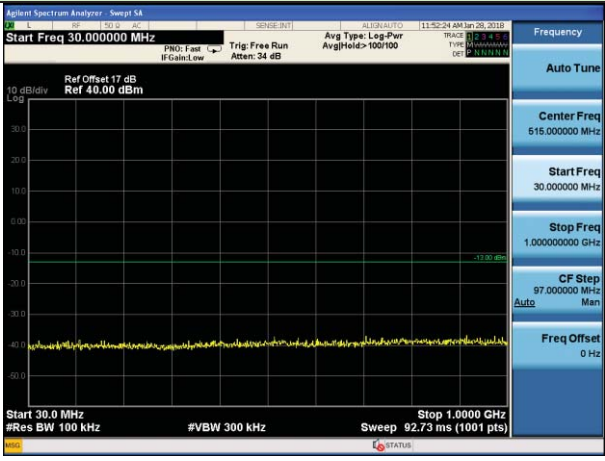

Lowest channel

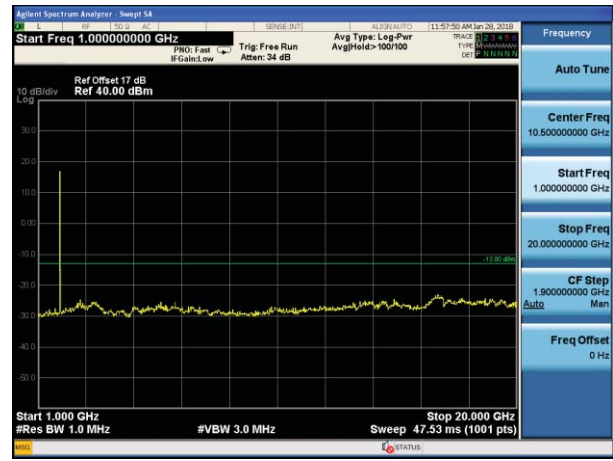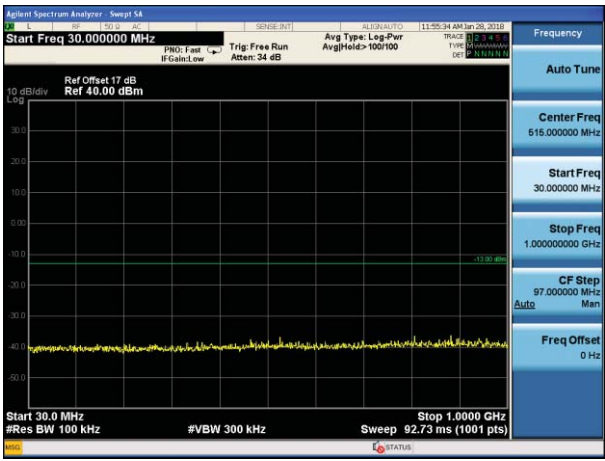

Middle channel

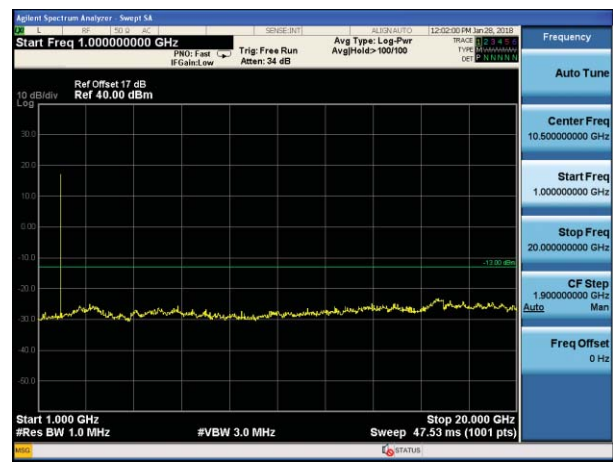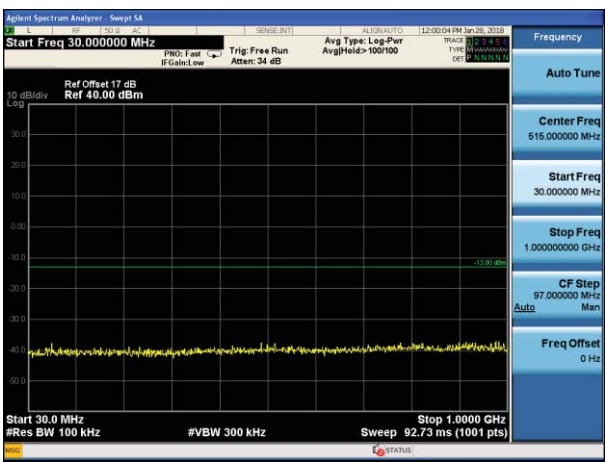

Highest channel

Band Edge:

Test Mode: Traffic mode GSM850 (GSM link)




Lowest channel




Highest channel

Test Mode: Traffic mode GSM850 (GPRS 1 link)

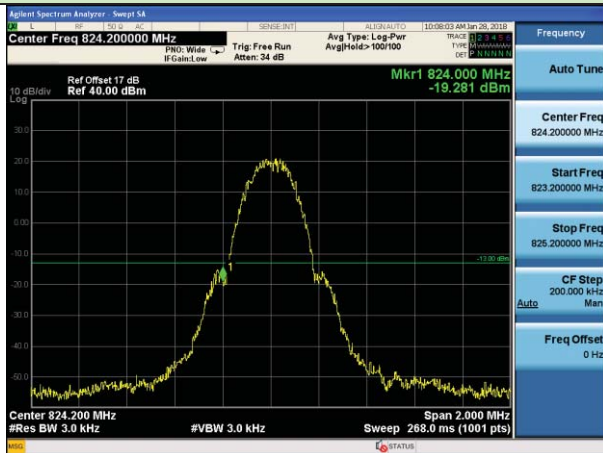


Lowest channel

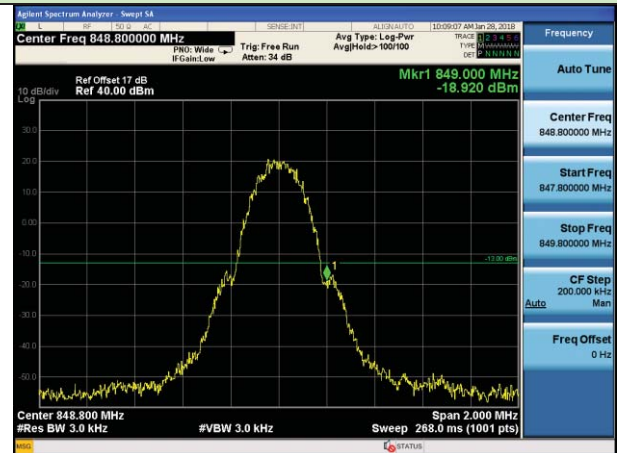


Highest channel

Test Mode: Traffic mode GSM850 (EGPRS 1 link)

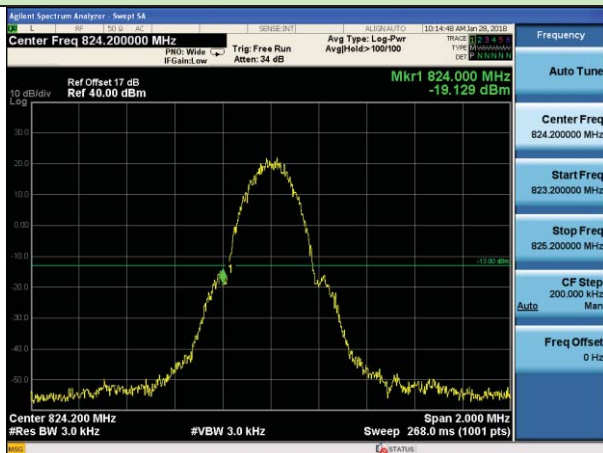


Lowest channel

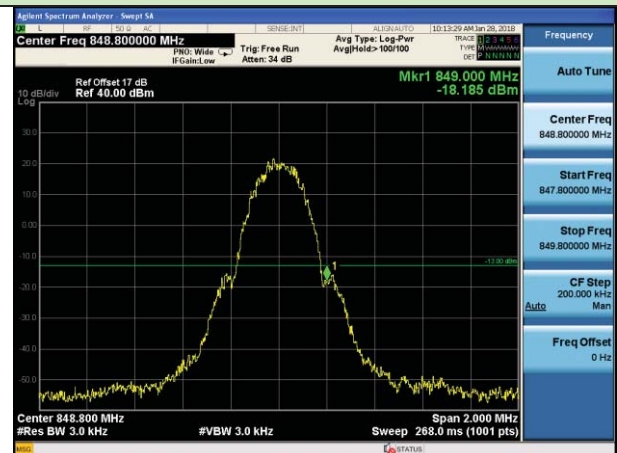


Highest channel

Test Mode: Traffic mode PCS1900 (GSM link)

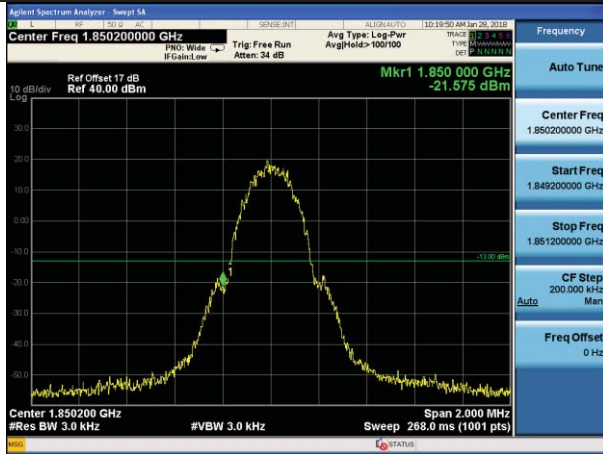


Lowest channel

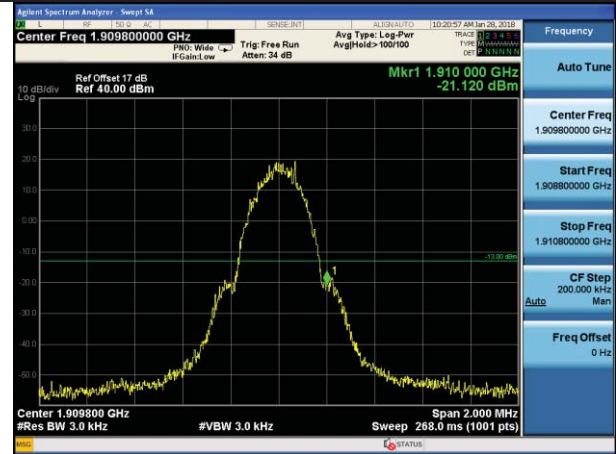


Highest channel

Test Mode: Traffic mode PCS1900 (GPRS 1 link)

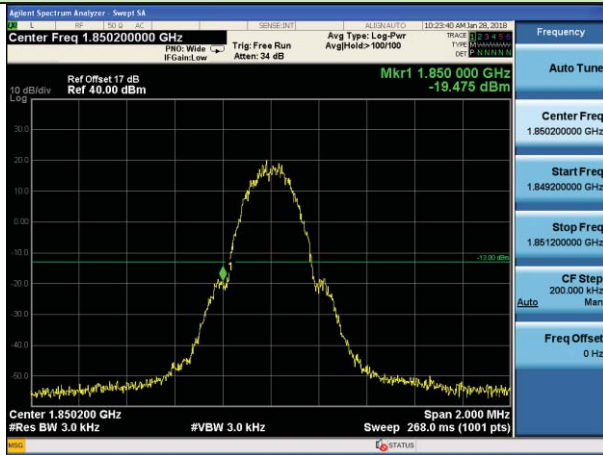


Lowest channel

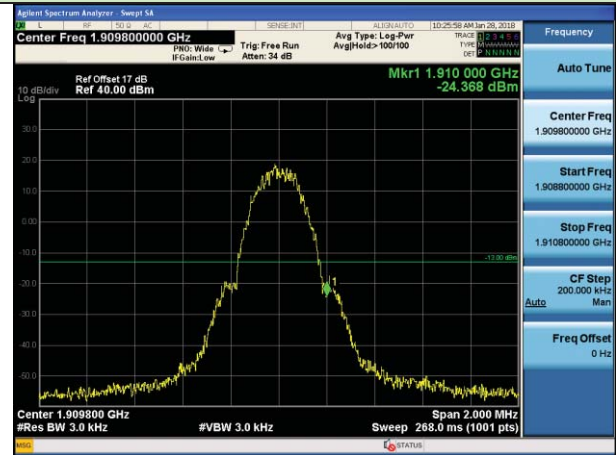


Highest channel

Test Mode: Traffic mode PCS1900 (EGPRS 1 link)

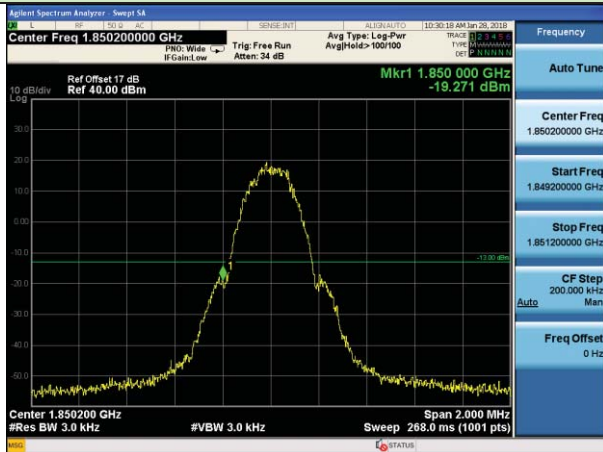


Lowest channel

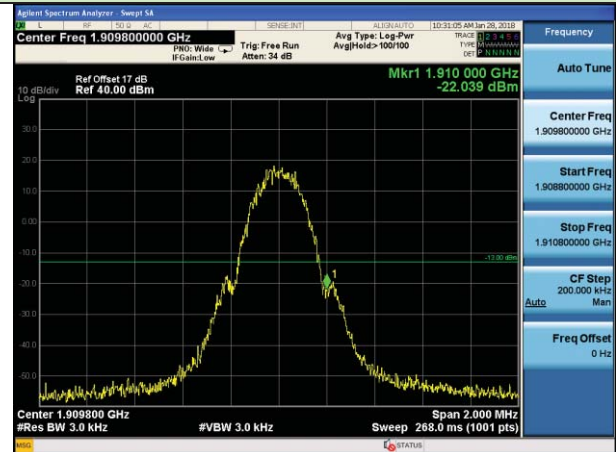

Highest channel

Test Mode: Traffic mode WCDMA Band V (RMC 12.2Kbps link)

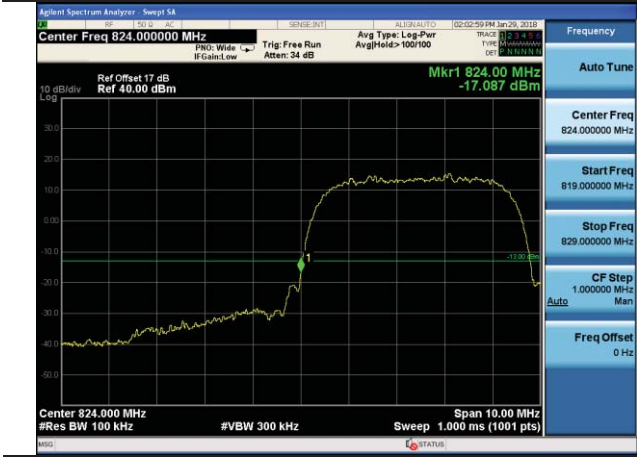

Lowest channel



Highest channel

Test Mode: Traffic mode WCDMA Band II (RMC 12.2Kbps link)






Lowest channel



Highest channel

6.8 ERP, EIRP Measurement

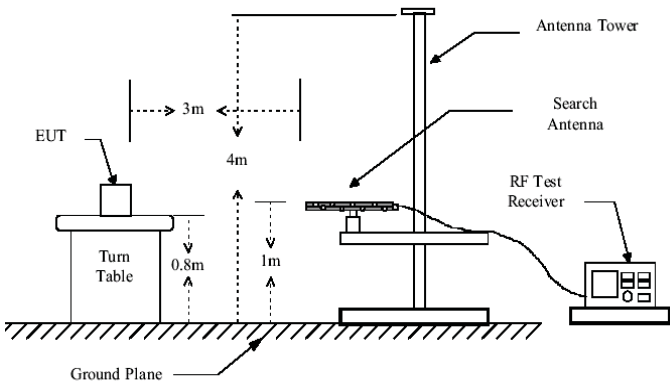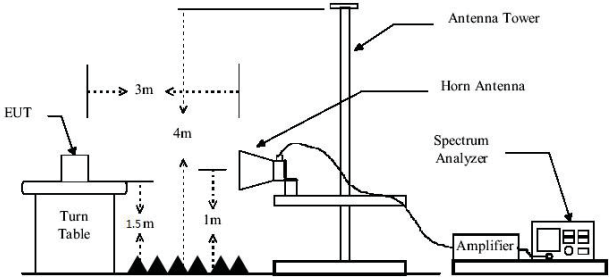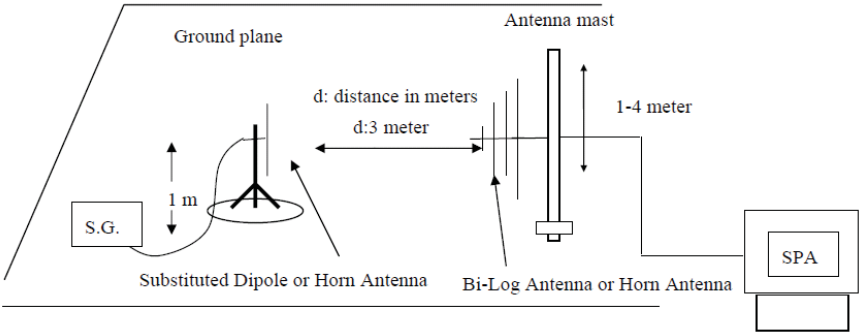Test Requirement:	FCC part22.913(a) and FCC part24.232(b)
Test Method:	FCC part2.1046
Limit:	GSM850, WCDMA Band V: 7W ERP PCS1900, WCDMA Band II: 2W EIRP
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>  <p>Substituted method:</p> 

<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated. 3. ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows: $\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$ 4. EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows: $\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$
<p>Test Instruments:</p>	<p>Refer to section 5.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 6.1 for details</p>
<p>Test results:</p>	<p>Pass</p>

Measurement Data

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850 (GSM link)	Lowest	H	V	26.61	38.45	Pass
			H	30.03		
		E1	V	25.81		
			H	29.09		
		E2	V	26.25		
			H	30.37		
	Middle	H	V	26.41	38.45	Pass
			H	30.32		
		E1	V	26.05		
			H	29.65		
		E2	V	25.77		
			H	28.97		
	Highest	H	V	26.32	38.45	Pass
			H	29.93		
		E1	V	26.61		
			H	30.62		
		E2	V	26.03		
			H	26.61		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850 (GPRS 1 link)	Lowest	H	V	27.16	38.45	Pass
			H	30.83		
		E1	V	26.32		
			H	29.85		
		E2	V	26.28		
			H	30.50		
	Middle	H	V	27.08	38.45	Pass
			H	30.78		
		E1	V	26.87		
			H	29.82		
		E2	V	25.72		
			H	29.58		
	Highest	H	V	26.51	38.45	Pass
			H	30.58		
		E1	V	26.69		
			H	30.88		
		E2	V	26.31		
			H	30.11		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850 (EGPRS 1 link)	Lowest	H	V	27.04	38.45	Pass
			H	30.47		
		E1	V	27.19		
			H	30.50		
		E2	V	26.66		
			H	29.25		
	Middle	H	V	26.15	38.45	Pass
			H	30.14		
		E1	V	25.36		
			H	29.34		
		E2	V	25.41		
			H	28.60		
	Highest	H	V	27.82	38.45	Pass
			H	30.72		
		E1	V	26.84		
			H	29.64		
		E2	V	24.94		
			H	28.22		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP (dBm)	Limit (dBm)	Result
PCS1900 (GSM link)	Lowest	H	V	23.73	33.01	Pass
			H	27.55		
		E1	V	23.71		
			H	26.62		
		E2	V	22.53		
			H	26.09		
	Middle	H	V	24.13	33.01	Pass
			H	27.43		
		E1	V	23.50		
			H	27.07		
		E2	V	23.14		
			H	26.43		
	Highest	H	V	24.70	33.01	Pass
			H	27.71		
		E1	V	23.88		
			H	26.89		
		E2	V	23.40		
			H	26.95		




EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP (dBm)	Limit (dBm)	Result
PCS1900 (GPRS 1 link)	Lowest	H	V	20.80	33.01	Pass
			H	24.21		
		E1	V	20.26		
			H	23.58		
		E2	V	22.77		
			H	26.19		
	Middle	H	V	22.83	33.01	Pass
			H	26.08		
		E1	V	21.77		
			H	24.39		
		E2	V	21.55		
			H	23.86		
	Highest	H	V	23.51	33.01	Pass
			H	27.10		
		E1	V	23.78		
			H	26.98		
		E2	V	22.71		
			H	25.47		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP (dBm)	Limit (dBm)	Result
PCS1900 (EGPRS 1 link)	Lowest	H	V	22.96	33.01	Pass
			H	25.85		
		E1	V	22.76		
			H	25.63		
		E2	V	22.28		
			H	26.09		
	Middle	H	V	22.42	33.01	Pass
			H	26.31		
		E1	V	22.98		
			H	25.53		
		E2	V	21.88		
			H	24.84		
	Highest	H	V	23.82	33.01	Pass
			H	26.58		
		E1	V	23.76		
			H	26.49		
		E2	V	23.70		
			H	26.88		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
WCDMA Band V	Lowest	H	V	23.07	38.45	Pass
			H	25.78		
		E1	V	22.78		
			H	25.72		
		E2	V	22.26		
			H	26.03		
	Middle	H	V	22.44	38.45	Pass
			H	26.31		
		E1	V	22.93		
			H	25.47		
		E2	V	21.96		
			H	24.84		
	Highest	H	V	23.91	38.45	Pass
			H	26.59		
		E1	V	23.85		
			H	26.60		
		E2	V	23.73		
			H	26.93		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
WCDMA Band II	Lowest	H	V	22.99	33.01	Pass
			H	25.77		
		E1	V	22.82		
			H	25.71		
		E2	V	22.27		
			H	26.04		
	Middle	H	V	22.43	33.01	Pass
			H	26.35		
		E1	V	22.90		
			H	25.47		
		E2	V	21.89		
			H	24.86		
	Highest	H	V	23.79	33.01	Pass
			H	26.55		
		E1	V	23.79		
			H	26.57		
		E2	V	23.81		
			H	26.92		

6.9 Field strength of spurious radiation measurement

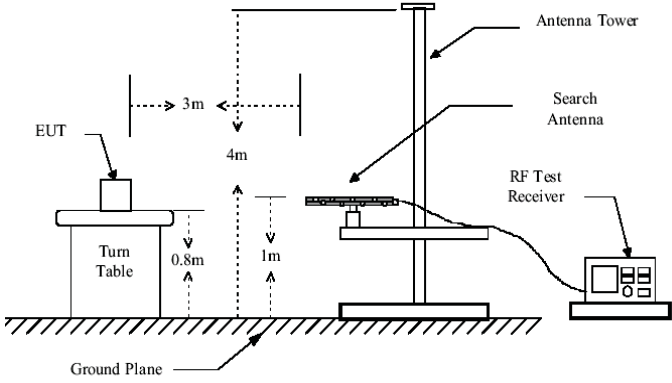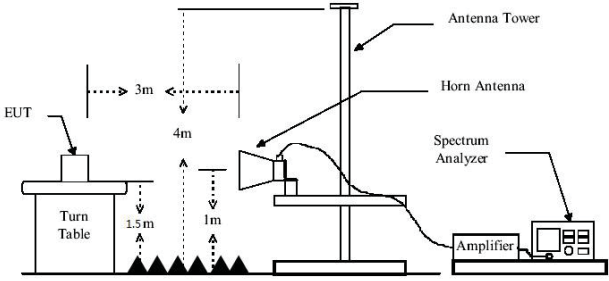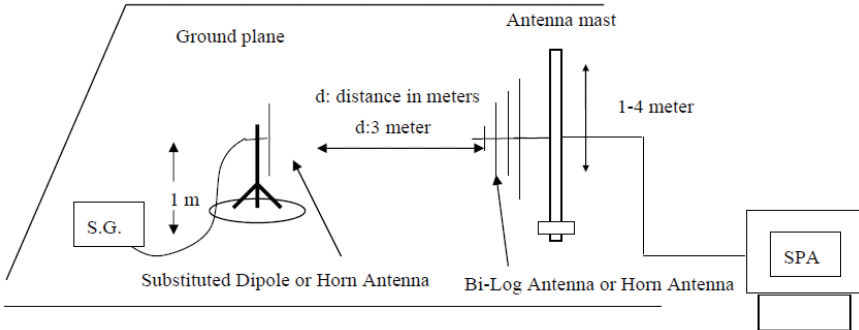Test Requirement:	FCC part22.917(a) and FCC part24.238(a)
Test Method:	FCC part2.1053
Limit:	-13dBm
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>  <p>Substituted method:</p> 

<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $\text{ERP / EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
<p>Test Instruments:</p>	<p>Refer to section 5.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 6.1 for details</p>
<p>Test results:</p>	<p>Pass</p>

Measurement Data

Test mode:	GSM850		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1648.40	Vertical	-36.67	-13.00	Pass
2472.60	V	-39.33		
3296.80	V	-41.53		
4121.00	V	-43.78		
4945.20	V	---		
1648.40	Horizontal	-41.89	-13.00	Pass
2472.60	H	-45.65		
3296.80	H	-47.27		
4121.00	H	-49.95		
4945.20	H	---		
Test mode:	GSM850		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-37.83	-13.00	Pass
2509.80	V	-40.07		
3346.40	V	-42.04		
4183.00	V	-43.77		
5019.60	V	---		
1673.20	Horizontal	-42.24	-13.00	Pass
2509.80	H	-45.46		
3346.40	H	-46.77		
4183.00	H	-48.89		
5019.60	H	---		
Test mode:	GSM850		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1697.60	Vertical	-38.01	-13.00	Pass
2546.40	V	-39.97		
3395.20	V	-41.71		
4244.00	V	-43.29		
5092.80	V	---		
1697.60	Horizontal	-41.86	-13.00	Pass
2546.40	H	-44.75		
3395.20	H	-45.81		
4244.00	H	-47.77		
5092.80	H	---		

Remark :

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	PCS1900		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3700.40	Vertical	-36.88	-13.00	Pass
5550.60	V	-39.23		
7400.80	V	-41.24		
9251.00	V	-43.12		
11101.20	V	---		
3700.40	Horizontal	-41.34	-13.00	Pass
5550.60	H	-44.85		
7400.80	H	-46.11		
9251.00	H	-48.56		
11101.20	H	---		
Test mode:	PCS1900		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-34.39	-13.00	Pass
5640.00	V	-36.82		
7520.00	V	-39.00		
9400.00	V	-40.90		
11280.00	V	---		
3760.00	Horizontal	-39.20	-13.00	Pass
5640.00	H	-42.73		
7520.00	H	-44.14		
9400.00	H	-46.54		
11280.00	H	---		
Test mode:	PCS1900		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3819.60	Vertical	-35.69	-13.00	Pass
5729.40	V	-38.11		
7639.20	V	-40.01		
9549.00	V	-41.93		
11458.80	V	---		
3819.60	Horizontal	-40.31	-13.00	Pass
5729.40	H	-43.72		
7639.20	H	-45.04		
9549.00	H	-47.39		
11458.80	H	---		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	WCDMA Band V		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1652.80	Vertical	-35.88	-13.00	Pass
2479.20	V	-39.64		
3305.60	V	-42.48		
4132.00	V	-40.11		
4958.40	V	---		
1652.80	Horizontal	-38.88	-13.00	Pass
2479.20	H	-41.60		
3305.60	H	-47.01		
4132.00	H	-50.78		
4958.40	H	---		
Test mode:	WCDMA Band V		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1672.80	Vertical	-38.23	-13.00	Pass
2509.20	V	-39.52		
3345.60	V	-43.30		
4182.00	V	-45.72		
5018.40	V	---		
1672.80	Horizontal	-40.75	-13.00	Pass
2509.20	H	-42.77		
3345.60	H	-47.41		
4182.00	H	-49.97		
5018.40	H	---		
Test mode:	WCDMA Band V		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1693.20	Vertical	-36.92	-13.00	Pass
2539.80	V	-39.42		
3386.40	V	-42.13		
4233.00	V	-44.99		
5079.60	V	---		
1693.20	Horizontal	-40.33	-13.00	Pass
2539.80	H	-42.87		
3386.40	H	-44.25		
4233.00	H	-50.42		
5079.60	H	---		

Remark :

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	WCDMA Band II		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3704.80	Vertical	-38.40	-13.00	Pass
5557.20	V	-41.47		
7409.60	V	-44.05		
9262.00	V	-46.49		
11114.40	V	---		
3704.80	Horizontal	-44.32	-13.00	Pass
5557.20	H	-48.74		
7409.60	H	-50.45		
9262.00	H	-53.49		
11114.40	H	---		
Test mode:	WCDMA Band II		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-39.24	-13.00	Pass
5640.00	V	-42.06		
7520.00	V	-44.63		
9400.00	V	-46.92		
11280.00	V	---		
3760.00	Horizontal	-44.77	-13.00	Pass
5640.00	H	-49.04		
7520.00	H	-50.64		
9400.00	H	-53.62		
11280.00	H	---		
Test mode:	WCDMA Band II		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3815.20	Vertical	-38.42	-13.00	Pass
5722.80	V	-41.17		
7630.40	V	-43.46		
9538.00	V	-45.63		
11445.60	V	---		
3815.20	Horizontal	-43.68	-13.00	Pass
5722.80	H	-47.57		
7630.40	H	-49.20		
9538.00	H	-51.84		
11445.60	H	---		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

6.10 Frequency stability V.S. Temperature measurement

Test Requirement:	FCC Part2.1055(a)(1)(b)
Test Method:	FCC Part2.1055(a)(1)(b)
Limit:	2.5ppm
Test setup:	<p style="text-align: center;">Note : Measurement setup for testing on Antenna connector</p>
Test procedure:	<ol style="list-style-type: none"> 1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass


Measurement Data

Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	35	0.0422	2.5	Pass
	-20	41	0.0491		
	-10	33	0.0394		
	0	29	0.0346		
	10	34	0.0411		
	20	26	0.0307		
	30	50	0.0592		
	40	45	0.0535		
	50	37	0.0438		
Reference Frequency: GSM850 (GPRS 1 link) Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	21	0.0251	2.5	Pass
	-20	27	0.0325		
	-10	17	0.0198		
	0	19	0.0230		
	10	16	0.0191		
	20	16	0.0191		
	30	30	0.0353		
	40	30	0.0356		
	50	20	0.0242		
Reference Frequency: GSM850 (EGPRS 1 link) Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	52	0.0624	2.5	Pass
	-20	54	0.0643		
	-10	48	0.0568		
	0	44	0.0527		
	10	47	0.0563		
	20	40	0.0474		
	30	70	0.0837		
	40	60	0.0714		
	50	57	0.0678		

Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
3.70	-30	32	0.017	2.5	Pass
	-20	45	0.024		
	-10	31	0.017		
	0	28	0.015		
	10	32	0.017		
	20	35	0.018		
	30	53	0.028		
	40	42	0.022		
	50	41	0.022		
Reference Frequency: PCS1900 (GPRS 1 link) Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
3.70	-30	41	0.022	2.5	Pass
	-20	48	0.026		
	-10	37	0.020		
	0	34	0.018		
	10	34	0.018		
	20	28	0.015		
	30	52	0.028		
	40	40	0.021		
	50	45	0.024		
Reference Frequency: PCS1900 (EGPRS 1 link) Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
3.70	-30	103	0.055	2.5	Pass
	-20	123	0.066		
	-10	97	0.052		
	0	83	0.044		
	10	101	0.054		
	20	82	0.044		
	30	139	0.074		
	40	111	0.059		
	50	123	0.065		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	97	0.115	2.5	Pass
	-20	136	0.163		
	-10	161	0.193		
	0	73	0.087		
	10	111	0.132		
	20	118	0.141		
	30	184	0.220		
	40	169	0.202		
	50	207	0.248		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880.0MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	92	0.110	2.5	Pass
	-20	83	0.099		
	-10	70	0.084		
	0	67	0.080		
	10	65	0.078		
	20	58	0.069		
	30	67	0.080		
	40	75	0.089		
	50	74	0.089		

6.11 Frequency stability V.S. Voltage measurement

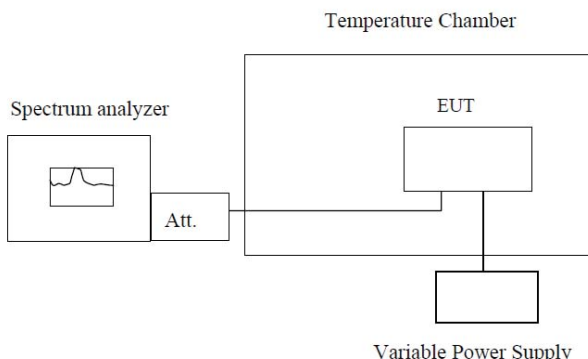Test Requirement:	FCC Part2.1055(d)(1)(2)
Test Method:	FCC Part2.1055(d)(1)(2)
Limit:	2.5ppm
Test setup:	 <p>Note : Measurement setup for testing on Antenna connector</p>
Test procedure:	<ol style="list-style-type: none"> 1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data



Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	52	0.062	2.5	Pass
	3.7	59	0.071		
	3.4	69	0.082		
Reference Frequency: GSM850 (GPRS 1 link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	32	0.038	2.5	Pass
	3.7	27	0.032		
	3.4	23	0.028		
Reference Frequency: GSM850 (EGPRS 1 link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	30	0.036	2.5	Pass
	3.7	29	0.035		
	3.4	32	0.038		

Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	46	0.025	2.5	Pass
	3.7	57	0.030		
	3.4	57	0.030		
Reference Frequency: PCS1900 (GPRS 1 link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	48	0.025	2.5	Pass
	3.7	32	0.017		
	3.4	33	0.018		
Reference Frequency: PCS1900 (EGPRS 1 link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	63	0.034	2.5	Pass
	3.7	74	0.039		
	3.4	75	0.040		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	55	0.066	2.5	Pass
	3.7	44	0.052		
	3.4	56	0.067		
Reference Frequency: WCDMA Band II Middle channel=940 channel=1880.0MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	13	0.016	2.5	Pass
	3.7	17	0.020		
	3.4	14	0.017		

7 Test Setup Photo

Radiated Emission

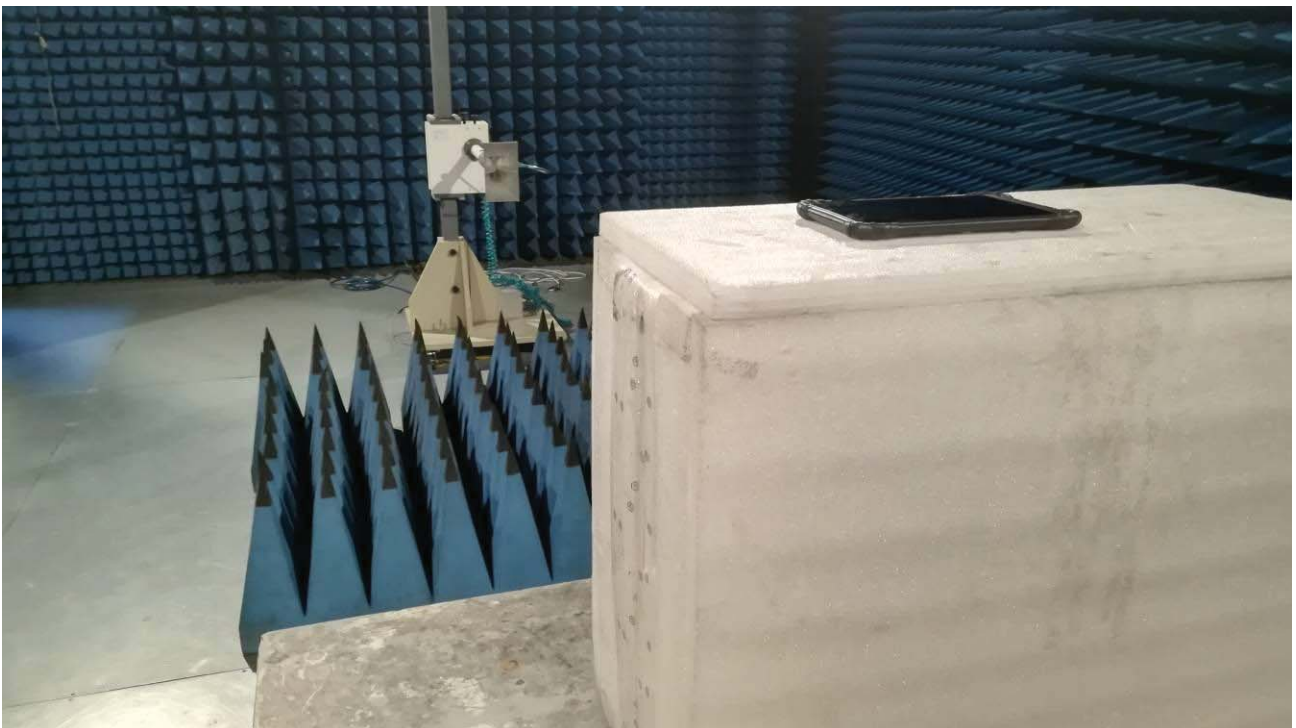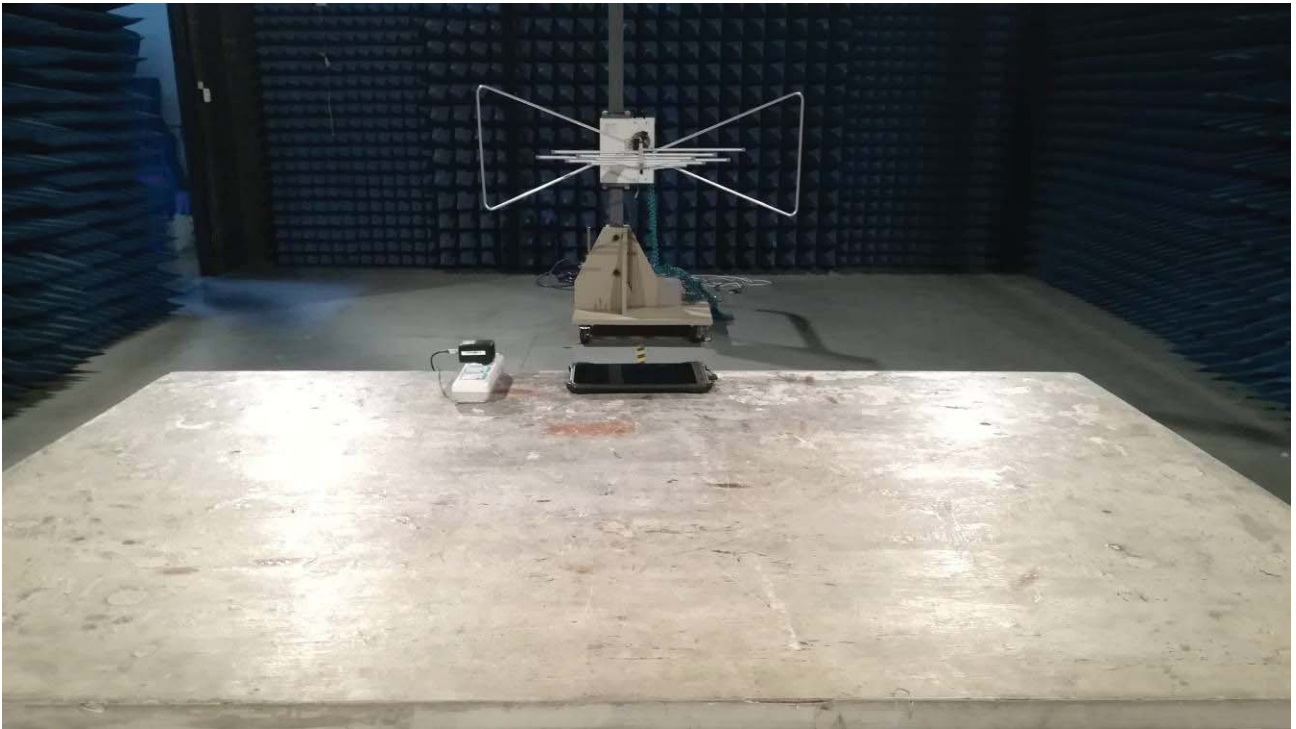

8 EUT Constructional Details

Please refer to report T1880102 01.

-----End-----