

Document : **User Manual for IBC Foldingkey**

Model : **SVI-JFRGE04**

Project Code :

Version: 1.0

Date: Jan. 22. '15

Engineering change order-No.:

Design Freeze No.:

Number of pages: 6

Filename:

**Contents list**

**Page**

|              |  |          |
|--------------|--|----------|
| <b>1.</b>    | <b>System configuration</b>                    | <b>3</b> |
| <b>1.1</b>   | <b>Short description of the IBC Foldingkey</b> | <b>3</b> |
| <b>1.1.1</b> | <b>How to use Foldingkey</b>                   | <b>3</b> |
| <b>1.1.2</b> | <b>Introduction of Transmitter(Foldingkey)</b> | <b>3</b> |
| <b>1.1.3</b> | <b>Introduction of BCM</b>                     | <b>3</b> |
| <b>1.2</b>   | <b>System Overview / Block Diagram</b>         | <b>3</b> |
| <b>2</b>     | <b>Remote Keyless System operatio</b>          | <b>5</b> |
| <b>2.1</b>   | <b>Button operation</b>                        | <b>5</b> |
| <b>3</b>     | <b>Homologation</b>                            | <b>6</b> |

Proprietary data, company confidential. All rights reserved.  
 Confie a titre de secret d'entreprise. Tous droits réservés.  
 Comunicado como secreto empresarial. Reservados todos os direitos.  
 Confidado como secreto industrial. Nos reservamos todos los derechos.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere für den Fall der Patenterteilung oder GM-Eintragung

|  |  |              |
|--|--|--------------|
| Editor : KS.Kim                            | Document name                            | Project code |
| Version: 1.0 Jan. 22. 2015<br>ECO / DF No. | <b>Identification No. : Document No.</b> | Page 2 / 6   |
| File:                                      |  |              |

# 1. System configuration

## 1.1 Short description of the IBC Foldingkey

### 1.1.1 How to use Foldingkey

- Foldingkey is Remote Keyless System.
- This unit controll door lock/unlock/tail gate with wireless.
- THE Foldingkey is a device that transmits the signal when the button is Pressed.

### 1.1.2 Introduction of Transmitter(Foldingkey)

- Transmitter has three buttons
- Transmitter use the battery
- Frequency is 433.92MHz
- Modulation item is SAW Resonator
- Transmitter use Rolling code algorithm

### 1.1.3 Introduction of BCM

- Description of Transmitter
- BCM use the vehicle battery
- Frequency is 433.92MHz
- After receiving the Transmitter signal , The receiver decides which operation will be performed.
- The user can slect the following operations by pressing the button of the remote


## 1.2 System Overview / Block Diagram

Technical description of alarm function:

JF BCM is designed to indicate intrusion into the vehicle by unauthorized door open. JF BCM receives CAN Signal of any door open including engine hood and trunk, and then JF BCM send CAN signal to SJB (Smart Junction Box) so that SJB can drive Alarm device such as horn and visible Lamp for 27s.

When alarm state is set by Foldingkey, JF BCM check all door lock status by CAN signal. And then JF BCM enters alarm system mode and drives Security Indicator which shows alarm setting status to the operator. JF BCM provides an alarm setting locking function to prevent inadvertent setting of the alarm when KEY is inserted in the Key Hole.

|  |  |              |
|--|--|--------------|
| Editor : KS.Kim                            | Document name                            | Project code |
| Version: 1.0 Jan. 22. 2015<br>ECO / DF No. | <b>Identification No. : Document No.</b> | Page 3 / 6   |
| File:                                      |  |              |

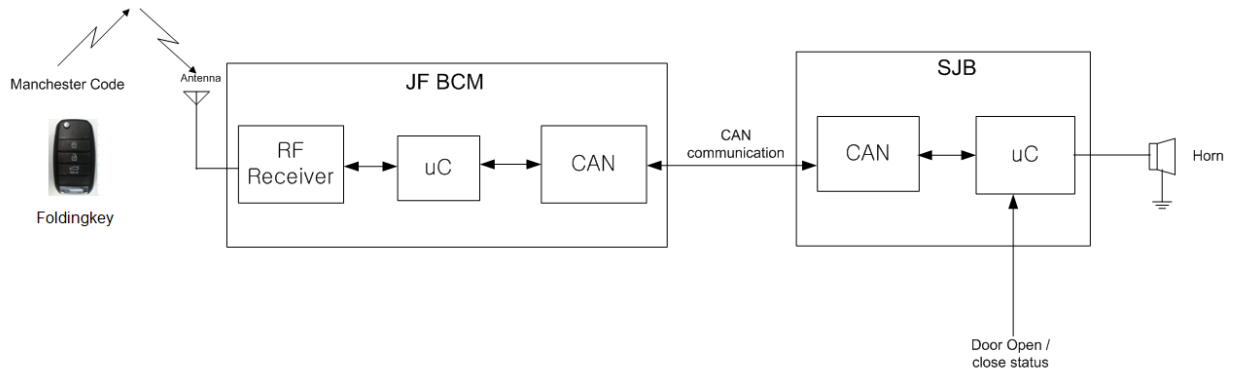

**Figure 1: System Block Diagram**

1. Foldingkey Lock button pushed
2. Foldingkey sends the data by radio frequency
3. JF BCM receives the RF data and decodes it.
4. JF BCM check KEY if received ID is right ID or not.
5. JF BCM checks all door lock status by CAN signal.
6. JF BCM enter Alarm System Mode
7. If JF BCM receives any door open signal, JF BCM sends CAN signal to SJB to operate horn and visible lamp.

|  |  |              |
|--|--|--------------|
| Editor : KS.Kim                            | Document name                            | Project code |
| Version: 1.0 Jan. 22. 2015<br>ECO / DF No. | <b>Identification No. : Document No.</b> |              |
| File:                                      |  | Page 4 / 6   |

Proprietary data, company confidential. All rights reserved.  
 Contine a titre de secret d'entreprise. Tous droits réservés.  
 Comunicado como segredo empresarial. Reservados todos os direitos.  
 Confidado como secreto industrial. Nos reservamos todos los derechos.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte vorbehalten, insbesondere für den Fall der Patenterteilung oder GM-Entragung.

## 2. Remote Keyless Entry System operation

### 2.1 Button operation



You can lock, unlock, trunk and hold your vehicle with this remote transmitter.

#### Lock

- When you push this button, all the doors will be locked.
- You can not lock any of the doors with this remote transmitter if any door is open or the key is in the fob holder.

#### Unlock

- When you push this button, all the doors will be unlocked.
- You can not unlock any of the doors with this remote transmitter if any door is open or the key is in the fob holder.

#### HOLD(Trunk)

- When you push this button and hold more than 1 second, the trunk will be opened.

#### Panic

- When you push this button for about 1 second, Horn will alarm.

|                            |               |  |
|----------------------------|---------------|--|
| Editor : KS.Kim            | Document name | Project code                             |
| Version: 1.0 Jan. 22. 2015 | ECO / DF No.  | <b>Identification No. : Document No.</b> |
| File:                      |               |  |
|                            |               | Page 5 / 6                               |

### 3. Homologation

#### FCC Compliance Statement.

**This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions :**

- (1) This device may not cause harmful interference, and**
- (2) This device must accept any interference received, including interference that may cause undesired operation.**

#### Do Not



**Any changes or modifications to the equipment not expressly approved by the party responsible for compliance could void user's authority to operate the equipment.**

#### IC Compliance Statement.

**This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:**

- (1) this device may not cause interference, and**
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.**

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

|  |  |              |
|--|--|--------------|
| Editor : KS.Kim                            | Document name                            | Project code |
| Version: 1.0 Jan. 22. 2015<br>ECO / DF No. | <b>Identification No. : Document No.</b> | Page 6 / 6   |
| File:                                      |  |              |