




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/6/2005 12:29:49 PM	DUT Battery Model/No:	
Filename:	righttlt190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Bellwave X100SA	Relative Permittivity:	42.01
Relative Humidity:	50%	Conductivity:	0.901
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-58.00 mm
DUT Position:	Left touch	Max SAR Z-axis Location:	-159.60 mm
Antenna Configuration:	Integral	Max E Field:	34.32 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.986 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.639 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.449 W/kg
Type of Modulation:		SAR End:	0.450 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

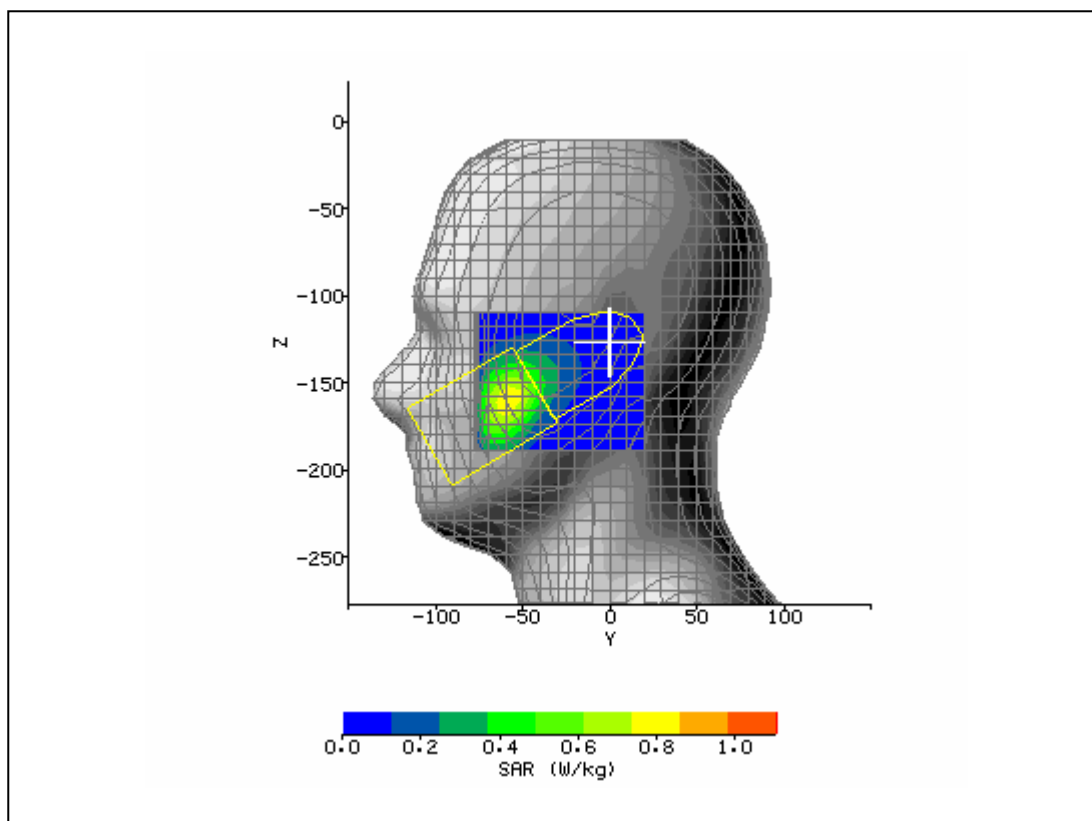


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/6/2005 12:59:54 PM	DUT Battery Model/No:	
Filename:	lefttch190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Bellwave X100SA	Relative Permittivity:	42.01
Relative Humidity:	50%	Conductivity:	0.901
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-49.00 mm
DUT Position:	Left tilt	Max SAR Z-axis Location:	-155.60 mm
Antenna Configuration:	Integral	Max E Field:	22.27 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.427 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.304 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.220 W/kg
Type of Modulation:		SAR End:	0.218 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.04 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

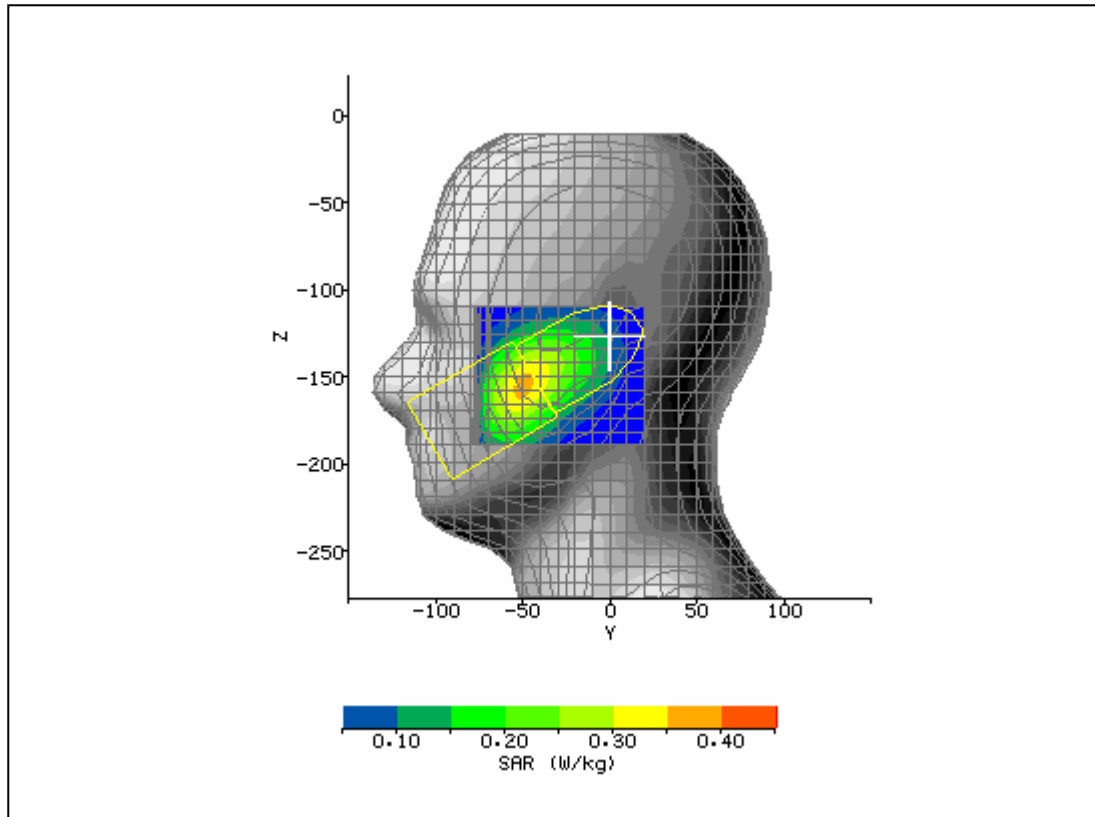


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/6/2005 11:10:49 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Bellwave X100SA	Relative Permittivity:	42.01
Relative Humidity:	50%	Conductivity:	0.901
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	52.00 mm
DUT Position:	Right touch	Max SAR Z-axis Location:	-170.00 mm
Antenna Configuration:	Integral	Max E Field:	32.69 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.883 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.566 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.408 W/kg
Type of Modulation:		SAR End:	0.407 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

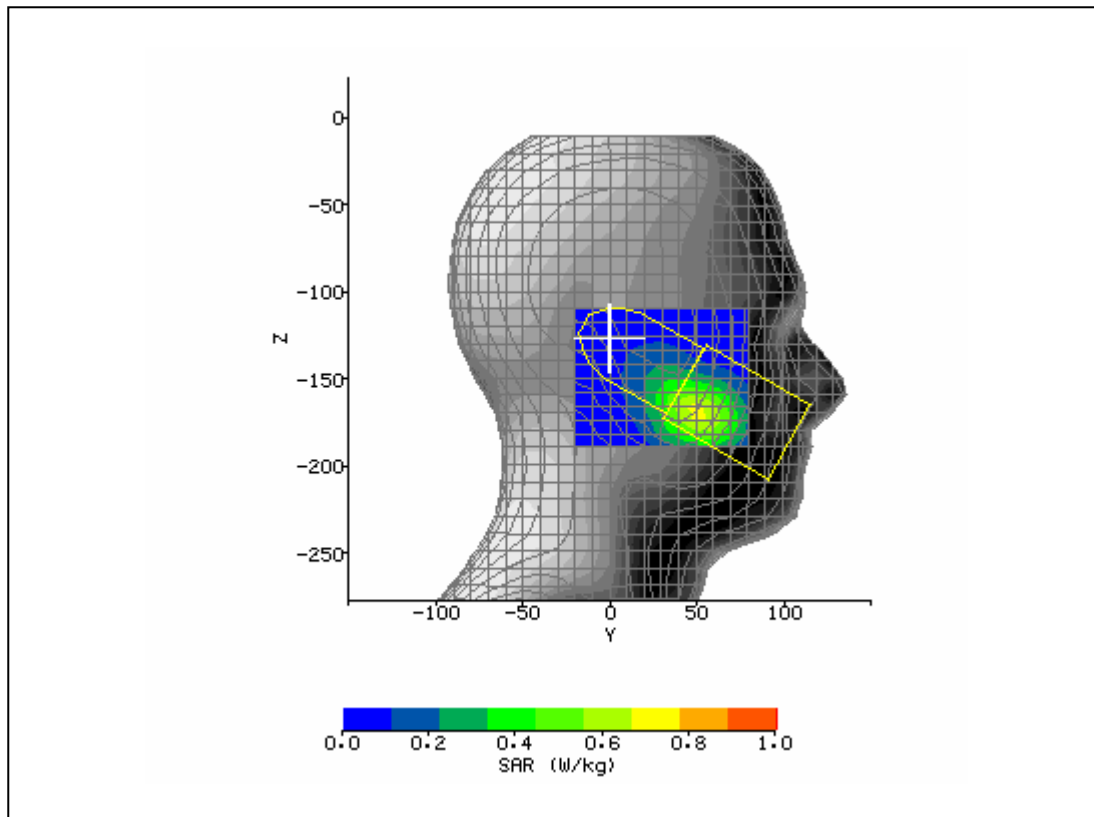


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/6/2005 11:54:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Bellwave X100SA	Relative Permittivity:	42.01
Relative Humidity:	50%	Conductivity:	0.901
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	44.00 mm
DUT Position:	Right tilt	Max SAR Z-axis Location:	-161.20 mm
Antenna Configuration:	Integral	Max E Field:	20.54 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.359 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.255 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.188 W/kg
Type of Modulation:		SAR End:	0.188 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

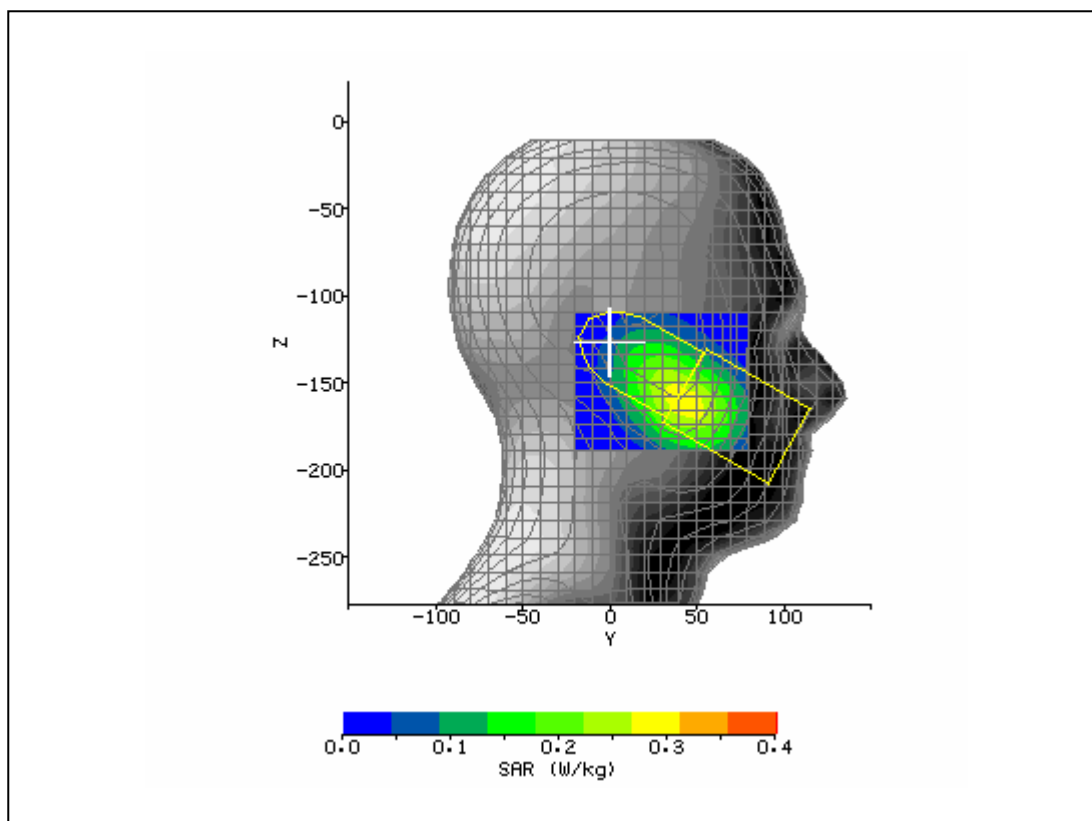


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/6/2005 1:31:34 PM	DUT Battery Model/No:	
Filename:	leftlt190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Bellwave X100SA	Relative Permittivity:	42.24
Relative Humidity:	50%	Conductivity:	0.899
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-58.00 mm
DUT Position:	Left touch	Max SAR Z-axis Location:	-160.40 mm
Antenna Configuration:	Integral	Max E Field:	34.47 V/m
Test Frequency:	824.2MHz	SAR 1g:	1.010 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.652 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.464 W/kg
Type of Modulation:		SAR End:	0.463 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

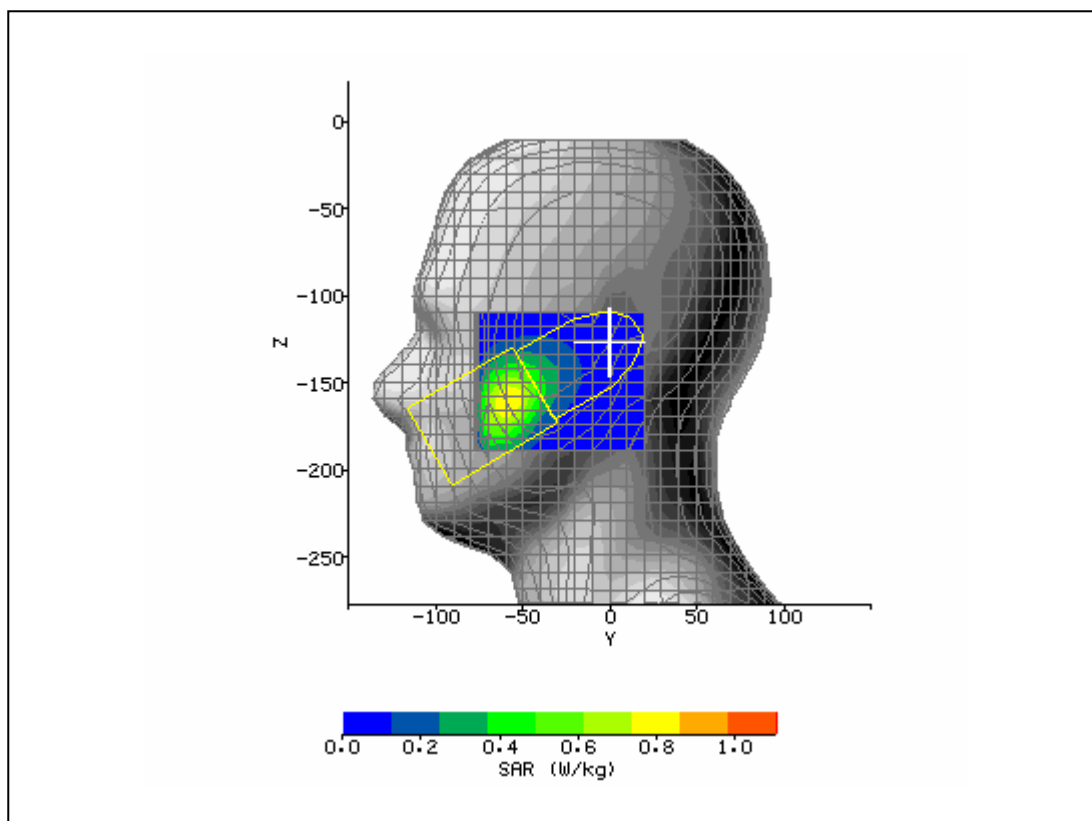


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/6/2005 2:35:45 PM	DUT Battery Model/No:	
Filename:	lefttch128_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Bellwave X100SA	Relative Permittivity:	41.86
Relative Humidity:	50%	Conductivity:	0.921
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-58.00 mm
DUT Position:	Left touch	Max SAR Z-axis Location:	-157.20 mm
Antenna Configuration:	Integral	Max E Field:	33.12 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.960 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.622 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.432 W/kg
Type of Modulation:		SAR End:	0.430 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.02 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

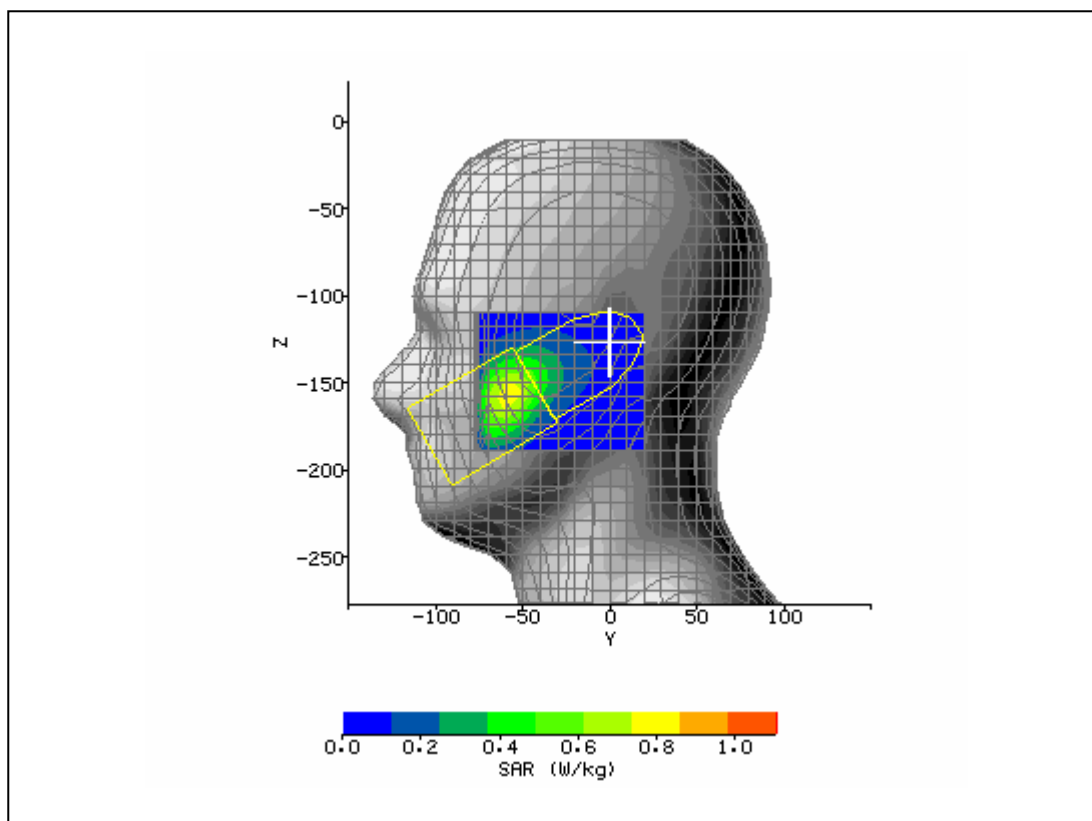


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/10/2005 1:04:04 PM	DUT Battery Model/No:	
Filename:	251_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Bellwave X100SA	Relative Permittivity:	56.21
Relative Humidity:	50%	Conductivity:	0.989
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-16.00 mm
DUT Position:	Body 1.5 cm from phantom	Max SAR Z-axis Location:	-153.20 mm
Antenna Configuration:	Integral	Max E Field:	22.68 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.442 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.295 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.190 W/kg
Type of Modulation:		SAR End:	0.191 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

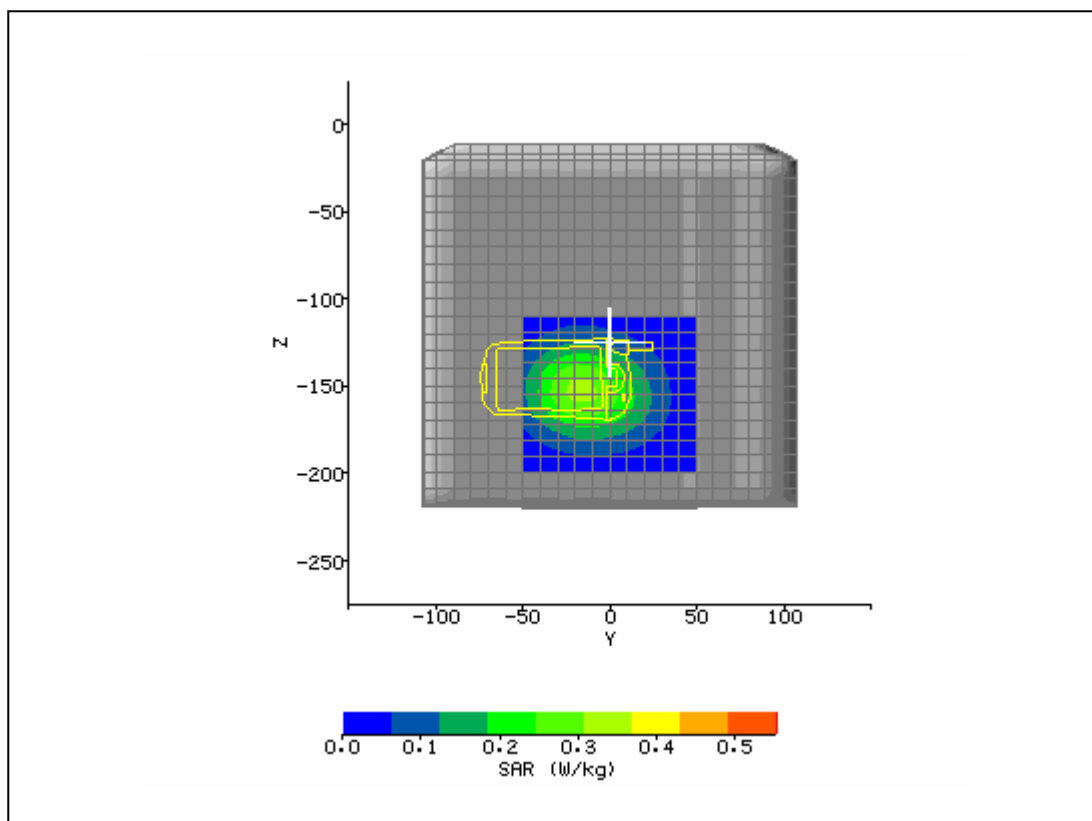


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/10/2005 12:03:02 PM	DUT Battery Model/No:	
Filename:	190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Bellwave X100SA	Relative Permittivity:	56.62
Relative Humidity:	50%	Conductivity:	0.982
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-20.00 mm
DUT Position:	Body 1.5 cm from phantom	Max SAR Z-axis Location:	-152.30 mm
Antenna Configuration:	Integral	Max E Field:	23.74 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.477 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.321 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.211 W/kg
Type of Modulation:		SAR End:	0.208 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.07 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

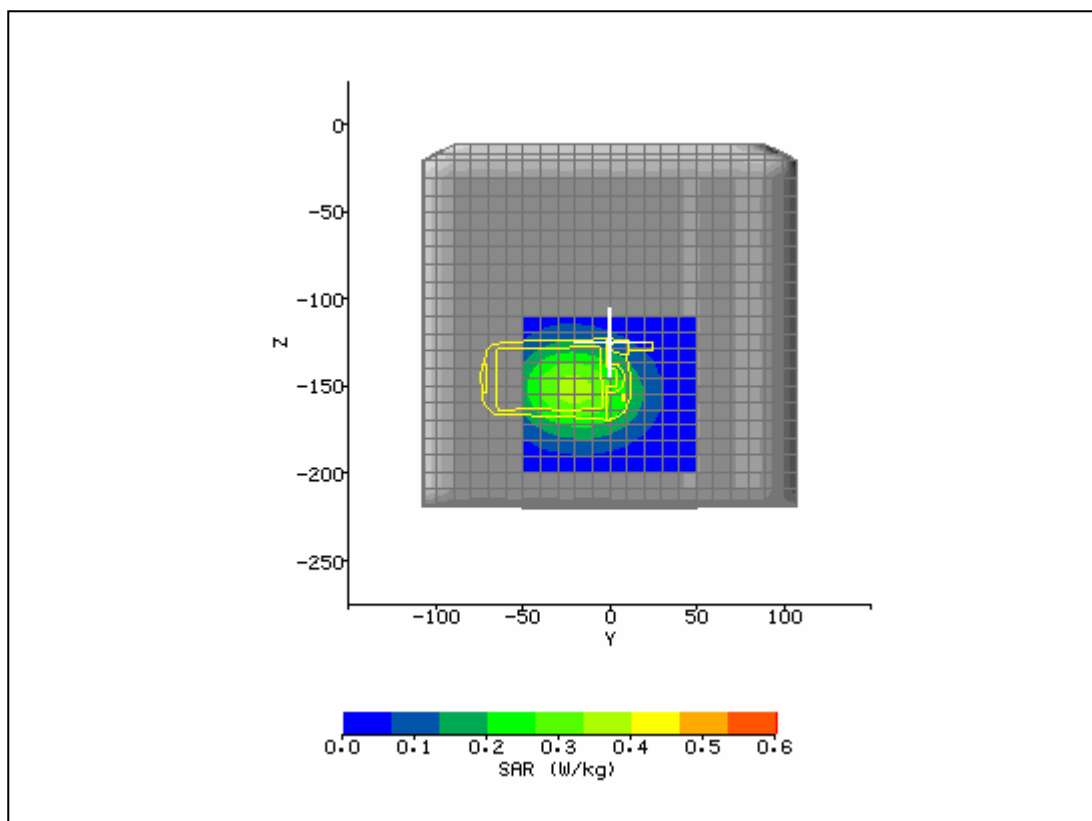


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/10/2005 12:33:19 PM	DUT Battery Model/No:	
Filename:	128_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Bellwave X100SA	Relative Permittivity:	56.01
Relative Humidity:	50%	Conductivity:	0.999
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-20.00 mm
DUT Position:	Body 1.5 cm from phantom	Max SAR Z-axis Location:	-152.30 mm
Antenna Configuration:	Integral	Max E Field:	23.99 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.495 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.331 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.213 W/kg
Type of Modulation:		SAR End:	0.216 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.06 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

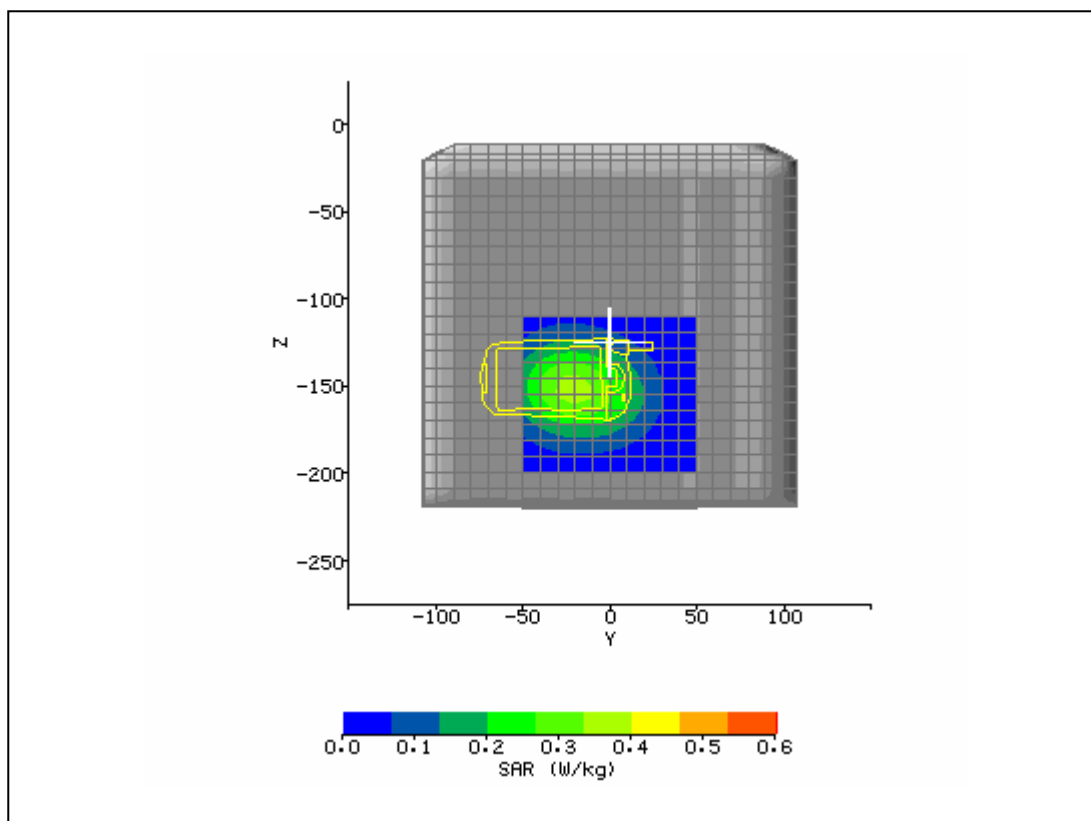


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/6/2005 4:33:01 PM	DUT Battery Model/No:	
Filename:	lefttch251_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Bellwave X100SA	Relative Permittivity:	39.24
Relative Humidity:	50%	Conductivity:	1.434
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-65.00 mm
DUT Position:	Left touch	Max SAR Z-axis Location:	-182.80 mm
Antenna Configuration:	Integral	Max E Field:	23.33 V/m
Test Frequency:	1880MHz	SAR 1g:	0.759 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.467 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.342 W/kg
Type of Modulation:		SAR End:	0.340 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.02 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

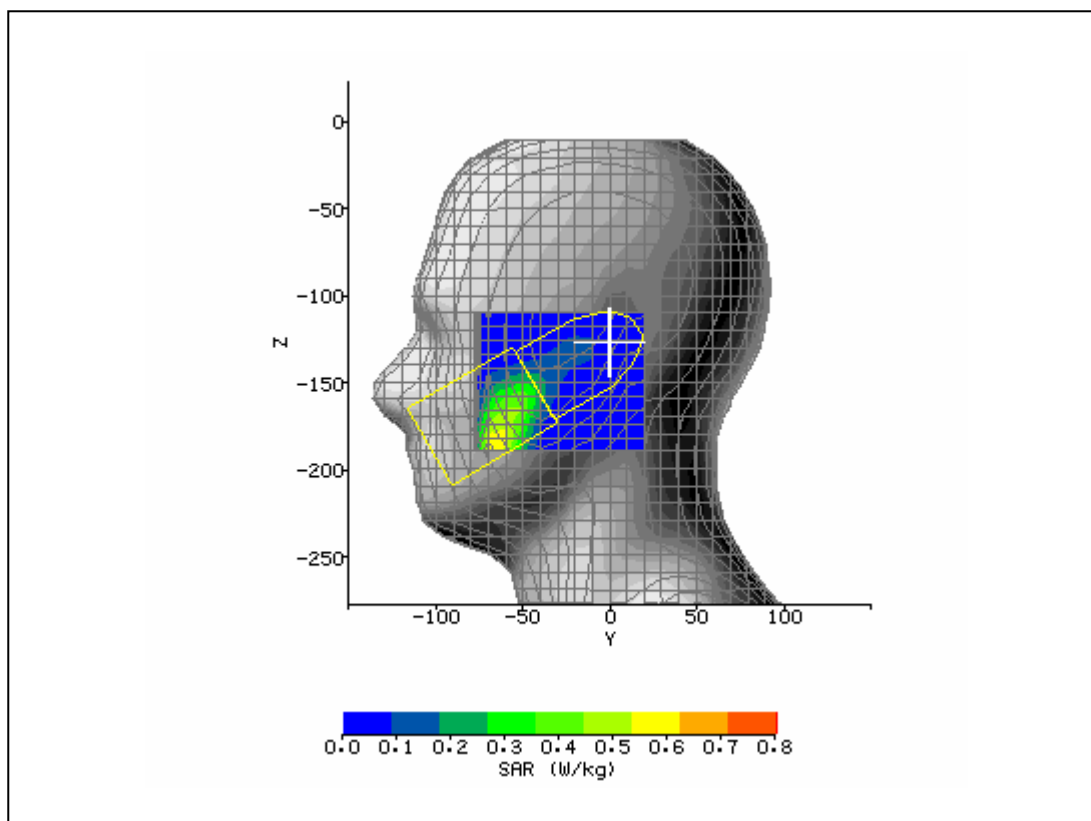


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/6/2005 5:02:29 PM	DUT Battery Model/No:	
Filename:	lefttch661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Bellwave X100SA	Relative Permittivity:	39.24
Relative Humidity:	50%	Conductivity:	1.434
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-61.00 mm
DUT Position:	Left tilt	Max SAR Z-axis Location:	-177.20 mm
Antenna Configuration:	Integral	Max E Field:	11.97 V/m
Test Frequency:	1880MHz	SAR 1g:	0.201 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.127 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.086 W/kg
Type of Modulation:		SAR End:	0.086 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

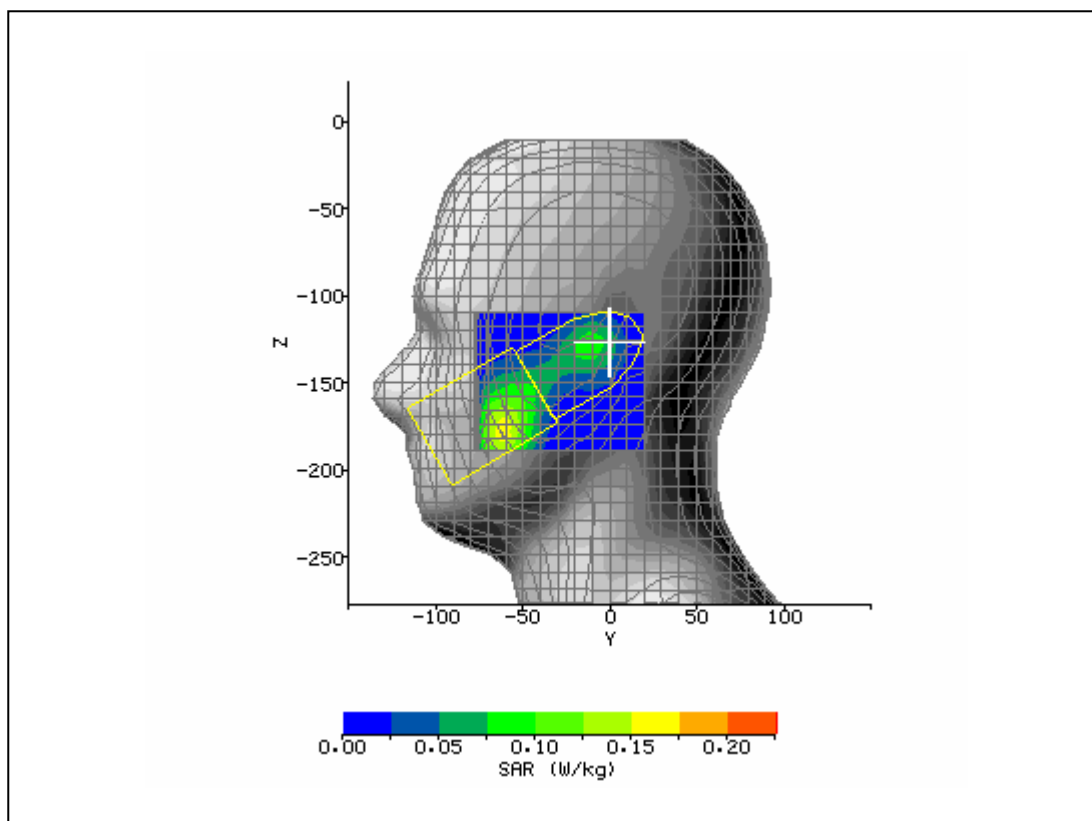


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/7/2005 10:16:29 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Bellwave X100SA	Relative Permittivity:	39.24
Relative Humidity:	50%	Conductivity:	1.434
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	68.00 mm
DUT Position:	Right touch	Max SAR Z-axis Location:	-164.90 mm
Antenna Configuration:	Integral	Max E Field:	23.51 V/m
Test Frequency:	1880MHz	SAR 1g:	0.711 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.436 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.313 W/kg
Type of Modulation:		SAR End:	0.313 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

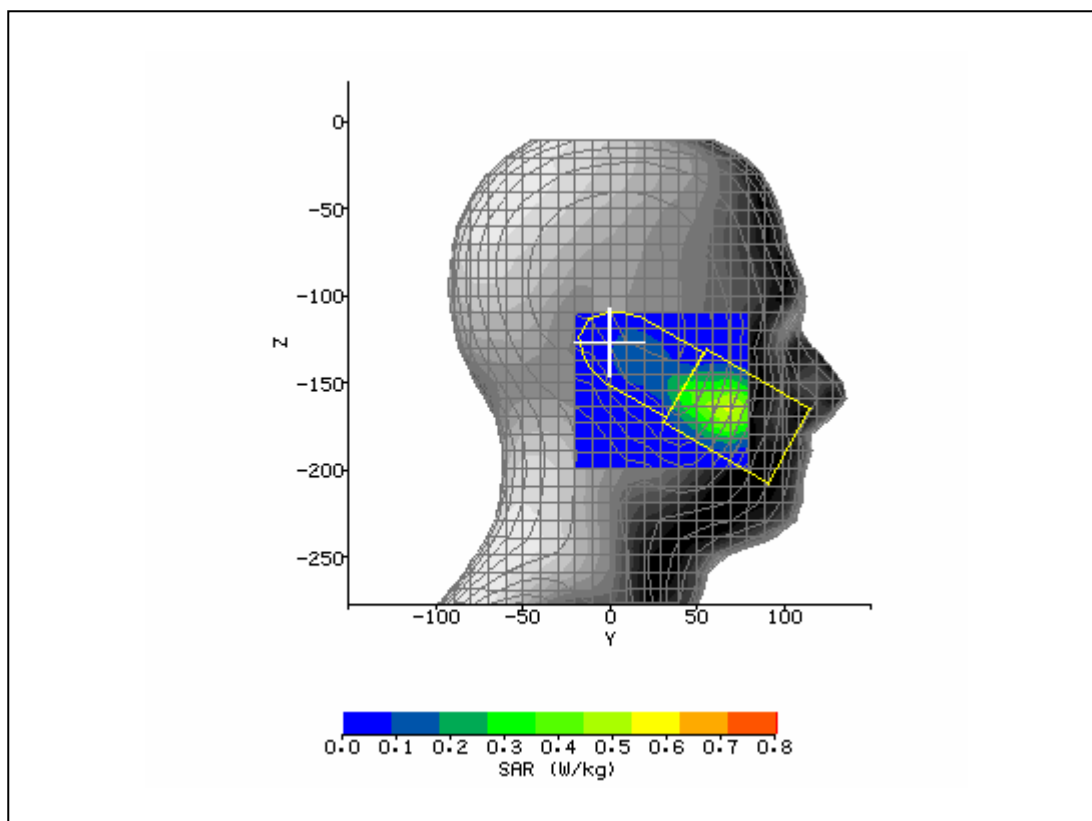


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/7/2005 10:49:22 AM	DUT Battery Model/No:	
Filename:	righttch661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Bellwave X100SA	Relative Permittivity:	39.24
Relative Humidity:	50%	Conductivity:	1.434
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	10.00 mm
DUT Position:	Right tilt	Max SAR Z-axis Location:	-128.90 mm
Antenna Configuration:	Integral	Max E Field:	11.98 V/m
Test Frequency:	1880MHz	SAR 1g:	0.180 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.107 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.071 W/kg
Type of Modulation:		SAR End:	0.070 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.05 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

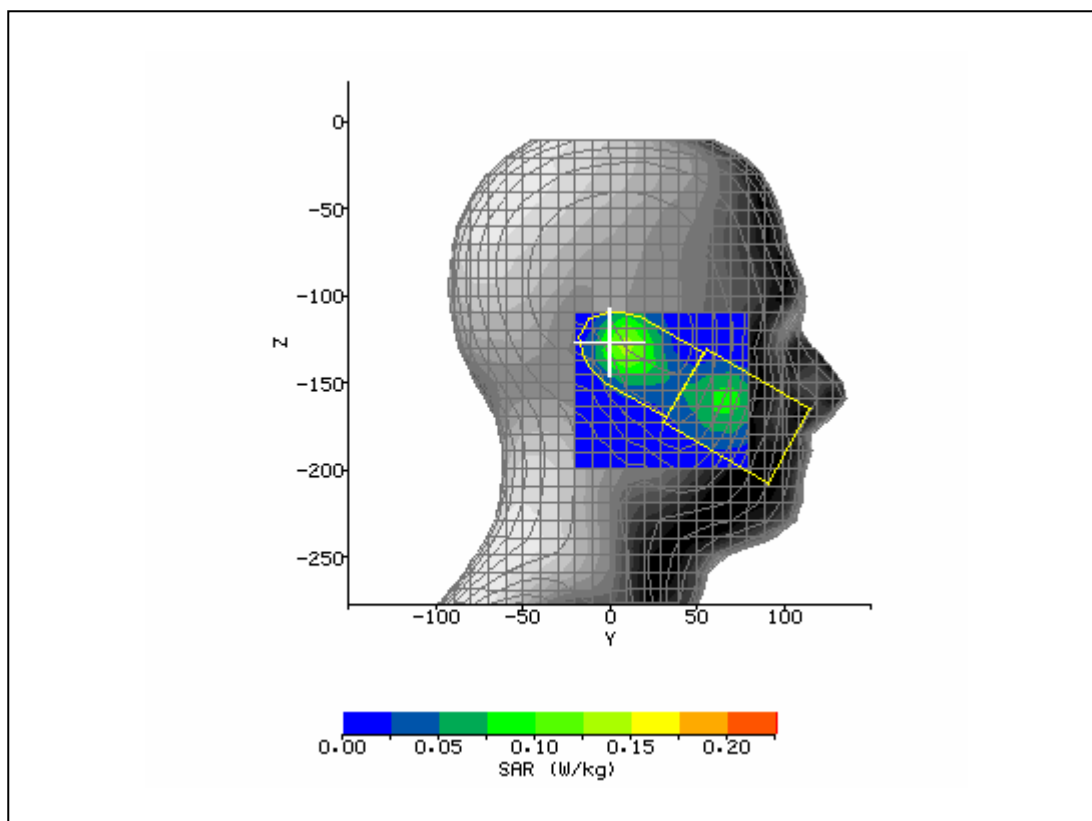


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/7/2005 11:21:59 AM	DUT Battery Model/No:	
Filename:	righttlt661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Bellwave X100SA	Relative Permittivity:	39.44
Relative Humidity:	50%	Conductivity:	1.411
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-64.00 mm
DUT Position:	Left touch	Max SAR Z-axis Location:	-172.10 mm
Antenna Configuration:	Integral	Max E Field:	24.31 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.784 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.498 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.391 W/kg
Type of Modulation:		SAR End:	0.392 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

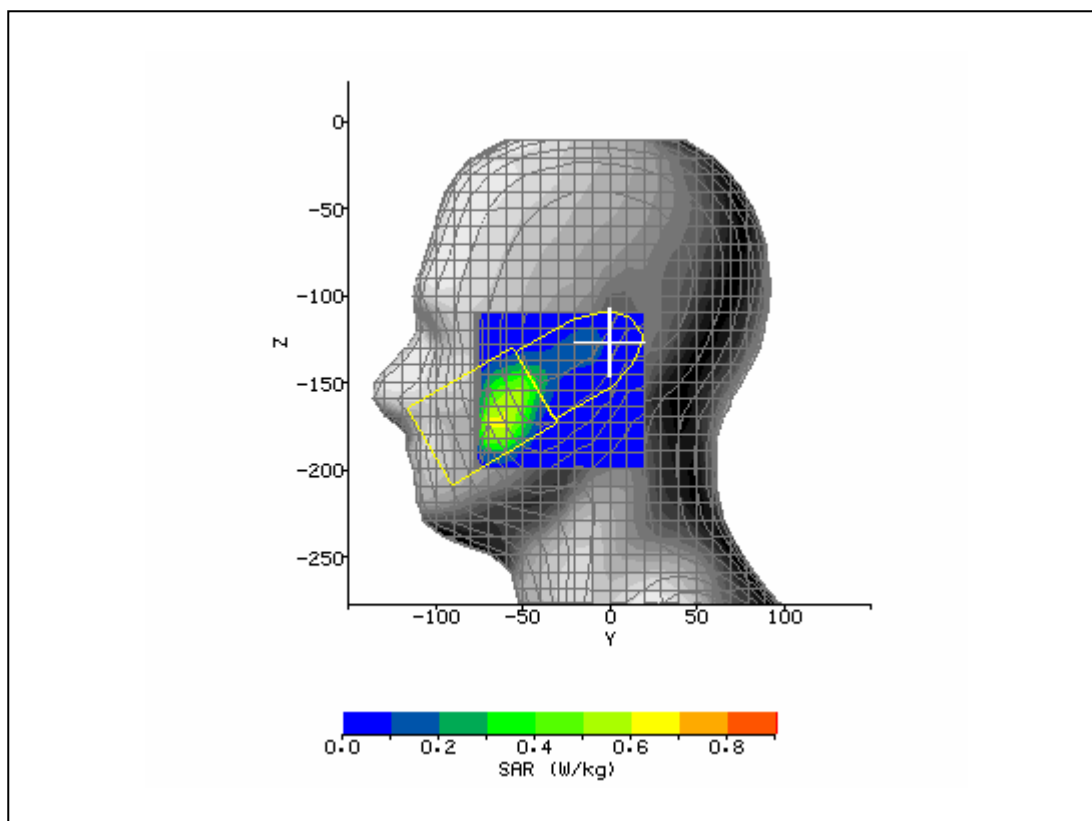


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/7/2005 11:59:43 AM	DUT Battery Model/No:	
Filename:	lefttch512_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Bellwave X100SA	Relative Permittivity:	39.01
Relative Humidity:	50%	Conductivity:	1.459
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-64.00 mm
DUT Position:	Left touch	Max SAR Z-axis Location:	-173.00 mm
Antenna Configuration:	Integral	Max E Field:	22.86 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.719 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.450 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.302 W/kg
Type of Modulation:		SAR End:	0.303 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

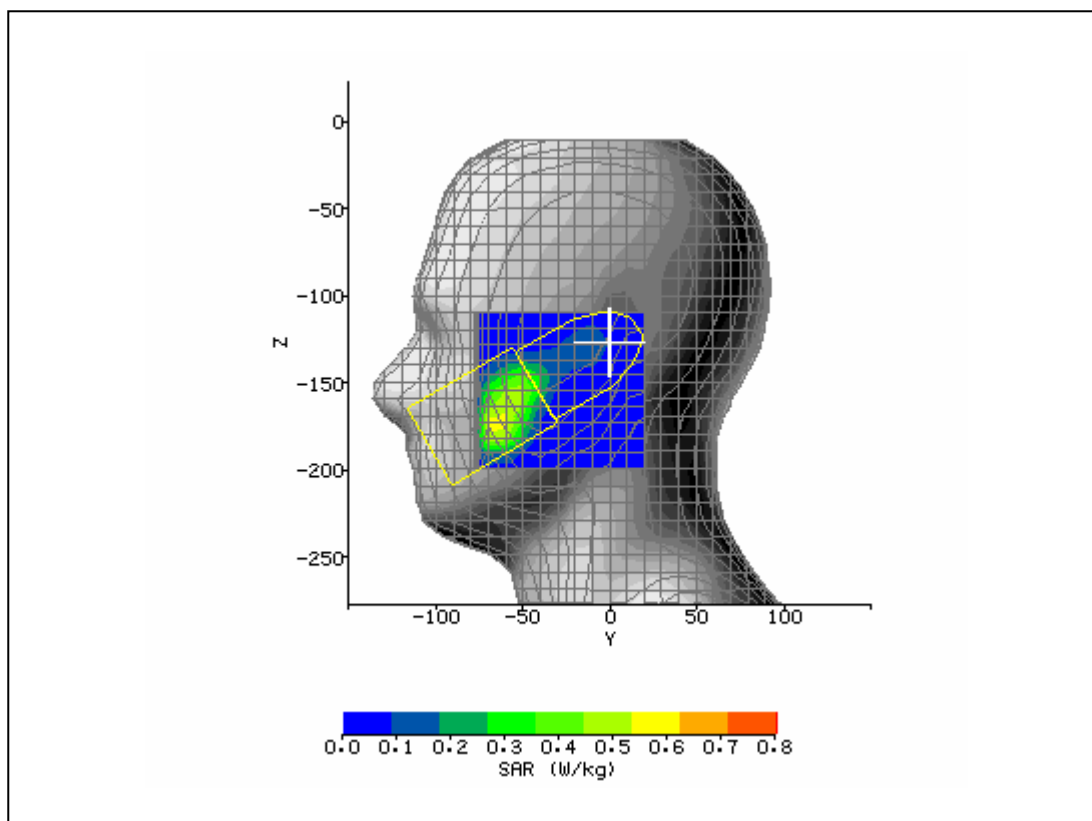

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/10/2005 2:24:58 PM	DUT Battery Model/No:	
Filename:	190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Bellwave X100SA	Relative Permittivity:	53.29
Relative Humidity:	50%	Conductivity:	1.561
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	22.00 mm
DUT Position:	Body 1.5 cm from phantom	Max SAR Z-axis Location:	-163.10 mm
Antenna Configuration:	Integral	Max E Field:	23.19 V/m
Test Frequency:	1880MHz	SAR 1g:	0.698 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.419 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.226 W/kg
Type of Modulation:		SAR End:	0.224 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.03 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

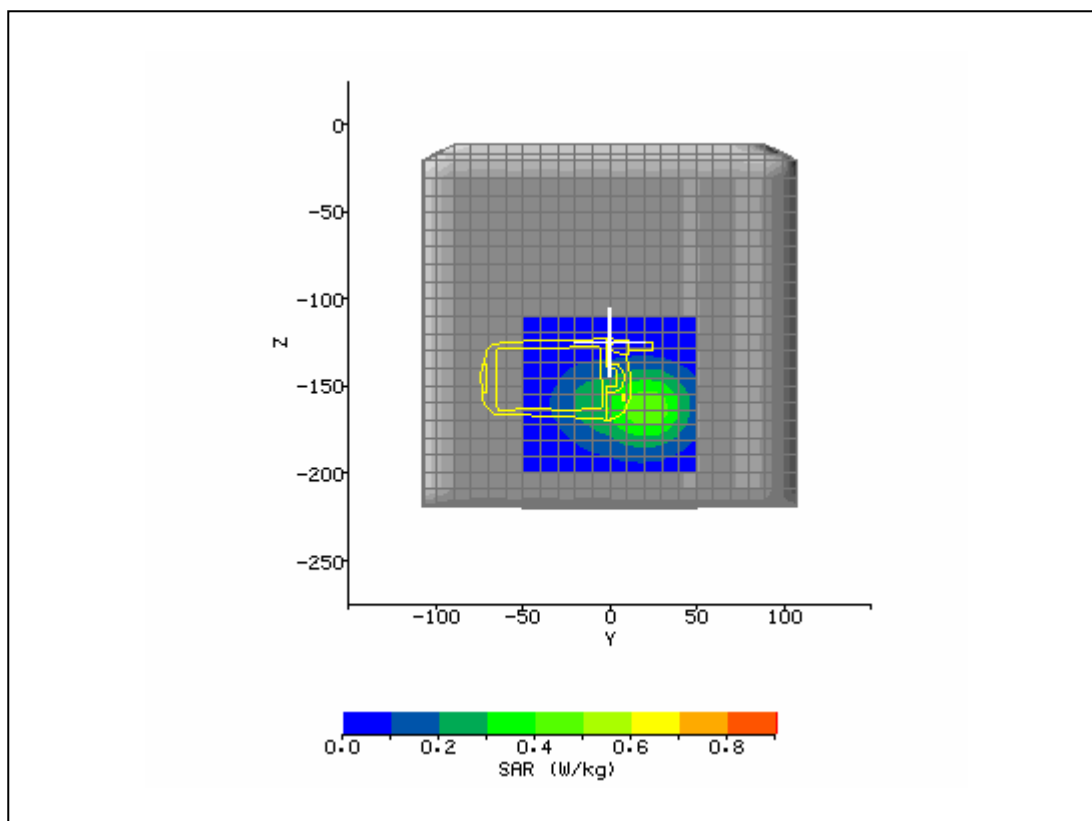

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/10/2005 3:01:36 PM	DUT Battery Model/No:	
Filename:	661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Bellwave X100SA	Relative Permittivity:	53.42
Relative Humidity:	50%	Conductivity:	1.545
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	20.00 mm
DUT Position:	Body 1.5 cm from phantom	Max SAR Z-axis Location:	-163.10 mm
Antenna Configuration:	Integral	Max E Field:	20.91 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.569 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.347 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.189 W/kg
Type of Modulation:		SAR End:	0.190 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

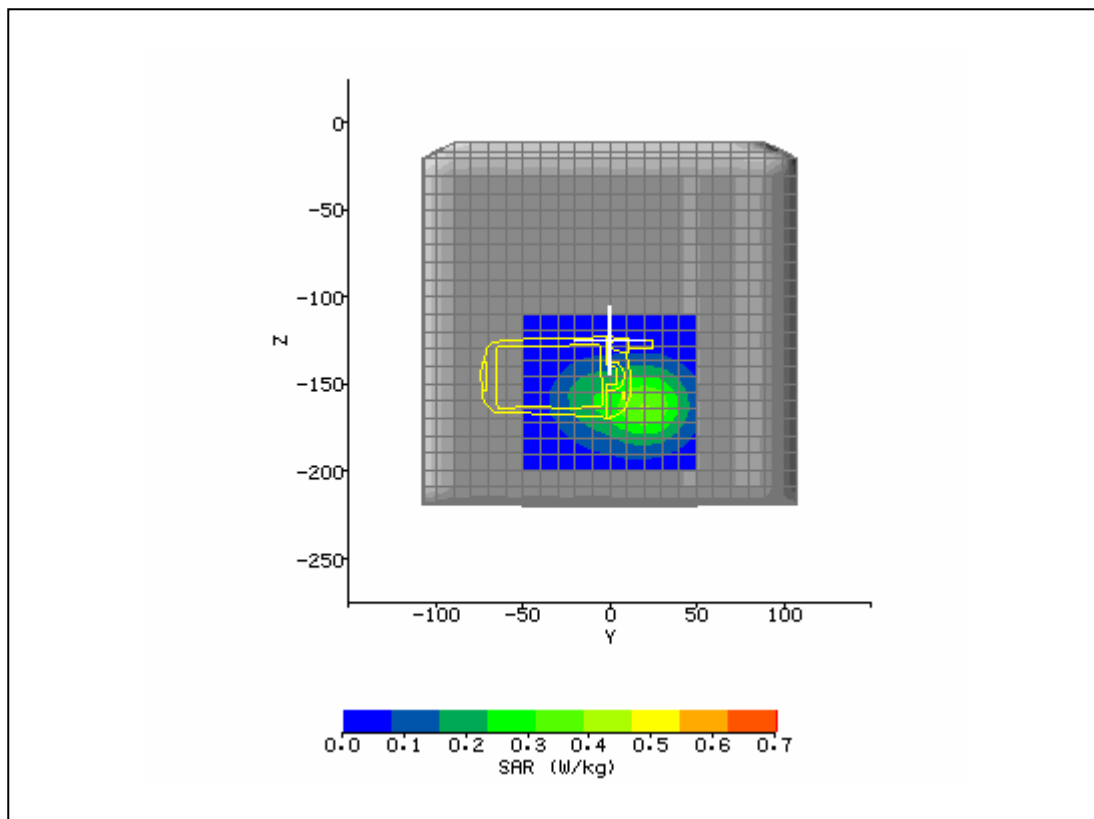

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	1/10/2005 3:42:32 PM	DUT Battery Model/No:	
Filename:	512_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Bellwave X100SA	Relative Permittivity:	53.07
Relative Humidity:	50%	Conductivity:	1.572
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	23.00 mm
DUT Position:	Body 1.5 cm from phantom	Max SAR Z-axis Location:	-164.00 mm
Antenna Configuration:	Integral	Max E Field:	24.39 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.784 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.471 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.253 W/kg
Type of Modulation:		SAR End:	0.254 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

