

FCC EVALUATION REPORT FOR CERTIFICATION

KOREA Standard Technology

Test report No.: KST-FCC0505

Applicant's Name : PROSS KOREA Inc.
Applicant's Address : #2007 Daewoo Utopia, 22 Bangi-dong, Songpa-gu,
Seoul, 138-827 KOREA
Manufacturer's Name : PROSS KOREA Inc.
Manufacturer's Address : #2007 Daewoo Utopia, 22 Bangi-dong, Songpa-gu,
Seoul, 138-827 KOREA

EUT's:

FCC ID : SYB0501-3
Product Name : One Way Car Alarm System
(Remote control/ Security Device Transceiver)
Model Number(s) : PKO-R1000U
Product Options : N/A
Category : FCC Part15, Subpart C – Intentional Radiator

Supplementary Information

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-2000.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Test Date : January 28, 2005

Issued Date : January 31 , 2005

Tested by:



Choi, Jae-Rock

Approved by:



Lee, Weon-Woo

Contents

1. Description of Device
2. Test Facility
3. MAP
4. Test system configuration
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

Appendix. Schematics

Specifications.

1. Description of Device

1) Kind of equipment:	One Way Car Alarm System
2) FCC ID:	SYB0501-3
3) Model Name:	PKO-R1000U
4) Serial No.:	None
5) Type of Sample Tested:	Pre-production
6) High Frequency Used:	433.9MHz
7) Communication;	FM One-Way
8) Operating Frequency;	FM 433.9 MHz
9) Modulation Type & Deviation;	FSK & STD 3 KHz
10) Power Rating:	DC 3.0 V Lithium ion Battery (CR2032)
11) RF Sensitivity;	-120dBm
12) Tested Power supply:	DC 3.0 V Lithium ion Battery (CR2032)
13) Dimension;	RF Module ; 57(W) x 34.3(H) x 11.6(T) mm
14) Date of Manufacture:	January , 2005
15) Manufacture:	PROSS KOREA Inc.
16) Description of Operating:	Pulse code signal with manually
17) Dates of Test:	January 29, 2005
18) Place of Tests:	Korea Standard Technology EMC site
19) Test Report No:	KST-FCC0505

2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

Korea Standard Technology (KOSTEC Co., Ltd)

Head office & Test Lab ;

:180-254, Annyung-Ri, Taeon-Yup, Hwasung-shi, Kyunggi-do, Korea

Telephone Number : 82-31-222-4251

Facsimile Number: 82-31-222-4252

MIC(Ministry of Information and Communication) Number: **KR0042**


FCC Filing Number. : **525762**

VCCI Membership Number : **2005**


VCCI Registration Number : **R-1657 / C-1763**

3. Route Map of Measurement Facility

Korea

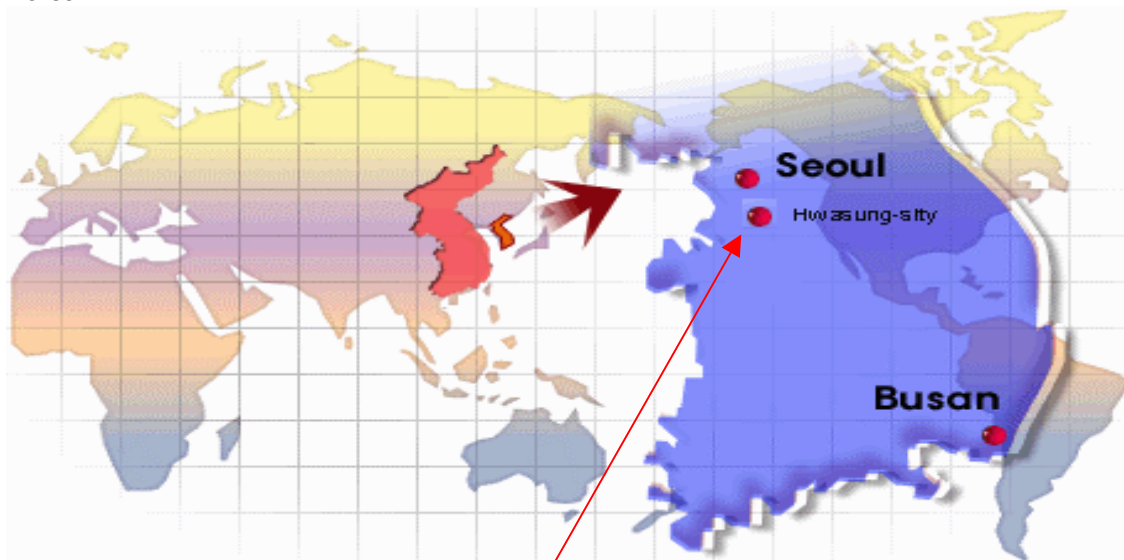

Hwasung-shi (open area test site)

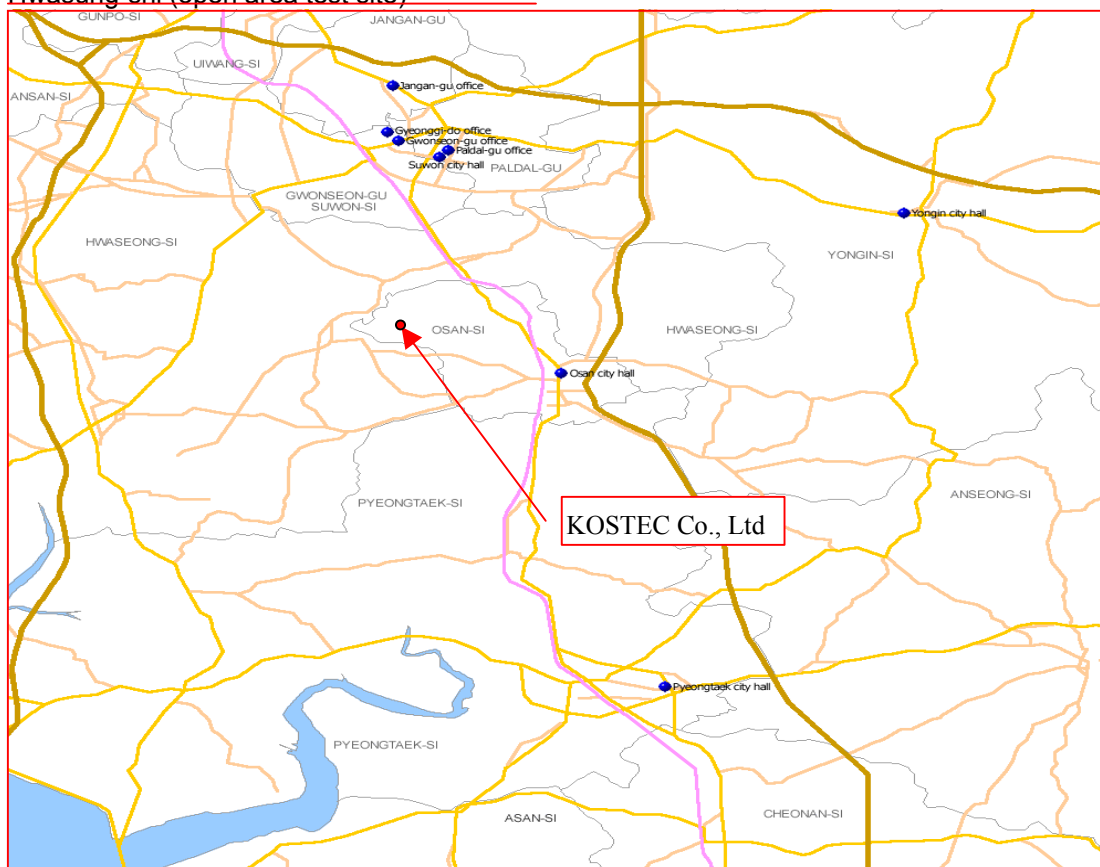

4. Test System Configuration

Operation Environment

Ambient	<u>Temperature</u> (° C)	<u>Humidity</u> (%)	<u>Pressure</u> (hPa)
10 m Open Area site	7.9	34	1022
Shielded room:	19.1	36	1022

Test site

These testing were performed following locations ;

Shielded room : Conducted Emission,

10 m Open Area Site: Radiated Emission

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability.

Based on NIS 80,81, The measurement uncertainty level with a 95% confidence level were applied.

sample calculation

Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30 dB, LISN Factor 1 dB, CL 1 dB

The result (MR) is

$$30 + 1 + 1 = 32 \text{ dB}_{\mu V}$$

7. TEST RESULTS

7.1 Conducted emission

Measurement procedure

Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4 m above the reference ground plane. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date	Used
Test receiver	ESPI3	100109	R&S	2005.3.15	●
L.I.S.N.	ESH2-Z5	100044	R&S	2005.4.23	●
	ESH2-Z5	100147	R&S	2005.4.23	●

Measurement uncertainty

Conducted Emission measurement : ± 2.4 (K=2)

Test data

- **Not Application**
- Use to DC 3V Lithium ion Battery

7.2 Radiated Emission

Measurement procedure

A pretest was performed at 3 m distances in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10 m open area test site with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date
Test receiver	ESCS30	100111	R&S	2005.3.17
Ultra broadband antenna	HL562	100075	R&S	2005.3.16
Matching network	RAM	358.5414.02	R&S	-
Antenna Mast	AT14	none	Daeil EMC	-
Turn Table	TT15	none	Daeil EMC	-
10m Open area site	none	none	KOSTEC Lab	-
chamber(3 m)	none	none	FRANCONIA	-

Measurement uncertainty

Radiated Emission measurement :
30-300 MHz +3.96 dB / -4.04 dB
300-1000 MHz +3.04 dB / -3.00 dB

Radiated Limits per section 15.231 ;

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter) μV	Field Strength of Spurious Emissions (microvolts / meter) μV
40.66 ~ 40.70	2250	225
70 ~ 130	1250	125
130 ~ 174	1250 ~ 3750	125 ~ 375
174 ~ 260	3750	375
260 ~ 470	3750 ~ 12500	375 ~ 1250
470 & above	12500	1250

EMI TEST REPORT



Report reference No: KST-FCC0505

Test data

< Part 15.231 – TX Mode >

Freq (MHz)	Reading (dB μ V/m)	P (H/V)	Antenna (dB)	Cable Loss (dB)	Result(P) (dB μ V/m)	Result(A) (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
433.90	54.90	H	14.19	7.73	76.82	76.82	80.8	3.98
867.80	12.30	H	20.17	11.27	46.10	43.74	60.8	17.06
1301.60	4.80	H	24.60	13.40	48.80	42.80	54.0	11.20
1735.60	6.90	V	26.30	15.80	53.50	49.00	60.8	11.80
2169.60	4.20	H	28.10	17.90	55.30	50.20	60.8	10.60
-	-	-	-	-	-	-	-	-

Reading = Test receiver reading / P= antenna Polarization / H=antenna H
 A=turn table Angle / Antenna = antenna factor / Cable loss = used cable loss
 Result = reading + antenna + loss / Margin = Limit - result
 * Receiving Antenna Mode: Horizontal, Vertical / * Test site: 3 m Open area site

Note ; These frequencies fall under restricted bands according to section 15.205.

The field strength of emissions at these frequencies does not exceed the limits specified in Section 15.205.

$$\text{dBuV} = 20\log_{10}(\mu\text{V/m})$$

$$\text{dBuV} = \text{dBm} + 107$$

Calculation of Limit at 434 MHz per Section 15.231 as follows;

$$260 \text{ MHz} - 3750 \mu\text{V/m} \quad / \quad 470 \text{ MHz} - 12500 \mu\text{V/m}$$

$$\frac{12500-3750}{470-260} = \frac{8750}{210}$$

$$\frac{(434-260) \times (8750)}{210} = 7250 \mu\text{V/m}$$

$$7250 + 3750 = 11000 \mu\text{V/m} \text{ (} 80.8 \text{ dB}\mu\text{V) Limit at 434 Mhz.}$$

7.3 Occupied Bandwidth Measurement

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz.

The bandwidth is determined at the points 20 dB down from the modulated carrier.

Carrier Frequency - 434 MHz

$434 \text{ MHz} \times 0.0025 = 1.085 \text{ MHz}$

Graph is as follows;


Next Page

EMI TEST REPORT



Report reference No: KST-FCC0505

Occupied Bandwidth

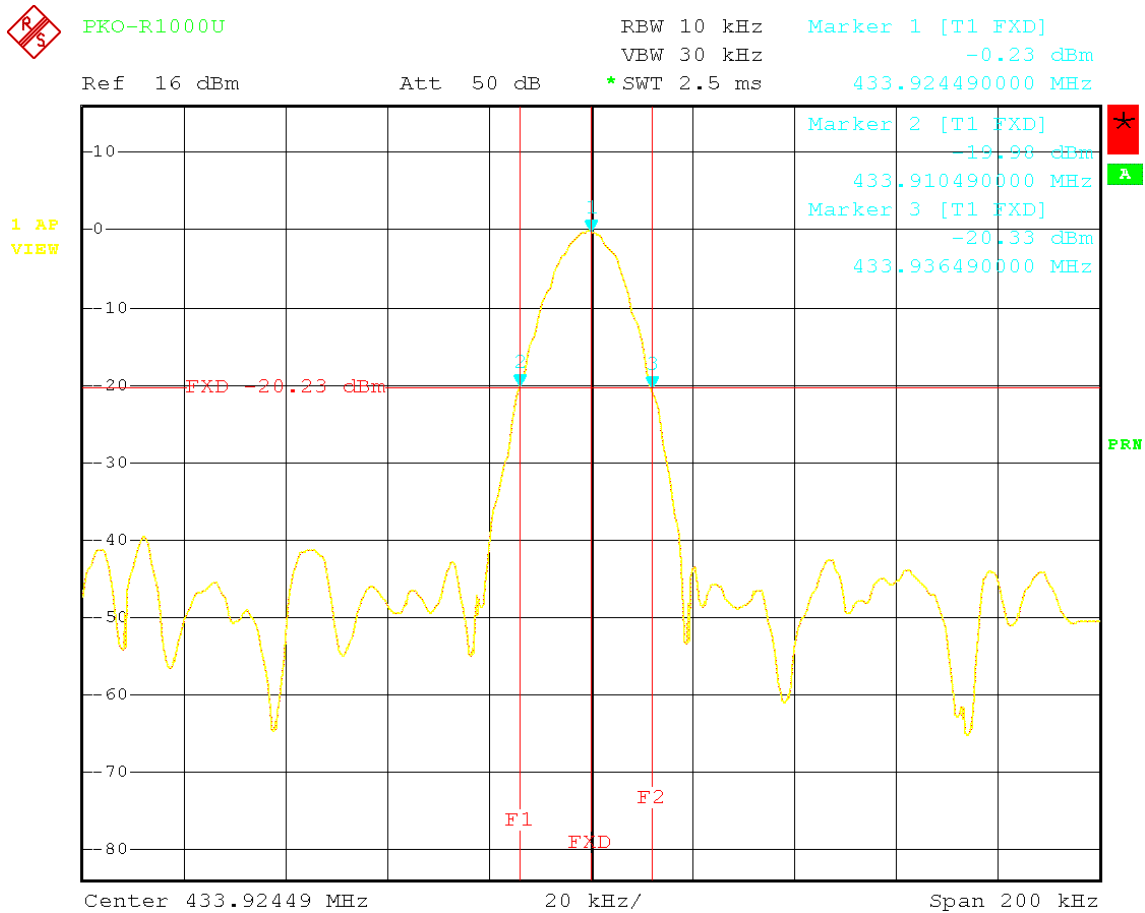

Date: 29.JAN.2005 10:43:37