

# ***FCC TEST REPORT***

**FCC ID** : CYM881887

**Applicant** : **CCA Electronic Factory**  
Building 82-83th Pinghuan Industrial City, PingShan Town,LongGang  
District, Shenzhen city China

**Equipment Under Test (EUT) :**


Product description : 3 in 1 ipod auto kit

Model No. : IXX(00-99)

**Standards** : FCC 15 Paragraph 15.203,Paragraph 15.205, Paragraph 15.209,  
Paragraph 15.31,Paragraph 15.33, Paragraph 15.35, Paragraph 15.239

**Date of Test** : February 23, 2005

**Test Engineer** : Model Wu

**Reviewed By** : 

PERPARED BY:  
**Shenzhen Huatongwei International Inspection Co., Ltd**

Keji S,12th,Road, Hi-tech Industrial Park, Shenzhen, Guangdong, China

FCC Registration Number: 662850

## 2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS .....	2
3 TEST SUMMARY.....	5
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION .....	5
4.2 GENERAL DESCRIPTION OF E.U.T.....	5
4.3 DETAILS OF E.U.T.....	5
4.4 DESCRIPTION OF SUPPORT UNITS .....	5
4.5 STANDARDS APPLICABLE FOR TESTING.....	5
4.6 TEST FACILITY.....	6
4.7 TEST LOCATION.....	6
5 EQUIPMENT USED DURING TEST .....	7
6 CONDUCTED EMISSION TEST .....	8
6.1 TEST EQUIPMENT.....	8
6.2 TEST PROCEDURE .....	8
6.3 CONDUCTED TEST SETUP .....	9
6.4 EUT OPERATING CONDITION .....	9
6.5 CONDUCTED EMISSION LIMITS .....	10
6.6 CONDUCTED EMISSION TEST RESULT.....	10
7 RADIATION EMISSION TEST.....	11
7.1 TEST EQUIPMENT.....	11
7.2 MEASUREMENT UNCERTAINTY.....	11
7.3 TEST PROCEDURE .....	11
7.4 RADIATED TEST SETUP.....	12
7.5 SPECTRUM ANALYZER SETUP.....	12
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	13
7.7 SUMMARY OF TEST RESULTS.....	13
7.8 EUT OPERATING CONDITION .....	14
7.9 RADIATED EMISSIONS LIMIT.....	14
7.10 RADIATED EMISSIONS TEST RESULT.....	15
8 BAND EDGE .....	17
8.1 TEST EQUIPMENT.....	17
8.2 TEST PROCEDURE .....	17
8.3 RADIATED TEST SETUP.....	18
8.4 EUT OPERATION .....	18
8.5 BAND EDGE LIMIT .....	18
8.6 BAND EDGE TEST RESULT.....	19
9 PHOTOGRAPHS OF TESTING.....	20
9.1 RADIATION EMISSION TEST VIEW .....	20

<b>10</b>	<b>PHOTOGRAPHS - CONSTRUCTIONAL DETAILS .....</b>	<b>21</b>
10.1	EUT - FRONT VIEW .....	21
10.2	EUT - BACK VIEW .....	21
10.3	PCB - COMPONENT VIEW.....	22
10.4	PCB - SOLDER VIEW .....	22
<b>11</b>	<b>FCC ID LABEL.....</b>	<b>23</b>

### 3 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 1GHz)	FCC PART 15: 2003	ANSI C63.4: 1992	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 1992	Class B	N/A

### 4 General Information

#### 4.1 Client Information

Applicant: **CCA Electronic Factory**  
Address of Applicant: Building 82-83th Pinghuan Industrial City, PingShan  
Town,LongGang District, Shenzhen city China

#### 4.2 General Description of E.U.T.

Product description: 3 in 1 ipod auto kit  
Model No.: IXX(00-99)

#### 4.3 Details of E.U.T.

Power Supply: 12.0VDC BATTERY

#### 4.4 Description of Support Units

The EUT has been tested as an independent unit.

#### 4.5 Standards Applicable for Testing

The customer requested FCC tests for a 3 in 1 ipod auto kit. The standards used were FCC 15 Paragraph 15.209 and Paragraph 15.239.

#### **4.6 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 662850**

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 662850, November 17, 2003.

#### **4.7 Test Location**

All Emissions tests were performed at:-Shenzhen Huatongwei International Inspection Co., Ltd. at Keji S,12th,Road, Hi-tech Industrial Park, Shenzhen, Guangdong, China.

## 5 Equipment Used during Test

<b>Conducted Emission Test</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Due date</b>
1	Shielding Room	Frankonia	12 x 4 x 4 m <sup>3</sup>	EMC0103	N/A	N/A
2	LISN	Schaffner Chase	MNZ050D11	1421	06-11-2004	05-11-2005
3	EMI Test Receiver	Rohde & Schwarz	ESCS30	100038	18-11-2004	17-11-2005
<b>Radiated Emission Test</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Due date</b>
1	3m Semi- Anechoic Chamber	ETS	N/A	N/A	05-11-2004	04-11-2005
2	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	100009	12-11.2004	12-11.2005
3	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100038	18-11-2004	17-11-2005
4	EMI Test Software	ROHDE & SCHWARZ	ES-K1	N/A	N/A	N/A
5	Bilog Type Antenna	ETS	2075	2346	02-12-2004	01-12-2005
5	Ultra-Broadband Antenna	ROHDE & SCHWARZ	HL562	100015	02-12-2004	01-12-2005
<b>Common Used Equipment</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Series No.</b>	<b>Cal. Date</b>	<b>Due date</b>
1	Temperature, Humidity & Barometer	OREGON SCIENTIFIC	BA-888	EMC0001 to EMC0004	25-07-2004	25-07-2005
2	DMM	FLUKE	73	70681569 or 70671122	23-07-2004	23-07-2005

## 6 Conducted Emission Test

Product:	3 in 1 ipod auto kit / IXX(00-99)
Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:	-----
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

### 6.1 Test Equipment


Please refer to Section 5 this report.

### 6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

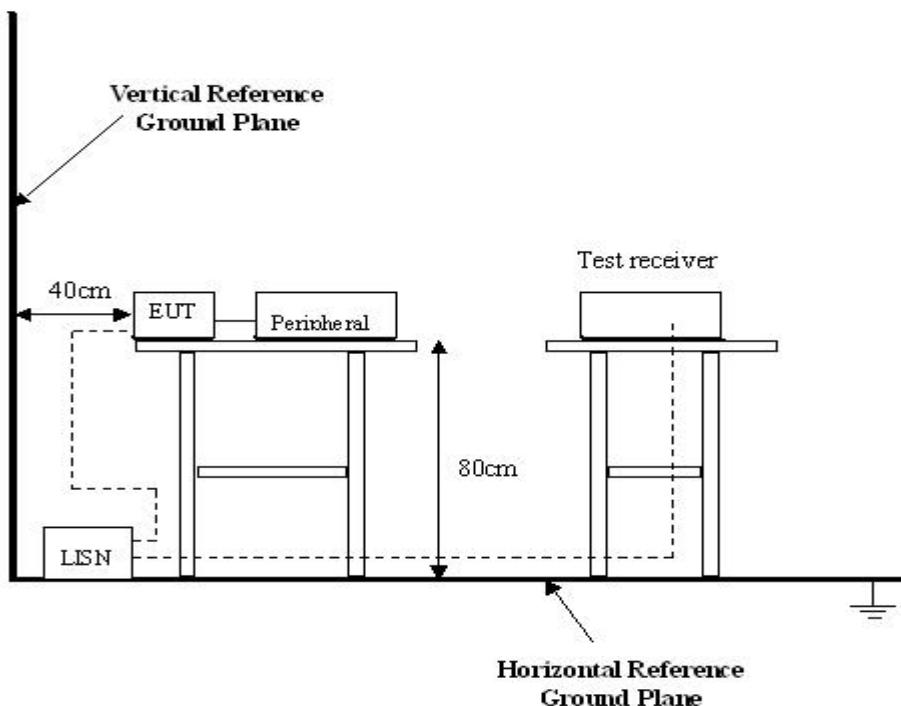

### 6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

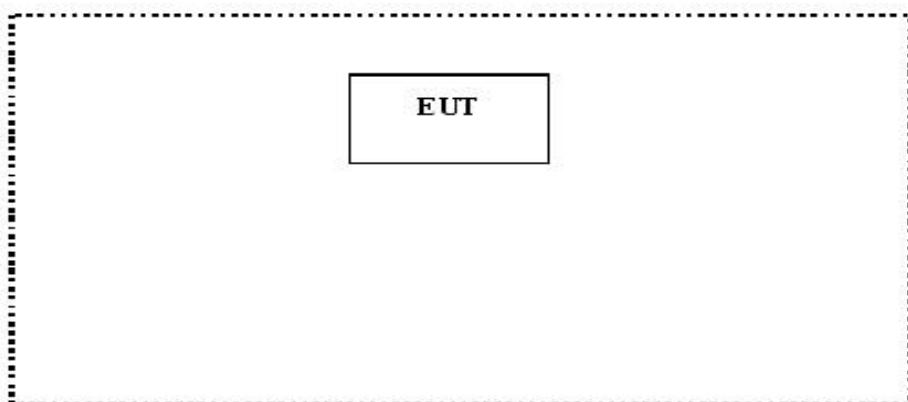

## 6.5 Conducted Emission Limits

66-56 dB $\mu$ V/m between 0.15MHz & 0.5MHz

56 dB $\mu$ V/m between 0.5MHz & 5MHz

60 dB $\mu$ V/m between 5MHz & 30MHz

**Note:** In the above limits, the tighter limit applies at the band edges.

## 6.6 Conducted Emission Test Result

Owing to the DC operation of EUT, this test is not performed.

## 7 Radiation Emission Test

Product:	3 in 1 ipod auto kit / IXX(00-99)
Test Requirement:	FCC Part15 Paragraph 15.209 and Paragraph 15.239
Test Method:	Based on FCC Part15 Paragraph 15.209 and Paragraph 15.239
Test Date:	February 23, 2005
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

### 7.1 Test Equipment

Please refer to Section 5 this report.

### 7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at SZHTW is +4.0 dB.

### 7.3 Test Procedure

1. For the radiated emissions test, since the EUT does not have a power source, there was no connection to AC outlets.
2. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
3. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB $\mu$ V of specification limits), and are distinguished with a "Qp" in the data table.
4. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

## 7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4, The specification used in this report was the FCC Part15 Paragraph 15.209 and Paragraph 15.239 limits.

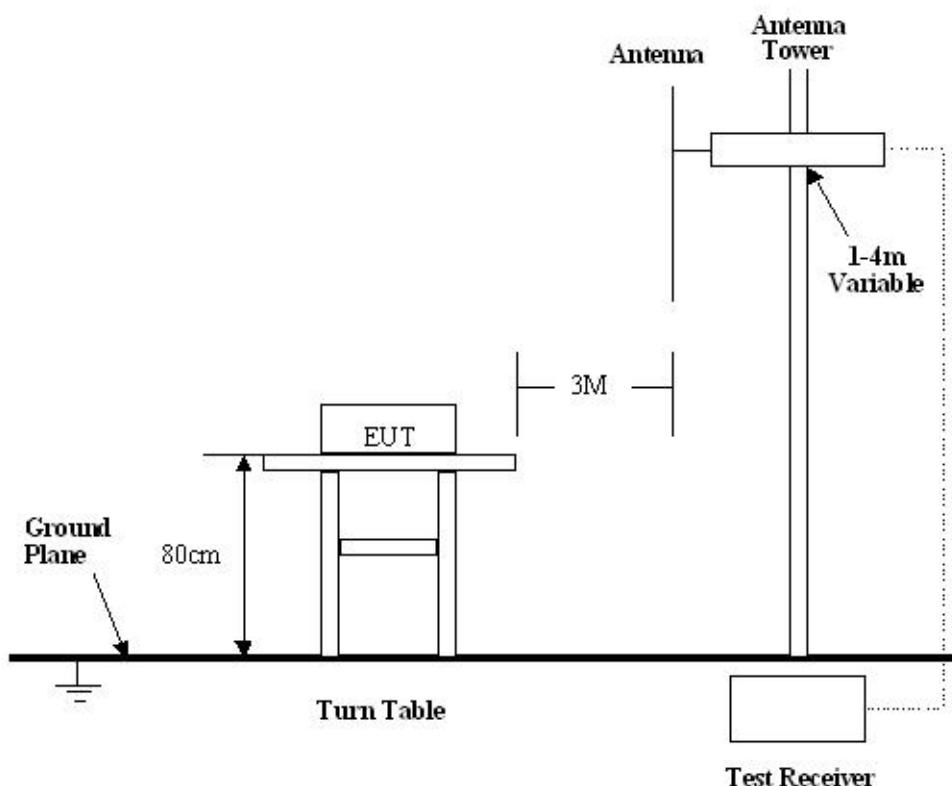

## 7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.209 and Paragraph 15.239 Rules, the system was tested to 1000 MHz.

Start Frequency .....	30 MHz
Stop Frequency .....	1000 MHz
Sweep Speed	Auto
IF Bandwidth .....	100 kHz
Video Bandwidth .....	1 MHz
Quasi-Peak Adapter Bandwidth .....	120 kHz
Quasi-Peak Adapter Mode .....	Normal
Resolution Bandwidth .....	1MHz

## 7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-7\text{dB}\mu\text{V}$  means the emission is  $7\text{dB}\mu\text{V}$  below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

## 7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.209 and Paragraph 15.239 standards.

## 7.8 EUT Operating Condition

Same as section 6.4 of this report.

## 7.9 Radiated Emissions Limit

### A. FCC Part 15 subpart C Paragraph 15.239 Limit

Fundamental Frequency(MHZ)	Field Strength of Fundamental	
	uV/m	dBuV/m
88-108	250	48

**Note:** (1) RF Voltage(dBuV)=20 log RF Voltage(uV)  
 (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.  
 (3) The emission limit in this paragraph is based on measurement instrumentaion employing an average detector. Measurement using instrumentation with a peak detector function,corresponding to 20dB above the maximum permitted average limit.

### B. Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

**Note:** (1) RF Voltage(dBuV)=20 log RF Voltage(uV)  
 (2) In the Above Table,the tighter limit applies at the band edges.  
 (3) Distance refers to the distance in meters between the measuring instrument antenna.

As shown in 15.35(b),for frequencies above 1000MHz,the field strength limits are based on average detector,however,the peak field strength of any emission shall not exceed the maximum permitted average limits,specified above by more than 20dB under any condition of modulation.

## 7.10 Radiated Emissions Test Result


Formula of conversion factors: the field strength at 3m was established by adding The meter reading of the spectrum analyser (which is set to read in units of dBuV) To the antenna correction factor supplied by the antenna manufacturer. The antenna Correction factors are stated in terms of dB. The gain of the pressleator was accounted For in the spectrum analyser meter reading.

Example:


Freq(MHz) Meter Reading +ACF=FS

33             $20\text{dBuV} + 10.36\text{dB} = 30.36\text{dBuV/m} @ 3\text{m}$

### Horizontal:

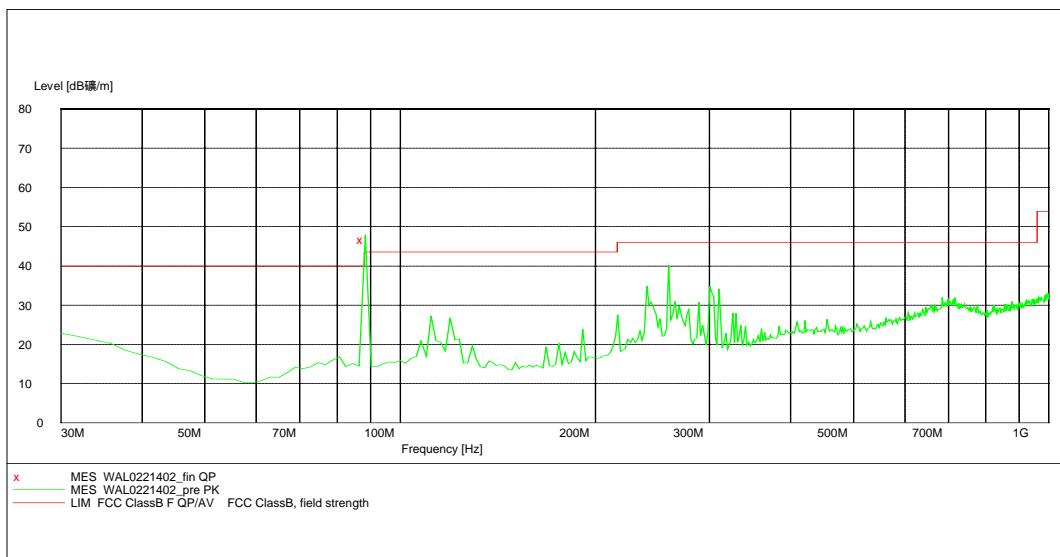

### Vertical:

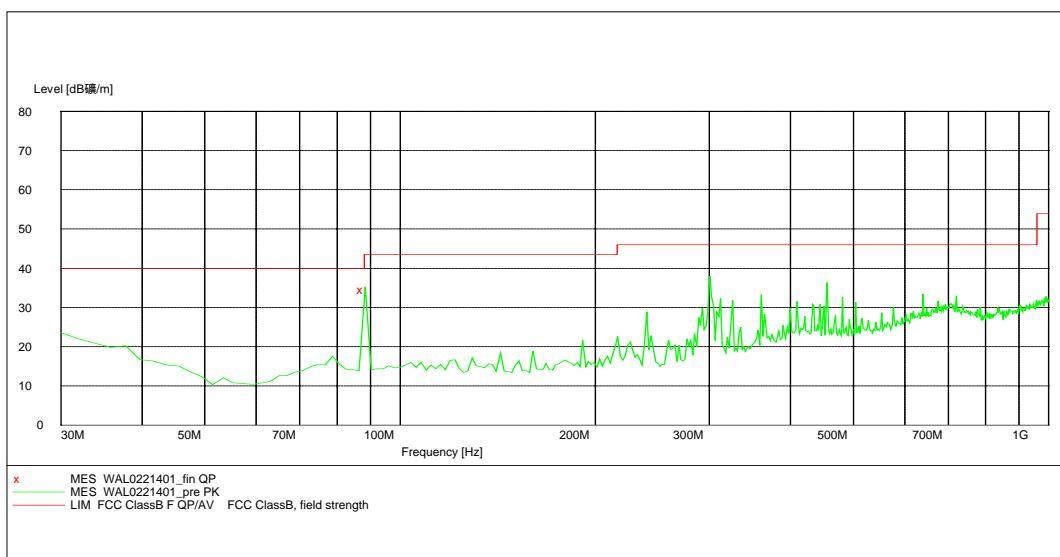

### A. Fundamental Radiated Emission Data

Test Item: Fundamental Radiated Emission Data  
 Test Voltage: 12.0VDC BATTERY  
 Test Mode: ON TX  
 Temperature: 24 °C  
 Humidity: 52%RH  
 Test Result: PASS

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°C)
88.30	Vertical	46.7	48.0	1.3	1.5	90
88.30	Horizontal	34.6	48.0	13.4	2.0	270

**Note:** (1) All Reading are Peak Value.  
 (2) Emission Level = Reading Level + Probe Factor + Cable Loss.  
 (3) The average measurement was not performed when the peak measured data under the limit of average detection.

### B. General Radiated Emission Data

Test Item: General Radiated Emission Data  
 Test Voltage: 12.0VDC BATTERY  
 Test Mode: ON TX  
 Temperature: 24 °C  
 Humidity: 52%RH  
 Test Result: PASS

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°C)
300.400	Vertical	36.1	46.0	9.9	1.5	90
362.600	Vertical	30.6	46.0	15.4	1.0	45
460.920	Vertical	34.5	46.0	11.5	1.8	180
268.500	Horizontal	37.6	46.0	8.4	2.0	270
301.620	Horizontal	32.8	46.0	13.2	1.5	45
313.880	Horizontal	31.2	46.0	14.8	1.0	180

**Note:** (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.  
 (2) Emission Level = Reading Level + Probe Factor + Cable Loss.

## 8 Band Edge


### 8.1 Test Equipment

Please refer to Section 5 this report.

### 8.2 Test Procedure

1. The EUT was tested according to ANSI C63.4. The radiated test was performed at Shenzhen Huatongwei International Inspection Co., Ltd. This lab has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 662850, November 17, 2003.
2. The EUT, peripherals were put on the turntable which table size is 1mX1.5m, table high 0.8m. All set up is according to ANSI C63.4.
3. The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. All reading are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.
4. The antenna high were varied from 1m to 4m high to find the maximum emission for each frequency.
5. Maximizing procedure was performed on the highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak reading was performed only when an emission was found to be marginal (within -4 dB $\mu$ V of specification limits), and are distinguished with a "QP" in the data table.
6. The antenna polarization: Vertical polarization and horizontal polarization.

### 8.3 Radiated Test Setup

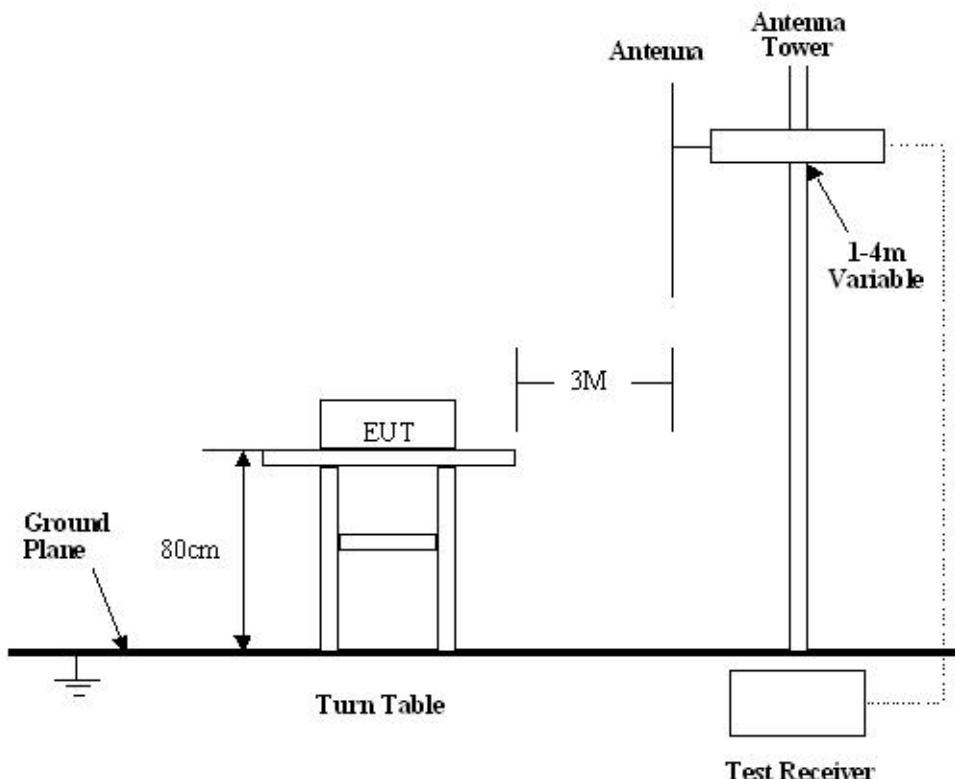

### 8.4 EUT Operation

Same as section 6.4 of this report.

### 8.5 Band Edge Limit

Attenuation below the general limits specified in section 15.231 (e) is not required. In addition,

radiated emissions which fall in the restricted bands, as defined in Section 15.231(e), must also comply with the radiated emission limits specified in Section 15.231(e).

## 8.6 Band Edge Test Result

Product: 3 in 1 ipod auto kit / IXX(00-99)


Test Item: Band Edge Test

Test Voltage: 12.0VDC BATTERY

Test Mode: ON TX

Temperature: 24 °C

Humidity: 52%RH

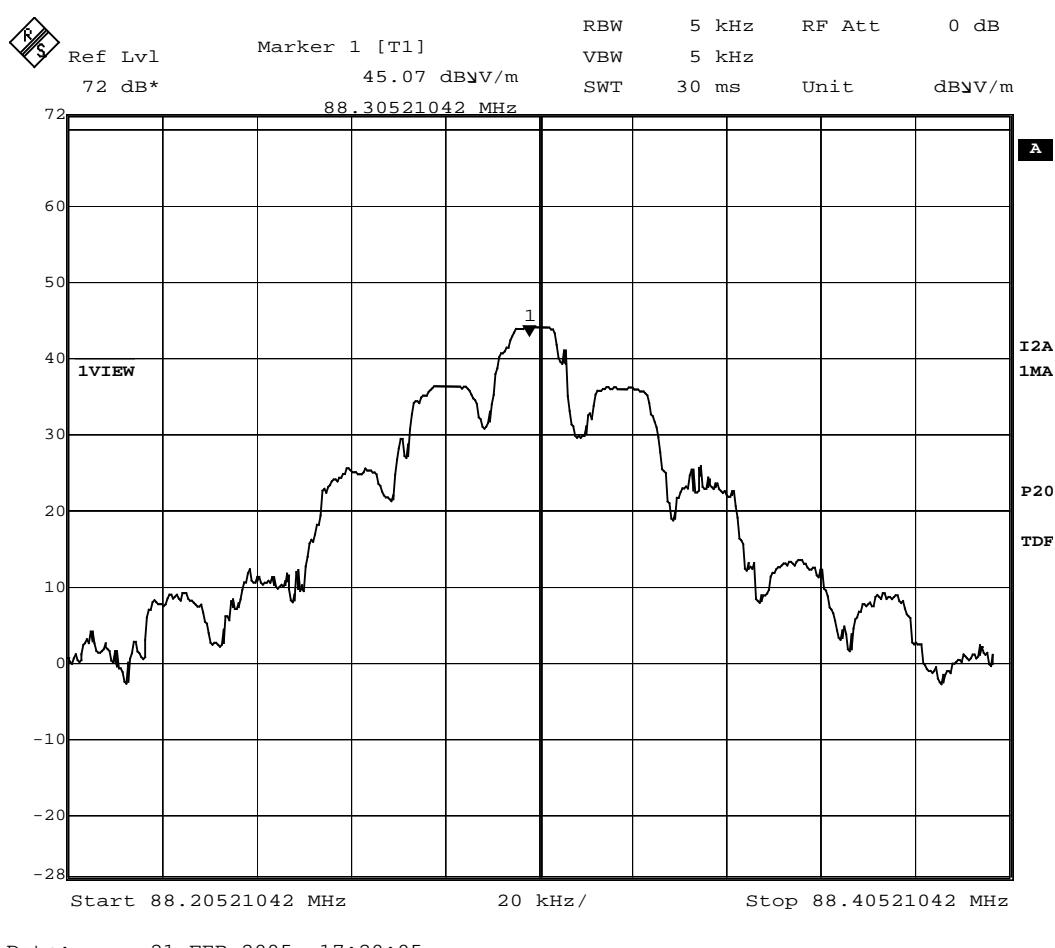


**Note:** (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

(2) The average measurement was not performed when the peak measured data under the limit of average detection.

## 9 Photographs of Testing

### 9.1 Radiation Emission Test View

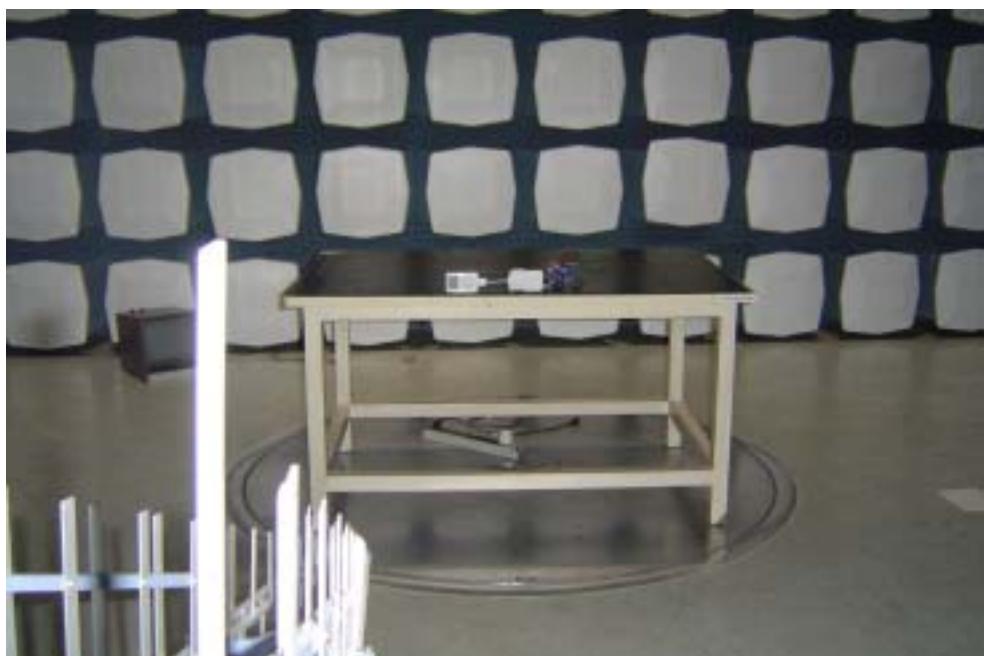

## 10 Photographs - Constructional Details


### 10.1 EUT - Front View



### 10.2 EUT - Back View



### 10.3 PCB - Component View

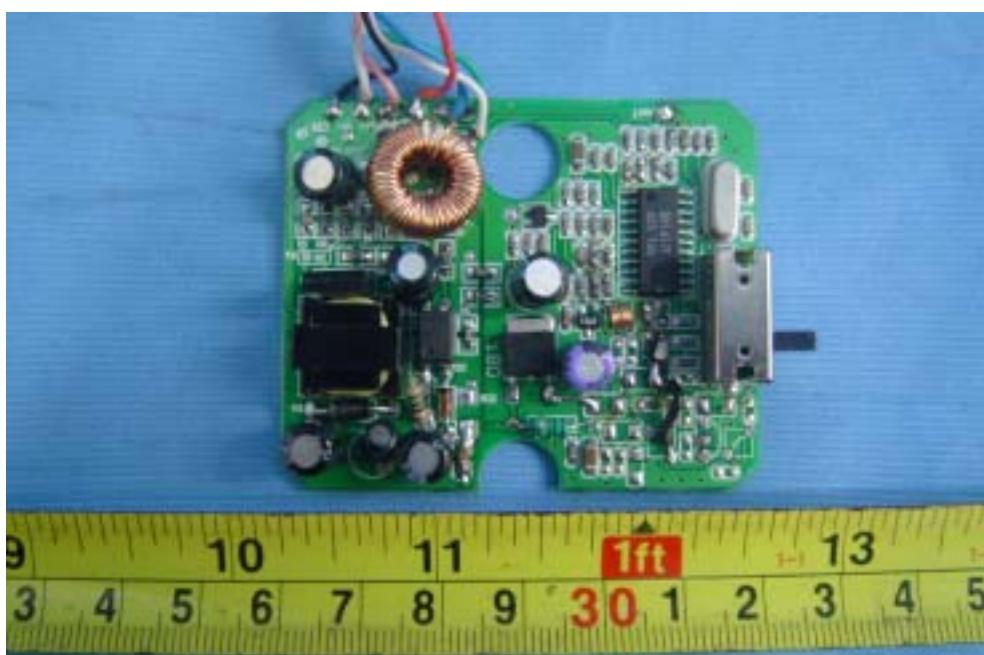

### 10.4 PCB - Solder View



## 11 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT

EUT Bottom View/proposed FCC Mark Location

