

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

FM Transmitter

MODEL No.: IT-0822

FCC ID: SYMIT-0822

REPORT NO: ES110329194F

ISSUE DATE: May 16, 2011

Prepared for

CCA Electronic Factory

**Building 82-83th Pinghuan Industrial City, PingShan Town, LongGang District,
ShenZhen, Guangdong, China**

Prepared by

SHENZHEN EMTEK CO., LTD

**Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282**

VERIFICATION OF COMPLIANCE

Applicant:	CCA Electronic Factory Building 82-83th Pinghuan Industrial City, PingShan Town, LongGang District, ShenZhen, Guangdong, China
Product Description:	FM Transmitter
Brand Name:	N/A
Model Number:	IT-0822
Serial Number:	N/A
File Number:	ES110329194F
Date of Test:	April 10, 2011 to May 10, 2011

We hereby certify that:

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.239.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : April 10, 2011 to May 10, 2011

Prepared by : Moira
(Engineer)

Reviewer : Vince
(Quality Manager)

Approved & Authorized Signer : Zhi Li
(Manager)

Table of Contents

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY	5
1.4 SPECIAL ACCESSORIES.....	5
1.5 EQUIPMENT MODIFICATIONS	5
1.6 TEST FACILITY	6
2. SYSTEM TEST CONFIGURATION.....	7
2.1 EUT CONFIGURATION	7
2.2 EUT EXERCISE	7
2.3 TEST PROCEDURE	7
2.4 LIMITATION	8
2.5 CONFIGURATION OF TESTED SYSTEM	8
3. SUMMARY OF TEST RESULTS	10
4. DESCRIPTION OF TEST MODES	11
5. RADIATED EMISSION TEST	12
5.1 MEASUREMENT PROCEDURE.....	12
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
5.3 MEASUREMENT EQUIPMENT USED:	13
5.4 MEASUREMENT RESULT	13
5.5 RADIATION MEASUREMENT PHOTOS.....	19
6. OCCUPIED BANDWIDTH.....	20
6.1 MEASUREMENT PROCEDURE.....	20
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	20
6.3 MEASUREMENT EQUIPMENT USED:	20
6.4 MEASUREMENT RESULTS:.....	20
7. ANTENNA APPLICATION	23
7.1 ANTENNA REQUIREMENT	23

1. GENERAL INFORMATION

1.1 Product Description

The CCA Electronic Factory Model: IT-0822 (referred to as the EUT in this report). The EUT is a FM Transmitter; The actual tuning Controls can be manually adjusted to from 88.1MHz to 107.9MHz.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 88.1MHz~107.9MHz
- B). Step: 100KHz
- C). Antenna Designation: Internal (Chip antenna)
- D). Power Supply: DC 12-24V

Channel List:

	88.1MHz	88.2MHz	88.3MHz	88.4MHz	88.5MHz	88.6MHz	88.7MHz	88.8MHz	88.9MHz
89.0MHz	89.1MHz	89.2MHz	89.3MHz	89.4MHz	89.5MHz	89.6MHz	89.7MHz	89.8MHz	89.9MHz
90.0MHz	90.1MHz	90.2MHz	90.3MHz	90.4MHz	90.5MHz	90.6MHz	90.7MHz	90.8MHz	90.9MHz
91.0MHz	91.1MHz	91.2MHz	91.3MHz	91.4MHz	91.5MHz	91.6MHz	91.7MHz	91.8MHz	91.9MHz
92.0MHz	92.1MHz	92.2MHz	92.3MHz	92.4MHz	92.5MHz	92.6MHz	92.7MHz	92.8MHz	92.9MHz
93.0MHz	93.1MHz	93.2MHz	93.3MHz	93.4MHz	93.5MHz	93.6MHz	93.7MHz	93.8MHz	93.9MHz
94.0MHz	94.1MHz	94.2MHz	94.3MHz	94.4MHz	94.5MHz	94.6MHz	94.7MHz	94.8MHz	94.9MHz
95.0MHz	95.1MHz	95.2MHz	95.3MHz	95.4MHz	95.5MHz	95.6MHz	95.7MHz	95.8MHz	95.9MHz
96.0MHz	96.1MHz	96.2MHz	96.3MHz	96.4MHz	96.5MHz	96.6MHz	96.7MHz	96.8MHz	96.9MHz
97.0MHz	97.1MHz	97.2MHz	97.3MHz	97.4MHz	97.5MHz	97.6MHz	97.7MHz	97.8MHz	97.9MHz
98.0MHz	98.1MHz	98.2MHz	98.3MHz	98.4MHz	98.5MHz	98.6MHz	98.7MHz	98.8MHz	98.9MHz
99.0MHz	99.1MHz	99.2MHz	99.3MHz	99.4MHz	99.5MHz	99.6MHz	99.7MHz	99.8MHz	99.9MHz
100.0MHz	100.1MHz	100.2MHz	100.3MHz	100.4MHz	100.5MHz	100.6MHz	100.7MHz	100.8MHz	100.9MHz
101.0MHz	101.1MHz	101.2MHz	101.3MHz	101.4MHz	101.5MHz	101.6MHz	101.7MHz	101.8MHz	101.9MHz
102.0MHz	102.1MHz	102.2MHz	102.3MHz	102.4MHz	102.5MHz	102.6MHz	102.7MHz	102.8MHz	102.9MHz
103.0MHz	103.1MHz	103.2MHz	103.3MHz	103.4MHz	103.5MHz	103.6MHz	103.7MHz	103.8MHz	103.9MHz
104.0MHz	104.1MHz	104.2MHz	104.3MHz	104.4MHz	104.5MHz	104.6MHz	104.7MHz	104.8MHz	104.9MHz
105.0MHz	105.1MHz	105.2MHz	105.3MHz	105.4MHz	105.5MHz	105.6MHz	105.7MHz	105.8MHz	105.9MHz
106.0MHz	106.1MHz	106.2MHz	106.3MHz	106.4MHz	106.5MHz	106.6MHz	106.7MHz	106.8MHz	106.9MHz
107.0MHz	107.1MHz	107.2MHz	107.3MHz	107.4MHz	107.5MHz	107.6MHz	107.7MHz	107.8MHz	107.9MHz

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: SYMIT-0822 filing to comply with Section 15.239 of the FCC Part 15, Subpart C Rules.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description
EMC Lab. : Accredited by CNAS, 2010.10.28
The certificate is valid until 2013.10.29
The Laboratory has been assessed and proved to be in compliance
with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291

Accredited by TUV Rheinland Guangzhou, 2010.10.25
The Laboratory has been assessed according to the requirements
ISO/IEC 17025

Accredited by FCC, October 28, 2010
The Certificate Registration Number is 406365.

Accredited by Industry Canada, March 05, 2010
The Certificate Registration Number is 46405-4480

Name of Firm : SHENZHEN EMTEK CO., LTD
Site Location : Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was 88.1MHz~107.9MHz.

2.3 Test Procedure

2.3.1 Conducted Emissions (Not apply in the report)

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Limitation

(1) Radiated Emission

- (a) The field strength of any emissions within the permitted 200kHz band shall not exceed 250 microvolts/meter at 3 meters, The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.
- (b) The field strength of any emissions radiated on any frequency outside of the specified 200Khz band shall not exceed the general radiated emission limits in Section 15.209.

Remark: The limit for average field strength dB_{UV}/m for the fundamental frequency=48.0 dB_{UV}/m.
And the limit for peak field strength dB_{UV}/m for the fundamental frequency=68.0 dB_{UV}/m.

Intentional Radiators general limit).as below.

Frequency (MHz)	Field strength μV/m	Distance(m)	Field strength at 3m dB _{UV} /m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
960~1000	500	3	54
Above 1000		3	74(Peak), 54(AVG)

(2) Occupied Bandwidth

- (a) Emissions from the intentional radiator shall be confined within a band 200kHz wide centered on the operation frequency; The 200kHz band shall lie wholly within the frequency range of 88.1MHz~107.9MHz.

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	FM Transmitter	CCA	IT-0822	SYMIT-0822	N/A	EUT
2.	iPhone	Apple	A1324	N/A	N/A	

Note:

(1) Unless otherwise denoted as EUT in **『Remark』** column , device(s) used in tested system is a support equipment.

3. Summary Of Test Results

FCC Rules	Description Of Test	Result
§ 15.239	Radiated Emission	Compliant
§ 15.239	Bandwidth Test	Compliant

4. Description of test modes

The EUT (FM Transmitter) has been tested under normal operating condition.

Three channels of EUT (the lowest channel, the middle channel and the highest channel) have been chosen for testing under Normal Operating condition. In this report, all the measured datum of the three channels have been reported. No software used to control the EUT for staying in continuous transmitting mode for testing.

1. For lowest channel : 88.1MHz
2. For middle channel : 98.0 MHz
3. For highest channel: 107.9MHz


5. Radiated Emission Test

5.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

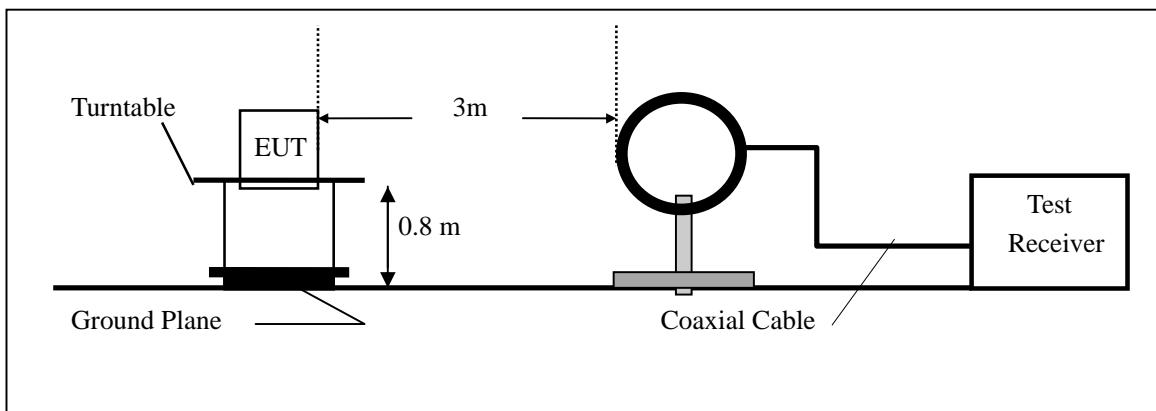

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

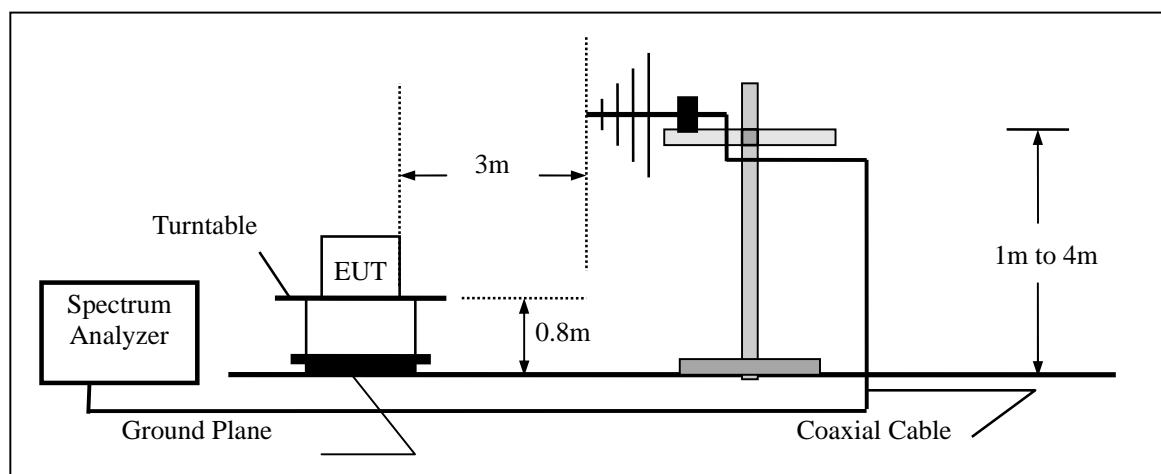

5.3 Measurement Equipment Used:

Test Site # 1					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/29/2011	05/29/2012
Pre-Amplifier	HP	8447D	2944A07999	05/29/2011	05/29/2012
Bilog Antenna	Schwarzbeck	VULB9163	142	05/29/2011	05/29/2012
Loop Antenna	ARA	PLA-1030/B	1029	05/29/2011	05/29/2012

5.4 Measurement Result

A. Fundamental Radiated Emission Data

Operation Mode: Transmitting Mode Test Date : April 15, 2011
Test Item: Fundamental Radiated Emission Data Temperature : 28
Fundamental Frequency: Lowest channel (88.10MHz) Humidity : 65 %
Test Result: PASS Test By: Andy

Peak Measurement

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
88.10	V	39.82	68.00	-28.18	Peak
88.10	H	45.28	68.00	-22.72	Peak

Average Measurement

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
88.10	V	38.82	48.00	-9.18	AV
88.10	H	44.92	48.00	-3.08	AV

Note: (1) Emission Level= Reading Level+Probe Factor +Cable Loss
(2) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: Transmitting Mode Test Date : April 15, 2011
Test Item: Fundamental Radiated Emission Data Temperature : 28
Fundamental Frequency: Middle channel (98MHz) Humidity : 65 %
Test Result: PASS Test By: Andy

Peak Measurement

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
98	V	41.89	68.00	-26.11	Peak
98	H	46.56	68.00	-21.44	Peak

Average Measurement

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
98	V	40.57	48.00	-7.43	AV
98	H	44.77	48.00	-3.23	AV

Note: (1) Emission Level= Reading Level+Probe Factor +Cable Loss
(2) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: Transmitting Mode Test Date : April 15, 2011
 Test Item: Fundamental Radiated Emission Data Temperature : 28
 Fundamental Frequency: Highest channel (107.9MHz) Humidity : 65 %
 Test Result: PASS Test By: Andy

Peak Measurement

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
107.90	V	40.27	68.00	-27.73	Peak
107.90	H	48.03	68.00	-19.97	Peak

Average Measurement

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
107.90	V	39.24	48.00	-8.76	AV
107.90	H	46.10	48.00	-1.9	AV

Note: (1) All Readings are Peak Value.

(2) Emission Level= Reading Level+Probe Factor +Cable Loss

(3) The average measurement was not performed when the peak measured data under the limit of average detection.

B. Harmonics Radiated Emission Data

Operation Mode: Transmitting Mode(Below 1GHz) Test Date : April 15, 2011
Test Item: Radiated Emission Data Temperature : 28
Fundamental Frequency: Lowest channel (88.1MHz) Humidity : 65 %
Test Result: PASS Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
176.12	V	25.04	43.50	-18.46	Peak
264.73	V	22.94	46.00	-23.06	Peak
645.58	V	26.23	46.00	-19.77	Peak
704.65	V	27.52	46.00	-18.48	Peak
954.92	V	30.87	46.00	-15.13	Peak
176.12	H	37.47	43.50	-6.03	Peak
264.73	H	34.04	46.00	-11.96	Peak
351.78	H	27.02	46.00	-18.98	Peak
706.20	H	27.04	46.00	-18.96	Peak
815.02	H	28.87	46.00	-17.13	Peak

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.239

Note: (1) All Readings are Peak Value.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: Transmitting Mode (Below 1GHz) Test Date : April 15, 2011
Test Item: Radiated Emission Data Temperature : 28
Fundamental Frequency: Middle channel (98MHz) Humidity : 65 %
Test Result: PASS Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
196.33	H	39.78	43.50	-3.72	Peak
294.26	H	38.86	46.00	-7.14	Peak
392.20	H	31.08	46.00	-14.92	Peak
490.13	H	26.28	46.00	-19.72	Peak
783.93	H	32.42	46.00	-13.58	Peak
194.78	V	32.33	43.50	-11.17	Peak
294.26	V	25.95	46.00	-20.05	Peak
703.09	V	27.71	46.00	-18.29	Peak
841.44	V	27.68	46.00	-18.32	Peak
959.58	V	29.44	46.00	-16.56	Peak

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.239

Note: (1) All Readings are Peak Value.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: Transmitting Mode (Below 1GHz) Test Date : April 15, 2011
Test Item: Radiated Emission Data Temperature : 28
Fundamental Frequency: High channel Humidity : 65 %
Test Result: PASS (107.9MHz) Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
214.98	V	31.82	43.50	-11.68	Peak
323.80	V	30.00	46.00	-16.00	Peak
706.20	V	27.92	46.00	-18.08	Peak
914.50	V	28.88	46.00	-17.12	Peak
954.92	V	29.94	46.00	-16.06	Peak
214.98	H	40.84	43.50	-2.66	Peak
323.80	H	41.77	46.00	-4.23	Peak
647.13	H	26.37	46.00	-19.63	Peak
755.95	H	28.46	46.00	-17.54	Peak
895.85	H	29.63	46.00	-16.37	Peak

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.239



Note: (1) All Readings are Peak Value.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: Transmitting Mode (above 1GHz) Test Date : April 16, 2011
Test Item: Radiated Emission Data Temperature : 28
Fundamental Frequency: High channel Humidity : 65 %
Test Result: PASS (107.9MHz) Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1213.45	V	49.36	33.9	74	54	-24.64	-20.1
2428.37	V	48.45	32.85	74	54	-25.55	-21.15
1212.26	H	47.19	31.33	74	54	-26.81	-22.67
2427.32	H	46.09	31.07	74	54	-27.91	-22.93

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.239

5.5 Radiation Measurement Photos

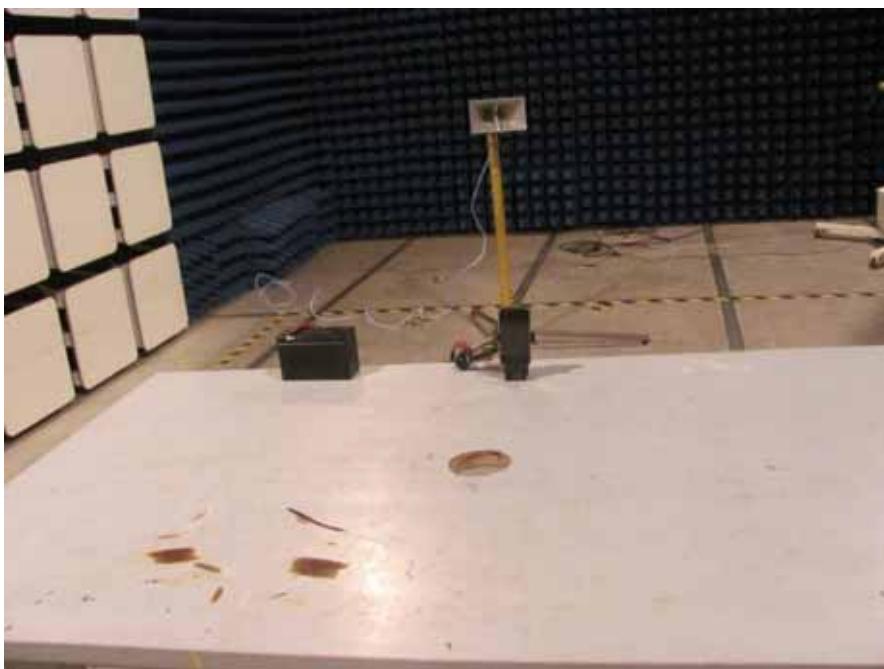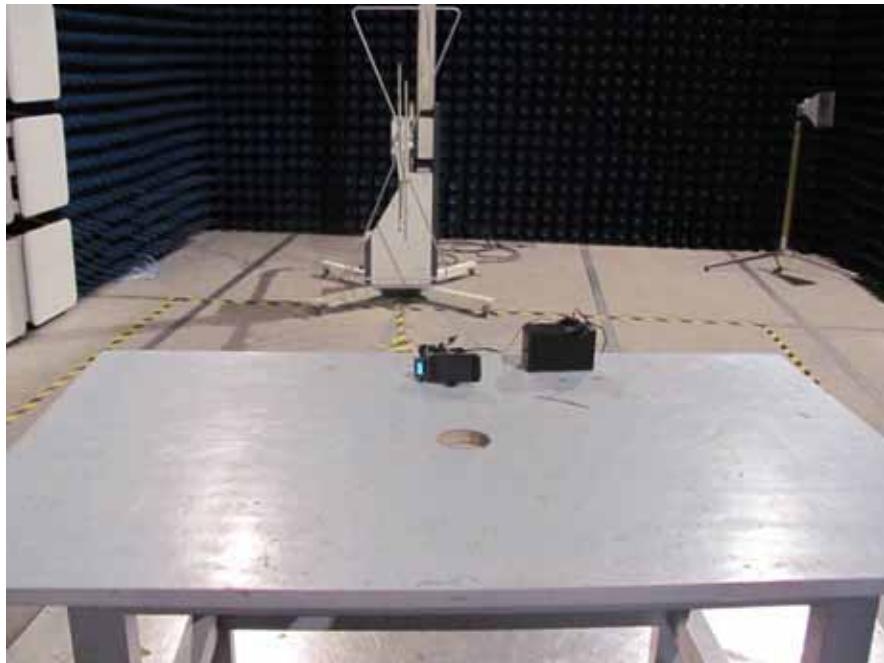


6. Occupied Bandwidth

6.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation
3. Set SPA Center Frequency = fundamental frequency, RBW = 10KHz, VBW= 30KHz
4. Set SPA Max hold. Mark peak.

Note: The EUT can be connected to iPod Player. The input signal of EUT is controlled by iPod Player. So the volume control of iPod Player was set to maximum during the test. It means that the test was performed with the maximum audio input.

6.2 Test SET-UP (Block Diagram of Configuration)



6.3 Measurement Equipment Used:


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	HP	8594E	88156318	05/29/2011	05/29/2012



6.4 Measurement Results:

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209.

Refer to attached data chart.

Band Width Test Data

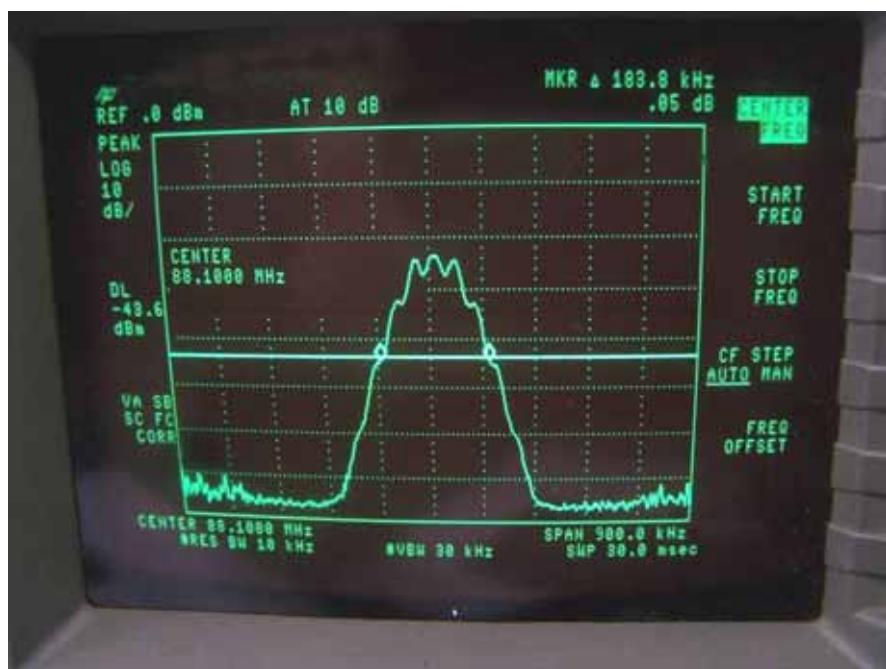

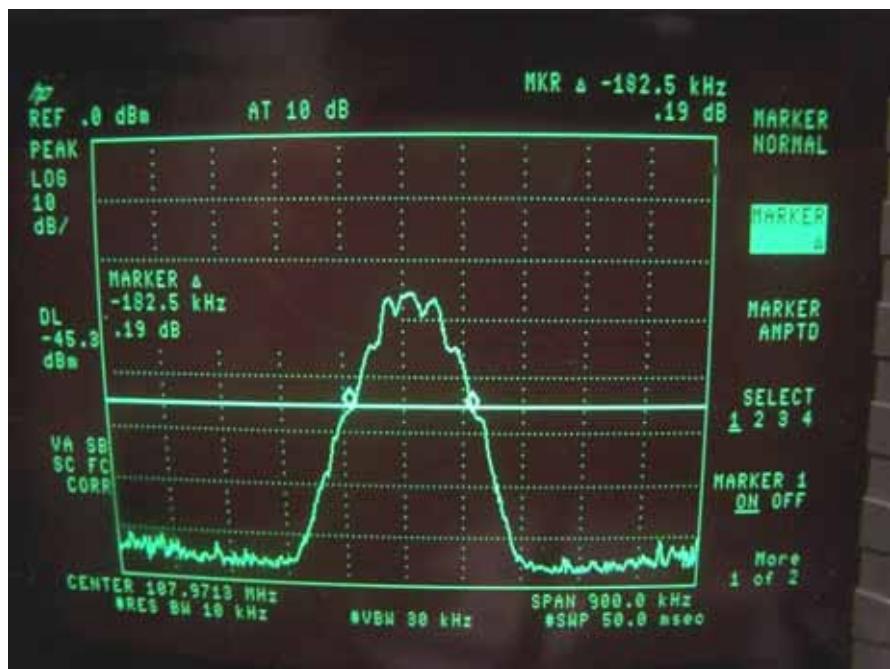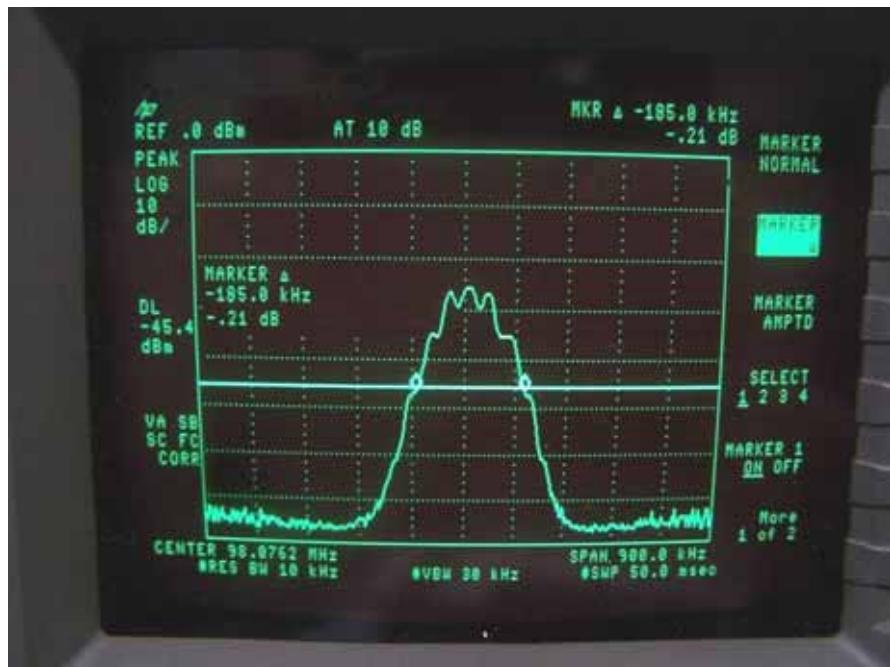

7. Antenna Application

7.1 Antenna requirement

The EUT's antenna is a chip antenna which contacted ground line. The EUT'S antenna is met the requirement of FCC part 15C section 15.203