

TEST REPORT

Reference No...... : WTD21D06058484W001 V1
FCC ID : SYW-DIM-SMART
Applicant..... : Feit Electric Company
Address..... : 4901 Gregg Road, Pico Rivera, California, United States
Manufacturer : Jiangxi Innotech Technology Co., Ltd
Address..... : No.399, Rule Lake Avenue, Nanchang Airport Economic Zone,
NANCHANG Jiangxi
Product..... : Dimmer
Model(s) : DIM/SMART
Standards..... : FCC CFR47 Part 15.247
Date of Receipt sample : 2021-06-17
Date of Test : 2021-06-18 to 2021-08-16
Date of Issue..... : 2021-08-16
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:
Waltek Testing Group Co., Ltd.**

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China
Tel: +86-769-2267 6998
Fax: +86-769-2267 6828

Compiled by:

Levi Xiao

Levi Xiao / Project Engineer

Approved by:



Daniel Liju

Daniel Liju Designated Reviewer

2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST.....	6
4.4 TEST MODE.....	7
5 TEST SUMMARY	8
6 EQUIPMENT USED DURING TEST	9
6.1 EQUIPMENTS LIST.....	9
6.2 DESCRIPTION OF SUPPORT UNITS.....	10
6.3 MEASUREMENT UNCERTAINTY.....	10
6.4 TEST EQUIPMENT CALIBRATION.....	10
7 CONDUCTED EMISSION	11
7.1 E.U.T. OPERATION.....	11
7.2 EUT SETUP.....	11
7.3 MEASUREMENT DESCRIPTION.....	12
7.4 CONDUCTED EMISSION TEST RESULT.....	12
8 RADIATED EMISSIONS	14
8.1 EUT OPERATION.....	14
8.2 TEST SETUP.....	15
8.3 SPECTRUM ANALYZER SETUP.....	16
8.4 TEST PROCEDURE.....	17
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
8.6 SUMMARY OF TEST RESULTS.....	18
9 DUTY CYCLE	34
10 CONDUCTED SPURIOUS EMISSIONS	36
10.1 TEST PROCEDURE.....	36
10.2 TEST RESULT.....	37
11 BAND EDGE MEASUREMENT	53
11.1 TEST PROCEDURE.....	53
11.2 TEST RESULT.....	54
12 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	59
12.1 TEST PROCEDURE:.....	59
12.2 TEST RESULT:.....	59
13 MAXIMUM PEAK OUTPUT POWER	76
13.1 TEST PROCEDURE:.....	76
13.2 TEST RESULT:.....	77
14 POWER SPECTRAL DENSITY	86
14.1 TEST PROCEDURE:.....	86
14.2 TEST RESULT:.....	86
15 ANTENNA REQUIREMENT	95
16 RF EXPOSURE	96

17 PHOTOGRAPHS OF TEST SETUP AND EUT..... 97

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD21D06058484 W001	2021-06-17	2021-06-18 to 2021-06-28	2021-06-28	Original	-	Replaced
WTD21D06058484 W001 V1	2021-06-17	2021-06-18 to 2021-08-16	2021-08-16	Version 1	Updata	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Dimmer
Model(s):	DIM/SMART
Model Description:	N/A
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40
Bluetooth Version:	BLE 4.0
Hardware Version:	2.0
Software Version:	1.1.71
Highest frequency (Exclude Radio):	26MHz
Storage Location:	Internal Storage
Note:	N/A

4.2 Details of E.U.T.

Operation Frequency:	WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz BLE:2402-2480MHz
Max. RF output power:	WiFi(2.4G): 17.23dBm BLE: 1.25dBm
Type of Modulation:	WiFi: CCK, OFDM BLE:GFSK
Antenna installation:	WiFi: internal permanent antenna BLE: internal permanent antenna
Antenna Gain:	WiFi(2.4G): 1.0dBi
Ratings:	AC 120V, 50/60Hz

4.3 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
6dB Bandwidth	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Band Edge	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2020-07-30 2021-07-28	2021-07-29 2022-07-27
2.	LISN	R&S	ENV216	101215	2020-07-30 2021-07-28	2021-07-29 2022-07-27
3.	Cable	Top	TYPE16(3.5M)	-	2020-07-30 2021-07-28	2021-07-29 2022-07-27
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2021-04-19	2022-04-18
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2021-04-19	2022-04-18
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2020-08-22	2021-08-21
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2021-04-19	2022-04-18
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2021-04-24	2022-04-23
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2021-04-19	2022-04-18
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2021-04-19	2022-04-18
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2021-04-19	2022-04-18
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2021-04-19	2022-04-18
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2021-04-24	2022-04-23
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2021-04-19	2022-04-18
4	Cable	HUBER+SUHNER	CBL2	525178	2021-04-19	2022-04-18
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2021-04-19	2022-04-18
2.	Spectrum Analyzer	R&S	FSL6	100959	2021-04-19	2022-04-18

	(9k-6GHz)					
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2021-04-19	2022-04-18

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)
Conducted Spurious Emissions test	± 3.12 dB (9kHz~30MHz)
	± 4.21 dB (30M~1000MHz)
	± 5.14 dB (1000M~26500MHz)

6.4 Test Equipment Calibration


All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


7.4 Conducted Emission Test Result

Live line:

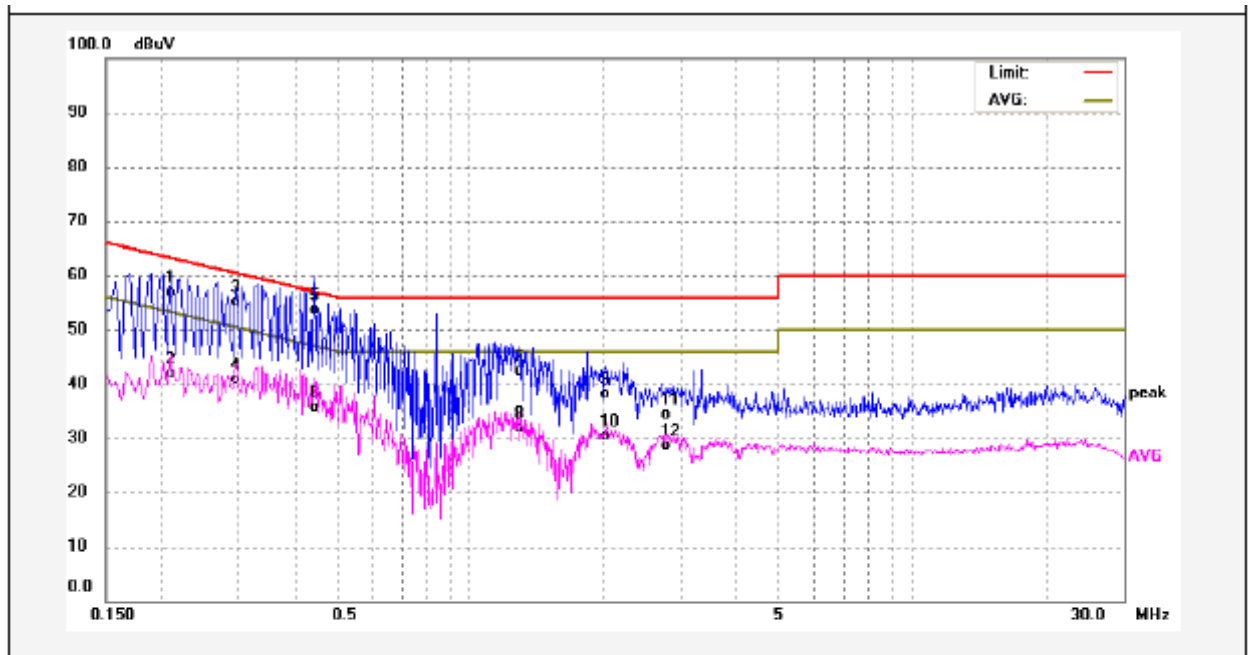

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.2100	46.18	10.66	56.84	63.20	-6.36	QP	
2	0.2100	31.30	10.66	41.96	53.20	-11.24	AVG	
3	0.2940	44.63	10.62	55.25	60.41	-5.16	QP	
4	0.2940	30.23	10.62	40.85	50.41	-9.56	AVG	
5	0.4420	43.20	10.55	53.75	57.02	-3.27	QP	
6	0.4420	25.20	10.55	35.75	47.02	-11.27	AVG	
7	1.2900	31.76	10.60	42.36	56.00	-13.64	QP	
8	1.2900	21.21	10.60	31.81	46.00	-14.19	AVG	
9	2.0300	27.46	10.60	38.06	56.00	-17.94	QP	
10	2.0300	19.81	10.60	30.41	46.00	-15.59	AVG	
11	2.7740	23.70	10.68	34.38	56.00	-21.62	QP	
12	2.7740	18.04	10.68	28.72	46.00	-17.28	AVG	

Neutral line:

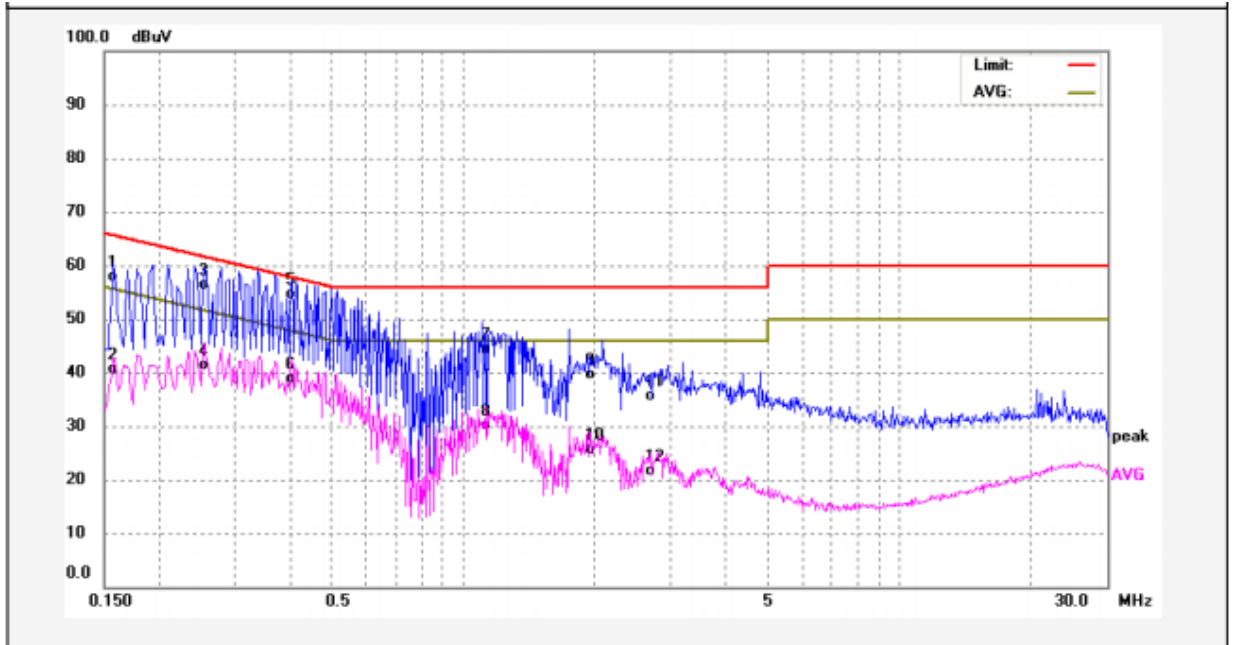

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	47.01	10.80	57.81	65.56	-7.75	QP	
2	0.1580	29.73	10.80	40.53	55.56	-15.03	AVG	
3	0.2540	45.66	10.64	56.30	61.62	-5.32	QP	
4	0.2540	30.75	10.64	41.39	51.62	-10.23	AVG	
5	0.4020	44.05	10.57	54.62	57.81	-3.19	QP	
6	0.4020	28.23	10.57	38.80	47.81	-9.01	AVG	
7	1.1340	33.75	10.60	44.35	56.00	-11.65	QP	
8	1.1340	19.53	10.60	30.13	46.00	-15.87	AVG	
9	1.9580	29.04	10.60	39.64	56.00	-16.36	QP	
10	1.9580	15.07	10.60	25.67	46.00	-20.33	AVG	
11	2.6860	24.94	10.67	35.61	56.00	-20.39	QP	
12	2.6860	10.85	10.67	21.52	46.00	-24.48	AVG	

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method: 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
 ANSI C63.10:2013
 Test Result: PASS
 Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C
 Humidity: 52.1 % RH
 Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in WIFI link mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

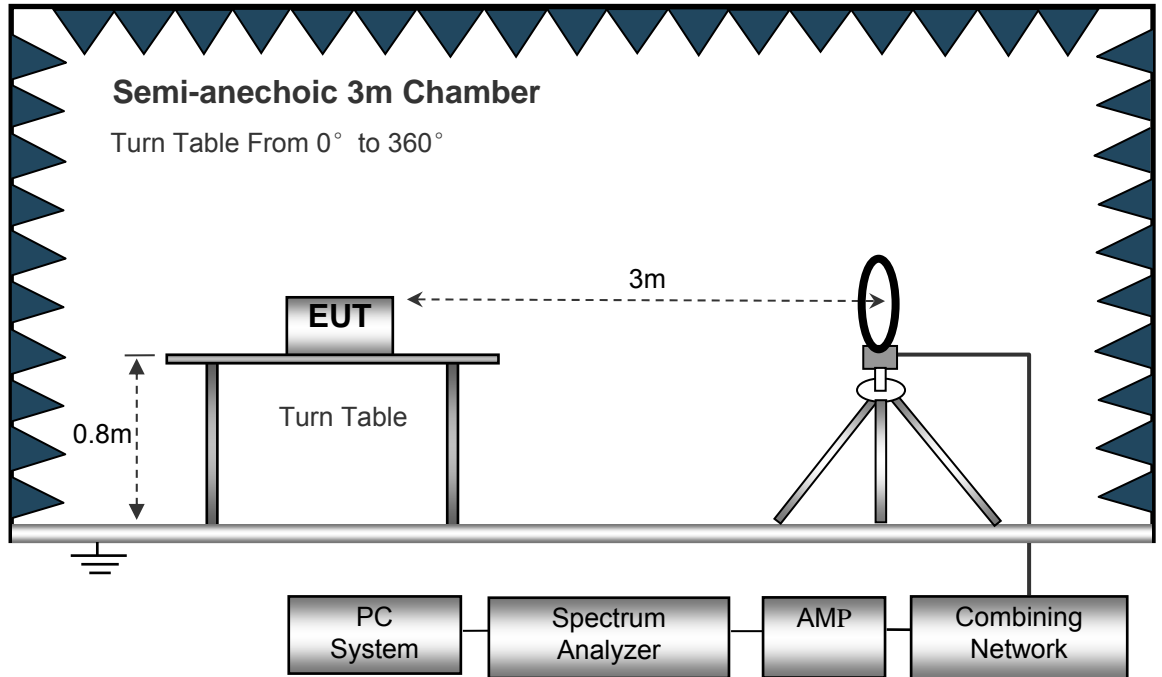

The test setup for emission measurement from 30 MHz to 1 GHz.

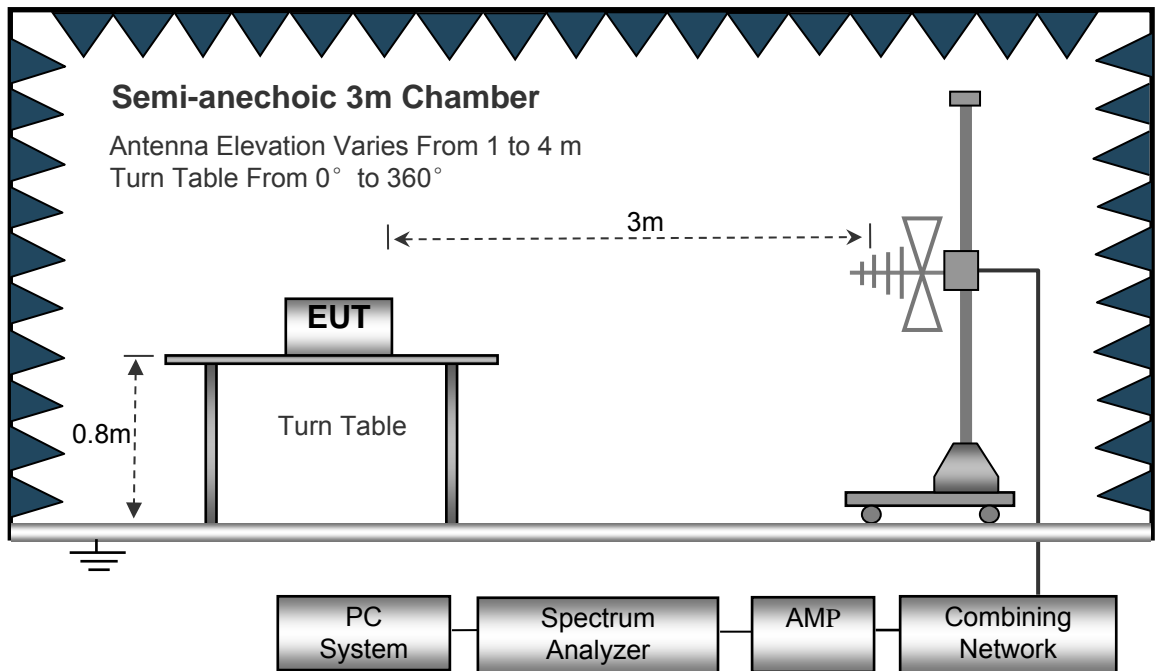

The test setup for emission measurement above 1 GHz.

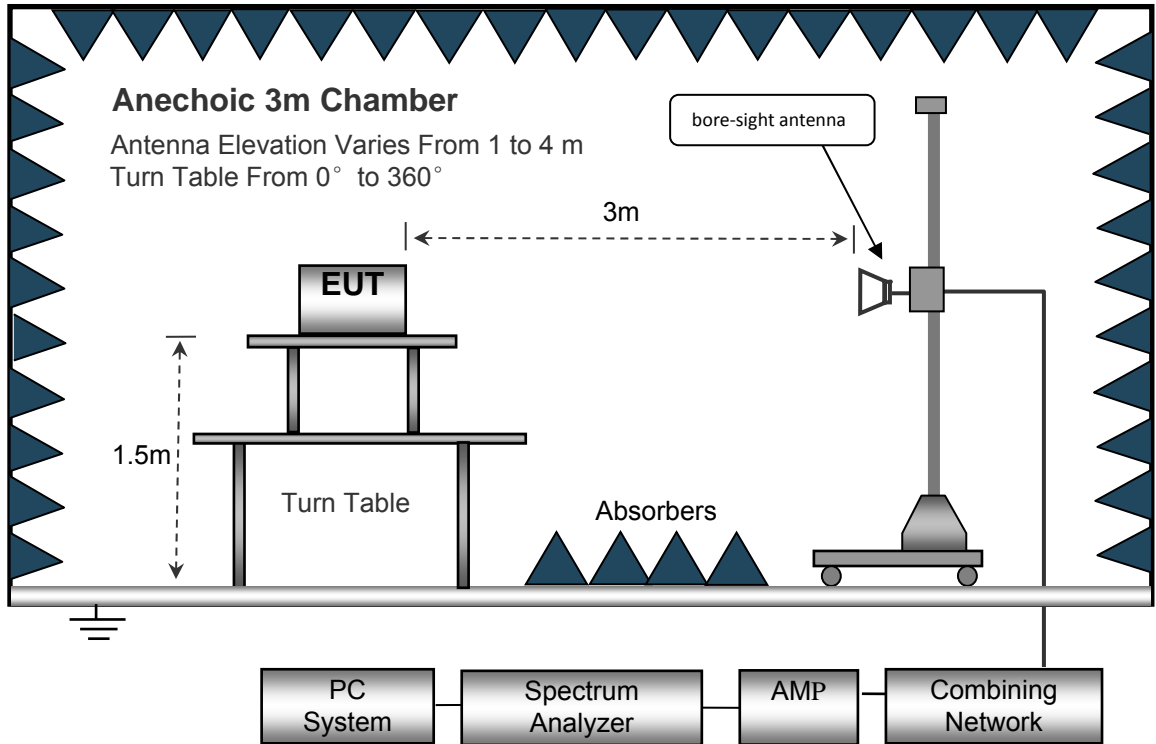

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Wifi:

Test Frequency: 9KHz~30MHz

Remark: only the worst data (802.11b/g/n Low channel mode) were recorded.

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
802.11b							
6.031	25.11	QP	21.84	40.00	6.95	29.54	-22.59
15.763	25.46	QP	21.35	40.00	6.81	29.54	-22.73
25.640	25.12	QP	20.67	40.00	5.79	29.54	-23.75
802.11g							
6.032	25.41	QP	21.84	40.00	7.25	29.54	-22.29
15.764	25.76	QP	21.35	40.00	7.11	29.54	-22.43
25.631	25.32	QP	20.67	40.00	5.99	29.54	-23.55
802.11n(HT20)							
6.045	25.71	QP	21.84	40.00	7.55	29.54	-21.99
15.736	25.43	QP	21.35	40.00	6.78	29.54	-22.76
25.480	25.65	QP	20.67	40.00	6.32	29.54	-23.22
802.11n(HT40)							
6.156	25.47	QP	21.84	40.00	7.31	29.54	-22.23
15.365	25.92	QP	21.35	40.00	7.27	29.54	-22.27
25.458	25.69	QP	20.67	40.00	6.36	29.54	-23.18

Test Frequency : 30MHz ~ 8GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: Low Channel 2412MHz									
223.43	41.32	QP	263	2.0	H	-11.62	29.70	46.00	-16.30
223.43	29.24	QP	356	1.5	V	-11.62	17.62	46.00	-28.38
4824.00	51.85	PK	250	2.0	V	-1.06	50.79	74.00	-23.21
4824.00	50.42	Ave	250	2.0	V	-1.06	49.36	54.00	-4.64
7236.00	45.65	PK	342	1.9	H	1.33	46.98	74.00	-27.02
7236.00	42.27	Ave	342	1.9	H	1.33	43.60	54.00	-10.40
2319.70	45.43	PK	213	1.4	V	-13.19	32.24	74.00	-41.76
2319.70	37.31	Ave	213	1.4	V	-13.19	24.12	54.00	-29.88
2382.69	43.38	PK	66	1.8	H	-13.14	30.24	74.00	-43.76
2382.69	38.93	Ave	66	1.8	H	-13.14	25.79	54.00	-28.21
2489.86	43.64	PK	122	1.6	V	-13.08	30.56	74.00	-43.44
2489.86	38.15	Ave	122	1.6	V	-13.08	25.07	54.00	-28.93

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: Middle Channel 2437MHz									
223.43	41.71	QP	222	1.8	H	-11.62	30.09	46.00	-15.91
223.43	28.93	QP	337	1.8	V	-11.62	17.31	46.00	-28.69
4874.00	52.12	PK	296	1.9	V	-0.62	51.50	74.00	-22.50
4874.00	51.68	Ave	296	1.9	V	-0.62	51.06	54.00	-2.94
7311.00	45.97	PK	172	1.5	H	2.21	48.18	74.00	-25.82
7311.00	41.93	Ave	172	1.5	H	2.21	44.14	54.00	-9.86
2328.70	46.05	PK	29	1.3	V	-13.19	32.86	74.00	-41.14
2328.70	38.79	Ave	29	1.3	V	-13.19	25.60	54.00	-28.40
2370.50	43.17	PK	57	1.2	H	-13.14	30.03	74.00	-43.97
2370.50	38.19	Ave	57	1.2	H	-13.14	25.05	54.00	-28.95
2499.65	44.92	PK	167	1.0	V	-13.08	31.84	74.00	-42.16
2499.65	37.01	Ave	167	1.0	V	-13.08	23.93	54.00	-30.07

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: High Channel 2462MHz									
223.43	43.11	QP	140	1.1	H	-11.62	31.49	46.00	-14.51
223.43	30.11	QP	7	1.1	V	-11.62	18.49	46.00	-27.51
4924.00	52.80	PK	49	1.2	V	-0.24	52.56	74.00	-21.44
4924.00	50.88	Ave	49	1.2	V	-0.24	50.64	54.00	-3.36
7386.00	45.56	PK	310	1.9	H	2.84	48.40	74.00	-25.60
7386.00	41.69	Ave	310	1.9	H	2.84	44.53	54.00	-9.47
2331.40	45.68	PK	121	1.8	V	-13.19	32.49	74.00	-41.51
2331.40	37.33	Ave	121	1.8	V	-13.19	24.14	54.00	-29.86
2375.82	42.34	PK	305	1.1	H	-13.14	29.20	74.00	-44.80
2375.82	36.88	Ave	305	1.1	H	-13.14	23.74	54.00	-30.26
2496.25	43.46	PK	199	1.8	V	-13.08	30.38	74.00	-43.62
2496.25	37.45	Ave	199	1.8	V	-13.08	24.37	54.00	-29.63

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: Low Channel 2412MHz									
223.43	44.16	QP	295	1.4	H	-11.62	32.54	46.00	-13.46
223.43	30.79	QP	121	1.3	V	-11.62	19.17	46.00	-26.83
4824.00	51.50	PK	218	1.9	V	-1.06	50.44	74.00	-23.56
4824.00	50.28	Ave	218	1.9	V	-1.06	49.22	54.00	-4.78
7236.00	46.94	PK	206	1.1	H	1.33	48.27	74.00	-25.73
7236.00	41.11	Ave	206	1.1	H	1.33	42.44	54.00	-11.56
2330.56	45.88	PK	287	1.4	V	-13.19	32.69	74.00	-41.31
2330.56	38.62	Ave	287	1.4	V	-13.19	25.43	54.00	-28.57
2386.24	44.95	PK	129	1.0	H	-13.14	31.81	74.00	-42.19
2386.24	38.48	Ave	129	1.0	H	-13.14	25.34	54.00	-28.66
2497.57	43.24	PK	94	1.9	V	-13.08	30.16	74.00	-43.84
2497.57	38.20	Ave	94	1.9	V	-13.08	25.12	54.00	-28.88

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: Middle Channel 2437MHz									
223.43	44.24	QP	56	1.1	H	-11.62	32.62	46.00	-13.38
223.43	30.80	QP	54	1.6	V	-11.62	19.18	46.00	-26.82
4874.00	50.32	PK	256	1.4	V	-0.62	49.70	74.00	-24.30
4874.00	49.86	Ave	256	1.4	V	-0.62	49.24	54.00	-4.76
7311.00	46.80	PK	146	1.2	H	2.21	49.01	74.00	-24.99
7311.00	42.18	Ave	146	1.2	H	2.21	44.39	54.00	-9.61
2326.00	45.35	PK	259	1.1	V	-13.19	32.16	74.00	-41.84
2326.00	37.60	Ave	259	1.1	V	-13.19	24.41	54.00	-29.59
2382.39	44.40	PK	159	1.6	H	-13.14	31.26	74.00	-42.74
2382.39	37.64	Ave	159	1.6	H	-13.14	24.50	54.00	-29.50
2499.37	44.42	PK	263	1.8	V	-13.08	31.34	74.00	-42.66
2499.37	37.77	Ave	263	1.8	V	-13.08	24.69	54.00	-29.31

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: High Channel 2462MHz									
223.43	42.78	QP	21	1.3	H	-11.62	31.16	46.00	-14.84
223.43	30.94	QP	310	2.0	V	-11.62	19.32	46.00	-26.68
4924.00	49.28	PK	42	1.3	V	-0.24	49.04	74.00	-24.96
4924.00	48.02	Ave	42	1.3	V	-0.24	47.78	54.00	-6.22
7386.00	47.36	PK	22	1.5	H	2.84	50.20	74.00	-23.80
7386.00	42.31	Ave	22	1.5	H	2.84	45.15	54.00	-8.85
2313.03	46.90	PK	320	1.9	V	-13.19	33.71	74.00	-40.29
2313.03	38.78	Ave	320	1.9	V	-13.19	25.59	54.00	-28.41
2356.00	42.78	PK	204	2.0	H	-13.14	29.64	74.00	-44.36
2356.00	37.74	Ave	204	2.0	H	-13.14	24.60	54.00	-29.40
2498.61	42.61	PK	312	1.6	V	-13.08	29.53	74.00	-44.47
2498.61	38.76	Ave	312	1.6	V	-13.08	25.68	54.00	-28.32

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11n20: Low Channel 2412MHz									
223.43	42.11	QP	220	1.8	H	-11.62	30.49	46.00	-15.51
223.43	31.59	QP	172	1.7	V	-11.62	19.97	46.00	-26.03
4824.00	49.09	PK	90	1.4	V	-1.06	48.03	74.00	-25.97
4824.00	48.52	Ave	90	1.4	V	-1.06	47.46	54.00	-6.54
7236.00	46.42	PK	326	1.3	H	1.33	47.75	74.00	-26.25
7236.00	42.81	Ave	326	1.3	H	1.33	44.14	54.00	-9.86
2347.54	46.48	PK	79	1.1	V	-13.19	33.29	74.00	-40.71
2347.54	37.67	Ave	79	1.1	V	-13.19	24.48	54.00	-29.52
2357.91	44.58	PK	320	1.8	H	-13.14	31.44	74.00	-42.56
2357.91	36.96	Ave	320	1.8	H	-13.14	23.82	54.00	-30.18
2486.32	42.66	PK	98	1.8	V	-13.08	29.58	74.00	-44.42
2486.32	38.17	Ave	98	1.8	V	-13.08	25.09	54.00	-28.91

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11n20: Middle Channel 2437MHz									
223.43	41.17	QP	149	1.6	H	-11.62	29.55	46.00	-16.45
223.43	32.22	QP	334	1.7	V	-11.62	20.60	46.00	-25.40
4874.00	49.48	PK	295	1.1	V	-0.62	48.86	74.00	-25.14
4874.00	48.96	Ave	295	1.1	V	-0.62	48.34	54.00	-5.66
7311.00	47.27	PK	232	1.0	H	2.21	49.48	74.00	-24.52
7311.00	44.00	Ave	232	1.0	H	2.21	46.21	54.00	-7.79
2322.56	46.11	PK	319	1.9	V	-13.19	32.92	74.00	-41.08
2322.56	38.95	Ave	319	1.9	V	-13.19	25.76	54.00	-28.24
2352.86	42.07	PK	47	1.4	H	-13.14	28.93	74.00	-45.07
2352.86	37.13	Ave	47	1.4	H	-13.14	23.99	54.00	-30.01
2496.61	43.45	PK	215	1.3	V	-13.08	30.37	74.00	-43.63
2496.61	37.15	Ave	215	1.3	V	-13.08	24.07	54.00	-29.93

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11n20: High Channel 2462MHz									
223.43	39.91	QP	88	1.4	H	-11.62	28.29	46.00	-17.71
223.43	31.75	QP	6	1.2	V	-11.62	20.13	46.00	-25.87
4924.00	50.16	PK	301	2.0	V	-0.24	49.92	74.00	-24.08
4924.00	46.64	Ave	301	2.0	V	-0.24	46.40	54.00	-7.60
7386.00	45.92	PK	64	1.7	H	2.84	48.76	74.00	-25.24
7386.00	42.99	Ave	64	1.7	H	2.84	45.83	54.00	-8.17
2320.97	46.20	PK	15	1.2	V	-13.19	33.01	74.00	-40.99
2320.97	39.37	Ave	15	1.2	V	-13.19	26.18	54.00	-27.82
2364.26	44.27	PK	111	1.6	H	-13.14	31.13	74.00	-42.87
2364.26	37.34	Ave	111	1.6	H	-13.14	24.20	54.00	-29.80
2492.85	42.05	PK	75	1.4	V	-13.08	28.97	74.00	-45.03
2492.85	38.95	Ave	75	1.4	V	-13.08	25.87	54.00	-28.13

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11n40: Low Channel 2422MHz									
223.43	39.33	QP	159	2.0	H	-11.62	27.71	46.00	-18.29
223.43	33.13	QP	259	1.6	V	-11.62	21.51	46.00	-24.49
4844.00	48.45	PK	264	1.2	V	-1.06	47.39	74.00	-26.61
4844.00	44.86	Ave	264	1.2	V	-1.06	43.80	54.00	-10.20
7266.00	43.24	PK	157	1.1	H	1.33	44.57	74.00	-29.43
7266.00	40.39	Ave	157	1.1	H	1.33	41.72	54.00	-12.28
2343.98	46.97	PK	134	1.4	V	-13.19	33.78	74.00	-40.22
2343.98	39.15	Ave	134	1.4	V	-13.19	25.96	54.00	-28.04
2379.79	44.75	PK	356	1.2	H	-13.14	31.61	74.00	-42.39
2379.79	36.88	Ave	356	1.2	H	-13.14	23.74	54.00	-30.26
2499.24	43.14	PK	99	1.4	V	-13.08	30.06	74.00	-43.94
2499.24	36.85	Ave	99	1.4	V	-13.08	23.77	54.00	-30.23

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11n40: Middle Channel 2437MHz									
223.43	39.69	QP	20	1.8	H	-11.62	28.07	46.00	-17.93
223.43	33.26	QP	317	1.1	V	-11.62	21.64	46.00	-24.36
4874.00	47.76	PK	342	1.8	V	-0.62	47.14	74.00	-26.86
4874.00	43.94	Ave	342	1.8	V	-0.62	43.32	54.00	-10.68
7311.00	43.00	PK	91	1.1	H	2.21	45.21	74.00	-28.79
7311.00	40.01	Ave	91	1.1	H	2.21	42.22	54.00	-11.78
2329.69	46.91	PK	47	1.8	V	-13.19	33.72	74.00	-40.28
2329.69	37.46	Ave	47	1.8	V	-13.19	24.27	54.00	-29.73
2372.79	44.02	PK	88	1.1	H	-13.14	30.88	74.00	-43.12
2372.79	38.76	Ave	88	1.1	H	-13.14	25.62	54.00	-28.38
2484.13	42.36	PK	318	1.6	V	-13.08	29.28	74.00	-44.72
2484.13	36.99	Ave	318	1.6	V	-13.08	23.91	54.00	-30.09

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11n40: High Channel 2452MHz									
223.43	39.64	QP	218	1.1	H	-11.62	28.02	46.00	-17.98
223.43	32.29	QP	345	1.2	V	-11.62	20.67	46.00	-25.33
4904.00	47.58	PK	277	1.4	V	-0.24	47.34	74.00	-26.66
4904.00	43.68	Ave	277	1.4	V	-0.24	43.44	54.00	-10.56
7356.00	42.72	PK	227	1.4	H	2.84	45.56	74.00	-28.44
7356.00	40.77	Ave	227	1.4	H	2.84	43.61	54.00	-10.39
2346.00	46.01	PK	140	1.0	V	-13.19	32.82	74.00	-41.18
2346.00	39.60	Ave	140	1.0	V	-13.19	26.41	54.00	-27.59
2388.90	44.84	PK	117	1.1	H	-13.14	31.70	74.00	-42.30
2388.90	36.62	Ave	117	1.1	H	-13.14	23.48	54.00	-30.52
2486.84	44.33	PK	320	1.9	V	-13.08	31.25	74.00	-42.75
2486.84	36.16	Ave	320	1.9	V	-13.08	23.08	54.00	-30.92

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

BT BLE:**Test Frequency: 9KHz~26MHz**

Remark: only the worst data (GFSK modulation Low channel mode) were recorded.

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
6.012	25.17	QP	21.84	40.00	7.01	29.54	-22.53
15.352	25.57	QP	21.35	40.00	6.92	29.54	-22.62
25.369	25.19	QP	20.67	40.00	5.86	29.54	-23.68

Test Frequency : 26MHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel 2402MHz									
269.47	31.51	QP	232	1.4	H	-13.35	18.16	46.00	-27.84
269.47	39.78	QP	333	1.8	V	-13.35	26.43	46.00	-19.57
4804.00	43.46	PK	86	1.9	V	-1.06	42.40	74.00	-31.60
4804.00	41.68	Ave	86	1.9	V	-1.06	40.62	54.00	-13.38
7206.00	44.99	PK	162	1.5	H	1.33	46.32	74.00	-27.68
7206.00	34.80	Ave	162	1.5	H	1.33	36.13	54.00	-17.87
2325.81	45.71	PK	218	1.9	V	-13.19	32.52	74.00	-41.48
2325.81	37.62	Ave	218	1.9	V	-13.19	24.43	54.00	-29.57
2365.60	42.51	PK	264	1.7	H	-13.14	29.37	74.00	-44.63
2365.60	37.51	Ave	264	1.7	H	-13.14	24.37	54.00	-29.63
2486.69	44.56	PK	132	2.0	V	-13.08	31.48	74.00	-42.52
2486.69	37.02	Ave	132	2.0	V	-13.08	23.94	54.00	-30.06

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel 2440MHz									
269.47	31.27	QP	87	2.0	H	-13.35	17.92	46.00	-28.08
269.47	40.58	QP	286	1.1	V	-13.35	27.23	46.00	-18.77
4880.00	43.46	PK	301	1.6	V	-0.62	42.84	74.00	-31.16
4880.00	41.30	Ave	301	1.6	V	-0.62	40.68	54.00	-13.32
7320.00	44.79	PK	131	1.4	H	2.21	47.00	74.00	-27.00
7320.00	35.46	Ave	131	1.4	H	2.21	37.67	54.00	-16.33
2321.54	45.73	PK	52	1.7	V	-13.19	32.54	74.00	-41.46
2321.54	39.15	Ave	52	1.7	V	-13.19	25.96	54.00	-28.04
2359.52	43.90	PK	122	1.7	H	-13.14	30.76	74.00	-43.24
2359.52	38.51	Ave	122	1.7	H	-13.14	25.37	54.00	-28.63
2487.81	44.50	PK	331	1.4	V	-13.08	31.42	74.00	-42.58
2487.81	38.69	Ave	331	1.4	V	-13.08	25.61	54.00	-28.39

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel 2480MHz									
269.47	31.14	QP	186	1.0	H	-13.35	17.79	46.00	-28.21
269.47	38.46	QP	326	1.4	V	-13.35	25.11	46.00	-20.89
4960.00	43.64	PK	75	2.0	V	-0.24	43.40	74.00	-30.60
4960.00	41.05	Ave	75	2.0	V	-0.24	40.81	54.00	-13.19
7440.00	45.80	PK	116	1.5	H	2.84	48.64	74.00	-25.36
7440.00	36.29	Ave	116	1.5	H	2.84	39.13	54.00	-14.87
2333.37	46.66	PK	114	1.2	V	-13.19	33.47	74.00	-40.53
2333.37	37.86	Ave	114	1.2	V	-13.19	24.67	54.00	-29.33
2380.51	42.41	PK	307	1.3	H	-13.14	29.27	74.00	-44.73
2380.51	36.97	Ave	307	1.3	H	-13.14	23.83	54.00	-30.17
2498.21	43.87	PK	338	1.0	V	-13.08	30.79	74.00	-43.21
2498.21	36.63	Ave	338	1.0	V	-13.08	23.55	54.00	-30.45

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

9 Duty Cycle

Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
GFSK	49.5	49.5	1.0	100	0	0
802.11b	8.38	8.40	0.9976	99.76	0.01	-0.02
802.11g	1.38	1.40	0.9857	98.57	0.06	-0.13
802.11n-HT20	1.29	1.31	0.9847	98.47	0.07	-0.13
802.11n-HT40	0.646	0.654	0.9878	98.78	0.05	-0.11


Remark:

Duty cycle=On Time/period;

Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$;

Average factor= $20 \log_{10} \text{Duty cycle}$


BLE- GFSK

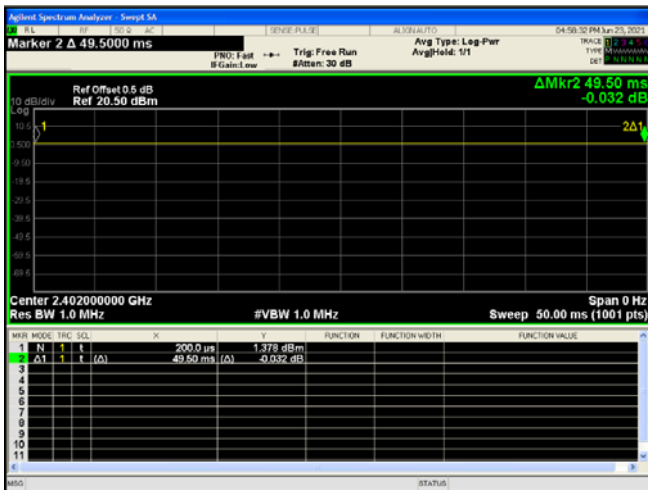


Wi-Fi 802.11b




Wi-Fi 802.11g

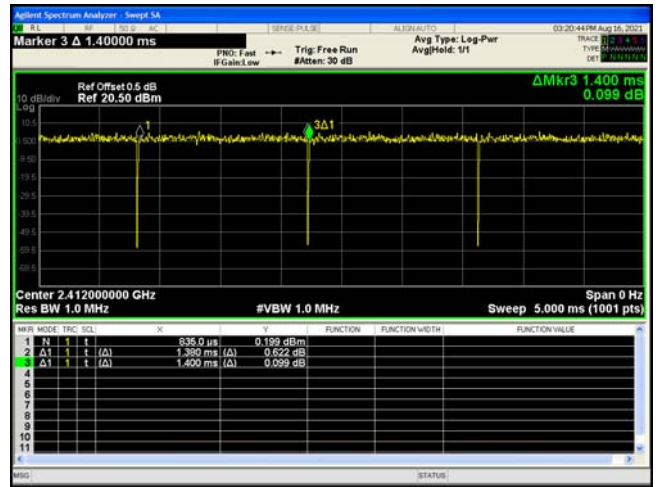

Wi-Fi 802.11n-HT20

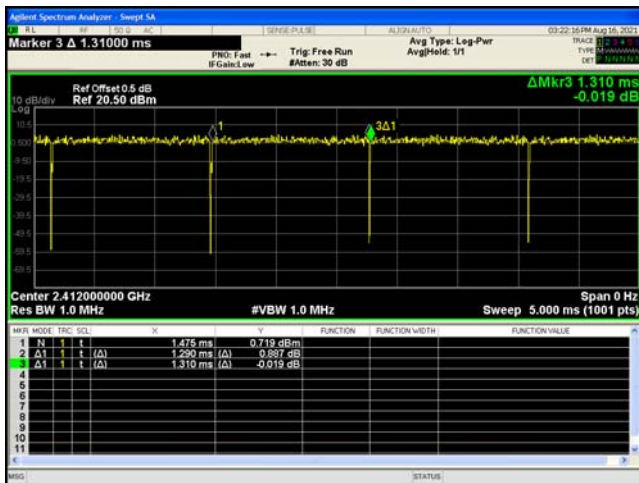

Wi-Fi 802.11n-HT40

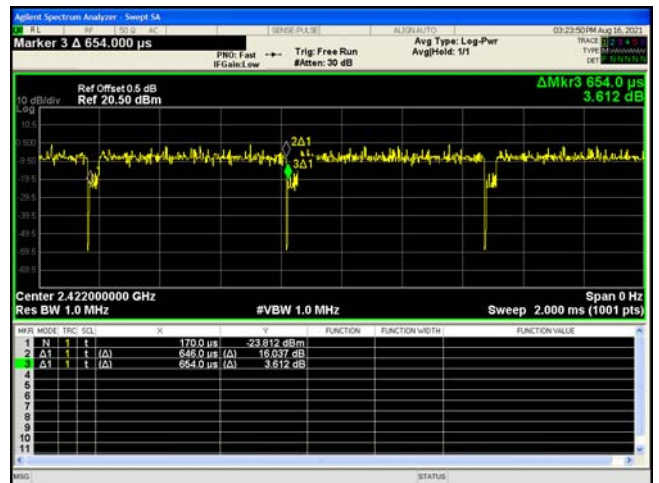

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to ≈ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW $\approx [3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

10.2 Test Result


9KHz – 30MHz

802.11b


Low Channel

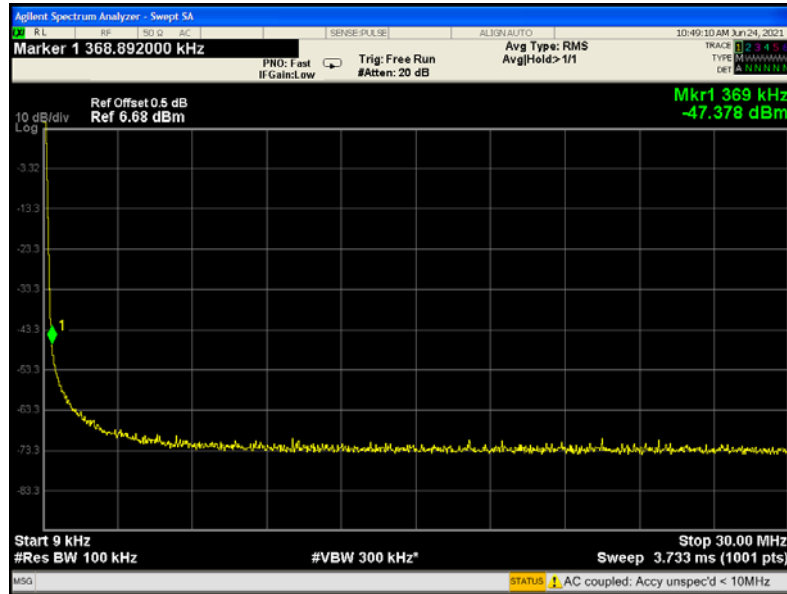

Middle Channel

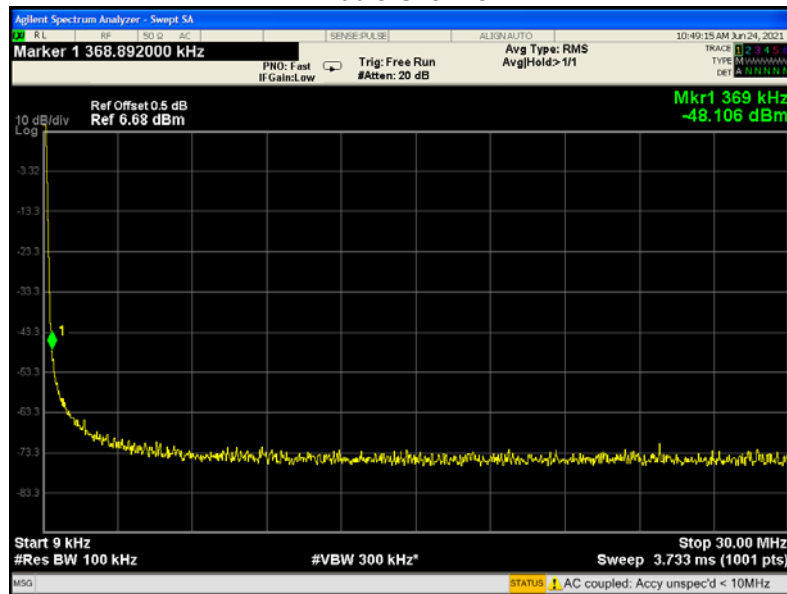


High Channel

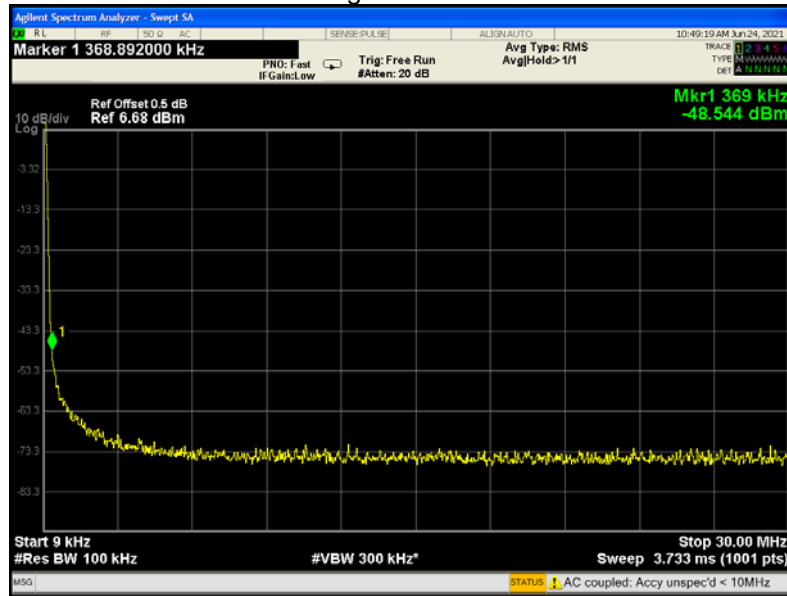


802.11g


Low Channel

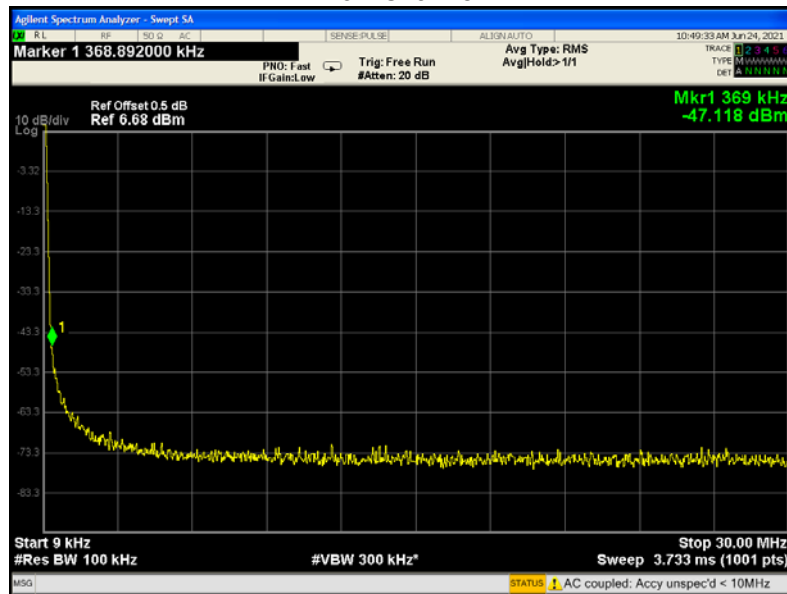

Middle Channel

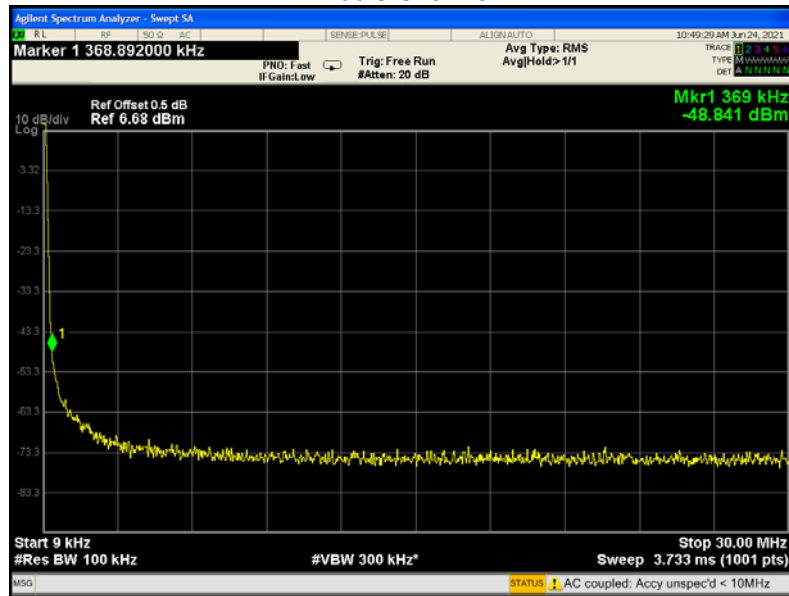


High Channel

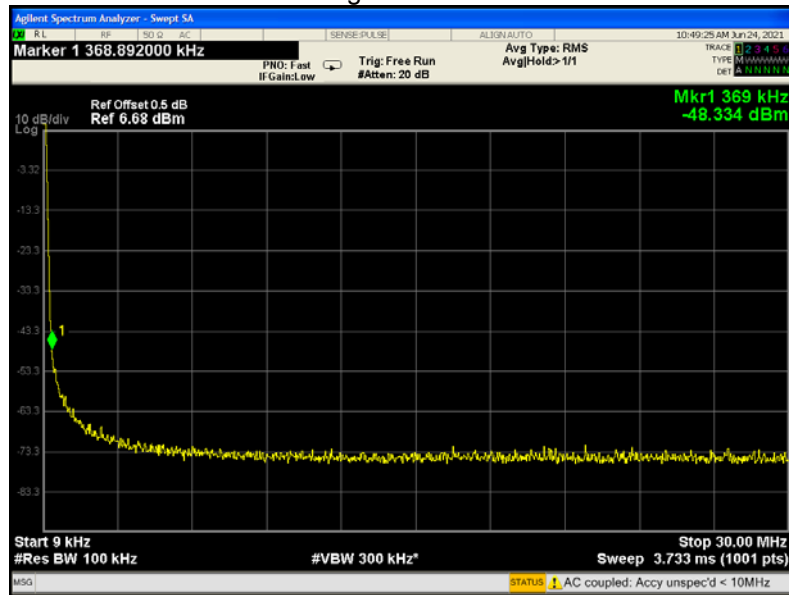


802.11n HT20


Low Channel

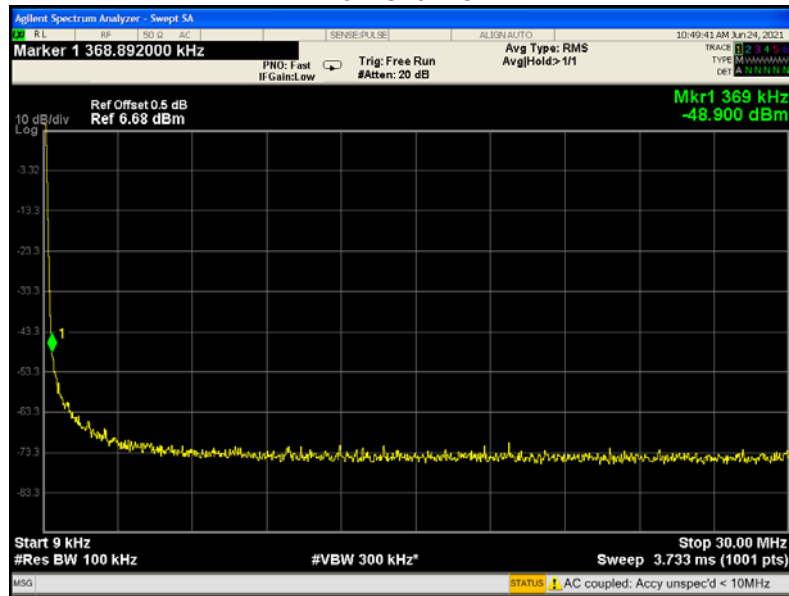

Middle Channel

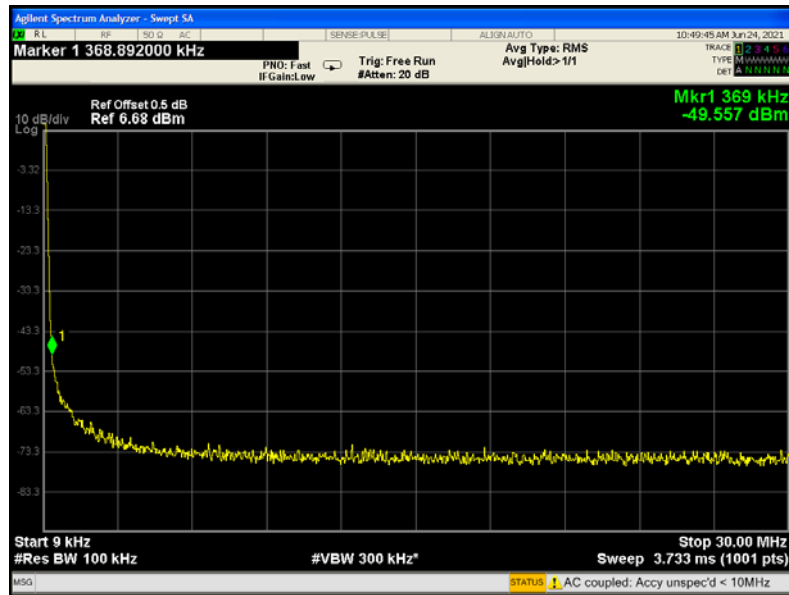


High Channel

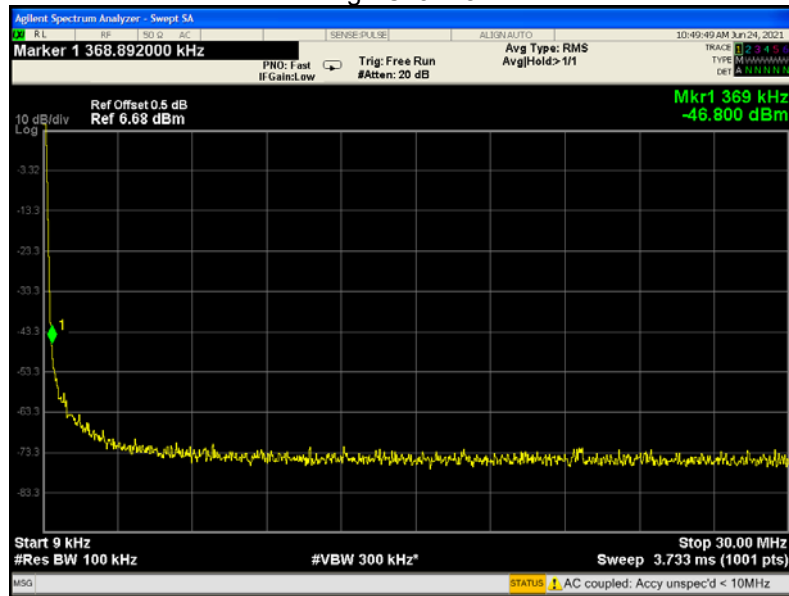


802.11n HT40


Low Channel

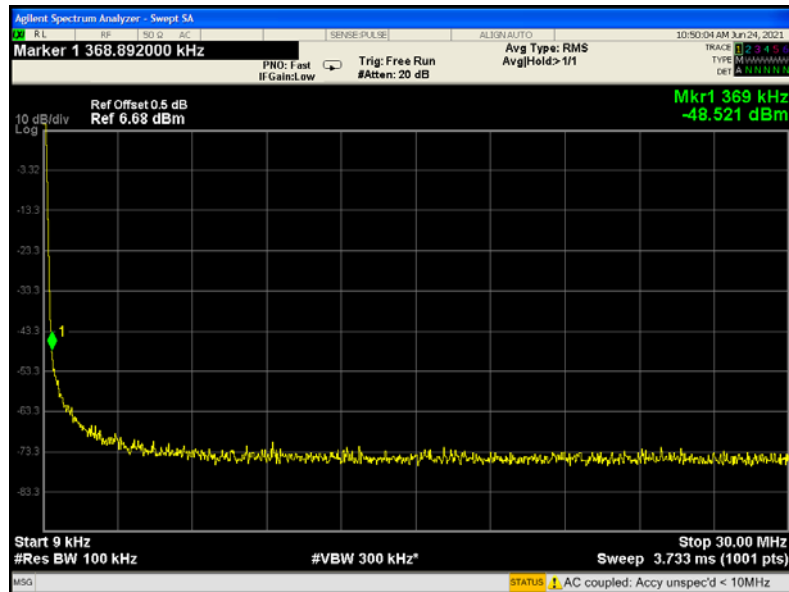


Middle Channel

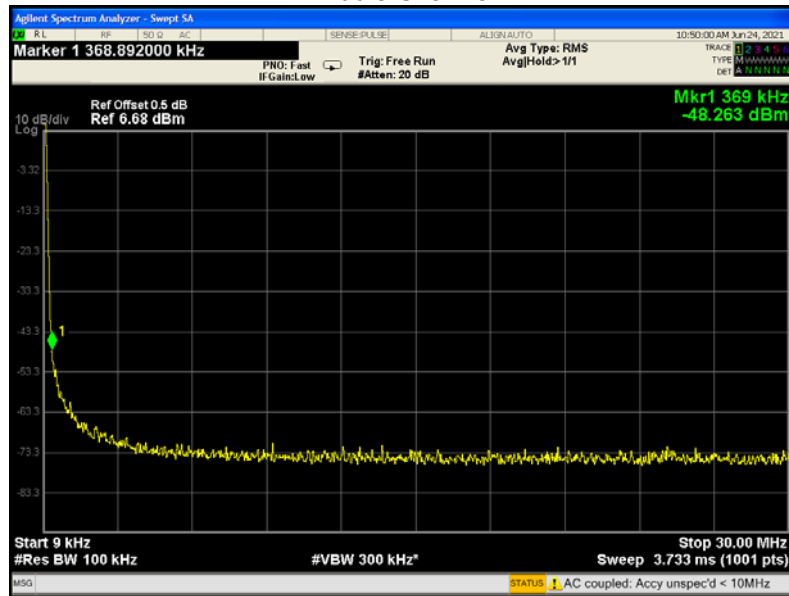


High Channel

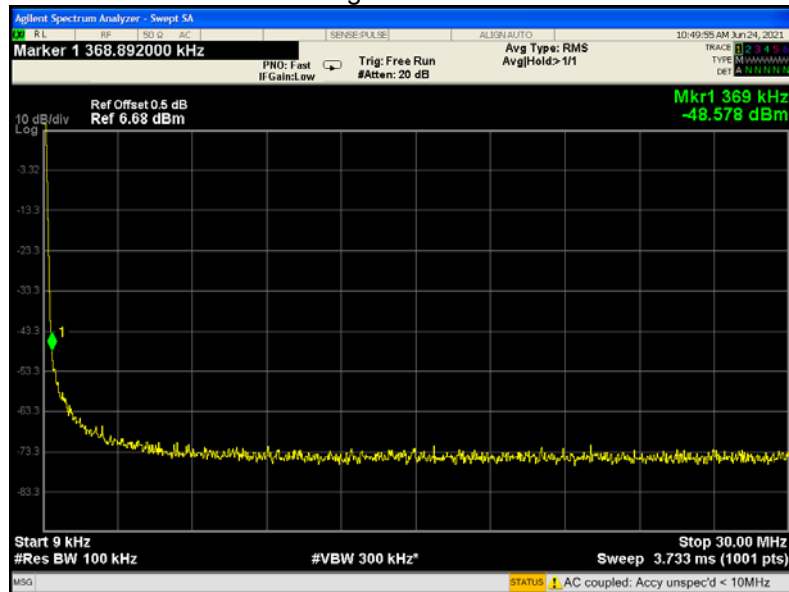


BLE Low Channel

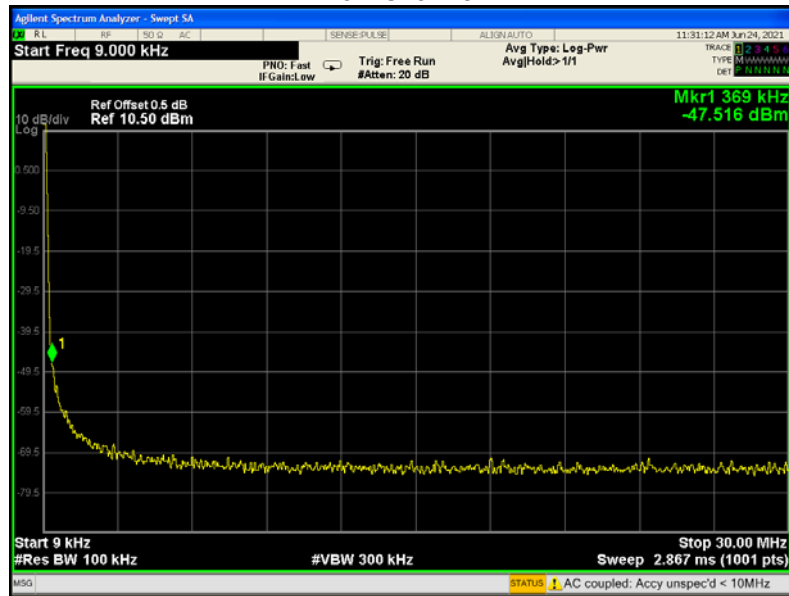

Middle Channel

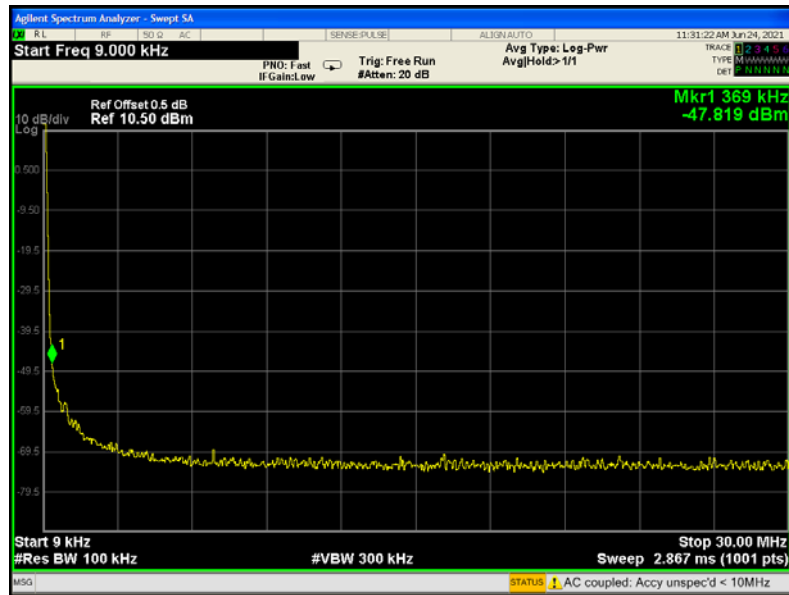


High Channel

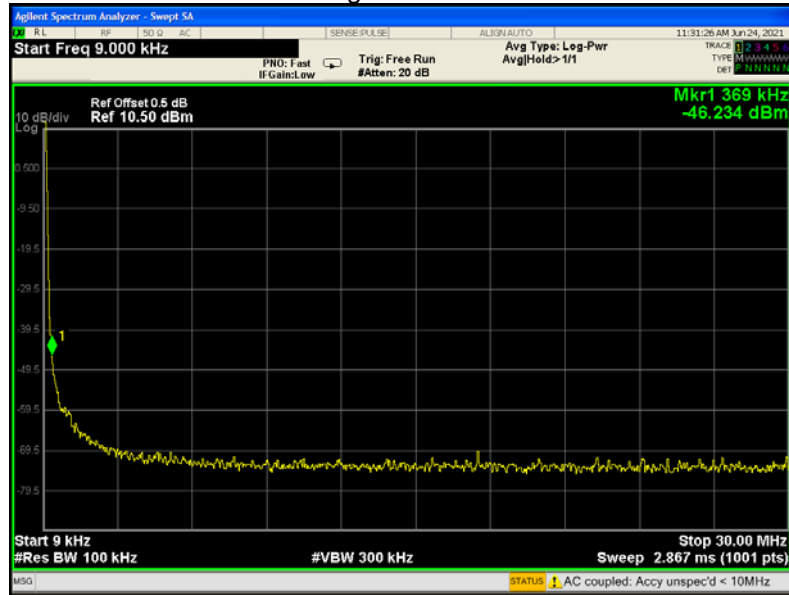


Above 30MHz
802.11b
Low Channel

Fundamental

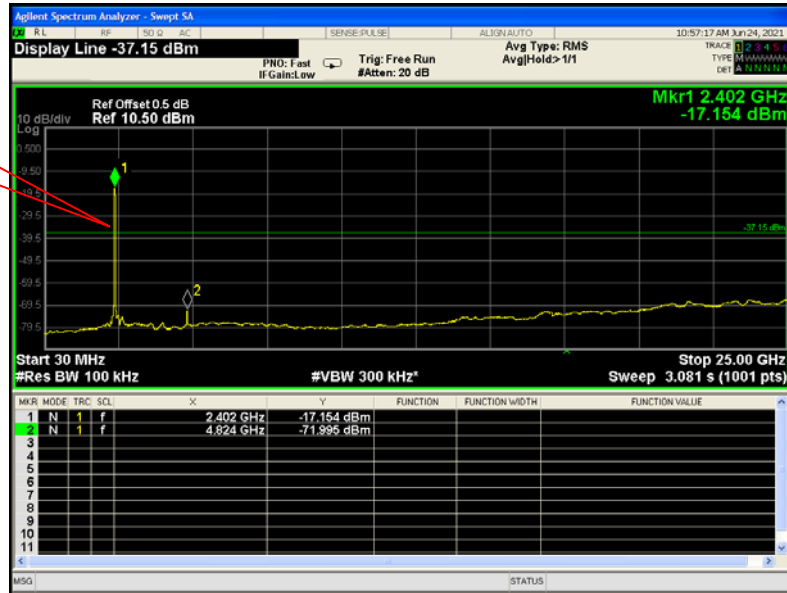


Middle Channel

Fundamental

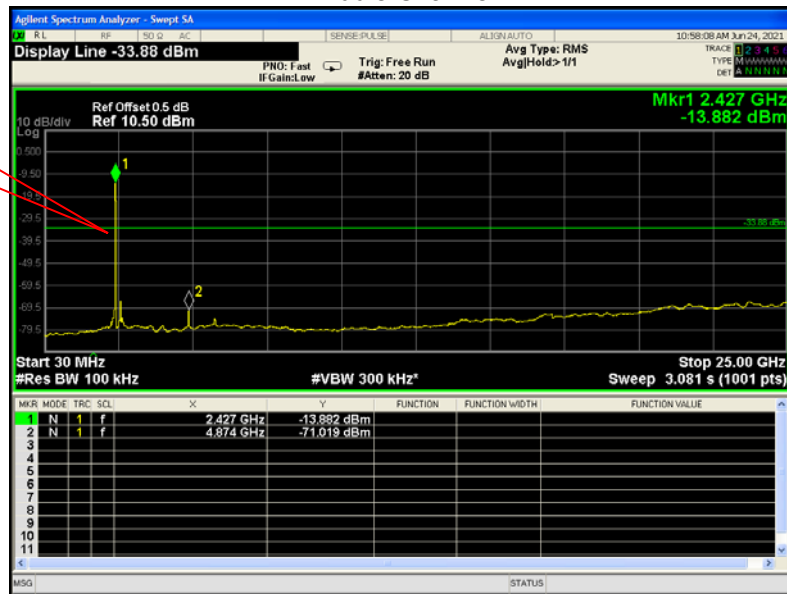

High Channel


Fundamental

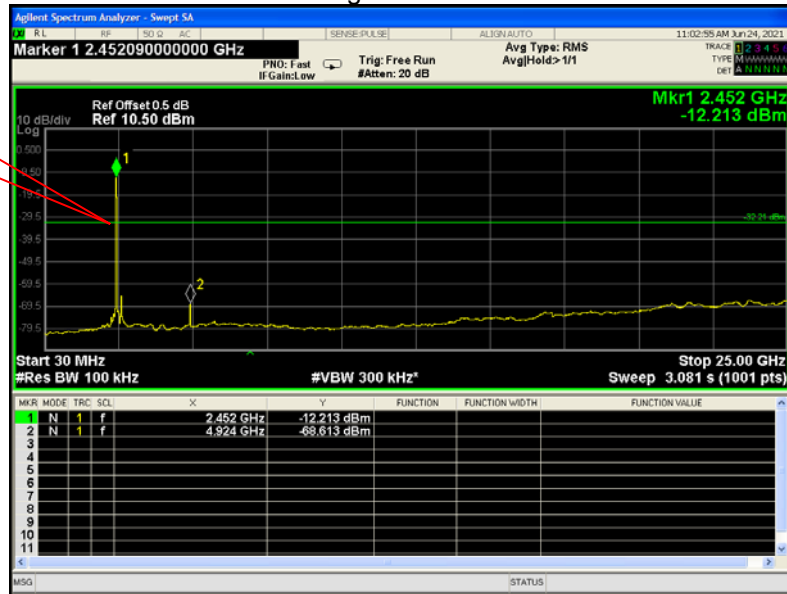

802.11g


Low Channel

Fundamental

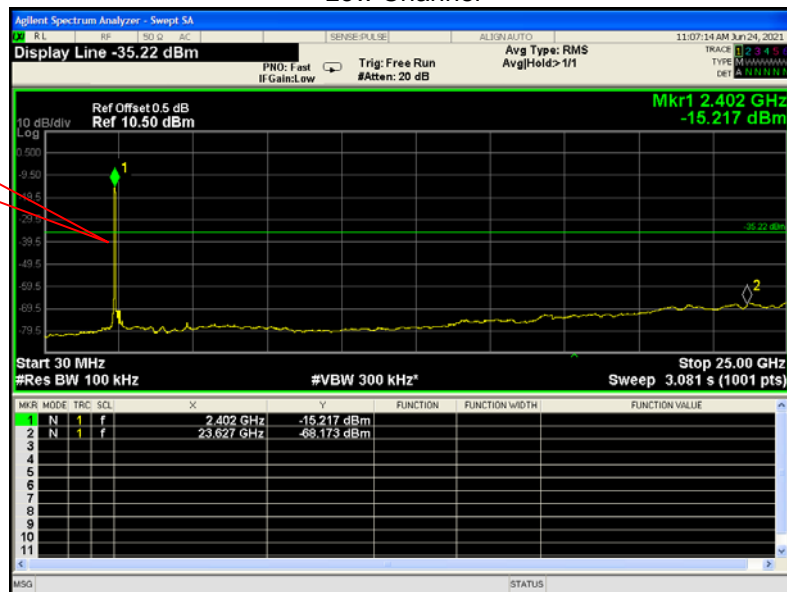


Middle Channel

Fundamental

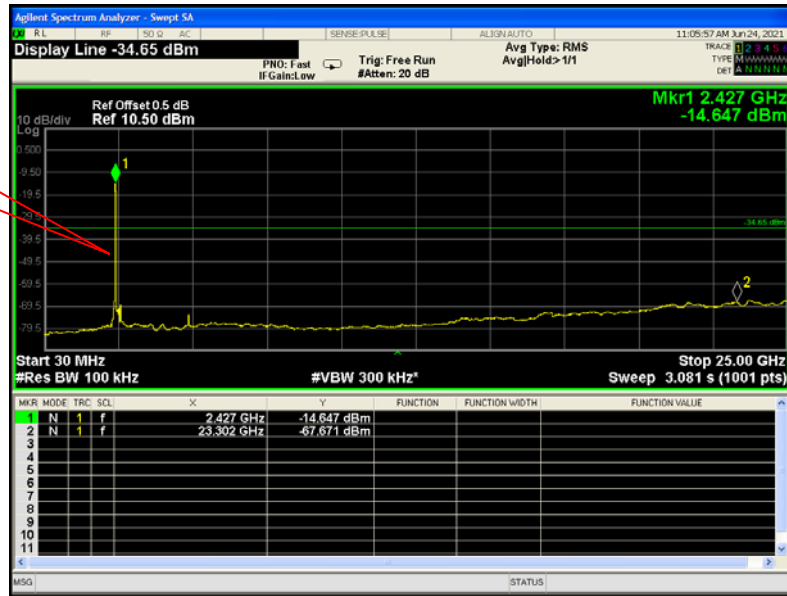

High Channel


Fundamental

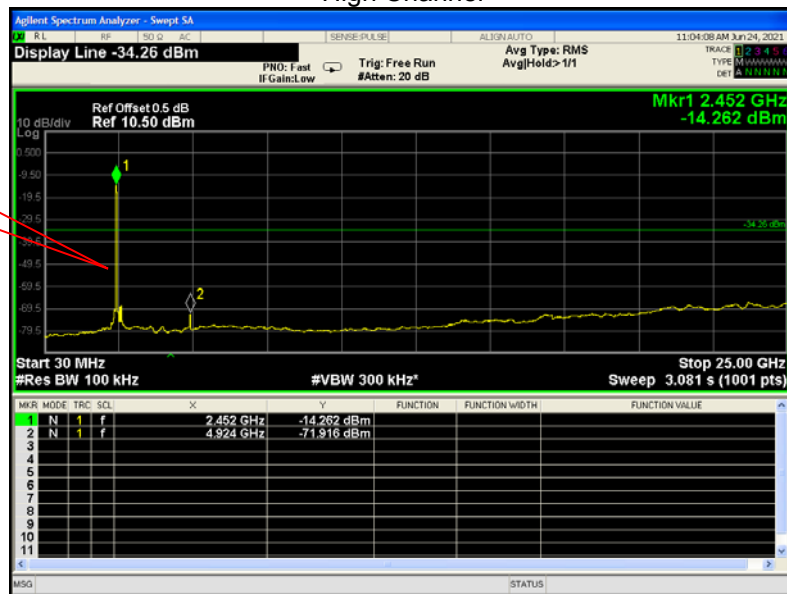

802.11n HT20


Low Channel

Fundamental

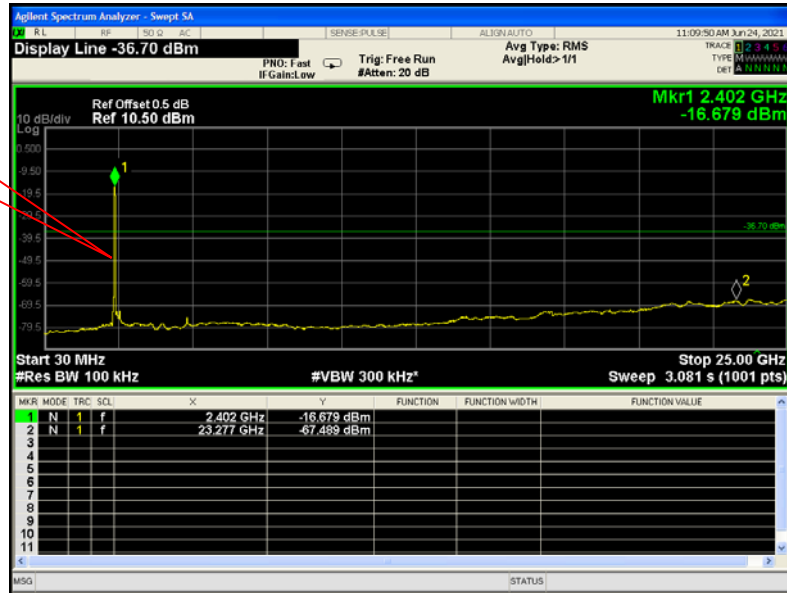


Middle Channel

Fundamental

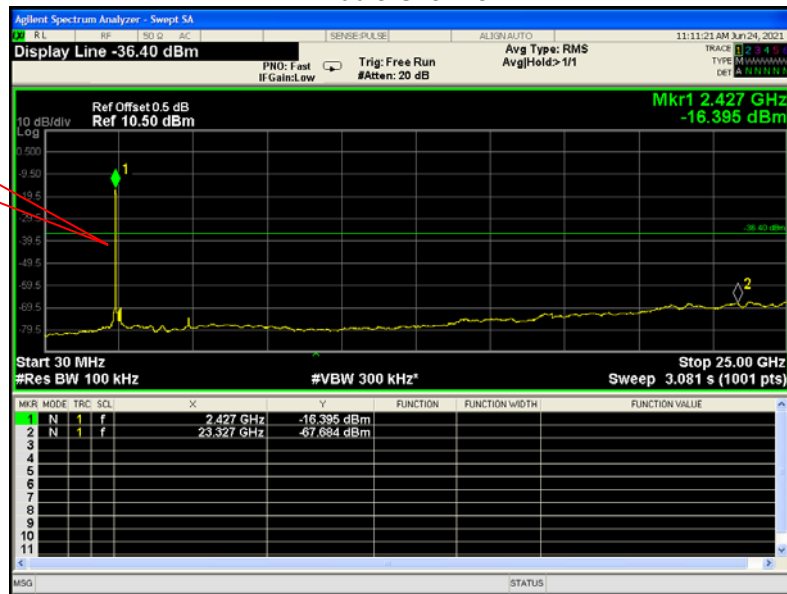

High Channel


Fundamental

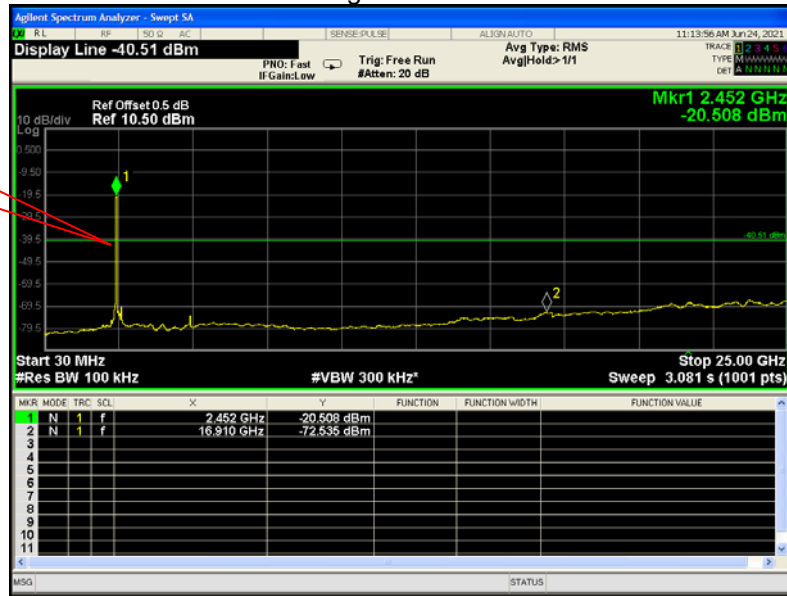

802.11n HT40


Low Channel

Fundamental

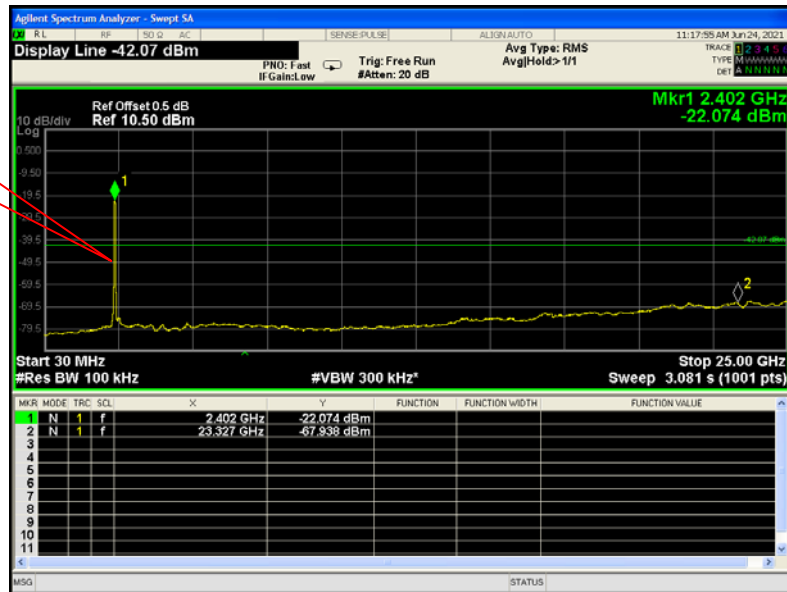


Middle Channel

Fundamental

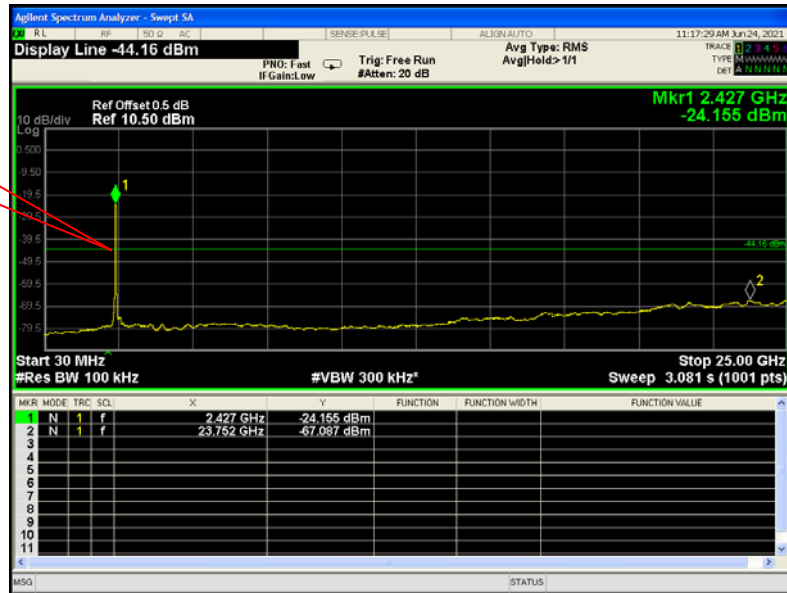


High Channel

Fundamental

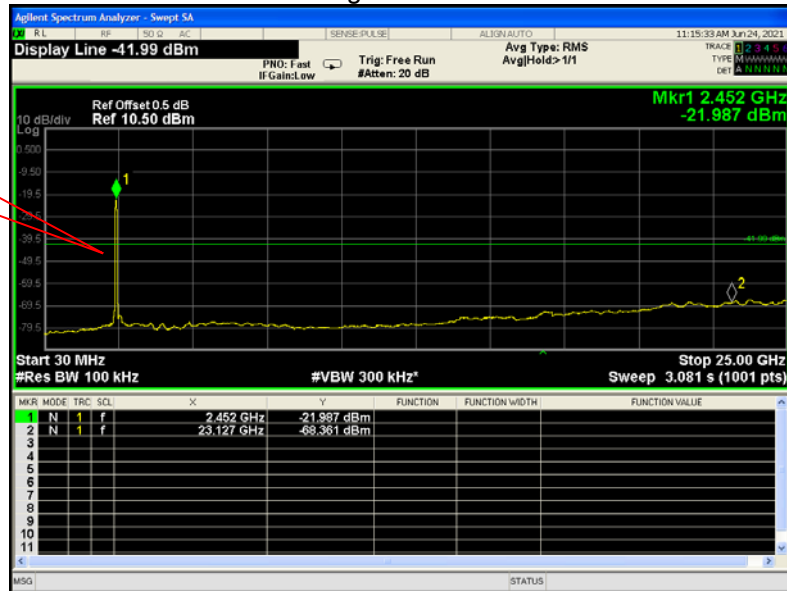


BLE
Low Channel

Fundamental

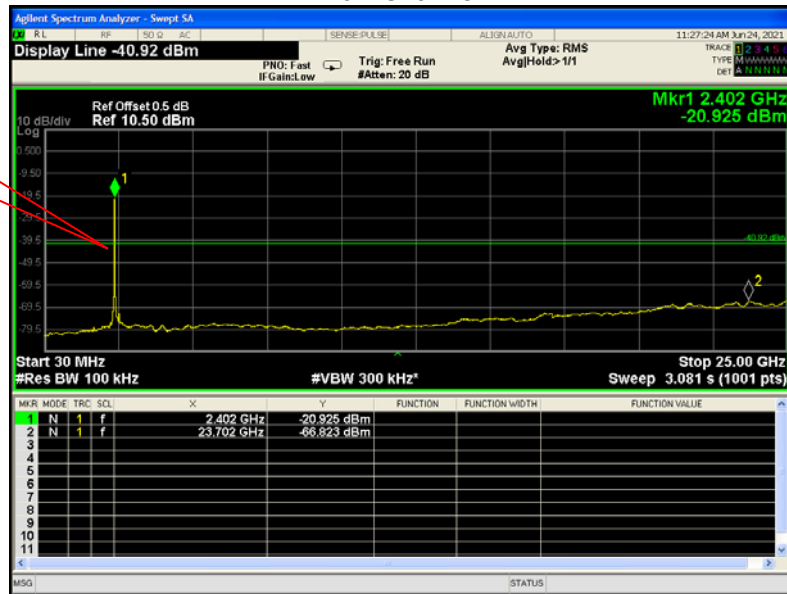


Middle Channel

Fundamental

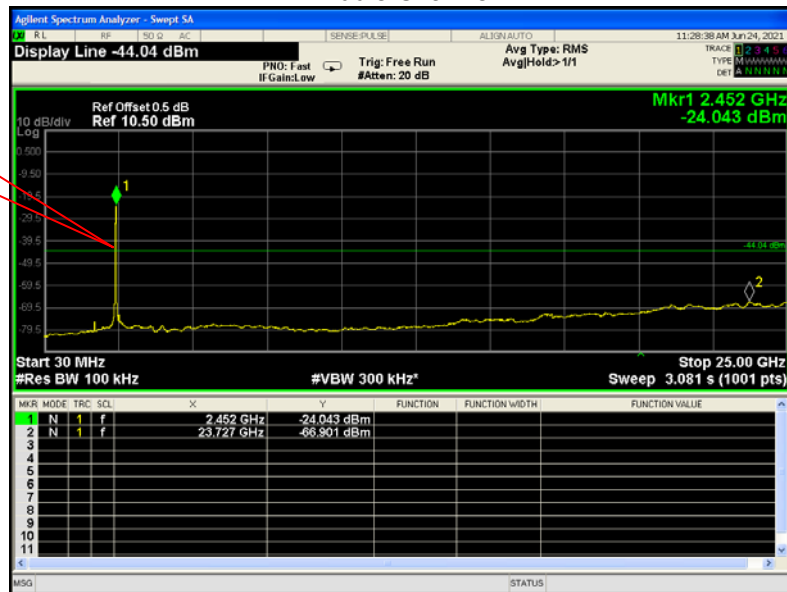

High Channel

Fundamental

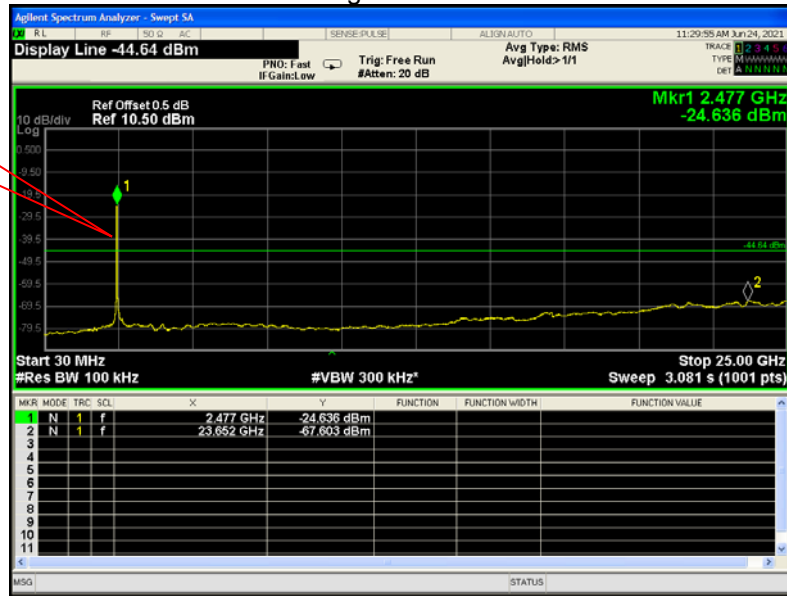

11 Band Edge Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02; April 2, 2019.

ANSI C63.10:2013

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



Test Mode: Transmitting

11.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.2 Test Result


Test result plots shown as follows:

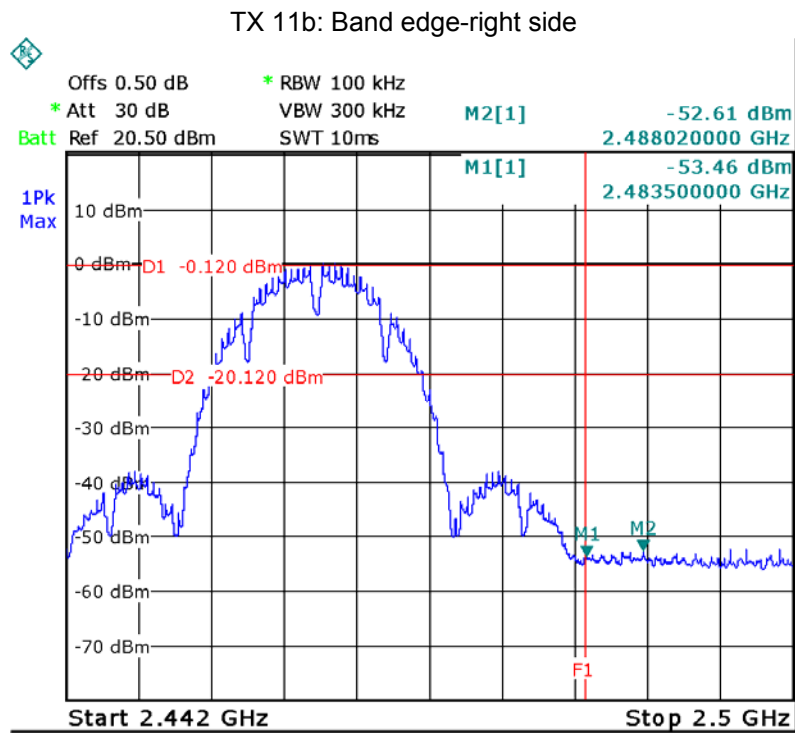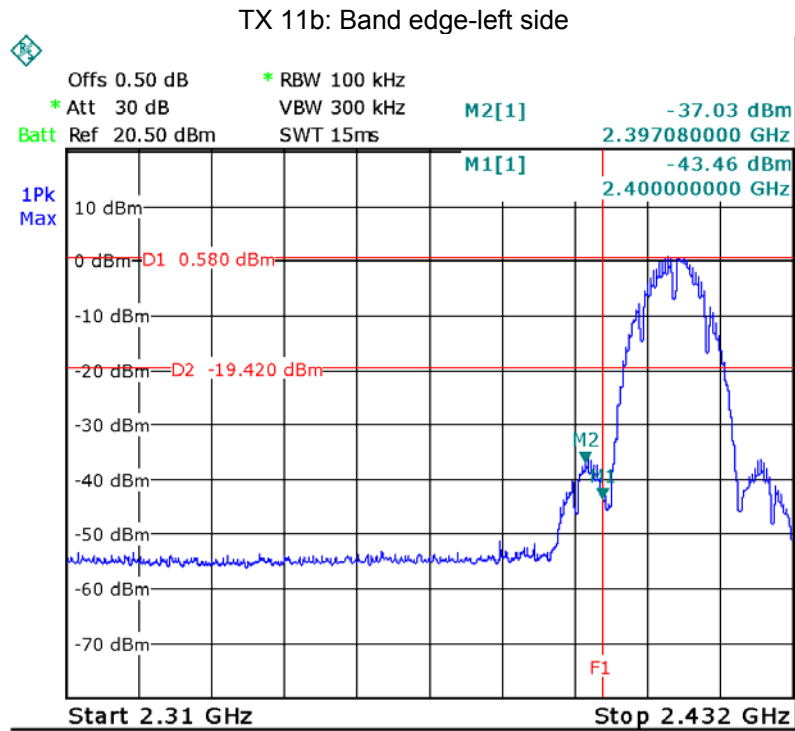


TX 11g: Band edge-left side

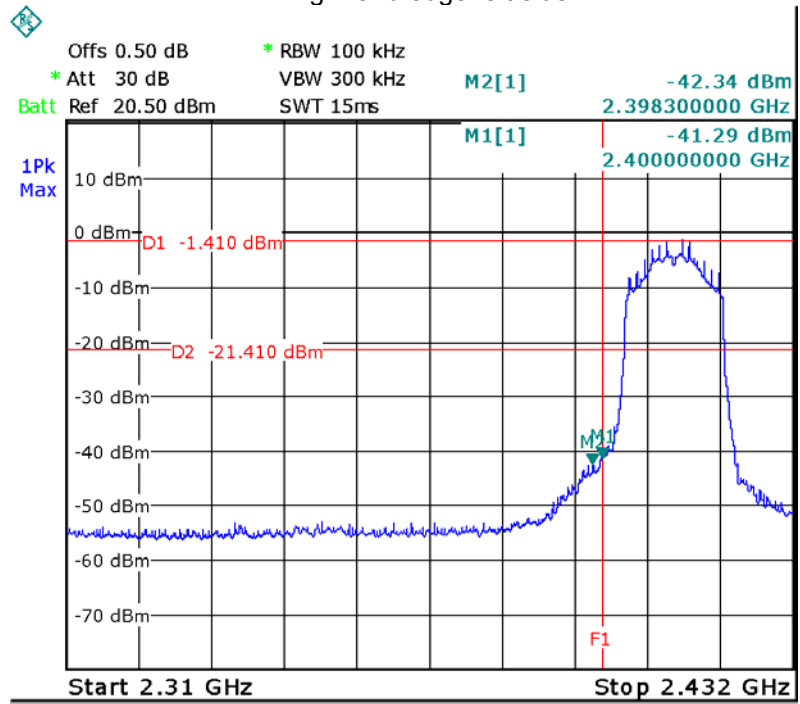


TX 11g: Band edge-right side

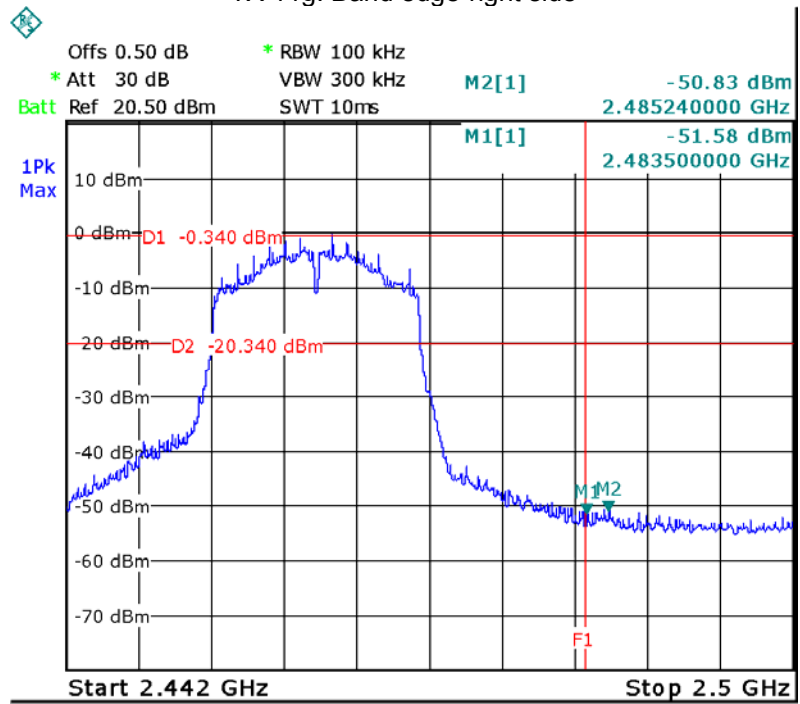


TX 11n HT20: Band edge-left side

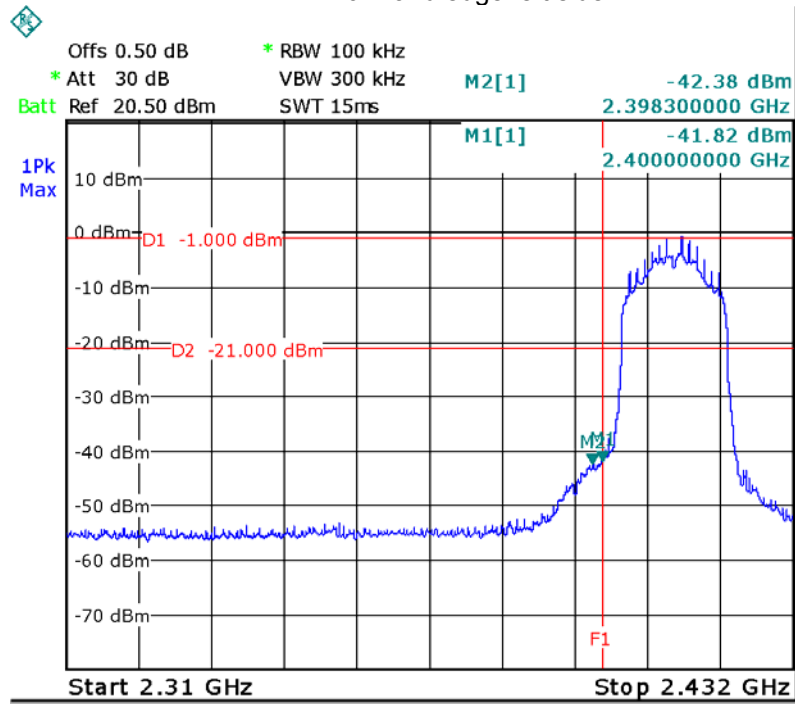


TX 11n HT20: Band edge-right side

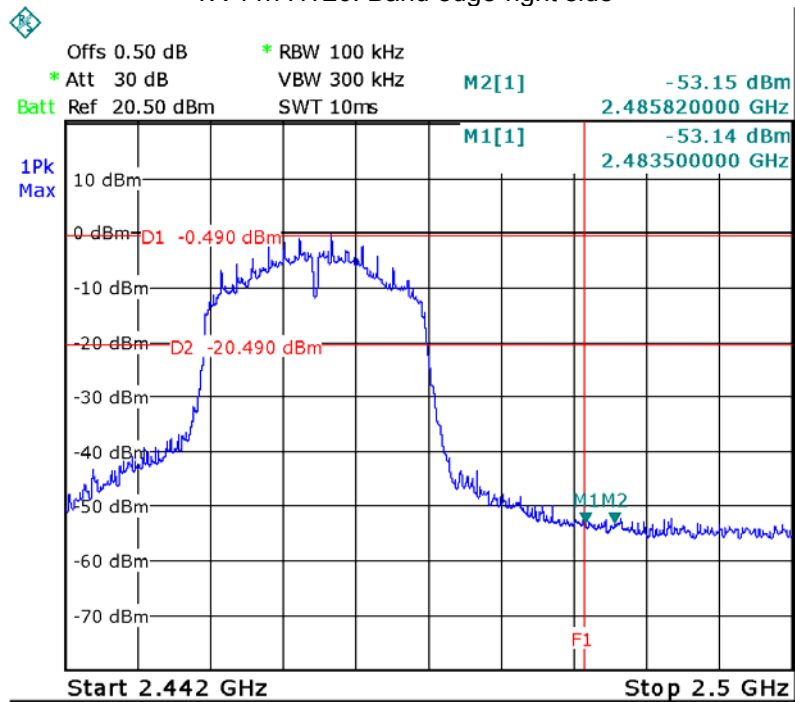


TX 11n HT40: Band edge-left side

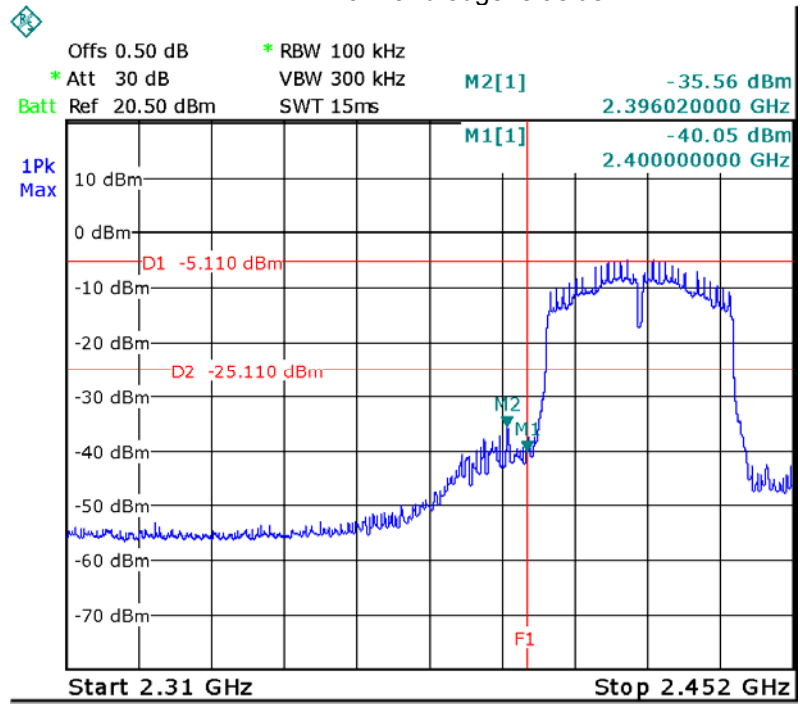


TX 11n HT40: Band edge-right side

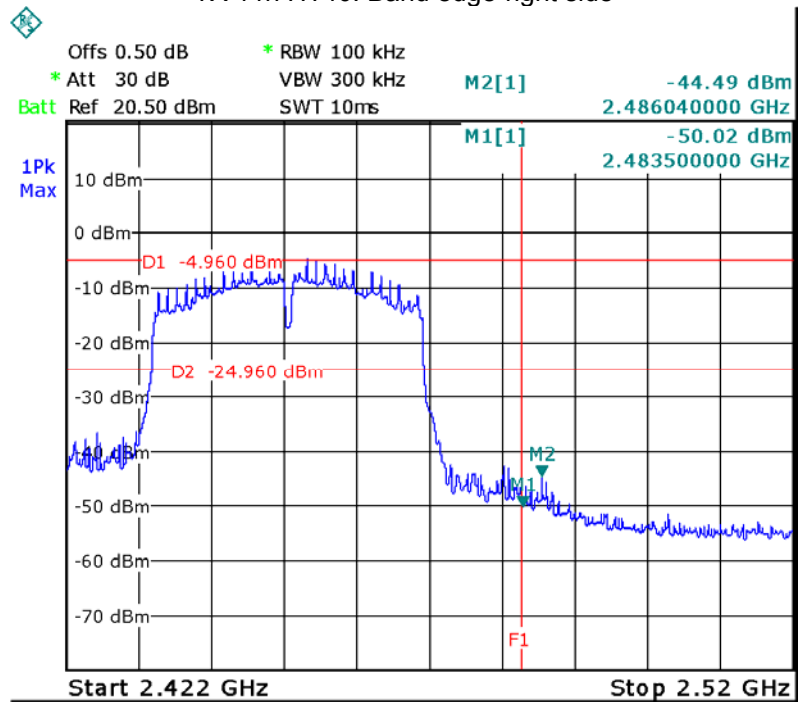

BLE: Band edge-left side

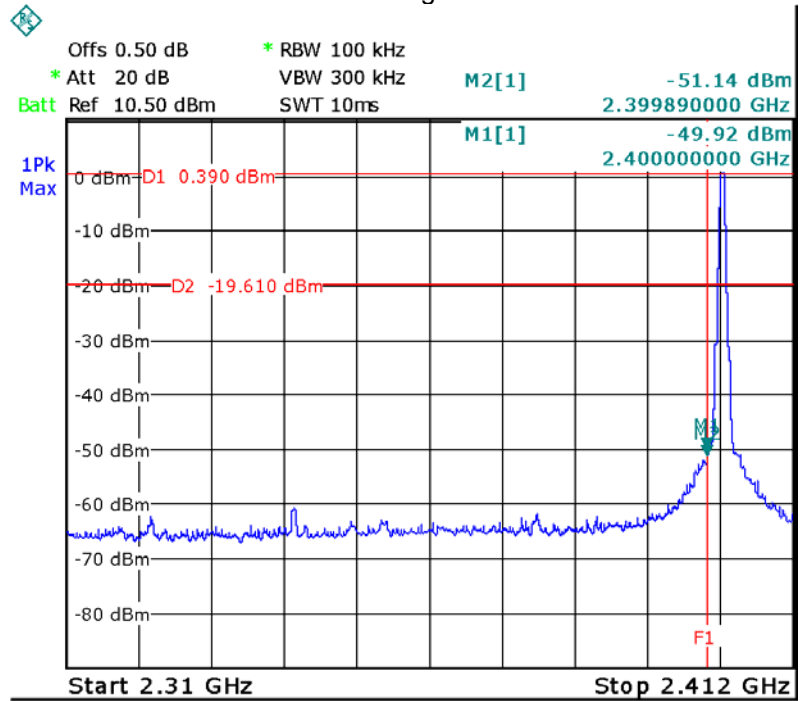

BLE: Band edge-right side

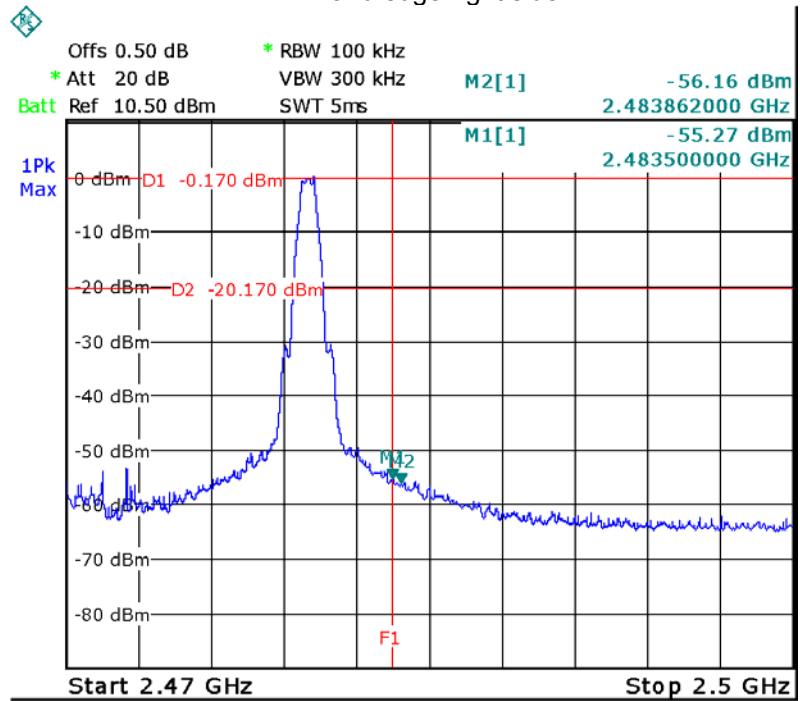

12 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;

ANSI C63.10:2013

12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


12.2 Test Result:

Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	9.581	14.116
	Channel 6	9.581	14.148
	Channel 11	9.134	14.116
TX 11g	Channel 1	11.327	16.068
	Channel 6	11.327	16.068
	Channel 11	12.475	16.068
TX 11n HT20	Channel 1	13.769	16.868
	Channel 6	13.904	16.922
	Channel 11	13.904	16.868
TX 11n HT40	Channel 3	33.92	36.008
	Channel 6	35.13	36.008
	Channel 9	32.71	36.008
BLE	Channel 0	0.689	1.030
	Channel 19	0.700	1.024
	Channel 39	0.683	1.036


Test result plot:

6dB Bandwidth


Mode: TX 11b channel 1

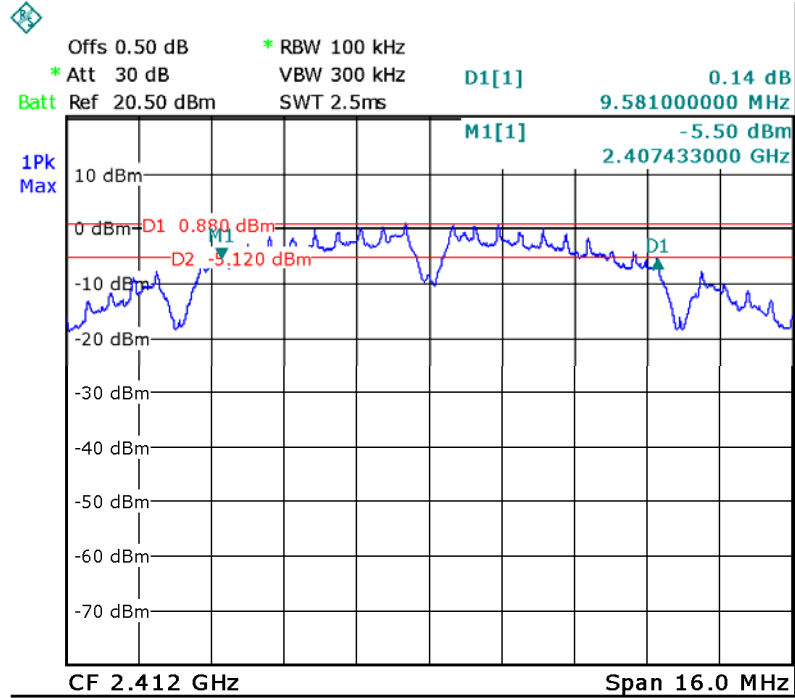


Mode: TX 11b channel 6

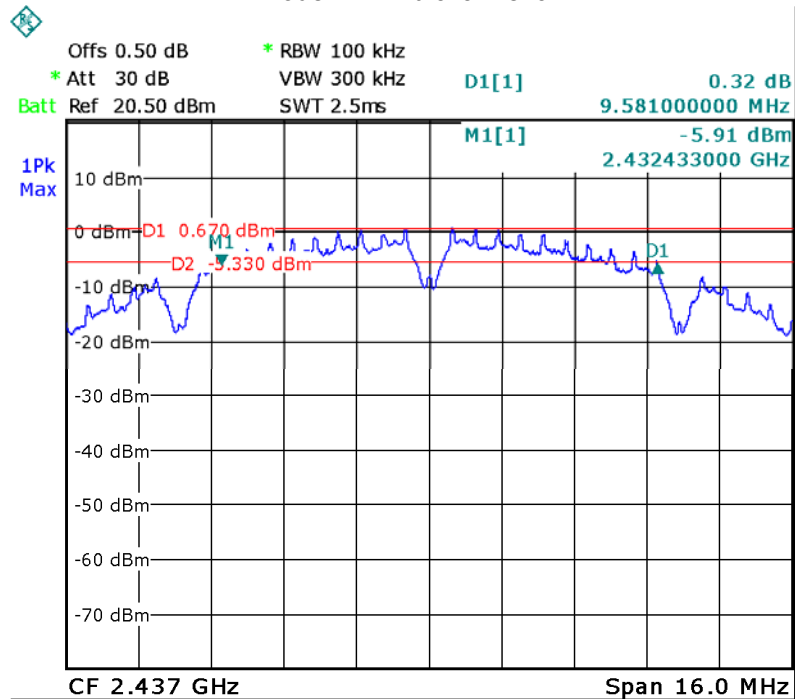


Mode: TX 11b channel 11

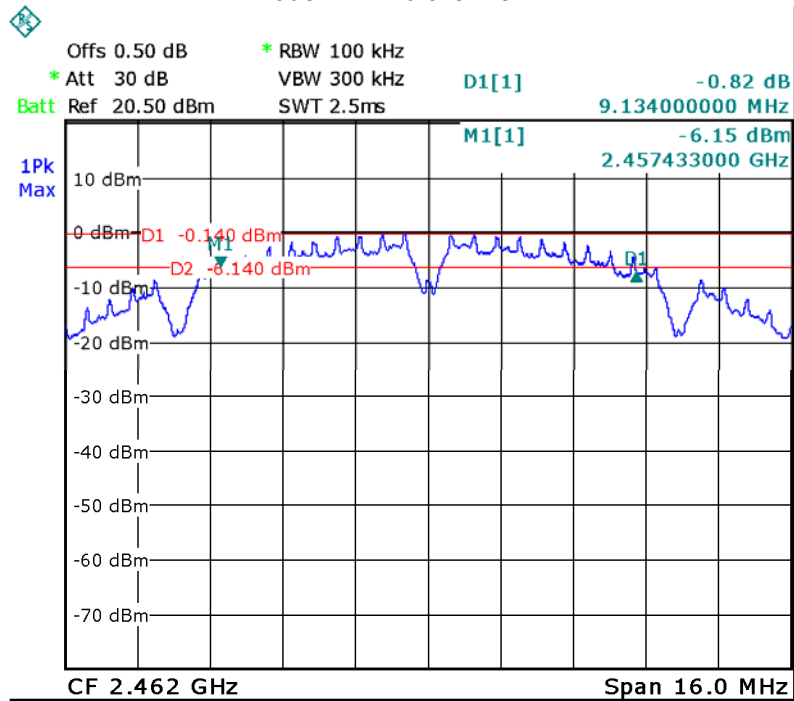


Mode: TX 11g channel 1

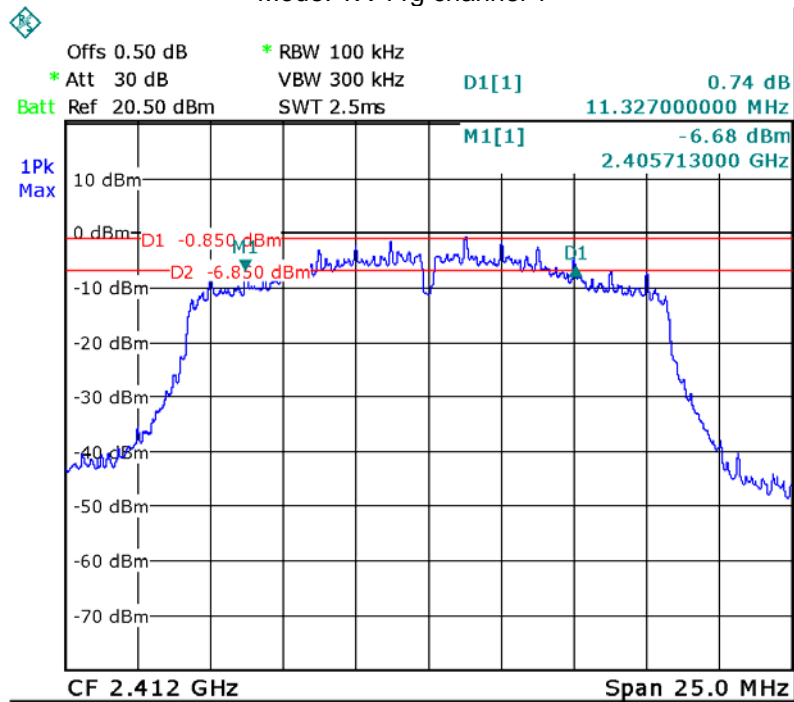


Mode: TX 11g channel 6

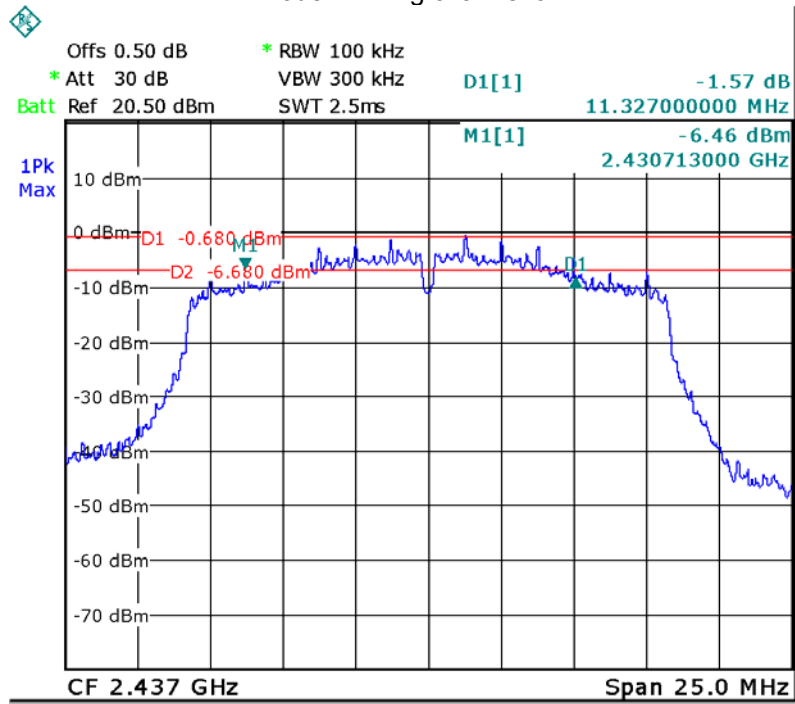


Mode: TX 11g channel 11

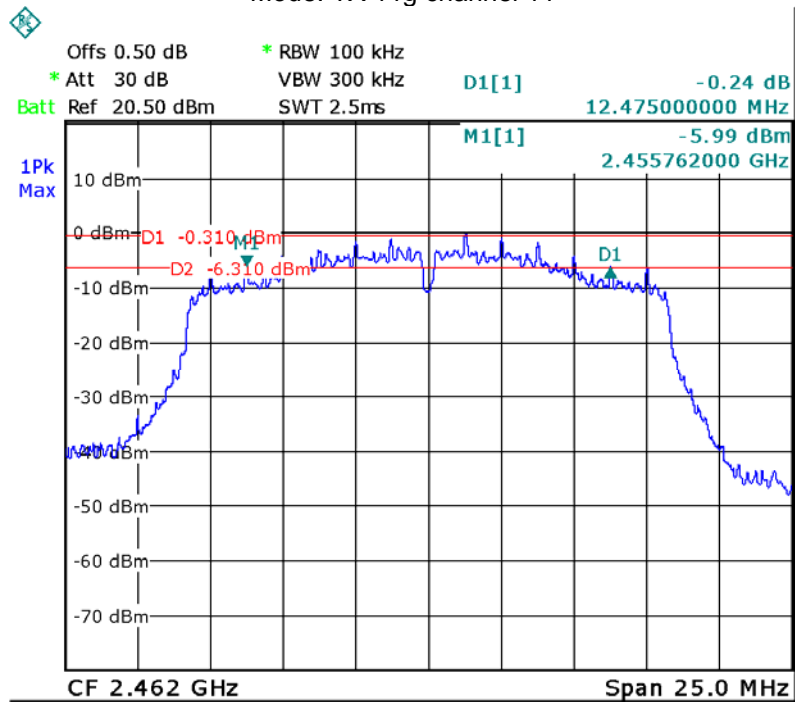


Mode: TX 11n HT20 channel 1

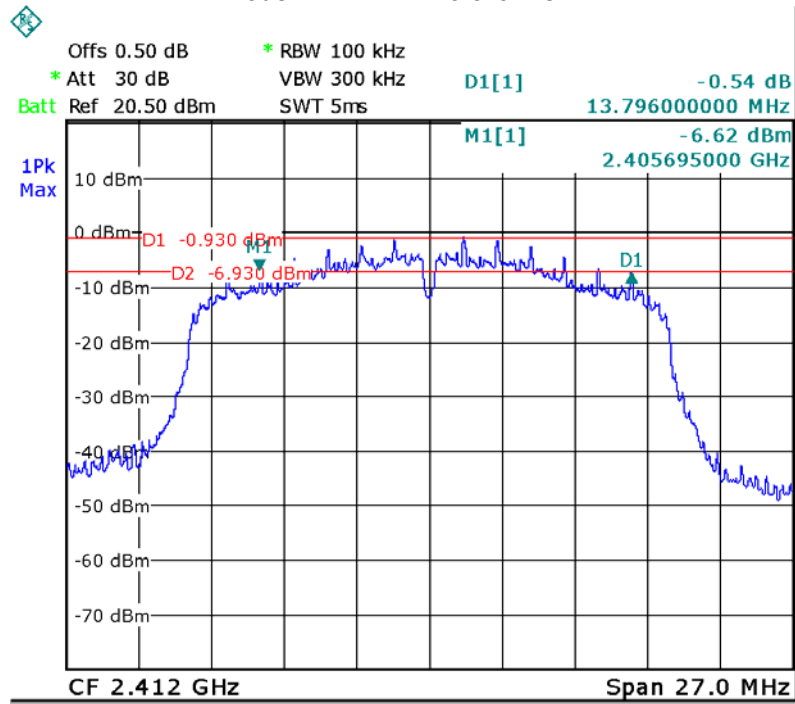


Mode: TX 11n HT20 channel 6

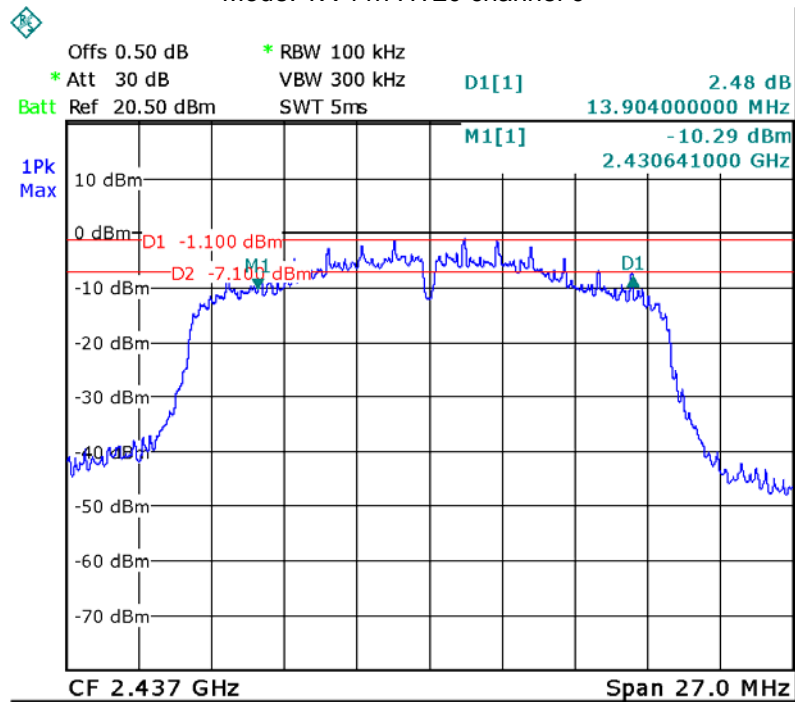


Mode: TX 11n HT20 channel 11

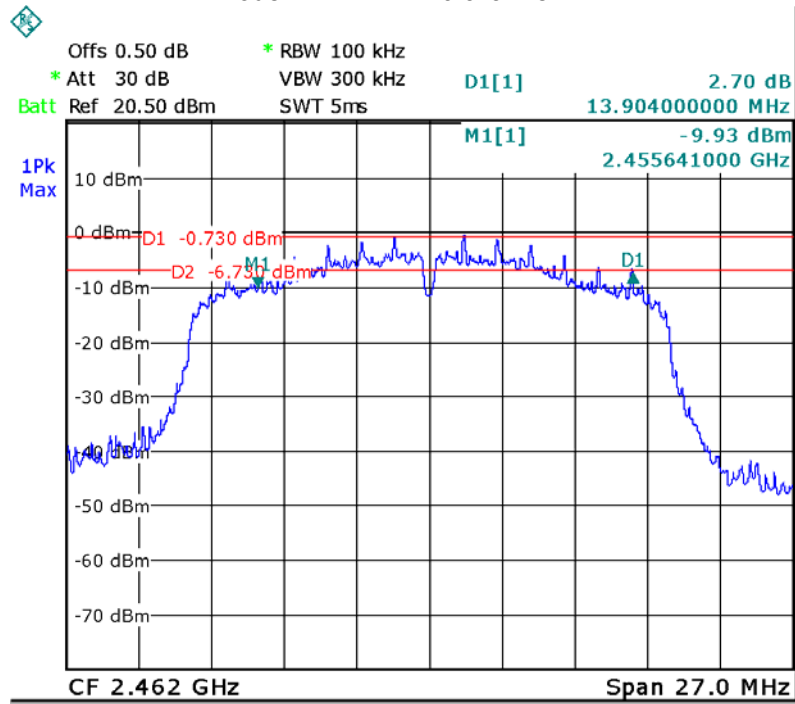


Mode: TX 11n HT40 channel 3

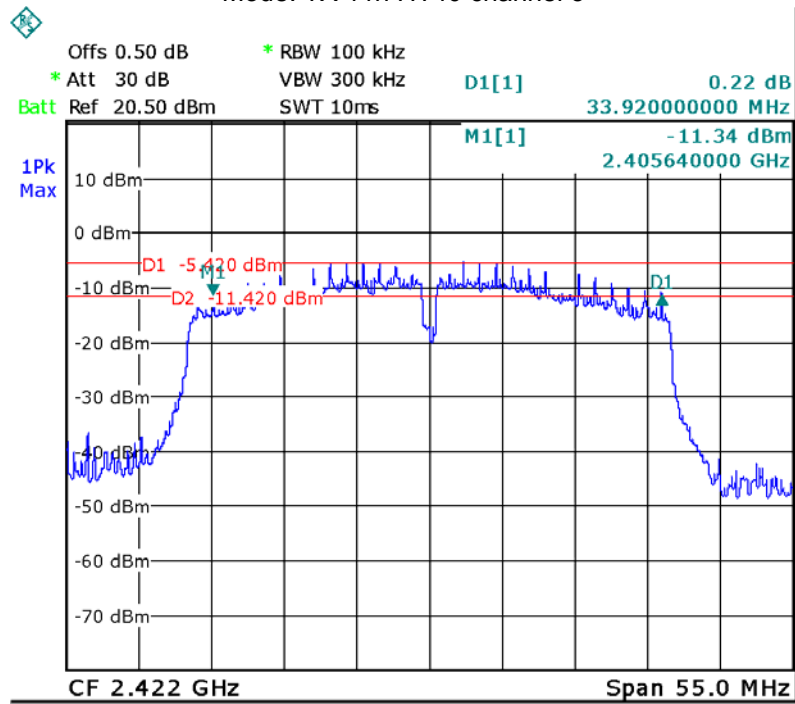


Mode: TX 11n HT40 channel 6

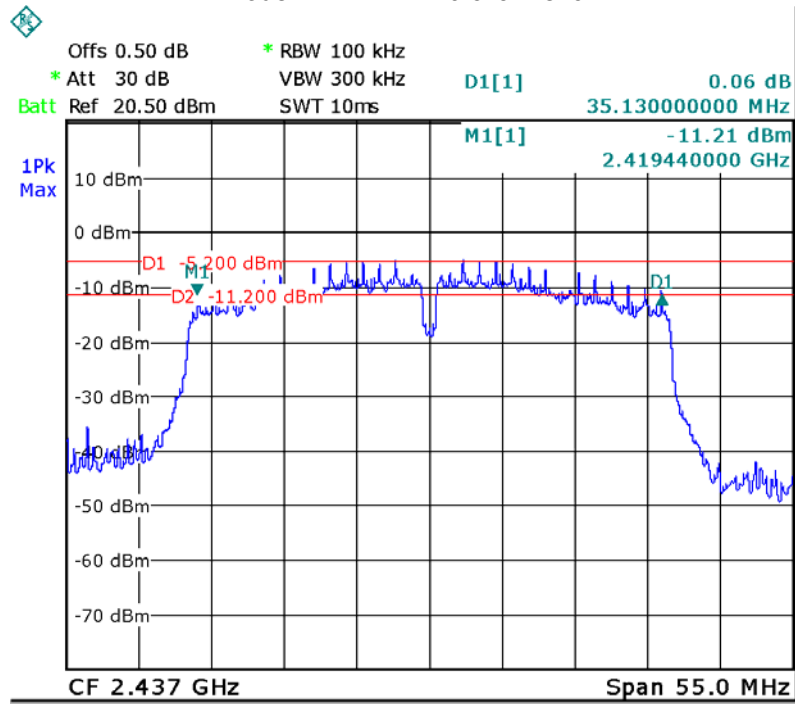


Mode: TX 11n HT40 channel 9

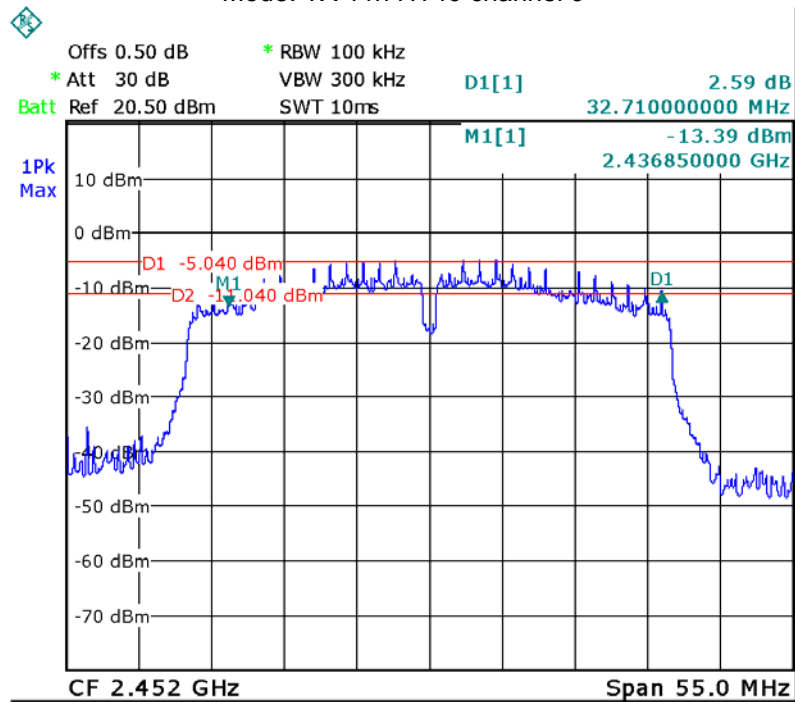


BLE: channel 0

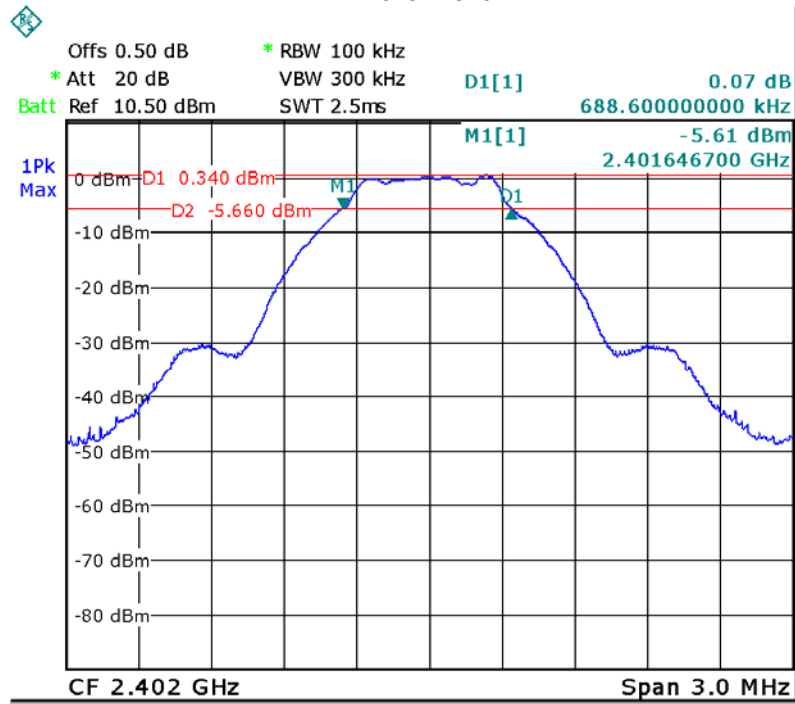


BLE: channel 19

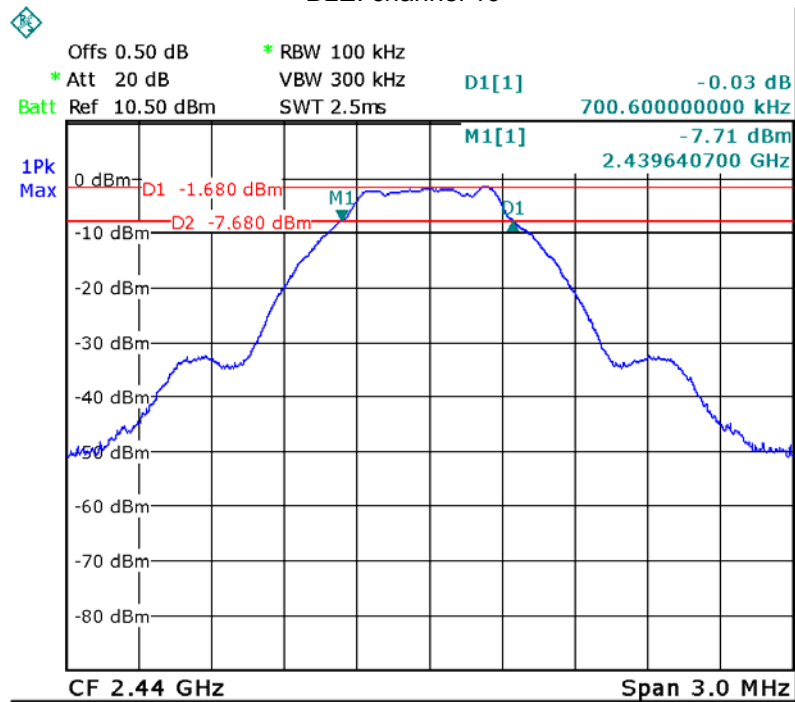

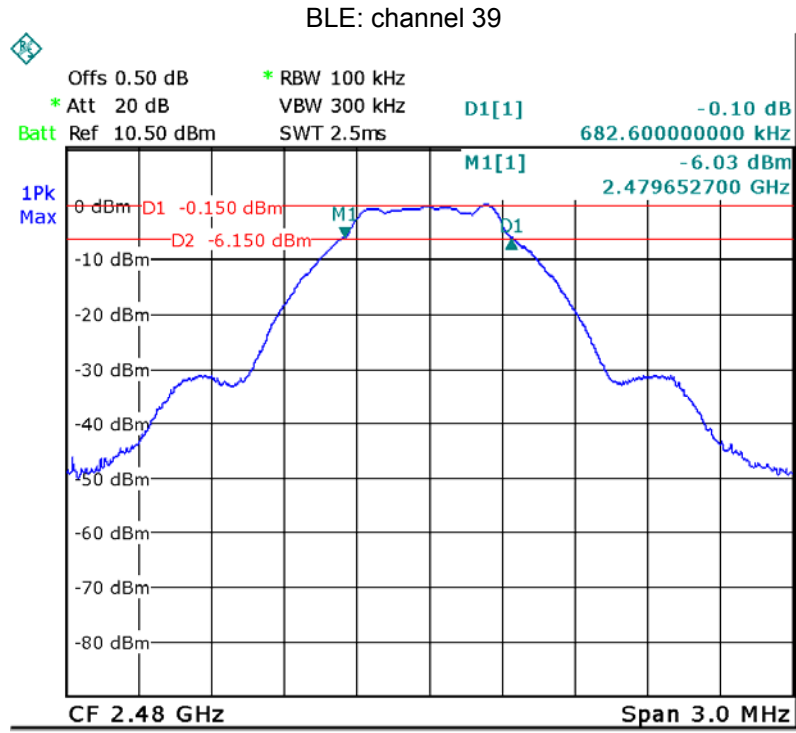


99% Bandwidth


Mode: TX 11b channel 1

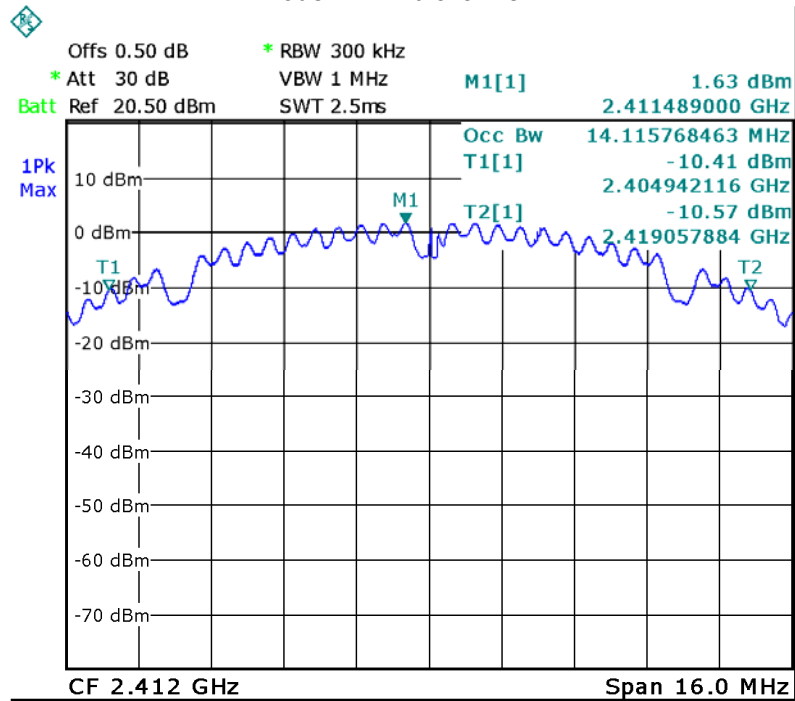


Mode: TX 11b channel 6

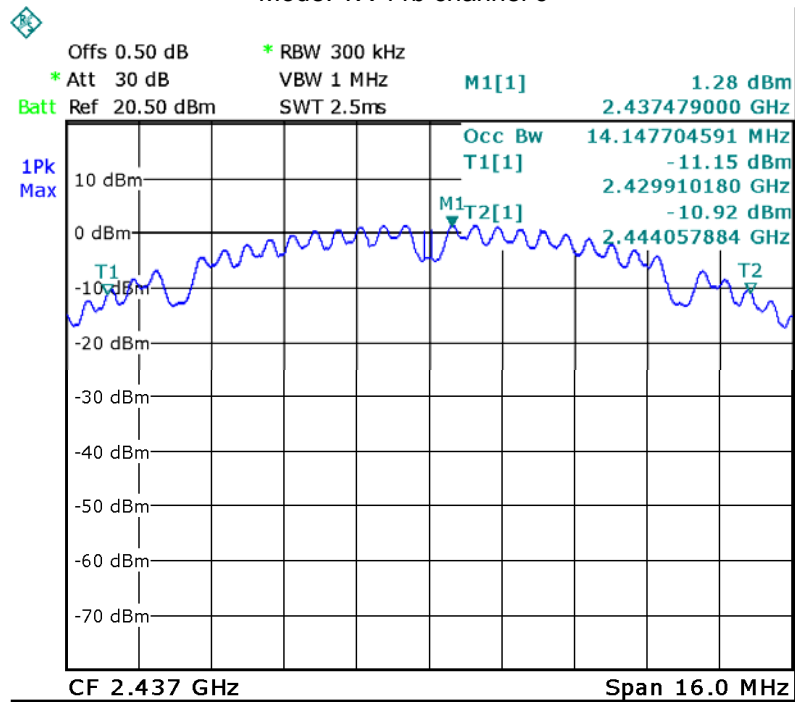


Mode: TX 11b channel 11

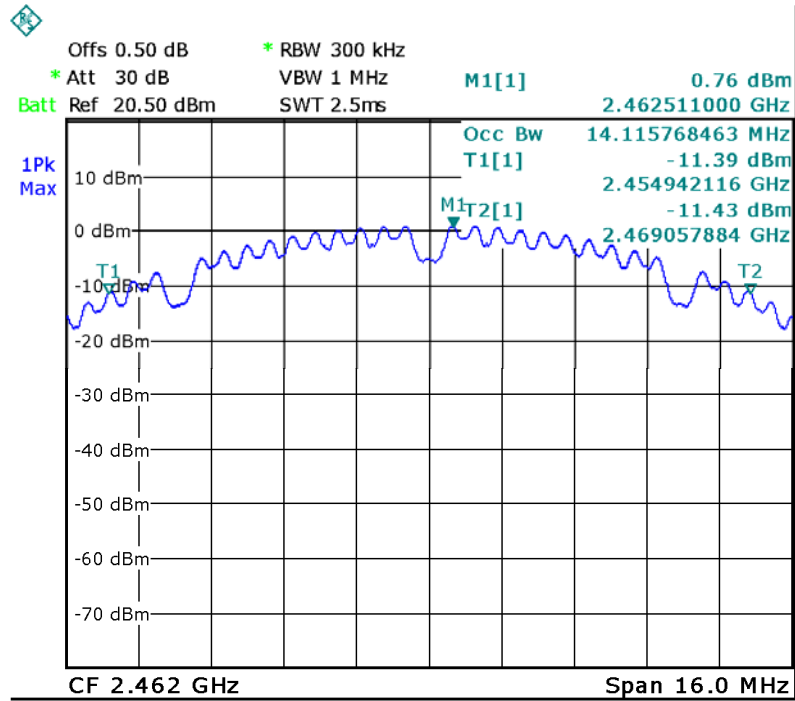


Mode: TX 11g channel 1

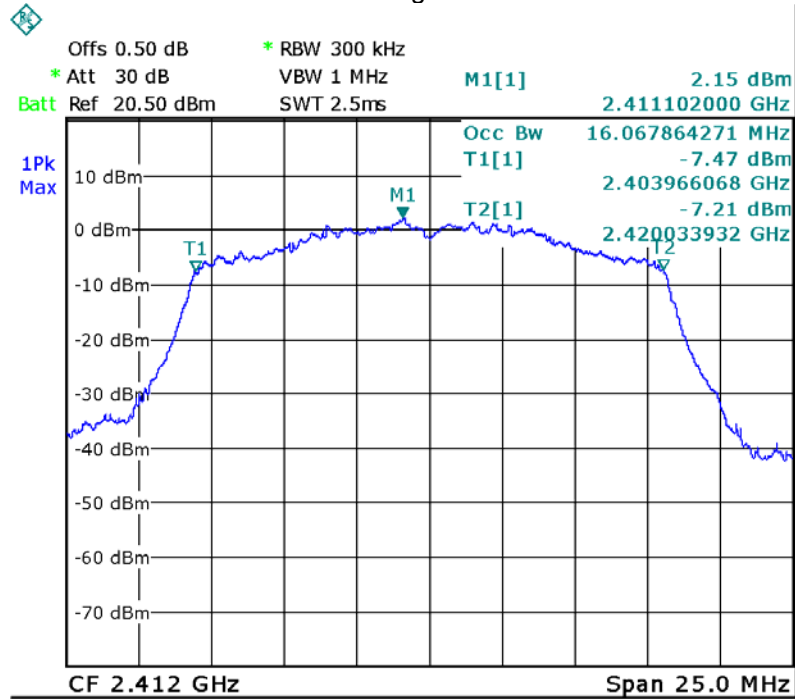


Mode: TX 11g channel 6

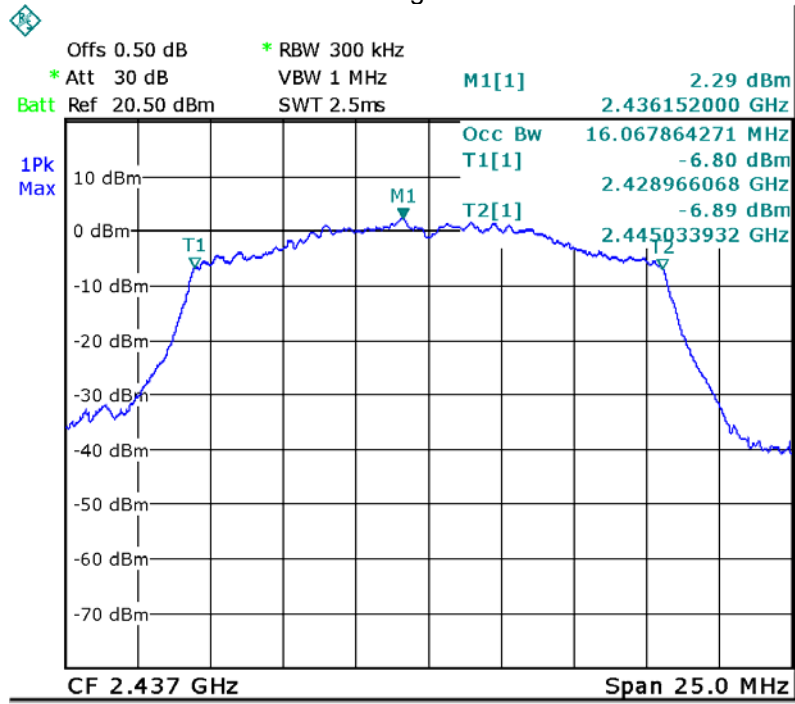


Mode: TX 11g channel 11

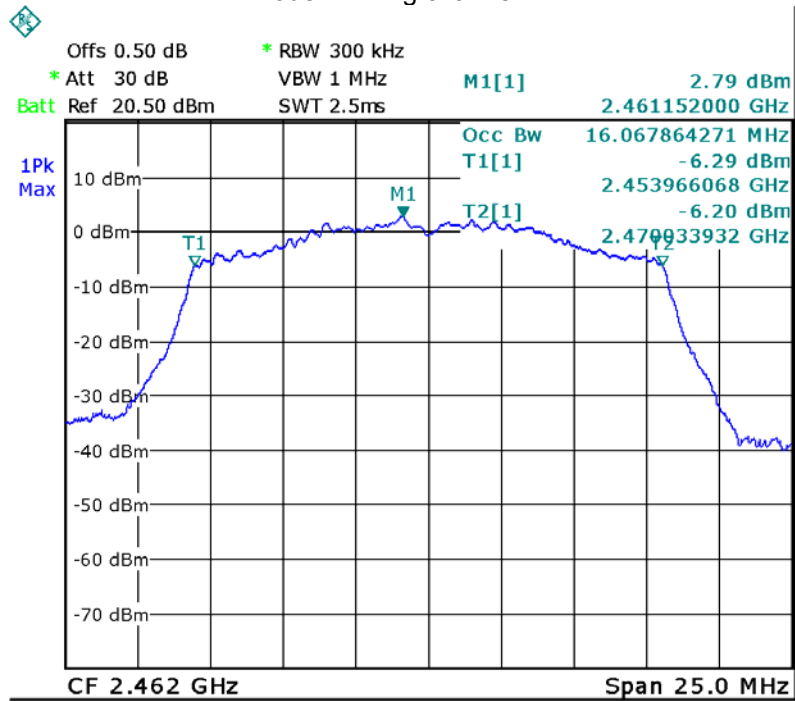


Mode: TX 11n HT20 channel 1

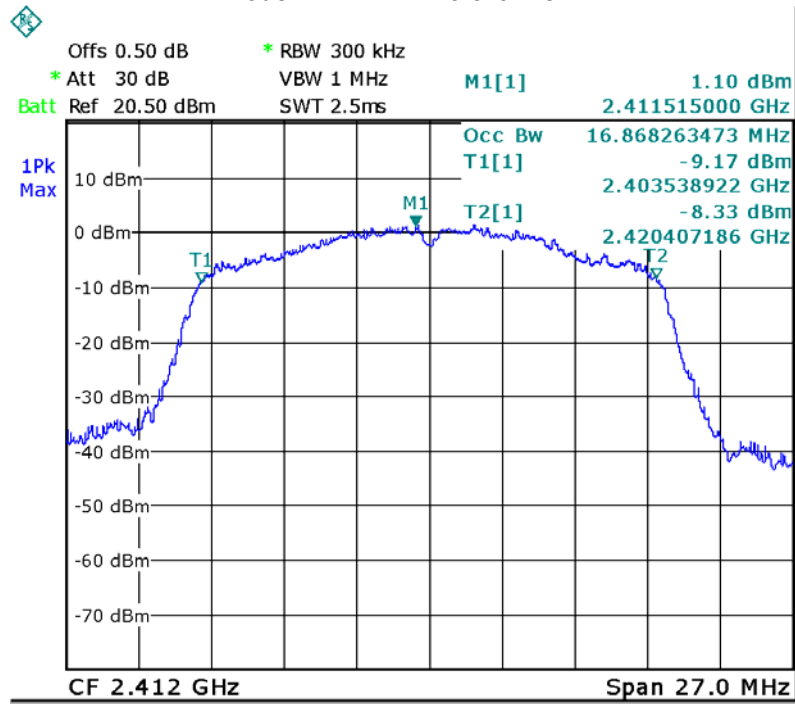


Mode: TX 11n HT20 channel 6

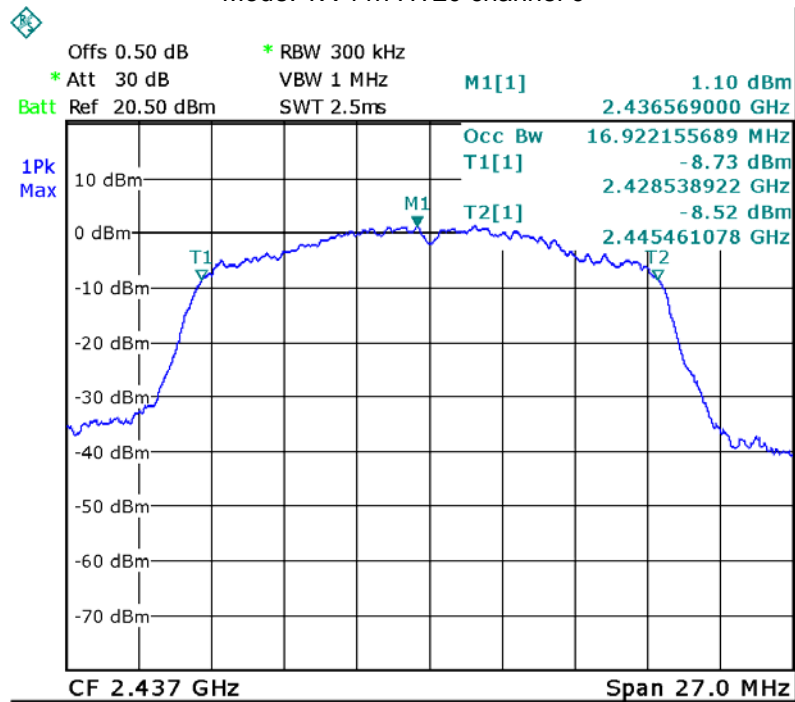


Mode: TX 11n HT20 channel 11

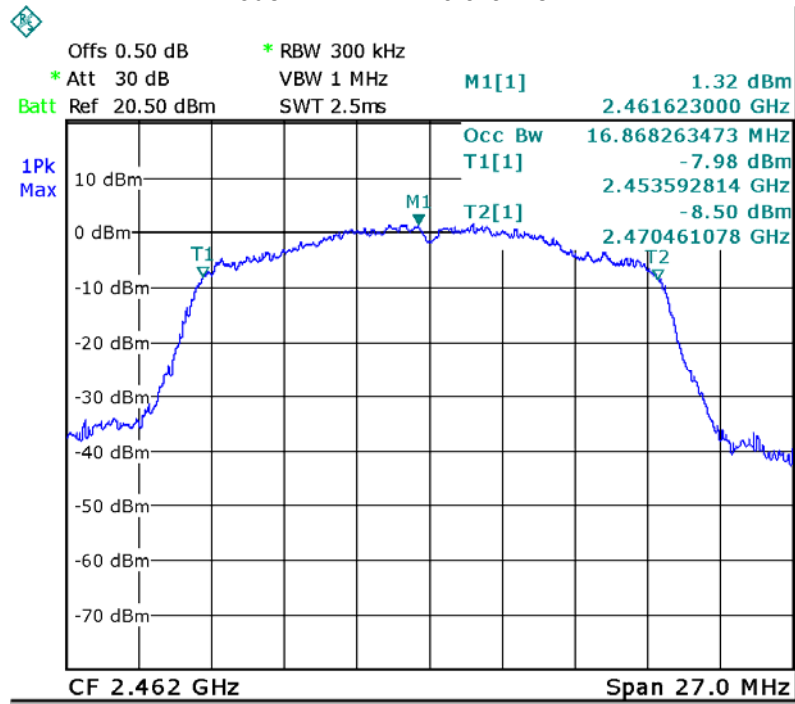


Mode: TX 11n HT40 channel 3

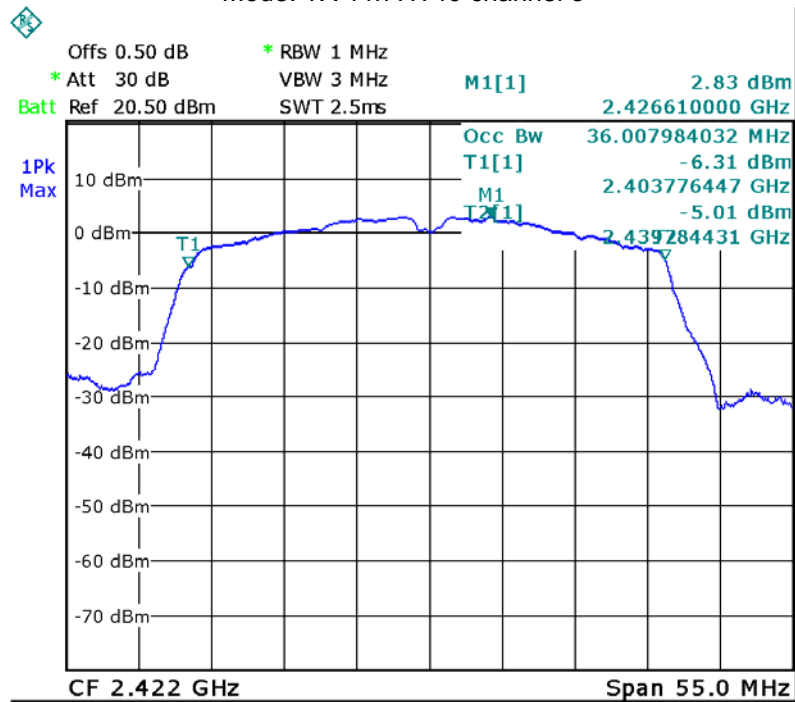


Mode: TX 11n HT40 channel 6

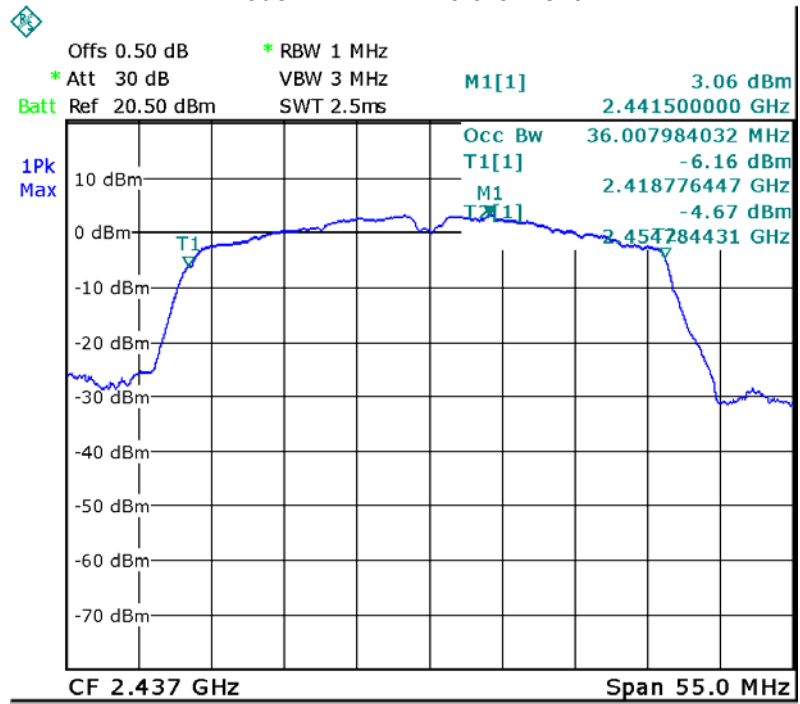


Mode: TX 11n HT40 channel 9

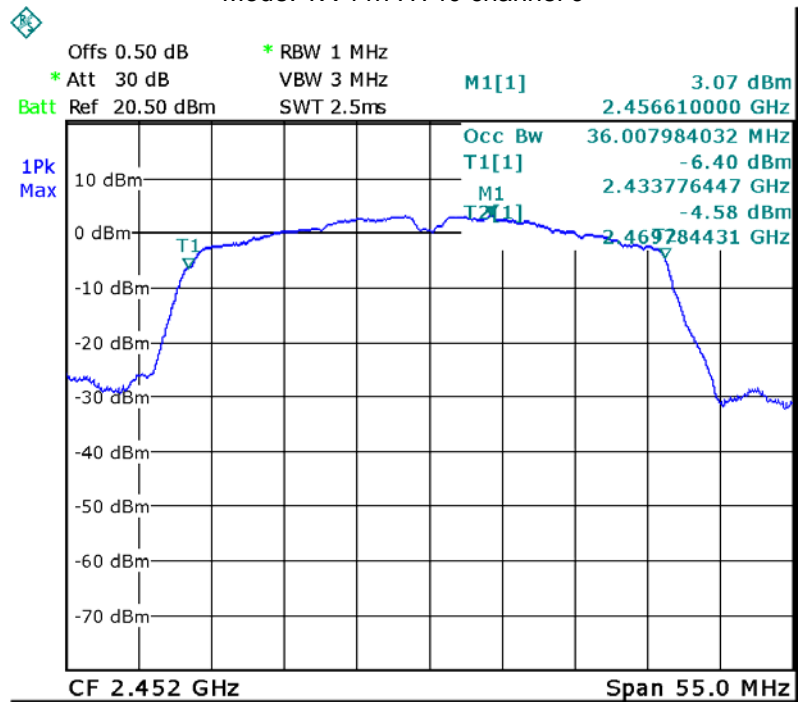


BLE: channel 0

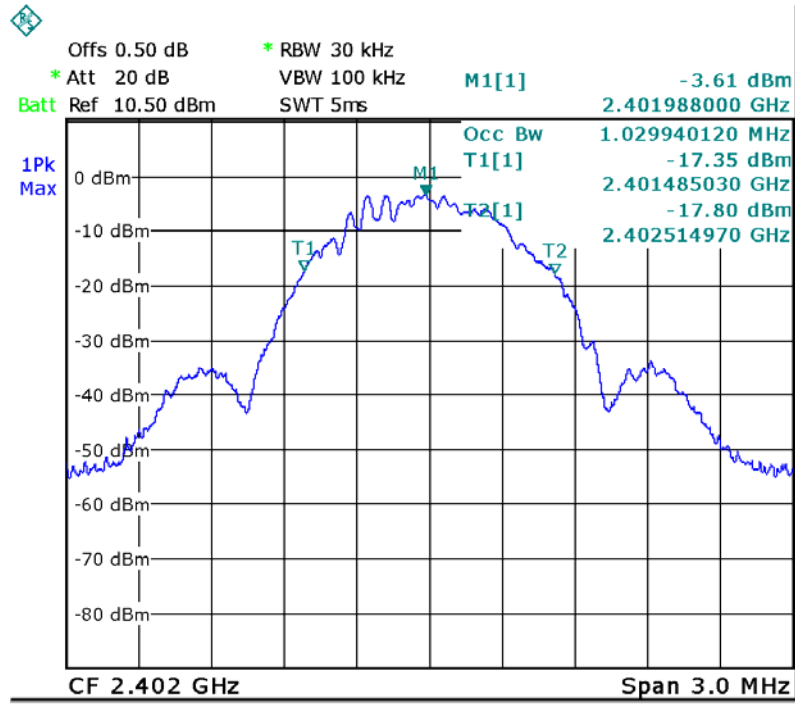

BLE: channel 19

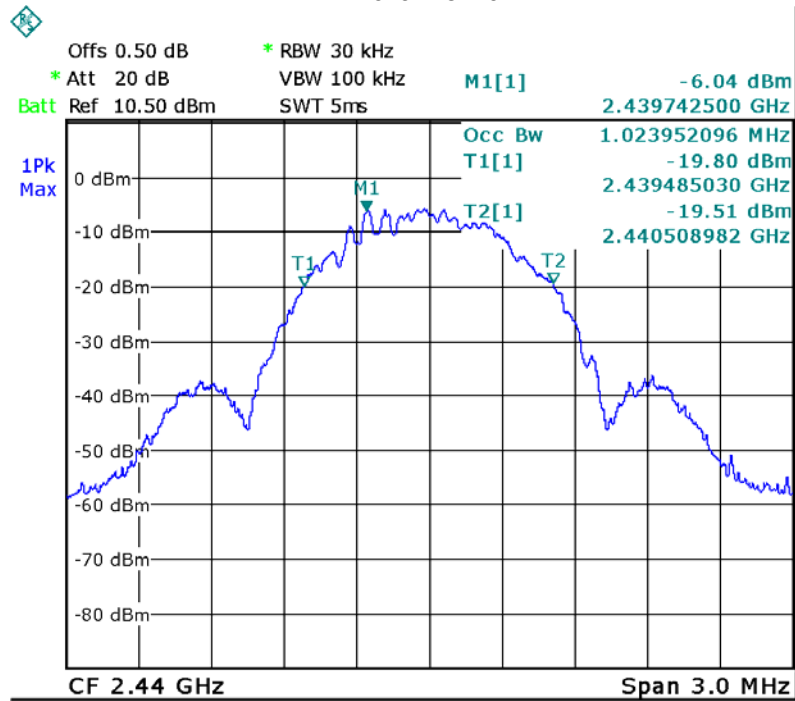

BLE: channel 39

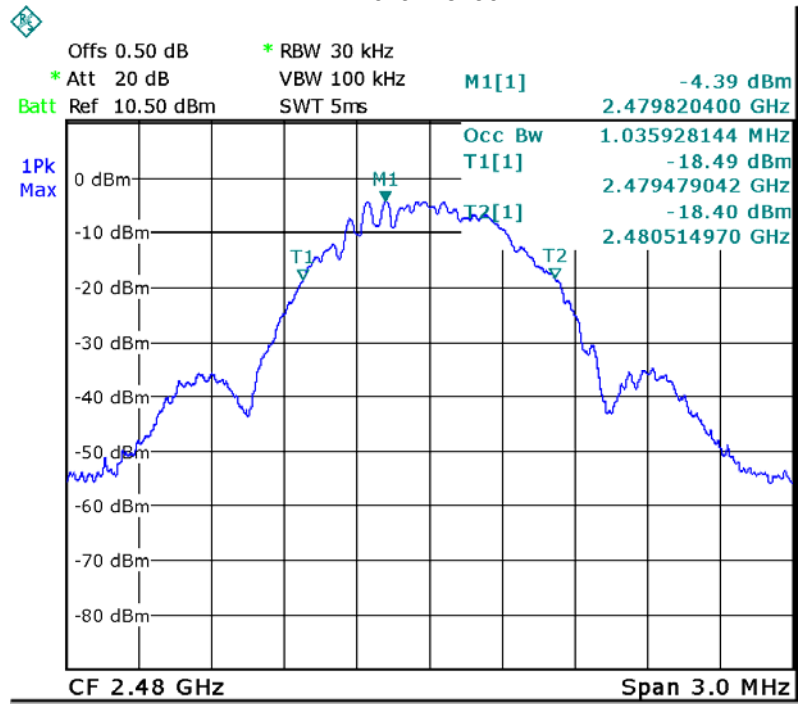

13 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
ANSI C63.10:2013

13.1 Test Procedure:

558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

section 8.3.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW ≥ 3 RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 8.3.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.


- a) Set the RBW = 1% to 5% of the OBW, not to exceed 1 MHz..
- b) Set the VBW $\geq 3 \times$ RBW
- c) Set the span $\geq 1.5 \times$ OBW.
- d) Detector = RMS.
- e) Sweep time = auto couple.
- f) trigger = free run..
- g) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\geq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum..

13.2 Test Result:


Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
TX 11b	Low-2412	13.02	1W/30dBm
	Middle-2437	12.72	1W/30dBm
	High-2462	13.65	1W/30dBm
TX 11g	Low-2412	16.29	1W/30dBm
	Middle-2437	16.68	1W/30dBm
	High-2462	17.23	1W/30dBm
TX 11n HT20	Low-2412	16.15	1W/30dBm
	Middle-2437	16.22	1W/30dBm
	High-2462	16.48	1W/30dBm
TX 11n HT40	Low-2422	15.91	1W/30dBm
	Middle-2437	15.84	1W/30dBm
	High-2452	16.00	1W/30dBm
BLE	Low-2402	1.25	1W/30dBm
	Middle-2440	-0.80	1W/30dBm
	High-2480	0.77	1W/30dBm

Test Plot


Mode: TX 11b channel 1

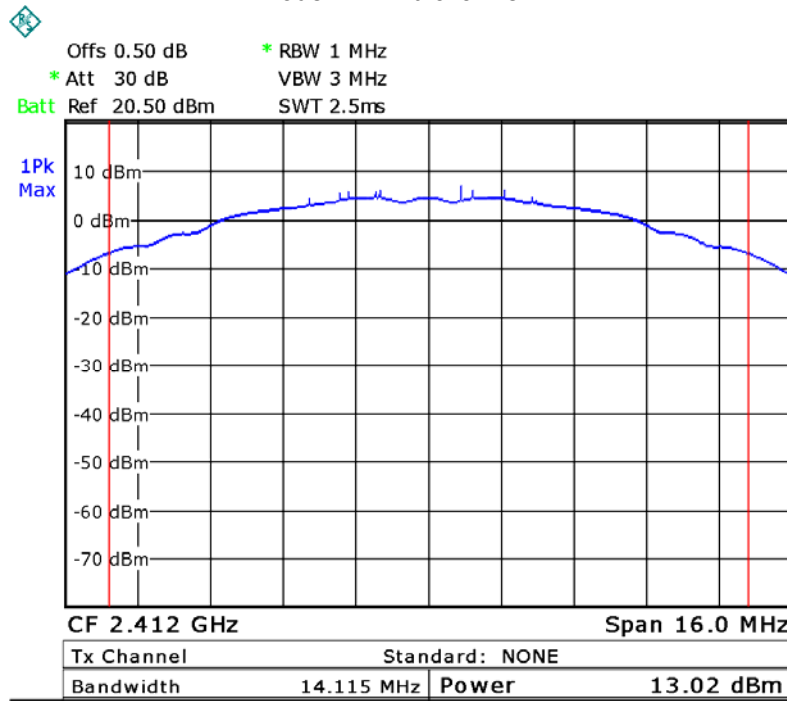


Mode: TX 11b channel 6

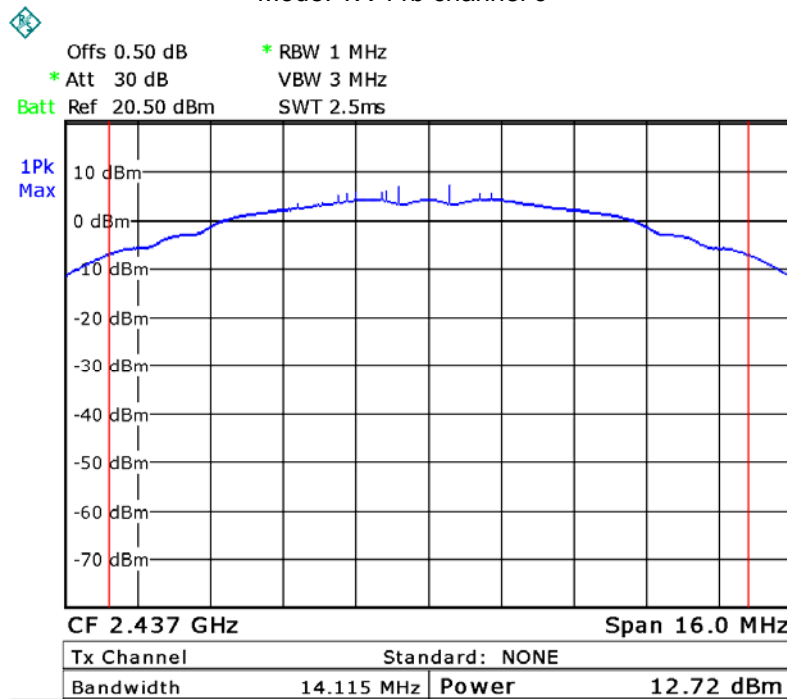


Mode: TX 11b channel 11

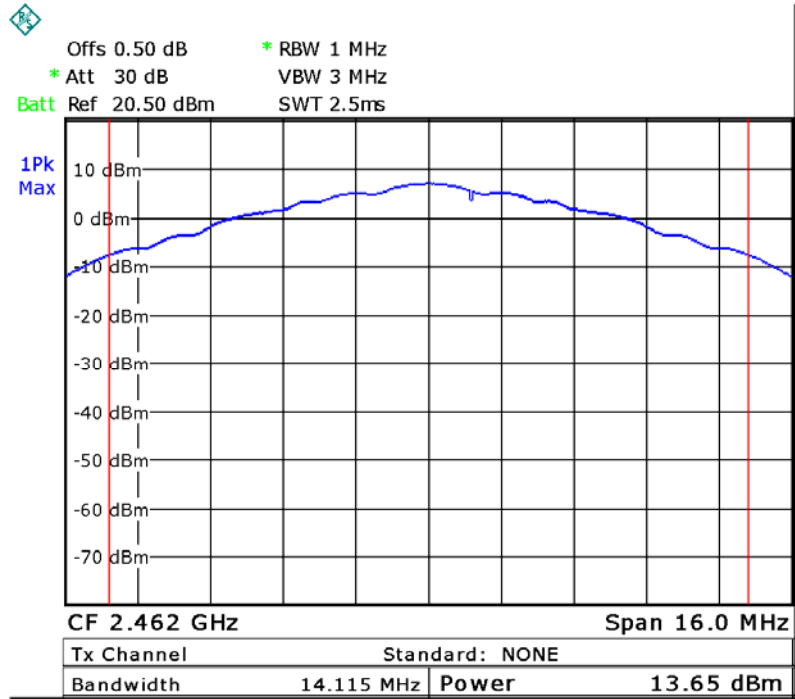


Mode :TX 11g channel 1

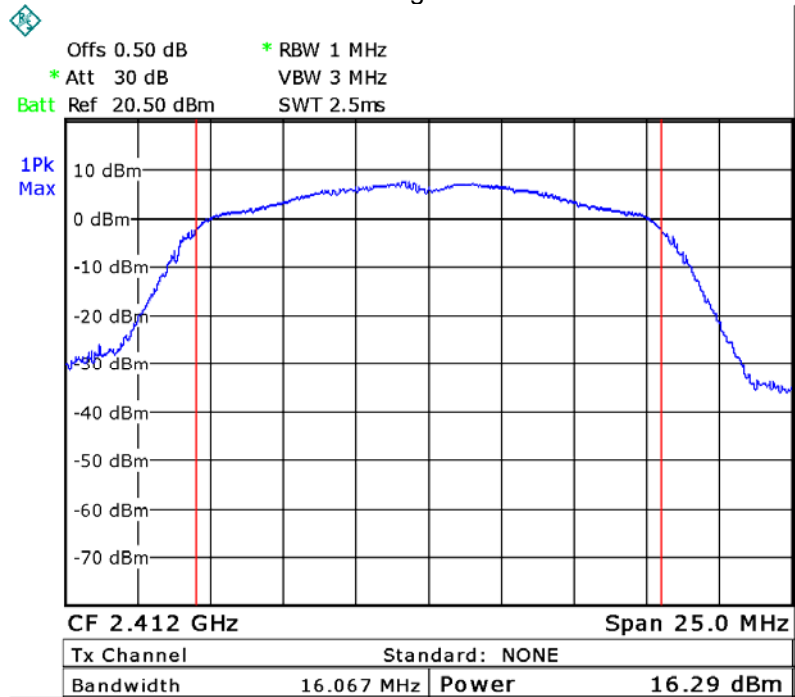


Mode :TX 11g channel 6

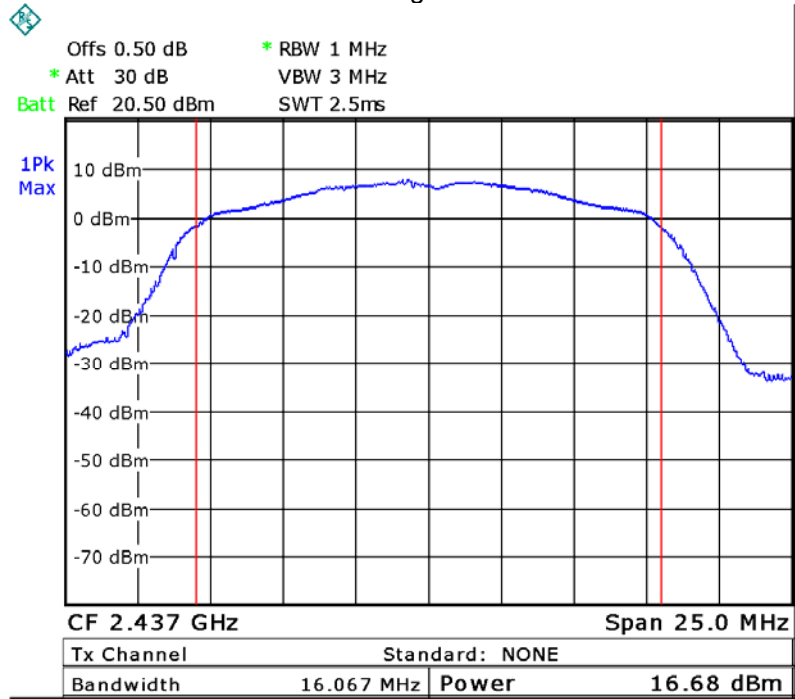


Mode :TX 11g channel 11

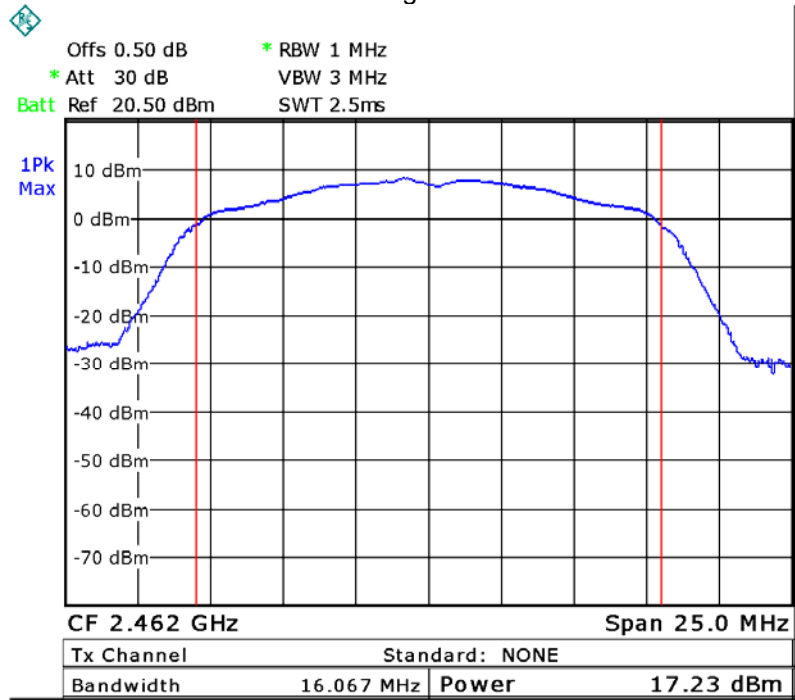


Mode: TX 11n HT20 channel 1

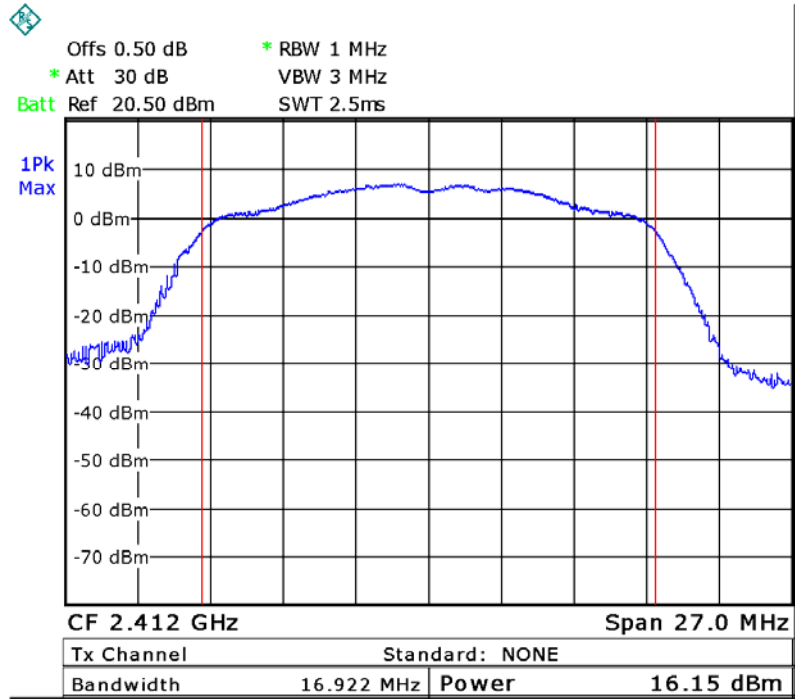


Mode: TX 11n HT20 channel 6

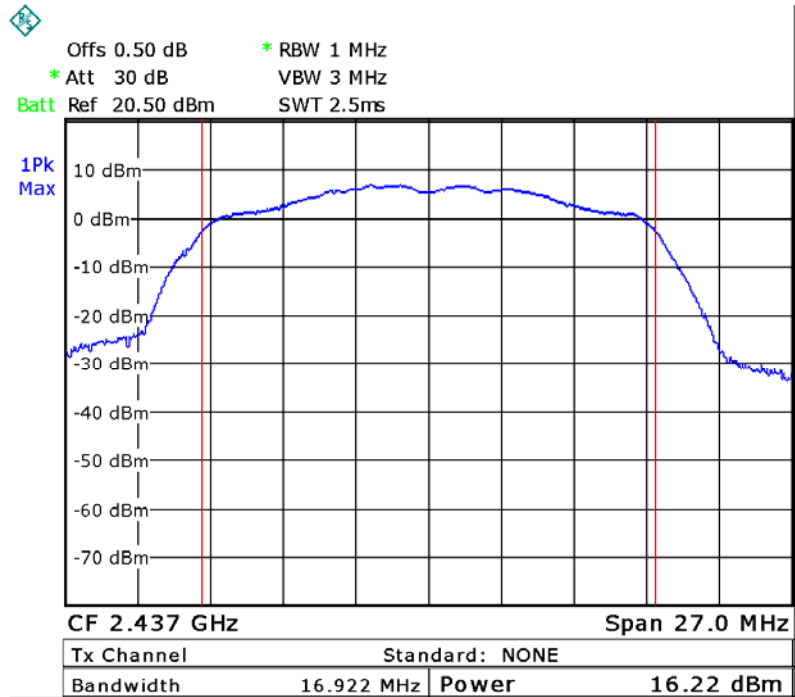


Mode: TX 11n HT20 channel 11

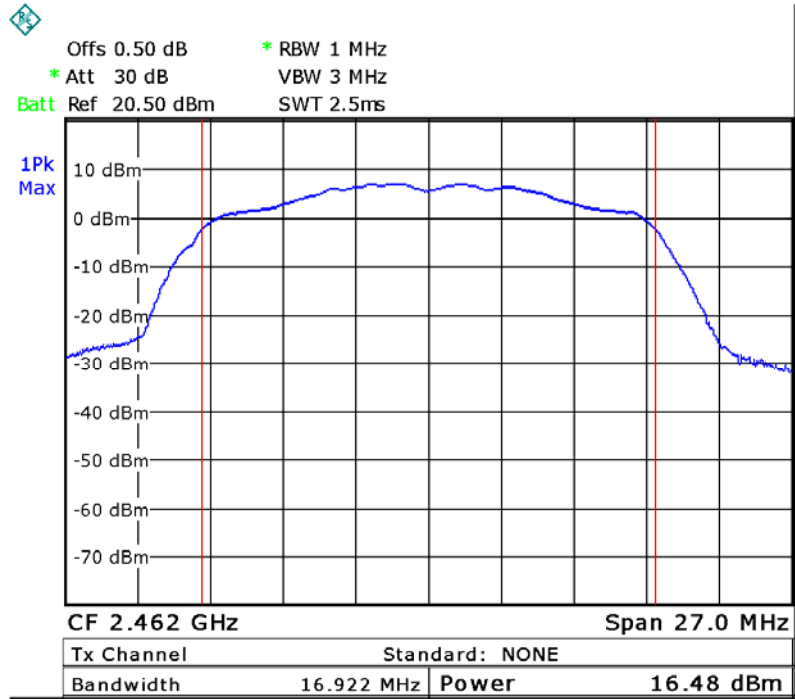


Mode: TX 11n HT40 channel 3

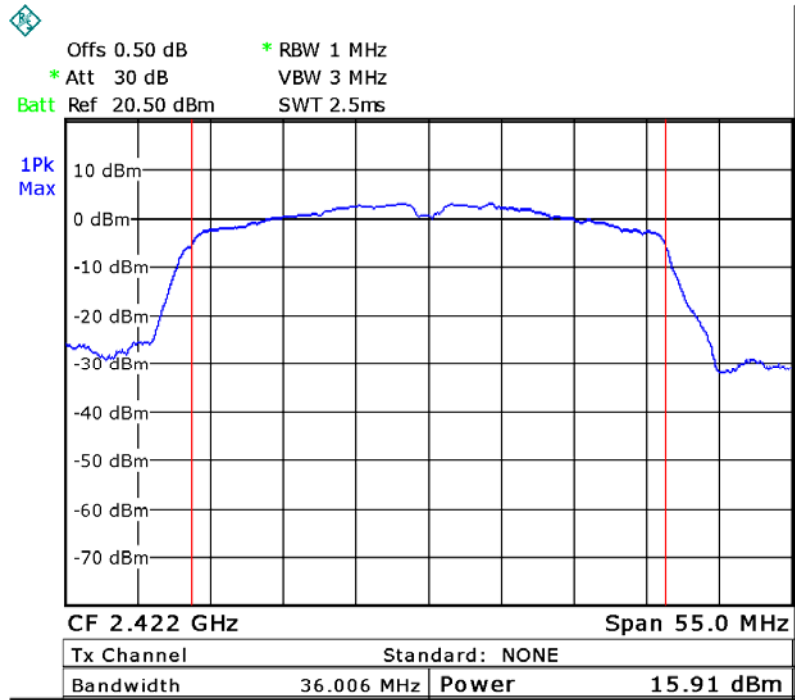


Mode: TX 11n HT40 channel 6

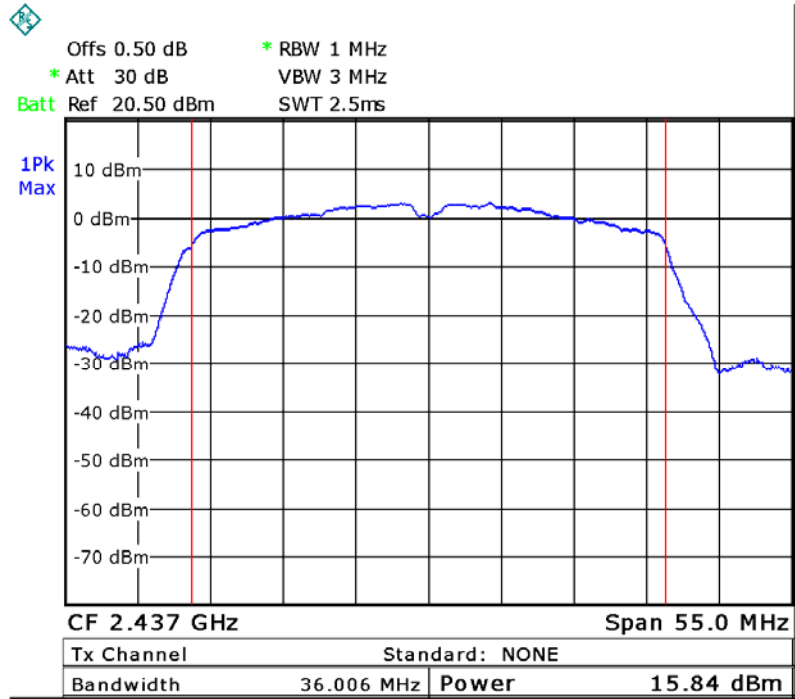


Mode: TX 11n HT40 channel 9

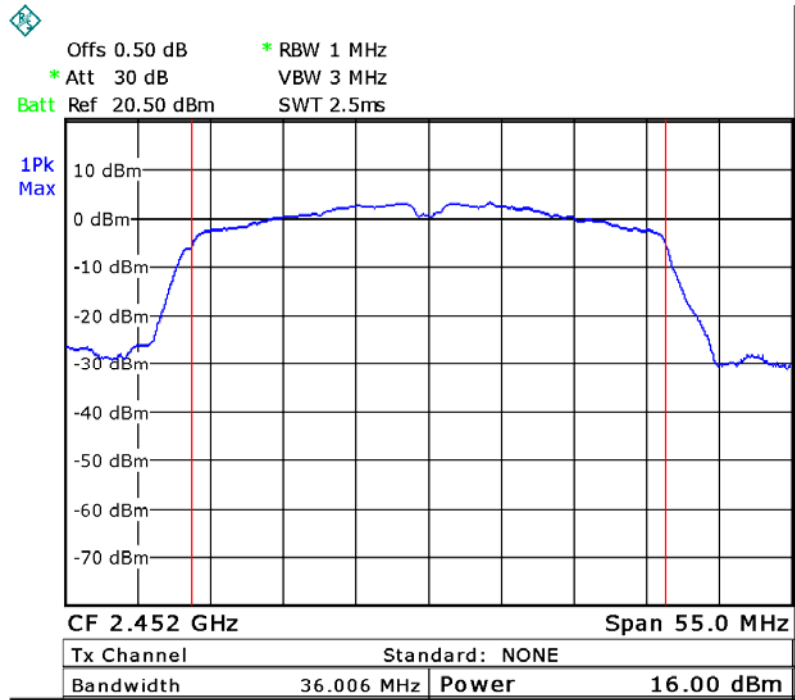


BLE: channel 0

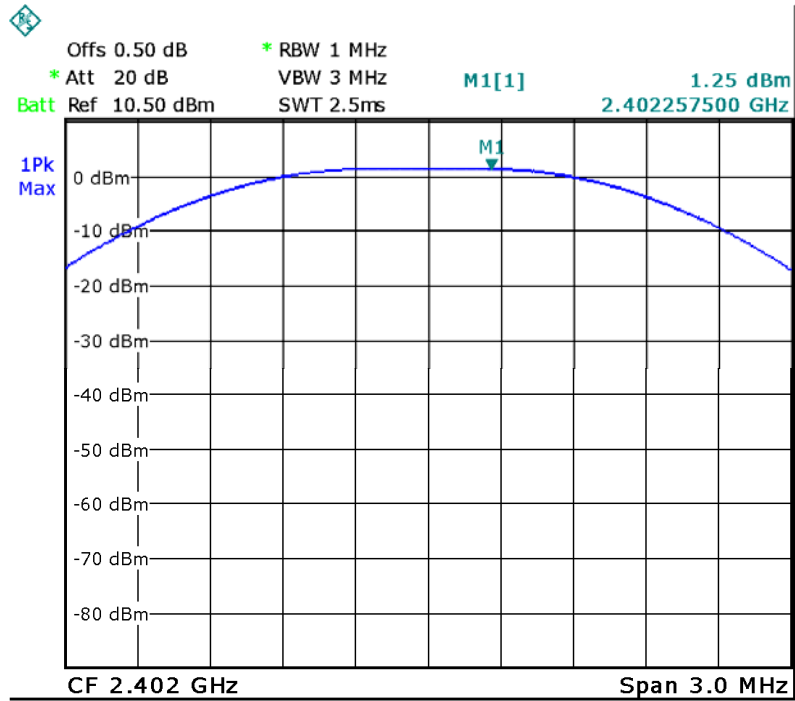

BLE: channel 19

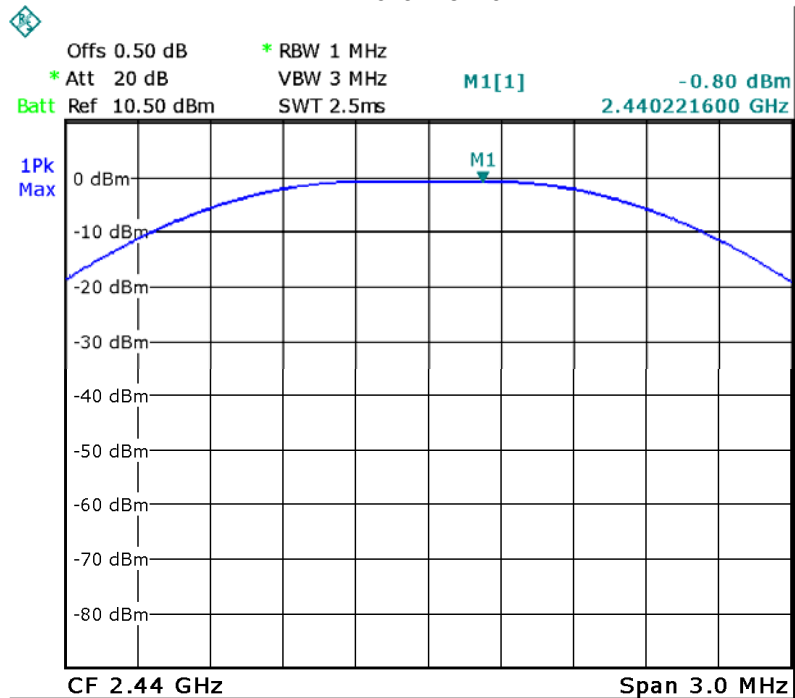

BLE: channel 39

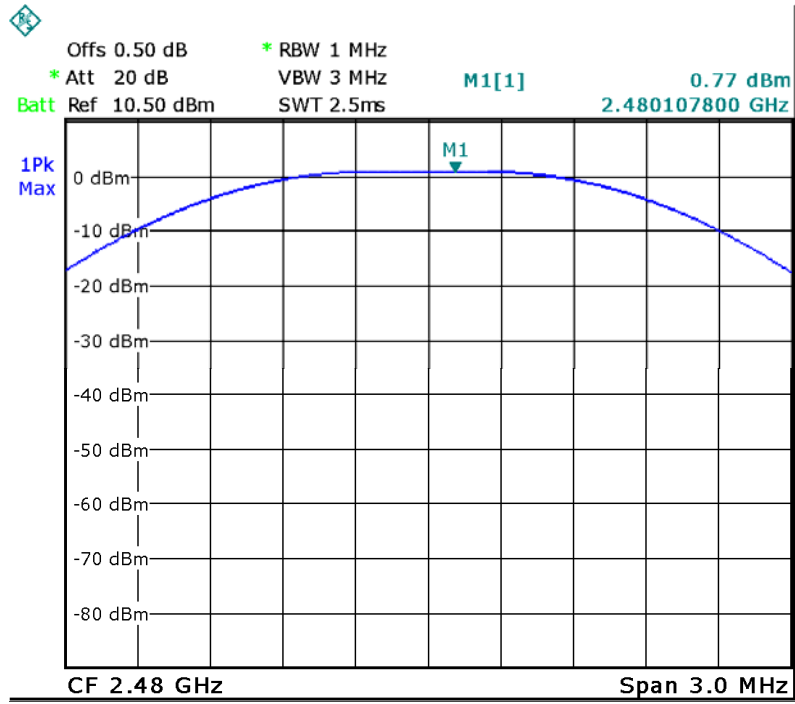

14 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;

ANSI C63.10:2013

14.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05r02 section 10.2


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.

14.2 Test Result:


Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
TX 11b	Low-2412	-13.38	8dBm per 3kHz
	Middle-2437	-13.34	8dBm per 3kHz
	High-2462	-14.60	8dBm per 3kHz
TX 11g	Low-2412	-16.68	8dBm per 3kHz
	Middle-2437	-17.01	8dBm per 3kHz
	High-2462	-15.88	8dBm per 3kHz
TX 11n HT20	Low-2412	-16.33	8dBm per 3kHz
	Middle-2437	-15.77	8dBm per 3kHz
	High-2462	-15.48	8dBm per 3kHz
TX 11n HT40	Low-2422	-19.14	8dBm per 3kHz
	Middle-2437	-20.47	8dBm per 3kHz
	High-2452	-18.93	8dBm per 3kHz
BLE	Low-2402	-14.27	8dBm per 3kHz
	Middle-2440	-16.71	8dBm per 3kHz
	High-2480	-14.95	8dBm per 3kHz

Test Plot


Mode: TX 11b channel 1

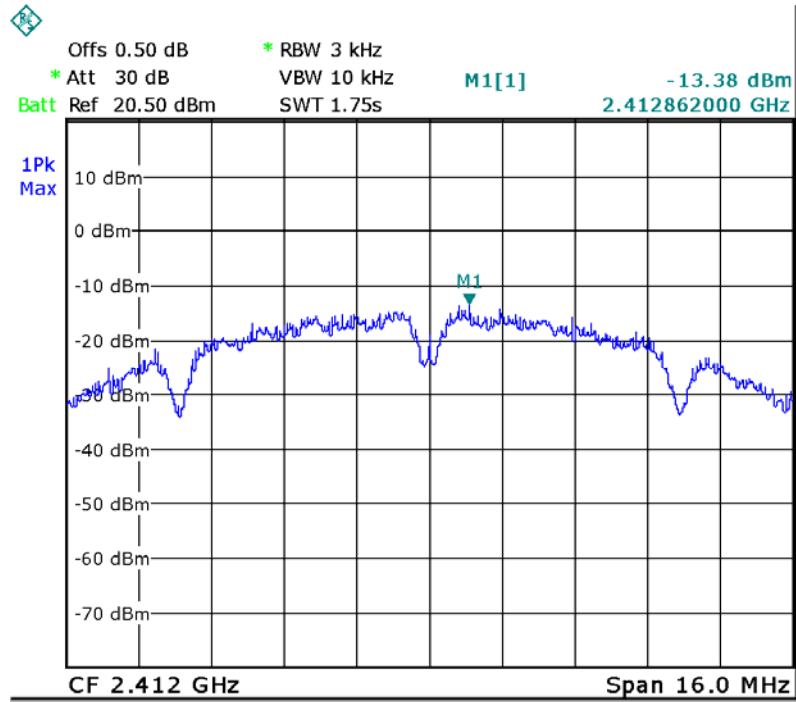


Mode: TX 11b channel 6

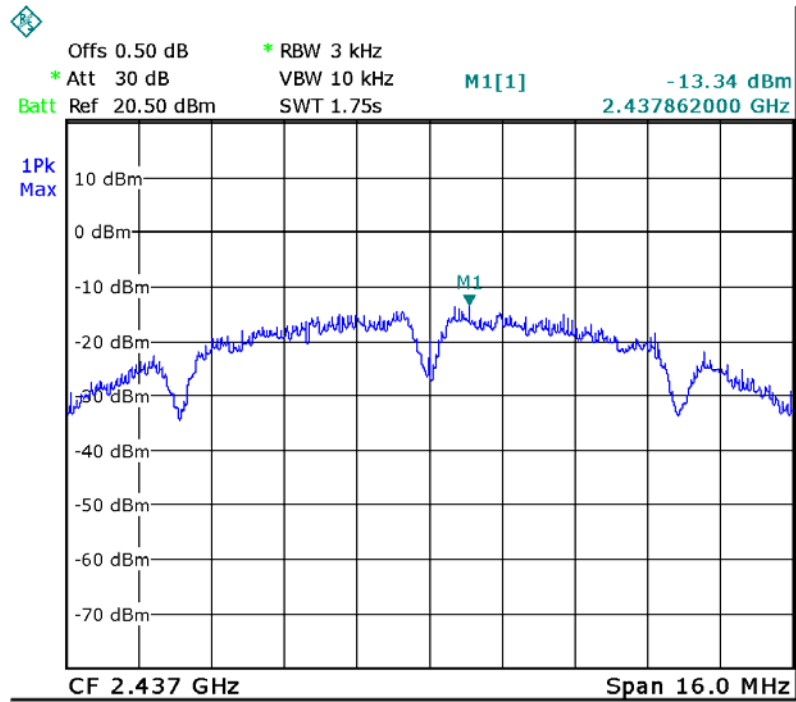


Mode: TX 11b channel 11

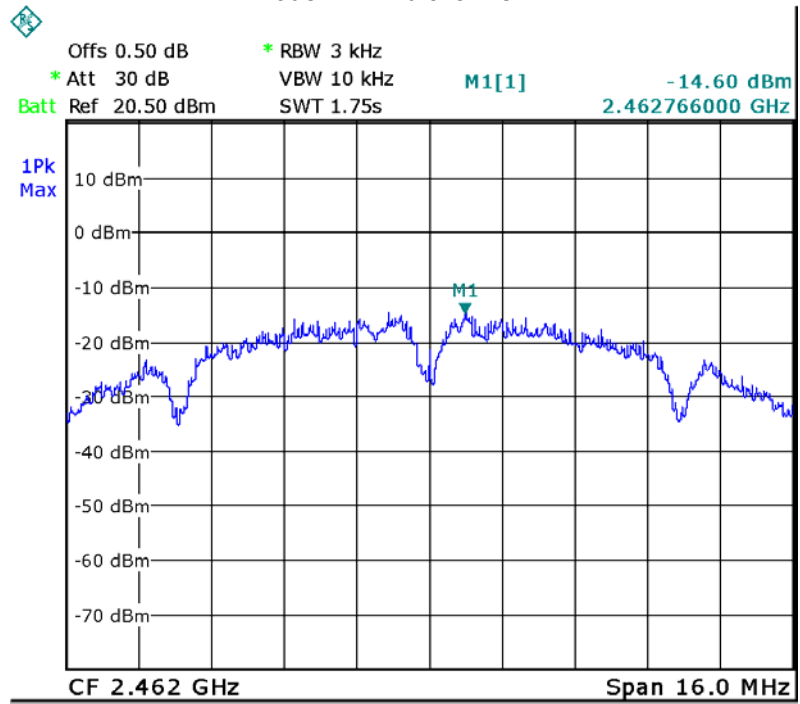


Mode :TX 11g channel 1

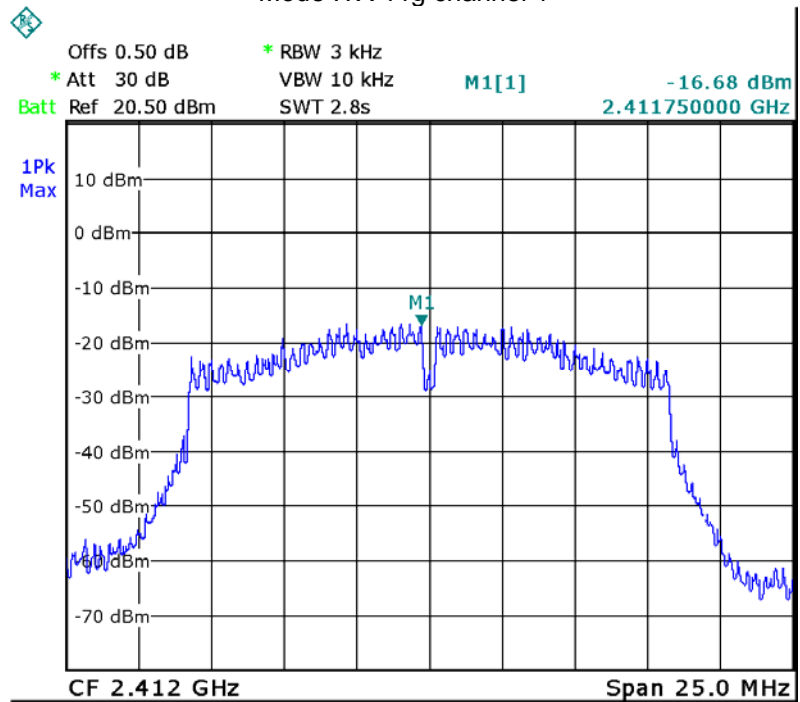


Mode :TX 11g channel 6

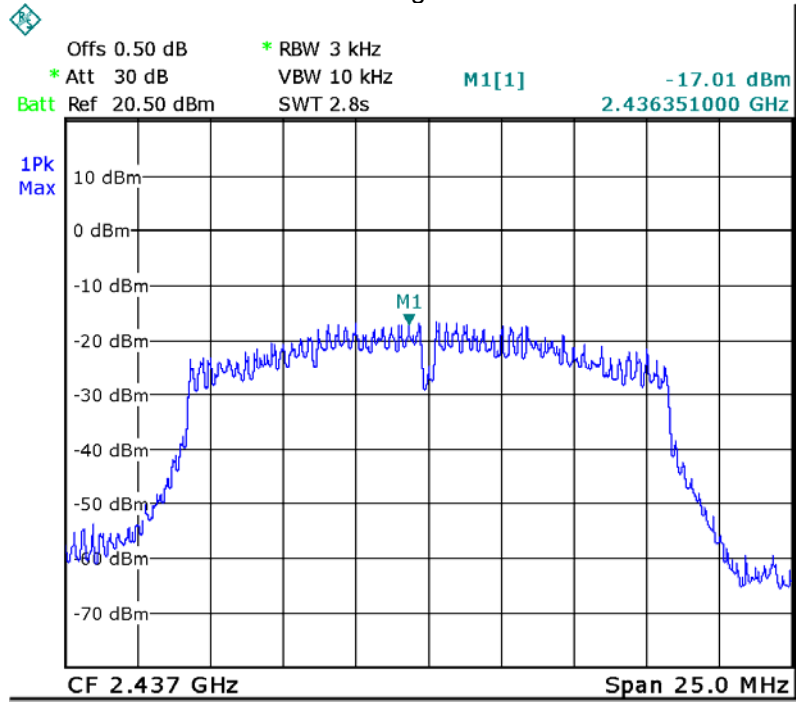


Mode :TX 11g channel 11

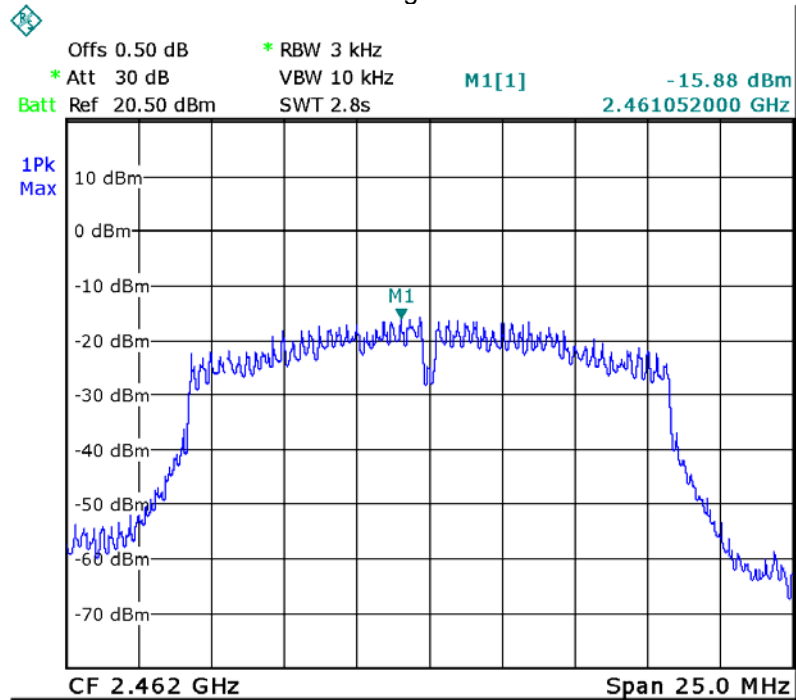


Mode: TX 11n HT20 channel 1

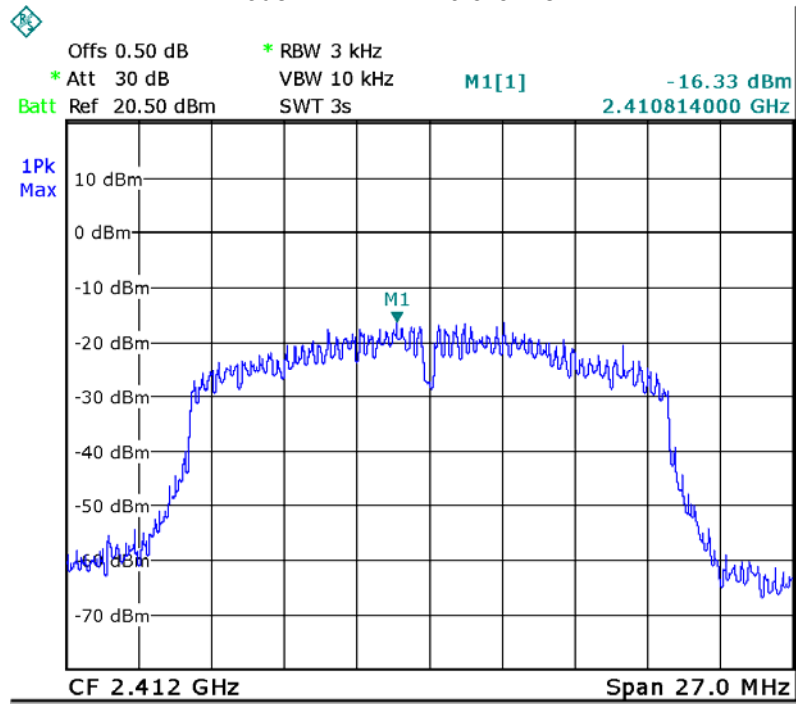


Mode: TX 11n HT20 channel 6

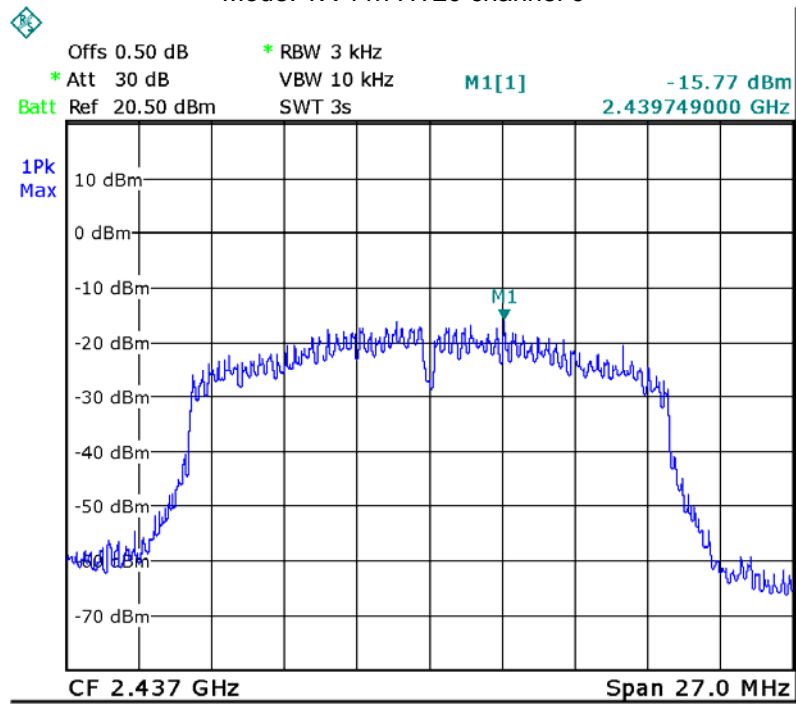


Mode: TX 11n HT20 channel 11

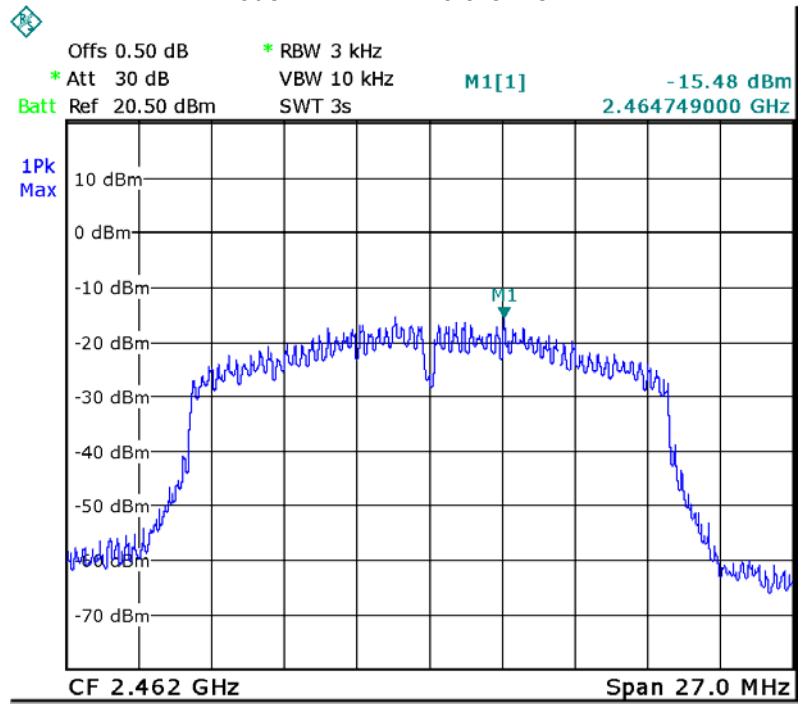


Mode: TX 11n HT40 channel 3

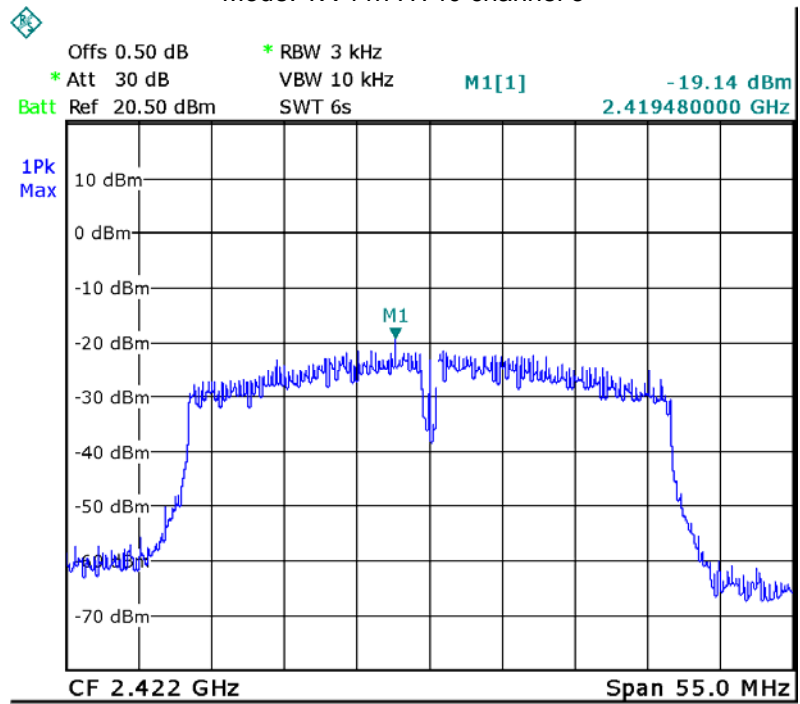


Mode: TX 11n HT40 channel 6

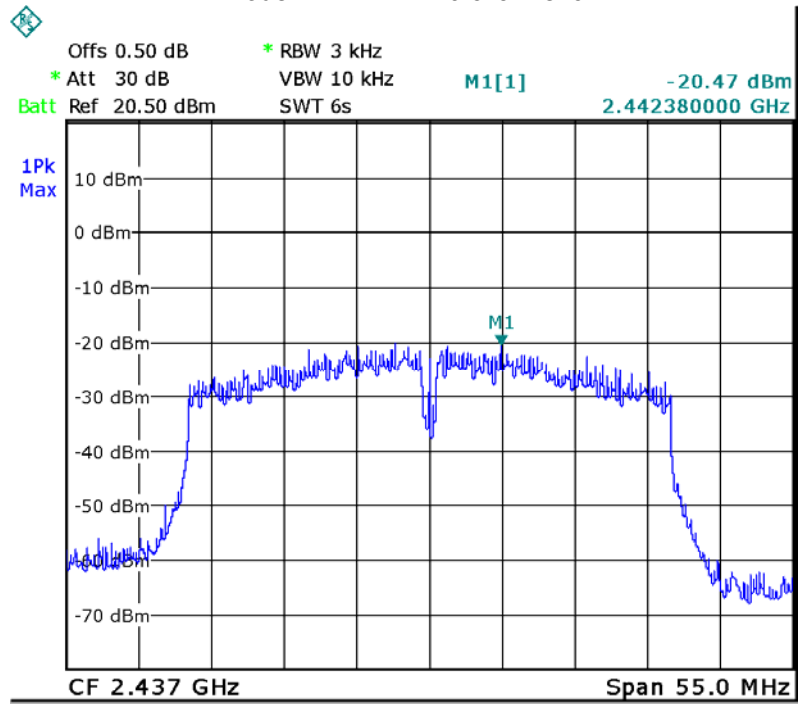


Mode: TX 11n HT40 channel 9

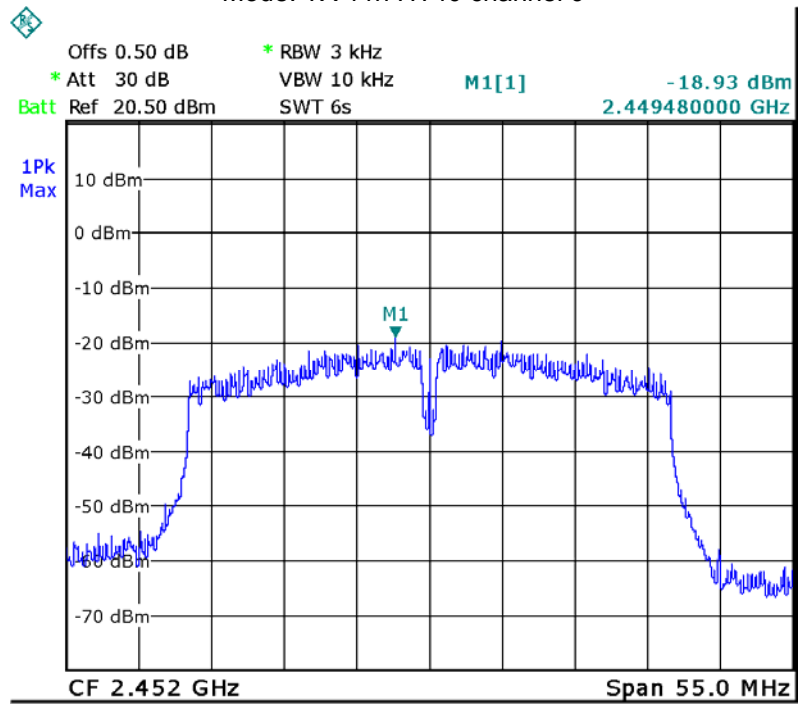


BLE: channel 0

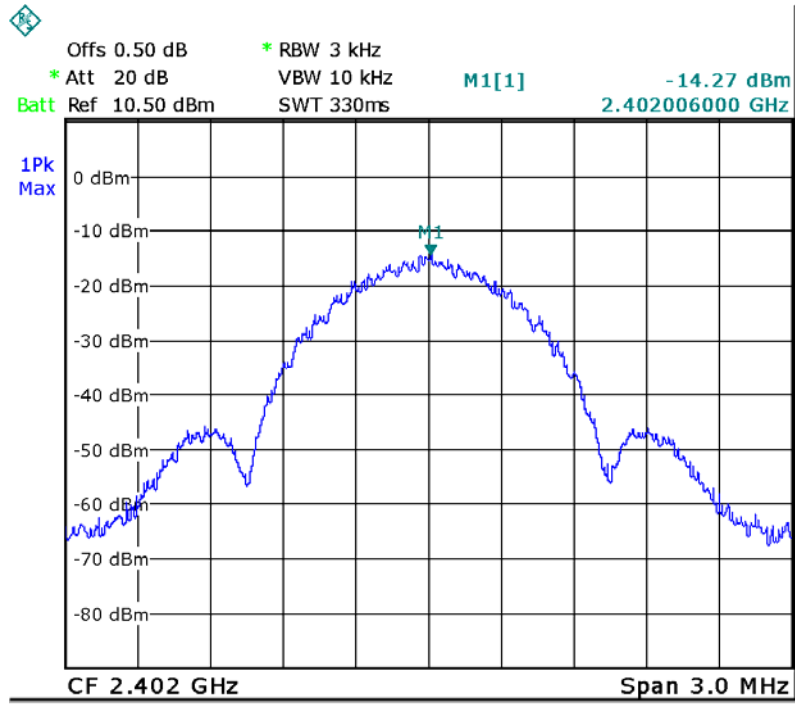

BLE: channel 19

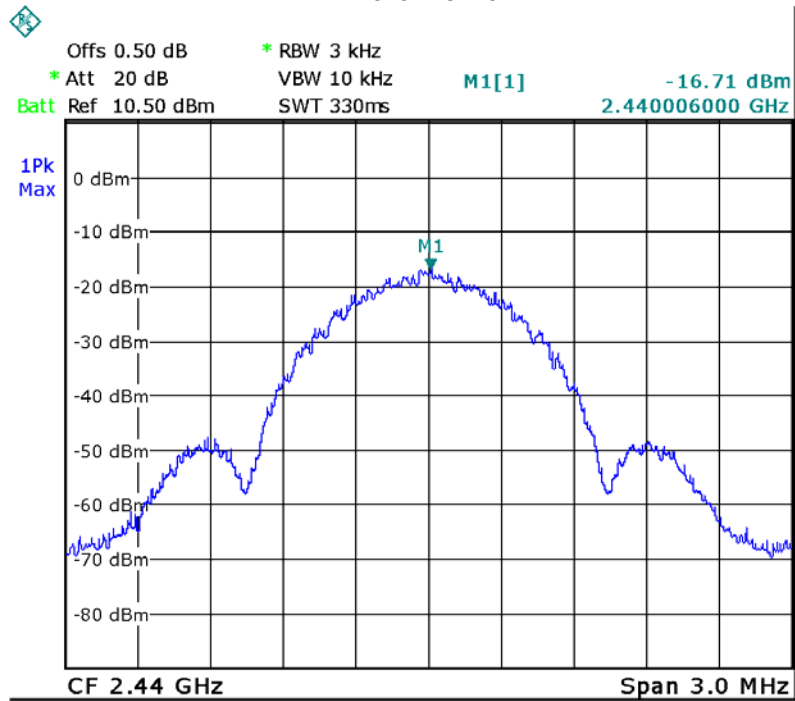

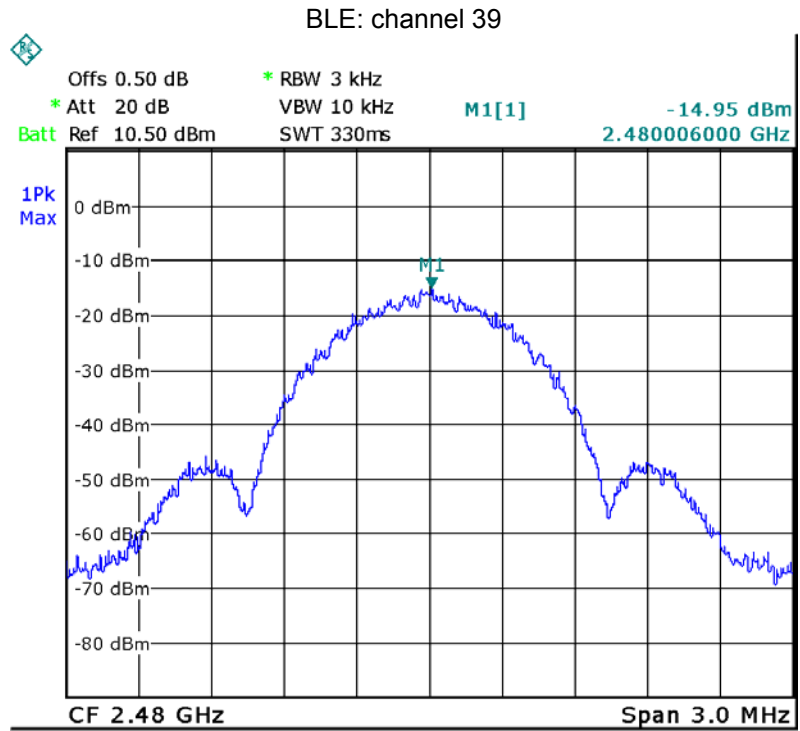

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

16 RF Exposure

Remark: refer to MPE test report: WTD21D06058484W002.

17 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-DIM/SMART -Photos.

=====**End of Report**=====