



FCC TEST REPORT

According to

47 CFR, Part 2, Part 15B, CISPR PUB. 22

Applicant	: Weifang GoerTek Electronic Co.,LTD
Address	: Gaoxin 2 Road,Free Trade Zone,Weifang, Shandong,261205,P.R.China
Equipment	: Wireless Stereo Headset Wireless Adaptor
Model No.	: CECHYA-0090; CECHYA-0091
Brand name	: Sony Interactive Entertainment America LLC
FCC ID	: SZGCECHYA0090 (Headset) SZGCECHYA0091 (Adaptor)

I HEREBY CERTIFY THAT :

The sample was received on Jul 12, 2016 and the testing was carried out on Jul 21, 2016 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Ray Chou
EMC/RF B.U. Assistant Manager



FCC TEST REPORT

Issued by:

CerpPASS Technology Co.,Ltd

No.10, Lane 2, Lianfu Street, Luzhu Township, Taoyuan County 33848, Taiwan(R.O.C.)

Tel: 886-3-322-6888

Fax: 886-3-322-6881

The test record, data evaluation & Equipment. Under Test configurations represented herein are true and accurate accounts of the measurements of the samples EMC characteristics under the conditions specified in this report.

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory

NVLAP LAB Code:	200954-0
TAF LAB Code:	1439



Contents

1. Summary of Test Procedure and Test Result.....	5
1.1. Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1. Feature of Equipment under Test.....	6
2.2. Test Manner	7
2.3. Description of Support Unit	7
2.4. Connection Diagram of Test System.....	8
2.5. General Information of Test.....	11
2.6. Measurement Uncertainty	11
3. Test of Conducted Emission.....	12
3.1. Test Limit	12
3.2. Test Procedures	12
3.3. Typical test Setup.....	13
3.4. Measurement Equipment.....	13
3.5. Test Result and Data.....	14
4. Test of Radiated Emission	15
4.1. Test Limit	15
4.2. Test Procedures	16
4.3. Typical test Setup.....	17
4.4. Measurement Equipment.....	18
4.5. Test Result and Data (30MHz~1GHz).....	19
4.6. Test Result and Data (1GHz ~ 18GHz).....	25



History of this test report

ORIGINAL.

Additional attachment as following record:

Report No	Version	Date	Description
SEFD1605172	Rev 01	Aug 01, 2016	Initial Issue



1. Summary of Test Procedure and Test Result

1.1. Applicable Standards

The measurements shown in this test report were made in accordance with the procedures given in ANSI C63.4 – 2014 and the energy emitted by this equipment was passed Part 2, Part 15, CISPR PUB. 22.

The energy emitted by this equipment was passed both Radiated and Conducted Emissions Class B limits.

Test Item	Normative References	Test Result	Remarks
Conducted Emission	ANSI C63.4-2014 FCC Part 15 Subpart B	N/A	N/A
Radiated Emission	ANSI C63.4-2014 FCC Part 15 Subpart B	PASS	Meets Class B Limit Minimum passing margin(Peak) is-12.63dB at 947.6200MHz



2. Test Configuration of Equipment under Test

2.1. Feature of Equipment under Test

Wireless Stereo Headset	Model No.:	CECHYA-0090;
Wireless Adaptor		CECHYA-0091
U+Dongle	Model No.:	PVT1-1.0-219
Audio Cable	Non-Shielded, 1.2m	
USB Cable	Shielded, 0.7m, with one ferrites core bonded	

Note: Please refer to user manual.

Model Discrepancy:

	Discrepancy	
Equipment	Wireless Stereo Headset	Wireless Adaptor
Model No.	CECHYA-0090	CECHYA-0091



2.2. Test Manner

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included Notebook PC and EUT for EMI test.
- c. During the test, setup up the EUT and all system, turn on the power of all Equipments.
- d. Make the EUT at the test mode and it is normal operation, and then test.

The pre-test modes :

- Mode 1: Charging Mode(From Computer)
- Mode 2: Normal Communication Mode(By Audio cable)
- Mode 3: Wierless Communication Mode(By U+Dongle)

The final modes :

- Mode 1: Charging Mode(From Computer)
- Mode 2: Normal Communication Mode(By Audio cable)
- Mode 3: Wierless Communication Mode(By U+Dongle)


2.3. Description of Support Unit

No.	Device	Manufacturer	Model No.	Description
1	Notebook PC	DELL	Vostro 3560	R31199



2.4. Connection Diagram of Test System


Mode 1

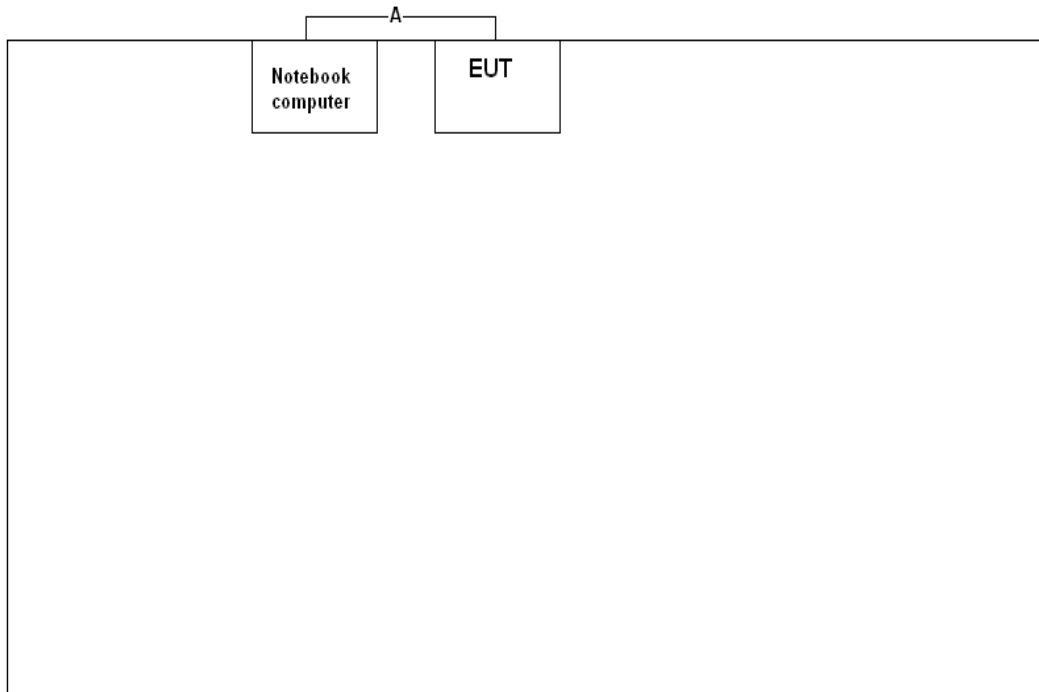

No.	Cable	Quantity	Description
A	USB Cable	1	Shielded, 0.7m with one ferrites core bonded




Mode 2

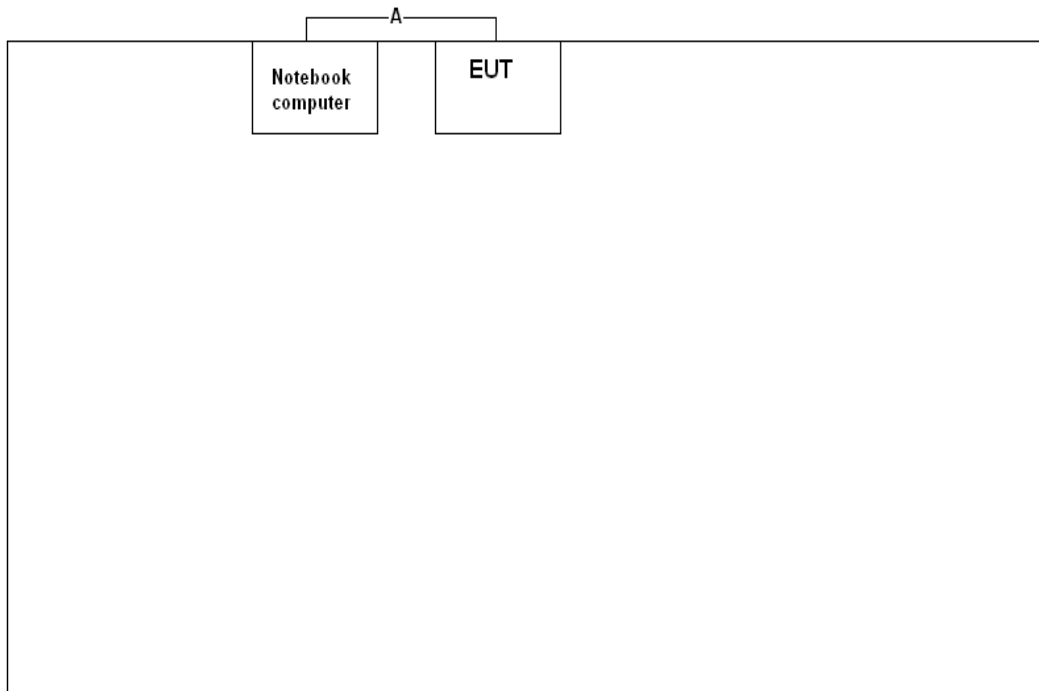

No.	Cable	Quantity	Description
A	Audio Cable	1	Non-Shielded, 1.2m



Mode 3

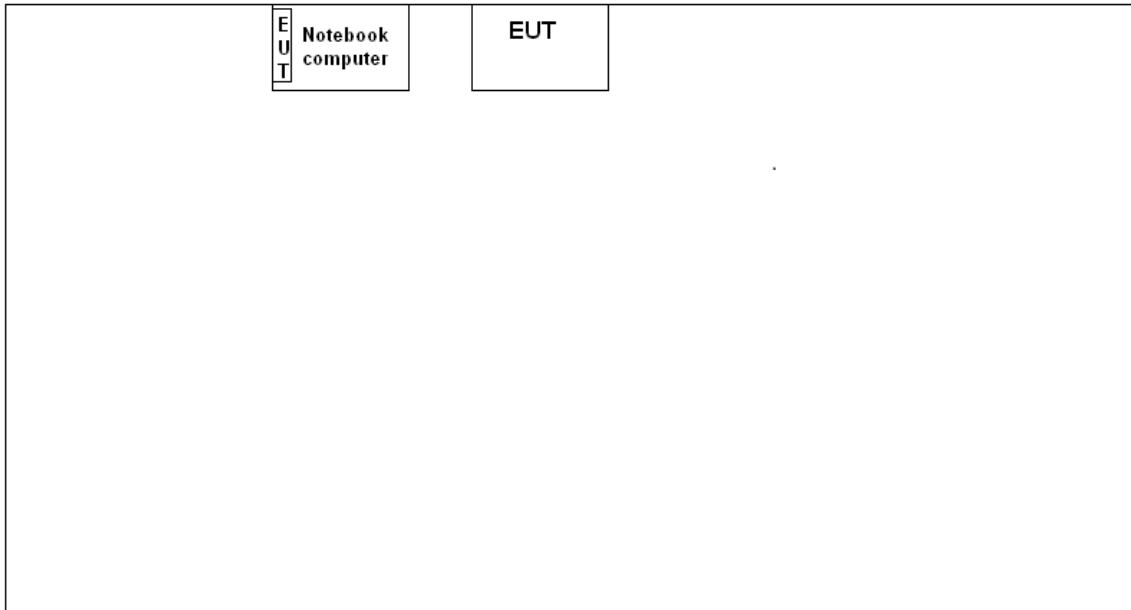

No.	Cable	Quantity	Description
N/A	N/A	N/A	N/A



2.5. General Information of Test

Test Site :	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582
FCC Registration Number :	TW1079, TW1061,390316, 228391, 641184
IC Registration Number :	4934B-1, 4934E-1, 4934E-2
VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-3428, R-4218 for Radiated emission test G-812, G-813 for radiated disturbance above 1GHz
Frequency Range Investigated :	Conducted Emission Test: from 150 kHz to 30 MHz Radiated Emission Test: from 30 MHz to 18,000 MHz
Test Distance :	The test distance of radiated emission below 1GHz from antenna to EUT is 3 M. The test distance of radiated emission above 1GHz from antenna to EUT is 3 M.

2.6. Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	LINE / NEUTRAL	3.25 dB
Radiated Emission	30 MHz ~ 1,000 MHz	Vertical / Horizontal	3.93 dB
	1,000 MHz ~ 18,000 MHz	Vertical / Horizontal	5.18 dB

The measurement uncertainty will be considered, when test result margin to the limit.



3. Test of Conducted Emission

3.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2009 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Conducted Emission Limits:


Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

3.2. Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



3.3. Typical test Setup

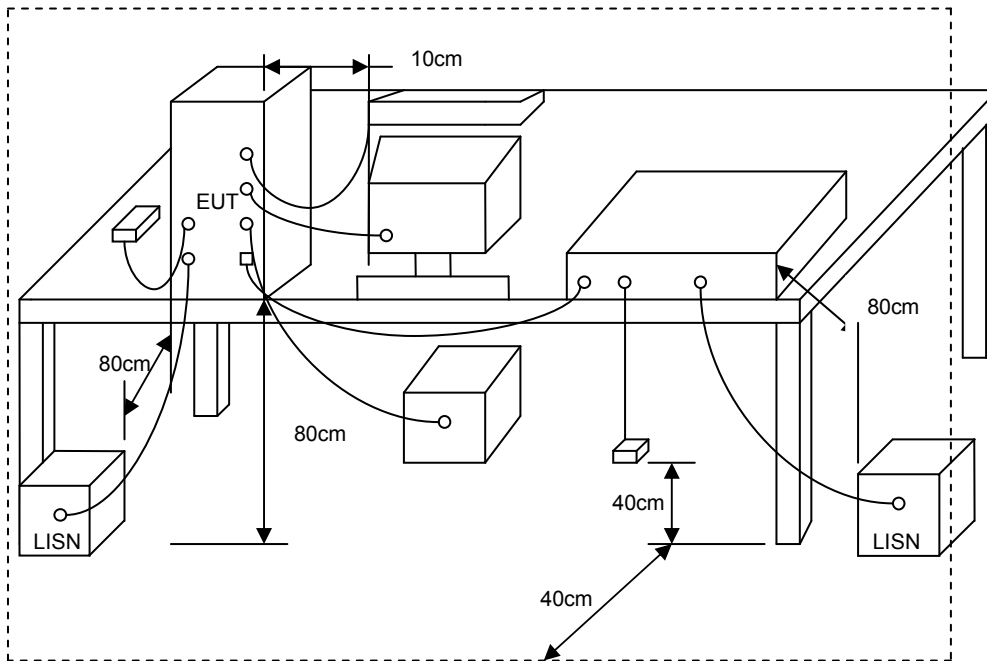

3.4. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100565	2016.03.26	2017.03.25
AMN	R&S	ESH2-Z5	100182	2015.09.06	2016.09.05
Two-Line V-Network	R&S	ENV216	100325	/	/
ISN	FCC	FCC-TLISN-T2-02	20379	2016.03.26	2017.03.25
ISN	FCC	FCC-TLISN-T4-02	20380	2016.03.26	2017.03.25
ISN	FCC	FCC-TLISN-T8-02	20381	2016.03.26	2017.03.25
ISN	TESEQ	ISN ST08	30175	2016.03.26	2017.03.25
Current Probe	R&S	EZ-17	100303	2016.03.26	2017.03.25
Passive Voltage Probe	R&S	ESH2-Z3	100026	2016.03.26	2017.03.25
Pulse Limiter	R&S	ESH3-Z2	100529	2016.03.26	2017.03.25
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2016.03.29	2017.03.28
EZ-EMC	Fala	Ver CT3A1	N/A	N/A	N/A



3.5. Test Result and Data

For this product is supplied by DC source, this test item needn't perform.



4. Test of Radiated Emission

4.1. Test Limit

Below 1GHz (for digital device)

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the below table.

FREQUENCY (MHz)	dBuV/m (At 10m)	
	Class A	Class B
30 ~ 230	40	30
230 ~ 1000	47	37

Limit tables for non-digital device:

Class A Radiated Emission limit at 10m (for others)

Frequency (MHz)	Field Strength Limit (uV/m)Q.P.	Field Strength Limit (dBuV/m)Q.P.
30 - 88	90	39
88 - 216	150	43.5
216 – 960	210	46.4
Above 960	300	49.5

Class B Radiated Emission limit at 3m (for others)

Frequency (MHz)	Field Strength Limit (uV/m)Q.P.	Field Strength Limit (dBuV/m)Q.P.
30 - 88	100	40
88 - 216	150	43.5
216 – 960	200	46
Above 960	500	54

Above 1GHz(for all device)

Frequency (MHz)	Class A (dBuV/m) (At 10m)		Class B (dBuV/m) (At 3m)	
	Average	Peak	Average	Peak
Above 1000	49.5	69.5	54	74

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

(3) The measurement above 1GHz is at close-in distances 3m, and determine the limit L2 corresponding to the close-in distance d2 by applying the following relation: $L2 = L1 (d1/d2)$, where L1 is the specified limit in microvolts per metre (uV/m) at the distance d1 (10m), L2 is the new limit for distance d2 (3m).

So the new Class A limit above 1GHz at 3m is as following table:



Frequency (MHZ)	Class A (dBuV/m) (At 3m)	
	Average	Peak
Above 1000	60	80

According to FCC Part 15.33 (b), for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.75	30
1.75-108	1000
108-500	2000
500-1000	5000
Above 1000	5 th harmonic of the highest frequency or 40GHz, whichever is lower

4.2. Test Procedures

Procedure of Preliminary Test

- The equipment was set up as per the test configuration to simulate typical usage per the user’s manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 15 cm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per ANSI C63.4.
- All I/O cables were positioned to simulate typical usage as per ANSI C63.4.
- The EUT received AC 120VAC/60Hz power source from the outlet socket under the turntable. All support equipment power received from another socket under the turntable.
- The antenna was placed at 3 or 10 meter away from the EUT as stated in ANSI C63.4. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.
- The Analyzer / Receiver quickly scanned from 30MHz to 40GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.




- Set the spectrum analyzer/ Receiver in the following setting as:
Below 1GHz:
RBW=120KHz / VBW=300KHz / Sweep=AUTO
Above 1GHz:
Peak: RBW=1MHz, VBW=3MHz / Sweep=AUTO
Average: RBW=1MHz / VBW=1Hz / Sweep=AUTO
- The worst configuration of EUT and cable of the above highest emission level were recorded for reference of the final test.

Procedure of Final Test

- EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.
- The Analyzer / Receiver scanned from 30MHz to 40GHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 or 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- Recording at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. Below 1GHz the Q.P. reading and above 1GHz the Peak and Average reading are presented.
- The test data of the worst-case condition(s) was recorded.


4.3. Typical test Setup

Below 1GHz Test Setup

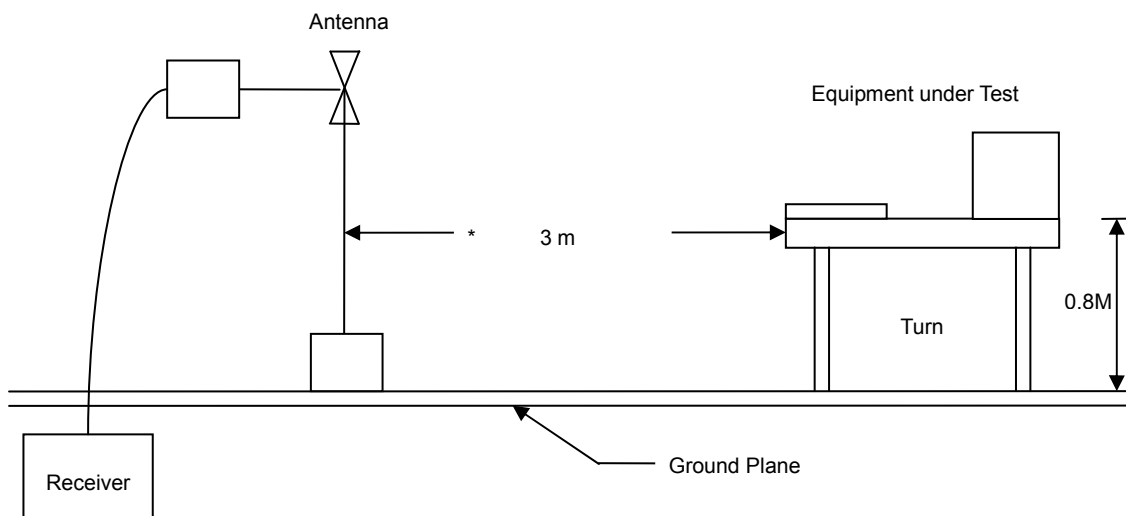



Above 1GHz Test Setup

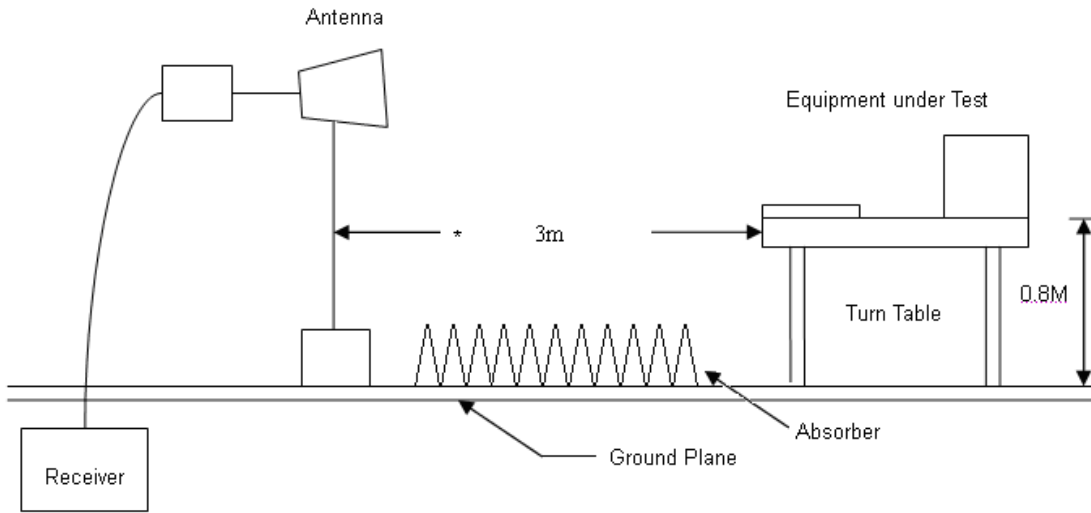


4.4. Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMI Test Receiver	R&S	ESCI	101183	2016.03.26	2017.03.25
Preamplifier	songyi	EM330	60618	2016.03.26	2017.03.25
Preamplifier	Agilent	8449B	3008A02342	2016.03.26	2017.03.25
Bilog Antenna	Sunol Science	JB1	A072414-1	2016.04.16	2017.04.15
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-618	2016.04.16	2017.04.15
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	9170-347	2016.04.16	2017.04.15
Preamplifier	COM-POWER	PA-840	711885	2016.03.26	2017.03.25
Spectrum Analyzer	R&S	FSP40	100324	2016.03.26	2017.03.25
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-002	2016.03.29	2017.03.28
EZ-EMC	Fala	Ver CT3A1	N/A	N/A	N/A



4.5. Test Result and Data (30MHz~1GHz)

Test Mode :	Mode 1: Charging Mode(From Computer)		
DC Power :	DC 3.7V	Ant. Polarization:	Horizontal
Temp :	25°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2016/07/21

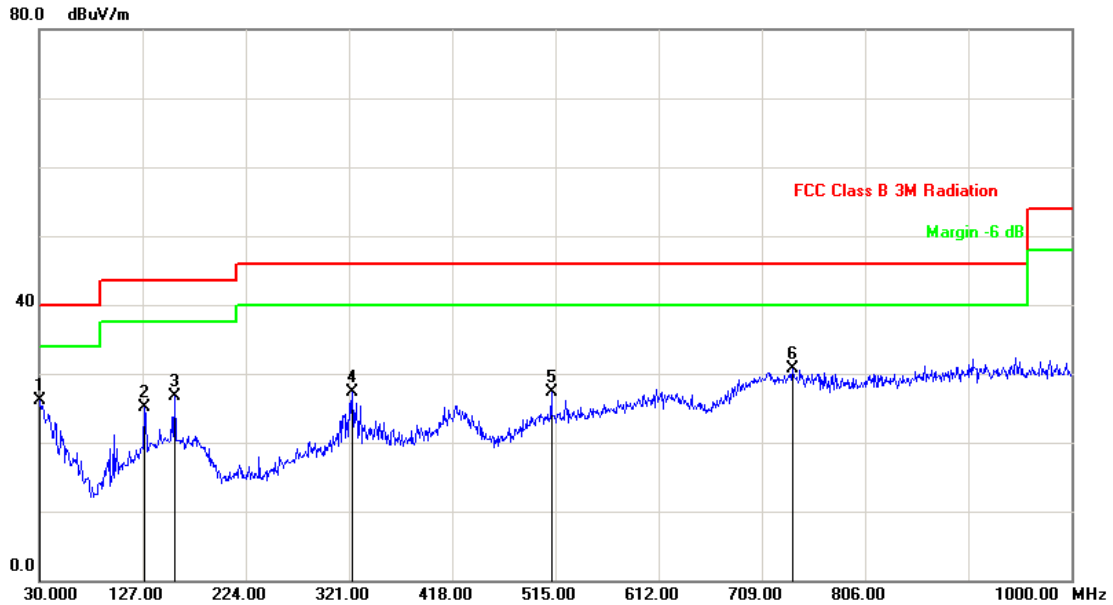


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.9699	-2.85	28.90	26.05	40.00	-13.95	peak	100	248
2	128.9399	-8.93	34.05	25.12	43.50	-18.38	peak	200	136
3	157.0699	-7.53	34.20	26.67	43.50	-16.83	peak	100	138
4	323.9100	-6.31	33.55	27.24	46.00	-18.76	peak	100	268
5	511.1200	-4.63	32.03	27.40	46.00	-18.60	peak	100	60
6	738.1000	1.62	29.06	30.68	46.00	-15.32	peak	100	241

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Charging Mode(From Computer)		
DC Power :	DC 3.7V	Ant. Polarization:	Vertical
Temp :	25°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2016/07/21

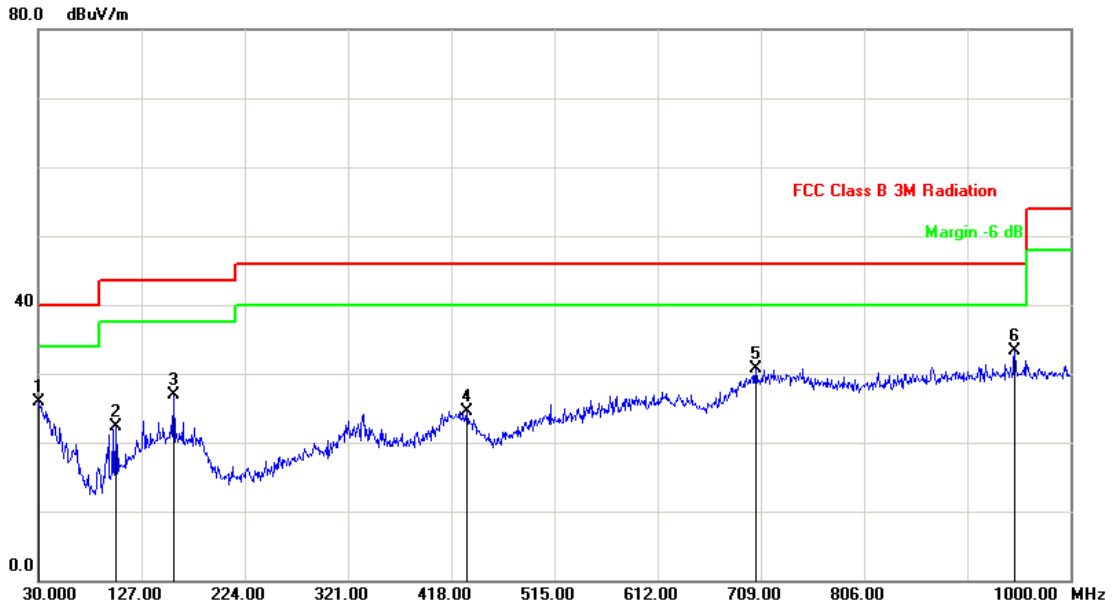


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.9699	-2.85	28.78	25.93	40.00	-14.07	peak	184	0
2	102.7500	-12.38	34.77	22.39	43.50	-21.11	peak	100	105
3	157.0699	-7.53	34.34	26.81	43.50	-16.69	peak	200	356
4	432.5500	-4.61	29.09	24.48	46.00	-21.52	peak	200	38
5	704.1499	1.18	29.48	30.66	46.00	-15.34	peak	141	0
6	947.6200	2.53	30.84	33.37	46.00	-12.63	peak	100	209

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Communication Mode(By Audio cable)		
DC Power :	DC 3.7V	Ant. Polarization:	Horizontal
Temp :	25°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2016/07/21

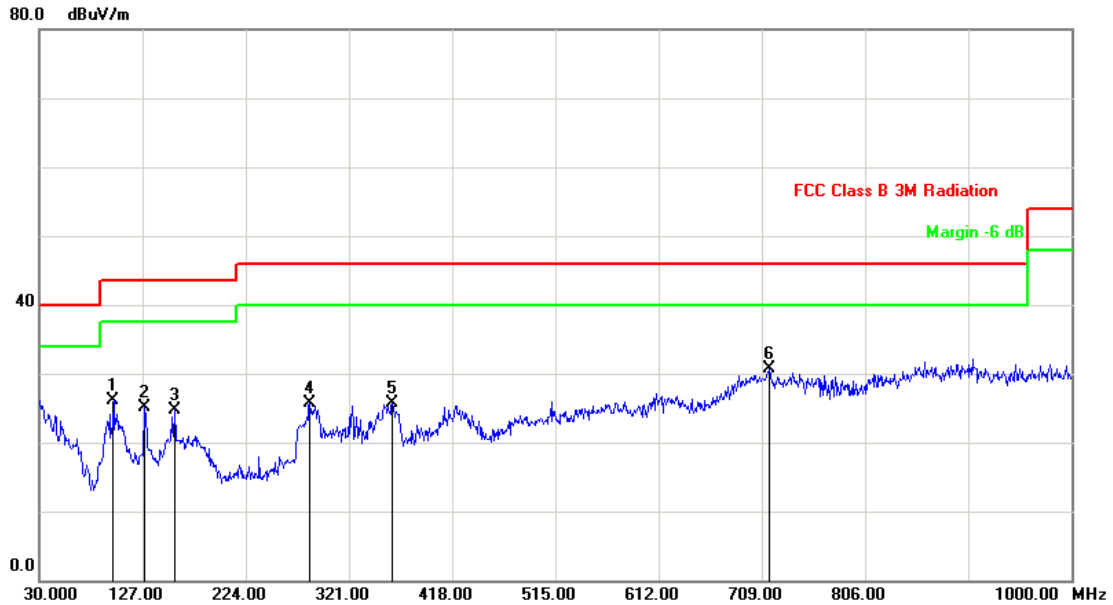


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	99.8399	-12.83	38.90	26.07	43.50	-17.43	peak	200	129
2	128.9398	-8.93	34.05	25.12	43.50	-18.38	peak	200	136
3	157.0699	-7.53	32.20	24.67	43.50	-18.83	peak	100	138
4	284.1399	-8.84	34.50	25.66	46.00	-20.34	peak	100	215
5	361.7400	-6.86	32.53	25.67	46.00	-20.33	peak	100	206
6	715.7898	1.33	29.28	30.61	46.00	-15.39	peak	200	169

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Communication Mode(By Audio cable)		
DC Power :	DC 3.7V	Ant. Polarization:	Vertical
Temp :	25°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2016/07/21

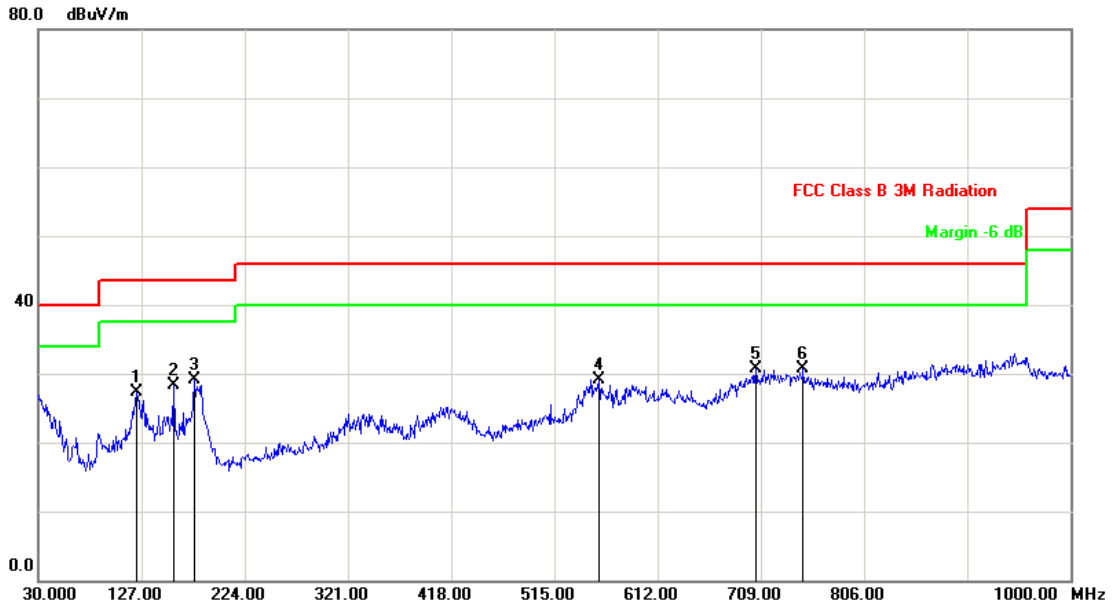


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	122.1500	-9.61	36.86	27.25	43.50	-16.25	peak	100	200
2	157.0699	-7.53	35.84	28.31	43.50	-15.19	peak	200	356
3	176.4698	-7.63	36.71	29.08	43.50	-14.42	peak	100	101
4	556.7100	-3.42	32.62	29.20	46.00	-16.80	peak	100	319
5	704.1499	1.18	29.48	30.66	46.00	-15.34	peak	141	0
6	748.7698	1.42	29.35	30.77	46.00	-15.23	peak	200	33

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 3: Wireless Communication Mode(By U+Dongle)		
DC Power :	DC 3.7V	Ant. Polarization:	Horizontal
Temp :	25°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2016/07/21

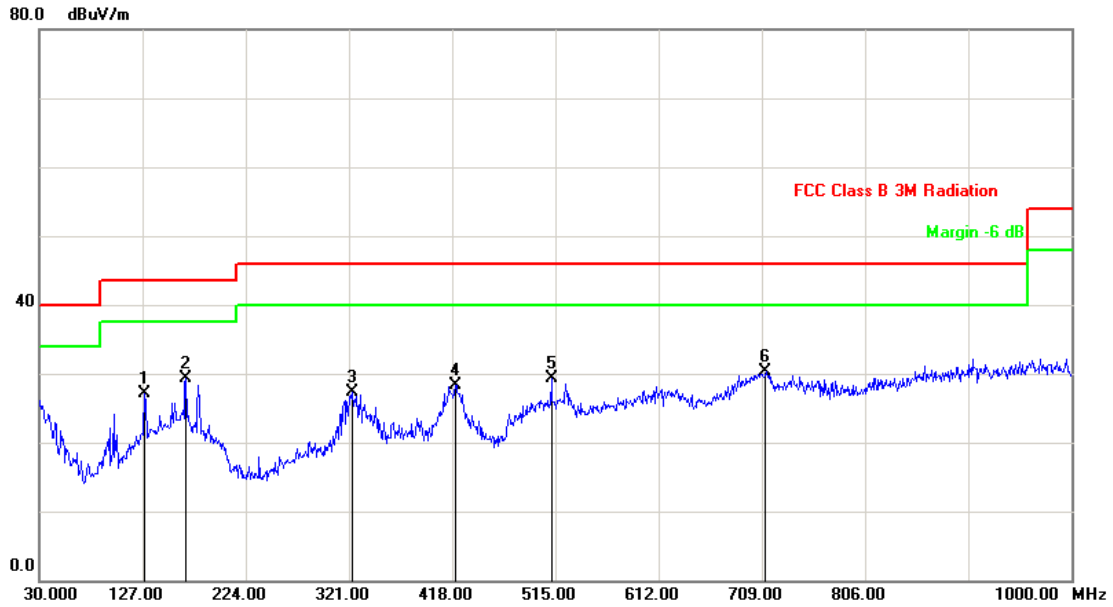


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	128.9398	-8.93	36.05	27.12	43.50	-16.38	peak	200	136
2	167.7400	-7.55	36.89	29.34	43.50	-14.16	peak	100	209
3	323.9100	-6.31	33.55	27.24	46.00	-18.76	peak	100	268
4	421.8799	-3.48	31.86	28.38	46.00	-17.62	peak	100	2
5	511.1200	-4.63	34.03	29.40	46.00	-16.60	peak	100	60
6	712.8799	1.29	28.96	30.25	46.00	-15.75	peak	100	241

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 3: Wireless Communication Mode(By U+Dongle)		
DC Power :	DC 3.7V	Ant. Polarization:	Vertical
Temp :	25°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2016/07/21

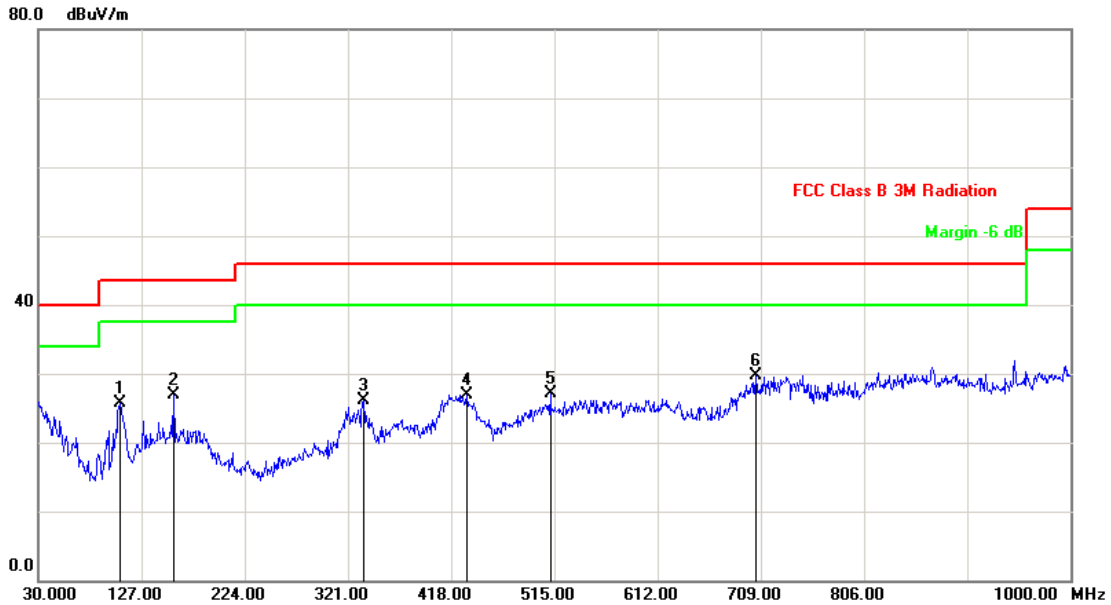


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	106.6299	-11.81	37.60	25.79	43.50	-17.71	peak	100	168
2	157.0699	-7.53	34.34	26.81	43.50	-16.69	peak	200	356
3	335.5500	-6.50	32.51	26.01	46.00	-19.99	peak	200	336
4	432.5500	-4.61	31.59	26.98	46.00	-19.02	peak	200	38
5	511.1200	-4.63	31.65	27.02	46.00	-18.98	peak	200	210
6	704.1499	1.18	28.48	29.66	46.00	-16.34	peak	141	0

Note: Measurement Level = Reading Level + Correct Factor



4.6. Test Result and Data (1GHz ~ 18GHz)

Test Mode :	Mode 1: Charging Mode(From Computer)		
DC Power :	DC 3.7V	Ant. Polarization:	Horizontal
Temp :	25°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2016/07/21

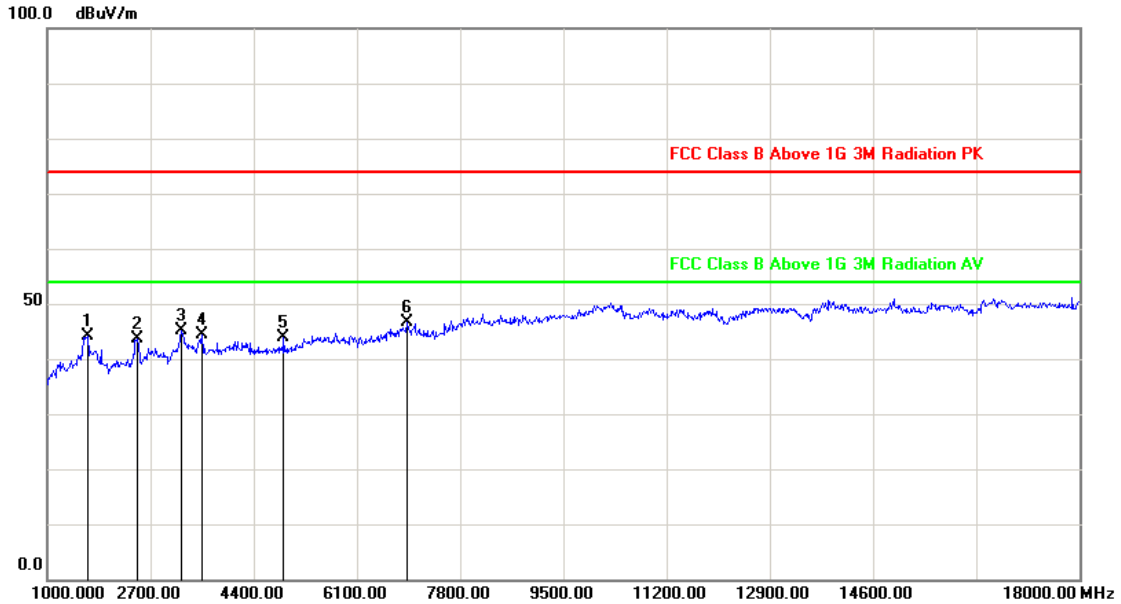


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1663.000	-14.09	58.12	44.03	74.00	-29.97	peak	100	245
2	2479.000	-10.04	53.66	43.62	74.00	-30.38	peak	100	328
3	3210.000	-7.61	52.67	45.06	74.00	-28.94	peak	200	96
4	3550.000	-6.16	50.64	44.48	74.00	-29.52	peak	100	74
5	4893.000	-3.83	47.62	43.79	74.00	-30.21	peak	100	105
6	6916.000	-0.23	46.90	46.67	74.00	-27.33	peak	100	1

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Charging Mode(From Computer)		
DC Power :	DC 3.7V	Ant. Polarization:	Vertical
Temp :	25°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2016/07/21

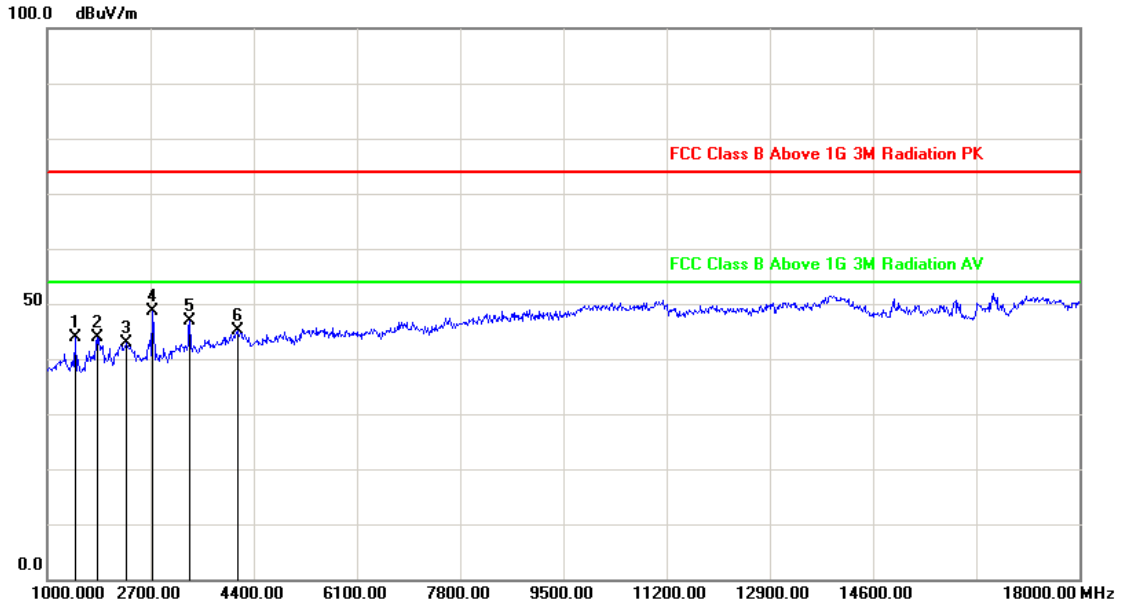


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1459.000	-15.21	59.15	43.94	74.00	-30.06	peak	200	85
2	1816.000	-13.22	57.10	43.88	74.00	-30.12	peak	100	327
3	2292.000	-10.87	53.68	42.81	74.00	-31.19	peak	100	15
4	2734.000	-9.27	57.81	48.54	74.00	-25.46	peak	200	224
5	3346.000	-7.03	54.03	47.00	74.00	-27.00	peak	100	96
6	4145.000	-4.18	49.20	45.02	74.00	-28.98	peak	100	264

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Communication Mode(By Audio cable)		
DC Power :	DC 3.7V	Ant. Polarization:	Horizontal
Temp :	25°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2016/07/21

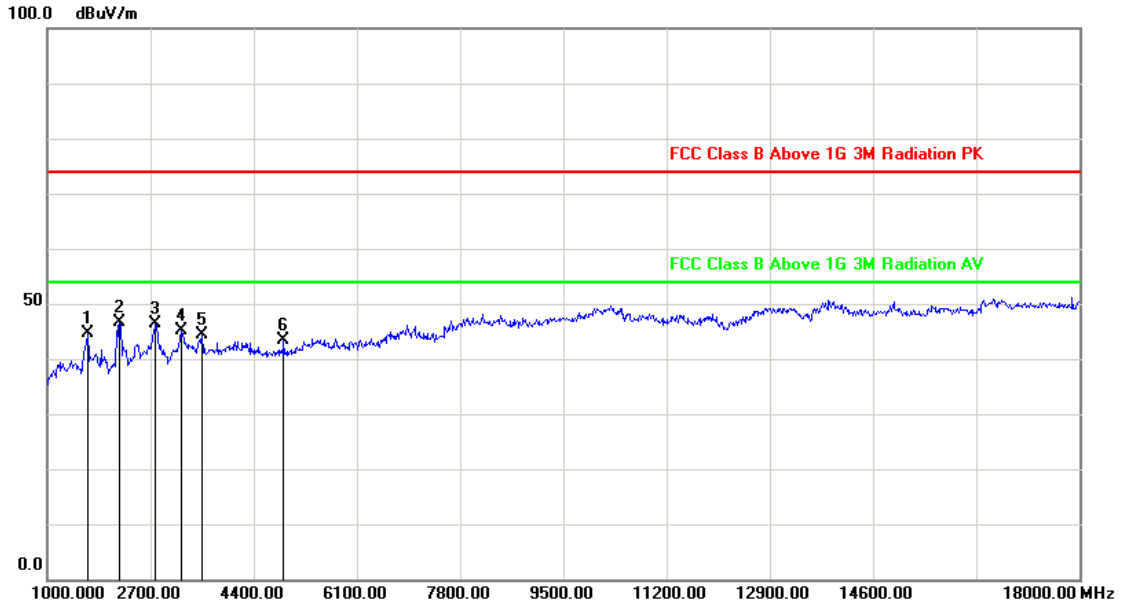


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1663.000	-14.09	58.62	44.53	74.00	-29.47	peak	100	8
2	2190.000	-11.33	58.04	46.71	74.00	-27.29	peak	100	205
3	2785.000	-9.12	55.47	46.35	74.00	-27.65	peak	100	324
4	3210.000	-7.61	52.67	45.06	74.00	-28.94	peak	200	105
5	3550.000	-6.16	50.64	44.48	74.00	-29.52	peak	100	227
6	4893.000	-3.83	47.12	43.29	74.00	-30.71	peak	100	4

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Normal Communication Mode(By Audio cable)		
DC Power :	DC 3.7V	Ant. Polarization:	Vertical
Temp :	25°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2016/07/21

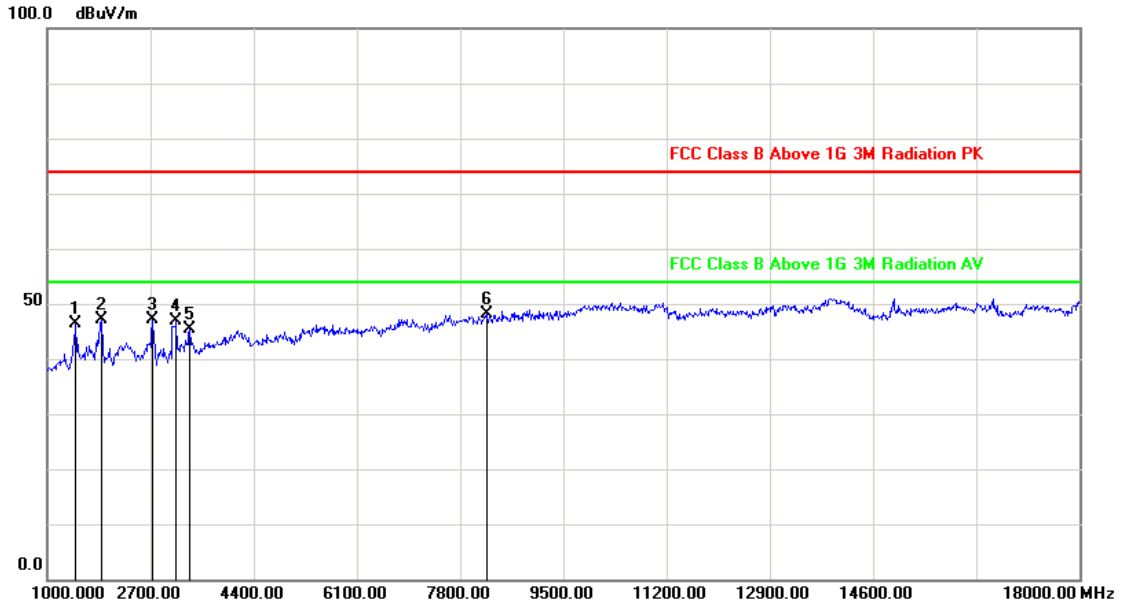


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1459.000	-15.21	61.65	46.44	74.00	-27.56	peak	100	201
2	1901.000	-12.73	59.76	47.03	74.00	-26.97	peak	100	41
3	2734.000	-9.27	56.31	47.04	74.00	-26.96	peak	100	336
4	3125.000	-7.97	54.75	46.78	74.00	-27.22	peak	100	95
5	3346.000	-7.03	52.53	45.50	74.00	-28.50	peak	100	274
6	8242.000	1.92	46.19	48.11	74.00	-25.89	peak	100	9

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 3: Wireless Communication Mode(By U+Dongle)		
DC Power :	DC 3.7V	Ant. Polarization:	Horizontal
Temp :	25°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2016/07/21

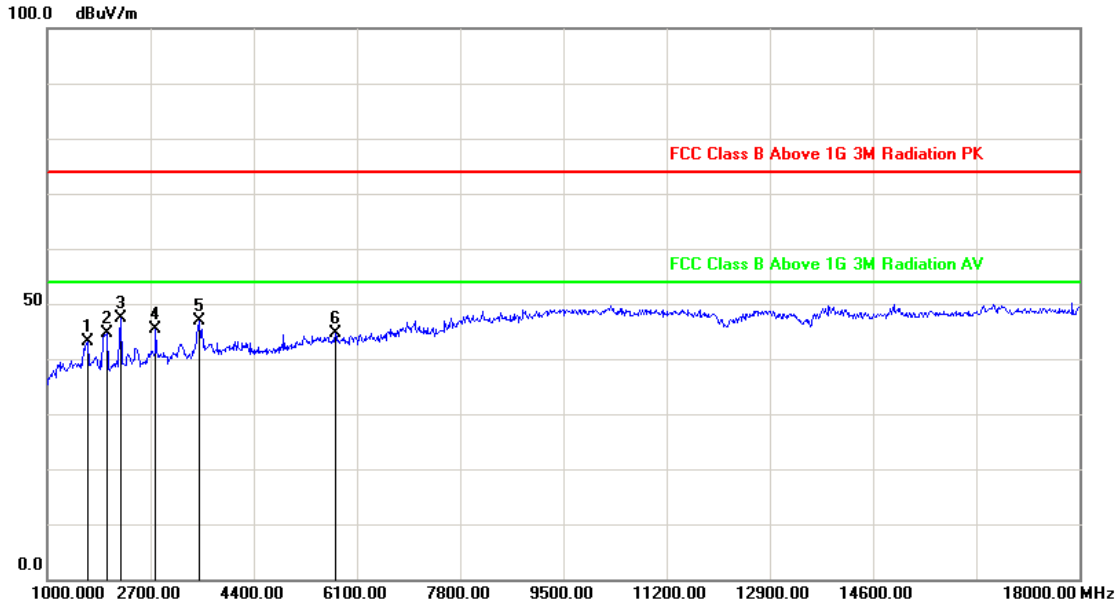


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1663.000	-14.09	57.12	43.03	74.00	-30.97	peak	100	328
2	1986.000	-12.25	56.77	44.52	74.00	-29.48	peak	100	45
3	2207.000	-11.25	58.60	47.35	74.00	-26.65	peak	100	75
4	2785.000	-9.12	54.47	45.35	74.00	-28.65	peak	200	93
5	3499.000	-6.38	53.15	46.77	74.00	-27.23	peak	200	214
6	5743.000	-2.49	47.18	44.69	74.00	-29.31	peak	100	102

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 3: Wireless Communication Mode(By U+Dongle)		
DC Power :	DC 3.7V	Ant. Polarization:	Vertical
Temp :	25°C	Humidity :	48%
Pressure(mbar) :	1002	Date :	2016/07/21

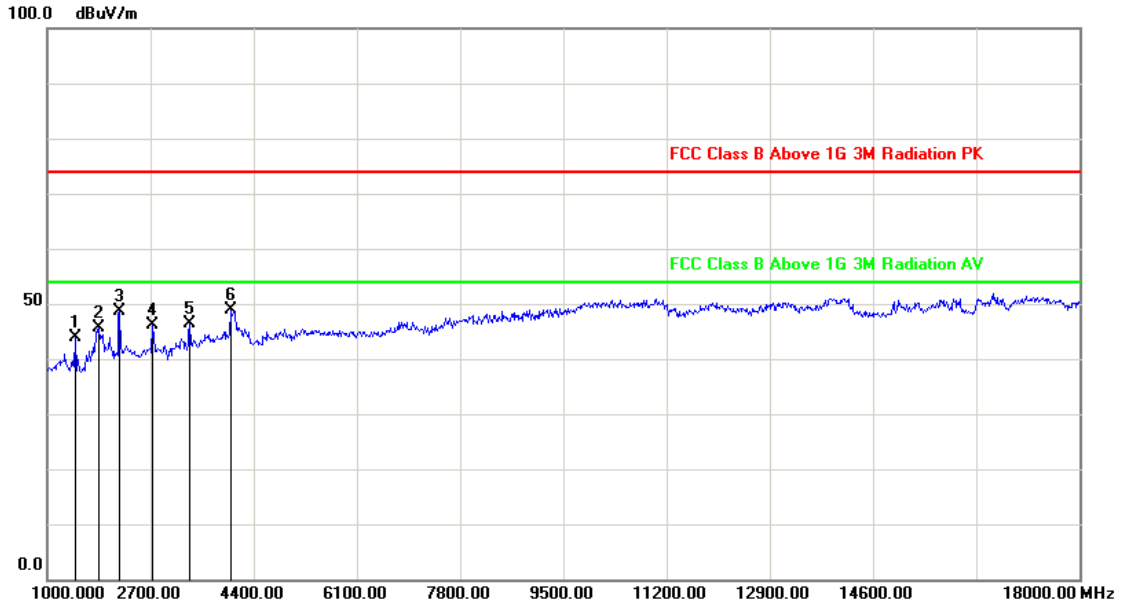

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1459.000	-15.21	59.15	43.94	74.00	-30.06	peak	100	201
2	1850.000	-13.02	58.64	45.62	74.00	-28.38	peak	200	159
3	2190.000	-11.33	59.95	48.62	74.00	-25.38	peak	200	35
4	2734.000	-9.27	55.31	46.04	74.00	-27.96	peak	100	41
5	3346.000	-7.03	53.53	46.50	74.00	-27.50	peak	100	127
6	4026.000	-4.22	53.20	48.98	74.00	-25.02	peak	100	8

Note: Measurement Level = Reading Level + Correct Factor

Test engineer: Karp

The end