



FCC/IC TEST REPORT

According to

CFR47 §15.249 & Industry Canada RSS-Gen Issue 4/RSS-247 Issue1

Applicant : Weifang GoerTek Electronics Co.,Ltd

Address : Gaoxin 2 Road,Free TradeZone,Weifang,Shandong,261205,P.R.China

Manufacturer : Weifang GoerTek Electronics Co.,Ltd

Address : Gaoxin 2 Road,Free TradeZone,Weifang,Shandong,261205,P.R.China

Equipment : Wireless Adaptor

Model No. : CECHYA-0091

Brand : Sony Interactive Entertainment America LLC

FCC ID : SZGCECHYA0091

IC ID : 7702A-CECHYA0091

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of **CerpPASS Technology Corp.** the test report shall not be reproduced except in full.

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.10 – 2013** and the energy emitted by this equipment was **passed**.

FCC Part 15 in both radiated and conducted emission class B limits. Testing was carried out on Jul 17,2016~Aug 17, 2016 at **CerpPASS Technology Corp.**

Prepared By:

Kerry Zhou

Approved by:

Miro Chueh (EMC/RF Manager)

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory

NVLAP LAB Code:	200954-0
TAF LAB Code:	1439

CerpPASS Technology (SuZhou) Co., Ltd.

NVLAP LAB Code:	200814-0
CNAS LAB Code:	L5515



Release History

Attachment No.	Version	Date	Description
SEFI1605172-B	Rev 01	2016-08-18	Initial release



Table of Contents

1. Report of Measurements and Examinations	4
1.1 List of Measurements and Examinations	4
2. Test Configuration of Equipment under Test	5
2.1 Feature of Equipment under Test	5
2.2 Carrier Frequency of Channels	6
2.3 Duty cycle	7
2.4 Test Manner	8
2.5 Description of Test System	9
2.6 Configuration of Tested System	10
2.7 General Information of Test	11
2.8 Measurement Uncertainty	11
3. Antenna Requirements	12
3.1 Standard Applicable	12
3.2 Antenna Construction and Directional Gain	12
4. Test of Conducted Emission	13
4.1 Test Limit	13
4.2 Test Procedures.....	13
4.3 Typical Test Setup	14
4.4 Measurement Equipment	14
4.5 Test Result and Data	15
5. Test of Radiated Emission	17
5.1 Test Limit	17
5.2 Test Procedures.....	18
5.3 Typical Test Setup	19
5.4 Measurement Equipment	21
5.5 Test Result and Data	22
6. 20dB Bandwidth	35
6.1 Test Limit	35
6.2 Test Procedures.....	36
6.3 Test Setup Layout.....	36
6.4 Measurement Equipment	36
6.5 Test Result and Data	37
7. Band-Edge Compliance of RF Conducted Emissions	38
7.1 Test Limit	38
7.2 Test Procedure	39
7.3 Test Setup Layout.....	40
7.4 Measurement Equipment	41
7.5 Test Result and Data	42
8. Restricted Bands of Operation	43
8.1 Labeling Requirement	43



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2016 Section 15.207 RSS-Gen Issue 4 December 2014 Section 8.8	Yes	No
20dB&99% Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2016 Section 15.215(c) RSS-Gen Issue 4 December 2014 Section 6.6	Yes	No
Radiated Emission	FCC CFR Title 47 Part 15 Subpart C: 2016 Section 15.209 and 15.249 RSS-Gen Issue 4 November 2014 Section 6.13	Yes	No
Band-edge Compliance of RF Conducted Emissions	FCC CFR Title 47 Part 15 Subpart C: 2016 Section 15.215(c)	Yes	No



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

RF Module	AV6351
Type of Modulation	$\pi/4$ DQPSK
Frequency Range	2405.35-2477.35MHz
Number of Channels	37
Data Rate	>2 kbps
Antenna Type	See antenna requirement



2.2 Carrier Frequency of Channels

Ch.2	Ch.3	Ch.4	Ch.5	Ch.6	Ch.7	Ch.8	Ch.9
2405.35	2407.35	2409.35	2411.35	2413.35	2415.35	2417.35	2419.35
Ch.10	Ch.11	Ch.12	Ch.13	Ch.14	Ch.15	Ch.16	Ch.17
2421.35	2423.35	2425.35	2427.35	2429.35	2431.35	2433.35	2435.35
Ch.18	Ch.19	Ch.20	Ch.21	Ch.22	Ch.23	Ch.24	Ch.25
2437.35	2439.35	2441.35	2443.35	2445.35	2447.35	2449.35	2451.35
Ch.26	Ch.27	Ch.28	Ch.29	Ch.30	Ch.31	Ch.32	Ch.33
2453.35	2455.35	2457.35	2459.35	2461.35	2463.35	2465.35	2467.35
Ch.34	Ch.35	Ch.36	Ch.37	Ch.38			
2469.35	2471.35	2473.35	2475.35	2477.35			



2.3 Duty cycle

Test Item	Duty cycle
-----------	------------

Frequency (MHz)	Measurement (%)
2439.35	100%



2.4 Test Manner

Test Manner	
1	During testing, the interface cables and equipment positions were varied according to C63.10.
2	Adjust the EUT at the test mode and the test channel. Then test.




2.5 Description of Test System

No	Device	Manufacturer	Model No.	Description
1	Notebook PC	SONY	PCG-71811P	Non-Shielded,1.5m (R33021)
2	Mouse	DELL	G0K02XYK	R41108
3	HDD	SSK	N/A	N/A
4	Keyboard	DELL	SK-8115	T3A002



2.6 Configuration of Tested System

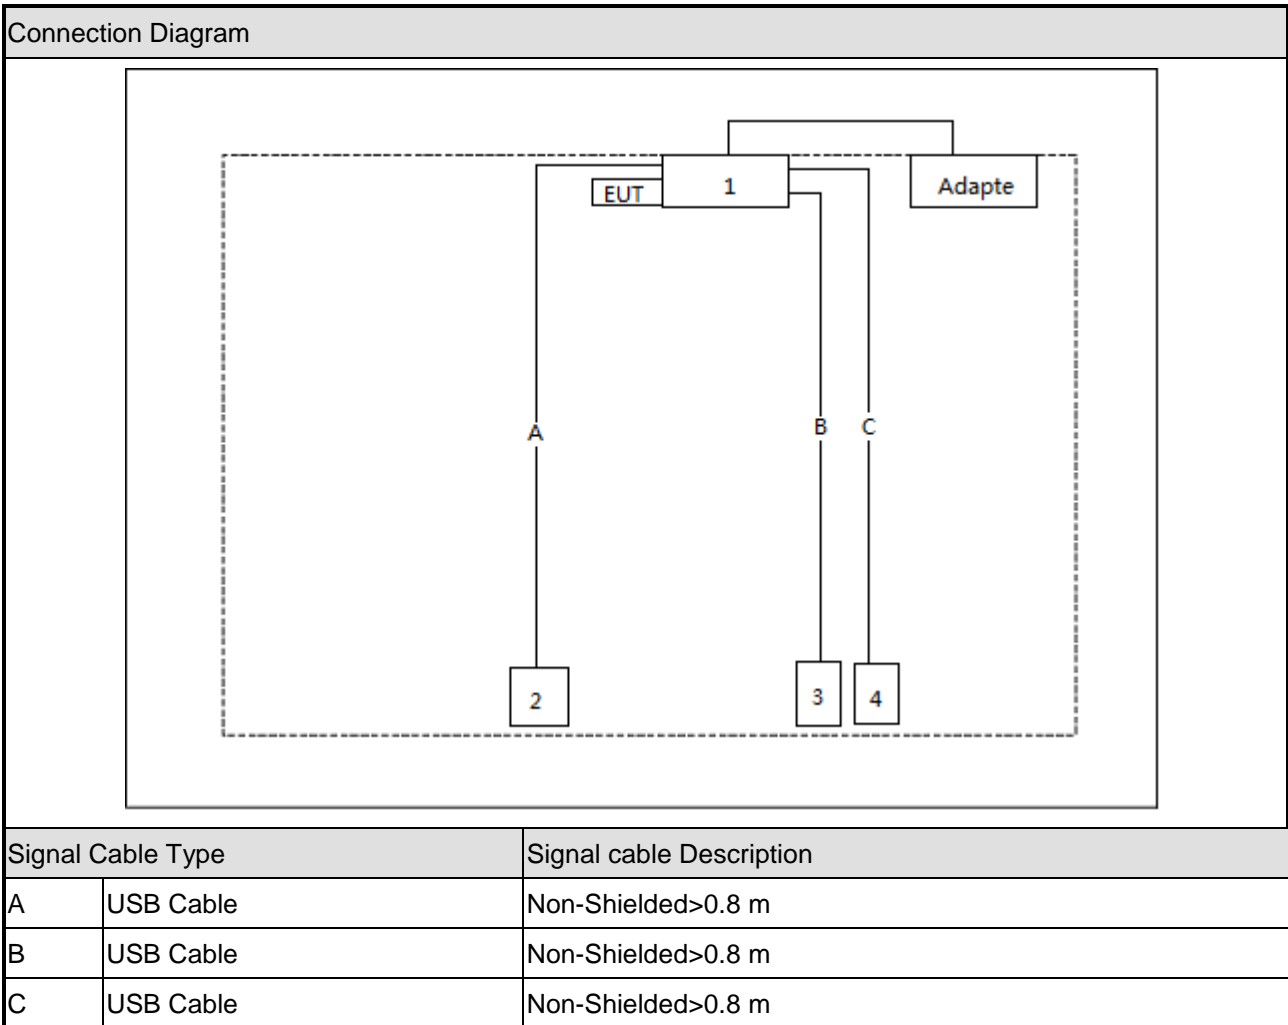



2.7 General Information of Test

Test Site:	Cerpass Technology (SuZhou) Co., LTD
Performand Location :	No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China
NVLAP LAB Code :	200814-0
FCC Registration Number :	916572, 331395
IC Registration Number :	7290A-1, 7290A-2

2.8 Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	LINE/NEUTRAL	±2.71 dB
Radiated Emission	30 MHz ~ 25GHz	Vertical	±4.11 dB
		Horizontal	±4.10 dB
Occupied Bandwidth	---	---	±7500 Hz



3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.2 Antenna Construction and Directional Gain

Antenna Type	Peak Gain
Chip antenna	Ant 0 -4.71dBi for 2400~2500MHz band
	Ant 1 -3.91dBi for 2400~2500MHz band

Note: Only an antenna in the launch at any time. Ant 1 is the worst case. We choose Ant 1 for All RF test.



4. Test of Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 6.2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	AVG (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

4.2 Test Procedures

The EUT was setup according to ANSI C63.10, 2013. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.



4.3 Typical Test Setup

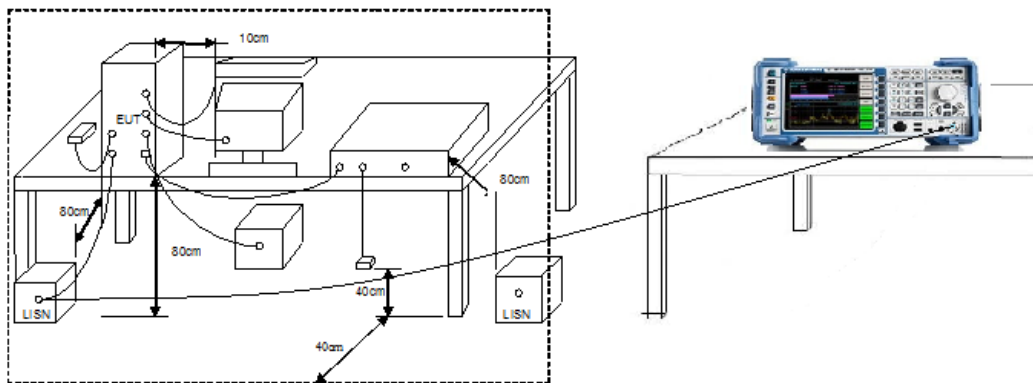


4.4 Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100565	2016.03.24	2017.03.23
AMN	R&S	ESH2-Z5	100182	2015.09.04	2016.09.03
Two-Line V-Network	R&S	ENV216	100325	2015.12.04	2016.12.03
ISN	FCC	FCC-TLISN-T2 -02	20379	2016.03.24	2017.03.23
ISN	FCC	FCC-TLISN-T4 -02	20380	2016.03.24	2017.03.23
ISN	FCC	FCC-TLISN-T8 -02	20381	2016.03.24	2017.03.23
ISN	TESEQ	ISN ST08	30175	2016.03.24	2017.03.23
Current Probe	R&S	EZ-17	100303	2016.04.04	2017.04.03
Passive Voltage Probe	R&S	ESH2-Z3	100026	2016.03.29	2017.03.28
Pulse Limiter	R&S	ESH3-Z2	100529	2016.03.29	2017.03.28
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2016.03.31	2017.03.30



4.5 Test Result and Data

Test Mode :	Mode 1: In the condition of charging by radio play music		
AC Power :	AC 120V/60Hz	Phase :	LINE
Temperature :	22°C	Humidity :	50%
Pressure(mbar) :	1002	Date:	2016/08/06

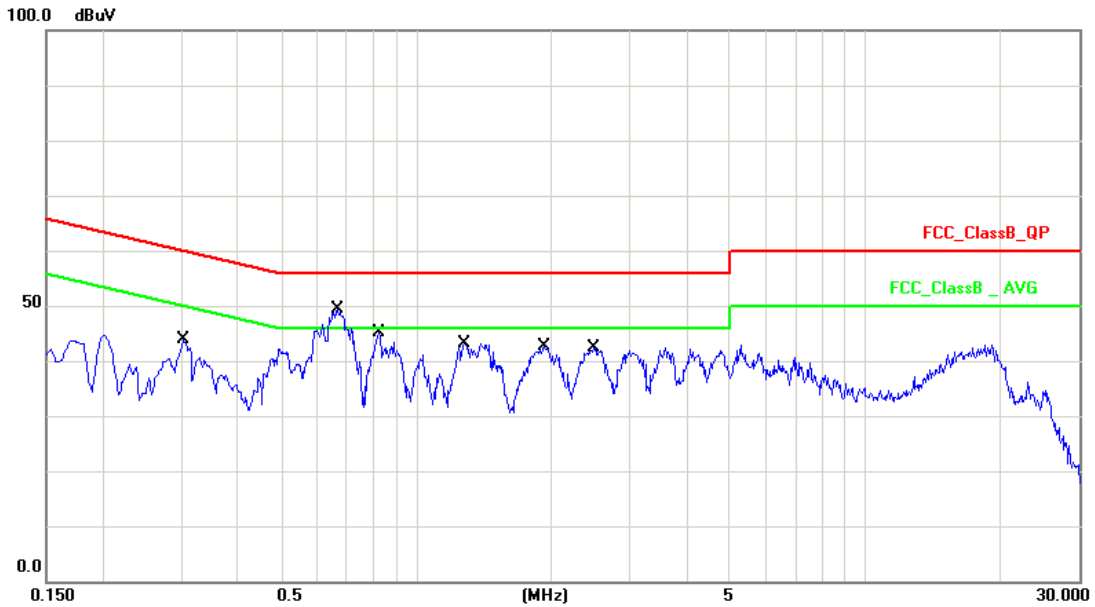


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3020	10.14	31.15	41.29	60.19	-18.90	QP
2	0.3020	10.14	22.30	32.44	50.19	-17.75	AVG
3	0.6700	10.15	36.15	46.30	56.00	-9.70	QP
4	0.6700	10.15	25.40	35.55	46.00	-10.45	AVG
5	0.8300	10.15	32.10	42.25	56.00	-13.75	QP
6	0.8300	10.15	19.48	29.63	46.00	-16.37	AVG
7	1.2860	10.16	29.71	39.87	56.00	-16.13	QP
8	1.2860	10.16	16.86	27.02	46.00	-18.98	AVG
9	1.9300	10.17	26.39	36.56	56.00	-19.44	QP
10	1.9300	10.17	15.68	25.85	46.00	-20.15	AVG
11	2.4980	10.18	27.77	37.95	56.00	-18.05	QP
12	2.4980	10.18	17.32	27.50	46.00	-18.50	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: In the condition of charging by radio play music		
AC Power :	AC 120V/60Hz	Phase :	NEUTRAL
Temperature :	22°C	Humidity :	50%
Pressure(mbar) :	1002	Date:	2016/08/06

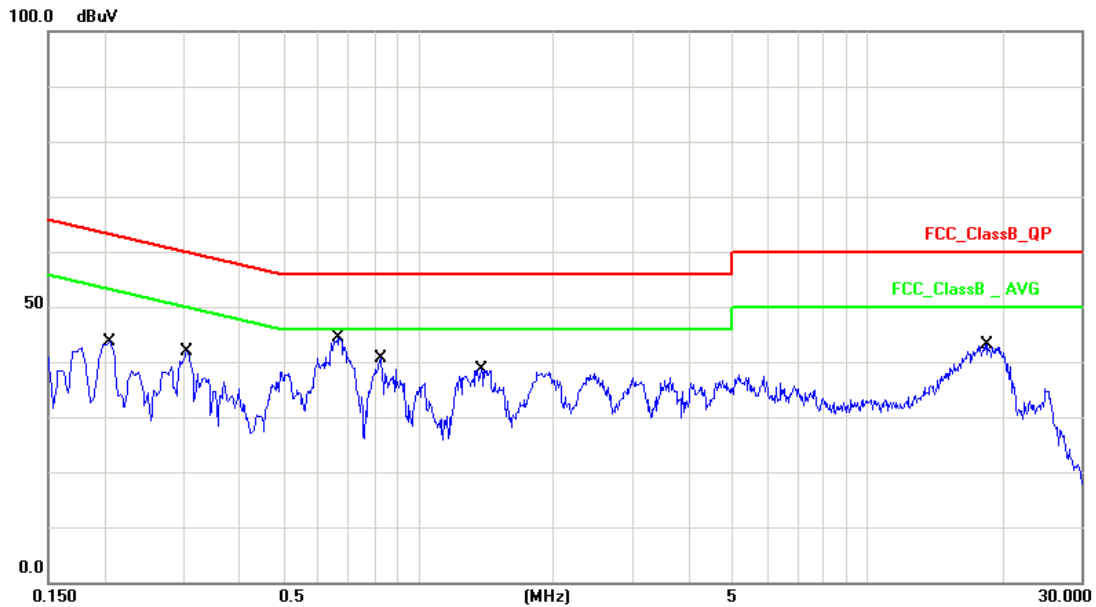

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2060	10.13	29.24	39.37	63.36	-23.99	QP
2	0.2060	10.13	16.71	26.84	53.36	-26.52	AVG
3	0.3060	10.14	27.15	37.29	60.08	-22.79	QP
4	0.3060	10.14	18.50	28.64	50.08	-21.44	AVG
5	0.6660	10.16	31.34	41.50	56.00	-14.50	QP
6	0.6660	10.16	22.30	32.46	46.00	-13.54	AVG
7	0.8300	10.16	27.17	37.33	56.00	-18.67	QP
8	0.8300	10.16	17.02	27.18	46.00	-18.82	AVG
9	1.3860	10.18	23.98	34.16	56.00	-21.84	QP
10	1.3860	10.18	15.16	25.34	46.00	-20.66	AVG
11	18.5780	10.47	25.32	35.79	60.00	-24.21	QP
12	18.5780	10.47	13.62	24.09	50.00	-25.91	AVG

Note: Measurement Level = Reading Level + Correct Factor



5. Test of Radiated Emission

5.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output Average power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m).



FCC Part 15 Subpart C Paragraph 15.249		
Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902-928(MHz)	50	500
2400-2483.5(MHz)	50	500
5725-5875(MHz)	50	500
24.0-24.25(GHz)	250	2500

FCC Part 15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedures

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10, 2013 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.


The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 60~10 degrees for H-plane and 90~10 degrees for E-plane.




5.3 Typical Test Setup

9kHz~30MHz Test Setup

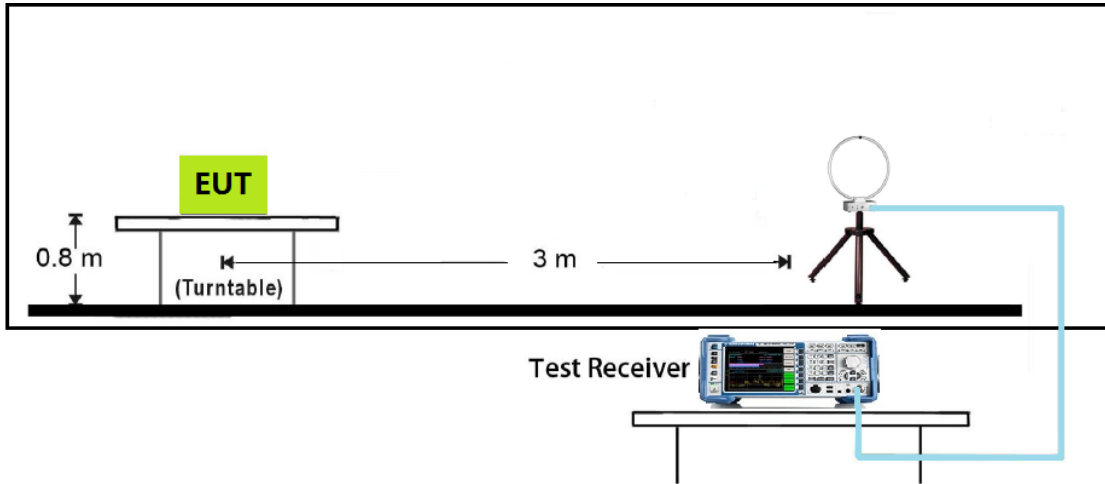


Below 1GHz Test Setup

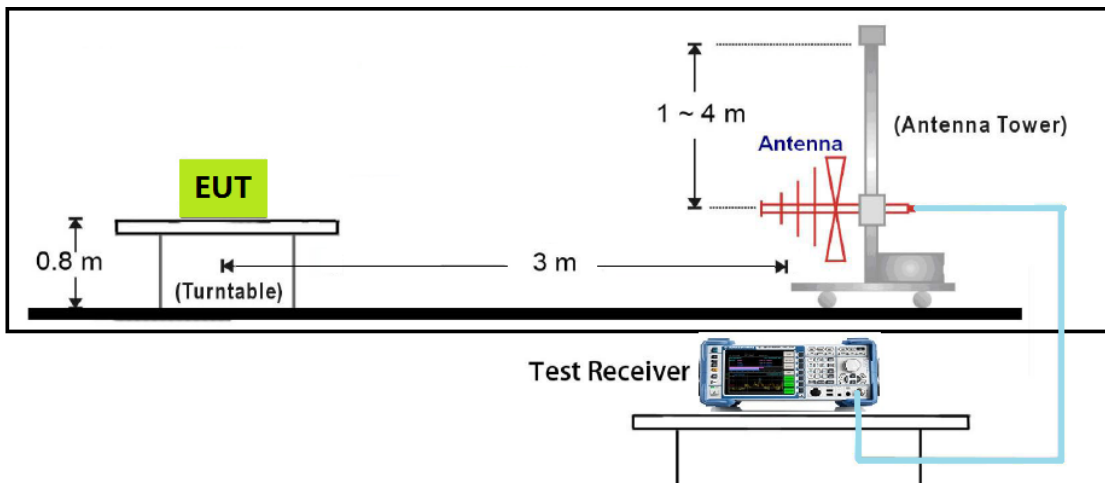




1GHz~18GHz Test Setup

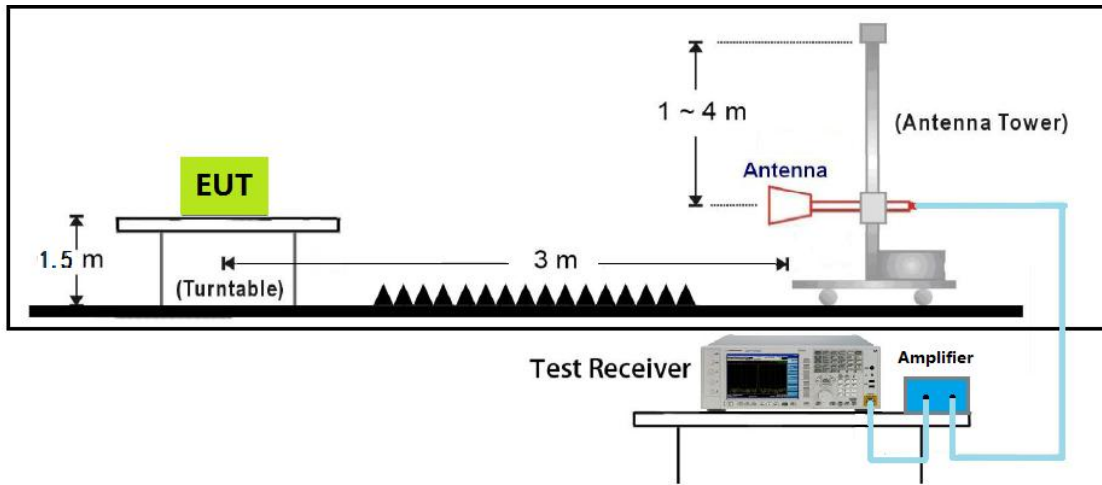

18GHz~40GHz Test Setup

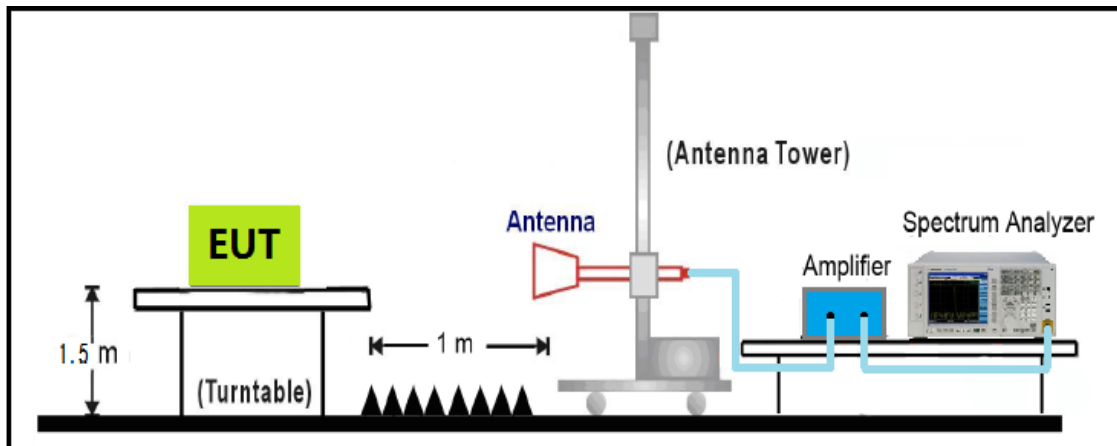

**5.4 Measurement Equipment**

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMI Test Receiver	R&S	ESCI	101183	2016.03.28	2017.03.29
Spectrum Analyzer	N9010A	Agilent	MY53400169	2015.11.11	2016.11.11
Spectrum Analyzer	R&S	FSP40	100324	2016.03.23	2017.03.24
H64 Preamplifier	HP	8447F	3113A05582	2016.03.24	2017.03.23
Preamplifier	songyi	EM330	60618	2016.03.29	2017.03.28
Preamplifier	Agilent	8449B	3008A02342	2016.03.29	2017.03.28
Preamplifier	COM-POWER	PA-840	711885	2016.03.29	2017.03.28
Bilog Antenna	Sunol Science	JB1	A072414-1	2016.04.22	2017.04.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2016.04.20	2017.04.19
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	9170-347	2016.04.20	2017.04.19
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-002	2016.03.31	2017.03.30
EZ-EMC	Fala	Ver CT3A1	N/A	N/A	N/A



5.5 Test Result and Data

All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 3MHz, VBW = 3MHz, sweep time = 200ms;

Average detector = Peak detector - $20 \cdot \log(1/\text{Duty Cycle})$

The maximum duty cycle plot is as the following:

Duty cycle correction factor (DCCF) = $20 \cdot \log(100\%) = 0\text{dB}$ (Duty cycle=100%)



Fundamental Radiated Emission

Test Item	:	Fundamental Radiated Emission
Test Site	:	AC102
Test Mode	:	Mode 1: Transmitting

Frequency (MHz)	Antenna	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Type
2405.35	H	53.45	33.18	86.63	114	-27.37	PK
	V	53.75	33.18	86.93	114	-27.07	PK
2439.35	H	55.22	33.21	88.43	114	-25.57	PK
	V	53.02	33.21	86.23	114	-27.77	PK
2477.35	H	54.31	33.47	87.78	114	-26.22	PK
	V	50.14	33.47	83.61	114	-30.39	PK

Note:

Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Frequency (MHz)	Antenna	Peak Measure (dBuV/m)	Duty Cycle Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Type
2405.35	H	86.63	0	86.63	94	-7.37	AV
	V	86.93	0	86.93	94	-7.07	AV
2439.35	H	88.43	0	88.43	94	-5.57	AV
	V	86.23	0	86.23	94	-7.77	AV
2477.35	H	87.78	0	87.78	94	-6.22	AV
	V	83.61	0	83.61	94	-10.39	AV

Note:

Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)



Harmonic Radiated Emission

PK: Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 500ms;

For average, use peak measure level + Duty Cycle Correct Factor.

Test Item	:	Harmonic Radiated Emission
Test Site	:	AC102
Test Mode	:	Mode 1: Transmit at 2405.35MHz

Frequency (MHz)	Antenna	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Type
4810.7	H	35.3	9.7	45.0	74	-29.0	PK
4810.7	V	34.9	9.7	44.6	74	-29.4	PK
7216.1	H	29.9	11.9	41.8	74	-32.2	PK
7216.1	V	38.6	11.9	50.5	74	-23.5	PK

Note:

Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Frequency (MHz)	Antenna	Peak Measure (dBuV/m)	Duty Cycle Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Type
4810.7	H	45.0	0	45.0	54	-9.0	AV
4810.7	V	44.6	0	44.6	54	-9.4	AV
7216.1	H	41.8	0	41.8	54	-12.2	AV
7216.1	V	50.5	0	50.5	54	-3.5	AV

Note: Average Measure Level = Peak Measure Level + Duty Cycle Correct Factor.



Test Item	:	Harmonic Radiated Emission
Test Site	:	AC102
Test Mode	:	Mode 1: Transmit at 2439.35MHz

Frequency (MHz)	Antenna	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Type
4878.7	H	34.5	10.2	44.7	74	-29.3	PK
4878.7	V	33.1	10.2	43.3	74	-30.7	PK
7318.1	H	30.5	12.0	42.5	74	-31.5	PK
7318.1	V	39.2	12.0	51.2	74	-22.8	PK

Note:

Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Frequency (MHz)	Antenna	Peak Measure (dBuV/m)	Duty Cycle Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Type
4878.7	H	44.7	0	44.7	54	-9.3	AV
4878.7	V	43.3	0	43.3	54	-10.7	AV
7318.1	H	42.5	0	42.5	54	-11.5	AV
7318.1	V	51.2	0	51.2	54	-2.8	AV

Note: Average Measure Level = Peak Measure Level + Duty Cycle Correct Factor.



Test Item	:	Harmonic Radiated Emission
Test Site	:	AC102
Test Mode	:	Mode 1: Transmit at 2477.35MHz

Frequency (MHz)	Antenna	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Type
4954.7	H	33.0	10.5	43.5	74	-30.5	PK
4954.7	V	34.6	10.5	45.1	74	-28.9	PK
7432.1	H	28.7	12.1	40.8	74	-33.2	PK
7432.1	V	36.3	12.1	48.4	74	-25.6	PK

Note:

Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)


Frequency (MHz)	Antenna	Peak Measure (dBuV/m)	Duty Cycle Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Type
4954.7	H	43.5	0	43.5	54	-10.5	AV
4954.7	V	45.1	0	45.1	54	-8.9	AV
7432.1	H	40.8	0	40.8	54	-13.2	AV
7432.1	V	48.4	0	48.4	54	-5.6	AV

Note: Average Measure Level = Peak Measure Level + Duty Cycle Correct Factor.



Restricted Band Result:

Engineer: Kerry	
Site: AC102	Time: 2016/08/05 - 13:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D(1-18GHz)	Polarity: Horizontal
EUT: Wireless Adaptor	Power: 120V/60Hz
Note: Mode1: Transmit at 2405.35MHz Ant 1	

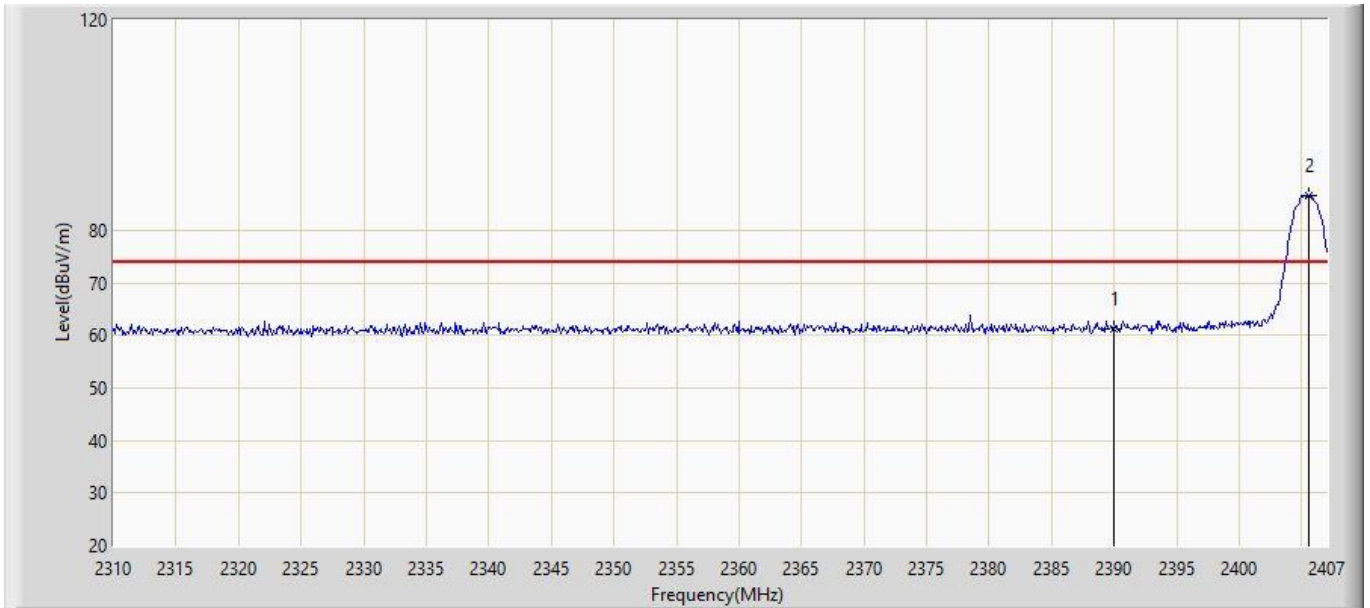

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	61.146	28.035	-12.854	74.000	33.111	PK
2	*	2405.545	86.625	53.450	N/A	N/A	33.175	PK


Note:

Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)



Engineer: Kerry	
Site: AC102	Time: 2016/08/05 - 13:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D(1-18GHz)	Polarity: Horizontal
EUT: Wireless Adaptor	Power: 120V/60Hz
Note: Mode1: Transmit at 2405.35MHz Ant 1	

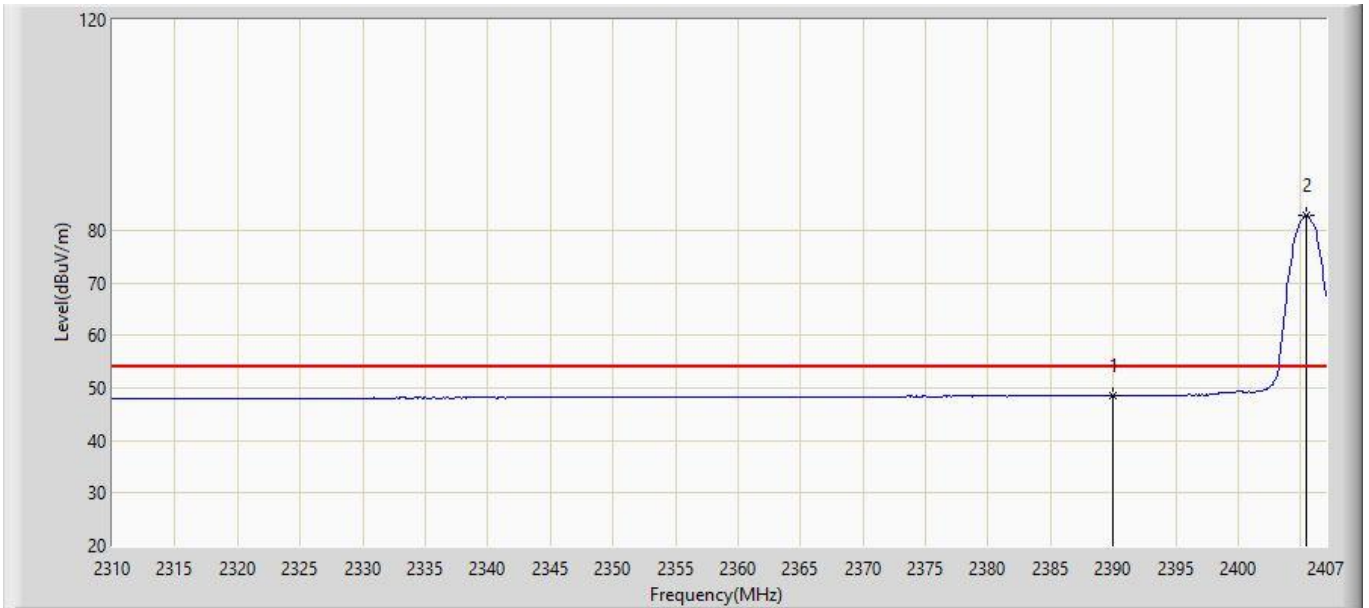

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	48.552	15.441	-5.448	54.000	33.111	AV
2	*	2405.448	82.856	49.682	N/A	N/A	33.174	AV


Note:

Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)



Engineer: Kerry	
Site: AC102	Time: 2016/08/05 - 13:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D(1-18GHz)	Polarity: Vertical
EUT: Wireless Adaptor	Power: 120V/60Hz
Note: Mode1: Transmit at 2405.35MHz Ant 1	

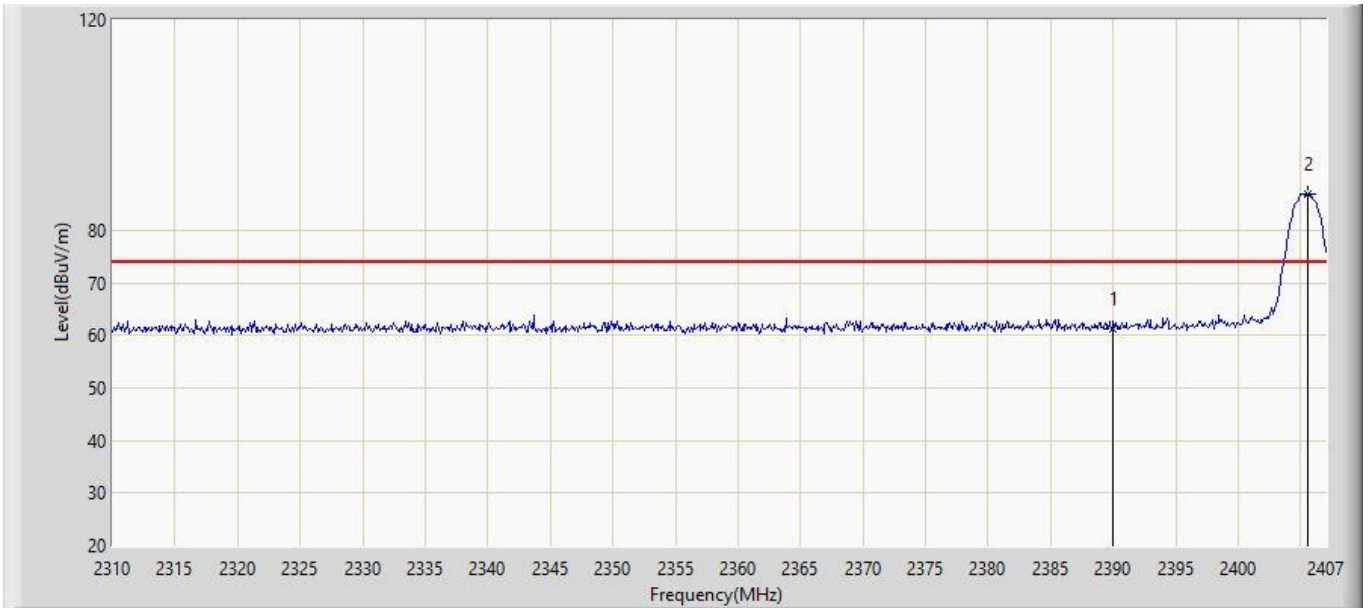

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	61.229	28.118	-12.771	74.000	33.111	PK
2	*	2405.545	86.944	53.769	N/A	N/A	33.175	PK


Note:

$$\text{Measure Level (dB}\mu\text{V/m)} = \text{Reading Level (dB}\mu\text{V)} + \text{Factor (dB)}$$

$$\text{Factor (dB)} = \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)} - \text{Pre_Amplifier Gain (dB)}$$



Engineer: Kerry	
Site: AC102	Time: 2016/08/05 - 13:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D(1-18GHz)	Polarity: Vertical
EUT: Wireless Adaptor	Power: 120V/60Hz
Note: Mode1: Transmit at 2405.35MHz Ant 1	

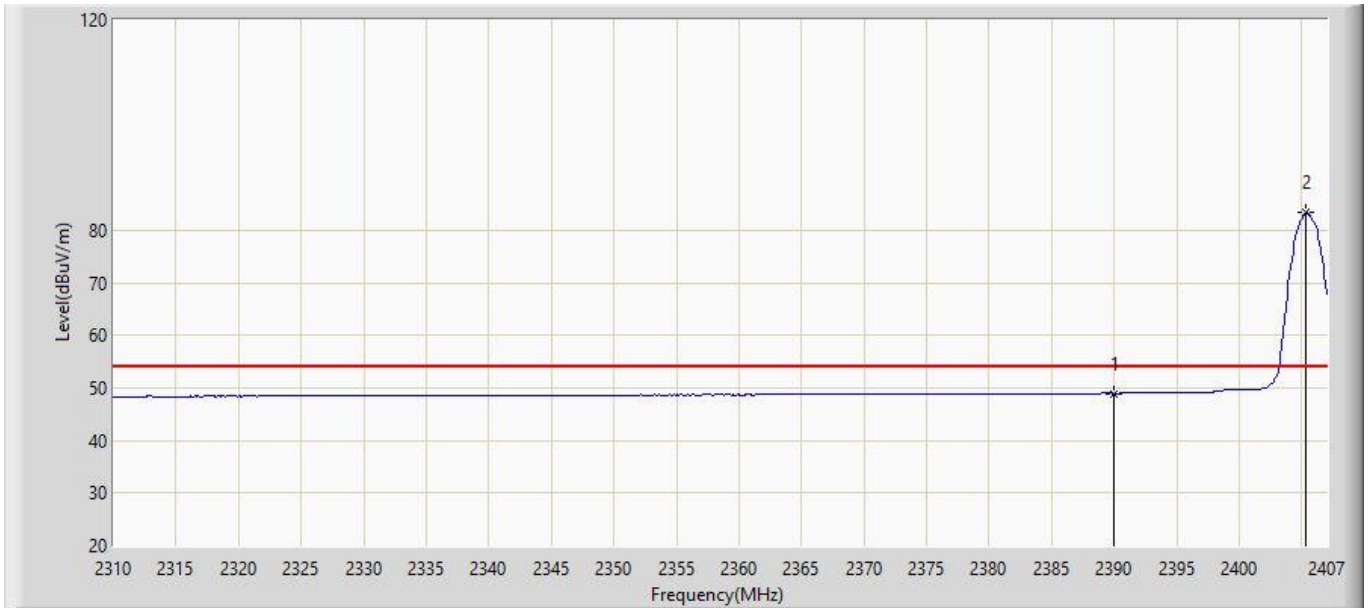

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	48.953	15.842	-5.047	54.000	33.111	AV
2	*	2405.351	83.292	50.118	N/A	N/A	33.174	AV


Note:

$$\text{Measure Level (dB}\mu\text{V/m)} = \text{Reading Level (dB}\mu\text{V)} + \text{Factor (dB)}$$

$$\text{Factor (dB)} = \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)} - \text{Pre_Amplifier Gain (dB)}$$



Engineer: Kerry	
Site: AC102	Time: 2016/08/05 - 13:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D(1-18GHz)	Polarity: Horizontal
EUT: Wireless Adaptor	Power: 120V/60Hz
Note: Mode1: Transmit at 2477.35MHz Ant 1	

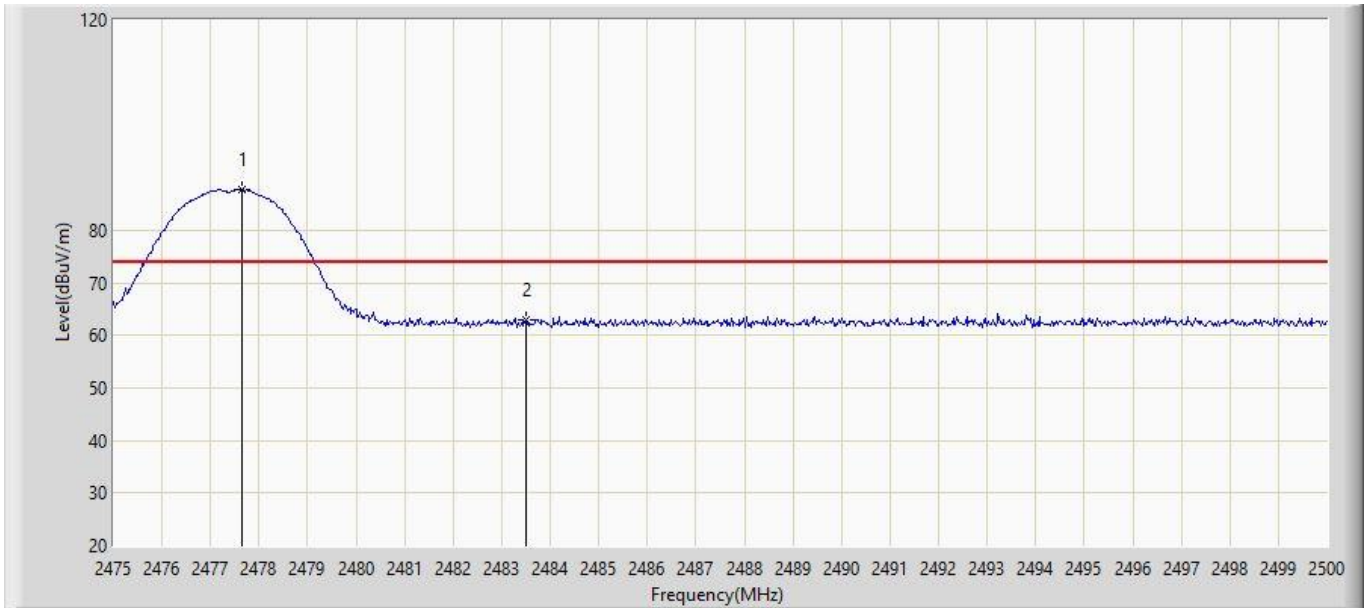

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2477.650	87.776	54.307	N/A	N/A	33.469	PK
2		2483.500	62.888	29.396	-11.112	74.000	33.493	PK


Note:

Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)



Engineer: Kerry	
Site: AC102	Time: 2016/08/05 - 14:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D(1-18GHz)	Polarity: Horizontal
EUT: Wireless Adaptor	Power: 120V/60Hz
Note: Mode1: Transmit at 2477.35MHz Ant 1	

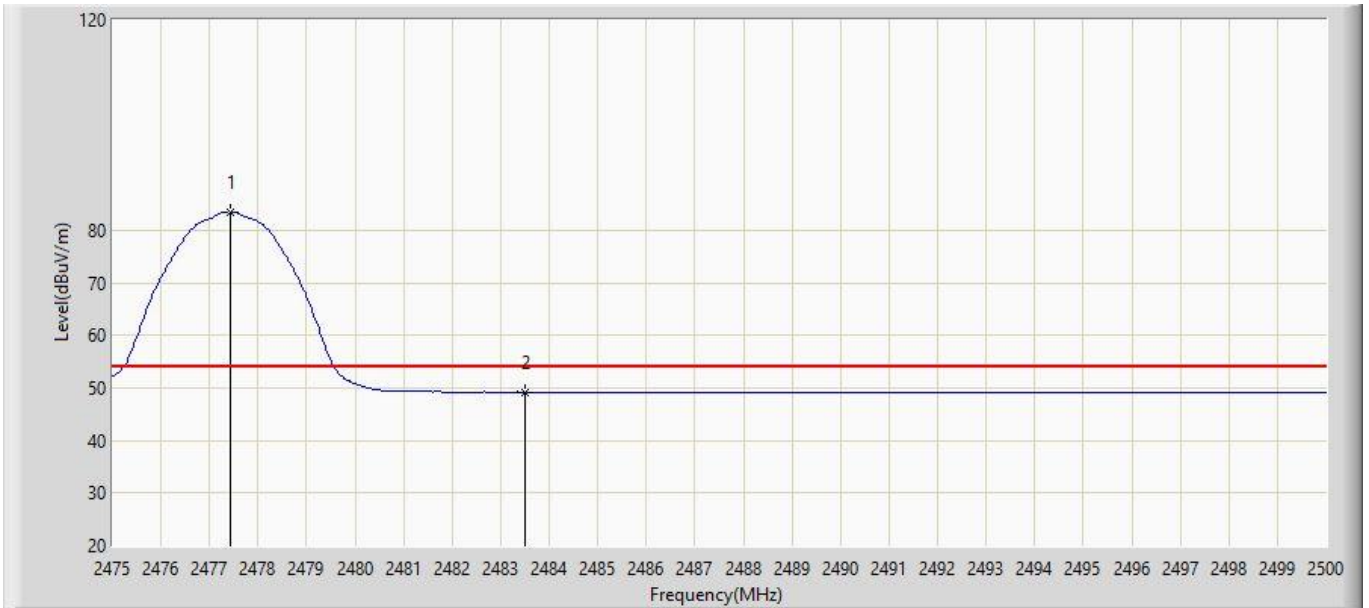

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2477.425	83.543	50.075	N/A	N/A	33.468	AV
2		2483.500	49.196	15.704	-4.804	54.000	33.493	AV


Note:

$$\text{Measure Level (dB}\mu\text{V/m)} = \text{Reading Level (dB}\mu\text{V)} + \text{Factor (dB)}$$

$$\text{Factor (dB)} = \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)} - \text{Pre_Amplifier Gain (dB)}$$



Engineer: Kerry	
Site: AC102	Time: 2016/08/05 - 14:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D(1-18GHz)	Polarity: Vertical
EUT: Wireless Adaptor	Power: 120V/60Hz
Note: Mode1: Transmit at 2477.35MHz Ant 1	

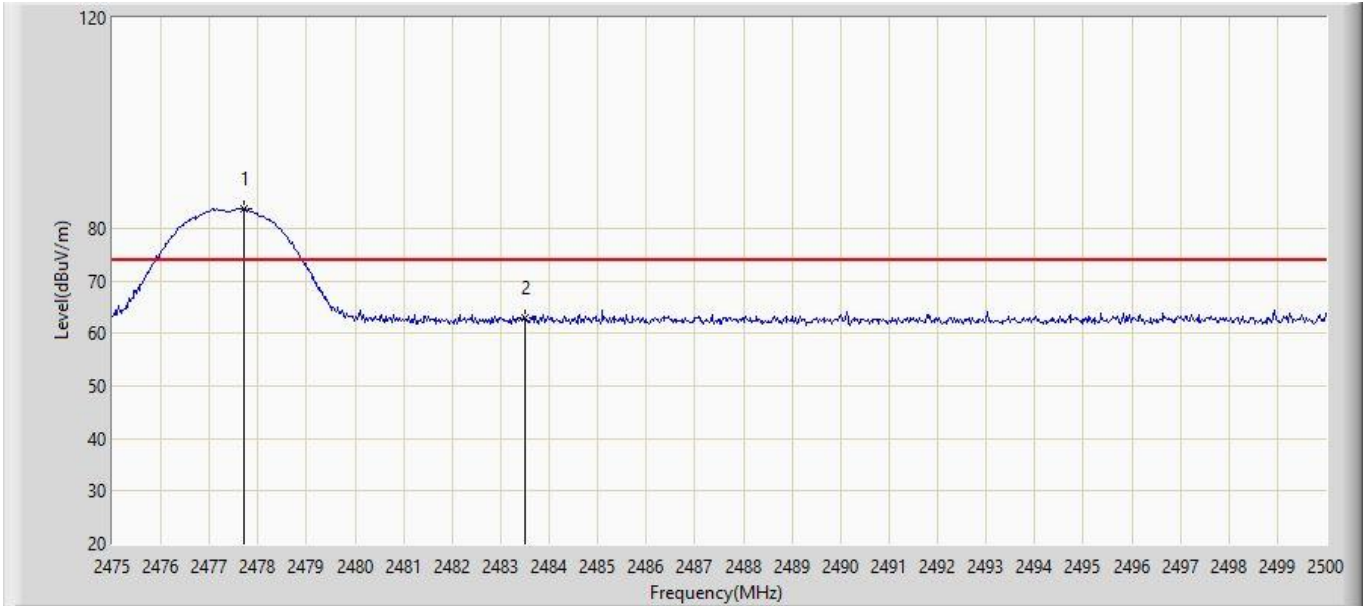

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2477.700	83.608	50.139	N/A	N/A	33.469	PK
2		2483.500	62.896	29.404	-11.104	74.000	33.493	PK


Note:

Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)



Engineer: Kerry	
Site: AC102	Time: 2016/08/05 - 14:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D(1-18GHz)	Polarity: Vertical
EUT: Wireless Adaptor	Power: 120V/60Hz
Note: Mode1: Transmit at 2477.35MHz Ant 1	

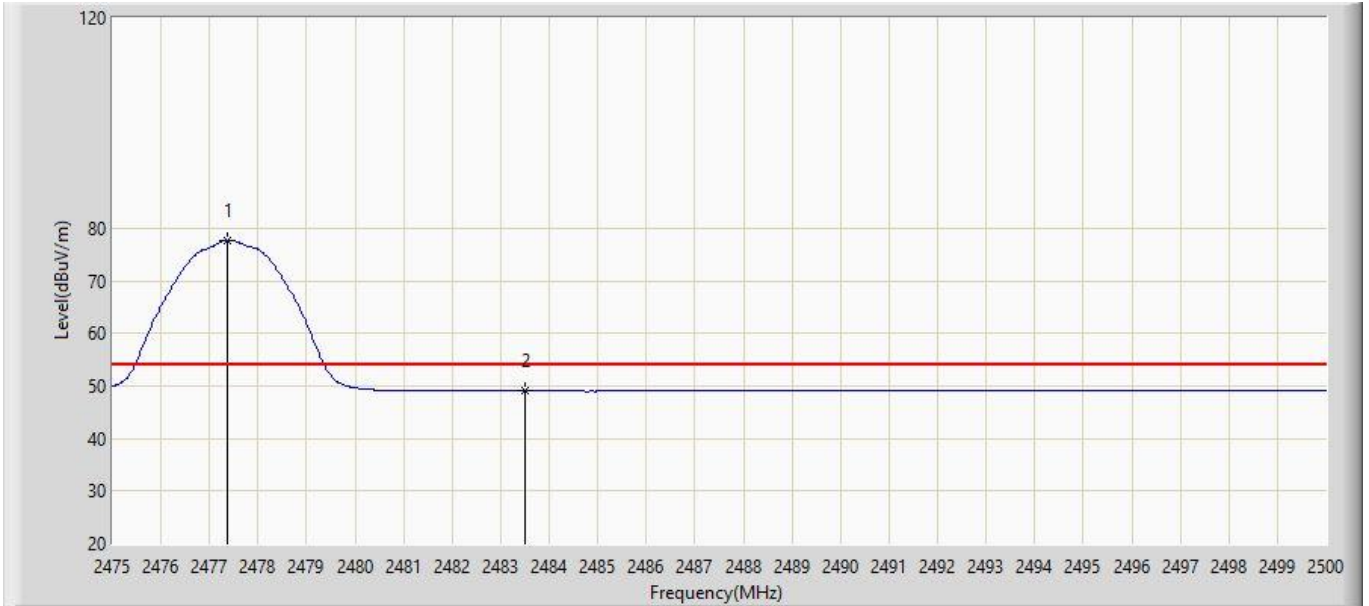

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2477.375	77.705	44.237	N/A	N/A	33.468	AV
2		2483.500	49.081	15.589	-4.919	54.000	33.493	AV

Note:

$$\text{Measure Level (dB}\mu\text{V/m)} = \text{Reading Level (dB}\mu\text{V)} + \text{Factor (dB)}$$

$$\text{Factor (dB)} = \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)} - \text{Pre_Amplifier Gain (dB)}$$



6. 20dB Bandwidth

6.1 Test Limit

- For frequency hopping systems operating in 2400-2483.5 MHz band, no limitation.
- For frequency hopping systems operating in 902-928 MHz band, the maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
- For frequency hopping systems operating in 5725-5850 MHz band, the maximum 20 dB bandwidth of the hopping channel is 1 MHz.



6.2 Test Procedures

According to ANSI C63.10, 2013.

Use the following spectrum analyzer settings:

Span = shall be between two times and five times the OBW

RBW \cong 1% of the 20dB bandwidth

VBW \cong RBW

Sweep = auto

Detector function = peak


Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize.

Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

6.3 Test Setup Layout

Spectrum Analyzer

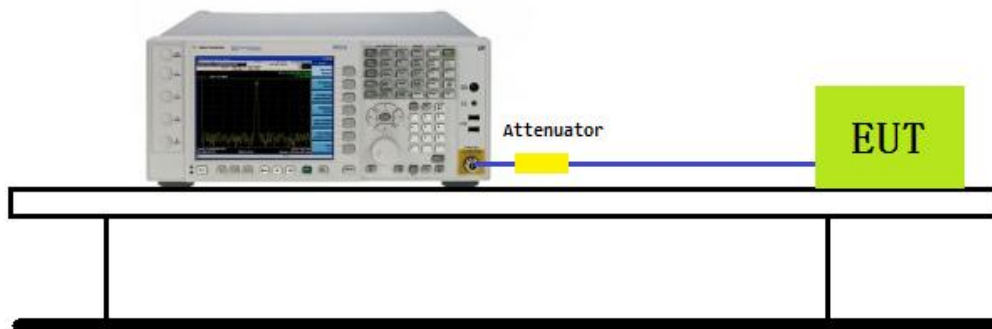

6.4 Measurement Equipment


Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	E4407B	Agilent	MY44211883	2015.10.15	2016.10.14



6.5 Test Result and Data

Test Item	20dB Bandwidth
Test Mode	Transmit
Test Date	2016-08-16

Channel No.	Frequency (MHz)	20dB Measurement Level (MHz)	99% Occupied Bandwidth (MHz)	Result
02	2405.35	2.141	1.918	Pass
19	2439.35	2.131	1.912	Pass
38	2477.35	2.149	1.920	Pass

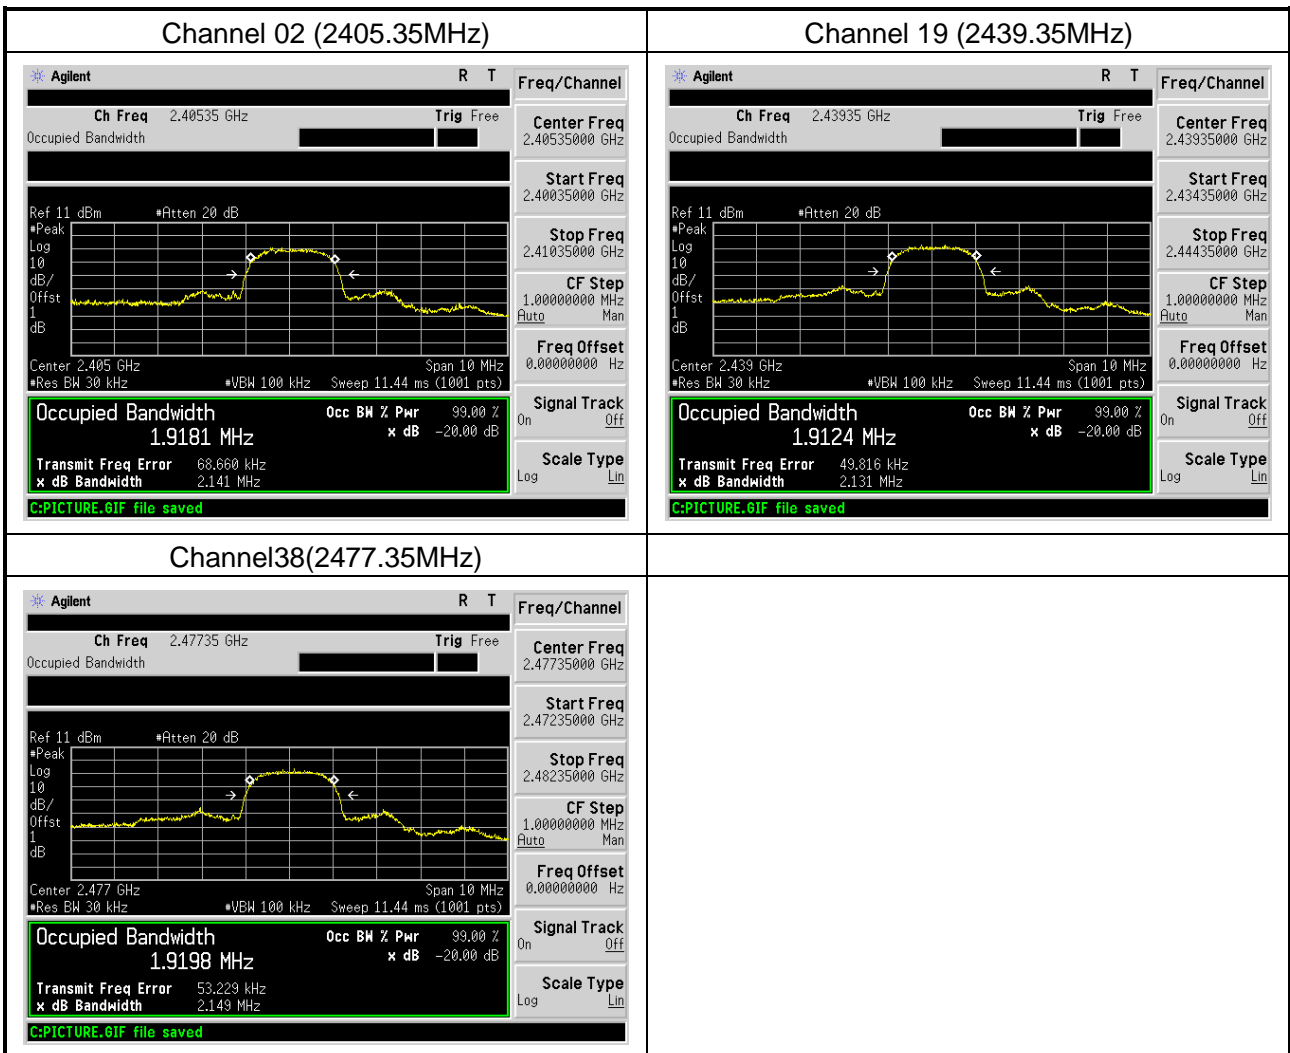



7. Band-Edge Compliance of RF Conducted Emissions

7.1 Test Limit

FCC Part 15.215 (c), Intentional radiators operating under the alternative provisions to the general emission limits as contained in 15.217 through 15.257 and in Subpart E of FCC part 15, must be designed to ensure that 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.



7.2 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation.

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.


Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.



7.3 Test Setup Layout

Conducted

Spectrum Analyzer

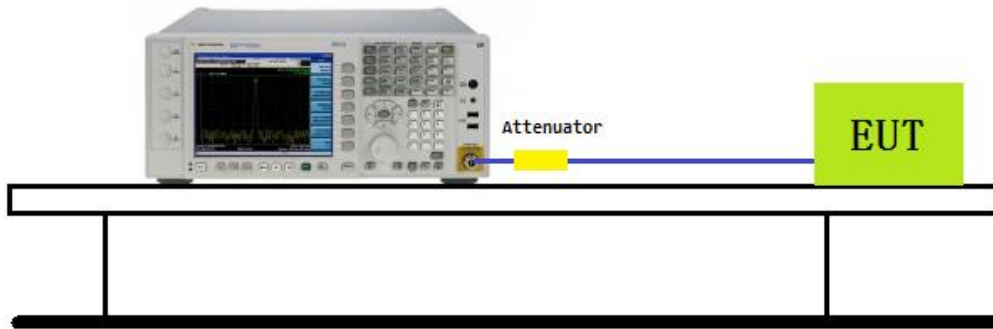



7.4 Measurement Equipment


Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Spectrum Analyzer	E4407B	Agilent	MY44211883	2015.10.15	2016.10.14
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-002	2016.03.31	2017.03.30




7.5 Test Result and Data

Band Edge (20dBc RF Conducted Measurement)

Mode 1: Transmit by (2405.35MHz)

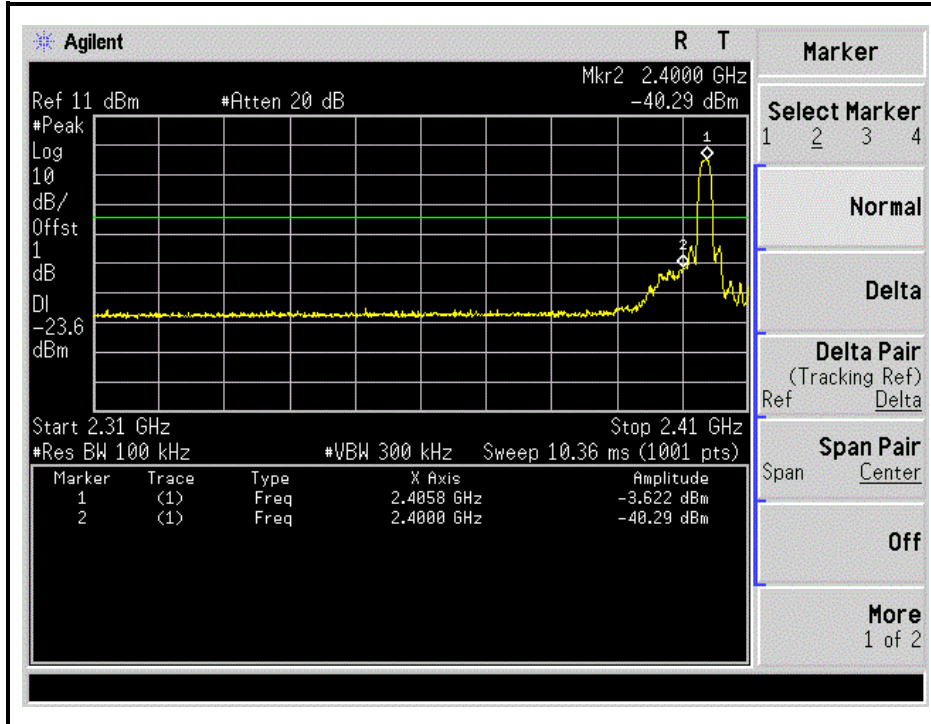

Mode 1: Transmit by (2477.35MHz)

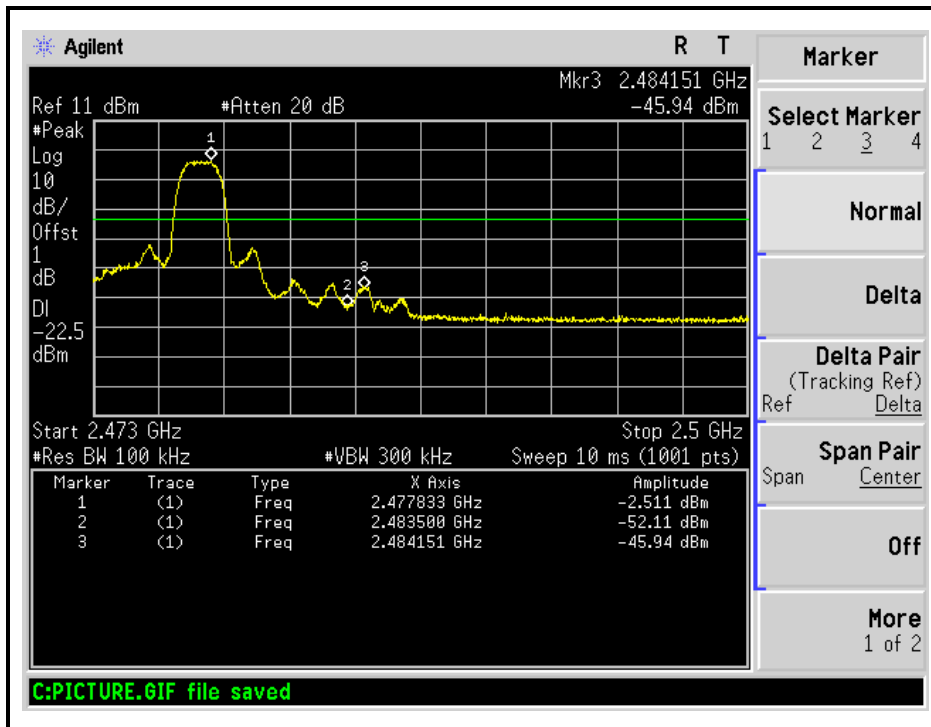



8. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

8.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.