





Mode	27																																																																															
	Band Edge																																																																															
	2400-2483.5_NRF_CH39_2480MHz																																																																															
ANT	3																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.62</td> <td>60.09</td> <td>74.00</td> <td>-13.91</td> <td>43.78</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>100</td> <td>79 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.62	60.09	74.00	-13.91	43.78	32.40	8.88	30.97	6.00	100	79 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>94.74</td> <td>-----</td> <td>-----</td> <td>78.43</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>100</td> <td>79 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	94.74	-----	-----	78.43	32.40	8.88	30.97	6.00	100	79 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2483.62	60.09	74.00	-13.91	43.78	32.40	8.88	30.97	6.00	100	79 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2480.00	94.74	-----	-----	78.43	32.40	8.88	30.97	6.00	100	79 PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.62</td> <td>44.76</td> <td>54.00</td> <td>-9.24</td> <td>28.45</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>100</td> <td>79 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.62	44.76	54.00	-9.24	28.45	32.40	8.88	30.97	6.00	100	79 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>93.81</td> <td>-----</td> <td>-----</td> <td>77.50</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>100</td> <td>79 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	93.81	-----	-----	77.50	32.40	8.88	30.97	6.00	100	79 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2483.62	44.76	54.00	-9.24	28.45	32.40	8.88	30.97	6.00	100	79 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2480.00	93.81	-----	-----	77.50	32.40	8.88	30.97	6.00	100	79 AVERAGE																																																																						



Mode	27																																																																																																																																																																				
	Harmonic																																																																																																																																																																				
	2400-2483.5_NRF_CH39_2480MHz																																																																																																																																																																				
ANT	3																																																																																																																																																																				
Pol.	Horizontal	Vertical																																																																																																																																																																			
Peak Avg																																																																																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>40.56</td> <td>74.00</td> <td>-33.44</td> <td>59.65</td> <td>34.24</td> <td>12.07</td> <td>65.40</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4983.00</td> <td>52.10</td> <td>74.00</td> <td>-21.90</td> <td>71.14</td> <td>34.10</td> <td>12.22</td> <td>65.36</td> <td>0.00</td> <td>100</td> <td>305</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4983.00</td> <td>41.16</td> <td>54.00</td> <td>-12.84</td> <td>60.20</td> <td>34.10</td> <td>12.22</td> <td>65.36</td> <td>0.00</td> <td>100</td> <td>305</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>43.87</td> <td>74.00</td> <td>-30.13</td> <td>58.05</td> <td>35.80</td> <td>15.21</td> <td>65.19</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.56	74.00	-33.44	59.65	34.24	12.07	65.40	0.00	--	--	PEAK	2	4983.00	52.10	74.00	-21.90	71.14	34.10	12.22	65.36	0.00	100	305	PEAK	3	4983.00	41.16	54.00	-12.84	60.20	34.10	12.22	65.36	0.00	100	305	AVERAGE	4	7440.00	43.87	74.00	-30.13	58.05	35.80	15.21	65.19	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>41.82</td> <td>74.00</td> <td>-32.18</td> <td>60.91</td> <td>34.24</td> <td>12.07</td> <td>65.40</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4999.00</td> <td>53.91</td> <td>74.00</td> <td>-20.09</td> <td>72.91</td> <td>34.01</td> <td>12.32</td> <td>65.33</td> <td>0.00</td> <td>100</td> <td>307</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4999.00</td> <td>43.49</td> <td>54.00</td> <td>-10.51</td> <td>62.49</td> <td>34.01</td> <td>12.32</td> <td>65.33</td> <td>0.00</td> <td>100</td> <td>307</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>44.21</td> <td>74.00</td> <td>-29.79</td> <td>58.39</td> <td>35.80</td> <td>15.21</td> <td>65.19</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	41.82	74.00	-32.18	60.91	34.24	12.07	65.40	0.00	--	--	PEAK	2	4999.00	53.91	74.00	-20.09	72.91	34.01	12.32	65.33	0.00	100	307	PEAK	3	4999.00	43.49	54.00	-10.51	62.49	34.01	12.32	65.33	0.00	100	307	AVERAGE	4	7440.00	44.21	74.00	-29.79	58.39	35.80	15.21	65.19	0.00	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																												
1	4960.00	40.56	74.00	-33.44	59.65	34.24	12.07	65.40	0.00	--	--	PEAK																																																																																																																																																									
2	4983.00	52.10	74.00	-21.90	71.14	34.10	12.22	65.36	0.00	100	305	PEAK																																																																																																																																																									
3	4983.00	41.16	54.00	-12.84	60.20	34.10	12.22	65.36	0.00	100	305	AVERAGE																																																																																																																																																									
4	7440.00	43.87	74.00	-30.13	58.05	35.80	15.21	65.19	0.00	--	--	PEAK																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																												
1	4960.00	41.82	74.00	-32.18	60.91	34.24	12.07	65.40	0.00	--	--	PEAK																																																																																																																																																									
2	4999.00	53.91	74.00	-20.09	72.91	34.01	12.32	65.33	0.00	100	307	PEAK																																																																																																																																																									
3	4999.00	43.49	54.00	-10.51	62.49	34.01	12.32	65.33	0.00	100	307	AVERAGE																																																																																																																																																									
4	7440.00	44.21	74.00	-29.79	58.39	35.80	15.21	65.19	0.00	--	--	PEAK																																																																																																																																																									

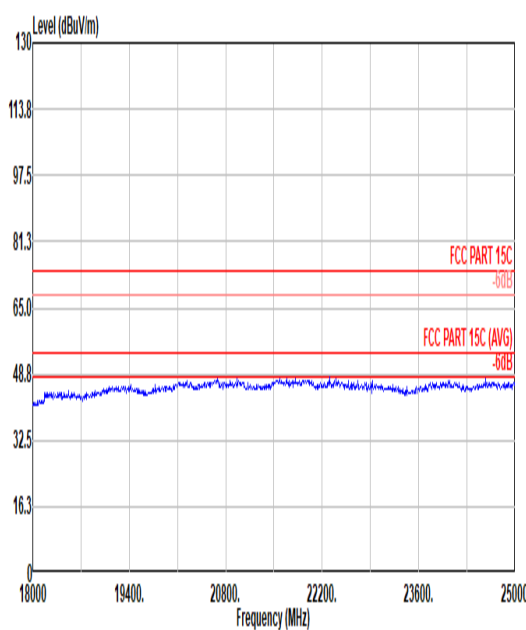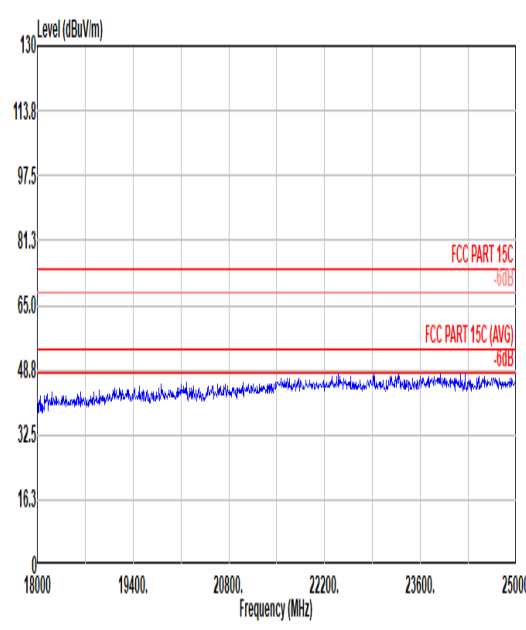

Mode	24	
	18~25GHz	
	2400-2483.5_BLE 2M_CH39_2480MHz	
ANT	3	
Peak Avg		




Mode	24																																																																																																																																																																								
	LF																																																																																																																																																																								
	2400-2483.5_BLE 2M_CH39_2480MHz																																																																																																																																																																								
ANT	3																																																																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																																																																							
Peak QP																																																																																																																																																																									
	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>ReadAntenna Level</th> <th>Antenna Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>35.82</th> <th>36.15</th> <th>40.00</th> <th>-3.85</th> <th>46.83</th> <th>21.28</th> <th>0.76</th> <th>32.72</th> <th>---</th> <th>---</th> <th>Peak</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>62.01</td> <td>36.23</td> <td>40.00</td> <td>-3.77</td> <td>55.95</td> <td>12.20</td> <td>1.18</td> <td>33.10</td> <td>100</td> <td>25</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>91.11</td> <td>31.29</td> <td>43.50</td> <td>-12.21</td> <td>47.44</td> <td>15.02</td> <td>1.45</td> <td>32.62</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>112.45</td> <td>33.81</td> <td>43.50</td> <td>-9.69</td> <td>48.69</td> <td>16.40</td> <td>1.60</td> <td>32.88</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>166.77</td> <td>29.39</td> <td>43.50</td> <td>-14.11</td> <td>43.75</td> <td>16.57</td> <td>1.97</td> <td>32.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>510.15</td> <td>24.24</td> <td>46.00</td> <td>-21.76</td> <td>29.21</td> <td>24.34</td> <td>3.45</td> <td>32.76</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Loss	A/Pos	T/Pos	Remark	1	35.82	36.15	40.00	-3.85	46.83	21.28	0.76	32.72	---	---	Peak	2	62.01	36.23	40.00	-3.77	55.95	12.20	1.18	33.10	100	25	Peak	3	91.11	31.29	43.50	-12.21	47.44	15.02	1.45	32.62	---	---	Peak	4	112.45	33.81	43.50	-9.69	48.69	16.40	1.60	32.88	---	---	Peak	5	166.77	29.39	43.50	-14.11	43.75	16.57	1.97	32.90	---	---	Peak	6	510.15	24.24	46.00	-21.76	29.21	24.34	3.45	32.76	---	---	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>ReadAntenna Level</th> <th>Antenna Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>34.85</th> <th>24.58</th> <th>40.00</th> <th>-15.42</th> <th>35.17</th> <th>21.70</th> <th>0.71</th> <th>33.00</th> <th>---</th> <th>---</th> <th>Peak</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>61.04</td> <td>25.67</td> <td>40.00</td> <td>-14.33</td> <td>45.36</td> <td>12.20</td> <td>1.17</td> <td>33.06</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>114.39</td> <td>33.58</td> <td>43.50</td> <td>-9.92</td> <td>48.59</td> <td>16.44</td> <td>1.62</td> <td>33.07</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>163.86</td> <td>26.88</td> <td>43.50</td> <td>-16.62</td> <td>41.20</td> <td>16.70</td> <td>1.95</td> <td>32.97</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>231.76</td> <td>28.58</td> <td>46.00</td> <td>-17.42</td> <td>41.78</td> <td>17.32</td> <td>2.32</td> <td>32.84</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>488.81</td> <td>22.95</td> <td>46.00</td> <td>-23.05</td> <td>28.13</td> <td>23.87</td> <td>3.38</td> <td>32.43</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Loss	A/Pos	T/Pos	Remark	1	34.85	24.58	40.00	-15.42	35.17	21.70	0.71	33.00	---	---	Peak	2	61.04	25.67	40.00	-14.33	45.36	12.20	1.17	33.06	---	---	Peak	3	114.39	33.58	43.50	-9.92	48.59	16.44	1.62	33.07	---	---	Peak	4	163.86	26.88	43.50	-16.62	41.20	16.70	1.95	32.97	---	---	Peak	5	231.76	28.58	46.00	-17.42	41.78	17.32	2.32	32.84	---	---	Peak	6	488.81	22.95	46.00	-23.05	28.13	23.87	3.38	32.43	---	---
Peak	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Loss	A/Pos	T/Pos	Remark																																																																																																																																																														
1	35.82	36.15	40.00	-3.85	46.83	21.28	0.76	32.72	---	---	Peak																																																																																																																																																														
2	62.01	36.23	40.00	-3.77	55.95	12.20	1.18	33.10	100	25	Peak																																																																																																																																																														
3	91.11	31.29	43.50	-12.21	47.44	15.02	1.45	32.62	---	---	Peak																																																																																																																																																														
4	112.45	33.81	43.50	-9.69	48.69	16.40	1.60	32.88	---	---	Peak																																																																																																																																																														
5	166.77	29.39	43.50	-14.11	43.75	16.57	1.97	32.90	---	---	Peak																																																																																																																																																														
6	510.15	24.24	46.00	-21.76	29.21	24.34	3.45	32.76	---	---	Peak																																																																																																																																																														
Peak	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Loss	A/Pos	T/Pos	Remark																																																																																																																																																														
1	34.85	24.58	40.00	-15.42	35.17	21.70	0.71	33.00	---	---	Peak																																																																																																																																																														
2	61.04	25.67	40.00	-14.33	45.36	12.20	1.17	33.06	---	---	Peak																																																																																																																																																														
3	114.39	33.58	43.50	-9.92	48.59	16.44	1.62	33.07	---	---	Peak																																																																																																																																																														
4	163.86	26.88	43.50	-16.62	41.20	16.70	1.95	32.97	---	---	Peak																																																																																																																																																														
5	231.76	28.58	46.00	-17.42	41.78	17.32	2.32	32.84	---	---	Peak																																																																																																																																																														
6	488.81	22.95	46.00	-23.05	28.13	23.87	3.38	32.43	---	---	Peak																																																																																																																																																														



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
BLE 1Mbps	62.50	0.391	2.556	2.7kHz
BLE 2Mbps	33.33	0.209	4.792	5.1kHz
nRF	62.96	0.394	2.537	2.7kHz

BLE 1Mbps_Ant.3

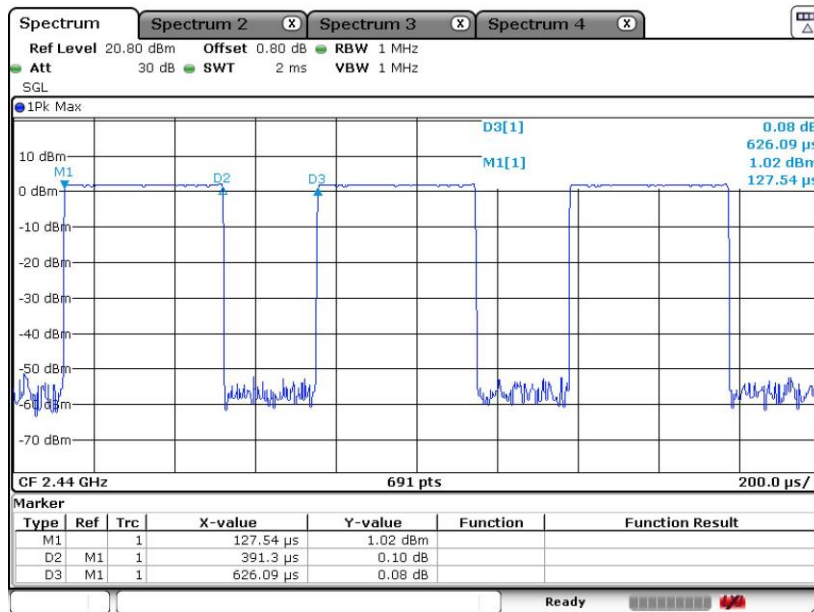



BLE 2Mbps_Ant.3

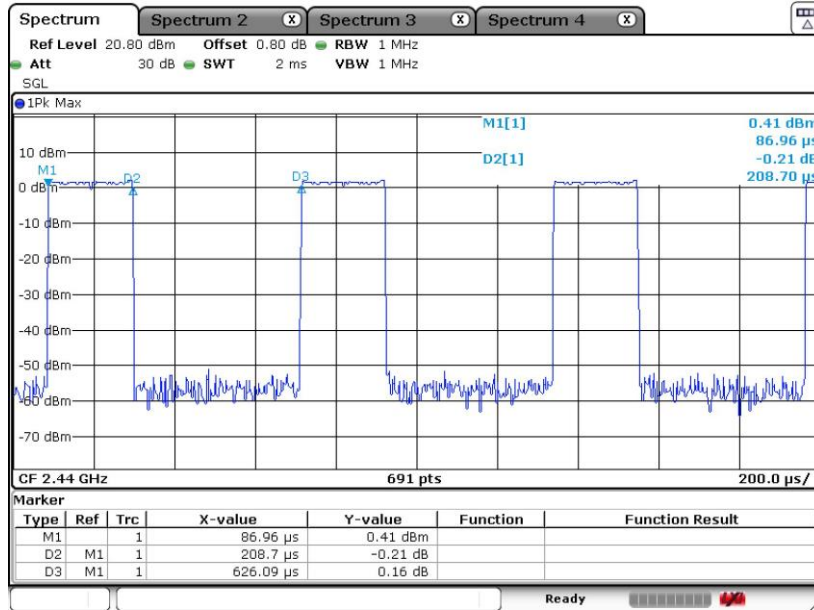

nRF_Ant.3

