






Mode	60																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																									
ANT	1+2																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2024-06-05</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.65</td> <td>53.58</td> <td>111.61</td> <td>-58.03</td> <td>42.10</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>154</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.56</td> <td>53.30</td> <td>105.60</td> <td>-52.30</td> <td>41.83</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>154</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.65</td> <td>50.60</td> <td>68.46</td> <td>-17.86</td> <td>39.15</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>154</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5928.75</td> <td>52.64</td> <td>68.30</td> <td>-15.66</td> <td>41.20</td> <td>35.16</td> <td>8.78</td> <td>32.50</td> <td>154</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.65	53.58	111.61	-58.03	42.10	35.11	8.87	32.50	154	330	PEAK	2	5873.56	53.30	105.60	-52.30	41.83	35.12	8.85	32.50	154	330	PEAK	3	5924.65	50.60	68.46	-17.86	39.15	35.16	8.79	32.50	154	330	PEAK	4	5928.75	52.64	68.30	-15.66	41.20	35.16	8.78	32.50	154	330	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.65	53.58	111.61	-58.03	42.10	35.11	8.87	32.50	154	330	PEAK																																																															
2	5873.56	53.30	105.60	-52.30	41.83	35.12	8.85	32.50	154	330	PEAK																																																															
3	5924.65	50.60	68.46	-17.86	39.15	35.16	8.79	32.50	154	330	PEAK																																																															
4	5928.75	52.64	68.30	-15.66	41.20	35.16	8.78	32.50	154	330	PEAK																																																															



Mode	60																																																																																														
	Harmonic																																																																																														
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																														
ANT	1+2																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p>Date: 2024-06-05</p>	<p>Date: 2024-06-05</p>																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>47.44</td> <td>74.00</td> <td>-26.56</td> <td>55.92</td> <td>37.80</td> <td>11.46</td> <td>57.74</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17265.00</td> <td>45.75</td> <td>68.30</td> <td>-22.55</td> <td>50.18</td> <td>40.32</td> <td>13.18</td> <td>57.93</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11510.00	47.44	74.00	-26.56	55.92	37.80	11.46	57.74	-- -- Peak	2	17265.00	45.75	68.30	-22.55	50.18	40.32	13.18	57.93	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>48.41</td> <td>74.00</td> <td>-25.59</td> <td>56.89</td> <td>37.80</td> <td>11.46</td> <td>57.74</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17265.00</td> <td>49.27</td> <td>68.30</td> <td>-19.03</td> <td>53.70</td> <td>40.32</td> <td>13.18</td> <td>57.93</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11510.00	48.41	74.00	-25.59	56.89	37.80	11.46	57.74	-- -- Peak	2	17265.00	49.27	68.30	-19.03	53.70	40.32	13.18	57.93
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	11510.00	47.44	74.00	-26.56	55.92	37.80	11.46	57.74	-- -- Peak																																																																																						
2	17265.00	45.75	68.30	-22.55	50.18	40.32	13.18	57.93	-- -- Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	11510.00	48.41	74.00	-25.59	56.89	37.80	11.46	57.74	-- -- Peak																																																																																						
2	17265.00	49.27	68.30	-19.03	53.70	40.32	13.18	57.93	-- -- Peak																																																																																						

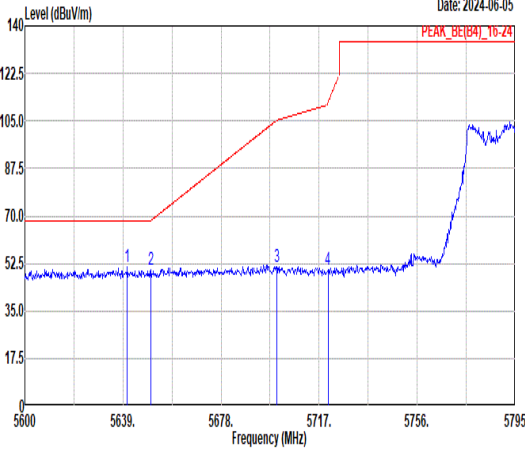
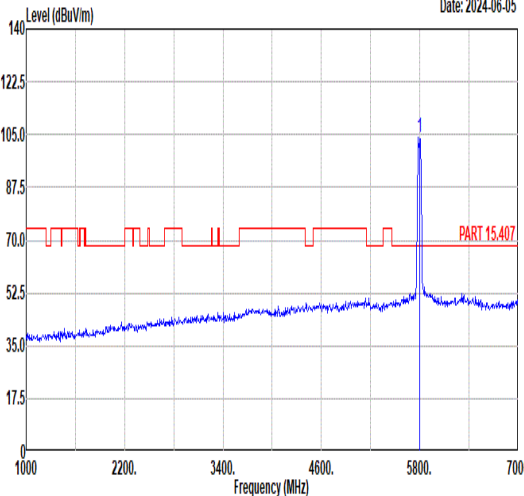
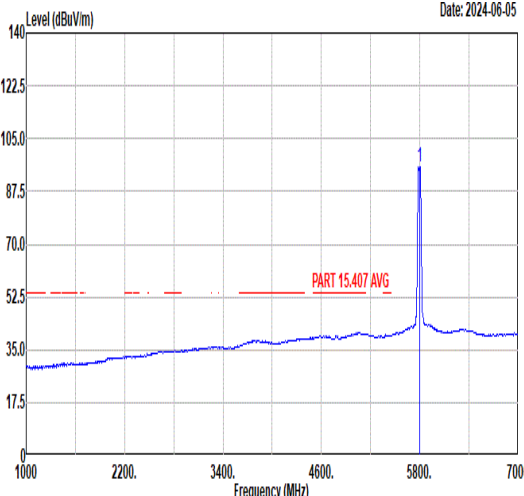


	61																																																																																																				
Mode	Band Edge - L																																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																				
ANT	1+2																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																			
Peak	 <table border="1" data-bbox="268 1070 735 1249"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5640.76</td> <td>50.99</td> <td>68.30</td> <td>-17.31</td> <td>40.15</td> <td>34.98</td> <td>8.36</td> <td>32.50</td> <td>314</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5650.12</td> <td>49.99</td> <td>68.39</td> <td>-18.40</td> <td>39.10</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>314</td> <td>0 PEAK</td> </tr> <tr> <td>3</td> <td>5700.23</td> <td>51.21</td> <td>105.26</td> <td>-54.05</td> <td>40.11</td> <td>35.02</td> <td>8.58</td> <td>32.50</td> <td>314</td> <td>0 PEAK</td> </tr> <tr> <td>4</td> <td>5720.51</td> <td>50.36</td> <td>111.96</td> <td>-61.60</td> <td>39.17</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>314</td> <td>0 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5640.76	50.99	68.30	-17.31	40.15	34.98	8.36	32.50	314	0 PEAK	2	5650.12	49.99	68.39	-18.40	39.10	34.99	8.40	32.50	314	0 PEAK	3	5700.23	51.21	105.26	-54.05	40.11	35.02	8.58	32.50	314	0 PEAK	4	5720.51	50.36	111.96	-61.60	39.17	35.03	8.66	32.50	314	0 PEAK	 <table border="1" data-bbox="911 1126 1378 1249"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>103.86</td> <td>92.44</td> <td>11.42</td> <td>35.06</td> <td>8.86</td> <td>32.50</td> <td>314</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	103.86	92.44	11.42	35.06	8.86	32.50	314	0	PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5640.76	50.99	68.30	-17.31	40.15	34.98	8.36	32.50	314	0 PEAK																																																																																											
2	5650.12	49.99	68.39	-18.40	39.10	34.99	8.40	32.50	314	0 PEAK																																																																																											
3	5700.23	51.21	105.26	-54.05	40.11	35.02	8.58	32.50	314	0 PEAK																																																																																											
4	5720.51	50.36	111.96	-61.60	39.17	35.03	8.66	32.50	314	0 PEAK																																																																																											
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5795.00	103.86	92.44	11.42	35.06	8.86	32.50	314	0	PEAK																																																																																											
Avg	Blank	 <table border="1" data-bbox="911 1803 1378 1926"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>95.86</td> <td>84.35</td> <td>11.51</td> <td>35.09</td> <td>8.92</td> <td>32.50</td> <td>314</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	95.86	84.35	11.51	35.09	8.92	32.50	314	0	AVERAGE																																																																		
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5795.00	95.86	84.35	11.51	35.09	8.92	32.50	314	0	AVERAGE																																																																																											



Mode	61																										
	Band Edge - R																										
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																										
ANT	1+2																										
Pol.	Horizontal	Fundamental																									
Peak	<p>The spectrum plot shows a signal level starting at approximately 105 dBuV/m at 5795 MHz, dropping to about 52 dBuV/m by 5826 MHz, and then remaining relatively flat with minor fluctuations between 5826 MHz and 5950 MHz. A red limit line starts at 140 dBuV/m and slopes downwards to about 70 dBuV/m at 5950 MHz. Four peaks are marked with vertical lines and numbered 1 through 4.</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.99</td> <td>51.77</td> <td>110.83</td> <td>-59.06</td> </tr> <tr> <td>2</td> <td>5873.12</td> <td>52.83</td> <td>105.73</td> <td>-52.90</td> </tr> <tr> <td>3</td> <td>5924.27</td> <td>51.06</td> <td>68.74</td> <td>-17.68</td> </tr> <tr> <td>4</td> <td>5941.01</td> <td>53.18</td> <td>68.30</td> <td>-15.12</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	1	5854.99	51.77	110.83	-59.06	2	5873.12	52.83	105.73	-52.90	3	5924.27	51.06	68.74	-17.68	4	5941.01	53.18	68.30	-15.12	Blank
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)																							
1	5854.99	51.77	110.83	-59.06																							
2	5873.12	52.83	105.73	-52.90																							
3	5924.27	51.06	68.74	-17.68																							
4	5941.01	53.18	68.30	-15.12																							

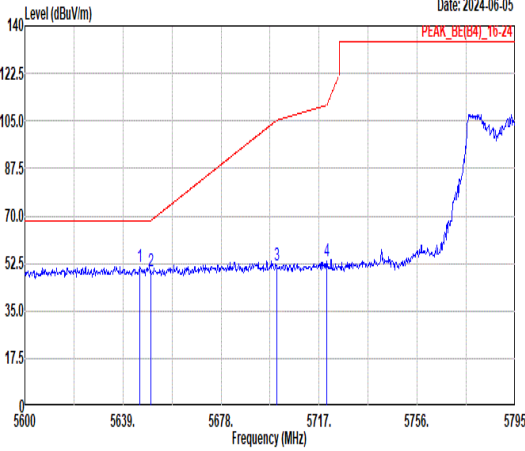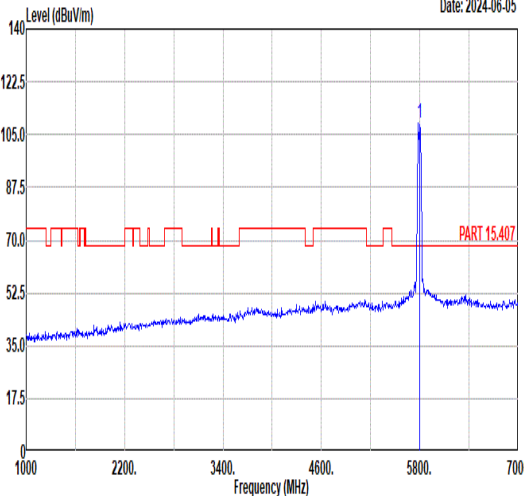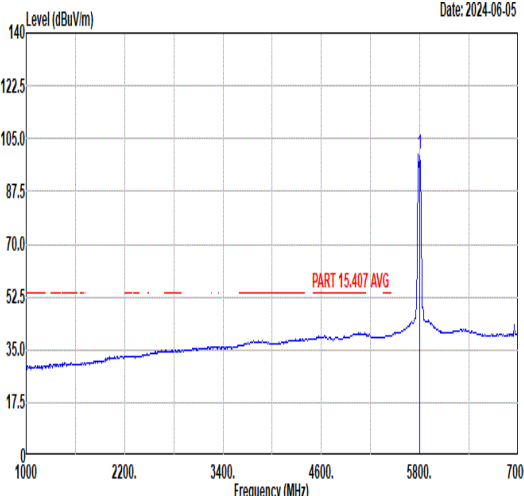

	61																																																																																																																					
Mode	Band Edge - L																																																																																																																					
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																					
ANT	1+2																																																																																																																					
Pol.	Vertical	Fundamental																																																																																																																				
Peak	 <table border="1" data-bbox="268 1070 794 1249"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5645.83</td> <td>51.41</td> <td>68.30</td> <td>-16.89</td> <td>40.54</td> <td>34.99</td> <td>8.38</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.12</td> <td>49.67</td> <td>68.39</td> <td>-18.72</td> <td>38.78</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.04</td> <td>51.88</td> <td>105.21</td> <td>-53.33</td> <td>40.78</td> <td>35.02</td> <td>8.58</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>53.15</td> <td>111.07</td> <td>-57.92</td> <td>41.96</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5645.83	51.41	68.30	-16.89	40.54	34.99	8.38	32.50	164	330	PEAK	2	5650.12	49.67	68.39	-18.72	38.78	34.99	8.40	32.50	164	330	PEAK	3	5700.04	51.88	105.21	-53.33	40.78	35.02	8.58	32.50	164	330	PEAK	4	5720.12	53.15	111.07	-57.92	41.96	35.03	8.66	32.50	164	330	PEAK	 <table border="1" data-bbox="911 1126 1437 1249"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>108.75</td> <td>-----</td> <td>-----</td> <td>97.30</td> <td>35.07</td> <td>8.88</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5795.00	108.75	-----	-----	97.30	35.07	8.88	32.50	164	330	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																													
1	5645.83	51.41	68.30	-16.89	40.54	34.99	8.38	32.50	164	330	PEAK																																																																																																											
2	5650.12	49.67	68.39	-18.72	38.78	34.99	8.40	32.50	164	330	PEAK																																																																																																											
3	5700.04	51.88	105.21	-53.33	40.78	35.02	8.58	32.50	164	330	PEAK																																																																																																											
4	5720.12	53.15	111.07	-57.92	41.96	35.03	8.66	32.50	164	330	PEAK																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																													
1	5795.00	108.75	-----	-----	97.30	35.07	8.88	32.50	164	330	PEAK																																																																																																											
Avg	Blank	 <table border="1" data-bbox="911 1803 1437 1926"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>99.63</td> <td>-----</td> <td>-----</td> <td>88.21</td> <td>35.06</td> <td>8.86</td> <td>32.50</td> <td>164</td> <td>330</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5795.00	99.63	-----	-----	88.21	35.06	8.86	32.50	164	330	AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																													
1	5795.00	99.63	-----	-----	88.21	35.06	8.86	32.50	164	330	AVERAGE																																																																																																											






Mode	61																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																									
ANT	1+2																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2024-06-05</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.99</td> <td>53.25</td> <td>110.83</td> <td>-57.58</td> <td>41.77</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.52</td> <td>53.26</td> <td>105.34</td> <td>-52.08</td> <td>41.79</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.65</td> <td>52.81</td> <td>69.19</td> <td>-16.38</td> <td>41.37</td> <td>35.15</td> <td>8.79</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5928.77</td> <td>54.07</td> <td>68.30</td> <td>-14.23</td> <td>42.63</td> <td>35.16</td> <td>8.78</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.99	53.25	110.83	-57.58	41.77	35.11	8.87	32.50	164	330	PEAK	2	5874.52	53.26	105.34	-52.08	41.79	35.12	8.85	32.50	164	330	PEAK	3	5923.65	52.81	69.19	-16.38	41.37	35.15	8.79	32.50	164	330	PEAK	4	5928.77	54.07	68.30	-14.23	42.63	35.16	8.78	32.50	164	330	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.99	53.25	110.83	-57.58	41.77	35.11	8.87	32.50	164	330	PEAK																																																															
2	5874.52	53.26	105.34	-52.08	41.79	35.12	8.85	32.50	164	330	PEAK																																																															
3	5923.65	52.81	69.19	-16.38	41.37	35.15	8.79	32.50	164	330	PEAK																																																															
4	5928.77	54.07	68.30	-14.23	42.63	35.16	8.78	32.50	164	330	PEAK																																																															



Mode	61																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																	
ANT	1+2																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Data: 1 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>47.41</td> <td>-26.59</td> <td>74.00</td> <td>55.68</td> <td>37.87</td> <td>11.51</td> <td>57.65</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17385.00</td> <td>47.25</td> <td>-21.05</td> <td>68.30</td> <td>51.29</td> <td>40.51</td> <td>13.20</td> <td>57.75</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	11590.00	47.41	-26.59	74.00	55.68	37.87	11.51	57.65	---	---	Peak	2	17385.00	47.25	-21.05	68.30	51.29	40.51	13.20	57.75	---	---	Peak	<p>Data: 2 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>46.34</td> <td>-27.66</td> <td>74.00</td> <td>54.61</td> <td>37.87</td> <td>11.51</td> <td>57.65</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17385.00</td> <td>46.81</td> <td>-21.49</td> <td>68.30</td> <td>50.85</td> <td>40.51</td> <td>13.20</td> <td>57.75</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	11590.00	46.34	-27.66	74.00	54.61	37.87	11.51	57.65	---	---	Peak	2	17385.00	46.81	-21.49	68.30	50.85	40.51	13.20	57.75	---	---	Peak
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																										
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																																											
1	11590.00	47.41	-26.59	74.00	55.68	37.87	11.51	57.65	---	---	Peak																																																																																							
2	17385.00	47.25	-21.05	68.30	51.29	40.51	13.20	57.75	---	---	Peak																																																																																							
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																											
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																																											
1	11590.00	46.34	-27.66	74.00	54.61	37.87	11.51	57.65	---	---	Peak																																																																																							
2	17385.00	46.81	-21.49	68.30	50.85	40.51	13.20	57.75	---	---	Peak																																																																																							

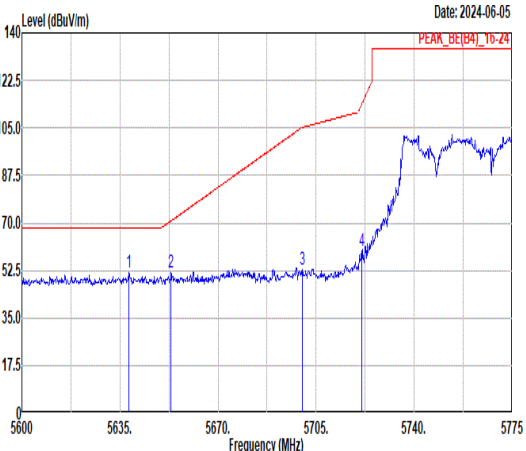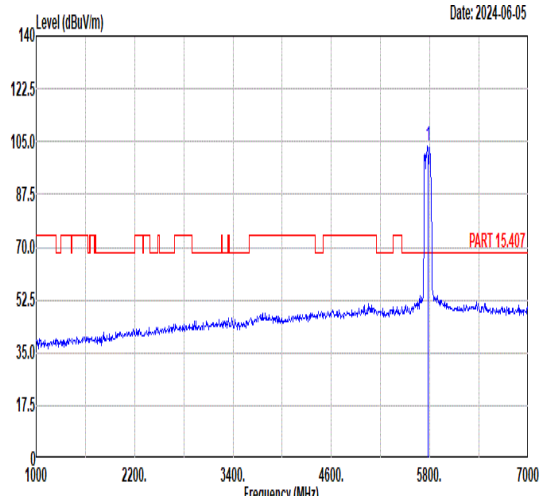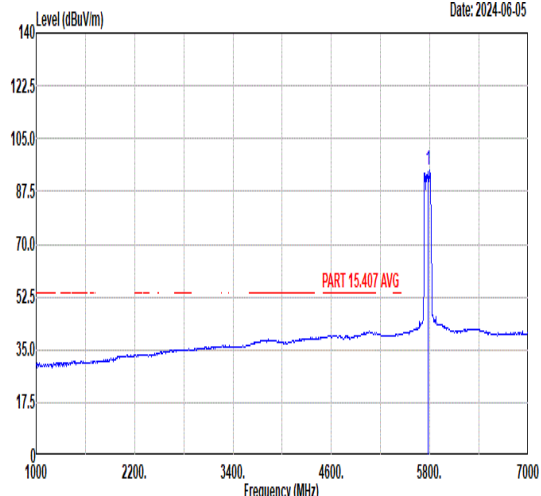

Mode	62																																																																																																								
	Band Edge - L																																																																																																								
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																								
ANT	1+2																																																																																																								
Pol.	Horizontal	Fundamental																																																																																																							
Peak	 <p>Date: 2024-06-05</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5638.15</td> <td>51.60</td> <td>68.30</td> <td>-16.70</td> <td>40.77</td> <td>34.98</td> <td>8.35</td> <td>32.50</td> <td>130</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5653.20</td> <td>51.54</td> <td>70.67</td> <td>-19.13</td> <td>40.64</td> <td>34.99</td> <td>8.41</td> <td>32.50</td> <td>130</td> <td>0 PEAK</td> </tr> <tr> <td>3</td> <td>5700.10</td> <td>52.57</td> <td>105.23</td> <td>-52.66</td> <td>41.47</td> <td>35.02</td> <td>8.58</td> <td>32.50</td> <td>130</td> <td>0 PEAK</td> </tr> <tr> <td>4</td> <td>5721.28</td> <td>59.89</td> <td>113.71</td> <td>-53.82</td> <td>48.70</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>130</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5638.15	51.60	68.30	-16.70	40.77	34.98	8.35	32.50	130	0 PEAK	2	5653.20	51.54	70.67	-19.13	40.64	34.99	8.41	32.50	130	0 PEAK	3	5700.10	52.57	105.23	-52.66	41.47	35.02	8.58	32.50	130	0 PEAK	4	5721.28	59.89	113.71	-53.82	48.70	35.03	8.66	32.50	130	0 PEAK	 <p>Date: 2024-06-05</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>103.48</td> <td>-----</td> <td>-----</td> <td>92.08</td> <td>35.06</td> <td>8.84</td> <td>32.50</td> <td>130</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5775.00	103.48	-----	-----	92.08	35.06	8.84	32.50	130	0 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																		
1	5638.15	51.60	68.30	-16.70	40.77	34.98	8.35	32.50	130	0 PEAK																																																																																															
2	5653.20	51.54	70.67	-19.13	40.64	34.99	8.41	32.50	130	0 PEAK																																																																																															
3	5700.10	52.57	105.23	-52.66	41.47	35.02	8.58	32.50	130	0 PEAK																																																																																															
4	5721.28	59.89	113.71	-53.82	48.70	35.03	8.66	32.50	130	0 PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																		
1	5775.00	103.48	-----	-----	92.08	35.06	8.84	32.50	130	0 PEAK																																																																																															
Avg	Blank	 <p>Date: 2024-06-05</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>94.60</td> <td>-----</td> <td>-----</td> <td>83.09</td> <td>35.08</td> <td>8.93</td> <td>32.50</td> <td>130</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5775.00	94.60	-----	-----	83.09	35.08	8.93	32.50	130	0 AVERAGE																																																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																		
1	5775.00	94.60	-----	-----	83.09	35.08	8.93	32.50	130	0 AVERAGE																																																																																															



Mode	62																																																													
	Band Edge - R																																																													
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																													
ANT	1+2																																																													
Pol.	Horizontal	Fundamental																																																												
Peak	<p>The spectrum plot shows a signal level starting at approximately 105 dBuV/m at 5775 MHz, dropping to about 52 dBuV/m by 5845 MHz. A red limit line is shown at 140 dBuV/m, with a specific peak labeled 'PEAK_BE(B4)_16-24' at approximately 5940 MHz. Four peaks are marked with vertical lines and numbered 1 through 4.</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Gain (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.63</td> <td>52.90</td> <td>111.65</td> <td>-58.75</td> <td>41.42</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>130</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.40</td> <td>54.47</td> <td>105.37</td> <td>-50.90</td> <td>43.00</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>130</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.45</td> <td>51.66</td> <td>68.61</td> <td>-16.95</td> <td>40.21</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>130</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5940.55</td> <td>52.17</td> <td>68.30</td> <td>-16.13</td> <td>40.73</td> <td>35.17</td> <td>8.77</td> <td>32.50</td> <td>130</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	APos (cm)	TPos (deg)	Remark	1	5854.63	52.90	111.65	-58.75	41.42	35.11	8.87	32.50	130	0	PEAK	2	5874.40	54.47	105.37	-50.90	43.00	35.12	8.85	32.50	130	0	PEAK	3	5924.45	51.66	68.61	-16.95	40.21	35.16	8.79	32.50	130	0	PEAK	4	5940.55	52.17	68.30	-16.13	40.73	35.17	8.77	32.50	130	0	PEAK	Blank
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	APos (cm)	TPos (deg)	Remark																																																			
1	5854.63	52.90	111.65	-58.75	41.42	35.11	8.87	32.50	130	0	PEAK																																																			
2	5874.40	54.47	105.37	-50.90	43.00	35.12	8.85	32.50	130	0	PEAK																																																			
3	5924.45	51.66	68.61	-16.95	40.21	35.16	8.79	32.50	130	0	PEAK																																																			
4	5940.55	52.17	68.30	-16.13	40.73	35.17	8.77	32.50	130	0	PEAK																																																			



Mode	62																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																															
ANT	1+2																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5630.63</td> <td>52.71</td> <td>68.30</td> <td>-15.59</td> <td>41.90</td> <td>34.98</td> <td>8.33</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.58</td> <td>52.43</td> <td>68.73</td> <td>-16.30</td> <td>41.54</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.63</td> <td>54.77</td> <td>105.38</td> <td>-50.61</td> <td>43.67</td> <td>35.02</td> <td>8.58</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.05</td> <td>58.84</td> <td>110.91</td> <td>-52.07</td> <td>47.65</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5630.63	52.71	68.30	-15.59	41.90	34.98	8.33	32.50	164	330	PEAK	2	5650.58	52.43	68.73	-16.30	41.54	34.99	8.40	32.50	164	330	PEAK	3	5700.63	54.77	105.38	-50.61	43.67	35.02	8.58	32.50	164	330	PEAK	4	5720.05	58.84	110.91	-52.07	47.65	35.03	8.66	32.50	164	330	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>104.82</td> <td>-----</td> <td>-----</td> <td>93.55</td> <td>35.04</td> <td>8.73</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5775.00	104.82	-----	-----	93.55	35.04	8.73	32.50	164	330	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5630.63	52.71	68.30	-15.59	41.90	34.98	8.33	32.50	164	330	PEAK																																																																																																					
2	5650.58	52.43	68.73	-16.30	41.54	34.99	8.40	32.50	164	330	PEAK																																																																																																					
3	5700.63	54.77	105.38	-50.61	43.67	35.02	8.58	32.50	164	330	PEAK																																																																																																					
4	5720.05	58.84	110.91	-52.07	47.65	35.03	8.66	32.50	164	330	PEAK																																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5775.00	104.82	-----	-----	93.55	35.04	8.73	32.50	164	330	PEAK																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>96.70</td> <td>-----</td> <td>-----</td> <td>85.45</td> <td>35.04</td> <td>8.71</td> <td>32.50</td> <td>164</td> <td>330</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5775.00	96.70	-----	-----	85.45	35.04	8.71	32.50	164	330	AVERAGE																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5775.00	96.70	-----	-----	85.45	35.04	8.71	32.50	164	330	AVERAGE																																																																																																					



Mode	62																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																									
ANT	1+2																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.63</td> <td>54.17</td> <td>111.65</td> <td>-57.48</td> <td>42.69</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.05</td> <td>55.16</td> <td>105.47</td> <td>-50.31</td> <td>43.69</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>52.20</td> <td>68.35</td> <td>-16.15</td> <td>40.75</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5927.95</td> <td>53.96</td> <td>68.30</td> <td>-14.34</td> <td>42.51</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>164</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.63	54.17	111.65	-57.48	42.69	35.11	8.87	32.50	164	330	PEAK	2	5874.05	55.16	105.47	-50.31	43.69	35.12	8.85	32.50	164	330	PEAK	3	5924.80	52.20	68.35	-16.15	40.75	35.16	8.79	32.50	164	330	PEAK	4	5927.95	53.96	68.30	-14.34	42.51	35.16	8.79	32.50	164	330	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.63	54.17	111.65	-57.48	42.69	35.11	8.87	32.50	164	330	PEAK																																																															
2	5874.05	55.16	105.47	-50.31	43.69	35.12	8.85	32.50	164	330	PEAK																																																															
3	5924.80	52.20	68.35	-16.15	40.75	35.16	8.79	32.50	164	330	PEAK																																																															
4	5927.95	53.96	68.30	-14.34	42.51	35.16	8.79	32.50	164	330	PEAK																																																															



Mode	62																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																
ANT	1+2																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-06-05</p>	<p>Date: 2024-06-05</p>																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>47.27</td> <td>74.00</td> <td>-26.73</td> <td>55.64</td> <td>37.84</td> <td>11.48</td> <td>57.69</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>46.72</td> <td>68.30</td> <td>-21.58</td> <td>50.96</td> <td>40.41</td> <td>13.19</td> <td>57.84</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11550.00	47.27	74.00	-26.73	55.64	37.84	11.48	57.69	-- -- Peak	2	17325.00	46.72	68.30	-21.58	50.96	40.41	13.19	57.84	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>47.41</td> <td>74.00</td> <td>-26.59</td> <td>55.78</td> <td>37.84</td> <td>11.48</td> <td>57.69</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>47.53</td> <td>68.30</td> <td>-20.77</td> <td>51.77</td> <td>40.41</td> <td>13.19</td> <td>57.84</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11550.00	47.41	74.00	-26.59	55.78	37.84	11.48	57.69	-- -- Peak	2	17325.00	47.53	68.30	-20.77	51.77	40.41	13.19	57.84
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11550.00	47.27	74.00	-26.73	55.64	37.84	11.48	57.69	-- -- Peak																																																																																								
2	17325.00	46.72	68.30	-21.58	50.96	40.41	13.19	57.84	-- -- Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11550.00	47.41	74.00	-26.59	55.78	37.84	11.48	57.69	-- -- Peak																																																																																								
2	17325.00	47.53	68.30	-20.77	51.77	40.41	13.19	57.84	-- -- Peak																																																																																								



Mode	63																																																																																																															
	Band Edge																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU26/0_5745MHz																																																																																																															
ANT	1+2																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	<p>Date: 2024-06-05</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5648.00</td> <td>50.53</td> <td>68.30</td> <td>-17.77</td> <td>39.65</td> <td>34.99</td> <td>8.39</td> <td>32.50</td> <td>102</td> <td>348</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.03</td> <td>49.11</td> <td>68.32</td> <td>-19.21</td> <td>38.22</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>102</td> <td>348</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.49</td> <td>49.38</td> <td>105.34</td> <td>-55.96</td> <td>38.28</td> <td>35.02</td> <td>8.58</td> <td>32.50</td> <td>102</td> <td>348</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.06</td> <td>49.52</td> <td>110.94</td> <td>-61.42</td> <td>38.33</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>102</td> <td>348</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5648.00	50.53	68.30	-17.77	39.65	34.99	8.39	32.50	102	348	PEAK	2	5650.03	49.11	68.32	-19.21	38.22	34.99	8.40	32.50	102	348	PEAK	3	5700.49	49.38	105.34	-55.96	38.28	35.02	8.58	32.50	102	348	PEAK	4	5720.06	49.52	110.94	-61.42	38.33	35.03	8.66	32.50	102	348	PEAK	<p>Date: 2024-06-05</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>107.46</td> <td>-----</td> <td>-----</td> <td>96.21</td> <td>35.04</td> <td>8.71</td> <td>32.50</td> <td>102</td> <td>348</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	107.46	-----	-----	96.21	35.04	8.71	32.50	102	348	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5648.00	50.53	68.30	-17.77	39.65	34.99	8.39	32.50	102	348	PEAK																																																																																																					
2	5650.03	49.11	68.32	-19.21	38.22	34.99	8.40	32.50	102	348	PEAK																																																																																																					
3	5700.49	49.38	105.34	-55.96	38.28	35.02	8.58	32.50	102	348	PEAK																																																																																																					
4	5720.06	49.52	110.94	-61.42	38.33	35.03	8.66	32.50	102	348	PEAK																																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5745.00	107.46	-----	-----	96.21	35.04	8.71	32.50	102	348	PEAK																																																																																																					
Avg	Blank	<p>Date: 2024-06-05</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.38</td> <td>-----</td> <td>-----</td> <td>89.13</td> <td>35.04</td> <td>8.71</td> <td>32.50</td> <td>102</td> <td>348</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	100.38	-----	-----	89.13	35.04	8.71	32.50	102	348	AVERAGE																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5745.00	100.38	-----	-----	89.13	35.04	8.71	32.50	102	348	AVERAGE																																																																																																					



Mode	63																																																																																																													
	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU26/0_5745MHz																																																																																																													
ANT	1+2																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5629.73</td> <td>50.71</td> <td>68.30</td> <td>-17.59</td> <td>39.91</td> <td>34.98</td> <td>8.32</td> <td>32.50</td> <td>100</td> <td>332</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.03</td> <td>48.16</td> <td>68.32</td> <td>-20.16</td> <td>37.27</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>100</td> <td>332</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.78</td> <td>49.23</td> <td>105.42</td> <td>-56.19</td> <td>38.13</td> <td>35.02</td> <td>8.58</td> <td>32.50</td> <td>100</td> <td>332</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.21</td> <td>49.01</td> <td>111.27</td> <td>-62.26</td> <td>37.82</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>100</td> <td>332</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5629.73	50.71	68.30	-17.59	39.91	34.98	8.32	32.50	100	332	PEAK	2	5650.03	48.16	68.32	-20.16	37.27	34.99	8.40	32.50	100	332	PEAK	3	5700.78	49.23	105.42	-56.19	38.13	35.02	8.58	32.50	100	332	PEAK	4	5720.21	49.01	111.27	-62.26	37.82	35.03	8.66	32.50	100	332	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>105.17</td> <td>-----</td> <td>-----</td> <td>93.92</td> <td>35.04</td> <td>8.71</td> <td>32.50</td> <td>100</td> <td>332</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5745.00	105.17	-----	-----	93.92	35.04	8.71	32.50	100	332	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5629.73	50.71	68.30	-17.59	39.91	34.98	8.32	32.50	100	332	PEAK																																																																																																			
2	5650.03	48.16	68.32	-20.16	37.27	34.99	8.40	32.50	100	332	PEAK																																																																																																			
3	5700.78	49.23	105.42	-56.19	38.13	35.02	8.58	32.50	100	332	PEAK																																																																																																			
4	5720.21	49.01	111.27	-62.26	37.82	35.03	8.66	32.50	100	332	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5745.00	105.17	-----	-----	93.92	35.04	8.71	32.50	100	332	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>96.87</td> <td>-----</td> <td>-----</td> <td>85.62</td> <td>35.04</td> <td>8.71</td> <td>32.50</td> <td>100</td> <td>332</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5745.00	96.87	-----	-----	85.62	35.04	8.71	32.50	100	332	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5745.00	96.87	-----	-----	85.62	35.04	8.71	32.50	100	332	AVERAGE																																																																																																			



Mode	64																																																																																																													
	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU26/8_5825MHz																																																																																																													
ANT	1+2																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>49.60</td> <td>110.80</td> <td>-61.20</td> <td>38.12</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>102</td> <td>348</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5872.88</td> <td>50.40</td> <td>105.79</td> <td>-55.39</td> <td>38.93</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>102</td> <td>348</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5925.00</td> <td>50.18</td> <td>68.20</td> <td>-18.02</td> <td>38.73</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>102</td> <td>348</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5939.75</td> <td>51.19</td> <td>68.30</td> <td>-17.11</td> <td>39.76</td> <td>35.16</td> <td>8.77</td> <td>32.50</td> <td>102</td> <td>348</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5855.00	49.60	110.80	-61.20	38.12	35.11	8.87	32.50	102	348	PEAK	2	5872.88	50.40	105.79	-55.39	38.93	35.12	8.85	32.50	102	348	PEAK	3	5925.00	50.18	68.20	-18.02	38.73	35.16	8.79	32.50	102	348	PEAK	4	5939.75	51.19	68.30	-17.11	39.76	35.16	8.77	32.50	102	348	PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>106.56</td> <td>-----</td> <td>-----</td> <td>95.07</td> <td>35.10</td> <td>8.89</td> <td>32.50</td> <td>102</td> <td>348</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5825.00	106.56	-----	-----	95.07	35.10	8.89	32.50	102	348	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5855.00	49.60	110.80	-61.20	38.12	35.11	8.87	32.50	102	348	PEAK																																																																																																			
2	5872.88	50.40	105.79	-55.39	38.93	35.12	8.85	32.50	102	348	PEAK																																																																																																			
3	5925.00	50.18	68.20	-18.02	38.73	35.16	8.79	32.50	102	348	PEAK																																																																																																			
4	5939.75	51.19	68.30	-17.11	39.76	35.16	8.77	32.50	102	348	PEAK																																																																																																			
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5825.00	106.56	-----	-----	95.07	35.10	8.89	32.50	102	348	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.44</td> <td>-----</td> <td>-----</td> <td>87.95</td> <td>35.10</td> <td>8.89</td> <td>32.50</td> <td>102</td> <td>348</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5825.00	99.44	-----	-----	87.95	35.10	8.89	32.50	102	348	AVERAGE																																																																								
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5825.00	99.44	-----	-----	87.95	35.10	8.89	32.50	102	348	AVERAGE																																																																																																			



Mode	64																																																																																																													
	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU26/8_5825MHz																																																																																																													
ANT	1+2																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.88</td> <td>50.43</td> <td>111.08</td> <td>-60.65</td> <td>38.95</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>103</td> <td>345</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.63</td> <td>51.76</td> <td>105.30</td> <td>-53.54</td> <td>40.29</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>103</td> <td>345</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.63</td> <td>50.22</td> <td>68.48</td> <td>-18.26</td> <td>38.77</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>103</td> <td>345</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5939.50</td> <td>50.75</td> <td>68.30</td> <td>-17.55</td> <td>39.32</td> <td>35.16</td> <td>8.77</td> <td>32.50</td> <td>103</td> <td>345</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5854.88	50.43	111.08	-60.65	38.95	35.11	8.87	32.50	103	345	PEAK	2	5874.63	51.76	105.30	-53.54	40.29	35.12	8.85	32.50	103	345	PEAK	3	5924.63	50.22	68.48	-18.26	38.77	35.16	8.79	32.50	103	345	PEAK	4	5939.50	50.75	68.30	-17.55	39.32	35.16	8.77	32.50	103	345	PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.81</td> <td>-----</td> <td>-----</td> <td>96.32</td> <td>35.10</td> <td>8.89</td> <td>32.50</td> <td>103</td> <td>345</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5825.00	107.81	-----	-----	96.32	35.10	8.89	32.50	103	345	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5854.88	50.43	111.08	-60.65	38.95	35.11	8.87	32.50	103	345	PEAK																																																																																																			
2	5874.63	51.76	105.30	-53.54	40.29	35.12	8.85	32.50	103	345	PEAK																																																																																																			
3	5924.63	50.22	68.48	-18.26	38.77	35.16	8.79	32.50	103	345	PEAK																																																																																																			
4	5939.50	50.75	68.30	-17.55	39.32	35.16	8.77	32.50	103	345	PEAK																																																																																																			
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5825.00	107.81	-----	-----	96.32	35.10	8.89	32.50	103	345	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.08</td> <td>-----</td> <td>-----</td> <td>89.59</td> <td>35.10</td> <td>8.89</td> <td>32.50</td> <td>103</td> <td>345</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5825.00	101.08	-----	-----	89.59	35.10	8.89	32.50	103	345	AVERAGE																																																																								
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5825.00	101.08	-----	-----	89.59	35.10	8.89	32.50	103	345	AVERAGE																																																																																																			



Mode	65																																																																																																													
	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU52/37_5745MHz																																																																																																													
ANT	1+2																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5640.75</td> <td>50.53</td> <td>68.30</td> <td>-17.77</td> <td>39.69</td> <td>34.98</td> <td>8.36</td> <td>32.50</td> <td>102</td> <td>347</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.33</td> <td>49.51</td> <td>69.29</td> <td>-19.78</td> <td>38.62</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>102</td> <td>347</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.49</td> <td>50.73</td> <td>105.34</td> <td>-54.61</td> <td>39.63</td> <td>35.02</td> <td>8.58</td> <td>32.50</td> <td>102</td> <td>347</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.21</td> <td>50.23</td> <td>111.27</td> <td>-61.04</td> <td>39.04</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>102</td> <td>347</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5640.75	50.53	68.30	-17.77	39.69	34.98	8.36	32.50	102	347	PEAK	2	5651.33	49.51	69.29	-19.78	38.62	34.99	8.40	32.50	102	347	PEAK	3	5700.49	50.73	105.34	-54.61	39.63	35.02	8.58	32.50	102	347	PEAK	4	5720.21	50.23	111.27	-61.04	39.04	35.03	8.66	32.50	102	347	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>110.22</td> <td>-----</td> <td>-----</td> <td>98.95</td> <td>35.04</td> <td>8.73</td> <td>32.50</td> <td>102</td> <td>347</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5745.00	110.22	-----	-----	98.95	35.04	8.73	32.50	102	347	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5640.75	50.53	68.30	-17.77	39.69	34.98	8.36	32.50	102	347	PEAK																																																																																																			
2	5651.33	49.51	69.29	-19.78	38.62	34.99	8.40	32.50	102	347	PEAK																																																																																																			
3	5700.49	50.73	105.34	-54.61	39.63	35.02	8.58	32.50	102	347	PEAK																																																																																																			
4	5720.21	50.23	111.27	-61.04	39.04	35.03	8.66	32.50	102	347	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5745.00	110.22	-----	-----	98.95	35.04	8.73	32.50	102	347	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>101.37</td> <td>-----</td> <td>-----</td> <td>90.12</td> <td>35.04</td> <td>8.71</td> <td>32.50</td> <td>102</td> <td>347</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5745.00	101.37	-----	-----	90.12	35.04	8.71	32.50	102	347	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5745.00	101.37	-----	-----	90.12	35.04	8.71	32.50	102	347	AVERAGE																																																																																																			



Mode	65																																																																																																															
	Band Edge																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU52/37_5745MHz																																																																																																															
ANT	1+2																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	<p>Date: 2024-06-05</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5641.62</td> <td>51.00</td> <td>68.30</td> <td>-17.30</td> <td>40.15</td> <td>34.98</td> <td>8.37</td> <td>32.50</td> <td>115</td> <td>334</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.61</td> <td>51.00</td> <td>68.75</td> <td>-17.75</td> <td>40.11</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>115</td> <td>334</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.05</td> <td>49.42</td> <td>105.21</td> <td>-55.79</td> <td>38.32</td> <td>35.02</td> <td>8.58</td> <td>32.50</td> <td>115</td> <td>334</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.50</td> <td>50.51</td> <td>111.93</td> <td>-61.42</td> <td>39.32</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>115</td> <td>334</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5641.62	51.00	68.30	-17.30	40.15	34.98	8.37	32.50	115	334	PEAK	2	5650.61	51.00	68.75	-17.75	40.11	34.99	8.40	32.50	115	334	PEAK	3	5700.05	49.42	105.21	-55.79	38.32	35.02	8.58	32.50	115	334	PEAK	4	5720.50	50.51	111.93	-61.42	39.32	35.03	8.66	32.50	115	334	PEAK	<p>Date: 2024-06-05</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>107.59</td> <td>-----</td> <td>-----</td> <td>96.32</td> <td>35.04</td> <td>8.73</td> <td>32.50</td> <td>115</td> <td>334</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	107.59	-----	-----	96.32	35.04	8.73	32.50	115	334	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5641.62	51.00	68.30	-17.30	40.15	34.98	8.37	32.50	115	334	PEAK																																																																																																					
2	5650.61	51.00	68.75	-17.75	40.11	34.99	8.40	32.50	115	334	PEAK																																																																																																					
3	5700.05	49.42	105.21	-55.79	38.32	35.02	8.58	32.50	115	334	PEAK																																																																																																					
4	5720.50	50.51	111.93	-61.42	39.32	35.03	8.66	32.50	115	334	PEAK																																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5745.00	107.59	-----	-----	96.32	35.04	8.73	32.50	115	334	PEAK																																																																																																					
Avg	Blank	<p>Date: 2024-06-05</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>99.65</td> <td>-----</td> <td>-----</td> <td>88.38</td> <td>35.04</td> <td>8.73</td> <td>32.50</td> <td>115</td> <td>334</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	99.65	-----	-----	88.38	35.04	8.73	32.50	115	334	AVERAGE																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5745.00	99.65	-----	-----	88.38	35.04	8.73	32.50	115	334	AVERAGE																																																																																																					



Mode	66																																																																																																											
	Band Edge																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU52/40_5825MHz																																																																																																											
ANT	1+2																																																																																																											
Pol.	Horizontal	Fundamental																																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.88</td> <td>50.25</td> <td>111.08</td> <td>-60.83</td> <td>38.77</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>104</td> <td>352</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.63</td> <td>50.07</td> <td>105.30</td> <td>-55.23</td> <td>38.60</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>104</td> <td>352</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.50</td> <td>49.80</td> <td>68.57</td> <td>-18.77</td> <td>38.35</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>104</td> <td>352</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5940.50</td> <td>50.89</td> <td>68.30</td> <td>-17.41</td> <td>39.45</td> <td>35.17</td> <td>8.77</td> <td>32.50</td> <td>104</td> <td>352</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5854.88	50.25	111.08	-60.83	38.77	35.11	8.87	32.50	104	352	PEAK	2	5874.63	50.07	105.30	-55.23	38.60	35.12	8.85	32.50	104	352	PEAK	3	5924.50	49.80	68.57	-18.77	38.35	35.16	8.79	32.50	104	352	PEAK	4	5940.50	50.89	68.30	-17.41	39.45	35.17	8.77	32.50	104	352	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>108.23</td> <td>-----</td> <td>-----</td> <td>96.73</td> <td>35.10</td> <td>8.90</td> <td>32.50</td> <td>104</td> <td>352</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5825.00	108.23	-----	-----	96.73	35.10	8.90	32.50	104	352	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																				
1	5854.88	50.25	111.08	-60.83	38.77	35.11	8.87	32.50	104	352	PEAK																																																																																																	
2	5874.63	50.07	105.30	-55.23	38.60	35.12	8.85	32.50	104	352	PEAK																																																																																																	
3	5924.50	49.80	68.57	-18.77	38.35	35.16	8.79	32.50	104	352	PEAK																																																																																																	
4	5940.50	50.89	68.30	-17.41	39.45	35.17	8.77	32.50	104	352	PEAK																																																																																																	
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																				
1	5825.00	108.23	-----	-----	96.73	35.10	8.90	32.50	104	352	PEAK																																																																																																	
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.39</td> <td>-----</td> <td>-----</td> <td>88.89</td> <td>35.10</td> <td>8.90</td> <td>32.50</td> <td>104</td> <td>352</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5825.00	100.39	-----	-----	88.89	35.10	8.90	32.50	104	352	AVERAGE																																																																							
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																				
1	5825.00	100.39	-----	-----	88.89	35.10	8.90	32.50	104	352	AVERAGE																																																																																																	



Mode	66																																																																																																													
	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU52/40_5825MHz																																																																																																													
ANT	1+2																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.38</td> <td>51.55</td> <td>112.22</td> <td>-60.67</td> <td>40.07</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>103</td> <td>345</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.00</td> <td>51.47</td> <td>105.76</td> <td>-54.29</td> <td>40.00</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>103</td> <td>345</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.00</td> <td>50.81</td> <td>68.94</td> <td>-18.13</td> <td>39.37</td> <td>35.15</td> <td>8.79</td> <td>32.50</td> <td>103</td> <td>345</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5931.88</td> <td>51.00</td> <td>68.30</td> <td>-17.30</td> <td>39.56</td> <td>35.16</td> <td>8.78</td> <td>32.50</td> <td>103</td> <td>345</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.38	51.55	112.22	-60.67	40.07	35.11	8.87	32.50	103	345	PEAK	2	5873.00	51.47	105.76	-54.29	40.00	35.12	8.85	32.50	103	345	PEAK	3	5924.00	50.81	68.94	-18.13	39.37	35.15	8.79	32.50	103	345	PEAK	4	5931.88	51.00	68.30	-17.30	39.56	35.16	8.78	32.50	103	345	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>109.70</td> <td>-----</td> <td>-----</td> <td>98.21</td> <td>35.10</td> <td>8.89</td> <td>32.50</td> <td>103</td> <td>345</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	109.70	-----	-----	98.21	35.10	8.89	32.50	103	345	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5854.38	51.55	112.22	-60.67	40.07	35.11	8.87	32.50	103	345	PEAK																																																																																																			
2	5873.00	51.47	105.76	-54.29	40.00	35.12	8.85	32.50	103	345	PEAK																																																																																																			
3	5924.00	50.81	68.94	-18.13	39.37	35.15	8.79	32.50	103	345	PEAK																																																																																																			
4	5931.88	51.00	68.30	-17.30	39.56	35.16	8.78	32.50	103	345	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	109.70	-----	-----	98.21	35.10	8.89	32.50	103	345	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.48</td> <td>-----</td> <td>-----</td> <td>89.98</td> <td>35.10</td> <td>8.90</td> <td>32.50</td> <td>103</td> <td>345</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	101.48	-----	-----	89.98	35.10	8.90	32.50	103	345	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	101.48	-----	-----	89.98	35.10	8.90	32.50	103	345	AVERAGE																																																																																																			



Mode	67																																																																																																													
	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU106/53_5745MHz																																																																																																													
ANT	1+2																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5616.39</td> <td>50.61</td> <td>68.30</td> <td>-17.69</td> <td>39.87</td> <td>34.97</td> <td>8.27</td> <td>32.50</td> <td>111</td> <td>348</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.61</td> <td>49.30</td> <td>68.75</td> <td>-19.45</td> <td>38.41</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>111</td> <td>348</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.36</td> <td>50.33</td> <td>105.58</td> <td>-55.25</td> <td>39.22</td> <td>35.02</td> <td>8.59</td> <td>32.50</td> <td>111</td> <td>348</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.06</td> <td>49.48</td> <td>110.94</td> <td>-61.46</td> <td>38.29</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>111</td> <td>348</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5616.39	50.61	68.30	-17.69	39.87	34.97	8.27	32.50	111	348	PEAK	2	5650.61	49.30	68.75	-19.45	38.41	34.99	8.40	32.50	111	348	PEAK	3	5701.36	50.33	105.58	-55.25	39.22	35.02	8.59	32.50	111	348	PEAK	4	5720.06	49.48	110.94	-61.46	38.29	35.03	8.66	32.50	111	348	PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>109.09</td> <td>-----</td> <td>-----</td> <td>97.82</td> <td>35.04</td> <td>8.73</td> <td>32.50</td> <td>111</td> <td>348</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5745.00	109.09	-----	-----	97.82	35.04	8.73	32.50	111	348	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5616.39	50.61	68.30	-17.69	39.87	34.97	8.27	32.50	111	348	PEAK																																																																																																			
2	5650.61	49.30	68.75	-19.45	38.41	34.99	8.40	32.50	111	348	PEAK																																																																																																			
3	5701.36	50.33	105.58	-55.25	39.22	35.02	8.59	32.50	111	348	PEAK																																																																																																			
4	5720.06	49.48	110.94	-61.46	38.29	35.03	8.66	32.50	111	348	PEAK																																																																																																			
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5745.00	109.09	-----	-----	97.82	35.04	8.73	32.50	111	348	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.62</td> <td>-----</td> <td>-----</td> <td>89.37</td> <td>35.04</td> <td>8.71</td> <td>32.50</td> <td>111</td> <td>348</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5745.00	100.62	-----	-----	89.37	35.04	8.71	32.50	111	348	AVERAGE																																																																								
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5745.00	100.62	-----	-----	89.37	35.04	8.71	32.50	111	348	AVERAGE																																																																																																			



		67																																																																																																																			
Mode	Band Edge																																																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU106/53_5745MHz																																																																																																																				
ANT	1+2																																																																																																																				
Pol.	Vertical	Fundamental																																																																																																																			
Peak																																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5612.47</td> <td>50.03</td> <td>68.30</td> <td>-18.27</td> <td>39.30</td> <td>34.97</td> <td>8.26</td> <td>32.50</td> <td>127</td> <td>336</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.32</td> <td>49.20</td> <td>68.53</td> <td>-19.33</td> <td>38.31</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>127</td> <td>336</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5705.56</td> <td>53.02</td> <td>106.76</td> <td>-53.74</td> <td>41.90</td> <td>35.02</td> <td>8.60</td> <td>32.50</td> <td>127</td> <td>336</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.21</td> <td>50.83</td> <td>111.27</td> <td>-60.44</td> <td>39.64</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>127</td> <td>336</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5612.47	50.03	68.30	-18.27	39.30	34.97	8.26	32.50	127	336	PEAK	2	5650.32	49.20	68.53	-19.33	38.31	34.99	8.40	32.50	127	336	PEAK	3	5705.56	53.02	106.76	-53.74	41.90	35.02	8.60	32.50	127	336	PEAK	4	5720.21	50.83	111.27	-60.44	39.64	35.03	8.66	32.50	127	336	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>109.18</td> <td>-----</td> <td>-----</td> <td>97.91</td> <td>35.04</td> <td>8.73</td> <td>32.50</td> <td>127</td> <td>336</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	109.18	-----	-----	97.91	35.04	8.73	32.50	127	336
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																													
1	5612.47	50.03	68.30	-18.27	39.30	34.97	8.26	32.50	127	336	PEAK																																																																																																										
2	5650.32	49.20	68.53	-19.33	38.31	34.99	8.40	32.50	127	336	PEAK																																																																																																										
3	5705.56	53.02	106.76	-53.74	41.90	35.02	8.60	32.50	127	336	PEAK																																																																																																										
4	5720.21	50.83	111.27	-60.44	39.64	35.03	8.66	32.50	127	336	PEAK																																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																													
1	5745.00	109.18	-----	-----	97.91	35.04	8.73	32.50	127	336	PEAK																																																																																																										
Avg	Blank																																																																																																																				
			<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.74</td> <td>-----</td> <td>-----</td> <td>89.47</td> <td>35.04</td> <td>8.73</td> <td>32.50</td> <td>127</td> <td>336</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	100.74	-----	-----	89.47	35.04	8.73	32.50	127	336	AVERAGE																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																													
1	5745.00	100.74	-----	-----	89.47	35.04	8.73	32.50	127	336	AVERAGE																																																																																																										



Mode	68																																																																																																													
	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU106/54_5825MHz																																																																																																													
ANT	1+2																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>51.09</td> <td>110.80</td> <td>-59.71</td> <td>39.61</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>102</td> <td>353</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.63</td> <td>51.37</td> <td>105.30</td> <td>-53.93</td> <td>39.90</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>102</td> <td>353</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5922.13</td> <td>51.89</td> <td>70.32</td> <td>-18.43</td> <td>40.45</td> <td>35.15</td> <td>8.79</td> <td>32.50</td> <td>102</td> <td>353</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5940.63</td> <td>51.18</td> <td>68.30</td> <td>-17.12</td> <td>39.74</td> <td>35.17</td> <td>8.77</td> <td>32.50</td> <td>102</td> <td>353</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5855.00	51.09	110.80	-59.71	39.61	35.11	8.87	32.50	102	353	PEAK	2	5874.63	51.37	105.30	-53.93	39.90	35.12	8.85	32.50	102	353	PEAK	3	5922.13	51.89	70.32	-18.43	40.45	35.15	8.79	32.50	102	353	PEAK	4	5940.63	51.18	68.30	-17.12	39.74	35.17	8.77	32.50	102	353	PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.67</td> <td>-----</td> <td>-----</td> <td>96.17</td> <td>35.10</td> <td>8.90</td> <td>32.50</td> <td>102</td> <td>353</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5825.00	107.67	-----	-----	96.17	35.10	8.90	32.50	102	353	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5855.00	51.09	110.80	-59.71	39.61	35.11	8.87	32.50	102	353	PEAK																																																																																																			
2	5874.63	51.37	105.30	-53.93	39.90	35.12	8.85	32.50	102	353	PEAK																																																																																																			
3	5922.13	51.89	70.32	-18.43	40.45	35.15	8.79	32.50	102	353	PEAK																																																																																																			
4	5940.63	51.18	68.30	-17.12	39.74	35.17	8.77	32.50	102	353	PEAK																																																																																																			
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5825.00	107.67	-----	-----	96.17	35.10	8.90	32.50	102	353	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.10</td> <td>-----</td> <td>-----</td> <td>88.60</td> <td>35.10</td> <td>8.90</td> <td>32.50</td> <td>102</td> <td>353</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5825.00	100.10	-----	-----	88.60	35.10	8.90	32.50	102	353	AVERAGE																																																																								
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5825.00	100.10	-----	-----	88.60	35.10	8.90	32.50	102	353	AVERAGE																																																																																																			



Mode	68																																																																																																
	Band Edge																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU106/54_5825MHz																																																																																																
ANT	1+2																																																																																																
Pol.	Vertical	Fundamental																																																																																															
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.88</td> <td>52.09</td> <td>111.08</td> <td>-58.99</td> <td>40.61</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>110</td> <td>345 PEAK</td> </tr> <tr> <td>2</td> <td>5874.88</td> <td>51.60</td> <td>105.23</td> <td>-53.63</td> <td>40.12</td> <td>35.13</td> <td>8.85</td> <td>32.50</td> <td>110</td> <td>345 PEAK</td> </tr> <tr> <td>3</td> <td>5925.00</td> <td>51.00</td> <td>68.20</td> <td>-17.20</td> <td>39.55</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>110</td> <td>345 PEAK</td> </tr> <tr> <td>4</td> <td>5943.00</td> <td>52.18</td> <td>68.30</td> <td>-16.12</td> <td>40.74</td> <td>35.17</td> <td>8.77</td> <td>32.50</td> <td>110</td> <td>345 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5854.88	52.09	111.08	-58.99	40.61	35.11	8.87	32.50	110	345 PEAK	2	5874.88	51.60	105.23	-53.63	40.12	35.13	8.85	32.50	110	345 PEAK	3	5925.00	51.00	68.20	-17.20	39.55	35.16	8.79	32.50	110	345 PEAK	4	5943.00	52.18	68.30	-16.12	40.74	35.17	8.77	32.50	110	345 PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>108.53</td> <td>-----</td> <td>-----</td> <td>97.04</td> <td>35.10</td> <td>8.89</td> <td>32.50</td> <td>110</td> <td>345 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5825.00	108.53	-----	-----	97.04	35.10	8.89	32.50	110	345 PEAK
	Peak	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	5854.88	52.09	111.08	-58.99	40.61	35.11	8.87	32.50	110	345 PEAK																																																																																							
2	5874.88	51.60	105.23	-53.63	40.12	35.13	8.85	32.50	110	345 PEAK																																																																																							
3	5925.00	51.00	68.20	-17.20	39.55	35.16	8.79	32.50	110	345 PEAK																																																																																							
4	5943.00	52.18	68.30	-16.12	40.74	35.17	8.77	32.50	110	345 PEAK																																																																																							
Peak	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	5825.00	108.53	-----	-----	97.04	35.10	8.89	32.50	110	345 PEAK																																																																																							
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.18</td> <td>-----</td> <td>-----</td> <td>89.68</td> <td>35.10</td> <td>8.90</td> <td>32.50</td> <td>110</td> <td>345 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5825.00	101.18	-----	-----	89.68	35.10	8.90	32.50	110	345 AVERAGE																																																																
Peak	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	5825.00	101.18	-----	-----	89.68	35.10	8.90	32.50	110	345 AVERAGE																																																																																							



Mode	69																																																																																																																																																																																	
	LF																																																																																																																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE160_CH50_5250MHz																																																																																																																																																																																	
ANT	1+2																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																
QP/ Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>113.42</td> <td>19.88</td> <td>43.50</td> <td>-23.62</td> <td>37.52</td> <td>16.00</td> <td>1.13</td> <td>34.77</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>142.52</td> <td>21.81</td> <td>43.50</td> <td>-21.69</td> <td>36.93</td> <td>18.35</td> <td>1.25</td> <td>34.72</td> <td>-- -- Peak</td> </tr> <tr> <td>3</td> <td>287.05</td> <td>23.91</td> <td>46.00</td> <td>-22.09</td> <td>38.06</td> <td>18.72</td> <td>1.76</td> <td>34.63</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>349.13</td> <td>25.91</td> <td>46.00</td> <td>-20.09</td> <td>38.37</td> <td>20.20</td> <td>1.94</td> <td>34.60</td> <td>-- -- Peak</td> </tr> <tr> <td>5</td> <td>695.42</td> <td>26.71</td> <td>46.00</td> <td>-19.29</td> <td>31.30</td> <td>27.02</td> <td>2.80</td> <td>34.41</td> <td>-- -- Peak</td> </tr> <tr> <td>6</td> <td>948.59</td> <td>31.41</td> <td>46.00</td> <td>-14.59</td> <td>32.71</td> <td>29.74</td> <td>3.26</td> <td>34.30</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	113.42	19.88	43.50	-23.62	37.52	16.00	1.13	34.77	-- -- Peak	2	142.52	21.81	43.50	-21.69	36.93	18.35	1.25	34.72	-- -- Peak	3	287.05	23.91	46.00	-22.09	38.06	18.72	1.76	34.63	-- -- Peak	4	349.13	25.91	46.00	-20.09	38.37	20.20	1.94	34.60	-- -- Peak	5	695.42	26.71	46.00	-19.29	31.30	27.02	2.80	34.41	-- -- Peak	6	948.59	31.41	46.00	-14.59	32.71	29.74	3.26	34.30	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>33.88</td> <td>23.98</td> <td>40.00</td> <td>-16.02</td> <td>39.82</td> <td>18.46</td> <td>0.57</td> <td>34.87</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>141.55</td> <td>23.03</td> <td>43.50</td> <td>-20.47</td> <td>38.23</td> <td>18.27</td> <td>1.25</td> <td>34.72</td> <td>-- -- Peak</td> </tr> <tr> <td>3</td> <td>198.78</td> <td>20.84</td> <td>43.50</td> <td>-22.66</td> <td>38.01</td> <td>16.05</td> <td>1.48</td> <td>34.70</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>448.07</td> <td>22.62</td> <td>46.00</td> <td>-23.38</td> <td>32.19</td> <td>22.70</td> <td>2.23</td> <td>34.50</td> <td>-- -- Peak</td> </tr> <tr> <td>5</td> <td>783.69</td> <td>29.09</td> <td>46.00</td> <td>-16.91</td> <td>32.66</td> <td>27.76</td> <td>3.00</td> <td>34.33</td> <td>-- -- Peak</td> </tr> <tr> <td>6</td> <td>948.59</td> <td>30.69</td> <td>46.00</td> <td>-15.31</td> <td>31.99</td> <td>29.74</td> <td>3.26</td> <td>34.30</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	33.88	23.98	40.00	-16.02	39.82	18.46	0.57	34.87	-- -- Peak	2	141.55	23.03	43.50	-20.47	38.23	18.27	1.25	34.72	-- -- Peak	3	198.78	20.84	43.50	-22.66	38.01	16.05	1.48	34.70	-- -- Peak	4	448.07	22.62	46.00	-23.38	32.19	22.70	2.23	34.50	-- -- Peak	5	783.69	29.09	46.00	-16.91	32.66	27.76	3.00	34.33	-- -- Peak	6	948.59	30.69	46.00	-15.31	31.99	29.74	3.26	34.30	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1	113.42	19.88	43.50	-23.62	37.52	16.00	1.13	34.77	-- -- Peak																																																																																																																																																																									
2	142.52	21.81	43.50	-21.69	36.93	18.35	1.25	34.72	-- -- Peak																																																																																																																																																																									
3	287.05	23.91	46.00	-22.09	38.06	18.72	1.76	34.63	-- -- Peak																																																																																																																																																																									
4	349.13	25.91	46.00	-20.09	38.37	20.20	1.94	34.60	-- -- Peak																																																																																																																																																																									
5	695.42	26.71	46.00	-19.29	31.30	27.02	2.80	34.41	-- -- Peak																																																																																																																																																																									
6	948.59	31.41	46.00	-14.59	32.71	29.74	3.26	34.30	-- -- Peak																																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1	33.88	23.98	40.00	-16.02	39.82	18.46	0.57	34.87	-- -- Peak																																																																																																																																																																									
2	141.55	23.03	43.50	-20.47	38.23	18.27	1.25	34.72	-- -- Peak																																																																																																																																																																									
3	198.78	20.84	43.50	-22.66	38.01	16.05	1.48	34.70	-- -- Peak																																																																																																																																																																									
4	448.07	22.62	46.00	-23.38	32.19	22.70	2.23	34.50	-- -- Peak																																																																																																																																																																									
5	783.69	29.09	46.00	-16.91	32.66	27.76	3.00	34.33	-- -- Peak																																																																																																																																																																									
6	948.59	30.69	46.00	-15.31	31.99	29.74	3.26	34.30	-- -- Peak																																																																																																																																																																									



Mode	70																																																																																																																																																											
	LF																																																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHz																																																																																																																																																											
ANT	1+2																																																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																																																										
QP/ Peak	<p>Data: 1 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit Line (dBuV/m)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>56.19</td><td>23.05</td><td>-16.95</td><td>40.00</td><td>37.93</td><td>19.26</td><td>0.76</td><td>34.90</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>142.52</td><td>23.81</td><td>-19.69</td><td>43.50</td><td>38.93</td><td>18.35</td><td>1.25</td><td>34.72</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>196.84</td><td>25.34</td><td>-18.16</td><td>43.50</td><td>42.40</td><td>16.17</td><td>1.47</td><td>34.70</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>349.43</td><td>25.91</td><td>-20.09</td><td>46.00</td><td>38.37</td><td>20.20</td><td>1.94</td><td>34.60</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>651.77</td><td>25.90</td><td>-20.10</td><td>46.00</td><td>31.41</td><td>26.28</td><td>2.70</td><td>34.49</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>859.35</td><td>30.98</td><td>-15.02</td><td>46.00</td><td>33.40</td><td>28.77</td><td>3.11</td><td>34.30</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	56.19	23.05	-16.95	40.00	37.93	19.26	0.76	34.90	---	Peak	2	142.52	23.81	-19.69	43.50	38.93	18.35	1.25	34.72	---	Peak	3	196.84	25.34	-18.16	43.50	42.40	16.17	1.47	34.70	---	Peak	4	349.43	25.91	-20.09	46.00	38.37	20.20	1.94	34.60	---	Peak	5	651.77	25.90	-20.10	46.00	31.41	26.28	2.70	34.49	---	Peak	6	859.35	30.98	-15.02	46.00	33.40	28.77	3.11	34.30	---	Peak	<p>Data: 2 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit Line (dBuV/m)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>33.08</td><td>23.98</td><td>-16.02</td><td>40.00</td><td>39.85</td><td>18.46</td><td>0.57</td><td>34.90</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>107.60</td><td>25.60</td><td>-17.90</td><td>43.50</td><td>43.76</td><td>15.53</td><td>1.10</td><td>34.79</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>141.55</td><td>24.03</td><td>-19.47</td><td>43.50</td><td>39.23</td><td>18.27</td><td>1.25</td><td>34.72</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>198.78</td><td>23.84</td><td>-19.66</td><td>43.50</td><td>41.01</td><td>16.05</td><td>1.48</td><td>34.70</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>282.20</td><td>24.45</td><td>-21.55</td><td>46.00</td><td>38.78</td><td>18.57</td><td>1.74</td><td>34.64</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>823.46</td><td>30.78</td><td>-15.22</td><td>46.00</td><td>33.73</td><td>28.29</td><td>3.06</td><td>34.30</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	33.08	23.98	-16.02	40.00	39.85	18.46	0.57	34.90	---	Peak	2	107.60	25.60	-17.90	43.50	43.76	15.53	1.10	34.79	---	Peak	3	141.55	24.03	-19.47	43.50	39.23	18.27	1.25	34.72	---	Peak	4	198.78	23.84	-19.66	43.50	41.01	16.05	1.48	34.70	---	Peak	5	282.20	24.45	-21.55	46.00	38.78	18.57	1.74	34.64	---	Peak	6	823.46	30.78	-15.22	46.00	33.73	28.29	3.06	34.30	---	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																	
1	56.19	23.05	-16.95	40.00	37.93	19.26	0.76	34.90	---	Peak																																																																																																																																																		
2	142.52	23.81	-19.69	43.50	38.93	18.35	1.25	34.72	---	Peak																																																																																																																																																		
3	196.84	25.34	-18.16	43.50	42.40	16.17	1.47	34.70	---	Peak																																																																																																																																																		
4	349.43	25.91	-20.09	46.00	38.37	20.20	1.94	34.60	---	Peak																																																																																																																																																		
5	651.77	25.90	-20.10	46.00	31.41	26.28	2.70	34.49	---	Peak																																																																																																																																																		
6	859.35	30.98	-15.02	46.00	33.40	28.77	3.11	34.30	---	Peak																																																																																																																																																		
Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																		
1	33.08	23.98	-16.02	40.00	39.85	18.46	0.57	34.90	---	Peak																																																																																																																																																		
2	107.60	25.60	-17.90	43.50	43.76	15.53	1.10	34.79	---	Peak																																																																																																																																																		
3	141.55	24.03	-19.47	43.50	39.23	18.27	1.25	34.72	---	Peak																																																																																																																																																		
4	198.78	23.84	-19.66	43.50	41.01	16.05	1.48	34.70	---	Peak																																																																																																																																																		
5	282.20	24.45	-21.55	46.00	38.78	18.57	1.74	34.64	---	Peak																																																																																																																																																		
6	823.46	30.78	-15.22	46.00	33.73	28.29	3.06	34.30	---	Peak																																																																																																																																																		



<Simultaneous transmission>

Mode	71																																																																					
	Band Edge																																																																					
	11b_CH01 & 11AX160_CH50 & BLE_CH39(2M)_Co-location																																																																					
ANT	1+2																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	<p>Data: 1</p> <table border="1"> <thead> <tr> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Limit Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2344.34</td> <td>50.65</td> <td>-23.35</td> <td>74.00</td> <td>48.81</td> <td>30.70</td> <td>4.73</td> <td>33.59</td> <td>388</td> <td>143</td> <td>Peak</td> </tr> </tbody> </table>	Over Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq Level	Limit Line	Level Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg	1	2344.34	50.65	-23.35	74.00	48.81	30.70	4.73	33.59	388	143	Peak	<p>Data: 3</p> <table border="1"> <thead> <tr> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Limit Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2412.00</td> <td>108.70</td> <td>34.70</td> <td>74.00</td> <td>106.82</td> <td>30.63</td> <td>4.81</td> <td>33.56</td> <td>388</td> <td>143</td> <td>PEAK_74</td> </tr> </tbody> </table>	Over Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq Level	Limit Line	Level Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg	1 *	2412.00	108.70	34.70	74.00	106.82	30.63	4.81	33.56	388	143	PEAK_74
	Over Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																															
Freq Level	Limit Line	Level Factor	Loss Factor	dB	cm	deg																																																																
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg																																																															
1	2344.34	50.65	-23.35	74.00	48.81	30.70	4.73	33.59	388	143	Peak																																																											
Over Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																
Freq Level	Limit Line	Level Factor	Loss Factor	dB	cm	deg																																																																
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg																																																															
1 *	2412.00	108.70	34.70	74.00	106.82	30.63	4.81	33.56	388	143	PEAK_74																																																											
Avg	<p>Data: 2</p> <table border="1"> <thead> <tr> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Limit Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2344.02</td> <td>40.63</td> <td>-13.37</td> <td>54.00</td> <td>38.79</td> <td>30.70</td> <td>4.73</td> <td>33.59</td> <td>388</td> <td>143</td> <td>Average</td> </tr> </tbody> </table>	Over Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq Level	Limit Line	Level Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg	1	2344.02	40.63	-13.37	54.00	38.79	30.70	4.73	33.59	388	143	Average	<p>Data: 4</p> <table border="1"> <thead> <tr> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Limit Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2412.00</td> <td>105.36</td> <td>51.36</td> <td>54.00</td> <td>103.48</td> <td>30.63</td> <td>4.81</td> <td>33.56</td> <td>388</td> <td>143</td> <td>AVG_54</td> </tr> </tbody> </table>	Over Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq Level	Limit Line	Level Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg	1 *	2412.00	105.36	51.36	54.00	103.48	30.63	4.81	33.56	388	143	AVG_54
Over Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																
Freq Level	Limit Line	Level Factor	Loss Factor	dB	cm	deg																																																																
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg																																																															
1	2344.02	40.63	-13.37	54.00	38.79	30.70	4.73	33.59	388	143	Average																																																											
Over Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																
Freq Level	Limit Line	Level Factor	Loss Factor	dB	cm	deg																																																																
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	deg																																																															
1 *	2412.00	105.36	51.36	54.00	103.48	30.63	4.81	33.56	388	143	AVG_54																																																											



Mode	71																																																																									
	Band Edge																																																																									
	11b_CH01 & 11AX160_CH50 & BLE_CH39(2M)_Co-location																																																																									
ANT	1+2																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Data: 5 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2376.78</td> <td>51.52</td> <td>-22.48</td> <td>74.00</td> <td>49.70</td> <td>30.63</td> <td>4.77</td> <td>33.58</td> <td>243</td> <td>322</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	1	2376.78	51.52	-22.48	74.00	49.70	30.63	4.77	33.58	243	322	Peak	<p>Data: 7 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2412.00</td> <td>110.93</td> <td>36.93</td> <td>74.00</td> <td>109.05</td> <td>30.63</td> <td>4.81</td> <td>33.56</td> <td>243</td> <td>322</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 *	2412.00	110.93	36.93	74.00	109.05	30.63	4.81	33.56	243	322	Peak
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm																																																																			
1	2376.78	51.52	-22.48	74.00	49.70	30.63	4.77	33.58	243	322	Peak																																																															
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																			
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																			
1 *	2412.00	110.93	36.93	74.00	109.05	30.63	4.81	33.56	243	322	Peak																																																															
Avg	<p>Data: 6 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.86</td> <td>39.71</td> <td>-14.29</td> <td>54.00</td> <td>37.88</td> <td>30.60</td> <td>4.81</td> <td>33.58</td> <td>243</td> <td>322</td> <td>Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	2386.86	39.71	-14.29	54.00	37.88	30.60	4.81	33.58	243	322	Average	<p>Data: 8 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2412.00</td> <td>107.60</td> <td>53.60</td> <td>54.00</td> <td>105.72</td> <td>30.63</td> <td>4.81</td> <td>33.56</td> <td>243</td> <td>322</td> <td>Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 *	2412.00	107.60	53.60	54.00	105.72	30.63	4.81	33.56	243	322	Average
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																			
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																			
1	2386.86	39.71	-14.29	54.00	37.88	30.60	4.81	33.58	243	322	Average																																																															
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																			
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																			
1 *	2412.00	107.60	53.60	54.00	105.72	30.63	4.81	33.56	243	322	Average																																																															



Mode	71																																																																												
	Band Edge																																																																												
	11b_CH01 & 11AX160_CH50 & BLE_CH39(2M)_Co-location																																																																												
ANT	1+2																																																																												
Pol.	Horizontal	Fundamental																																																																											
Peak	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5144.30</td> <td>52.65</td> <td>-21.35</td> <td>74.00</td> <td>42.76</td> <td>34.62</td> <td>7.91 32.64 231 46</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	5144.30	52.65	-21.35	74.00	42.76	34.62	7.91 32.64 231 46	Peak	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5250.00</td> <td>96.05</td> <td>27.75</td> <td>68.30</td> <td>85.88</td> <td>34.70</td> <td>8.06 32.59 231</td> <td>46 Peak</td> </tr> <tr> <td>2</td> <td>5250.00</td> <td>88.86</td> <td>-----</td> <td>-----</td> <td>78.69</td> <td>34.70</td> <td>8.06 32.59 231</td> <td>46 Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 *	5250.00	96.05	27.75	68.30	85.88	34.70	8.06 32.59 231	46 Peak	2	5250.00	88.86	-----	-----	78.69	34.70	8.06 32.59 231	46 Average
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																						
Freq	Level	Limit	Level	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																						
1	5144.30	52.65	-21.35	74.00	42.76	34.62	7.91 32.64 231 46	Peak																																																																					
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																						
Freq	Level	Limit	Level	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																						
1 *	5250.00	96.05	27.75	68.30	85.88	34.70	8.06 32.59 231	46 Peak																																																																					
2	5250.00	88.86	-----	-----	78.69	34.70	8.06 32.59 231	46 Average																																																																					
Avg	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>40.36</td> <td>-13.64</td> <td>54.00</td> <td>30.47</td> <td>34.62</td> <td>7.91 32.64 231</td> <td>46 Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	5150.00	40.36	-13.64	54.00	30.47	34.62	7.91 32.64 231	46 Average	NA																																										
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																						
Freq	Level	Limit	Level	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																						
1	5150.00	40.36	-13.64	54.00	30.47	34.62	7.91 32.64 231	46 Average																																																																					



Mode	71																																					
	Band Edge																																					
	11b_CH01 & 11AX160_CH50 & BLE_CH39(2M)_Co-location																																					
ANT	1+2																																					
Pol.	Horizontal	Fundamental																																				
Peak	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5424.24</td> <td>49.99</td> <td>-24.01</td> <td>74.00</td> <td>39.21</td> <td>34.83</td> <td>8.48</td> <td>32.53</td> <td>231</td> <td>46</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	5424.24	49.99	-24.01	74.00	39.21	34.83	8.48	32.53	231	46	Peak	NA
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																															
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																															
1	5424.24	49.99	-24.01	74.00	39.21	34.83	8.48	32.53	231	46	Peak																											
Avg	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.04</td> <td>39.94</td> <td>-14.06</td> <td>54.00</td> <td>29.33</td> <td>34.78</td> <td>8.38</td> <td>32.55</td> <td>231</td> <td>46</td> <td>Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	5351.04	39.94	-14.06	54.00	29.33	34.78	8.38	32.55	231	46	Average	NA
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																															
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																															
1	5351.04	39.94	-14.06	54.00	29.33	34.78	8.38	32.55	231	46	Average																											



	71																																																																										
Mode	Band Edge																																																																										
	11b_CH01 & 11AX160_CH50 & BLE_CH39(2M)_Co-location																																																																										
ANT	1+2																																																																										
Pol.	Vertical	Fundamental																																																																									
Peak	<p>Data: 6 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>55.15</td> <td>-18.85</td> <td>74.00</td> <td>45.26</td> <td>34.62</td> <td>7.91</td> <td>32.64</td> <td>143</td> <td>359 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	55.15	-18.85	74.00	45.26	34.62	7.91	32.64	143	359 Peak	<p>Data: 8 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5250.00</td> <td>98.78</td> <td>30.48</td> <td>68.30</td> <td>88.61</td> <td>34.70</td> <td>8.06</td> <td>32.59</td> <td>143</td> <td>359 Peak</td> </tr> <tr> <td>2</td> <td>5250.00</td> <td>90.80</td> <td>-----</td> <td>-----</td> <td>80.63</td> <td>34.70</td> <td>8.06</td> <td>32.59</td> <td>143</td> <td>359 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 *	5250.00	98.78	30.48	68.30	88.61	34.70	8.06	32.59	143	359 Peak	2	5250.00	90.80	-----	-----	80.63	34.70	8.06	32.59	143	359 Average
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5149.76	55.15	-18.85	74.00	45.26	34.62	7.91	32.64	143	359 Peak																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 *	5250.00	98.78	30.48	68.30	88.61	34.70	8.06	32.59	143	359 Peak																																																																	
2	5250.00	90.80	-----	-----	80.63	34.70	8.06	32.59	143	359 Average																																																																	
Avg	<p>Data: 7 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.26</td> <td>46.86</td> <td>-7.14</td> <td>54.00</td> <td>36.98</td> <td>34.62</td> <td>7.91</td> <td>32.65</td> <td>143</td> <td>359 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5143.26	46.86	-7.14	54.00	36.98	34.62	7.91	32.65	143	359 Average	NA																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5143.26	46.86	-7.14	54.00	36.98	34.62	7.91	32.65	143	359 Average																																																																	



Mode	71																															
	Band Edge																															
	11b_CH01 & 11AX160_CH50 & BLE_CH39(2M)_Co-location																															
ANT	1+2																															
Pol.	Vertical	Fundamental																														
Peak	<p>Data: 9 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.56</td> <td>53.45</td> <td>-20.55</td> <td>74.00</td> <td>42.84</td> <td>34.78</td> <td>8.38</td> <td>32.55</td> <td>143</td> <td>359 Peak</td> </tr> </tbody> </table>	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5350.56	53.45	-20.55	74.00	42.84	34.78	8.38	32.55	143	359 Peak	NA
Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																							
1 5350.56	53.45	-20.55	74.00	42.84	34.78	8.38	32.55	143	359 Peak																							
Avg	<p>Data: 10 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5363.28</td> <td>41.32</td> <td>-12.68</td> <td>54.00</td> <td>30.70</td> <td>34.79</td> <td>8.38</td> <td>32.55</td> <td>143</td> <td>359 Average</td> </tr> </tbody> </table>	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5363.28	41.32	-12.68	54.00	30.70	34.79	8.38	32.55	143	359 Average	NA
Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																							
1 5363.28	41.32	-12.68	54.00	30.70	34.79	8.38	32.55	143	359 Average																							



Mode	71																																																													
	Band Edge																																																													
	11b_CH01 & 11AX160_CH50 & BLE_CH39(2M)_Co-location																																																													
ANT	3																																																													
Pol.	Horizontal	Fundamental																																																												
Peak	<p>Data: 3 Date: 2024-07-09</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>2483.64</td> <td>52.86</td> <td>-21.14</td> <td>74.00</td> <td>50.62</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>371</td> <td>163 Peak</td> </tr> </tbody> </table>	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	2483.64	52.86	-21.14	74.00	50.62	30.83	4.92	33.51	371	163 Peak	<p>Data: 1 Date: 2024-07-09</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>2480.00</td> <td>94.90</td> <td>20.90</td> <td>74.00</td> <td>92.66</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>371</td> <td>163 Peak</td> </tr> </tbody> </table>	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	2480.00	94.90	20.90	74.00	92.66	30.83	4.92	33.51	371	163 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
2483.64	52.86	-21.14	74.00	50.62	30.83	4.92	33.51	371	163 Peak																																																					
Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
2480.00	94.90	20.90	74.00	92.66	30.83	4.92	33.51	371	163 Peak																																																					
Avg	<p>Data: 4 Date: 2024-07-09</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>2483.92</td> <td>41.49</td> <td>-12.51</td> <td>54.00</td> <td>39.25</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>371</td> <td>163 Average</td> </tr> </tbody> </table>	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	2483.92	41.49	-12.51	54.00	39.25	30.83	4.92	33.51	371	163 Average	<p>Data: 2 Date: 2024-07-09</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>2480.00</td> <td>93.89</td> <td>39.89</td> <td>54.00</td> <td>91.65</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>371</td> <td>163 Peak</td> </tr> </tbody> </table>	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	2480.00	93.89	39.89	54.00	91.65	30.83	4.92	33.51	371	163 Peak
Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
2483.92	41.49	-12.51	54.00	39.25	30.83	4.92	33.51	371	163 Average																																																					
Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
2480.00	93.89	39.89	54.00	91.65	30.83	4.92	33.51	371	163 Peak																																																					



Mode	71																																																													
	Band Edge																																																													
	11b_CH01 & 11AX160_CH50 & BLE_CH39(2M)_Co-location																																																													
ANT	3																																																													
Pol.	Vertical	Fundamental																																																												
Peak	<p>Data: 7</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.64</td> <td>50.47</td> <td>-23.53</td> <td>74.00</td> <td>48.23</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>309 97 Peak</td> </tr> </tbody> </table>	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2483.64	50.47	-23.53	74.00	48.23	30.83	4.92	33.51	309 97 Peak	<p>Data: 5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2480.00</td> <td>91.47</td> <td>17.47</td> <td>74.00</td> <td>89.23</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>309 97 Peak</td> </tr> </tbody> </table>	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	2480.00	91.47	17.47	74.00	89.23	30.83	4.92	33.51	309 97 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2483.64	50.47	-23.53	74.00	48.23	30.83	4.92	33.51	309 97 Peak																																																					
Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1 *	2480.00	91.47	17.47	74.00	89.23	30.83	4.92	33.51	309 97 Peak																																																					
Avg	<p>Data: 8</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>41.46</td> <td>-12.54</td> <td>54.00</td> <td>39.22</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>309 97 Average</td> </tr> </tbody> </table>	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2483.56	41.46	-12.54	54.00	39.22	30.83	4.92	33.51	309 97 Average	<p>Data: 6</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2480.00</td> <td>91.47</td> <td>37.47</td> <td>54.00</td> <td>89.23</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>309 97 Peak</td> </tr> </tbody> </table>	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	2480.00	91.47	37.47	54.00	89.23	30.83	4.92	33.51	309 97 Peak
Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2483.56	41.46	-12.54	54.00	39.22	30.83	4.92	33.51	309 97 Average																																																					
Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1 *	2480.00	91.47	37.47	54.00	89.23	30.83	4.92	33.51	309 97 Peak																																																					



Mode	71																																																																																																																																											
	Harmonic																																																																																																																																											
	11b_CH01 & 11AX160_CH50 & BLE_CH39(2M)_Co-location																																																																																																																																											
ANT	1+2																																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																																										
Peak Avg	<p>Data: 7 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>40.92</td> <td>-33.08</td> <td>74.00</td> <td>56.39</td> <td>34.26</td> <td>7.75 57.48</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>41.38</td> <td>-32.62</td> <td>74.00</td> <td>56.70</td> <td>34.45</td> <td>7.81 57.58</td> <td>--- --- Peak</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>43.18</td> <td>-30.82</td> <td>74.00</td> <td>57.56</td> <td>35.41</td> <td>9.19 58.98</td> <td>--- --- Peak</td> </tr> <tr> <td>4</td> <td>10500.00</td> <td>47.79</td> <td>-20.51</td> <td>68.30</td> <td>58.29</td> <td>37.50</td> <td>10.84 58.84</td> <td>--- --- Peak</td> </tr> <tr> <td>5</td> <td>15750.00</td> <td>48.12</td> <td>-25.88</td> <td>74.00</td> <td>55.46</td> <td>39.11</td> <td>12.71 59.16</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	4824.00	40.92	-33.08	74.00	56.39	34.26	7.75 57.48	--- --- Peak	2	4960.00	41.38	-32.62	74.00	56.70	34.45	7.81 57.58	--- --- Peak	3	7440.00	43.18	-30.82	74.00	57.56	35.41	9.19 58.98	--- --- Peak	4	10500.00	47.79	-20.51	68.30	58.29	37.50	10.84 58.84	--- --- Peak	5	15750.00	48.12	-25.88	74.00	55.46	39.11	12.71 59.16	--- --- Peak	<p>Data: 8 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>41.30</td> <td>-32.70</td> <td>74.00</td> <td>56.77</td> <td>34.26</td> <td>7.75 57.48</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>42.69</td> <td>-31.31</td> <td>74.00</td> <td>58.01</td> <td>34.45</td> <td>7.81 57.58</td> <td>--- --- Peak</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>41.71</td> <td>-32.29</td> <td>74.00</td> <td>56.09</td> <td>35.41</td> <td>9.19 58.98</td> <td>--- --- Peak</td> </tr> <tr> <td>4</td> <td>10500.00</td> <td>46.29</td> <td>-22.01</td> <td>68.30</td> <td>56.79</td> <td>37.50</td> <td>10.84 58.84</td> <td>--- --- Peak</td> </tr> <tr> <td>5</td> <td>15750.00</td> <td>47.07</td> <td>-26.93</td> <td>74.00</td> <td>54.41</td> <td>39.11</td> <td>12.71 59.16</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	4824.00	41.30	-32.70	74.00	56.77	34.26	7.75 57.48	--- --- Peak	2	4960.00	42.69	-31.31	74.00	58.01	34.45	7.81 57.58	--- --- Peak	3	7440.00	41.71	-32.29	74.00	56.09	35.41	9.19 58.98	--- --- Peak	4	10500.00	46.29	-22.01	68.30	56.79	37.50	10.84 58.84	--- --- Peak	5	15750.00	47.07	-26.93	74.00	54.41	39.11	12.71 59.16	--- --- Peak
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																				
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																																																																																					
1	4824.00	40.92	-33.08	74.00	56.39	34.26	7.75 57.48	--- --- Peak																																																																																																																																				
2	4960.00	41.38	-32.62	74.00	56.70	34.45	7.81 57.58	--- --- Peak																																																																																																																																				
3	7440.00	43.18	-30.82	74.00	57.56	35.41	9.19 58.98	--- --- Peak																																																																																																																																				
4	10500.00	47.79	-20.51	68.30	58.29	37.50	10.84 58.84	--- --- Peak																																																																																																																																				
5	15750.00	48.12	-25.88	74.00	55.46	39.11	12.71 59.16	--- --- Peak																																																																																																																																				
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																																																																																					
1	4824.00	41.30	-32.70	74.00	56.77	34.26	7.75 57.48	--- --- Peak																																																																																																																																				
2	4960.00	42.69	-31.31	74.00	58.01	34.45	7.81 57.58	--- --- Peak																																																																																																																																				
3	7440.00	41.71	-32.29	74.00	56.09	35.41	9.19 58.98	--- --- Peak																																																																																																																																				
4	10500.00	46.29	-22.01	68.30	56.79	37.50	10.84 58.84	--- --- Peak																																																																																																																																				
5	15750.00	47.07	-26.93	74.00	54.41	39.11	12.71 59.16	--- --- Peak																																																																																																																																				


Note: the highest signal over limit is WLAN 5G co-location fundamental signal.



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	99.31	-	-	10Hz
802.11ax HE20	100	-	-	10Hz
802.11ax HE40	100	-	-	10Hz
802.11ax HE80	100	-	-	10Hz
802.11ax HE160	100	-	-	10Hz

802.11a

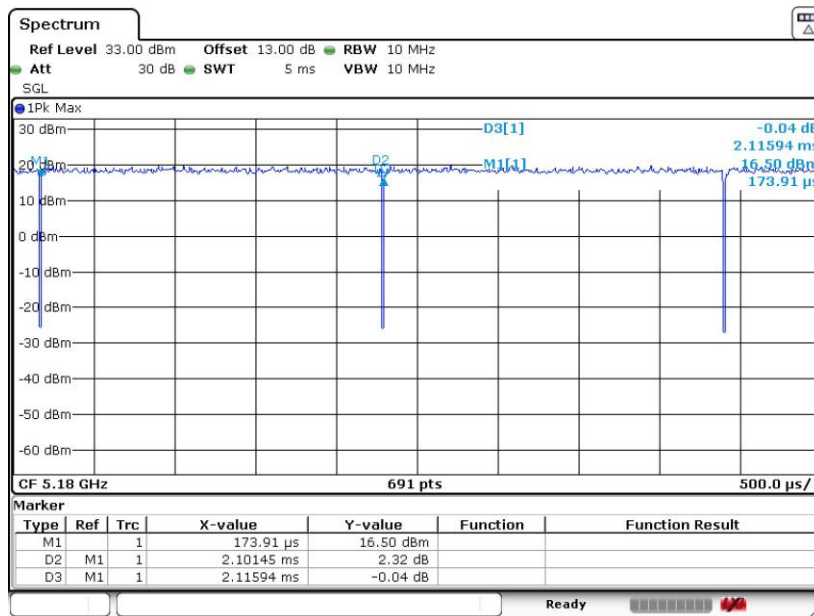




802.11ax HE20

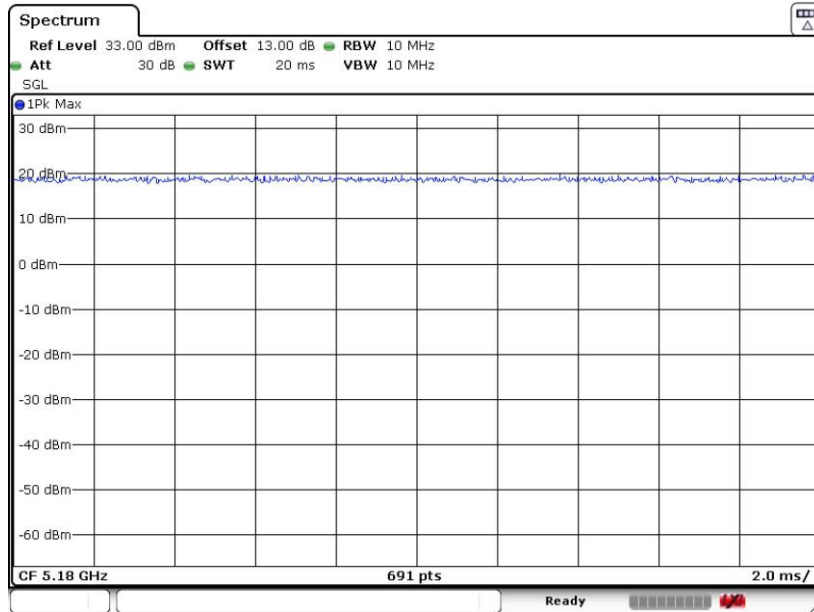


802.11ax HE40

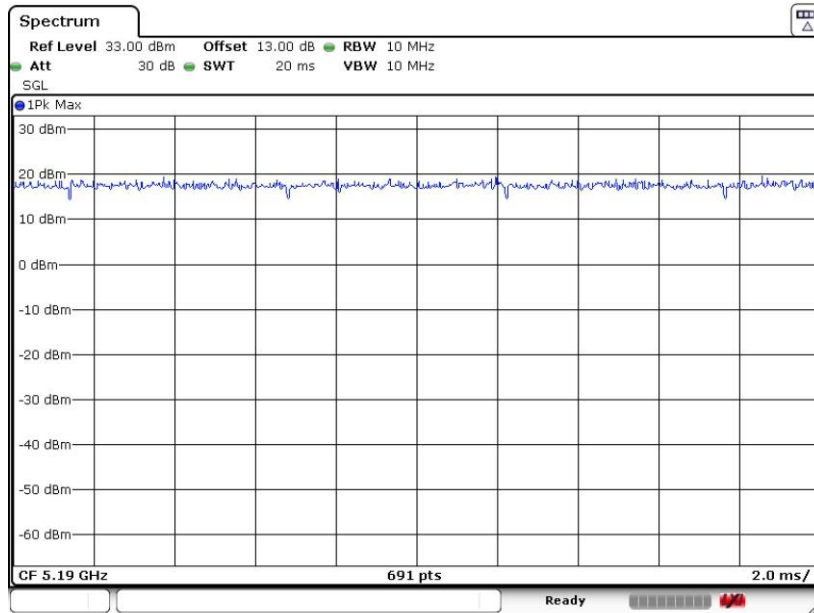



802.11ax HE80

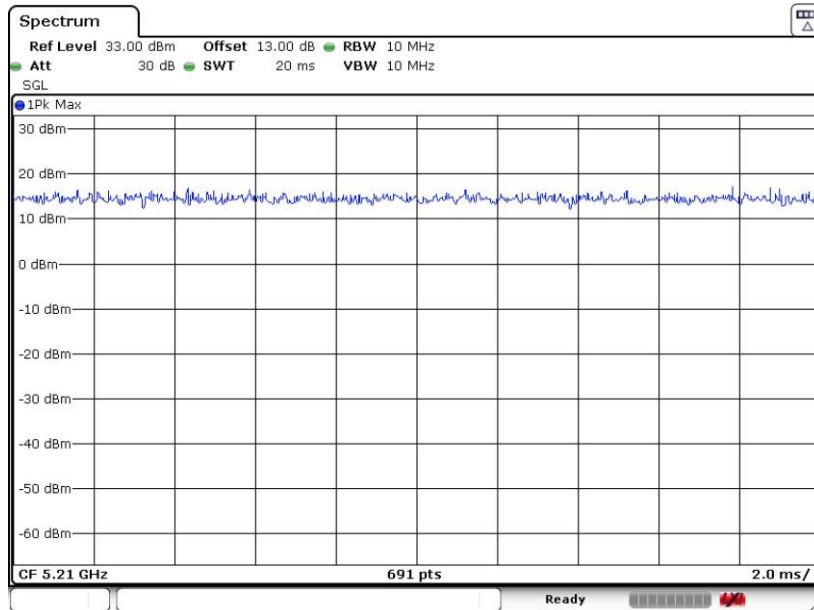

802.11ax HE160

