



	66																																																																																					
Mode	Band Edge																																																																																					
	WLAN 5G 11AX160_CH50 & WLAN 6G 11AX160_CH207 & BLE_CH39(2M) Co-location																																																																																					
ANT	1+2+3																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<p>Data: 1 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.24</td> <td>50.40</td> <td>-23.60</td> <td>74.00</td> <td>40.51</td> <td>34.62</td> <td>7.91</td> <td>32.64</td> <td>237</td> <td>46</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	5149.24	50.40	-23.60	74.00	40.51	34.62	7.91	32.64	237	46	Peak	<p>Data: 3 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>* 5250.00</td> <td>95.37</td> <td>27.07</td> <td>68.30</td> <td>85.20</td> <td>34.70</td> <td>8.06</td> <td>32.59</td> <td>237</td> <td>46</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5250.00</td> <td>88.77</td> <td>-----</td> <td>-----</td> <td>78.60</td> <td>34.70</td> <td>8.06</td> <td>32.59</td> <td>237</td> <td>46</td> <td>Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	* 5250.00	95.37	27.07	68.30	85.20	34.70	8.06	32.59	237	46	Peak	2	5250.00	88.77	-----	-----	78.60	34.70	8.06	32.59	237	46	Average
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																															
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																															
1	5149.24	50.40	-23.60	74.00	40.51	34.62	7.91	32.64	237	46	Peak																																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																															
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																															
1	* 5250.00	95.37	27.07	68.30	85.20	34.70	8.06	32.59	237	46	Peak																																																																											
2	5250.00	88.77	-----	-----	78.60	34.70	8.06	32.59	237	46	Average																																																																											
Avg	<p>Data: 2 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>40.80</td> <td>-13.20</td> <td>54.00</td> <td>30.91</td> <td>34.62</td> <td>7.91</td> <td>32.64</td> <td>237</td> <td>46</td> <td>Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	5149.76	40.80	-13.20	54.00	30.91	34.62	7.91	32.64	237	46	Average	NA																																																
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																															
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																															
1	5149.76	40.80	-13.20	54.00	30.91	34.62	7.91	32.64	237	46	Average																																																																											



Mode	66																																	
	Band Edge																																	
	WLAN 5G 11AX160_CH50 & WLAN 6G 11AX160_CH207 & BLE_CH39(2M) Co-location																																	
ANT	1+2+3																																	
Pol.	Horizontal	Fundamental																																
Peak	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.72</td> <td>52.98</td> <td>-21.02</td> <td>74.00</td> <td>42.37</td> <td>34.78</td> <td>8.38 32.55 237 46 Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm deg	1	5352.72	52.98	-21.02	74.00	42.37	34.78	8.38 32.55 237 46 Peak	NA
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																											
Freq	Level	Limit	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm deg																											
1	5352.72	52.98	-21.02	74.00	42.37	34.78	8.38 32.55 237 46 Peak																											
Avg	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5368.08</td> <td>40.56</td> <td>-13.44</td> <td>54.00</td> <td>29.94</td> <td>34.79</td> <td>8.38 32.55 237 46 Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm deg	1	5368.08	40.56	-13.44	54.00	29.94	34.79	8.38 32.55 237 46 Average	NA
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																											
Freq	Level	Limit	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm deg																											
1	5368.08	40.56	-13.44	54.00	29.94	34.79	8.38 32.55 237 46 Average																											



	66																																																																									
Mode	Band Edge																																																																									
	WLAN 5G 11AX160_CH50 & WLAN 6G 11AX160_CH207 & BLE_CH39(2M) Co-location																																																																									
ANT	1+2+3																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Data: 6 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.98</td> <td>56.98</td> <td>-17.02</td> <td>74.00</td> <td>47.09</td> <td>34.62</td> <td>7.91 32.64 145 358 Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Level	Line	Level	Loss	Loss	Factor	Factor		dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5148.98	56.98	-17.02	74.00	47.09	34.62	7.91 32.64 145 358 Peak	<p>Data: 8 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5250.00</td> <td>100.64</td> <td>32.34</td> <td>68.30</td> <td>90.47</td> <td>34.70</td> <td>8.06 32.59 145 358 Peak</td> </tr> <tr> <td>2</td> <td>5250.00</td> <td>92.53</td> <td>-----</td> <td>-----</td> <td>82.36</td> <td>34.70</td> <td>8.06 32.59 145 358 Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Level	Line	Level	Loss	Loss	Factor	Factor		dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 *	5250.00	100.64	32.34	68.30	90.47	34.70	8.06 32.59 145 358 Peak	2	5250.00	92.53	-----	-----	82.36	34.70	8.06 32.59 145 358 Average
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																			
Level	Line	Level	Loss	Loss	Factor	Factor																																																																				
dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	5148.98	56.98	-17.02	74.00	47.09	34.62	7.91 32.64 145 358 Peak																																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																			
Level	Line	Level	Loss	Loss	Factor	Factor																																																																				
dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 *	5250.00	100.64	32.34	68.30	90.47	34.70	8.06 32.59 145 358 Peak																																																																			
2	5250.00	92.53	-----	-----	82.36	34.70	8.06 32.59 145 358 Average																																																																			
Avg	<p>Data: 7 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.00</td> <td>46.61</td> <td>-7.39</td> <td>54.00</td> <td>36.73</td> <td>34.62</td> <td>7.91 32.65 145 358 Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Level	Line	Level	Loss	Loss	Factor	Factor		dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5143.00	46.61	-7.39	54.00	36.73	34.62	7.91 32.65 145 358 Average	<p>NA</p>																																								
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																			
Level	Line	Level	Loss	Loss	Factor	Factor																																																																				
dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	5143.00	46.61	-7.39	54.00	36.73	34.62	7.91 32.65 145 358 Average																																																																			







	66																												
Mode	Band Edge																												
	WLAN 5G 11AX160_CH50 & WLAN 6G 11AX160_CH207 & BLE_CH39(2M) Co-location																												
ANT	1+2+3																												
Pol.	Vertical	Fundamental																											
Peak	<table border="1"> <thead> <tr> <th>Over Limit</th> <th>ReadAntenna Level Factor</th> <th>Cable Preamp Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.92</td> <td>54.73</td> <td>-19.27</td> <td>74.00</td> <td>44.12</td> <td>34.78</td> <td>8.38</td> <td>32.55</td> <td>145</td> <td>358</td> <td>Peak</td> </tr> </tbody> </table>	Over Limit	ReadAntenna Level Factor	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	dB	dBuV	dB	cm	deg		1	5353.92	54.73	-19.27	74.00	44.12	34.78	8.38	32.55	145	358	Peak	NA			
Over Limit	ReadAntenna Level Factor	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark																								
dB	dBuV	dB	cm	deg																									
1	5353.92	54.73	-19.27	74.00	44.12	34.78	8.38	32.55	145	358	Peak																		
Avg	<table border="1"> <thead> <tr> <th>Over Limit</th> <th>ReadAntenna Level Factor</th> <th>Cable Preamp Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.72</td> <td>42.33</td> <td>-11.67</td> <td>54.00</td> <td>31.72</td> <td>34.78</td> <td>8.38</td> <td>32.55</td> <td>145</td> <td>358</td> <td>Average</td> </tr> </tbody> </table>	Over Limit	ReadAntenna Level Factor	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5358.72	42.33	-11.67	54.00	31.72	34.78	8.38	32.55	145	358	Average	NA
Over Limit	ReadAntenna Level Factor	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark																								
dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																					
1	5358.72	42.33	-11.67	54.00	31.72	34.78	8.38	32.55	145	358	Average																		



Mode	66																																																																																					
	Band Edge																																																																																					
	WLAN 5G 11AX160_CH50 & WLAN 6G 11AX160_CH207 & BLE_CH39(2M) Co-location																																																																																					
ANT	1+2+3																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<p>Data: 3 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7172.23</td> <td>51.82</td> <td>-36.38</td> <td>88.20</td> <td>41.19</td> <td>35.47</td> <td>8.63</td> <td>33.47</td> <td>152</td> <td>280</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7250.32</td> <td>50.62</td> <td>-23.38</td> <td>74.00</td> <td>40.02</td> <td>35.45</td> <td>8.70</td> <td>33.55</td> <td>152</td> <td>280</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	7172.23	51.82	-36.38	88.20	41.19	35.47	8.63	33.47	152	280	Peak	2	7250.32	50.62	-23.38	74.00	40.02	35.45	8.70	33.55	152	280	Peak	<p>Data: 1 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6985.00</td> <td>90.35</td> <td>-28.85</td> <td>119.20</td> <td>79.32</td> <td>35.49</td> <td>8.84</td> <td>33.30</td> <td>152</td> <td>280</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	6985.00	90.35	-28.85	119.20	79.32	35.49	8.84	33.30	152	280	Peak
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																															
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																															
1	7172.23	51.82	-36.38	88.20	41.19	35.47	8.63	33.47	152	280	Peak																																																																											
2	7250.32	50.62	-23.38	74.00	40.02	35.45	8.70	33.55	152	280	Peak																																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																															
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																															
1	6985.00	90.35	-28.85	119.20	79.32	35.49	8.84	33.30	152	280	Peak																																																																											
Avg	<p>Data: 4 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7132.38</td> <td>41.96</td> <td>-26.24</td> <td>68.20</td> <td>31.23</td> <td>35.47</td> <td>8.68</td> <td>33.42</td> <td>152</td> <td>280</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7267.70</td> <td>41.20</td> <td>-12.80</td> <td>54.00</td> <td>30.51</td> <td>35.44</td> <td>8.83</td> <td>33.58</td> <td>152</td> <td>280</td> <td>Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	7132.38	41.96	-26.24	68.20	31.23	35.47	8.68	33.42	152	280	Peak	2	7267.70	41.20	-12.80	54.00	30.51	35.44	8.83	33.58	152	280	Average	<p>Data: 2 Date: 2024-06-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6985.00</td> <td>82.22</td> <td>-16.98</td> <td>99.20</td> <td>71.19</td> <td>35.49</td> <td>8.84</td> <td>33.30</td> <td>152</td> <td>280</td> <td>Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	6985.00	82.22	-16.98	99.20	71.19	35.49	8.84	33.30	152	280	Average
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																															
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																															
1	7132.38	41.96	-26.24	68.20	31.23	35.47	8.68	33.42	152	280	Peak																																																																											
2	7267.70	41.20	-12.80	54.00	30.51	35.44	8.83	33.58	152	280	Average																																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																															
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																															
1	6985.00	82.22	-16.98	99.20	71.19	35.49	8.84	33.30	152	280	Average																																																																											

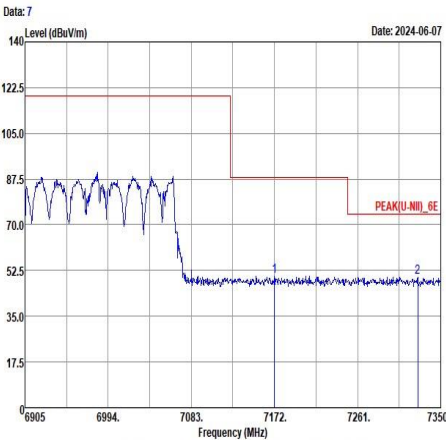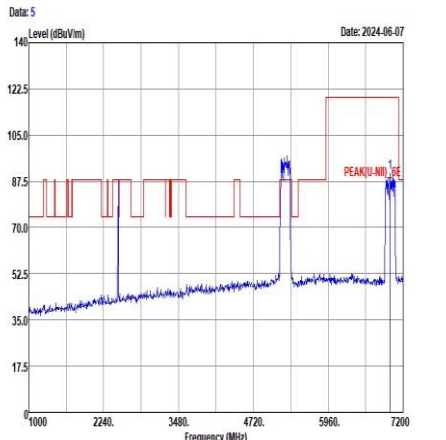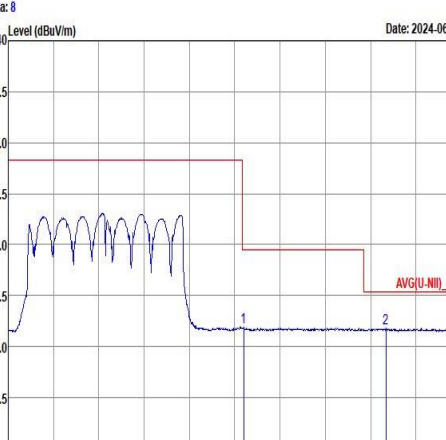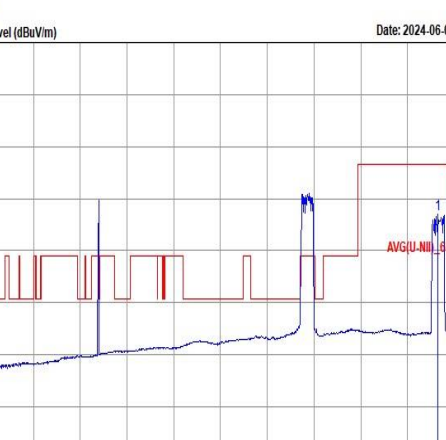

	66																																																								
Mode	Band Edge																																																								
	WLAN 5G 11AX160_CH50 & WLAN 6G 11AX160_CH207 & BLE_CH39(2M) Co-location																																																								
ANT	1+2+3																																																								
Pol.	Vertical	Fundamental																																																							
Peak	<p style="text-align: right;">Data: 7 Date: 2024-06-07</p>  <table border="1" data-bbox="279 1064 726 1187"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit (dBuV/m)</th> <th>ReadAntenna (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (dB)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7172.00</td> <td>50.43</td> <td>-37.77</td> <td>88.20</td> <td>39.80</td> <td>35.47</td> <td>8.63</td> <td>33.47</td> <td>160</td> <td>343 Peak</td> </tr> <tr> <td>2</td> <td>7325.53</td> <td>50.04</td> <td>-23.96</td> <td>74.00</td> <td>39.28</td> <td>35.43</td> <td>8.95</td> <td>33.62</td> <td>160</td> <td>343 Peak</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (dB)	T/Pos (deg)	Remark	1	7172.00	50.43	-37.77	88.20	39.80	35.47	8.63	33.47	160	343 Peak	2	7325.53	50.04	-23.96	74.00	39.28	35.43	8.95	33.62	160	343 Peak	<p style="text-align: right;">Data: 5 Date: 2024-06-07</p>  <table border="1" data-bbox="1005 1064 1452 1187"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit (dBuV/m)</th> <th>ReadAntenna (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (dB)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6985.00</td> <td>90.78</td> <td>-28.42</td> <td>119.20</td> <td>79.75</td> <td>35.49</td> <td>8.84</td> <td>33.30</td> <td>160</td> <td>343 Peak</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (dB)	T/Pos (deg)	Remark	1	6985.00	90.78	-28.42	119.20	79.75	35.49	8.84	33.30	160	343 Peak
Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (dB)	T/Pos (deg)	Remark																																															
1	7172.00	50.43	-37.77	88.20	39.80	35.47	8.63	33.47	160	343 Peak																																															
2	7325.53	50.04	-23.96	74.00	39.28	35.43	8.95	33.62	160	343 Peak																																															
Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (dB)	T/Pos (deg)	Remark																																															
1	6985.00	90.78	-28.42	119.20	79.75	35.49	8.84	33.30	160	343 Peak																																															
Avg	<p style="text-align: right;">Data: 8 Date: 2024-06-07</p>  <table border="1" data-bbox="279 1691 726 1859"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit (dBuV/m)</th> <th>ReadAntenna (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (dB)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7126.00</td> <td>41.61</td> <td>-26.59</td> <td>68.20</td> <td>30.87</td> <td>35.48</td> <td>8.68</td> <td>33.42</td> <td>160</td> <td>343 Peak</td> </tr> <tr> <td>2</td> <td>7272.81</td> <td>41.41</td> <td>-12.59</td> <td>54.00</td> <td>30.72</td> <td>35.44</td> <td>8.83</td> <td>33.58</td> <td>160</td> <td>343 Average</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (dB)	T/Pos (deg)	Remark	1	7126.00	41.61	-26.59	68.20	30.87	35.48	8.68	33.42	160	343 Peak	2	7272.81	41.41	-12.59	54.00	30.72	35.44	8.83	33.58	160	343 Average	<p style="text-align: right;">Data: 6 Date: 2024-06-07</p>  <table border="1" data-bbox="1005 1691 1452 1859"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit (dBuV/m)</th> <th>ReadAntenna (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (dB)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6985.00</td> <td>82.17</td> <td>-17.03</td> <td>99.20</td> <td>71.14</td> <td>35.49</td> <td>8.84</td> <td>33.30</td> <td>160</td> <td>343 Average</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (dB)	T/Pos (deg)	Remark	1	6985.00	82.17	-17.03	99.20	71.14	35.49	8.84	33.30	160	343 Average
Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (dB)	T/Pos (deg)	Remark																																															
1	7126.00	41.61	-26.59	68.20	30.87	35.48	8.68	33.42	160	343 Peak																																															
2	7272.81	41.41	-12.59	54.00	30.72	35.44	8.83	33.58	160	343 Average																																															
Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (dB)	T/Pos (deg)	Remark																																															
1	6985.00	82.17	-17.03	99.20	71.14	35.49	8.84	33.30	160	343 Average																																															



	66																																																																	
Mode	Band Edge																																																																	
	WLAN 5G 11AX160_CH50 & WLAN 6G 11AX160_CH207 & BLE_CH39(2M) Co-location																																																																	
ANT	1+2+3																																																																	
Pol.	Horizontal	Fundamental																																																																
Peak	<p>Data: 3 Date: 2024-07-09</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.84</td> <td>52.60</td> <td>-21.40</td> <td>74.00</td> <td>50.36</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>374</td> <td>169</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.84	52.60	-21.40	74.00	50.36	30.83	4.92	33.51	374	169	Peak	<p>Data: 1 Date: 2024-07-09</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2480.00</td> <td>93.60</td> <td>19.60</td> <td>74.00</td> <td>91.36</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>374</td> <td>169</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 *	2480.00	93.60	19.60	74.00	91.36	30.83	4.92	33.51	374	169	Peak
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																									
1	2483.84	52.60	-21.40	74.00	50.36	30.83	4.92	33.51	374	169	Peak																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																									
1 *	2480.00	93.60	19.60	74.00	91.36	30.83	4.92	33.51	374	169	Peak																																																							
Avg	<p>Data: 4 Date: 2024-07-09</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.52</td> <td>40.80</td> <td>-13.20</td> <td>54.00</td> <td>38.56</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>374</td> <td>169</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	40.80	-13.20	54.00	38.56	30.83	4.92	33.51	374	169	Average	<p>Data: 2 Date: 2024-07-09</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2480.00</td> <td>94.09</td> <td>40.09</td> <td>54.00</td> <td>91.85</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>374</td> <td>169</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 *	2480.00	94.09	40.09	54.00	91.85	30.83	4.92	33.51	374	169	Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																									
1	2483.52	40.80	-13.20	54.00	38.56	30.83	4.92	33.51	374	169	Average																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																									
1 *	2480.00	94.09	40.09	54.00	91.85	30.83	4.92	33.51	374	169	Average																																																							



	66																																													
Mode	Band Edge																																													
	WLAN 5G 11AX160_CH50 & WLAN 6G 11AX160_CH207 & BLE_CH39(2M) Co-location																																													
ANT	1+2+3																																													
Pol.	Vertical	Fundamental																																												
Peak	<p>Data: 7 Date: 2024-07-09</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit Line (dBuV/m)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.52</td> <td>53.60</td> <td>-20.40</td> <td>74.00</td> <td>51.36</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>318</td> <td>88 Peak</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	2483.52	53.60	-20.40	74.00	51.36	30.83	4.92	33.51	318	88 Peak	<p>Data: 5 Date: 2024-07-09</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit Line (dBuV/m)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2480.00</td> <td>94.07</td> <td>20.07</td> <td>74.00</td> <td>91.83</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>318</td> <td>88 Peak</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1 *	2480.00	94.07	20.07	74.00	91.83	30.83	4.92	33.51	318	88 Peak
Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																				
1	2483.52	53.60	-20.40	74.00	51.36	30.83	4.92	33.51	318	88 Peak																																				
Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																				
1 *	2480.00	94.07	20.07	74.00	91.83	30.83	4.92	33.51	318	88 Peak																																				
Avg	<p>Data: 8 Date: 2024-07-09</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit Line (dBuV/m)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>40.88</td> <td>-13.12</td> <td>54.00</td> <td>38.64</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>318</td> <td>88 Average</td> </tr> </tbody> </table>	Avg	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	2483.56	40.88	-13.12	54.00	38.64	30.83	4.92	33.51	318	88 Average	<p>Data: 6 Date: 2024-07-09</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit Line (dBuV/m)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2480.00</td> <td>93.47</td> <td>39.47</td> <td>54.00</td> <td>91.23</td> <td>30.83</td> <td>4.92</td> <td>33.51</td> <td>318</td> <td>88 Average</td> </tr> </tbody> </table>	Avg	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1 *	2480.00	93.47	39.47	54.00	91.23	30.83	4.92	33.51	318	88 Average
Avg	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																				
1	2483.56	40.88	-13.12	54.00	38.64	30.83	4.92	33.51	318	88 Average																																				
Avg	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																				
1 *	2480.00	93.47	39.47	54.00	91.23	30.83	4.92	33.51	318	88 Average																																				



Mode	66																																																																																																																									
	Harmonic																																																																																																																									
	WLAN 5G 11AX160_CH50 & WLAN 6G 11AX160_CH207 & BLE_CH39(2M) Co-location																																																																																																																									
ANT	1+2+3																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10500.00</td> <td>47.68</td> <td>-20.62</td> <td>68.30</td> <td>58.18</td> <td>37.50</td> <td>10.84</td> <td>58.84</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>13968.00</td> <td>48.22</td> <td>-20.08</td> <td>68.30</td> <td>55.94</td> <td>38.51</td> <td>12.73</td> <td>58.96</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>15750.00</td> <td>48.25</td> <td>-25.75</td> <td>74.00</td> <td>55.59</td> <td>39.11</td> <td>12.71</td> <td>59.16</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	1	10500.00	47.68	-20.62	68.30	58.18	37.50	10.84	58.84	---	---	Peak	2	13968.00	48.22	-20.08	68.30	55.94	38.51	12.73	58.96	---	---	Peak	3	15750.00	48.25	-25.75	74.00	55.59	39.11	12.71	59.16	---	---	Peak	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10500.00</td> <td>48.02</td> <td>-20.28</td> <td>68.30</td> <td>58.52</td> <td>37.50</td> <td>10.84</td> <td>58.84</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>13968.00</td> <td>48.04</td> <td>-19.46</td> <td>68.30</td> <td>56.56</td> <td>38.51</td> <td>12.73</td> <td>58.96</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>15750.00</td> <td>48.82</td> <td>-25.18</td> <td>74.00</td> <td>56.16</td> <td>39.11</td> <td>12.71</td> <td>59.16</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	1	10500.00	48.02	-20.28	68.30	58.52	37.50	10.84	58.84	---	---	Peak	2	13968.00	48.04	-19.46	68.30	56.56	38.51	12.73	58.96	---	---	Peak	3	15750.00	48.82	-25.18	74.00	56.16	39.11	12.71	59.16	---	---	Peak
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																			
Freq	Level	Limit	Level Factor	Loss Factor																																																																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg																																																																																																																			
1	10500.00	47.68	-20.62	68.30	58.18	37.50	10.84	58.84	---	---	Peak																																																																																																															
2	13968.00	48.22	-20.08	68.30	55.94	38.51	12.73	58.96	---	---	Peak																																																																																																															
3	15750.00	48.25	-25.75	74.00	55.59	39.11	12.71	59.16	---	---	Peak																																																																																																															
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																			
Freq	Level	Limit	Level Factor	Loss Factor																																																																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg																																																																																																																			
1	10500.00	48.02	-20.28	68.30	58.52	37.50	10.84	58.84	---	---	Peak																																																																																																															
2	13968.00	48.04	-19.46	68.30	56.56	38.51	12.73	58.96	---	---	Peak																																																																																																															
3	15750.00	48.82	-25.18	74.00	56.16	39.11	12.71	59.16	---	---	Peak																																																																																																															

Note: the highest signal over limit is WLAN 6G co-location fundamental signal.




Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	99.32	-	-	10Hz
802.11ax HE20	100.00	-	-	10Hz
802.11ax HE40	100.00	-	-	10Hz
802.11ax HE80	100.00	-	-	10Hz
802.11ax HE160	100.00	-	-	10Hz
802.11ax HE20 Partial RU 26	100.00	-	-	10Hz
802.11ax HE20 Partial RU 52	100.00	-	-	10Hz
802.11ax HE20 Partial RU 106	100.00	-	-	10Hz



802.11a

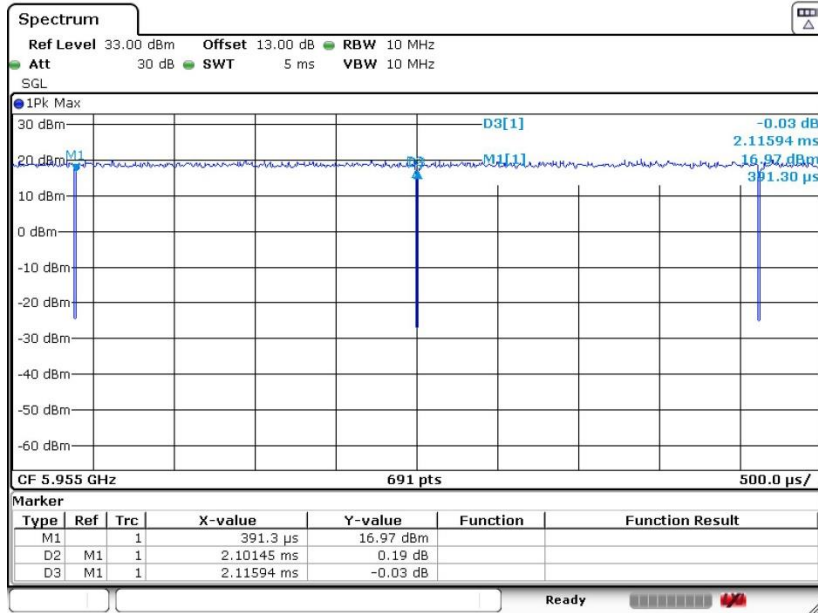


802.11ax HE20

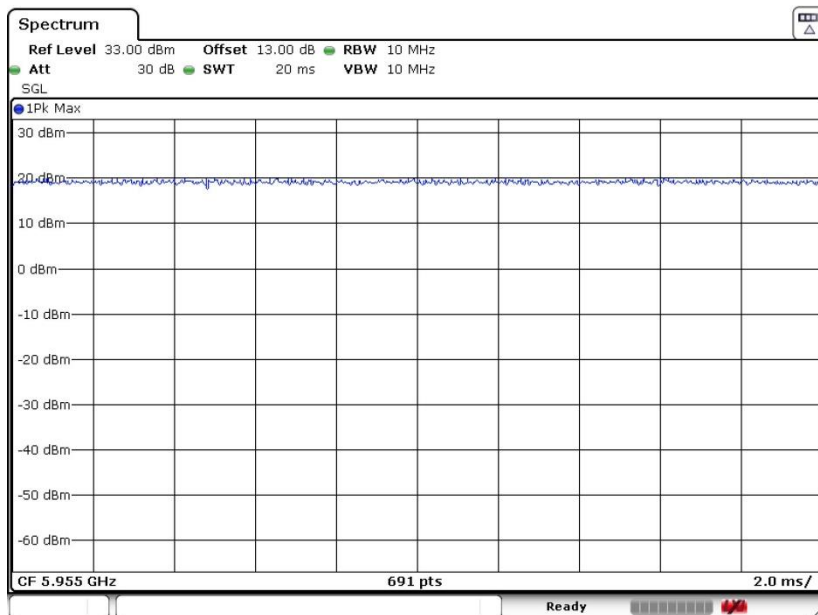




802.11ax HE40

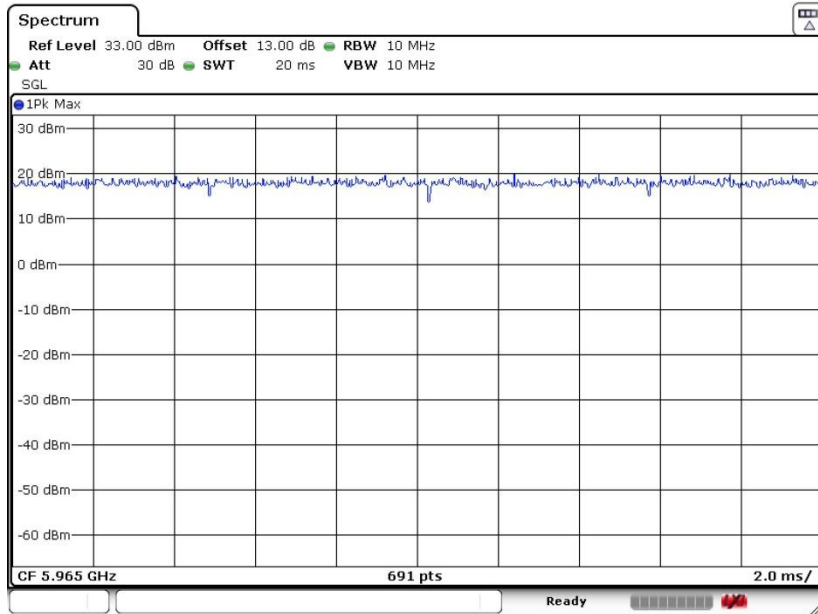


802.11ax HE80

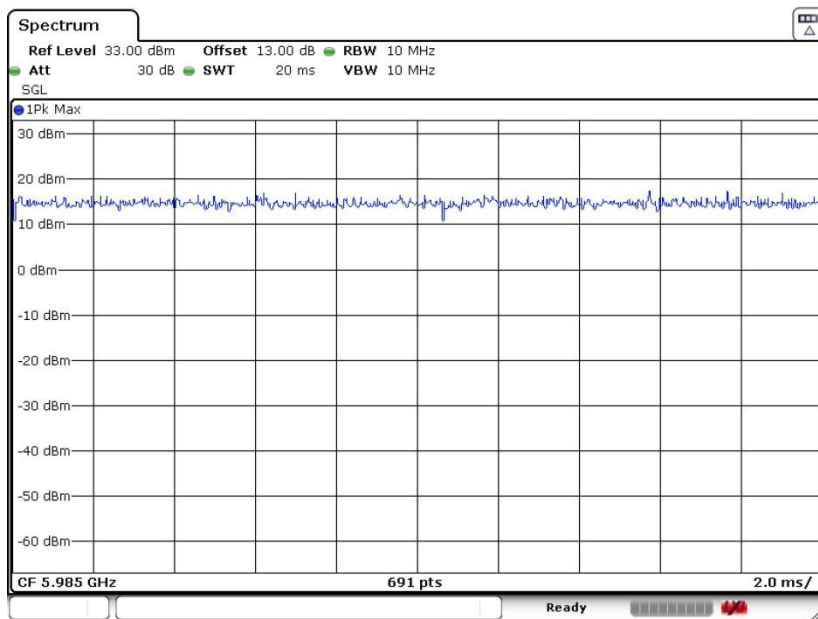




802.11ax HE160

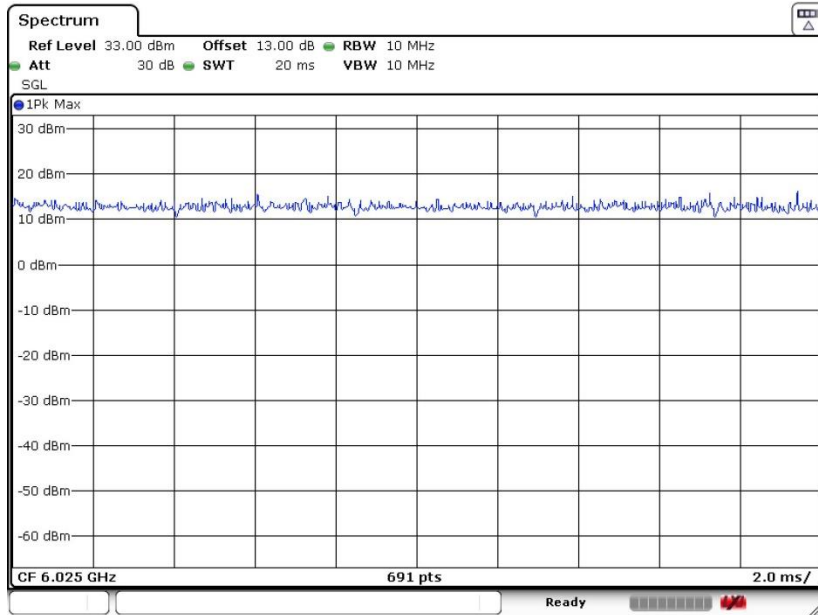


802.11ax HE20 Partial RU 26

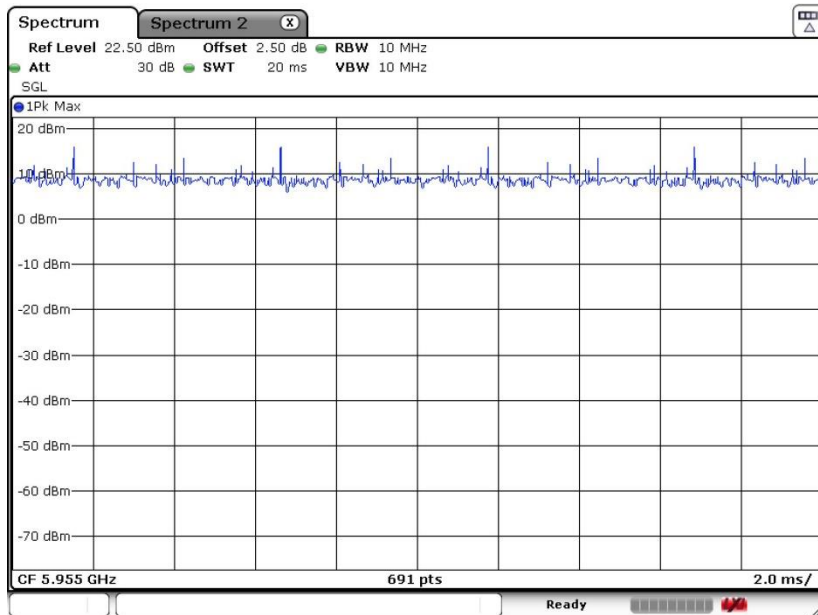



802.11ax HE20 Partial RU 52

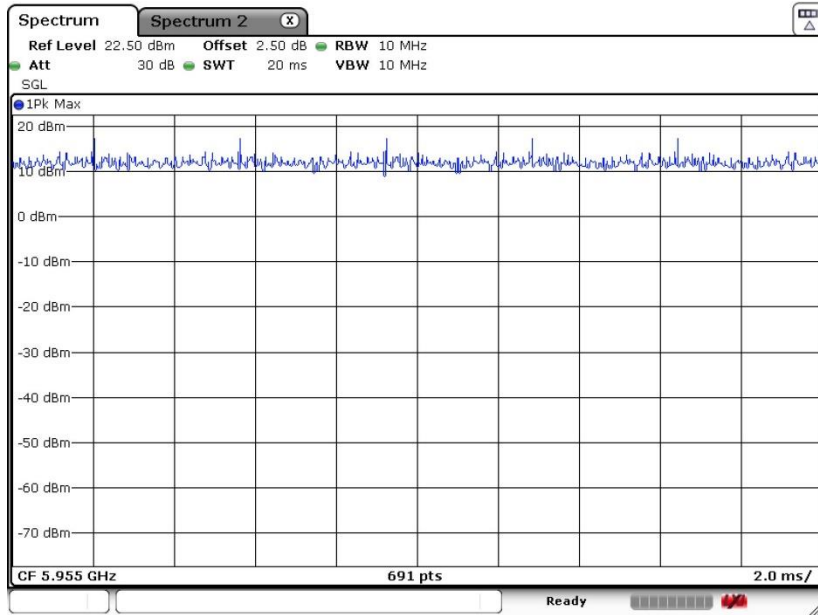

802.11ax HE20 Partial RU 106

