

Nemko GmbH & Co. KG
Prüf- und Zertifizierungsstelle
Test and Certification Institute
Reetzstraße 58
D-76327 Pfinztal
Tel.: +49 (0) 72 40 / 63 -0
Fax: +49 (0) 72 40 / 63 -11



Deutsche
Akkreditierungsstelle
D-PL-18175-01-05
D-PL-18175-01-06



EMV
Testzentrum

FCC TEST REPORT / IC TEST REPORT

APPLICANT

Company: race result AG
Address: Joseph-von-Fraunhofer-Str. 11
D - 76327 Pfinztal (Germany)
Witness(es) at tests: -

EQUIPMENT UNDER TEST (EUT)

Equipment: Chip2Go
Model/Type: RR06
Serial No.: C2G-W0083

TEST

Arrival of EUT: 2019-10-08
Date of measurement: 2019-10-14; 2019-10-23; 2019-11-26
Standards: 47 CFR Part 15, Subpart B
ICES-003 Issue 6
limit class: class B
Results: Passed - Details see test result summary
Performed by: F. Hupbauer

LABORATORY

Test site: Nemko GmbH & Co. KG, Pfinztal, Germany
FCC Reg. No.: 973501
IC File No.: 10921A

TEST REPORT

Identification No.: **FC-1907-379011**

Date of Report: 2019-12-20

Provided by: F. Hupbauer

Person responsible

Signature

Approved by: Dipl.-Ing. P. Lukas

Person responsible

Signature

Index of the test report:

| | | |
|-------|---|----|
| 1 | General information | 5 |
| 1.1 | Description of Equipment under test (EUT)..... | 5 |
| 1.2 | Internal frequency..... | 5 |
| 1.3 | Equipment configuration..... | 5 |
| 1.3.1 | Assembly of EUT | 5 |
| 1.3.2 | EUT software during test..... | 5 |
| 1.4 | Operating status (OS)..... | 5 |
| 1.5 | Project history | 5 |
| 1.6 | Labelling information | 6 |
| 1.7 | Test equipment..... | 6 |
| 1.8 | definitions limit class | 7 |
| 1.9 | General | 8 |
| 2 | Test Report Summary..... | 9 |
| 2.1 | Standards | 9 |
| 2.2 | Results..... | 9 |
| 3 | Measurement of conducted emission | 10 |
| 3.1 | Standards | 10 |
| 3.2 | Measurement equipment..... | 10 |
| 3.3 | Test set-up..... | 10 |
| 3.4 | Test methods and limits..... | 11 |
| 3.5 | Subpart B - FCC Part 15.107 / ICES-003 class B limit values | 11 |
| 3.6 | Settings receiver | 11 |
| 3.7 | Climatic conditions..... | 12 |
| 3.8 | Test result..... | 12 |
| 3.9 | Diagrams and tables..... | 12 |
| 3.9.1 | Diagram 379011-32EC | 12 |
| 3.9.2 | Table Final Measurements 379011-32EC_fin QP | 13 |
| 3.9.3 | Table Final Measurements 379011-32EC_fin AV | 13 |

| | | |
|--------|--|----|
| 4 | Measurement of radiated field | 14 |
| 4.1 | Standards | 14 |
| 4.2 | Measurement equipment..... | 14 |
| 4.3 | Test set-up..... | 14 |
| 4.4 | Test method and limits | 15 |
| 4.5 | Subpart B - Part 15.109 / ICES-003 class B limit values | 16 |
| 4.6 | Settings receiver..... | 16 |
| 4.7 | Climatic conditions..... | 16 |
| 4.8 | Internal generated or used frequency for <u>intentional</u> radiators..... | 16 |
| 4.9 | Test result..... | 17 |
| 4.10 | Diagrams and tables..... | 17 |
| 4.10.1 | Diagram 379011-4ER | 17 |
| 4.10.2 | Table Final measurements 379011-4ER QP | 17 |
| 5 | Measurement of radiated field | 18 |
| 5.1 | Standards | 18 |
| 5.2 | Measurement equipment..... | 18 |
| 5.3 | Test set-up..... | 18 |
| 5.4 | Test method and limits | 19 |
| 5.5 | Subpart B - FCC Part 15.109 / ICES-003 class B limit values | 20 |
| 5.6 | Settings receiver..... | 20 |
| 5.7 | Climatic conditions..... | 20 |
| 5.8 | Internal generated or used frequency for <u>intentional</u> radiators..... | 20 |
| 5.9 | Test result..... | 21 |
| 5.10 | Diagrams and tables..... | 21 |
| 5.10.1 | Diagram 379011-5ER | 21 |
| 5.10.2 | Table Final measurements 379011-5ER QP | 21 |

| | | |
|--|---|----|
| 6 | Measurement of radiated field | 23 |
| 6.1 | Standards | 23 |
| 6.2 | Measurement equipment | 23 |
| 6.3 | Test set-up | 23 |
| 6.4 | Test method and limits | 24 |
| 6.5 | Subpart B - FCC Part 15.109 / ICES-003 class B limit values | 25 |
| 6.6 | Settings receiver | 25 |
| 6.7 | Climatic conditions | 25 |
| 6.8 | Internal generated or used frequency for <u>intentional</u> radiators | 25 |
| 6.9 | Test result | 25 |
| 6.10 | Diagrams and tables | 26 |
| 6.10.1 | Diagram 379011-34ER2 | 26 |
| 6.10.2 | Table Final measurements 379011-34ER2 PK | 26 |
| 6.10.3 | Table Final measurements 379011-34ER2 AV | 27 |
| 7 | Test equipment used | 28 |
| Annex A | 29 | |
| EUT / technical data | 29 | |
| Annex B | 33 | |
| Arrangement in the semi anechoic chamber | 33 | |

1 General information

1.1 Description of Equipment under test (EUT)

Chip2Go is a programming device for passive transponders for sports timing. The RFID transponders are automatically transported and programmed from a roll. The device can be operated via a touch screen or a USB numeric keypad. At the front there is an additional antenna to check the programmed transponders. The antennas operate in the 865 - 927 MHz frequency range (US Band: 917.10 – 926.90 MHz).

1.2 Internal frequency

| | |
|---|----------|
| Maximum internal frequency (base unit and EuT) | 1200 MHz |
|---|----------|

1.3 Equipment configuration

Devices often consists of systems with no fixed configuration. The kind, number and installation of different subassemblies within the equipment may vary from system to system. To realistically simulate EMC conditions (related both to emission and immunity), the equipment assembly shall represent a typical installation as specified by the manufacturer. Such tests shall be carried out as type tests under normal conditions as specified by the manufacturer. The equipment was tested in one configuration.

1.3.1 Assembly of EUT

The EuT was tested in the following typical set up, because the highest disturbance was expected in this configuration.

| Item | Component | Serial number | Description |
|------|--------------------|---------------|--------------|
| 1 | Chip2Go | C2G-W0083 | - |
| 2 | Delock USB Key Pad | 12481 | USB NumPad |
| 3 | CUI SDI50-15-U | - | Power supply |

1.3.2 EUT software during test

The software used for simulating the different modes of operation is documented below. This software represents the estimated worst-case operating mode for normal application.

| Item | Software version | Description |
|------|------------------|---------------------|
| 1 | 1.0.2 | firmware |
| 2 | 2.1.2_E | firmware UHF-module |

1.4 Operating status (OS)

OS I) **Programming transponder cyclically, motor in operation
supply voltage 115 V / 60 Hz**

The operational conditions of the EUT was be determined by the manufacturer according to the typical use of the EUT with respect to the expected highest level of emission.

1.5 Project history

| test report (Ident.-No.) | date of report | modification of the EuT | Change in standard in clause: |
|-----------------------------|----------------|-------------------------|----------------------------------|
| FC-1907-379011 | 2019-12-20 | delivery status | initial test report |

1.6 Labelling information

The EuT had been tested against FCC §15 / ICES-003 class B limits.

U.S. only:

The device under test shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference's that may cause undesirable operation.

Canada only:

Each unit of an ITE model shall bear a label which represents the manufacturer's or importer's Self-Declaration of Compliance (SDoC) to Industry Canada ICES-003:

"CAN ICES-3 (*)/NMB-3(*)"

* Insert either "A" or "B" but not both to identify the applicable Class of ITE.

1.7 Test equipment

See list of test equipment in chapter 7.

If any modifications are made to the EUT to bring the EUT into compliance with the appropriate specifications, the test report shall give a complete description of, and reasons for, these modifications.

1.8 definitions limit class

Class A digital device:

A digital device that is marketed for use in a commercial, industrial or business environment, exclusive of a device which is marketed for use by the general public or is intended to be used in the home.

Class B digital device:

A digital device that is marketed for use in a residential environment notwithstanding use in commercial, business and industrial environments. Examples of such devices include, but are not limited to, personal computers, calculators, and similar electronic devices that are marketed for use by the general public.

Information to the user

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note:

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

1.9 General

The tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with:

47 CFR Part 15, Subpart B

ICES-003 Issue 6

The test methods have been in accordance with 47 CFR Part 15 and RSS where applicable.

- Production Unit
- Pre-production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

**Deviations from, additions to, or exclusions from the test specifications
are described in "Test results".**



TEST REPORT NO.: FC-1907-379011

Nemko authorizes the above-named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any reproduction of parts of this report requires approval in writing from Nemko. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.

2 Test Report Summary

2.1 Standards

Federal Communications Commission **47 CFR Part 15, Subpart B**
Interference-Causing Equipment Standard **ICES-003 Issue 6**
limit class **class B**

2.2 Results

| Environmental phenomena | Port / Test module | Basic standard and test setup | Limit class | Result |
|-------------------------|------------------------------|-------------------------------|----------------------------------|----------|
| Conducted emission | Input and output power ports | EC | see chapter test module EC. | B |
| Radiated field | Enclosure 30 - 200 MHz | ER low | see chapter test module ER low. | B |
| Radiated field | Enclosure 200 - 1000 MHz | ER high | see chapter test module ER high. | B |
| Radiated field | Enclosure 1 - 14 GHz | ER2 | see chapter test module ER2. | B |

For details (e.g. date of standards) see chapter test modules.

Test module EC

3 Measurement of conducted emission

3.1 Standards

| | |
|---|-------------------------------------|
| Federal Communications Commission | 47 CFR Part 15, Subpart B |
| Interference-Causing Equipment Standard | ICES-003 Issue 6 |
| limit class | class B |
| Measurement standard | ANSI C63.4: 2014 |
| Internal procedure | QMA-5.4.1-11 |
| Frequency range | 0.15 - 30 MHz |
| Limits FCC | §15.107; class B |
| Limits IC | ICES-003 clause 6.1; class B |
| Test uncertainty U95 | 3.58 dB (150 kHz - 30 MHz) |

3.2 Measurement equipment

| Equipment | Ident. No. | Type | Manufacturer |
|---|------------|----------------|-----------------|
| <input checked="" type="checkbox"/> Artificial mains network, 1ph | 1-0072 | ESH3-Z5 | Rohde & Schwarz |
| <input type="checkbox"/> Artificial mains network, 3ph | 1-0037 | ESH2-Z5 | Rohde & Schwarz |
| <input type="checkbox"/> Current clamp | 1-0353 | EZ-17 | Rohde & Schwarz |
| <input type="checkbox"/> Capacitive voltage probe | 1-1122 | CVP 9222 C | Schwarzbeck |
| <input type="checkbox"/> 8-wire ISN CAT3 | 1-0850 | ISN CAT 3 8158 | Schwarzbeck |
| <input type="checkbox"/> Passive probe | 1-0092 | ESH2-Z3 | Rohde & Schwarz |
| <input type="checkbox"/> conical test adaptor | 1-0765 | Konus EN 55015 | Erika Fiedler |
| <input type="checkbox"/> M2 - CDN | 1-0094 | FCC-801-M2-16 | FCC |
| <input type="checkbox"/> M3 - CDN | 1-0083 | FCC-801-M3-16 | FCC |
| <input type="checkbox"/> M5 - CDN | 1-0374 | L-801 M5 | Lüthi |
| <input checked="" type="checkbox"/> Antenna cable 2 | 1-0364 | RF 214-N/7 | Kabelwerk Eupen |
| <input checked="" type="checkbox"/> Coaxial cable (to SAC) | 1-0365 | Aircom plus | SSB electronic |
| <input checked="" type="checkbox"/> Coaxial cable (to switch) | 1-1118 | RG 213 | - |
| <input checked="" type="checkbox"/> Pulse limiter | 1-0054 | ESH3-Z2 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> Measuring receiver | 1-0604 | ESU8 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> EMI-Software RadiMation | 1-0624 | RM 2018.2.8 | DARE |
| <input checked="" type="checkbox"/> Semi anechoic chamber | 1-0361 | - | R&M München |

3.3 Test set-up

The test set-up was realized in a shielded chamber according to the above-mentioned standard.

The test has been performed as following:

- 1) Preview test: Peak- and Average-Detector; measuring time 100 ms; frequency step 2,5 kHz; all lines; protection earth grounded.

- 2) Find frequencies with maximum emission:
 - ⇒ Acceptance-analysis: Limit minus 10 dB
 - ⇒ Peak-reduction: 20 Peaks in frequency range 150 kHz - 30 MHz
- 3) Final test; Quasi-Peak and Average-Detector; measuring time 1 s; at the critical frequencies.

3.4 Test methods and limits

The test was performed according to ANSI C63.4-2014 inside a shielded room where the floor and one of the walls of the test site comprised the reference ground plane (RGP). The test was performed at the AC input. For the duration of the test EUT were placed 0.4 m apart from the vertical RGP (see fig. 3). The power input cable of the was connected to an artificial mains network. The test was performed separately on each phase and on the neutral wire also.

The disturbances were first examined by performing a spectrum scan by using a peak detector. The general procedure in the conducted disturbance emission test is that no further measurements are necessary if the disturbance levels measured by using the peak detector are below the limit value defined for the measurement performed by using an average detector. If not, then at the test frequencies concerned the measurement is performed also by using a quasi-peak detector. If the disturbance levels measured by using the quasi-peak detector are below the limit value defined for the measurement performed by using an average detector, then measurements by using the average detector are not necessary.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate) are reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements were carried out separately only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If fewer than six emission frequencies are within 20 dB of the limit, the noise level of the measuring instrument at representative frequencies is reported. The specific conductor of the power-line cord for each of the reported emissions is identified in the table below.

3.5 Subpart B - FCC Part 15.107 / ICES-003 class B limit values

| Frequency MHz | Quasi-peak dB μ V | Average dB μ V |
|------------------|--------------------------|-----------------------|
| 0.15 - 0.5 | 66 to 56 *) | 56 to 46 *) |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

The lower limit applies at the band edges.

*)Decreases with the logarithm of the frequency.

3.6 Settings receiver

| | | | |
|-------------|------------------|---------------|----------------------------|
| Ref. Level: | 80 dB μ Vrms | Measure time: | 100 ms |
| Attenuator: | 10 dB | Sweep time: | Auto [120 ms] |
| RBW: | 9 kHz | Step freq: | Linear: 0,002250 MHz steps |
| Preamp: | 0 dB | | |

3.7 Climatic conditions

| Parameter | Admissible range | Actual range | |
|----------------------|-----------------------------------|--------------|------|
| Ambient temperature | 10 °C - 40 °C (50 °F - 105 °F) | 22 °C | O.K. |
| Relative humidity | 10 % - 90 % | 58 % | O.K. |
| Atmospheric pressure | N/A | 999 mbar | O.K. |


3.8 Test result

Power ports AC input

| OS | Diagram | Remarks | Result |
|----|-------------|-------------------------------|---------|
| I) | 379011-32EC | Measurement at 115 V / 60 Hz. | Passed. |

3.9 Diagrams and tables

3.9.1 Diagram 379011-32EC

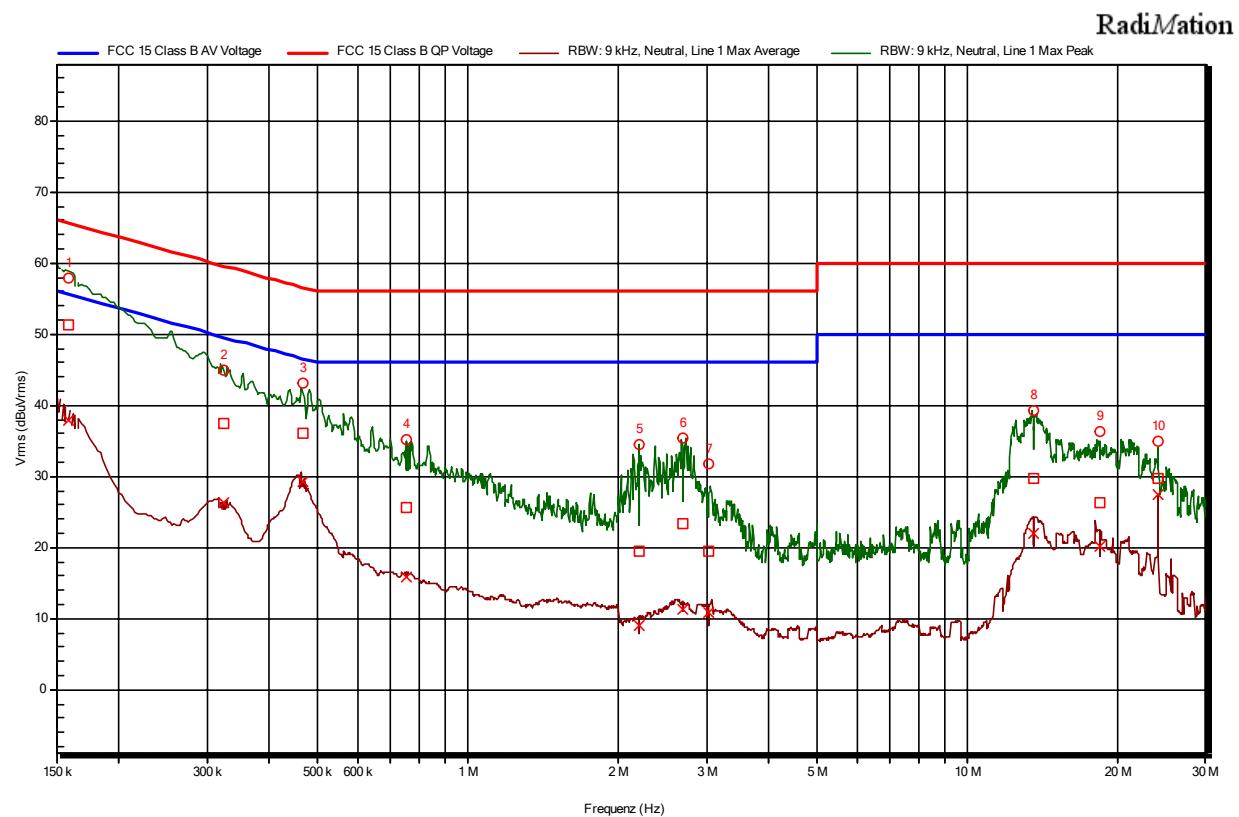

3.9.2 Table Final Measurements 379011-32EC_fin QP

| No. | Frequency MHz | Level dB μ V | Transd dB | Limit dB μ V | Margin dB | Line | PE |
|-----|---------------|------------------|-----------|------------------|-----------|---------|-----|
| 1 | 0,159000 | 51,41 | 9,97 | 65,52 | 14,11 | Neutral | GND |
| 2 | 0,323250 | 37,48 | 9,99 | 59,62 | 22,15 | Line 1 | GND |
| 3 | 0,467250 | 36,03 | 10,00 | 56,56 | 20,53 | Line 1 | GND |
| 4 | 0,755250 | 25,70 | 10,02 | 56,00 | 30,30 | Line 1 | GND |
| 5 | 2,206500 | 19,49 | 10,12 | 56,00 | 36,51 | Line 1 | GND |
| 6 | 2,690250 | 23,44 | 10,15 | 56,00 | 32,56 | Neutral | GND |
| 7 | 3,023250 | 19,38 | 10,17 | 56,00 | 36,62 | Line 1 | GND |
| 8 | 13,535250 | 29,65 | 10,69 | 60,00 | 30,35 | Line 1 | GND |
| 9 | 18,413250 | 26,40 | 10,88 | 60,00 | 33,60 | Neutral | GND |
| 10 | 24,002250 | 29,71 | 11,15 | 60,00 | 30,29 | Line 1 | GND |

3.9.3 Table Final Measurements 379011-32EC_fin AV

| No. | Frequency MHz | Level dB μ V | Transd dB | Limit dB μ V | Margin dB | Line | PE |
|-----|---------------|------------------|-----------|------------------|-----------|---------|-----|
| 1 | 0,159000 | 37,89 | 9,97 | 55,52 | 17,63 | Neutral | GND |
| 2 | 0,323250 | 26,21 | 9,99 | 49,62 | 23,41 | Line 1 | GND |
| 3 | 0,467250 | 29,24 | 10,00 | 46,56 | 17,32 | Line 1 | GND |
| 4 | 0,755250 | 15,77 | 10,02 | 46,00 | 30,23 | Line 1 | GND |
| 5 | 2,206500 | 8,95 | 10,12 | 46,00 | 37,05 | Line 1 | GND |
| 6 | 2,690250 | 11,34 | 10,15 | 46,00 | 34,66 | Neutral | GND |
| 7 | 3,023250 | 10,81 | 10,17 | 46,00 | 35,19 | Line 1 | GND |
| 8 | 13,535250 | 22,06 | 10,69 | 50,00 | 27,94 | Line 1 | GND |
| 9 | 18,413250 | 20,22 | 10,88 | 50,00 | 29,78 | Neutral | GND |
| 10 | 24,002250 | 27,55 | 11,15 | 50,00 | 22,45 | Line 1 | GND |

For calculating the disturbance voltage U and the Margin the following formulas were employed:

$$U = U_M + CF \quad \text{with: } CF = a_{CB1} + a_{CB2} + a_{PL}$$

CF Correction factor (All transducers)
 U Value in dB μ V
 U_M Measured value at receiver input in dB μ V
 a_{CB} Cable loss in dB
 a_{PL} Attenuation Pulse limiter in dB

Margin = Limit - Result

Test module ER low (30 - 200 MHz)

4 Measurement of radiated field

4.1 Standards

| | | |
|---|-------------------------------------|----------------------------------|
| Federal Communications Commission | 47 CFR Part 15, Subpart B | |
| Interference-Causing Equipment Standard | ICES-003 Issue 6 | |
| limit class | class B | |
| Measurement standard | ANSI C63.4: 2014 | |
| Internal procedure | QMA-5.4.1-12 | |
| Frequency range | 30 - 200 MHz | |
| Limits FCC | §15.109; class B | |
| Limits IC | ICES-003 clause 6.2; class B | |
| Test uncertainty U95 | 4.17 dB | (30 - 200 MHz) horizontal |
| | 4.77 dB | (30 - 200 MHz) vertical |

4.2 Measurement equipment

| Equipment | Ident. No. | Type | Manufacturer |
|---|------------|-------------|-----------------|
| <input checked="" type="checkbox"/> Biconical antenna HK116 | 1-0040 | HK116 | Rohde & Schwarz |
| <input type="checkbox"/> Log.-per. antenna | 1-0055 | HL223 | Rohde & Schwarz |
| <input type="checkbox"/> Trilog antenna | 1-0200 | VULB 9163 | Schwarzbeck |
| <input checked="" type="checkbox"/> Antenna mast | 1-0807 | MA4000-XPET | Innco |
| <input checked="" type="checkbox"/> Turntable | 1-0080 | DS 420 | H. Deisel |
| <input checked="" type="checkbox"/> Controller | 1-0806 | CO3000 | Innco |
| <input type="checkbox"/> Antenna cable 1 | 1-0363 | RF 214-N/7 | Kabelwerk Eupen |
| <input checked="" type="checkbox"/> Antenna cable 2 | 1-0364 | RF 214-N/7 | Kabelwerk Eupen |
| <input checked="" type="checkbox"/> Coaxial cable (to FAC) | 1-0619 | SF 106 | Huber & Suhner |
| <input checked="" type="checkbox"/> Measuring receiver | 1-0604 | ESU 8 | Rohde & Schwarz |
| <input type="checkbox"/> Spectrum analyser | 1-0611 | FSV 40 | Rohde & Schwarz |
| <input type="checkbox"/> Attenuator | 1-0994 | BW-N3W5+ | mini circuits |
| <input checked="" type="checkbox"/> Attenuator | 1-0995 | UNAT-6+ | mini circuits |
| <input type="checkbox"/> Attenuator | 1-0870 | BW-N10W5+ | mini circuits |
| <input type="checkbox"/> Attenuator | 1-0871 | BW-N10W5+ | mini circuits |
| <input type="checkbox"/> EMI-Software ES-K1 | 1-0071 | ES-K1 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> EMI-Software RadiMation | 1-0624 | RM 2018.2.8 | DARE |
| <input checked="" type="checkbox"/> Semi anechoic chamber | 1-0361 | - | R&M München |

4.3 Test set-up

The test set-up was realized in a semi anechoic chamber according to the above-mentioned standard. The position of the receiving antenna and the EUT in the semi-anechoic chamber is shown in the figure.

ANNEX B

The test has been performed as following:

- 1) Preview test; Peak-Detector; measuring time 10 ms; frequency range from 30 MHz to 200 MHz; frequency step 30 kHz; antenna height from 1,00 m up to 4,00 m; horizontal and vertical polarization; antenna-to-EUT azimuth 0 up to 360 degrees in steps of 22.5 degrees.
- 2) Find frequencies with maximum emission:
 - ⇒ Acceptance-analyze: Limit minus 20 dB; Because of the dimensions of the FAR the measurements have been performed at a distance of 3 m.
 - ⇒ According to §15.31 of CFR 47 (Code of Federal Regulations Title 47; Volume 1; Chapter I; Subchapter A) measurements at frequencies at or above 30 MHz may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.
 - ⇒ While performing measurements at a distance other than that specified, the **limit line** was extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements). An inverse proportionality of 20 dB per decade was used to normalize the limit line to the specified distance for determine compliance.
 - ⇒ Peak-reduction of highest peaks in frequency range 30,000 MHz - 200,000 MHz
- 3) Final test; Quasi-Detector; measuring time 1 s; at frequencies from step 2); Search maximum: vary antenna height and azimuth (rotate turntable) to find the maximum field strength readings.
- 4) Manual test of selected frequencies which meet the criterion 2).

4.4 Test method and limits

The test was performed in a test chamber according to ANSI C63.4-2014. In order to find the maximum levels of the disturbance radiation the angle of the turntable, the height of the measuring antenna and the lay-out of the EUT cables were varied during the tests. The test was performed separately with the measuring antenna being both in horizontal and vertical polarizations.

For ITE unintentional radiators, the frequency and amplitude of the six highest radiated emissions relative to the limit and independent of antenna polarization are reported in the table below, unless such emissions are more than 20 dB below the limit.

For unintentional radiators other than ITE, for each of the frequencies to which the device is tuned, the frequency and amplitude of the six highest radiated emissions relative to the limit and the operating frequency, or frequency to which the EUT is tuned (if appropriate), are reported in the table below unless such emissions are more than 20 dB below the limit.

4.5 Subpart B - Part 15.109 / ICES-003 class B limit values

| Frequency MHz | Quasi-peak µV/m | Quasi-peak dB(µV/m) @3 m | Average dB(µV/m) @3 m |
|------------------|--------------------|-----------------------------|--------------------------|
| 30 - 88 | 100 @3 m | 40.00 @3 m | - |
| 88 - 216 | 150 @3 m | 43.52 @3 m | - |
| 216 - 960 | 200 @3 m | 46.02 @3 m | - |
| 960 - 1000 | 500 @3 m | 53.98 @3 m | - |

In the emission tables above, the tighter limit applies at the band edges.

4.6 Settings receiver

| | | | |
|-------------------|------------|----------------|--------------------------|
| Ref. Level: | 80 dBuVrms | VBW: | Auto [120 kHz] |
| Attenuator: | 10 dB | Sweep time: | Auto [120 ms] |
| RBW: | 120 kHz | Step freq: | Linear: 30,000 kHz steps |
| Preamp: | 10 dB | Measure time: | 10 ms |
| Antenna distance: | 3 m | Antenna tower: | 1,00 m - 4,00 m |

Of those disturbances above (L -20 dB), where L is the limit level in logarithmic units, at least the disturbance levels and the frequencies of the 6 highest disturbances is recorded. The antenna polarization for each reported disturbance is recorded.

4.7 Climatic conditions

| Parameter | Admissible range | Actual range | |
|----------------------|-----------------------------------|--------------|------|
| Ambient temperature | 10 °C - 40 °C (50 °F - 105 °F) | 18 °C | O.K. |
| Relative humidity | 10 % - 90 % | 59 % | O.K. |
| Atmospheric pressure | N/A | 999 mbar | O.K. |

4.8 Internal generated or used frequency for intentional radiators

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes.


| | Highest frequency generated or used in the device or on which the device operates or tunes (MHz) | Upper frequency of measurement range |
|-------------------------------------|--|--|
| <input checked="" type="checkbox"/> | 9 kHz - 10 GHz | The measurement is made up to 10 times the highest frequency or 40 GHz, whichever is less. |
| <input type="checkbox"/> | 10 - 30 GHz | The measurement is made up to 5 times the highest frequency or 100 GHz, whichever is less. |
| <input type="checkbox"/> | 30 - 95 GHz | The measurement is made up to 5 times the highest frequency or 200 GHz, whichever is less. |
| <input type="checkbox"/> | > 95 GHz | The measurement is made up to 3 times the highest frequency or 750 GHz, whichever is less. |

4.9 Test result

| OS | Diagram | Remarks | Result |
|----|------------|---------|---------|
| I) | 379011-4ER | - | Passed. |

4.10 Diagrams and tables

4.10.1 Diagram 379011-4ER

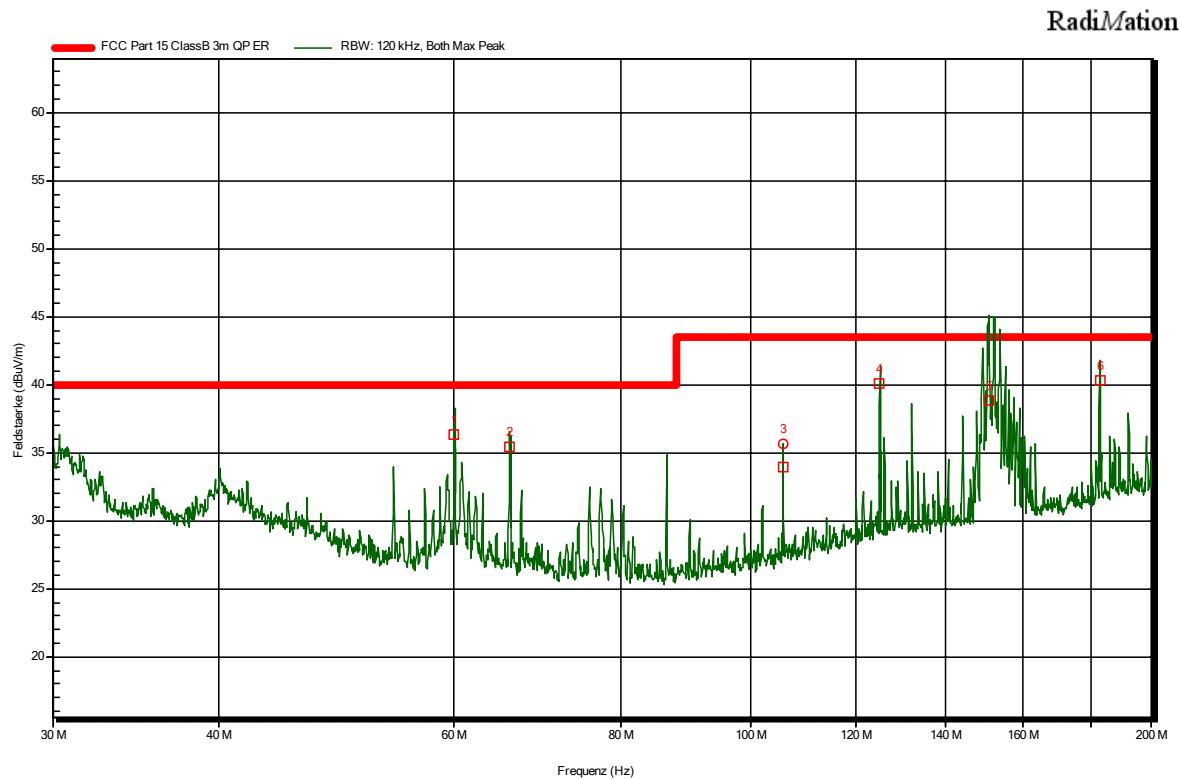

4.10.2 Table Final measurements 379011-4ER QP

| Frequency MHz | Level QP dB(µV/m) | QP Limit dB(µV/m) | Margin dB | Angle deg | Height m | Polarization |
|------------------|----------------------|----------------------|--------------|--------------|-------------|--------------|
| 60,000 | 36,33 | 40,00 | 3,67 | 19,0 | 1,00 | Vertical |
| 66,000 | 35,45 | 40,00 | 4,55 | 4,0 | 1,00 | Vertical |
| 105,780 | 33,90 | 43,50 | 9,60 | 292,0 | 4,00 | Horizontal |
| 125,010 | 40,06 | 43,50 | 3,44 | 279,0 | 2,10 | Horizontal |
| 150,750 | 38,86 | 43,50 | 4,64 | 279,0 | 1,60 | Horizontal |
| 182,700 | 40,29 | 43,50 | 3,21 | 214,0 | 1,10 | Horizontal |

For calculating the disturbance field strength and the Margin the following formulas were employed:

$$E = U_M + CF \quad \text{with } CF = a_{Cb1} + a_{Cb2} + AF + a_{ATT}$$

CF Correction factor (All transducers)

E Value in dBµV/m

U_M Measured value at receiver input in dBµV

a_{CB} Cable loss in dB

AF Antenna factor in dB/m

a_{ATT} Attenuation in dB

Margin = Limit - Result

Test module ER high (200 - 1000 MHz)

5 Measurement of radiated field

5.1 Standards

| | | |
|---|-------------------------------------|-----------------------------|
| Federal Communications Commission | 47 CFR Part 15, Subpart B | |
| Interference-Causing Equipment Standard | ICES-003 Issue 6 | |
| limit class | class B | |
| Measurement standard | ANSI C63.4: 2014 | |
| Internal procedure | QMA-5.4.1-12 | |
| Frequency range | 200 - 1000 MHz | |
| Limits FCC | §15.109; class B | |
| Limits IC | ICES-003 clause 6.2; class B | |
| Test uncertainty U95 | 4.54 dB | (200 - 1000 MHz) horizontal |
| | 5.02 dB | (200 - 1000 MHz) vertical |

5.2 Measurement equipment

| | Equipment | Ident. No. | Type | Manufacturer |
|-------------------------------------|-------------------------|------------|-------------|-----------------|
| <input type="checkbox"/> | Biconical antenna HK116 | 1-0040 | HK116 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> | Log.-per. antenna | 1-0055 | HL223 | Rohde & Schwarz |
| <input type="checkbox"/> | Trilog antenna | 1-0200 | VULB 9163 | Schwarzbeck |
| <input checked="" type="checkbox"/> | Antenna mast | 1-0807 | MA4000-XPET | Innco |
| <input checked="" type="checkbox"/> | Turntable | 1-0080 | DS 420 | H. Deisel |
| <input checked="" type="checkbox"/> | Controller | 1-0806 | CO3000 | Innco |
| <input checked="" type="checkbox"/> | Antenna cable 2 | 1-0364 | RF 214-N/7 | Kabelwerk Eupen |
| <input checked="" type="checkbox"/> | Coaxial cable (to FAC) | 1-0619 | SF 106 | Huber & Suhner |
| <input checked="" type="checkbox"/> | Measuring receiver | 1-0604 | ESU 8 | Rohde & Schwarz |
| <input type="checkbox"/> | Spectrum analyser | 1-0611 | FSV 40 | Rohde & Schwarz |
| <input type="checkbox"/> | Attenuator | 1-0994 | BW-N3W5+ | mini circuits |
| <input type="checkbox"/> | Attenuator | 1-0995 | UNAT-6+ | mini circuits |
| <input type="checkbox"/> | Attenuator | 1-0870 | BW-N10W5+ | mini circuits |
| <input type="checkbox"/> | Attenuator | 1-0871 | BW-N10W5+ | mini circuits |
| <input checked="" type="checkbox"/> | EMI-Software RadiMation | 1-0624 | RM 2018.2.8 | DARE |
| <input checked="" type="checkbox"/> | Semi anechoic chamber | 1-0361 | - | R&M München |

5.3 Test set-up

The test set-up was realized in a semi anechoic chamber according to the above-mentioned standard. The position of the receiving antenna and the EUT in the semi-anechoic chamber is shown in the figure.

ANNEX B

The test has been performed as following:

- 5) Preview test; Peak-Detector; measuring time 10 ms; frequency range from 200 MHz to 1000 MHz, frequency 30 kHz; antenna height from 1,00 m up to 4,00 m; horizontal and vertical polarization; antenna-to-EUT azimuth 0 up to 360 degrees in steps of 22.5 degrees.
- 6) Find frequencies with maximum emission:
 - ⇒ Acceptance-analyze: Limit minus 20 dB; Because of the dimensions of the FAR the measurements have been performed at a distance of 3 m.
 - ⇒ According to §15.31 of CFR 47 (Code of Federal Regulations Title 47; Volume 1; Chapter I; Subchapter A) measurements at frequencies at or above 30 MHz may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.
 - ⇒ While performing measurements at a distance other than that specified, the **limit line** was extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements). An inverse proportionality of 20 dB per decade was used to normalize the limit line to the specified distance for determine compliance.
 - ⇒ Peak-reduction of highest peaks in frequency range 200,000 MHz - 1,000 GHz
- 7) Final test; Quasi-Detector; measuring time 1 s; at frequencies from step 2); Search maximum: vary antenna height and azimuth (rotate turntable) to find the maximum field strength readings.
- 8) Manual test of selected frequencies which meet the criterion 2).

5.4 Test method and limits

The test was performed in a test chamber according to ANSI C63.4-2014. In order to find the maximum levels of the disturbance radiation the angle of the turntable, the height of the measuring antenna and the lay-out of the EUT cables were varied during the tests. The test was performed separately with the measuring antenna being both in horizontal and vertical polarizations.

For ITE unintentional radiators, the frequency and amplitude of the six highest radiated emissions relative to the limit and independent of antenna polarization are reported in the table below, unless such emissions are more than 20 dB below the limit.

For unintentional radiators other than ITE, for each of the frequencies to which the device is tuned, the frequency and amplitude of the six highest radiated emissions relative to the limit and the operating frequency, or frequency to which the EUT is tuned (if appropriate), are reported in the table below unless such emissions are more than 20 dB below the limit.

5.5 Subpart B - FCC Part 15.109 / ICES-003 class B limit values

| Frequency MHz | Quasi-peak μV/m | Quasi-peak dB(μV/m) @3 m | Average dB(μV/m) @3 m |
|------------------|--------------------|-----------------------------|--------------------------|
| 30 - 88 | 100 @3 m | 40.00 @3 m | - |
| 88 - 216 | 150 @3 m | 43.52 @3 m | - |
| 216 - 960 | 200 @3 m | 46.02 @3 m | - |
| 960 - 1000 | 500 @3 m | 53.98 @3 m | - |

In the emission tables above, the tighter limit applies at the band edges.

5.6 Settings receiver

| | | | |
|-------------------|------------|----------------|--------------------------|
| Ref. Level: | 80 dBuVrms | VBW: | Auto [120 kHz] |
| Attenuator: | 10 dB | Sweep time: | Auto [120 ms] |
| RBW: | 120 kHz | Step freq: | Linear: 30,000 kHz steps |
| Preamp: | 10 dB | Measure time: | 10 ms |
| Antenna distance: | 3 m | Antenna tower: | 1,00 m - 4,00 m |

Of those disturbances above (L -20 dB), where L is the limit level in logarithmic units, at least the disturbance levels and the frequencies of the 6 highest disturbances is recorded. The antenna polarization for each reported disturbance is recorded.

5.7 Climatic conditions

| Parameter | Admissible range | Actual range | |
|----------------------|-----------------------------------|--------------|------|
| Ambient temperature | 10 °C - 40 °C (50 °F - 105 °F) | 18 °C | O.K. |
| Relative humidity | 10 % - 90 % | 59 % | O.K. |
| Atmospheric pressure | N/A | 999 mbar | O.K. |

5.8 Internal generated or used frequency for intentional radiators

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes.


| | Highest frequency generated or used in the device or on which the device operates or tunes (MHz) | Upper frequency of measurement range |
|-------------------------------------|--|--|
| <input checked="" type="checkbox"/> | 9 kHz - 10 GHz | The measurement is made up to 10 times the highest frequency or 40 GHz, whichever is less. |
| <input type="checkbox"/> | 10 - 30 GHz | The measurement is made up to 5 times the highest frequency or 100 GHz, whichever is less. |
| <input type="checkbox"/> | 30 - 95 GHz | The measurement is made up to 5 times the highest frequency or 200 GHz, whichever is less. |
| <input type="checkbox"/> | > 95 GHz | The measurement is made up to 3 times the highest frequency or 750 GHz, whichever is less. |

5.9 Test result

| OS | Diagram | Remarks | Result |
|----|------------|---------|---------|
| I) | 379011-5ER | - | Passed. |

5.10 Diagrams and tables

5.10.1 Diagram 379011-5ER

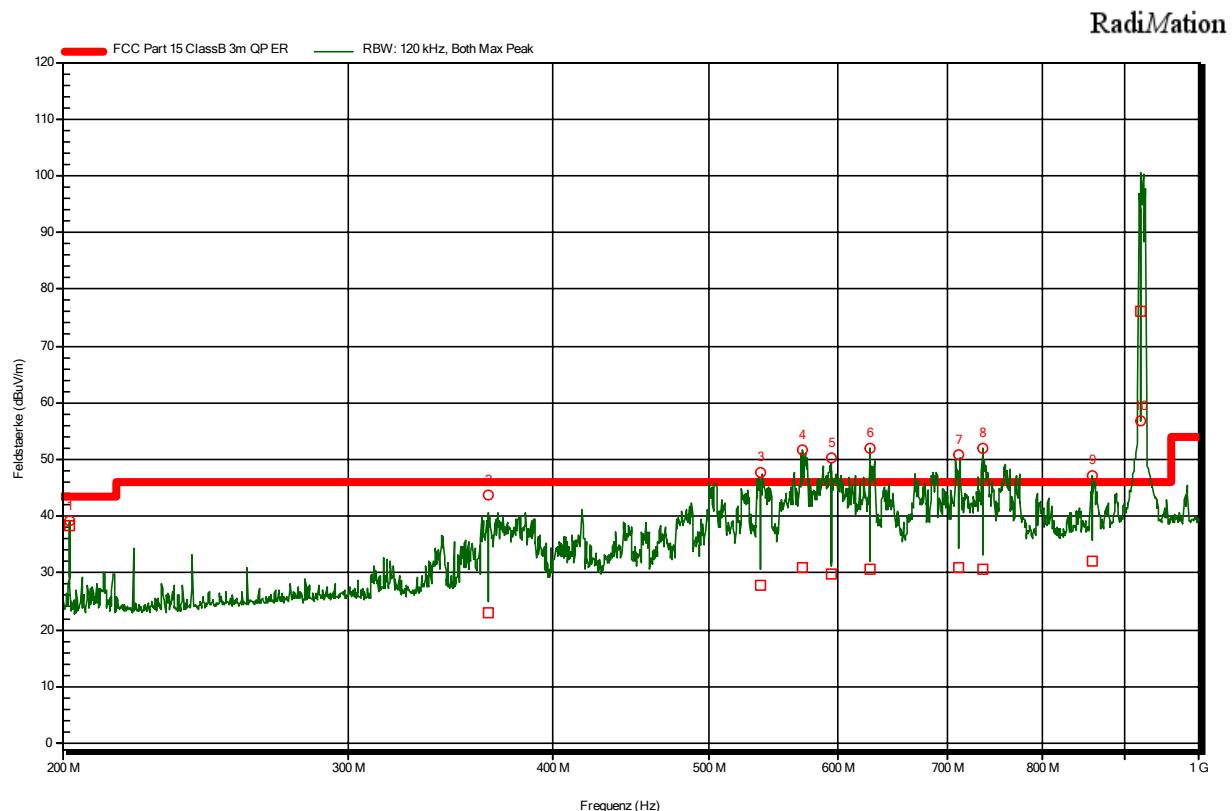

5.10.2 Table Final measurements 379011-5ER QP

| Frequency MHz | Level QP dB(µV/m) | QP Limit dB(µV/m) | Margin dB | Angle deg | Height m | Polarization |
|------------------|----------------------|----------------------|--------------|--------------|-------------|--------------|
| 201,920 | 38,25 | 43,50 | 5,25 | 247,0 | 1,00 | Horizontal |
| 365,450 | 22,88 | 46,00 | 23,12 | 292,0 | 4,00 | Horizontal |
| 536,780 | 27,85 | 46,00 | 18,15 | 22,0 | 1,00 | Vertical |
| 570,530 | 30,86 | 46,00 | 15,14 | 45,0 | 1,00 | Vertical |
| 593,480 | 29,95 | 46,00 | 16,05 | 135,0 | 1,00 | Vertical |
| 626,870 | 30,77 | 46,00 | 15,23 | 90,0 | 4,00 | Vertical |
| 711,530 | 31,00 | 46,00 | 15,00 | 337,0 | 1,00 | Horizontal |
| 735,800 | 30,73 | 46,00 | 15,27 | 67,0 | 2,50 | Horizontal |
| 859,670 | 32,02 | 46,00 | 13,98 | 247,0 | 1,00 | Horizontal |
| 920,450 *) | 76,20 | | | 360,0 | 1,00 | Vertical |

*) Fundamental frequency

For calculating the disturbance field strength and the Margin the following formulas were employed:

$$E = U_M + CF \quad \text{with } CF = a_{Cb1} + a_{Cb2} + AF + a_{ATT}$$

| | |
|------------------------|--|
| <i>CF</i> | Correction factor (All transducers) |
| <i>E</i> | Value in dB μ V/m |
| <i>U_M</i> | Measured value at receiver input in dB μ V |
| <i>a_{CB}</i> | Cable loss in dB |
| <i>AF</i> | Antenna factor in dB/m |
| <i>a_{ATT}</i> | Attenuation in dB |

Margin = Limit - Result

Test module ER2 (1 - 14 GHz)

6 Measurement of radiated field

6.1 Standards

| | | |
|---|-------------------------------------|--------------|
| Federal Communications Commission | 47 CFR Part 15, Subpart B | |
| Interference-Causing Equipment Standard | ICES-003 Issue 6 | |
| limit class | class B | |
| Measurement standard | ANSI C63.4: 2014 | |
| Internal procedure | QMA-5.4.1-40 | |
| Frequency range | 1000 - 14000 MHz | |
| Limits FCC | §15.109; class B | |
| Limits IC | ICES-003 clause 6.2; class B | |
| Test uncertainty U95 | 7.03 dB | (1 - 6 GHz) |
| | 16.46 dB | (6 - 18 GHz) |

6.2 Measurement equipment

| Equipment | Ident. No. | Type | Manufacturer |
|---|------------|-------------|-----------------|
| <input checked="" type="checkbox"/> Horn antenna | 1-0772 | BBHA 9120D | Schwarzbeck |
| <input type="checkbox"/> Trilog antenna | 1-0200 | VULB 9163 | Schwarzbeck |
| <input checked="" type="checkbox"/> Antenna mast | 1-0807 | MA4000-XPET | Innco |
| <input type="checkbox"/> Coaxial cable | 1-1037 | AK 9515H | Schwarzbeck |
| <input checked="" type="checkbox"/> Pre amplifier | 1-0615 | BBV 9718 | Schwarzbeck |
| <input checked="" type="checkbox"/> Coaxial cable | 1-0620 | SF 106 | Huber & Suhner |
| <input checked="" type="checkbox"/> Coaxial cable (to FAC) | 1-0619 | SF 106 | Huber & Suhner |
| <input type="checkbox"/> Measuring receiver | 1-0604 | ESU 8 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> Spectrum analyser | 1-0611 | FSV 40 | Rohde & Schwarz |
| <input checked="" type="checkbox"/> EMI-Software RadiMation | 1-0624 | RM 2018.2.8 | DARE |
| <input checked="" type="checkbox"/> Turntable | 1-0080 | DS 420 | H. Deisel |
| <input checked="" type="checkbox"/> Controller | 1-0806 | CO3000 | Innco |
| <input checked="" type="checkbox"/> Semi anechoic chamber | 1-0361 | - | R&M München |

6.3 Test set-up

The test set-up was realized in a semi anechoic chamber according to the above-mentioned standard. The position of the receiving antenna and the EUT in the semi-anechoic chamber is shown in the figure.

Annex B

The test has been performed as following:

9) Preview test; Peak-Detector; measuring time 10 ms; frequency range from 1000 MHz to 14,000 GHz; frequency step 250 kHz; antenna height from 1,00 m up to 1,00 m; horizontal and vertical polarization; antenna-to-EUT azimuth 0 up to 360 degrees in steps of 15 degrees.

10) Find frequencies with maximum emission:

- ⇒ Acceptance-analyze: Limit minus 20 dB; Because of the dimensions of the FAR the measurements have been performed at a distance of 3,00 m.
- ⇒ According to §15.31 of CFR 47 (Code of Federal Regulations Title 47; Volume 1; Chapter I; Subchapter A) measurements at frequencies at or above 30 MHz may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.
- ⇒ While performing measurements at a distance other than that specified, the **limit line** was extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements). An inverse proportionality of 20 dB per decade was used to normalize the limit line to the specified distance for determine compliance.
- ⇒ Peak-reduction: 0 Peaks frequency range 1,000 GHz - 14,000 GHz

11) Final test; Peak- und Average-Detector; measuring time 1 s; at frequencies from step 2); Search maximum: vary antenna height and azimuth (rotate turntable) to find the maximum field strength readings.

12) If there are more than 10 peaks within the 10 dB margin a manual test with all settings is necessary to find the maximum field strength readings.

6.4 Test method and limits

The test was performed in a test chamber according to ANSI C63.4-2014. In order to find the maximum levels of the disturbance radiation the angle of the turntable, the height of the measuring antenna and the lay-out of the EUT cables were varied during the tests. The test was performed separately with the measuring antenna being both in horizontal and vertical polarizations.

For ITE unintentional radiators, the frequency and amplitude of the six highest radiated emissions relative to the limit and independent of antenna polarization are reported in the table below, unless such emissions are more than 20 dB below the limit.

For unintentional radiators other than ITE, for each of the frequencies to which the device is tuned, the frequency and amplitude of the six highest radiated emissions relative to the limit and the operating frequency, or frequency to which the EUT is tuned (if appropriate), are reported in the table below unless such emissions are more than 20 dB below the limit.

6.5 Subpart B - FCC Part 15.109 / ICES-003 class B limit values

| Frequency MHz | Peak μV/m | Peak dB(μV/m) @3 m | Average dB(μV/m) @3 m |
|------------------|--------------|-----------------------|--------------------------|
| 1000 - 14000 | - | 73.98 @3 m | 53.98 @3 m |

6.6 Settings receiver

| | | | |
|-------------------|-------------|----------------|---|
| Ref. Level: | 80 dBuVrms | VBW: | 1 MHz |
| Attenuator: | Auto [0 dB] | Sweep time: | 30 s |
| RBW: | 1 MHz | Step freq: | Fixed step count: 20001 steps per Band |
| Preamp: | 0 dB | Measure time: | 1 ms |
| Antenna distance: | 3 m | Antenna tower: | 1 m - 1 m |

Of those disturbances above (L -20 dB), where L is the limit level in logarithmic units, at least the disturbance levels and the frequencies of the 8 highest disturbances is recorded. The antenna polarization for each reported disturbance is recorded.

6.7 Climatic conditions

| Parameter | Admissible range | Actual range | |
|----------------------|-----------------------------------|--------------|------|
| Ambient temperature | 10 °C - 40 °C (50 °F - 105 °F) | 20 °C | O.K. |
| Relative humidity | 10 % - 90 % | 40 % | O.K. |
| Atmospheric pressure | N/A | 992 mbar | O.K. |

6.8 Internal generated or used frequency for intentional radiators

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes.


| | Highest frequency generated or used in the device or on which the device operates or tunes (MHz) | Upper frequency of measurement range |
|-------------------------------------|--|--|
| <input checked="" type="checkbox"/> | 9 kHz - 10 GHz | The measurement is made up to 10 times the highest frequency or 40 GHz, whichever is less. |
| <input type="checkbox"/> | 10 - 30 GHz | The measurement is made up to 5 times the highest frequency or 100 GHz, whichever is less. |
| <input type="checkbox"/> | 30 - 95 GHz | The measurement is made up to 5 times the highest frequency or 200 GHz, whichever is less. |
| <input type="checkbox"/> | > 95 GHz | The measurement is made up to 3 times the highest frequency or 750 GHz, whichever is less. |

6.9 Test result

| OM | Diagram | Remarks | Result |
|----|--------------|---------|---------|
| I) | 379011-34ER2 | - | Passed. |

6.10 Diagrams and tables

6.10.1 Diagram 379011-34ER2

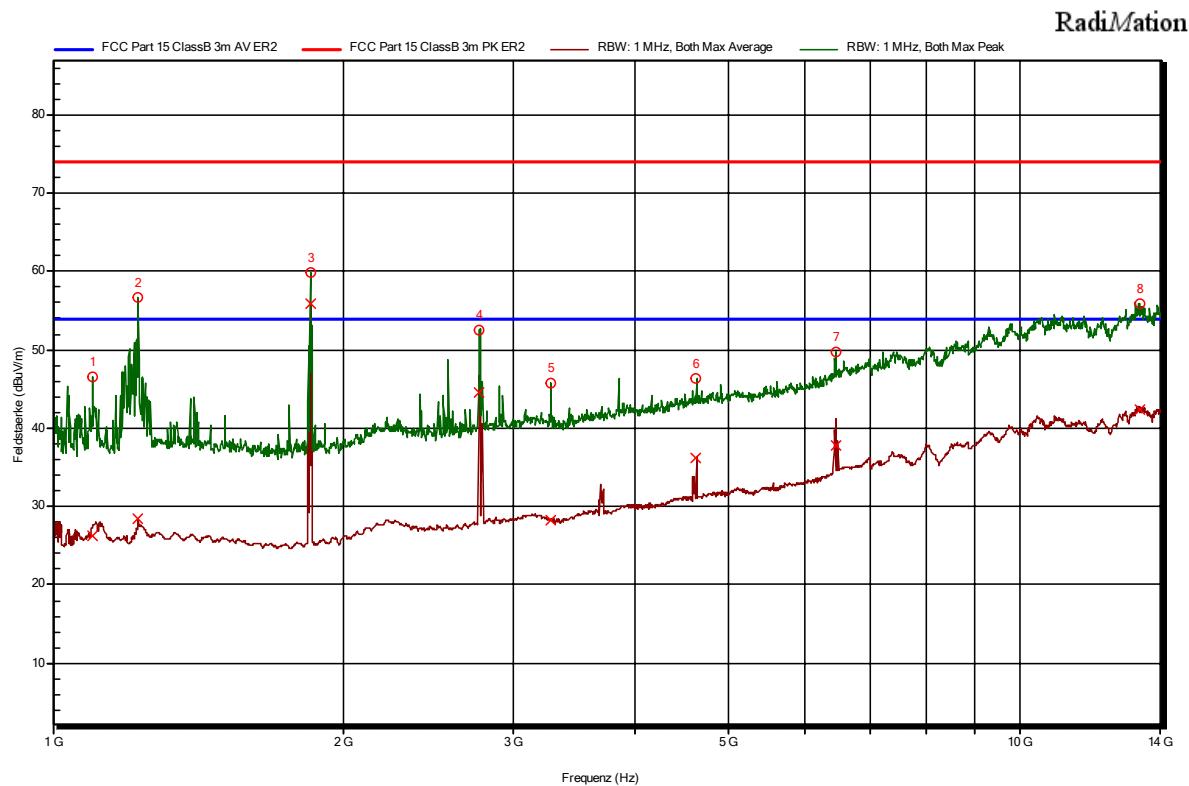

6.10.2 Table Final measurements 379011-34ER2 PK

| Frequency | Level PK | Peak Limit | Margin | Angle | Height | Polarization |
|-----------|----------------|----------------|--------|--------|--------|--------------|
| GHz | dB(μ V/m) | dB(μ V/m) | dB | deg | m | |
| 1,099 | 46,58 | 73,98 | 27,4 | 180,00 | 1 | Horizontal |
| 1,224 | 56,58 | 73,98 | 17,4 | 180,00 | 1 | Horizontal |
| 1,845 | 59,85 | 73,98 | 14,13 | 337,00 | 1 | Vertical |
| 2,763 | 52,53 | 73,98 | 21,45 | 0,00 | 1 | Horizontal |
| 3,270 | 45,70 | 73,98 | 28,28 | 337,00 | 1 | Vertical |
| 4,630 | 46,29 | 73,98 | 27,69 | 0,00 | 1 | Vertical |
| 6,450 | 49,63 | 73,98 | 24,35 | 337,00 | 1 | Vertical |
| 13,292 | 55,84 | 73,98 | 18,14 | 291,00 | 1 | Vertical |

6.10.3 Table Final measurements 379011-34ER2 AV

| Frequency | Level AV | Peak Limit | Margin | Angle | Height | Polarization |
|-----------|----------------|----------------|--------|--------|--------|--------------|
| GHz | dB(μ V/m) | dB(μ V/m) | dB | deg | m | |
| 1,099 | 26,16 | 53,98 | 27,82 | 180,00 | 1 | Horizontal |
| 1,224 | 28,54 | 53,98 | 25,44 | 180,00 | 1 | Horizontal |
| 1,845 *) | 55,98 | | | 337,00 | 1 | Vertical |
| 2,763 | 44,48 | 53,98 | 9,5 | 0,00 | 1 | Horizontal |
| 3,270 | 28,25 | 53,98 | 25,73 | 337,00 | 1 | Vertical |
| 4,630 | 36,29 | 53,98 | 17,69 | 0,00 | 1 | Vertical |
| 6,450 | 37,83 | 53,98 | 16,15 | 337,00 | 1 | Vertical |
| 13,292 | 42,34 | 53,98 | 11,64 | 291,00 | 1 | Vertical |

*) Harmonic of the fundamental frequency

For calculating the disturbance field strength and the Margin the following formulas were employed:

$$E = U_M + CF \quad \text{with } CF = a_{Cb1} - g_{PA} + a_{Cb2} + AF + a_{ATT}$$

CF Correction factor (All transducers)
 E Value in $\text{dB}\mu\text{V}/\text{m}$
 U_M Measured value at receiver input in $\text{dB}\mu\text{V}$
 a_{CB} Cable loss in dB
 g_{PA} gain pre amplifier in dB
 AF Antenna factor in dB/m
 a_{ATT} Attenuation in dB

Margin = Limit - Result

7 Test equipment used

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the test house.

| Inv.-Nr. | Instrument/ ancillary | Manufacturer | Type | Serial number | Cal. Date | Cal. Due |
|----------|-------------------------------|------------------|--------------------|------------------|-----------|----------|
| 1-0037 | Artificial mains network, 3ph | Rohde & Schwarz | ESH2-Z5 | 882394/019 | 2019-09 | 2020-09 |
| 1-0040 | Biconical antenna | Rohde & Schwarz | HK116 | 888945/007 | 2017-07 | 2020-07 |
| 1-0054 | Pulse limiter | Rohde & Schwarz | ESH3-Z2 | 3MSE/0099 | 2019-09 | 2020-09 |
| 1-0055 | LogPer antenna | Rohde & Schwarz | HL223 | 826517/014 | 2017-07 | 2020-07 |
| 1-0072 | Artificial mains network, 1ph | Rohde & Schwarz | ESH3-Z5 | 840062/001 | 2019-09 | 2020-09 |
| 1-0080 | Turntable | H. Deisel | DS 420 | 1361114 | N / A | N / A |
| 1-0200 | Trilog antenna | Schwarzbeck | VULB 9163 | VULB 9163-107 | 2019-02 | 2022-02 |
| 1-0361 | Semi anechoic chamber | Reinhold & Mahla | 3m | 1124 | 2017-06 | 2020-06 |
| 1-0364 | Antenna cable 2 | Kabelwerk Eupen | CMS / RG 214-N/7 | none | 2019-09 | 2022-09 |
| 1-0604 | EMI test receiver | Rohde & Schwarz | ESU8 | 100203 | 2019-09 | 2020-09 |
| 1-0611 | Spectrum analyzer | Rohde & Schwarz | FSV 40 | 100898 | 2019-11 | 2020-11 |
| 1-0614 | Log.-per. antenna | Schwarzbeck | STLP 9148 | STLP 9148-133 | 2019-08 | 2022-08 |
| 1-0615 | Pre amplifier | Schwarzbeck | BBV-9718 | BBV 9718-191 | 2019-09 | 2020-09 |
| 1-0619 | Coaxial cable (to SAC) | Huber+Suhner | SF106/2x11N-651/2m | 70168/6 | 2019-09 | 2022-09 |
| 1-0620 | Antenna cable 3 | Huber+Suhner | SF106/2x11N-651/3m | 70619/6 | 2019-09 | 2022-09 |
| 1-0624 | EMI-Software Radimation | DARE | Radimation | not applicable | N / A | N / A |
| 1-0770 | Horn antenna | Schwarzbeck | BBHA 9170 | BBHA 9170-477 | 2018-06 | 2021-06 |
| 1-0771 | Horn antenna | Schwarzbeck | BBHA 9170 | BBHA 9170-476 | 2018-03 | 2021-03 |
| 1-0772 | Horn antenna | Schwarzbeck | BBHA 9120D | BBHA 9120D-972 | 2018-03 | 2021-03 |
| 1-0781 | Pre amplifier | Schwarzbeck | BBV 9721 | BBV 9721-001 | 2019-09 | 2020-09 |
| 1-0782 | Antenna cable | Huber & Suhner | FB142A1060002020 | 75193-01 | 2017-10 | 2020-10 |
| 1-0794 | Coaxial cable | Rosenberger | FB142A0010002020 | 65627-01 | 2017-10 | 2020-10 |
| 1-0806 | Controller | Innco | CO 3000 | 821/34571114/L | N / A | N / A |
| 1-0807 | Antenna mast | Innco | MA-400-XPET | 4681114 | N / A | N / A |
| 1-0870 | 10 dB Attenuator | mini circiuts | BW-N10W5+ | 1429 | 2019-09 | 2022-09 |
| 1-0871 | 10 dB Attenuator | mini circiuts | BW-N10W5+ | 1414 | 2019-09 | 2022-09 |
| 1-0925 | Coaxial cable | HARBOUR | RG316 MIL | #003 | 2019-09 | 2022-09 |
| 1-0927 | Coaxial cable | HARBOUR | RG316 MIL | #005 | 2019-09 | 2022-09 |
| 1-0993 | 6 dB Attenuator | mini circiuts | BW-N6W5+ | 1725 | 2017-10 | 2020-10 |
| 1-0994 | 3 dB Attenuator | mini circiuts | BW-N3W5+ | 1734 | 2017-10 | 2020-10 |
| 1-0995 | 6 dB Attenuator | mini circiuts | UNAT-6+ | 15542 | 2017-09 | 2021-09 |
| 1-1012 | Coaxial cable | Rosenberger | LA2-018-2000 | 010-1964471 0001 | 2018-09 | 2021-09 |
| 1-1037 | Coaxial cable | Schwarzbeck | AK 9515H | AK 9515H #91 | 2018-09 | 2021-09 |

Annex A

EUT / technical data

| General Information | | | Description | | |
|---------------------------------------|--|----------------------------------|----------------------------------|-------------------------------------|-------------|
| Enclosure | | | metal / plastic | | |
| Dimensions | | | 0,22 x 0,25 x 0,21 m | | |
| input voltage | | | | | |
| Nominal voltage | Frequency | Neutral | PE | Nominal Current | |
| 100 - 240 V | 50 - 60 Hz | <input type="checkbox"/> without | <input type="checkbox"/> without | 1,2 A | |
| output voltage | | | | | |
| Nominal voltage | Frequency | Neutral | PE | Nominal Current | |
| none | - | <input type="checkbox"/> without | <input type="checkbox"/> without | A | |
| Interface (I/O, LAN, USB) | | | | | |
| I/O and communication ports | | | No. | Shielded | max. Length |
| 3x USB | | | 1-3 | <input checked="" type="checkbox"/> | < 3 m |
| Process measurement and control ports | | | No. | Shielded | max. Length |
| none | | | - | <input type="checkbox"/> | m |
| Interface Cables | | | Length | Shielded | Type |
| none | | | m | <input type="checkbox"/> | Round |
| Protective earth connection | | | | | |
| Cross-section | max. Length | Description | | | |
| - | - | by line connection | | | |
| Table 1 | Description of EUT / Technical data | | | | |



Figure 1 EUT / set up - test module EC (spurious conducted 150 kHz - 30 MHz)

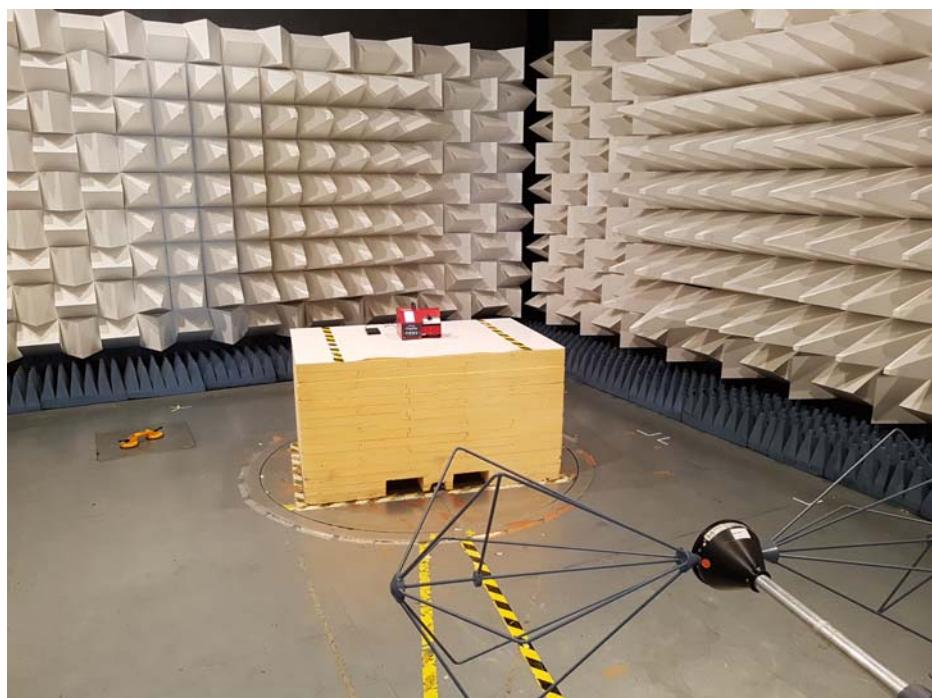


Figure 2 EUT / set up - test module ER low (radiated emissions 30 - 200 MHz)



Figure 3 EUT / set up - test module ER high (radiated emissions 200 - 1000 MHz)

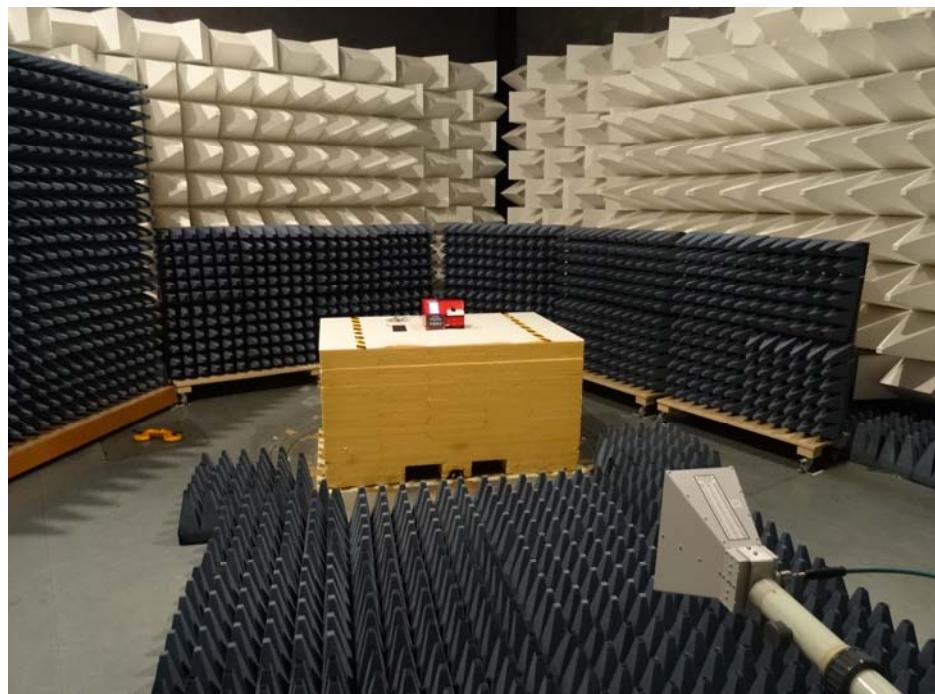


Figure 4 EUT / set up - test module ER2 (radiated emissions 1 - 14 GHz)



Figure 5 EUT / type label

Annex B

Arrangement in the semi anechoic chamber

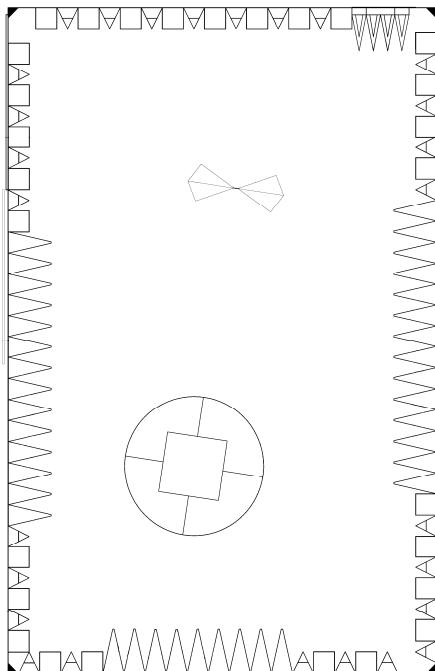


Figure 6 Set-up - ER (30 - 200 MHz)

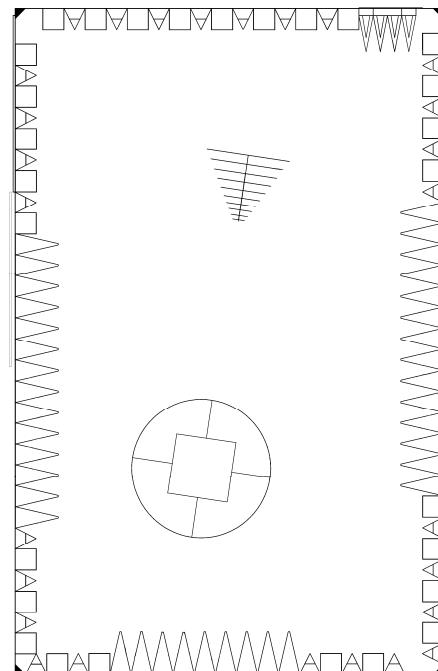


Figure 7 Set-up - ER (200 - 1000 MHz)

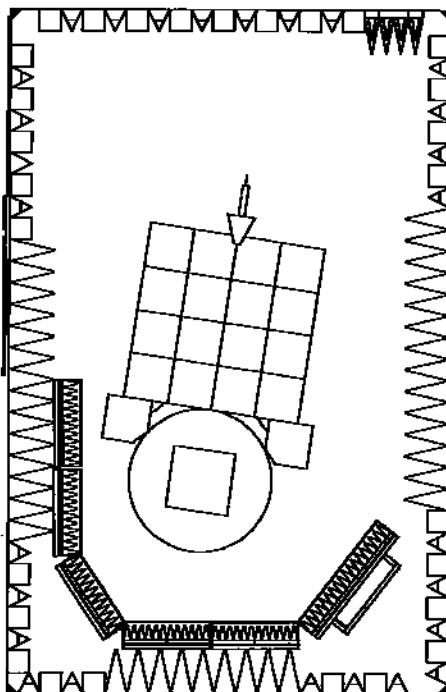


Figure 8 Set-up - ER2 (1 - 14 GHz)