

TEST REPORT

FCC ID: SZRHD5-600

Product: Digital Video Recorder

Model No.: HD5-600

Additional Model No.: N/A

Trade Mark:



Report No.: TCT161117E015

Issued Date: Dec. 09, 2016

Issued for:

Radio Engineering Industries Inc.

6534 L Street Omaha, Nebraska 68117, United States

Issued By:

Shenzhen Tongce Testing Lab.

1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification.....	3
2. Test Result Summary	4
3. EUT Description.....	5
4. Genera Information.....	7
4.1. Test environment and mode.....	7
4.2. Description of Support Units.....	8
5. Facilities and Accreditations	9
5.1. Facilities	9
5.2. Location	9
5.3. Measurement Uncertainty.....	9
6. Test Results and Measurement Data	10
6.1. Antenna requirement	10
6.2. Conducted Emission.....	11
6.3. Maximum Conducted Output Power.....	12
6.4. 6dB Emission Bandwidth	15
6.5. 26dB Bandwidth and 99% Occupied Bandwidth	21
6.6. Power Spectral Density.....	27
6.7. Band edge	33
6.8. Spurious Emission	46
6.9. Frequency Stability Measurement	56
7. Appendix A: Photographs of Test Setup.....	59
8. Photographs of EUT	59

1. Test Certification

Product:	Digital Video Recorder
Model No.:	HD5-600
Additional Model No.:	N/A
Applicant:	Radio Engineering Industries Inc.
Address:	6534 L Street Omaha, Nebraska 68117, United States
Manufacturer:	Radio Engineering Industries Inc.
Address:	6534 L Street Omaha, Nebraska 68117, United States
Date of Test:	Nov. 17 – Dec. 08, 2016
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart E Section 15.407 KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v01r03

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:



Jin Wang

Date:

Dec. 08, 2016

Reviewed By:



Joe Zhou

Date:

Dec. 09, 2016

Approved By:



Tomsin

Date:

Dec. 09, 2016


2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	N/A
Maximum Conducted Output Power	§15.407(a) §2.1046	PASS
6dB Emission Bandwidth	§15.407(a) §2.1049	PASS
26dB Emission Bandwidth & 99% Occupied Bandwidth	§15.407(a) §2.1049	PASS
Power Spectral Density	§15.407(a)	PASS
Restricted Bands around fundamental frequency	§15.407(a)	PASS
Radiated Emission	§15.407(a) §2.1053	PASS
Frequency Stability	§15.407(g) §2.1055	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product Name:	Digital Video Recorder
Model :	HD5-600
Additional Model:	N/A
Trade Mark:	
Operation Frequency:	Band IV: 5745MHz~5825MHz
Channel Bandwidth:	802.11n :20MHz, 40MHz
Modulation Technology:	Orthogonal Frequency Division Multiplexing(OFDM)
Modulation Type	256QAM, 64QAM, 16QAM, BPSK, QPSK
Antenna Type:	External antenna
Antenna Gain:	Band IV: 5745MHz~5825MHz: 3.5dBi
Power Supply:	DC 12V

Band IV (5725 - 5850 MHz) Power level setup in software			
Mode	Channel	Frequency	Soft set
11n (HT20)	CH149	5745	13
11n (HT20)	CH157	5785	19
11n (HT20)	CH165	5825	13
11n (HT40)	CH151	5755	13
11n (HT40)	CH159	5795	13

Note: The Soft set value is the internal setting required to meet the requirements and does not necessarily mean the 'dBm' value

Operation Frequency each of channel

20MHz		40MHz	
Channel	Frequency	Channel	Frequency
149	5745	151	5755
153	5765	159	5790
157	5785		
161	5805		
165	5825		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)

Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)
149	Low	5745
157	Mid	5785
165	High	5825

For 802.11n (HT40)

Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)
151	Low	5755
159	High	5795

4. Genera Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)
<p>The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

<p>We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:</p>	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11n(HT20)	6.5 Mbps
802.11n(HT40)	13.5 Mbps
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Lead-acid Battery	DC12ED	/	/	/

Note:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*
- For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.*

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331
Shenzhen Tongce Testing Lab
The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.
- IC - Registration No.: 10668A-1
The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing
- CNAS - Registration No.: CNAS L6165
Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

Tel: 86-755-36638142


5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$

6. Test Results and Measurement Data

6.1. Antenna requirement

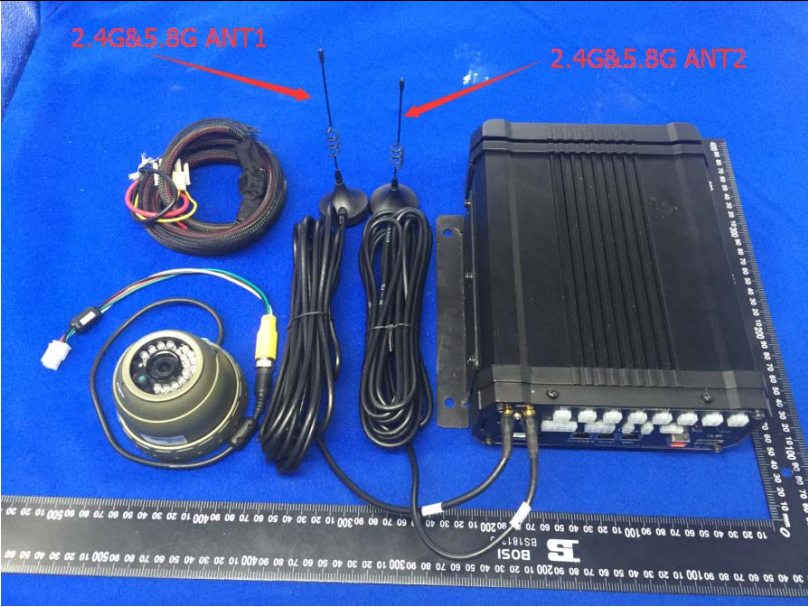Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
E.U.T Antenna:	
The EUT two antennas are external antennas which permanently attached,, and the best case gain of the antennas all are 3.5dBi.	
	


6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Tx Mode														
Test Procedure:	<ol style="list-style-type: none"> The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Result:	N/A														

6.3. Maximum Conducted Output Power

6.3.1. Test Specification

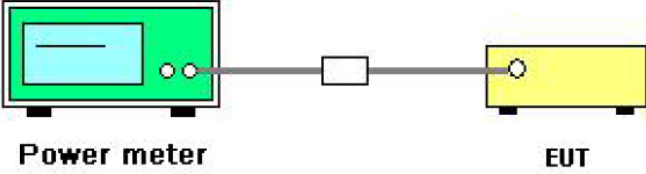Test Requirement:	FCC Part15 E Section 15.407(a)& Part 2 J Section 2.1046										
Test Method:	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v01r03 Section E										
Limit:	<table border="1"> <thead> <tr> <th>Frequency Band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5150-5250</td> <td>1W for indoor access point</td> </tr> <tr> <td>5250-5350</td> <td>250 mW or 11 dBm + 10log B, whichever is less.</td> </tr> <tr> <td>5470-5725</td> <td>250 mW or 11 dBm + 10log B, whichever is less.</td> </tr> <tr> <td>5725-5850</td> <td>1 W</td> </tr> </tbody> </table> <p>Note: Where “B” is the 26 dB emissions bandwidth in MHz.</p>	Frequency Band (MHz)	Limit	5150-5250	1W for indoor access point	5250-5350	250 mW or 11 dBm + 10log B, whichever is less.	5470-5725	250 mW or 11 dBm + 10log B, whichever is less.	5725-5850	1 W
Frequency Band (MHz)	Limit										
5150-5250	1W for indoor access point										
5250-5350	250 mW or 11 dBm + 10log B, whichever is less.										
5470-5725	250 mW or 11 dBm + 10log B, whichever is less.										
5725-5850	1 W										
Test Setup:	 <p>The diagram illustrates the test setup. On the left is a green Power meter. A cable connects it to a small white attenuator. Another cable connects the attenuator to a yellow EUT (Equipment Under Test).</p>										
Test Mode:	Transmitting mode with modulation										
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v01r03 Section E, 3, a 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 5. Measure the conducted output power and record the results in the test report. 										
Test Result:	PASS										
Remark:	Conducted output power= measurement power +10log(1/x) X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power										

6.3.2. Test Instruments

Equipment	Manufacturer	Model	Date of Cal.	Due Date
Power Meter	Agilent	N1911A	Aug. 13, 2016	Aug. 12, 2017
Power Sensor	Agilent	N1922A	Aug. 13, 2016	Aug. 12, 2017
RF cable	TCT	RE-06	Aug. 13, 2016	Aug. 12, 2017
Antenna Connector	TCT	RFC-01	Aug. 13, 2016	Aug. 12, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.3.3. Test Data


Configuration Band IV (5725 - 5850 MHz) / Antenna 0+Antenna 1						
Mode	Test channel	Maximum Conducted (Average) Output Power (dBm)			FCC Limit (dBm)	Result
		Ant0	Ant1	Total		
11n (HT20)	CH149	15.05	14.24	17.67	29.49	PASS
11n (HT20)	CH157	14.67	14.73	17.71	29.49	PASS
11n (HT20)	CH161	14.72	14.53	17.64	29.49	PASS
11n (HT40)	CH151	16.69	16.21	19.47	29.49	PASS
11n (HT40)	CH159	16.36	16.05	19.22	29.49	PASS

Note 1: $G_{ANT}=3.5\text{dBi}$, $\text{Array Gain}=10\log(N_{ANT}/N_{SS})=3.01\text{dBi}$,
 $\text{Directional Gain}=G_{ANT} + \text{Array Gain}=6.51\text{dBi}$,

$6.51\text{dBi} > 6\text{dBi}$ so $\text{limit}=30-(6.51-6)=29.49\text{dBm/MHz}$

6.4. 6dB Emission Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e)& Part 2 J Section 2.1049
Test Method:	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v01r03 Section C
Limit:	>500kHz
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v01r03 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

6.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	Aug. 13, 2016	Aug. 12, 2017
RF cable	TCT	RE-06	Aug. 13, 2016	Aug. 12, 2017
Antenna Connector	TCT	RFC-01	Aug. 13, 2016	Aug. 12, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.4.3. Test data

ANT 0

Band IV (5725 - 5850 MHz)					
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11n(HT20)	CH149	5745	16.18	0.5	PASS
11n(HT20)	CH157	5785	16.31	0.5	PASS
11n(HT20)	CH161	5825	16.30	0.5	PASS
11n(HT40)	CH151	5755	35.17	0.5	PASS
11n(HT40)	CH159	5795	35.17	0.5	PASS


ANT 1

Band IV (5725 - 5850 MHz)					
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11n(HT20)	CH149	5745	16.29	0.5	PASS
11n(HT20)	CH157	5785	16.31	0.5	PASS
11n(HT20)	CH161	5825	16.29	0.5	PASS
11n(HT40)	CH151	5755	35.17	0.5	PASS
11n(HT40)	CH159	5795	35.16	0.5	PASS


Test plots as follows:

ANT 0
Band IV (5725 – 5850 MHz)
 11n(HT20)


CH149

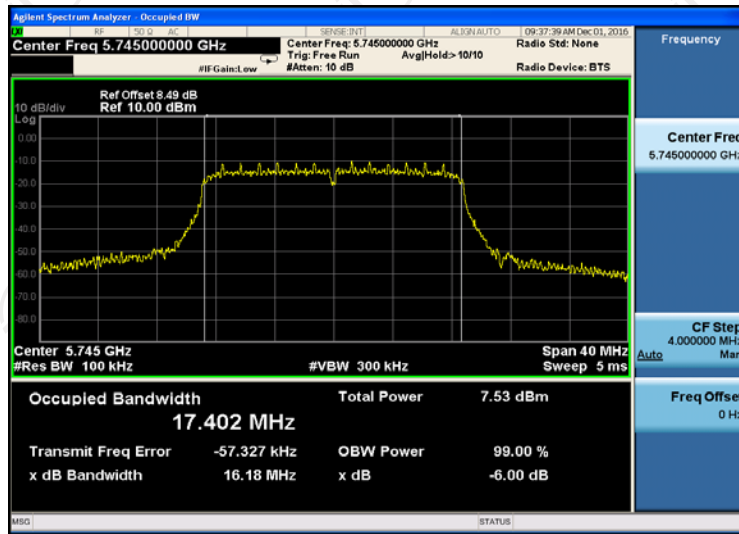

CH157

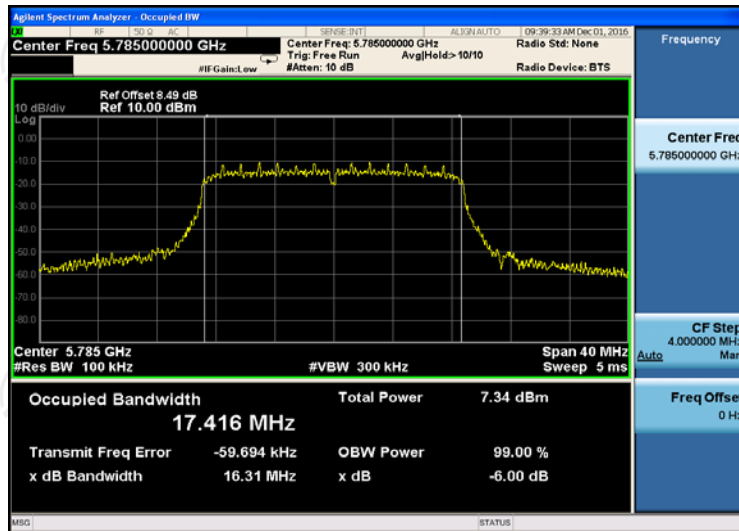


CH161

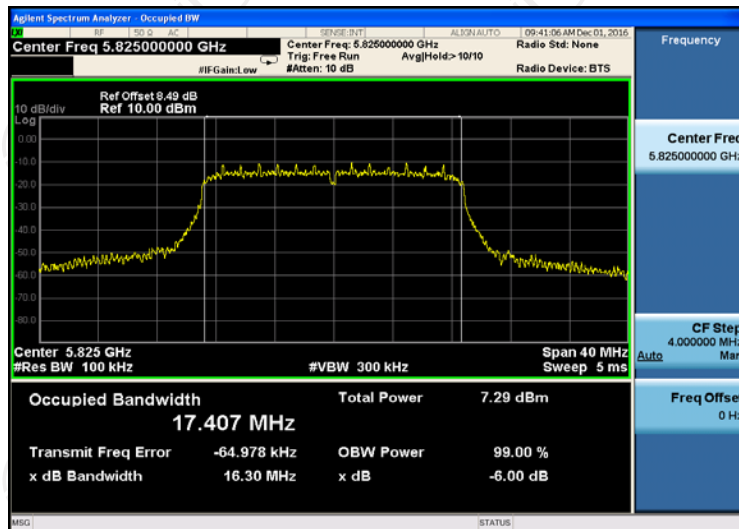


11n(HT40)

CH151

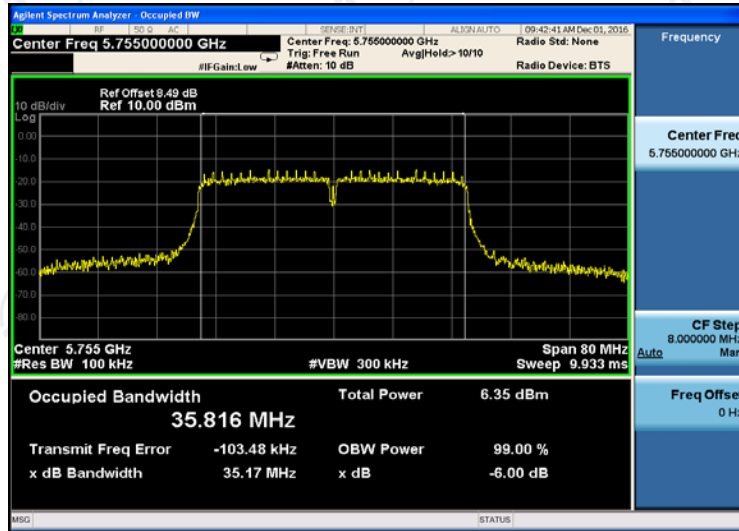


CH159

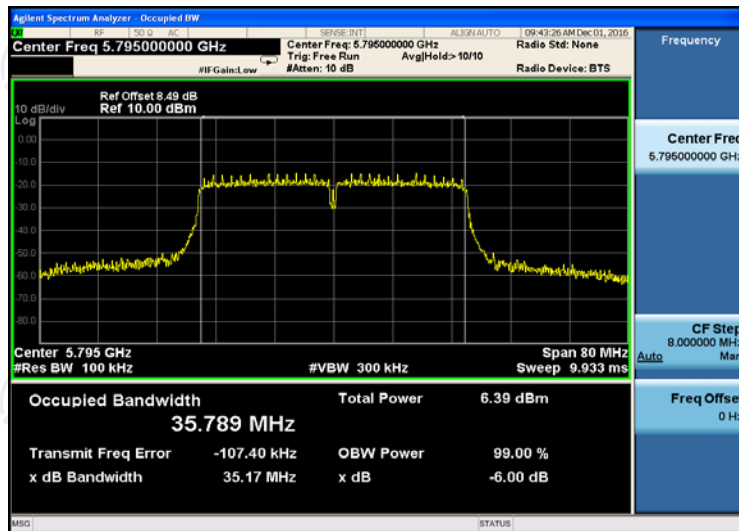


ANT 1
Band IV (5725 – 5850 MHz)
 11n(HT20)


CH149

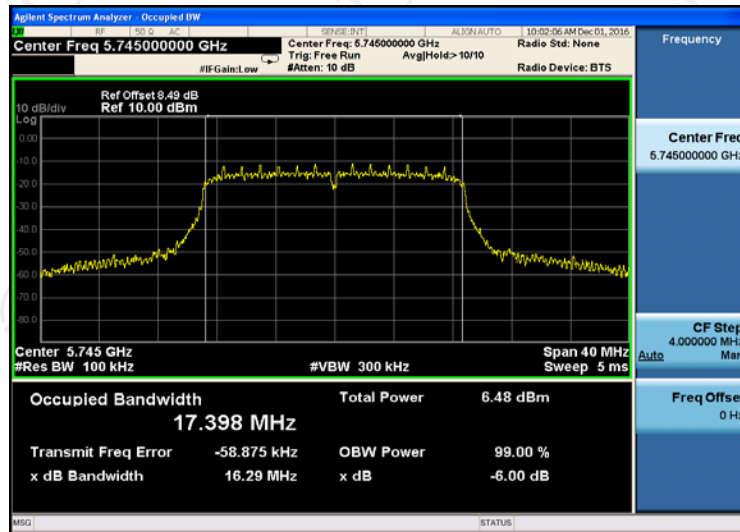

CH157

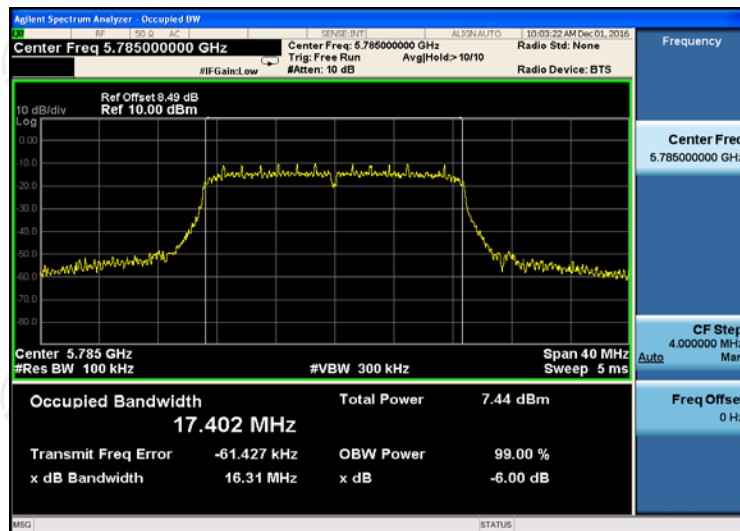


CH161

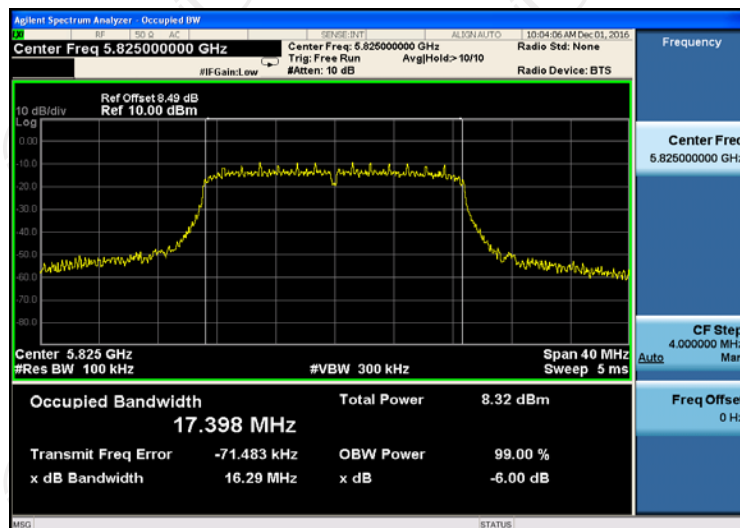


11n(HT40)

CH151

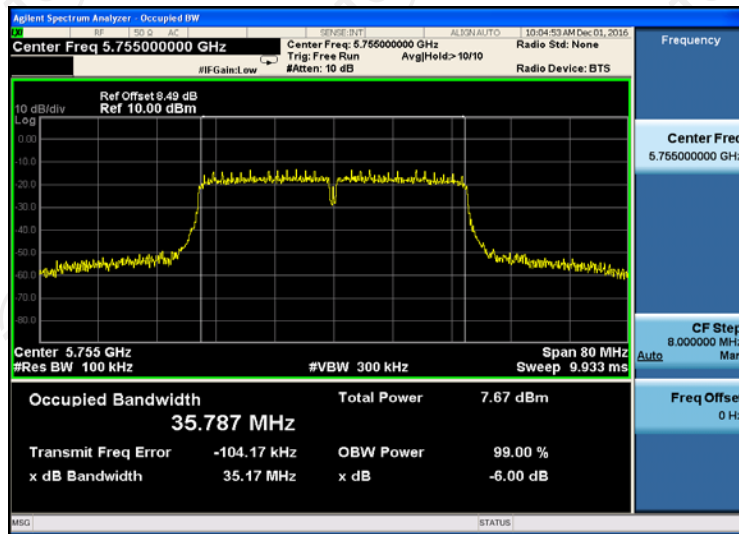


CH159

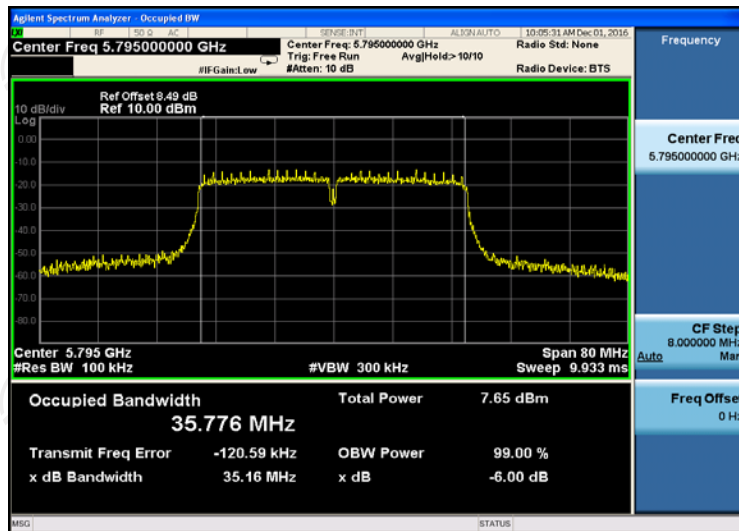

6.5. 26dB Bandwidth and 99% Occupied Bandwidth

6.5.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407 (a)& Part 2 J Section 2.1049
Test Method:	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v01r03 Section D
Limit:	No restriction limits
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v01r03 Section D 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. 4. Measure and record the results in the test report.
Test Result:	PASS

6.5.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	Aug. 13, 2016	Aug. 12, 2017
RF cable	TCT	RE-06	Aug. 13, 2016	Aug. 12, 2017
Antenna Connector	TCT	RFC-01	Aug. 13, 2016	Aug. 12, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.5.3. Test data**ANT 0:****Band IV**

Mode	Test channel	Frequency (MHz)	99% Bandwidth (MHz)
11n(HT20)	CH149	5745	17.419
11n(HT20)	CH157	5785	17.410
11n(HT20)	CH161	5825	17.429
11n(HT40)	CH151	5755	35.853
11n(HT40)	CH159	5795	35.849


ANT 1:**Band IV**

Mode	Test channel	Frequency (MHz)	99% Bandwidth (MHz)
11n(HT20)	CH149	5745	17.435
11n(HT20)	CH157	5785	17.432
11n(HT20)	CH161	5825	17.418
11n(HT40)	CH151	5755	35.805
11n(HT40)	CH159	5795	35.812


Test plots as follows:

ANT 0
Band IV (5725 – 5850 MHz)
 11n(HT20)


CH149

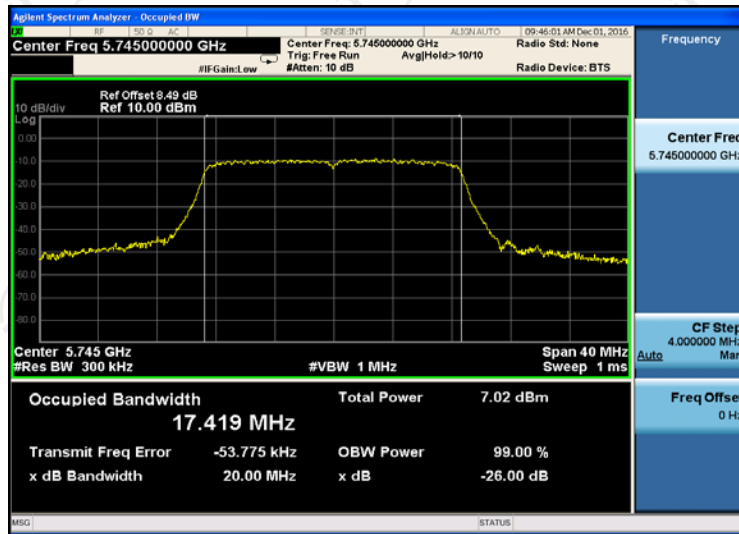

CH157

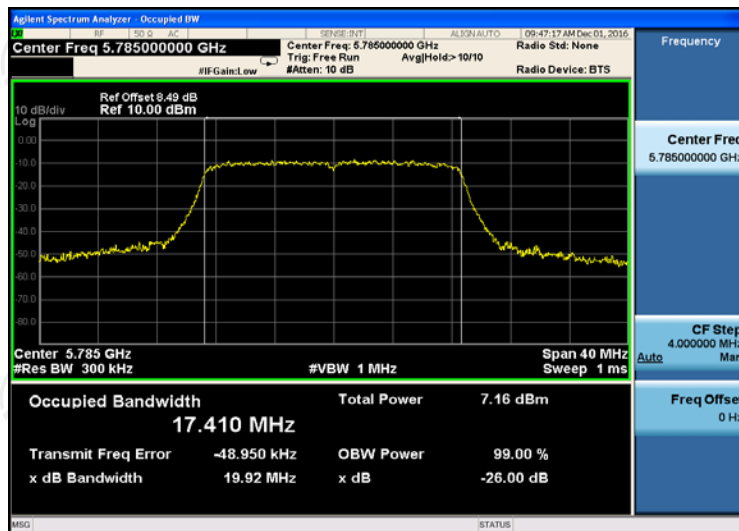


CH161

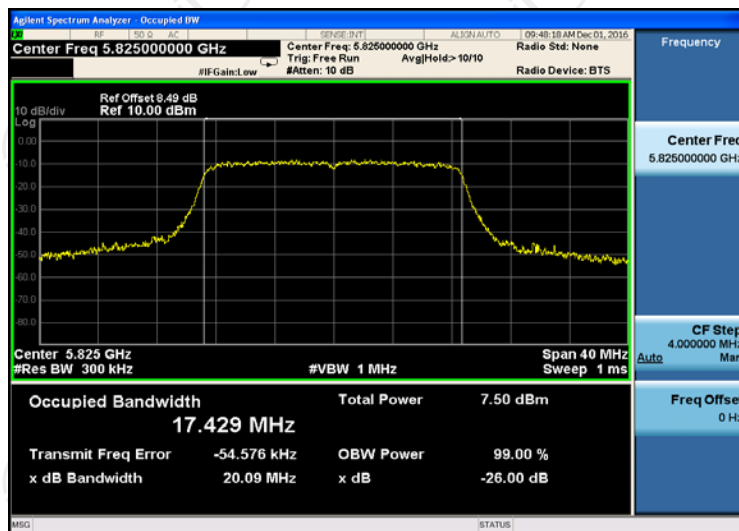


11n(HT40)

CH151

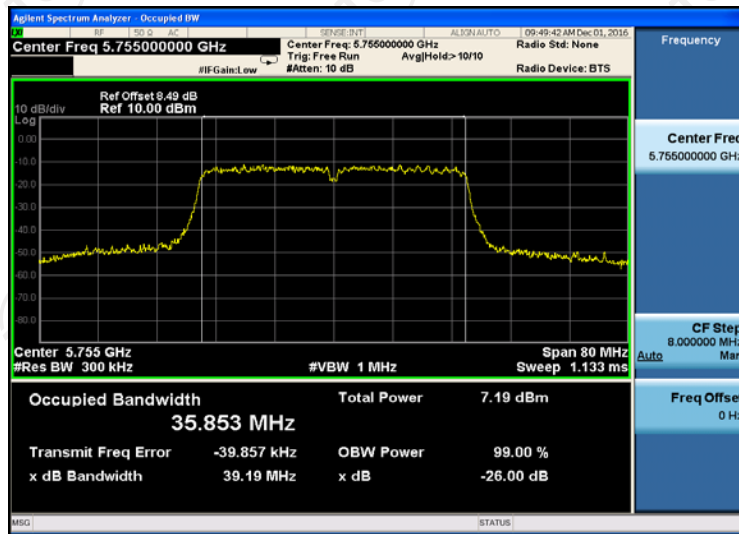


CH159

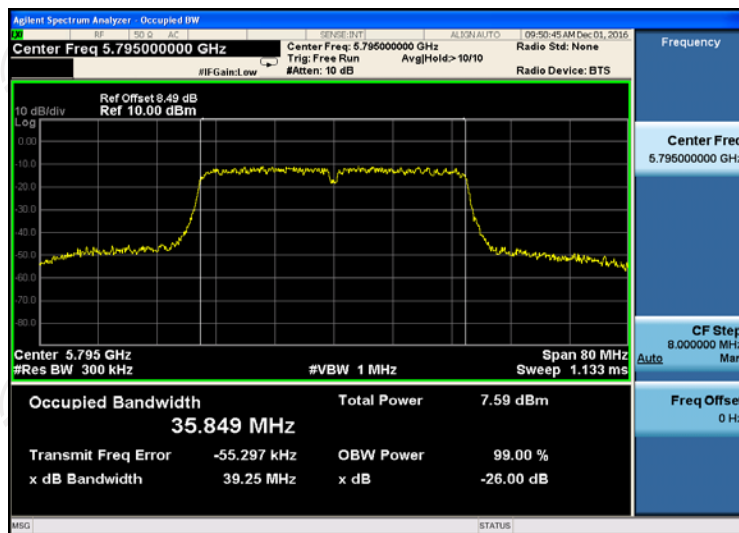


ANT 1
Band IV (5725 – 5850 MHz)
11n(HT20)


CH149

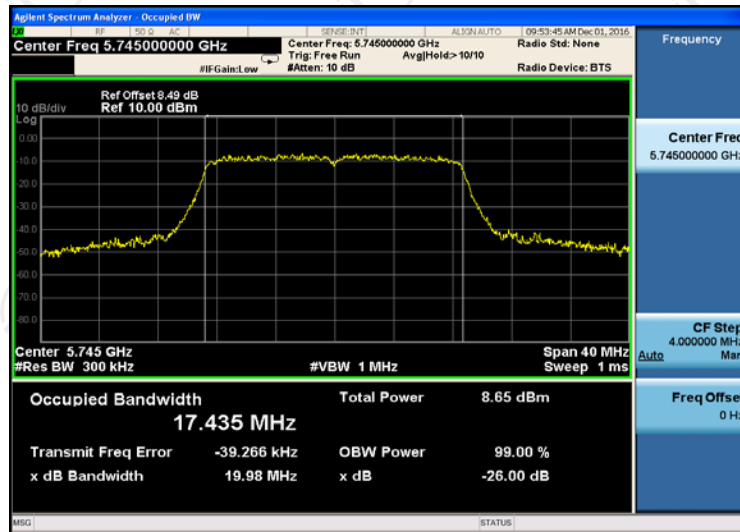

CH157

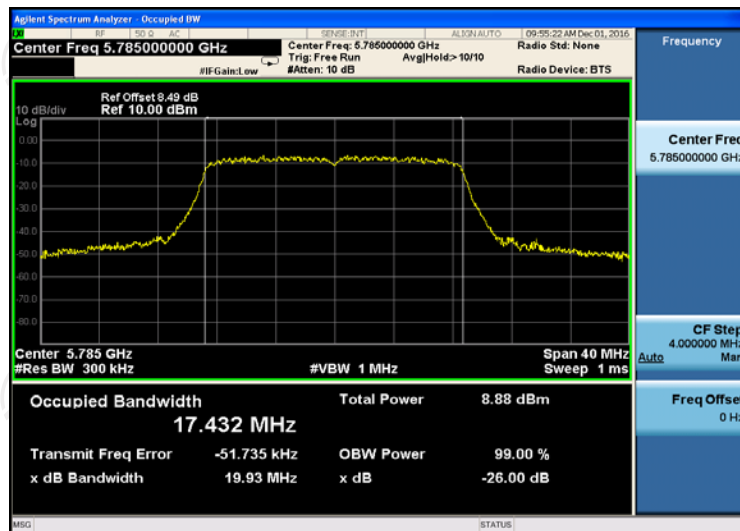


CH161

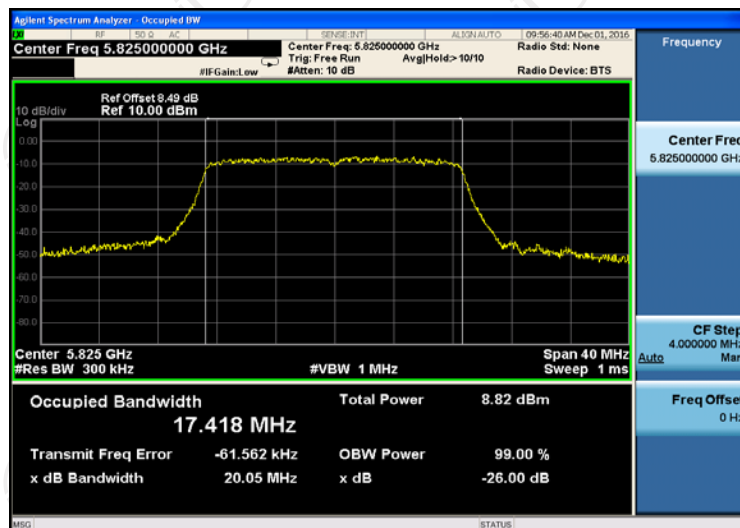


11n(HT40)

CH151

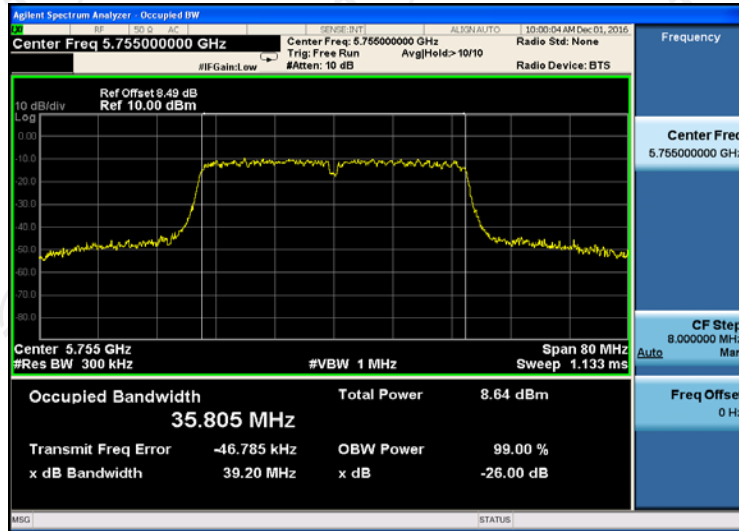


CH159

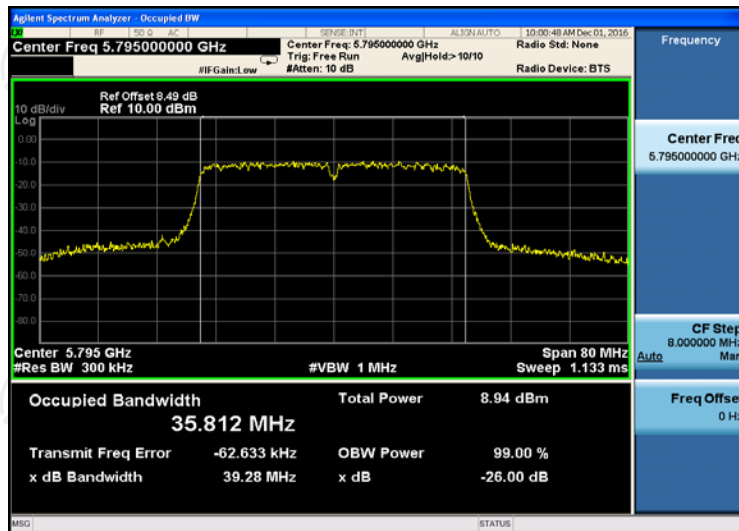

6.6. Power Spectral Density

6.6.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407 (a)
Test Method:	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v01r03 Section F
Limit:	$\leq 17.00\text{dBm/MHz}$ for Band I 5150MHz-5250MHz $\leq 11.00\text{dBm/MHz}$ for Band II 5250MHz-5350MHz $\leq 11.00\text{dBm/MHz}$ for Band III 5450MHz-5725MHz $\leq 30.00\text{dBm/500KHz}$ for Band IV 5725MHz-5850MHz
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 510 kHz/1 MHz, VBW $\geq 3 \times$ RBW, Sweep time = Auto, Detector = RMS. 2. Allow the sweeps to continue until the trace stabilizes. 3. Use the peak marker function to determine the maximum amplitude level. 4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.
Test Result:	PASS

6.6.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	Aug. 13, 2016	Aug 12, 2017
RF cable	TCT	RE-06	Aug. 13, 2016	Aug 12, 2017
Antenna Connector	TCT	RFC-01	Aug. 13, 2016	Aug 12, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.6.3. Test data

Configuration Band IV (5725 - 5850 MHz) / Antenna 0+Antenna 1						
Mode	Test channel	Power Spectral Density			Limit (dBm/500kHz)	Result
		Ant0	Ant1	Total		
11n(HT20)	CH149	-4.854	-4.056	-1.43	29.49	PASS
11n(HT20)	CH157	-4.171	-2.322	-0.14	29.49	PASS
11n(HT20)	CH161	-4.497	-2.556	-0.41	29.49	PASS
11n(HT40)	CH151	-7.084	-5.803	-3.39	29.49	PASS
11n(HT40)	CH159	-7.049	-4.948	-2.86	29.49	PASS

Note: 1. All antennas have the same gain. $G_{ANT}=3.5\text{dBi}$, Array Gain= $10\log(N_{ANT}/N_{SS})=3.01\text{dBi}$


**Directional Gain= $G_{ANT} + \text{Array Gain}=6.51\text{dBi}$, $6.51\text{dBi} > 6\text{dBi}$
so limit= $30-(6.51-6)=29.49\text{dBm}/500\text{kHz}$**

2. The total PSD method used the sum spectra maxima across the outputs.


Test plots as follows:

ANT 0
Band IV (5725 – 5850 MHz)
11n(HT20)


CH149

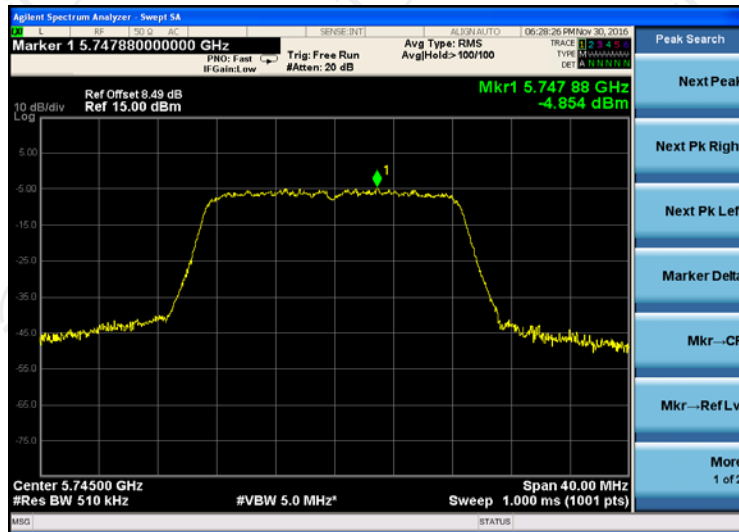

CH157

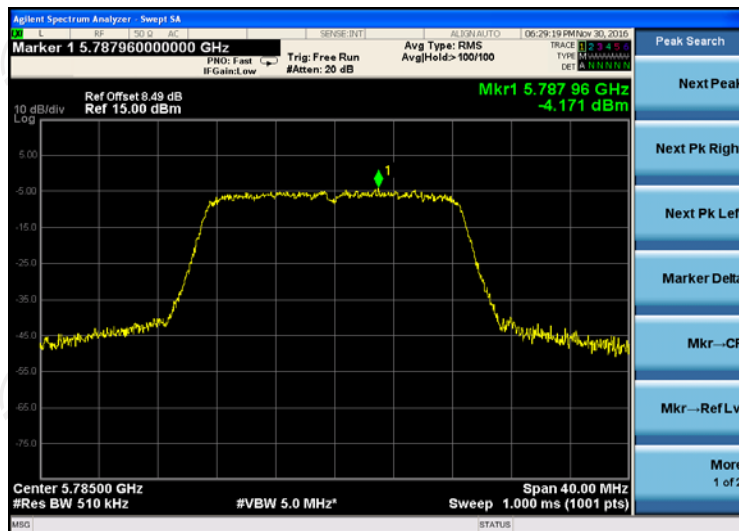


CH161

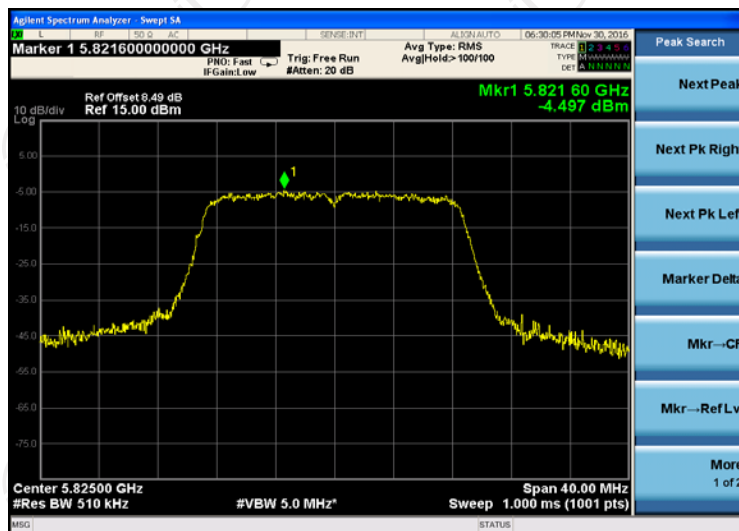


11n(HT40)

CH151

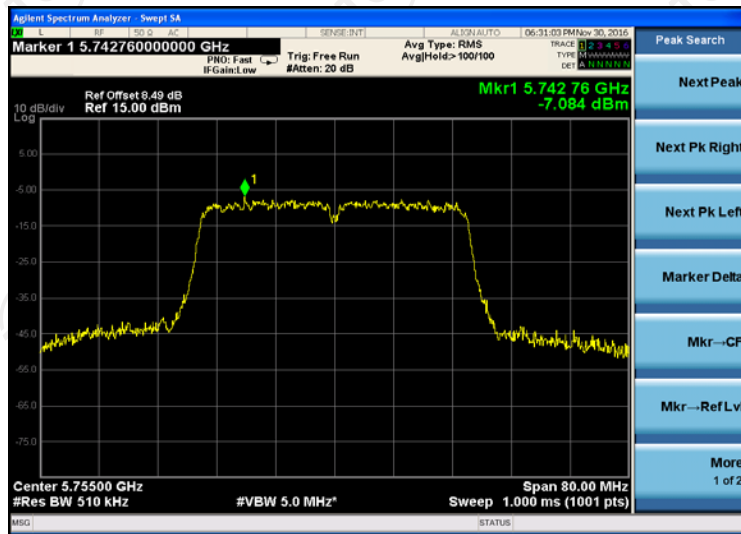


CH159

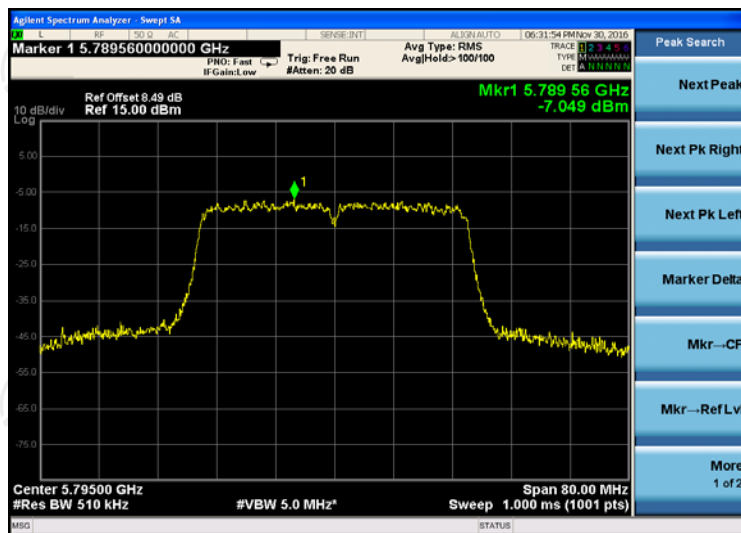


ANT 1
Band IV (5725 – 5850 MHz)
11n(HT20)


CH149

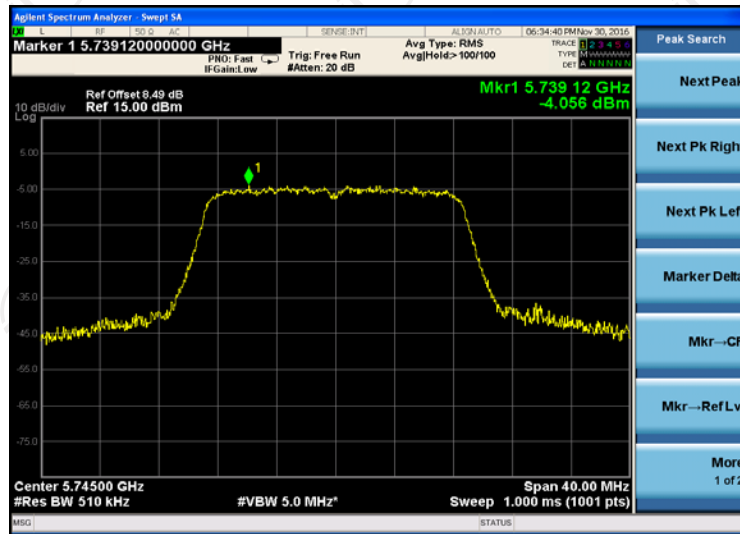

CH157

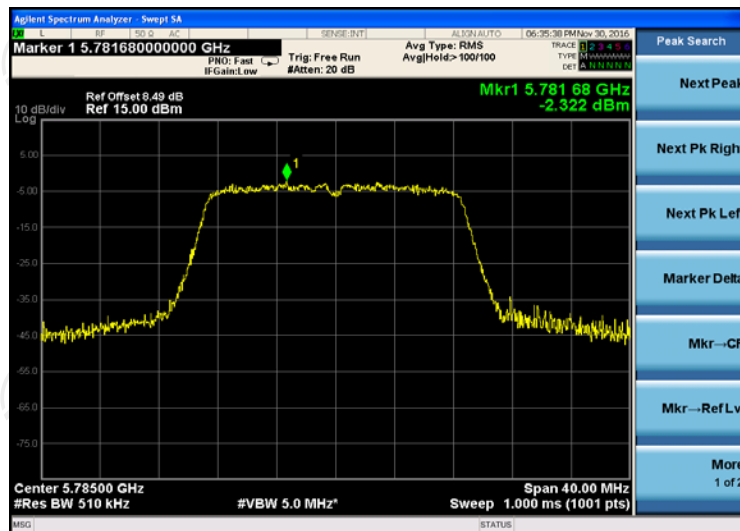


CH161

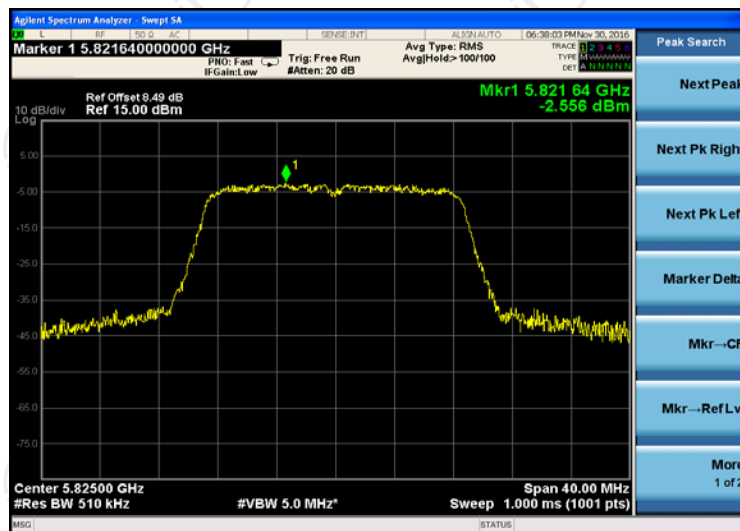


11n(HT40)

CH151

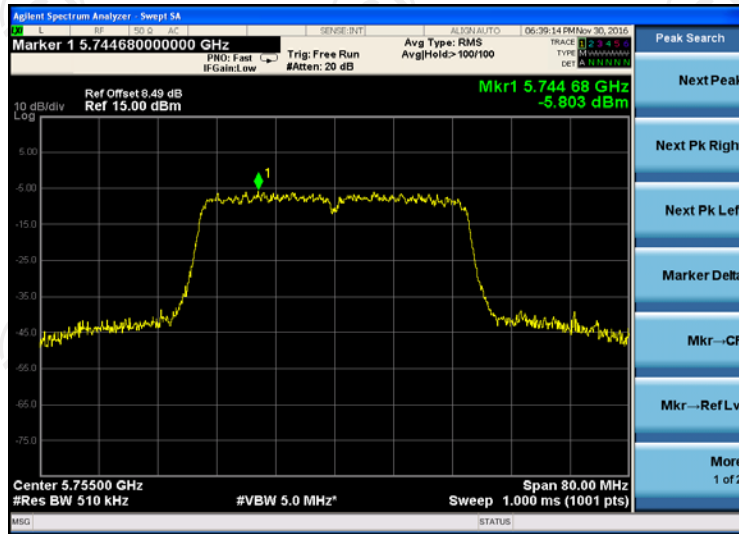


CH159

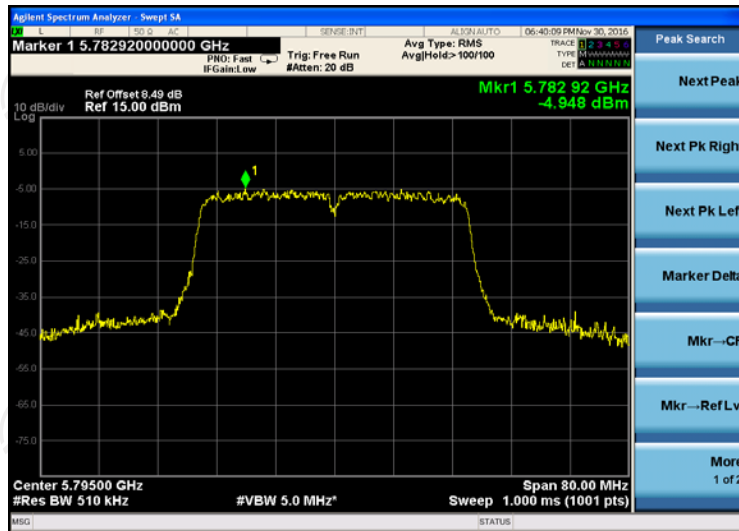

6.7. Band edge

6.7.1. Test Specification

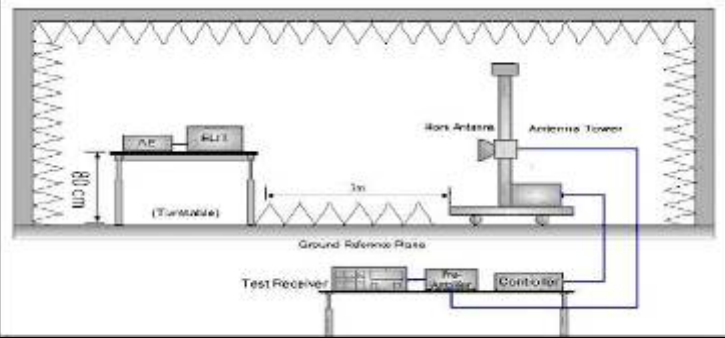Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10 2013
Limit:	For band I&II&III: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$ For band IV(5715-5725MHz&5850-5860MHz): $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 78.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -17\text{dBm}$; For band IV(other un-restricted band): $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$
Test Setup:	 <p>The diagram illustrates the test setup. An EUT (Under Test) is placed on a rotating table (Tumble) at a height of 0.8 meters. The table is positioned 3 meters away from a Work Antenna mounted on an Antenna Tower. A Ground Reference Plane is shown below the table. The Test Receiver system consists of a Pre-Amplifier and a Controller connected to the antenna tower.</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak,

	quasipeak or average method as specified and then reported in a data sheet.
Test Result:	PASS

6.7.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHW ARZ	ESVD	Aug. 12, 2016	Aug. 11, 2017
Spectrum Analyzer	ROHDE&SCHW ARZ	FSEM	Aug. 12, 2016	Aug. 11, 2017
Spectrum Analyzer	ROHDE&SCHW ARZ	FSP40	Aug. 12, 2016	Aug. 11, 2017
Spectrum Analyzer	Agilent	N9020A	Aug. 13, 2016	Aug. 12, 2017
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	Aug. 12, 2016	Aug. 11, 2017
Pre-amplifier	HP	8447D	Aug. 12, 2016	Aug. 11, 2017
Loop antenna	ZHINAN	ZN30900A	Aug. 14, 2016	Aug. 13, 2017
Broadband Antenna	Schwarzbeck	VULB9163	Aug. 14, 2016	Aug. 13, 2017
Horn Antenna	Schwarzbeck	BBHA 9120D	Aug. 14, 2016	Aug. 13, 2017
Horn Antenna	Schwarzbeck	BBHA 9170	Aug. 14, 2016	Aug. 13, 2017
Coax cable	TCT	RE-low-01	Aug. 12, 2016	Aug. 11, 2017
Coax cable	TCT	RE-high-02	Aug. 12, 2016	Aug. 11, 2017
Coax cable	TCT	RE-low-03	Aug. 12, 2016	Aug. 11, 2017
Coax cable	TCT	RE-High-04	Aug. 12, 2016	Aug. 11, 2017
Antenna Mast	CCS	CC-A-4M	Aug. 12, 2016	Aug. 11, 2017
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.7.3. Test Data

Band IV Band-edge for Radiated Emissions

802.11n HT20


Horizontal:

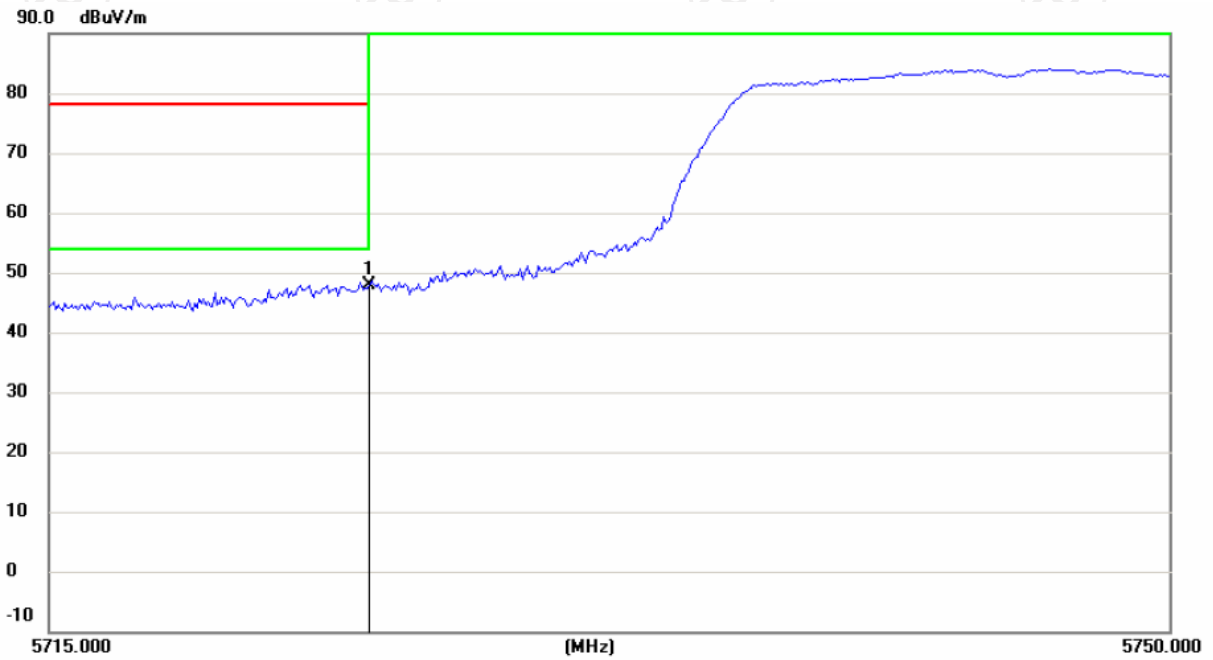

Site Polarization: *Horizontal* Temperature: 25
Limit: FCC part 15.407 band edge (PK) Power: Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	5725.000	39.58	8.21	47.79	78.20	-30.41	peak		


Vertical:

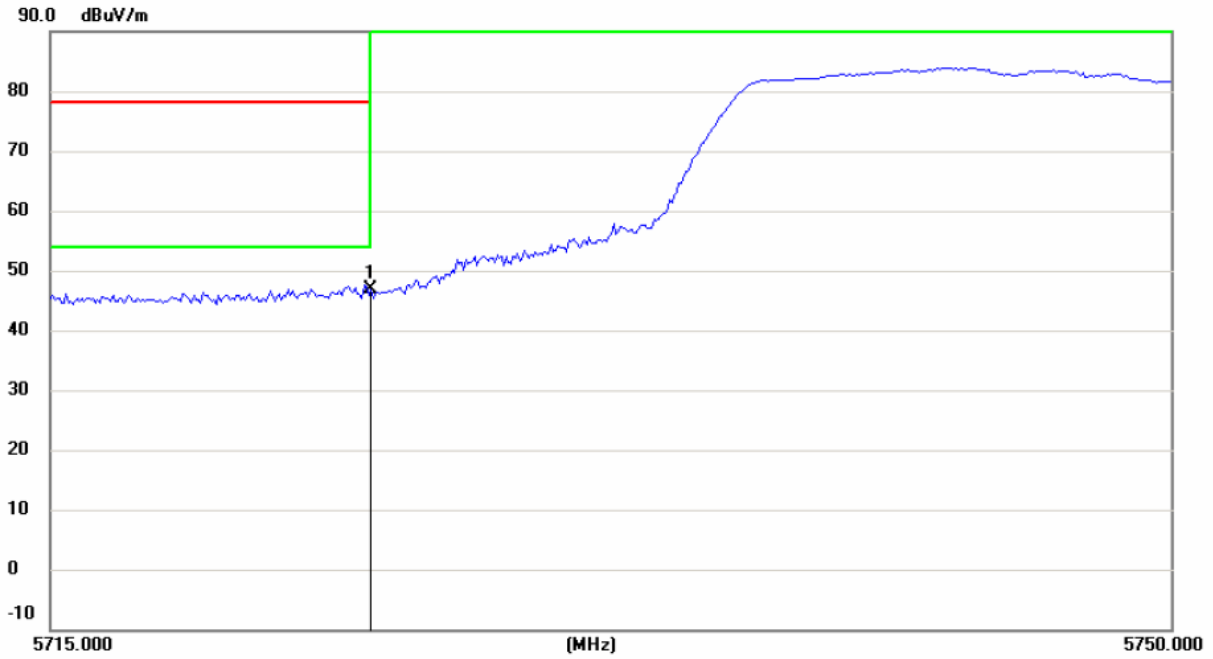

Site: Polarization: **Vertical** Temperature: 25
 Limit: FCC part 15.407 band edge (PK) Power: Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5725.000	38.66	8.21	46.87	78.20	-31.33	peak		


Horizontal:

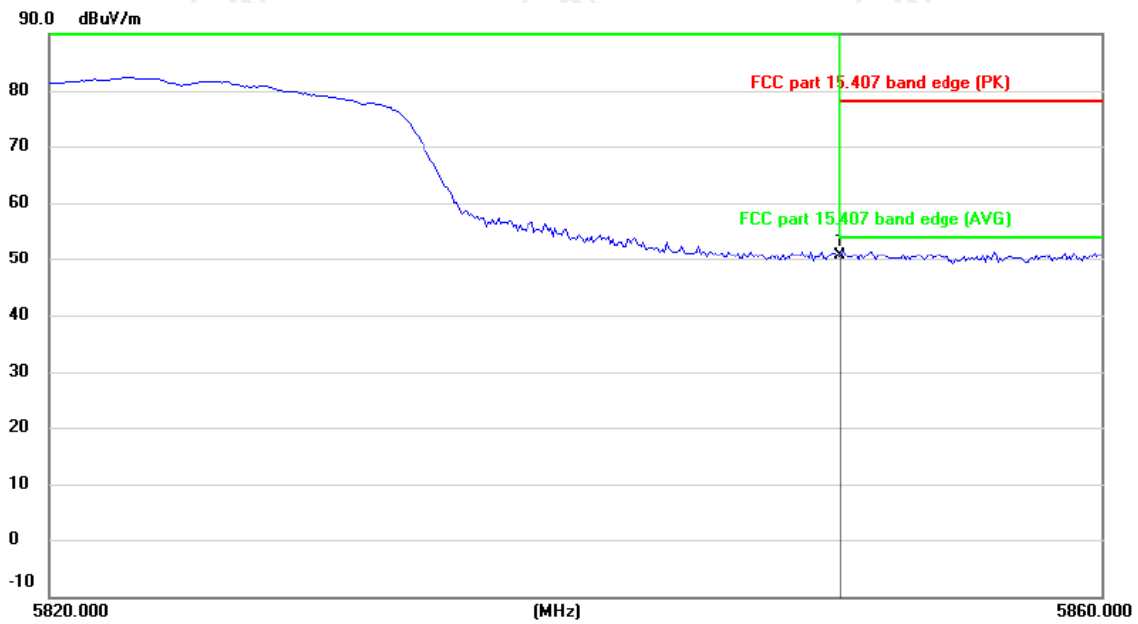

Site: Polarization: **Horizontal** Temperature: 25
Limit: FCC part 15.407 band edge (PK) Power: Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5850.000	41.68	8.87	50.55	78.20	-27.65	peak		

Vertical:

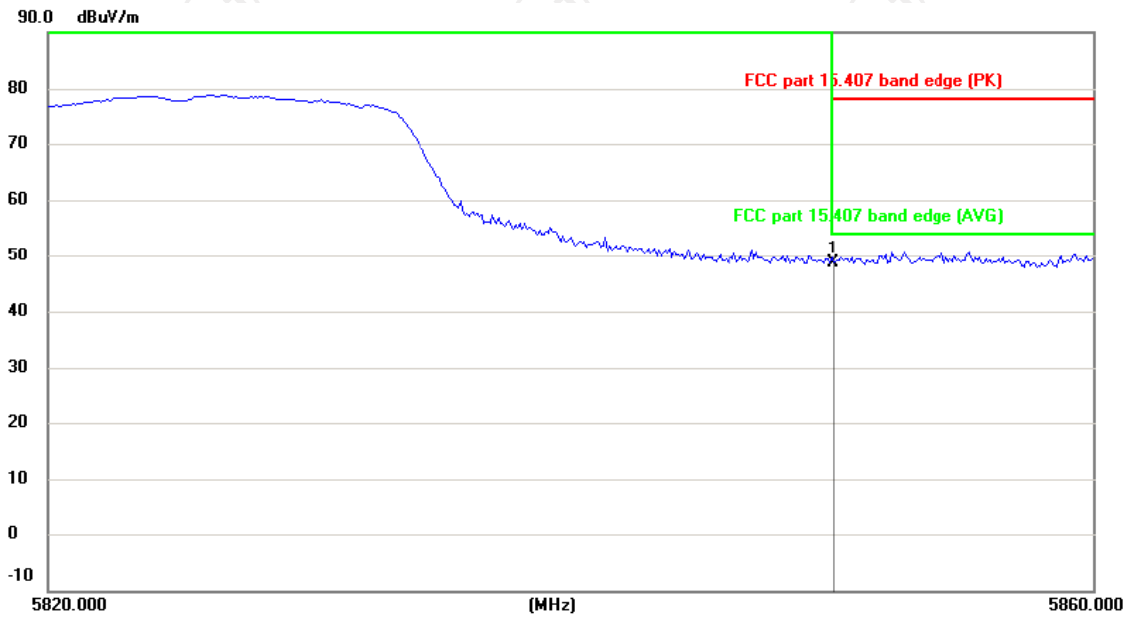


Site: Polarization: **Vertical** Temperature: 25
 Limit: FCC part 15.407 band edge (PK) Power: Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5850.000	39.77	8.87	48.64	78.20	-29.56	peak		

802.11n HT40


Horizontal:

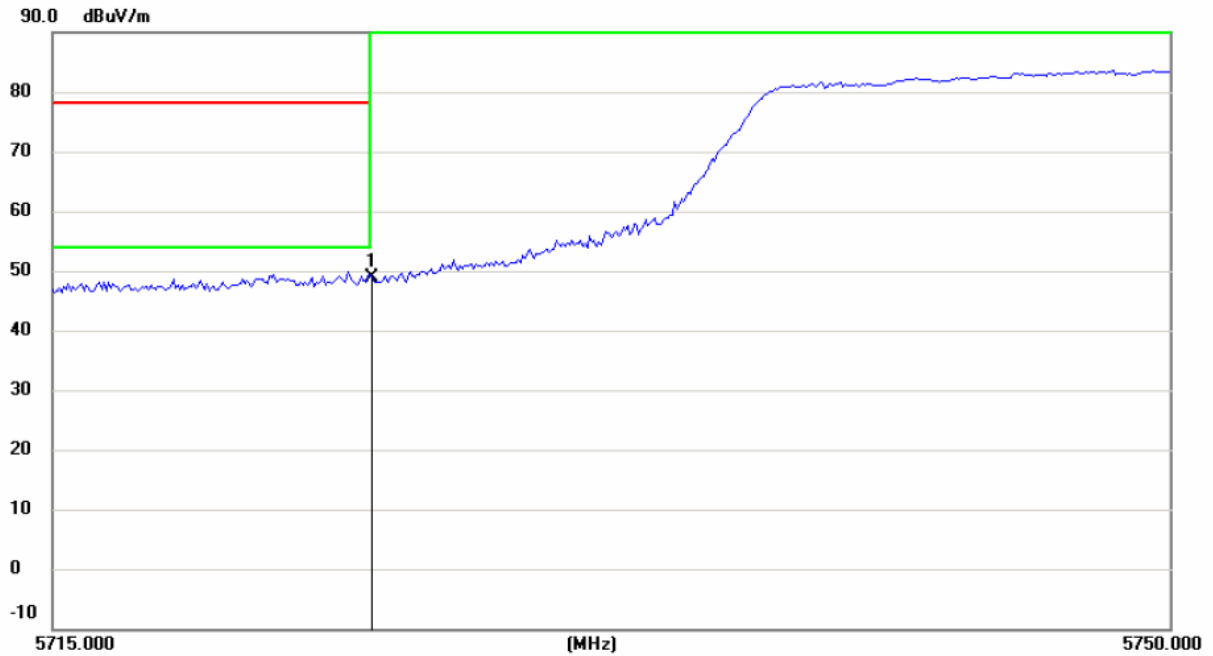

Site: Polarization: **Horizontal** Temperature: 25
Limit: FCC part 15.407 band edge (PK) Power: Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5725.000	40.67	8.21	48.88	78.20	-29.32	peak		


Vertical:

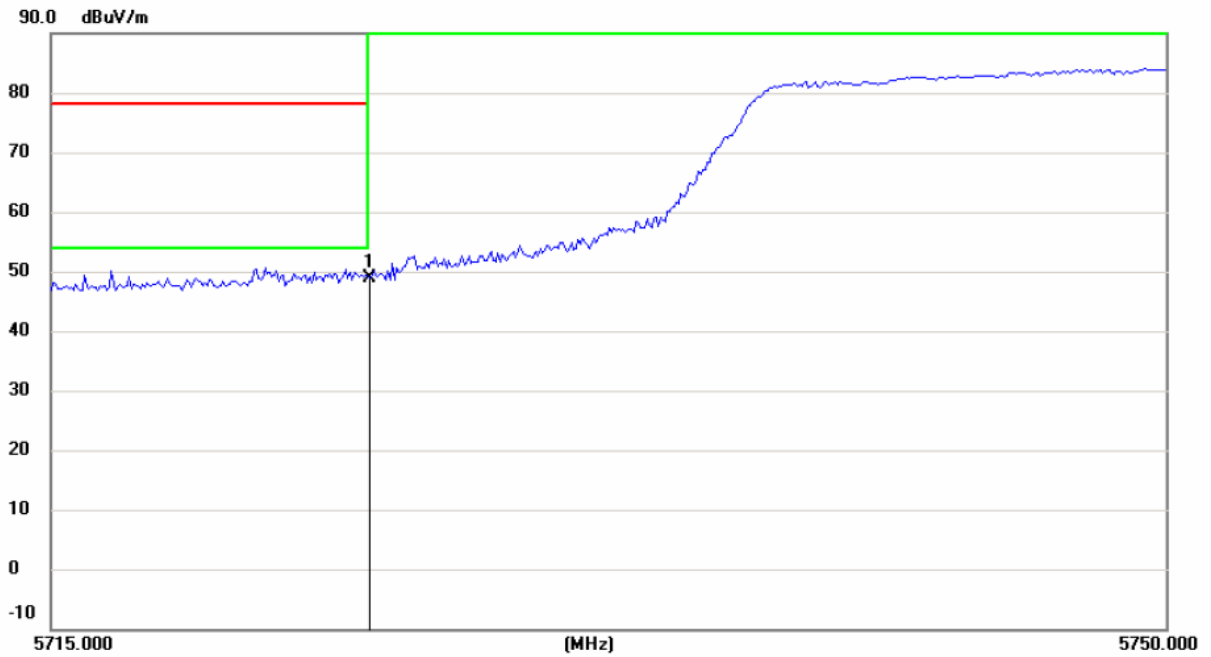

Site: Polarization: **Vertical** Temperature: 25
 Limit: FCC part 15.407 band edge (PK) Power: Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5725.000	40.61	8.21	48.82	78.20	-29.38	peak		


Horizontal:

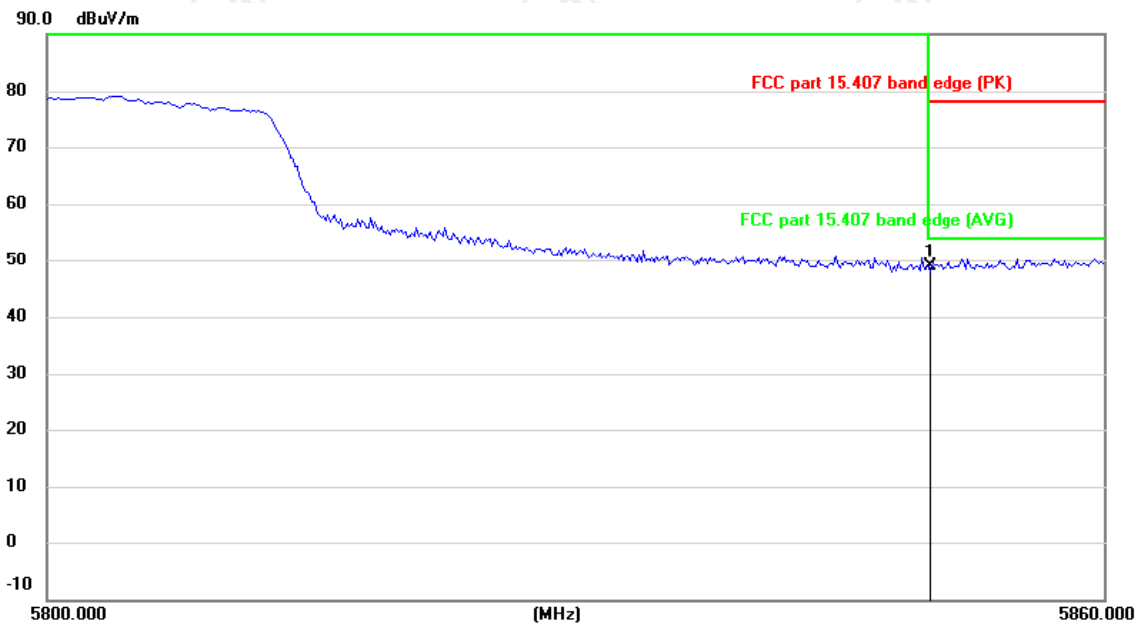

Site: Polarization: **Horizontal** Temperature: 25
Limit: FCC part 15.407 band edge (PK) Power: Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	5850.000	40.00	8.87	48.87	78.20	-29.33	peak			


Vertical:

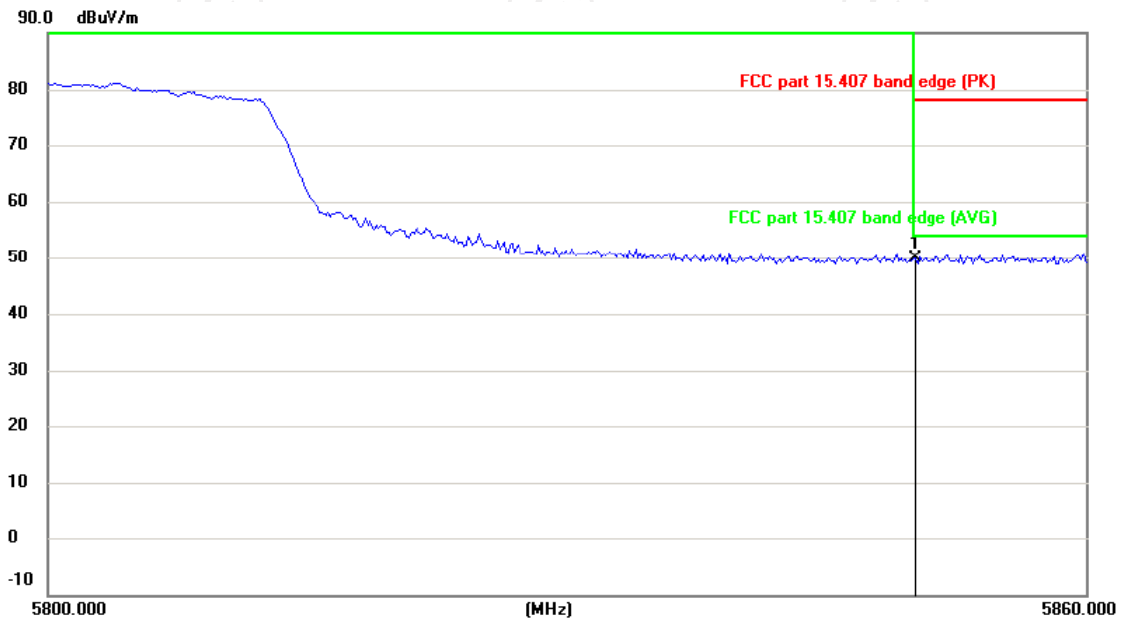

Site: Limit: FCC part 15.407 band edge (PK) Polarization: **Vertical** Temperature: 25
 Power: Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	5850.000	40.90	8.87	49.77	78.20	-28.43	peak		


Band IV Band-edge for RF Conducted Emissions

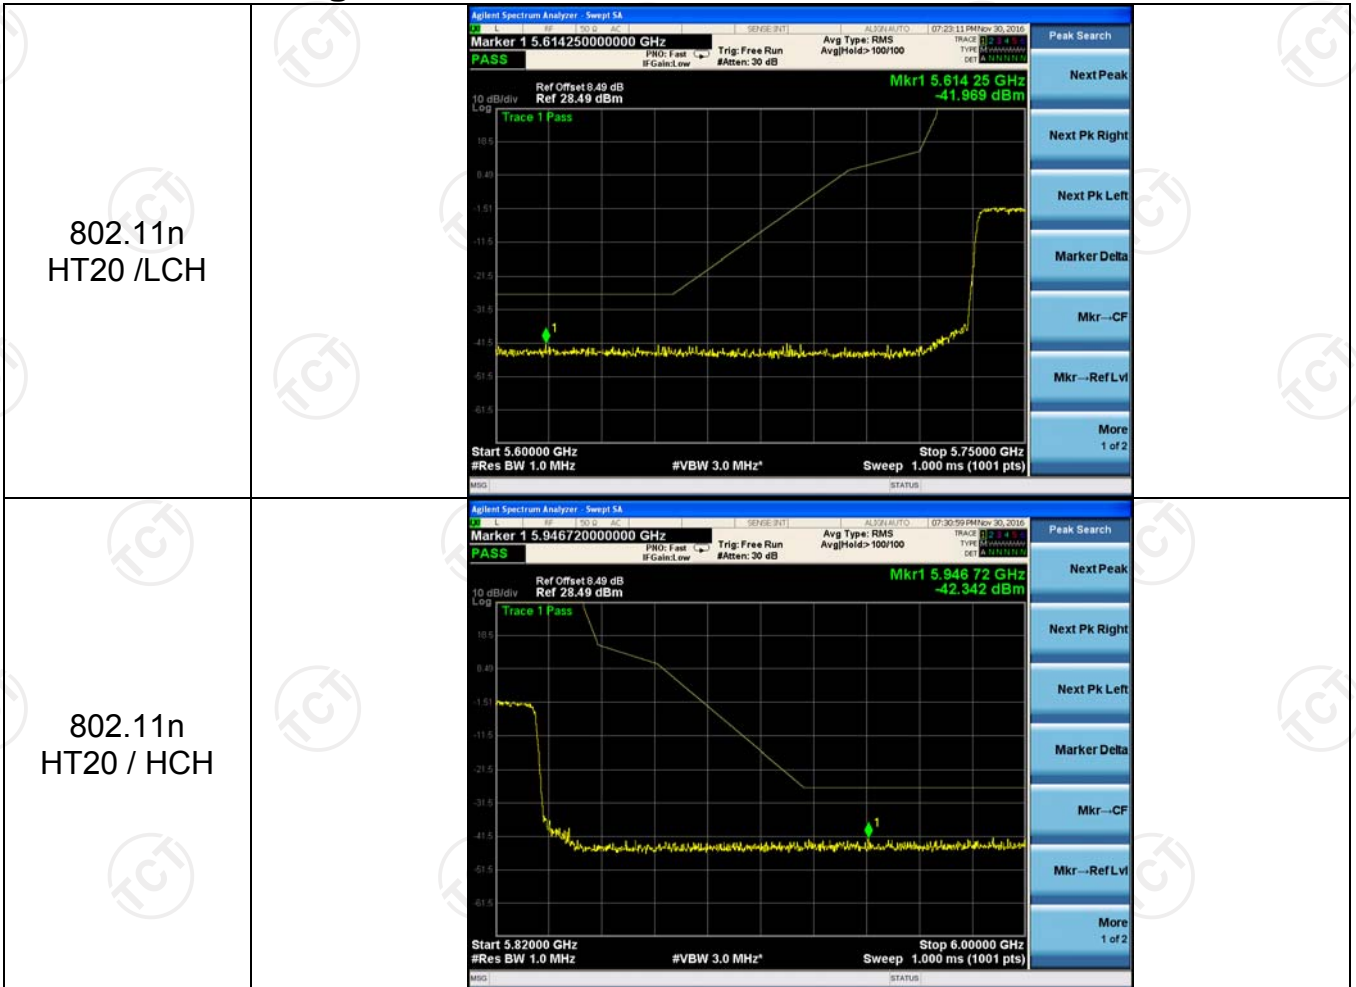

802.11n
HT40 /LCH




802.11n
HT40 / HCH

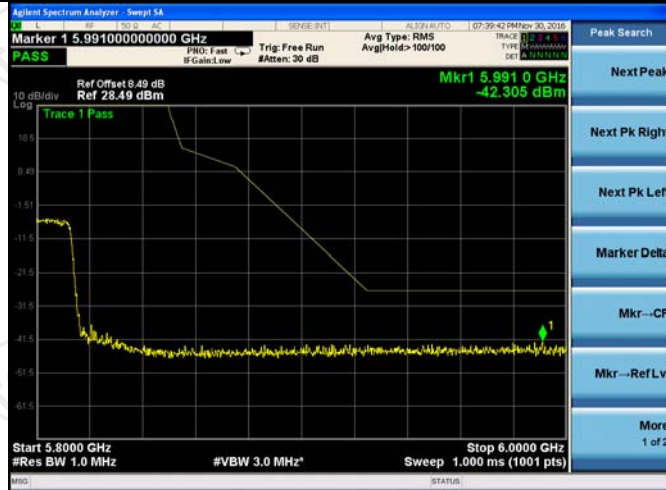

6.8. Spurious Emission

6.8.1. Restrict Bands Measurement

6.8.1.1. Test Specification

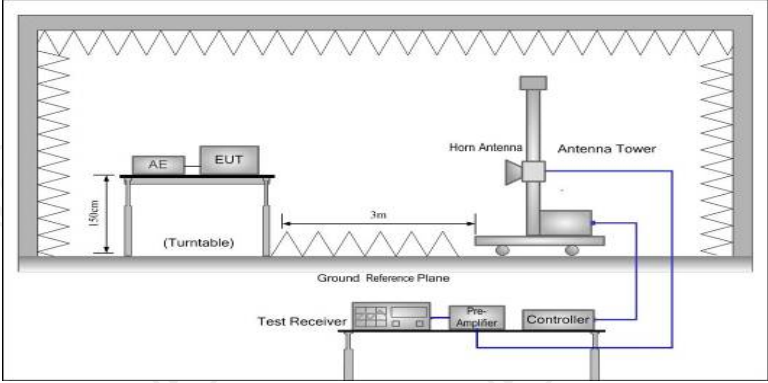Test Requirement:	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205				
Test Method:	KDB 789033 D02 v01r03				
Frequency Range:	Band I & II: 4.5 GHz to 5.15 GHz and 5.35GHz to 5.46GHz Band III & IV: 5.35 GHz to 5.46 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)	Remark		
	Above 1GHz	74	Peak Value		
		54	Average Value		
Test setup:	<p>Above 1GHz</p> 				
Test Procedure:	<ol style="list-style-type: none"> The testing follows FCC KDB Publication No. 789033 D02 General UNII Test Procedures New Rules v01r03. Section G) Unwanted emissions measurement. For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune 				

	<p>the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.</p> <p>For the radiated emission test above 1GHz: Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p> <p>4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>5. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, VBW= 3MHz for $f > 1$ GHz for peak measurement. <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p> <p>(4) A 5.8GHz high -PASS filter is used during radiated emissions above 1GHz measurement.</p>
Test results:	PASS

6.8.1.1 Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHW ARZ	ESVD	Aug. 12, 2016	Aug. 11, 2017
Spectrum Analyzer	ROHDE&SCHW ARZ	FSEM	Aug. 12, 2016	Aug. 11, 2017
Spectrum Analyzer	ROHDE&SCHW ARZ	FSP40	Aug. 13, 2016	Aug. 11, 2017
Spectrum Analyzer	Agilent	N9020A	Aug. 13, 2016	Aug. 12, 2017
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	Aug. 12, 2016	Aug. 11, 2017
Pre-amplifier	HP	8447D	Aug. 12, 2016	Aug. 11, 2017
Loop antenna	ZHINAN	ZN30900A	Aug. 14, 2016	Aug. 13, 2017
Broadband Antenna	Schwarzbeck	VULB9163	Aug. 14, 2016	Aug. 13, 2017
Horn Antenna	Schwarzbeck	BBHA 9120D	Aug. 14, 2016	Aug. 13, 2017
Horn Antenna	Schwarzbeck	BBHA 9170	Aug. 14, 2016	Aug. 13, 2017
Coax cable	TCT	RE-low-01	Aug. 12, 2016	Aug. 11, 2017
Coax cable	TCT	RE-high-02	Aug. 12, 2016	Aug. 11, 2017
Coax cable	TCT	RE-low-03	Aug. 12, 2016	Aug. 11, 2017
Coax cable	TCT	RE-High-04	Aug. 12, 2016	Aug. 11, 2017
Antenna Mast	CCS	CC-A-4M	Aug. 13, 2016	Aug. 12, 2017
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.8.1.2 Test Data


Restrict band around fundamental

11n(HT20) CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (Db μ V)	AV reading (dBuV)	Correction Factor (Db/m)	Emission Level		Peak limit (Db μ V/m)	AV limit (Db μ V/m)	Margin (Db)
					Peak (Db μ V/m)	AV (Db μ V/m)			
5737.57	H	51.23	---	0.53	51.76	---	74	54	-2.24
5687.19	H	49.05	---	0.59	49.64	---	74	54	-4.36
5686.28	H	49.17	---	0.57	49.74	---	74	54	-4.26
5737.57	V	50.16	---	0.53	50.69	---	74	54	-3.31
5687.19	V	51.73	---	0.54	52.27	---	74	54	-1.73
5686.28	V	51.28	---	0.57	51.85	---	74	54	-2.15
11n(HT20) CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (Db μ V)	AV reading (Db μ V)	Correction Factor (Db/m)	Emission Level		Peak limit (Db μ V/m)	AV limit (Db μ V/m)	Margin (Db)
					Peak (Db μ V/m)	AV (Db μ V/m)			
5727.00	H	50.48	---	0.99	51.47	---	74	54	-2.53
5660.00	H	50.61	---	0.85	51.46	---	74	54	-2.54
5727.00	V	51.23	---	0.99	52.22	---	74	54	-1.78
5660.00	V	50.82	---	0.85	50.77	---	74	54	-3.23
11n(HT20) CH161: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (Db μ V)	AV reading (dBuV)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
5750.28	H	49.17	---	0.99	50.16	---	74	54	-3.84
5760.00	H	48.25	---	0.89	49.14	---	74	54	-4.86
5801.76	H	49.52	---	0.85	50.37	---	74	54	-3.63
5750.28	V	51.23	---	0.99	52.22	---	74	54	-1.78
5760.00	V	51.67	---	0.89	52.56	---	74	54	-1.44
5801.76	V	50.83	---	0.99	51.82	---	74	54	-2.18
11n(HT40) CH151: 5755MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dBuV)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
5635.98	H	50.67	---	0.57	51.24	---	74	54	-2.76
5707.33	H	51.32	---	0.86	52.18	---	74	54	-1.82
5635.98	V	51.49	---	0.57	52.06	---	74	54	-1.94
5607.33	V	41.85	---	0.85	50.55	---	74	54	-3.45
11n(HT40) CH159: 5795MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dBuV)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
5717.98	H	50.16	---	0.81	50.97	---	74	54	-3.03
5703.60	H	50.35	---	0.82	51.17	---	74	54	-2.83
5717.98	V	50.47	---	0.81	51.28	---	74	54	-2.72
5703.60	V	51.66	---	0.81	52.47	---	74	54	-1.53


6.8.2. Unwanted Emissions out of the Restricted Bands

6.8.2.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205				
Test Method:	KDB 789033 D02 v01r03				
Frequency Range:	9kHz to 40GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,				
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)		
	0.009-0.490	2400/F(KHz)	300		
	0.490-1.705	24000/F(KHz)	30		
	1.705-30	30	30		
	30-88	100	3		
	88-216	150	3		
	216-960	200	3		
	Above 960	500	3		
		Frequency	Limit (dBuV/m @3m)	Detector	
	Above 1G	74.0	Peak		
		54.0	Average		
Test setup:	For radiated emissions below 30MHz				
	<p>Distance = 3m</p> <p>EUT</p> <p>Turn table</p> <p>Ground Plane</p> <p>Computer</p> <p>Pre -Amplifier</p> <p>Receiver</p>				
	30MHz to 1GHz				

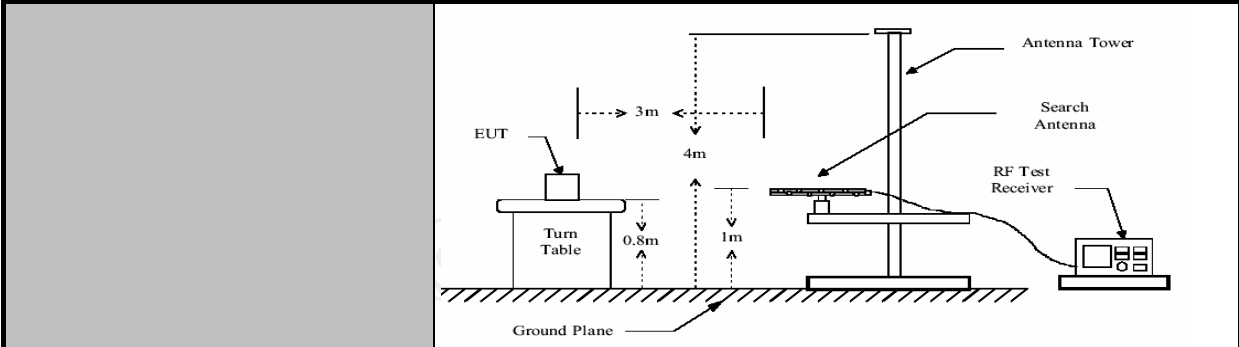

Above 1GHz

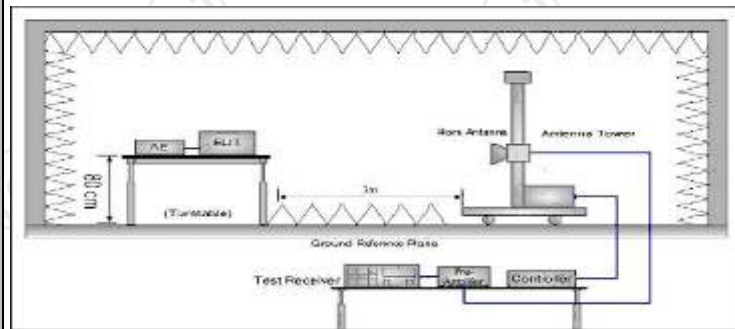

Test Procedure:

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Max Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


Test results:

PASS

6.8.3. Test Data

Please refer to following diagram for individual
Below 1GHz


Horizontal:

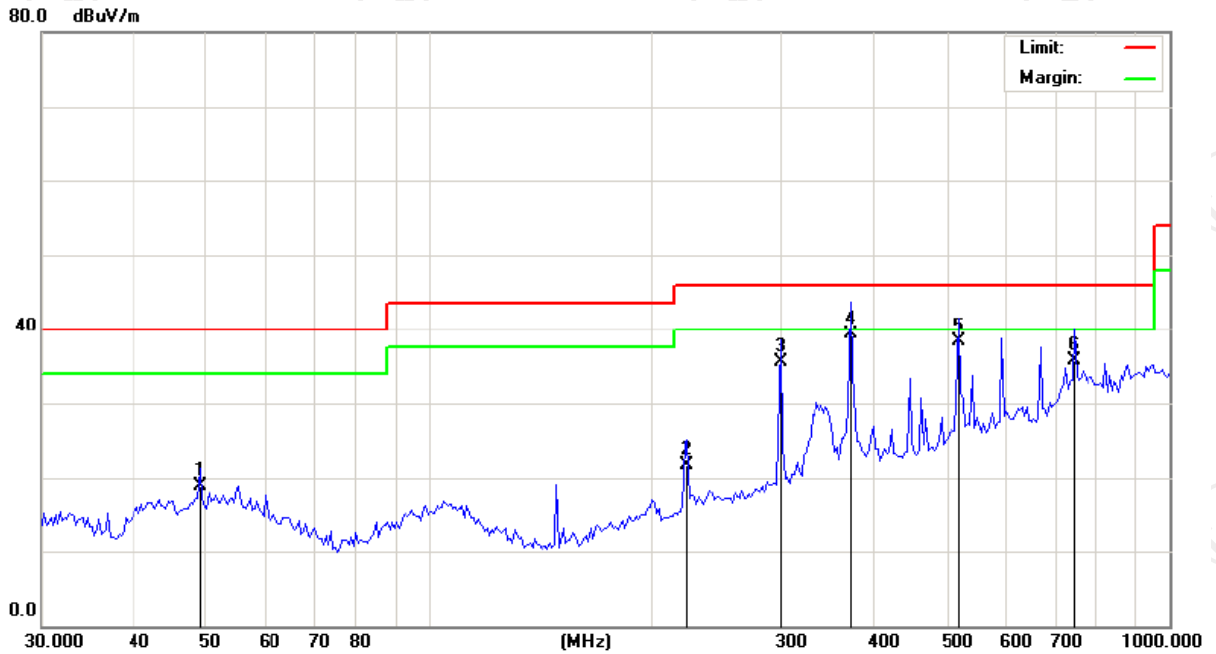

Site: Polarization: **Horizontal** Temperature: 23
Limit: FCC Part 15B Class B RE_3 m Power: Humidity: 54 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		49.0626	28.70	-9.71	18.99	40.00	-21.01	QP	0	
2		223.8480	31.40	-9.72	21.68	46.00	-24.32	QP	0	
3		298.5932	42.30	-6.74	35.56	46.00	-10.44	QP	0	
4	*	371.2680	44.50	-5.18	39.32	46.00	-6.68	QP	0	
5		520.2078	40.40	-2.13	38.27	46.00	-7.73	QP	0	
6		744.4265	29.70	6.04	35.74	46.00	-10.26	QP	0	

Vertical:

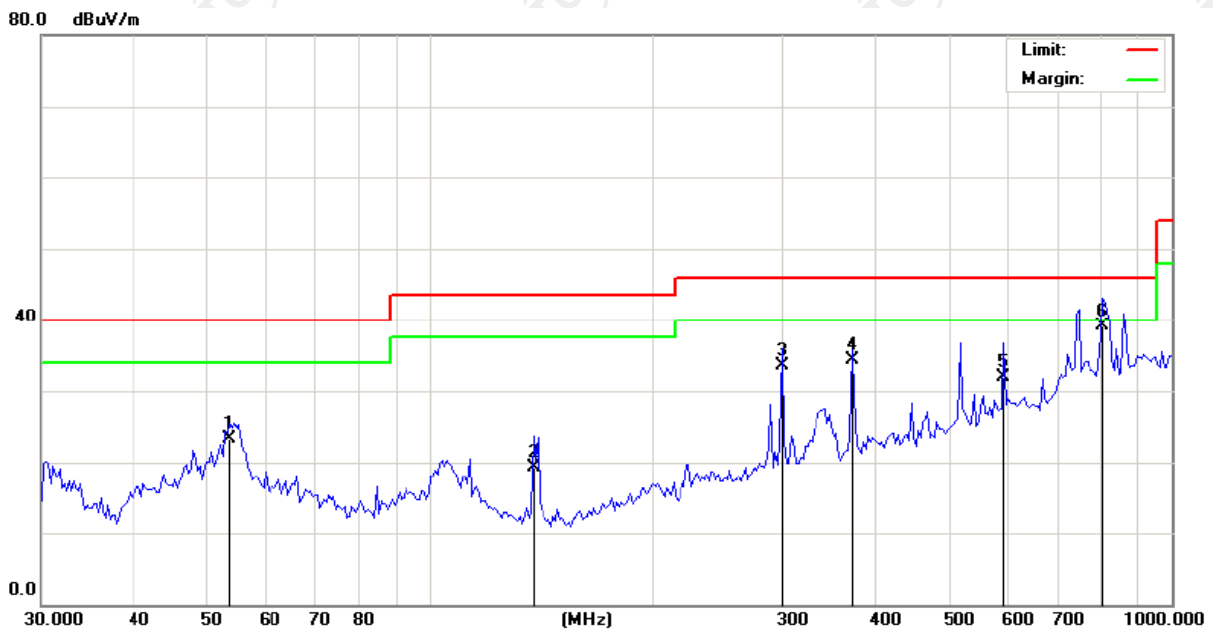

Site: Polarization: **Vertical** Temperature: 23
 Limit: FCC Part 15B Class B RE_3 m Power: Humidity: 54 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		53.7558	32.40	-9.05	23.35	40.00	-16.65	QP	0
2		137.8400	34.50	-15.18	19.32	43.50	-24.18	QP	0
3		298.5932	40.30	-6.74	33.56	46.00	-12.44	QP	0
4		371.2680	39.50	-5.18	34.32	46.00	-11.68	QP	0
5		594.5143	31.40	0.43	31.83	46.00	-14.17	QP	0
6	*	809.9238	34.10	4.95	39.05	46.00	-6.95	QP	0

Note: 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low) and all modulation (802.11n), and the worst case Mode (Middle channel and 11n(HT20)) was submitted only.

Modulation Type: Band IV

11n(HT20) CH149: 5745MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11490	H	51.05	---	0.66	51.71	---	74	54	-2.29
17235	H	41.26	---	9.5	50.76	---	74	54	-3.24
---	H	---	---	---	---	---	---	---	---
11490	V	50.63	---	0.66	51.29	---	74	54	-2.71
17235	V	42.49	---	9.5	51.99	---	74	54	-2.01
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH157: 5785MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11570	H	51.08	---	0.66	51.74	---	74	54	-2.26
17355	H	41.64	---	9.5	51.14	---	74	54	-3.97
---	H	---	---	---	---	---	---	---	---
11570	V	51.27	---	0.66	51.93	---	74	54	-2.07
17355	V	42.78	---	9.5	52.28	---	74	54	-1.72
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH161: 5825MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11650	H	50.67	---	0.99	51.66	---	74	54	-2.34
17475	H	40.16	---	9.85	50.01	---	74	54	-3.99
---	H	---	---	---	---	---	---	---	---
11650	V	51.36	---	0.99	52.35	---	74	54	-1.65
17475	V	41.08	---	9.85	50.93	---	74	54	-3.07
---	V	---	---	---	---	---	---	---	---

11n(HT40) CH151: 5755MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11510	H	49.42	---	1.33	50.75	---	74	54	-3.25
17265	H	40.21	---	10.22	50.43	---	74	54	-3.57
---	H	---	---	---	---	---	---	---	---
11510	V	51.36	---	1.33	52.69	---	74	54	-1.31
17265	V	40.39	---	10.22	50.61	---	74	54	-3.39
---	V	---	---	---	---	---	---	---	---

11n(HT40) CH159: 5795MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11590	H	50.87	---	0.66	51.53	---	74	54	-2.47
17385	H	40.02	---	9.5	49.52	---	74	54	-4.48
---	H	---	---	---	---	---	---	---	---
11590	V	51.26	---	0.66	51.92	---	74	54	-2.08
17385	V	41.83	---	9.5	51.33	---	74	54	-2.67
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown "---" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

6.9. Frequency Stability Measurement

6.9.1. Test Specification

Test Requirement:	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
Test Method:	ANSI C63.10: 2013
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	<pre> graph LR SA[Spectrum Analyzer] --- EUT[EUT] subgraph TC [Temperature Chamber] EUT end P[AC/DC Power supply] --- EUT </pre>
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	Pre-scan was performed at Antenna 0 and Antenna 1, the worst case was found. Only the test data of Antenna 0 was shown in this report.

Test plots as follows:

Test mode:		802.11n(HT20)	Frequency(MHz):	5745
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	12.0	5745.0125	12500	PASS
35		5745.0047	4700	PASS
25		5745.0023	2300	PASS
15		5745.0066	6600	PASS
5		5744.9983	-1700	PASS
0		5745.0025	2500	PASS
20		13.8	5745.0068	6800
	12.0	5744.9929	-7100	PASS
	10.2	5745.0017	1700	PASS

Test mode:		802.11n(HT20)	Frequency(MHz):	5785
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	12.0	5785.0022	2200	PASS
35		5785.0061	6100	PASS
25		5785.0017	1700	PASS
15		5784.9968	-3200	PASS
5		5784.9909	-9100	PASS
0		5785.0053	5300	PASS
20		13.8	5785.0046	4600
	12.0	5785.0011	1100	PASS
	10.2	5785.0023	2300	PASS

Test mode:		802.11n(HT20)	Frequency(MHz):	5825
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	12.0	5824.9967	-3300	PASS
35		5824.9912	-8800	PASS
25		5825.0035	3500	PASS
15		5825.0083	8300	PASS
5		5825.0029	2900	PASS
0		5825.0073	7300	PASS
20		13.8	5825.0021	2100
	12.0	5824.9994	-600	PASS
	10.2	5825.0038	3800	PASS

Test mode:		802.11n(HT40)	Frequency(MHz):	5755
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	12.0	5755.0019	1900	PASS
35		5755.0132	13200	PASS
25		5755.0015	1500	PASS
15		5755.0041	4100	PASS
5		5755.0086	8600	PASS
0		5755.0064	6400	PASS
20	13.8	5755.0035	3500	PASS
	12.0	5755.0022	2200	PASS
	10.2	5755.0076	7600	PASS

Test mode:		802.11n(HT40)	Frequency(MHz):	5795
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	12.0	5794.9983	-1700	PASS
35		5794.9929	-7100	PASS
25		5795.0068	6800	PASS
15		5795.0037	3700	PASS
5		5795.0018	1800	PASS
0		5795.0093	9300	PASS
20	13.8	5795.0089	8900	PASS
	12.0	5794.9972	-2800	PASS
	10.2	5795.0092	9200	PASS

7. Appendix A: Photographs of Test Setup

Refer to the test report No. TCT161117E010

8. Photographs of EUT

Refer to the test report No. TCT161117E010

*******END OF REPORT*******