

Center for Quality Engineering

Test Report No.: D0GB0001

FCC ID: SZV-PTM33XC

IC ID: 5713A-PTM33XC

Order No.: D0GB

Pages: 33

Munich. Jul 15, 2010

Client:	EnOcean GmbH
Equipment Under Test:	Transmitter Module PTM330C/PTM332C
Manufacturer:	EnOcean GmbH
Task:	Conformance test according to the test specifications mentioned below
Test Specification(s):	FCC 47 CFR Part 15 IC RSS-210
Result:	The EUT complies with the requirements of the specification.

The results relate only to the items tested as described in this test report.

approved by:

Date

Signature

Neuhäusler
Lab Manager Wireless & Software

Jul 15, 2010



Bauer
Lab Manager EMC

Jul 15, 2010



This document was signed electronically.

CONTENTS

1 Summary	5
2 References	6
2.1 Specifications	6
2.2 Glossary of Terms	6
3 General Information	7
3.1 Identification of Client	7
3.2 Test Laboratory	7
3.3 Time Schedule	7
3.4 Participants	7
4 Equipment Under Test	8
4.1 Description of EUT	8
4.2 Configuration of EUT	9
4.3 Operating Conditions	9
4.4 Compliance Criteria	9
5 General Description of Tests	10
5.1 Tested Carrier Frequencies	10
5.2 Calibration of the Test Equipment	10
6 Test Results	11
6.1 Test No. 1: Conducted Emissions ([1] § 15.207)	11
6.1.1 Purpose	11
6.1.2 Limits	11
6.1.3 EUT Operating Condition	11
6.1.4 Test Configuration	11
6.1.5 Test Procedure and Results	12
6.1.6 Test Protocol	13
6.2 Test No. 2: Field strength correction for pulse operation (Duty Cycle) ([1] § 15.35(c))	14
6.2.1 Purpose	14
6.2.2 Limits	14
6.2.3 EUT Operating Condition	14
6.2.4 Test Configuration	14
6.2.5 Test Procedure and Results	15
6.2.6 Test Protocol	15
6.3 Test No. 3: Field strength of the fundamental wave ([1] § 15.231(b), [3] A1.1.2)	17
6.3.1 Purpose	17
6.3.2 Limits	17

The test report shall not be reproduced except in full without the written approval of the testing laboratory

6.3.3 EUT Operating Condition	17
6.3.4 Test Configuration	17
6.3.5 Test Procedure and Results	18
6.3.6 Test Protocol	18
6.4 Test No. 4: Radiated Emissions (9kHz – 30MHz) ([1] § 15.209; [3] T1. 3)	19
6.4.1 Purpose	19
6.4.2 Limits	19
6.4.3 EUT Operating Condition	19
6.4.4 Test Configuration	19
6.4.5 Test Procedure and Results	20
6.4.6 Test Protocol	21
6.5 Test No. 5: Radiated Emissions (30MHz – 1GHz) ([1] § 15.209. 231(b); [3] T1. 2).....	22
6.5.1 Purpose	22
6.5.2 Limits	22
6.5.3 EUT Operating Condition	23
6.5.4 Test Configuration	23
6.5.5 Test Procedure and Results	23
6.5.6 Test Protocol	24
6.6 Test No. 6: Radiated Emissions (1GHz – 4GHz) ([1] § 15.209. 231(b); [3] T1. 2)	25
6.6.1 Purpose	25
6.6.2 Limits	25
6.6.3 EUT Operating Condition	26
6.6.4 Test Configuration	26
6.6.5 Test Procedure and Results	26
6.6.6 Test Protocol	27
6.7 Test No. 7: Emission Bandwidth ([1] § 15.231(c); [3] A1.1.3)	28
6.7.1 Purpose	28
6.7.2 Limits	28
6.7.3 EUT Operating Condition	28
6.7.4 Test Configuration	28
6.7.5 Test Procedure and Results	29
6.7.6 Test Protocol	29
6.8 Test No. 8: Transmit Duration ([1] § 15.231(a))	30
6.8.1 Purpose	30
6.8.2 Limits	30
6.8.3 EUT Operating Condition	30
6.8.4 Test Configuration	30

The test report shall not be reproduced except in full without the written approval of the testing laboratory

6.8.5 Test Procedure and Results	31
6.8.6 Test Protocol	31
7 Test Data	33
7.1 Part List of the Test Equipment.....	33

The test report shall not be reproduced except in full without the written approval of the testing laboratory

1 Summary

The measurements described in this report were conducted pursuant to 47 CFR § 2.947, § 2.1041 and [1] § 15.31. All applicable paragraphs of the [1] 47 CFR part 15 of the most current version of the rules were considered.

The following tests were performed according to the FCC rules in order to verify the compliance of the EUT with the FCC requirements:

Test No.	Measurement	FCC Rule	Page Number of this Report	Result
1	Conducted Emissions	[1] § 15.207	11	compliant
2	Field strength correction for pulse operation (Duty Cycle)	[1] § 15.35(c)	14	-
3	Field strength of the fundamental wave	[1] § 15.231(b) [3] Annex 1.1.2. Table 4	17	compliant
4	Radiated Emissions (9kHz – 30MHz)	[1] § 15.209 [3] Table 1 and 3	19	compliant
5	Radiated Emissions (30MHz – 1GHz)	[1] § 15.205. 15.209 15.231(b) [3] Table 1 and 2	22	compliant
6	Radiated Emissions (1GHz – 4GHz)	[1] § 15.205. 15.209 15.231(b) [3] Table 1 and 2	25	compliant
7	Emission Bandwidth	[1] § 15.231(c) [3] Annex 1.1.3	28	compliant
8	Transmit Duration	[1] § 15.231(a) [3] Annex 1.1.1	30	compliant

Table 1-1: Results – Summary

The test report shall not be reproduced except in full without the written approval of the testing laboratory

2 References

2.1 Specifications

No.	Standard	Title	Date
[1]	FCC 47 CFR Part 15	Code of Federal Regulations. Title 47: Telecommunication Part 15: Radio Frequency Devices	2009-10
[2]	ANSI C63.4-2003	American National Standard for Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2004-01
[3]	RSS-210 Issue 7	Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment	2007-06

2.2 Glossary of Terms

°C	Degree Celsius
AC	Alternating Current
ANT	Antenna
chk	checked against a calibrated reference
cnn	calibration not necessary
DAR	Deutscher Akkreditierungsrat (German Accreditation Council)
DATech	Deutsche Akkreditierungsstelle Technik e.V.
dB	Decibel
dBc	Decibel per Carrier
dBm	Decibel per Milliwatt
EUT	Equipment Under Test
ind	for indication only
kbps	Kilobits per second
max	Maximum
min	Minimum
n/a	Not Applicable
n/p	Not Performed
P	Power
Pmax	Maximum Output Power
Prat	Rated Output Power
RBW	Resolution Bandwidth
Ref	Reference
RF	Radio Frequency
RMS	Root Mean Square
RX	Receive Path
SW	Software
T	Temperature
TRX	Transceiver
TX	Transmit Path
V	Volt
W	Watt
w/	with
w/o	without

The test report shall not be reproduced except in full without the written approval of the testing laboratory

3 General Information

3.1 Identification of Client

EnOcean GmbH
 Kolpingstr. 18a
 82041 Oberhaching
 Frank Schmidt

3.2 Test Laboratory

Center for Quality Engineering
 SGS Germany GmbH
 Hofmannstraße 50
 81379 München

Federal Communications Commission (FCC):
 Testfirm registration numbers – MZ2: 97242
 – MZ3: 299569

Industry Canada (IC):
 Company number: 9058A
 Test-site number: – MZ2: 9058A-2
 – MZ3: 9058A-3

3.3 Time Schedule

Test No.:	1	2. 7. 8	3. 4. 5. 6
Start of Test:	Jul 14. 2010	Jun 29. 2010	Jul 02. 2010
End of Test:	Jul 14. 2010	Jun 29. 2010	Jul 02. 2010

3.4 Participants

Name	Function
Michael Sperling	Accredited Testing. Editor
Anton Rieb	Accredited Testing


The test report shall not be reproduced except in full without the written approval of the testing laboratory

4 Equipment Under Test

The tested equipment is representative for serial production.

4.1 Description of EUT

The tested Transmitter-Module transmits control data by using ASK modulation through its 315MHz carrier signal.

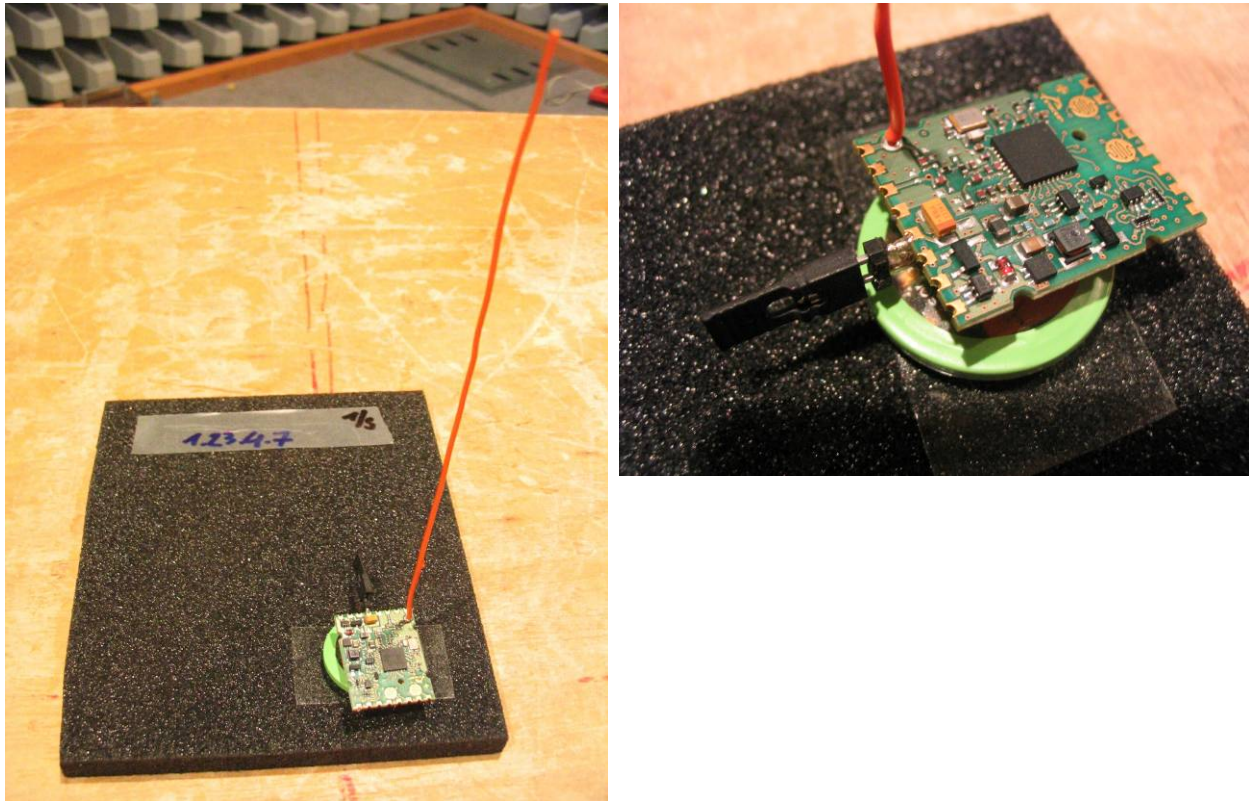

The test report shall not be reproduced except in full without the written approval of the testing laboratory

Note: During the tests the electro-dynamic DC supply system was replaced by a 3V Li Mn battery to allow continuous operation of the EUT.

Figure 4-1: Photos of EUT

4.2 Configuration of EUT

The used different EUT configurations are shown by the following tables.

Module Type	Transmitter-Module
Operating Band	315MHz
Operating Frequency	315MHz
Rated Output Power (Prat)	n/a
Modulation Type	ASK (OOK)
Operation w/o modulation	No
Emission designator	315KA1DN
Antenna Type	Wire antenna (15cm)
Number of Antenna Ports	1
Gain	n/a
Power Src. Type	Electro-dynamic DC supply system ¹
Battery type (if applicable)	Li Mn (CR2032) ¹
Voltage nominal	3V
minimal	3V
maximum:	6V

1) During the tests the electro-dynamic DC supply system was replaced by a 3V Li Mn battery to allow continuous operation of the EUT.

Table 4-1: Overview of EUT Configuration

The tests were performed with one EUT.

The used different EUT configurations are shown by the following table.

Module Name	Serial-No.	Module Type
PTM330C ¹	80560A	Transmitter-Module

1) Besides the wire antenna (provided by EnOcean) which has to be mounted manually at the PTM332C by the customer PTM332C and PTM330C are identical.

Table 4-2: Configuration of EUT

For a functional description of the modules, please refer to the appropriate related parts and exhibit sections of this certification application.

4.3 Operating Conditions

If not stated otherwise, the following standard setup procedure for the EUT was used:

The EUT was set up in a continuously transmitting operating mode. The TX signal was thus permanently activated during the test. To do so the pulse train which will be sent only once (after manual activation) during normal operation was repeated each 1000ms.

The EUT was supplied with 3V DC by a new Li Mn battery.

4.4 Compliance Criteria

The EUT must fulfil the requirements (described in the specifications mentioned in chapter 2.1. Specifications) for the selected test cases.

5 General Description of Tests

5.1 Tested Carrier Frequencies

The measurements were performed on 1 carrier frequency according to the following table:

Frequency [MHz]	Remark
315	Only possible carrier frequency

Table 5-1: Carrier Frequency

5.2 Calibration of the Test Equipment

All relevant test equipment has a valid calibration from an external calibration laboratory. Additionally the used spectrum and EMI analyzers have a built-in self-calibration procedure. This calibration procedure was activated prior to the measurements so that the analyzer is deemed accurate. High quality cables were used to connect the measurement equipment. The actual loss of the attenuators and the cables was measured with a high precision network analyzer and taken into account for all measurements.

The test report shall not be reproduced except in full without the written approval of the testing laboratory

6 Test Results

6.1 Test No. 1: Conducted Emissions ([1] § 15.207)

6.1.1 Purpose

The AC power-line conducted emissions caused by the EUT via the power lines were measured pursuant to [2] Clause 13.3 in the frequency range from 150kHz to 30MHz.

6.1.2 Limits

Following conducted emission limits are specified by [1] § 15.207:

Frequency of Emission [MHz]	Conducted Limit [dB μ V]	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5.0	56	46
5.0-30.0	60	50

Table 6-1: Limits – Conducted Emissions

6.1.3 EUT Operating Condition

The standard setup procedure as described in section 4.3 of this report was used.

6.1.4 Test Configuration

The power supply used for the conducted emission test:

Samsung, S/N RT2Q920GS/5-G, Input: 100-240V AC, Output: 4.75V DC

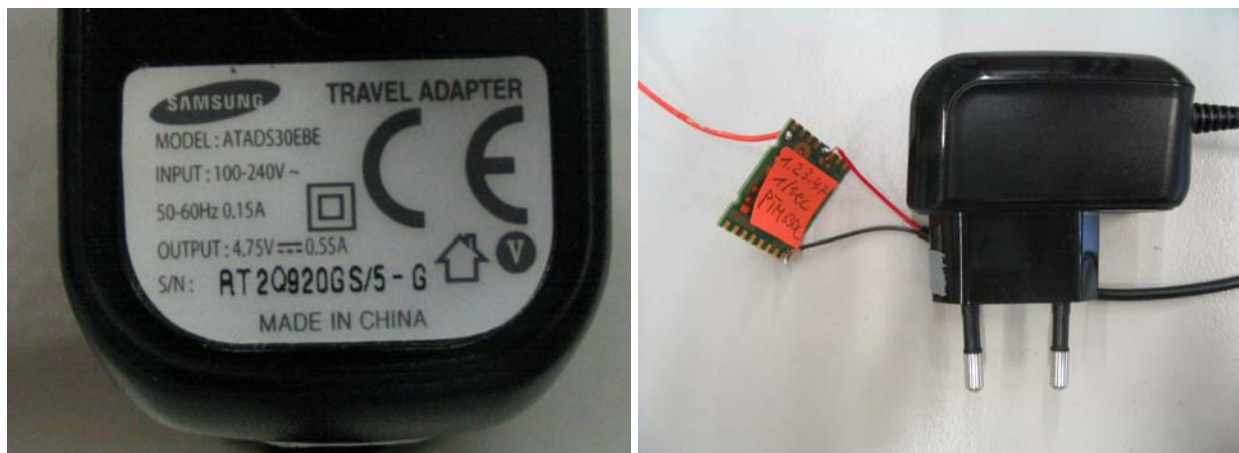


Figure 6-1: Power supply for conducted emission test on AC power port

The resolution bandwidth used during the emission measurement was as follows:

150kHz – 30MHz: 9kHz

For the parts list of used test equipment see chapter 7.1

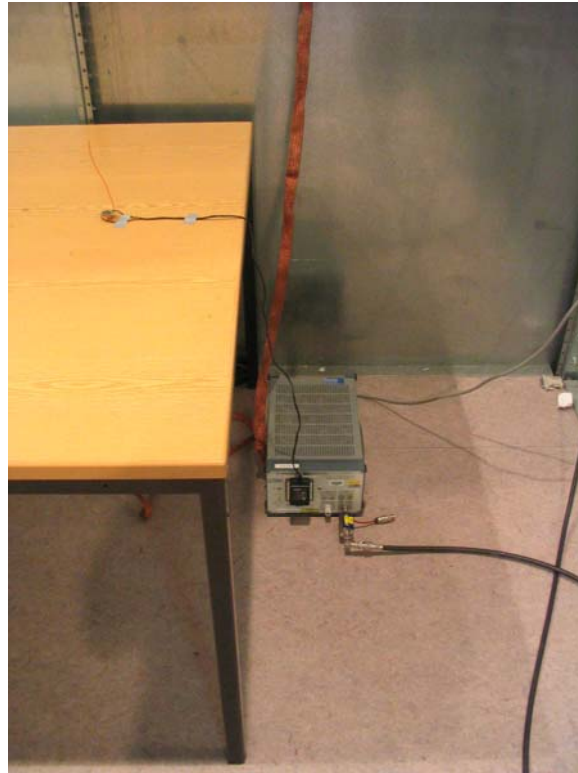


Figure 6-2: Test Configuration – Conducted Emissions (150k – 30MHz)

6.1.5 Test Procedure and Results

The conducted emission on AC power leads is measured according to FCC 47 CFR Part 15 with an AMN and a receiver with peak and average detector. The voltage is measured separately on each power lead (Phase and Neutral). Only if the measured peak value is near or above the quasi-peak limit the detector function is changed to quasi-peak.

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
3.638000	33.3	1000.0	9.000	GND	L1	10.2	22.7	56.0
3.902000	34.8	1000.0	9.000	GND	L1	10.2	21.2	56.0
4.014000	36.0	1000.0	9.000	GND	L1	10.2	20.0	56.0
4.086000	35.7	1000.0	9.000	GND	L1	10.2	20.3	56.0
4.274000	36.9	1000.0	9.000	GND	L1	10.2	19.1	56.0
4.314000	36.6	1000.0	9.000	GND	L1	10.2	19.4	56.0
4.386000	35.7	1000.0	9.000	GND	L1	10.2	20.3	56.0
4.426000	34.2	1000.0	9.000	GND	L1	10.2	21.8	56.0
4.534000	33.5	1000.0	9.000	GND	L1	10.2	22.5	56.0
4.722000	34.3	1000.0	9.000	GND	L1	10.2	21.7	56.0
Measurement Uncertainty:						+2.2 dB / -2.5 dB		

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
3.578000	16.4	1000.0	9.000	GND	L1	10.2	29.6	46.0
3.902000	17.7	1000.0	9.000	GND	L1	10.2	28.3	46.0
4.014000	18.3	1000.0	9.000	GND	L1	10.2	27.7	46.0
4.202000	18.5	1000.0	9.000	GND	L1	10.2	27.5	46.0
4.314000	19.3	1000.0	9.000	GND	L1	10.2	26.7	46.0
4.426000	17.7	1000.0	9.000	GND	L1	10.2	28.3	46.0
4.722000	17.1	1000.0	9.000	GND	L1	10.2	28.9	46.0
Measurement Uncertainty:						+2.2 dB / -2.5 dB		

Table 6-2: Results – Conducted Emissions (150k – 30MHz)

6.1.6 Test Protocol

The following figure shows the test protocol of the conducted emissions (150k – 30MHz) measurement.

The test report shall not be reproduced except in full without the written approval of the testing laboratory

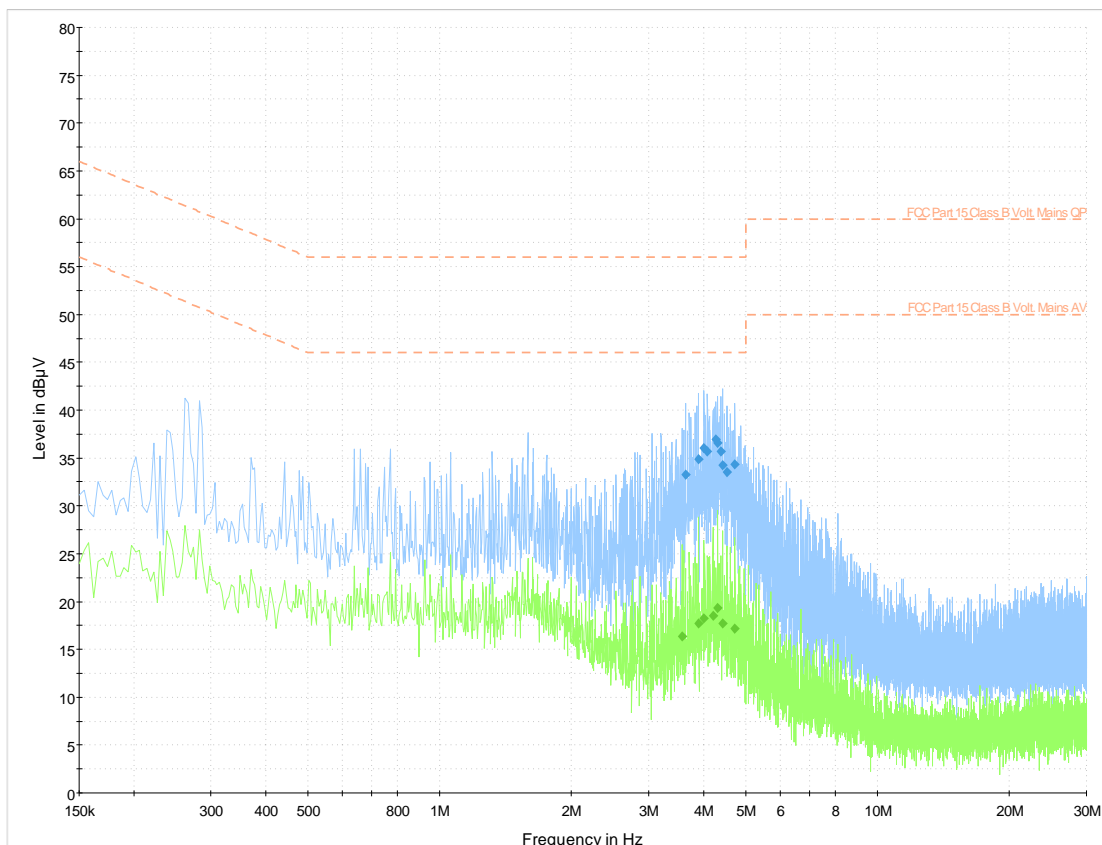


Figure 6-3: Conducted Emissions (150k – 30 Hz)

The measured emission levels were found to be compliant with the manufacturer’s specifications and with all requirements of the FCC rules.

6.2 Test No. 2: Field strength correction for pulse operation (Duty Cycle) ([1] § 15.35(c))

6.2.1 Purpose

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed according to [1] § 15.35(c) the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted.

6.2.2 Limits

According to [1] § 15.35(b) the duty cycle correction factor must be not below -20dB.

6.2.3 EUT Operating Condition

The standard setup procedure as described in section 4.3 of this report was used.

6.2.4 Test Configuration

The measurement of the duty cycle of the EUT's pulse train was performed with a probe antenna by means of a spectrum analyzer operating in the zero span mode. For the parts list of used test equipment see chapter 7.1

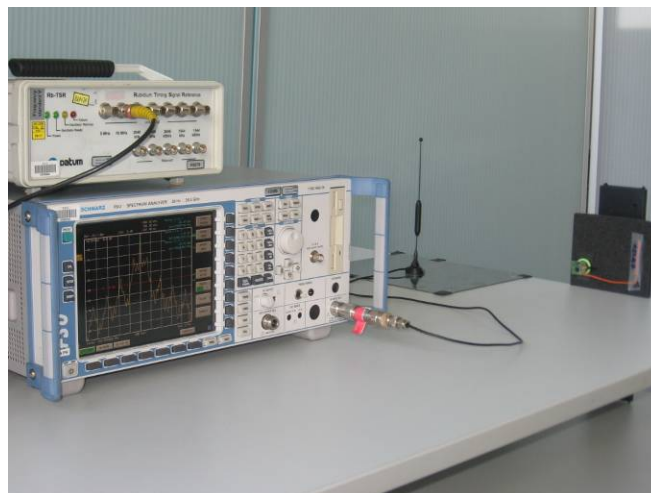


Figure 6-4: Test Configuration – Duty Cycle

6.2.5 Test Procedure and Results

The duty cycle correction factor (dB) was calculated with following formula:

$$CF = 20 \log \frac{t_p}{100ms}$$

With:

CF: Duty cycle correction factor

t_p : Puls duration


t_p [ms]	CF [dB] calculated	CF [dB] used (≥ -20 dB)
3 x 801	-32	-20

Table 6-3: Results – Duty Cycle

6.2.6 Test Protocol


The following figures show the pulse train details (time domain)

The test report shall not be reproduced except in full without the written approval of the testing laboratory

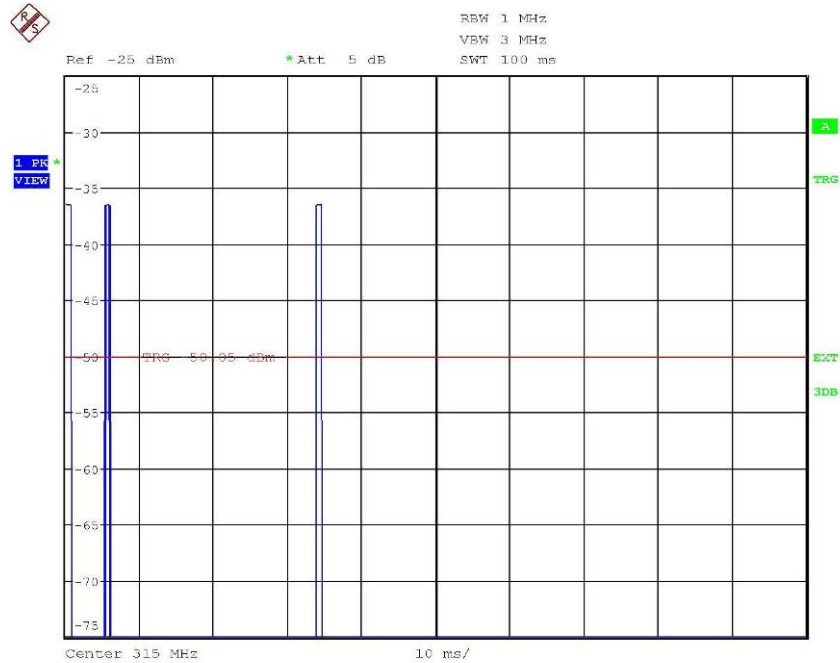

RF output power
Date: 29.JUN.2010 09:41:25

Figure 6-5: Duty Cycle (complete Pulse Train in 100ms window)

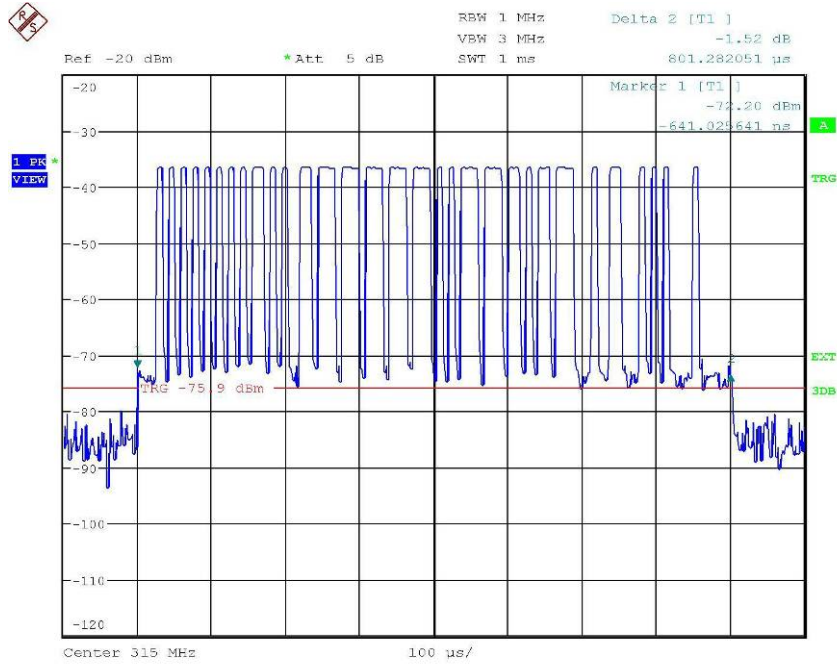

RF output power
 Date: 29.JUN.2010 09:44:56

Figure 6-6: Duty Cycle (Pulse details)

The determined duty cycle correction factor will be applied for the field strength and radiated emission measurements.

The test report shall not be reproduced except in full without the written approval of the testing laboratory

6.3 Test No. 3: Field strength of the fundamental wave ([1] § 15.231(b). [3] A1.1.2)

6.3.1 Purpose

The measurement of the field strength of the fundamental wave of the EUT was performed pursuant to [2] Clause 13.1.4 to verify that the field strength of the fundamental wave does not exceed the specified limit.

6.3.2 Limits

According to [1] § 15.231(b) and [3] A1.1.2, the field strength of the fundamental wave must not exceed following field strength levels:

Frequency of Emission [MHz]	Field strength [$\mu\text{V}/\text{m}$]	Field strength [dB $\mu\text{V}/\text{m}$]	Meas. Distance [m]
40.66–40.70	2250	67.0	3
70–130	1250	61.9	3
130–174	1250–3750 ¹	61.9–71.5	3
174–260	3750	71.5	3
260–470	3750–12500 ¹	71.6–81.9	3
315	6042²	75.6	3
Above 470	12500	81.9	3

1) Linear interpolation

2) Calculated by linear interpolation

Table 6-4: Limits – Field Strength of Fundamental Wave

6.3.3 EUT Operating Condition

The standard setup procedure as described in section 4.3 of this report was used.

6.3.4 Test Configuration

The measurements were performed in an anechoic chamber. The radiated test site complies with the site attenuation requirements of [2] and is listed with the FCC and IC. The resolution bandwidth used during the emission measurement was as follows:

30MHz – 1GHz: 120kHz

For the parts list of used test equipment see chapter 7.1

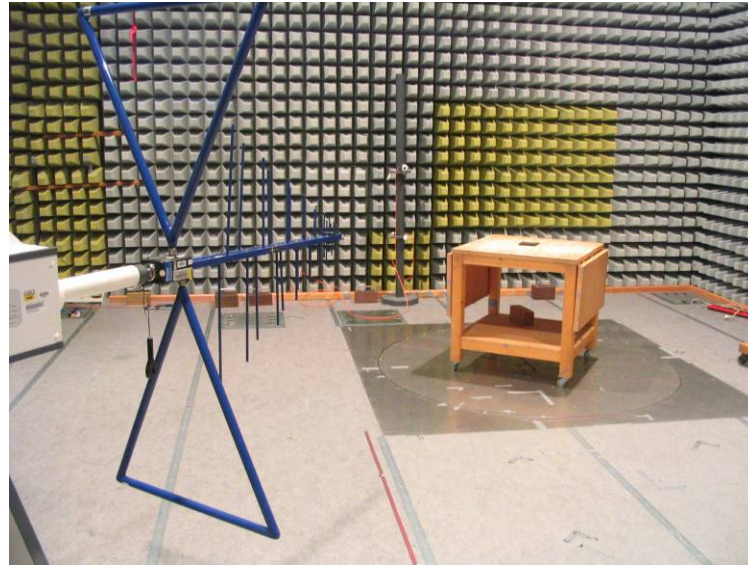


Figure 6-7: Test Configuration – Field Strength of Fundamental Wave

6.3.5 Test Procedure and Results

This investigation is performed with a broadband antenna and a receiver with peak detector. The field strength is measured in a distance of 3m with an antenna in horizontal and vertical polarization. the antenna height is varied from 1 to 4 m and the EUT is turned around 360° to maximize the emission. The used bandwidth for the measurement is 120 kHz.

Frequency (MHz)	Average (dB μ V/m) ¹	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
315.060000	44.5	1.0	150.0	V	0.0	14.4	30.1	75.6
Measurement Uncertainty:						+3.1 dB / -3.9 dB		

1) The average field strength was calculated by applying the duty cycle correction factor of -20dB (see chapter 6.2) to the measured peak field strength.

Table 6-5: Results – Field Strength of Fundamental Wave

6.3.6 Test Protocol

See chapter 6.5.6 for the test protocol of the fundamental wave field strength measurement.

The measured field strength of the fundamental wave was found to be compliant with the manufacturer's specifications and with all requirements of the FCC rules.

6.4 Test No. 4: Radiated Emissions (9kHz – 30MHz) ([1] § 15.209; [3] T1. 3)

6.4.1 Purpose

The radiated emissions of the EUT were measured pursuant to [2] Clause 13.1.4. The measurement was performed to verify that emissions radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements are attenuated below the specified limits.

6.4.2 Limits

At frequencies equal to or less than 1000MHz compliance with the limits in [1] § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. According to [1] § 15.209 and [3] Table 1 and 3 the radiated emissions of an intentional radiator must not exceed following field strength levels:

Frequency of Emission [MHz]	Field strength [μ V/m]	Field strength [dB μ V/m]	Meas. Distance [m]
0.009–0.490	2400/F [kHz]	88.5 – 53.8 ¹	300
0.490–1.705	24000/F [kHz]	53.8 – 43 ¹	30
1.705–30	30	49.5 ¹	30

1): Limit adapted to a measurement distance of 3m!

Table 6-6: Limits – Radiated Emissions (9kHz – 30MHz)

According to [1] § 15.205(a) the field strength of emissions in the following restricted bands of operation shall not exceed the limits of [1] § 15.209.

MHz	MHz	MHz	GHz
0.090–0.110	6.215–6.2	8.41425–8.41475	16.69475–16.69525
0.495–0.505	6.26775–6.26825	12.29–12.293	16.80425–16.80475
2.1735–2.1905	6.31175–6.31225	12.51975–12.52025	25.5–25.67
4.125–4.128	8.291–8.294	12.57675–12.57725	
4.17725–4.17775	8.362–8.366	13.36–13.41	
4.20725–4.20775	8.37625–8.38675	16.42–16.423	

Table 6-7: Restricted Bands (9kHz – 30MHz)

6.4.3 EUT Operating Condition

The standard setup procedure as described in section 4.3 of this report was used.

6.4.4 Test Configuration

The measurements were performed in an anechoic chamber. The radiated test site complies with the site attenuation requirements of [2] and is listed with the FCC and IC.

The resolution bandwidth used during the emission measurement was as follows:

9kHz – 150 kHz: 200Hz
150kHz – 30MHz: 9kHz

For the parts list of used test equipment see chapter 7.1



Figure 6-8: Test Configuration – Radiated Emissions (9kHz – 30MHz)


The test report shall not be reproduced except in full without the written approval of the testing laboratory

6.4.5 Test Procedure and Results

This investigation is performed with the EUT turned around 360° to maximize the emission. The spectrum analyzer is set to 'peak' mode from 9 kHz to 30 MHz. On any emission over the limit, the spectrum analyzer is set to 'average' mode for 9 kHz to 150 kHz and the spectrum analyzer is set to quasi-peak mode between 150 kHz and 30 MHz. The rod antenna is positioned 3 meters from the closest point of any part of the test sample. The antenna counterpoise is grounded.

6.4.6 Test Protocol

The following figure shows the test protocol of the radiated emissions (9kHz – 30MHz) measurement.

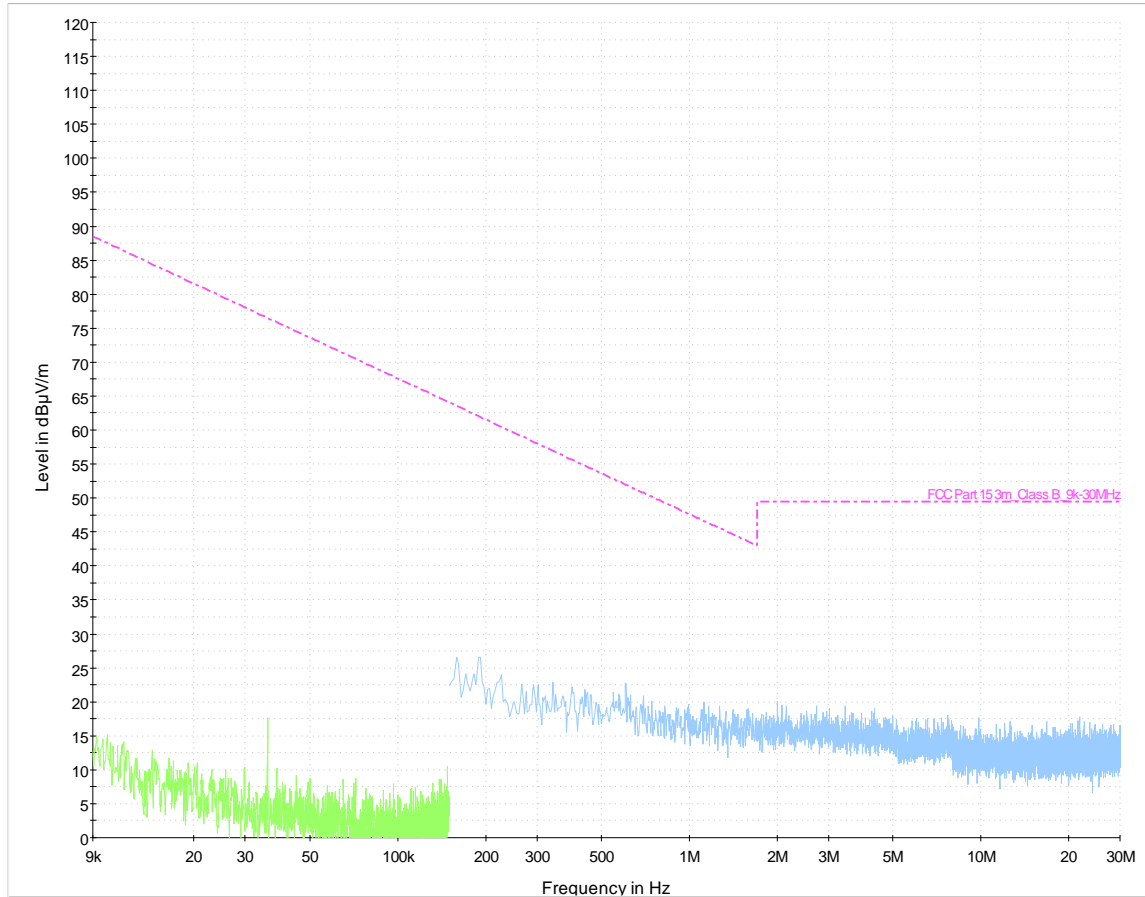

The test report shall not be reproduced except in full without the written approval of the testing laboratory

Figure 6-9: Radiated Emissions (9kHz – 30MHz)

The measured emission levels were found to be compliant with the manufacturer’s specifications and with all requirements of the FCC rules.

6.5 Test No. 5: Radiated Emissions (30MHz – 1GHz) ([1] § 15.209. 231(b); [3] T1. 2)

6.5.1 Purpose

The radiated emissions of the EUT were measured pursuant to [2] Clause 13.1.4. The measurement was performed to verify that emissions radiated directly from the cabinet. control circuits. power leads or intermediate circuit elements are attenuated below the specified limits.

6.5.2 Limits

At frequencies equal to or less than 1000MHz radiated emissions shall be attenuated to CISPR quasi peak limits specified by [1] § 15.209 and [3] Table 1 and 2 (general limits) or to the limits specified by [1] § 15.231(b). whichever limit permits a higher field strength.

According to [1] § 15.209 and [3] Table 1 and 2 the radiated emissions of an intentional radiator must not exceed following field strength levels:

Frequency of Emission [MHz]	Field strength [μV/m]	Field strength [dBμV/m]	Meas. Distance [m]
30–88	100	40	3
88–216	150	43.5	3
216–960	200	46	3
Above 960	500	54	3

Table 6-8: Limits – Radiated Emissions (30MHz – 1GHz) (§ 15.209)

According to [1] § 15.231(b) the radiated emissions of an intentional radiator must not exceed following field strength levels:

Frequency of Emission [MHz]	Field strength [μV/m]	Field strength [dBμV/m]	Meas. Distance [m]
40.66–40.70	225	47.0	3
70–130	125	41.9	3
130–174	125–375 ¹	41.9–51.5	3
174–260	375	51.5	3
260–470	375–1250 ¹	51.6–61.9	3
315	604.2²	55.6	3
Above 470	1250	61.9	3

1) Linear interpolation

2) Calculated by linear interpolation

Table 6-9: Limits – Radiated Emissions (30MHz – 1GHz) (§ 15.231(b))

According to [1] § 15.205(a) the field strength of emissions in the following restricted bands of operation shall not exceed the limits of [1] § 15.209.

MHz	MHz	MHz	MHz
37.5–38.25	123–138	162.0125–167.17	399.9–410
73–74.6	149.9–150.05	167.72–173.2	608–614
74.8–75.2	156.52475–156.52525	240–285	960–1000
108–121.94	156.7–156.9	322–335.4	

Table 6-10: Restricted Bands (30MHz – 1GHz)

6.5.3 EUT Operating Condition

The standard setup procedure as described in section 4.3 of this report was used.

6.5.4 Test Configuration

The measurements were performed in an anechoic chamber. The radiated test site complies with the site attenuation requirements of [2] and is listed with the FCC and IC. The resolution bandwidth used during the emission measurement was as follows:

30MHz – 1GHz: 120kHz

For the parts list of used test equipment see chapter 7.1

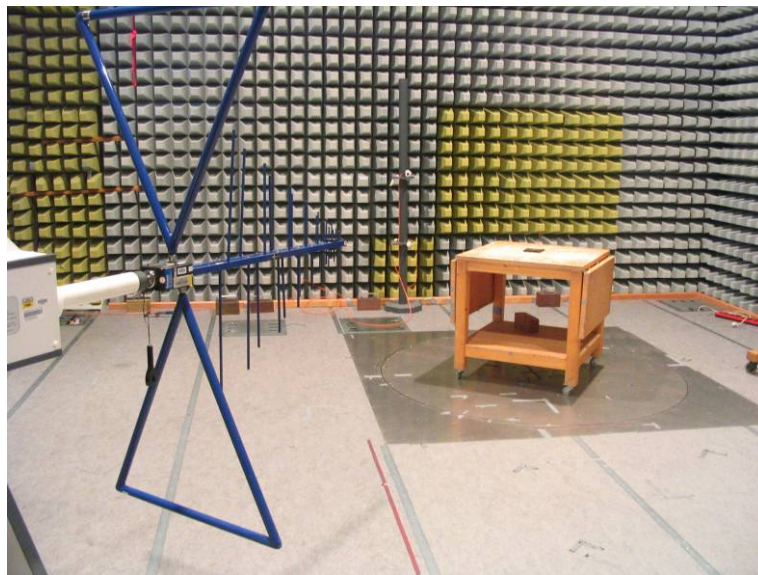


Figure 6-10: Test Configuration – Radiated Emissions (30MHz – 1GHz)

6.5.5 Test Procedure and Results

This investigation is performed with a broadband antenna and a receiver with peak detector. The field strength is measured in a distance of 3m with an antenna in horizontal and vertical polarization. the antenna height is varied from 1 to 4 m and the EUT is turned around 360° to maximize the emission. The used bandwidth for the measurement is 120 kHz and a step size of 60 kHz is applied.


Frequency (MHz)	Average (dB μ V/m) ¹	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
315.060000	44.5	1000.0	150.0	V	0.0	14.4	-	Carrier
630.080000	32.0	1000.0	200.0	V	0.0	21.4	23.6	55.6
Measurement Uncertainty:						+3.1 dB / -3.9 dB		

1) The average field strength was calculated by applying the duty cycle correction factor of -20dB (see chapter 6.2) to the measured peak field strength.

Table 6-11: Results – Radiated Emissions (30MHz – 1GHz)

6.5.6 Test Protocol

The following figure shows the test protocol of the radiated emissions (30MHz – 1GHz) measurement.

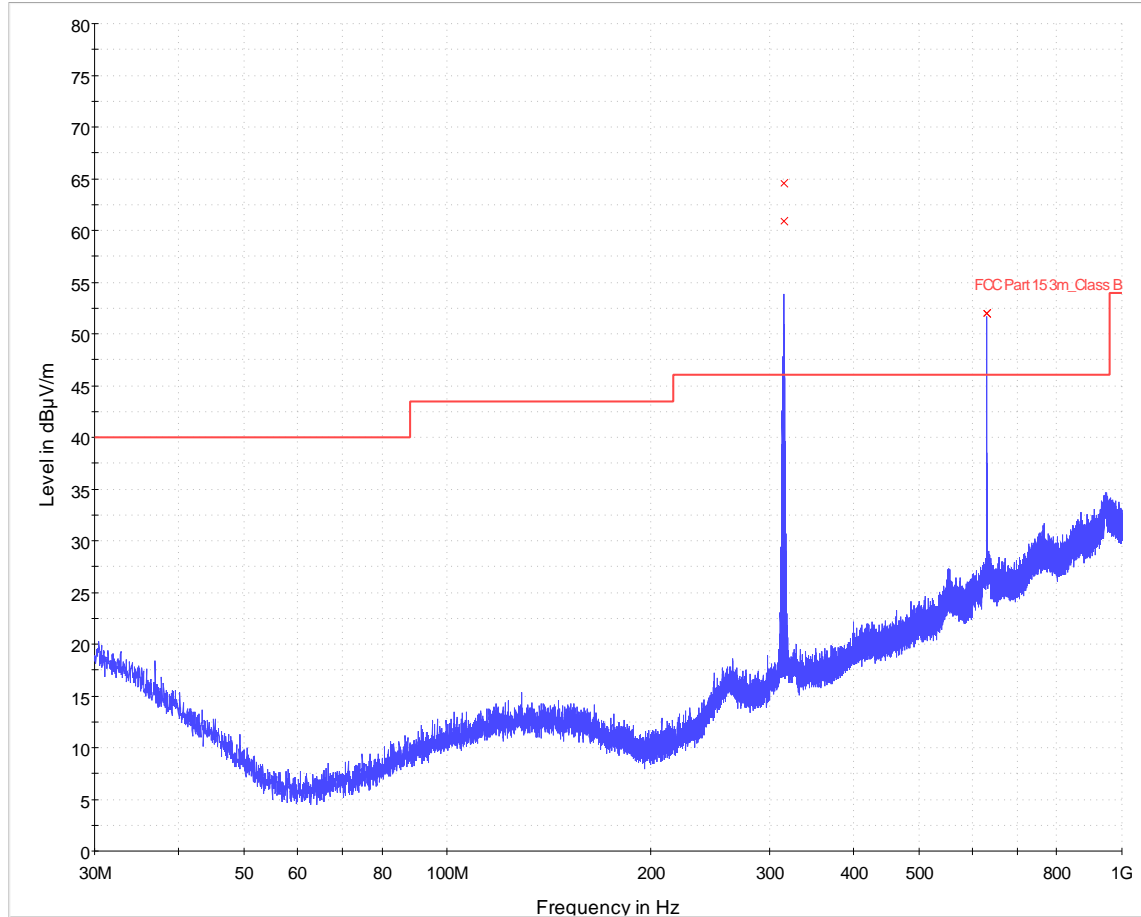

The test report shall not be reproduced except in full without the written approval of the testing laboratory

Figure 6-11: Radiated Emissions (30MHz – 1GHz)

The measured emission levels were found to be compliant with the manufacturer’s specifications and with all requirements of the FCC rules.

6.6 Test No. 6: Radiated Emissions (1GHz – 4GHz) ([1] § 15.209. 231(b); [3] T1. 2)

6.6.1 Purpose

The radiated emissions of the EUT were measured pursuant to [2] Clause 13.1.4. The measurement was performed to verify that emissions radiated directly from the cabinet. control circuits. power leads or intermediate circuit elements are attenuated below the specified limits.

6.6.2 Limits

At frequencies above 1GHz radiated emissions shall be attenuated to average limits specified by [1] § 15.209 and [3] Table 1 and 2 (general limits) or to the limits specified by [1] § 15.231(b), whichever limit permits a higher field strength.

According to [1] § 15.209 and [3] Table 1 and 2 the radiated emissions of an intentional radiator must not exceed following field strength levels:

Frequency of Emission [MHz]	Field strength [μV/m]	Field strength [dBμV/m]	Meas. Distance [m]
Above 960	500	54	3

Table 6-12: Limits – Radiated Emissions (1GHz – 4GHz) (§ 15.209)

According to [1] § 15.231(b) the radiated emissions of an intentional radiator must not exceed following field strength levels:

Frequency of Emission [MHz]	Field strength [μV/m]	Field strength [dBμV/m]	Meas. Distance [m]
40.66–40.70	225	47.0	3
70–130	125	41.9	3
130–174	125–375 ¹	41.9–51.5	3
174–260	375	51.5	3
260–470	375–1250 ¹	51.6–61.9	3
315	604.2²	55.6	3
Above 470	1250	61.9	3

1) Linear interpolation

2) Calculated by linear interpolation

Table 6-13: Limits – Radiated Emissions (1GHz – 4GHz) (§ 15.231(b))

According to [1] § 15.205(a) the field strength of emissions in the following restricted bands of operation shall not exceed the limits of [1] § 15.209.

MHz	MHz	MHz	MHz
1000–1240	1660–1710	2483.5–2500	3345.8–3358
1300–1427	1718.8–1722.2	2690–2900	3600–4000
1435–1626.5	2200–2300	3260–3267	
1645.5–1646.5	2310–2390	3332–3339	

Table 6-14: Restricted Bands (1GHz – 4GHz)

6.6.3 EUT Operating Condition

The standard setup procedure as described in section 4.3 of this report was used.

6.6.4 Test Configuration

The measurements were performed in an anechoic chamber. The radiated test site complies with the site attenuation requirements of [2] and is listed with the FCC and IC. The resolution bandwidth used during the emission measurement was as follows:

1GHz – 4GHz: 1MHz

For the parts list of used test equipment see chapter 7.1

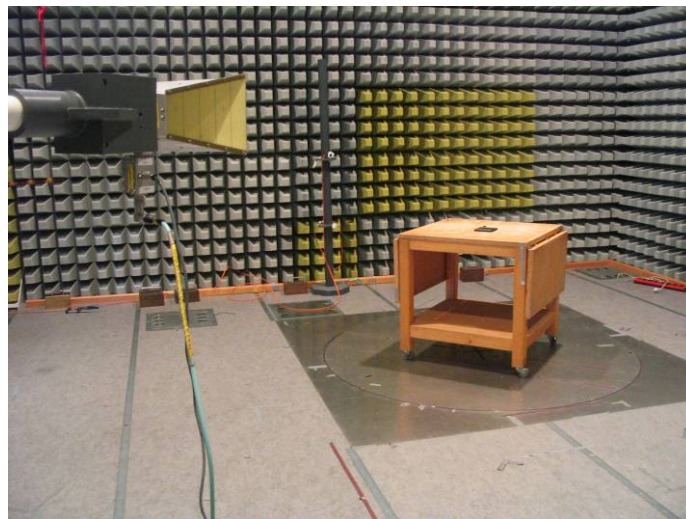


Figure 6-12: Test Configuration – Radiated Emissions (1GHz – 4GHz)

6.6.5 Test Procedure and Results

This investigation is performed with the EUT rotated 360°. the antenna height scanned between 1m and 4m. and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
2205.300000	34.0	1000.0	100.0	H	240.0	4.0	20.0	54.0
2834.300000	35.8	1000.0	150.0	V	210.0	5.4	18.2	54.0
Measurement Uncertainty:						+4.4 dB / -6.3 dB		

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
2198.500000	24.2	1000.0	200.0	V	210.0	4.0	20.6	54.0
2834.300000	25.9	1000.0	200.0	H	330.0	5.4	19.6	54.0
3465.000000	29.9	1000.0	100.0	H	0.0	7.6	17.1	54.0
3899.066667	29.5	1000.0	100.0	V	150.0	9.1	17.0	54.0
Measurement Uncertainty:						+4.4 dB / -6.3 dB		

Table 6-15: Results – Radiated Emissions (1GHz – 4GHz)

6.6.6 Test Protocol

The following figure shows the test protocol of the radiated emissions (1GHz – 4GHz) measurement.

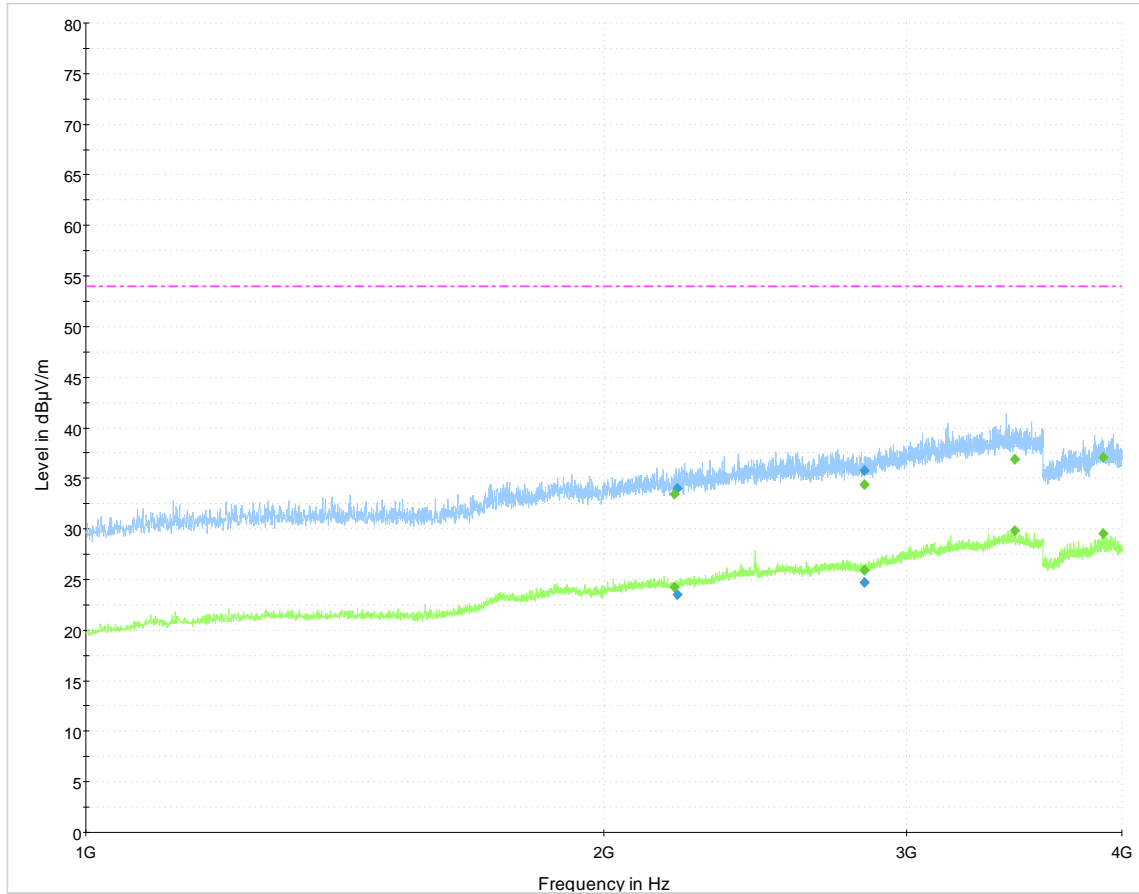

The test report shall not be reproduced except in full without the written approval of the testing laboratory

Figure 6-13: Radiated Emissions (1GHz – 4GHz)

The measured emission levels were found to be compliant with the manufacturer’s specifications and with all requirements of the FCC rules.

6.7 Test No. 7: Emission Bandwidth ([1] § 15.231(c); [3] A1.1.3)

6.7.1 Purpose

The emission bandwidth of the EUT was measured pursuant to [2] Clause 13.1.7. The measurement was performed to verify the 20 dB bandwidth of emission.

6.7.2 Limits

According to § 15.231(c) and [3] Annex 1.1.3 the bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. For the EUT with a center frequency of 315MHz therefore an emission bandwidth limit of 787.5kHz applies.

According to § 15.231(c) the bandwidth is determined at the points 20 dB down from the modulated carrier.

Instead of the 99% bandwidth according to [3] A1.1.3 the 20 dB bandwidth of emission was determined.

6.7.3 EUT Operating Condition

The standard setup procedure as described in section 4.3 of this report was used.

6.7.4 Test Configuration

The measurement was performed with activated modulation by using a probe antenna and a spectrum analyzer. The analyzer frequency span was set wide enough to capture the most of the power envelope of the modulated signal.

For the parts list of used test equipment see chapter 7.1

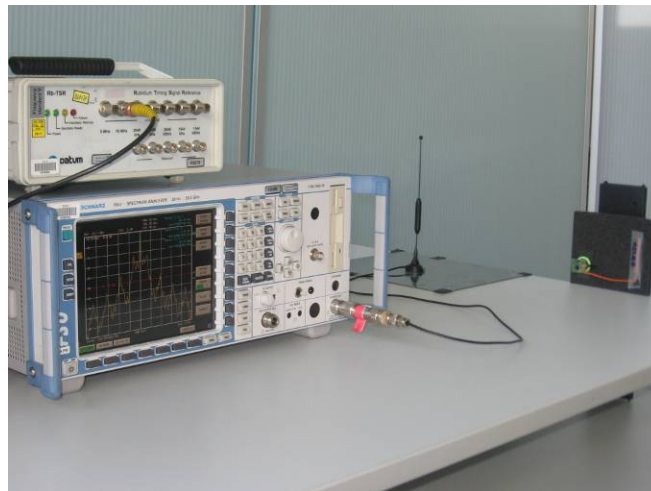


Figure 6-14: Test Configuration – Emission Bandwidth

6.7.5 Test Procedure and Results


The 20 dB bandwidth of the carrier emission is measured using a spectrum analyzer. In order to measure the modulated signal properly, a resolution bandwidth that is small compared with the emission bandwidth limit shall be used on the measuring instrument. According to [2] the resolution bandwidth was set to 10kHz. For the determination of the 20 dB bandwidth the delta marker function of the signal analyzer was used to measure the maximum bandwidth of the outer side band. The following table summarizes the results:

Carrier Frequency	20dB Emission Bandwidth	Result
[MHz]	[kHz]	
315	314.7	compliant
Measurement Uncertainty:		±3.2kHz

Table 6-16: Results – 20dB Emission Bandwidth

6.7.6 Test Protocol

The following figure shows the test protocol of the emission bandwidth measurement.

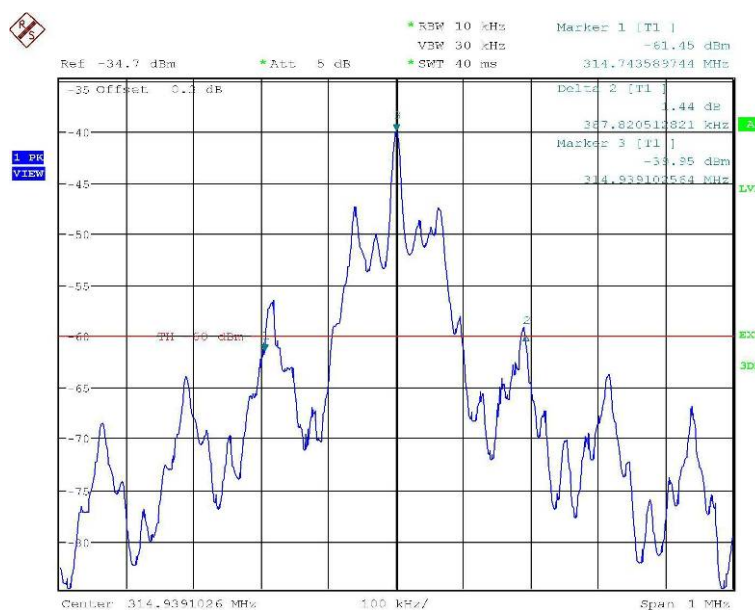

RF output power
 Date: 29 JUN 2010 10:14:32

Figure 6-15: 20dB Emission Bandwidth

The occupied bandwidth was found to be compliant with the manufacturer's specifications and with all requirements of the FCC rules.

The test report shall not be reproduced except in full without the written approval of the testing laboratory

6.8 Test No. 8: Transmit Duration ([1] § 15.231(a))

6.8.1 Purpose

The measurement was performed to verify if the transmit duration limit is met.

6.8.2 Limits

According to § 15.231(a) and [3] Annex 1.1.1 the following transmit duration limitation applies: A manually/automatically operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

6.8.3 EUT Operating Condition

The standard setup procedure as described in section 4.3 of this report was used.

6.8.4 Test Configuration

The measurement of the transmit duration of the EUT was performed with a probe antenna by means of a spectrum analyzer operating in the zero span mode. For the parts list of used test equipment see chapter 7.1

The test report shall not be reproduced except in full without the written approval of the testing laboratory

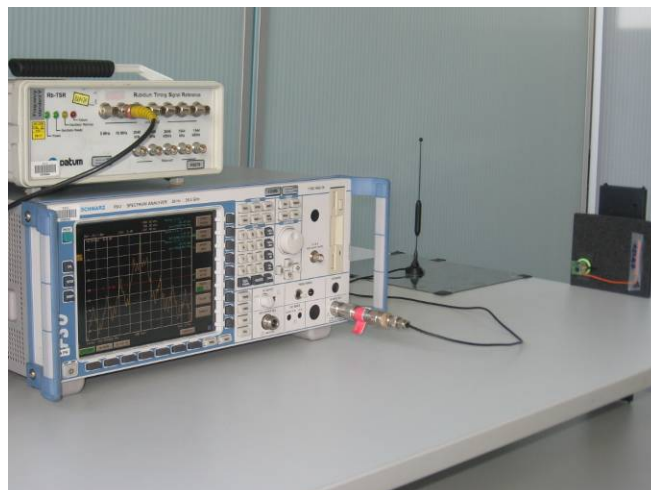


Figure 6-16: Test Configuration – Transmit Duration

6.8.5 Test Procedure and Results

The following table summarizes the transmit duration results:

Transmit Condition	Transmit Duration	Result
	[ms]	
After releasing the button	34.7	compliant

Table 6-17: Results – Transmit Duration

6.8.6 Test Protocol

The following figure shows the test protocol of the transmit duration measurement.


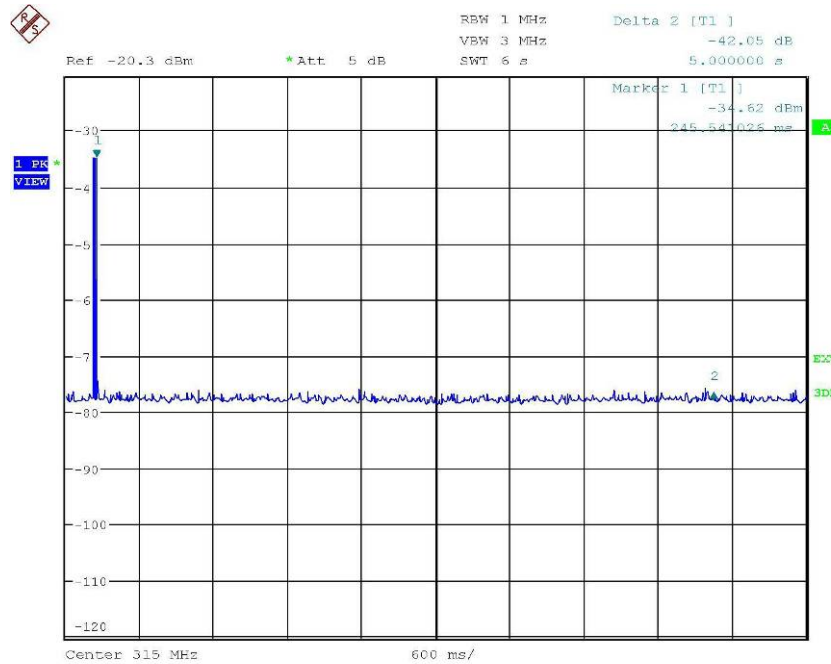


Figure 6-17: Transmit Duration (5s)

The test report shall not be reproduced except in full without the written approval of the testing laboratory

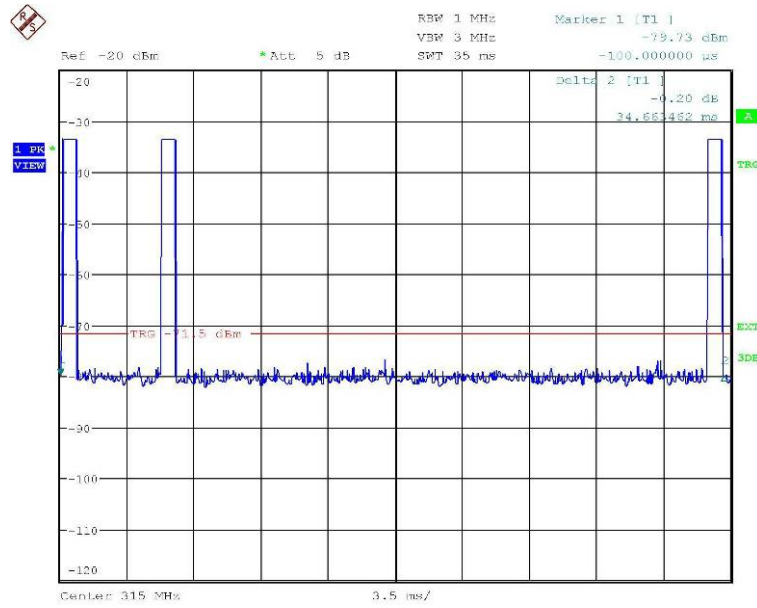

RF output power
 Date: 29.JUN.2010 15:52:51

Figure 6-18: Transmit Duration (details)

The transmit duration was found to be compliant with the manufacturer’s specifications and with all requirements of the FCC rules.

The test report shall not be reproduced except in full without the written approval of the testing laboratory

7 Test Data

7.1 Part List of the Test Equipment

No.	Test Equipment	Type (Manufacturer)	Identification No.	Calibration date	Calibration due	Test No.
1	Test Chamber 3	-	P0338	02/2010	02/2011	3-5
2	EMI receiver	ESPI-3	P1325	03/2009	03/2011	3-5
3	Controller	CO 2000	P1304	cnn	cnn	3-5
4	Antenna	95010-1	P0065	07/2009	07/2011	4
5	Mast	MA 4000	P1303	cnn	cnn	3, 5
6	Antenna	CBL6111	P0311	04/2010	04/2011	3, 5
7	Test Chamber 2	-	P0337	02/2010	02/2011	6
8	EMI receiver	ESU40	P1327	07/2009	07/2011	6
9	Controller	CO 2000	P1284	cnn	cnn	6
10	Mast	MA 4000	P1283	cnn	cnn	6
11	Antenna	3115	P0961	04/2010	04/2012	6
12	Test Chamber 6	-	P0977	02/2010	02/2011	1
13	EMI receiver	ESPI-3	P1100	03/2010	03/2012	1
14	Pulse Limiter	ESH3-Z2	P0491	03/2010	03/2012	1
15	LISN	ESH3-Z5	P1338	03/2010	03/2012	1

Table 7-1: Part List of the EMC Measurement Test Equipment

No.	Test Equipment	Type (Manufacturer)	Identification No.	Calibration date	Calibration due	Test No.
1	Spectrum Analyzer	FSU 26 (R&S)	F0366	11/2009	11/2011	2, 7, 8
2	Network Analyzer	ZVM (R&S)	F0092	10/2009	10/2011	2, 7, 8
3	Frequency Standard	Rubisource (Datum)	F0076	11/2009	05/2011	2, 7, 8

Table 7-2: Part List of the RF Measurement Test Equipment

The test report shall not be reproduced except in full without the written approval of the testing laboratory