

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

## **2.9 Peak Radiated Spurious Emission in the Frequency Range 30 -25000 MHz (FCC Section 15.247(c))**

The EUT was hop-stopped and when possible, placed into a continuous transmit mode of operation. A preliminary scan was performed on the EUT to determine frequencies that were caused by the transmitter portion of the product. Significant emissions that fell within restricted bands were then measured on an OAT's site. Radiated measurements below 1 GHz were tested with a RBW = 120 kHz. Radiated measurements above 1 GHz were measured using a RBW = VBW = 1 MHz. The results of peak radiated spurious emissions falling within restricted bands are given in Table 4a –4c and Figure 5a1 – Figure 5c7.

Report Number: 05-0039

Issue Date: March 28, 2005


Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**TABLE 4a PEAK RADIATED SPURIOUS EMISSIONS (Low Channel)**

Peak Radiated Emissions							
<b>Test By:</b>	<b>Test:</b> FCC 15.247 Low Channel				<b>Client:</b> Wireless Detection		
<b>DPB</b>	<b>Project:</b> 05-0039				<b>Model:</b> System Manager Unit		
<b>Frequency</b> (MHz)	<b>Test Data</b> (dBm)	<b>Test Data</b> (dBuV)	<b>AF+CA-AMP</b> (dB)	<b>Results</b> (uV/m)	<b>Limits</b> (uV/m)	<b>Margin</b> (dB)	<b>PK = n</b> / QP
721.1	-79.4	27.6	27.4	565.4	61334.7	<b>40.7</b>	<b>PK</b>
999.42	-82.2	24.8	31.9	681.3	5000.0	<b>17.3</b>	<b>PK</b>
902.33	-21.8	85.2	30.6	613347.3			<b>PK</b>
1804.69	-34.5	72.5	-7.1	1855.2	61334.7	<b>30.4</b>	<b>PK</b>
2707	-43.1	63.9	-2.5	1172.9	5000.0	<b>12.6</b>	<b>PK</b>
3609.54	-58.5	48.5	0.9	294.0	5000.0	<b>24.6</b>	<b>PK</b>

Data corrected by 1 dB for loss of high pass filter except for fundamental frequency

**SAMPLE CALCULATION:****RESULTS (uV/m @ 3m) = Antilog ((-79.4 + 27.4 + 107)/20) = 565.4****CONVERSION FROM dBm TO dBuV = 107 dB****Test Date: March 24, 2005****Tester****Signature:**  **Name:** David Blethen


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5a-1**  
**Peak Radiated Spurious Emission 15.247(c) Low Channel –**  
**Sub-Harmonic**

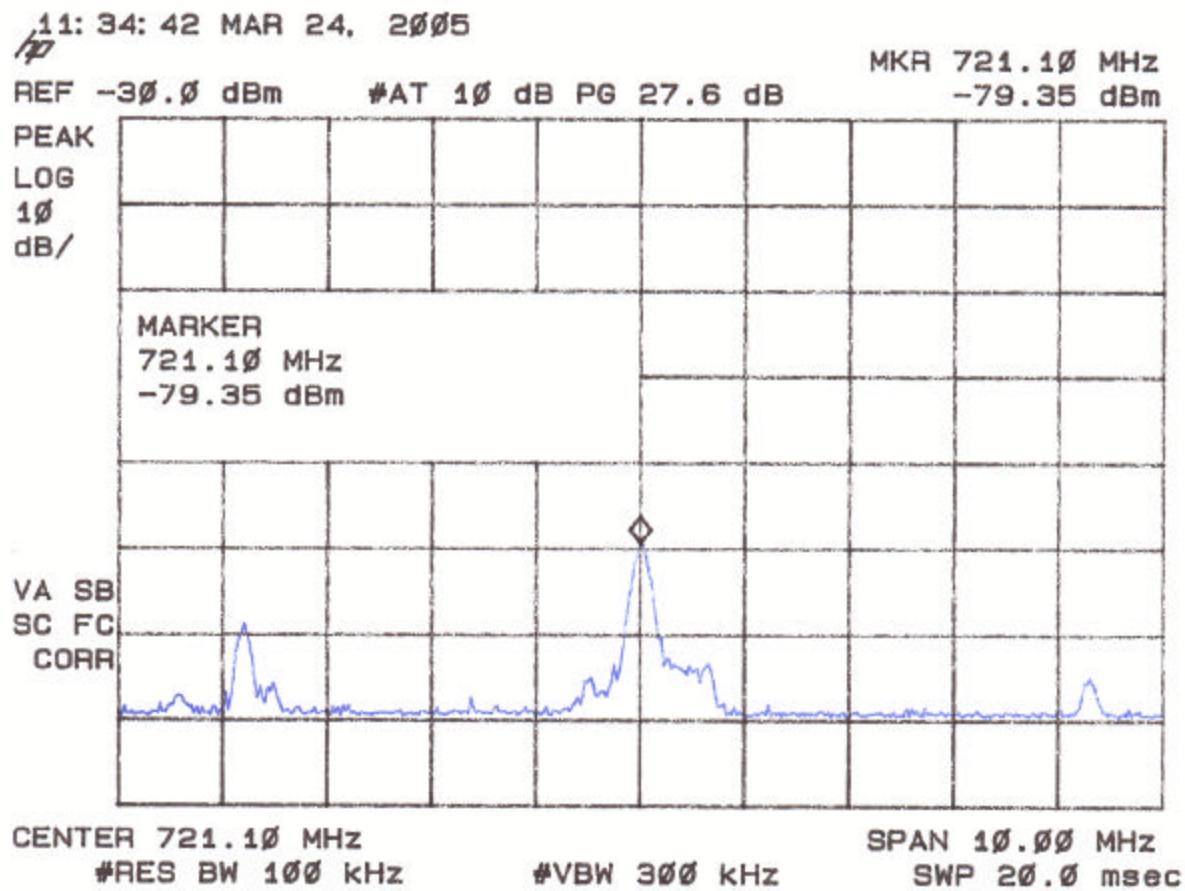


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5a-2**  
**Peak Radiated Spurious Emission 15.247(c) Low Channel –**  
**Sub-Harmonic**

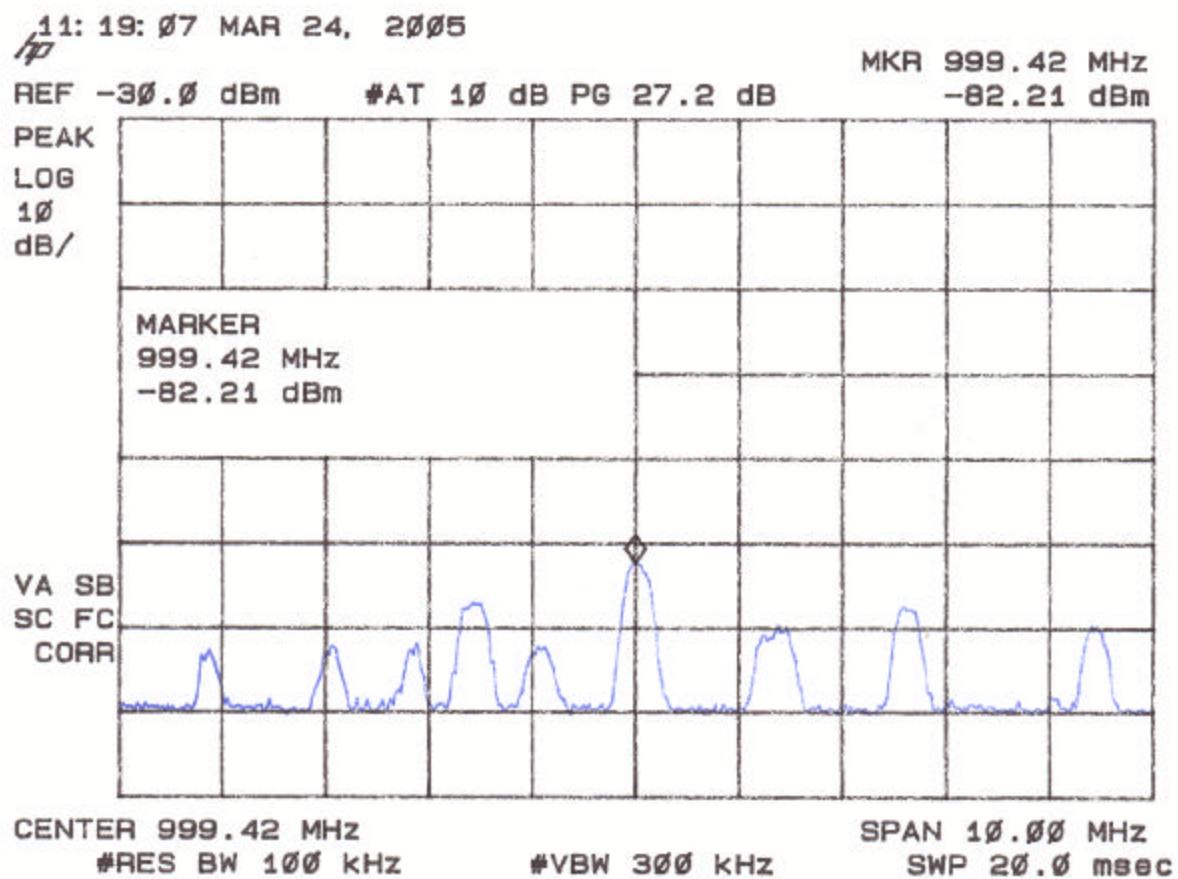


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5a-3**  
**Peak Radiated Spurious Emission 15.247(c) Low Channel –**  
**Fundamental**

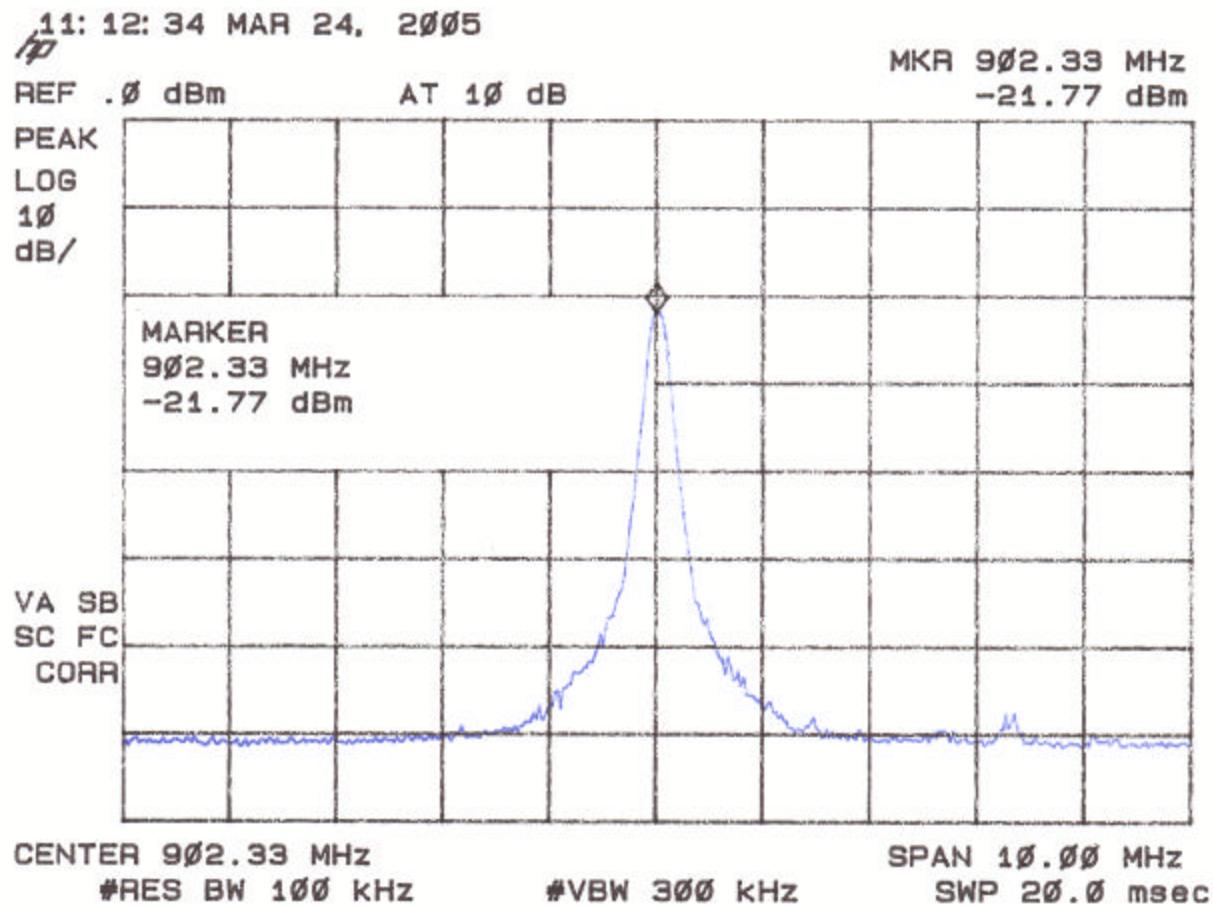


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

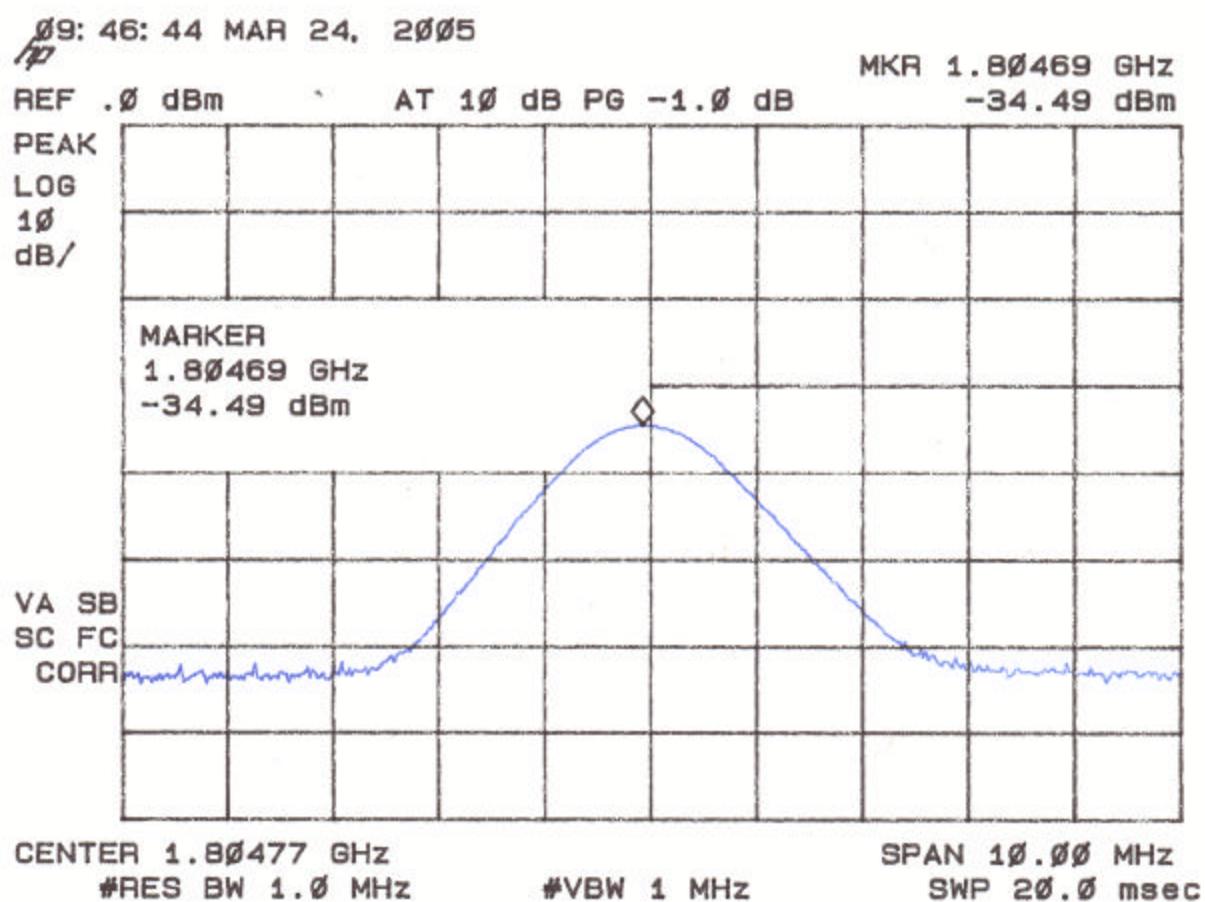**Figure 5a-4****Peak Radiated Spurious Emission 15.247(c) Low Channel –  
2<sup>nd</sup> Harmonic**


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5a-5**  
**Peak Radiated Spurious Emission 15.247(c) Low Channel –**  
**3<sup>rd</sup> Harmonic**

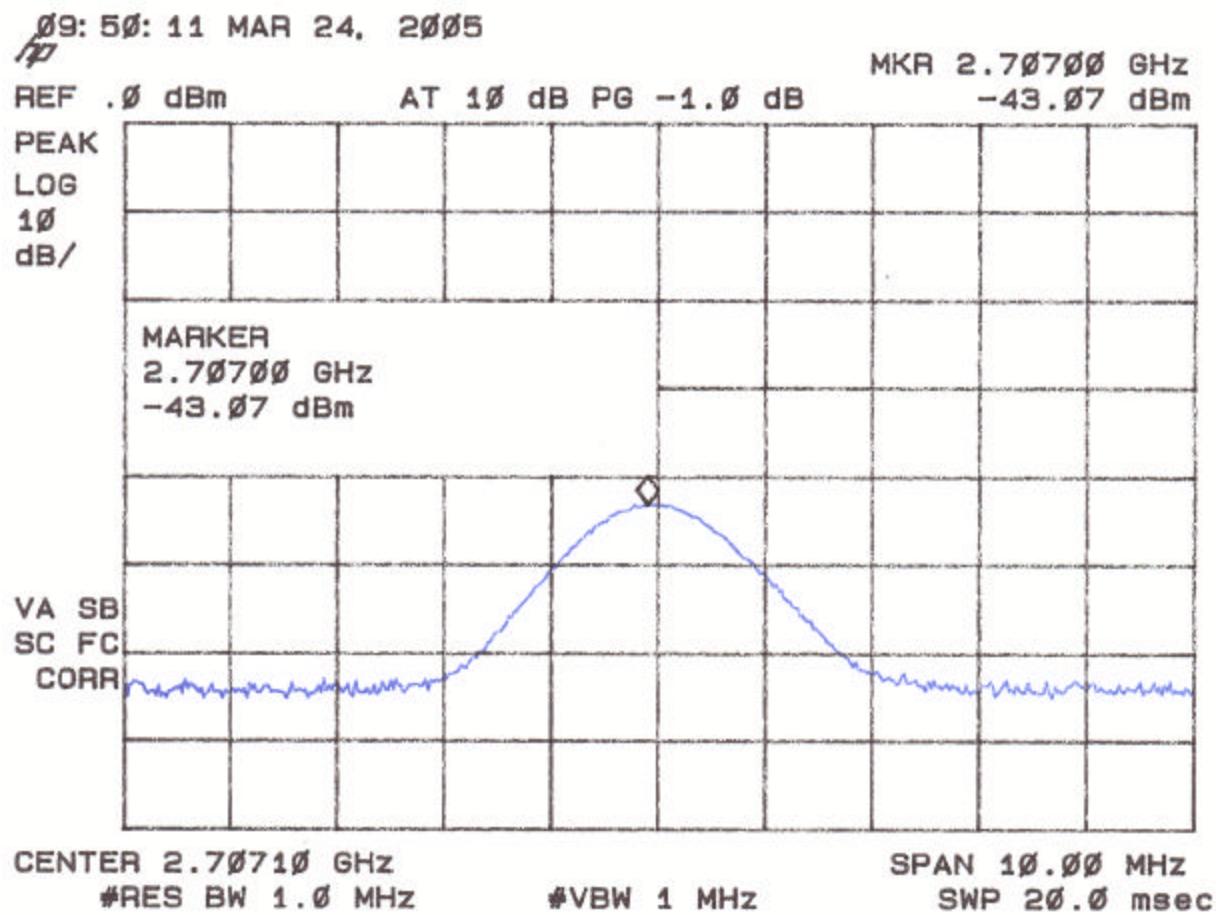


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5a-6**  
**Peak Radiated Spurious Emission 15.247(c) Low Channel –**  
**4<sup>th</sup> Harmonic**

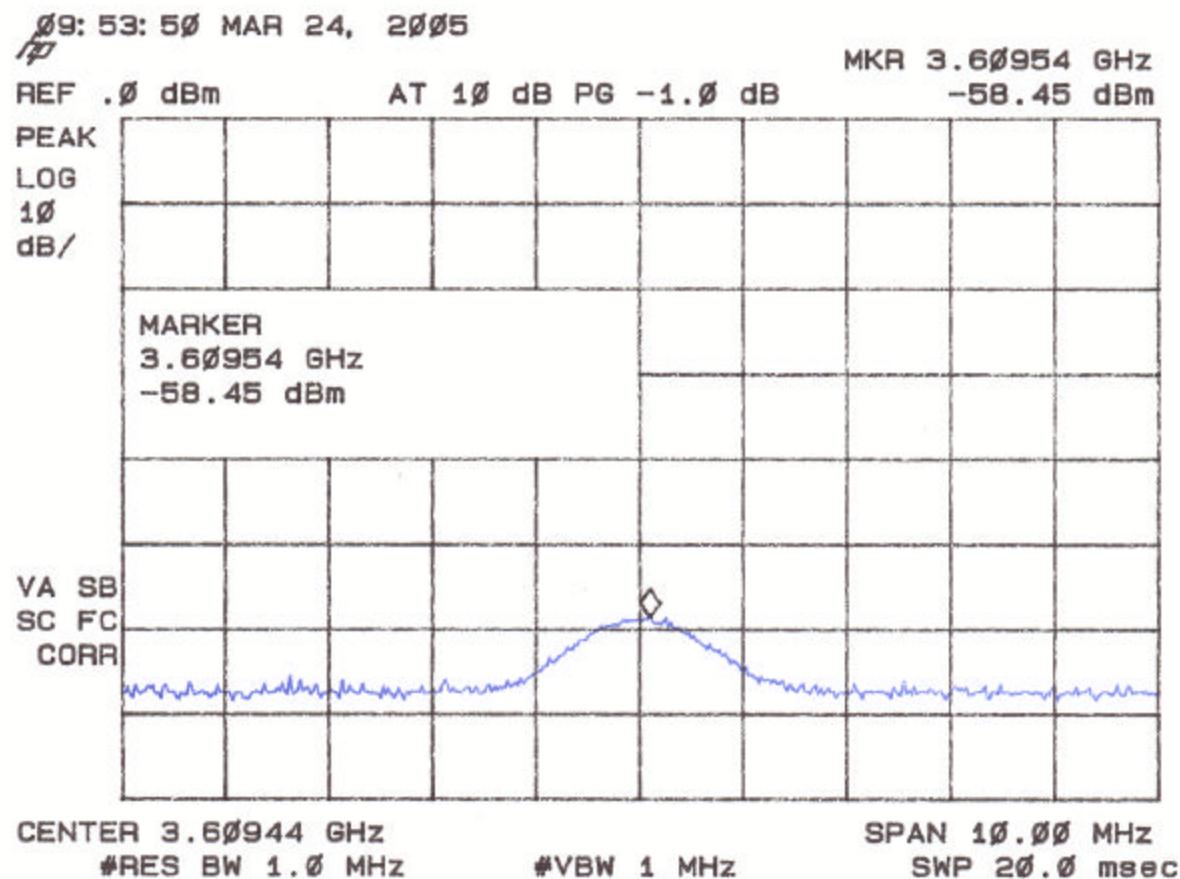

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager


**TABLE 4b PEAK RADIATED SPURIOUS EMISSIONS (Mid Channel)**

Peak Radiated Emissions							
Test By:	Test:			Client:			
DPB	Project:			Model:			
Frequency	Test Data	Test Data	AF+CA-AMP	Results	Limits	Margin	PK = n
(MHz)	(dBm)	(dBuV)	(dB)	(uV/m)	(uV/m)	(dB)	/ QP
639.81	-84.1	22.9	26.3	290.0	96451.8	<b>50.4</b>	<b>PK</b>
915.02	-18.1	88.9	30.8	964518.1			<b>PK</b>
1830.13	-27.5	79.5	-6.7	4355.0	96451.8	<b>26.9</b>	<b>PK</b>
2745.2	-37.6	69.4	-2.4	2240.6	5000.0	<b>7.0</b>	<b>PK</b>
3660.18	-60.3	46.7	1.1	246.7	5000.0	<b>26.1</b>	<b>PK</b>

Data corrected by 1 dB for loss of high pass filter except for fundamental frequency

**SAMPLE CALCULATION:**RESULTS (uV/m @ 3m) = Antilog  $((-84.1 + 26.3 + 107)/20) = 290.0$ 

CONVERSION FROM dBm TO dBuV = 107 dB

**Test Date: March 24, 2005****Tester****Signature:**  **Name:** David Blethen


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5b-1**  
**Peak Radiated Spurious Emission 15.247(c) Mid Channel –**

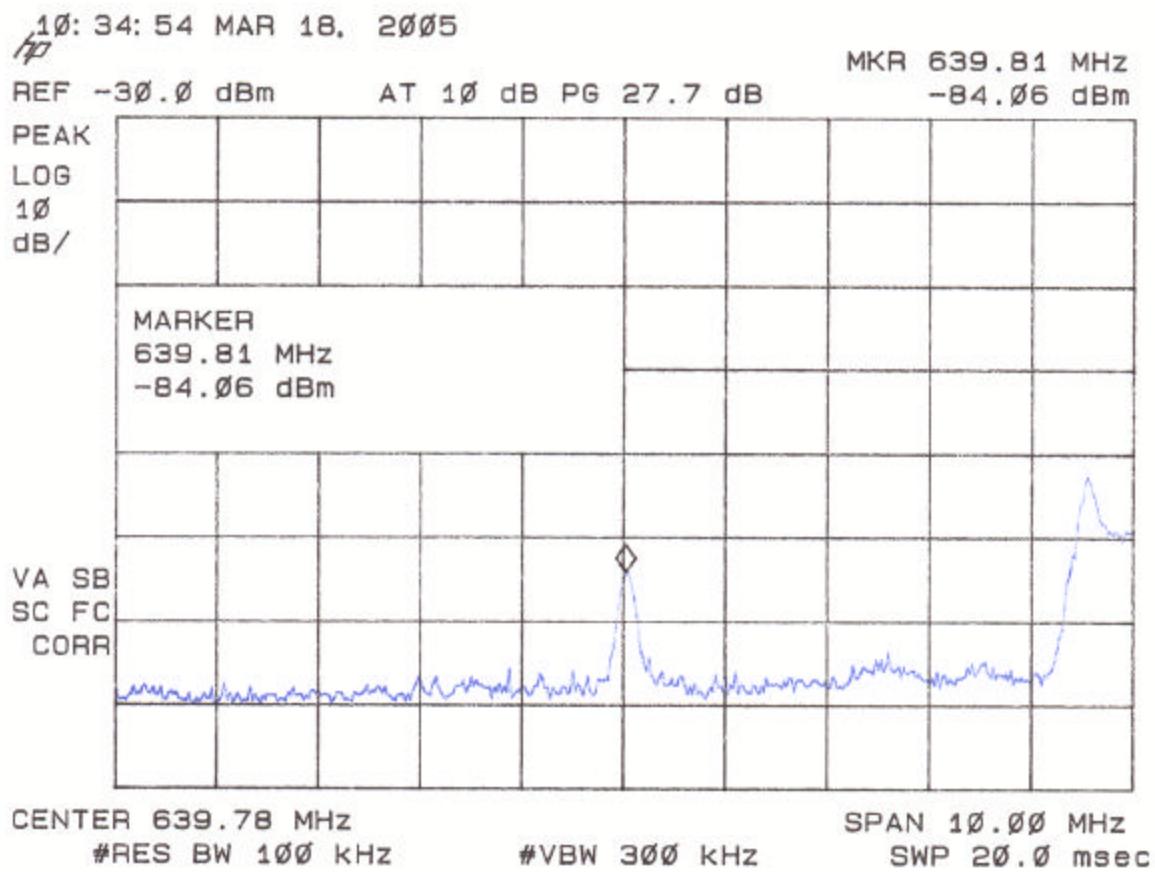


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5b-2**  
**Peak Radiated Spurious Emission 15.247(c) Mid Channel –**  
**Fundamental**

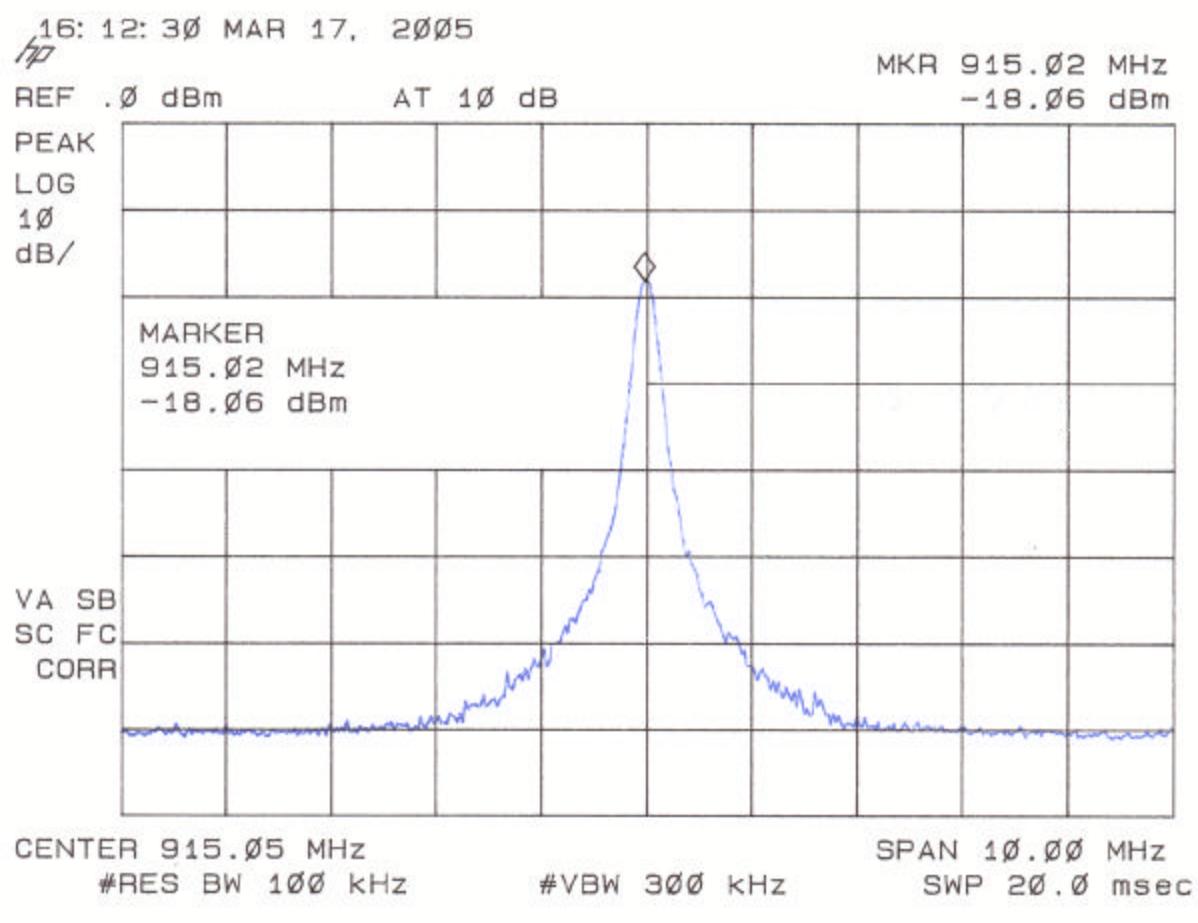


Report Number: 05-0039

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

Issue Date: March 28, 2005

**Figure 5b-3**  
**Peak Radiated Spurious Emission 15.247(c) Mid Channel –**  
**2nd Harmonic**

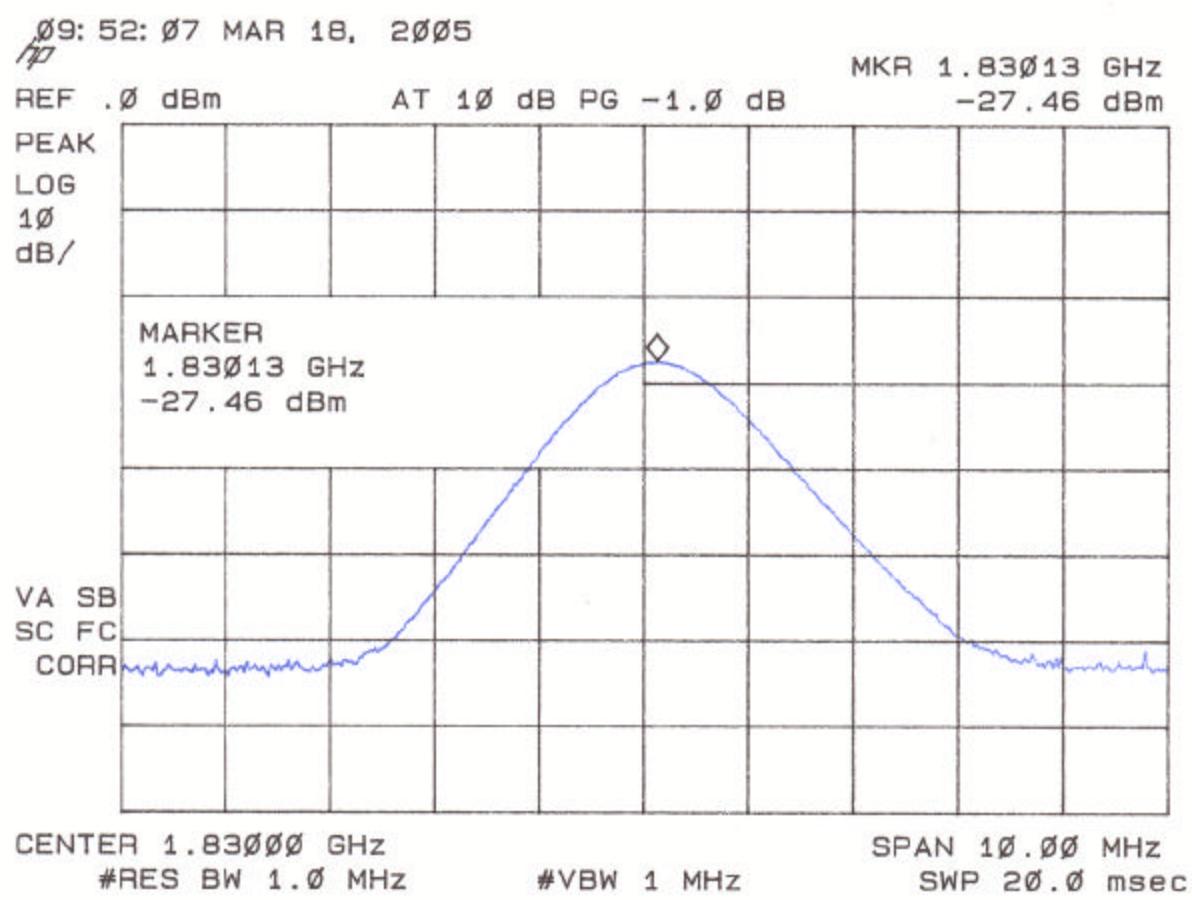


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5b-4**  
**Peak Radiated Spurious Emission 15.247(c) Mid Channel –**  
**3rd Harmonic**

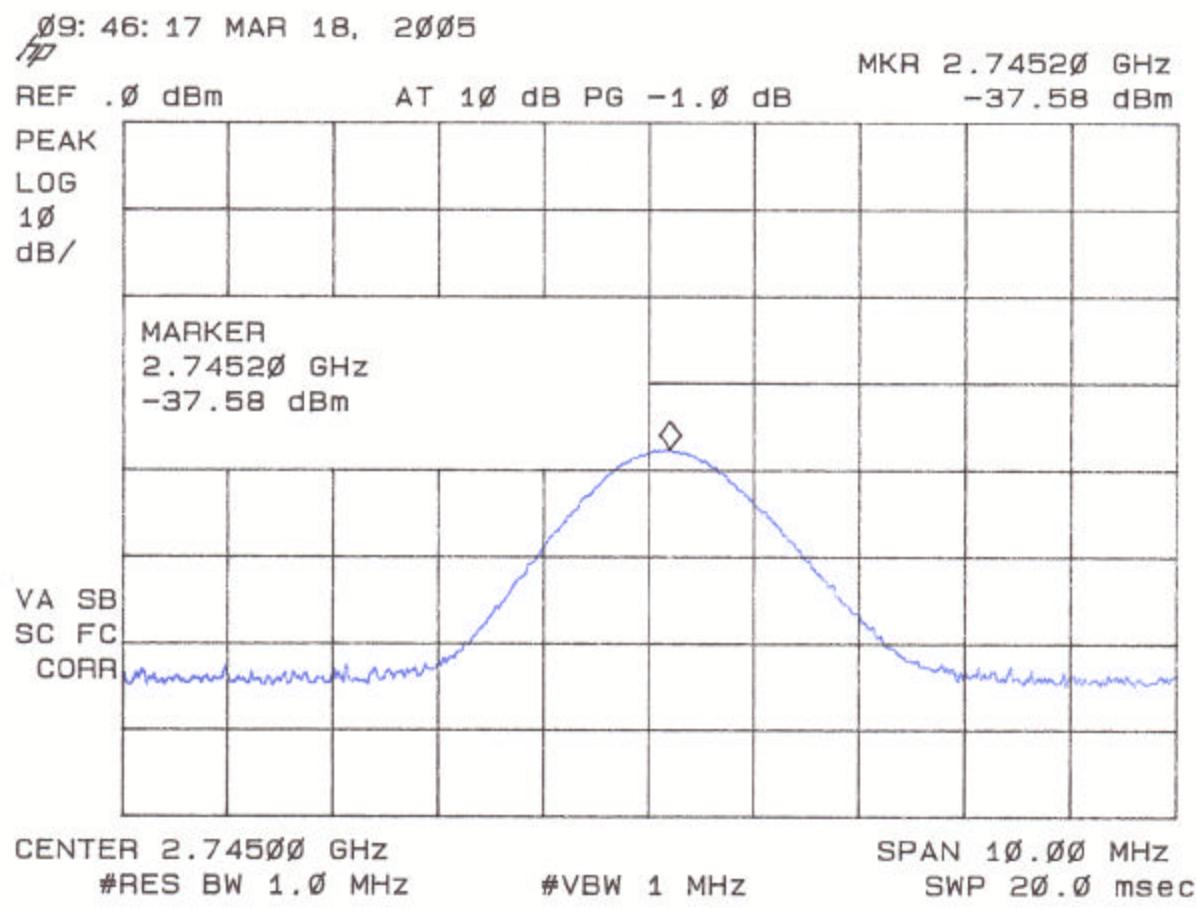


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5b-5**  
**Peak Radiated Spurious Emission 15.247(c) Mid Channel –**  
**4th Harmonic**

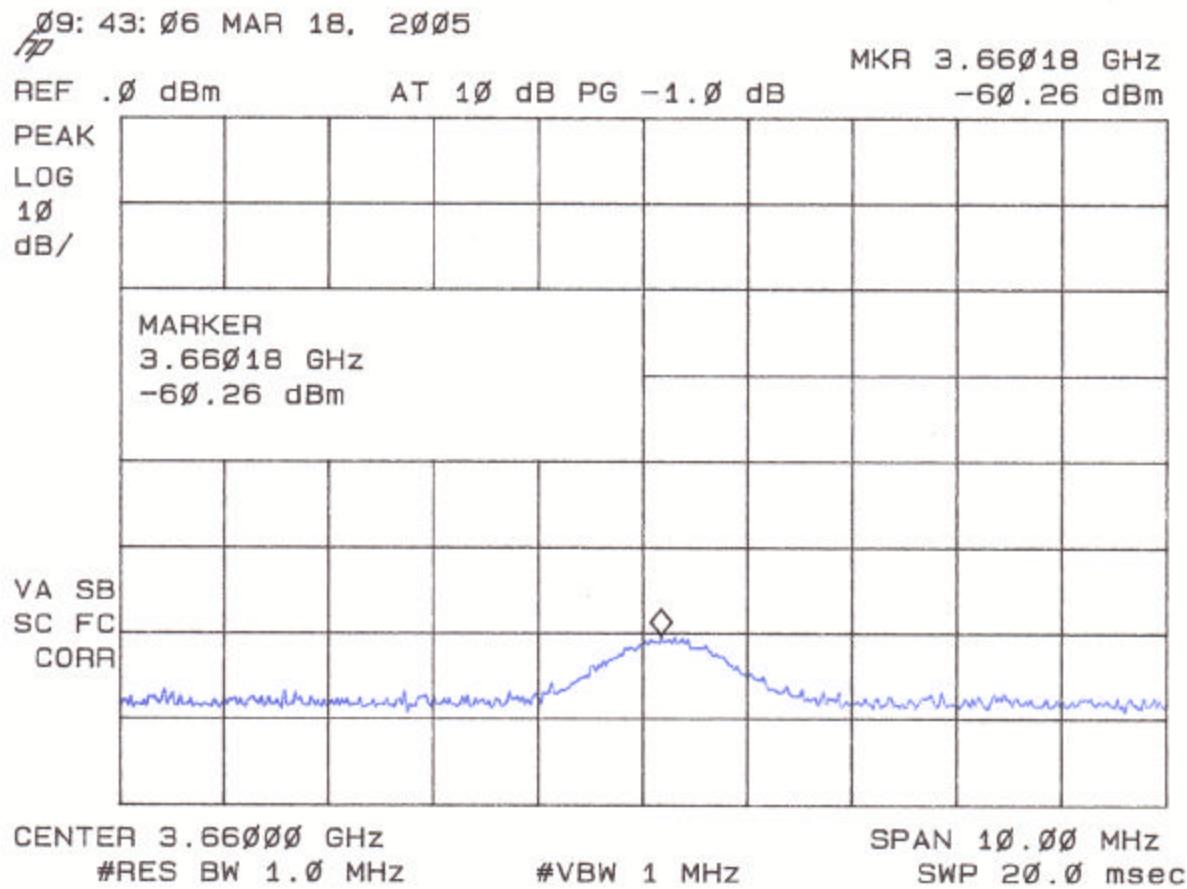

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager


**Table 4c. PEAK RADIATED SPURIOUS EMISSIONS (High Channel)**

Peak Radiated Emissions							
Test By:	Test: FCC 15.247 High Channel, 3rd test			Client:	Wireless Detection		
DPB	Project: 05-0039			Model:	System Manager Unit		
Frequency (MHz)	Test Data (dBm)	Test Data (dBuV)	AF+CA-AMP (dB)	Results (uV/m)	Limits (uV/m)	Margin (dB)	PK = n / QP
280.58	-68.4	38.6	17.5	635.8	99462.0	<b>43.9</b>	<b>PK</b>
647.13	-50.7	56.3	26.5	13852.5	99462.0	<b>17.1</b>	<b>PK</b>
927.31	-17.8	89.2	30.8	994620.1			<b>PK</b>
1854.69	-26.8	80.2	-6.3	4941.6	99462.0	<b>26.1</b>	<b>PK</b>
2782.03	-34.5	72.5	-2.3	3245.1	5000.0	<b>3.8</b>	<b>PK</b>
3709.44	-57.6	49.4	1.4	347.3	5000.0	<b>23.2</b>	<b>PK</b>

Data corrected by 1 dB for loss of high pass filter except for fundamental frequency

**SAMPLE CALCULATION:****RESULTS (uV/m @ 3m) = Antilog ((-68.4 + 17.5 + 107)/20) = 635.8**

CONVERSION FROM dBm TO dBuV = 107 dB

**Test Date: March 24, 2005****Tester****Signature:**  **Name:** David Blethen


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5c-1**  
**Peak Radiated Spurious Emission 15.247(c) High Channel –**  
**Sub Harmonic**

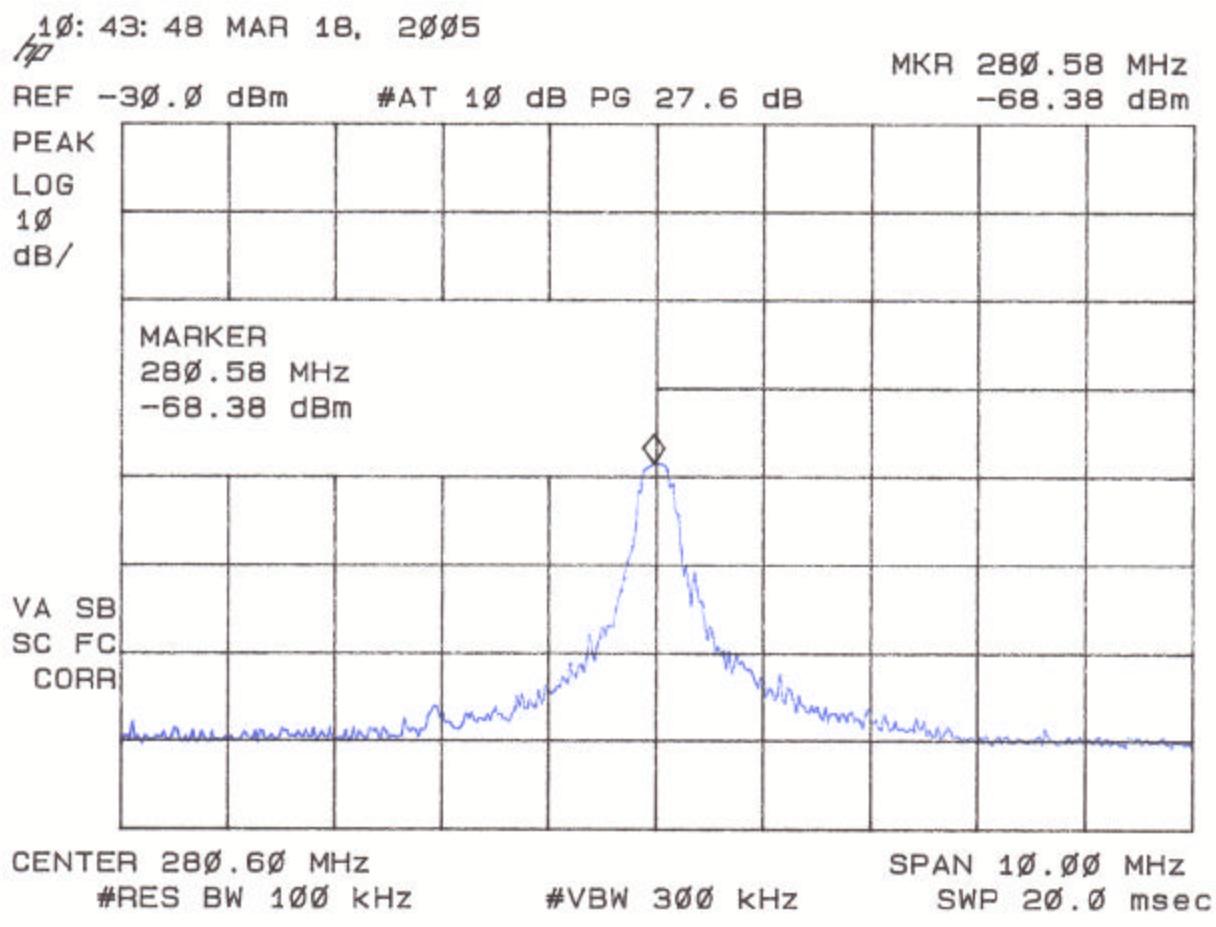


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5c-2**  
**Peak Radiated Spurious Emission 15.247(c) High Channel –**  
**Sub Harmonic**

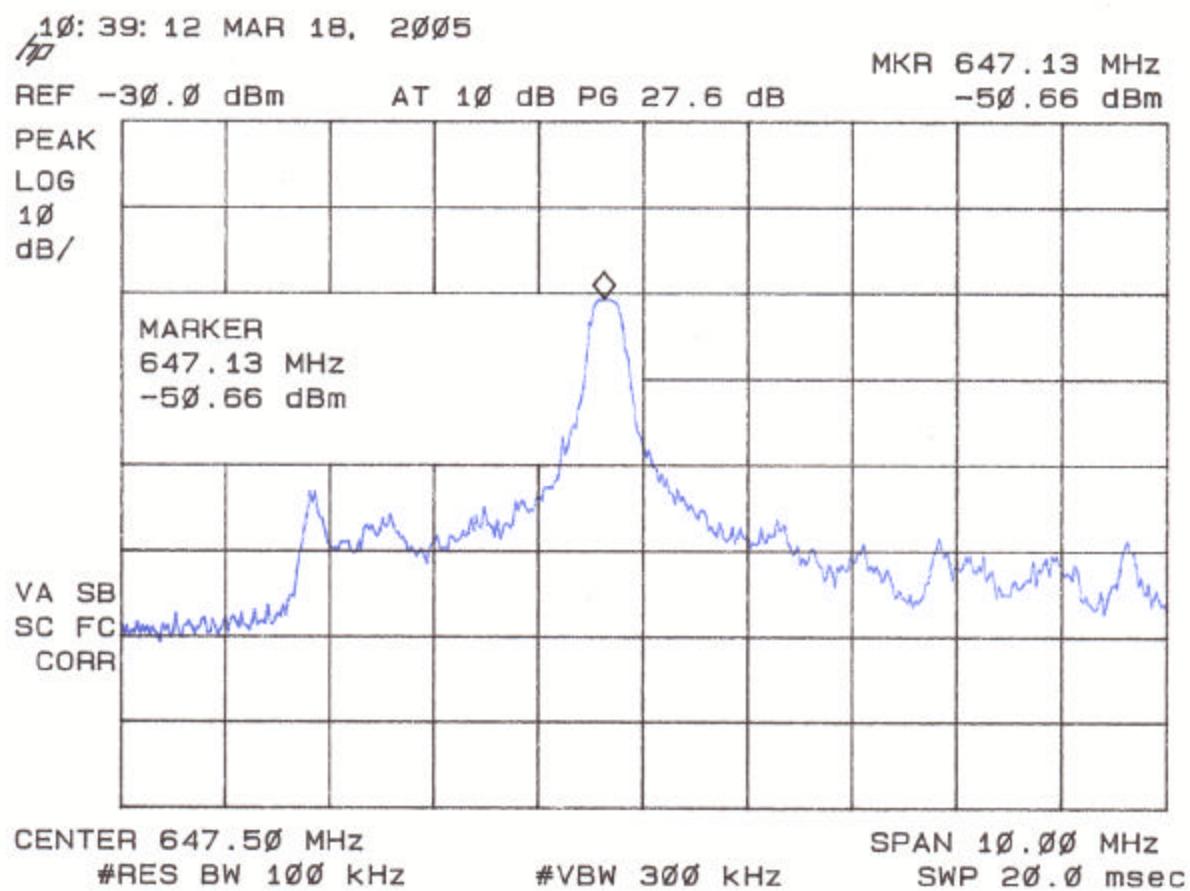


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5c-3**  
**Peak Radiated Spurious Emission 15.247(c) High Channel –**  
**Fundamental**

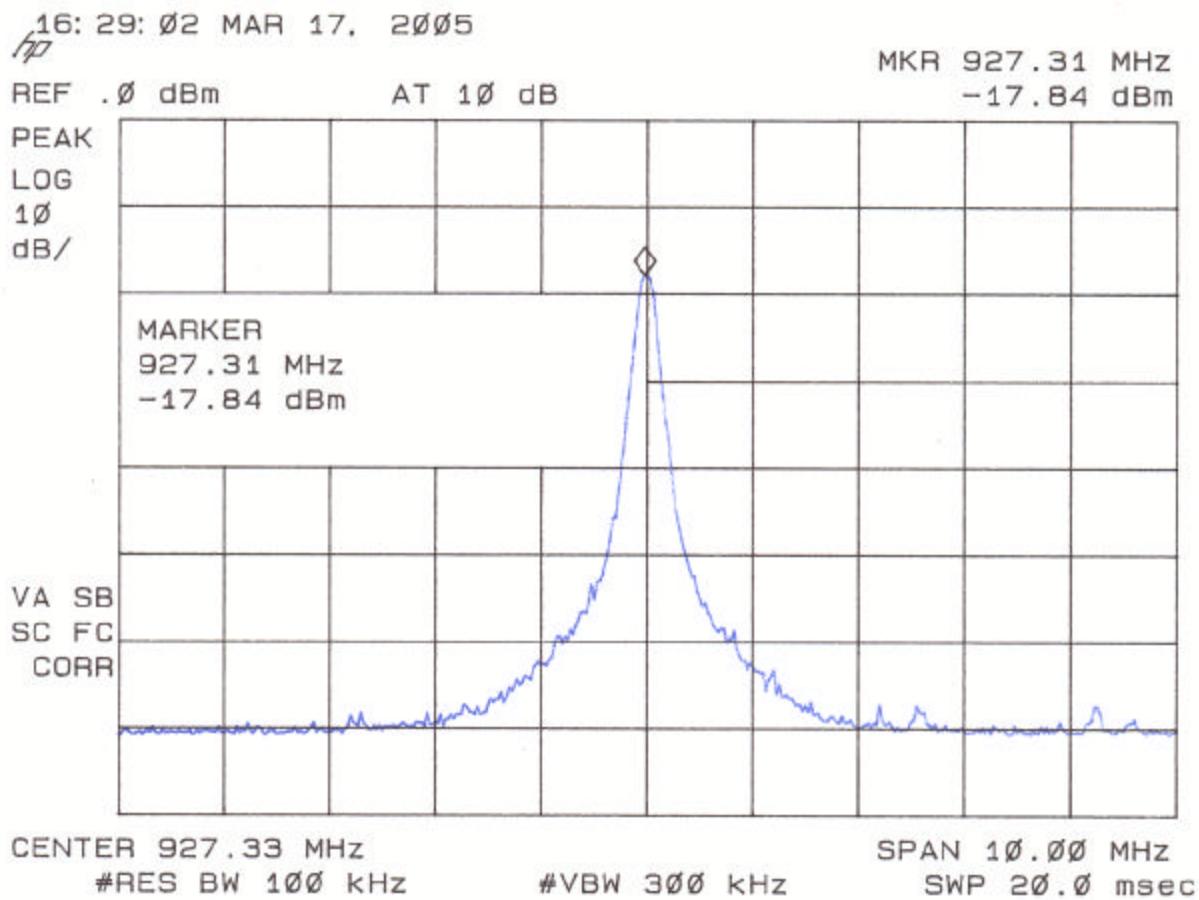


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5c-4**  
**Peak Radiated Spurious Emission 15.247(c) High Channel –**  
**2nd Harmonic**

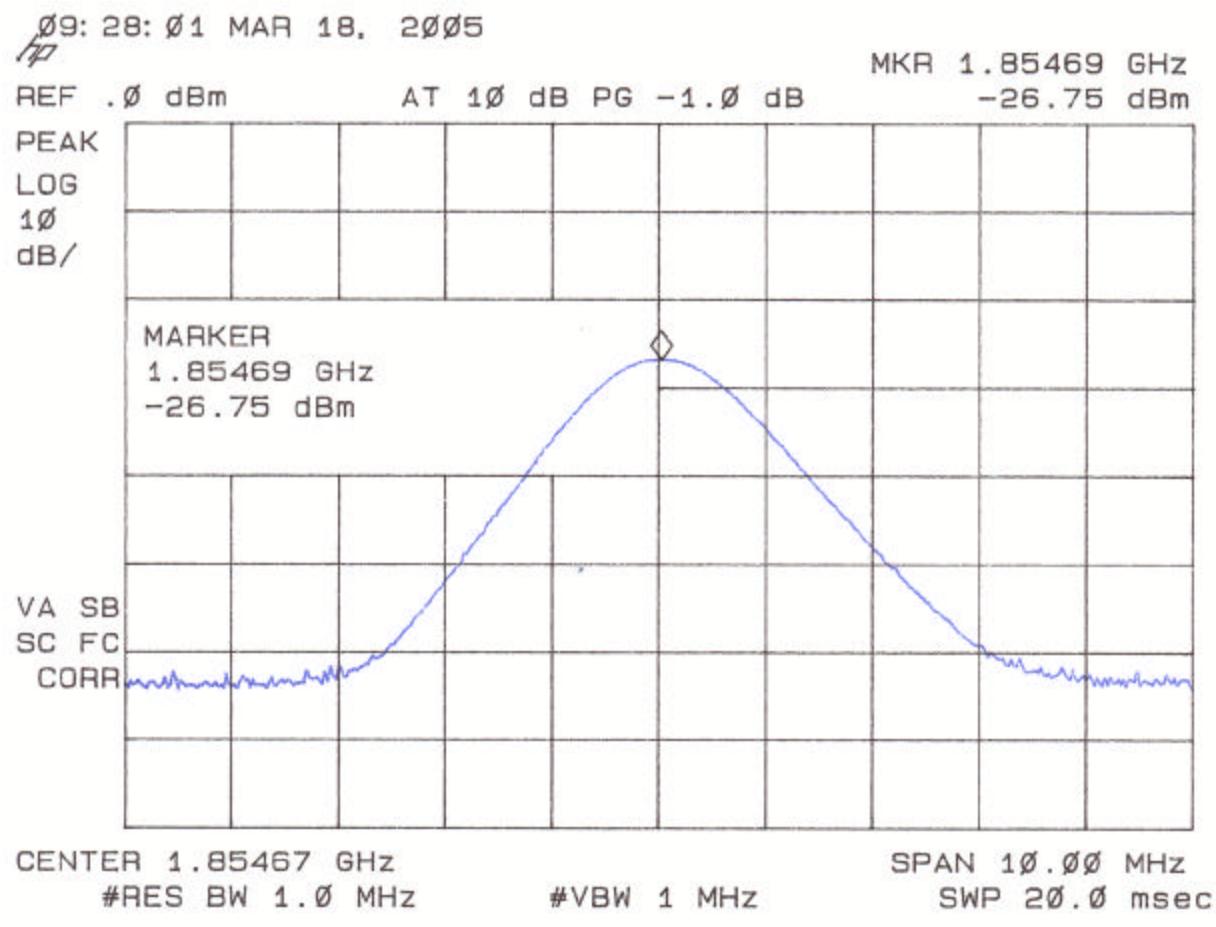


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5c-5**  
**Peak Radiated Spurious Emission 15.247(c) High Channel –**  
**3rd Harmonic**

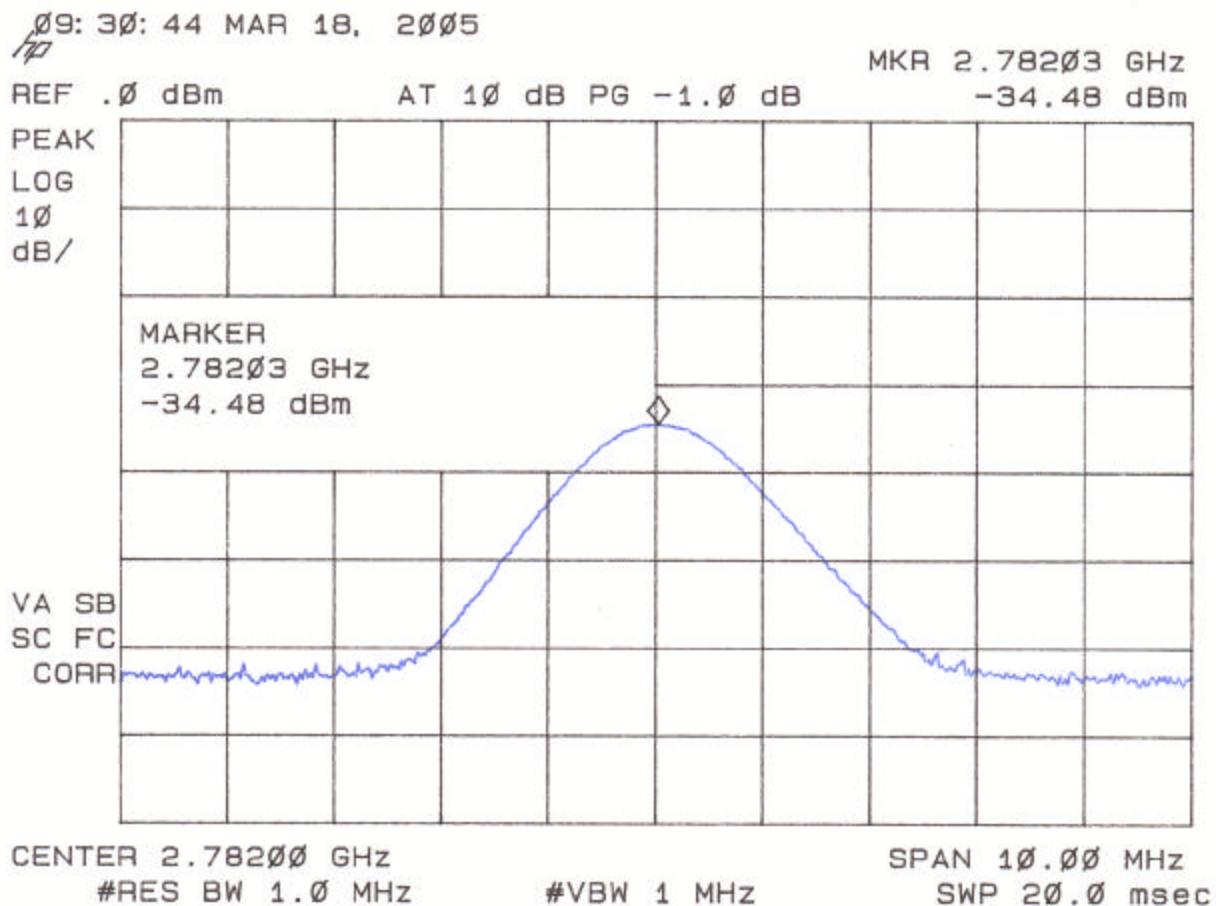


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 5c-6**  
**Peak Radiated Spurious Emission 15.247(c) High Channel –**  
**4th Harmonic**

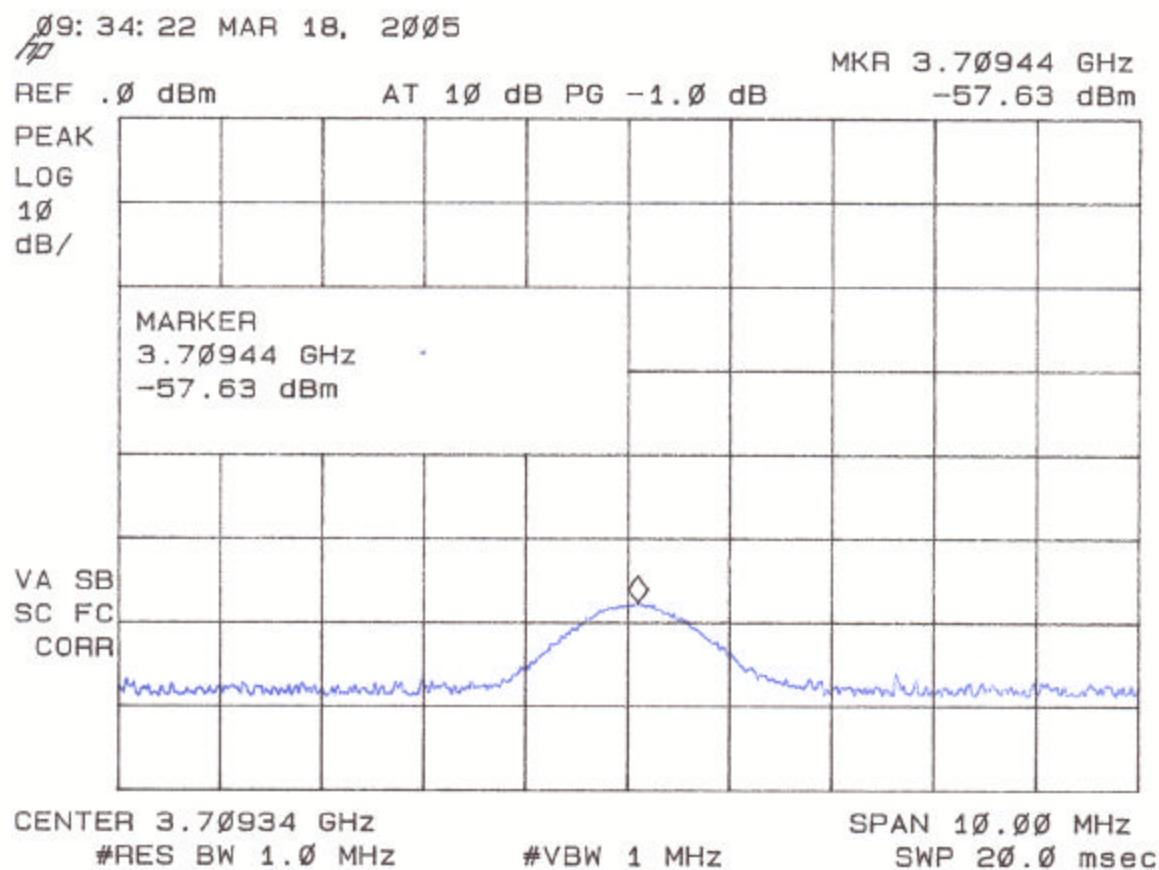

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**2.10 Average Spurious Emission in the Frequency Range 30 - 25000 MHz (FCC  
15.247(c))** Section

The results of average radiated spurious emissions falling within restricted bands are given in Tables 5a – 5c. These values were calculated using the following duty cycle corrections:

The maximum transmit time of the EUT, based upon software and firmware settings, is 2.84 ms. Measured time of occupancy from Section 2.13 is 3.125 ms therefore:

3.125 ms/100 ms = 3.125% duty cycle  
 $20^{\log}(.0313) = -30.1$  dB correction factor

Report Number: 05-0039

Issue Date: March 28, 2005


Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Table 5a. AVERAGE RADIATED SPURIOUS EMISSIONS Low Channel**

Average Radiated Emissions, 3.125% duty cycle, - 30.1 dB correction							
Test By:	Test:				Client:		
DPB	Project: 05-0039				Model: System Manager Unit		
Frequency	Test Data	Test Data	AF+CA-AMP	Results	Limits	Margin	PK = n
(MHz)	(dBm)	(dBuV)	(dB)	(uV/m)	(uV/m)	(dB)	/ QP
721.1	-109.5	-2.5	27.4	17.7	1917.4	40.7	AVG
999.42	-112.3	-5.3	31.9	21.3	500.0	27.4	AVG
902.33	-51.9	55.1	30.6	19173.7			AVG
1804.69	-64.6	42.4	-7.1	58.0	1917.4	30.4	AVG
2707	-73.2	33.8	-2.5	36.7	500.0	22.7	AVG
3609.54	-88.6	18.4	0.9	9.2	500.0	34.7	AVG

Data corrected by 1 dB for loss of high pass filter except for fundamental frequency

**SAMPLE CALCULATION:****RESULTS (uV/m @ 3m) = Antilog ((-109.5 + 27.4 + 107)/20) = 17.7****CONVERSION FROM dBm TO dBuV = 107 dB****Test Date: March 24, 2005****Tester****Signature:  Name: David Blethen**

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Table 5b. AVERAGE RADIATED SPURIOUS EMISSIONS Mid Channel**

Average Radiated Emissions, 3.125% duty cycle, - 30.1 dB correction							
Test By:	Test:				Client:		
DPB	Project: 05-0039				Model: System Manager Unit		
Frequency	Test Data	Test Data	AF+CA-AMP	Results	Limits	Margin	PK = n
(MHz)	(dBm)	(dBuV)	(dB)	(uV/m)	(uV/m)	(dB)	/ QP
639.81	-114.2	-7.2	26.3	9.1	3015.2	<b>50.4</b>	<b>AVG</b>
915.02	-48.2	58.8	30.8	30151.6			<b>AVG</b>
1830.13	-57.6	49.4	-6.7	136.1	3015.2	<b>26.9</b>	<b>AVG</b>
2745.2	-67.7	39.3	-2.4	70.0	500.0	<b>17.1</b>	<b>AVG</b>
3660.18	-90.4	16.6	1.1	7.7	500.0	<b>36.2</b>	<b>AVG</b>

Data corrected by 1 dB for loss of high pass filter except for fundamental frequency

**SAMPLE CALCULATION:****RESULTS (uV/m @ 3m) = Antilog ((-114.2 + 26.3 + 107)/20) = 9.1****CONVERSION FROM dBm TO dBuV = 107 dB****Test Date: March 24, 2005**

Tester

Signature: David P. Blethen Name: David Blethen

Report Number: 05-0039

Issue Date: March 28, 2005


Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Table 5c. AVERAGE RADIATED SPURIOUS EMISSIONS High Channel**

Average Radiated Emissions, 3.125% duty cycle, - 30.1 dB correction							
Test By:	Test:			Client:			
DPB	Project: 05-0039			Model: System Manager Unit			
Frequency	Test Data	Test Data	AF+CA-AMP	Results	Limits	Margin	PK = n
(MHz)	(dBm)	(dBuV)	(dB)	(uV/m)	(uV/m)	(dB)	/ QP
280.58	-98.5	8.5	17.5	19.9	3109.3	<b>43.9</b>	<b>AVG</b>
647.13	-80.8	26.2	26.5	433.0	3109.3	<b>17.1</b>	<b>AVG</b>
927.31	-47.9	59.1	30.8	31092.6			<b>AVG</b>
1854.69	-56.9	50.1	-6.3	154.5	3109.3	<b>26.1</b>	<b>AVG</b>
2782.03	-64.6	42.4	-2.3	101.4	500.0	<b>13.9</b>	<b>AVG</b>
3709.44	-87.7	19.3	1.4	10.9	500.0	<b>33.3</b>	<b>AVG</b>

Data corrected by 1 dB for loss of high pass filter except for fundamental frequency

**SAMPLE CALCULATION:**RESULTS (uV/m @ 3m) = Antilog  $((-98.5 + 17.5 + 107)/20) = 19.9$ **CONVERSION FROM dBm TO dBuV = 107 dB****Test Date: March 24, 2005****Tester**Signature:  Name: David Blethen

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**2.11 20 dB Bandwidth per FCC Section 15.247(a)(1)(ii)**

The antenna port was connected to a spectrum analyzer that was set for a  $50 \Omega$  impedance with the RBW = approximately 1/100 of the manufacturers claimed RBW & VBW > RBW. The results of this test are given in Table 6 and Figure 6a through 6c.

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**TABLE 6**  
**20 dB Bandwidth**

Frequency (MHz)	20 dB Bandwidth (MHz)	MAXIMUM FCC LIMIT (MHz)
901.659	0.125	1.0
915.046	0.125	1.0
927.334	0.125	1.0

Test Date: March 24, 2005

Tester

Signature: David Blethen Name: David Blethen


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

Figure 6a.  
20 dB Bandwidth per FCC Section 15.247(a)(1)(ii) (Low Channel)

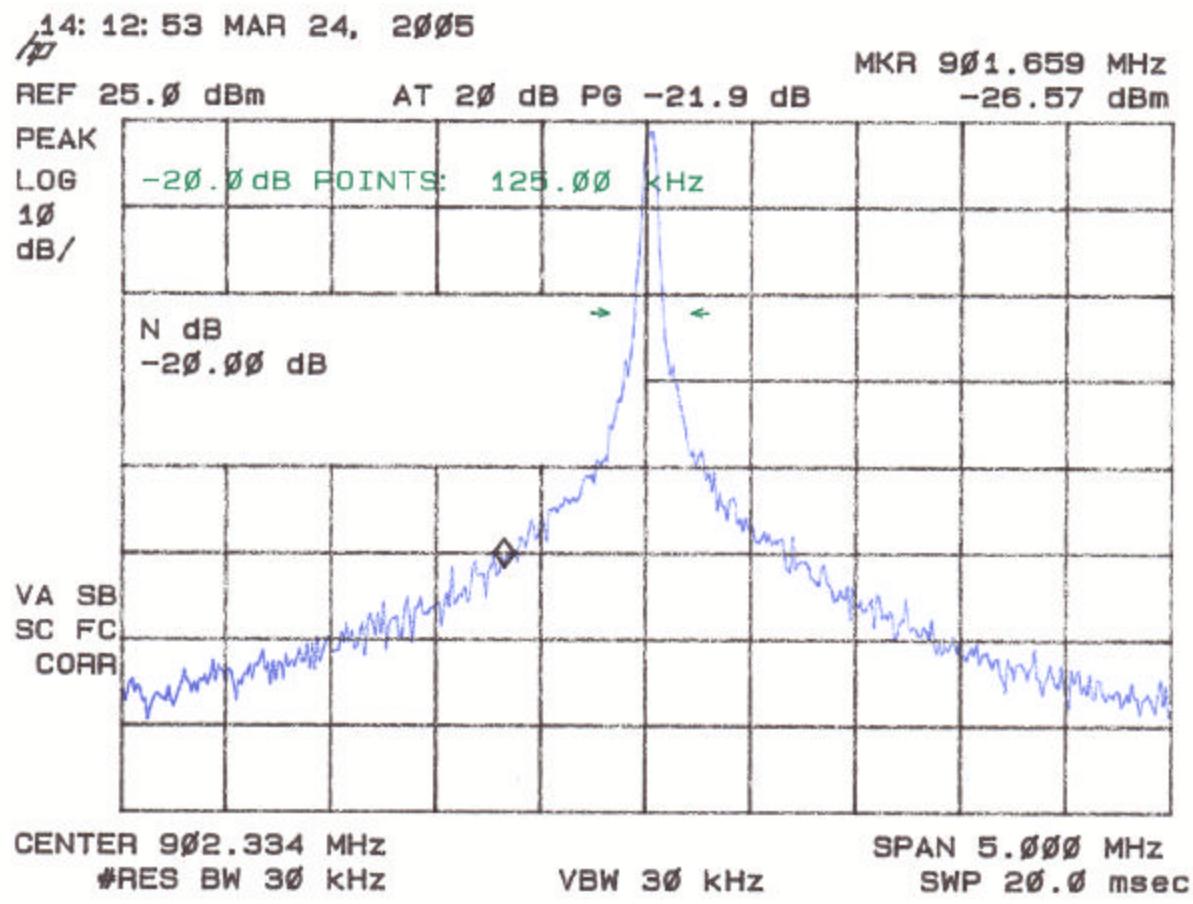


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 6b.**  
**20 dB Bandwidth per FCC Section 15.247(a)(1)(ii) (Mid Channel)**

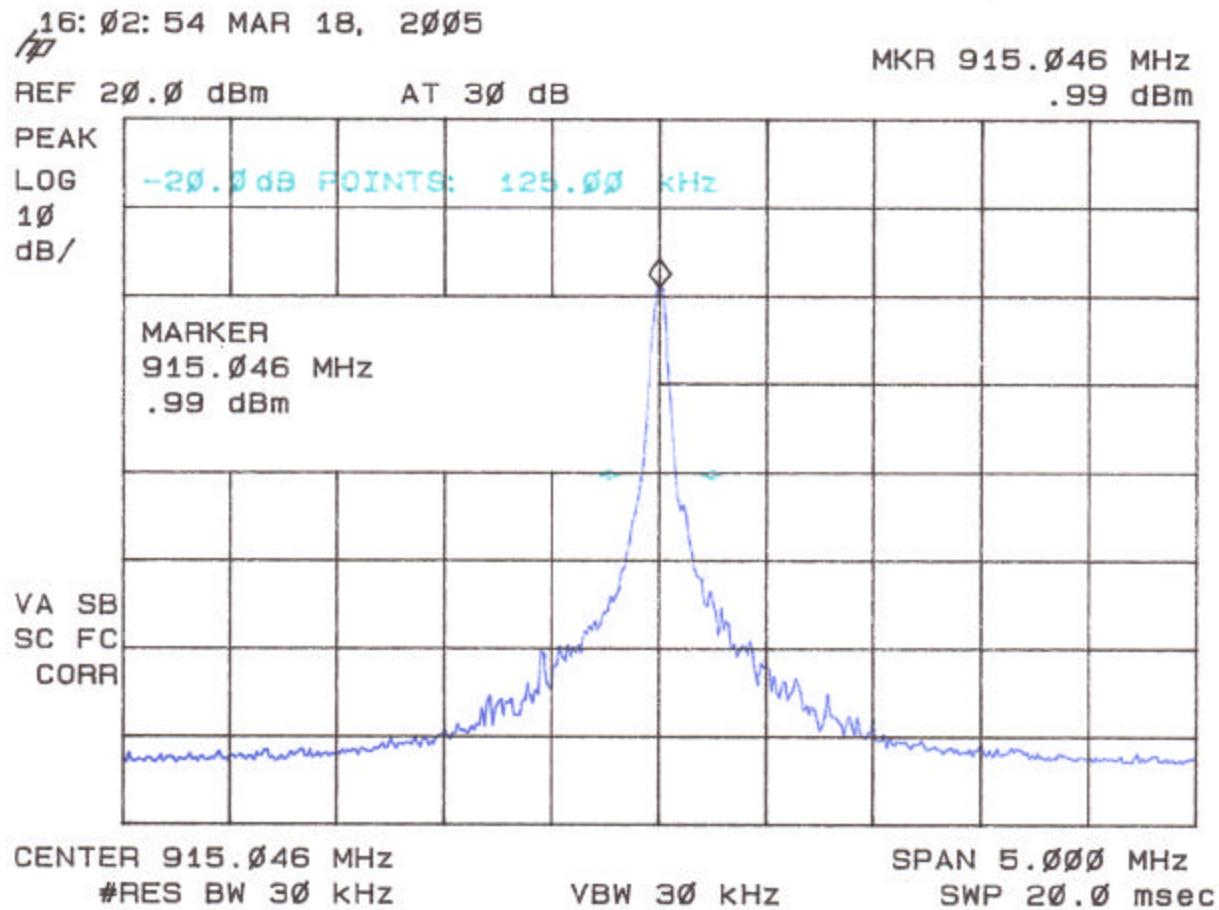


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 6c.**  
**20 dB Bandwidth per FCC Section 15.247(a)(1)(ii) (High Channel)**

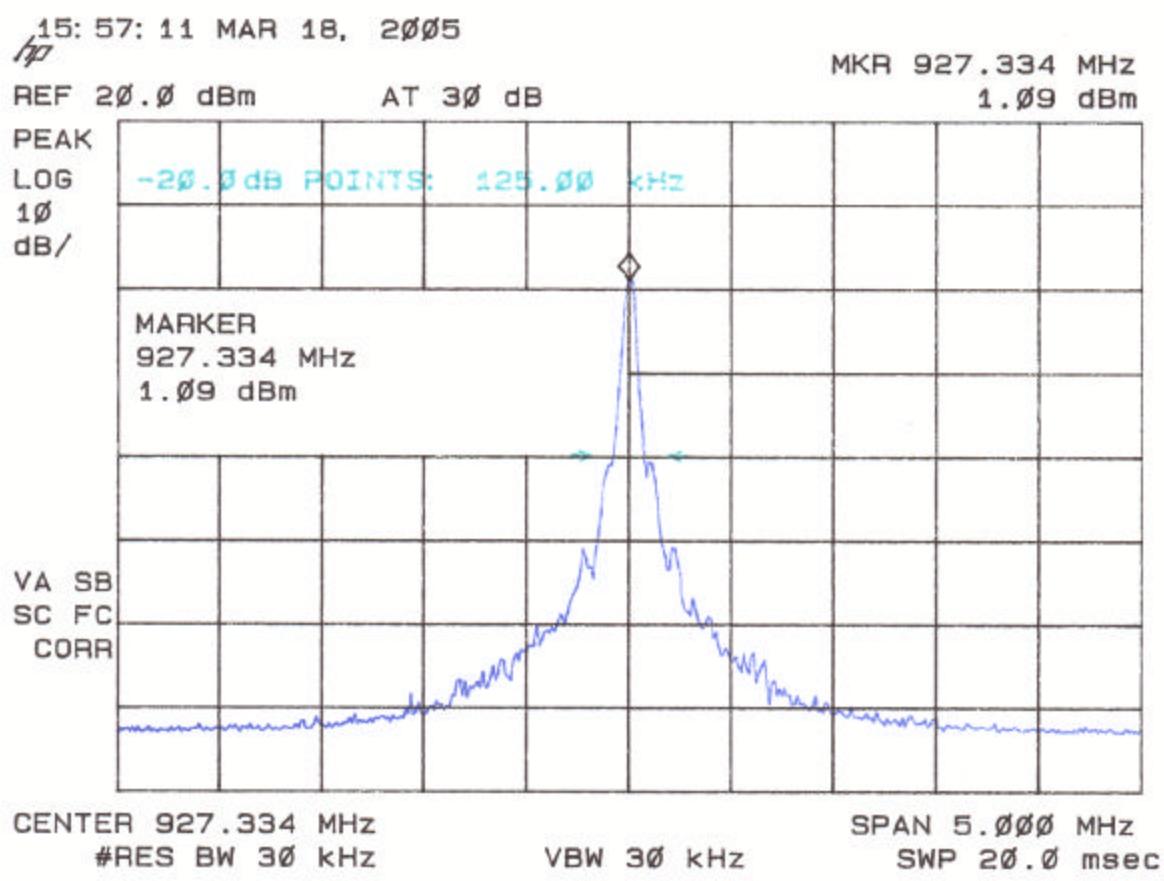

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**2.12 Number of Hopping Channels FCC Section 15.247(a)(1)(ii)**

The transmitter was placed into a typical frequency hopping mode of operation. The 902-928 MHz band was centered on the screen and the RBW and VBW chosen such that the individual channels could be discerned. The trace capture time was a minimum of 5 minutes.

The results of this test are given in Table 7 and Figure 7.

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**TABLE 7**  
**NUMBER OF HOPPING CHANNELS**

Number of Hopping Frequencies Measured	FCC Limit (Minimum Number of Channels)
62	50


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 7**  
**Number of Hopping Channels FCC Section 15.247(a)(1)(ii)**

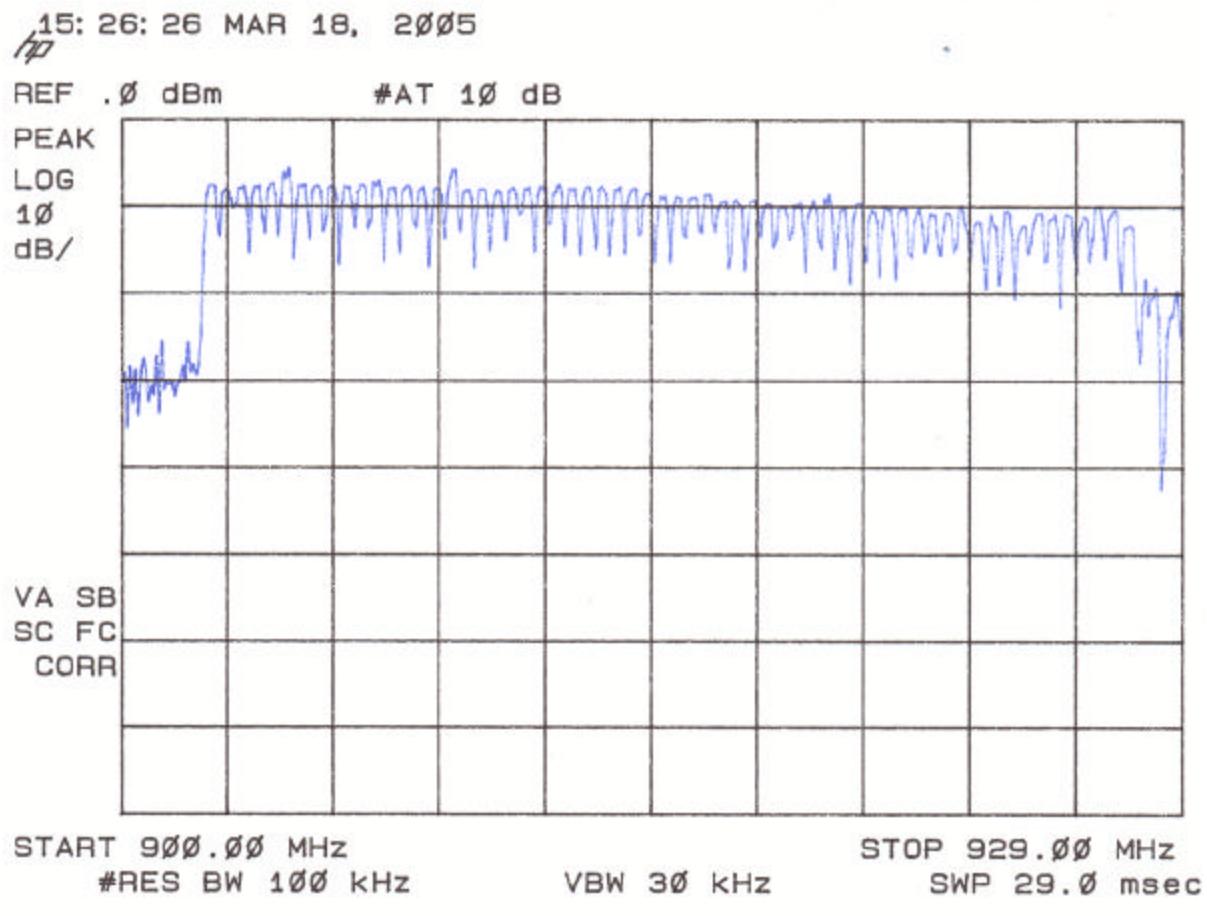

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

---

**2.13 Average Time of Occupancy per Channel FCC Section 15.247(a)(1)(ii)**

The maximum transmit time of the EUT, based upon software and firmware settings, is 2.84 ms average time of occupancy.


Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 8**  
Average Time of Occupancy per Channel FCC Section 15.247(a)(1)(ii)

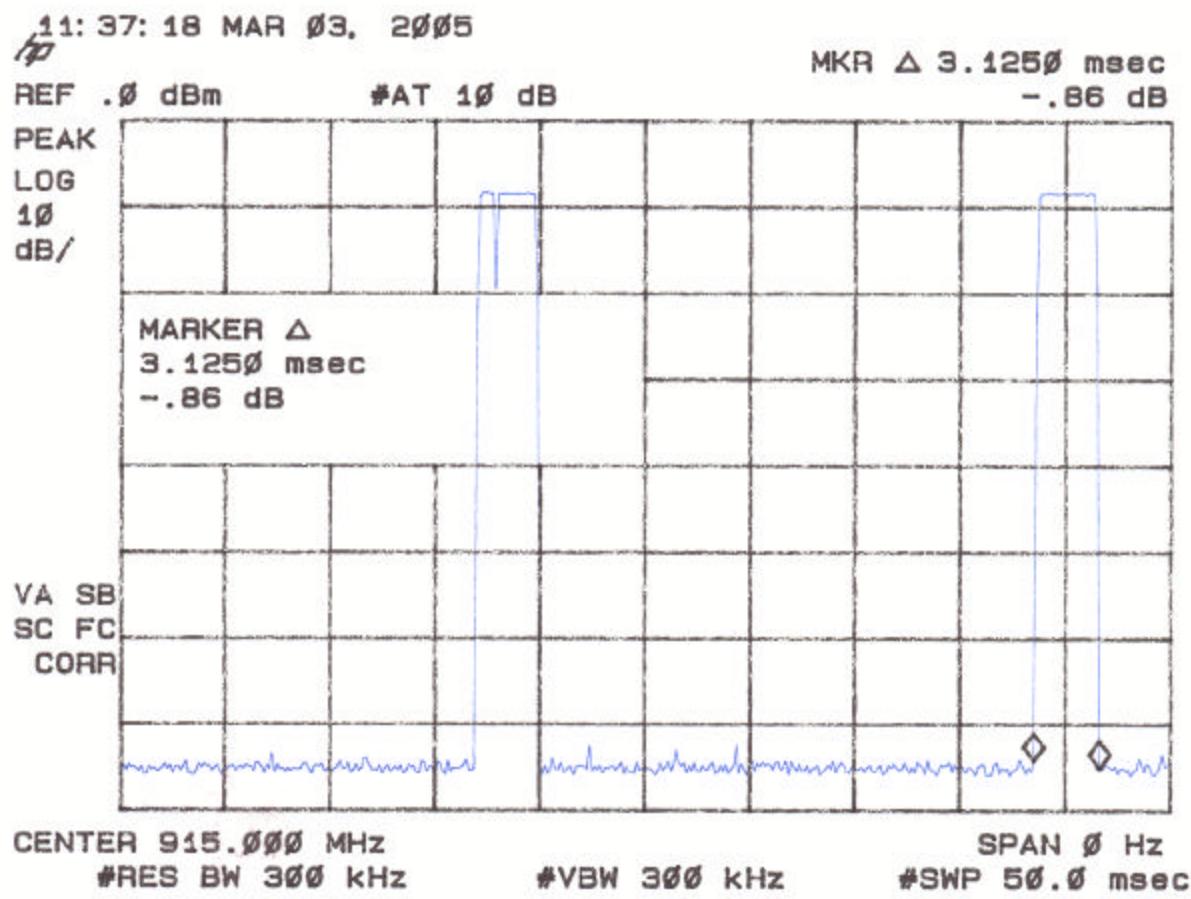

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**2.14 Power Line Conducted Emissions for Transmitter FCC Section 15.207**

The conducted voltage measurements have been carried out in accordance with FCC Section 15.207, with a spectrum analyzer connected to a LISN and the EUT placed into a continuous mode of transmit. The results are given in Tables 8a-8b.

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**TABLE 8a. CONDUCTED EMISSIONS DATA****CLASS B****(Peak-Quasi Peak Measurements vs Average Limits) PHASE DATA**

Line Conducted Emissions							
Test By:	Test:			Client:			
DPB	Project:			Model:			
Frequency	Test Data	Test Data	AF+CA-AMP	Results	Limits	Margin	PK = n
(MHz)	(dBm)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	/ QP
0.15	-66.4	40.6	0.2	40.8	56.0	15.2	PK
0.193	-69.5	37.5	0.3	37.8	54.8	17.0	PK
0.205	-68.8	38.2	0.3	38.5	54.4	15.9	PK
0.245	-70.1	36.9	0.2	37.1	53.3	16.2	PK
0.3	-72.6	34.4	0.2	34.6	51.7	17.1	PK
0.328	-72.5	34.5	0.2	34.7	50.9	16.2	PK

**SAMPLE CALCULATIONS: 40.6 + 0.2 = 40.8 dBuV****Test Date: March 24, 2005**Tested by  
Signature: David BlethenName: David Blethen**TABLE 8b. CONDUCTED EMISSIONS DATA****CLASS B**

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**(Peak-Quasi Peak Measurements vs Average Limits) NEUTRAL DATA**

Line Conducted Emissions							
Test By:	Test: FCC Part 15 Neutral vs. AVG limits				Client: Wireless Detection		
DPB	Project: 05-0039				Model: System Manager Unit		
Frequency (MHz)	Test Data (dBm)	Test Data (dBuV)	AF+CA-AMP (dB)	Results (dBuV)	Limits (dBuV)	Margin (dB)	PK = n / QP
0.15	-62.7	44.3	0.2	44.5	56.0	11.5	PK
0.193	-65.0	42.0	0.3	42.3	54.8	12.5	PK
0.205	-65.3	41.7	0.3	42.0	54.4	12.4	PK
0.245	-66.7	40.3	0.2	40.5	53.3	12.8	PK
0.3	-69.9	37.1	0.2	37.3	51.7	14.4	PK
0.328	-70.3	36.7	0.2	36.9	50.9	14.0	PK

**SAMPLE CALCULATIONS: 44.3 + 0.2 = 44.5 dBuV****Test Date: March 24, 2005****Tested by****Signature:** David Blethen **Name:** David Blethen

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**2.15 Radiated Emissions for Digital Device & Receiver (47 CFR 15.109a)**

Radiated emissions were evaluated from 30 to 14500 MHz while the EUT was placed into a Receive mode of operation. Measurements were made with the analyzer's bandwidth set to 120 kHz measurements made less than 1 GHz and 1 MHz for measurements made greater than or equal to 1 GHz. The results for less than 1 GHz are shown in Table 9.

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**TABLE 9a. RADIATED EMISSIONS DATA  
(Digital Device Receive Mode)**

**CLASS B**

**Measurements 30 MHz – 1 GHz**

<b>Radiated Emissions</b>							
<b>Test By:</b>	<b>Test:</b> FCC Part 15				<b>Client:</b> Wireless Detection		
DPB	<b>Project:</b> 05-0039				<b>Model:</b> System Manager Unit		
<b>Frequency</b> <b>(MHz)</b>	<b>Test Data</b> <b>(dBm)</b>	<b>Test Data</b> <b>(dBuV)</b>	<b>AF+CA-AMP</b> <b>(dB)</b>	<b>Results</b> <b>(uV/m)</b>	<b>Limits</b> <b>(uV/m)</b>	<b>Margin</b> <b>(dB)</b>	<b>PK = n</b> <b>/ QP</b>
275.00	-98.0	9.0	17.2	20.5	200.0	<b>19.8</b>	<b>PK</b>
373	-91.0	16.0	19.3	58.3	200.0	<b>10.7</b>	<b>PK</b>
531	-94.0	13.0	23.4	66.0	200.0	<b>9.6</b>	<b>PK</b>
167	-97.0	10.0	17.1	22.6	150.0	<b>16.5</b>	<b>PK</b>
157	-90.0	17.0	16.4	46.9	150.0	<b>10.1</b>	<b>PK</b>
117	-83.0	24.0	14.3	82.2	150.0	<b>5.2</b>	<b>PK</b>


**SAMPLE CALCULATION:**

RESULTS (uV/m @ 3m) = Antilog  $((-98.0 + 17.2 + 107)/20) = 20.5$

**CONVERSION FROM dBm TO dBuV = 107 dB**

**Test Date:** March 24, 2005

Tested by  
Signature: \_\_\_\_\_



Name: David Blethen

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**TABLE 9b. RADIATED EMISSIONS DATA  
(Digital Device & Receiver)****CLASS B****Measurements 1 GHz – 5 GHz (PEAK)**

Radiated Emissions								
Test By:	<b>Test:</b> Part 15 Digital device / Receive Mode					<b>Client:</b> Wireless Detection		
DPB	<b>Project:</b> 05-0039					<b>Model:</b> System Manager Unit		
Frequency	Test Data	Test Data	AF+CA-AMP	Results	Limits	Distance /	Margin	PK = n
(MHz)	(dBm)	(dBuV)	(dB)	(uV/m)	(uV/m)	Polarity	(dB)	/ QP
<b>NO EMISSIONS DETECTED WITHIN 20 dB OF THE FCC LIMIT</b>								

Test Date: March 24, 2005

Tested by  
Signature: David BlethenName: David Blethen

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**TABLE 9b. RADIATED EMISSIONS DATA  
(Digital Device & Receiver)****CLASS B****Measurements 1 GHz – 5 GHz (AVERAGE)**

Radiated Emissions								
Test By:	Test: Part 15 Digital device / Receive Mode				Client: Wireless Detection			
DPB	Project: 05-0039				Model: System Manager Unit			
Frequency	Test Data	Test Data	AF+CA-AMP	Results	Limits	Distance /	Margin	PK = n
(MHz)	(dBm)	(dBuV)	(dB)	(uV/m)	(uV/m)	Polarity	(dB)	/ QP
NO EMISSIONS DETECTED WITHIN 20 dB OF THE FCC LIMIT								

Test Date: March 24, 2005

Tested by

Signature: David P. BlethenName: David Blethen

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**2.16 Power Line Conducted Emissions for Digital Device and Receiver  
FCC Section 15.107**

The conducted voltage measurements have been carried out in accordance with FCC Section 15.107, with a spectrum analyzer connected to a LISN and the EUT placed into an idle condition or a continuous mode of receive. Similar results were seen as compared to the EUT in a transmit mode of operation. **Therefore, please refer to the results as shown in Table 8a and 8b.**

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

## 2.17 Channel Separation

The transmitter was placed into a typical frequency hopping mode of operation. Using an RBW and UBW of 30 kHz, the delta between 2 peaks was measured and the distance between them was noted. Characteristics of the time of occupancy are shown in Figure 9 and Table 10.

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**TABLE 10****CHANNEL SEPARATION**

Channel Separation	FCC Limit (Minimum)
425 kHz	25 kHz, 20 dB Bandwidth

Report Number: 05-0039

Issue Date: March 28, 2005

Customer: Wireless Detection

Model: SM-002 Rev 02 System Manager

**Figure 9**  
**Channel Separation FCC Section 15.247(a)(1)(ii)**

