

Dexatek Technology Ltd.
15F.,NO.81,Sec.1,Sintai 5th Rd., Sijhih Dist.,New Taipei City 221, Taiwan

Federal Communications Commission
Authorization and Evaluation Division
Equipment Authorization Branch
7435 Oakland Mills Road
Columbia, MD 21046

Applicant's declaration concerning RF Radiation Exposure

We hereby indicate that the product
Product description: Smart Hub
Model No: SA-7113

The equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. The integral antennas used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter within the host device.

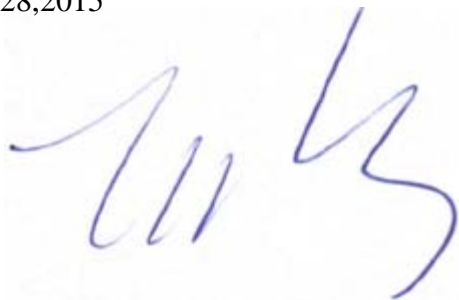
A safety statement concerning minimum separation distances from enclosure of the Product : Smart Hub will be integrated in the user's manual to provide end-users with transmitter operating conditions for satisfying RF exposure compliance.

The appropriate information can be drawn from the test report no: W6M21502-14834-C-1 and the accompanying calculations.

Company: Dexatek Technology Ltd.
Address: 15F.,NO.81,Sec.1,Sintai 5th Rd., Sijhih Dist.,New Taipei City 221, Taiwan

Date: April 28,2015

Signature

A handwritten signature in blue ink, consisting of stylized, cursive letters that appear to be 'M' and 'L'.



Registration number: W6M21502-14834-C-1
 FCC ID: SZY-SA7113

3.2 Equivalent isotropic radiated power

FCC Rule: 15.247(b)(3)

802.11b/g/n
 EIRP = max. conducted output power + antenna gain
 EIRP = 19.67 dBm + 2.01 dBi
 = 21.68 dBm

BLE4.0
 EIRP = max. conducted output power + antenna gain
 EIRP = 2.87 dBm + 1.996 dBi
 = 4.866 dBm

Limit: EIRP = +36 dBm for Antenna gain <6dBi

Test equipment used: ETSTW-RE 055

3.3 RF Exposure Compliance Requirements

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a “worst case” or conservative prediction.

$$S = \frac{PG}{4 \pi R^2}$$

S – Power Density
 P – Output power ERP
 R – Distance
 D – Cable Loss
 AG – Antenna Gain
 802.11b/g/n

Item	Unit	Value	Remarks
P	mW	92.6830	Peak value
D	dB		
AG	dBi	2.01	
G		1.5885	Calculated Value
R	cm	20	Assumed value
S	mW/cm ²	0.0293	Calculated value

BT4.0

Item	Unit	Value	Remarks
P	mW	1.9364	Peak value
D	dB		
AG	dBi	1.996	
G		1.5834	Calculated Value
R	cm	20	Assumed value
S	mW/cm ²	0.0006	Calculated value

Limits:

Limit for General Population / Uncontrolled Exposure	
Frequency (MHz)	Power Density (mW/cm ²)
1500 – 100.000	1.0