



## FCC Test Report

**Report No.:** FVC-ESH-P20112382B-13

**FCC ID:** T2C-A30

**Product:** Video Conferencing Endpoint

**Model:** MeetingBar A30

**Received Date:** Dec.30, 2020

**Test Date:** Jan.02 to Jan.22, 2021

**Issued Date:** Jan.23, 2021

**Applicant:** YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.

**Address:** 309, 3rd Floor, No.16, Yun Ding North Road, Huli District, Xiamen City, Fujian, P.R. China

**Manufacturer:** YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.

**Address:** 309, 3rd Floor, No.16, Yun Ding North Road, Huli District, Xiamen City, Fujian, P.R. China

**Issued By:** BUREAU VERITAS ADT (Shanghai) Corporation

**Lab Address:** No. 829, Xinzhuan Road, Shanghai, P.R.China (201612)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



## Table of Contents

Release Control Record.....	5
1 Certificate of Conformity .....	6
2 Summary of Test Results .....	7
2.1 Test Instruments.....	8
2.2 Measurement Uncertainty .....	9
2.3 Modification Record .....	9
3 General Information.....	10
3.1 General Description of EUT.....	10
3.2 Description of Test Modes .....	11
3.2.1 Test Mode Applicability: .....	12
3.2.2 Test Condition: .....	13
3.3 Duty Cycle of Test Signal .....	14
3.4 Description of Support Units.....	23
3.5 General Description of Applied Standards .....	23
4 Test Procedure and Results .....	24
4.1 AC Power Conducted Emission.....	24
4.1.1 Limits .....	24
4.1.2 Test Procedures .....	24
4.1.3 Deviation from Test Standard.....	24
4.1.4 Test Setup.....	25
4.1.5 EUT Operating Conditions.....	25
4.1.6 Test Results .....	26
4.2 Minimum 6dB Bandwidth.....	30
4.2.1 Limit.....	30
4.2.2 Test Setup.....	30
4.2.3 Test Procedures .....	30
4.2.4 Deviation of Test Standard.....	30
4.2.5 Test Results .....	31
4.3 Conducted Output Power .....	40
4.3.1 Limit.....	40
4.3.2 Test Setup.....	40
4.3.3 Test Procedures .....	40



4.3.4	Deviation of Test Standard.....	40
4.3.5	Test Results .....	41
4.4	Power Spectral Density .....	50
4.4.1	Limit.....	50
4.4.2	Test Setup.....	50
4.4.3	Test Procedures .....	50
4.4.4	Deviation of Test Standard.....	50
4.4.5	Test Results .....	51
4.5	Conducted Band Edges Measurement .....	60
4.5.1	Limit.....	60
4.5.2	Test Setup.....	60
4.5.3	Test Procedures .....	60
4.5.4	Deviation of Test Standard.....	60
4.5.5	Test Results .....	61
4.6	Conducted Spurious Emissions.....	68
4.6.1	Limit.....	68
4.6.2	Test Setup.....	68
4.6.3	Test Procedures .....	68
4.6.4	Deviation of Test Standard.....	68
4.6.5	Test Results .....	69
4.7	Emissions in restricted frequency bands.....	95
4.7.1	Test Limit.....	95
4.7.2	Test Procedure Reference.....	96
4.7.3	Test Procedures .....	96
4.7.4	Test Setup.....	97
4.7.5	Test Results .....	98
4.8	Radiated Emission Measurement.....	106
4.8.1	Limits .....	106
4.8.2	Test Procedures .....	106
4.8.3	Deviation from Test Standard.....	107
4.8.4	Test Setup.....	108
4.8.5	EUT Operating Conditions.....	109
4.8.6	Test Results .....	109



5 Pictures of Test Arrangements .....122



### Release Control Record

Issue No.	Description	Date Issued
FVC-ESH-P20112382B-13	Original release	Jan.23, 2021



## 1 Certificate of Conformity

**Product:** Video Conferencing Endpoint

**Brand:** Yealink

**Model:** MeetingBar A30

**Applicant:** YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.

**Test Date:** Jan.02 to Jan.22, 2021

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **BUREAU VERITAS ADT (Shanghai) Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**

Yuan ZHANG  
Project Engineer

**Date:**

Jan.23, 2021

**Approved by :**



Daniel Sun  
EMC Lab Manager

**Date:**

Jan.23, 2021



## 2 Summary of Test Results

The EUT has been tested according to the following specifications:

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.203	Antenna Requirement	PASS	No antenna connector is used.
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	Minimum 6dB Bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output Power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.247(d)	Conducted Band Edges Measurement	PASS	Meet the requirement of limit.
15.247(d)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
15.247(d)	Emissions in restricted frequency bands	PASS	Meet the requirement of limit.
15.205 / 15.209 / 15.247(d)	Radiated Emissions Measurement	PASS	Meet the requirement of limit.



## 2.1 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Hybrid Antenna(25MHz-1.5GHz)	Schwarzbeck	VULB9168	E1A1012	Jul.29, 20	Jul.28, 22
Horn Antenna(1GHz -18GHz)	Schwarzbeck	BBHA9120D	E1A1017	Aug.25, 20	Aug.24, 22
Double Ridge Horn Antenna(18G-40G)	COM-POWER	AH-840	E1A1040	Jul.15, 20	Jul.14, 22
Pre-Amplifier(100kHz-1.3GHz)	Agilent	8447D	E1A2001	Apr.20, 20	Apr.19, 21
Pre-Amplifier(0.5GHz-18GHz)	EMCI	EMC184045SE	E1A2009	Jul.06, 20	Jul.05, 21
Pre-Amplifier(18GHz-40GHz)	EMCI	EMC051845SE	E1A2008	Jul.06, 20	Jul.05, 21
EMI test receiver	R&S	ESR7	E1R1005	Apr.20, 20	Apr.19, 21
Spectrum Analyzer	Keysight	N9030B	E1S1003	Jul.23, 20	Jul.22, 21
Spectrum Analyzer	Keysight	N9020A	E1S1004	Mar.03, 20	Mar.02, 21
EMI test receiver	R&S	ESCS30	E1R1001	May.12, 20	May.11, 21
LISN	R&S	ENV216	E1L1011	May.12, 20	May.11, 21
Humidity&Temp Tester	Baolima	WS508	E1H1011	Apr. 03, 20	Apr. 02, 21
RF Control Unit	Toscend	JS0806-2	E1C5003	N/A	N/A
Test Software	ADT	ADT_COND_V7 .3.1	N/A	N/A	N/A
Test Software	Toscend	JS32-RE	N/A	N/A	N/A
Test Software	Toscend	JS1120	N/A	N/A	N/A
Test Software	Toscend	JS1120-3	N/A	N/A	N/A



## 2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Frequency	Expanded Uncertainty ( $k=2$ ) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.36 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.47 dB
	6GHz ~ 18GHz	3.75 dB
	18GHz ~ 40GHz	3.30 dB

## 2.3 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Video Conferencing Endpoint
Brand	Yealink
Test Model	MeetingBar A30
Power Rating	I/P: 48V ===, 0.7A for Video Conferencing Endpoint; I/P: 100-240Vac, 50/60Hz, 1.0A; O/P: 48V ===, 0.7A for AC Adapter.
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Operating Frequency	See clause 3.2
Number of Channel	See clause 3.2
Output Power	16.24dBm
Antenna Type	PCB Antenna
Antenna Connector	--
Antenna Gain	Ant1:3dBi Ant2:3dBi MIMO Gian:6.01dBi

Note: For more details, please refer to the User's manual of the EUT.

**Special comments:** The model MeetingBar A30 and MeetingBar A20 use same wireless module, so we choose RSE for further test.

Modulation Mode	TX /RX Function
802.11b	2TX / 2RX
802.11g	2TX / 2RX
802.11n (HT20)	2TX / 2RX
802.11n (HT40)	2TX / 2RX



### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20) and 7 channels are provided for 802.11n (HT40).

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz	-	-



### 3.2.1 Test Mode Applicability:

EUT Configure Mode	Applicable to				Description
	RE ≥ 1G	RE < 1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz      **RE≤1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

#### **Radiated Emission Test (Above 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

#### **Radiated Emission Test (Below 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1	DSSS	DBPSK	1.0



### **Antenna Port Conducted Measurement**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

### **3.2.2 Test Condition:**

Applicable to	Normal Environmental Conditions	Normal Input Power
RE ≥ 1G	25deg. C, 60%RH	120Vac, 60Hz
RE < 1G	25deg. C, 60%RH	120Vac, 60Hz
PLC	25deg. C, 60%RH	120Vac, 60Hz
APCM	25deg. C, 60%RH	120Vac, 60Hz




### 3.3 Duty Cycle of Test Signal


The test result refer to the report FVC-ESH-P20112379B-13.

Test Mode	Antenna	Channel [MHz]	Duty Cycle [%]	10log(1/x) Factor[dB]
11B	Ant1	2412	99.36	0.03
	Ant2	2412	99.28	0.03
	Ant1	2437	99.36	0.03
	Ant2	2437	99.36	0.03
	Ant1	2462	99.36	0.03
	Ant2	2462	99.36	0.03
11G	Ant1	2412	98.10	0.08
	Ant2	2412	98.10	0.08
	Ant1	2437	98.10	0.08
	Ant2	2437	98.10	0.08
	Ant1	2462	98.10	0.08
	Ant2	2462	98.10	0.08
11N20MIMO	Ant1	2412	97.96	0.09
	Ant2	2412	97.96	0.09
	Ant1	2437	97.96	0.09
	Ant2	2437	97.96	0.09
	Ant1	2462	97.96	0.09
	Ant2	2462	97.96	0.09
11N40MIMO	Ant1	2422	95.00	0.22
	Ant2	2422	95.00	0.22
	Ant1	2437	95.00	0.22
	Ant2	2437	95.00	0.22
	Ant1	2452	95.00	0.22
	Ant2	2452	95.00	0.22


### 11B\_Ant1\_2412

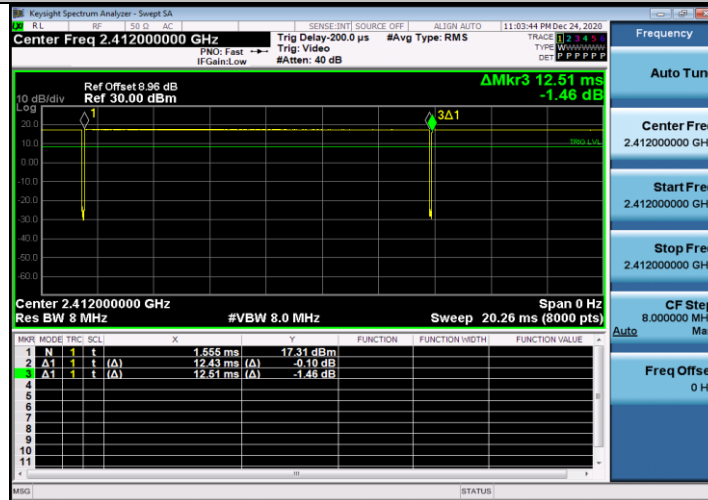


### 11B\_Ant2\_2412

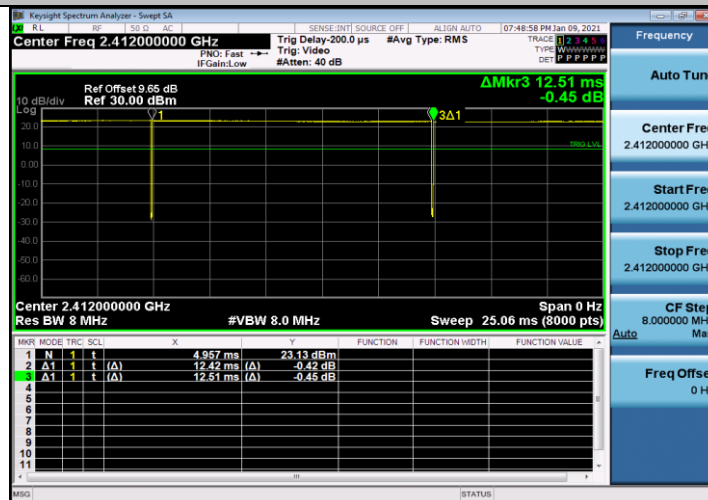


### 11B\_Ant1\_2437

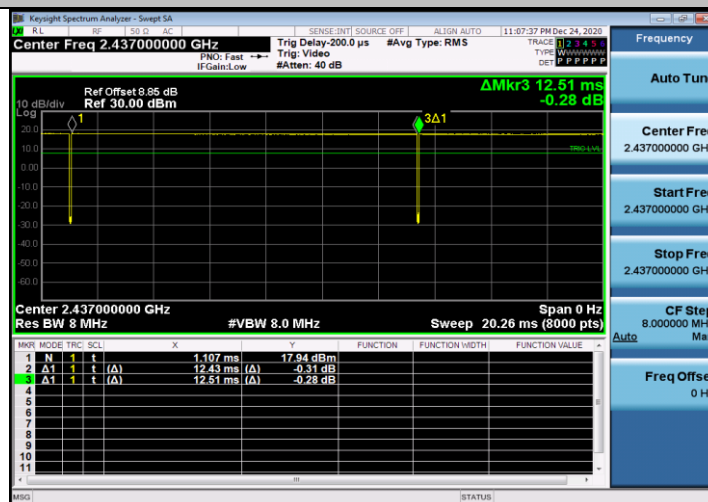


### 11B\_Ant2\_2437

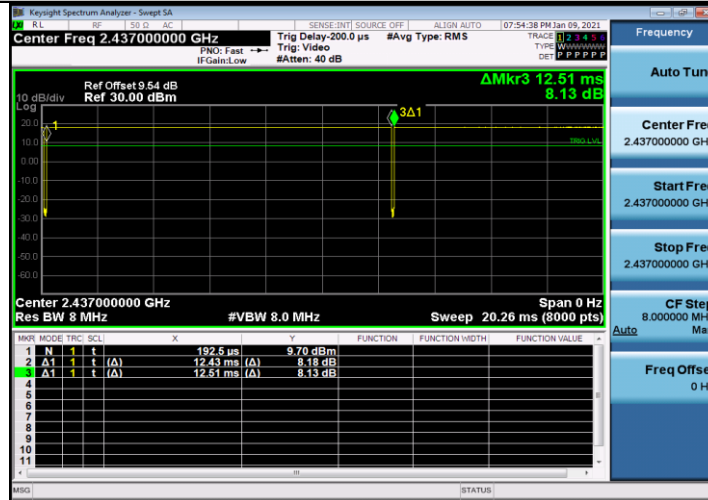

### 11B\_Ant1\_2462

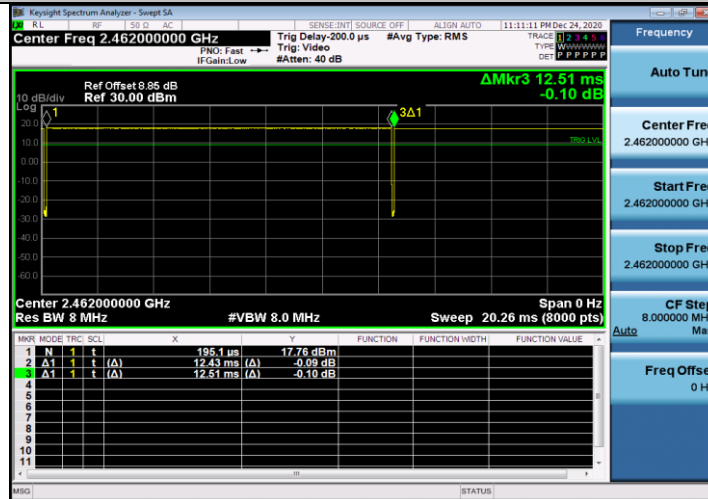


### 11B\_Ant2\_2462

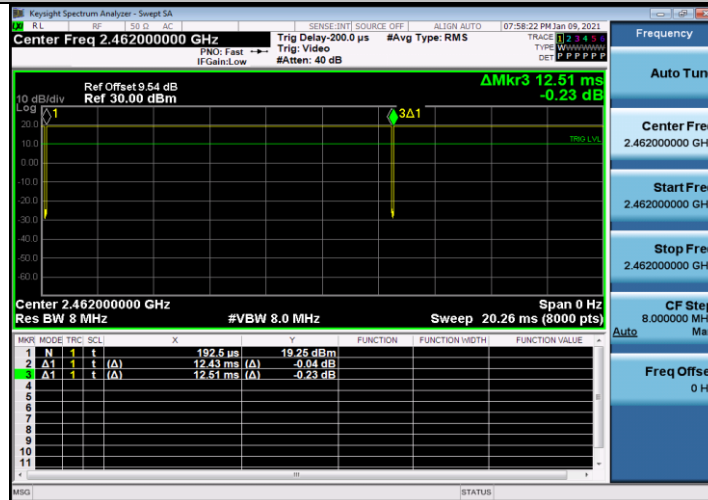





### 11G\_Ant1\_2412

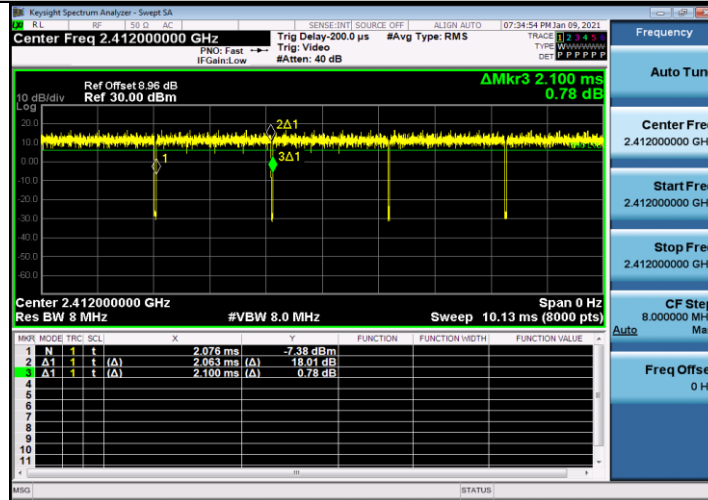


### 11G\_Ant2\_2412

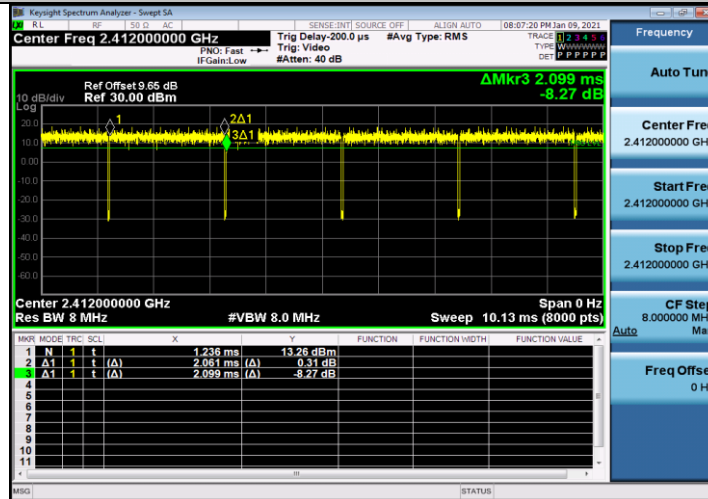


### 11G\_Ant1\_2437

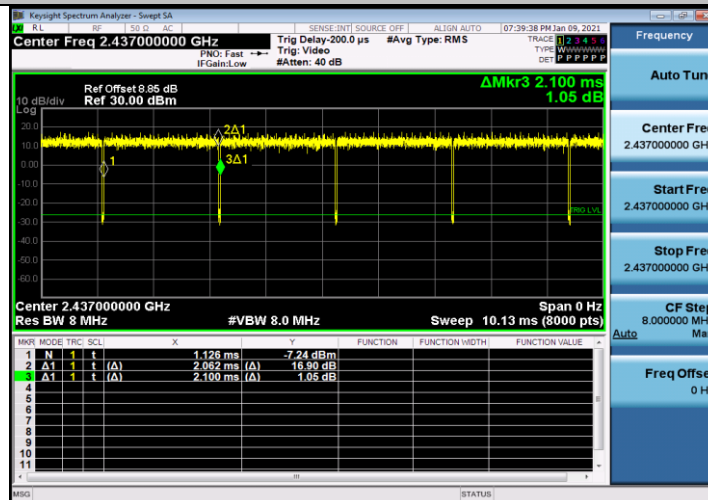


### 11G\_Ant2\_2437

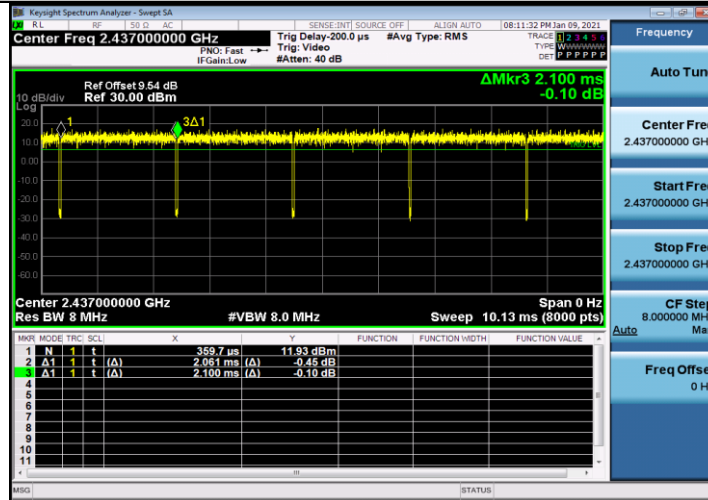


### 11G\_Ant1\_2462

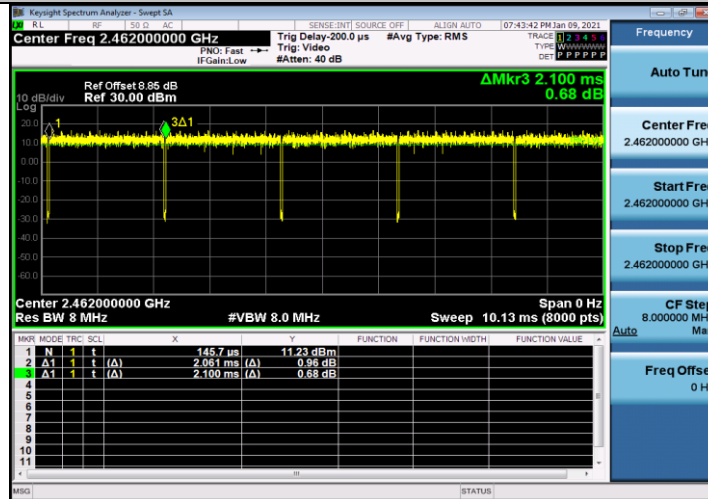


### 11G\_Ant2\_2462

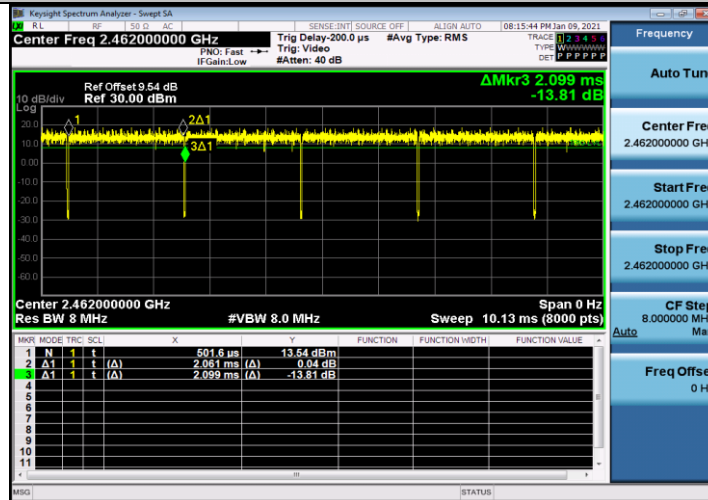


### 11N20MIMO\_Ant1\_2412

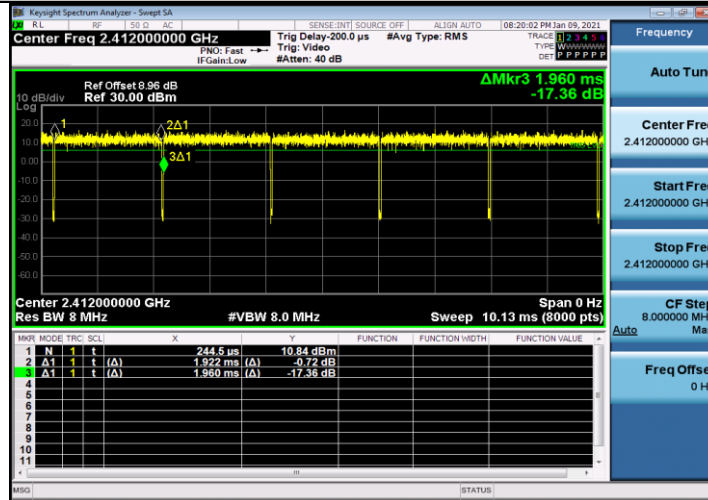


### 11N20MIMO\_Ant2\_2412

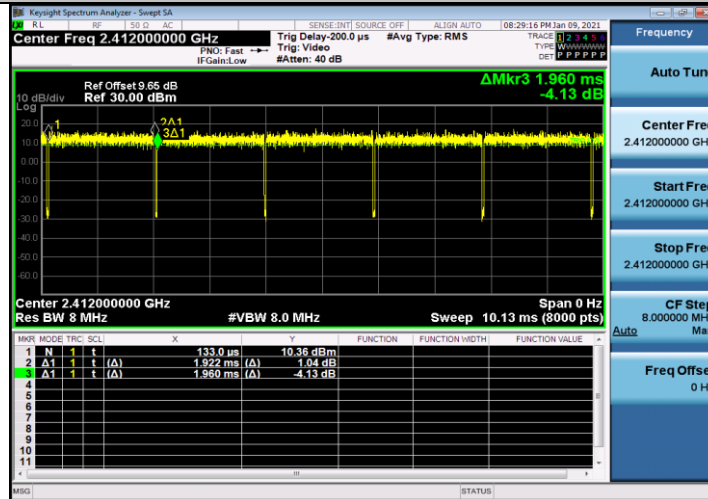


### 11N20MIMO\_Ant1\_2437

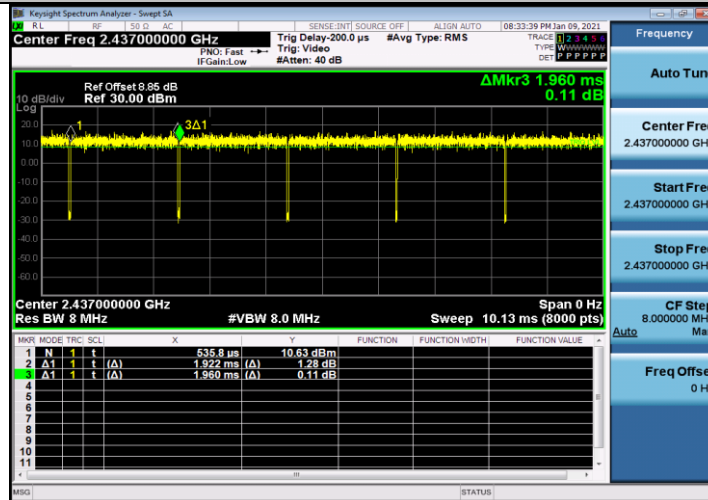

### 11N20MIMO\_Ant2\_2437

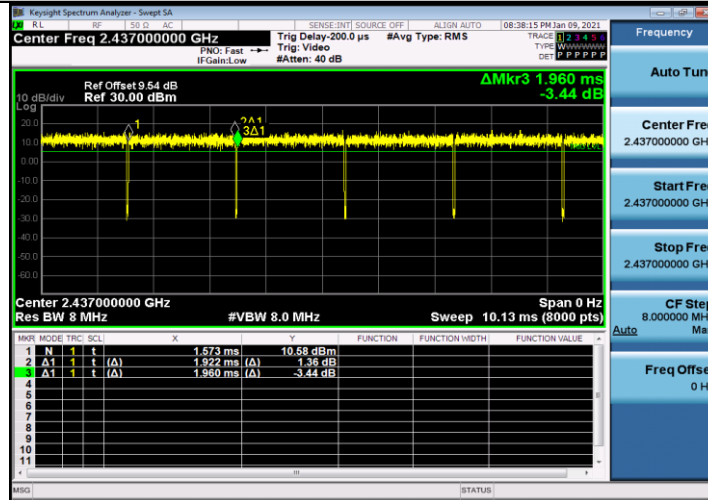

### 11N20MIMO\_Ant1\_2462

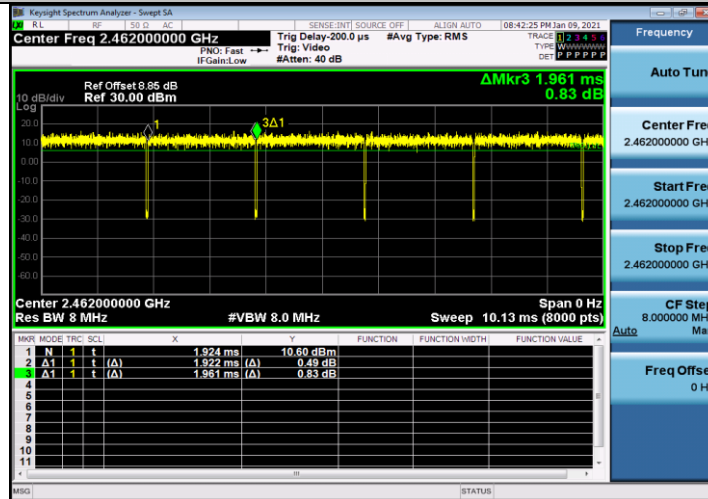

### 11N20MIMO\_Ant2\_2462

