


2DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)



Channel 39 (2441MHz)

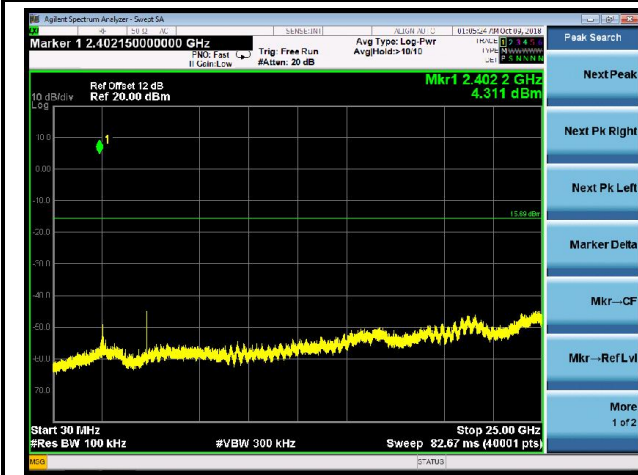


Channel 78 (2480MHz)

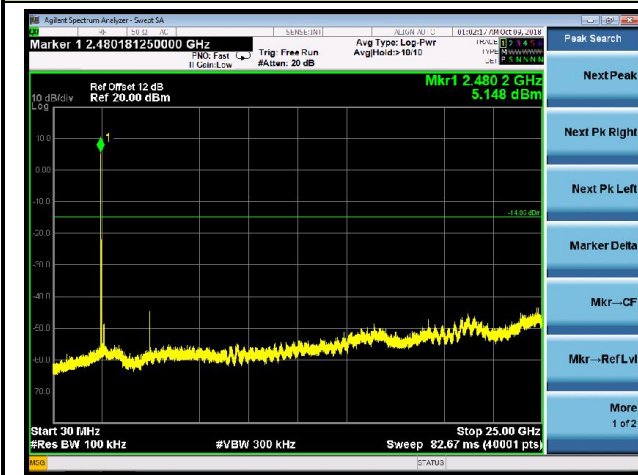

3DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

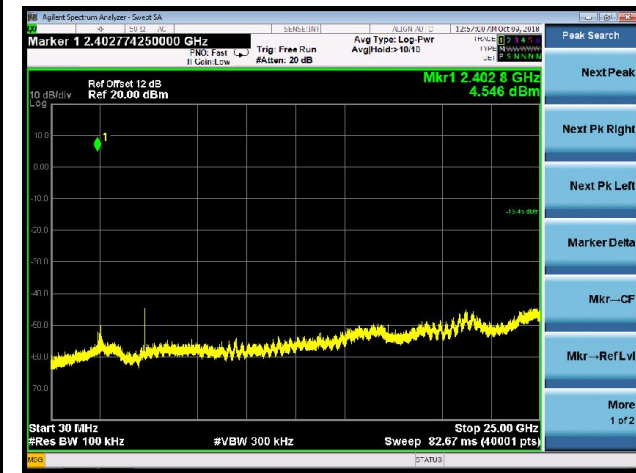

Channel 39 (2441MHz)



Channel 78 (2480MHz)

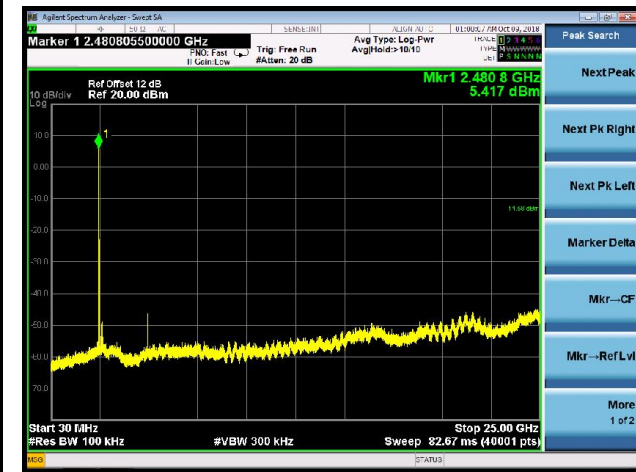

7.9. Radiated Spurious Emission Measurement

7.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209/ RSS-Gen Section 8.9		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.9.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple

6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW \geq 1/T
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.9.4. Test Setup


9kHz ~ 30MHz Test Setup:

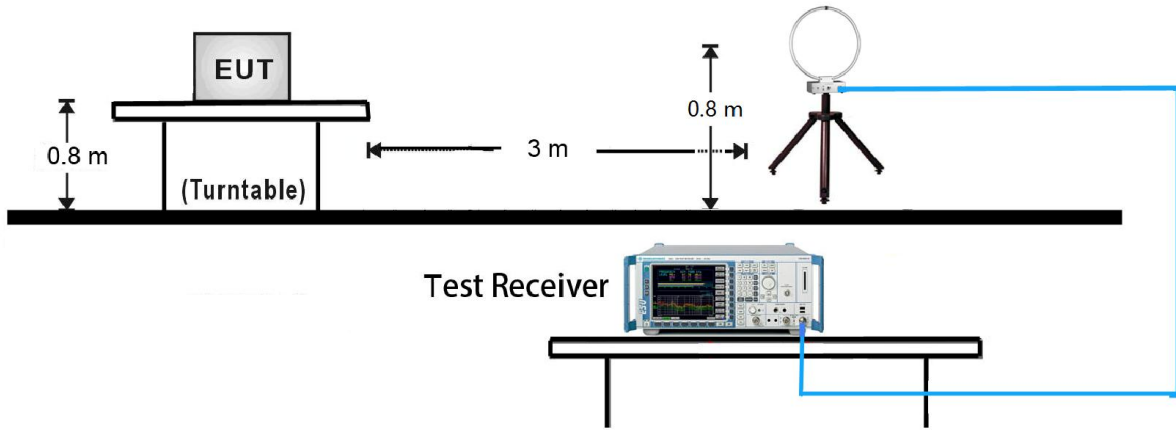


30MHz ~ 1GHz Test Setup:

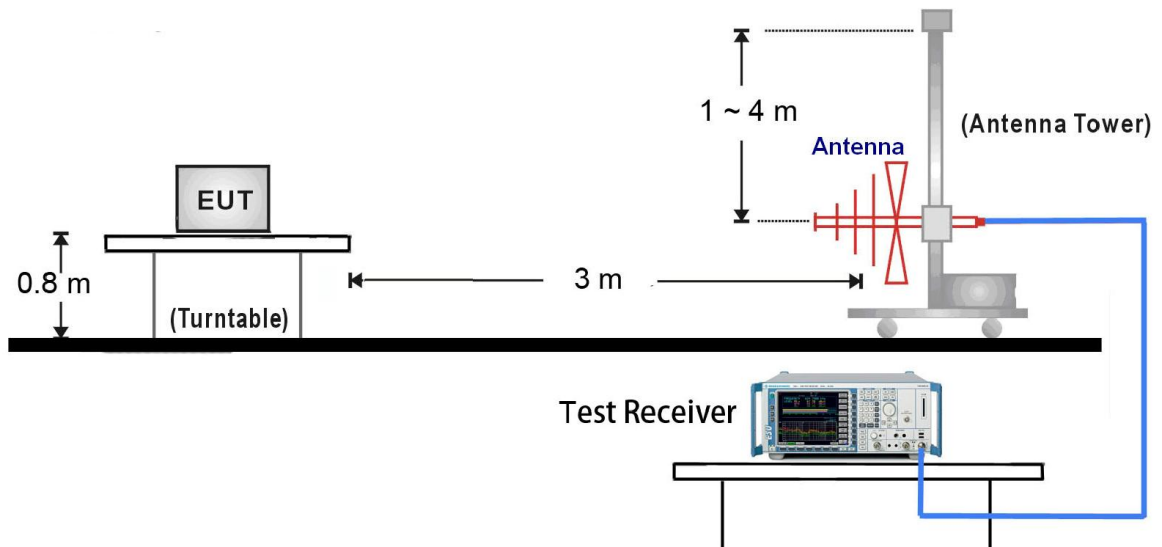

1GHz ~ 18GHz Test Setup:

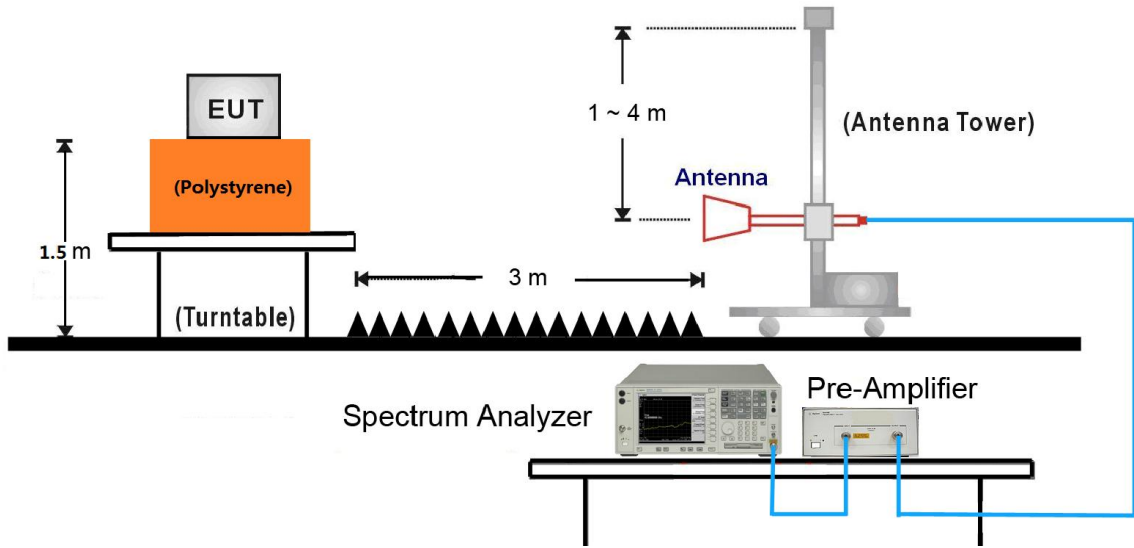

18GHz ~25GHz Test Setup:

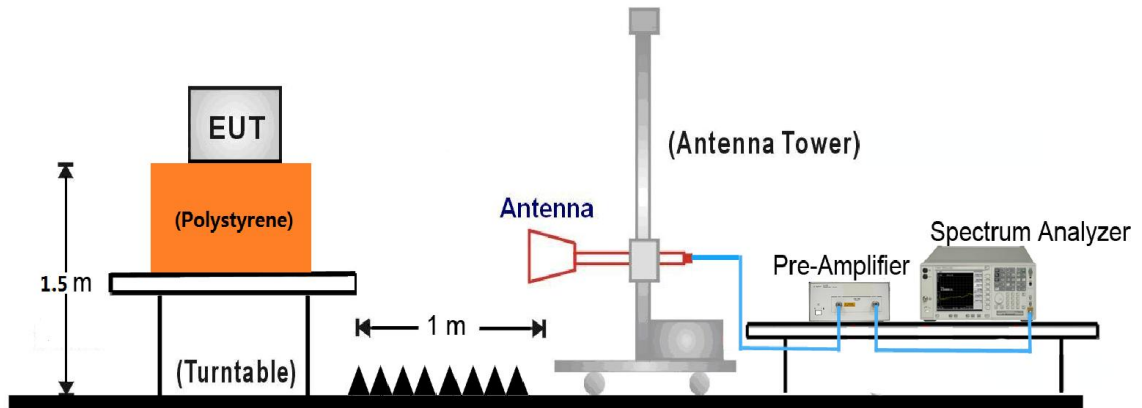

7.9.5. Test Result

Product	DECT Conference Phone	Temperature	25°C
Test Engineer	Jone Zhang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/22
Test Mode:	DH5	Test Channel:	00
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4808.0	39.5	5.9	45.4	74.0	-28.6	Peak	Horizontal
	7553.5	34.5	13.0	47.5	74.0	-26.5	Peak	Horizontal
*	8675.5	34.1	13.0	47.1	78.1	-31.0	Peak	Horizontal
*	9950.5	34.1	16.7	50.8	78.1	-27.3	Peak	Horizontal
	4808.0	42.2	5.9	48.1	74.0	-25.9	Peak	Vertical
	7443.0	34.5	12.9	47.4	74.0	-26.6	Peak	Vertical
*	8684.0	33.4	13.1	46.5	78.1	-31.6	Peak	Vertical
*	9814.5	33.0	16.4	49.4	78.1	-28.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (98.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	DECT Conference Phone	Temperature	25°C
Test Engineer	Jone Zhang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/22
Test Mode:	DH5	Test Channel:	39
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4884.5	40.1	6.0	46.1	74.0	-27.9	Peak	Horizontal
	7468.5	34.4	12.9	47.3	74.0	-26.7	Peak	Horizontal
*	8862.5	34.6	13.3	47.9	79.2	-31.3	Peak	Horizontal
*	10418.0	33.9	17.3	51.2	79.2	-28.0	Peak	Horizontal
	4884.5	42.1	6.0	48.1	74.0	-25.9	Peak	Vertical
	7477.0	33.4	12.9	46.3	74.0	-27.7	Peak	Vertical
*	8743.5	35.0	13.1	48.1	79.2	-31.1	Peak	Vertical
*	10324.5	33.1	17.3	50.4	79.2	-28.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (99.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	DECT Conference Phone	Temperature	25°C
Test Engineer	Jone Zhang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/22
Test Mode:	DH5	Test Channel:	78
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4961.0	40.4	6.1	46.5	74.0	-27.5	Peak	Horizontal
	7417.5	35.7	12.7	48.4	74.0	-25.6	Peak	Horizontal
*	8658.5	35.3	13.0	48.3	79.4	-31.1	Peak	Horizontal
*	9772.0	34.8	16.2	51.0	79.4	-28.4	Peak	Horizontal
	4961.0	41.5	6.1	47.6	74.0	-26.4	Peak	Vertical
	7468.5	35.0	12.9	47.9	74.0	-26.1	Peak	Vertical
*	8769.0	35.3	13.2	48.5	79.2	-30.7	Peak	Vertical
*	10163.0	34.4	17.0	51.4	79.2	-27.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (99.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	DECT Conference Phone	Temperature	25°C
Test Engineer	Jone Zhang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/22
Test Mode:	2DH5	Test Channel:	00
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4808.0	36.2	5.9	42.1	74.0	-31.9	Peak	Horizontal
	7553.5	36.0	13.0	49.0	74.0	-25.0	Peak	Horizontal
*	8735.0	35.4	13.0	48.4	78.1	-29.7	Peak	Horizontal
*	9670.0	35.9	15.4	51.3	78.1	-26.8	Peak	Horizontal
	4808.0	37.2	5.9	43.1	74.0	-30.9	Peak	Vertical
	7553.5	35.3	13.0	48.3	74.0	-25.7	Peak	Vertical
*	8803.0	36.0	13.3	49.3	78.1	-28.8	Peak	Vertical
*	10537.0	34.4	17.7	52.1	78.1	-26.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (98.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	DECT Conference Phone	Temperature	25°C
Test Engineer	Jone Zhang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/22
Test Mode:	2DH5	Test Channel:	39
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4884.5	38.1	6.0	44.1	74.0	-29.9	Peak	Horizontal
	7579.0	34.1	12.8	46.9	74.0	-27.1	Peak	Horizontal
*	8760.5	35.0	13.2	48.2	78.0	-29.8	Peak	Horizontal
*	9950.5	34.1	16.7	50.8	78.0	-27.2	Peak	Horizontal
	4884.5	38.4	6.0	44.4	74.0	-29.6	Peak	Vertical
	7426.0	36.1	12.8	48.9	74.0	-25.1	Peak	Vertical
*	8735.0	35.0	13.0	48.0	78.0	-30.0	Peak	Vertical
*	9857.0	34.7	16.7	51.4	78.0	-26.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (98.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	DECT Conference Phone	Temperature	25°C
Test Engineer	Jone Zhang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/22
Test Mode:	2DH5	Test Channel:	78
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4961.0	37.6	6.1	43.7	74.0	-30.3	Peak	Horizontal
	7528.0	34.8	12.8	47.6	74.0	-26.4	Peak	Horizontal
*	8811.5	35.4	13.3	48.7	77.9	-29.2	Peak	Horizontal
*	10163.0	34.9	17.0	51.9	77.9	-26.0	Peak	Horizontal
	4961.0	37.6	6.1	43.7	74.0	-30.3	Peak	Vertical
	7451.5	35.3	12.9	48.2	74.0	-25.8	Peak	Vertical
*	8616.0	35.1	12.9	48.0	77.9	-29.9	Peak	Vertical
*	9831.5	33.3	16.6	49.9	77.9	-28.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (97.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	DECT Conference Phone	Temperature	25°C
Test Engineer	Jone Zhang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/22
Test Mode:	3DH5	Test Channel:	00
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4808.0	36.4	5.9	42.3	74.0	-31.7	Peak	Horizontal
	7579.0	34.5	12.8	47.3	74.0	-26.7	Peak	Horizontal
*	8667.0	34.7	12.9	47.6	78.1	-30.5	Peak	Horizontal
*	10035.5	35.0	16.7	51.7	78.1	-26.4	Peak	Horizontal
	4808.0	37.6	5.9	43.5	74.0	-30.5	Peak	Vertical
	7434.5	34.9	12.8	47.7	74.0	-26.3	Peak	Vertical
*	8735.0	34.5	13.0	47.5	78.1	-30.6	Peak	Vertical
*	9857.0	33.8	16.7	50.5	78.1	-27.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (98.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	DECT Conference Phone	Temperature	25°C
Test Engineer	Jone Zhang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/22
Test Mode:	3DH5	Test Channel:	39
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4884.5	35.9	6.0	41.9	74.0	-32.1	Peak	Horizontal
	7545.0	34.9	13.0	47.9	74.0	-26.1	Peak	Horizontal
*	8854.0	35.2	13.4	48.6	78.1	-29.5	Peak	Horizontal
*	9942.0	34.9	16.8	51.7	78.1	-26.4	Peak	Horizontal
	4884.5	37.3	6.0	43.3	74.0	-30.7	Peak	Vertical
	7511.0	35.7	12.7	48.4	74.0	-25.6	Peak	Vertical
*	8811.5	34.0	13.3	47.3	78.1	-30.8	Peak	Vertical
*	10299.0	35.4	17.3	52.7	78.1	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (98.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	DECT Conference Phone	Temperature	25°C
Test Engineer	Jone Zhang	Relative Humidity	56%
Test Site	AC1	Test Date	2018/10/22
Test Mode:	3DH5	Test Channel:	78
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4961.0	37.4	6.1	43.5	74.0	-30.5	Peak	Horizontal
	7621.5	35.3	12.6	47.9	74.0	-26.1	Peak	Horizontal
*	8820.0	34.4	13.3	47.7	77.9	-30.2	Peak	Horizontal
*	9916.5	34.6	16.6	51.2	77.9	-26.7	Peak	Horizontal
	4961.0	37.7	6.1	43.8	74.0	-30.2	Peak	Vertical
	7553.5	34.8	13.0	47.8	74.0	-26.2	Peak	Vertical
*	8726.5	35.2	13.0	48.2	77.9	-29.7	Peak	Vertical
*	9865.5	34.0	16.7	50.7	77.9	-27.2	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (97.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: AC1	Time: 2018/10/09 - 00:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT: DECT Conference Phone	Power: By Battery
Worst Case Mode: Transmit at Channel 2402MHz by 3DH5	

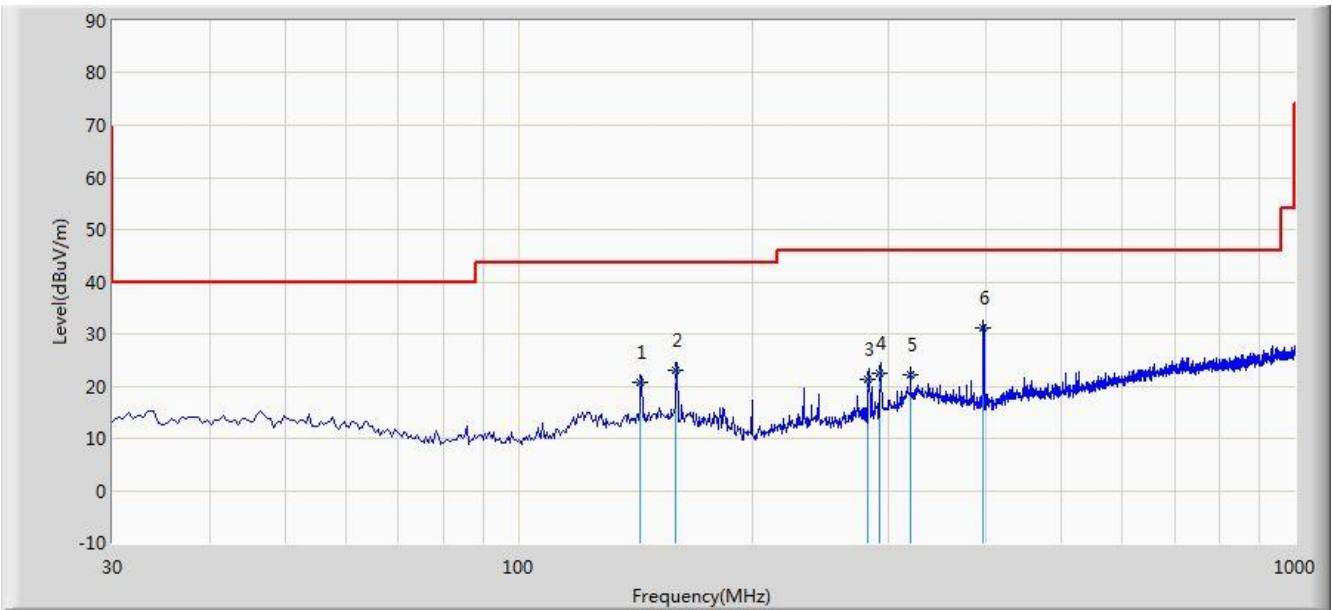


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		143.658	20.815	5.971	-22.685	43.500	14.845	QP
2	*	159.251	23.147	7.862	-20.353	43.500	15.286	QP
3		282.346	21.335	7.365	-24.665	46.000	13.970	QP
4		292.254	22.464	8.256	-23.536	46.000	14.208	QP
5		320.250	22.071	7.120	-23.929	46.000	14.951	QP
6		397.250	31.209	14.680	-14.791	46.000	16.528	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2018/10/09 - 00:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: VULB 9168 _20-2000MHz	Polarity: Vertical
EUT: DECT Conference Phone	Power: By Battery
Worst Case Mode: Transmit at Channel 2402MHz by 3DH5	

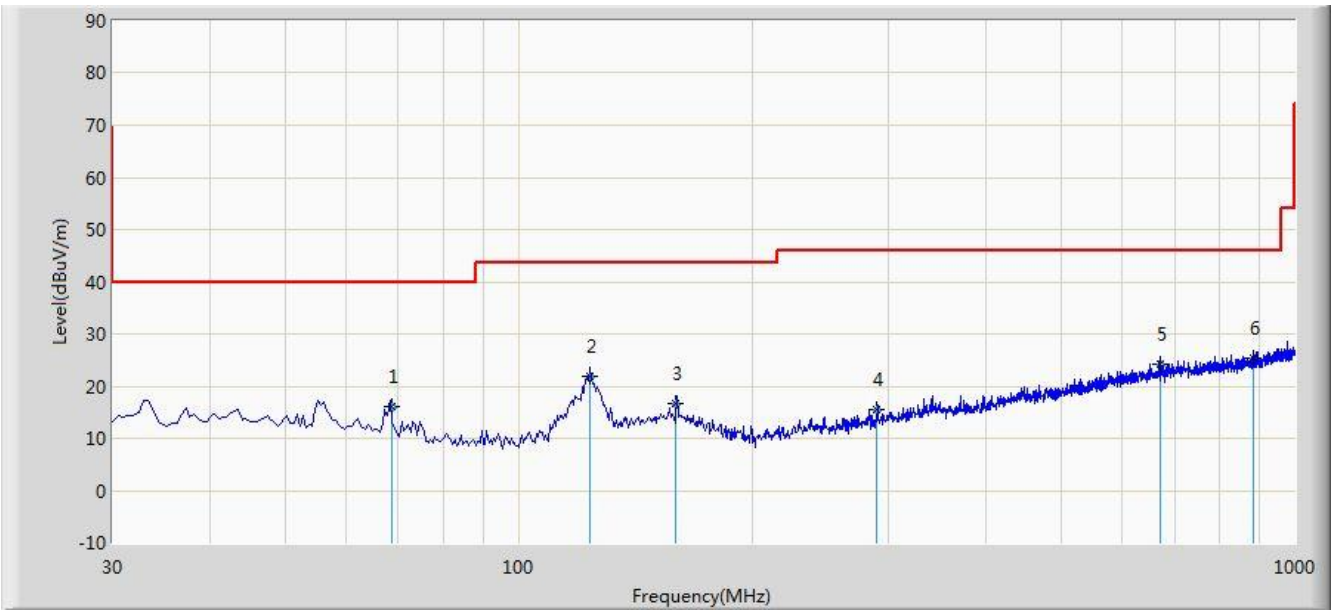

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	68.759	16.141	4.322	-23.859	40.000	11.819	QP
2		123.501	21.813	8.364	-21.687	43.500	13.449	QP
3		159.325	16.540	1.256	-26.960	43.500	15.283	QP
4		289.365	15.393	1.254	-30.607	46.000	14.139	QP
5		672.351	24.311	2.547	-21.689	46.000	21.764	QP
6		884.652	25.229	1.025	-20.771	46.000	24.204	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.10. Radiated Restricted Band Edge Measurement

7.10.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.009 - 0.110	149.9 -150.5	9.0 - 9.2
0.495 -0.505	156.52475 - 156.525225	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	--
8.37625 - 8.38675	1718.8 -1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 -2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 -13.41	3260 - 3267	
16.42 - 16.423	3332 -3339	
16.69475 - 16.69525	334.5 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138	--	

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9			
Frequency [MHz]	Magnetic field strength (H-Field) [uA/m]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	6.37/F(F in kHz)	N/A	300
0.490 - 1.705	63.7/F(F in kHz)	N/A	30
1.705 - 30	0.08	N/A	30
30 - 88	N/A	100	3
88 - 216	N/A	150	3
216 - 960	N/A	200	3
Above 960	N/A	500	3

7.10.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.10.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize


7.10.4. Test Setup

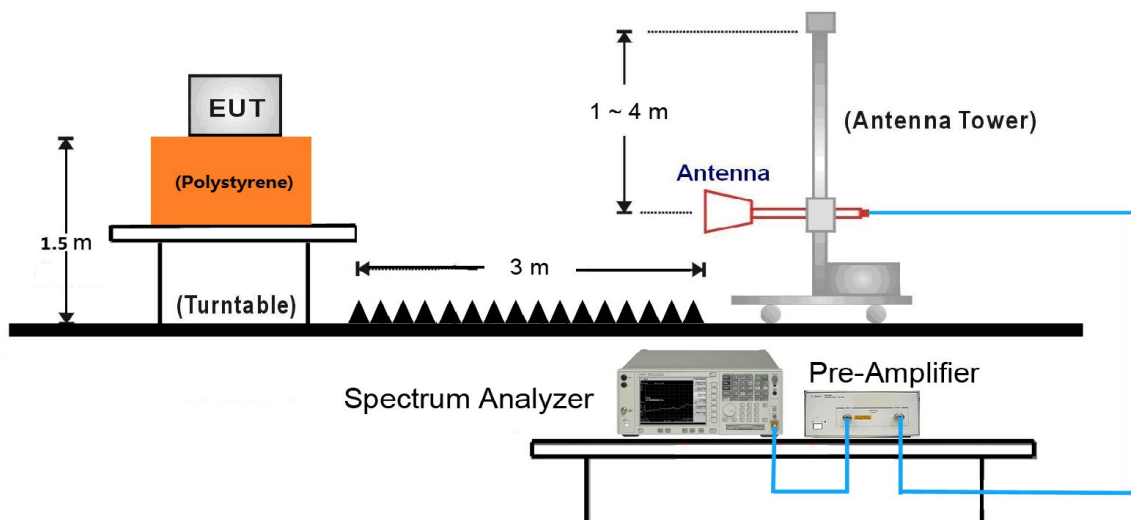

Note: This item was performed with the WIFI antenna connected.

7.10.5. Test Result

Site: AC1	Time: 2018/10/09 - 02:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

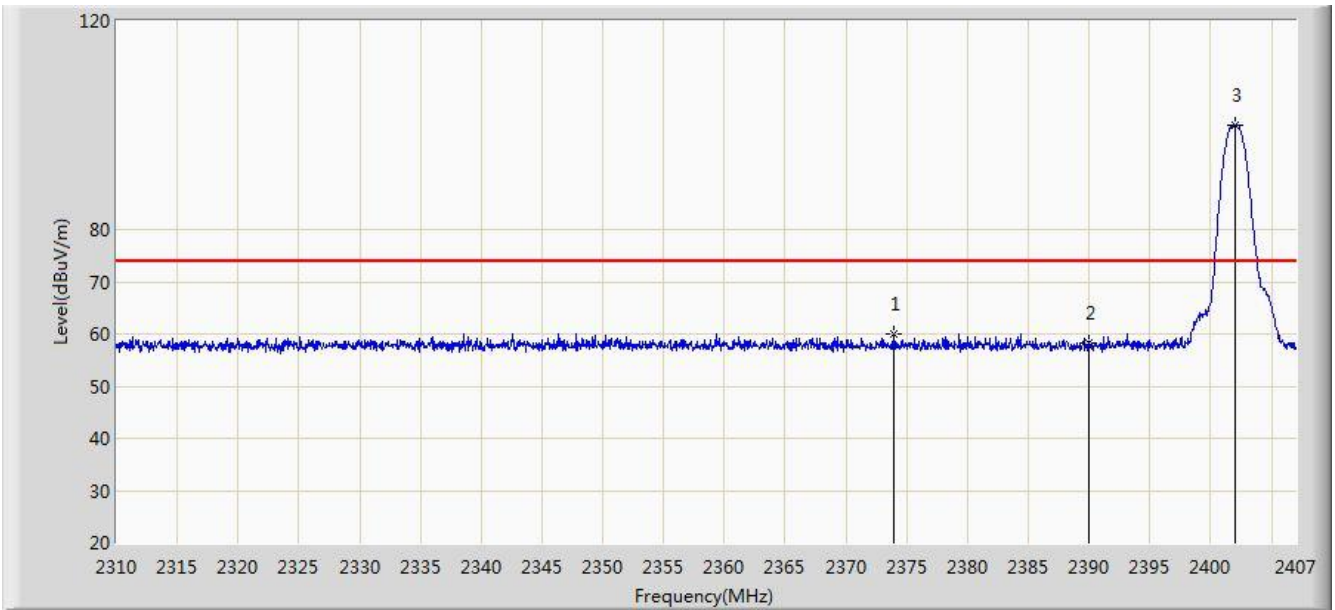


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.971	59.922	27.572	-14.078	74.000	32.350	PK
2			2390.000	58.340	26.013	-15.660	74.000	32.327	PK
3		*	2401.956	99.970	67.665	N/A	N/A	32.305	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 02:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

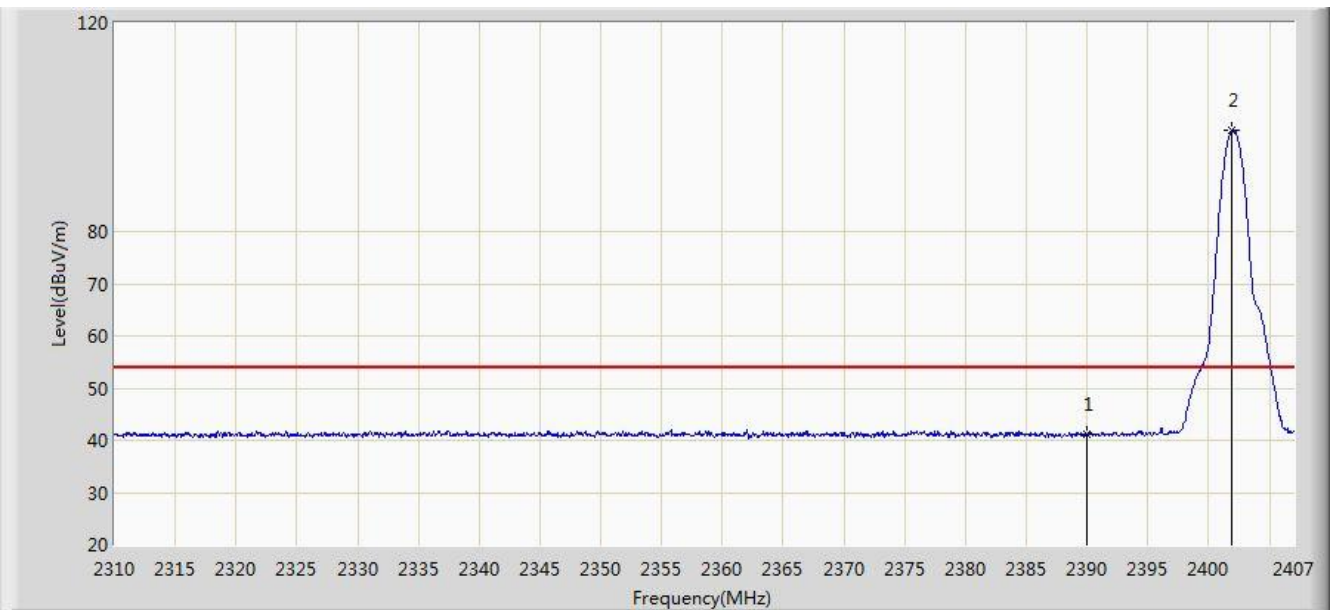


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	41.111	8.784	-12.889	54.000	32.327	AV
2		*	2401.907	99.411	67.106	N/A	N/A	32.305	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 02:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit byDH5 at channel 2402MHz	

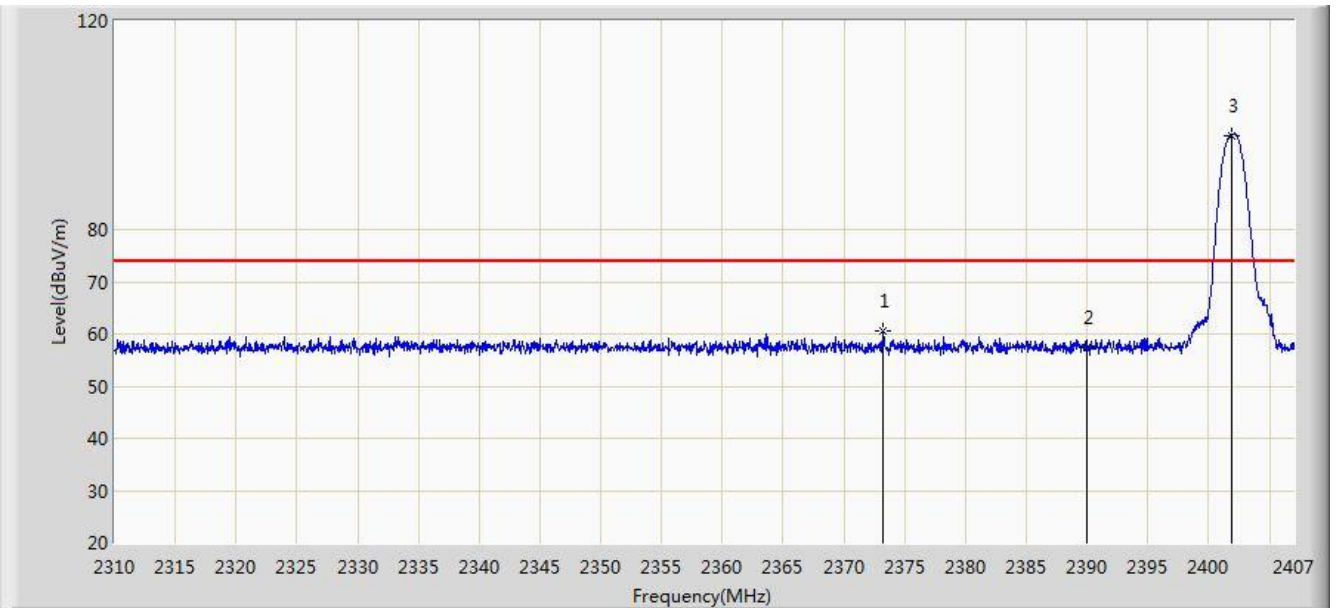


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.196	60.448	28.096	-13.552	74.000	32.351	PK
2			2390.000	57.487	25.160	-16.513	74.000	32.327	PK
3		*	2401.859	98.107	65.802	N/A	N/A	32.305	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 02:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

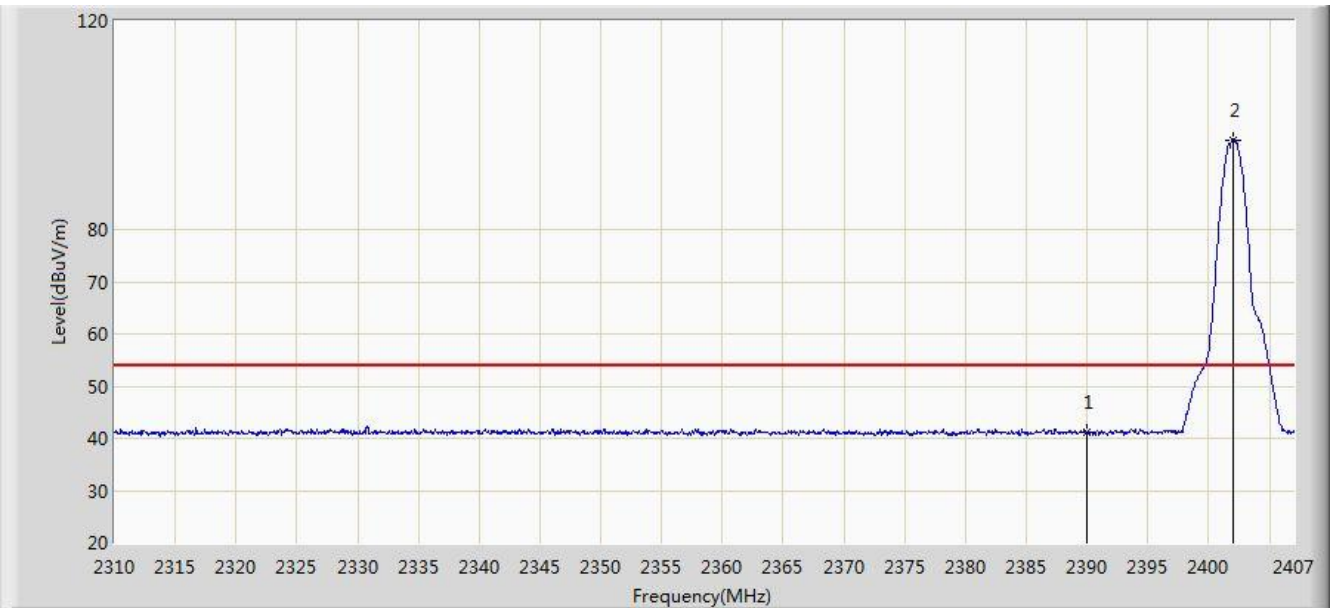


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	41.037	8.710	-12.963	54.000	32.327	AV
2		*	2401.956	97.197	64.892	N/A	N/A	32.305	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 02:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

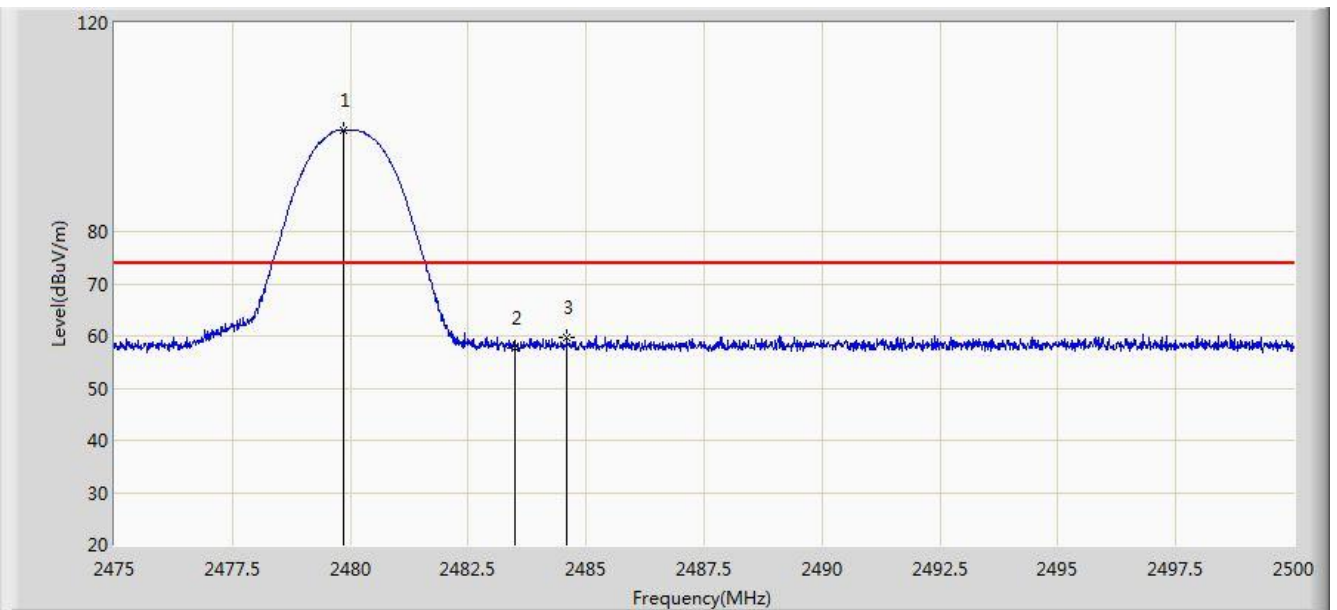


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.850	99.442	67.117	N/A	N/A	32.325	PK
2			2483.500	57.587	25.248	-16.413	74.000	32.340	PK
3			2484.587	59.699	27.356	-14.301	74.000	32.344	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

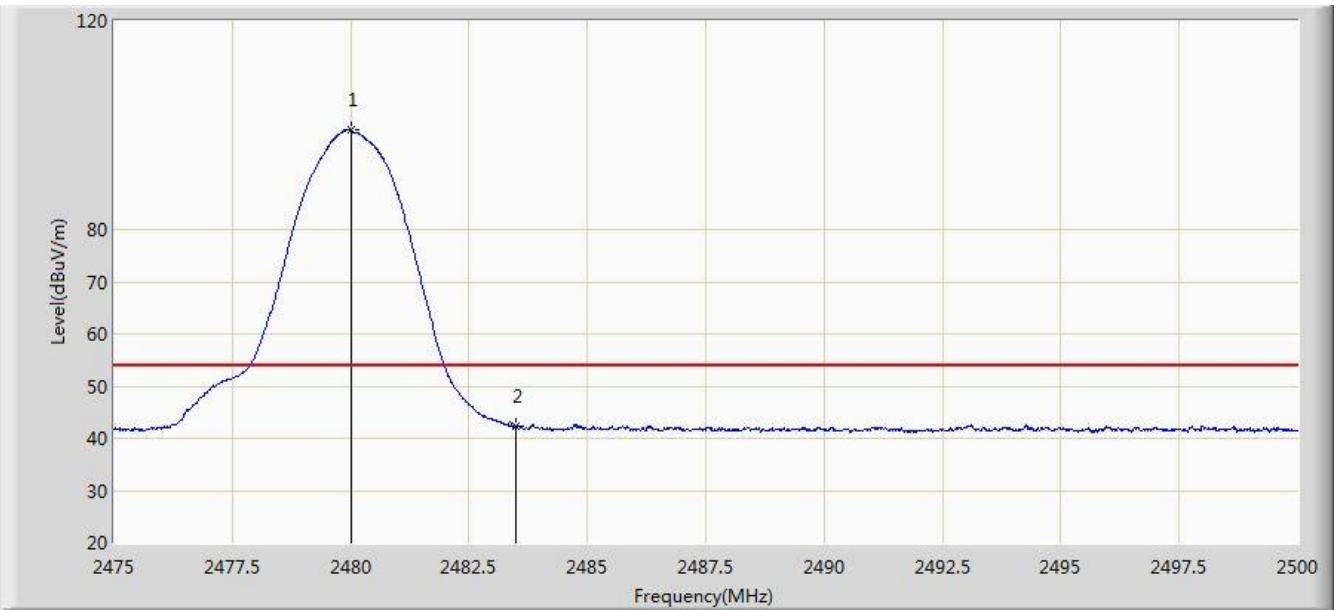


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.000	99.137	66.812	N/A	N/A	32.325	AV
2			2483.500	42.205	9.866	-11.795	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

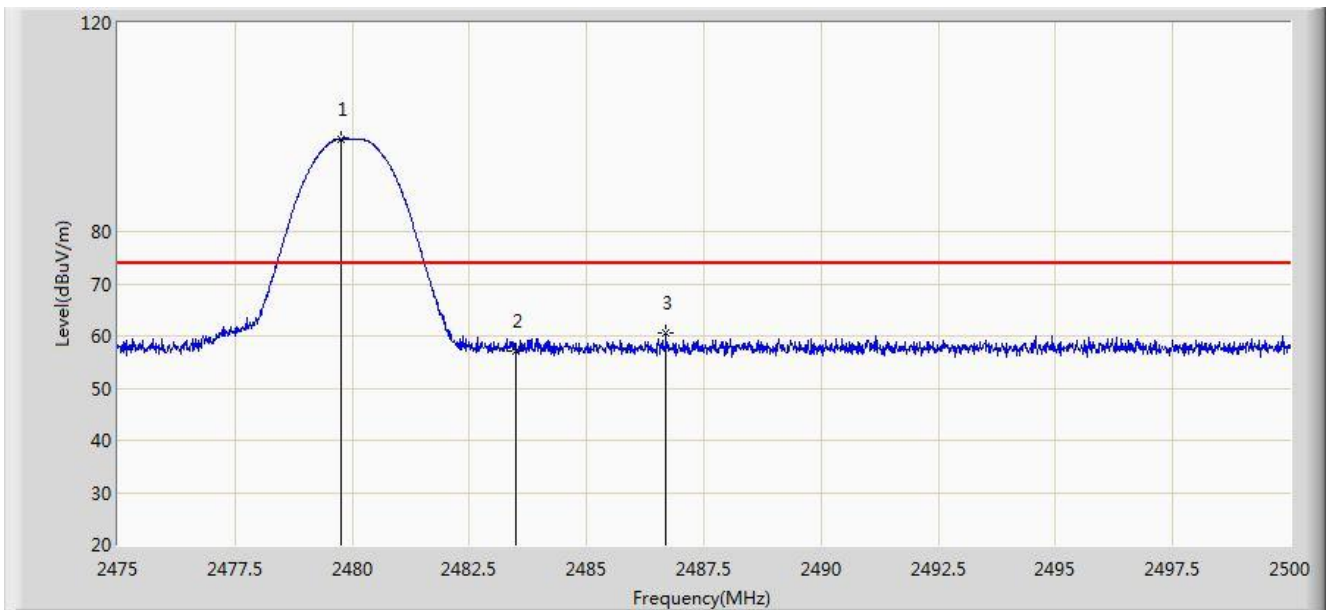


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.750	97.795	65.471	N/A	N/A	32.325	PK
2			2483.500	57.175	24.836	-16.825	74.000	32.340	PK
3			2486.700	60.527	28.175	-13.473	74.000	32.351	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

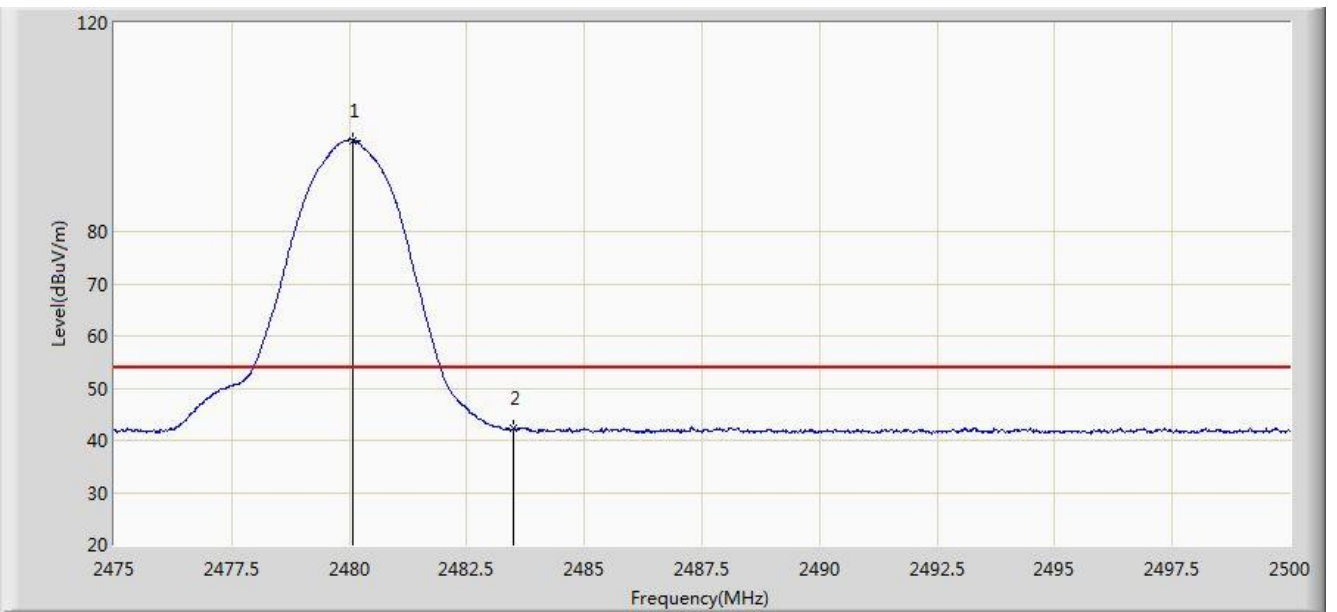


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.075	97.535	65.209	N/A	N/A	32.325	AV
2			2483.500	42.237	9.898	-11.763	54.000	32.340	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

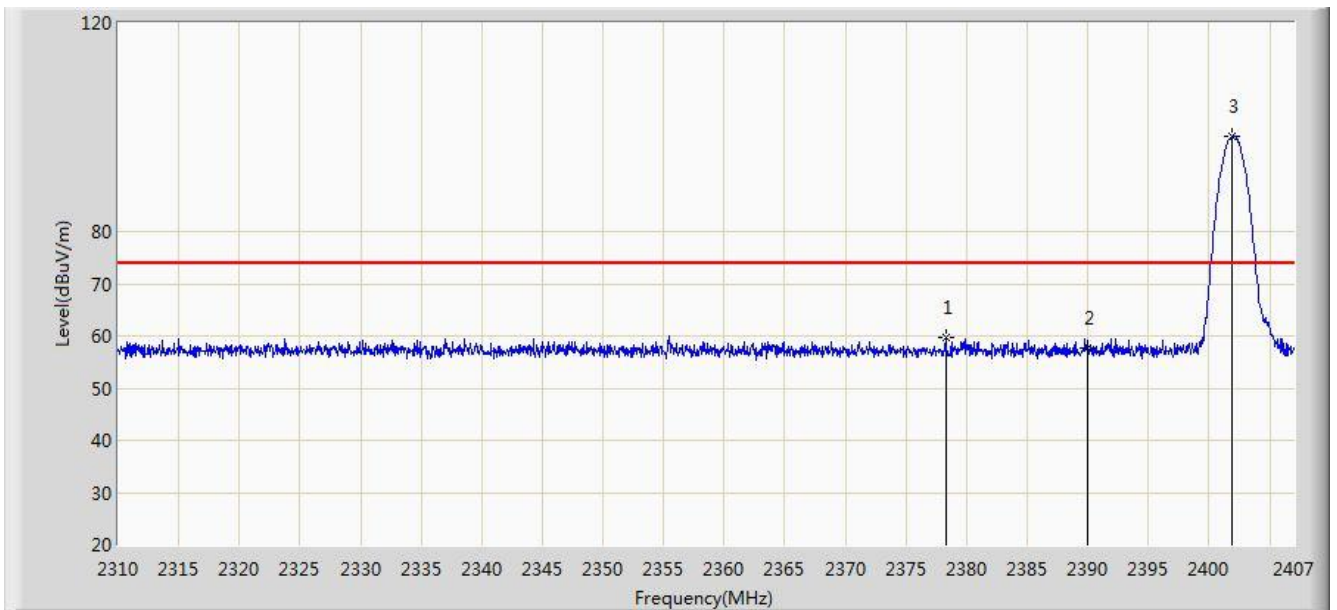


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2378.288	59.578	27.235	-14.422	74.000	32.343	PK
2			2390.000	57.815	25.488	-16.185	74.000	32.327	PK
3		*	2401.859	98.138	65.833	N/A	N/A	32.305	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

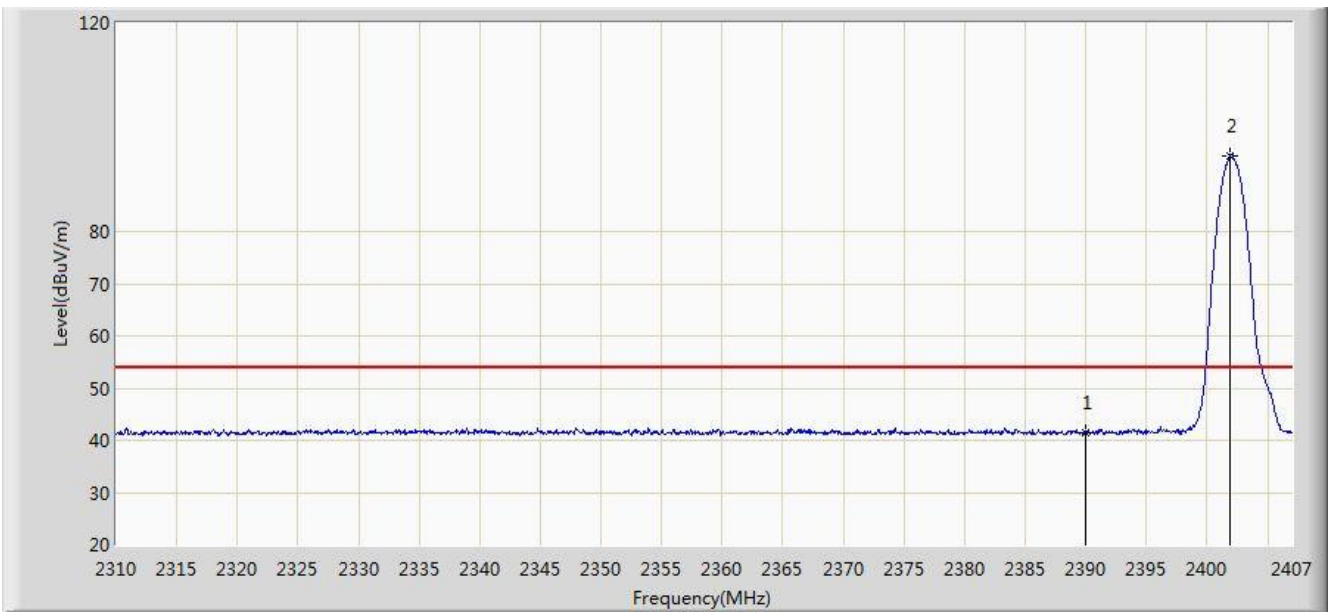


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	41.422	9.095	-12.578	54.000	32.327	AV
2		*	2401.859	94.530	62.225	N/A	N/A	32.305	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

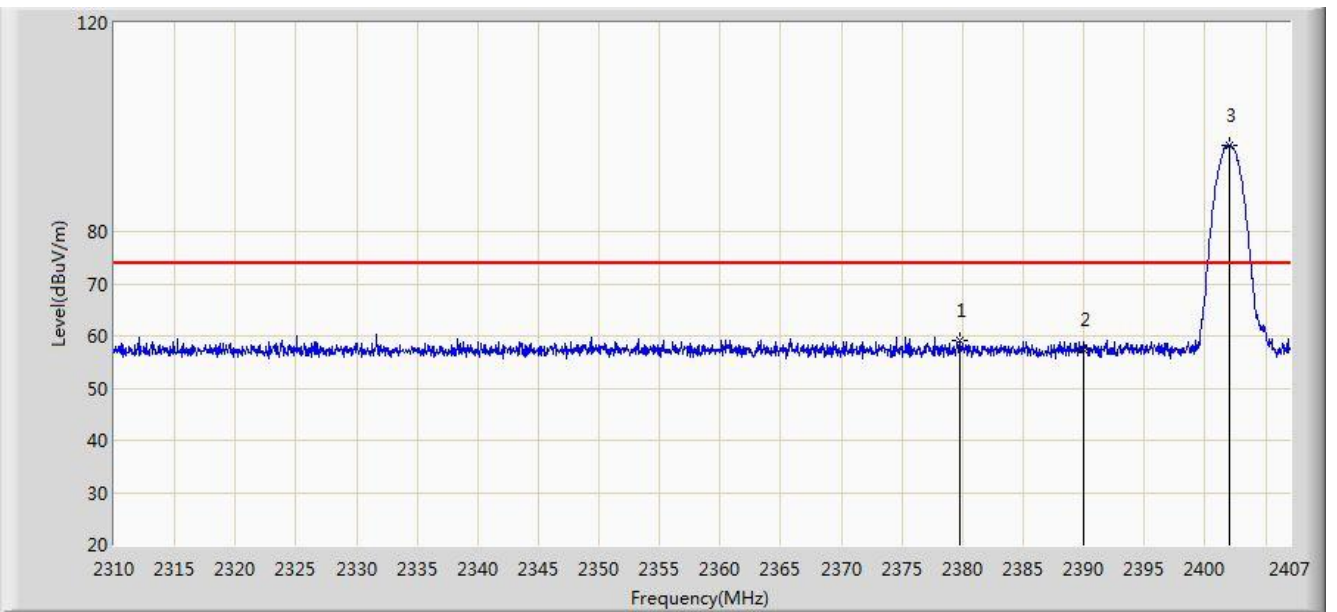


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2379.743	59.197	26.856	-14.803	74.000	32.340	PK
2			2390.000	57.529	25.202	-16.471	74.000	32.327	PK
3		*	2402.053	96.596	64.292	N/A	N/A	32.304	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

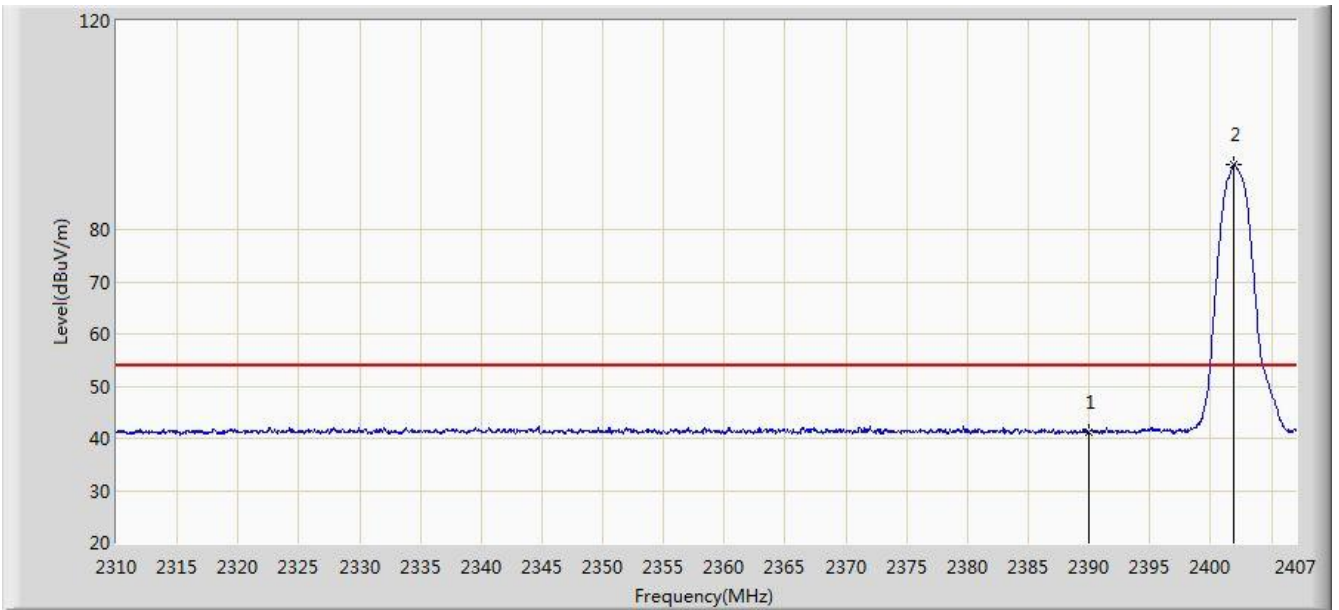


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	41.101	8.774	-12.899	54.000	32.327	AV
2		*	2401.907	92.543	60.238	N/A	N/A	32.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

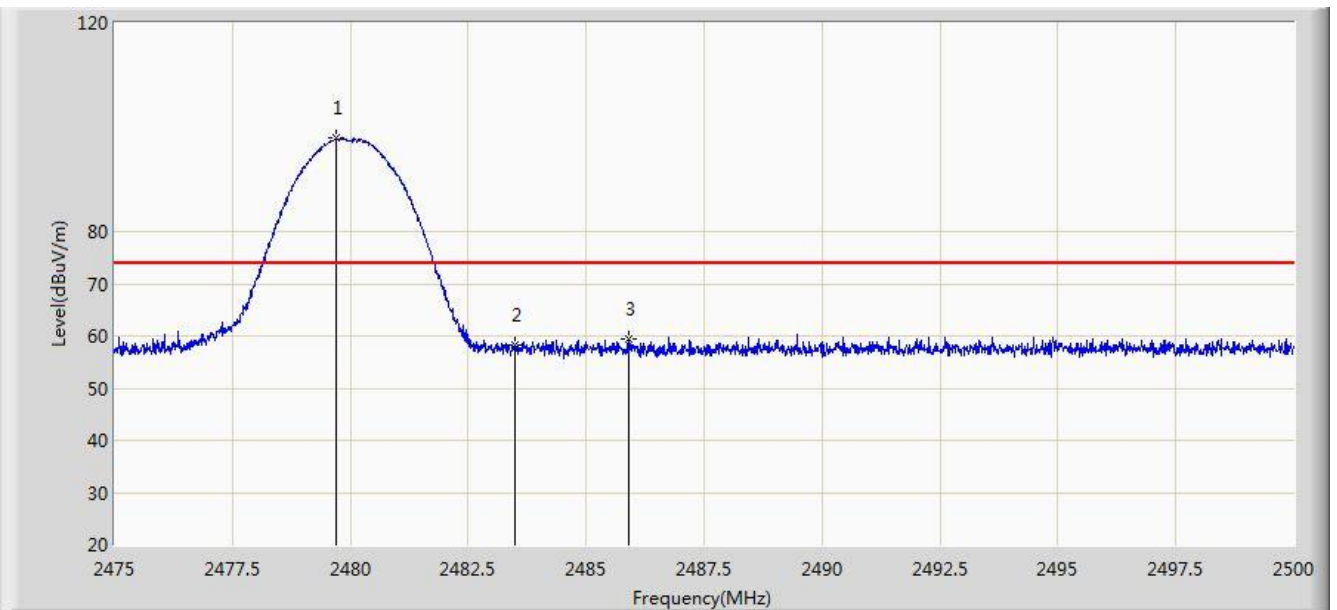


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.712	97.870	65.546	N/A	N/A	32.325	PK
2			2483.500	58.117	25.778	-15.883	74.000	32.340	PK
3			2485.887	59.549	27.200	-14.451	74.000	32.349	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

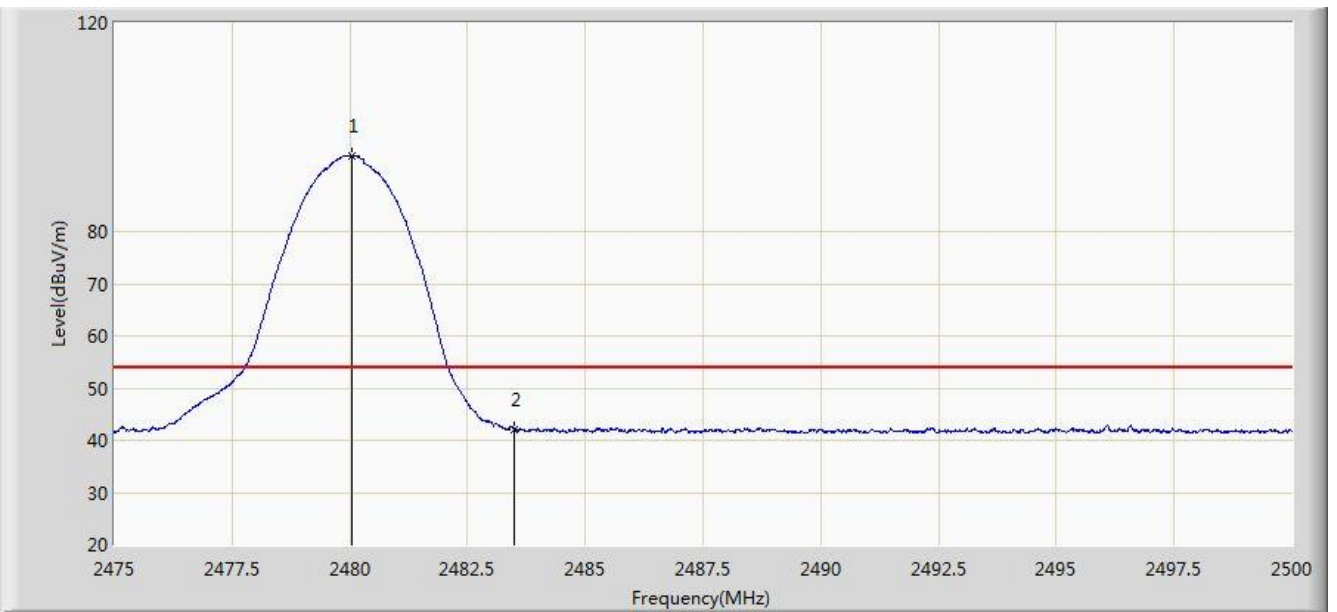


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.038	94.536	62.210	N/A	N/A	32.325	AV
2			2483.500	41.947	9.608	-12.053	54.000	32.340	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

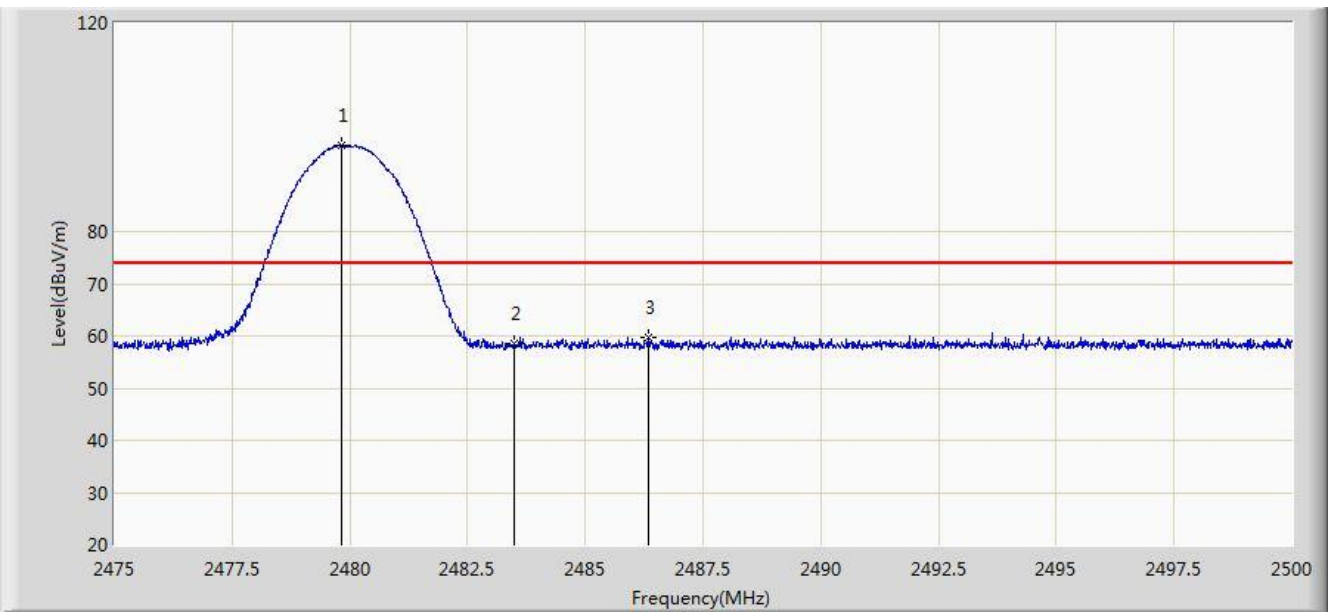


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.812	96.551	64.226	N/A	N/A	32.325	PK
2			2483.500	58.450	26.111	-15.550	74.000	32.340	PK
3			2486.337	59.569	27.219	-14.431	74.000	32.351	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

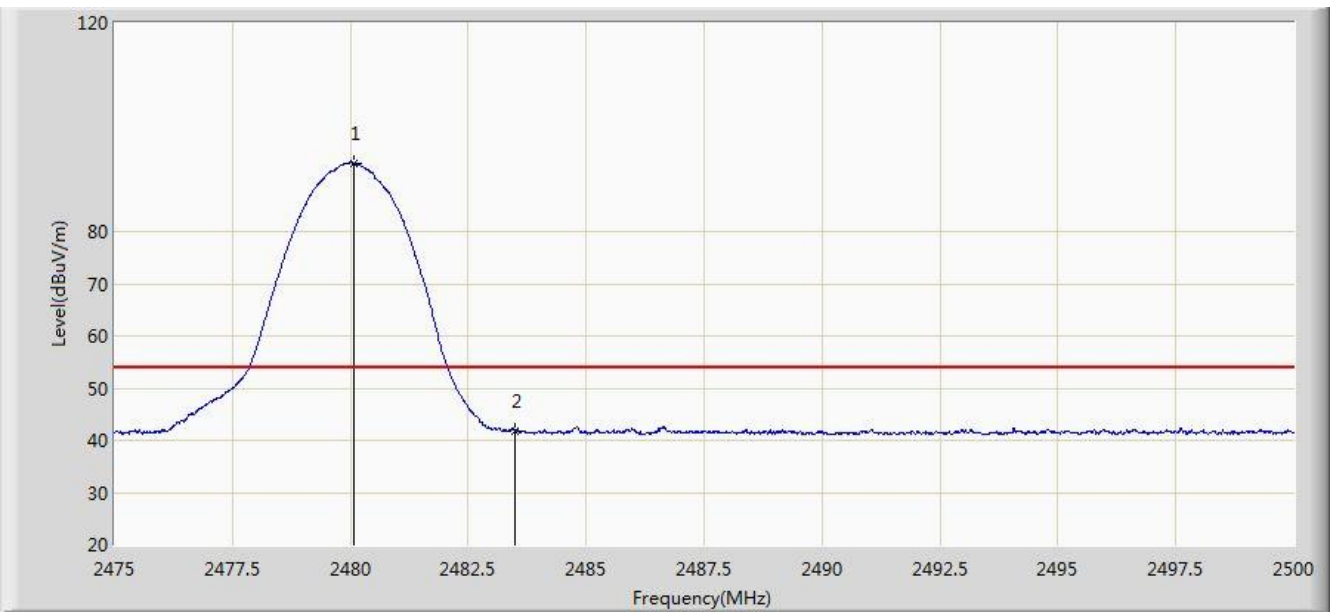


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.075	93.182	60.856	N/A	N/A	32.325	AV
2			2483.500	41.853	9.514	-12.147	54.000	32.340	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

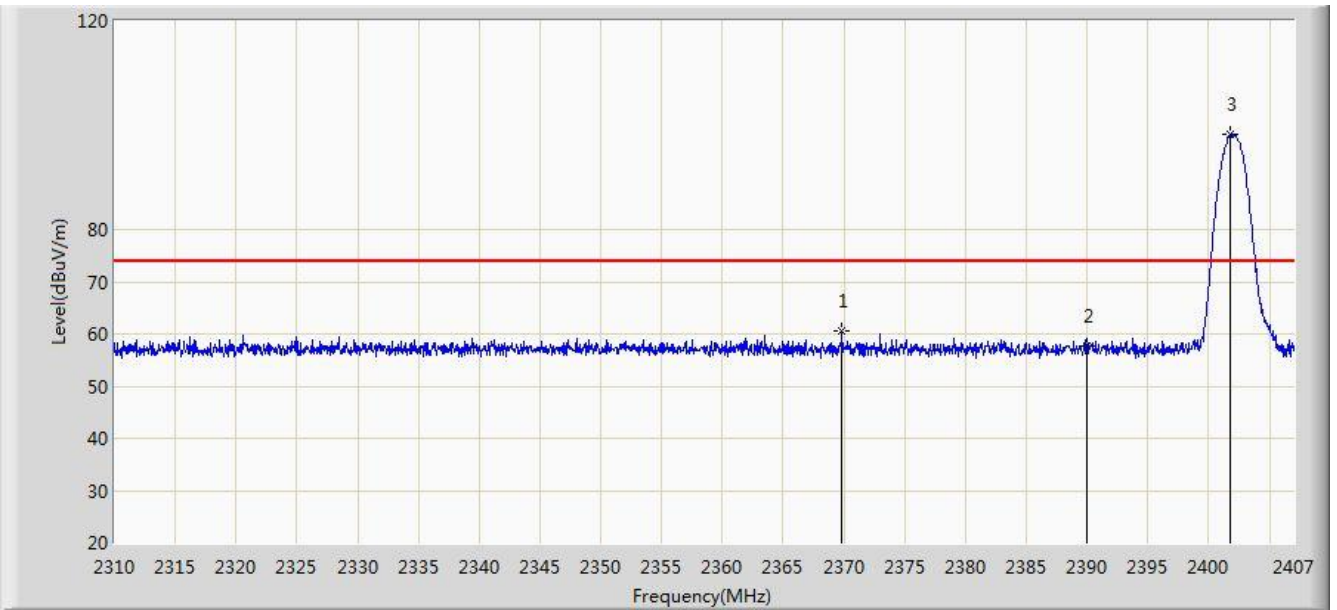


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2369.849	60.478	28.120	-13.522	74.000	32.358	PK
2			2390.000	57.545	25.218	-16.455	74.000	32.327	PK
3		*	2401.811	98.122	65.817	N/A	N/A	32.305	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

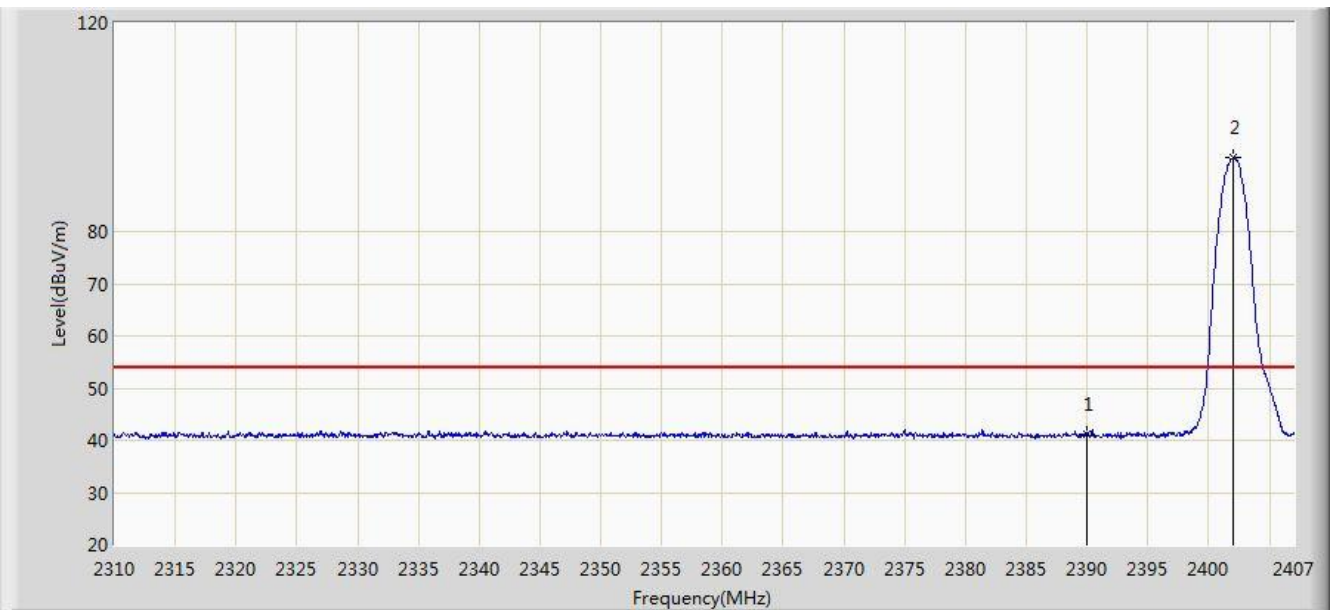


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	41.193	8.866	-12.807	54.000	32.327	AV
2		*	2402.053	94.121	61.817	N/A	N/A	32.304	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

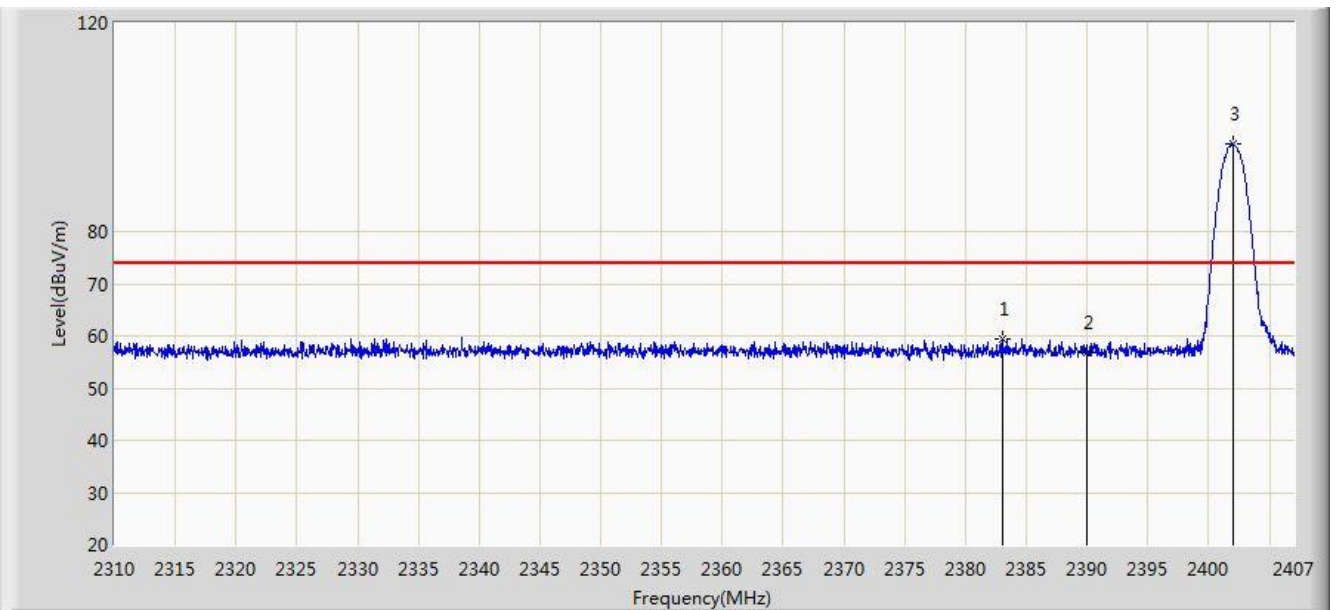


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.041	59.317	26.981	-14.683	74.000	32.336	PK
2			2390.000	56.833	24.506	-17.167	74.000	32.327	PK
3		*	2401.956	96.892	64.587	N/A	N/A	32.305	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

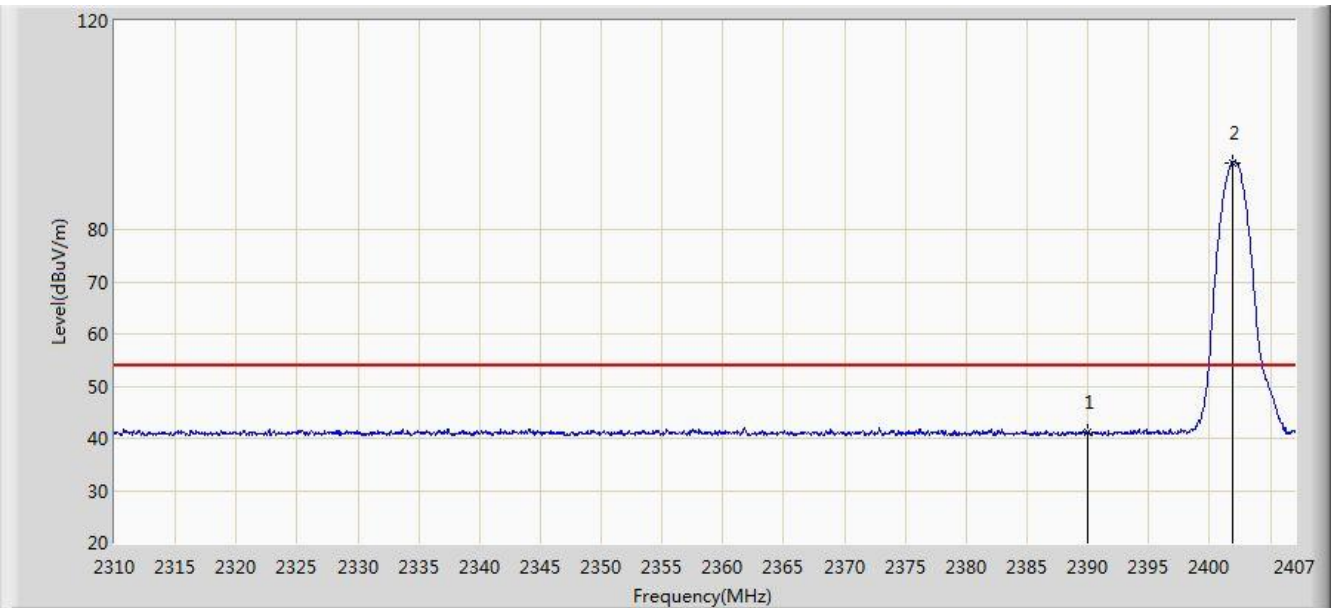


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	41.046	8.719	-12.954	54.000	32.327	AV
2		*	2401.859	92.849	60.544	N/A	N/A	32.305	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

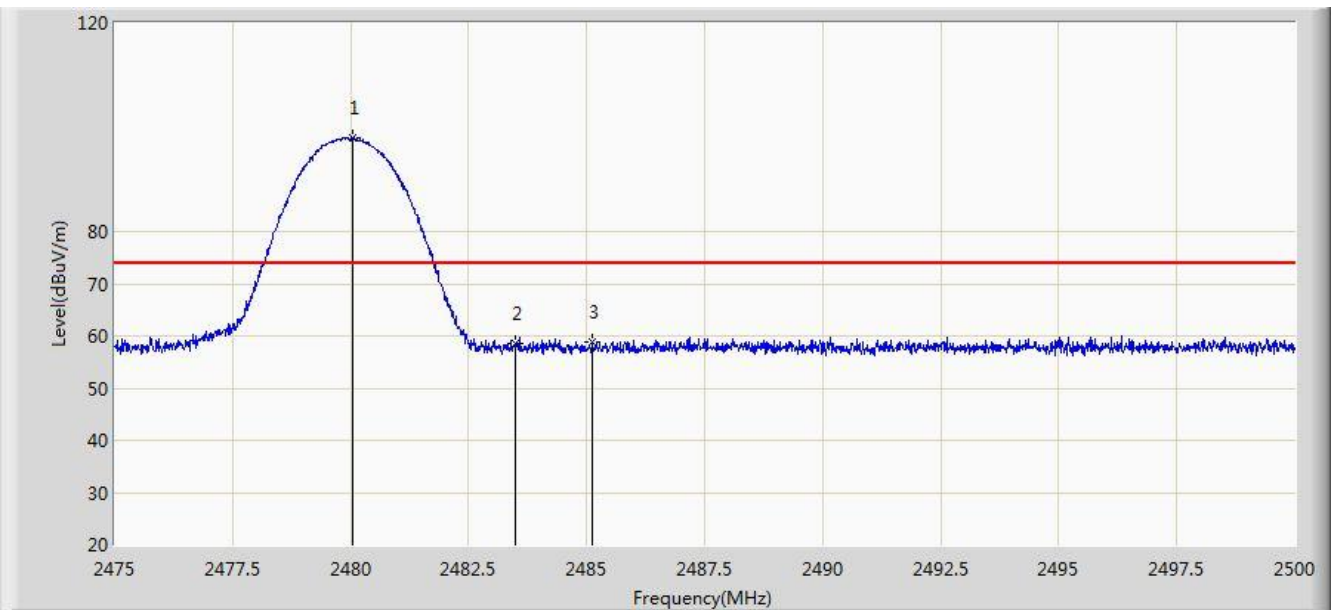


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.038	97.928	65.602	N/A	N/A	32.325	PK
2			2483.500	58.420	26.081	-15.580	74.000	32.340	PK
3			2485.113	58.980	26.635	-15.020	74.000	32.346	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

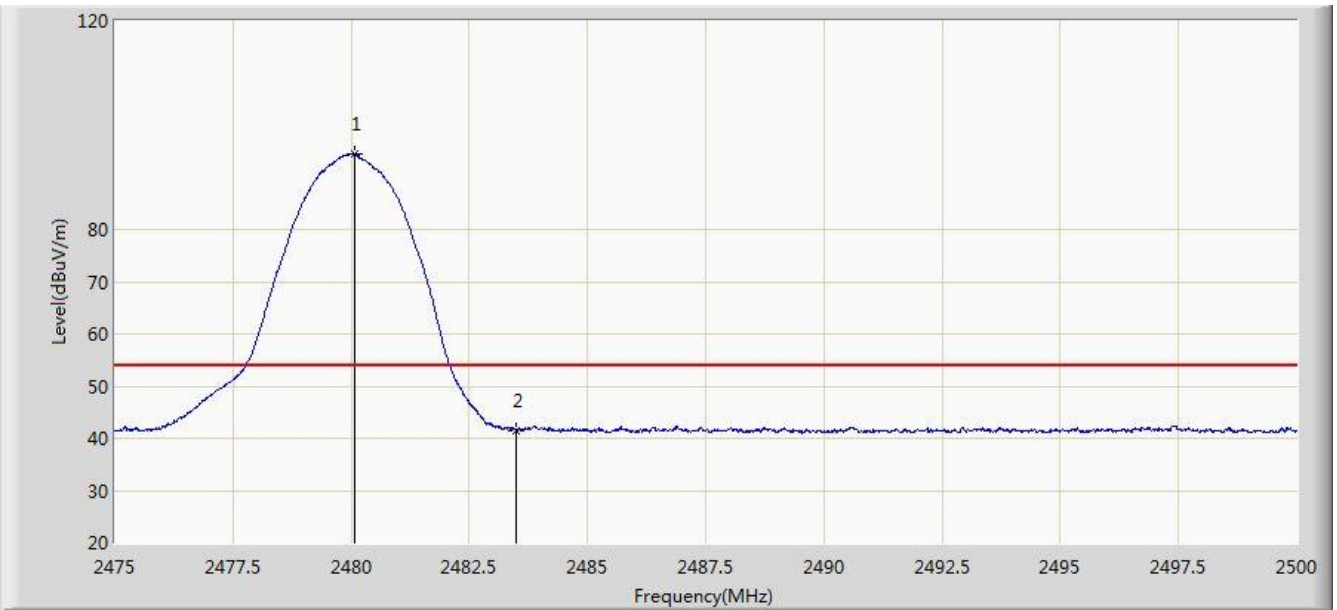


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.075	94.392	62.066	N/A	N/A	32.325	AV
2			2483.500	41.585	9.246	-12.415	54.000	32.340	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

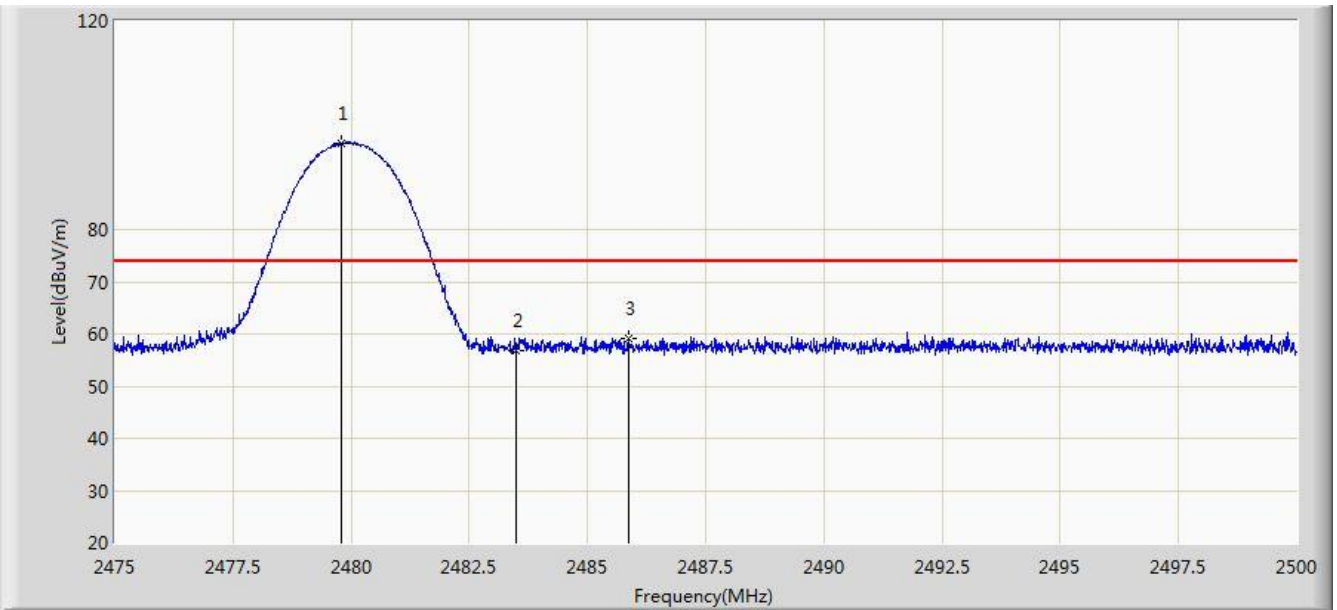


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.800	96.561	64.236	N/A	N/A	32.325	PK
2			2483.500	56.706	24.367	-17.294	74.000	32.340	PK
3			2485.875	58.996	26.648	-15.004	74.000	32.349	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/09 - 03:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DECT Conference Phone	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

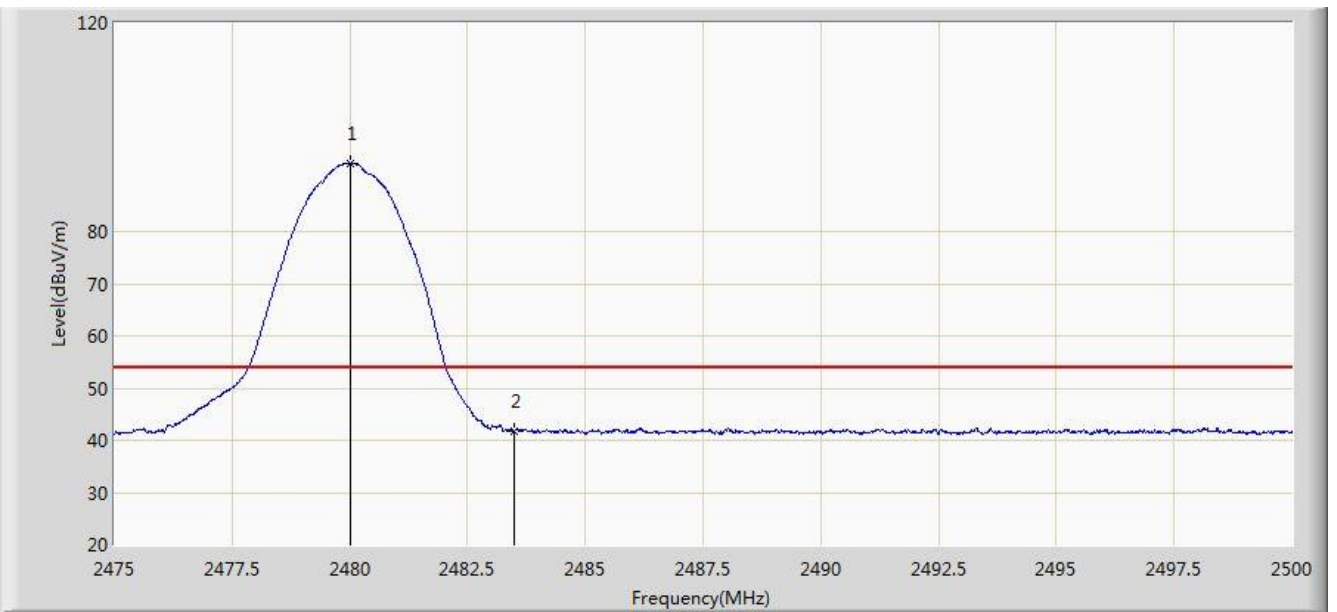

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.000	93.107	60.782	N/A	N/A	32.325	AV
2			2483.500	41.771	9.432	-12.229	54.000	32.340	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.11. AC Conducted Emissions Measurement


7.11.1. Test Limit

FCC 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.11.2. Test Setup

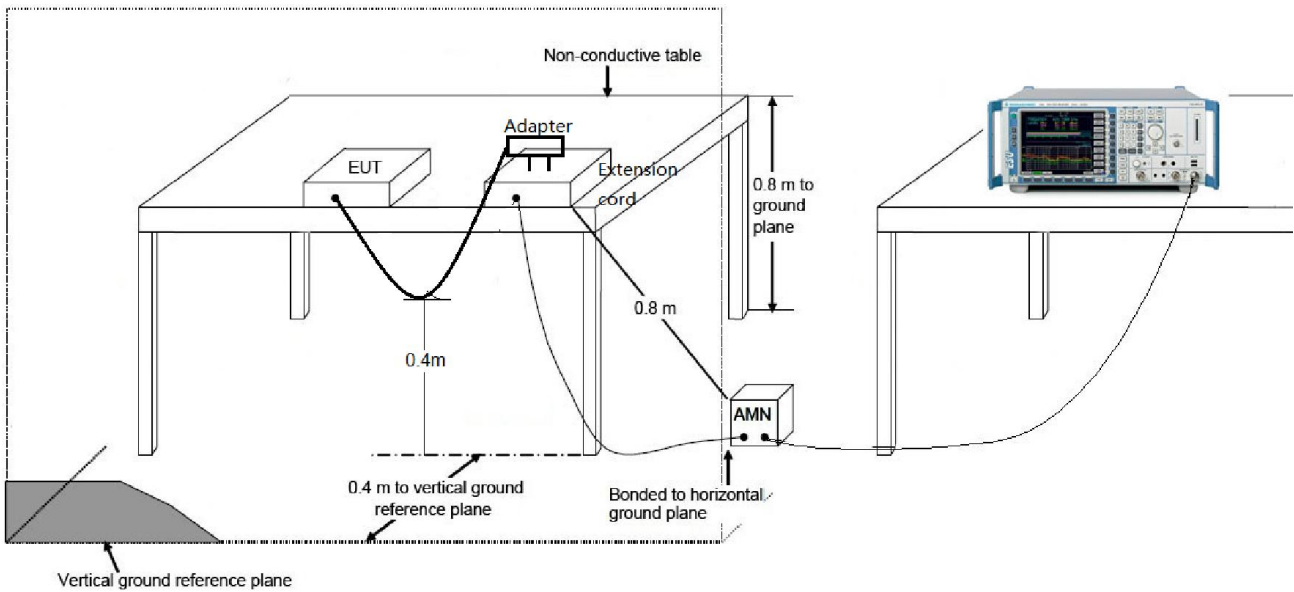

7.11.3. Test Result

Site: SR2	Time: 2018/10/25 - 14:42
Limit: FCC_Part15.207_CE_AC Power	Engineer: Flag Yang
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: DECT Conference Phone	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2402MHz By DH5	

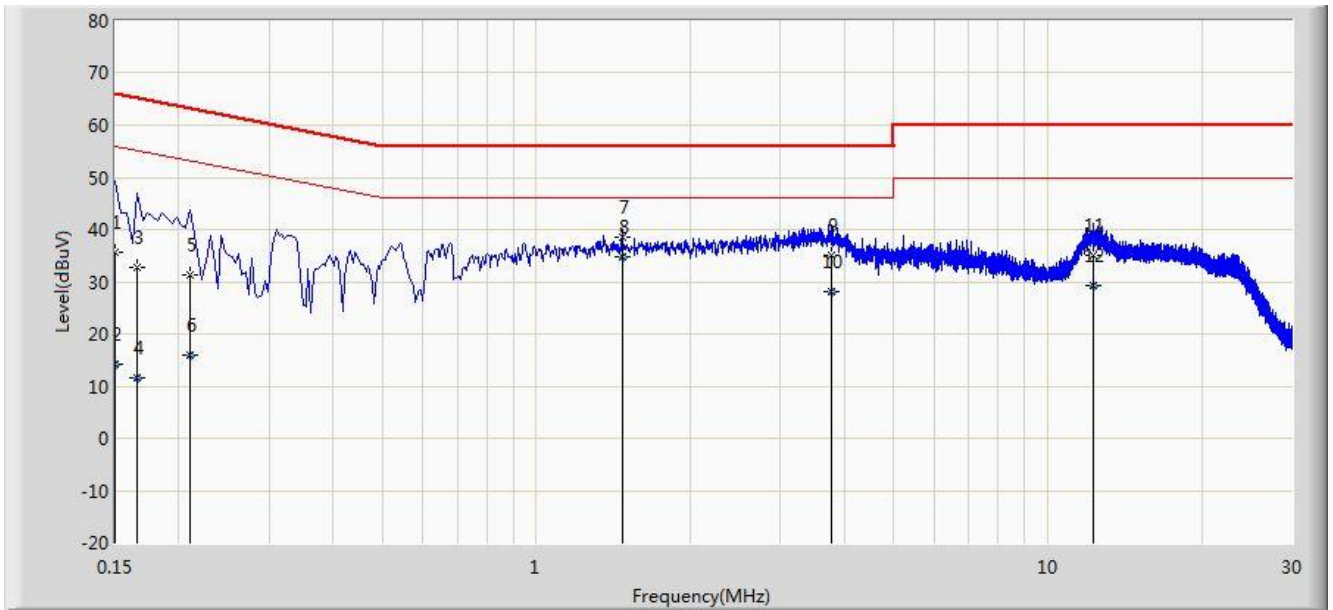


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	35.784	24.622	-30.216	66.000	11.161	QP
2			0.150	14.220	3.058	-41.780	56.000	11.161	AV
3			0.166	32.674	22.582	-32.484	65.158	10.092	QP
4			0.166	11.512	1.420	-43.646	55.158	10.092	AV
5			0.210	31.331	21.323	-31.875	63.205	10.008	QP
6			0.210	15.870	5.862	-37.335	53.205	10.008	AV
7			1.474	38.606	28.457	-17.394	56.000	10.149	QP
8			1.474	34.744	24.595	-11.256	46.000	10.149	AV
9			3.782	34.955	24.725	-21.045	56.000	10.230	QP
10		*	3.782	28.071	17.840	-17.929	46.000	10.230	AV
11			12.278	35.047	24.823	-24.953	60.000	10.223	QP
12			12.278	29.297	19.074	-20.703	50.000	10.223	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2018/10/25 - 14:47
Limit: FCC_Part15.207_CE_AC Power	Engineer: Flag Yang
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: DECT Conference Phone	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2402MHz By DH5	

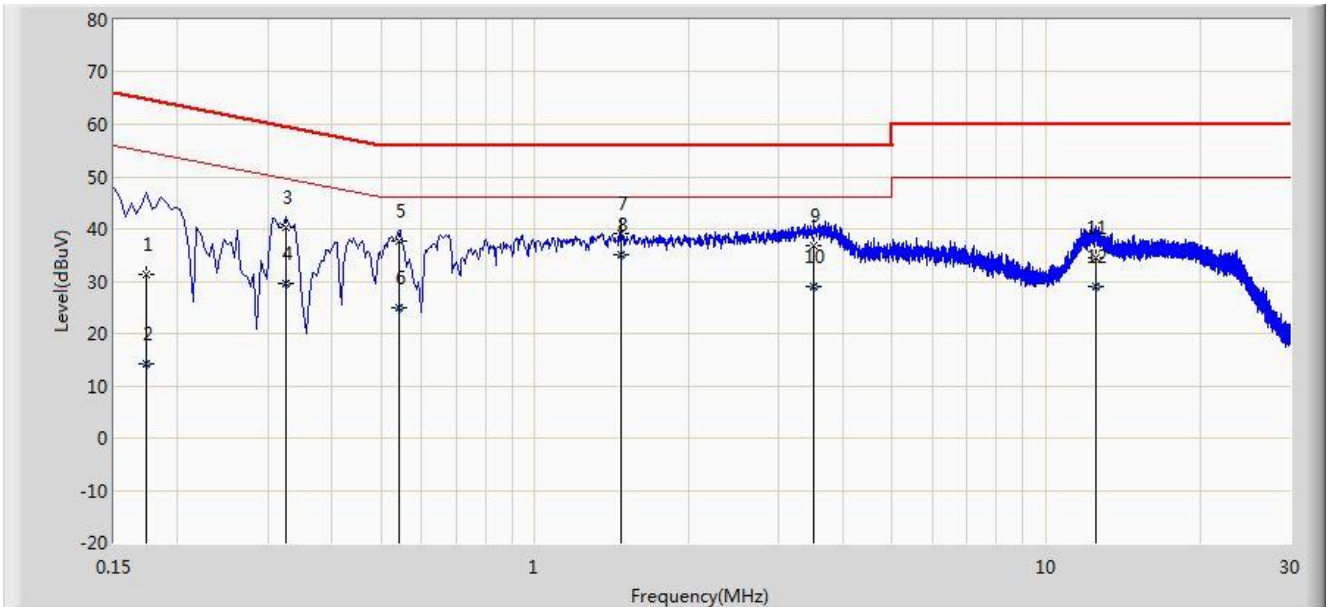

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.174	31.395	21.321	-33.373	64.767	10.074	QP
2			0.174	14.280	4.207	-40.487	54.767	10.074	AV
3			0.326	40.213	30.087	-19.339	59.552	10.126	QP
4			0.326	29.571	19.445	-19.981	49.552	10.126	AV
5			0.542	37.819	27.576	-18.181	56.000	10.243	QP
6			0.542	24.949	14.705	-21.051	46.000	10.243	AV
7			1.474	39.071	28.921	-16.929	56.000	10.150	QP
8			1.474	35.095	24.945	-10.905	46.000	10.150	AV
9			3.506	36.678	26.411	-19.322	56.000	10.267	QP
10		*	3.506	29.094	18.827	-16.906	46.000	10.267	AV
11			12.498	34.600	24.346	-25.400	60.000	10.254	QP
12			12.498	29.110	18.856	-20.890	50.000	10.254	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **DECT Conference Phone** is in compliance with Part 15C of the FCC Rule and RSS-247 of the ISED Rules.

_____ The End _____