



Channel 11 (2462MHz)


100kHz PSD reference Level

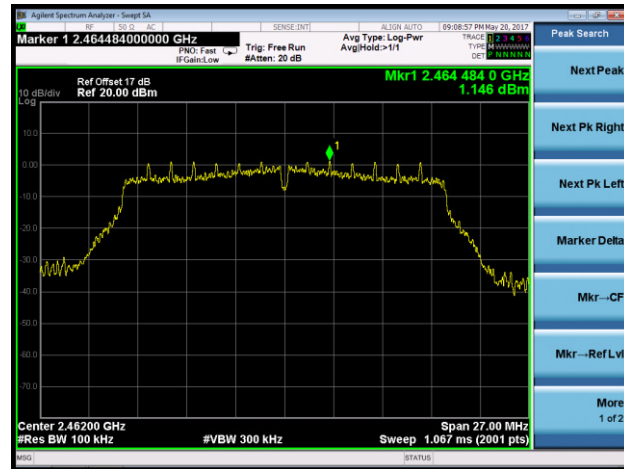

High Band Edge

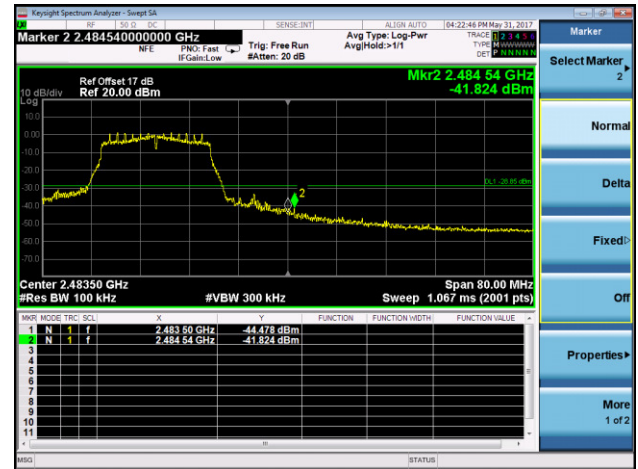


Spurious Emission

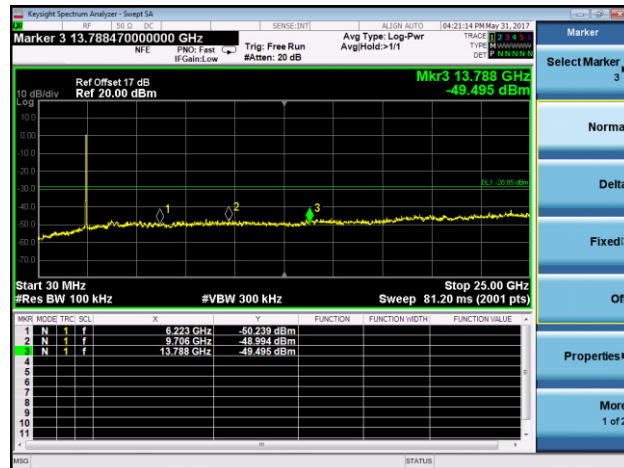


802.11n-HT40 Out-of-Band Emissions

Channel 03 (2422MHz)


100kHz PSD reference Level

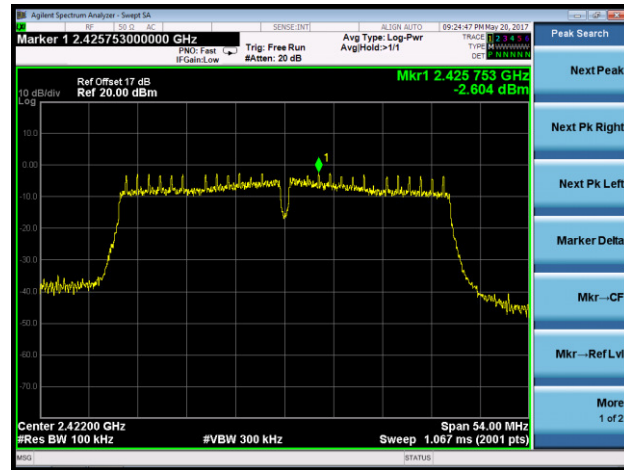

Low Band Edge

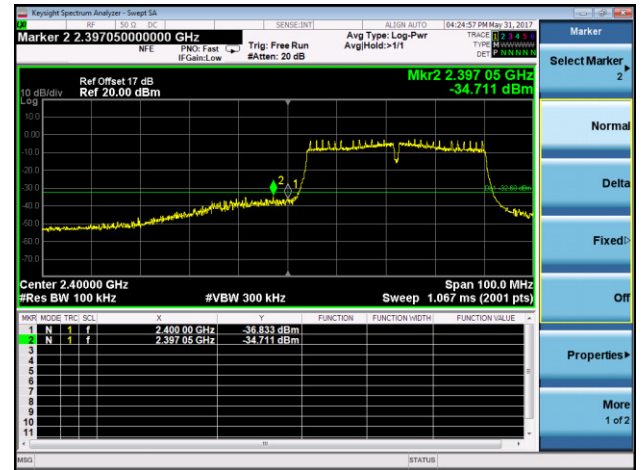


Spurious Emission

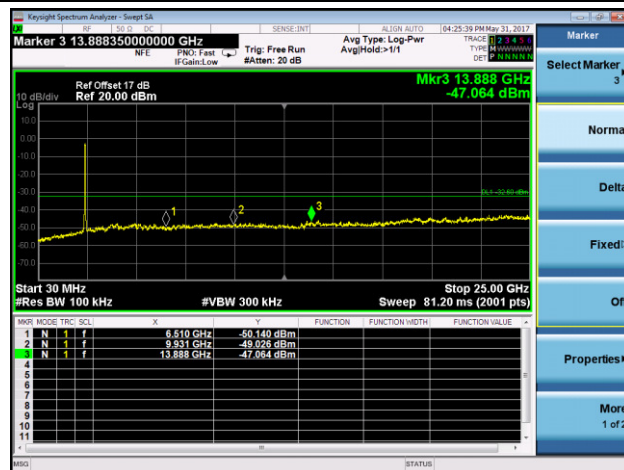


Channel 06 (2437MHz)

100kHz PSD reference Level

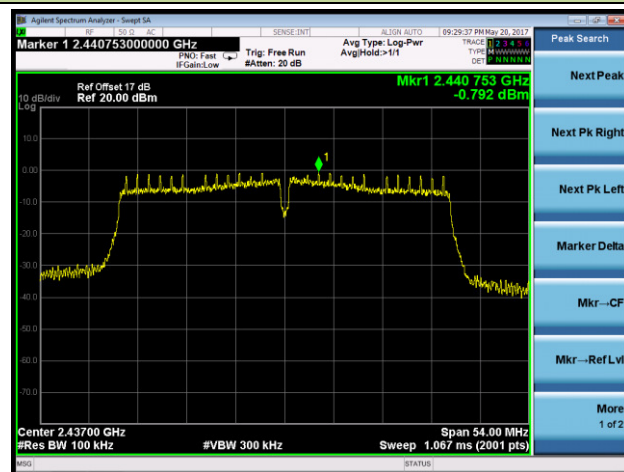


Spurious Emission

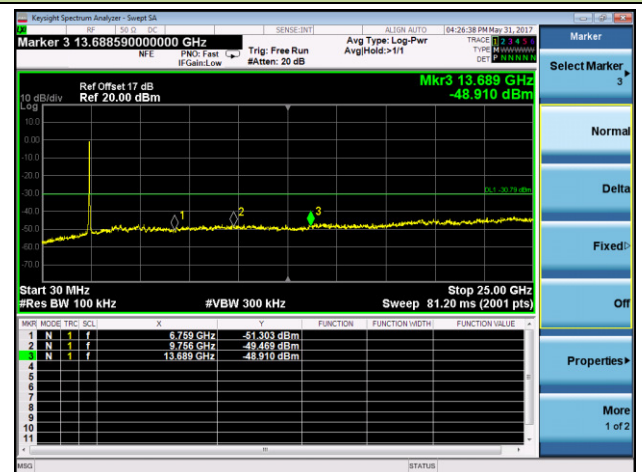


Channel 09 (2452MHz)


100kHz PSD reference Level

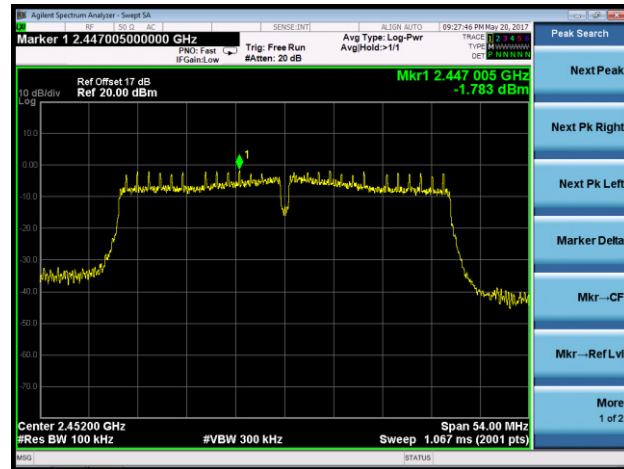

High Band Edge

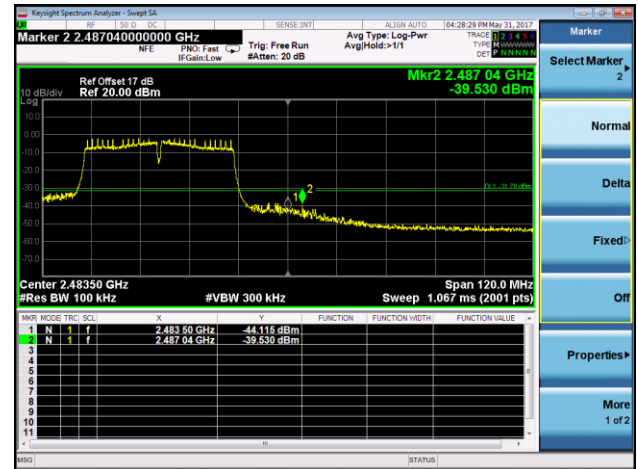

Spurious Emission

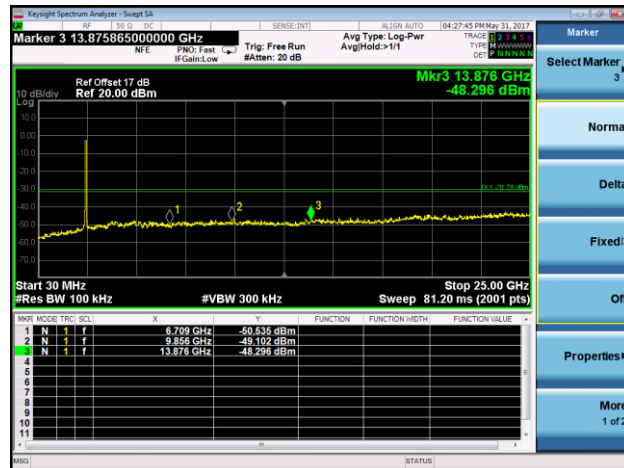

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

KDB 558074 D01v04 - Section 12.2.3 (quasi-peak measurements)

KDB 558074 D01v04 - Section 12.2.4 (peak power measurements)

KDB 558074 D01v04 - Section 12.2.5 (average power measurements)

7.6.3. Test Setting

Peak Field Strength Measurements

Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

RBW = as specified in Table 1

VBW = 3MHz

Detector = peak

Sweep time = auto couple

Trace mode = max hold

Trace was allowed to stabilize

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

RBW = 1MHz

VBW \geq 1/T

De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode

Detector = Peak


Sweep time = auto

Trace mode = max hold


Allow max hold to run for at least 50 times (1/duty cycle) traces

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

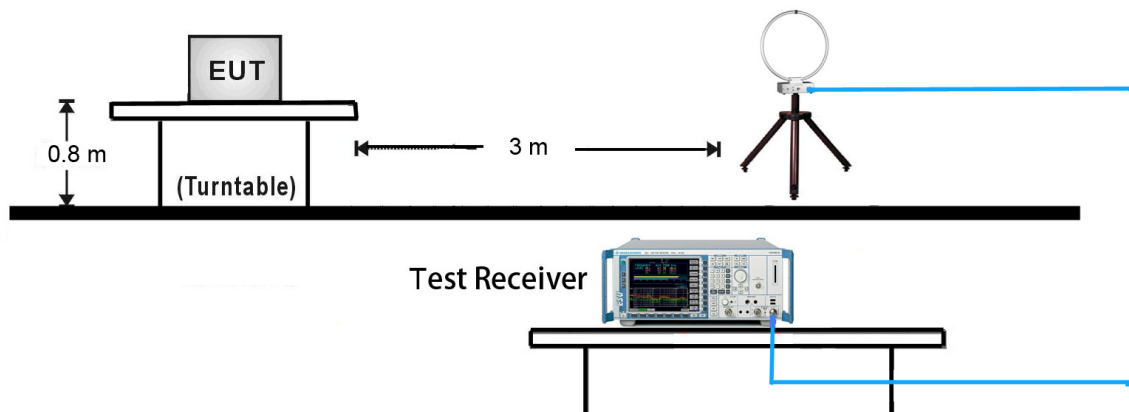


30MHz ~ 1GHz Test Setup:

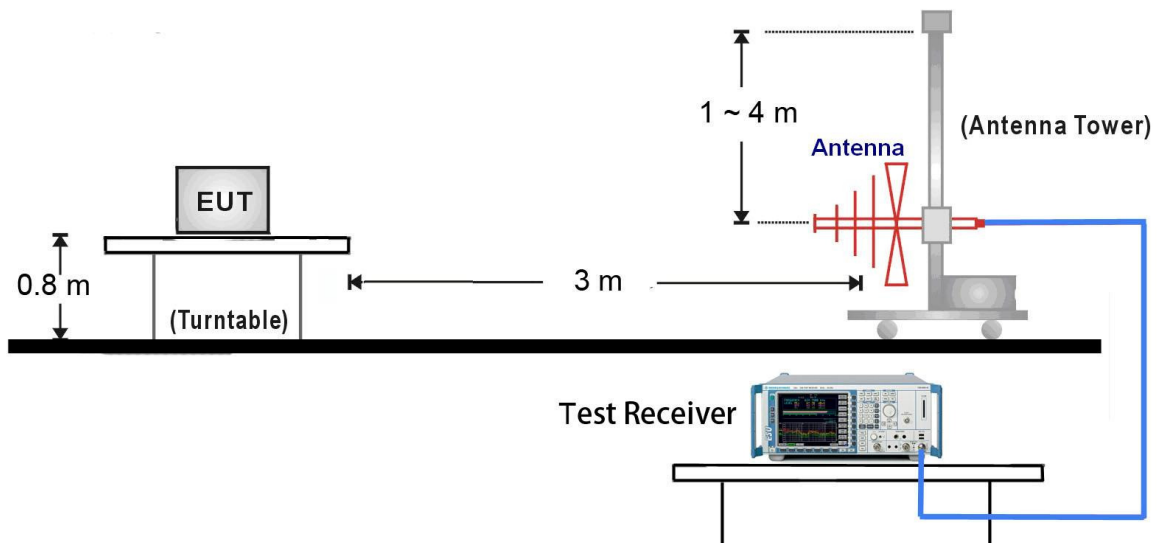

1GHz ~ 18GHz Test Setup:

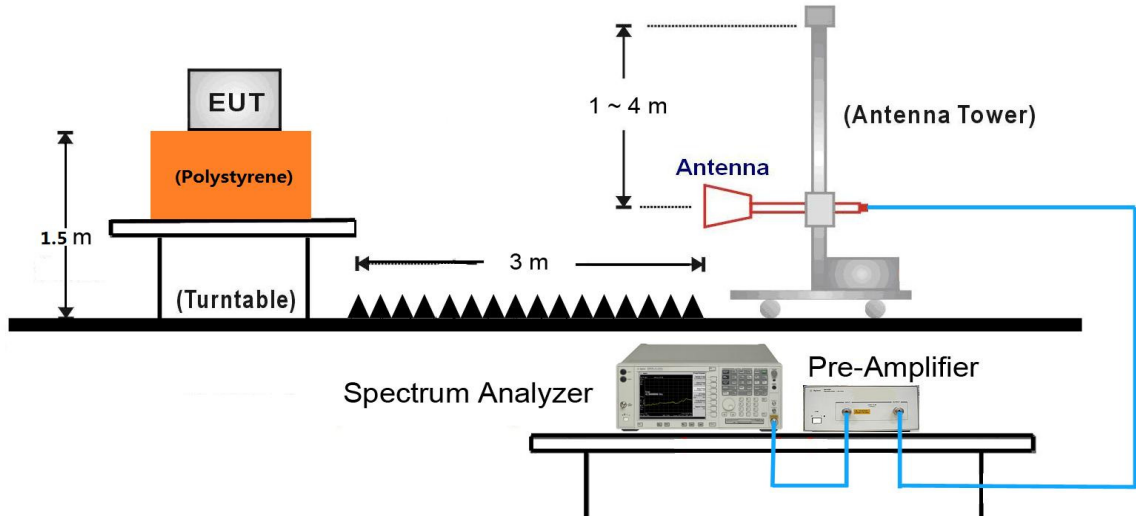

18GHz ~ 25GHz Test Setup:

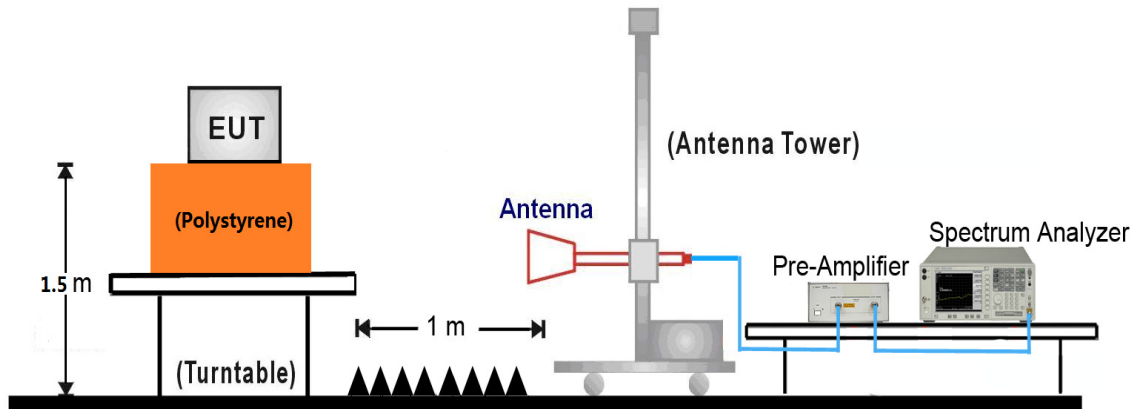

7.6.5. Test Result

Test Mode:	802.11b	Test Site:	AC2
Test Channel:	01	Test Engineer:	Snake Ni
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	5105.5	33.2	3.2	36.4	74.0	-37.6	Peak	Horizontal
	5411.5	32.7	3.2	35.9	74.0	-38.1	Peak	Horizontal
*	7239.0	36.5	10.6	47.1	74.0	-26.9	Peak	Horizontal
*	8616.0	31.9	11.2	43.1	74.0	-30.9	Peak	Horizontal
	4825.0	34.2	2.7	36.9	74.0	-37.1	Peak	Vertical
	5386.0	33.3	3.2	36.5	74.0	-37.5	Peak	Vertical
*	7239.0	38.5	10.6	49.1	74.0	-24.9	Peak	Vertical
*	8735.0	31.4	11.6	43.0	74.0	-31.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (103.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11b	Test Site:	AC2
Test Channel:	06	Test Engineer:	Snake Ni
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	5411.5	34.5	3.2	37.7	74.0	-36.3	Peak	Horizontal
	7307.0	34.6	10.7	45.3	74.0	-28.7	Peak	Horizontal
*	8769.0	31.5	11.8	43.3	74.0	-30.7	Peak	Horizontal
*	9772.0	33.0	12.6	45.6	74.0	-28.4	Peak	Horizontal
	4876.0	34.9	2.6	37.5	74.0	-36.5	Peak	Vertical
	7315.5	38.3	10.7	49.0	74.0	-25.0	Peak	Vertical
*	8811.5	31.9	11.7	43.6	74.0	-30.4	Peak	Vertical
*	10171.5	32.0	14.0	46.0	74.0	-28.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (103.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11b	Test Site:	AC2
Test Channel:	11	Test Engineer:	Snake Ni
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4927.0	34.0	2.6	36.6	74.0	-37.4	Peak	Horizontal
	7383.5	34.1	10.7	44.8	74.0	-29.2	Peak	Horizontal
*	8735.0	31.5	11.6	43.1	74.0	-30.9	Peak	Horizontal
*	9593.5	31.1	12.6	43.7	74.0	-30.3	Peak	Horizontal
	4927.0	36.3	2.6	38.9	74.0	-35.1	Peak	Vertical
	7383.5	37.0	10.7	47.7	74.0	-26.3	Peak	Vertical
*	8735.0	30.9	11.6	42.5	74.0	-31.5	Peak	Vertical
*	10443.5	31.8	14.6	46.4	74.0	-27.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (102.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11g	Test Site:	AC2
Test Channel:	01	Test Engineer:	Snake Ni
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4621.0	33.2	2.3	35.5	74.0	-38.5	Peak	Horizontal
	5360.5	33.2	2.7	35.9	74.0	-38.1	Peak	Horizontal
*	7239.0	35.2	10.6	45.8	76.3	-30.5	Peak	Horizontal
*	8582.0	31.9	11.0	42.9	76.3	-33.4	Peak	Horizontal
	4859.0	33.0	2.5	35.5	74.0	-38.5	Peak	Vertical
	5386.0	33.0	3.2	36.2	74.0	-37.8	Peak	Vertical
*	7239.0	40.2	10.6	50.8	76.3	-25.5	Peak	Vertical
*	8616.0	31.4	11.2	42.6	76.3	-33.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (106.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11g	Test Site:	AC2
Test Channel:	06	Test Engineer:	Snake Ni
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7307.0	35.9	10.7	46.6	74.0	-27.4	Peak	Horizontal
	8165.5	32.5	10.4	42.9	74.0	-31.1	Peak	Horizontal
*	8769.0	32.0	11.8	43.8	76.1	-32.3	Peak	Horizontal
*	10214.0	31.2	14.1	45.3	76.1	-30.8	Peak	Horizontal
	7315.5	40.9	10.7	51.6	74.0	-22.4	Peak	Vertical
	8310.0	31.9	10.2	42.1	74.0	-31.9	Peak	Vertical
*	9219.5	31.2	13.1	44.3	76.1	-31.8	Peak	Vertical
*	10265.0	31.4	14.2	45.6	76.1	-30.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (106.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11g	Test Site:	AC2
Test Channel:	11	Test Engineer:	Snake Ni
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7392.0	36.1	10.7	46.8	74.0	-27.2	Peak	Horizontal
	8386.5	31.9	10.4	42.3	74.0	-31.7	Peak	Horizontal
*	8854.0	31.8	11.7	43.5	74.5	-31.0	Peak	Horizontal
*	10350.0	32.7	14.9	47.6	74.5	-26.9	Peak	Horizontal
	7383.5	38.2	10.7	48.9	74.0	-25.1	Peak	Vertical
	8242.0	32.3	10.3	42.6	74.0	-31.4	Peak	Vertical
*	9874.0	34.6	13.4	48.0	74.5	-26.5	Peak	Vertical
*	12721.5	31.9	16.2	48.1	74.5	-26.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (104.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11n-HT20	Test Site:	AC2
Test Channel:	01	Test Engineer:	Snake Ni
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	32.8	2.6	35.4	74.0	-38.6	Peak	Horizontal
	5360.5	33.0	2.7	35.7	74.0	-38.3	Peak	Horizontal
*	6559.0	31.9	7.5	39.4	75.9	-36.5	Peak	Horizontal
*	7239.0	34.6	10.6	45.2	75.9	-30.7	Peak	Horizontal
	4621.0	32.7	2.3	35.0	74.0	-39.0	Peak	Vertical
	5411.5	32.8	3.2	36.0	74.0	-38.0	Peak	Vertical
*	7239.0	37.8	10.6	48.4	75.9	-27.5	Peak	Vertical
*	8539.5	31.5	11.0	42.5	75.9	-33.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (105.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11n-HT20	Test Site:	AC2
Test Channel:	06	Test Engineer:	Snake Ni
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7307.0	34.4	10.7	45.1	74.0	-28.9	Peak	Horizontal
	8386.5	32.2	10.4	42.6	74.0	-31.4	Peak	Horizontal
*	9721.0	31.0	12.3	43.3	75.7	-32.4	Peak	Horizontal
*	13189.0	31.4	17.6	49.0	75.7	-26.7	Peak	Horizontal
	7307.0	40.3	10.7	51.0	74.0	-23.0	Peak	Vertical
	8199.5	32.0	10.3	42.3	74.0	-31.7	Peak	Vertical
*	8769.0	31.8	11.8	43.6	75.7	-32.1	Peak	Vertical
*	9678.5	33.1	12.5	45.6	75.7	-30.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (105.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11n-HT20	Test Site:	AC2
Test Channel:	11	Test Engineer:	Snake Ni
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7332.5	30.9	10.7	41.6	74.0	-32.4	Peak	Horizontal
	8165.5	32.7	10.4	43.1	74.0	-30.9	Peak	Horizontal
*	9551.0	32.3	12.8	45.1	74.9	-29.8	Peak	Horizontal
*	12891.5	31.6	17.2	48.8	74.9	-26.1	Peak	Horizontal
	7383.5	35.9	10.7	46.6	74.0	-27.4	Peak	Vertical
	8386.5	32.6	10.4	43.0	74.0	-31.0	Peak	Vertical
*	9296.0	32.1	12.8	44.9	74.9	-30.0	Peak	Vertical
*	10214.0	32.8	14.1	46.9	74.9	-28.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (104.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11n-HT40	Test Site:	AC2
Test Channel:	03	Test Engineer:	Snake Ni
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7298.5	31.1	10.7	41.8	74.0	-32.2	Peak	Horizontal
	8046.5	33.3	10.9	44.2	74.0	-29.8	Peak	Horizontal
*	9219.5	31.2	13.1	44.3	74.0	-29.7	Peak	Horizontal
*	10290.5	32.4	14.7	47.1	74.0	-26.9	Peak	Horizontal
	7264.5	34.2	10.7	44.9	74.0	-29.1	Peak	Vertical
	10928.0	32.3	16.4	48.7	74.0	-25.3	Peak	Vertical
*	13010.5	30.4	17.6	48.0	74.0	-26.0	Peak	Vertical
*	15288.5	31.6	18.4	50.0	74.0	-24.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (102.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11n-HT40	Test Site:	AC2
Test Channel:	06	Test Engineer:	Snake Ni
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7307.0	33.5	10.7	44.2	74.0	-29.8	Peak	Horizontal
	10690.0	33.2	15.6	48.8	74.0	-25.2	Peak	Horizontal
*	12840.5	30.8	16.9	47.7	74.0	-26.3	Peak	Horizontal
*	14234.5	29.8	20.8	50.6	74.0	-23.4	Peak	Horizontal
	7298.5	34.9	10.7	45.6	74.0	-28.4	Peak	Vertical
	12109.5	32.9	16.9	49.8	74.0	-24.2	Peak	Vertical
*	13010.5	31.1	17.6	48.7	74.0	-25.3	Peak	Vertical
*	14549.0	32.4	20.6	53.0	74.0	-21.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (102.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11n-HT40	Test Site:	AC2
Test Channel:	09	Test Engineer:	Snake Ni
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7477.0	32.9	10.8	43.7	74.0	-30.3	Peak	Horizontal
	12050.0	31.9	17.1	49.0	74.0	-25.0	Peak	Horizontal
*	12840.5	30.2	16.9	47.1	74.0	-26.9	Peak	Horizontal
*	14107.0	30.8	20.3	51.1	74.0	-22.9	Peak	Horizontal
	7621.5	34.7	10.6	45.3	74.0	-28.7	Peak	Vertical
	11506.0	31.8	17.5	49.3	74.0	-24.7	Peak	Vertical
*	13189.0	30.7	17.6	48.3	74.0	-25.7	Peak	Vertical
*	14234.5	30.2	20.8	51.0	74.0	-23.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (103.4dBμV/m) or 15.209 which is higher.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: AC2	Time: 2017/06/01 - 18:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: VULB 9168_20-2000MHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz

Note: There is the worst case within frequency range 30MHz~1GHz.

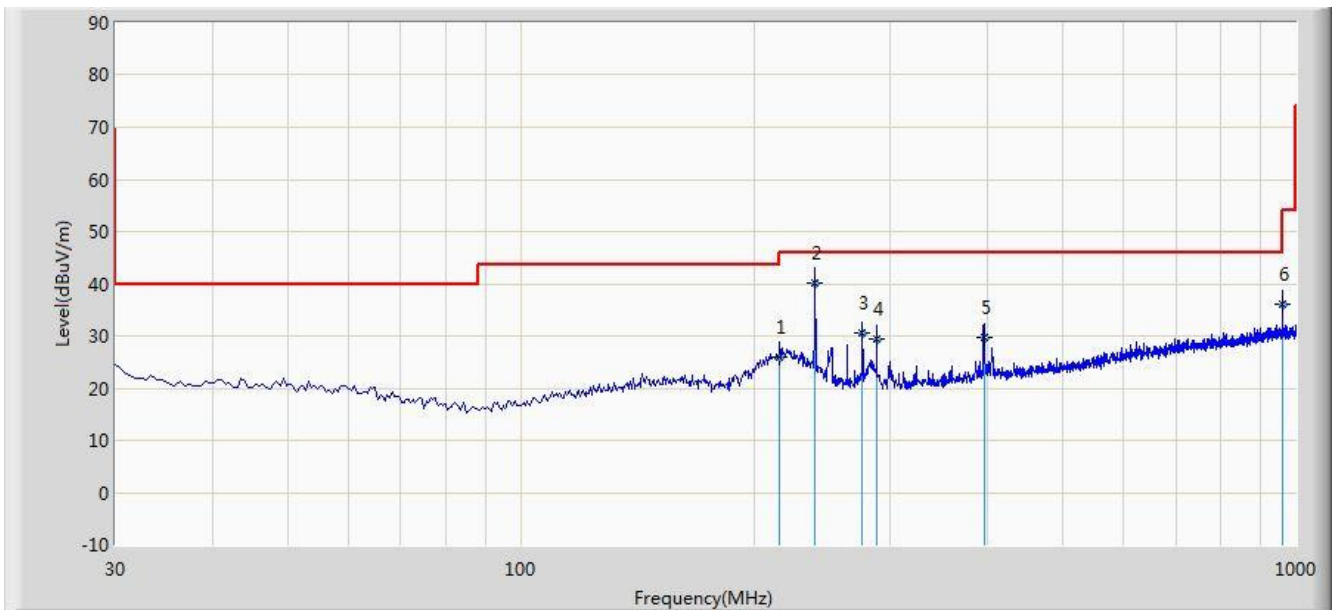


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			215.755	25.939	14.290	-17.561	43.500	11.649	QP
2		*	240.005	40.039	27.277	-5.961	46.000	12.762	QP
3			275.895	30.659	16.983	-15.341	46.000	13.675	QP
4			288.020	29.280	15.288	-16.720	46.000	13.992	QP
5			396.175	29.715	13.299	-16.285	46.000	16.416	QP
6			960.021	36.149	11.203	-17.851	54.000	24.946	QP

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC2	Time: 2017/06/01 - 18:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: VULB 9168_20-2000MHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Note: There is the worst case within frequency range 30MHz~1GHz.	

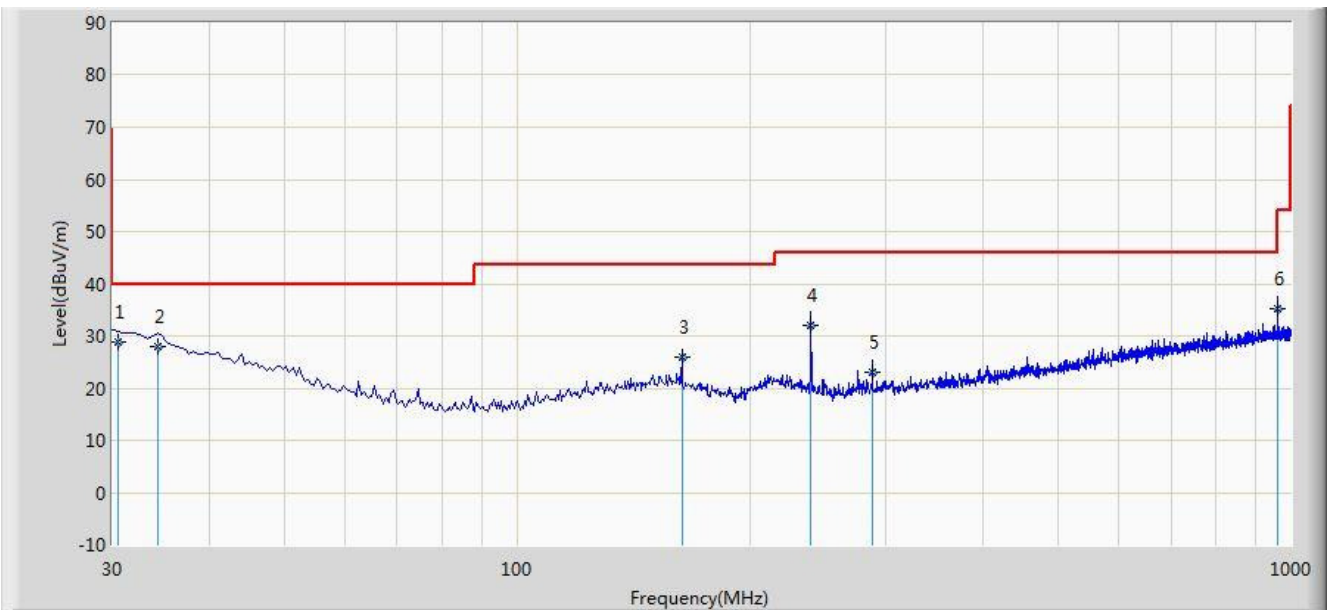

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	30.485	28.921	15.292	-11.079	40.000	13.629	QP
2			34.365	27.831	14.024	-12.169	40.000	13.807	QP
3			163.375	25.818	10.924	-17.682	43.500	14.894	QP
4			240.005	32.050	19.288	-13.950	46.000	12.762	QP
5			288.020	23.184	9.192	-22.816	46.000	13.992	QP
6			960.234	35.229	10.283	-18.771	54.000	24.946	QP

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Result

Site: AC2	Time: 2017/05/16 - 21:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

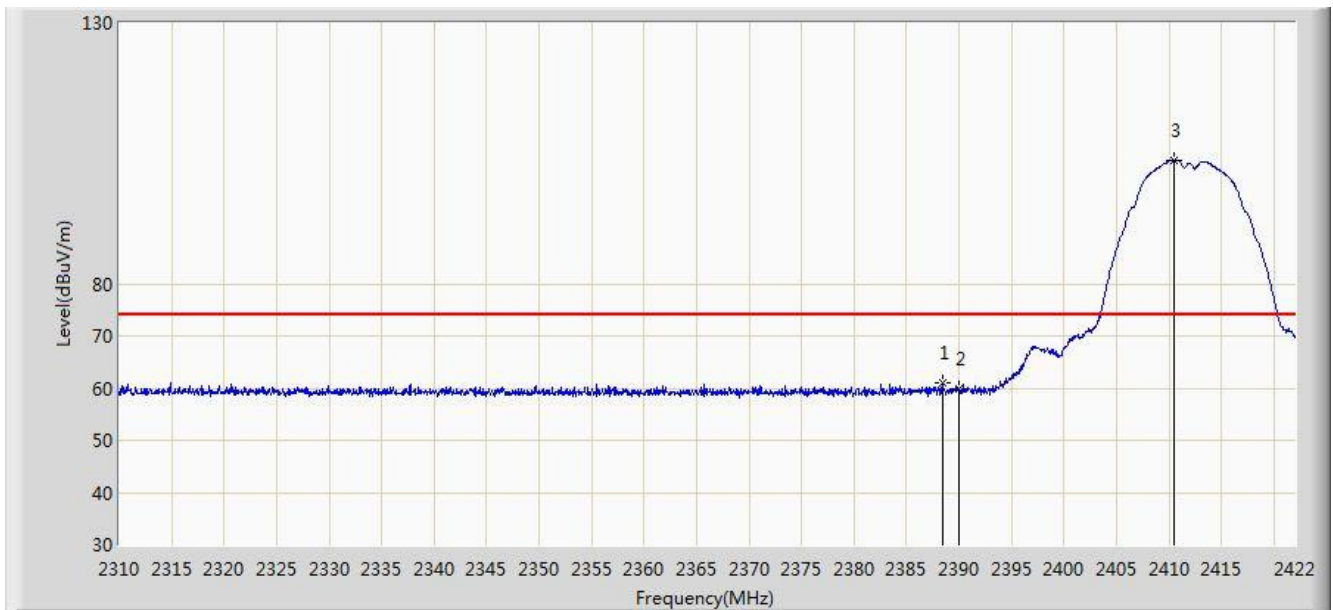


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.400	60.911	28.642	-13.089	74.000	32.269	PK
2			2390.000	59.761	27.483	-14.239	74.000	32.278	PK
3		*	2410.520	103.756	71.511	N/A	N/A	32.245	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

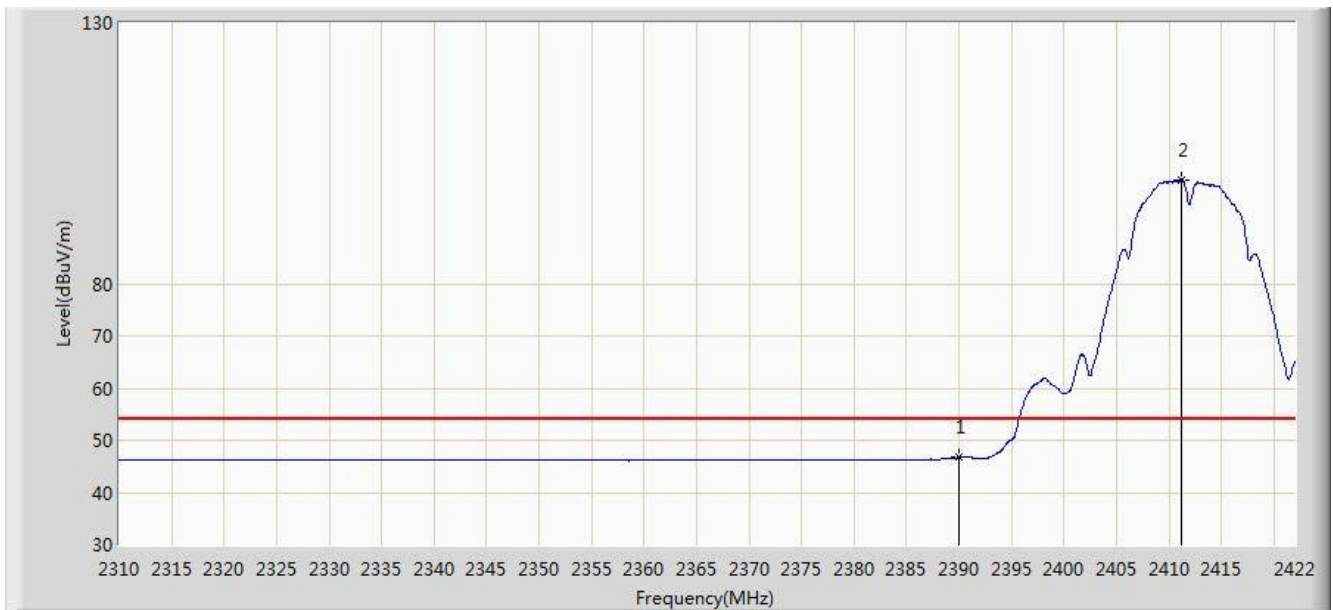


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.723	14.445	-7.277	54.000	32.278	AV
2		*	2411.192	100.000	67.757	N/A	N/A	32.243	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

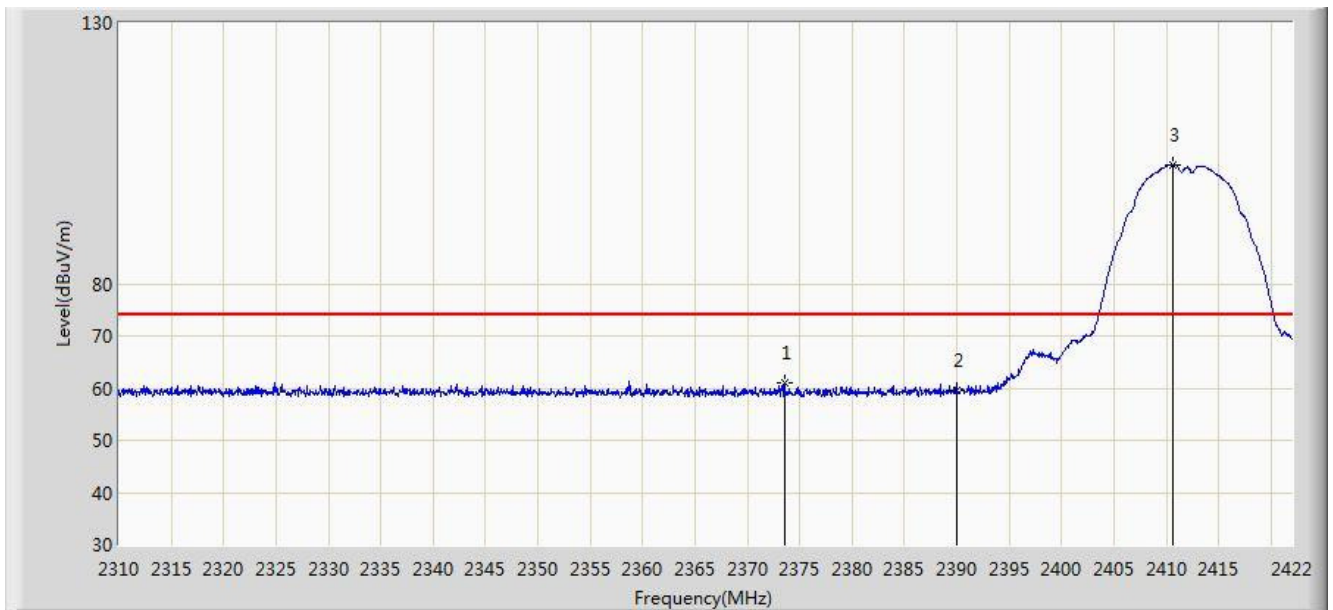


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.560	60.981	28.766	-13.019	74.000	32.215	PK
2			2390.000	59.662	27.384	-14.338	74.000	32.278	PK
3		*	2410.576	102.863	70.618	N/A	N/A	32.245	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

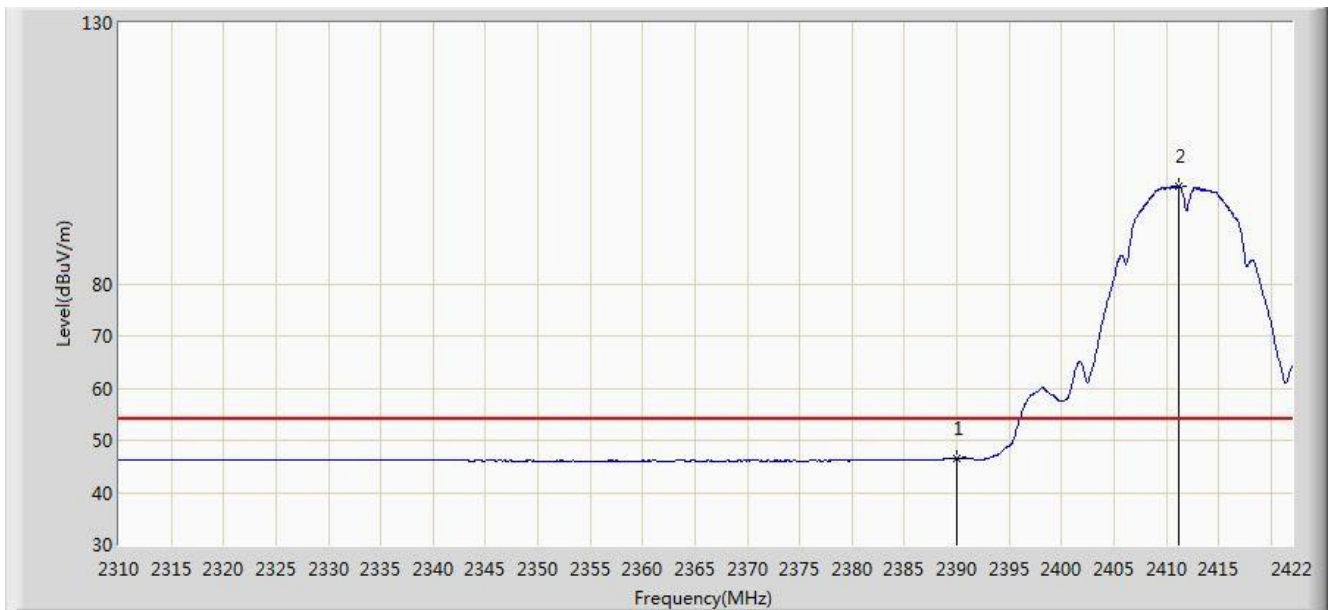


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.568	14.290	-7.432	54.000	32.278	AV
2		*	2411.192	98.816	66.573	N/A	N/A	32.243	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz	

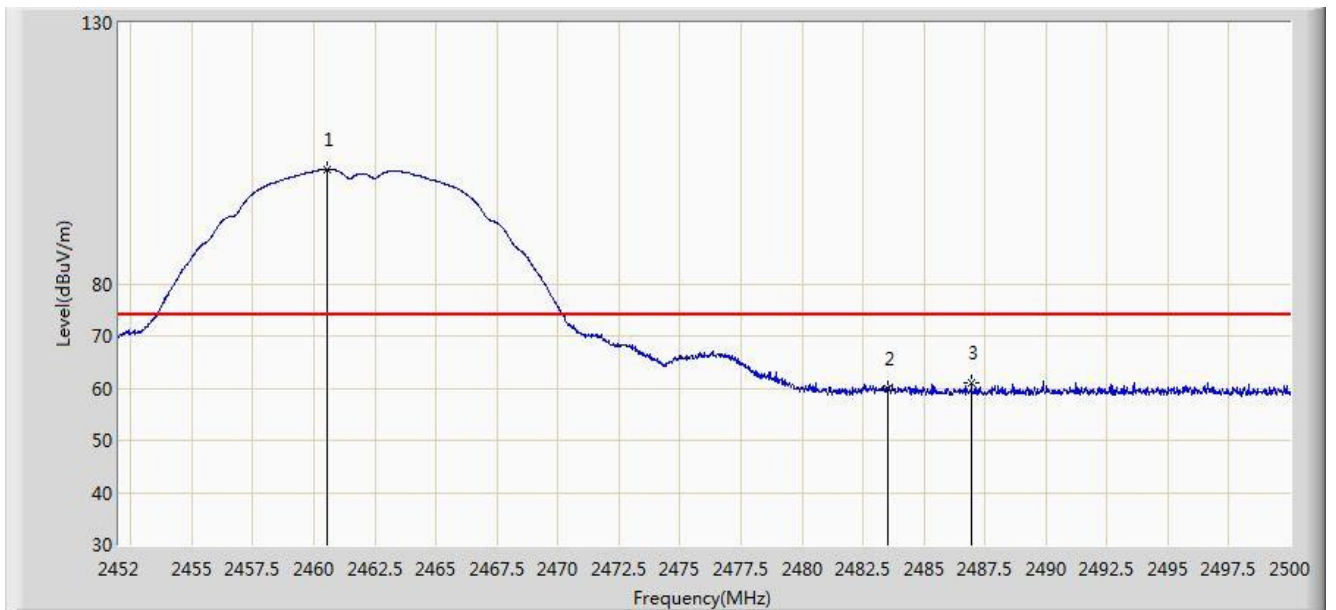

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.568	101.915	69.683	N/A	N/A	32.232	PK
2			2483.500	59.783	27.502	-14.217	74.000	32.282	PK
3			2486.944	60.911	28.618	-13.089	74.000	32.293	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.192	97.670	65.435	N/A	N/A	32.235	AV
2			2483.500	47.177	14.896	-6.823	54.000	32.282	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz	

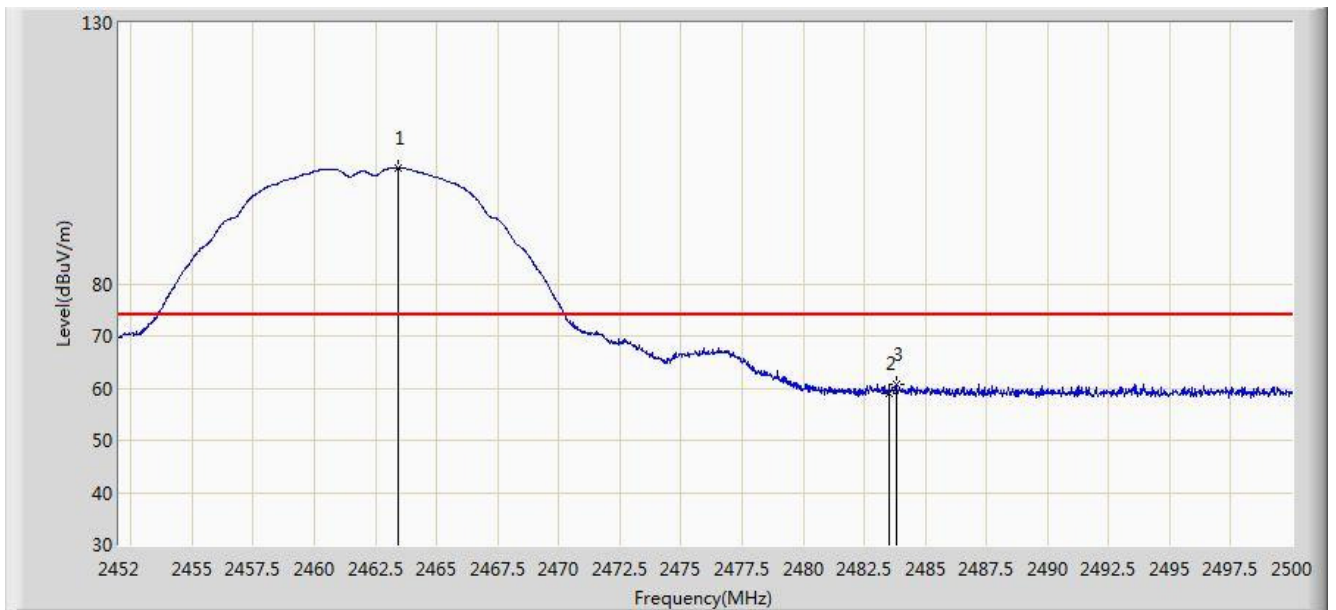

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.448	102.204	69.965	N/A	N/A	32.240	PK
2			2483.500	59.116	26.835	-14.884	74.000	32.282	PK
3			2483.800	60.667	28.385	-13.333	74.000	32.282	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.168	98.069	65.834	N/A	N/A	32.235	AV
2			2483.500	47.301	15.020	-6.699	54.000	32.282	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz	

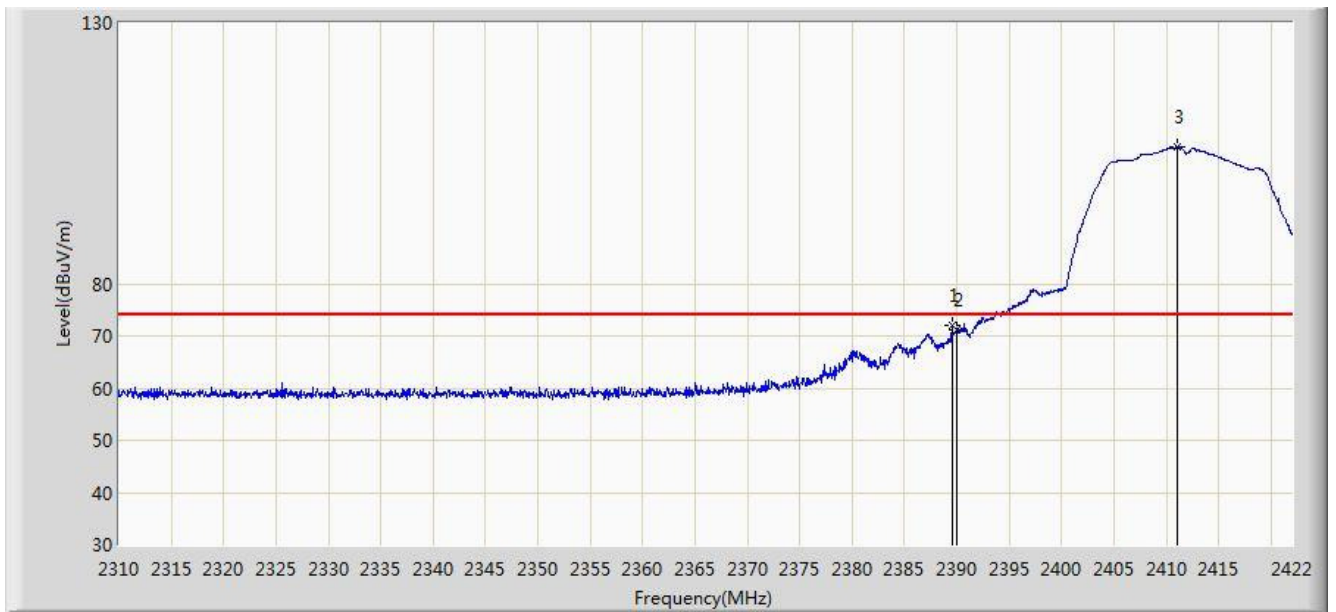


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.520	72.018	39.743	-1.982	74.000	32.275	PK
2			2390.000	71.081	38.803	-2.919	74.000	32.278	PK
3		*	2411.080	106.250	74.006	N/A	N/A	32.243	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz	

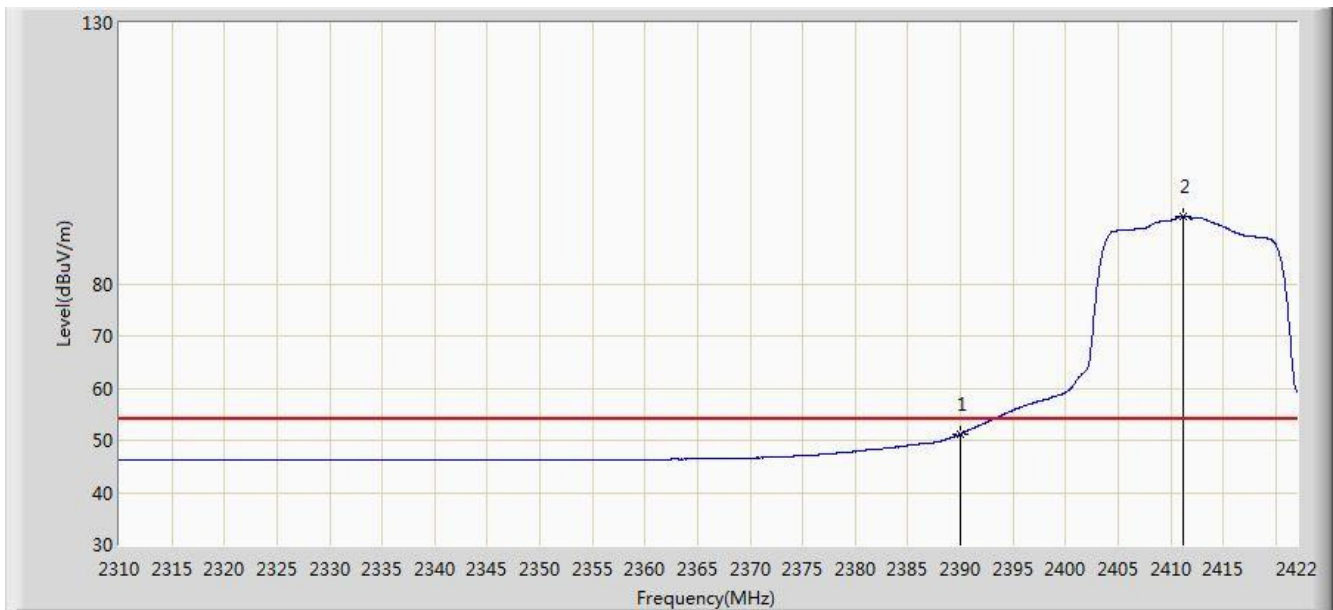


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.225	18.947	-2.775	54.000	32.278	AV
2		*	2411.136	92.910	60.667	N/A	N/A	32.243	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz	

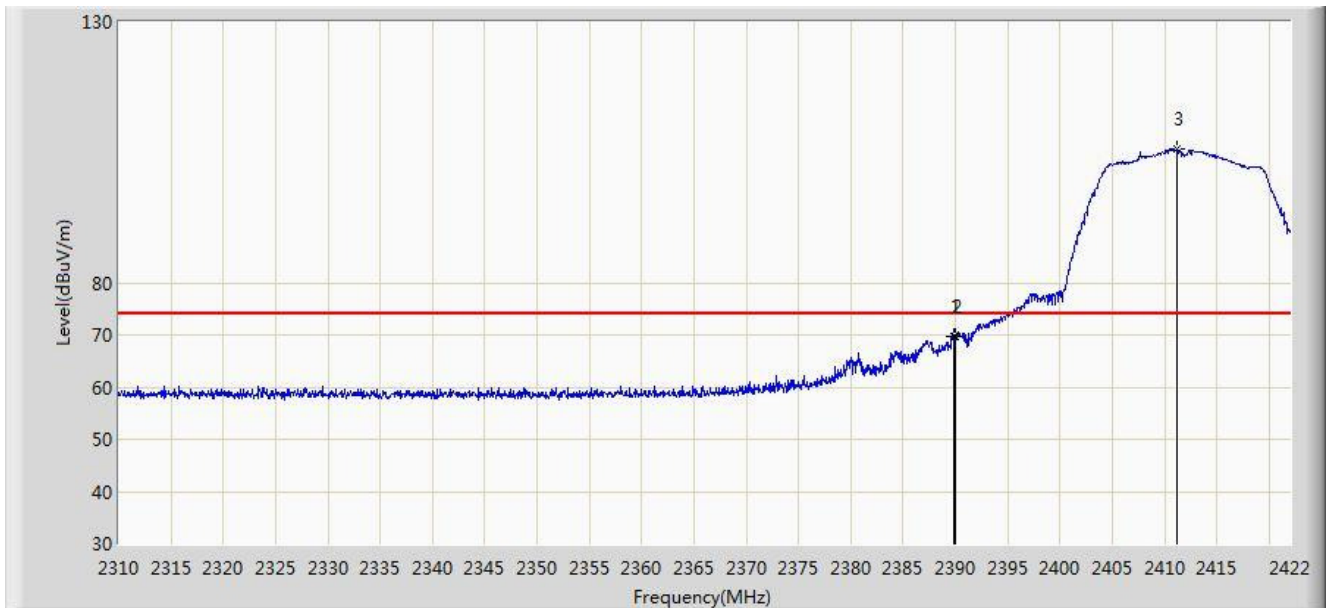


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	69.838	37.560	-4.162	74.000	32.278	PK
2			2390.000	69.652	37.374	-4.348	74.000	32.278	PK
3		*	2411.136	105.688	73.445	N/A	N/A	32.243	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz	

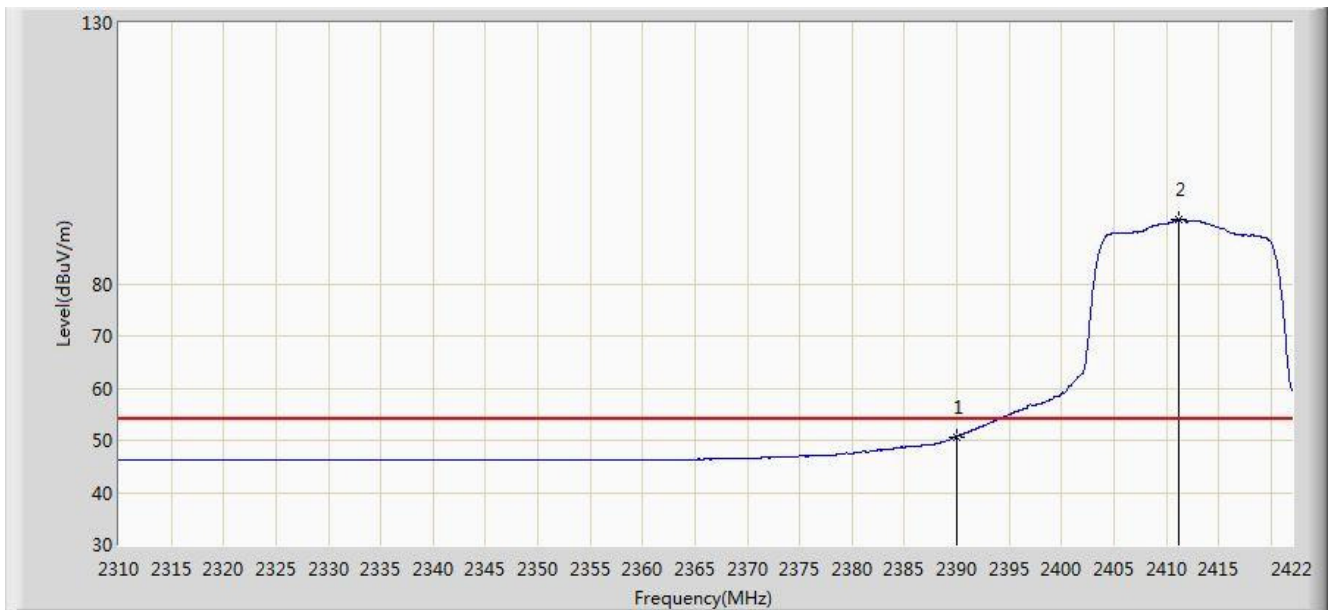

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.700	18.422	-3.300	54.000	32.278	AV
2		*	2411.192	92.307	60.064	N/A	N/A	32.243	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.120	104.460	72.226	N/A	N/A	32.235	PK
2			2483.500	70.146	37.865	-3.854	74.000	32.282	PK
3			2483.512	70.313	38.032	-3.687	74.000	32.282	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz	

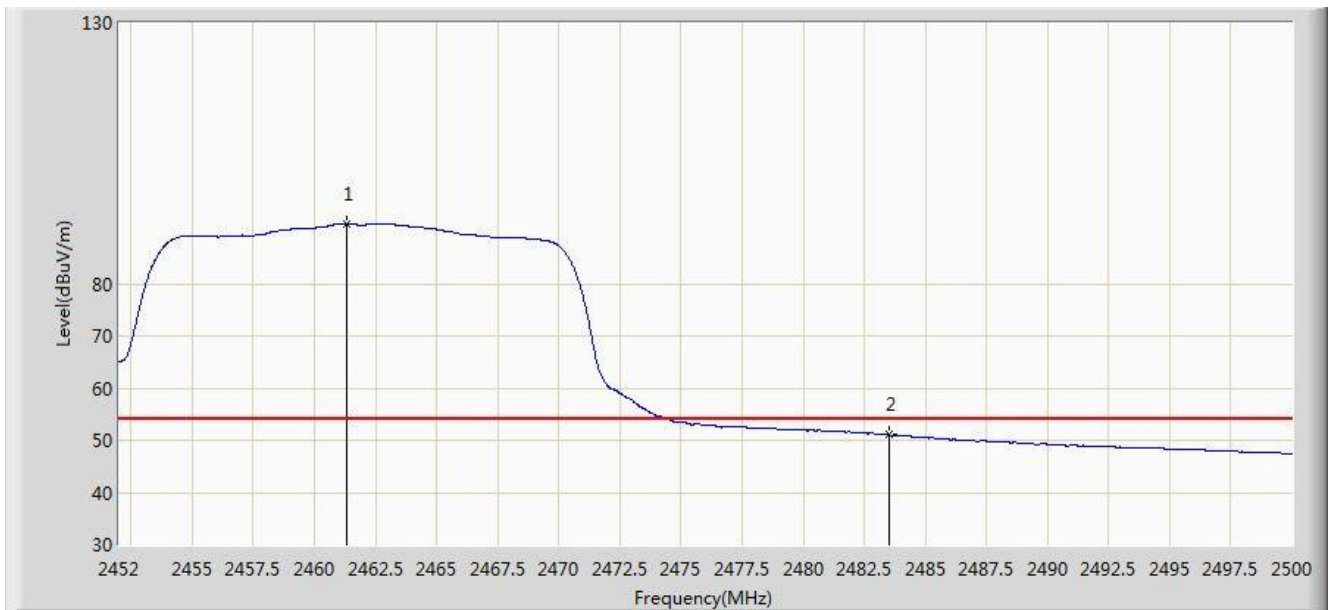

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.336	91.547	59.312	N/A	N/A	32.236	AV
2			2483.500	51.076	18.795	-2.924	54.000	32.282	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.656	105.451	73.212	N/A	N/A	32.239	PK
2			2483.500	71.513	39.232	-2.487	74.000	32.282	PK
3			2483.896	71.738	39.455	-2.262	74.000	32.282	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz	

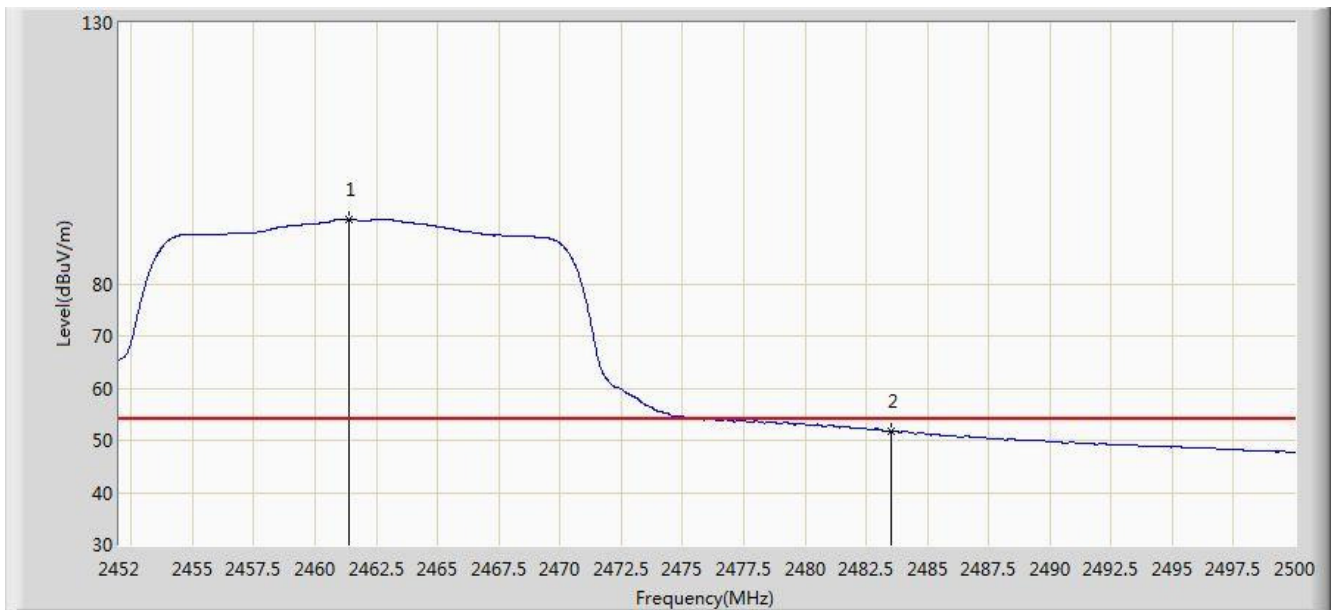


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.408	92.390	60.154	N/A	N/A	32.236	AV
2			2483.500	51.868	19.587	-2.132	54.000	32.282	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

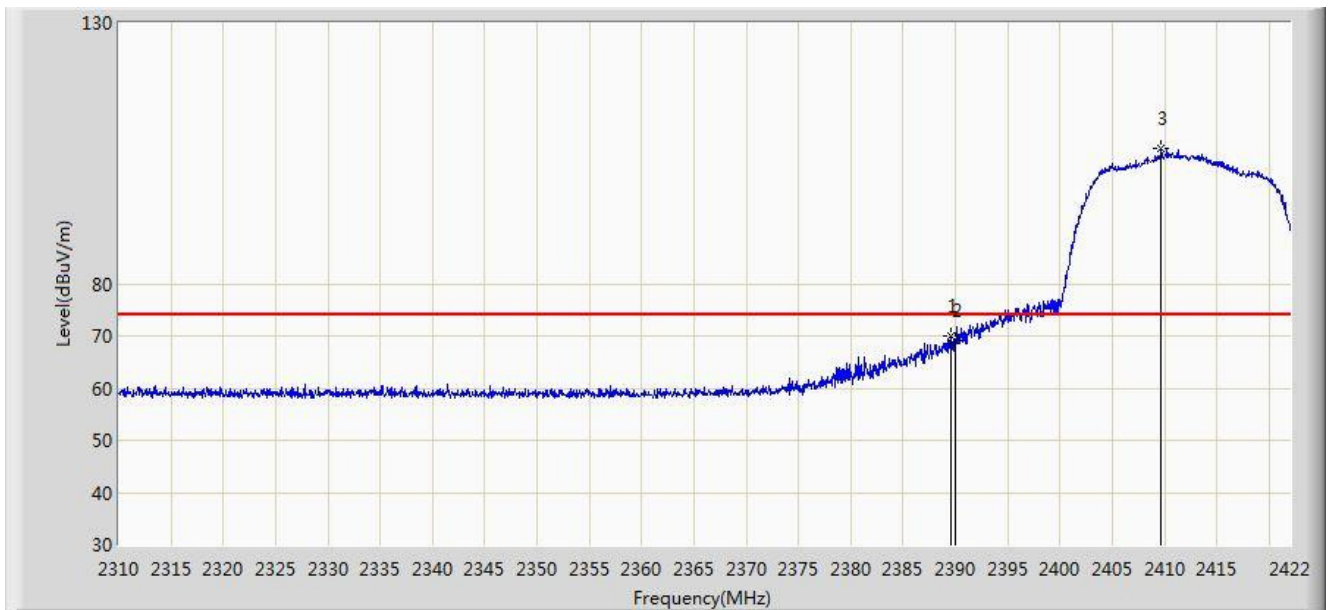


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.576	69.865	37.589	-4.135	74.000	32.276	PK
2			2390.000	69.128	36.850	-4.872	74.000	32.278	PK
3		*	2409.680	105.910	73.662	N/A	N/A	32.249	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

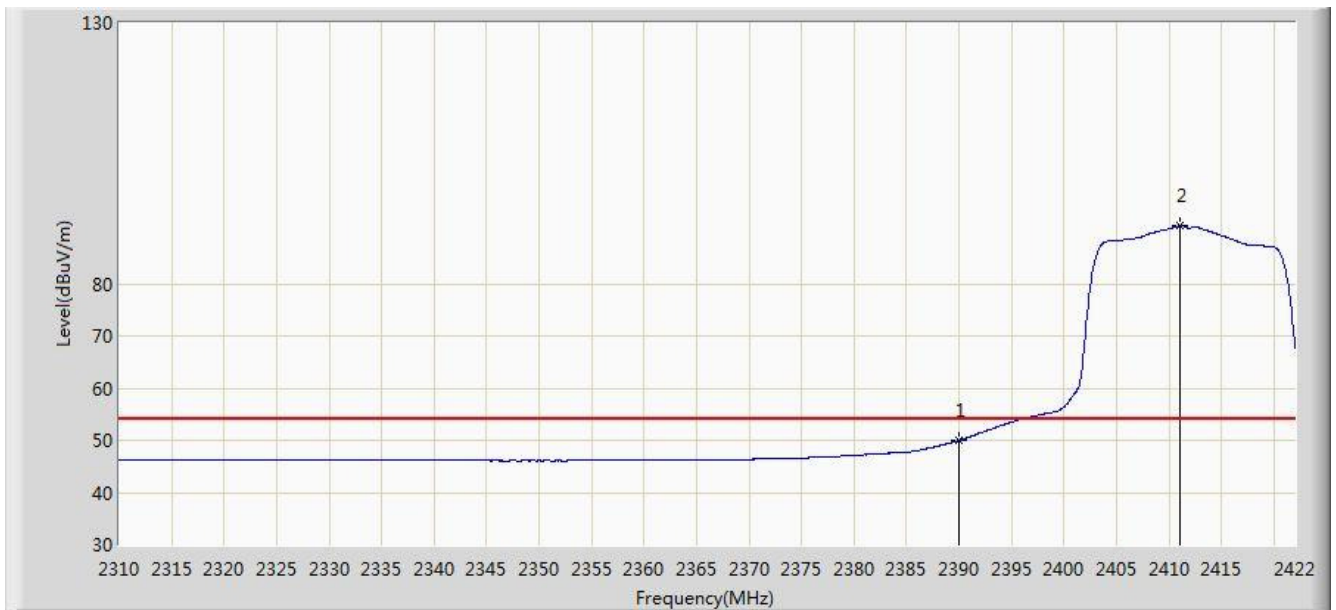


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.984	17.706	-4.016	54.000	32.278	AV
2		*	2411.080	91.059	58.815	N/A	N/A	32.243	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

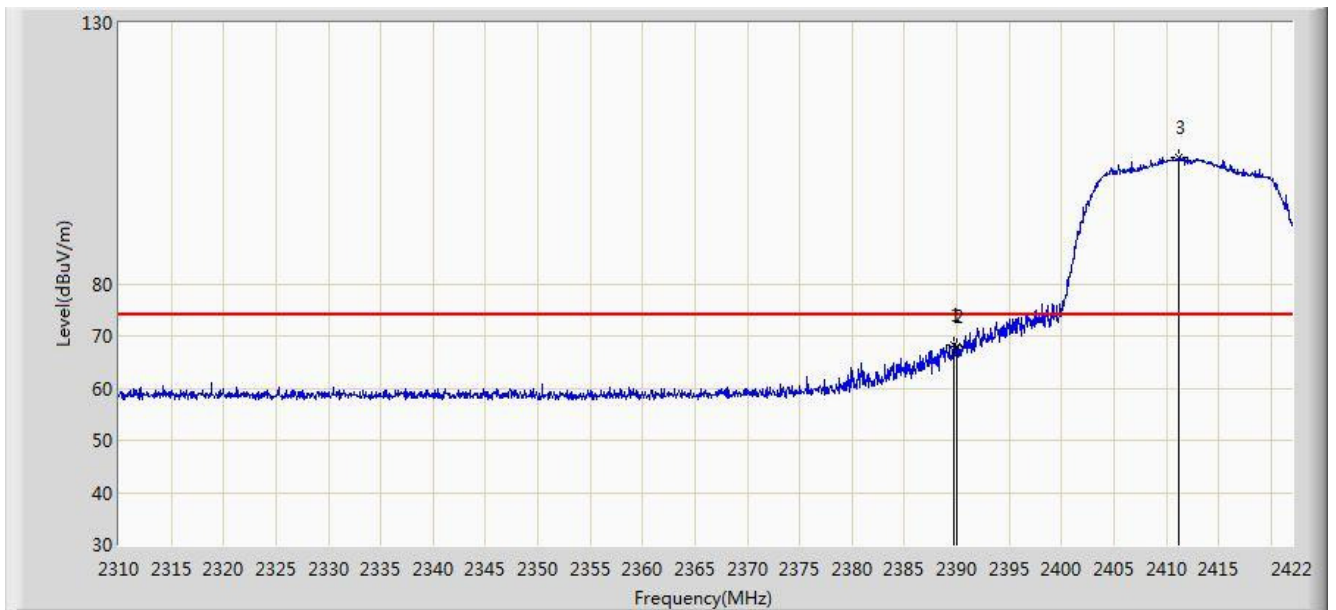


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.688	68.281	36.005	-5.719	74.000	32.277	PK
2			2390.000	67.972	35.694	-6.028	74.000	32.278	PK
3		*	2411.248	104.085	71.842	N/A	N/A	32.243	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 21:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

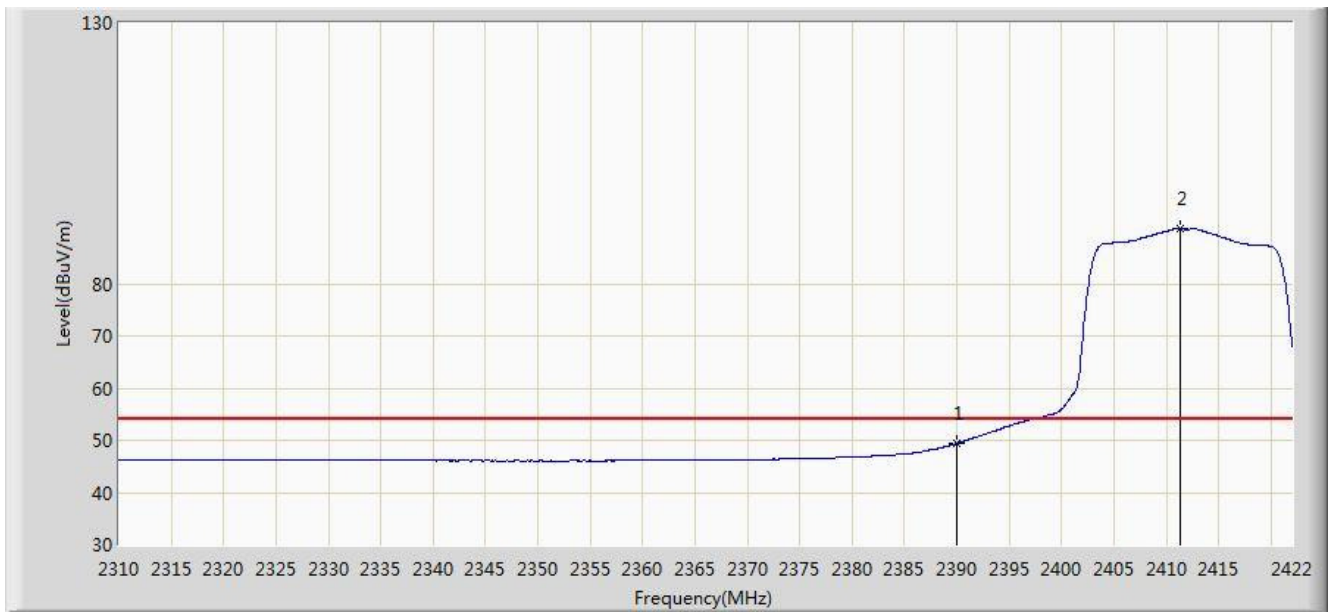


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.386	17.108	-4.614	54.000	32.278	AV
2		*	2411.304	90.670	58.427	N/A	N/A	32.243	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 22:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

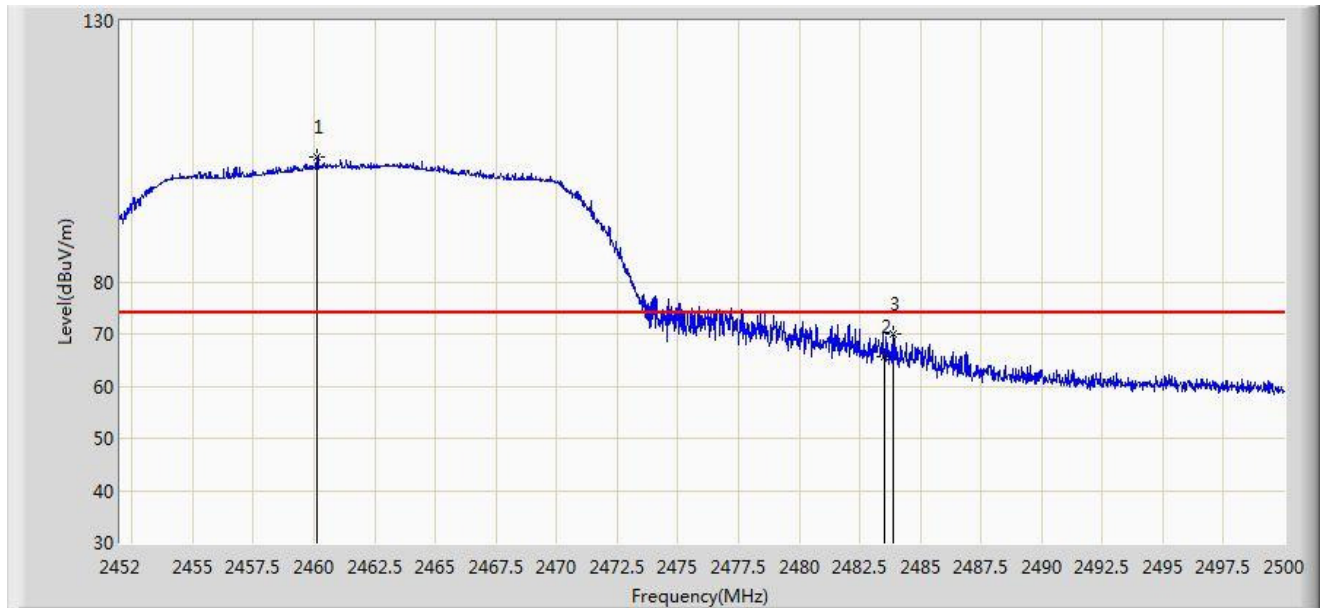


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.136	103.955	71.725	N/A	N/A	32.231	PK
2			2483.500	65.525	33.244	-8.475	74.000	32.282	PK
3			2483.872	69.964	37.681	-4.036	74.000	32.282	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 22:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

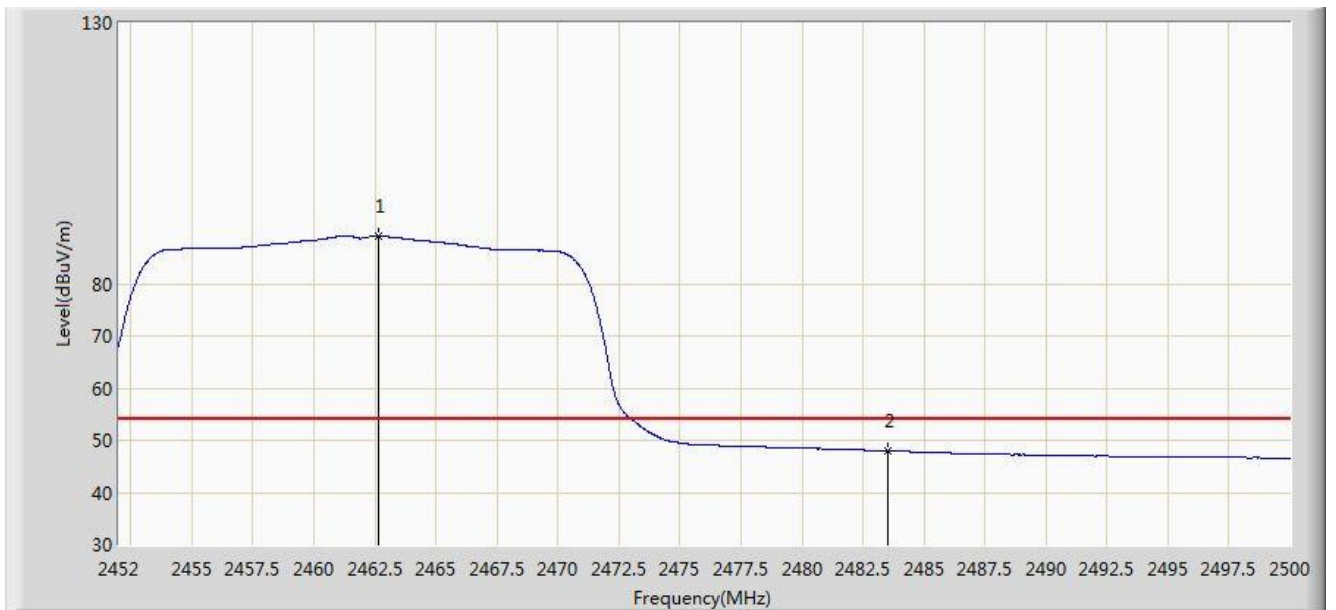


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.656	89.093	56.854	N/A	N/A	32.239	AV
2			2483.500	47.966	15.685	-6.034	54.000	32.282	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 22:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

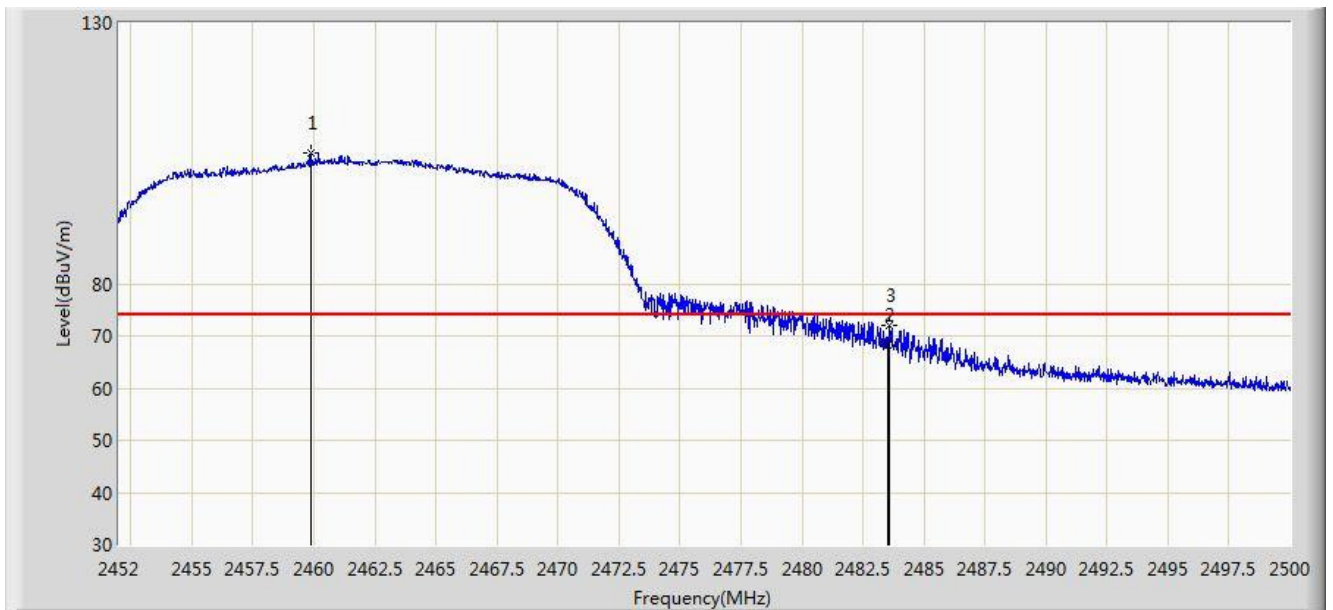


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.896	104.947	72.718	N/A	N/A	32.229	PK
2			2483.500	68.373	36.092	-5.627	74.000	32.282	PK
3			2483.584	71.892	39.610	-2.108	74.000	32.282	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/16 - 22:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

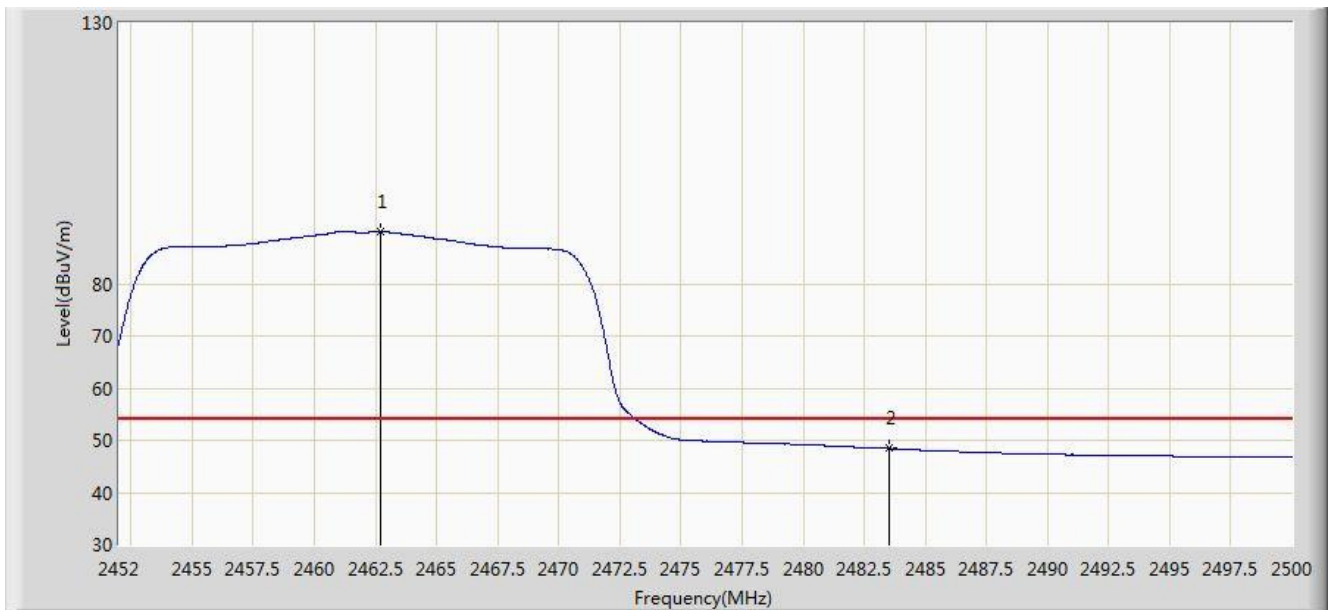


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.680	90.015	57.776	N/A	N/A	32.239	AV
2			2483.500	48.423	16.142	-5.577	54.000	32.282	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/19 - 22:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz	

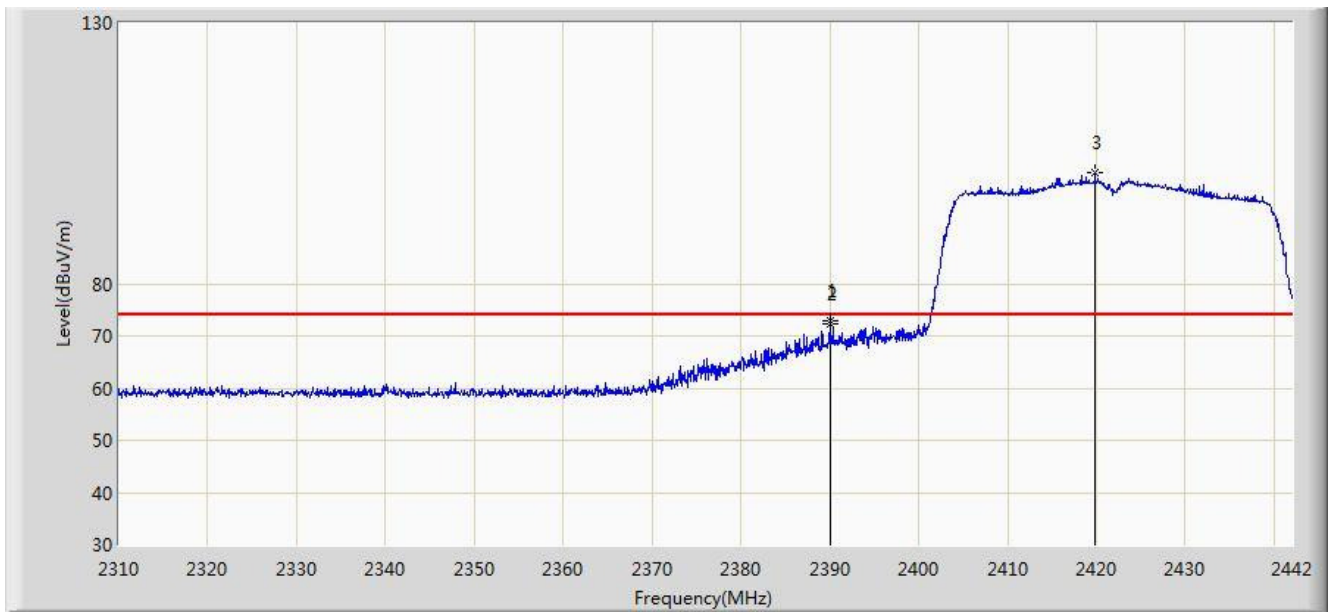


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.992	72.856	40.578	-1.144	74.000	32.278	PK
2			2390.000	72.394	40.116	-1.606	74.000	32.278	PK
3		*	2419.824	101.190	68.983	N/A	N/A	32.207	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/19 - 22:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz	

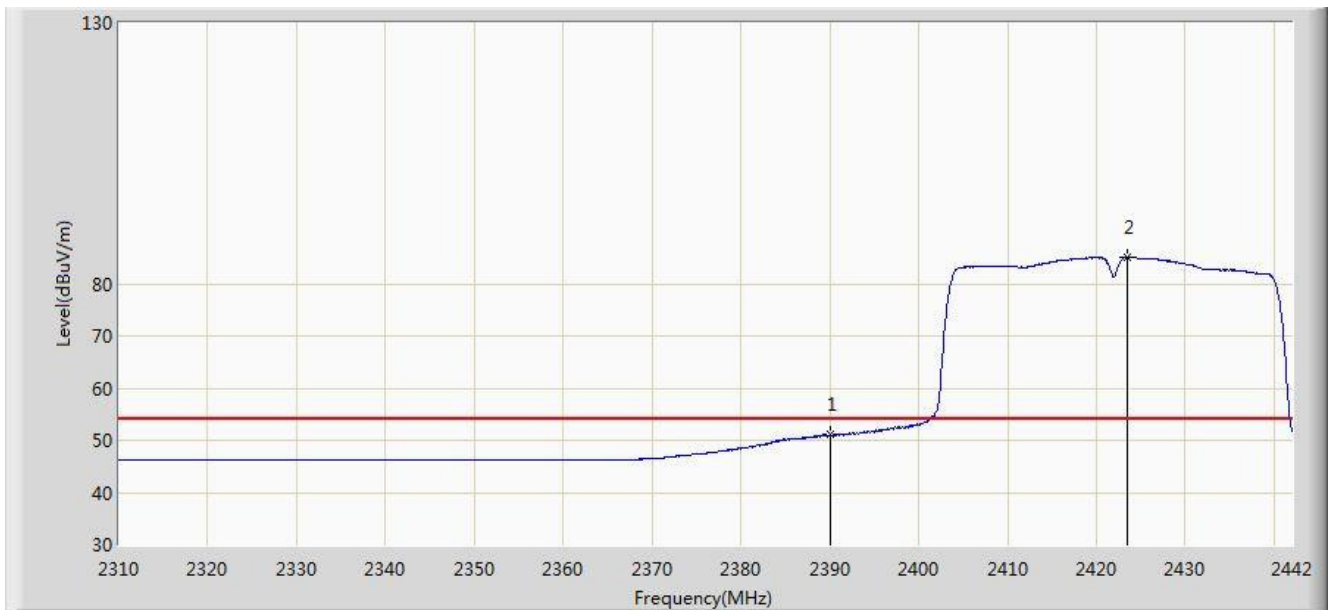


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.096	18.818	-2.904	54.000	32.278	AV
2		*	2423.520	85.127	52.935	N/A	N/A	32.192	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/19 - 22:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz	

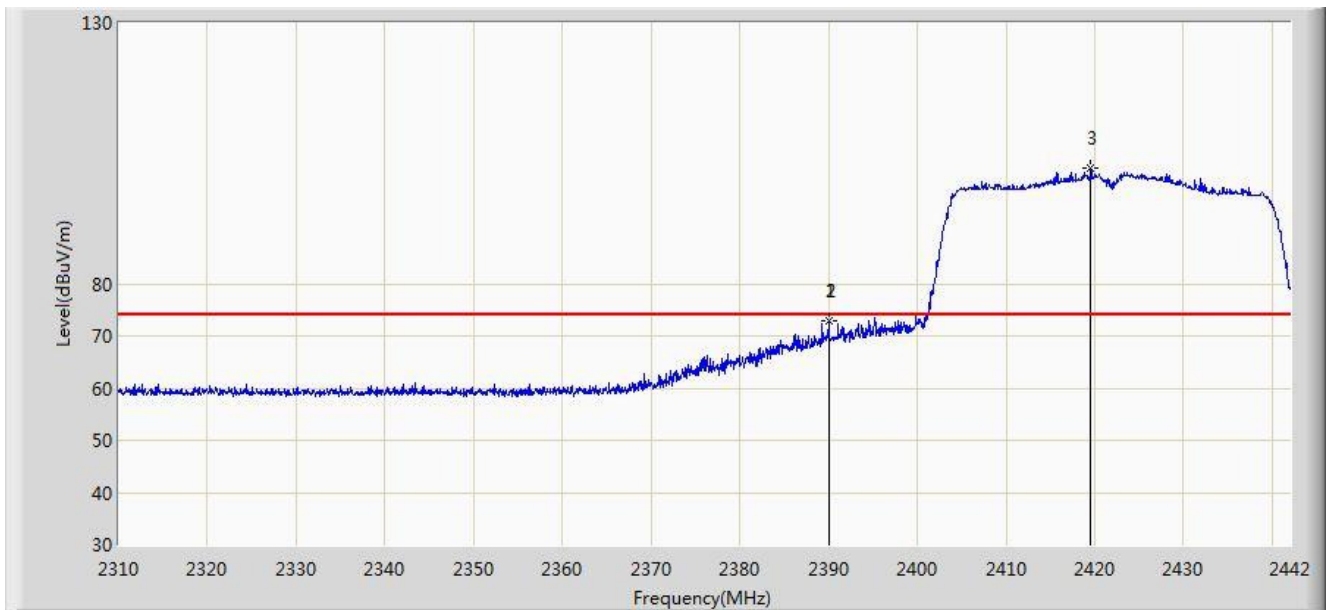


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.992	72.954	40.676	-1.046	74.000	32.278	PK
2			2390.000	72.812	40.534	-1.188	74.000	32.278	PK
3		*	2419.560	102.091	69.883	N/A	N/A	32.208	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/19 - 22:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz	

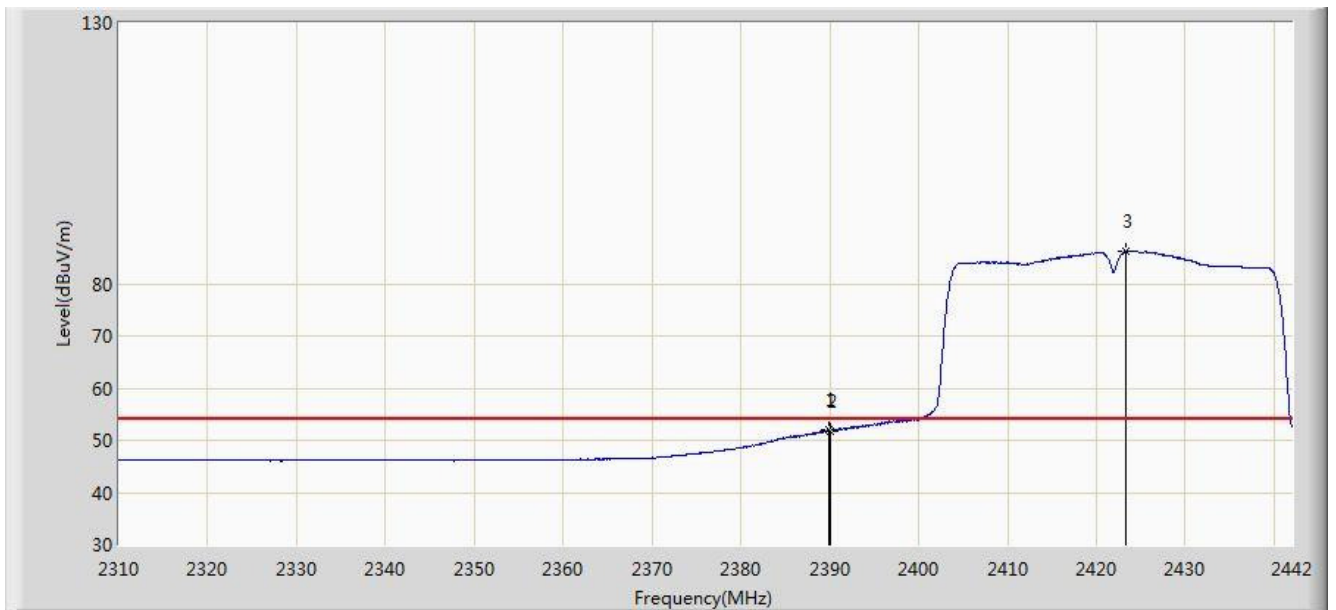


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.860	51.941	19.664	-2.059	54.000	32.277	AV
2			2390.000	51.808	19.530	-2.192	54.000	32.278	AV
3		*	2423.388	86.308	54.116	N/A	N/A	32.192	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/19 - 22:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz	

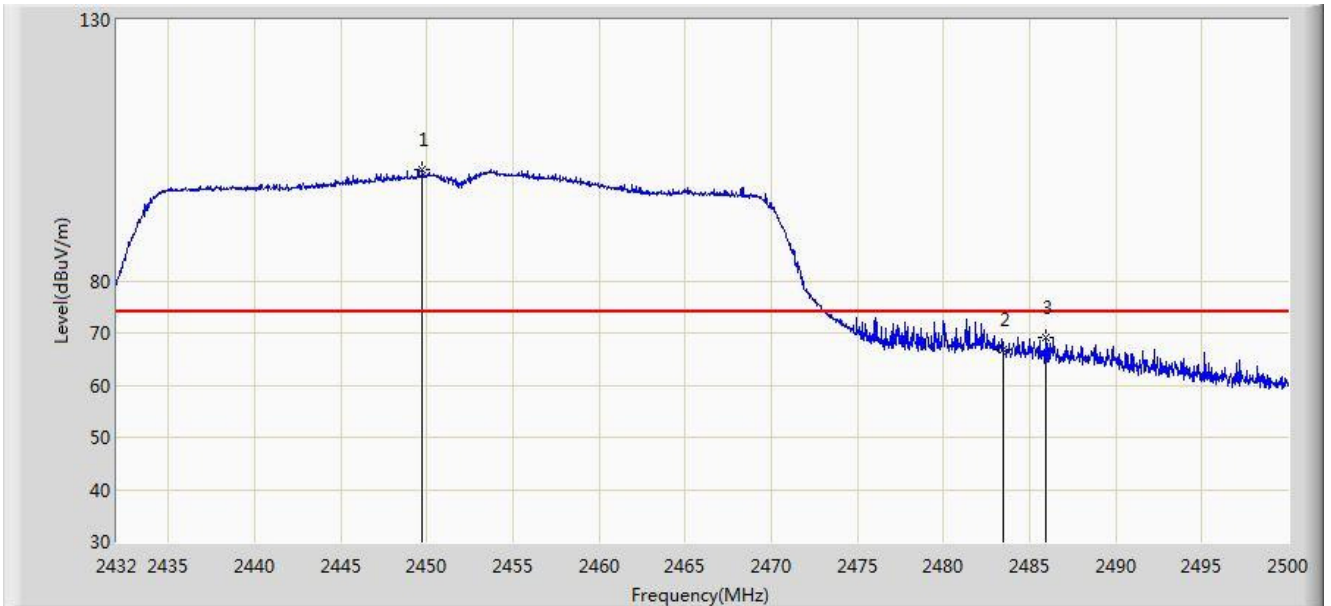


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2449.748	101.412	69.226	N/A	N/A	32.185	PK
2			2483.500	66.946	34.665	-7.054	74.000	32.282	PK
3			2485.924	69.192	36.902	-4.808	74.000	32.290	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/19 - 22:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz	

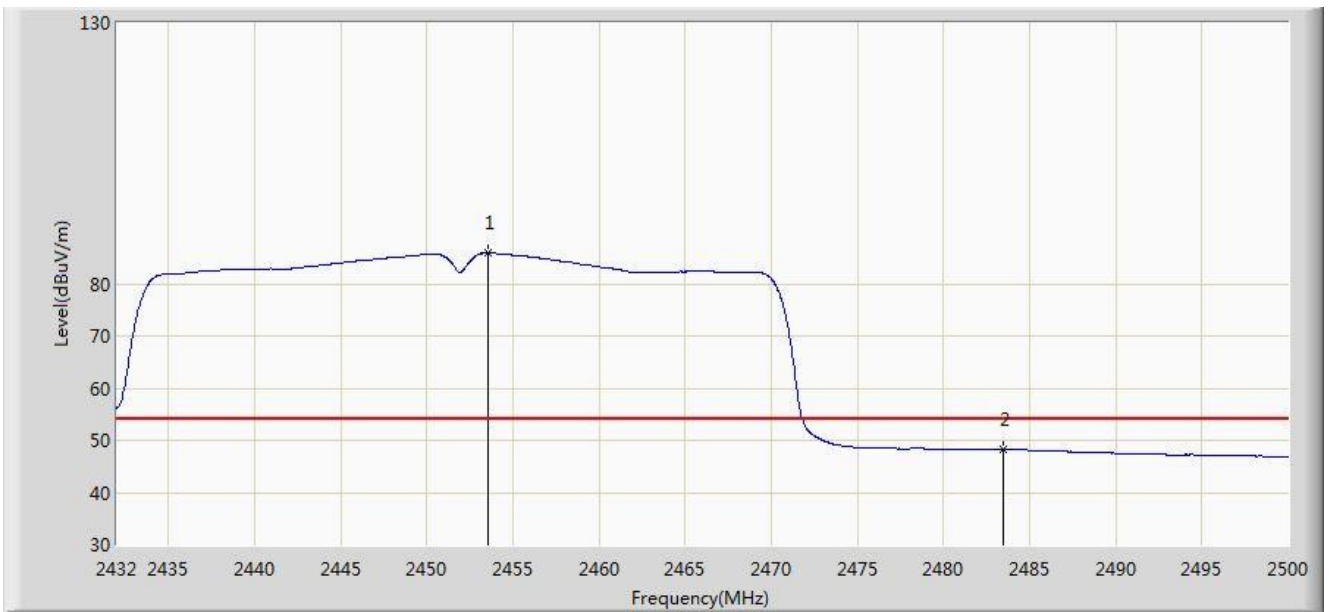


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2453.590	85.947	53.745	N/A	N/A	32.202	AV
2			2483.500	48.233	15.952	-5.767	54.000	32.282	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/19 - 22:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz	

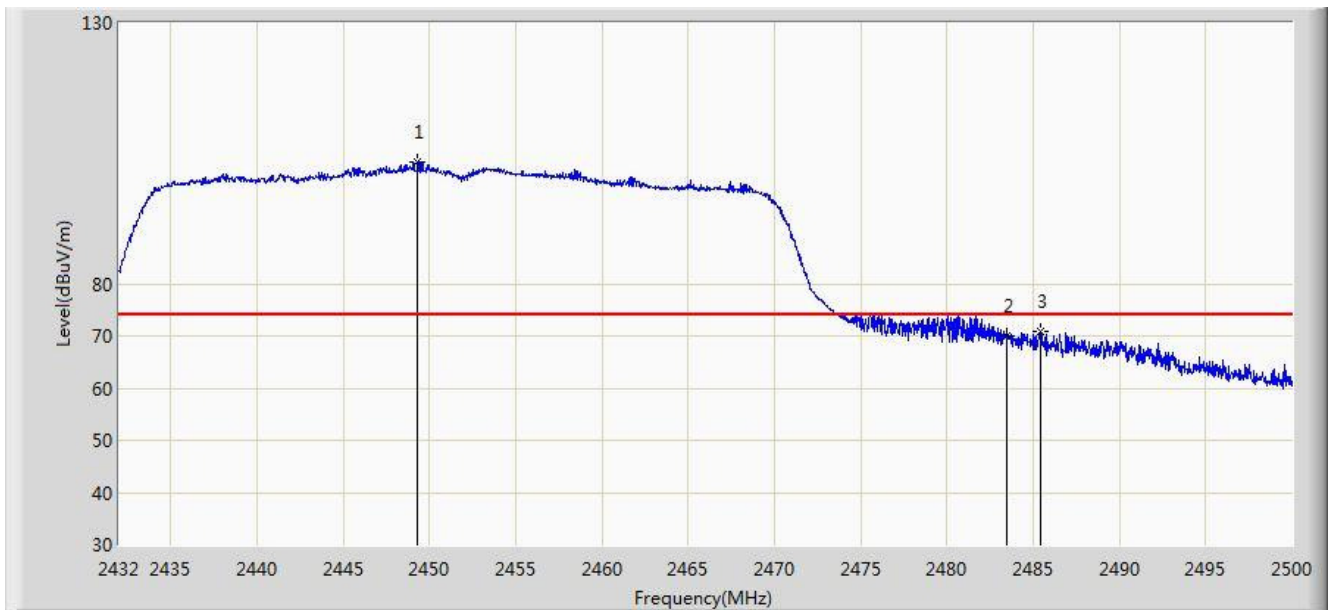


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2449.306	103.385	71.201	N/A	N/A	32.184	PK
2			2483.500	69.913	37.632	-4.087	74.000	32.282	PK
3			2485.448	70.867	38.579	-3.133	74.000	32.288	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/05/19 - 22:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz	

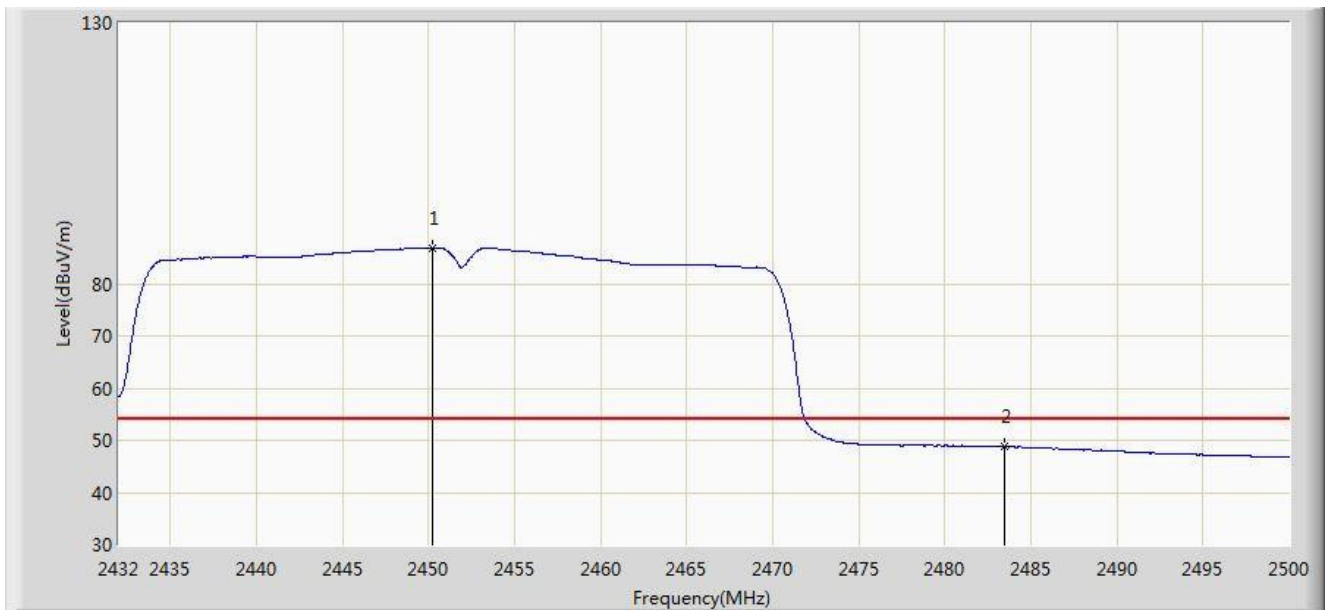

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.258	86.943	54.755	N/A	N/A	32.188	AV
2			2483.500	48.796	16.515	-5.204	54.000	32.282	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

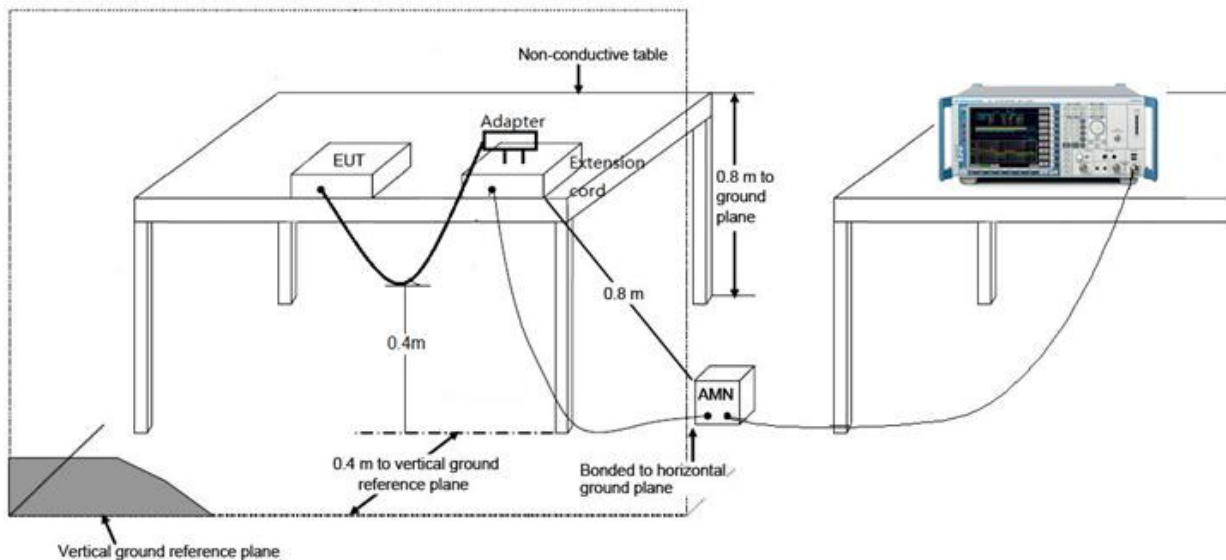

7.8.3. Test Result

Site: SR2	Time: 2017/06/04 - 18:27
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bruce Wang
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Mode 1	

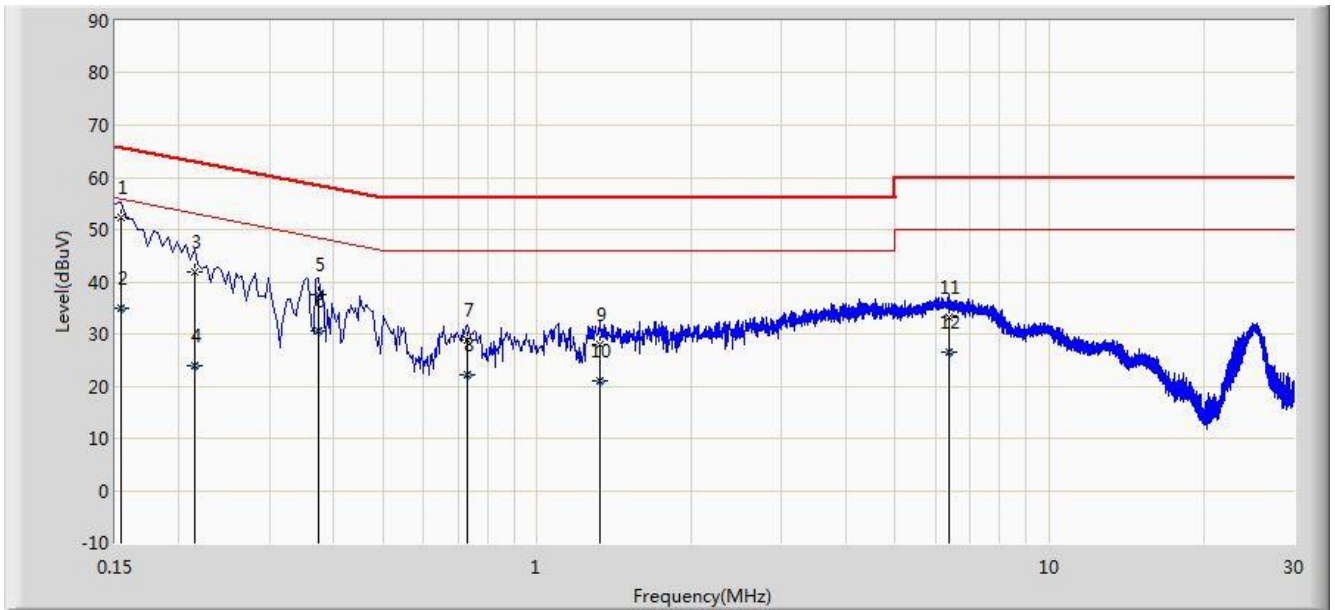


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.154	52.381	41.642	-13.400	65.781	10.740	QP
2			0.154	34.876	24.136	-20.906	55.781	10.740	AV
3			0.214	41.928	31.971	-21.121	63.049	9.957	QP
4			0.214	23.896	13.940	-29.152	53.049	9.957	AV
5			0.374	37.565	27.500	-20.847	58.412	10.064	QP
6			0.374	30.617	20.553	-17.795	48.412	10.064	AV
7			0.730	28.764	18.716	-27.236	56.000	10.048	QP
8			0.730	22.282	12.234	-23.718	46.000	10.048	AV
9			1.322	27.904	18.008	-28.096	56.000	9.896	QP
10			1.322	21.114	11.217	-24.886	46.000	9.896	AV
11			6.362	33.051	22.924	-26.949	60.000	10.127	QP
12			6.362	26.415	16.288	-23.585	50.000	10.127	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2017/06/04 - 18:39
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bruce Wang
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: HD IP Conference Phone	Power: AC 120V/60Hz
Test Mode: Mode 1	

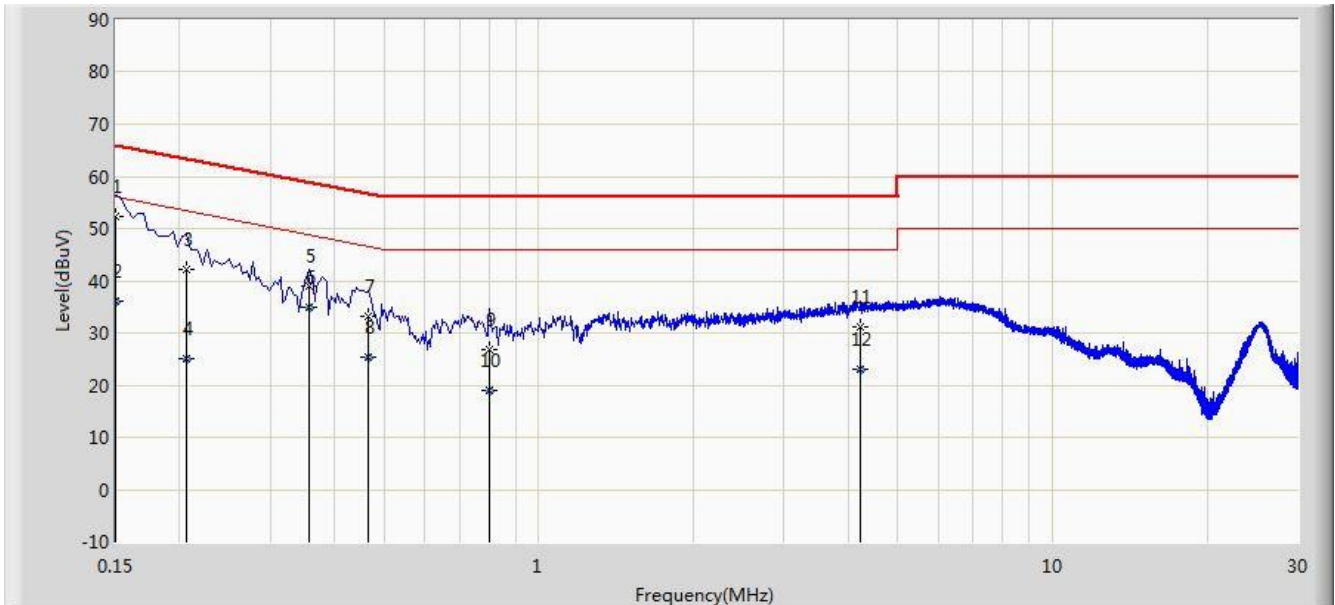

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.150	52.344	41.202	-13.656	66.000	11.142	QP
2			0.150	36.100	24.958	-19.900	56.000	11.142	AV
3			0.206	42.053	32.052	-21.312	63.365	10.001	QP
4			0.206	25.012	15.011	-28.353	53.365	10.001	AV
5			0.358	39.067	28.986	-19.707	58.775	10.081	QP
6			0.358	34.846	24.765	-13.929	48.775	10.081	AV
7			0.466	33.125	22.964	-23.460	56.585	10.162	QP
8			0.466	25.453	15.292	-21.132	46.585	10.162	AV
9			0.802	26.813	16.795	-29.187	56.000	10.018	QP
10			0.802	19.084	9.066	-26.916	46.000	10.018	AV
11			4.226	31.304	21.319	-24.696	56.000	9.985	QP
12			4.226	22.979	12.994	-23.021	46.000	9.985	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **HD IP Conference Phone FCC ID: T2C-CP960** is in compliance with Part 15C of the FCC Rules and IC Rule.

_____ The End _____