


TEST REPORT

Applicant Name: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
Address: No.666 Hu'an Rd,Huli District Xiamen City, Fujian, P.R. China
Report Number: SZ1240109-02053E-RFB
FCC ID: T2C-MP54E2
IC: 10741A-MP54E2

Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2;
RSS-247 ISSUE 3, AUGUST 2023

Sample Description


Product Type: Smart Business Phone
Model No.: MP54 E2
Multiple Model(s) No.: N/A
Trade Mark: 

Date Received: 2024/01/09
Issue Date: 2024/05/31

Test Result:	Pass▲
--------------	-------


▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:



Andy Yu
RF Engineer

Approved By:



Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	6
MEASUREMENT UNCERTAINTY.....	6
TEST FACILITY	7
SYSTEM TEST CONFIGURATION.....	8
DESCRIPTION OF TEST CONFIGURATION	8
EQUIPMENT MODIFICATIONS	9
EUT EXERCISE SOFTWARE	9
DUTY CYCLE	9
SUPPORT EQUIPMENT LIST AND DETAILS	9
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
FCC §15.247 (I) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	13
APPLICABLE STANDARD	13
RESULT	13
RSS-102 § 2.5.2 –EXEMPTION LIMITS FOR ROUTINE EVALUATION-RF EXPOSURE EVALUATION	14
APPLICABLE STANDARD	14
CALCULATED DATA:.....	14
§15.203 & RSS-GEN §6.8 ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	16
§15.207 (A) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS	17
APPLICABLE STANDARD	17
EUT SETUP	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
FACTOR & OVER LIMIT CALCULATION.....	19
TEST DATA	19
§15.205, §15.209, §15.247(D) & RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS.....	24
APPLICABLE STANDARD	24
EUT SETUP	24
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	26
TEST PROCEDURE	26
FACTOR & OVER LIMIT/MARGIN CALCULATION	27
TEST DATA	27

§15.247 (A)(2) & RSS-GEN§6.7 RSS-247 § 5.2 (A) 99% OCCUPIED BANDWIDTH & 6 DB EMISSION BANDWIDTH.....58

 APPLICABLE STANDARD58

 TEST PROCEDURE58

 TEST DATA59

§15.247(B)(3) & RSS-247 § 5.4(D) MAXIMUM CONDUCTED OUTPUT POWER60

 APPLICABLE STANDARD60

 TEST PROCEDURE60

 TEST DATA61

§15.247(D) & RSS-247 § 5.5 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....62

 APPLICABLE STANDARD62

 TEST PROCEDURE62

 TEST DATA62

§15.247(E) & RSS-247 § 5.2 (B) POWER SPECTRAL DENSITY63

 APPLICABLE STANDARD63

 TEST PROCEDURE63

 TEST DATA64

EUT PHOTOGRAPHS65

TEST SETUP PHOTOGRAPHS66

APPENDIX-BLE67

 APPENDIX A: DTS BANDWIDTH67

 APPENDIX B: OCCUPIED CHANNEL BANDWIDTH69

 APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER71

 APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY73

 APPENDIX E: BAND EDGE MEASUREMENTS75

 APPENDIX F: DUTY CYCLE76

APPENDIX-WIFI.....77

 APPENDIX A: DTS BANDWIDTH77

 APPENDIX B: OCCUPIED CHANNEL BANDWIDTH82

 APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER87

 APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY88

 APPENDIX E: BAND EDGE MEASUREMENTS94

 APPENDIX F: DUTY CYCLE97

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	SZ1240109-02053E-RFB	Original Report	2024/05/31

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	MP54 E2
FVIN	176.15.0.13
Product	Smart Business Phone
Tested Model	MP54 E2
Multiple Model(s)	N/A
Frequency Range	BLE: 2402-2480MHz Wi-Fi: 2412-2462MHz
Maximum Conducted Peak Output Power	BLE: 9.66dBm Wi-Fi: 18.27dBm(802.11b), 22.69dBm(802.11g), 22.22dBm(802.11n20)
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification [#]	BLE: 0.69dBi Wi-Fi: 0.69dBi (provided by the applicant)
Voltage Range	DC 48V from POE or DC 5V from adapter
Sample serial number	2GDB-8 for Conducted and Radiated Emissions Test 2GDB-1 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Adapter 1 Model:YLPS052000B1-US Input:100-240V,50/60Hz,0.5A Output:5.0V,2.0A Adapter 2 Model:YLPS052000C1-US Input:100-240V,50/60Hz,0.5A Output:5.0V,2.0A Adapter 3 Model:YLPS052000E1-US Input:100-240V,50/60Hz,0.5A Output:5.0V,2.0A

Objective

This report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission’s rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023 of the Innovation, Science and Economic Development Canada rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Frequency		213.55 Hz(k=2, 95% level of confidence)
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.75 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9 kHz~150 KHz	3.94dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)	
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20, EUT was tested with Channel 1, 6 and 11.

For BLE 1M mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“AuthenticTool_1.2.25.0[#]” exercise software was used ,The device was tested with the worst case was performed as below:

Mode	Data rate	Power Level [#]		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	16	16	16
802.11g	6Mbps	14	14	14
802.11n20	MCS0	14	14	14
BLE	1Mbps	9	9	9

The software and power level was provided by the applicant.

Duty cycle

Test Result: Compliant. Please refer to the Appendix.Please refer to the Appendix.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
BULL	Socket	GN-415K	5503290068073
DELL	PC	Latitude E5430	JG3NLV1
Grandstream	IP Phone	GXV3480	T11223323B898
Yealink	Earphone	N/A	N/A


External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-shielded un-detachable AC cable	1.2	Socket	LISN/ AC Mains
Un-shielded un-detachable DC cable	1.5	Adapter	EUT
Un-shielded detachable RJ45 cable	3.0	EUT	IP Phone
Un-shielded detachable RJ45 cable	3.0	EUT	PC
Un-shielded detachable RJ11 cable	1.8	EUT	Earphone
Un-shielded detachable RJ45 cable	10.0	EUT	PC
Un-shielded detachable RJ45 cable	10.0	EUT	IP Phone


Block Diagram of Test Setup

Powered by Adapter

For Conducted Emissions:

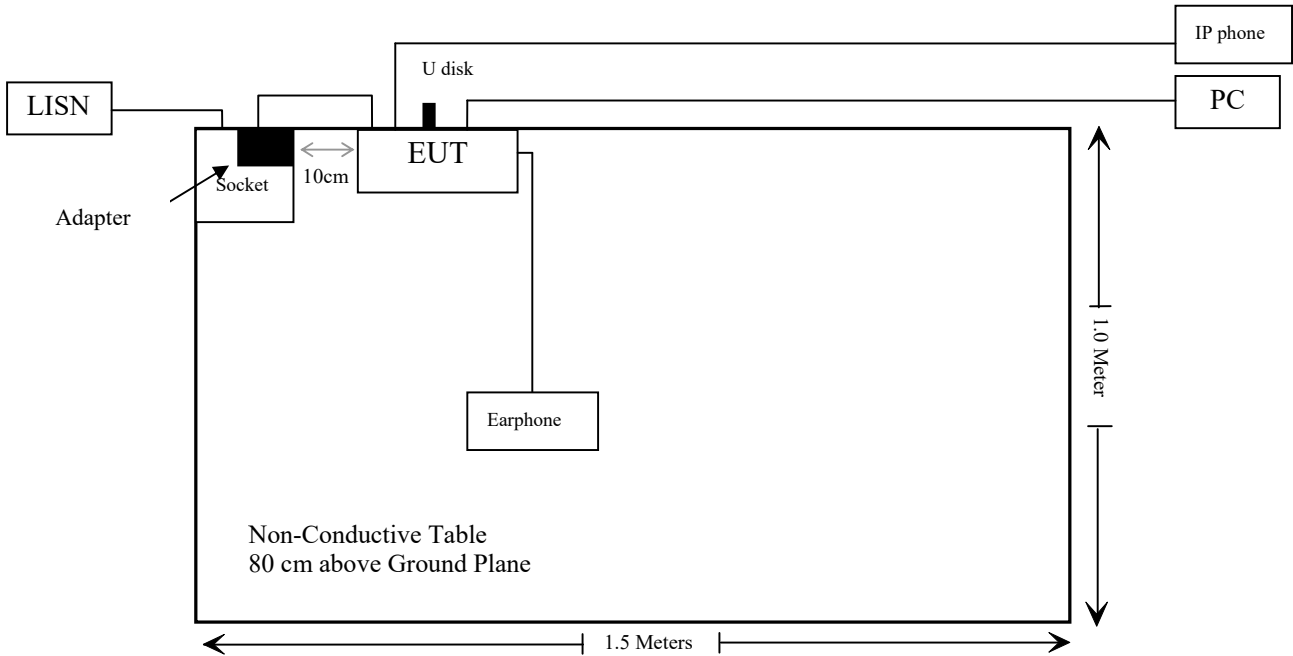

For Radiated Emissions :

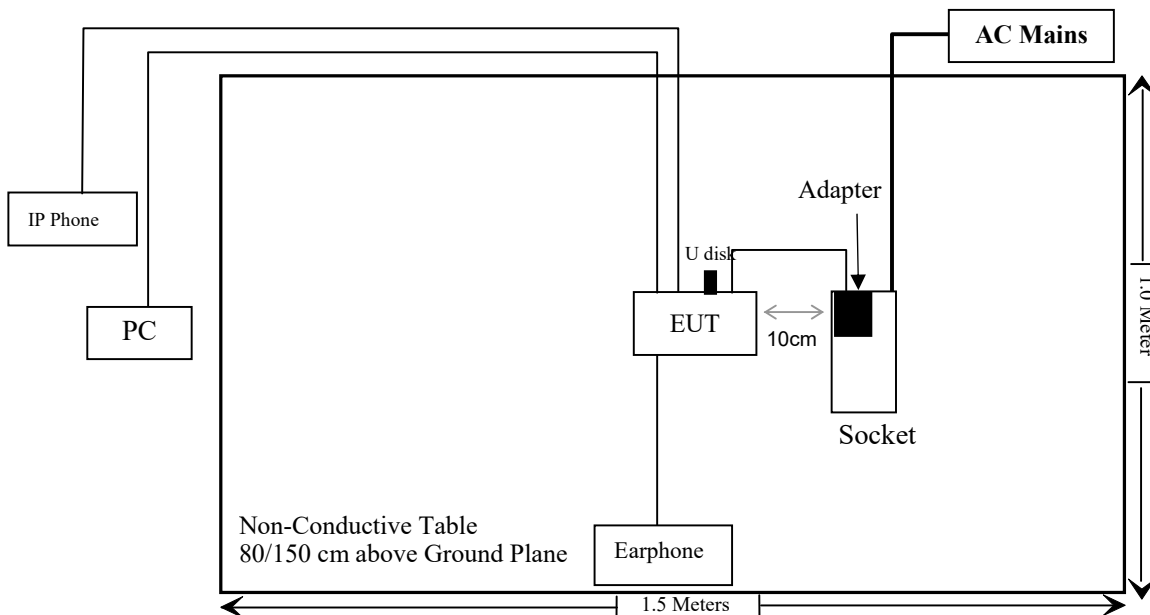

SUMMARY OF TEST RESULTS

FCC Rules	RSS Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (3) & §2.1091	RSS-102 § 2.5.2	Maximum Permissible Exposure (MPE)& Exposure Limits& Exemption Limits for Routine Evaluation – RF Exposure Evaluation	Compliant
§15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
§15.207 (a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	RSS-GEN § 8.10 & RSS-247 § 5.5	Spurious Emissions	Compliant
§15.247 (a)(2)	RSS- Gen§6.7 RSS-247 § 5.2 (a)	99% Occupied Bandwidth & 6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	RSS-247 § 5.4(d)	Maximum Conducted Output Power	Compliant
§15.247(d)	RSS-247 § 5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	RSS-247 § 5.2 (b)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2023/08/03	2024/08/02
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2023/08/03	2024/08/02
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2023/06/08	2024/06/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2024/07/19
ETS	Passive Loop Antenna	6512	29604	2023/07/07	2024/07/06
Unknown	Cable	Chamber Cable 1	F-03-EM236	2023/08/03	2024/08/02
Unknown	Cable	Chamber Cable 4	EC-007	2023/08/03	2024/08/02
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2023/04/18	2024/04/17
COM-POWER	Pre-amplifier	PA-122	181919	2023/06/29	2024/06/28
Schwarzbeck	Horn Antenna	BBHA9120D (1201)	1143	2023/07/26	2024/07/25
Unknown	RF Cable	KMSE	0735	2023/10/08	2024/10/07
Unknown	RF Cable	UFA147	219661	2023/10/08	2024/10/07
SNSD	2.4G Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2023/08/03	2024/08/02
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	NCR	NCR
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
A.H.System	Pre-amplifier	PAM-1840VH	190	2023/08/03	2024/08/02
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2023/08/03	2024/08/02
RF Conducted Test					
Tonscend	RF control Unit	JS0806-2	19D8060154	2023/09/06	2024/09/05
Rohde & Schwarz	Signal and Spectrum Analyzer	FSV40	101473	2024/01/16	2025/01/15
Unknown	10dB Attenuator	Unknown	F-03-EM190	2023/07/04	2024/07/03
Micro-Tronics	RF Cable	8082135	W1113	2023/07/04	2024/07/03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain [#]		Tune up conducted power [#]		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	0.69	1.17	10.0	10	20	0.002	1
2412-2462	0.69	1.17	23.0	200	20	0.05	1

Note: To maintain compliance with the FCC’s RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

RSS-102 § 2.5.2 –EXEMPTION LIMITS FOR ROUTINE EVALUATION-RF EXPOSURE EVALUATION

Applicable Standard

According to RSS-102 § (2.5.2):

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance). In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

Calculated Data:

For BLE:

The max tune-up conducted output power is 10.0 dBm, antenna gain is 0.69dBi.

Time-averaged maximum e.i.r.p. of the device is $10.0\text{dBm} + 0.69\text{dBi} = 10.69\text{dBm} = 0.012\text{ W}$

The worst case is $f = 2402\text{ MHz}$:

The limit is $1.31 \times 10^{-2} f^{0.6834} \text{ W} = 2.68\text{ W}$

$0.012\text{ W} < 2.68\text{ W}$

For WiFi:

The max tune-up conducted output power is 23.0 dBm, antenna gain is 0.69dBi.

Time-averaged maximum e.i.r.p. of the device is $23.0\text{dBm} + 0.69\text{dBi} = 23.69\text{dBm} = 0.234\text{ W}$

The worst case is $f = 2412\text{ MHz}$:

The limit is $1.31 \times 10^{-2} f^{0.6834} \text{ W} = 2.68\text{ W}$

$0.234\text{ W} < 2.68\text{ W}$

So the RF Exposure evaluation can be exempted.

§15.203 & RSS-Gen §6.8 ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has an internal antenna arrangement which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.

Mode	Antenna Type	Antenna Gain [#]	Impedance
BLE/Wi-Fi ANT	FPC	0.69dBi	50Ω

Result: Compliant.

§15.207 (a) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207 (a) & RSS-GEN §8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μH / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.


Table 4 - AC Power Lines Conducted Emission Limits		
Frequency range (MHz)	Conducted limit (dBμV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- (a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- (b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

EUT Setup

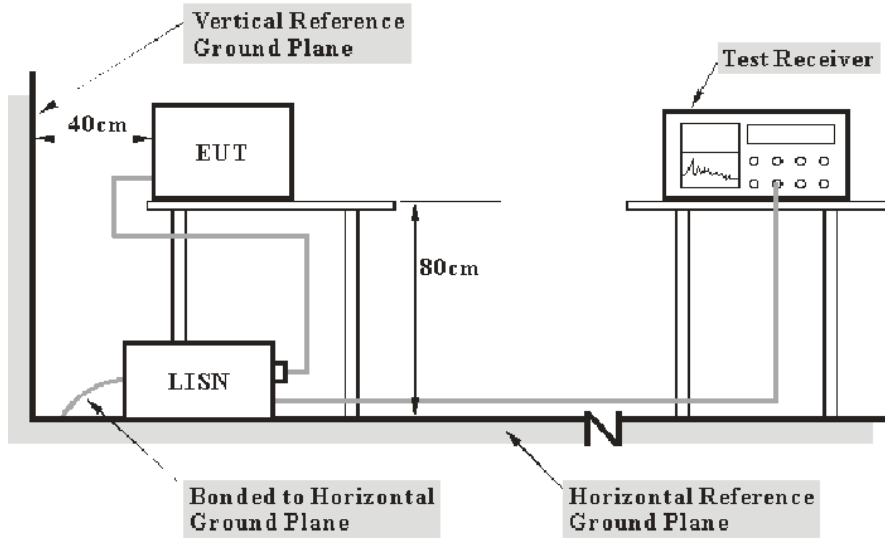

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 & RSS-247/RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions

Temperature:	22~24 °C
Relative Humidity:	49~54 %
ATM Pressure:	101 kPa


The testing was performed by Macy Shi on 2024-03-14.

EUT operation mode: Transmitting

Note: according to the test result of BT report, the worse case is adapter 1 YLPS052000B1-US was tested.

BLE: (Maximum output power mode, BLE Low channel)


AC 120V/60 Hz, Line

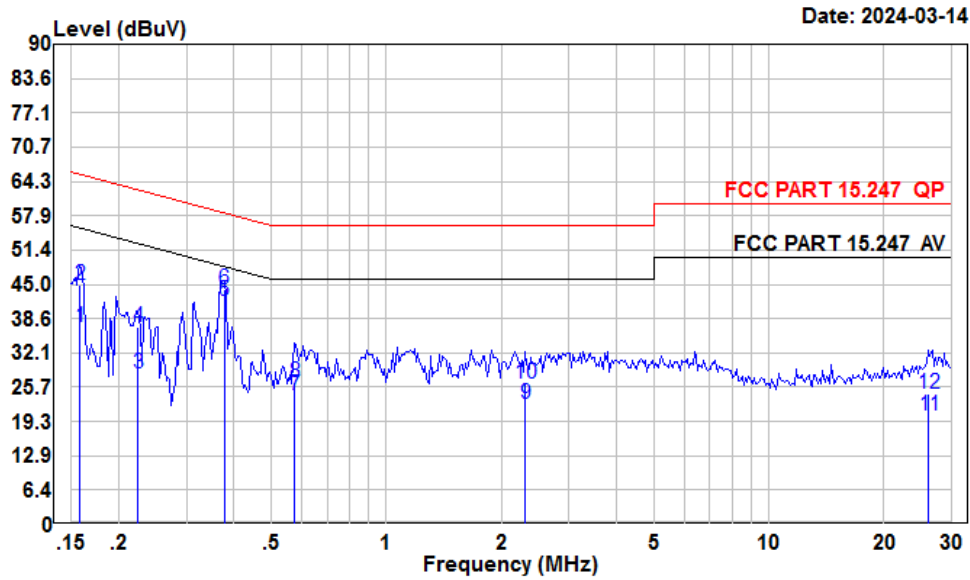

Condition: Line
 Project : SZ1240109-02053E-RF
 Tester : Macy shi
 Note : BLE

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.16	16.00	37.03	10.88	10.15	55.56	-18.53	Average
2	0.16	23.82	44.85	10.88	10.15	65.56	-20.71	QP
3	0.22	7.44	28.35	10.76	10.15	52.66	-24.31	Average
4	0.22	16.15	37.06	10.76	10.15	62.66	-25.60	QP
5	0.38	21.09	41.87	10.59	10.19	48.34	-6.47	Average
6	0.38	23.17	43.95	10.59	10.19	58.34	-14.39	QP
7	0.58	3.56	24.26	10.50	10.20	46.00	-21.74	Average
8	0.58	5.93	26.63	10.50	10.20	56.00	-29.37	QP
9	2.31	1.90	22.64	10.54	10.20	46.00	-23.36	Average
10	2.31	5.56	26.30	10.54	10.20	56.00	-29.70	QP
11	26.14	-0.41	20.47	10.64	10.24	50.00	-29.53	Average
12	26.14	3.61	24.49	10.64	10.24	60.00	-35.51	QP

AC 120V/60 Hz, Neutral

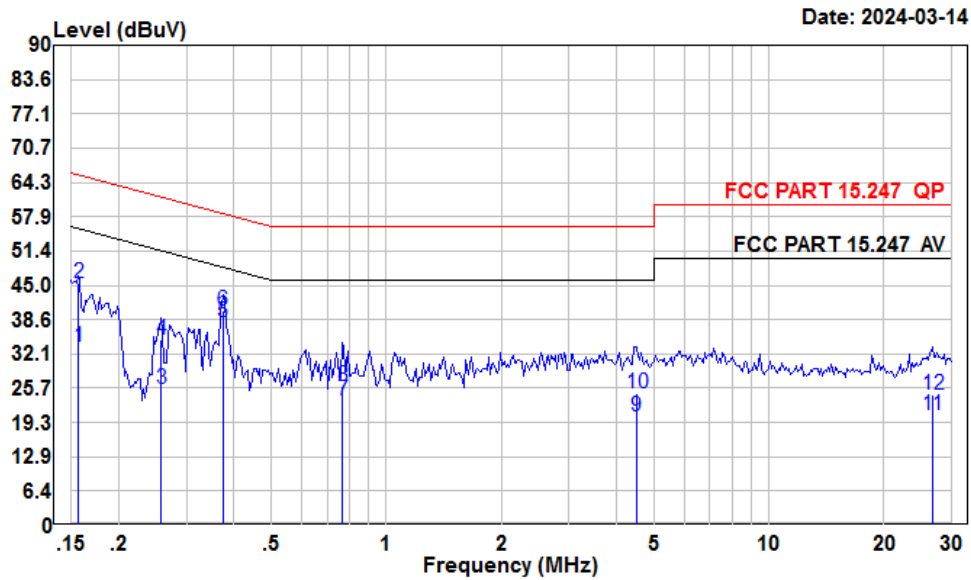


Condition: Neutral
 Project : SZ1240109-02053E-RF
 Tester : Macy shi
 Note : BLE

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.16	12.78	33.50	10.57	10.15	55.65	-22.15	Average
2	0.16	24.71	45.43	10.57	10.15	65.65	-20.22	QP
3	0.26	4.92	25.60	10.48	10.20	51.51	-25.91	Average
4	0.26	14.04	34.72	10.48	10.20	61.51	-26.79	QP
5	0.37	17.25	38.04	10.60	10.19	48.43	-10.39	Average
6	0.37	19.46	40.25	10.60	10.19	58.43	-18.18	QP
7	0.77	2.55	23.48	10.75	10.18	46.00	-22.52	Average
8	0.77	5.12	26.05	10.75	10.18	56.00	-29.95	QP
9	4.50	-0.29	20.41	10.46	10.24	46.00	-25.59	Average
10	4.50	4.16	24.86	10.46	10.24	56.00	-31.14	QP
11	26.70	-0.11	20.70	10.56	10.25	50.00	-29.30	Average
12	26.70	3.68	24.49	10.56	10.25	60.00	-35.51	QP

2.4G WiFi: (Maximum output power mode, 802.11 g, 2412MHz)


AC 120V/60 Hz, Line

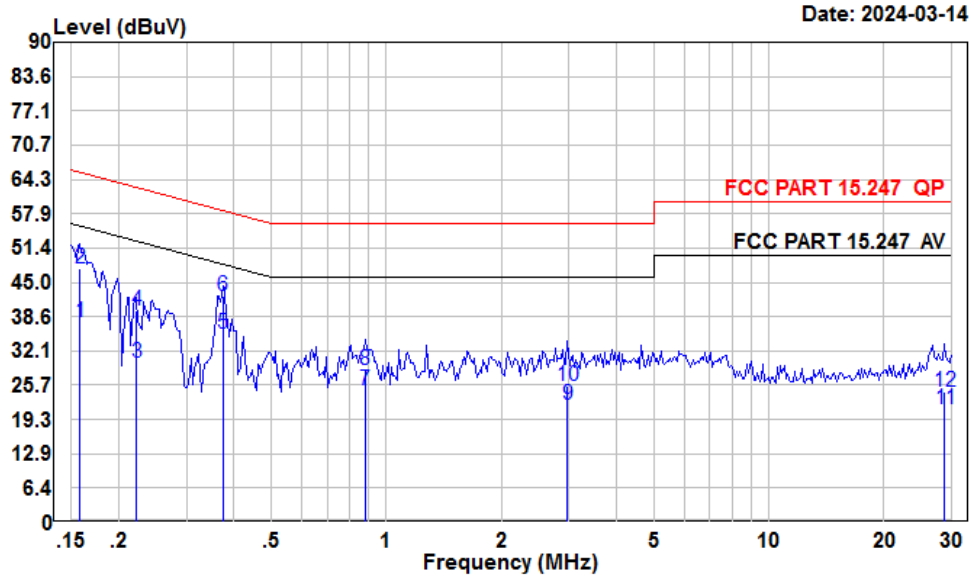

Condition: Line
 Project : SZ1240109-02053E-RF
 Tester : Macy shi
 Note : 2.4G WIFI

	Read	LISN	Cable	Limit	Over	
Freq	Level	Level	Factor	Line	Limit	Remark
MHz	dBuV	dBuV	dB	dB	dB	dB
1	0.16	16.44	37.47	10.88	10.15	55.56 -18.09 Average
2	0.16	26.43	47.46	10.88	10.15	65.56 -18.10 QP
3	0.22	8.91	29.82	10.77	10.14	52.74 -22.92 Average
4	0.22	18.92	39.83	10.77	10.14	62.74 -22.91 QP
5	0.37	14.55	35.34	10.60	10.19	48.43 -13.09 Average
6	0.37	21.59	42.38	10.60	10.19	58.43 -16.05 QP
7	0.88	4.08	24.69	10.44	10.17	46.00 -21.31 Average
8	0.88	8.03	28.64	10.44	10.17	56.00 -27.36 QP
9	2.98	1.20	21.90	10.43	10.27	46.00 -24.10 Average
10	2.98	4.75	25.45	10.43	10.27	56.00 -30.55 QP
11	28.76	0.35	21.15	10.54	10.26	50.00 -28.85 Average
12	28.76	3.74	24.54	10.54	10.26	60.00 -35.46 QP

AC 120V/60 Hz, Neutral

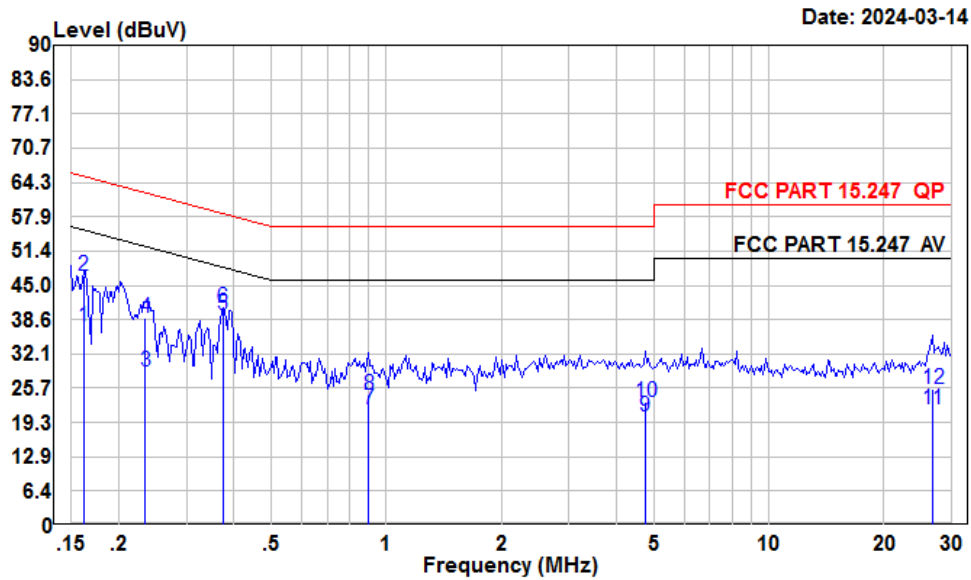

Condition: Neutral
 Project : SZ1240109-02053E-RF
 Tester : Macy shi
 Note : 2.4G WIFI

	Read	LISN	Cable	Limit	Over			
Freq	Level	Level	Loss	Line	Limit	Remark		
MHz	dBuV	dBuV	dB	dB	dBuV	dB		
1	0.16	16.50	37.20	10.55	10.15	55.38	-18.18	Average
2	0.16	26.04	46.74	10.55	10.15	65.38	-18.64	QP
3	0.23	8.14	28.76	10.45	10.17	52.30	-23.54	Average
4	0.23	18.31	38.93	10.45	10.17	62.30	-23.37	QP
5	0.37	18.67	39.46	10.60	10.19	48.43	-8.97	Average
6	0.37	20.05	40.84	10.60	10.19	58.43	-17.59	QP
7	0.90	0.80	21.81	10.84	10.17	46.00	-24.19	Average
8	0.90	3.39	24.40	10.84	10.17	56.00	-31.60	QP
9	4.75	-0.22	20.50	10.49	10.23	46.00	-25.50	Average
10	4.75	2.36	23.08	10.49	10.23	56.00	-32.92	QP
11	26.70	0.83	21.64	10.56	10.25	50.00	-28.36	Average
12	26.70	4.87	25.68	10.56	10.25	60.00	-34.32	QP

§15.205, §15.209, §15.247(d) & RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


According to RSS-GEN § 8.10 & RSS-247 § 5.5

Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:(a) The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD).(b) Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.(c) Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

EUT Setup


9 kHz-30MHz:

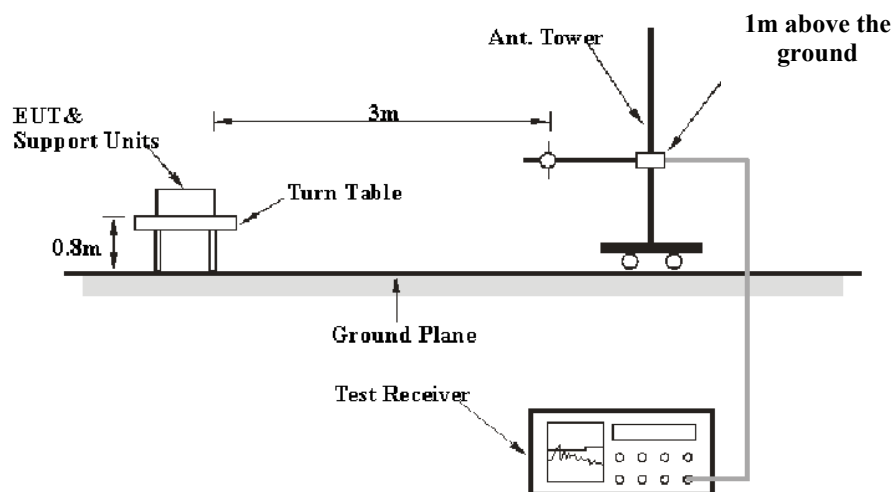

30MHz-1GHz:

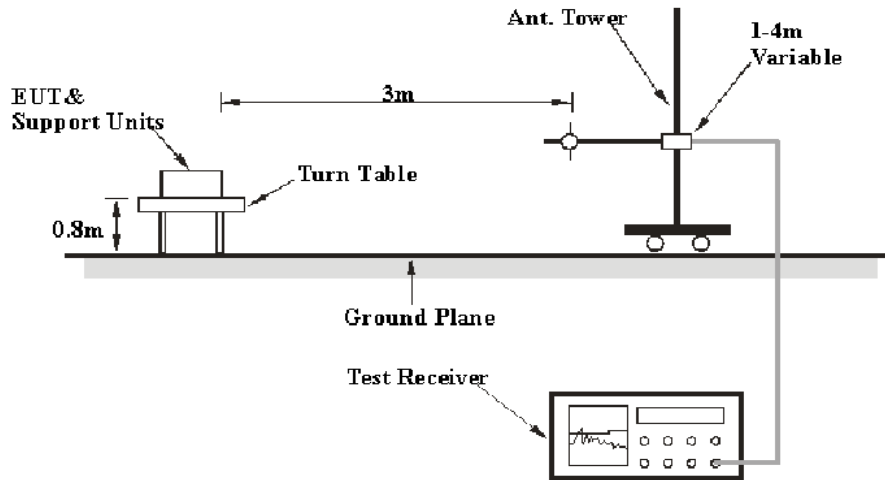

Above 1GHz:

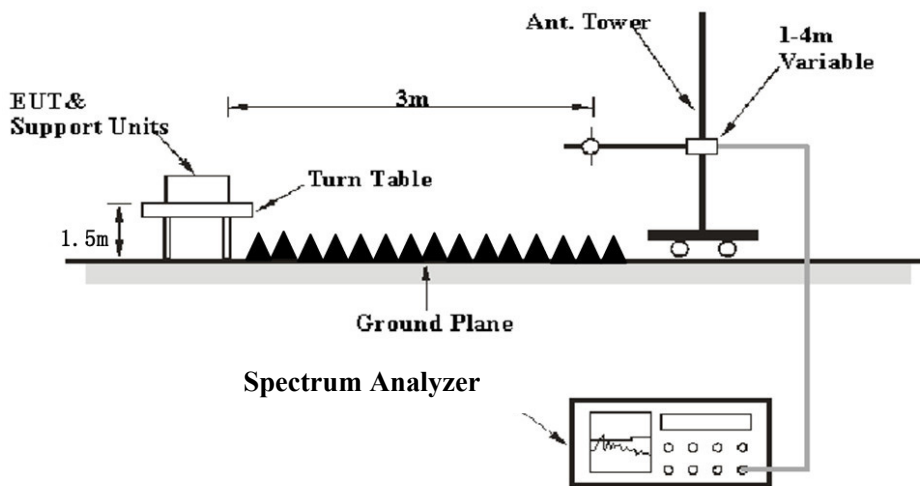

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013 & RSS-Gen. The specification used was the FCC 15.209, and FCC 15.247 & RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-25GHz:

Frequency Range	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/Ton

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	23~25.3 °C
Relative Humidity:	51~55 %
ATM Pressure:	101 kPa

The testing was performed by Anson Su on 2024-03-16 for below 1GHz and Zenos Qiao from 2024-03-04 to 2024-03-10 for above 1GHz.

EUT operation mode: Transmitting

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded.

Note: according to the test result of BT report, the worse case is adapter 1 YLPS052000B1-US was tested.

9 kHz-30MHz:

BLE (*Maximum output power mode, BLE Low channel*)


The amplitude of spurious emissions attenuated more than 20 dB below the limit was not recorded.

2.4G WiFi: (*Maximum output power mode, 802.11 g, 2412MHz*)

The amplitude of spurious emissions attenuated more than 20 dB below the limit was not recorded.

30MHz-1GHz:


BLE: (Maximum output power mode, BLE Low channel)
Horizontal

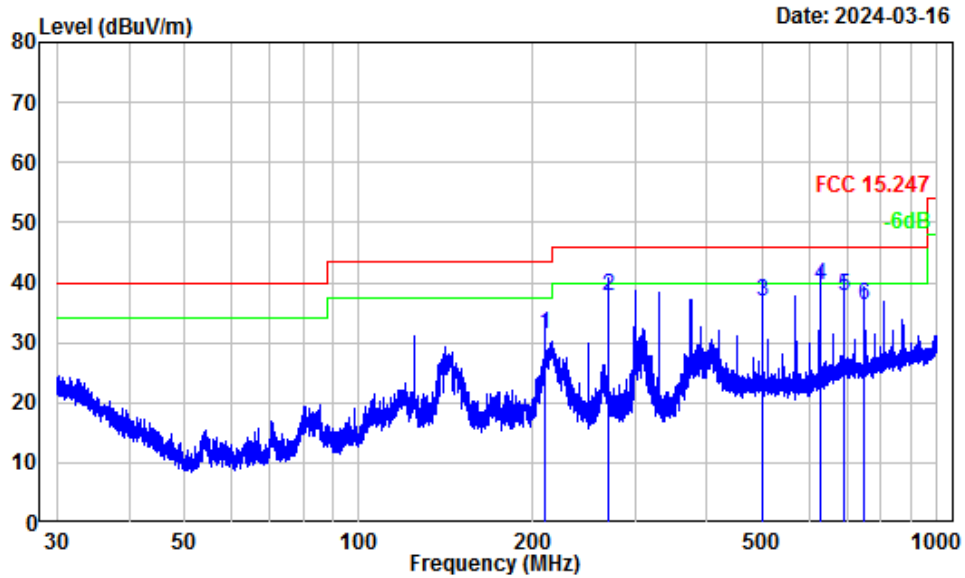

Site : Chamber A
 Condition : 3m Horizontal
 Project Number: SZ1240109-02053E-RF
 Note : BLE
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	210.05	-11.19	42.68	31.49	43.50	-12.01	QP
2	270.02	-11.09	48.86	37.77	46.00	-8.23	QP
3	500.08	-5.05	41.80	36.75	46.00	-9.25	QP
4	630.03	-3.25	42.70	39.45	46.00	-6.55	QP
5	690.17	-1.70	39.41	37.71	46.00	-8.29	QP
6	750.11	-1.67	37.99	36.32	46.00	-9.68	QP

Vertical

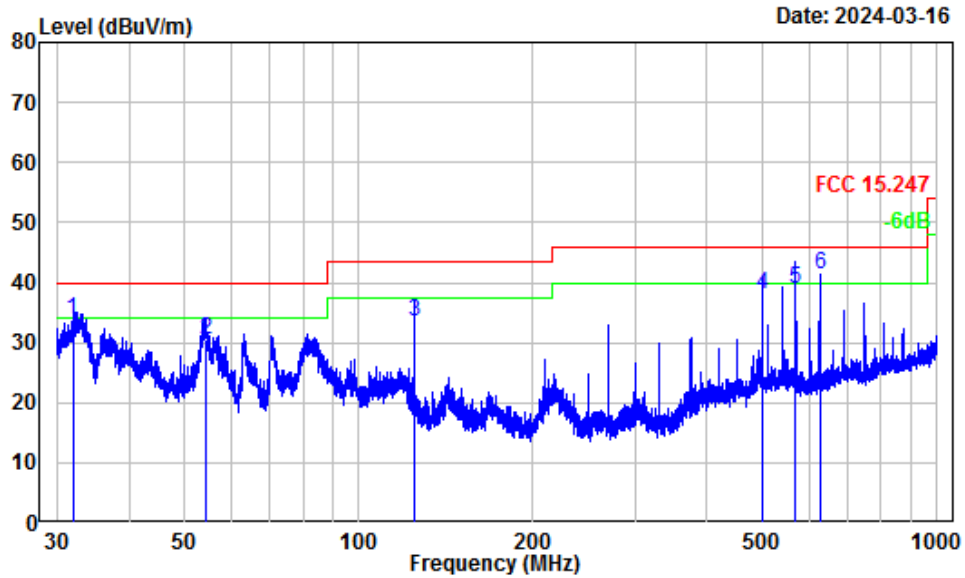


Site : Chamber A
 Condition : 3m Vertical
 Project Number: SZ1240109-02053E-RF
 Note : BLE
 Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	31.97	-6.82	40.60	33.78	40.00	-6.22	QP
2	54.33	-17.53	48.07	30.54	40.00	-9.46	QP
3	125.01	-10.77	44.36	33.59	43.50	-9.91	QP
4	500.08	-5.25	43.30	38.05	46.00	-7.95	QP
5	570.11	-4.71	43.60	38.89	46.00	-7.11	QP
6	630.03	-3.49	45.00	41.51	46.00	-4.49	QP

2.4G WiFi: (Maximum output power mode, 802.11 g, 2412MHz)


Horizontal

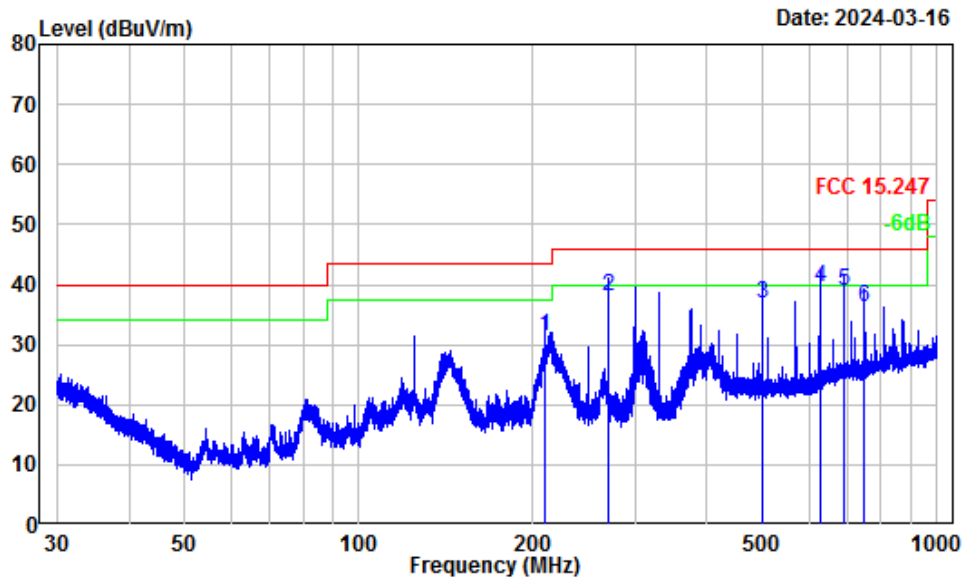

Site : Chamber A
 Condition : 3m Horizontal
 Project Number: SZ1240109-02053E-RF
 Note : 2.4G WIFI
 Tester : Anson Su

	Freq Factor		Read Level		Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	209.96	-11.19	42.49	31.30	43.50	-12.20	QP
2	270.02	-11.09	49.01	37.92	46.00	-8.08	QP
3	500.08	-5.05	41.90	36.85	46.00	-9.15	QP
4	630.03	-3.25	42.65	39.40	46.00	-6.60	QP
5	690.17	-1.70	40.51	38.81	46.00	-7.19	QP
6	750.11	-1.67	37.98	36.31	46.00	-9.69	QP

Vertical

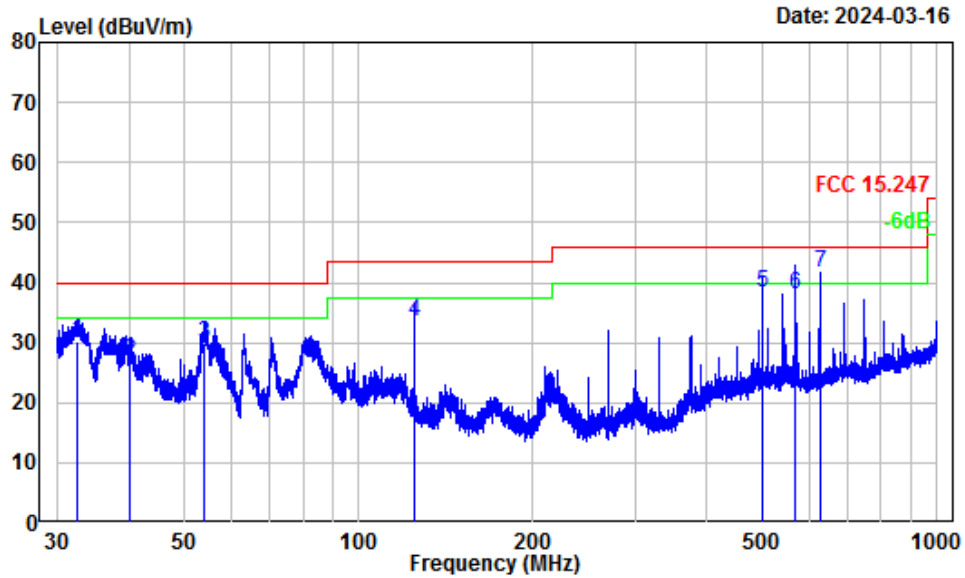

Site : Chamber A
 Condition : 3m Vertical
 Project Number: SZ1240109-02053E-RF
 Note : 2.4G WIFI
 Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	32.55	-7.19	37.40	30.21	40.00	-9.79 QP
2	40.08	-11.94	38.77	26.83	40.00	-13.17 QP
3	54.05	-17.52	47.46	29.94	40.00	-10.06 QP
4	125.01	-10.77	44.22	33.45	43.50	-10.05 QP
5	500.08	-5.25	43.70	38.45	46.00	-7.55 QP
6	570.11	-4.71	42.80	38.09	46.00	-7.91 QP
7	630.03	-3.49	45.02	41.53	46.00	-4.47 QP

1-25 GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
BLE 1M							
Low Channel 2402MHz							
4804.00	49.84	PK	H	2.42	52.26	74	-21.74
4804.00	42.26	AV	H	2.42	44.68	54	-9.32
4804.00	50.38	PK	V	2.42	52.80	74	-21.20
4804.00	42.75	AV	V	2.42	45.17	54	-8.83
Middle Channel 2440MHz							
4880.00	50.57	PK	H	2.58	53.15	74	-20.85
4880.00	43.04	AV	H	2.58	45.62	54	-8.38
4880.00	51.12	PK	V	2.58	53.70	74	-20.30
4880.00	43.63	AV	V	2.58	46.21	54	-7.79
High Channel 2480MHz							
4960.00	51.25	PK	H	2.68	53.93	74	-20.07
4960.00	43.87	AV	H	2.68	46.55	54	-7.45
4960.00	51.69	PK	V	2.68	54.37	74	-19.63
4960.00	44.52	AV	V	2.68	47.20	54	-6.80

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

2.4G Wi-Fi

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11b							
Low Channel 2412MHz							
4824.00	47.87	PK	H	2.45	50.32	74	-23.68
4824.00	40.02	AV	H	2.45	42.47	54	-11.53
4824.00	48.58	PK	V	2.45	51.03	74	-22.97
4824.00	40.76	AV	V	2.45	43.21	54	-10.79
Middle Channel 2437MHz							
4884.00	48.75	PK	H	2.6	51.35	74	-22.65
4884.00	41.84	AV	H	2.6	44.44	54	-9.56
4884.00	49.53	PK	V	2.6	52.13	74	-21.87
4884.00	42.48	AV	V	2.6	45.08	54	-8.92
High Channel 2462MHz							
4924.00	49.63	PK	H	2.63	52.26	74	-21.74
4924.00	43.51	AV	H	2.63	46.14	54	-7.86
4924.00	50.45	PK	V	2.63	53.08	74	-20.92
4924.00	44.24	AV	V	2.63	46.87	54	-7.13
802.11g							
Low Channel 2412MHz							
4824.00	46.78	PK	H	2.45	49.23	74	-24.77
4824.00	33.51	AV	H	2.45	35.96	54	-18.04
4824.00	47.33	PK	V	2.45	49.78	74	-24.22
4824.00	34.06	AV	V	2.45	36.51	54	-17.49
Middle Channel 2437MHz							
4884.00	47.32	PK	H	2.6	49.92	74	-24.08
4884.00	34.29	AV	H	2.6	36.89	54	-17.11
4884.00	47.94	PK	V	2.6	50.54	74	-23.46
4884.00	34.81	AV	V	2.6	37.41	54	-16.59
High Channel 2462MHz							
4924.00	47.89	PK	H	2.63	50.52	74	-23.48
4924.00	35.06	AV	H	2.63	37.69	54	-16.31
4924.00	48.47	PK	V	2.63	51.10	74	-22.90
4924.00	35.68	AV	V	2.63	38.31	54	-15.69

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11n20							
Low Channel 2412MHz							
4824.00	46.57	PK	H	2.45	49.02	74	-24.98
4824.00	33.36	AV	H	2.45	35.81	54	-18.19
4824.00	47.15	PK	V	2.45	49.60	74	-24.40
4824.00	33.83	AV	V	2.45	36.28	54	-17.72
Middle Channel 2437MHz							
4884.00	47.09	PK	H	2.6	49.69	74	-24.31
4884.00	34.15	AV	H	2.6	36.75	54	-17.25
4884.00	47.72	PK	V	2.6	50.32	74	-23.68
4884.00	34.66	AV	V	2.6	37.26	54	-16.74
High Channel 2462MHz							
4924.00	47.64	PK	H	2.63	50.27	74	-23.73
4924.00	34.87	AV	H	2.63	37.50	54	-16.50
4924.00	48.28	PK	V	2.63	50.91	74	-23.09
4924.00	35.39	AV	V	2.63	38.02	54	-15.98

Note:


Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

Test plots for Band Edge Measurements (Radiated):

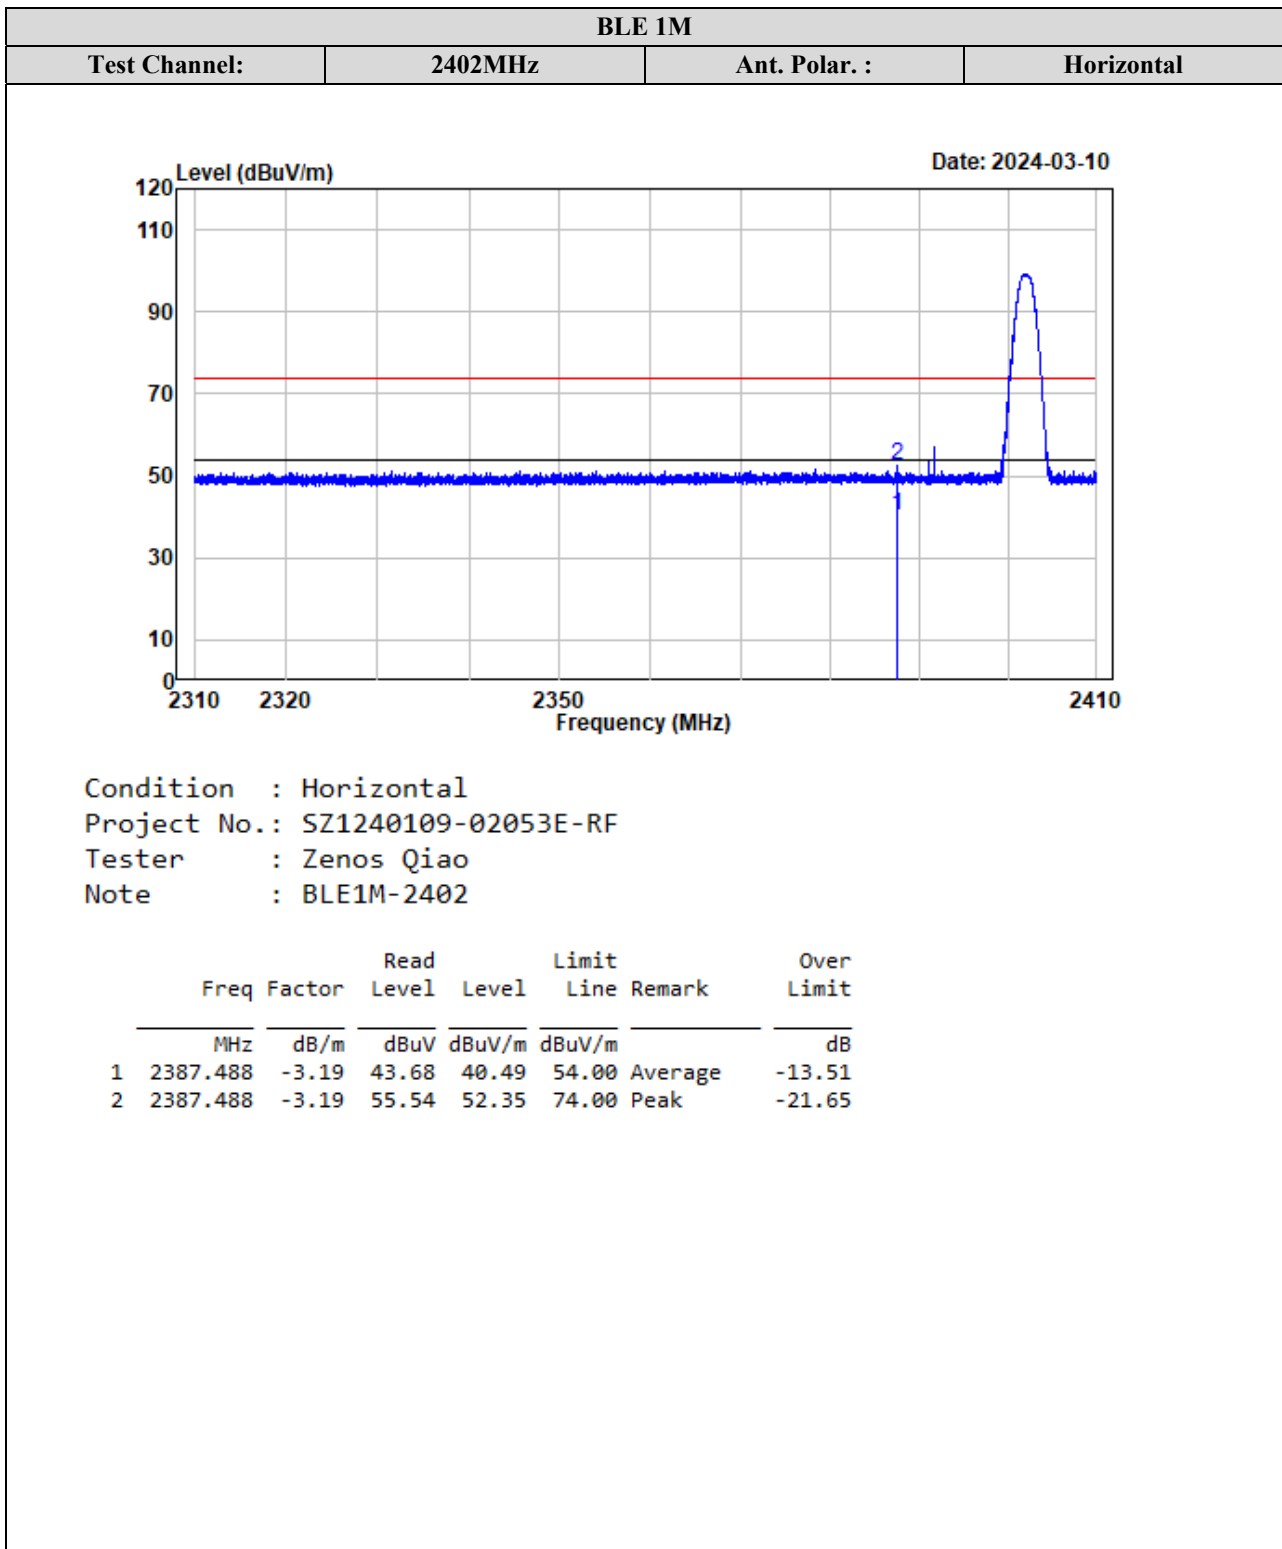


BLE 1M			
Test Channel:	2402MHz	Ant. Polar. :	Vertical

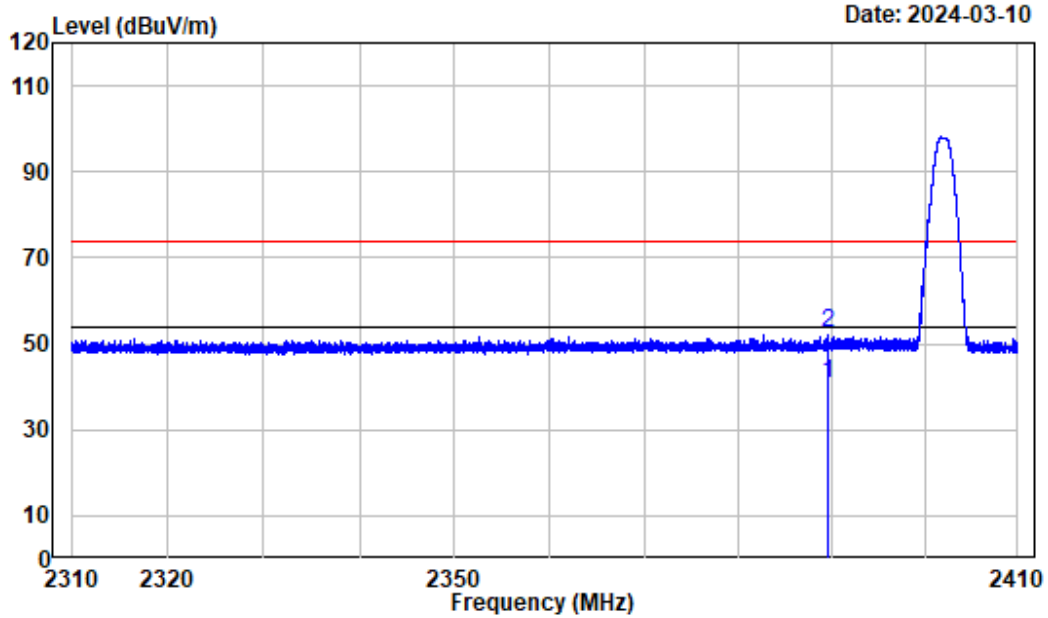

Condition : Vertical
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : BLE1M-2402

	Freq	Factor	Read Level	Level	Limit	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	2389.688	-3.20	44.01	40.81	54.00	Average -13.19
2	2389.688	-3.20	55.86	52.66	74.00	Peak -21.34


BLE 1M			
Test Channel:	2480MHz	Ant. Polar. :	Horizontal

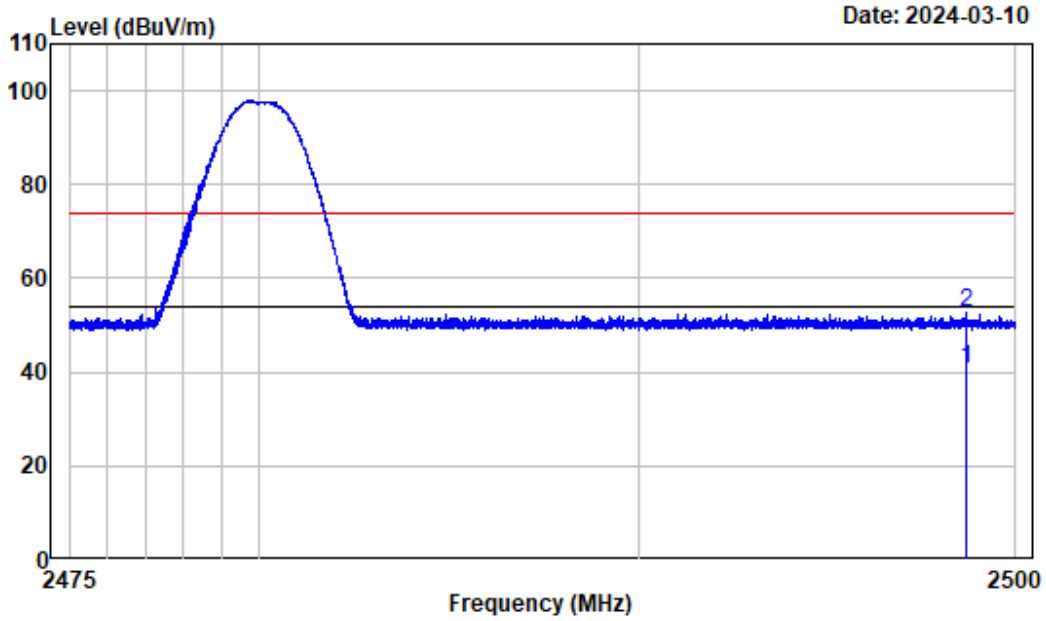

Condition : Horizontal
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : BLE1M-2480

	Freq	Factor	Read Level	Level	Limit	Line Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2498.675	-3.20	43.93	40.73	54.00	Average	-13.27
2	2498.675	-3.20	55.79	52.59	74.00	Peak	-21.41


BLE 1M			
Test Channel:	2480MHz	Ant. Polar. :	Vertical

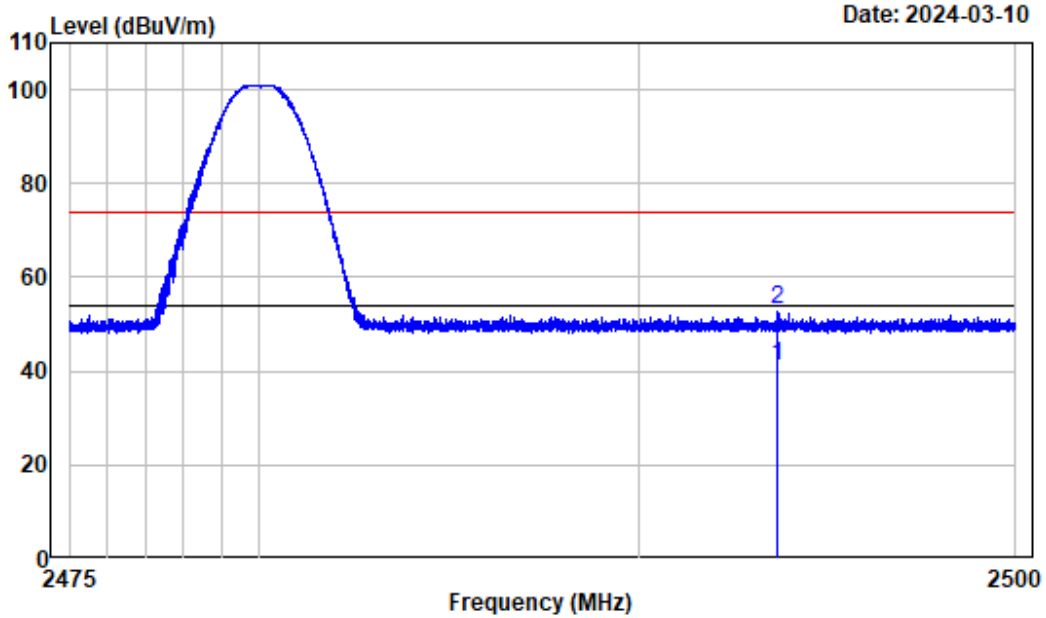

Condition : Vertical
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : BLE1M-2480

	Freq	Factor	Read Level	Level	Limit	Line Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2493.706	-3.19	44.35	41.16	54.00	Average	-12.84
2	2493.706	-3.19	56.12	52.93	74.00	Peak	-21.07


802.11b			
Test Channel:	2412MHz	Ant. Polar. :	Horizontal

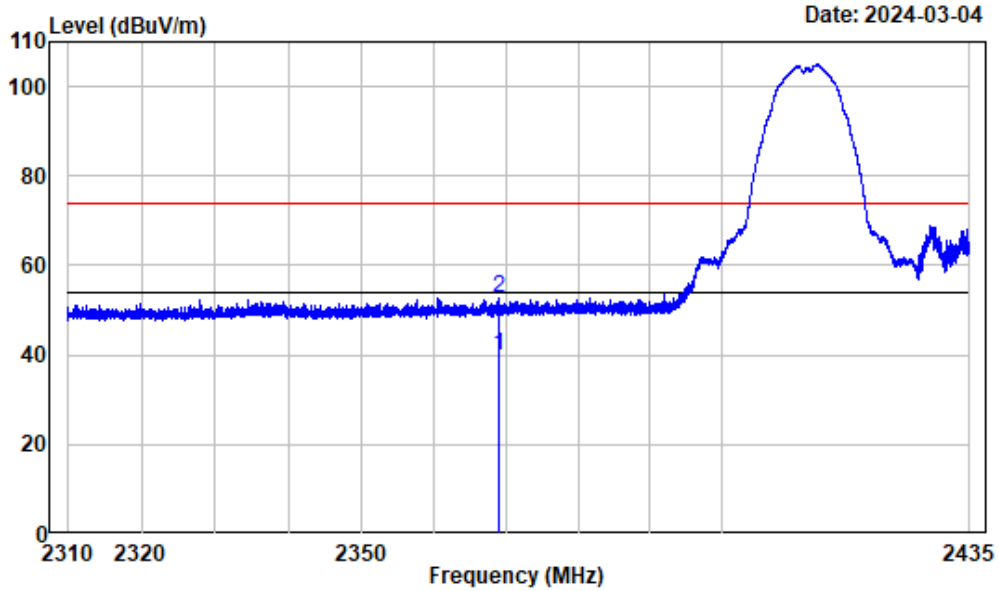

Condition : Horizontal
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi-b-2412

	Freq	Factor	Read		Limit		Over
			Level	Level	Line	Remark	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2368.938	-3.17	43.17	40.00	54.00	Average	-14.00
2	2368.938	-3.17	55.94	52.77	74.00	Peak	-21.23


802.11b			
Test Channel:	2412MHz	Ant. Polar. :	Vertical

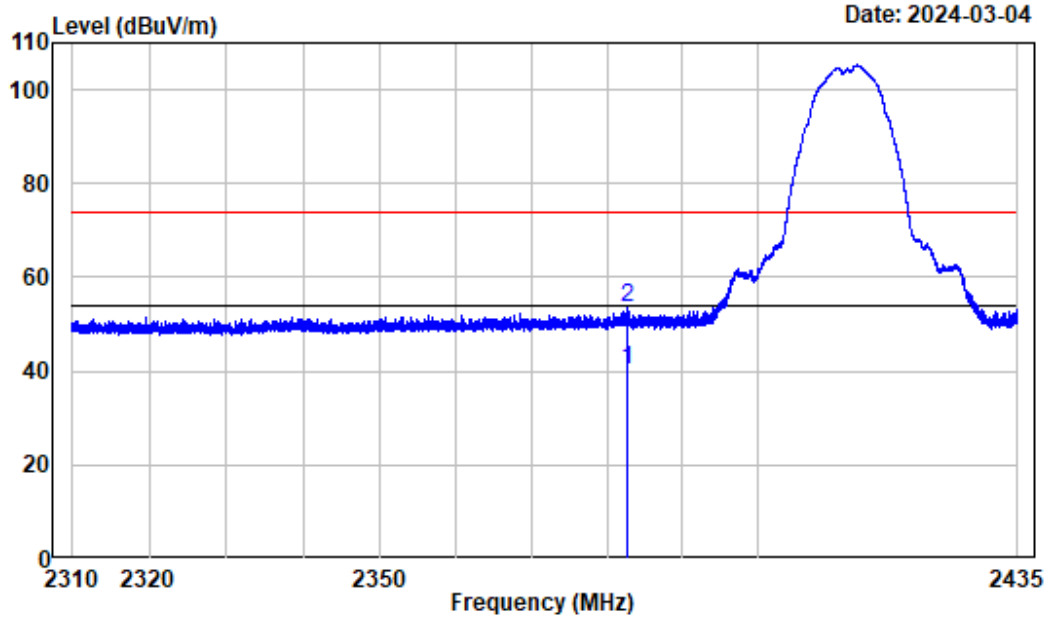

Condition : Vertical
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi-b-2412

	Freq	Factor	Read Level	Level	Limit	Line Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2382.578	-3.20	43.34	40.14	54.00	Average	-13.86
2	2382.578	-3.20	56.63	53.43	74.00	Peak	-20.57


802.11b			
Test Channel:	2462MHz	Ant. Polar. :	Horizontal

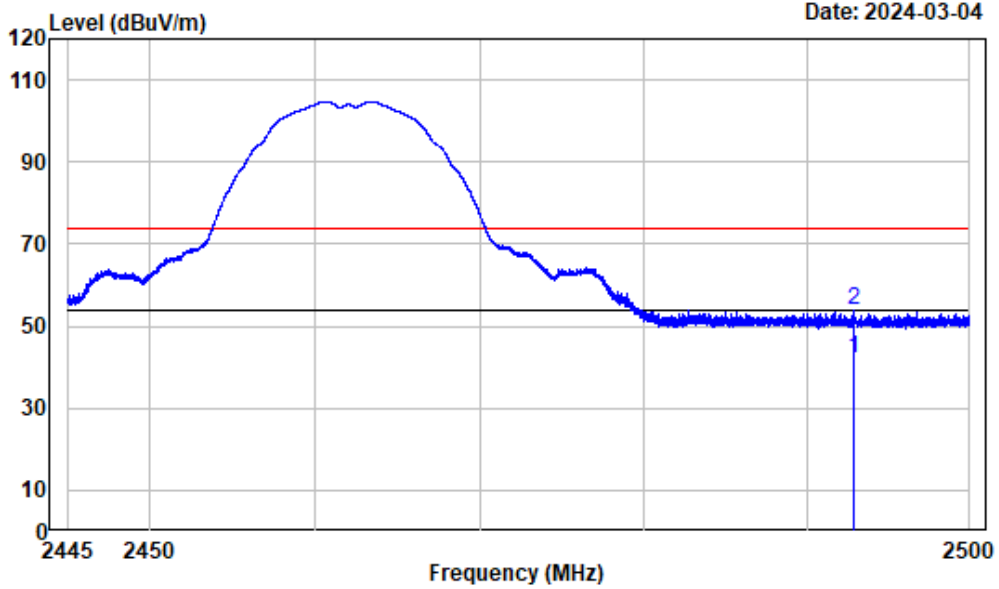

Condition : Horizontal
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi-b-2462

Freq Factor		Read Level		Limit		Over
MHz	dB/m	dBuV	dBuV/m	dBuV/m	Remark	Limit
1	2492.836	-3.19	45.16	41.97	54.00 Average	-12.03
2	2492.836	-3.19	57.29	54.10	74.00 Peak	-19.90


802.11b			
Test Channel:	2462MHz	Ant. Polar. :	Vertical

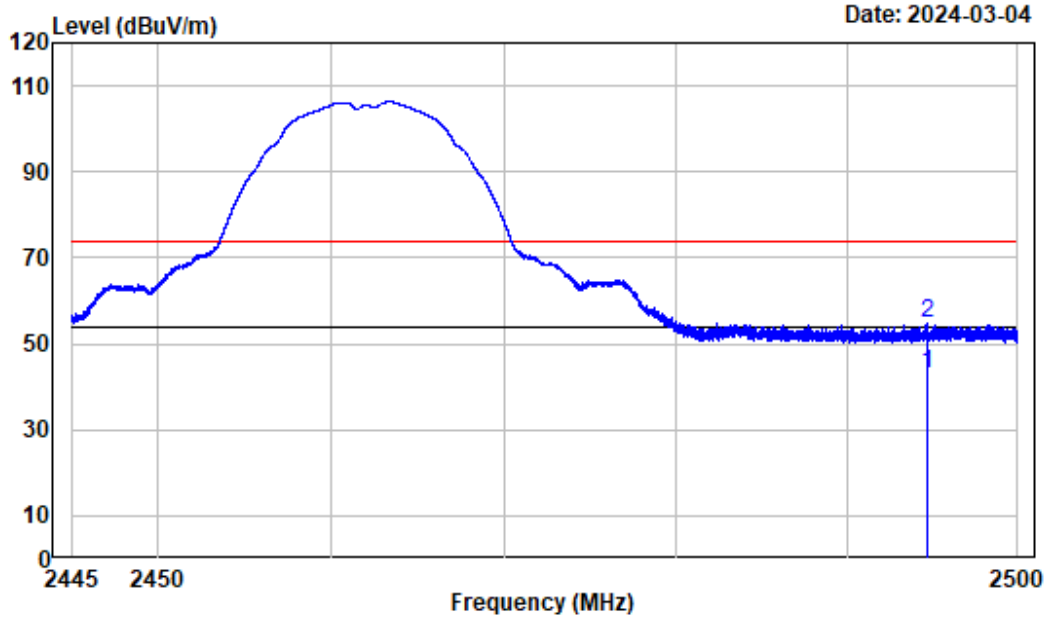

Condition : Vertical
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi-b-2462

	Freq	Factor	Read Level	Level	Limit	Line Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2494.734	-3.19	46.05	42.86	54.00	Average	-11.14
2	2494.734	-3.19	57.88	54.69	74.00	Peak	-19.31


802.11g			
Test Channel:	2412MHz	Ant. Polar. :	Horizontal

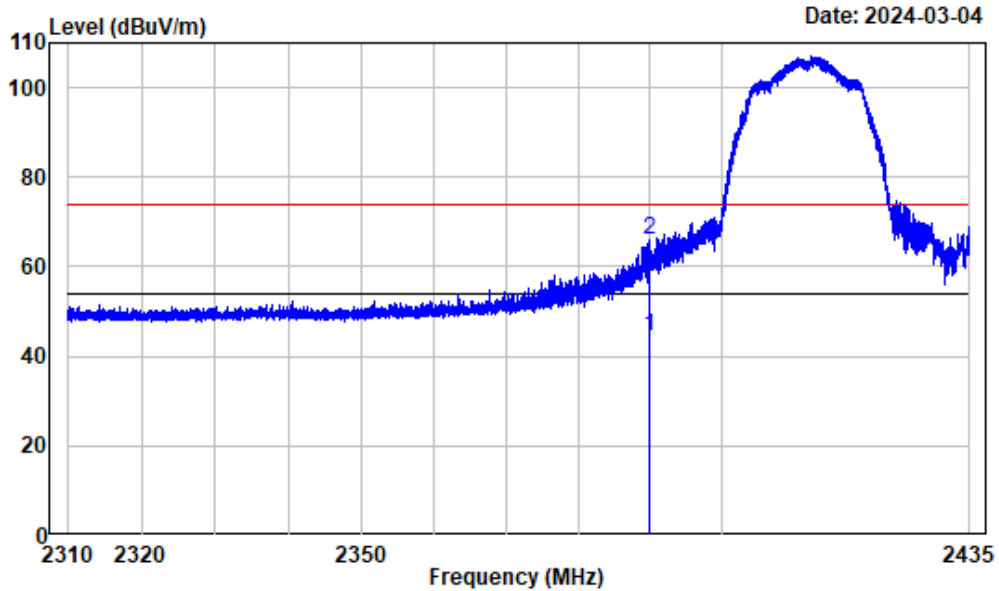

Condition : Horizontal
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi-g-2412

	Freq	Factor	Read		Limit	Remark	Over
			Level	Level	Line		Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2390.000	-3.20	47.59	44.39	54.00	Average	-9.61
2	2390.000	-3.20	69.16	65.96	74.00	Peak	-8.04


802.11g			
Test Channel:	2412MHz	Ant. Polar. :	Vertical

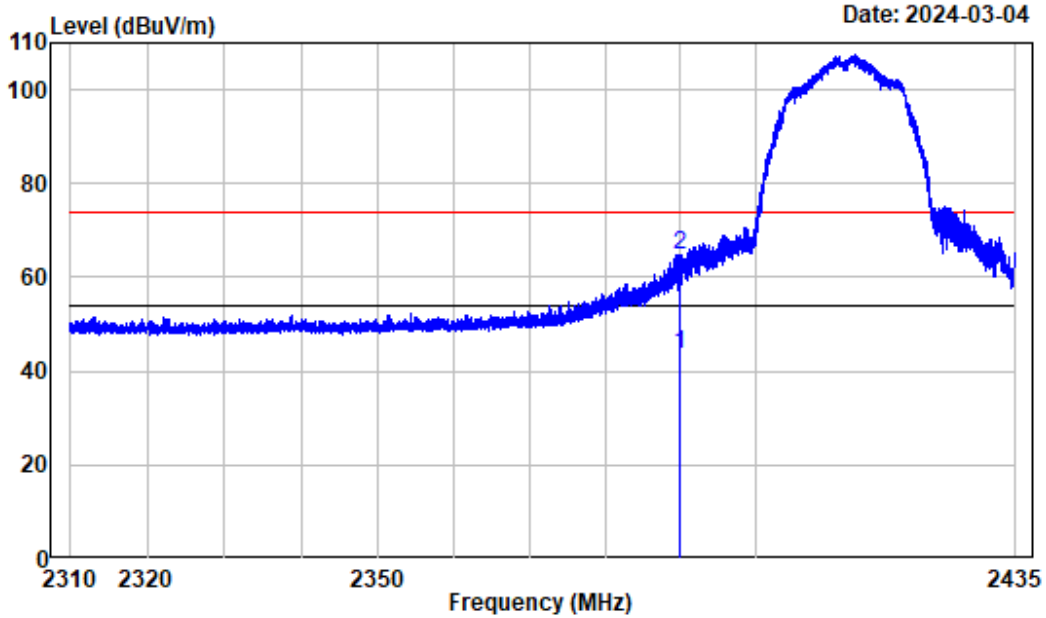

Condition : Vertical
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi-g-2412

	Freq	Factor	Read Level	Level	Limit	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	-3.20	46.64	43.44	54.00	Average -10.56
2	2390.000	-3.20	67.89	64.69	74.00	Peak -9.31


802.11g			
Test Channel:	2462MHz	Ant. Polar. :	Horizontal

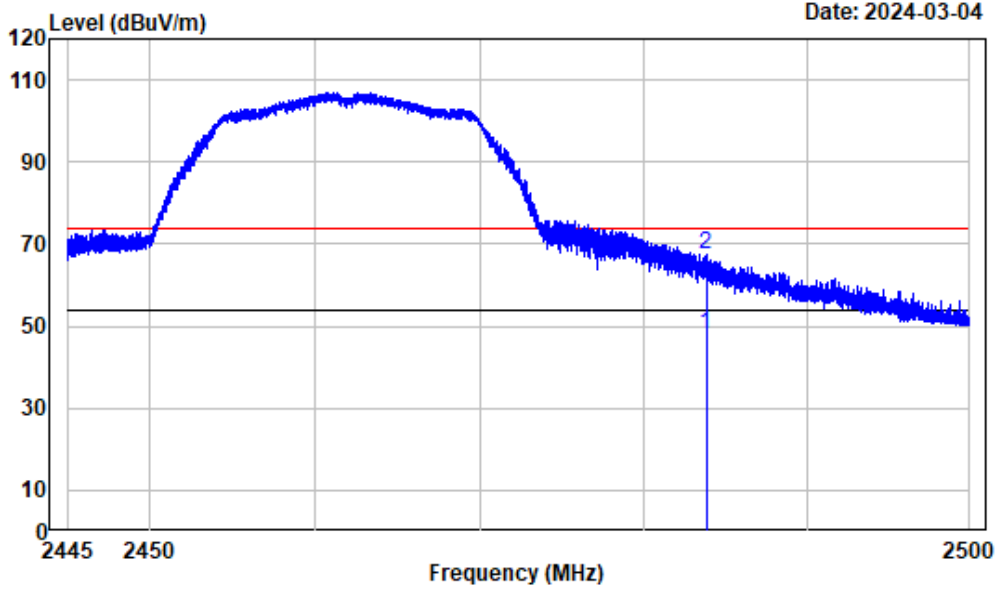

Condition : Horizontal
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi-g-2462

Freq Factor		Read Level		Limit		Over
MHz	dB/m	dBuV	dBuV/m	dBuV/m	Remark	Limit
1	2483.816	-3.17	51.29	48.12	54.00 Average	-5.88
2	2483.816	-3.17	70.79	67.62	74.00 Peak	-6.38


802.11g			
Test Channel:	2462MHz	Ant. Polar. :	Vertical

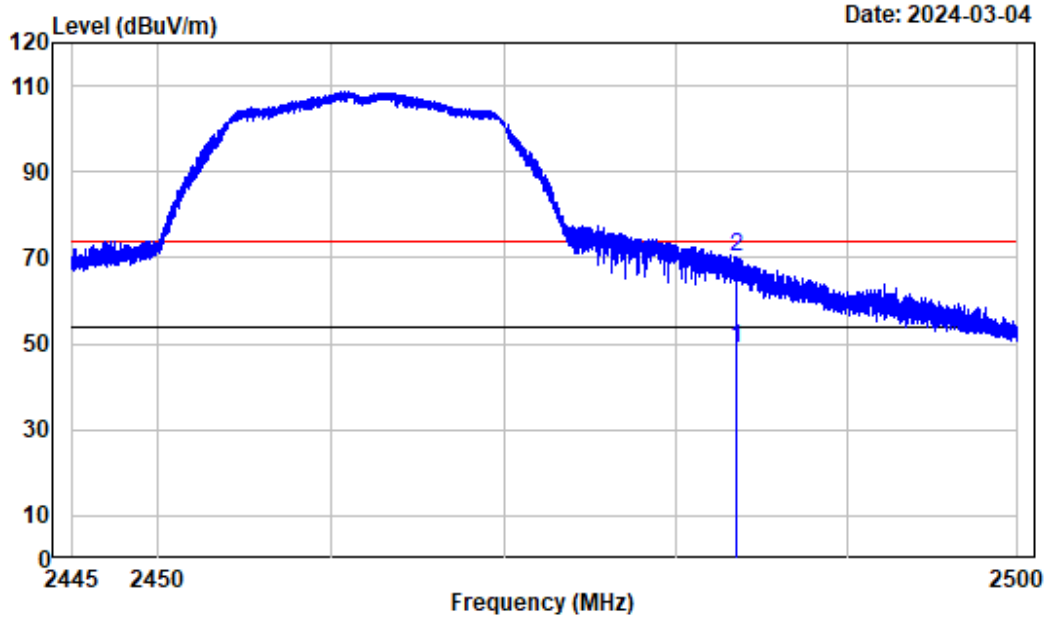

Condition : Vertical
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	2483.500	-3.17	52.15	48.98	54.00	Average -5.02
2	2483.500	-3.17	73.21	70.04	74.00	Peak -3.96


802.11n20			
Test Channel:	2412MHz	Ant. Polar. :	Horizontal

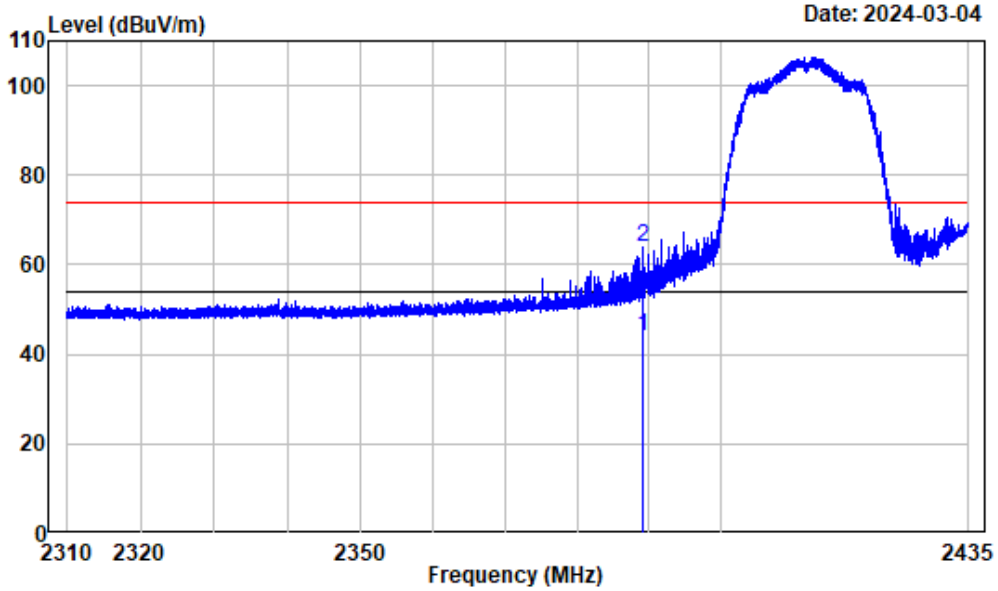

Condition : Horizontal
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi-n20-2412

Freq Factor		Read Level		Limit	Remark	Over	
MHz	dB/m	dBuV	dBuV/m	dBuV/m		Limit	
1	2389.188	-3.20	47.03	43.83	54.00	Average	-10.17
2	2389.188	-3.20	67.28	64.08	74.00	Peak	-9.92


802.11n20			
Test Channel:	2412MHz	Ant. Polar. :	Vertical

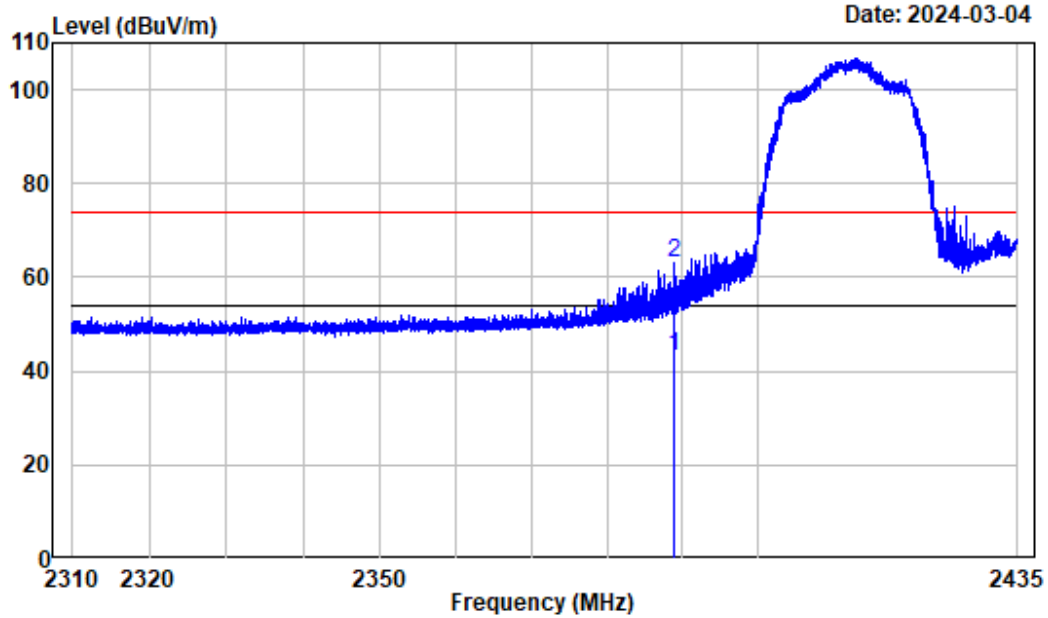

Condition : Vertical
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi-n20-2412

	Freq	Factor	Read Level	Level	Limit	Line Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2388.938	-3.20	46.19	42.99	54.00	Average	-11.01
2	2388.938	-3.20	66.22	63.02	74.00	Peak	-10.98


802.11n20			
Test Channel:	2462MHz	Ant. Polar. :	Horizontal

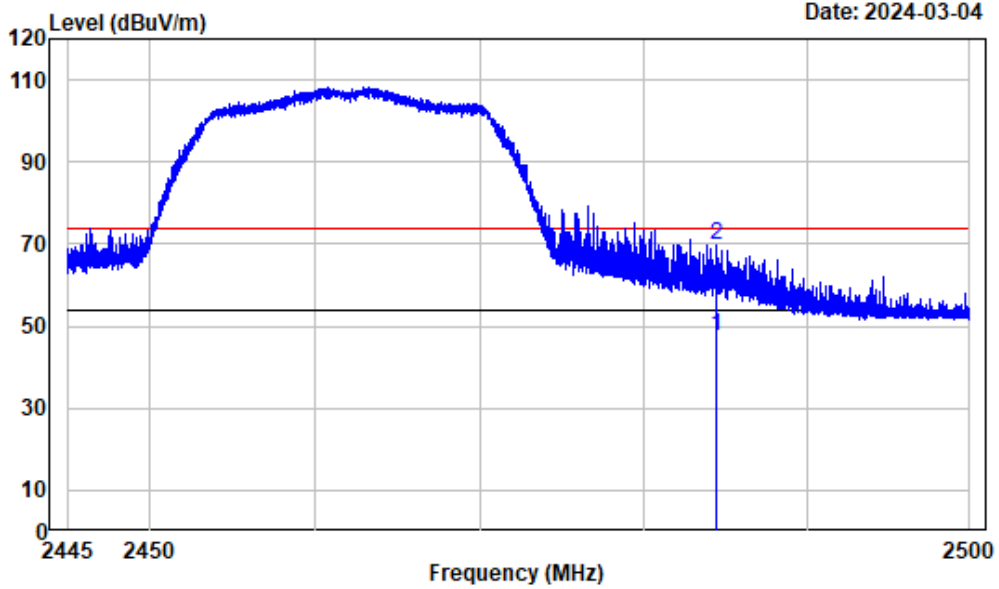

Condition : Horizontal
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Limit Level	Limit Line	Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2484.476	-3.17	50.75	47.58	54.00	Average	-6.42
2	2484.476	-3.17	73.09	69.92	74.00	Peak	-4.08


802.11n20			
Test Channel:	2462MHz	Ant. Polar. :	Vertical

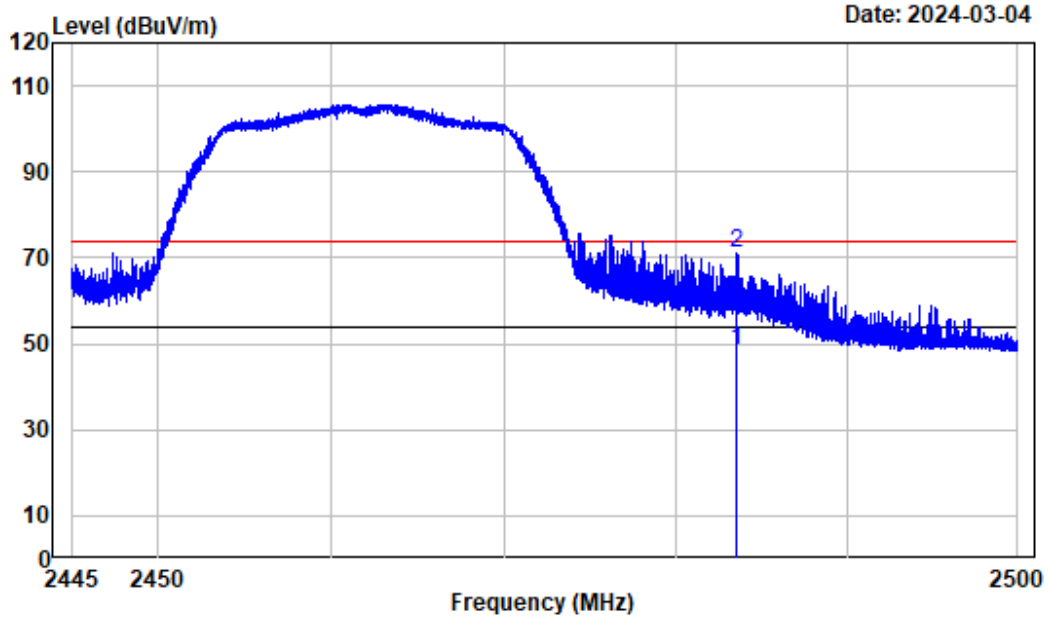

Condition : Vertical
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi-n20-2462


	Freq	Factor	Read Level	Limit Level	Limit Line	Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	2483.583	-3.17	51.68	48.51	54.00	Average	-5.49
2	2483.583	-3.17	74.16	70.99	74.00	Peak	-3.01

Listed with the worst harmonic margin test plot:

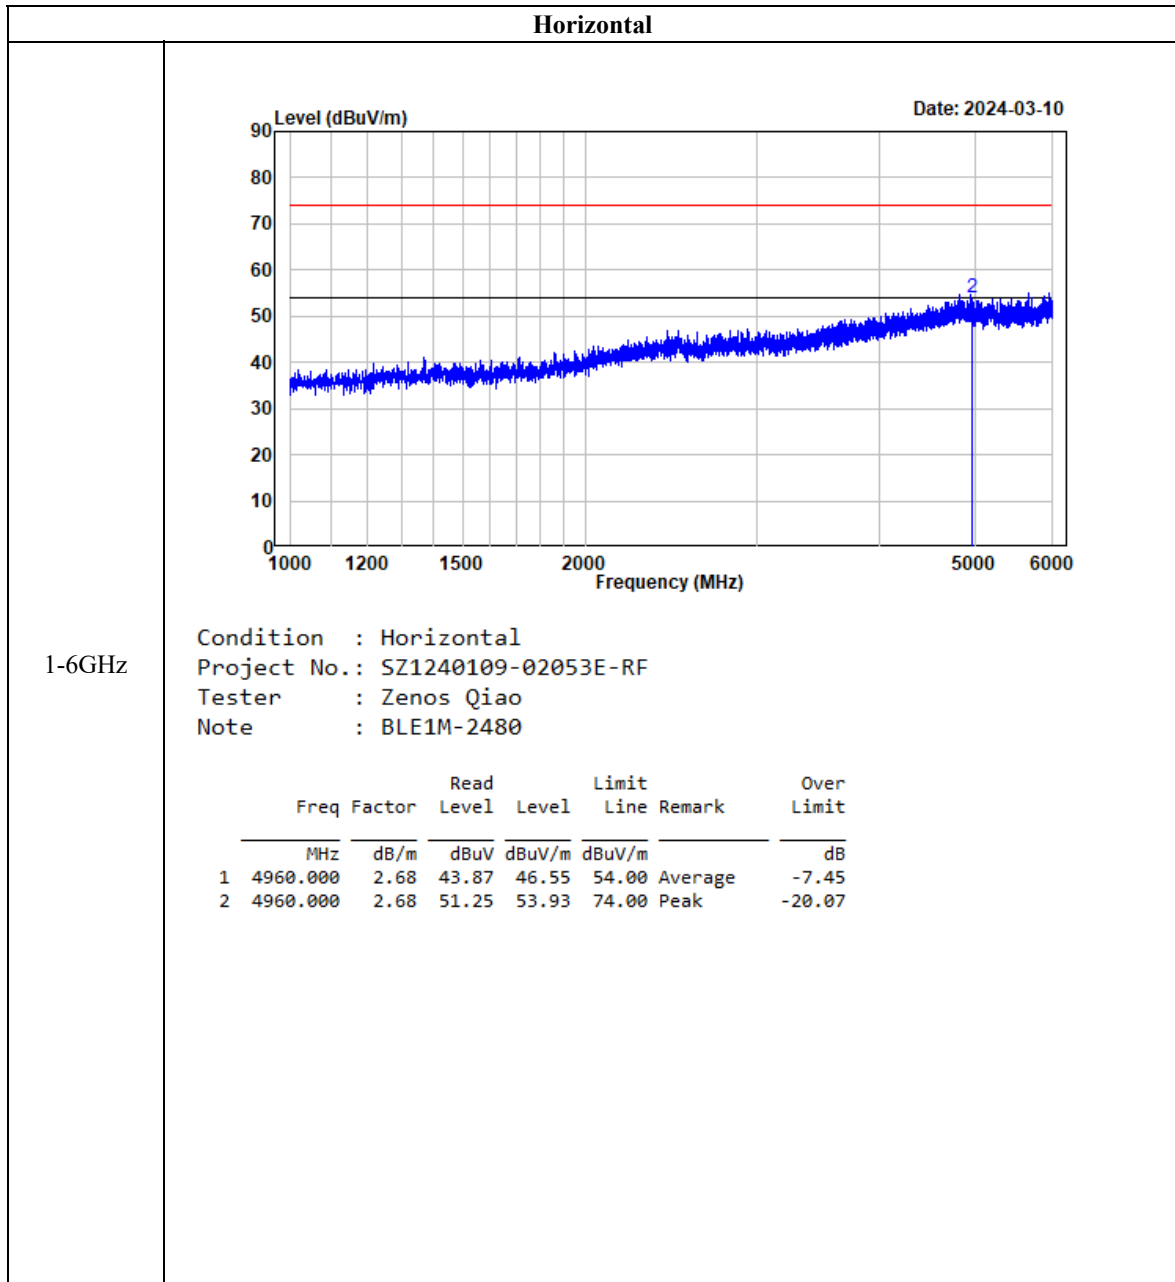

Vertical

1-6GHz

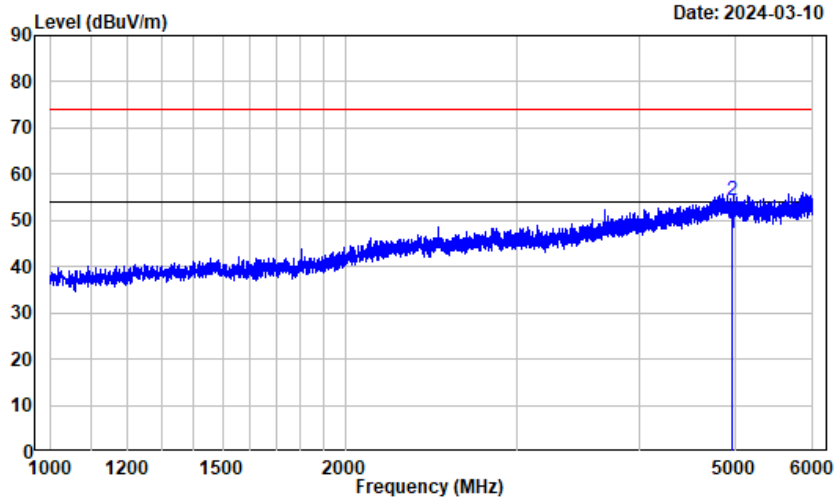


Condition : Vertical
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : BLE1M-2480

	Freq	Factor	Read Level	Level	Limit	Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	4960.000	2.68	44.52	47.20	54.00	Average	-6.80
2	4960.000	2.68	51.69	54.37	74.00	Peak	-19.63

Horizontal

6-18GHz

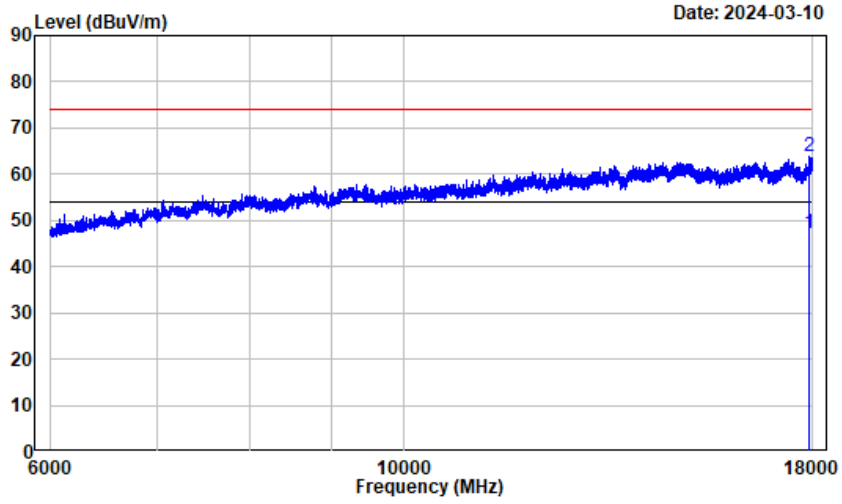


Condition : Horizontal
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : BLE1M-2480

	Read	Limit	Over				
Freq	Factor	Level	Level				
MHz	dB/m	dBuV	dBuV/m				
1	17905.500	23.95	23.41	47.36	54.00	Average	-6.64
2	17905.500	23.95	39.76	63.71	74.00	Peak	-10.29

Vertical

6-18GHz

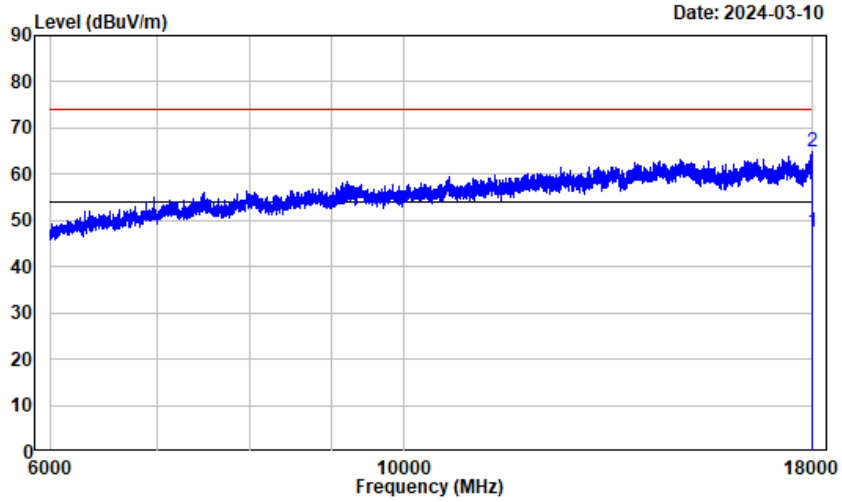


Date: 2024-03-10

Condition : Vertical
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : BLE1M-2480

	Freq	Factor	Read		Limit		Over
			Level	Level	Line	Remark	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	17998.500	24.61	23.08	47.69	54.00	Average	-6.31
2	17998.500	24.61	40.42	65.03	74.00	Peak	-8.97

Horizontal

18-25GHz

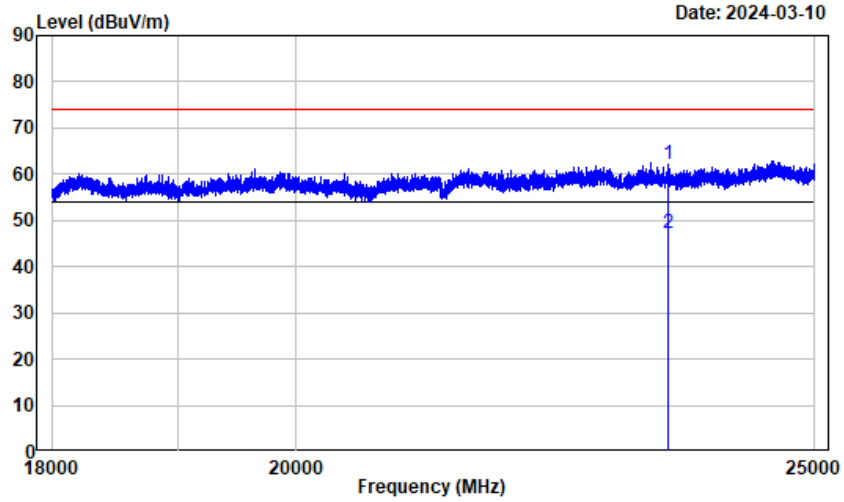


Condition : Horizontal
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : BLE1M-2480

	Freq	Factor	Read Level	Level	Limit	Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	23466.130	17.43	44.88	62.31	74.00	Peak	-11.69
2	23466.130	17.43	29.82	47.25	54.00	Average	-6.75

Vertical

18-25GHz

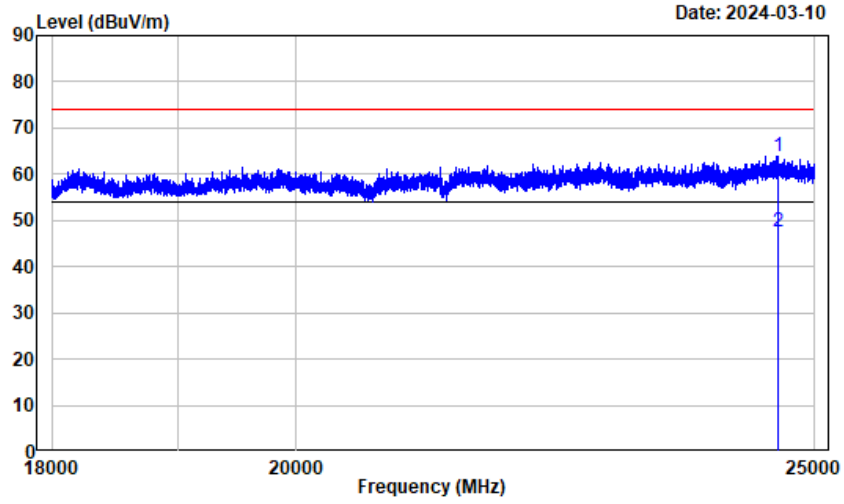

Condition : Vertical
 Project No.: SZ1240109-02053E-RF
 Tester : Zenos Qiao
 Note : BLE1M-2480

	Freq	Factor	Read Level	Level	Limit	Remark	Over Limit
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB
1	24614.130	18.85	45.00	63.85	74.00	Peak	-10.15
2	24614.130	18.85	28.72	47.57	54.00	Average	-6.43

§15.247 (a)(2) & RSS-Gen§6.7 RSS-247 § 5.2 (a) 99% OCCUPIED BANDWIDTH & 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “6 dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 6 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 and Clause 6.9.3


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

The following conditions shall be observed for measuring the occupied bandwidth and 6 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 6 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 6 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

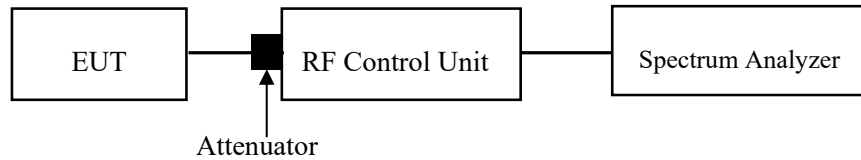

Test Data

Environmental Conditions

Temperature:	22~24 °C
Relative Humidity:	49~54 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan on 2024-03-12.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

§15.247(b)(3) & RSS-247 § 5.4(d) MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).


As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure


Test Method: ANSI C63.10-2013 Clause 11.9.1.1 for BLE and 11.9.1.3 for Wi-Fi

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

For Wi-Fi mode:

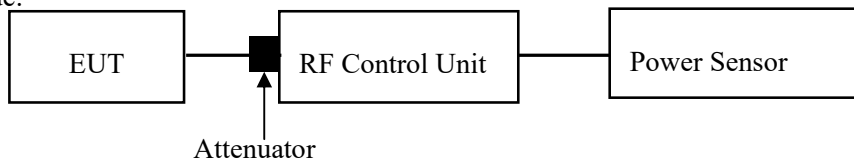

For BLE mode:

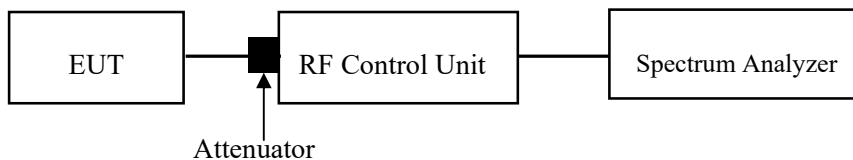

Test Data**Environmental Conditions**

Temperature:	22~24 °C
Relative Humidity:	49~54 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan from 2024-03-12 to 2024-03-27.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

§15.247(d) & RSS-247 § 5.5 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

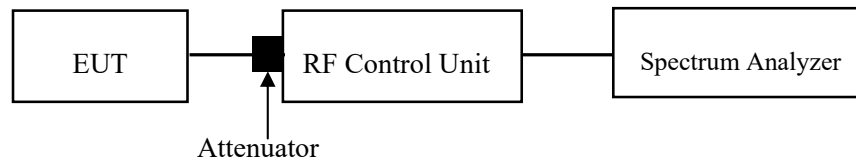

Test Data

Environmental Conditions

Temperature:	22~24 °C
Relative Humidity:	49~54 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan from 2024-03-12 to 2024-03-27.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

§15.247(e) & RSS-247 § 5.2 (b) POWER SPECTRAL DENSITY

Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

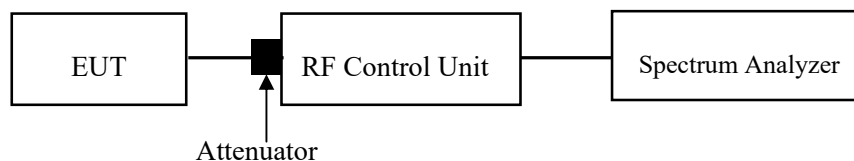

Test Data**Environmental Conditions**

Temperature:	22~24 °C
Relative Humidity:	49~54 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan on 2024-03-12.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

EUT PHOTOGRAPHS

Please refer to the attachment SZ1240109-02053E-RF External photo and SZ1240109-02053E-RF Internal photo.

TEST SETUP PHOTOGRAPHS



Please refer to the attachment SZ1240109-02053E-RFA Test Setup photo.


APPENDIX-BLE

Appendix A: DTS Bandwidth Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.67	0.5	PASS
		2440	0.67	0.5	PASS
		2480	0.66	0.5	PASS

Test Graphs

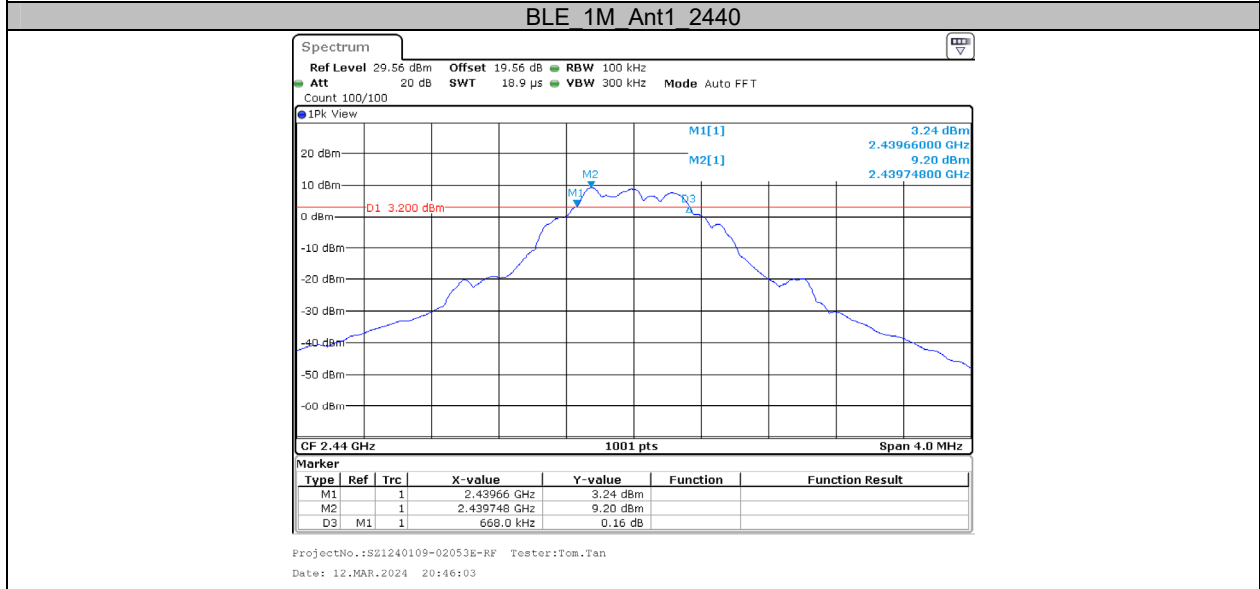
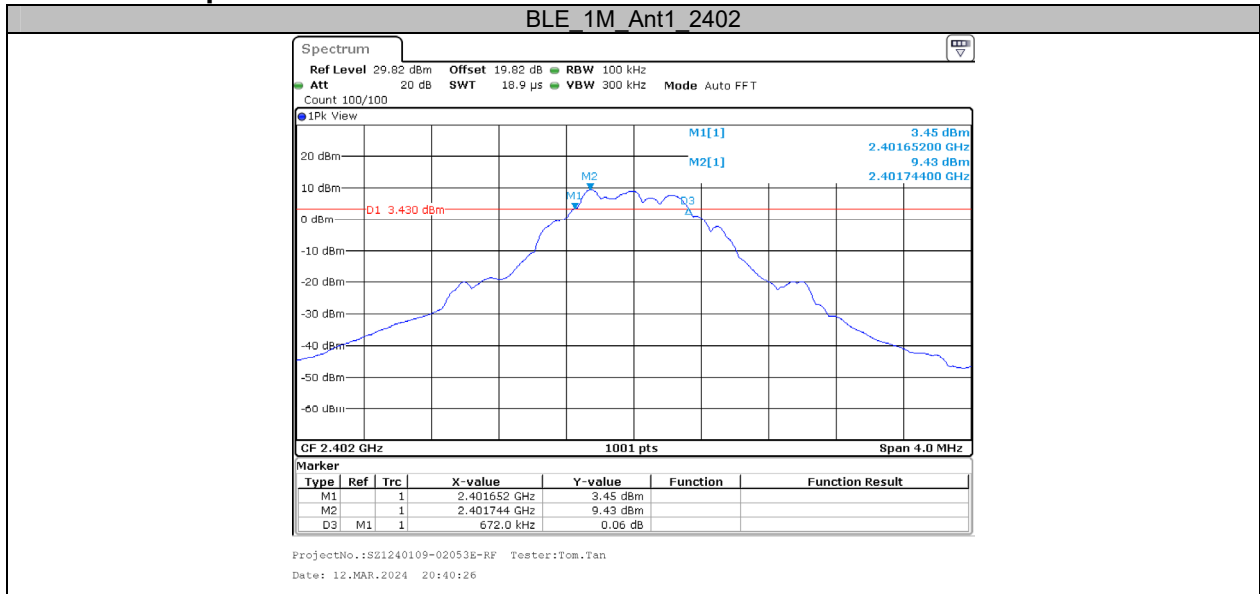


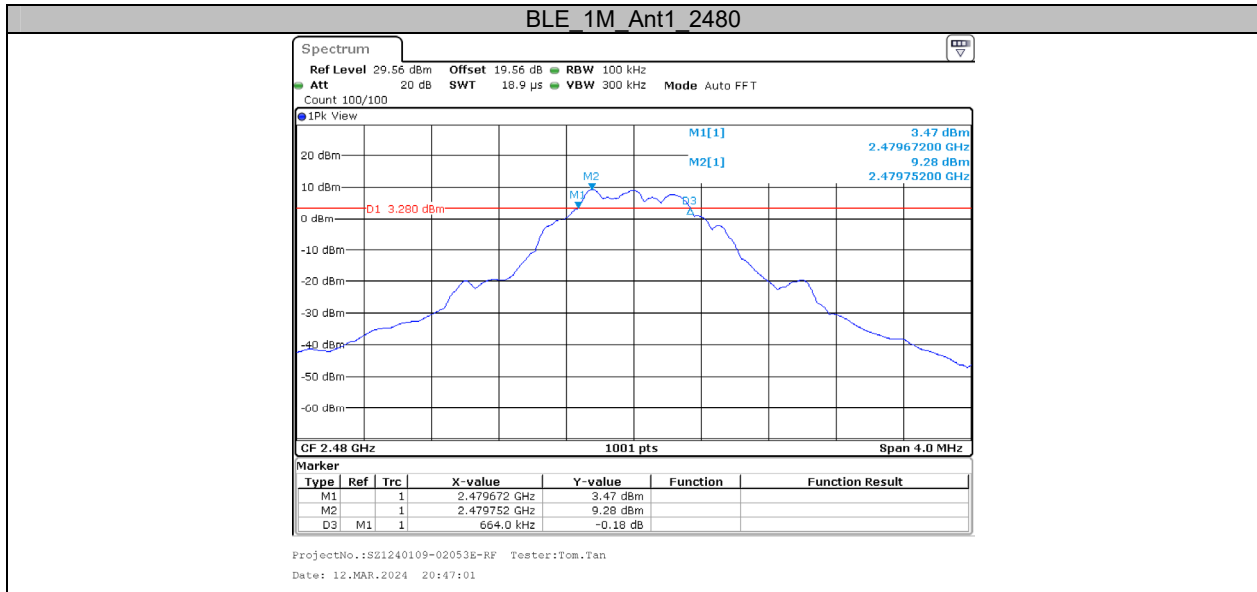


Appendix B: Occupied Channel Bandwidth Test Result

Test Mode	Antenna	Channel	OCB [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	1.047	---	---
		2440	1.047	---	---
		2480	1.047	---	---

Test Graphs

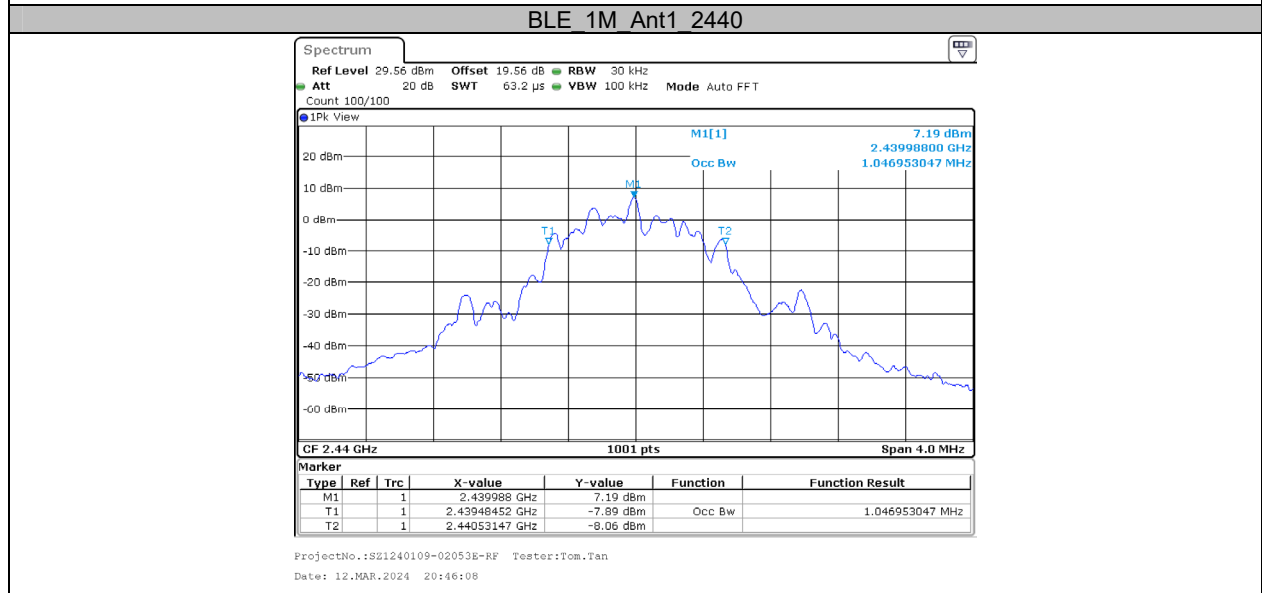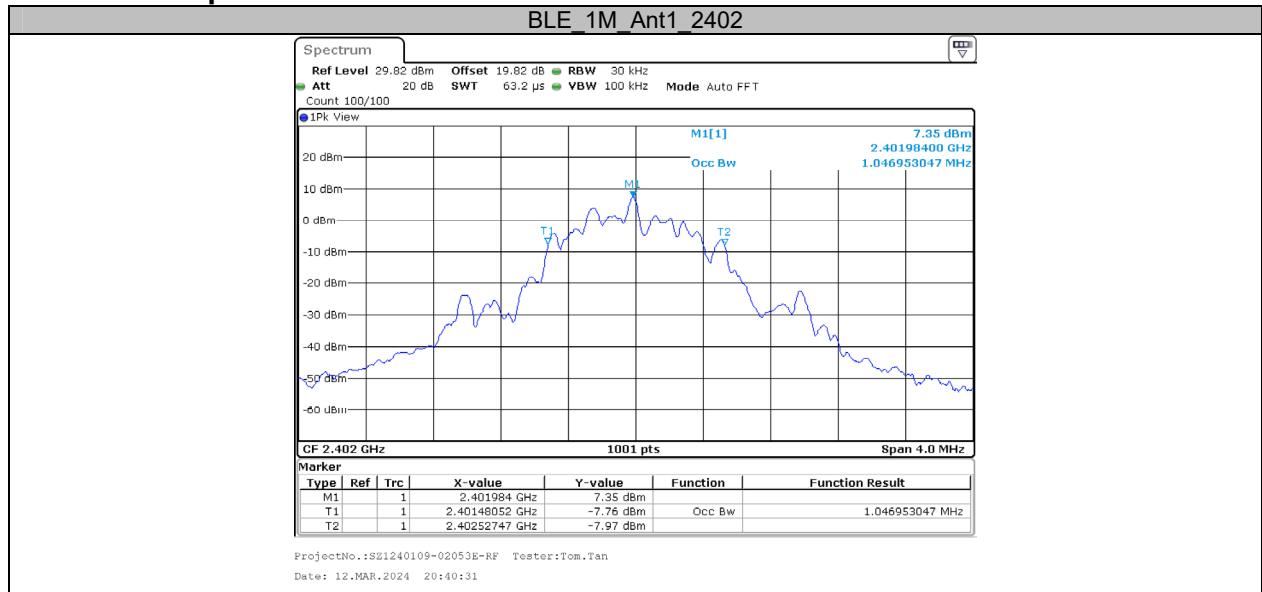


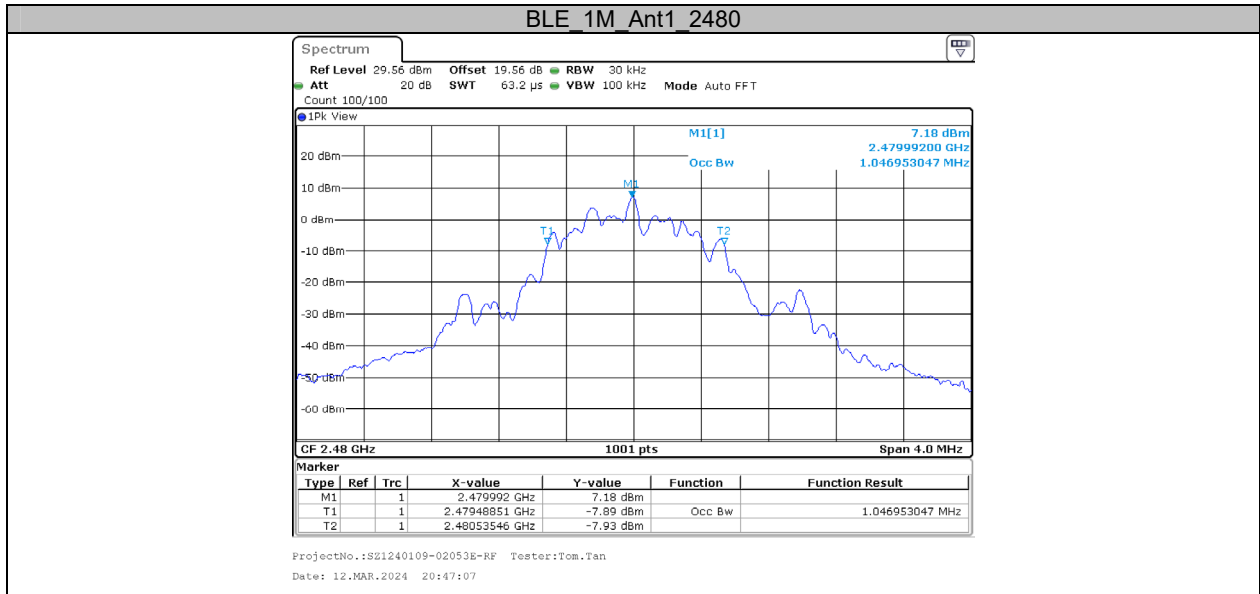


Appendix C: Maximum conducted output power Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
BLE_1M	Ant1	2402	9.66	≤30	10.35	≤36	PASS
		2440	9.54	≤30	10.23	≤36	PASS
		2480	9.58	≤30	10.27	≤36	PASS

Test Graphs Peak


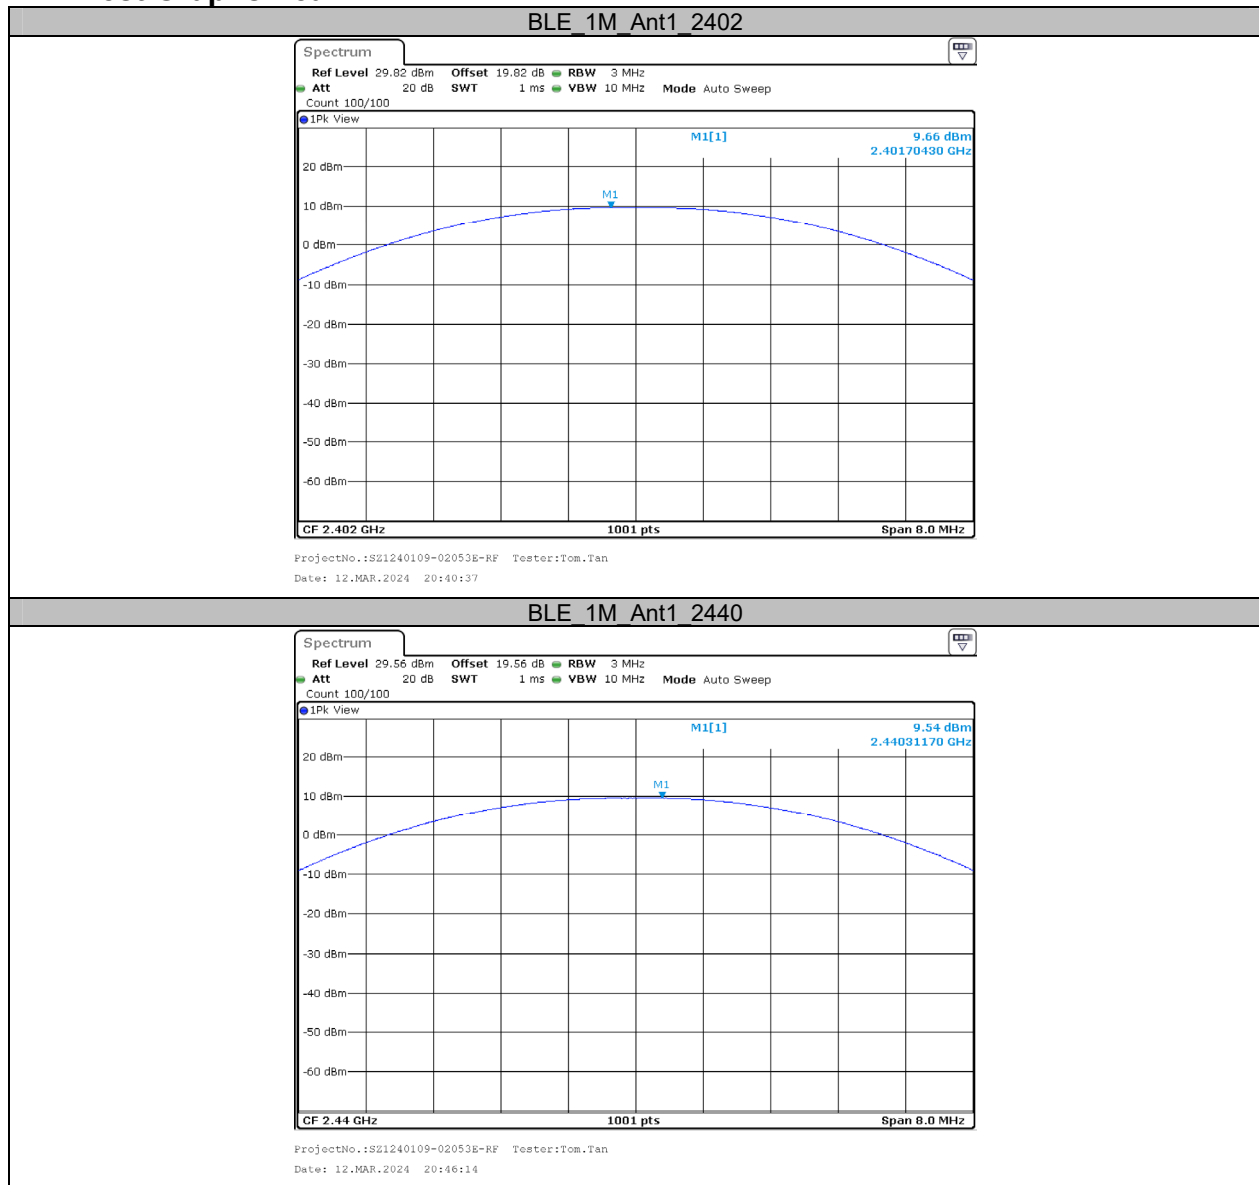


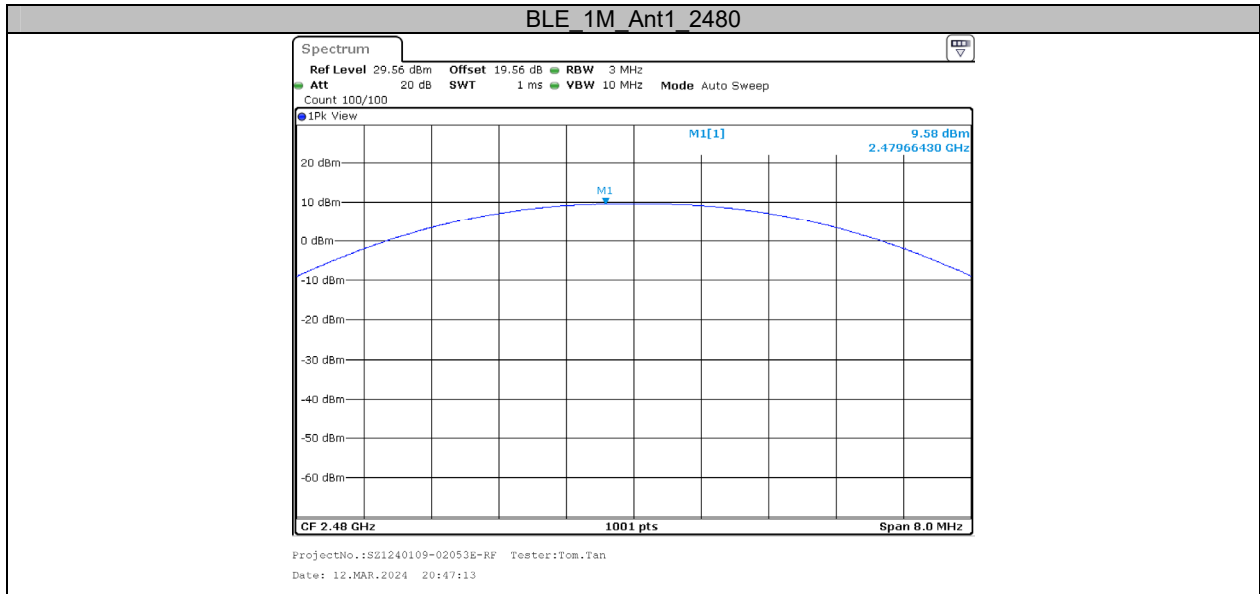


Appendix D: Maximum power spectral density Test Result


Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-8.92	≤8.00	PASS
		2440	-8.93	≤8.00	PASS
		2480	-8.77	≤8.00	PASS

Test Graphs

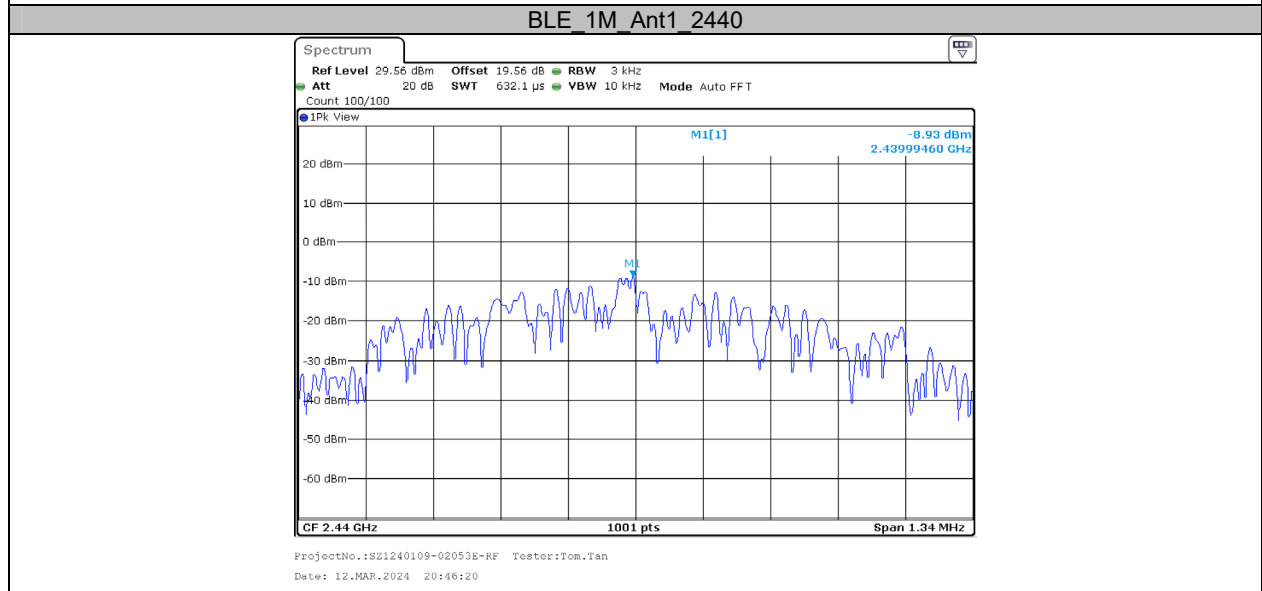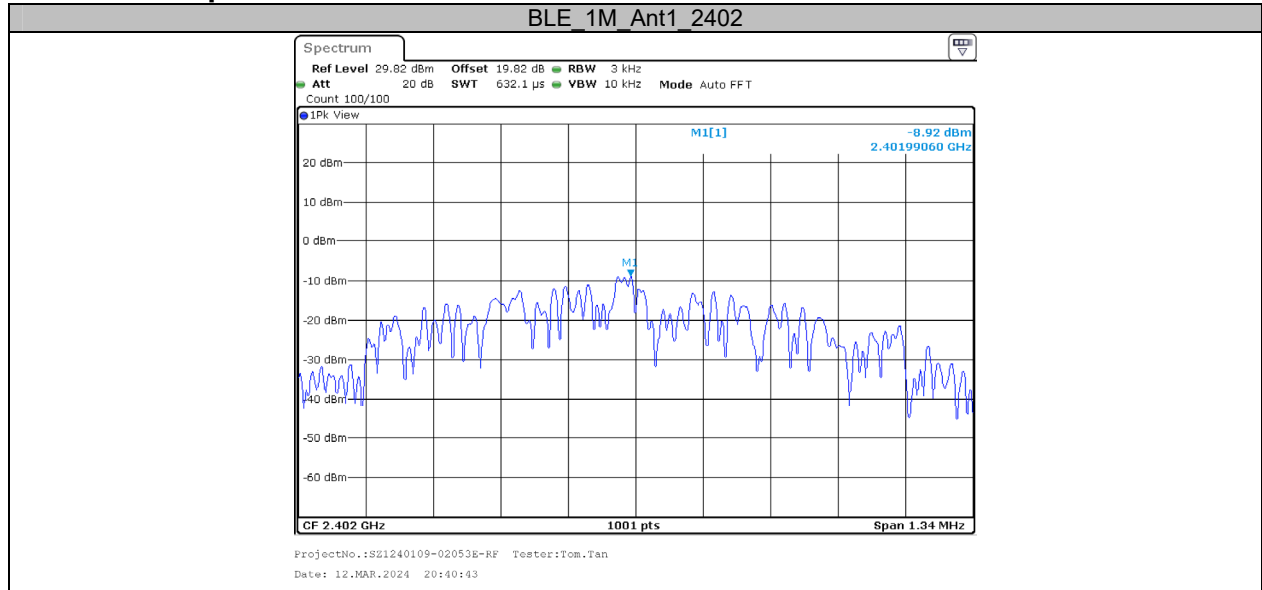

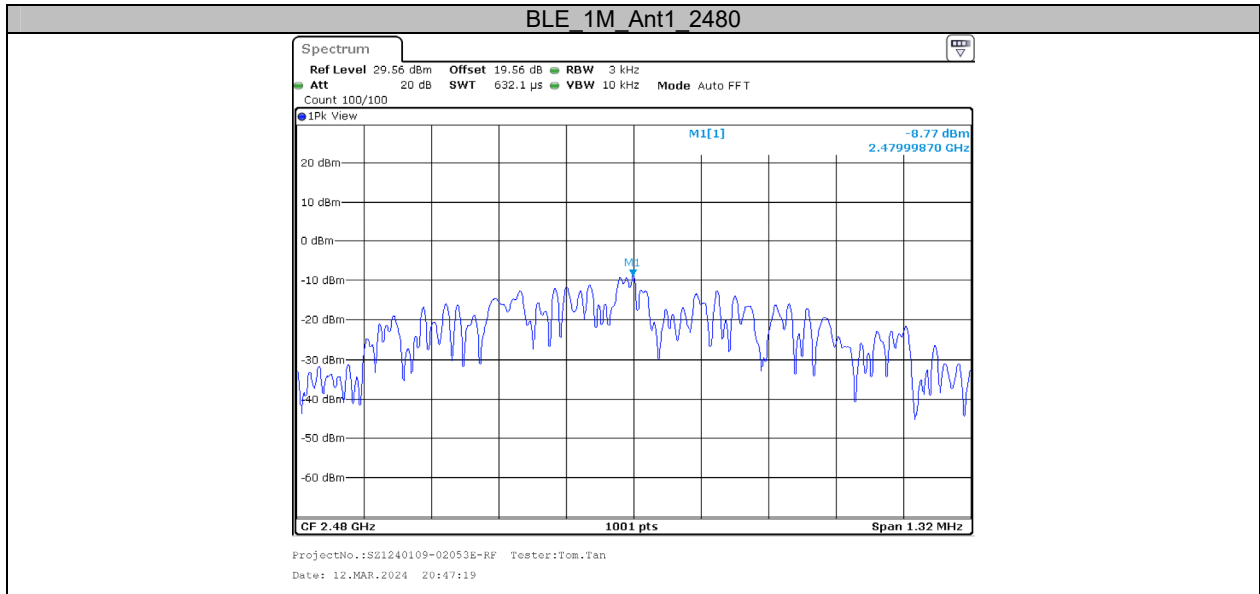


Appendix E: Band edge measurements Test Graphs

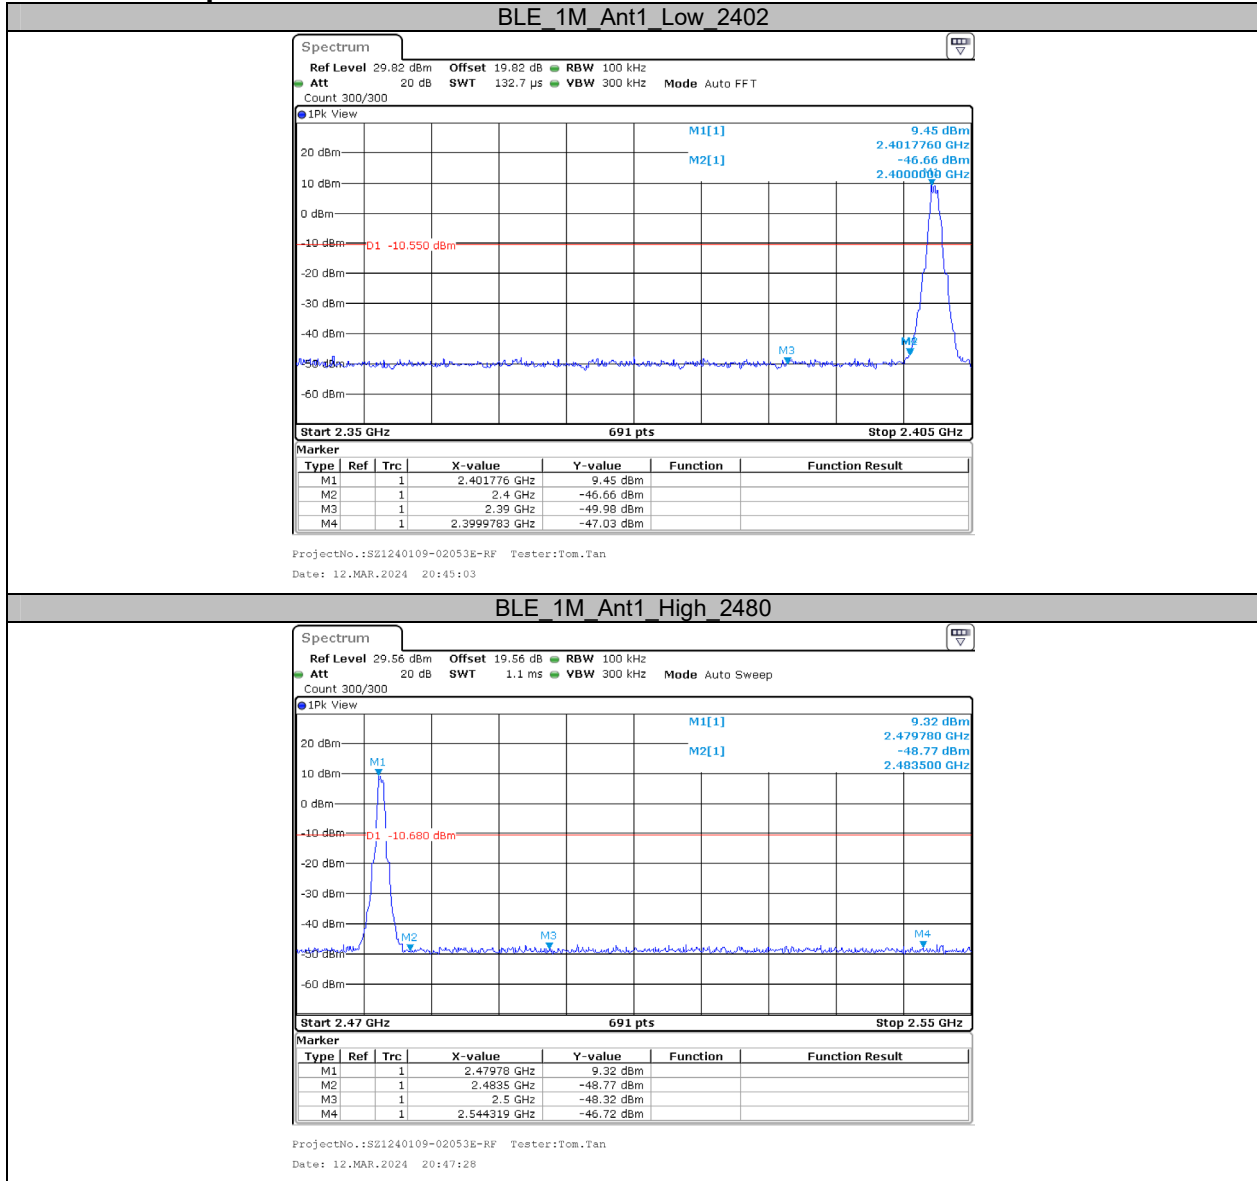

Appendix F: Duty Cycle Test Result

Test Mode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	1/T [kHz]	VBW setting [kHz]
BLE_1M	Ant1	2440	0.09	0.63	14.29	11.11	20

Test Graphs


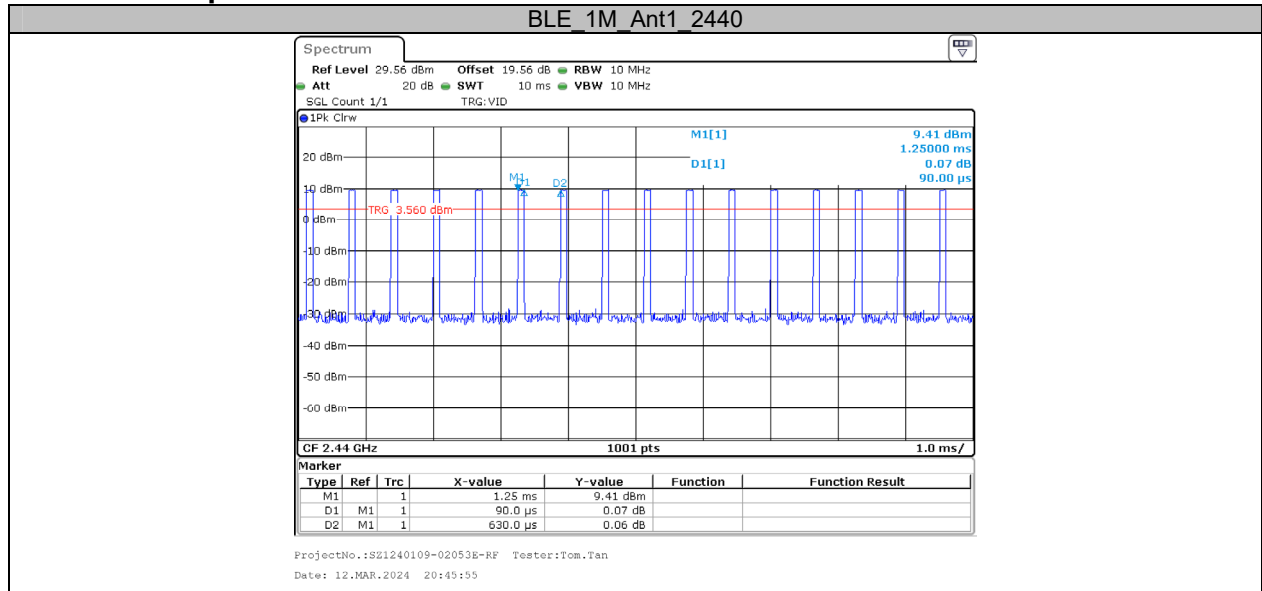




APPENDIX-WIFI

Appendix A: DTS Bandwidth Test Result


Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.04	0.5	PASS
		2442	7.56	0.5	PASS
		2462	8.08	0.5	PASS
11G	Ant1	2412	15.16	0.5	PASS
		2442	16.28	0.5	PASS
		2462	15.76	0.5	PASS
11N20SISO	Ant1	2412	15.12	0.5	PASS
		2442	17.28	0.5	PASS
		2462	16.52	0.5	PASS

Test Graphs

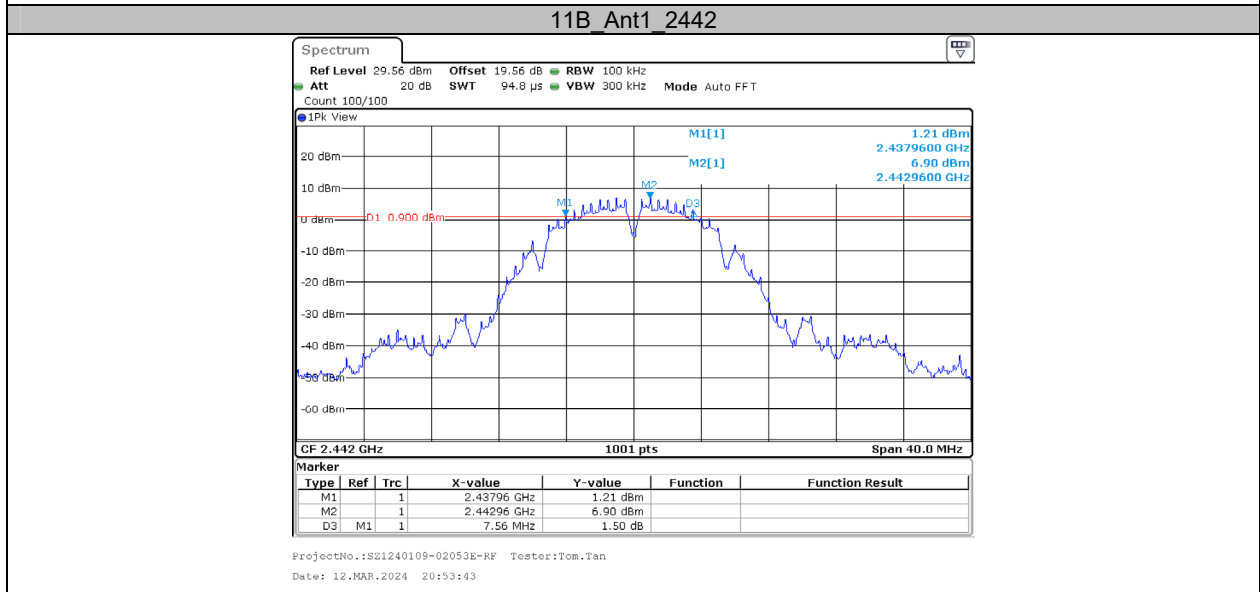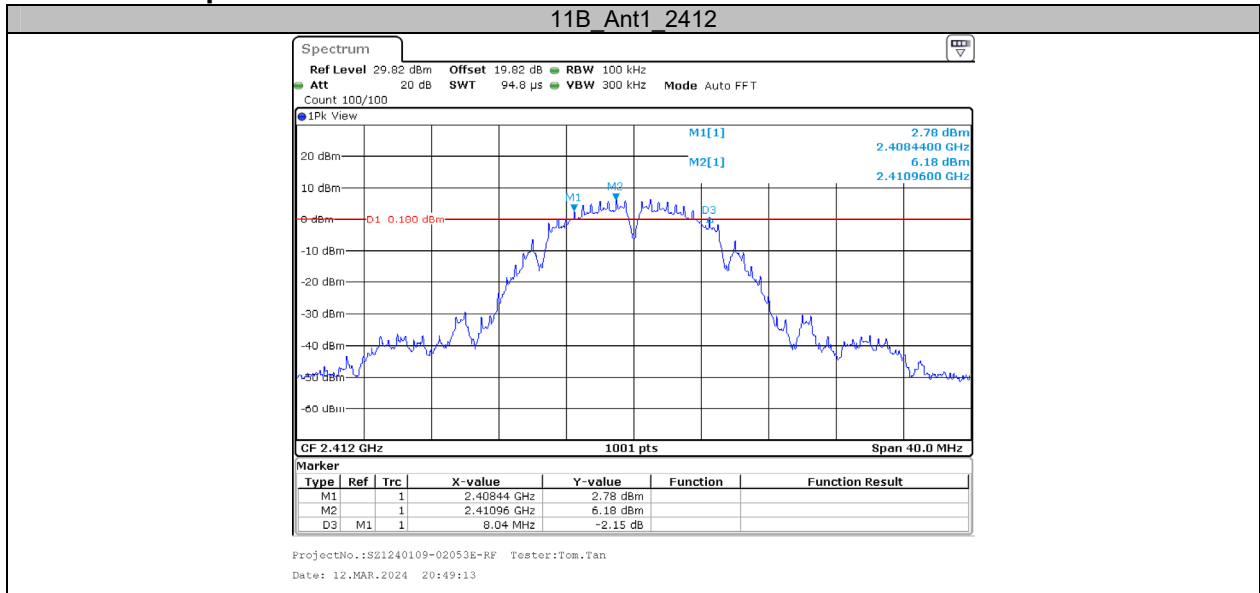

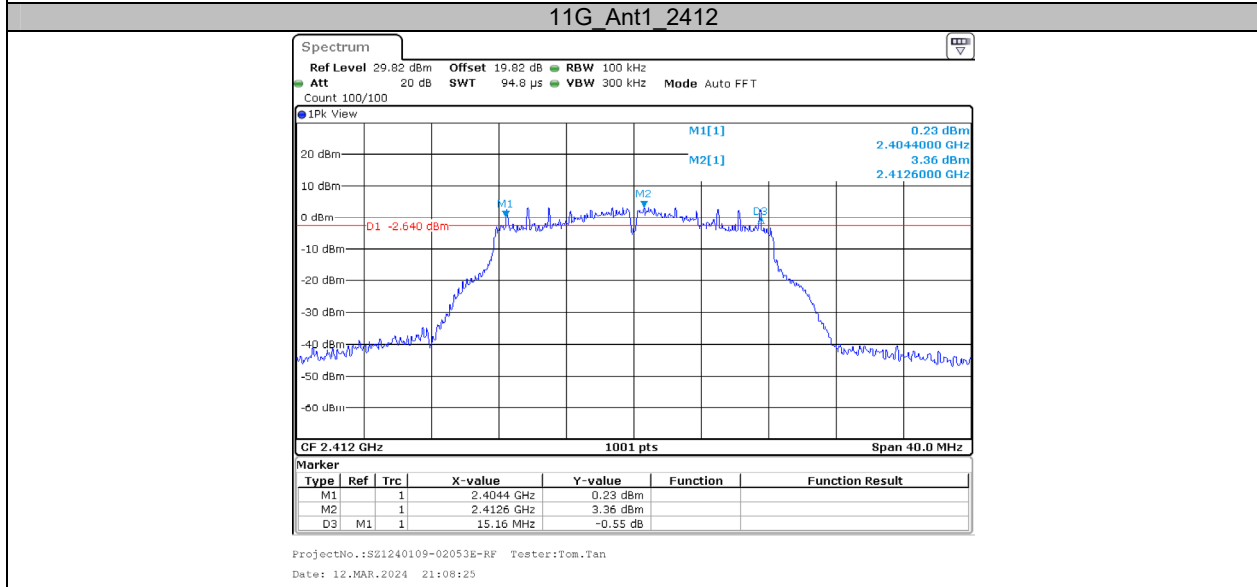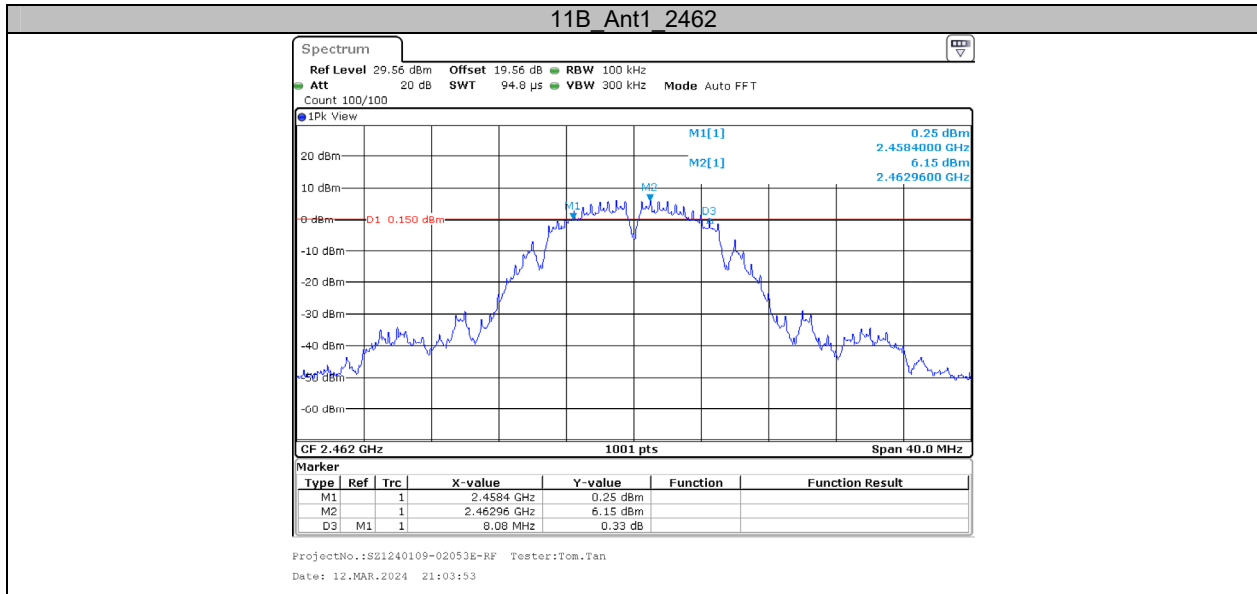


11G Ant1_2442

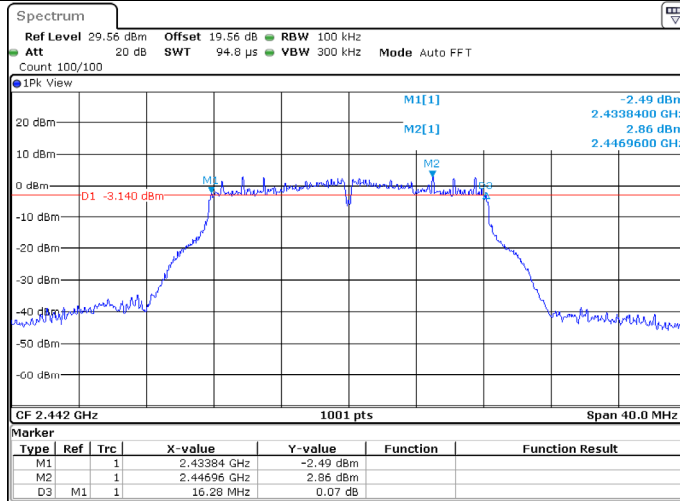



ProjectNo.:SZ1240109-02053E-RF Tester:Tom.Tan
 Date: 12.MAR.2024 21:11:13

11G Ant1_2462

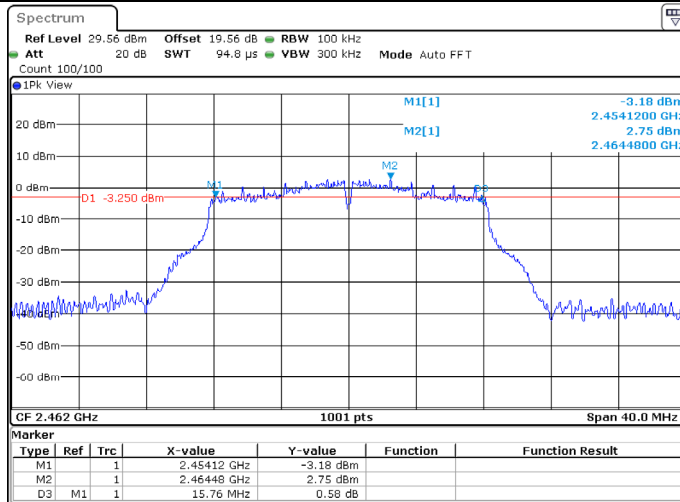

ProjectNo.:SZ1240109-02053E-RF Tester:Tom.Tan
 Date: 12.MAR.2024 21:13:37


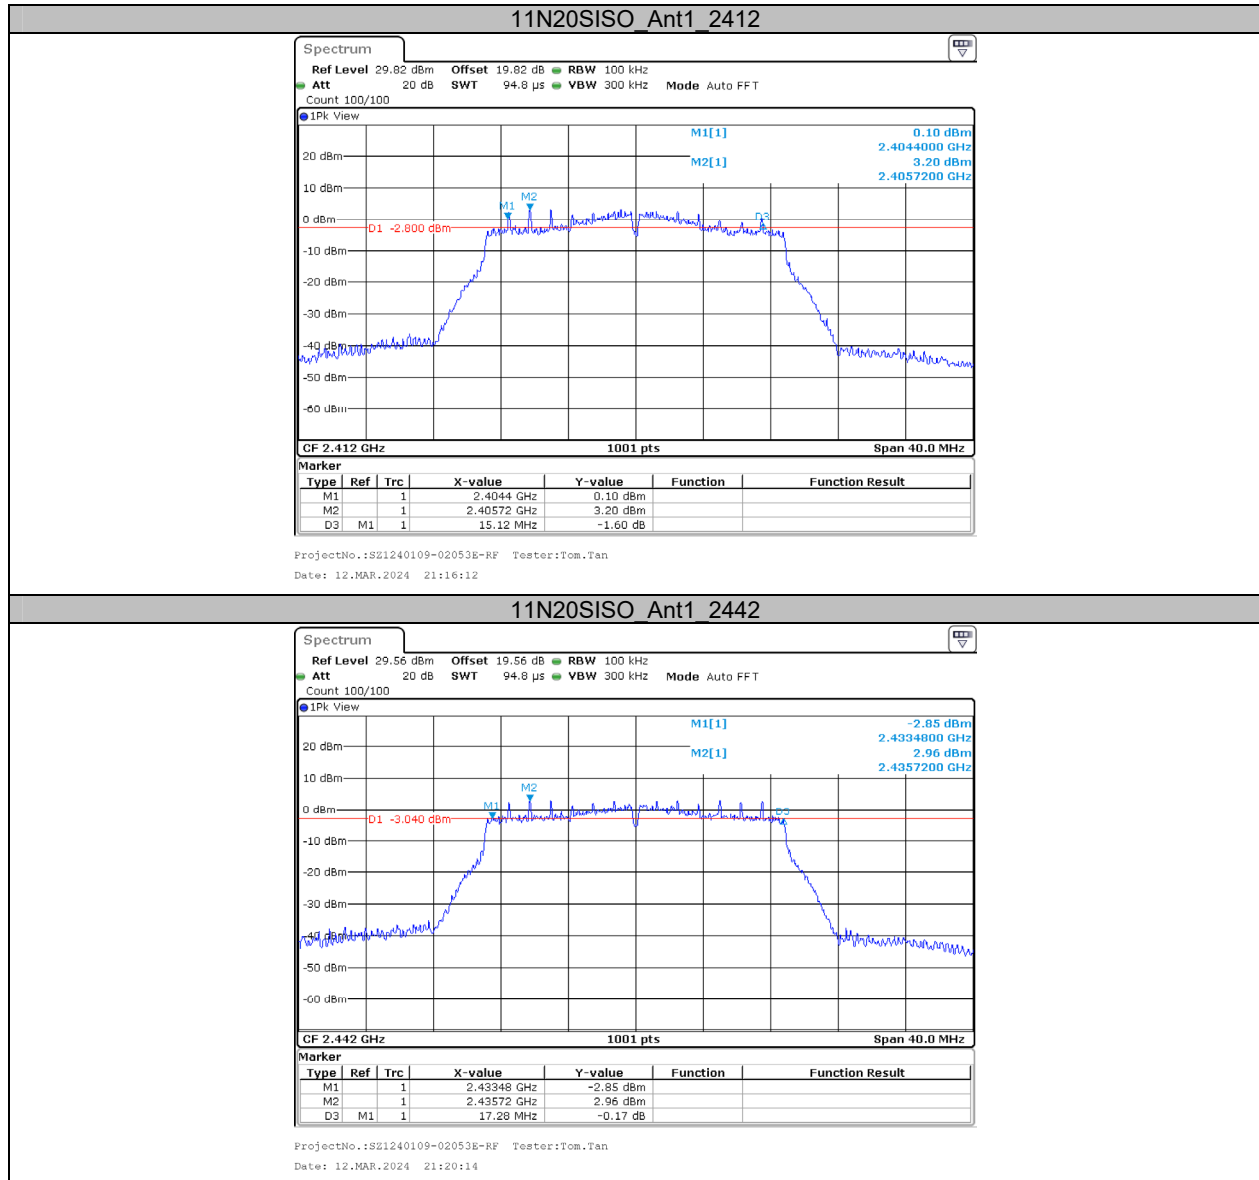


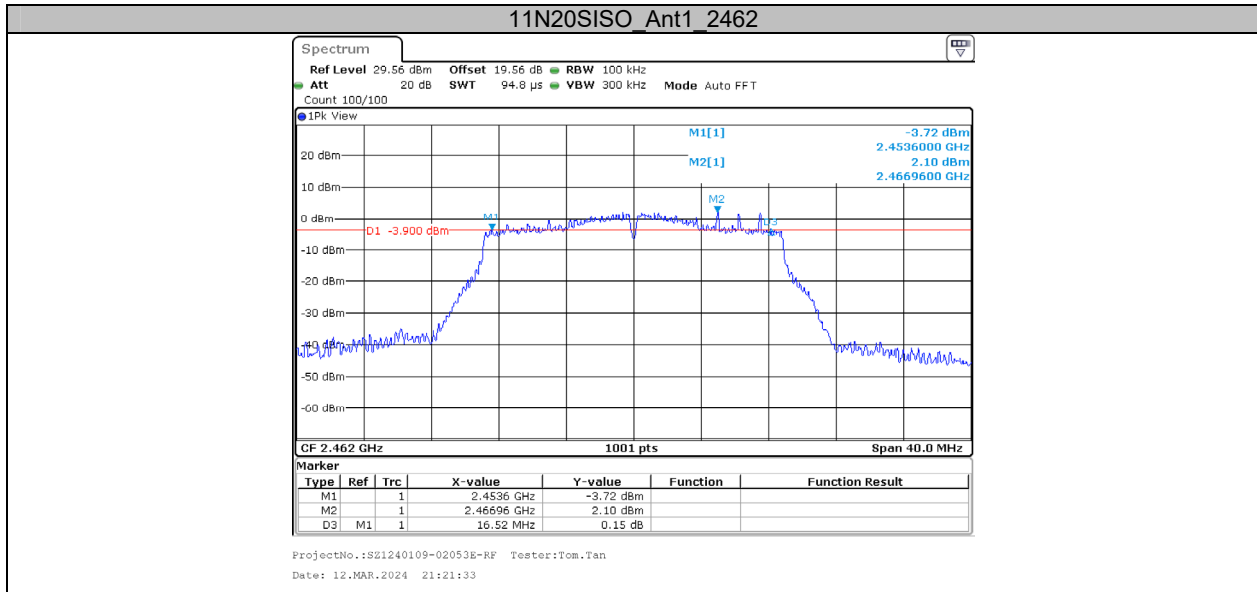


Appendix B: Occupied Channel Bandwidth Test Result

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	11.788	---	---
		2442	11.788	---	---
		2462	11.908	---	---
11G	Ant1	2412	17.423	---	---
		2442	17.502	---	---
		2462	17.303	---	---
11N20SISO	Ant1	2412	18.262	---	---
		2442	18.501	---	---
		2462	18.262	---	---

Test Graphs

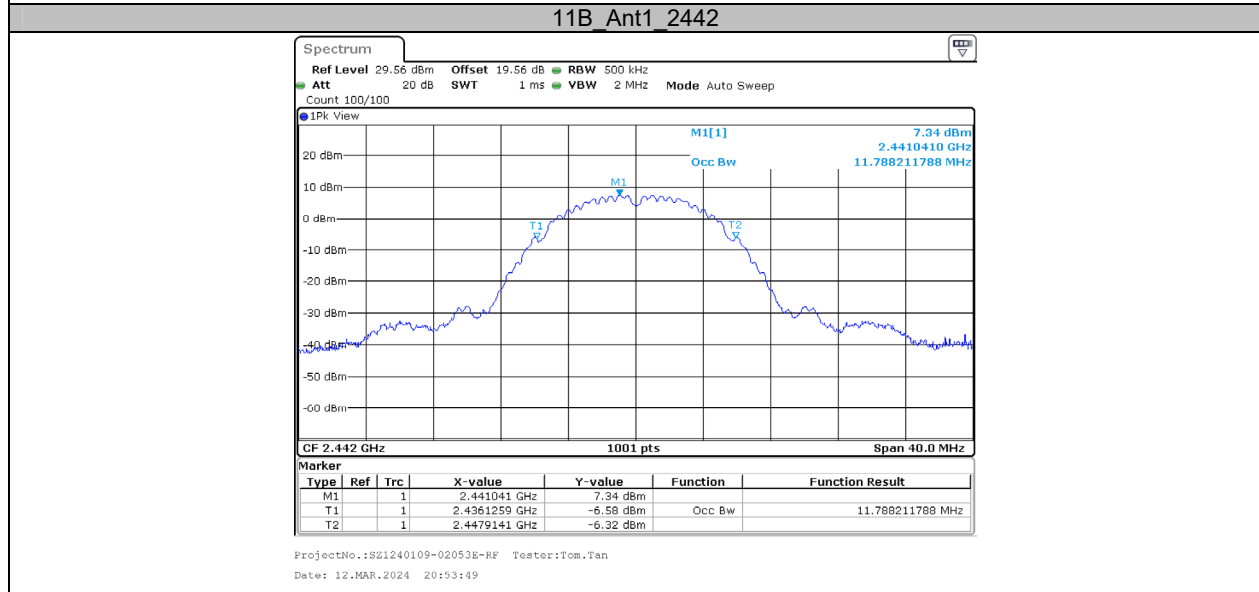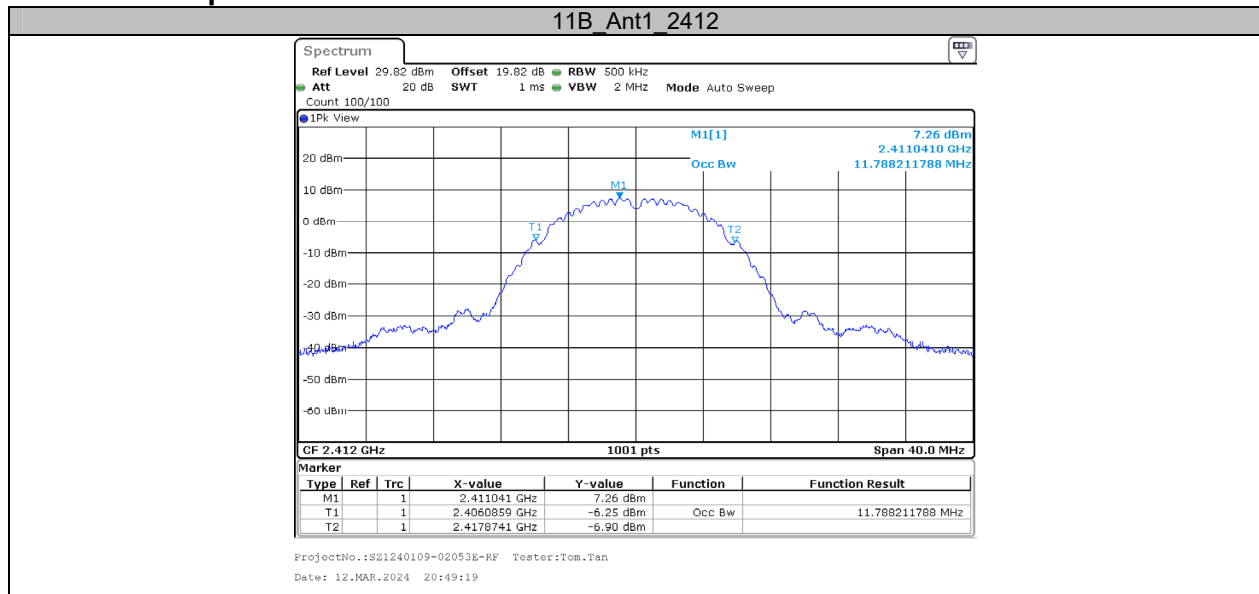


11B_Ant1_2462


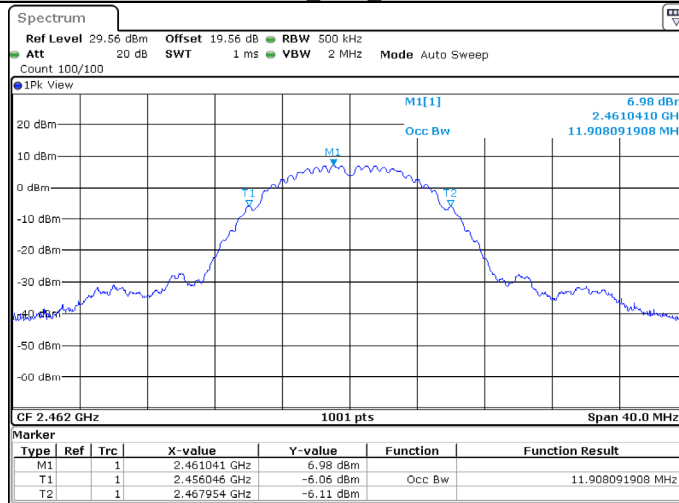



ProjectNo.:SZ1240109-02053E-RF Tester:Tom.Tan
 Date: 12.MAR.2024 21:03:59


11G_Ant1_2412

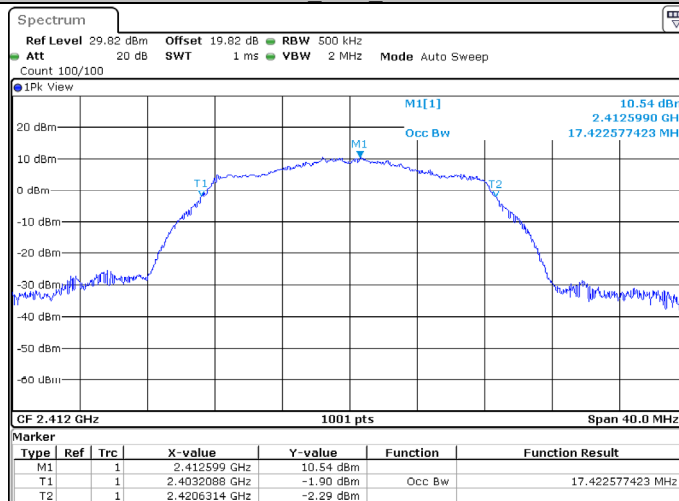

ProjectNo.:SZ1240109-02053E-RF Tester:Tom.Tan
 Date: 12.MAR.2024 21:08:31

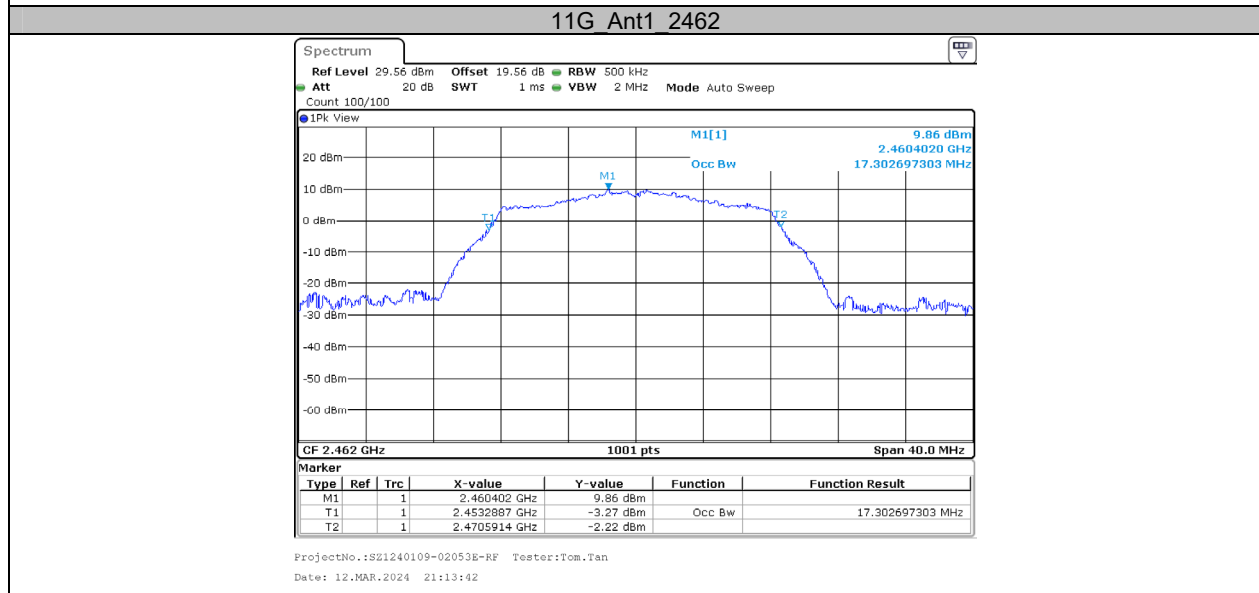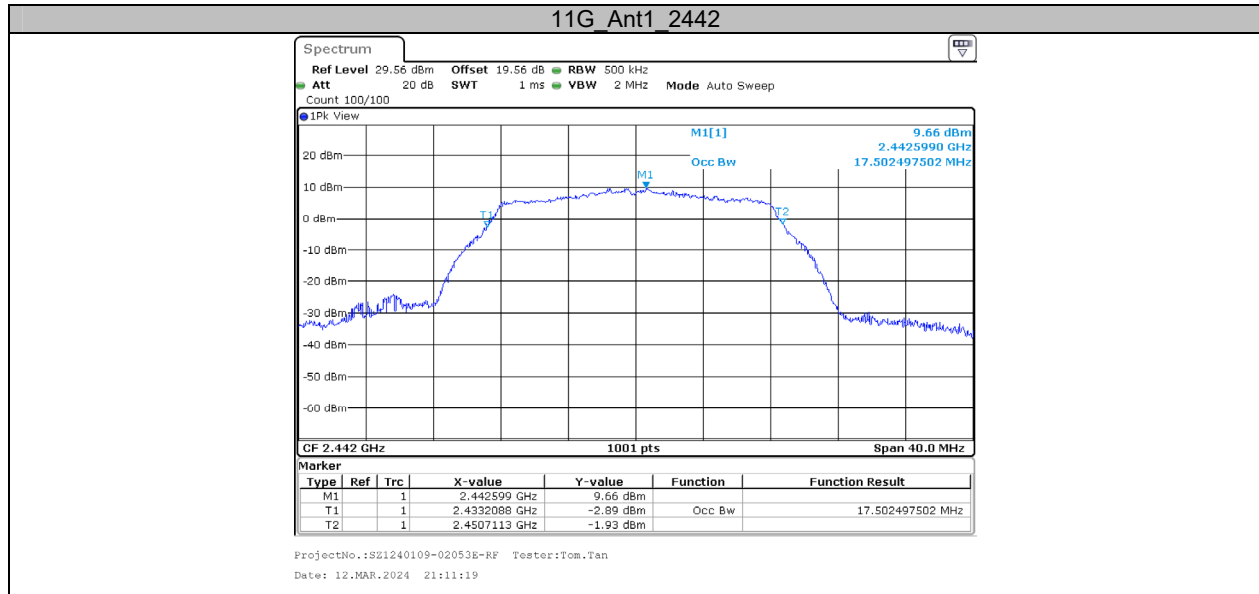

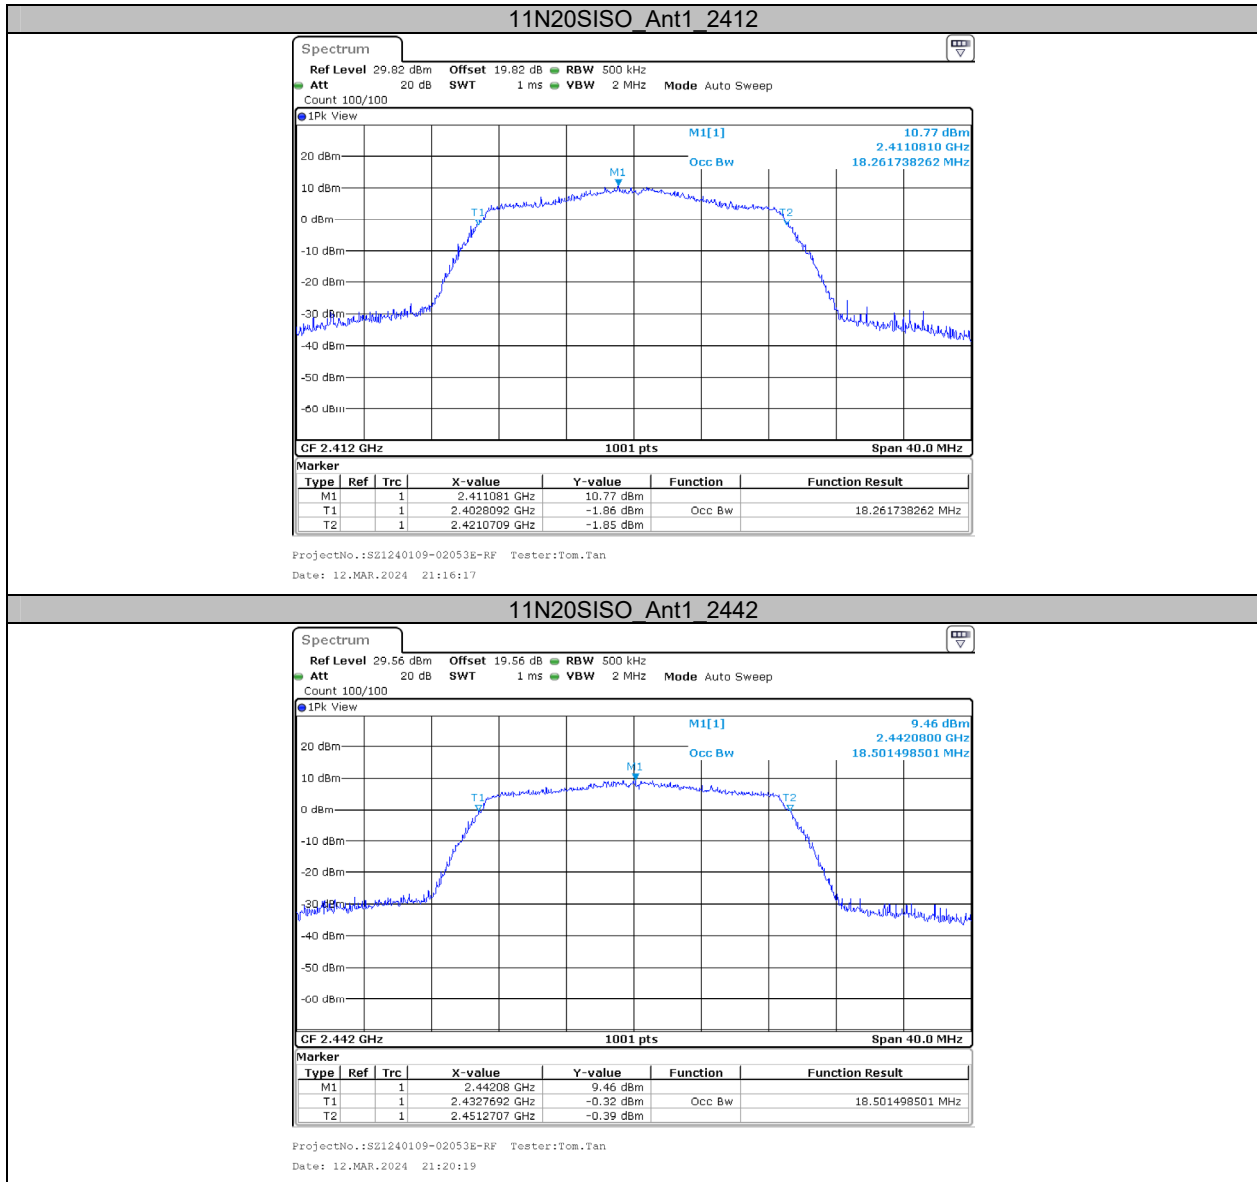

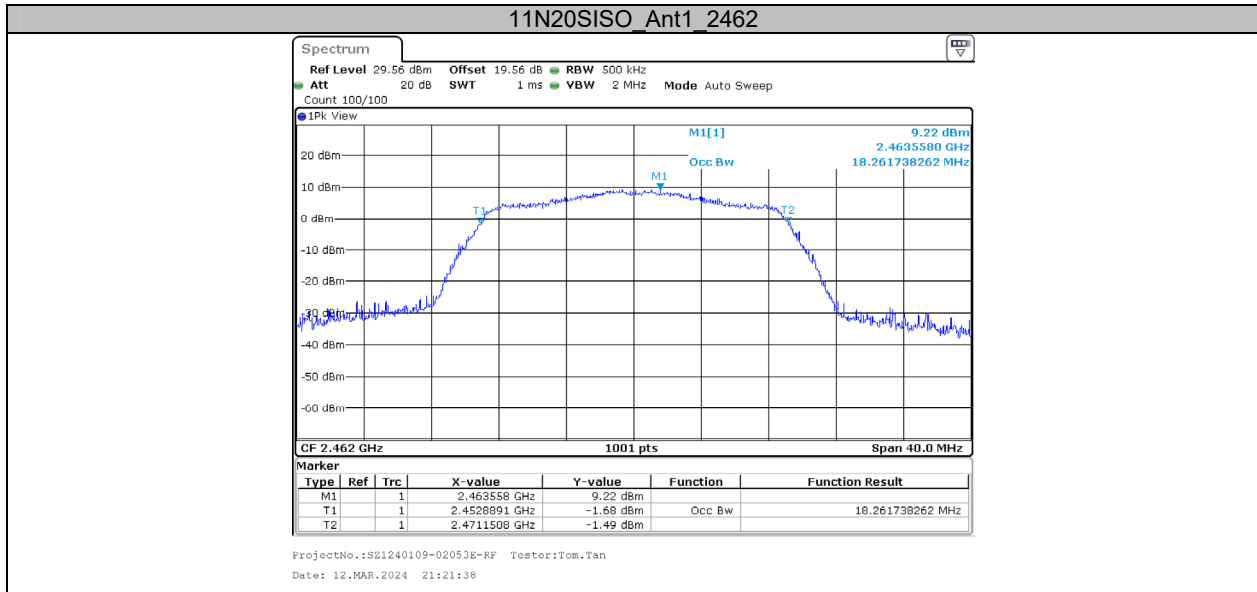

Appendix C: Maximum conducted output power

Test Result-Peak

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	18.15	≤30.00	PASS
		2442	18.27	≤30.00	PASS
		2462	17.97	≤30.00	PASS
11G	Ant1	2412	22.69	≤30.00	PASS
		2442	22.62	≤30.00	PASS
		2462	22.32	≤30.00	PASS
11N20SISO	Ant1	2412	22.22	≤30.00	PASS
		2442	22.19	≤30.00	PASS
		2462	21.82	≤30.00	PASS
Antenna Gain:	0.69dBi	Max. EIRP:	23.38dBm	EIRP Limit:	36dBm



Test Result-Average



Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	15.29	≤30.00	PASS
		2442	15.29	≤30.00	PASS
		2462	15.32	≤30.00	PASS
11G	Ant1	2412	15.01	≤30.00	PASS
		2442	14.81	≤30.00	PASS
		2462	14.82	≤30.00	PASS
11N20SISO	Ant1	2412	14.55	≤30.00	PASS
		2442	14.36	≤30.00	PASS
		2462	14.38	≤30.00	PASS



**Appendix D: Maximum power spectral density
Test Result**



Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-6.65	≤8.00	PASS
		2442	-6.32	≤8.00	PASS
		2462	-5.96	≤8.00	PASS
11G	Ant1	2412	-7.6	≤8.00	PASS
		2442	-8.21	≤8.00	PASS
		2462	-8.28	≤8.00	PASS
11N20SISO	Ant1	2412	-8.1	≤8.00	PASS
		2442	-9.27	≤8.00	PASS
		2462	-8.25	≤8.00	PASS


Test Graphs

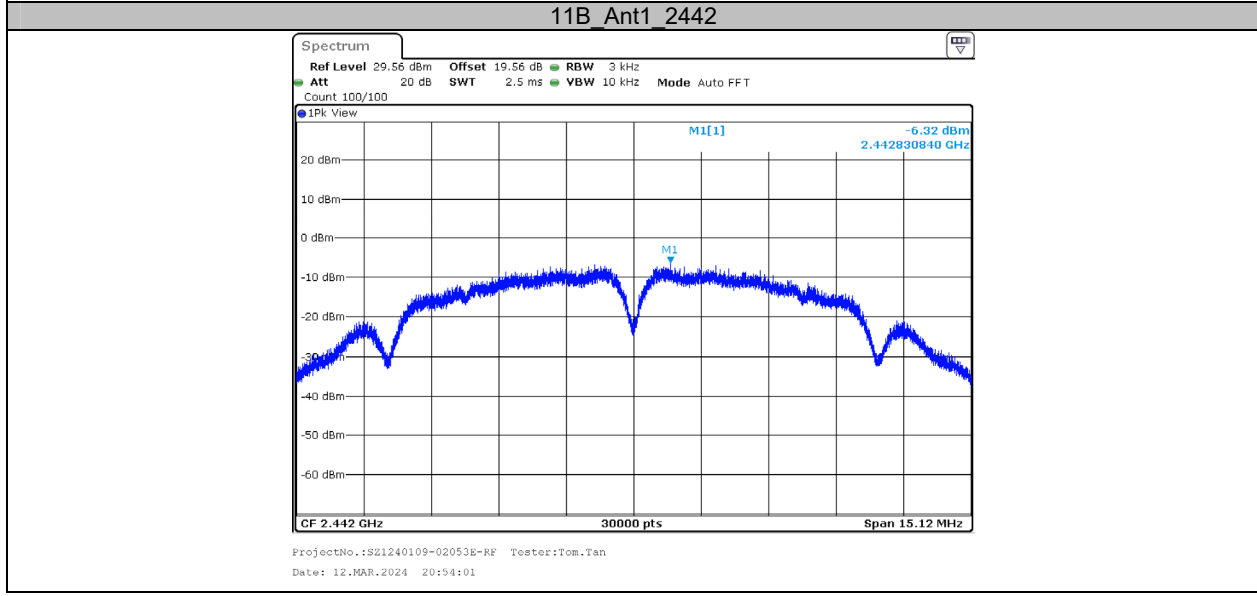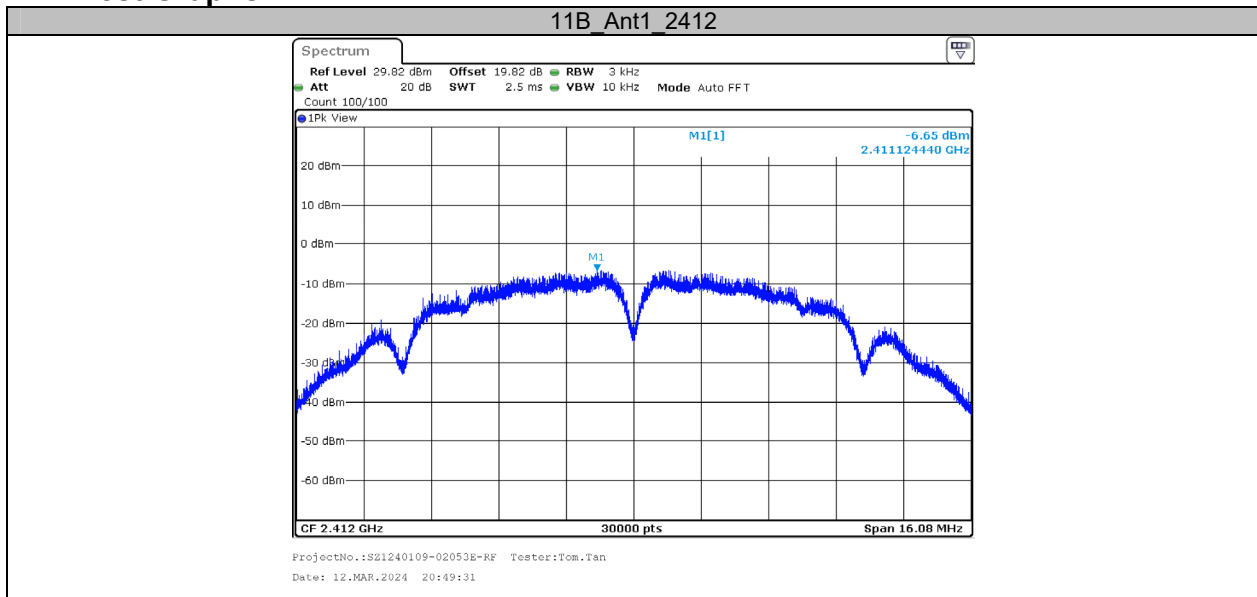

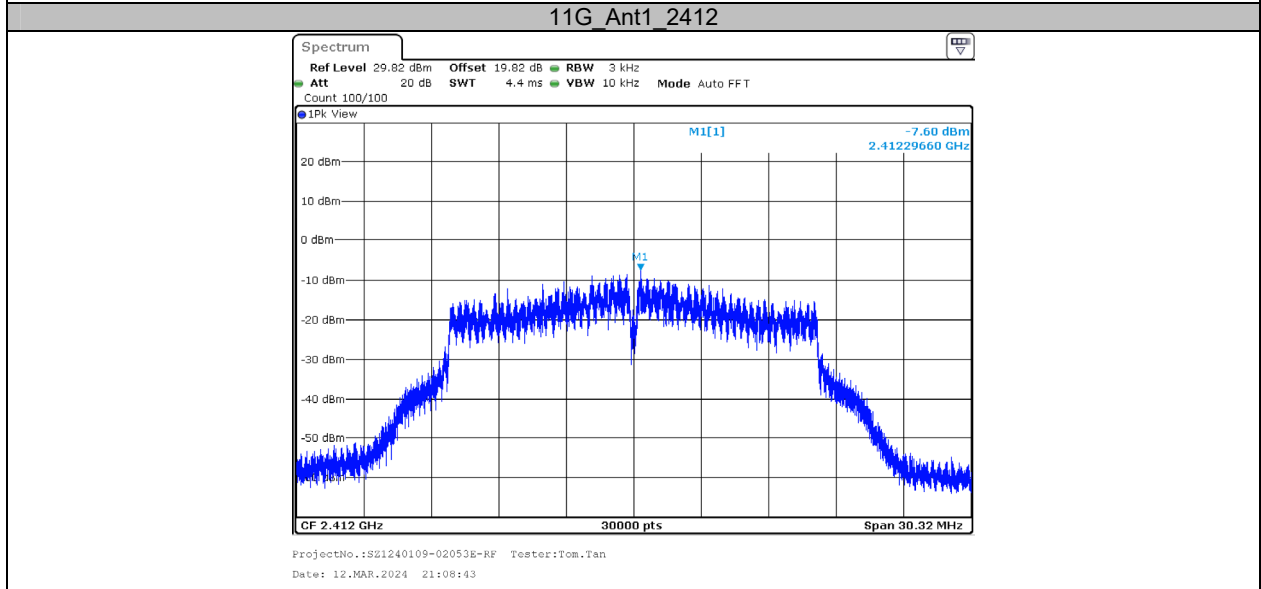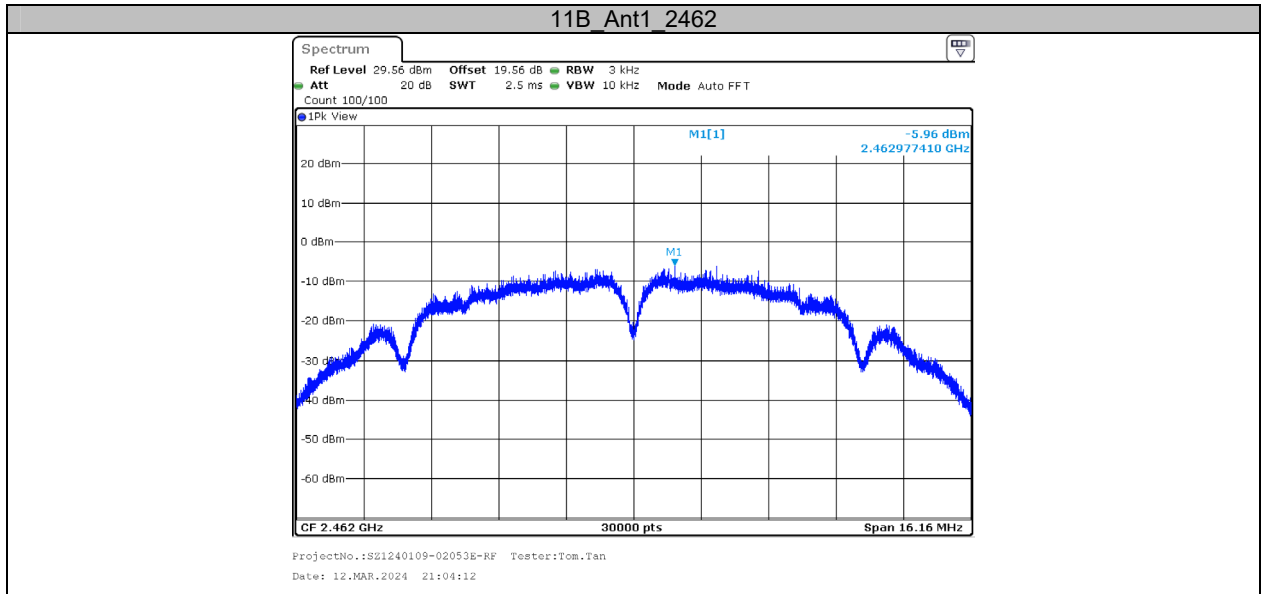

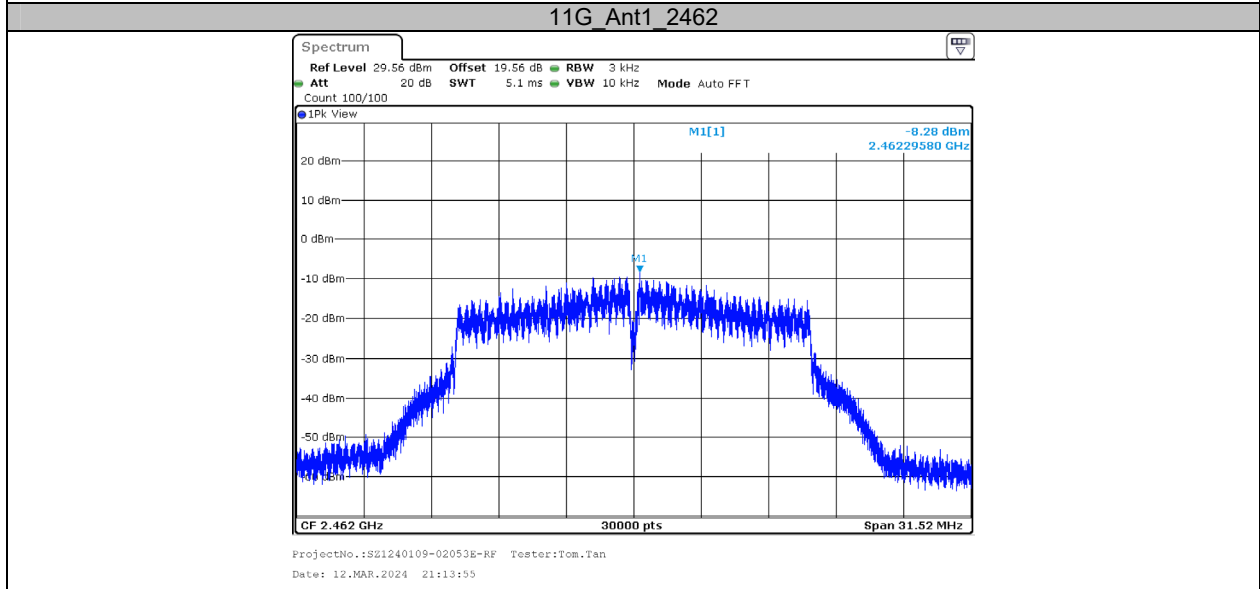
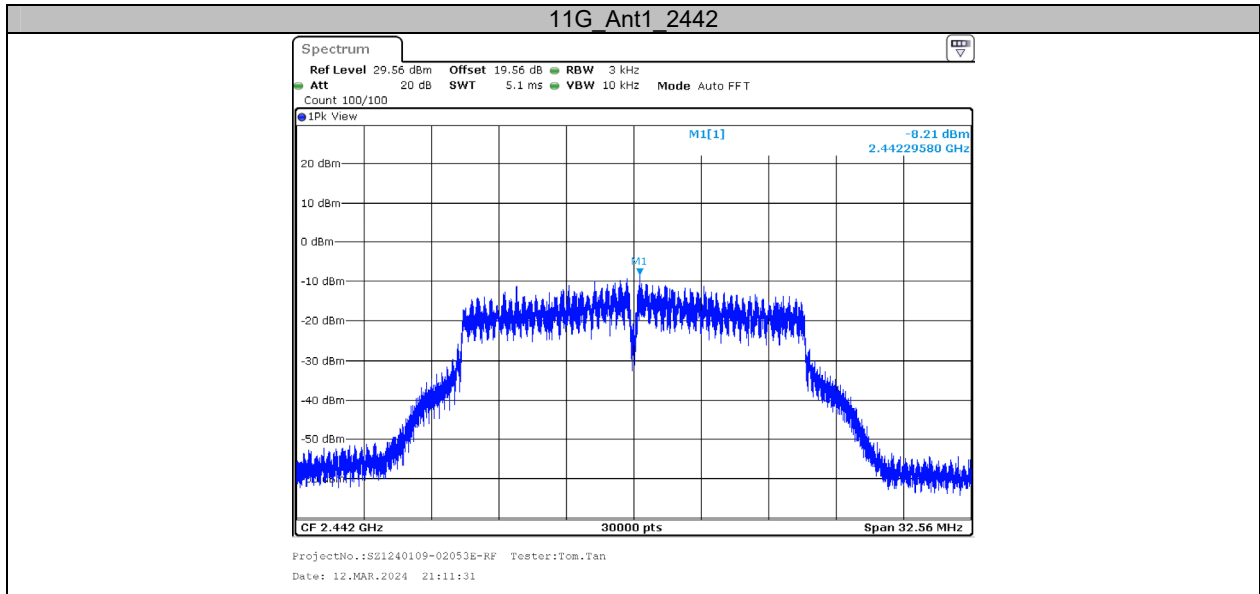


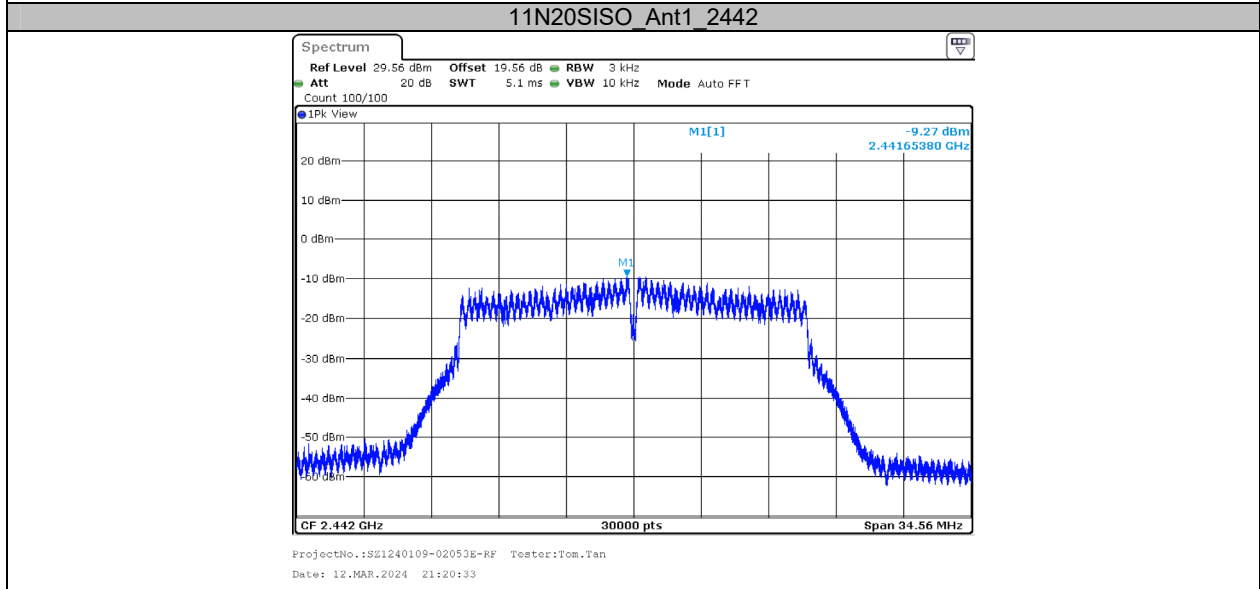
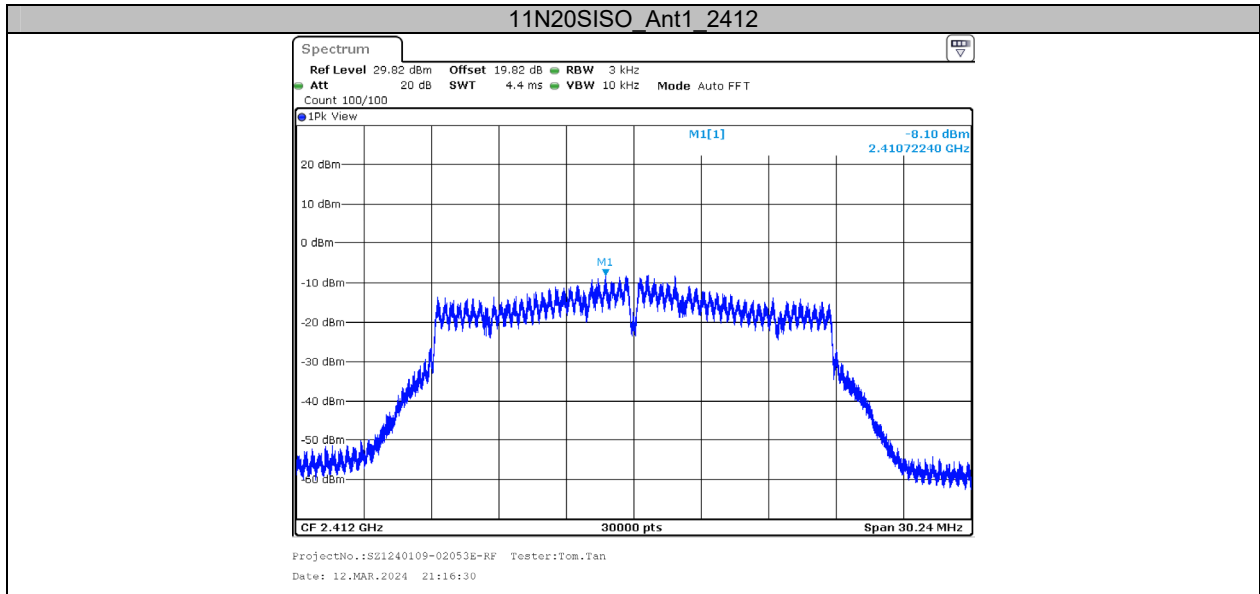



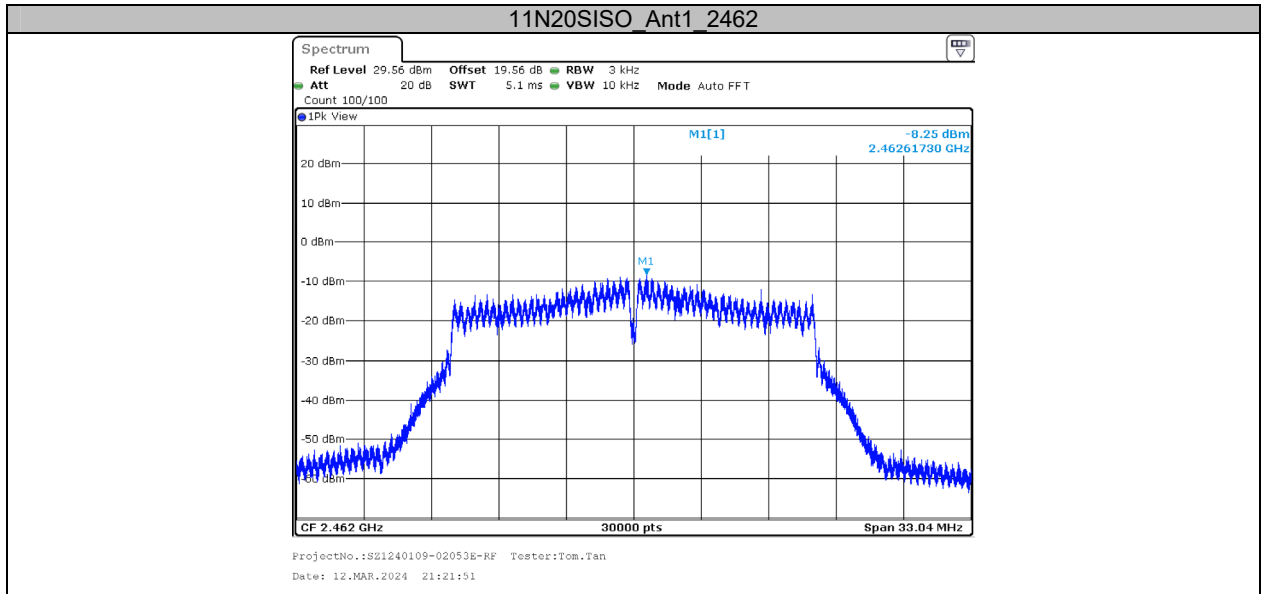


Appendix E: Band edge measurements

Test Graphs

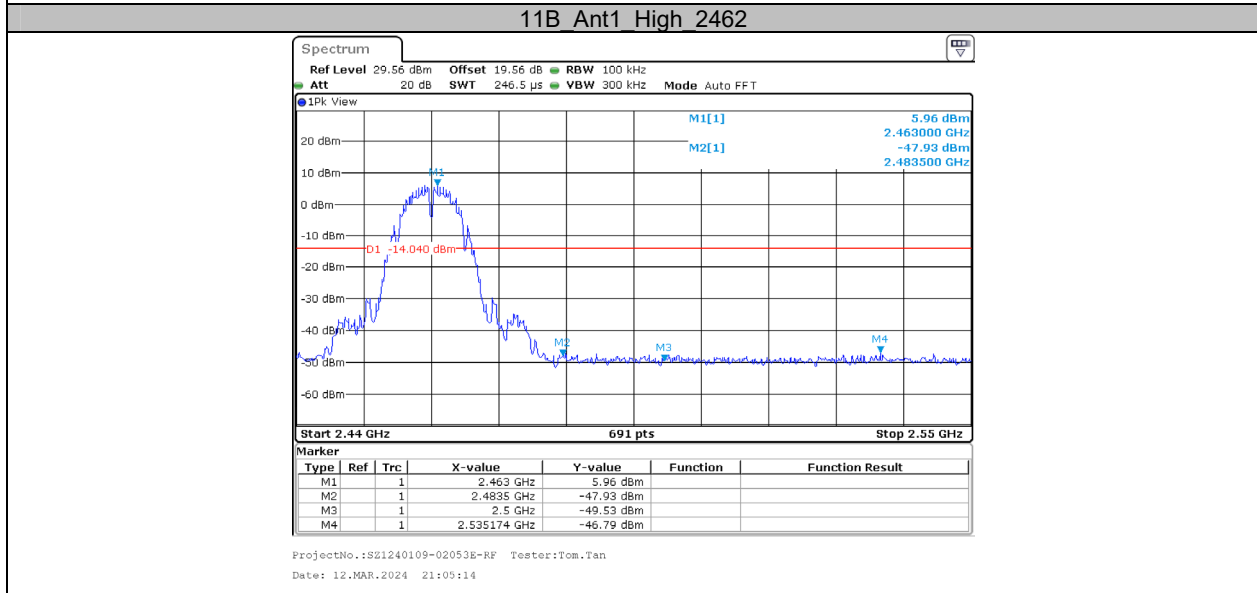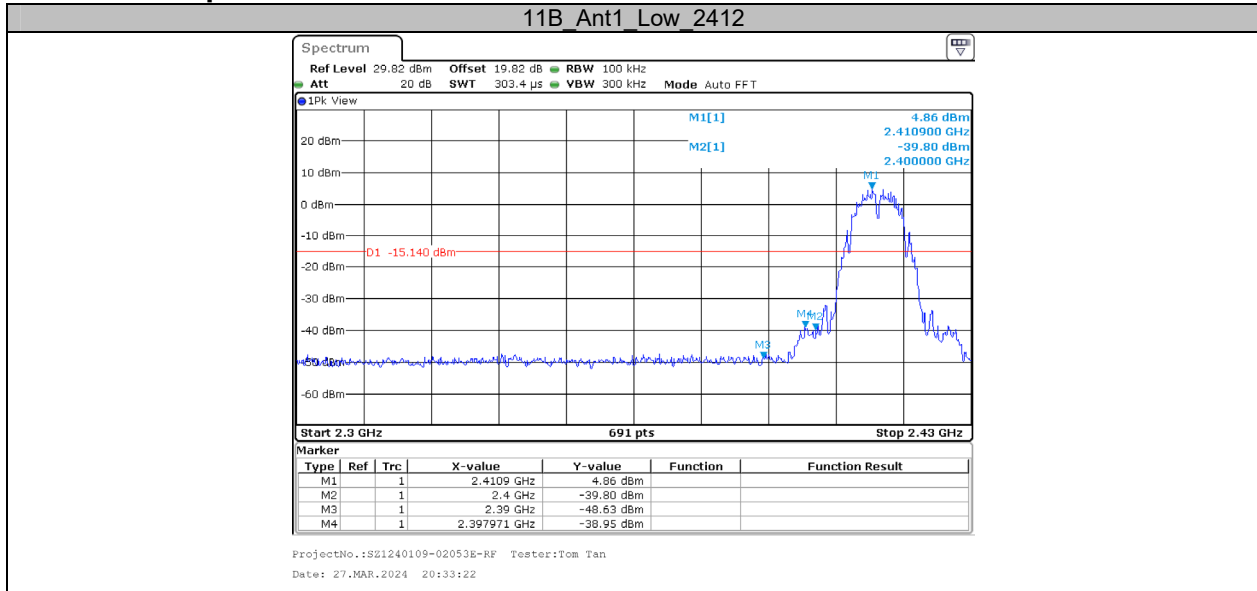

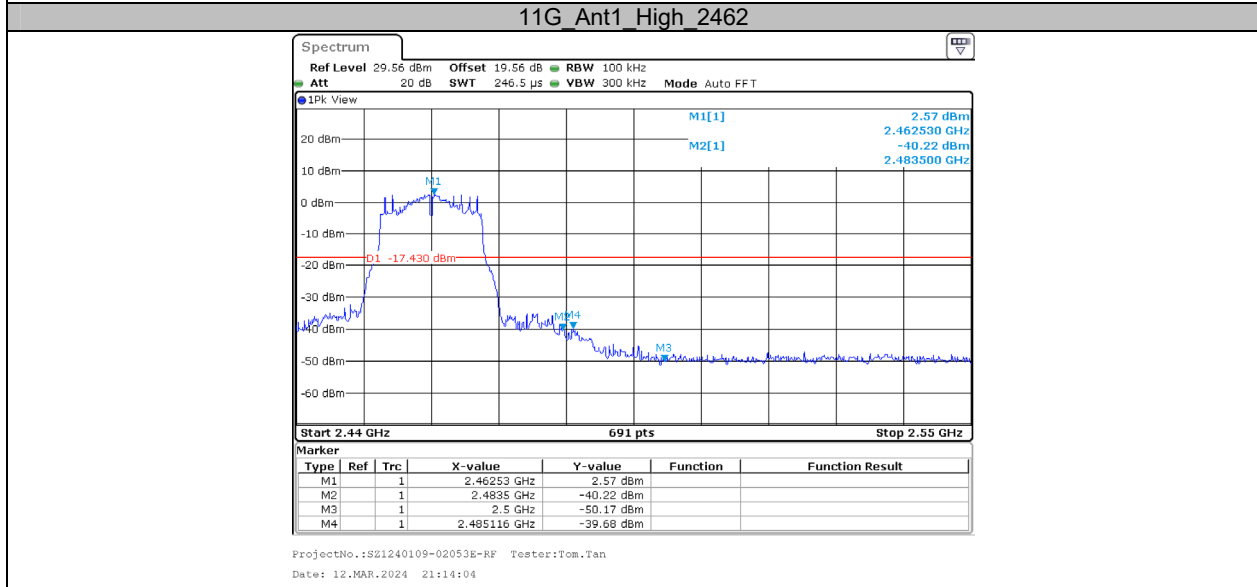
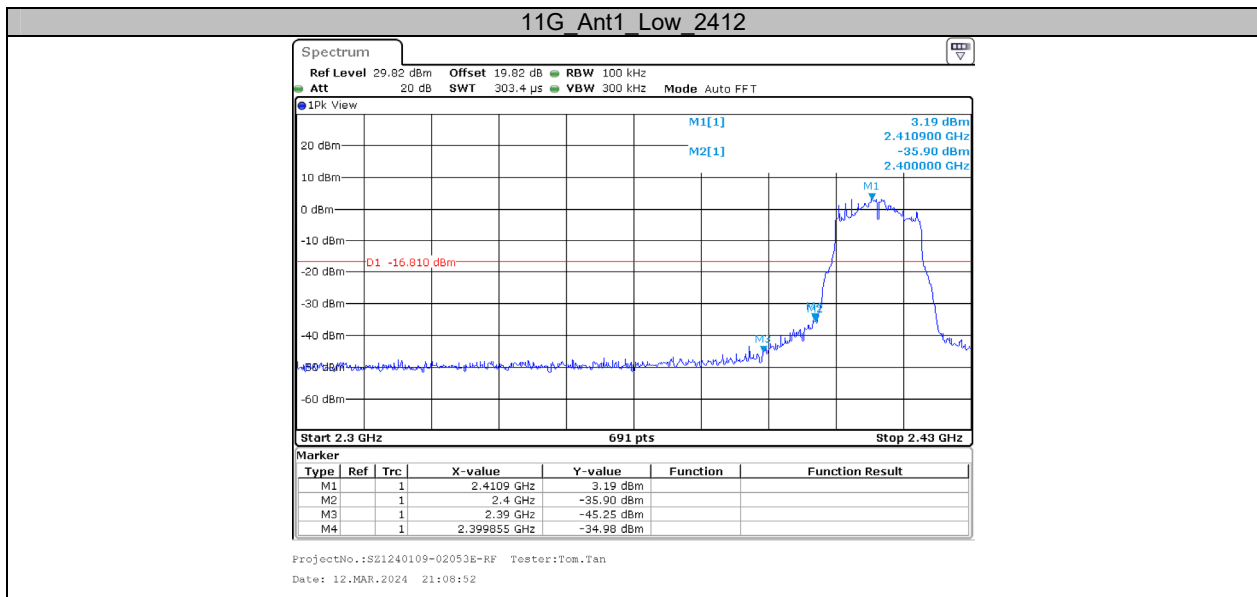


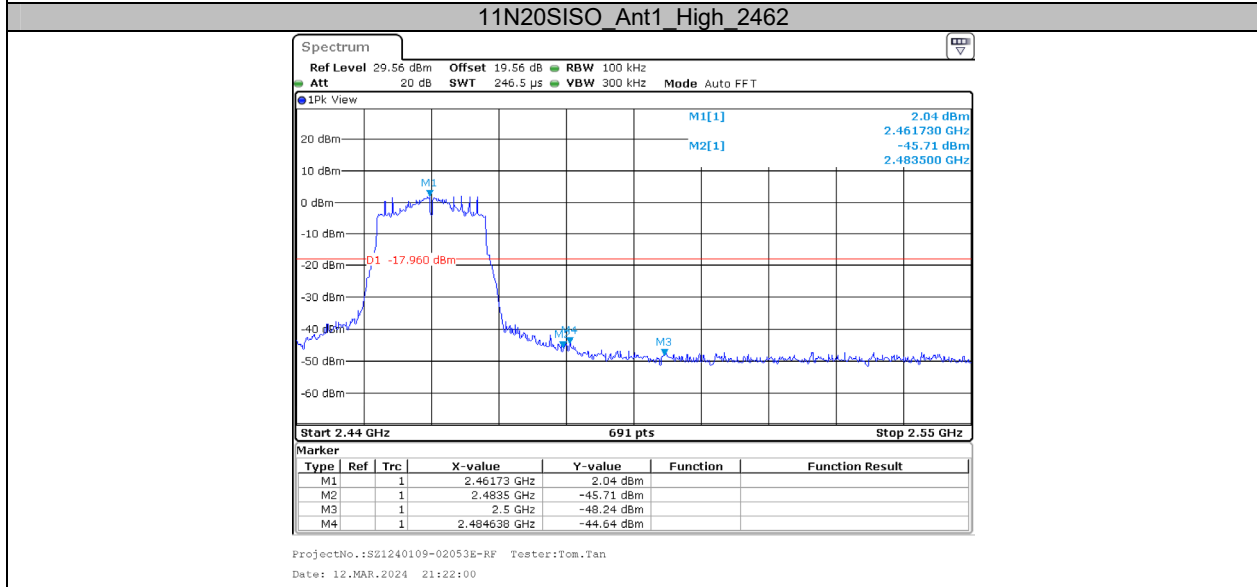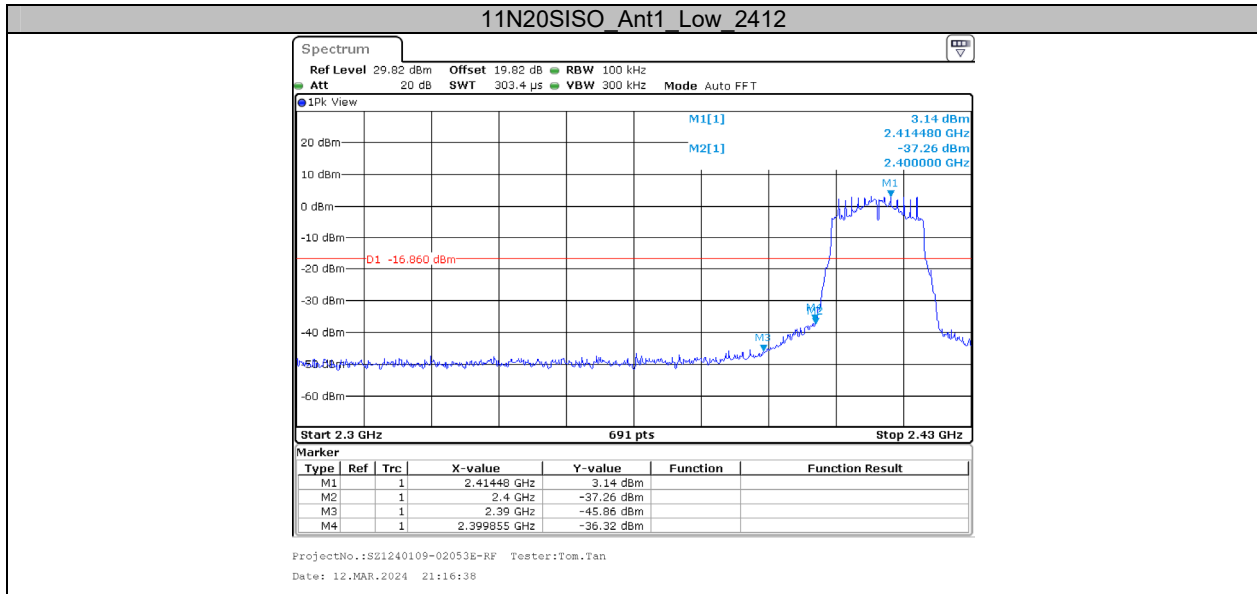


Appendix F: Duty Cycle Test Result

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T (Hz)	VBW Setting (Hz)
11B	Ant1	2412	8.41	8.51	98.82	/	10
		2442	8.41	8.50	98.94	/	10
		2462	8.42	8.51	98.94	/	10
11G	Ant1	2412	1.38	1.49	92.62	725	1000
		2442	1.39	1.50	92.67	719	1000
		2462	1.38	1.49	92.62	725	1000
11N20SISO	Ant1	2412	1.33	1.44	92.36	752	1000
		2442	1.33	1.44	92.36	752	1000
		2462	1.34	1.44	93.06	746	1000

Test Graphs

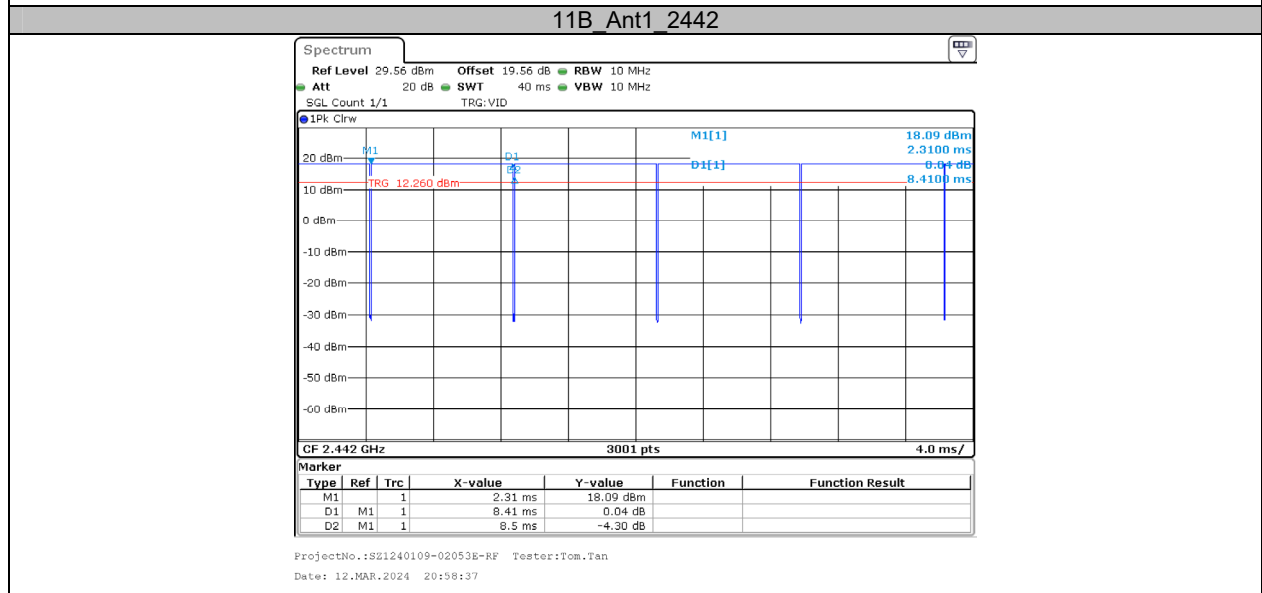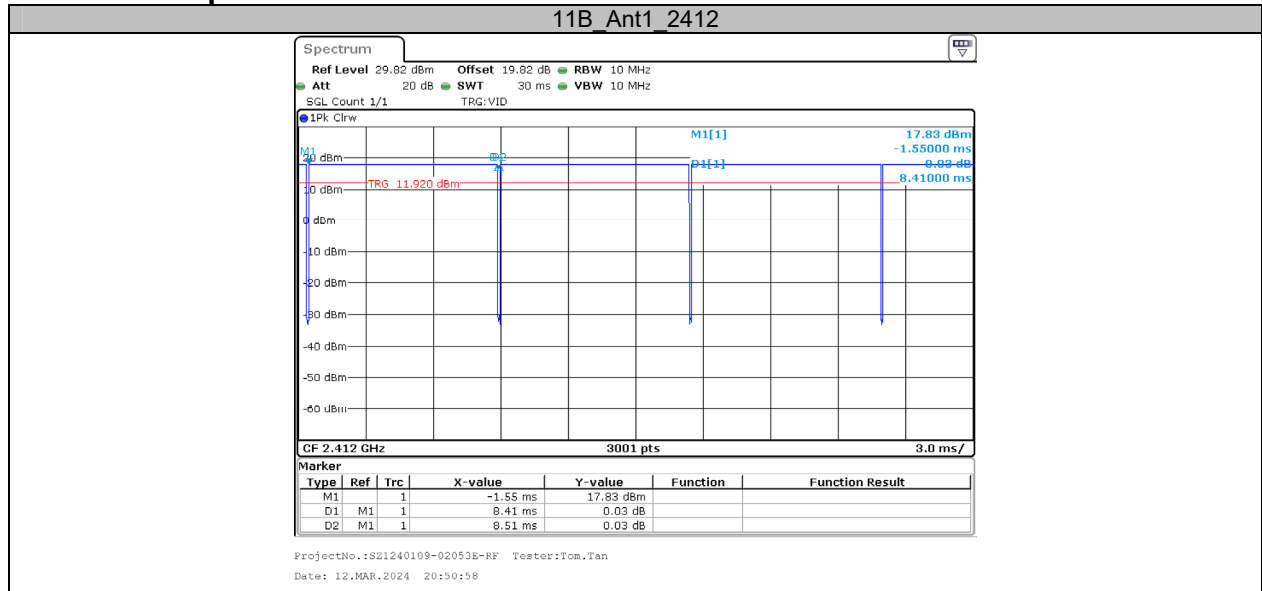


11B_Ant1_2462

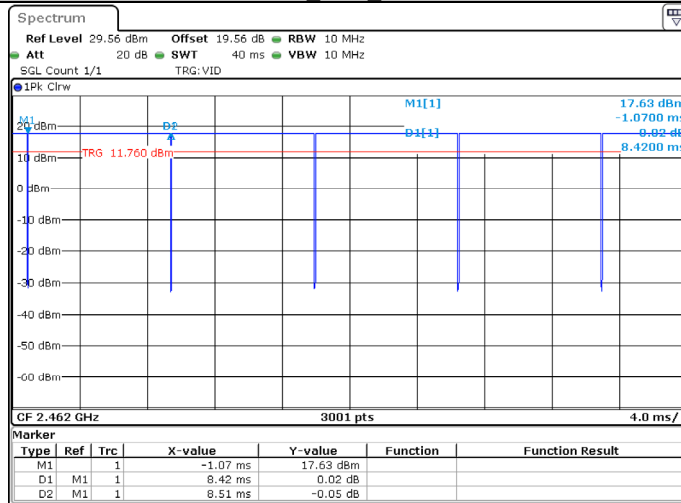


ProjectNo.:SZ1240109-02053E-RF Tester:Tom.Tan
 Date: 12.MAR.2024 21:03:46

11G_Ant1_2412

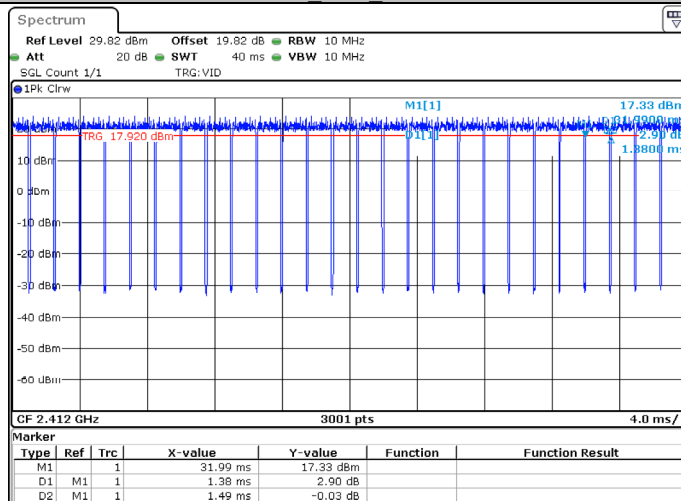


ProjectNo.:SZ1240109-02053E-RF Tester:Tom.Tan
 Date: 12.MAR.2024 21:08:18

11G Ant1_2442

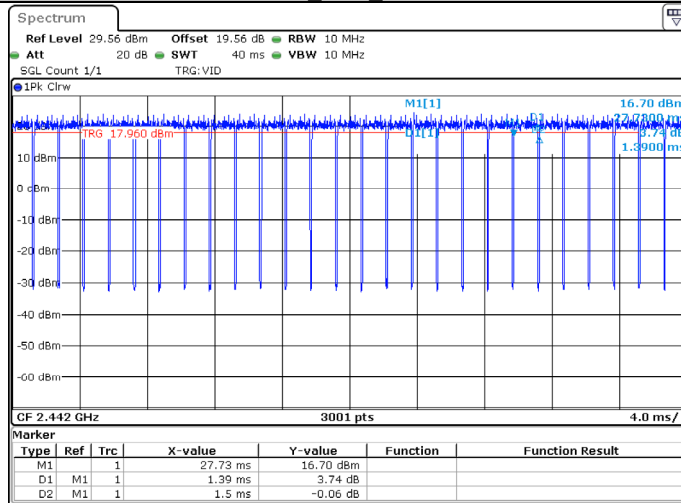


ProjectNo.:SZ1240109-02053E-RF Tester:Tom.Tan
Date: 12.MAR.2024 21:11:06

11G Ant1_2462

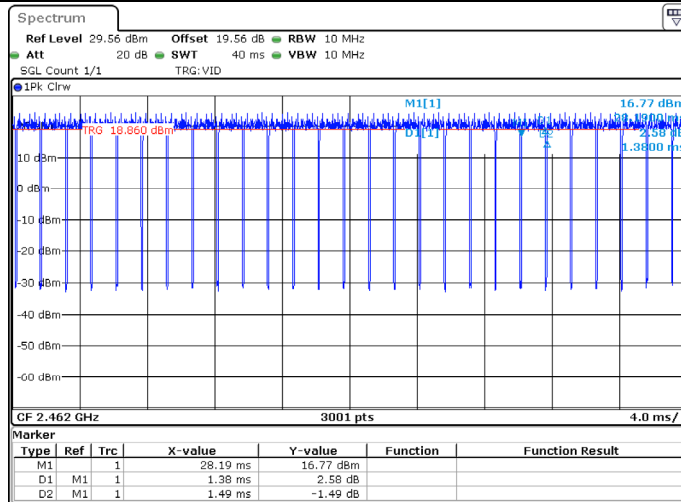


ProjectNo.:SZ1240109-02053E-RF Tester:Tom.Tan
Date: 12.MAR.2024 21:13:29

11N20SISO Ant1 2412

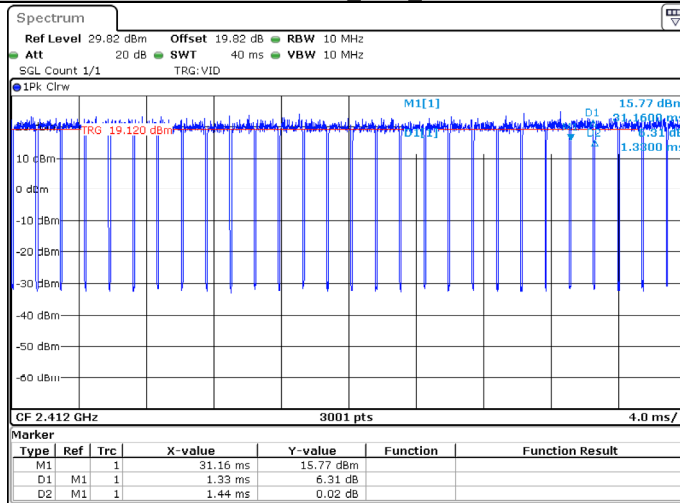


ProjectNo.:SZ1240109-02053E-RF Tester:Tom.Tan
Date: 12.MAR.2024 21:16:04

11N20SISO Ant1 2442

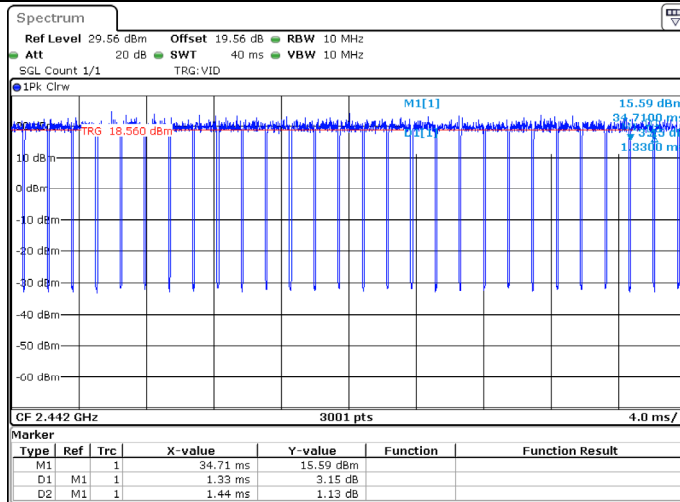

ProjectNo.:SZ1240109-02053E-RF Tester:Tom.Tan
Date: 12.MAR.2024 21:20:06

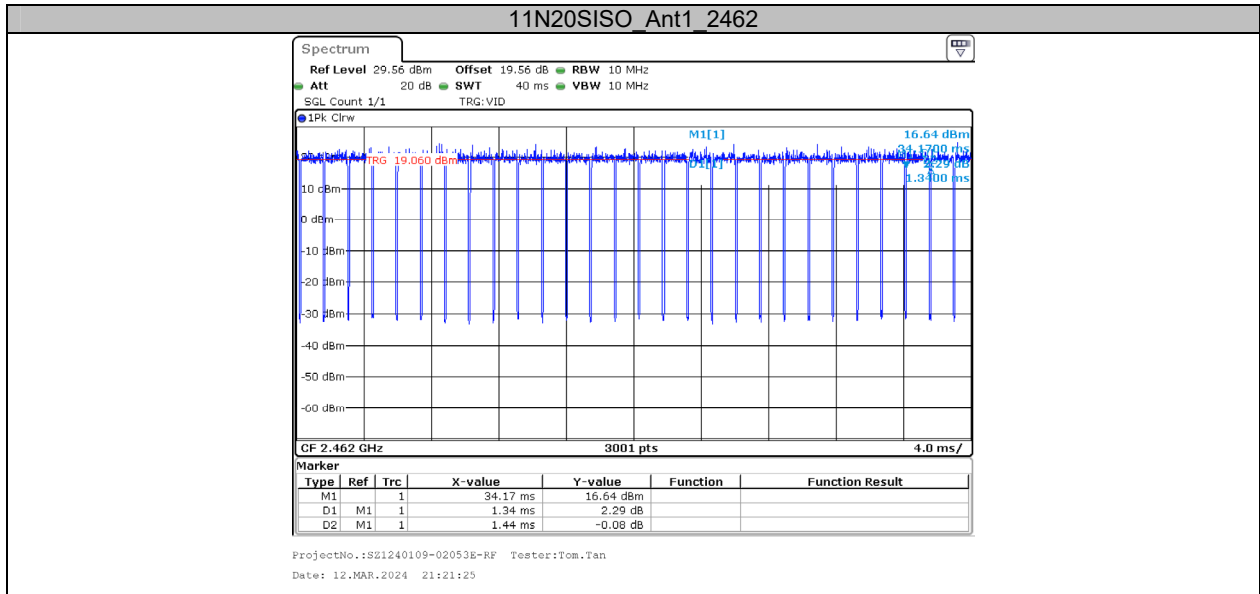

******* END OF REPORT *******