

TEST REPORT

Applicant Name: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
Address: No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China
Report Number: SZ1240201-07392E-RF-00
FCC ID: T2C-SV40

Test Standard (s)

FCC PART 15.407

Sample Description

Product Type: Video Conferencing Endpoint
Model No.: SmartVision 40
Multiple Model(s) No.: N/A
Trade Mark: **Yealink**
Date Received: 2024/02/01
Issue Date: 2024/04/12

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

April Zhang

April Zhang
RF Engineer

Approved By:

Jimmy Xiao

Jimmy Xiao
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	8
EQUIPMENT MODIFICATIONS	9
SUPPORT EQUIPMENT LIST AND DETAILS	9
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
FCC 1.1307 (B) & §2.1091- MPE-BASED EXEMPTION	13
APPLICABLE STANDARD	13
RESULT	14
FCC §15.203 – ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.407 (B) (6) §15.207 (A) – CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
FACTOR & OVER LIMIT CALCULATION.....	17
TEST DATA	17
§15.205 & §15.209 & §15.407(B)– UNDESIRABLE EMISSION	22
APPLICABLE STANDARD	22
EUT SETUP	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	24
FACTOR & OVER LIMIT/MARGIN CALCULATION	25
TEST DATA	25
EUT PHOTOGRAPHS.....	257
TEST SETUP PHOTOGRAPHS	258

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	SZ1240201-07392E-RF-00	Original Report	2024/04/12

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Video Conferencing Endpoint
Tested Model	SmartVision 40
Multiple Model(s)	N/A
Frequency Range	5G Wi-Fi: 5150-5250MHz; 5250-5350MHz; 5470-5725MHz; 5725-5850MHz
Mode	Module YL43752: 802.11a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80 Module YL43456: 802.11a/n20/n40/ac20/ac40/ac80
Maximum Conducted Average Output Power	For Module YL43752: 5150-5250MHz: 11.65dBm 5250-5350MHz: 12.24dBm 5470-5725MHz: 11.76dBm 5725-5850MHz: 13.98dBm For Module YL43456: 5150-5250MHz: 15.76dBm 5250-5350MHz: 16.12dBm 5470-5725MHz: 16.28dBm 5725-5850MHz: 15.93dBm
Modulation Technique	OFDM
Antenna Specification [#]	Module YL43752 ANT1: 4.17dBi; ANT2: 3.01dBi Module YL43456 ANT: 4.17dBi (provided by the applicant)
Voltage Range	DC 48V from Adapter
Sample serial number	2HH0-2 for Conducted and Radiated Emissions Test 2HH0-1 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: YLPS480700C Input: AC 100-240~50/60Hz 1.0A Output: DC 48.0V 0.7A 33.6W

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Frequency		213.55 Hz(k=2, 95% level of confidence)
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.75 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.94dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

The system support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80/ax20/ax40/ax80, the 802.11 n ht20/n ht40 were reduced since the identical parameters with 802.11ac vht20 and vht40.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a/ac20 mode: channel 36, 40, 48 were tested;

For 802.11ac40 mode: channel 38, 46 were tested;

For 802.11ac80 mode, channel 42 was tested.

For 5250-5350MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
54	5270	62	5310
56	5280	64	5320
58	5290	/	/

For 802.11a, 802.11n20/ac20 mode: channel 52, 56, 64 were tested;

For 802.11n40/ac40 mode: channel 54, 62 were tested;

For 802.11ac80 mode, channel 58 was tested.

For 5470-5725MHz Band, 18 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	120	5600
102	5510	122	5610
104	5520	124	5620
106	5530	126	5630
108	5540	128	5640
110	5550	132	5660
112	5560	134	5670
116	5580	136	5680
118	5590	140	5700

For 802.11a, 802.11n20/ac20 mode: channel 100, 116, 140 were tested;

For 802.11n40/ac40 mode: channel 102, 110, 134 were tested;

For 802.11ac80 mode, channel 106, 122 was tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a/ac20 mode: channel 149, 157, 165 were tested;

For 802.11ac40 mode: channel 151, 159 were tested;

For 802.11ac80 mode, channel 155 was tested.

EUT Exercise Software

“Authentic Tool _1.2.24.0”[#] software was used and power level as below. The software and power level was provided by the applicant. The device was tested with the worst case was performed as below:

Module YL43752

U-NII	Mode	Data rate	Power Level [#]		
			Low Channel	Middle Channel	High Channel
5150 – 5250MHz	802.11a	6Mbps	12	12	12
	802.11ac20	MCS0	11	11	11
	802.11ac40	MCS0	12	/	12
	802.11ac80	MCS0	/	13	/
	802.11ax 20	MCS0	12	12	12
	802.11ax 40	MCS0	11	/	11
5250 – 5350MHz	802.11a	6Mbps	12	12	12
	802.11ac20	MCS0	12	12	12
	802.11ac40	MCS0	12	/	12
	802.11ac80	MCS0	/	12	/
	802.11ax20	MCS0	12	12	12
	802.11ax40	MCS0	11	/	11
5470~5725MHz	802.11a	6Mbps	11	11	11
	802.11ac20	MCS0	11	11	11
	802.11ac40	MCS0	12	12	12
	802.11ac80	MCS0	12	/	12
	802.11ax20	MCS0	11	11	11
	802.11ax40	MCS0	12	12	12
5470~5725MHz	802.11a	6Mbps	14	14	14
	802.11ac20	MCS0	14	14	14
	802.11ac40	MCS0	13	/	13
	802.11ac80	MCS0	/	14	/
	802.11ax20	MCS0	14	14	14
	802.11ax40	MCS0	13	/	13
5470~5725MHz	802.11a	6Mbps	14	14	14
	802.11ac20	MCS0	14	14	14
	802.11ac40	MCS0	13	/	13
	802.11ac80	MCS0	/	14	/
	802.11ax20	MCS0	14	14	14
	802.11ax40	MCS0	13	/	13

EUT has two antennas and support SISO/MIMO transmit except for 802.11a mode which only support SISO. The MIMO mode was the worst case which select to test. All the antenna ports have the same power level.

Module YL43456

U-NII	Mode	Data rate	Power Level [#]		
			Low Channel	Middle Channel	High Channel
5150 – 5250MHz	802.11a	6Mbps	14	14	14
	802.11ac20	MCS0	14	14	14
	802.11ac40	MCS0	8	8	\
	802.11ac80	MCS0	6	\	\
5250-5350MHz	802.11a	6Mbps	16	16	16
	802.11ac20	MCS0	16	16	16
	802.11ac40	MCS0	12	12	\
	802.11ac80	MCS0	8	\	\
5470~5725 MHz	802.11a	6Mbps	12	12	12
	802.11ac20	MCS0	12	12	12
	802.11ac40	MCS0	10	10	10
	802.11ac80	MCS0	8	8	/
5725~5850 MHz	802.11a	6Mbps	16	16	16
	802.11ac20	MCS0	16	16	16
	802.11ac40	MCS0	16	16	\
	802.11ac80	MCS0	16	\	\

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable DC Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For Conducted Emissions:

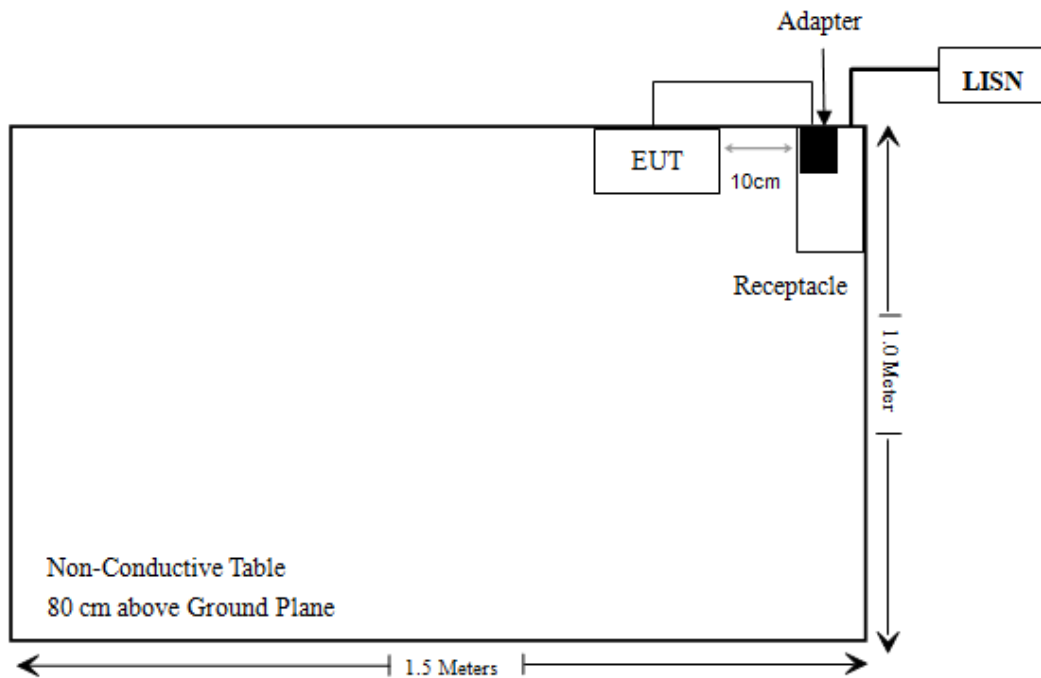

For Radiated Emissions:

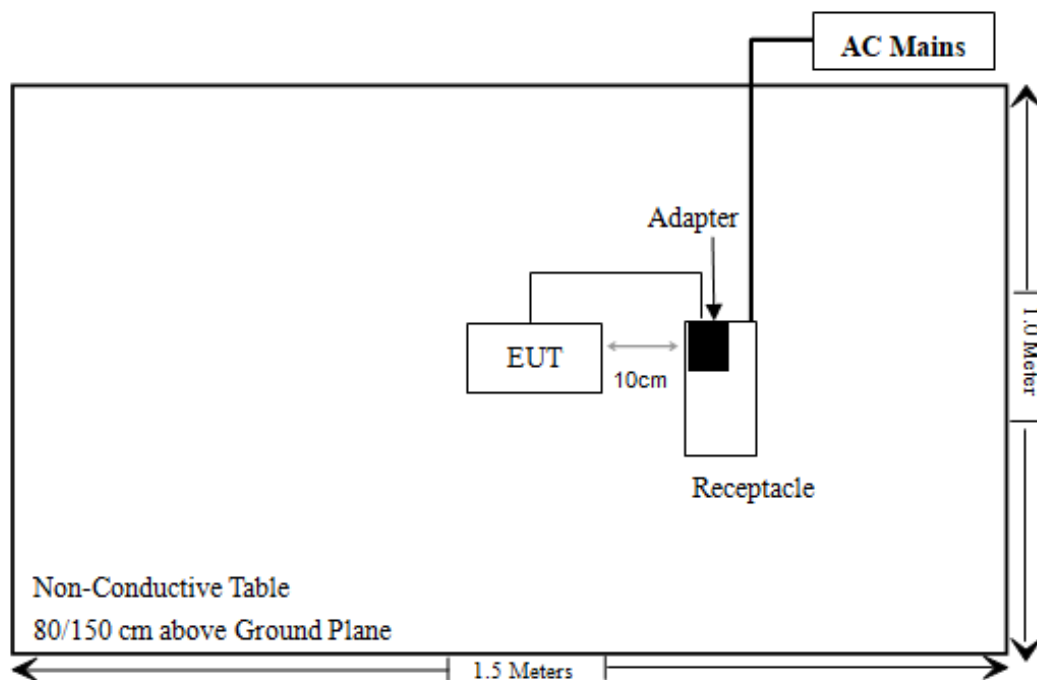

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result	Remark
§1.1307 (b) & §2.1091	MPE-Based Exemption	Compliant	-
§15.203	Antenna Requirement	Compliant	-
§15.407(b)(9)& §15.207(a)	Conducted Emissions	Compliant	-
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant	-
§15.407(a) (e)	26 dB Emission Bandwidth & 6dB Bandwidth	-	See Note 2
§15.407(a)	Conducted Transmitter Output Power	-	See Note 2
§15.407 (a)	Power Spectral Density	-	See Note 2
§15.407 (h)	Transmit Power Control (TPC)	Not Applicable	-
§15.407 (h)	Dynamic Frequency Selection (DFS)	Compliant*	-
-	Duty Cycle	-	See Note 2

Note 1:

Compliant*: Please refer to the DFS report SZ1240201-07392E-RFB.

Not Applicable: The supplier declared that the equipment has no this function.

Note 2:

1: The manufacturer declared two certified WLAN module installed in EUT, model YL43752 (FCC ID: T2C-YL43752) and model YL43456 (FCC ID: T2C-YL43456)

2: The test data are referred to the module report SZNS220511-19727E-RF-00 and FCC022022-06244RF2, the cross-reference of each test item and the data of reference module report as below:

Test item	Reference data of module report	
	SZNS220511-19727E-RF-00	FCC022022-06244RF2
26 dB Emission Bandwidth & 6dB Bandwidth	Page 150~212	Page 218~288
Conducted Transmitter Output Power	Page 213~217	Page 289~290
Power Spectral Density	Page 218~279	Page 291~322
Duty Cycle	Page 280~292	Page 15~18

3: The BACL is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2023/08/03	2024/08/02
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2023/08/03	2024/08/02
Audix	EMI Test software	E3	191218	NCR	NCR
Radiated Emissions Test					
R&S	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2023/06/08	2024/06/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2024/07/19
ETS	Passive Loop Antenna	6512	29604	2023/07/07	2024/07/06
Unknown	Cable	Chamber Cable 1	F-03-EM236	2023/08/03	2024/08/02
Unknown	Cable	Chamber Cable 4	EC-007	2023/08/03	2024/08/02
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2023/04/18	2024/04/17
COM-POWER	Pre-amplifier	PA-122	181919	2023/06/29	2024/06/28
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2024/07/25
Unknown	RF Cable	KMSE	0735	2023/10/08	2024/10/07
Unknown	RF Cable	UFA147	219661	2023/10/08	2024/10/07
SNSD	5G Band Reject filter	BSF5150-5850MN-0899-004	5G filter	2023/08/03	2024/08/02
A.H.System	Pre-amplifier	PAM-1840VH	190	2023/08/03	2024/08/02
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC 1.1307 (B) & §2.1091- MPE-BASED EXEMPTION

Applicable Standard

According to subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power (ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Result**For worst case:**

For Module YL43752:

Mode	Frequency (MHz)	Tune up conducted power [#]	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
2.4G Wi-Fi	2412-2462	18.5	3.08	0.93	19.43	87.70	0.2	768
5G Wi-Fi	5180-5240	12.0	4.17	2.02	14.02	25.23	0.2	768
	5260-5280	13.0	4.17	2.02	15.02	31.77	0.2	768
	5500-5700	12.0	4.17	2.02	14.02	25.23	0.2	768
	5745-5825	14.5	4.17	2.02	16.52	44.87	0.2	768

For Module YL43456:

Mode	Frequency (MHz)	Maximum power [#]	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
2.4G Wi-Fi	2412-2462	20.71	3.22	1.07	21.78	150.66	0.2	768
5G Wi-Fi	5150-5850	16.28	4.17	2.02	18.30	67.61	0.2	768

Note 1: The tune-up power was refer the module report

Note2: The antenna gain was declared by the applicant.

Note 2: 0dBd=2.15dBi.

Simultaneous transmitting consideration:

According to applicant, the 2.4G Wi-Fi and 5G Wi-Fi cannot transmit at same time, the two Wi-Fi module cannot transmit as same time.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has three internal antennas which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup

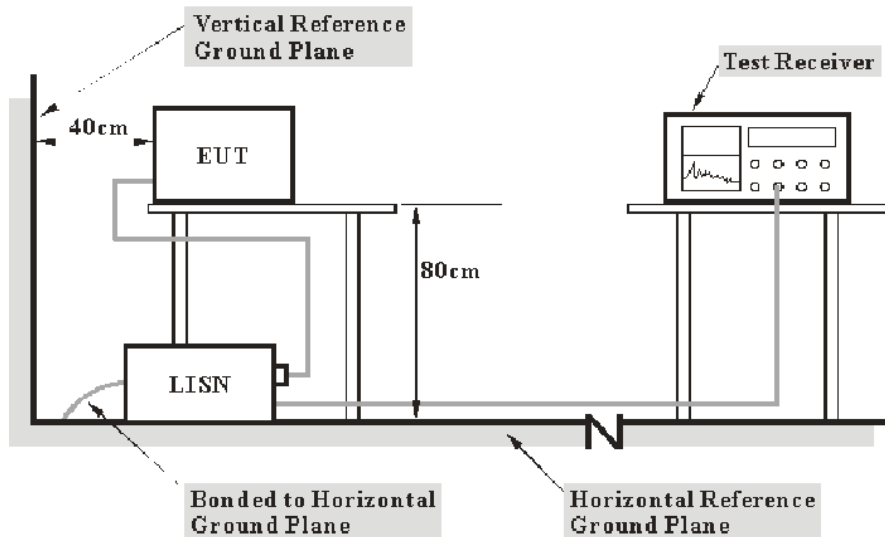

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions


Temperature:	23 °C
Relative Humidity:	42 %
ATM Pressure:	101.0 kPa

The testing was performed by Macy Shi on 2024-02-27.

EUT operation mode: Transmitting (maximum output power mode)

For Module YL43752

AC 120V/60 Hz, Line

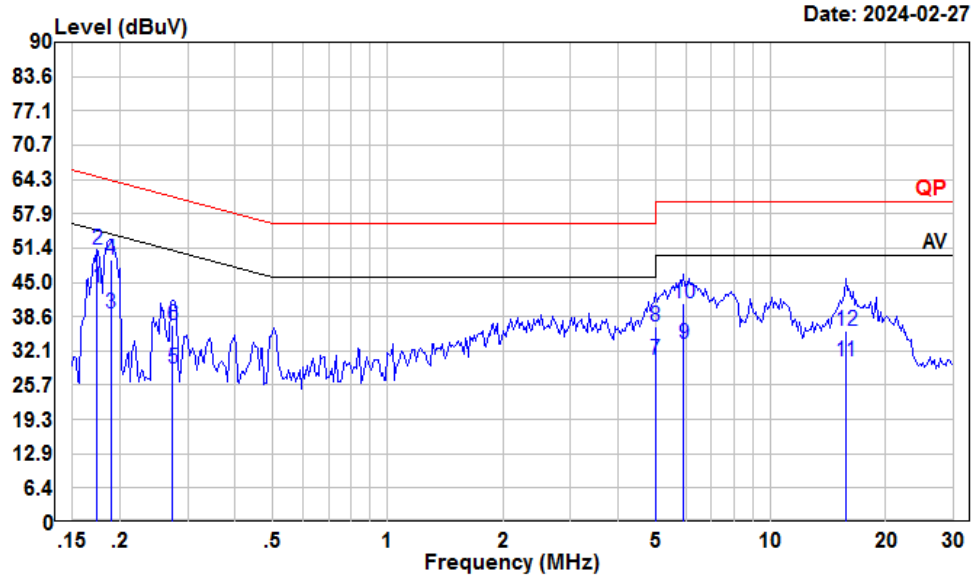

Condition: Neutral


Project : SZ1240201-07392E-RF

Tester : Macy shi

Note : 5G WIFI

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.17	23.50	44.05	10.41	10.14	54.77	-10.72	Average
2	0.17	30.70	51.25	10.41	10.14	64.77	-13.52	QP
3	0.19	18.55	39.18	10.52	10.11	54.06	-14.88	Average
4	0.19	28.60	49.23	10.52	10.11	64.06	-14.83	QP
5	0.27	8.09	28.93	10.67	10.17	50.98	-22.05	Average
6	0.27	16.23	37.07	10.67	10.17	60.98	-23.91	QP
7	5.01	9.98	30.60	10.40	10.22	50.00	-19.40	Average
8	5.01	16.18	36.80	10.40	10.22	60.00	-23.20	QP
9	5.93	12.80	33.42	10.40	10.22	50.00	-16.58	Average
10	5.93	20.45	41.07	10.40	10.22	60.00	-18.93	QP
11	15.72	9.60	30.07	10.37	10.10	50.00	-19.93	Average
12	15.72	15.30	35.77	10.37	10.10	60.00	-24.23	QP

AC 120V/60 Hz, Neutral

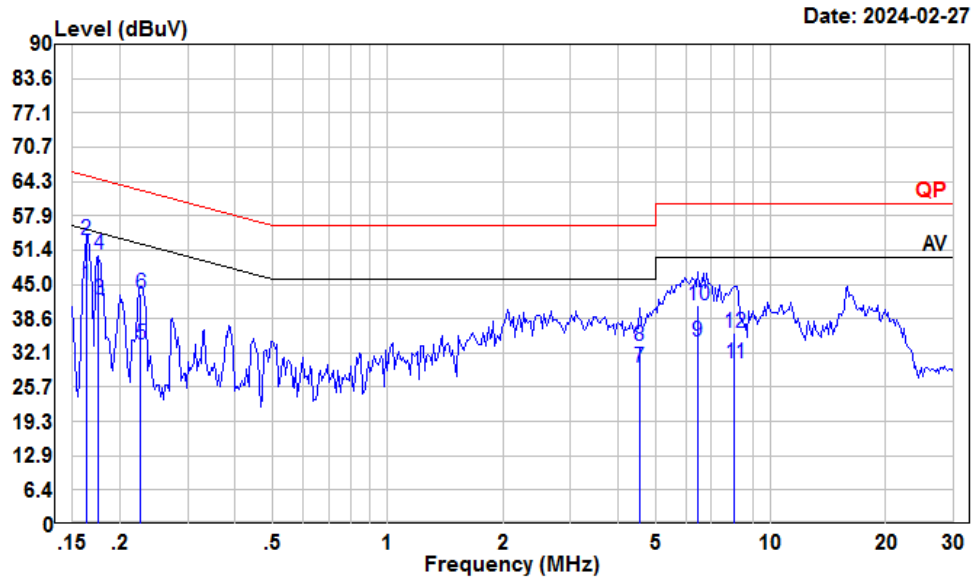

Condition: Line

Project : SZ1240201-07392E-RF


Tester : Macy shi

Note : 5G WIFI

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.16	24.29	44.84	10.40	10.15	55.30	-10.46	Average
2	0.16	32.77	53.32	10.40	10.15	65.30	-11.98	QP
3	0.18	21.70	42.24	10.40	10.14	54.68	-12.44	Average
4	0.18	30.00	50.54	10.40	10.14	64.68	-14.14	QP
5	0.23	13.17	33.69	10.37	10.15	52.57	-18.88	Average
6	0.23	22.70	43.22	10.37	10.15	62.57	-19.35	QP
7	4.55	8.79	29.48	10.45	10.24	46.00	-16.52	Average
8	4.55	12.78	33.47	10.45	10.24	56.00	-22.53	QP
9	6.45	13.47	34.26	10.57	10.22	50.00	-15.74	Average
10	6.45	20.19	40.98	10.57	10.22	60.00	-19.02	QP
11	8.06	9.71	30.30	10.36	10.23	50.00	-19.70	Average
12	8.06	15.21	35.80	10.36	10.23	60.00	-24.20	QP

For Module YL43456

AC 120V/60 Hz, Line

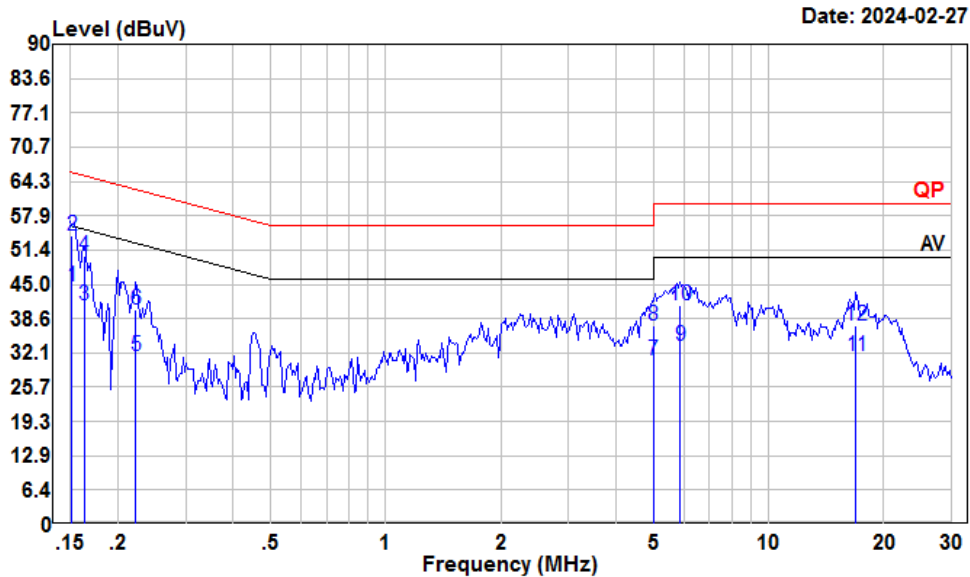

Condition: Line


Project : SZ1240201-07392E-RF

Tester : Macy shi

Note : 5G WIFI

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	24.14	44.69	10.40	10.15	55.91	-11.22	Average
2	0.15	33.70	54.25	10.40	10.15	65.91	-11.66	QP
3	0.16	20.60	41.15	10.40	10.15	55.30	-14.15	Average
4	0.16	29.80	50.35	10.40	10.15	65.30	-14.95	QP
5	0.22	11.16	31.68	10.38	10.14	52.74	-21.06	Average
6	0.22	19.67	40.19	10.38	10.14	62.74	-22.55	QP
7	5.01	10.02	30.72	10.48	10.22	50.00	-19.28	Average
8	5.01	16.61	37.31	10.48	10.22	60.00	-22.69	QP
9	5.87	12.67	33.43	10.54	10.22	50.00	-16.57	Average
10	5.87	20.19	40.95	10.54	10.22	60.00	-19.05	QP
11	16.93	11.10	31.67	10.47	10.10	50.00	-18.33	Average
12	16.93	16.60	37.17	10.47	10.10	60.00	-22.83	QP

AC 120V/60 Hz, Neutral

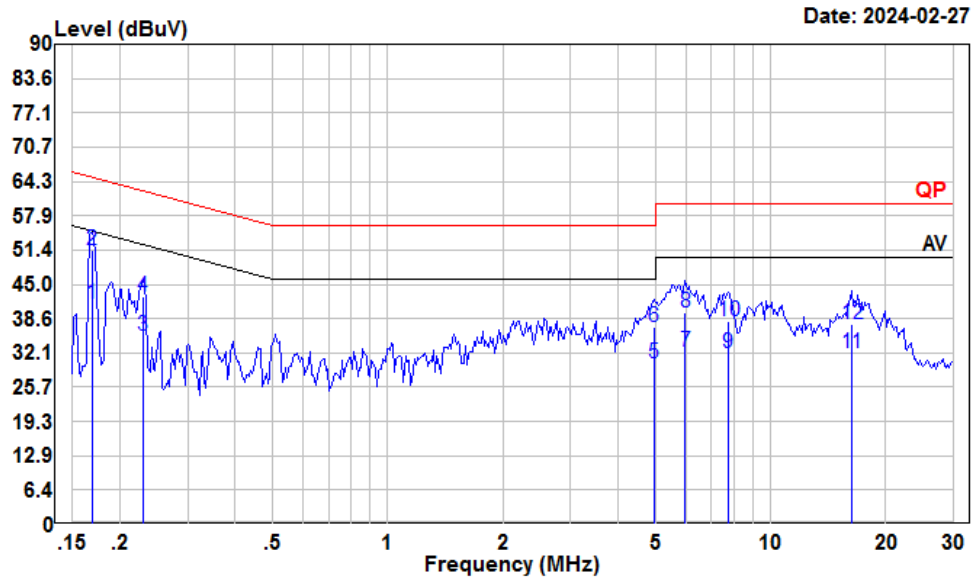

Condition: Neutral

Project : SZ1240201-07392E-RF

Tester : Macy shi

Note : 5G WIFI

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.17	20.86	41.37	10.36	10.15	55.03	-13.66	Average
2	0.17	30.92	51.43	10.36	10.15	65.03	-13.60	QP
3	0.23	14.55	35.34	10.63	10.16	52.48	-17.14	Average
4	0.23	21.94	42.73	10.63	10.16	62.48	-19.75	QP
5	4.95	9.64	30.26	10.40	10.22	46.00	-15.74	Average
6	4.95	16.46	37.08	10.40	10.22	56.00	-18.92	QP
7	5.99	11.70	32.32	10.40	10.22	50.00	-17.68	Average
8	5.99	19.12	39.74	10.40	10.22	60.00	-20.26	QP
9	7.73	11.30	31.99	10.46	10.23	50.00	-18.01	Average
10	7.73	17.40	38.09	10.46	10.23	60.00	-21.91	QP
11	16.23	11.70	32.15	10.35	10.10	50.00	-17.85	Average
12	16.23	17.00	37.45	10.35	10.10	60.00	-22.55	QP

§15.205 & §15.209 & §15.407(B)– UNDESIRABLE EMISSION

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:



- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

9 kHz-30MHz:

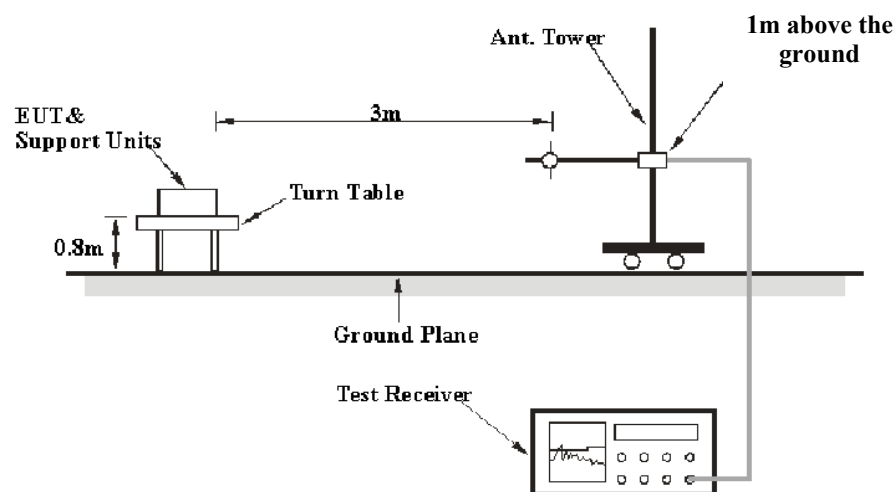

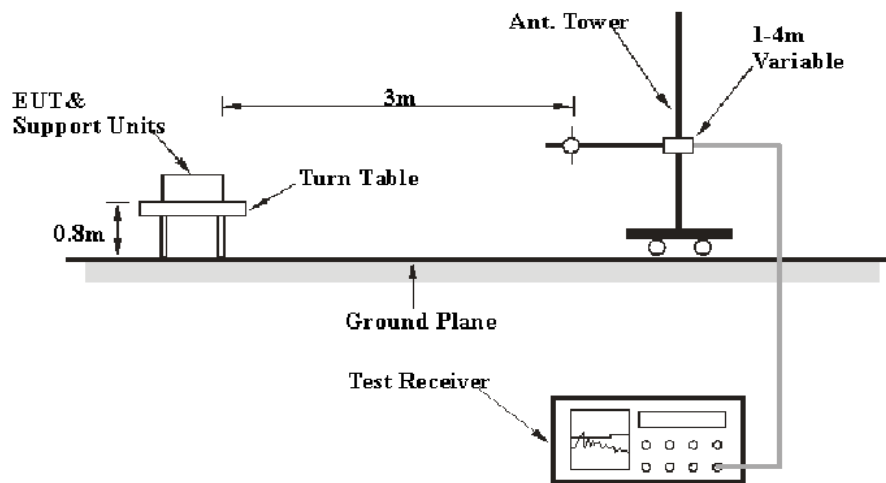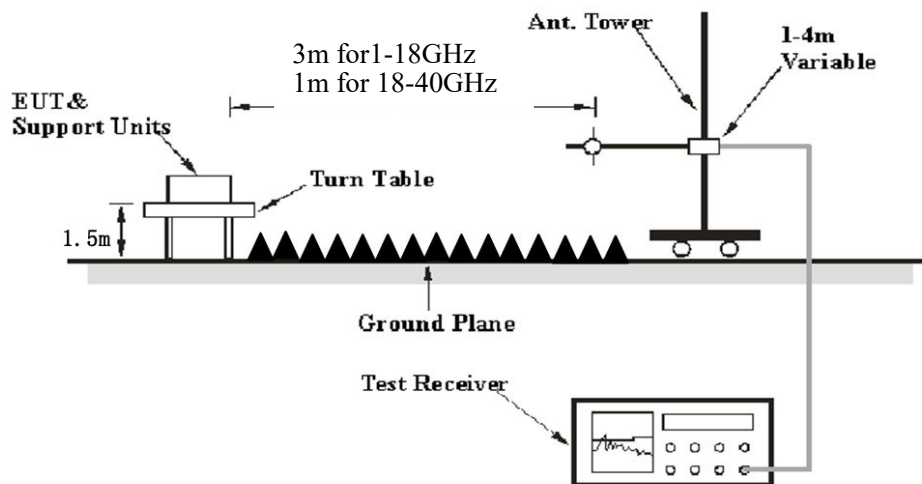30MHz-1GHz:**Above 1 GHz:**

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Radiated Spurious Emission

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dB μ V/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dB μ V/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1/3) = -9.5$ dB, for 18-40GHz range, the limit of 1m distance was added by 9.5dB from limit of 3m to compared with the result measurement at 1m distance.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit}; \text{Margin} = \text{Limit} - \text{Corrected Amplitude} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions


Temperature:	22~24.5 °C
Relative Humidity:	50~54 %
ATM Pressure:	101.0 kPa

The testing was performed by Anson Su on 2024-03-07 for below 1GHz and Zenos Qiao from 2024-03-12 to 2024-03-15 for above 1GHz.

EUT operation mode: Transmitting


For Module YL43752

9 kHz-30MHz: (maximum output power mode)

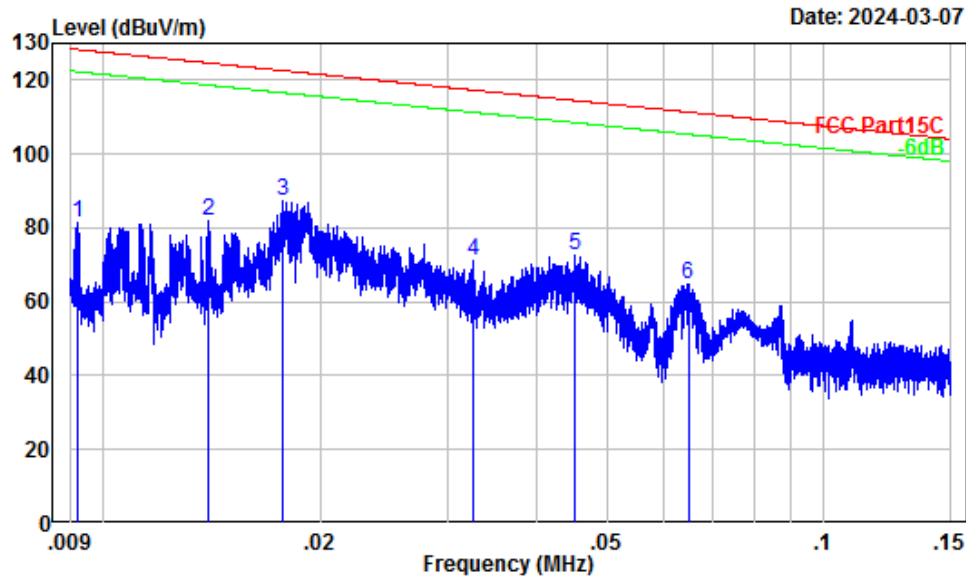

Site : Chamber A
Condition : 3m
Project Number: SZ1240201-07392E-RF
Note : 5G WIFI
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	53.51	27.93	81.44	128.32	-46.88	Peak
2	0.01	52.08	29.96	82.04	124.67	-42.63	Peak
3	0.02	50.91	36.62	87.53	122.60	-35.07	Peak
4	0.03	46.35	24.90	71.25	117.33	-46.08	Peak
5	0.05	42.51	29.89	72.40	114.53	-42.13	Peak
6	0.06	38.96	26.04	65.00	111.37	-46.37	Peak

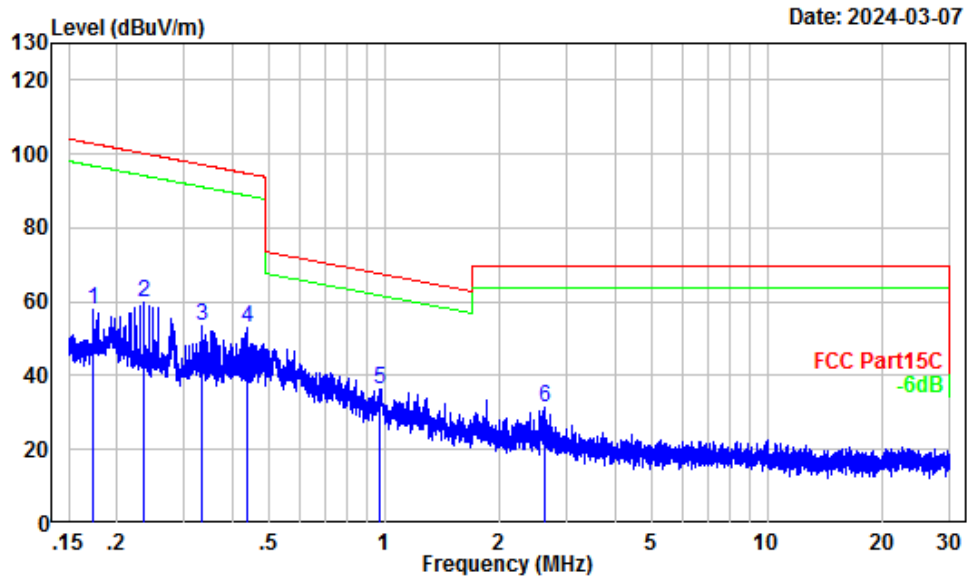


Site : Chamber A
Condition : 3m
Project Number: SZ1240201-07392E-RF
Note : 5G WIFI
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.17	30.38	27.68	58.06	102.85	-44.79	Peak
2	0.24	27.71	32.07	59.78	100.15	-40.37	Peak
3	0.34	24.34	29.32	53.66	97.10	-43.44	Peak
4	0.44	21.81	31.04	52.85	94.77	-41.92	Peak
5	0.98	15.58	20.81	36.39	67.68	-31.29	Peak
6	2.62	8.99	22.61	31.60	69.54	-37.94	Peak

30 MHz–1 GHz: (maximum output power mode)


Horizontal

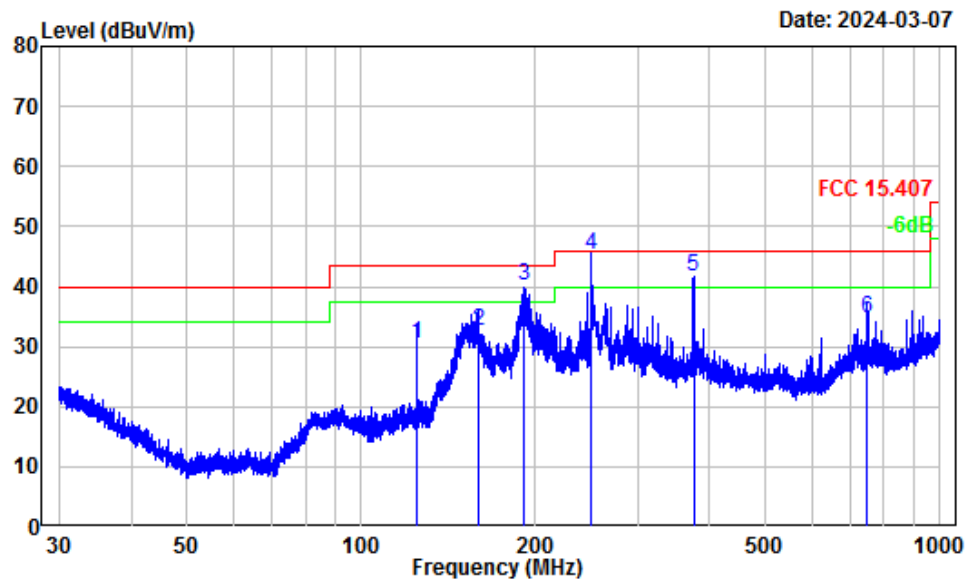

Site : Chamber A
Condition : 3m Horizontal
Project Number: SZ1240201-07392E-RF
Note : 5G WIFI
Tester : Anson

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	125.01	-10.32	40.91	30.59	43.50	-12.91 QP
2	158.95	-11.83	44.41	32.58	43.50	-10.92 QP
3	190.49	-12.25	52.30	40.05	43.50	-3.45 QP
4	249.97	-11.85	57.08	45.23	46.00	-0.77 QP
5	375.12	-8.60	50.30	41.70	46.00	-4.30 QP
6	750.11	-1.67	36.30	34.63	46.00	-11.37 QP

Vertical

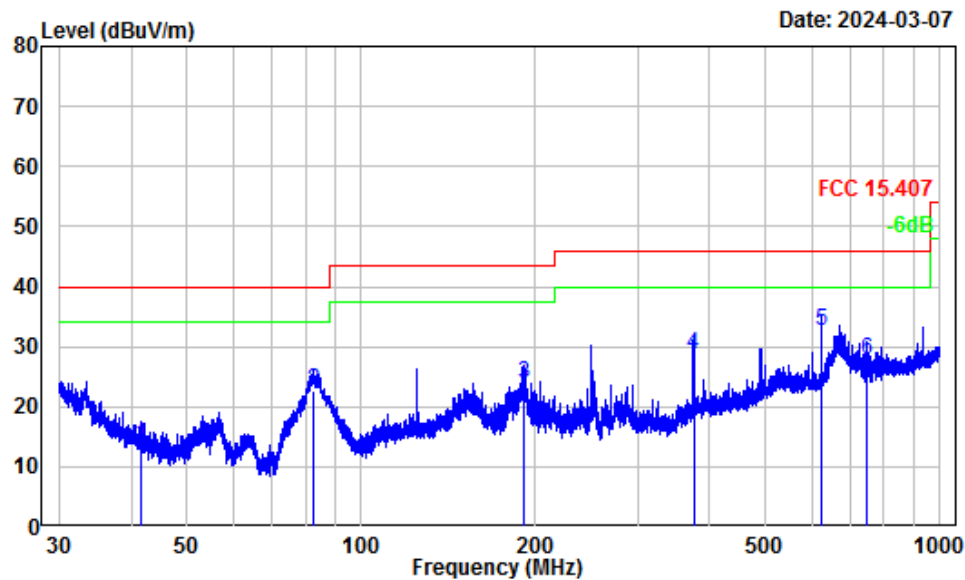


Site : Chamber A
Condition : 3m Vertical
Project Number: SZ1240201-07392E-RF
Note : 5G WIFI
Tester : Anson

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	41.48	-12.73	26.21	13.48	40.00	-26.52 QP
2	82.68	-17.26	39.90	22.64	40.00	-17.36 QP
3	190.49	-12.88	36.74	23.86	43.50	-19.64 QP
4	375.12	-8.85	37.53	28.68	46.00	-17.32 QP
5	625.08	-3.65	36.14	32.49	46.00	-13.51 QP
6	750.11	-2.17	30.05	27.88	46.00	-18.12 QP


For Module YL43456

9 kHz-30MHz: (maximum output power mode)

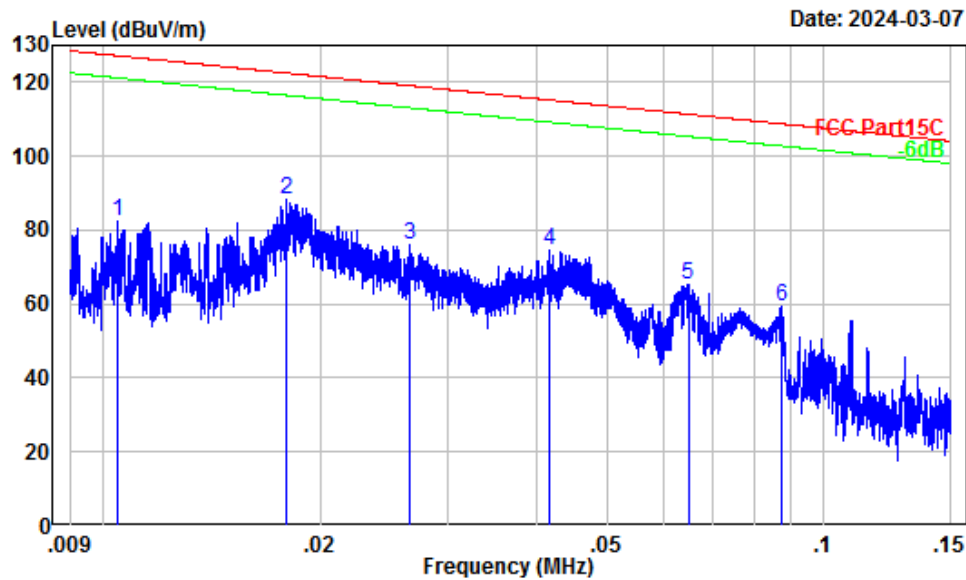

Site : Chamber A
Condition : 3m
Project Number: SZ1240201-07392E-RF
Note : 5G WIFI
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	53.17	29.37	82.54	127.21	-44.67	Peak
2	0.02	50.86	37.47	88.33	122.52	-34.19	Peak
3	0.03	48.21	27.78	75.99	119.11	-43.12	Peak
4	0.04	43.57	30.96	74.53	115.21	-40.68	Peak
5	0.06	38.96	26.21	65.17	111.37	-46.20	Peak
6	0.09	35.90	23.30	59.20	108.80	-49.60	Peak

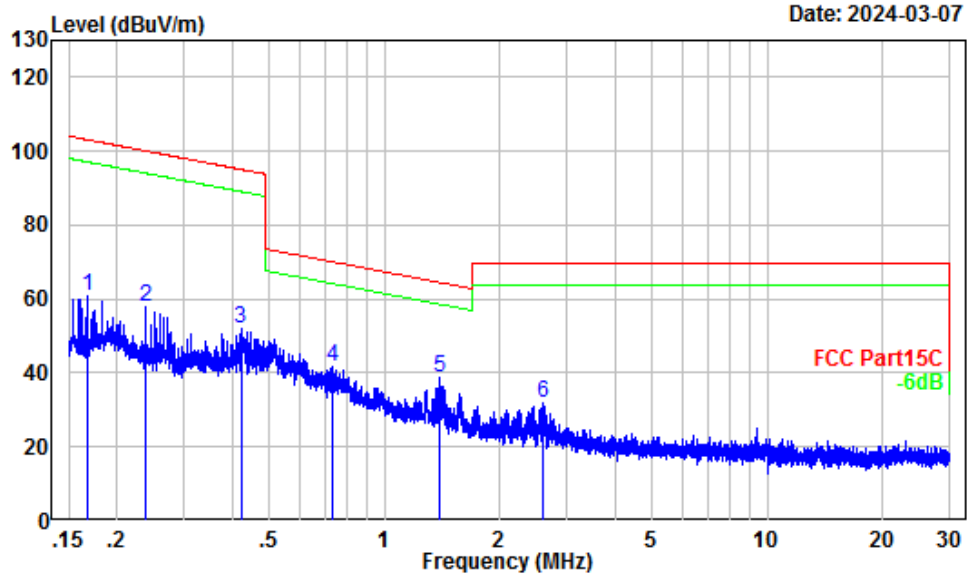


Site : Chamber A
 Condition : 3m
 Project Number: SZ1240201-07392E-RF
 Note : 5G WIFI
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.17	30.65	30.23	60.88	103.12	-42.24	Peak
2	0.24	27.61	30.22	57.83	100.05	-42.22	Peak
3	0.42	22.04	30.17	52.21	95.10	-42.89	Peak
4	0.73	17.80	23.91	41.71	70.22	-28.51	Peak
5	1.40	13.48	25.33	38.81	64.51	-25.70	Peak
6	2.59	9.07	23.00	32.07	69.54	-37.47	Peak

30 MHz–1 GHz: (maximum output power mode)


Horizontal

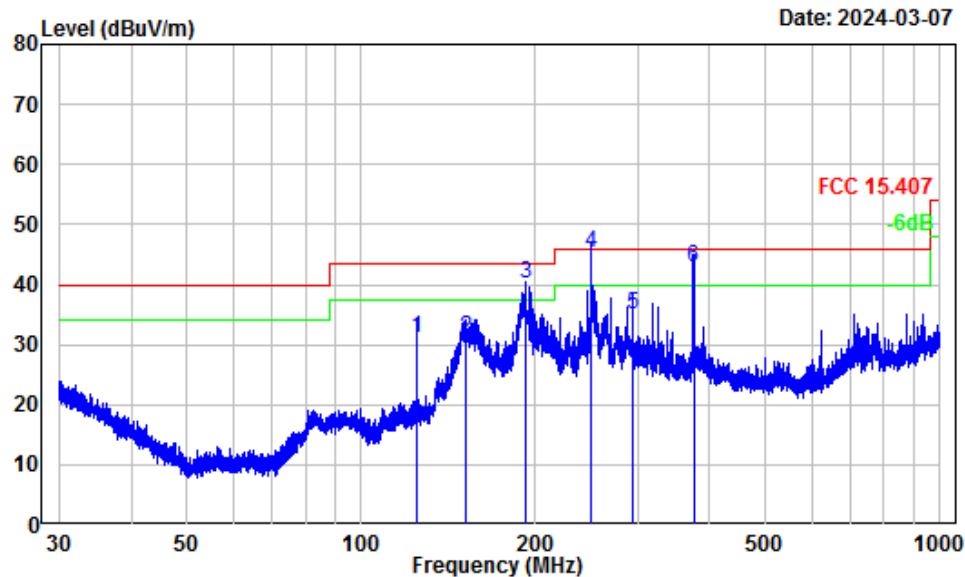

Site : Chamber A
Condition : 3m Horizontal
Project Number: SZ1240201-07392E-RF
Note : 5G WIFI
Tester : Anson

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	125.01	-10.32	41.31	30.99	43.50	-12.51	QP
2	151.33	-11.42	42.40	30.98	43.50	-12.52	QP
3	192.00	-12.05	52.20	40.15	43.50	-3.35	QP
4	249.97	-11.85	57.10	45.25	46.00	-0.75	QP
5	294.89	-10.15	45.30	35.15	46.00	-10.85	QP
6	375.12	-8.60	51.40	42.80	46.00	-3.20	QP

Vertical

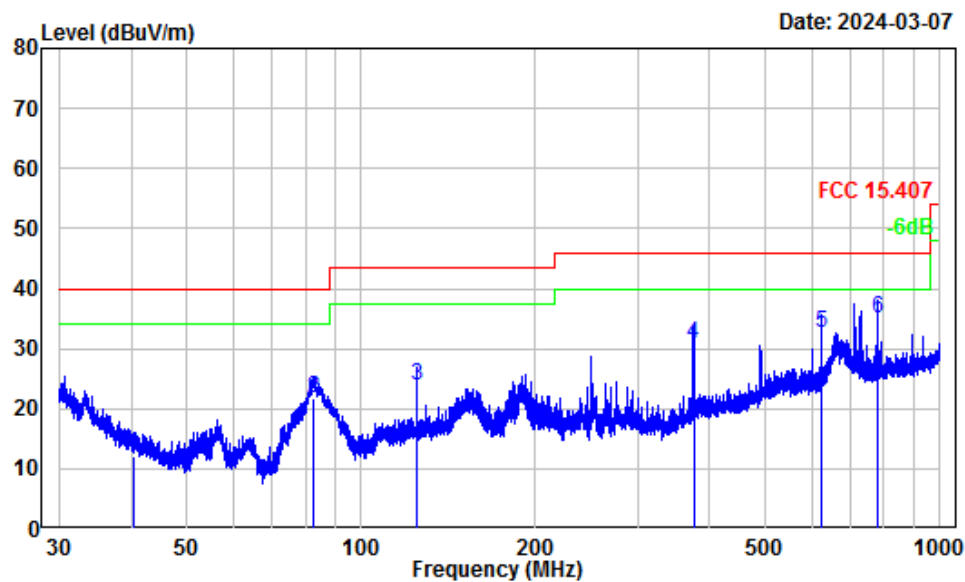

Site : Chamber A
Condition : 3m Vertical
Project Number: SZ1240201-07392E-RF
Note : 5G WIFI
Tester : Anson

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.33	-12.07	24.18	12.11	40.00	-27.89 QP
2	82.83	-17.26	38.90	21.64	40.00	-18.36 QP
3	124.95	-10.76	34.64	23.88	43.50	-19.62 QP
4	375.12	-8.85	39.62	30.77	46.00	-15.23 QP
5	625.08	-3.65	36.27	32.62	46.00	-13.38 QP
6	780.63	-1.24	36.12	34.88	46.00	-11.12 QP

Above 1GHz:**For Module YL43752****5150-5250 MHz:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11a (ANT 1)							
5180MHz							
10360.00	45.99	PK	H	13.07	59.06	68.2	-9.14
10360.00	46.34	PK	V	13.07	59.41	68.2	-8.79
5200MHz							
10400.00	46.25	PK	H	13.12	59.37	68.2	-8.83
10400.00	46.52	PK	V	13.12	59.64	68.2	-8.56
5240MHz							
10480.00	46.58	PK	H	13.07	59.65	68.2	-8.55
10480.00	46.87	PK	V	13.07	59.94	68.2	-8.26
802.11a (ANT 2)							
5180MHz							
10360.00	45.63	PK	H	13.07	58.70	68.2	-9.50
10360.00	45.76	PK	V	13.07	58.83	68.2	-9.37
5200MHz							
10400.00	45.97	PK	H	13.12	59.09	68.2	-9.11
10400.00	46.18	PK	V	13.12	59.30	68.2	-8.90
5240MHz							
10480.00	46.36	PK	H	13.07	59.43	68.2	-8.77
10480.00	46.54	PK	V	13.07	59.61	68.2	-8.59
802.11ac20							
5180MHz							
10360.00	45.65	PK	H	13.07	58.72	68.2	-9.48
10360.00	45.86	PK	V	13.07	58.93	68.2	-9.27
5200MHz							
10400.00	45.98	PK	H	13.12	59.10	68.2	-9.10
10400.00	46.21	PK	V	13.12	59.33	68.2	-8.87
5240MHz							
10480.00	46.39	PK	H	13.07	59.46	68.2	-8.74
10480.00	46.52	PK	V	13.07	59.59	68.2	-8.61

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11ac40							
5190MHz							
10380.00	45.64	PK	H	13.09	58.73	68.2	-9.47
10380.00	45.81	PK	V	13.09	58.90	68.2	-9.30
5230MHz							
10460.00	46.08	PK	H	13.09	59.17	68.2	-9.03
10460.00	46.25	PK	V	13.09	59.34	68.2	-8.86
802.11ac80							
5210MHz							
10420.00	45.95	PK	H	13.12	59.07	68.2	-9.13
10420.00	46.17	PK	V	13.12	59.29	68.2	-8.91
802.11ax20							
5180MHz							
10360.00	45.63	PK	H	13.07	58.70	68.2	-9.50
10360.00	45.89	PK	V	13.07	58.96	68.2	-9.24
5200MHz							
10400.00	45.96	PK	H	13.12	59.08	68.2	-9.12
10400.00	46.15	PK	V	13.12	59.27	68.2	-8.93
5240MHz							
10480.00	46.24	PK	H	13.07	59.31	68.2	-8.89
10480.00	46.52	PK	V	13.07	59.59	68.2	-8.61
802.11ax40							
5190MHz							
10380.00	45.57	PK	H	13.09	58.66	68.2	-9.54
10380.00	45.76	PK	V	13.09	58.85	68.2	-9.35
5230MHz							
10460.00	46.25	PK	H	13.09	59.34	68.2	-8.86
10460.00	46.42	PK	V	13.09	59.51	68.2	-8.69
802.11ax80							
5210MHz							
10420.00	45.68	PK	H	13.12	58.80	68.2	-9.40
10420.00	45.93	PK	V	13.12	59.05	68.2	-9.15

5250-5350MHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11a (ANT 1)							
5260MHz							
10520.00	46.23	PK	H	13.05	59.28	68.2	-8.92
10520.00	46.48	PK	V	13.05	59.53	68.2	-8.67
5280MHz							
10560.00	46.54	PK	H	13.02	59.56	68.2	-8.64
10560.00	46.73	PK	V	13.02	59.75	68.2	-8.45
5320MHz							
10640.00	47.07	PK	H	13.19	60.26	74	-13.74
10640.00	32.41	AV	H	13.19	45.60	54	-8.40
10640.00	47.25	PK	V	13.19	60.44	74	-13.56
10640.00	32.64	AV	V	13.19	45.83	54	-8.17
802.11a (ANT 2)							
5260MHz							
10520.00	46.05	PK	H	13.05	59.10	68.2	-9.10
10520.00	46.31	PK	V	13.05	59.36	68.2	-8.84
5280MHz							
10560.00	46.36	PK	H	13.02	59.38	68.2	-8.82
10560.00	46.59	PK	V	13.02	59.61	68.2	-8.59
5320MHz							
10640.00	46.94	PK	H	13.19	60.13	74	-13.87
10640.00	32.37	AV	H	13.19	45.56	54	-8.44
10640.00	47.13	PK	V	13.19	60.32	74	-13.68
10640.00	32.59	AV	V	13.19	45.78	54	-8.22
802.11ac20							
5260MHz							
10520.00	46.45	PK	H	13.05	59.50	68.2	-8.70
10520.00	46.67	PK	V	13.05	59.72	68.2	-8.48
5280MHz							
10560.00	46.72	PK	H	13.02	59.74	68.2	-8.46
10560.00	46.94	PK	V	13.02	59.96	68.2	-8.24
5320MHz							
10640.00	47.26	PK	H	13.19	60.45	74	-13.55
10640.00	32.39	AV	H	13.19	45.58	54	-8.42
10640.00	47.48	PK	V	13.19	60.67	74	-13.33
10640.00	32.52	AV	V	13.19	45.71	54	-8.29

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11ac40							
5270MHz							
10540.00	46.18	PK	H	13.03	59.21	68.2	-8.99
10540.00	46.35	PK	V	13.03	59.38	68.2	-8.82
5310MHz							
10620.00	46.69	PK	H	13.09	59.78	74	-14.22
10620.00	32.56	AV	H	13.09	45.65	54	-8.35
10620.00	46.82	PK	V	13.09	59.91	74	-14.09
10620.00	32.73	AV	V	13.09	45.82	54	-8.18
802.11ac80							
5290MHz							
10580.00	46.27	PK	H	13.00	59.27	68.2	-8.93
10580.00	46.48	PK	V	13.00	59.48	68.2	-8.72
802.11ax20							
5260MHz							
10520.00	46.31	PK	H	13.05	59.36	68.2	-8.84
10520.00	46.54	PK	V	13.05	59.59	68.2	-8.61
5280MHz							
10560.00	46.63	PK	H	13.02	59.65	68.2	-8.55
10560.00	46.82	PK	V	13.02	59.84	68.2	-8.36
5320MHz							
10640.00	46.99	PK	H	13.19	60.18	74	-13.82
10640.00	32.42	AV	H	13.19	45.61	54	-8.39
10640.00	47.17	PK	V	13.19	60.36	74	-13.64
10640.00	32.65	AV	V	13.19	45.84	54	-8.16

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11ax40							
5270MHz							
10540.00	45.85	PK	H	13.03	58.88	68.2	-9.32
10540.00	46.01	PK	V	13.03	59.04	68.2	-9.16
5310MHz							
10620.00	46.28	PK	H	13.09	59.37	74	-14.63
10620.00	32.55	AV	H	13.09	45.64	54	-8.36
10620.00	46.47	PK	V	13.09	59.56	74	-14.44
10620.00	32.72	AV	V	13.09	45.81	54	-8.19
802.11ax80							
5290MHz							
10580.00	46.55	PK	H	13.00	59.55	68.2	-8.65
10580.00	46.71	PK	V	13.00	59.71	68.2	-8.49

5470-5725MHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11a (ANT 1)							
5500MHz							
11000.00	47.41	PK	H	13.98	61.39	74	-12.61
11000.00	32.54	AV	H	13.98	46.52	54	-7.48
11000.00	47.95	PK	V	13.98	61.93	74	-12.07
11000.00	33.09	AV	V	13.98	47.07	54	-6.93
5580MHz							
11160.00	49.15	PK	H	13.62	62.77	74	-11.23
11160.00	33.88	AV	H	13.62	47.50	54	-6.50
11160.00	49.57	PK	V	13.62	63.19	74	-10.81
11160.00	34.39	AV	V	13.62	48.01	54	-5.99
5700MHz							
11400.00	50.67	PK	H	14.08	64.75	74	-9.25
11400.00	35.28	AV	H	14.08	49.36	54	-4.64
11400.00	51.14	PK	V	14.08	65.22	74	-8.78
11400.00	35.73	AV	V	14.08	49.81	54	-4.19
802.11a (ANT 2)							
5500MHz							
11000.00	45.23	PK	H	13.98	59.21	74	-14.79
11000.00	31.19	AV	H	13.98	45.17	54	-8.83
11000.00	45.54	PK	V	13.98	59.52	74	-14.48
11000.00	31.38	AV	V	13.98	45.36	54	-8.64
5580MHz							
11160.00	45.81	PK	H	13.62	59.43	74	-14.57
11160.00	31.52	AV	H	13.62	45.14	54	-8.86
11160.00	46.05	PK	V	13.62	59.67	74	-14.33
11160.00	31.73	AV	V	13.62	45.35	54	-8.65
5700MHz							
11400.00	46.57	PK	H	14.08	60.65	74	-13.35
11400.00	31.92	AV	H	14.08	46.00	54	-8.00
11400.00	46.86	PK	V	14.08	60.94	74	-13.06
11400.00	32.15	AV	V	14.08	46.23	54	-7.77

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11ac20							
5500MHz							
11000.00	45.84	PK	H	13.98	59.82	74	-14.18
11000.00	31.12	AV	H	13.98	45.10	54	-8.90
11000.00	46.09	PK	V	13.98	60.07	74	-13.93
11000.00	31.31	AV	V	13.98	45.29	54	-8.71
5580MHz							
11160.00	46.29	PK	H	13.62	59.91	74	-14.09
11160.00	31.43	AV	H	13.62	45.05	54	-8.95
11160.00	46.51	PK	V	13.62	60.13	74	-13.87
11160.00	31.64	AV	V	13.62	45.26	54	-8.74
5700MHz							
11400.00	46.53	PK	H	14.08	60.61	74	-13.39
11400.00	31.96	AV	H	14.08	46.04	54	-7.96
11400.00	46.77	PK	V	14.08	60.85	74	-13.15
11400.00	32.18	AV	V	14.08	46.26	54	-7.74
802.11ac40							
5510MHz							
11020.00	45.05	PK	H	13.89	58.94	74	-15.06
11020.00	31.36	AV	H	13.89	45.25	54	-8.75
11020.00	45.24	PK	V	13.89	59.13	74	-14.87
11020.00	31.59	AV	V	13.89	45.48	54	-8.52
5550MHz							
11100.00	45.58	PK	H	13.53	59.11	74	-14.89
11100.00	31.75	AV	H	13.53	45.28	54	-8.72
11100.00	45.81	PK	V	13.53	59.34	74	-14.66
11100.00	31.96	AV	V	13.53	45.49	54	-8.51
5670MHz							
11340.00	46.13	PK	H	13.99	60.12	74	-13.88
11340.00	32.28	AV	H	13.99	46.27	54	-7.73
11340.00	46.37	PK	V	13.99	60.36	74	-13.64
11340.00	32.46	AV	V	13.99	46.45	54	-7.55

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11ac80							
5530MHz							
11060.00	45.52	PK	H	13.71	59.23	74	-14.77
11060.00	32.64	AV	H	13.71	46.35	54	-7.65
11060.00	45.75	PK	V	13.71	59.46	74	-14.54
11060.00	32.87	AV	V	13.71	46.58	54	-7.42
5610MHz							
11220.00	46.15	PK	H	13.73	59.88	74	-14.12
11220.00	33.02	AV	H	13.73	46.75	54	-7.25
11220.00	46.39	PK	V	13.73	60.12	74	-13.88
11220.00	33.24	AV	V	13.73	46.97	54	-7.03
802.11ax20							
5500MHz							
11000.00	45.49	PK	H	13.98	59.47	74	-14.53
11000.00	31.14	AV	H	13.98	45.12	54	-8.88
11000.00	45.72	PK	V	13.98	59.70	74	-14.30
11000.00	31.36	AV	V	13.98	45.34	54	-8.66
5580MHz							
11160.00	45.88	PK	H	13.62	59.50	74	-14.50
11160.00	31.52	AV	H	13.62	45.14	54	-8.86
11160.00	46.07	PK	V	13.62	59.69	74	-14.31
11160.00	31.75	AV	V	13.62	45.37	54	-8.63
5700MHz							
11400.00	46.43	PK	H	14.08	60.51	74	-13.49
11400.00	31.98	AV	H	14.08	46.06	54	-7.94
11400.00	46.69	PK	V	14.08	60.77	74	-13.23
11400.00	32.21	AV	V	14.08	46.29	54	-7.71

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11ax40							
5510MHz							
11020.00	45.18	PK	H	13.89	59.07	74	-14.93
11020.00	31.43	AV	H	13.89	45.32	54	-8.68
11020.00	45.42	PK	V	13.89	59.31	74	-14.69
11020.00	31.65	AV	V	13.89	45.54	54	-8.46
5550MHz							
11100.00	45.71	PK	H	13.53	59.24	74	-14.76
11100.00	31.94	AV	H	13.53	45.47	54	-8.53
11100.00	45.88	PK	V	13.53	59.41	74	-14.59
11100.00	32.17	AV	V	13.53	45.70	54	-8.30
5670MHz							
11340.00	46.24	PK	H	13.99	60.23	74	-13.77
11340.00	32.51	AV	H	13.99	46.50	54	-7.50
11340.00	46.46	PK	V	13.99	60.45	74	-13.55
11340.00	32.69	AV	V	13.99	46.68	54	-7.32
802.11ax80							
5530MHz							
11060.00	45.41	PK	H	13.71	59.12	74	-14.88
11060.00	32.54	AV	H	13.71	46.25	54	-7.75
11060.00	45.68	PK	V	13.71	59.39	74	-14.61
11060.00	32.76	AV	V	13.71	46.47	54	-7.53
5610MHz							
11220.00	45.87	PK	H	13.73	59.60	74	-14.40
11220.00	32.75	AV	H	13.73	46.48	54	-7.52
11220.00	46.09	PK	V	13.73	59.82	74	-14.18
11220.00	32.96	AV	V	13.73	46.69	54	-7.31

5725-5850 MHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11a (ANT 1)							
5745MHz							
11490.00	45.45	PK	H	14.31	59.76	74	-14.24
11490.00	31.27	AV	H	14.31	45.58	54	-8.42
11490.00	45.66	PK	V	14.31	59.97	74	-14.03
11490.00	31.52	AV	V	14.31	45.83	54	-8.17
5785MHz							
11570.00	45.78	PK	H	14.05	59.83	74	-14.17
11570.00	31.59	AV	H	14.05	45.64	54	-8.36
11570.00	46.02	PK	V	14.05	60.07	74	-13.93
11570.00	31.81	AV	V	14.05	45.86	54	-8.14
5825MHz							
11650.00	46.16	PK	H	13.83	59.99	74	-14.01
11650.00	31.94	AV	H	13.83	45.77	54	-8.23
11650.00	46.37	PK	V	13.83	60.20	74	-13.80
11650.00	32.13	AV	V	13.83	45.96	54	-8.04
802.11a (ANT 2)							
5745MHz							
11490.00	45.38	PK	H	14.31	59.69	74	-14.31
11490.00	30.71	AV	H	14.31	45.02	54	-8.98
11490.00	45.62	PK	V	14.31	59.93	74	-14.07
11490.00	30.85	AV	V	14.31	45.16	54	-8.84
5785MHz							
11570.00	45.75	PK	H	14.05	59.80	74	-14.20
11570.00	31.04	AV	H	14.05	45.09	54	-8.91
11570.00	45.98	PK	V	14.05	60.03	74	-13.97
11570.00	31.26	AV	V	14.05	45.31	54	-8.69
5825MHz							
11650.00	46.16	PK	H	13.83	59.99	74	-14.01
11650.00	31.48	AV	H	13.83	45.31	54	-8.69
11650.00	46.39	PK	V	13.83	60.22	74	-13.78
11650.00	31.75	AV	V	13.83	45.58	54	-8.42

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11ac20							
5745MHz							
11490.00	45.53	PK	H	14.31	59.84	74	-14.16
11490.00	31.02	AV	H	14.31	45.33	54	-8.67
11490.00	45.75	PK	V	14.31	60.06	74	-13.94
11490.00	31.26	AV	V	14.31	45.57	54	-8.43
5785MHz							
11570.00	46.04	PK	H	14.05	60.09	74	-13.91
11570.00	31.35	AV	H	14.05	45.40	54	-8.60
11570.00	46.23	PK	V	14.05	60.28	74	-13.72
11570.00	31.56	AV	V	14.05	45.61	54	-8.39
5825MHz							
11650.00	46.42	PK	H	13.83	60.25	74	-13.75
11650.00	31.68	AV	H	13.83	45.51	54	-8.49
11650.00	46.59	PK	V	13.83	60.42	74	-13.58
11650.00	31.87	AV	V	13.83	45.70	54	-8.30
802.11ac40							
5755MHz							
11510.00	46.02	PK	H	14.29	60.31	74	-13.69
11510.00	31.98	AV	H	14.29	46.27	54	-7.73
11510.00	46.23	PK	V	14.29	60.52	74	-13.48
11510.00	32.15	AV	V	14.29	46.44	54	-7.56
5795MHz							
11590.00	46.54	PK	H	13.97	60.51	74	-13.49
11590.00	32.48	AV	H	13.97	46.45	54	-7.55
11590.00	46.75	PK	V	13.97	60.72	74	-13.28
11590.00	32.67	AV	V	13.97	46.64	54	-7.36
802.11ac80							
5775MHz							
11550.00	46.27	PK	H	14.13	60.40	74	-13.60
11550.00	33.32	AV	H	14.13	47.45	54	-6.55
11550.00	46.49	PK	V	14.13	60.62	74	-13.38
11550.00	33.54	AV	V	14.13	47.67	54	-6.33

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11ax20							
5745MHz							
11490.00	45.31	PK	H	14.31	59.62	74	-14.38
11490.00	30.95	AV	H	14.31	45.26	54	-8.74
11490.00	45.54	PK	V	14.31	59.85	74	-14.15
11490.00	31.12	AV	V	14.31	45.43	54	-8.57
5785MHz							
11570.00	45.77	PK	H	14.05	59.82	74	-14.18
11570.00	31.24	AV	H	14.05	45.29	54	-8.71
11570.00	45.98	PK	V	14.05	60.03	74	-13.97
11570.00	31.43	AV	V	14.05	45.48	54	-8.52
5825MHz							
11650.00	46.22	PK	H	13.83	60.05	74	-13.95
11650.00	31.57	AV	H	13.83	45.40	54	-8.60
11650.00	46.46	PK	V	13.83	60.29	74	-13.71
11650.00	31.84	AV	V	13.83	45.67	54	-8.33
802.11ax40							
5755MHz							
11510.00	45.84	PK	H	14.29	60.13	74	-13.87
11510.00	31.78	AV	H	14.29	46.07	54	-7.93
11510.00	46.07	PK	V	14.29	60.36	74	-13.64
11510.00	32.01	AV	V	14.29	46.30	54	-7.70
5795MHz							
11590.00	46.43	PK	H	13.97	60.40	74	-13.60
11590.00	32.34	AV	H	13.97	46.31	54	-7.69
11590.00	46.65	PK	V	13.97	60.62	74	-13.38
11590.00	32.52	AV	V	13.97	46.49	54	-7.51
802.11ax80							
5775MHz							
11550.00	46.05	PK	H	14.13	60.18	74	-13.82
11550.00	33.21	AV	H	14.13	47.34	54	-6.66
11550.00	46.32	PK	V	14.13	60.45	74	-13.55
11550.00	33.43	AV	V	14.13	47.56	54	-6.44

For Module YL43456

5150-5250 MHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11a							
5180MHz							
10360.00	47.19	PK	H	13.07	60.26	68.2	-7.94
10360.00	47.54	PK	V	13.07	60.61	68.2	-7.59
5200MHz							
10400.00	47.43	PK	H	13.12	60.55	68.2	-7.65
10400.00	47.87	PK	V	13.12	60.99	68.2	-7.21
5240MHz							
10480.00	47.68	PK	H	13.07	60.75	68.2	-7.45
10480.00	48.15	PK	V	13.07	61.22	68.2	-6.98
802.11ac20							
5180MHz							
10360.00	47.32	PK	H	13.07	60.39	68.2	-7.81
10360.00	47.75	PK	V	13.07	60.82	68.2	-7.38
5200MHz							
10400.00	47.59	PK	H	13.12	60.71	68.2	-7.49
10400.00	47.94	PK	V	13.12	61.06	68.2	-7.14
5240MHz							
10480.00	47.78	PK	H	13.07	60.85	68.2	-7.35
10480.00	48.27	PK	V	13.07	61.34	68.2	-6.86
802.11ac40							
5190MHz							
10380.00	45.69	PK	H	13.09	58.78	68.2	-9.42
10380.00	46.08	PK	V	13.09	59.17	68.2	-9.03
5230MHz							
10460.00	46.25	PK	H	13.09	59.34	68.2	-8.86
10460.00	46.57	PK	V	13.09	59.66	68.2	-8.54
802.11ac80							
5210MHz							
10420.00	45.37	PK	H	13.12	58.49	68.2	-9.71
10420.00	45.64	PK	V	13.12	58.76	68.2	-9.44

5250-5350MHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11a							
5260MHz							
10520.00	48.09	PK	H	13.05	61.14	68.2	-7.06
10520.00	47.87	PK	V	13.05	60.92	68.2	-7.28
5280MHz							
10560.00	47.81	PK	H	13.02	60.83	68.2	-7.37
10560.00	47.63	PK	V	13.02	60.65	68.2	-7.55
5320MHz							
10640.00	47.64	PK	H	13.19	60.83	74	-13.17
10640.00	33.01	AV	H	13.19	46.20	54	-7.80
10640.00	47.36	PK	V	13.19	60.55	74	-13.45
10640.00	32.85	AV	V	13.19	46.04	54	-7.96
802.11ac20							
5260MHz							
10520.00	47.94	PK	H	13.05	60.99	68.2	-7.21
10520.00	47.77	PK	V	13.05	60.82	68.2	-7.38
5280MHz							
10560.00	47.61	PK	H	13.02	60.63	68.2	-7.57
10560.00	47.38	PK	V	13.02	60.40	68.2	-7.80
5320MHz							
10640.00	47.35	PK	H	13.19	60.54	74	-13.46
10640.00	32.96	AV	H	13.19	46.15	54	-7.85
10640.00	47.09	PK	V	13.19	60.28	74	-13.72
10640.00	32.78	AV	V	13.19	45.97	54	-8.03

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11ac40							
5270MHz							
10540.00	46.48	PK	H	13.03	59.51	68.2	-8.69
10540.00	46.21	PK	V	13.03	59.24	68.2	-8.96
5310MHz							
10620.00	46.64	PK	H	13.09	59.73	74	-14.27
10620.00	32.77	AV	H	13.09	45.86	54	-8.14
10620.00	46.32	PK	V	13.09	59.41	74	-14.59
10620.00	32.53	AV	V	13.09	45.62	54	-8.38
802.11ac80							
5290MHz							
10580.00	46.24	PK	H	13.00	59.24	68.2	-8.96
10580.00	45.97	PK	V	13.00	58.97	68.2	-9.23

5470-5725MHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11a							
5500MHz							
11000.00	45.69	PK	H	13.98	59.67	74	-14.33
11000.00	31.37	AV	H	13.98	45.35	54	-8.65
11000.00	45.55	PK	V	13.98	59.53	74	-14.47
11000.00	31.18	AV	V	13.98	45.16	54	-8.84
5580MHz							
11160.00	46.05	PK	H	13.62	59.67	74	-14.33
11160.00	31.78	AV	H	13.62	45.40	54	-8.60
11160.00	45.84	PK	V	13.62	59.46	74	-14.54
11160.00	31.62	AV	V	13.62	45.24	54	-8.76
5700MHz							
11400.00	46.42	PK	H	14.08	60.50	74	-13.50
11400.00	32.16	AV	H	14.08	46.24	54	-7.76
11400.00	46.25	PK	V	14.08	60.33	74	-13.67
11400.00	32.01	AV	V	14.08	46.09	54	-7.91
802.11ac20							
5500MHz							
11000.00	45.65	PK	H	13.98	59.63	74	-14.37
11000.00	31.39	AV	H	13.98	45.37	54	-8.63
11000.00	45.48	PK	V	13.98	59.46	74	-14.54
11000.00	31.26	AV	V	13.98	45.24	54	-8.76
5580MHz							
11160.00	45.96	PK	H	13.62	59.58	74	-14.42
11160.00	31.72	AV	H	13.62	45.34	54	-8.66
11160.00	45.81	PK	V	13.62	59.43	74	-14.57
11160.00	31.57	AV	V	13.62	45.19	54	-8.81
5700MHz							
11400.00	46.51	PK	H	14.08	60.59	74	-13.41
11400.00	32.15	AV	H	14.08	46.23	54	-7.77
11400.00	46.38	PK	V	14.08	60.46	74	-13.54
11400.00	32.04	AV	V	14.08	46.12	54	-7.88

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11ac40							
5510MHz							
11020.00	45.45	PK	H	13.89	59.34	74	-14.66
11020.00	31.53	AV	H	13.89	45.42	54	-8.58
11020.00	45.72	PK	V	13.89	59.61	74	-14.39
11020.00	31.68	AV	V	13.89	45.57	54	-8.43
5550MHz							
11000.00	45.91	PK	H	13.98	59.89	74	-14.11
11000.00	31.89	AV	H	13.98	45.87	54	-8.13
11000.00	46.17	PK	V	13.98	60.15	74	-13.85
11000.00	32.06	AV	V	13.98	46.04	54	-7.96
5670MHz							
11340.00	46.46	PK	H	13.99	60.45	74	-13.55
11340.00	32.39	AV	H	13.99	46.38	54	-7.62
11340.00	46.65	PK	V	13.99	60.64	74	-13.36
11340.00	32.57	AV	V	13.99	46.56	54	-7.44
802.11ac80							
5530MHz							
11060.00	45.56	PK	H	13.71	59.27	74	-14.73
11060.00	33.13	AV	H	13.71	46.84	54	-7.16
11060.00	45.41	PK	V	13.71	59.12	74	-14.88
11060.00	32.92	AV	V	13.71	46.63	54	-7.37
5610MHz							
11220.00	46.67	PK	H	13.73	60.40	74	-13.60
11220.00	33.36	AV	H	13.73	47.09	54	-6.91
11220.00	46.45	PK	V	13.73	60.18	74	-13.82
11220.00	33.21	AV	V	13.73	46.94	54	-7.06

5725-5850 MHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11a							
5745MHz							
11490.00	46.19	PK	H	14.31	60.50	74	-13.50
11490.00	31.38	AV	H	14.31	45.69	54	-8.31
11490.00	45.87	PK	V	14.31	60.18	74	-13.82
11490.00	31.26	AV	V	14.31	45.57	54	-8.43
5785MHz							
11570.00	46.45	PK	H	14.05	60.50	74	-13.50
11570.00	31.56	AV	H	14.05	45.61	54	-8.39
11570.00	46.28	PK	V	14.05	60.33	74	-13.67
11570.00	31.41	AV	V	14.05	45.46	54	-8.54
5825MHz							
11650.00	46.85	PK	H	13.83	60.68	74	-13.32
11650.00	31.79	AV	H	13.83	45.62	54	-8.38
11650.00	46.58	PK	V	13.83	60.41	74	-13.59
11650.00	31.62	AV	V	13.83	45.45	54	-8.55
802.11ac20							
5745MHz							
11490.00	46.04	PK	H	14.31	60.35	74	-13.65
11490.00	31.15	AV	H	14.31	45.46	54	-8.54
11490.00	45.83	PK	V	14.31	60.14	74	-13.86
11490.00	30.98	AV	V	14.31	45.29	54	-8.71
5785MHz							
11570.00	46.25	PK	H	14.05	60.30	74	-13.70
11570.00	31.53	AV	H	14.05	45.58	54	-8.42
11570.00	46.06	PK	V	14.05	60.11	74	-13.89
11570.00	31.24	AV	V	14.05	45.29	54	-8.71
5825MHz							
11650.00	46.48	PK	H	13.83	60.31	74	-13.69
11650.00	31.81	AV	H	13.83	45.64	54	-8.36
11650.00	46.26	PK	V	13.83	60.09	74	-13.91
11650.00	31.67	AV	V	13.83	45.50	54	-8.50

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11ac40							
5755MHz							
11510.00	46.48	PK	H	14.29	60.77	74	-13.23
11510.00	32.07	AV	H	14.29	46.36	54	-7.64
11510.00	46.32	PK	V	14.29	60.61	74	-13.39
11510.00	31.89	AV	V	14.29	46.18	54	-7.82
5795MHz							
11590.00	46.71	PK	H	13.97	60.68	74	-13.32
11590.00	32.63	AV	H	13.97	46.60	54	-7.40
11590.00	46.54	PK	V	13.97	60.51	74	-13.49
11590.00	32.48	AV	V	13.97	46.45	54	-7.55
802.11ac80							
5775MHz							
11550.00	46.64	PK	H	14.13	60.77	74	-13.23
11550.00	33.35	AV	H	14.13	47.48	54	-6.52
11550.00	46.41	PK	V	14.13	60.54	74	-13.46
11550.00	33.16	AV	V	14.13	47.29	54	-6.71

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading


Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.


Test plots for Band Edge Measurements (Radiated)


For Module YL43752


5150-5250MHz:

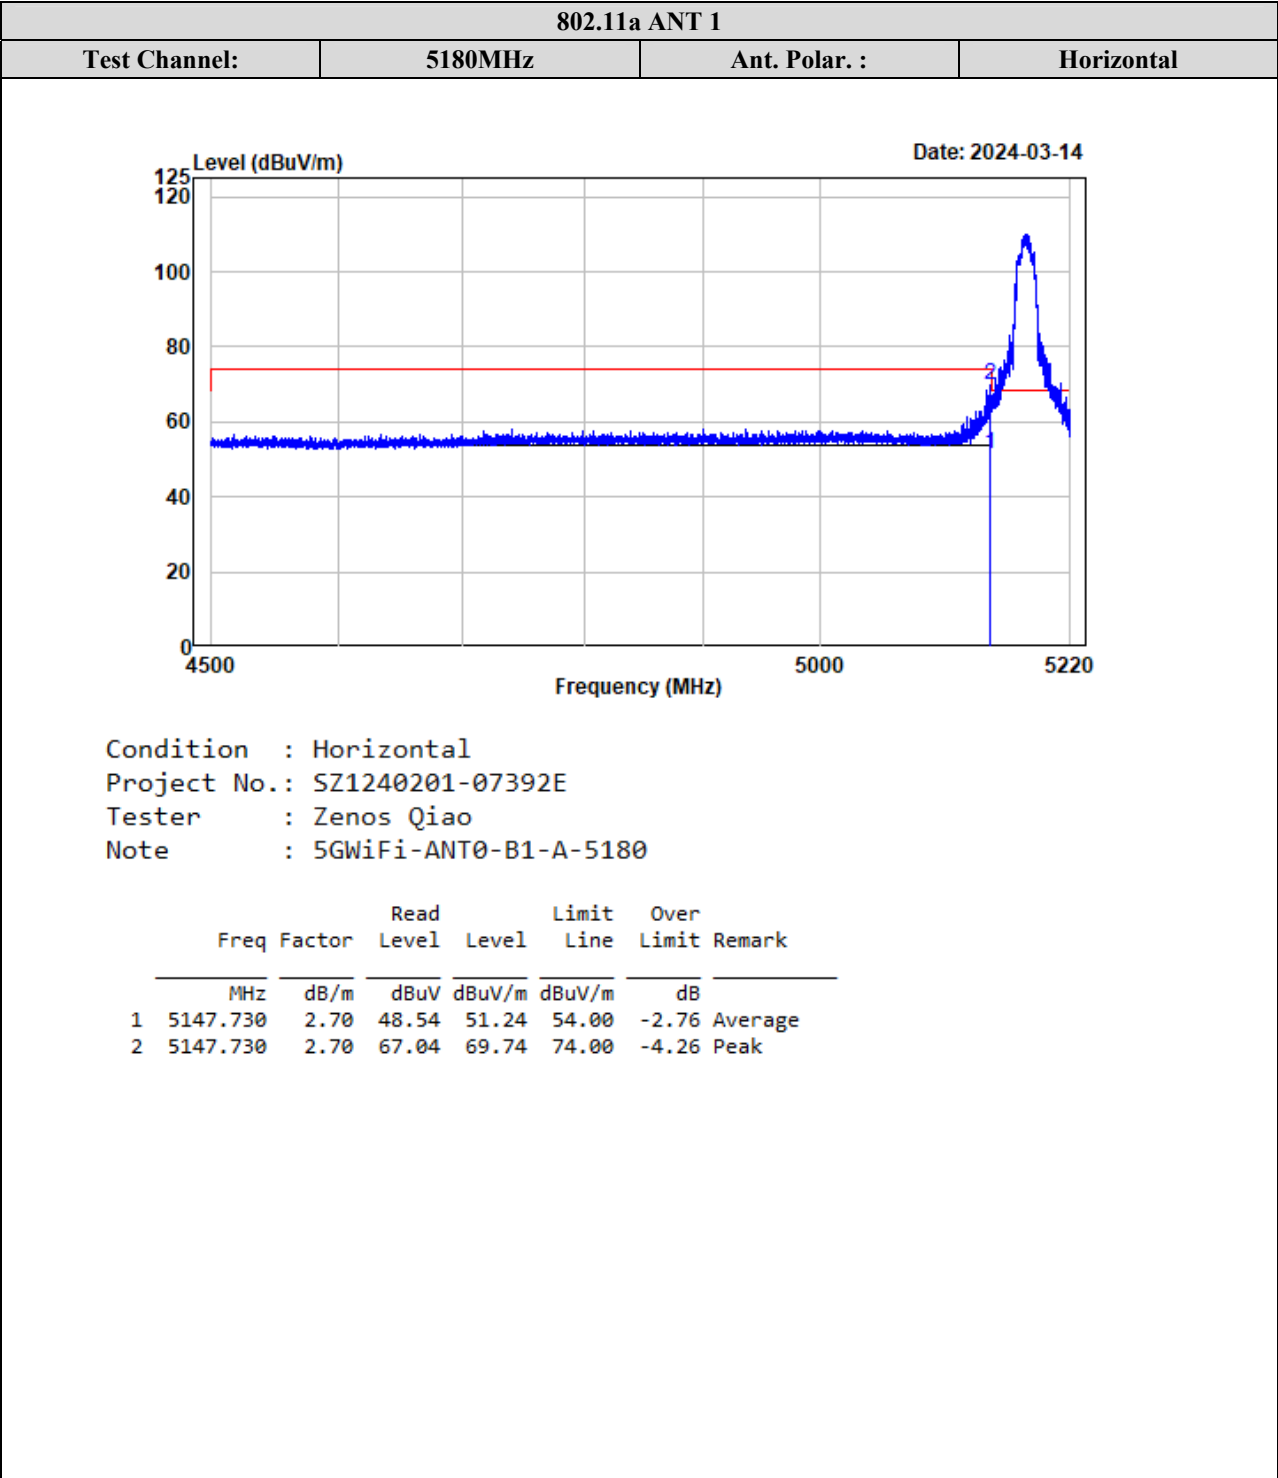


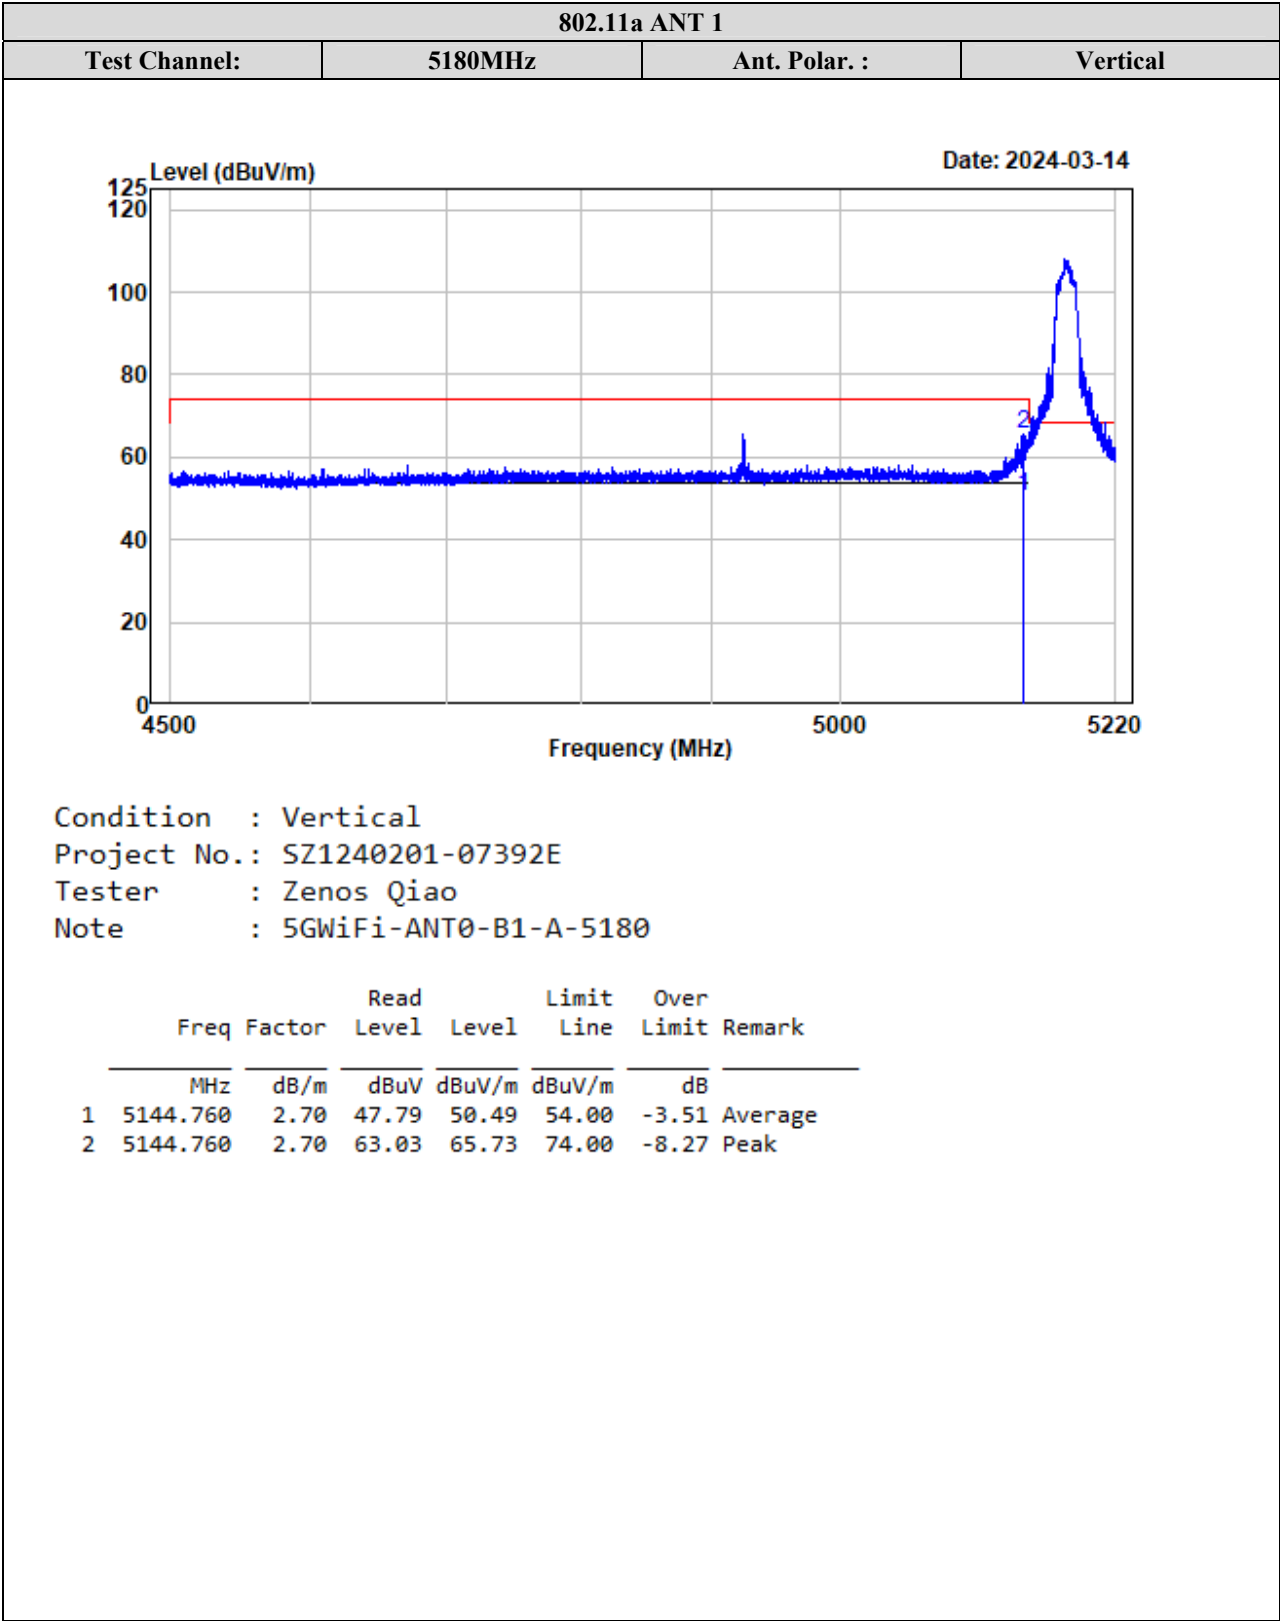


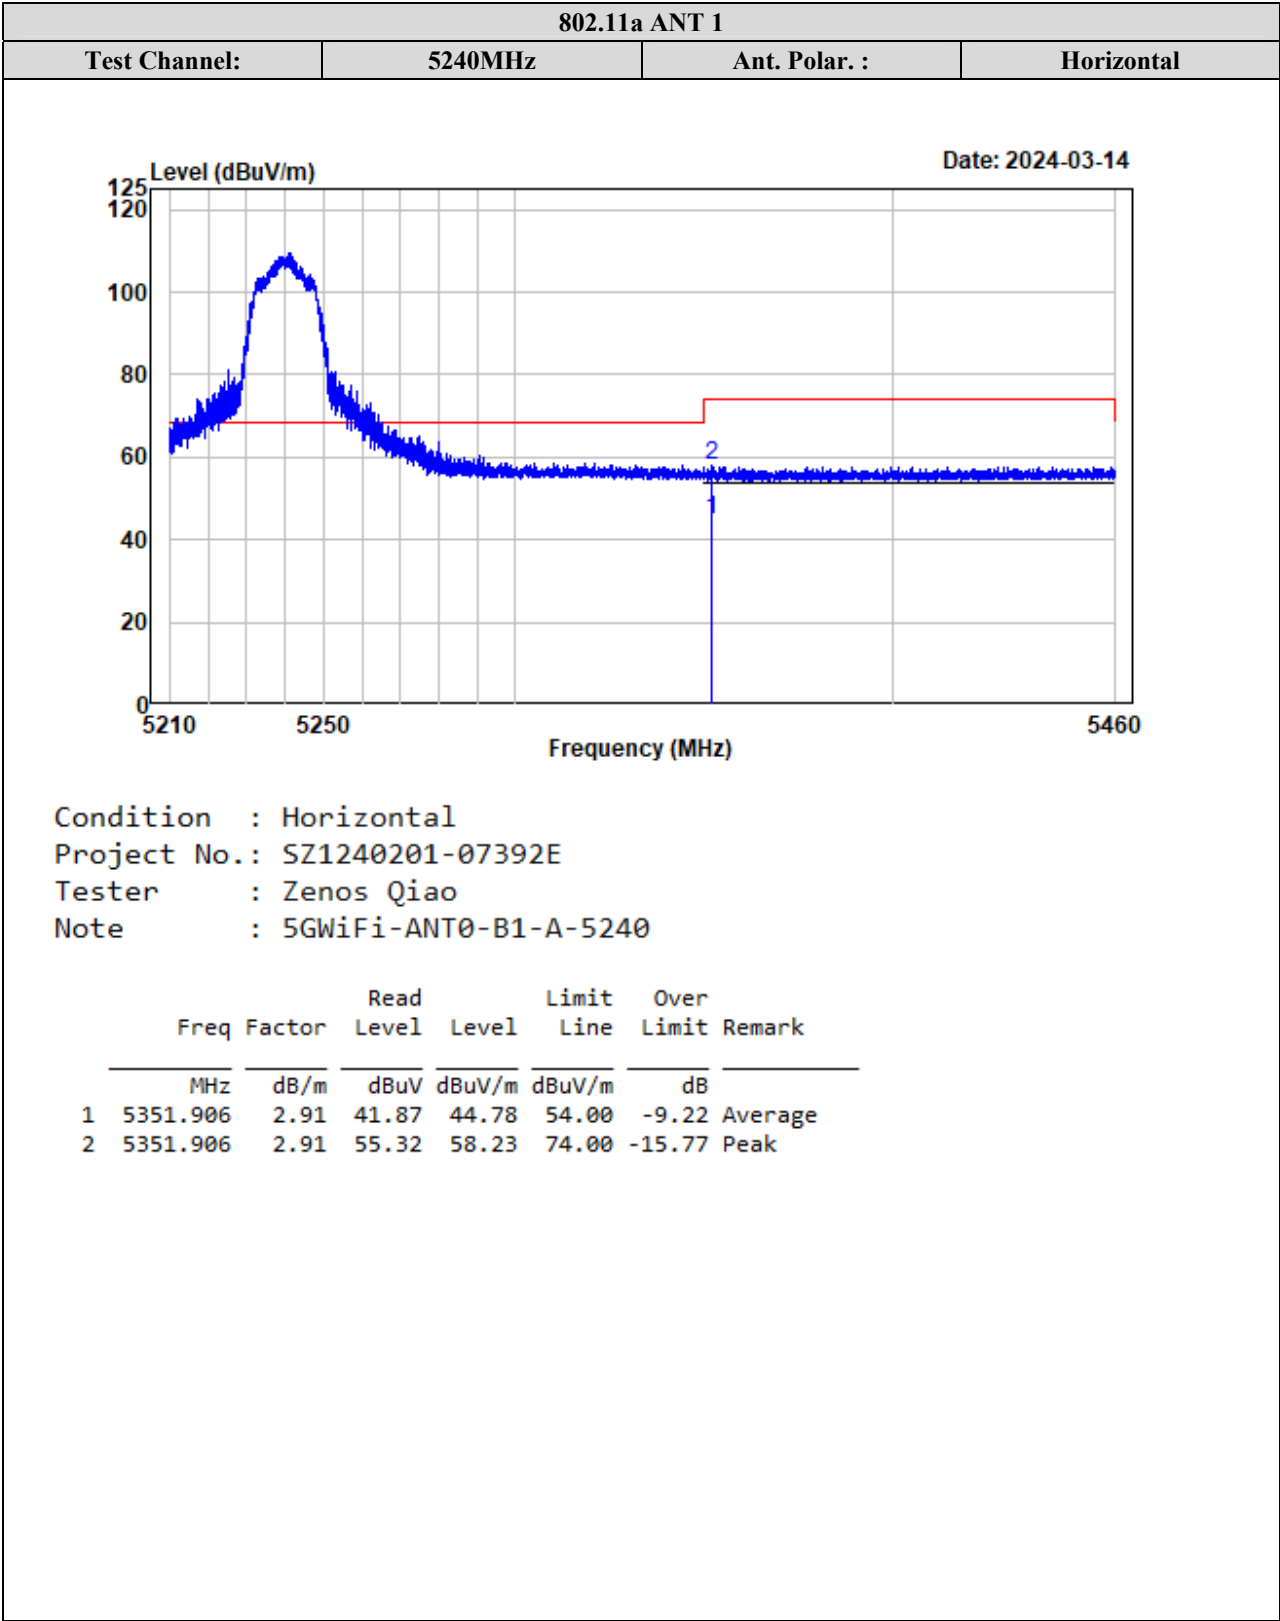


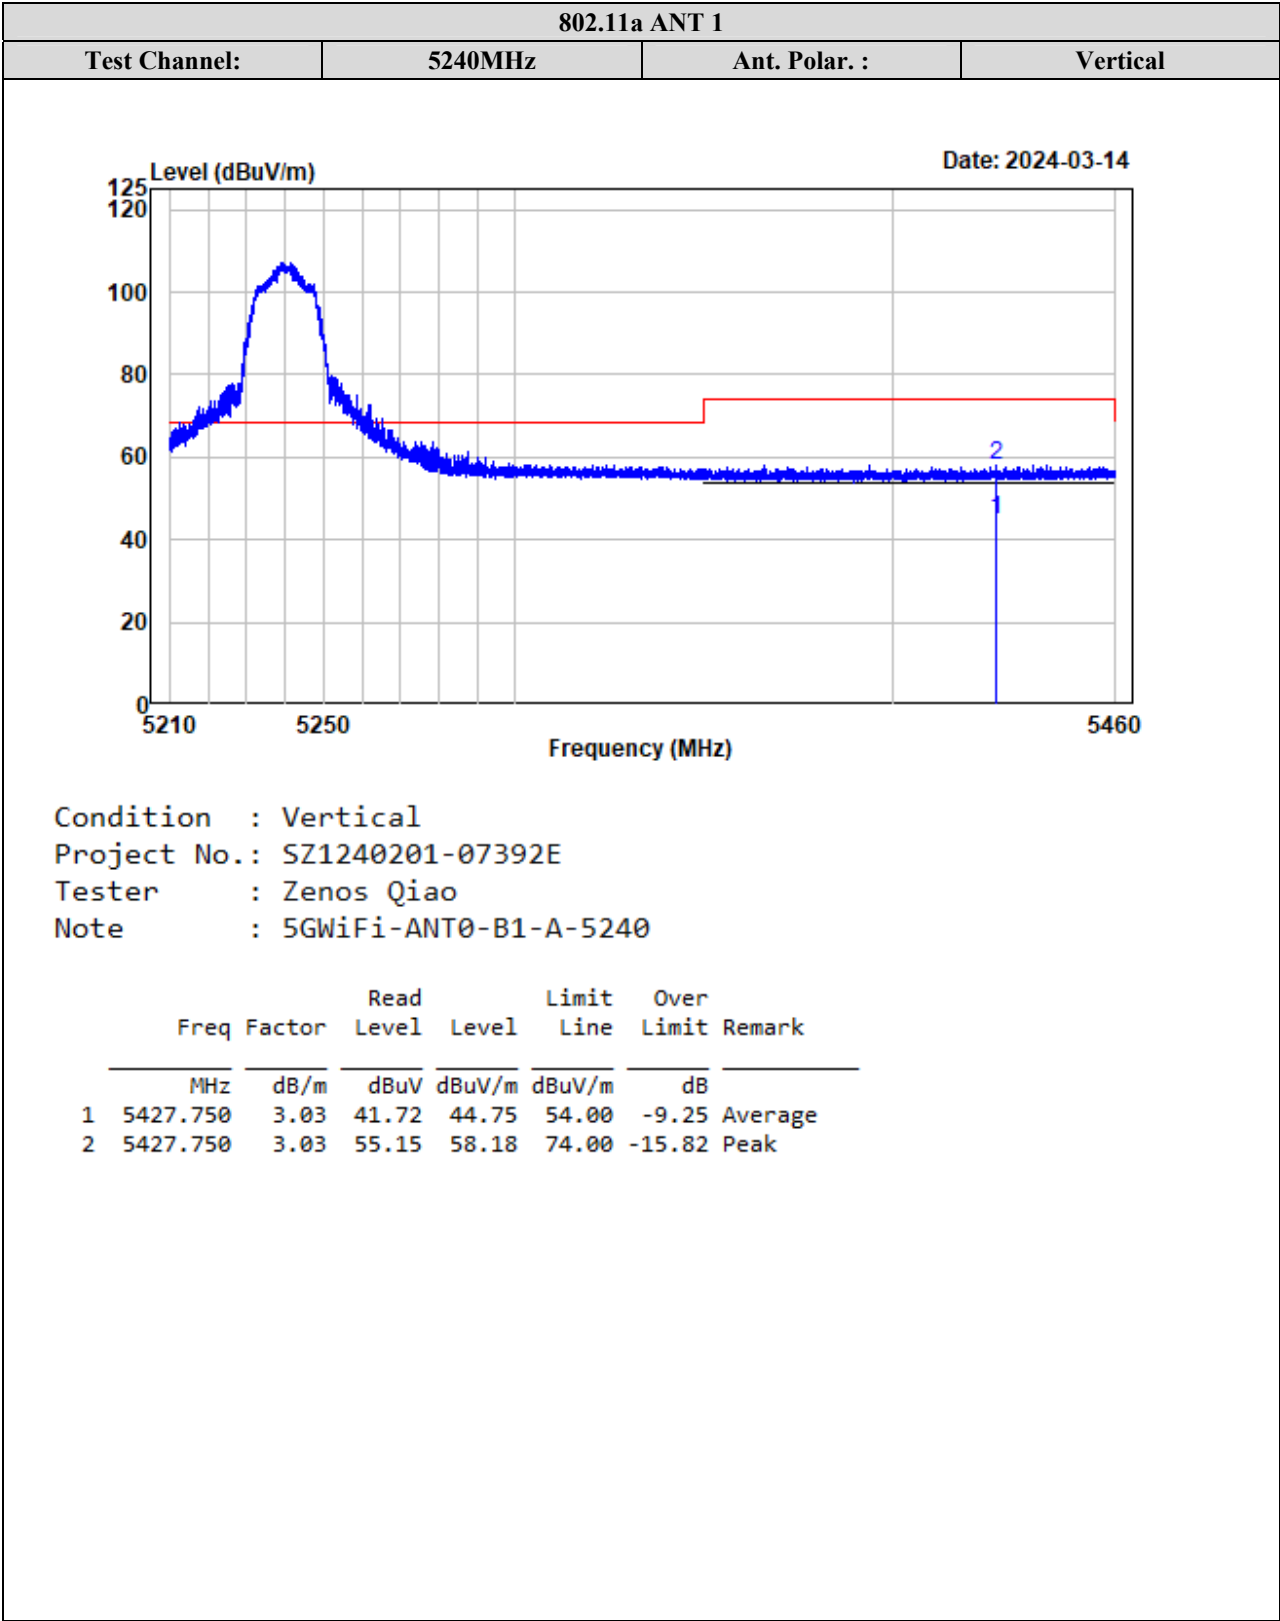


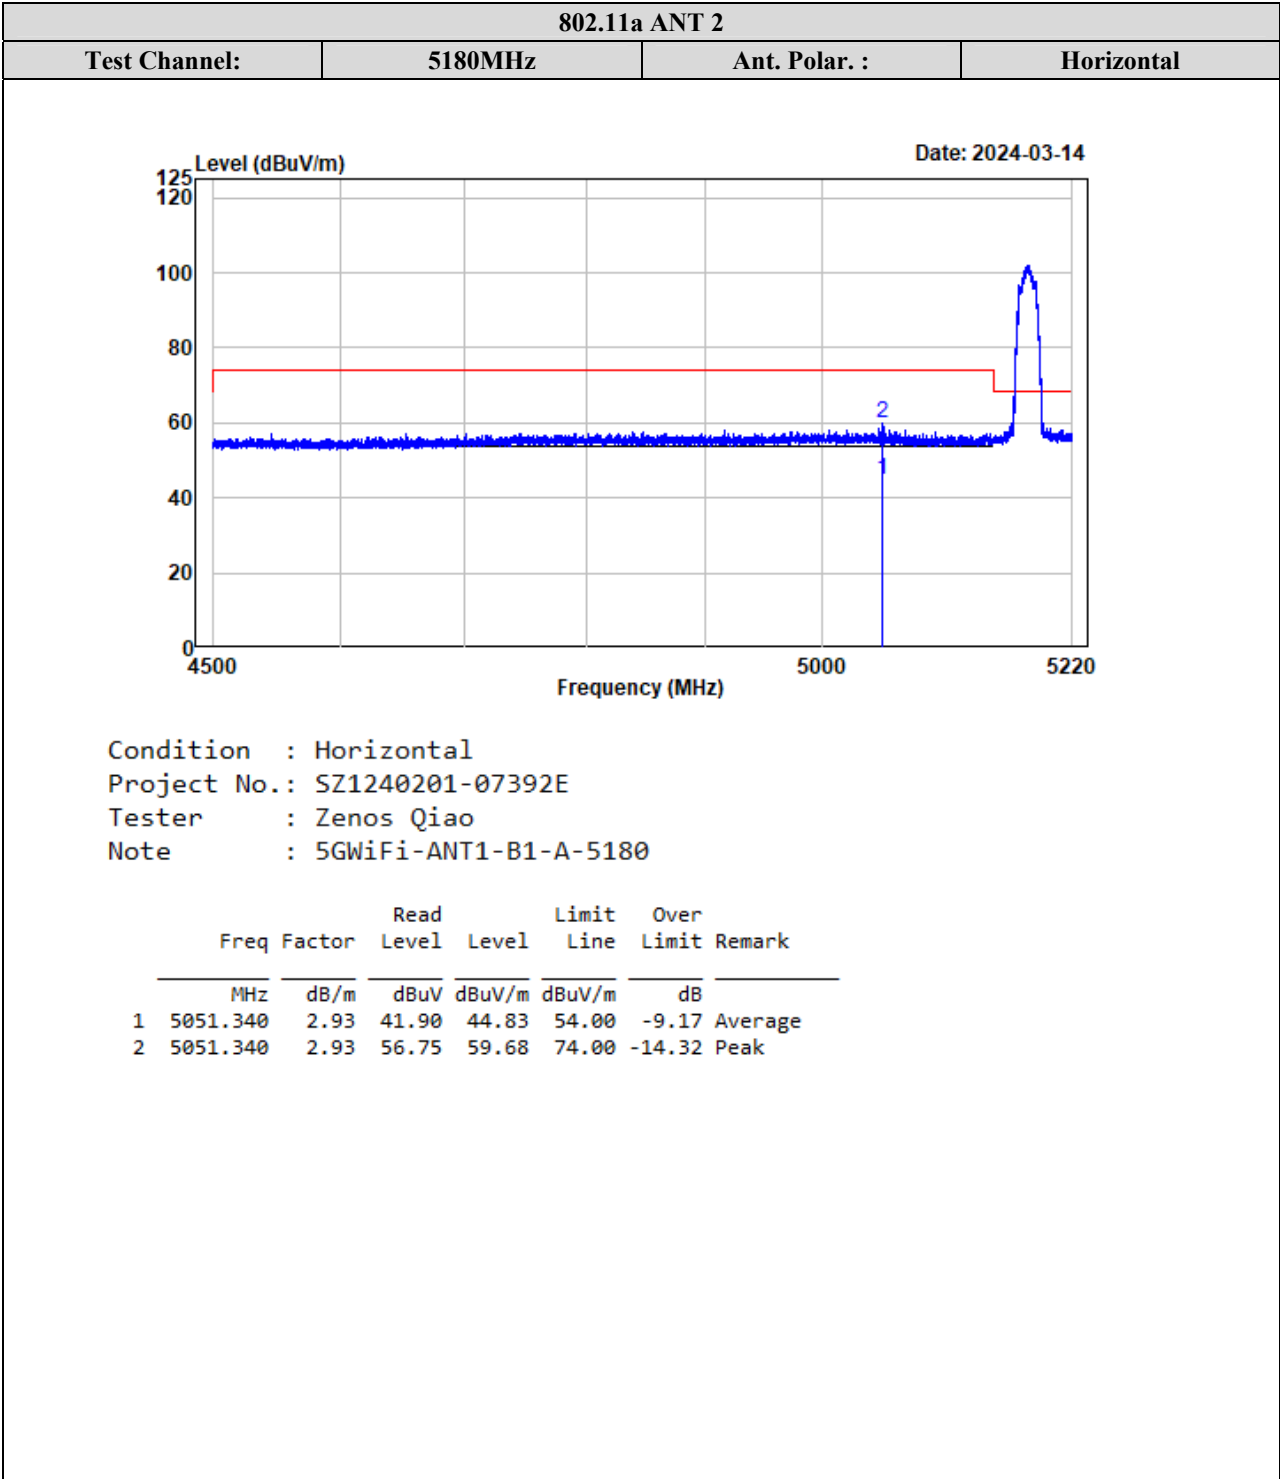


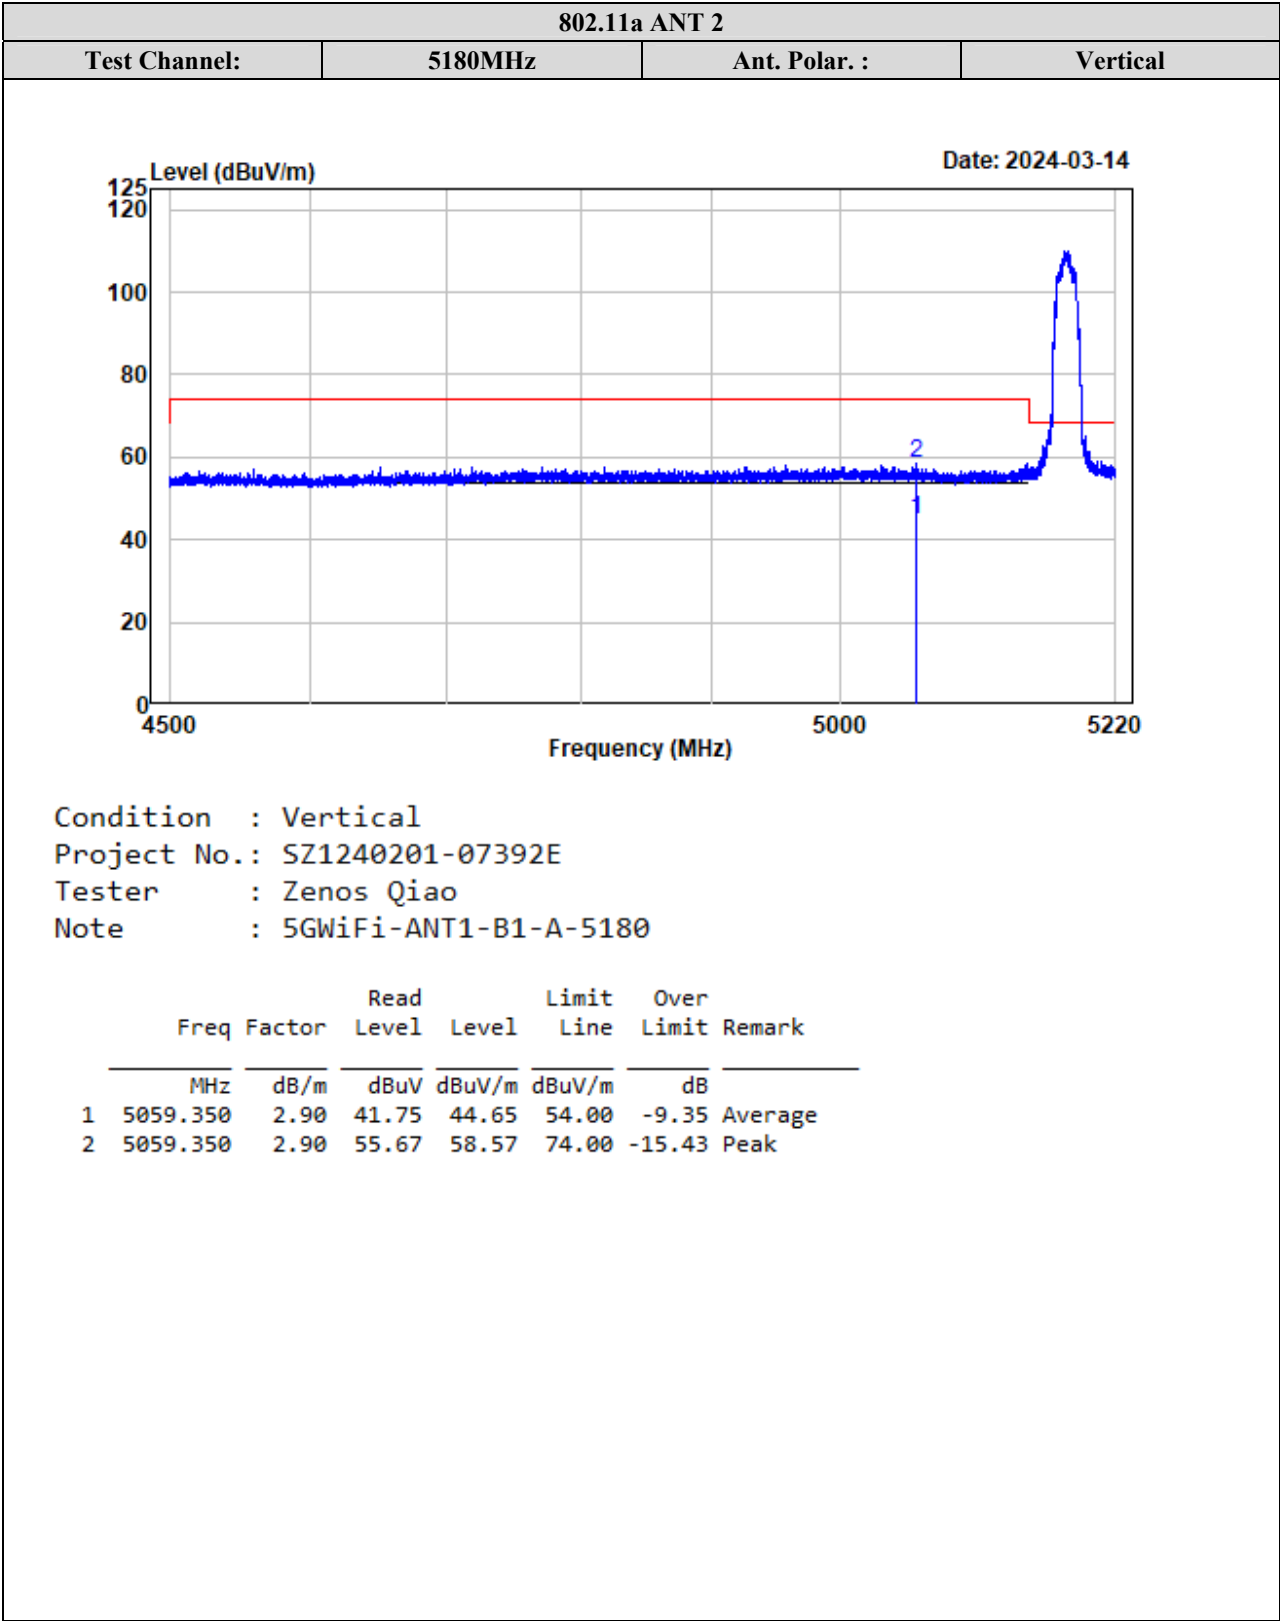


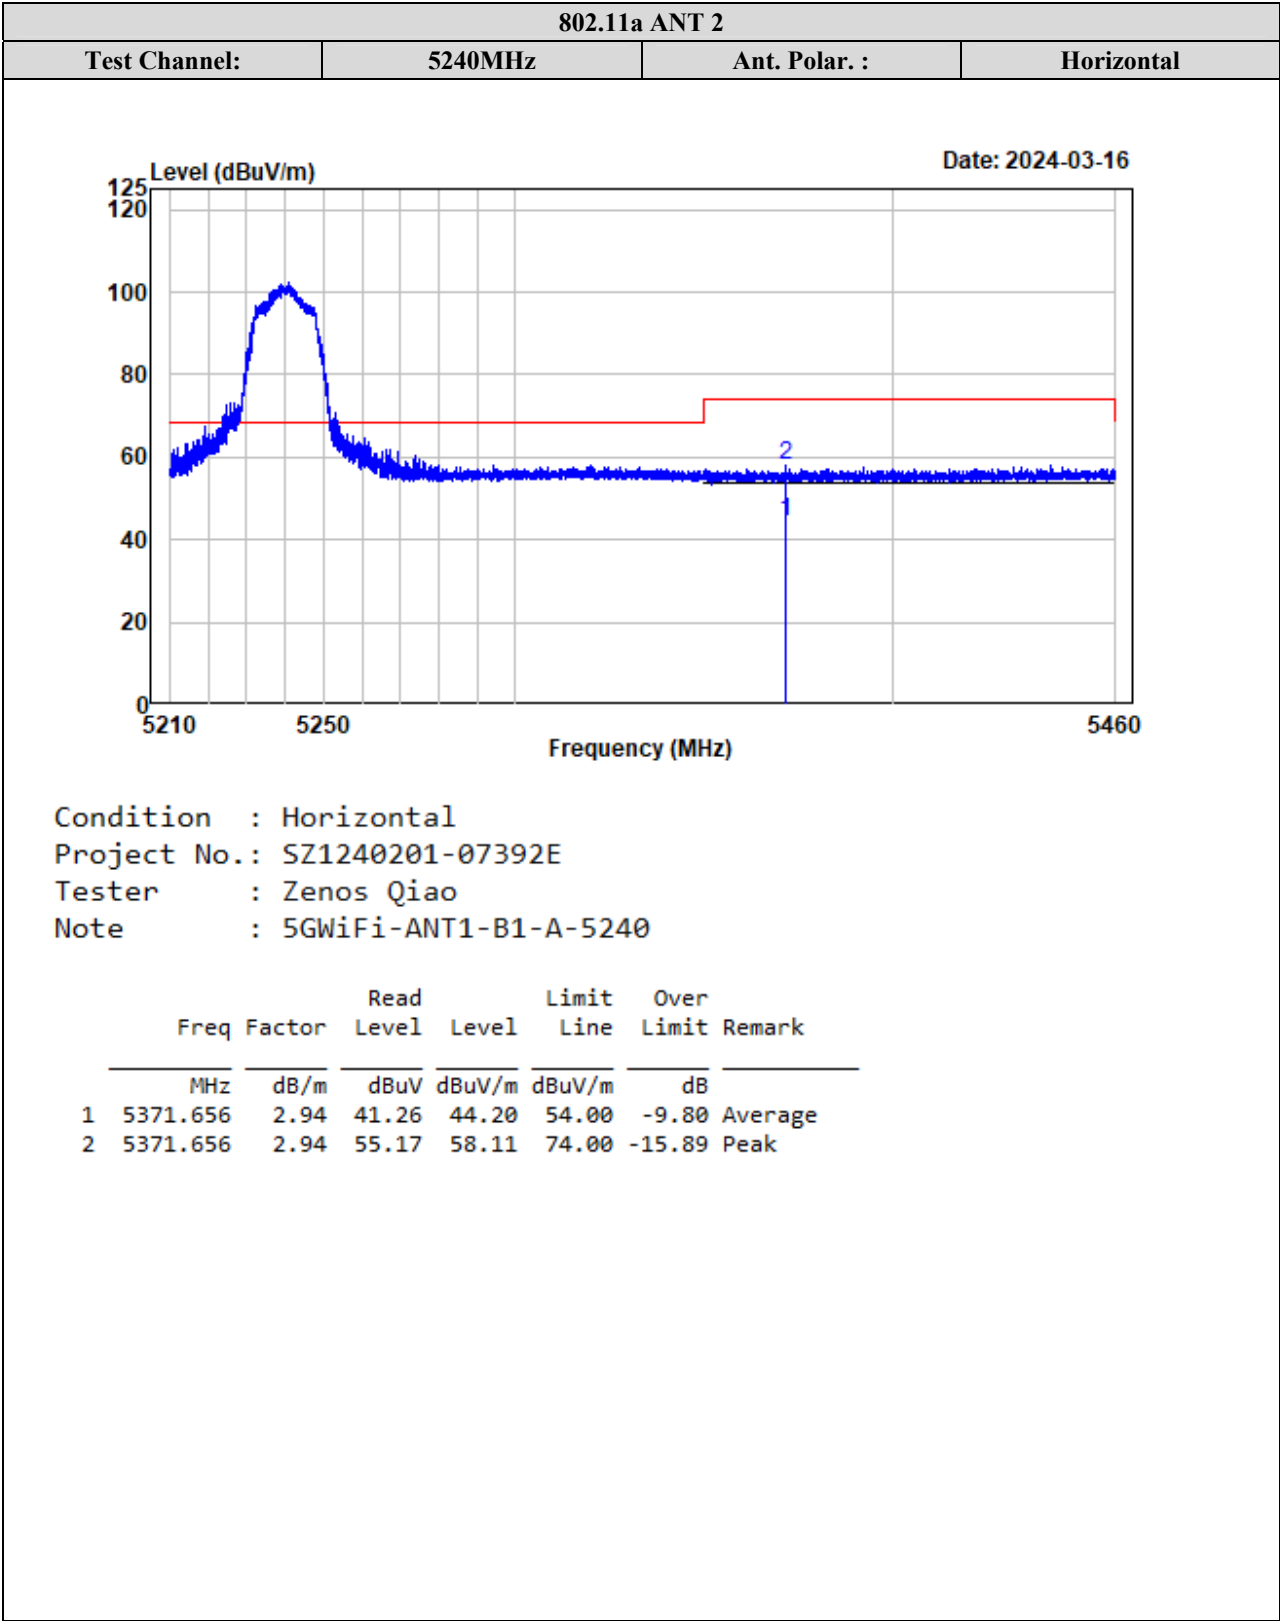

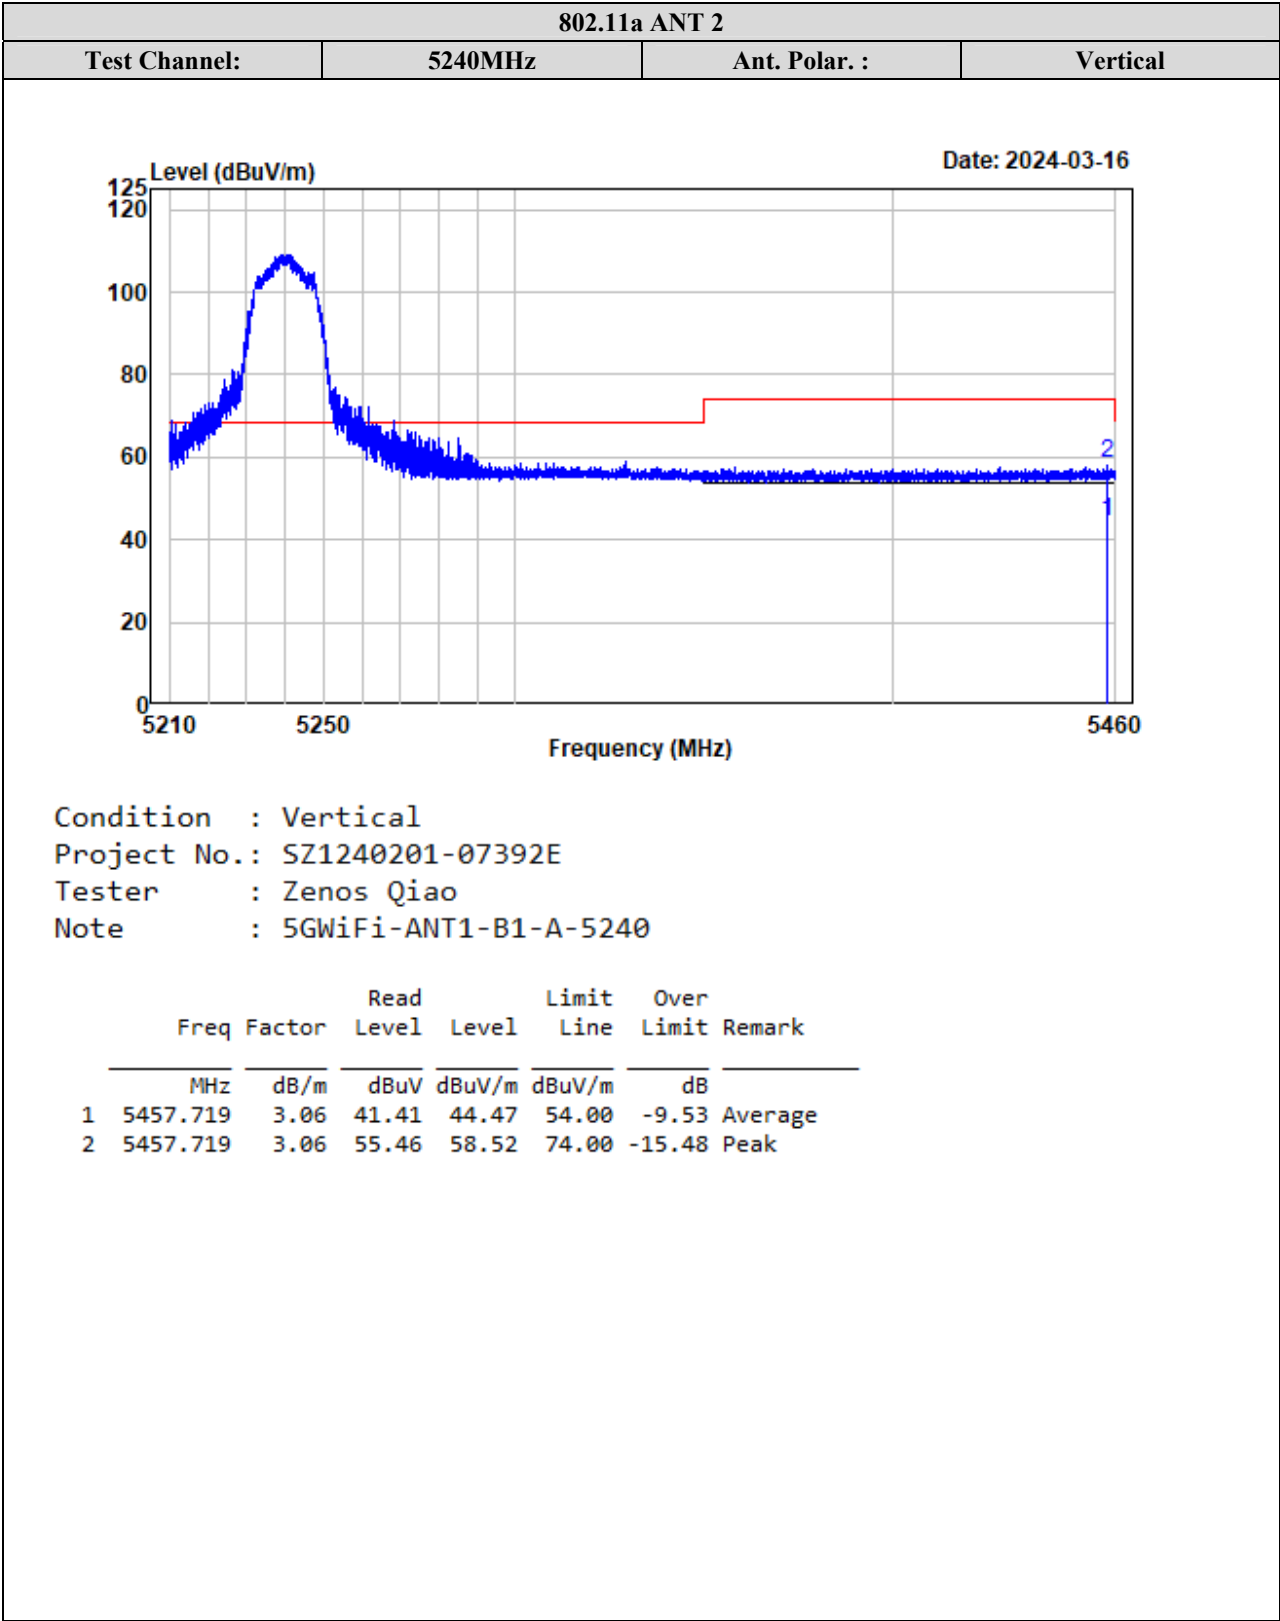

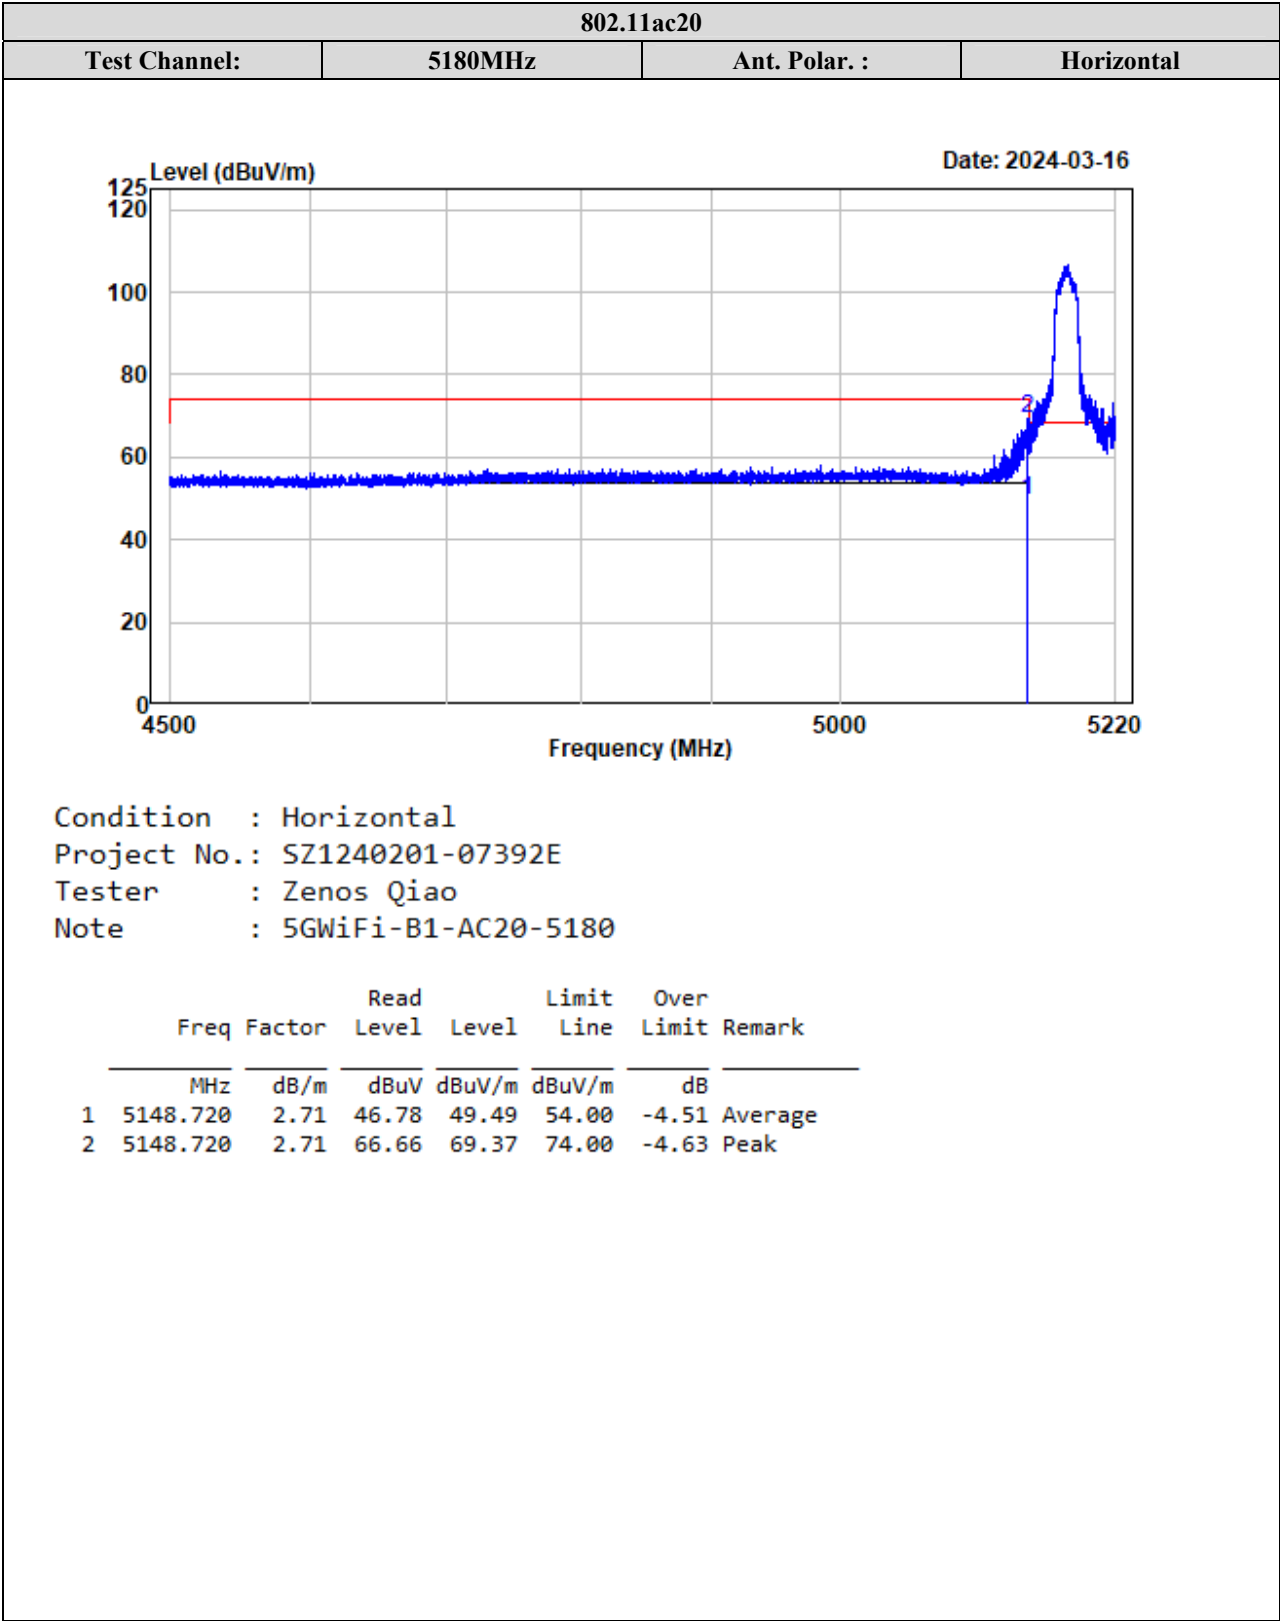

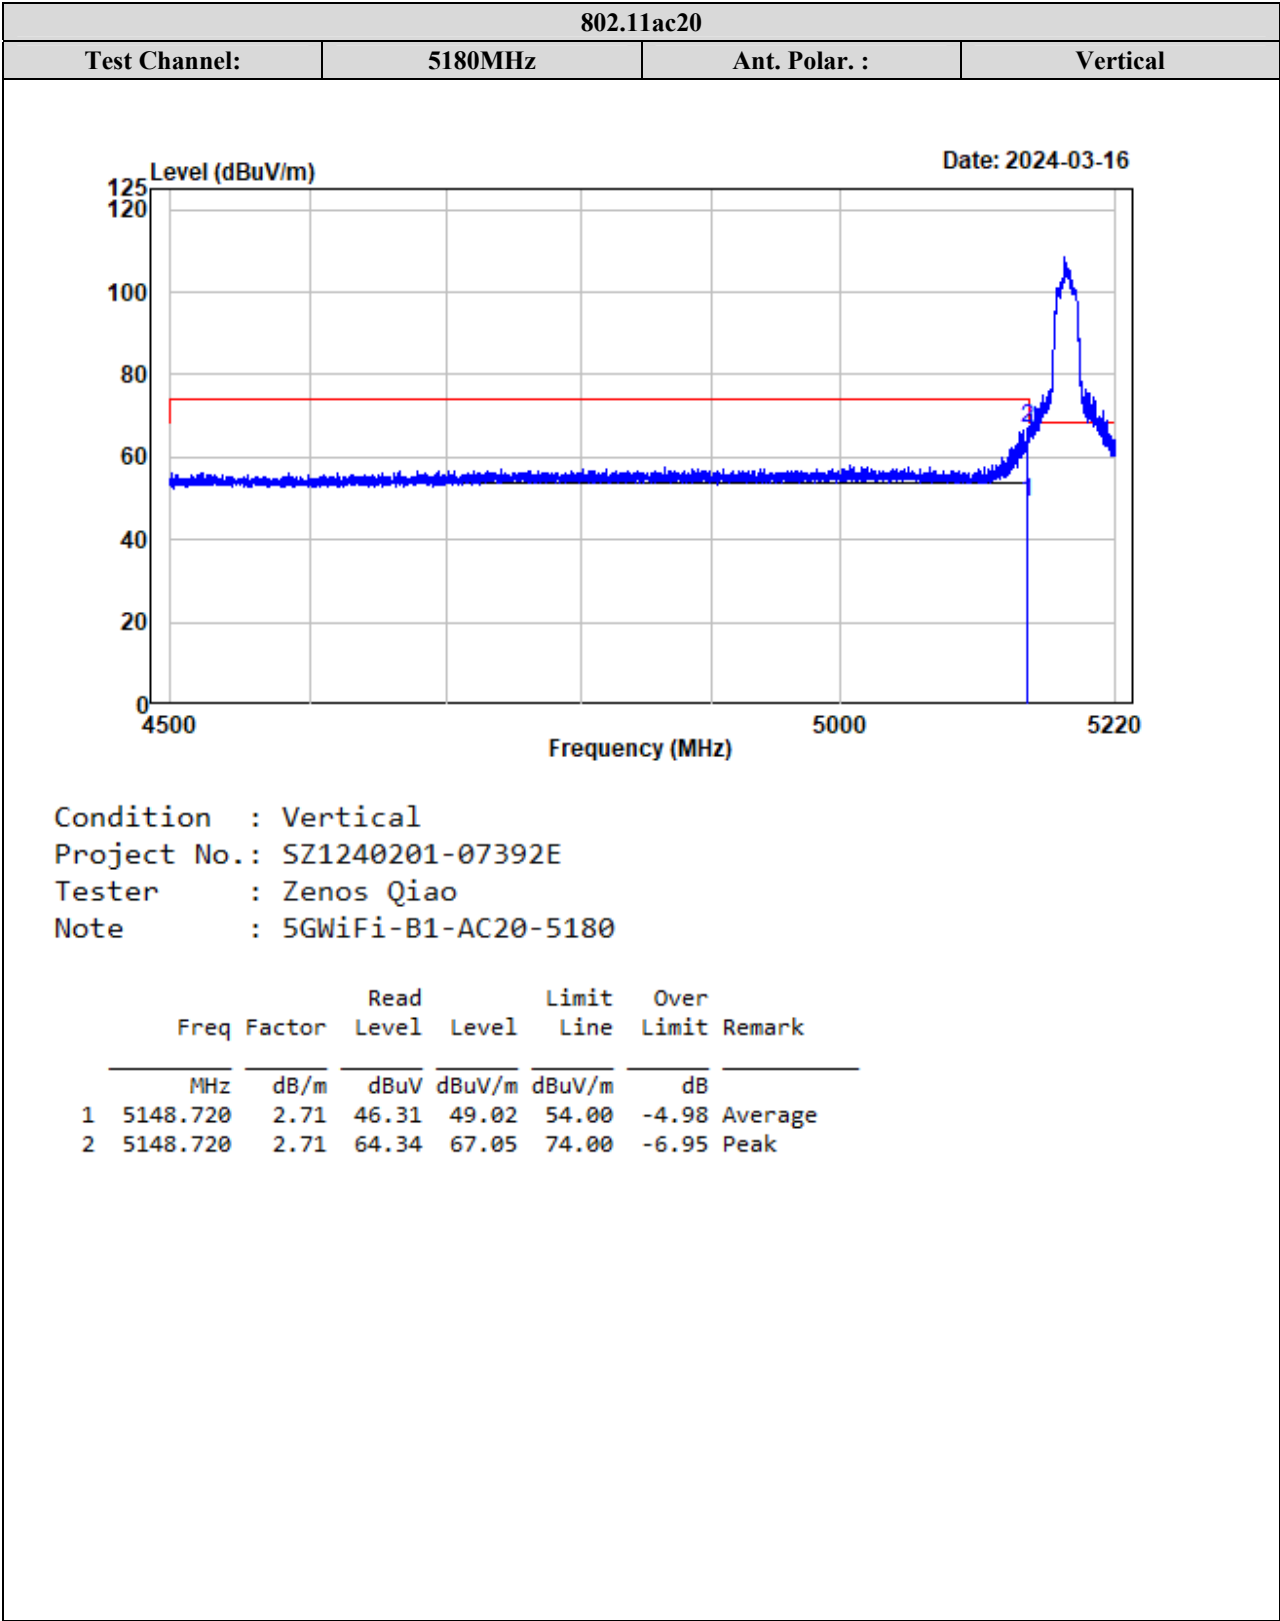


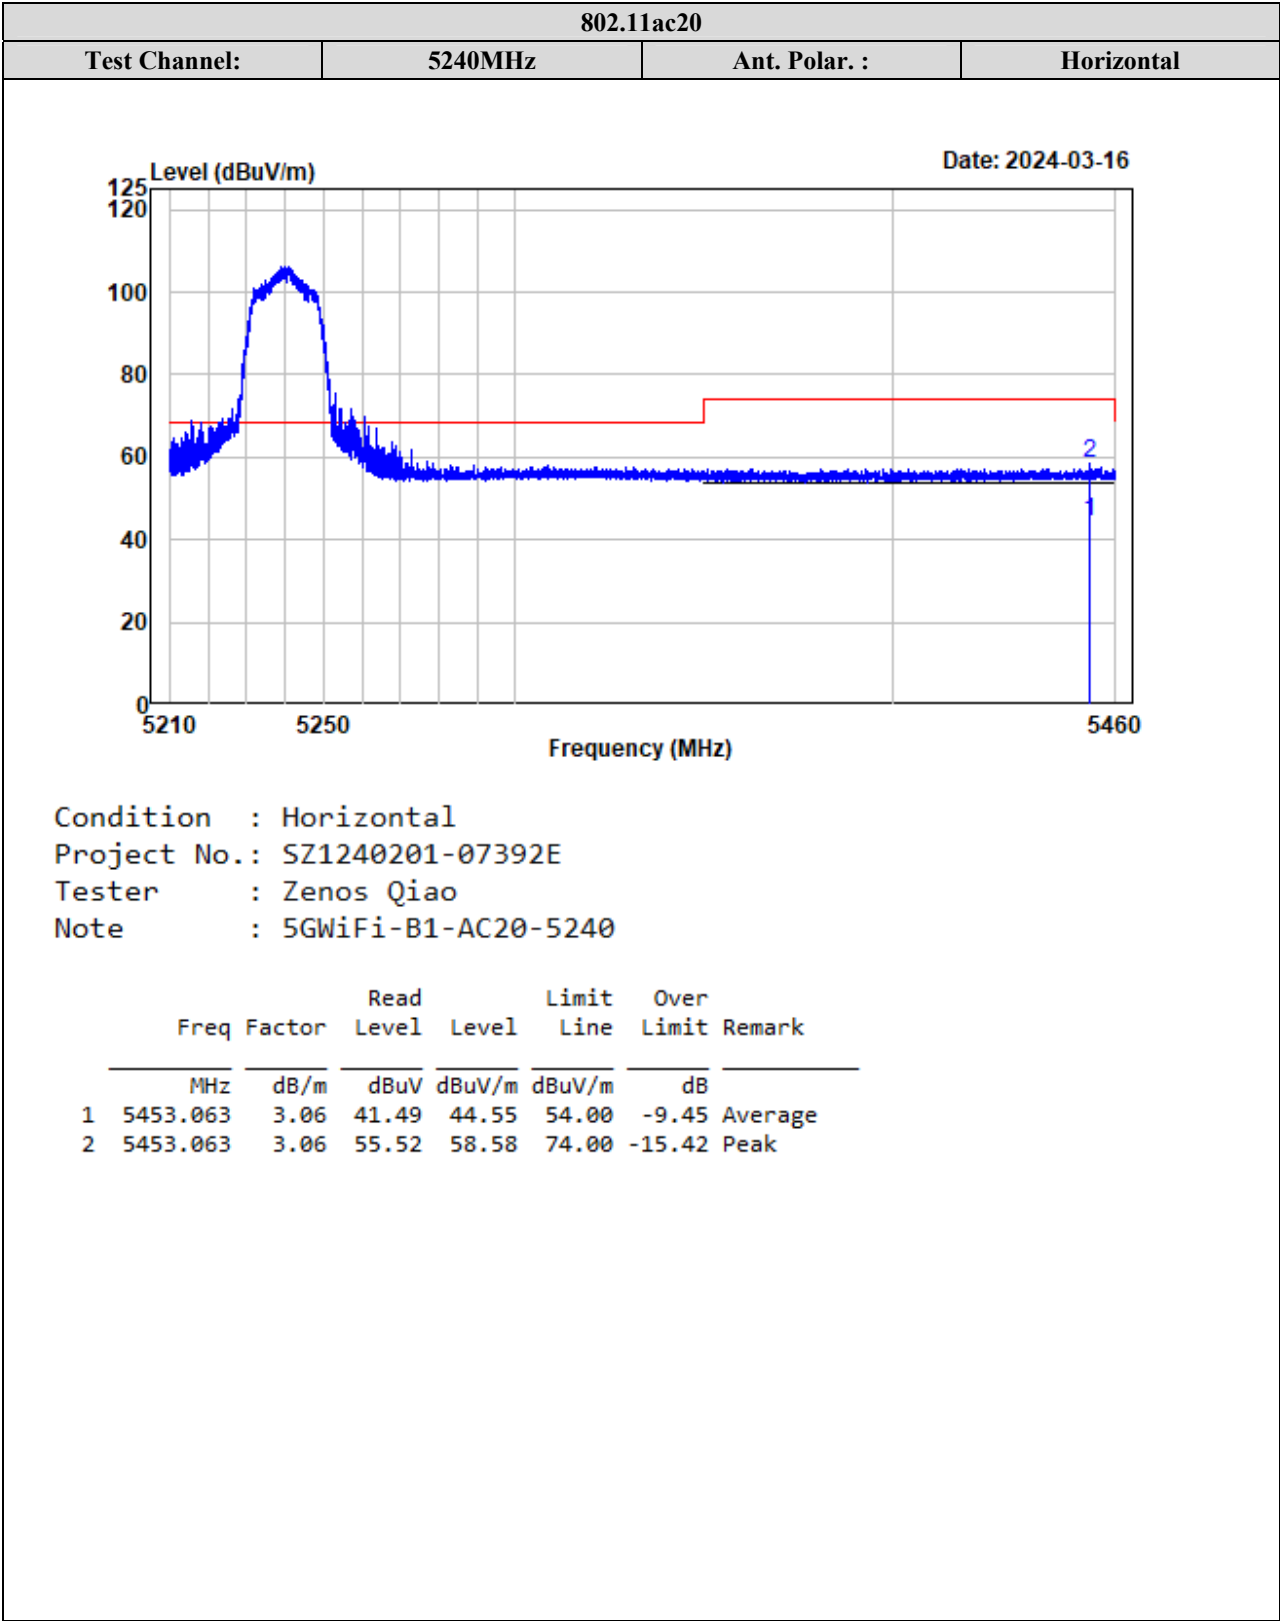



TR-EM-RF015


Page 63 of 258


Version 1.0 (2023/10/07)

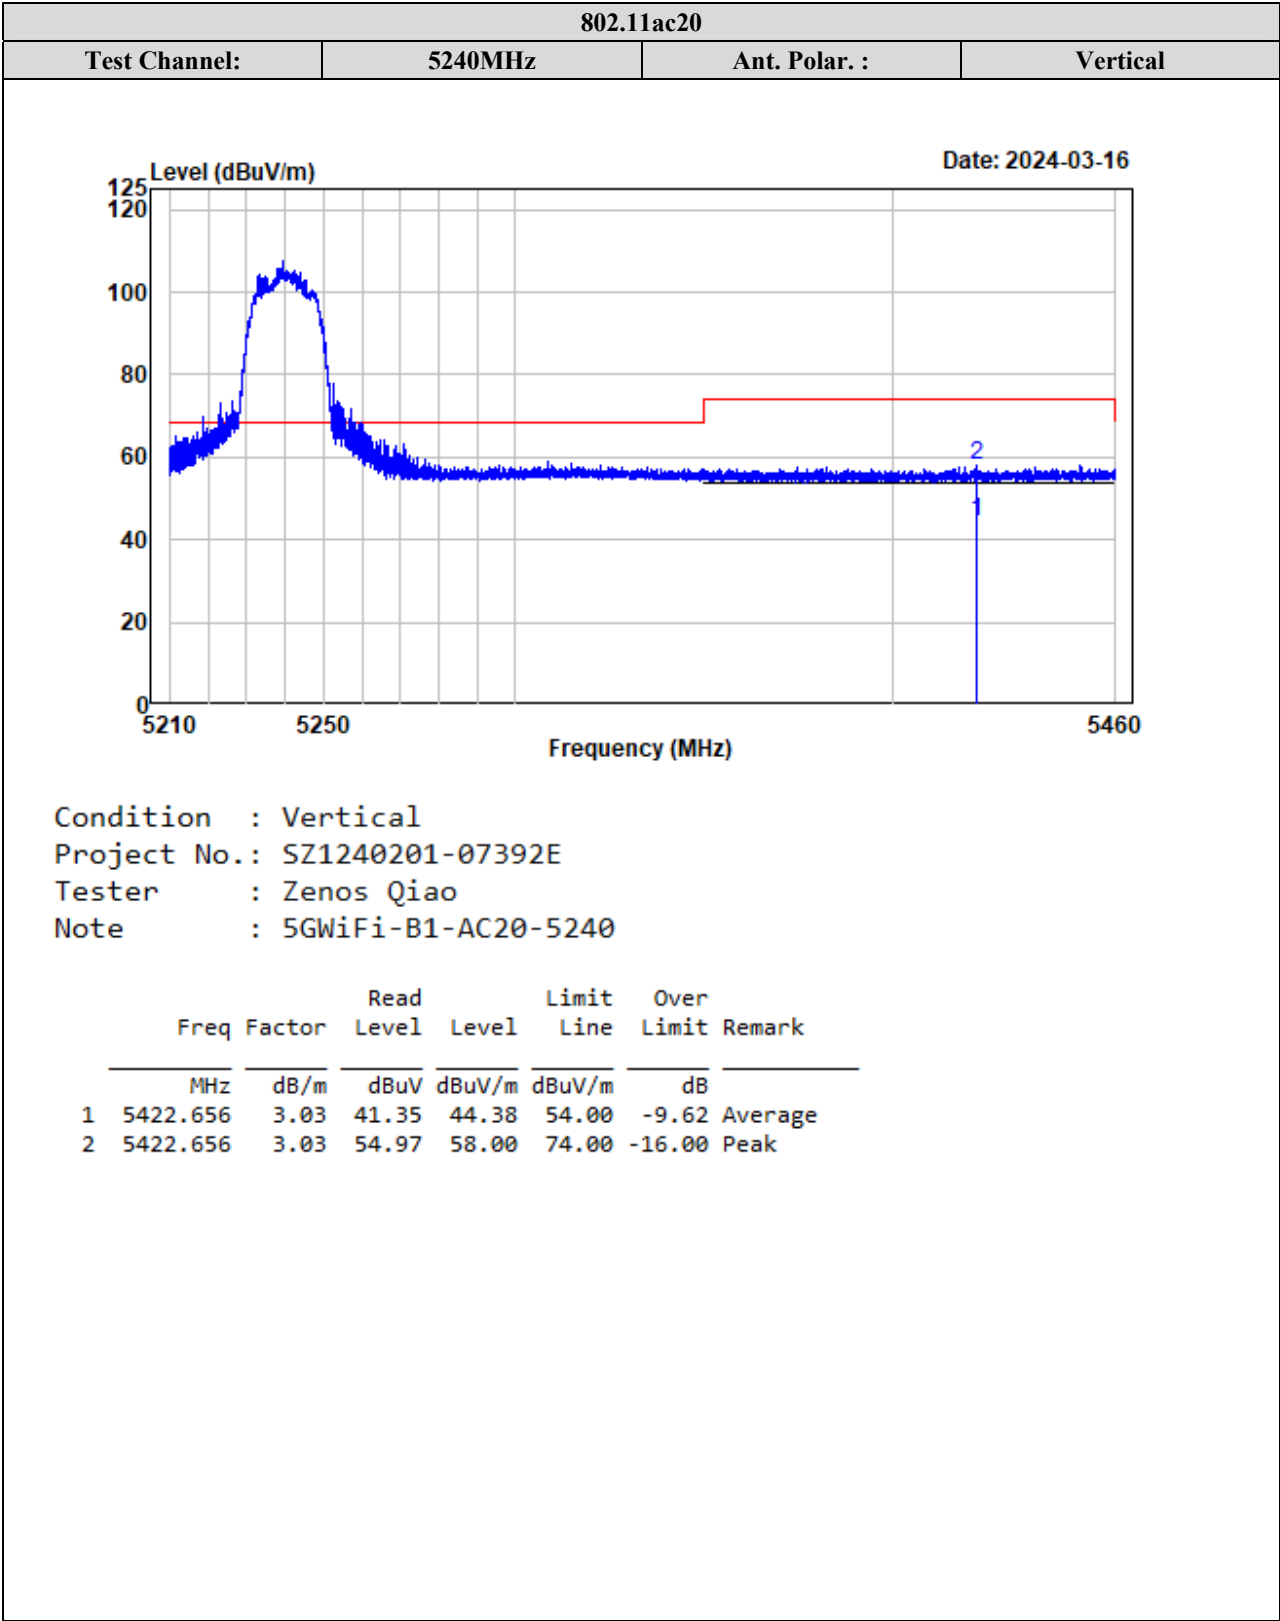


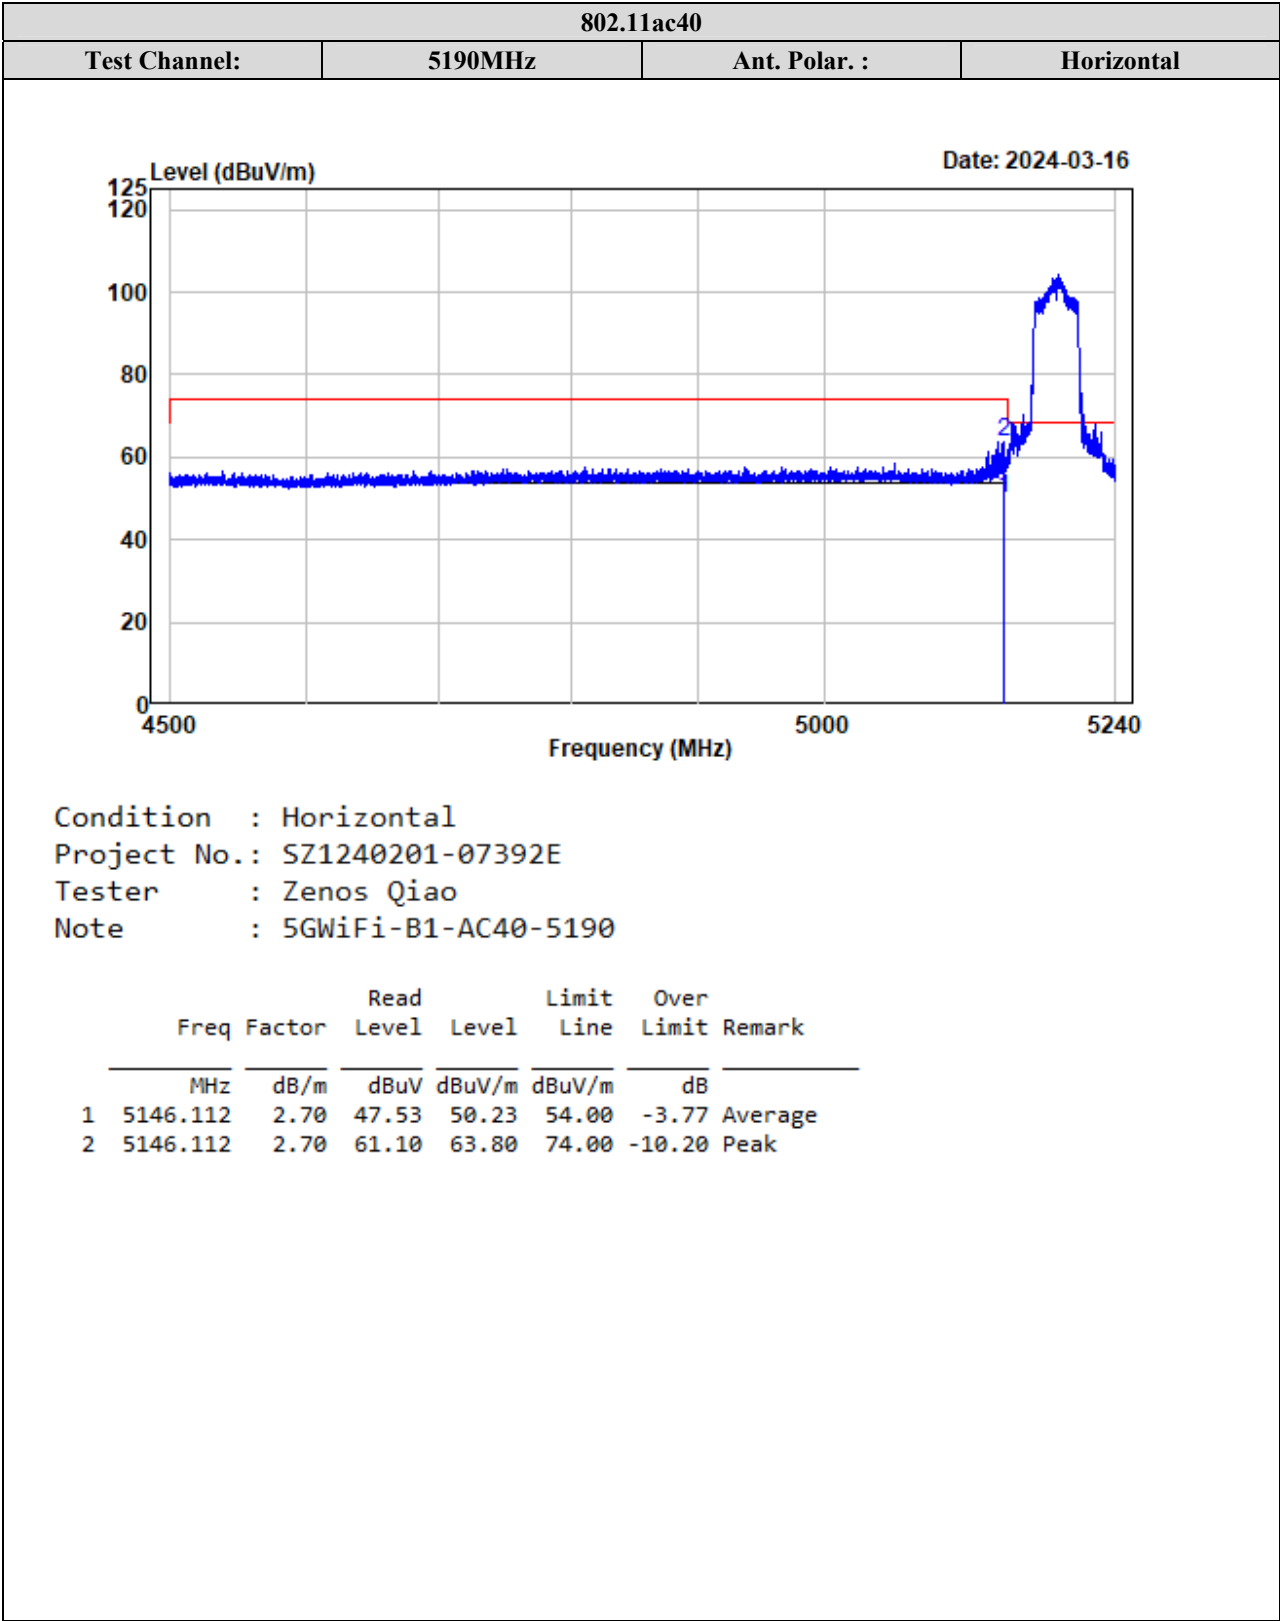


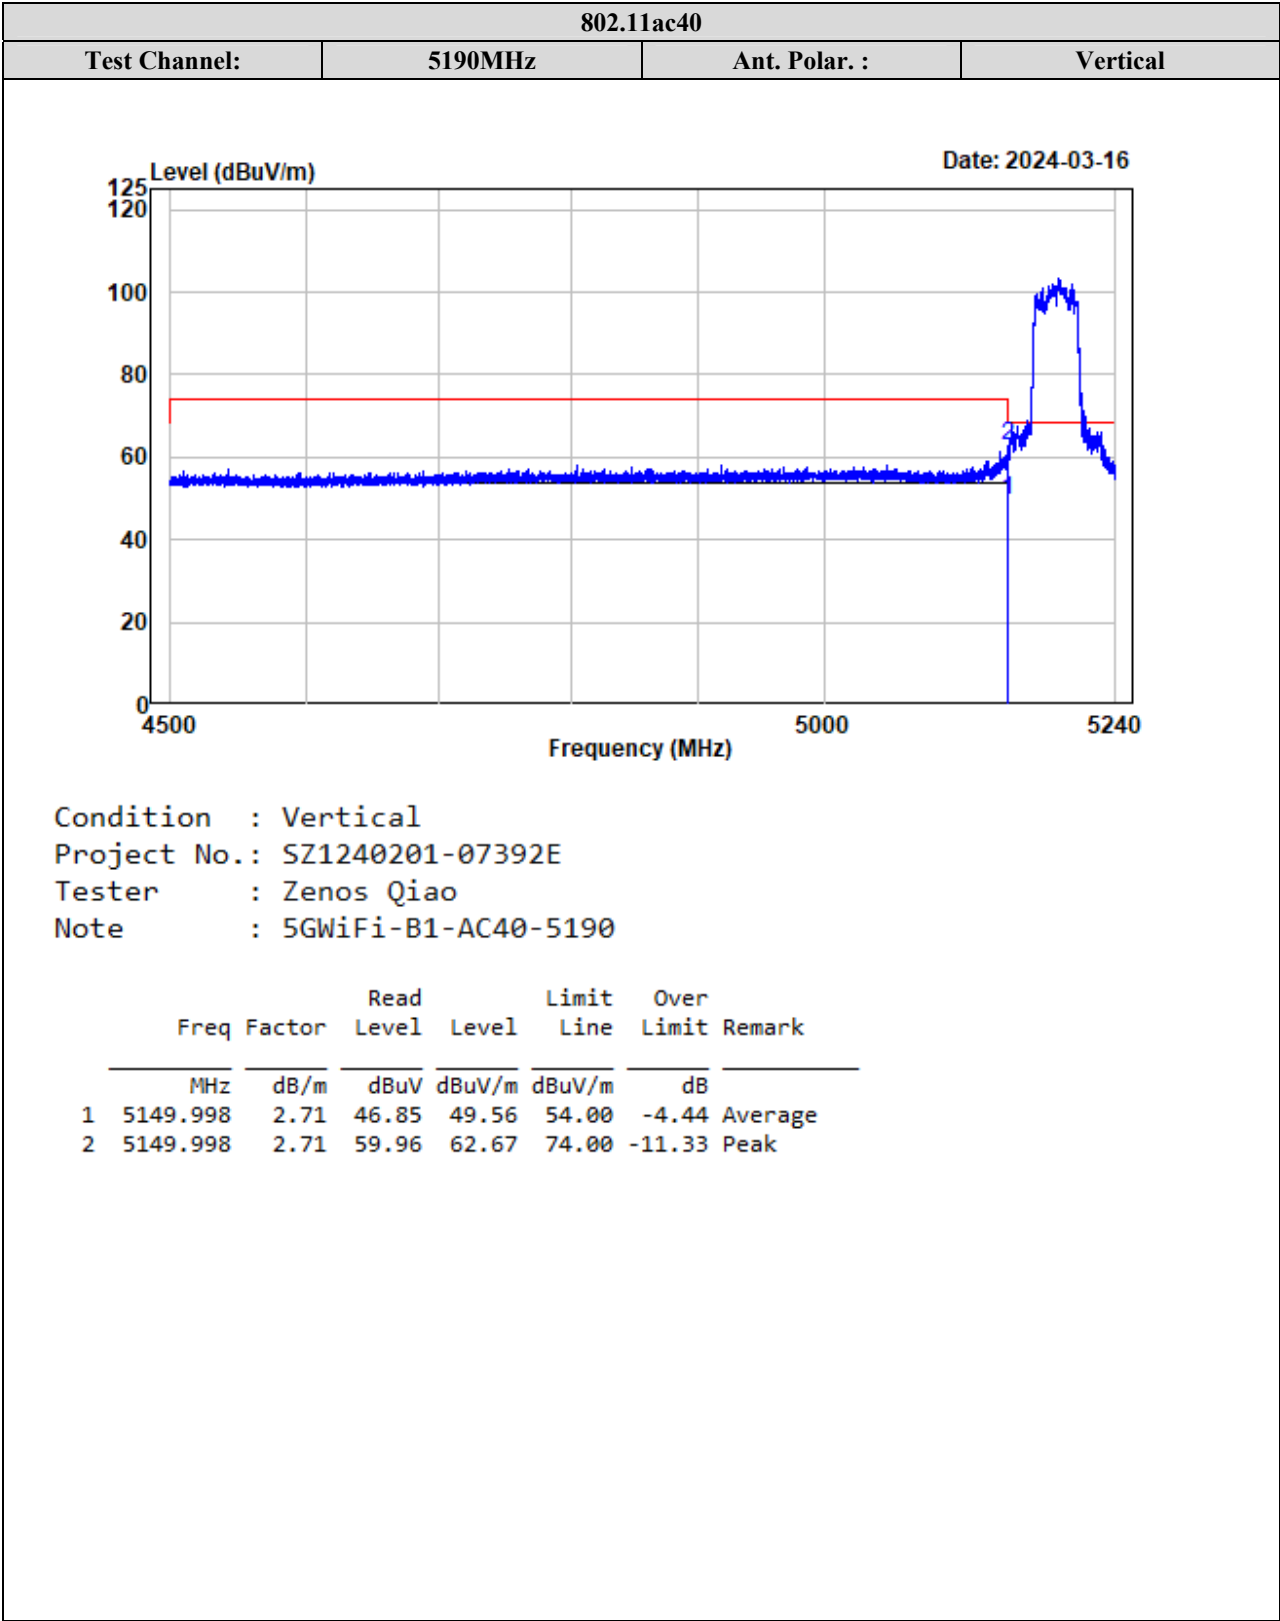


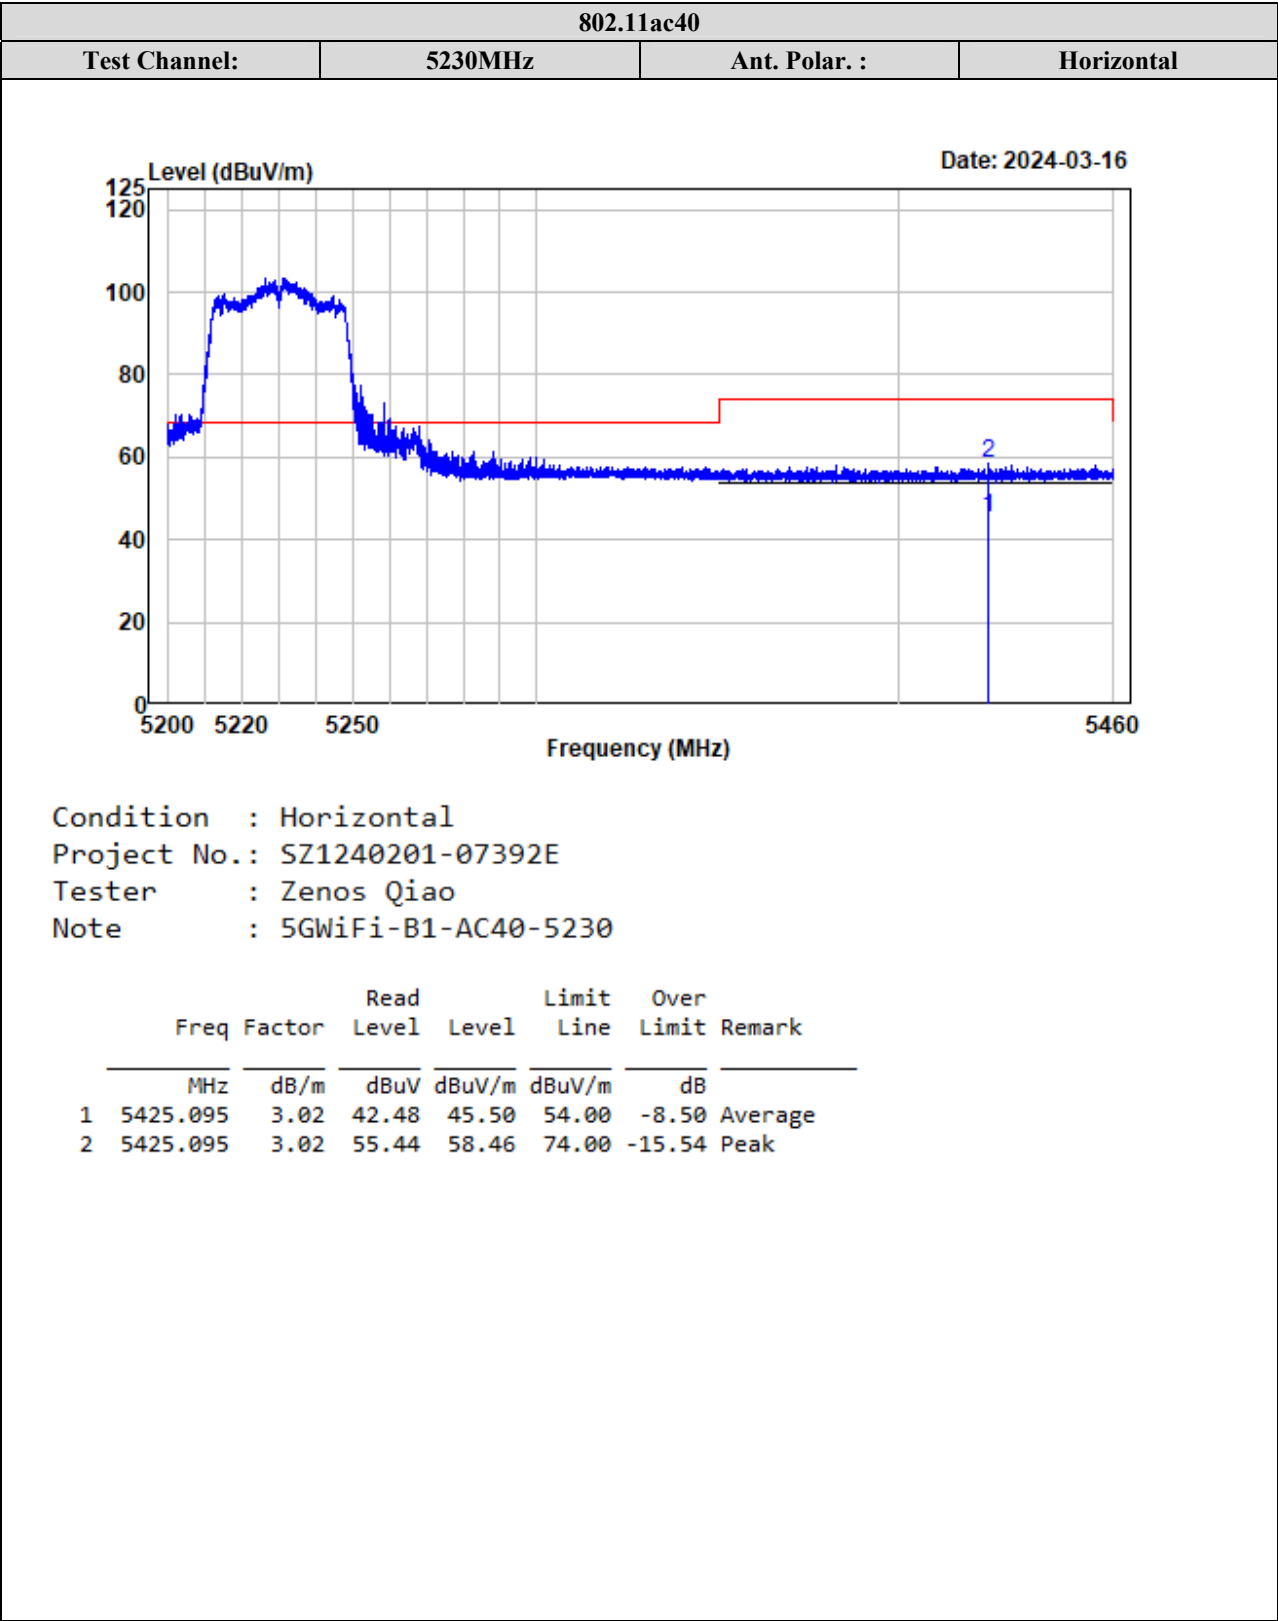


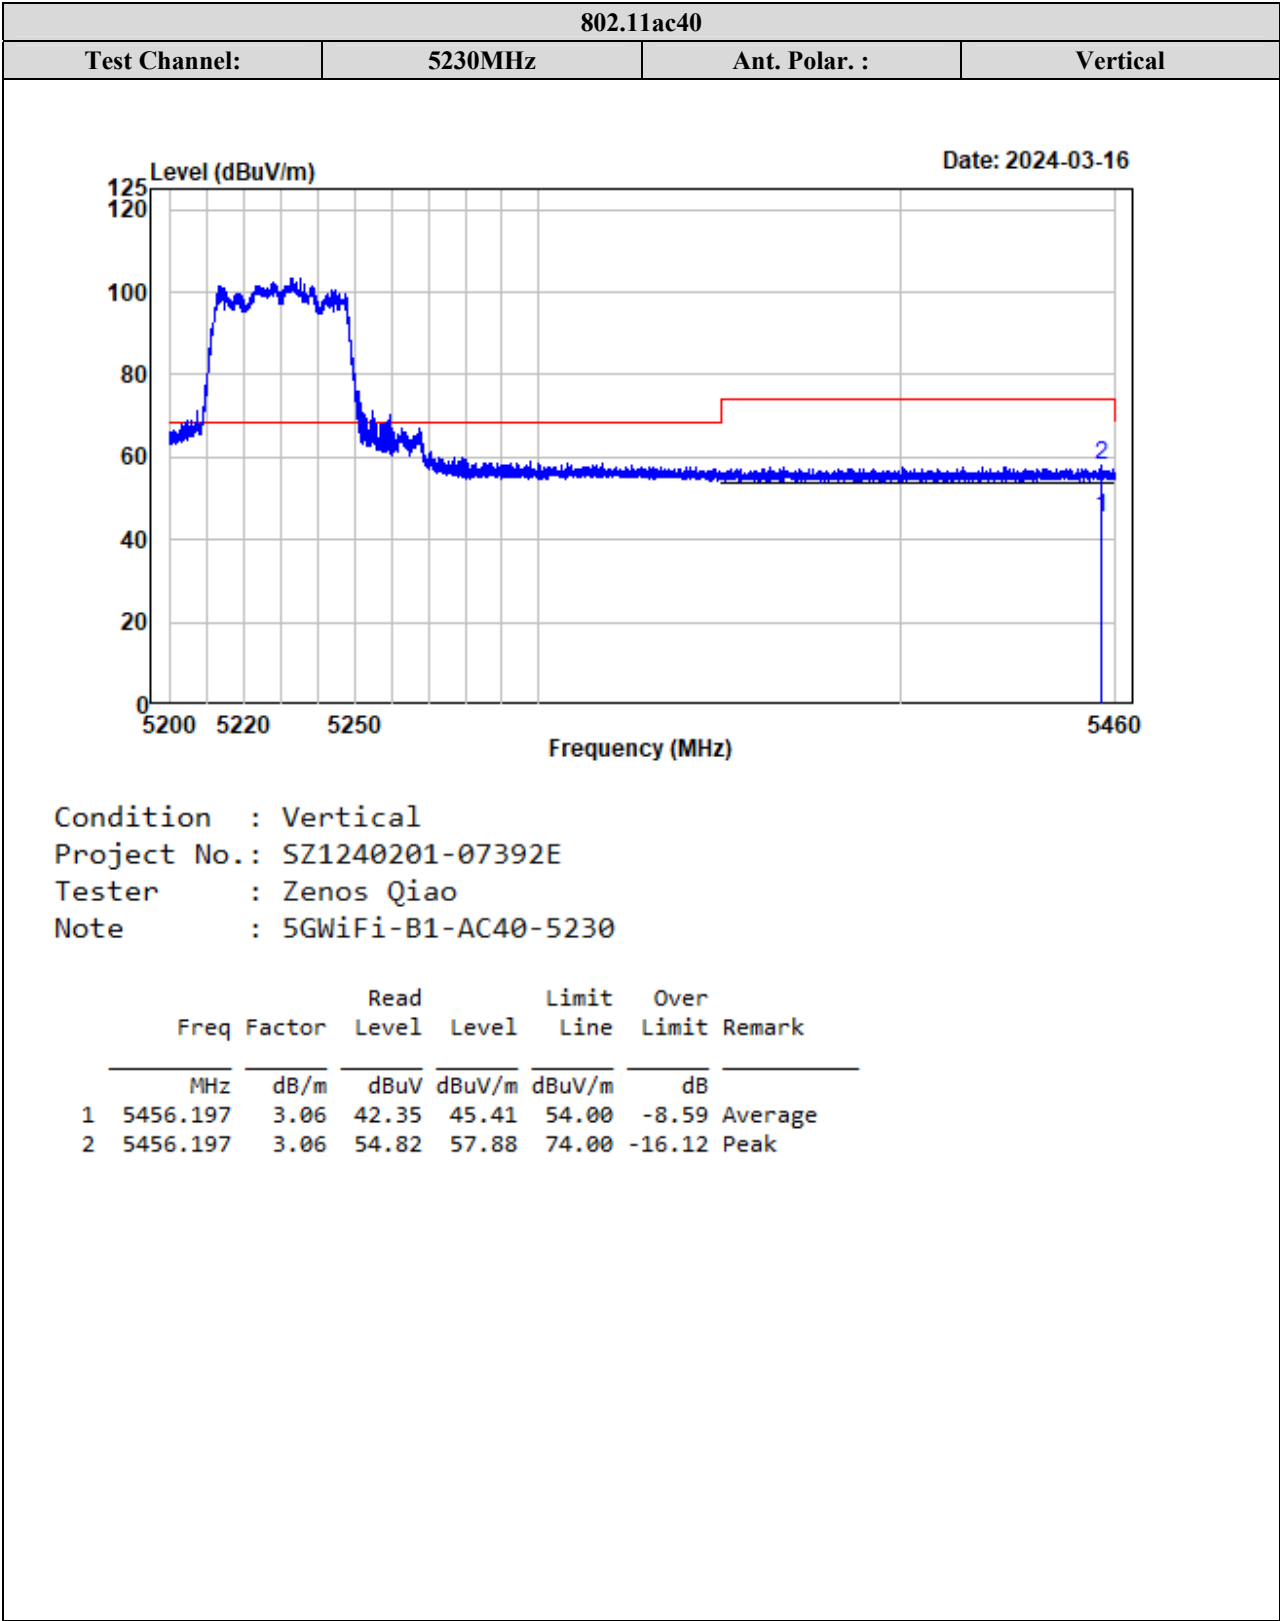


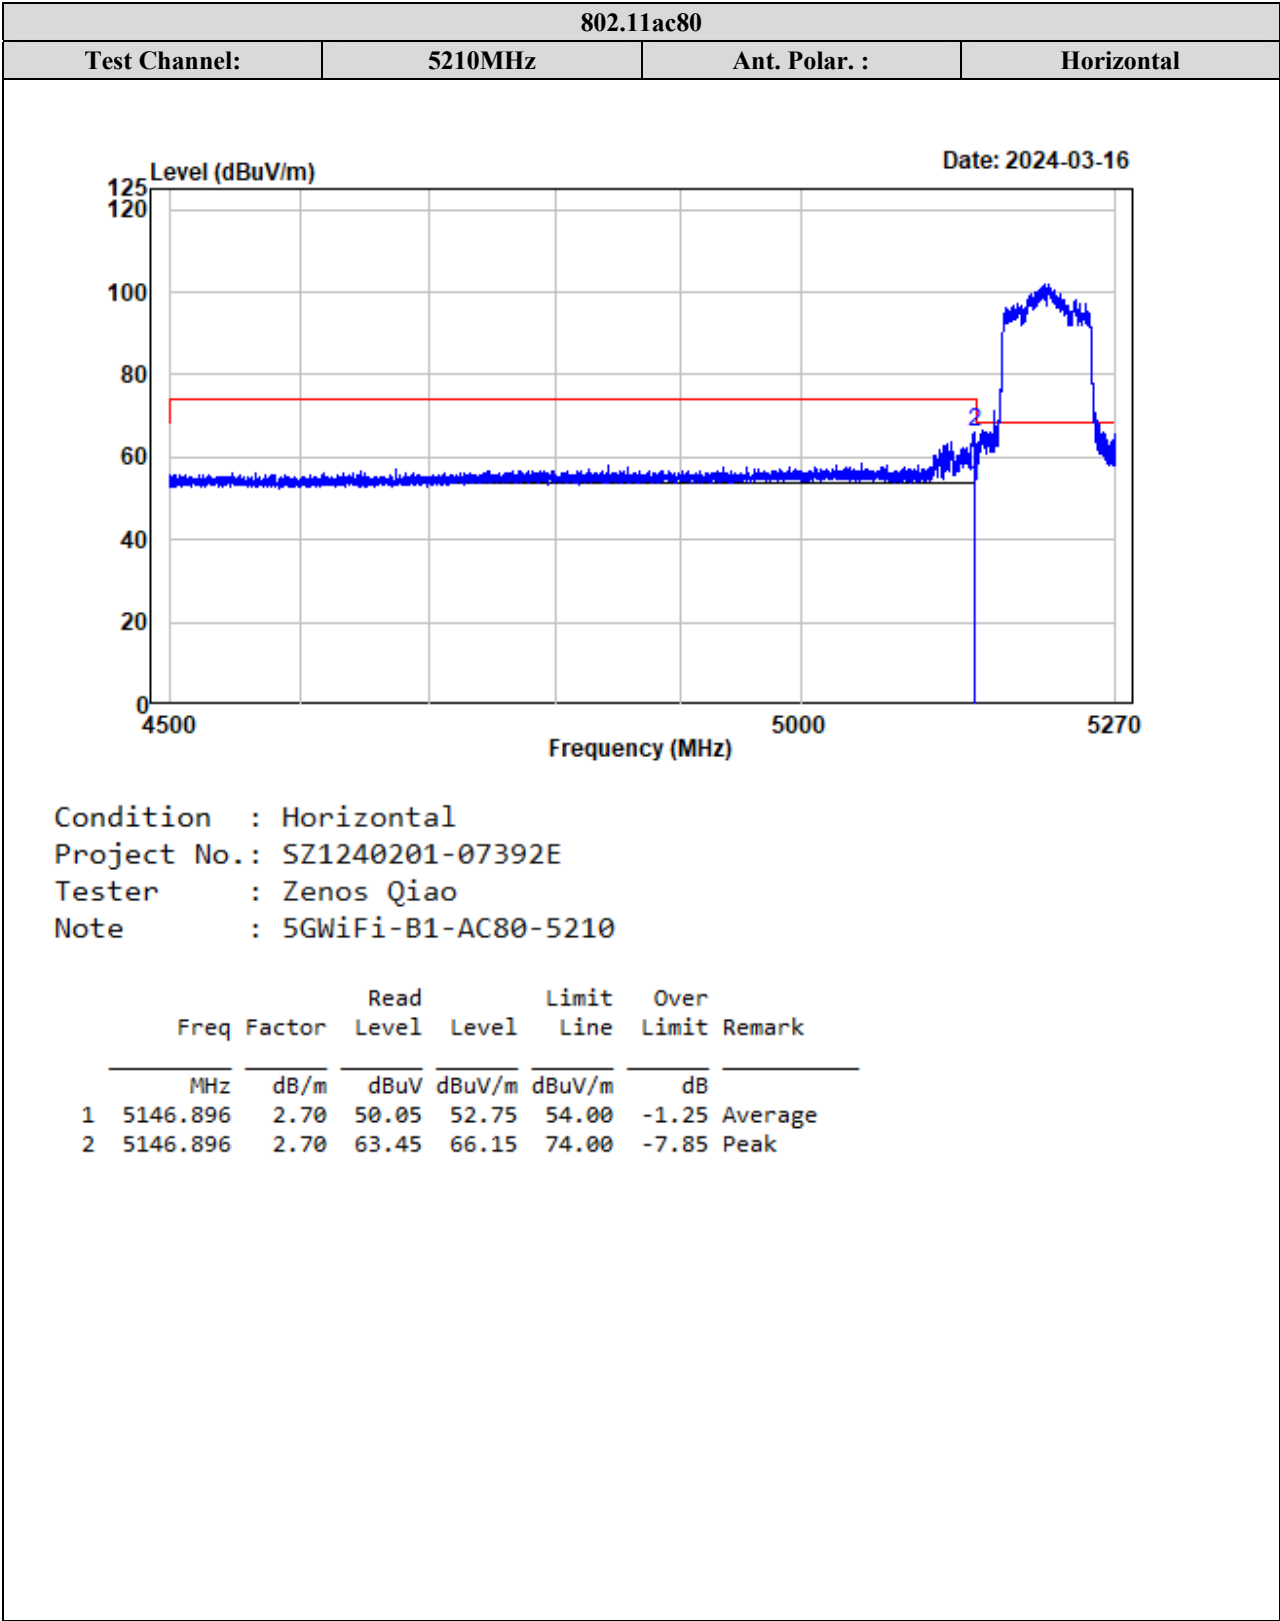


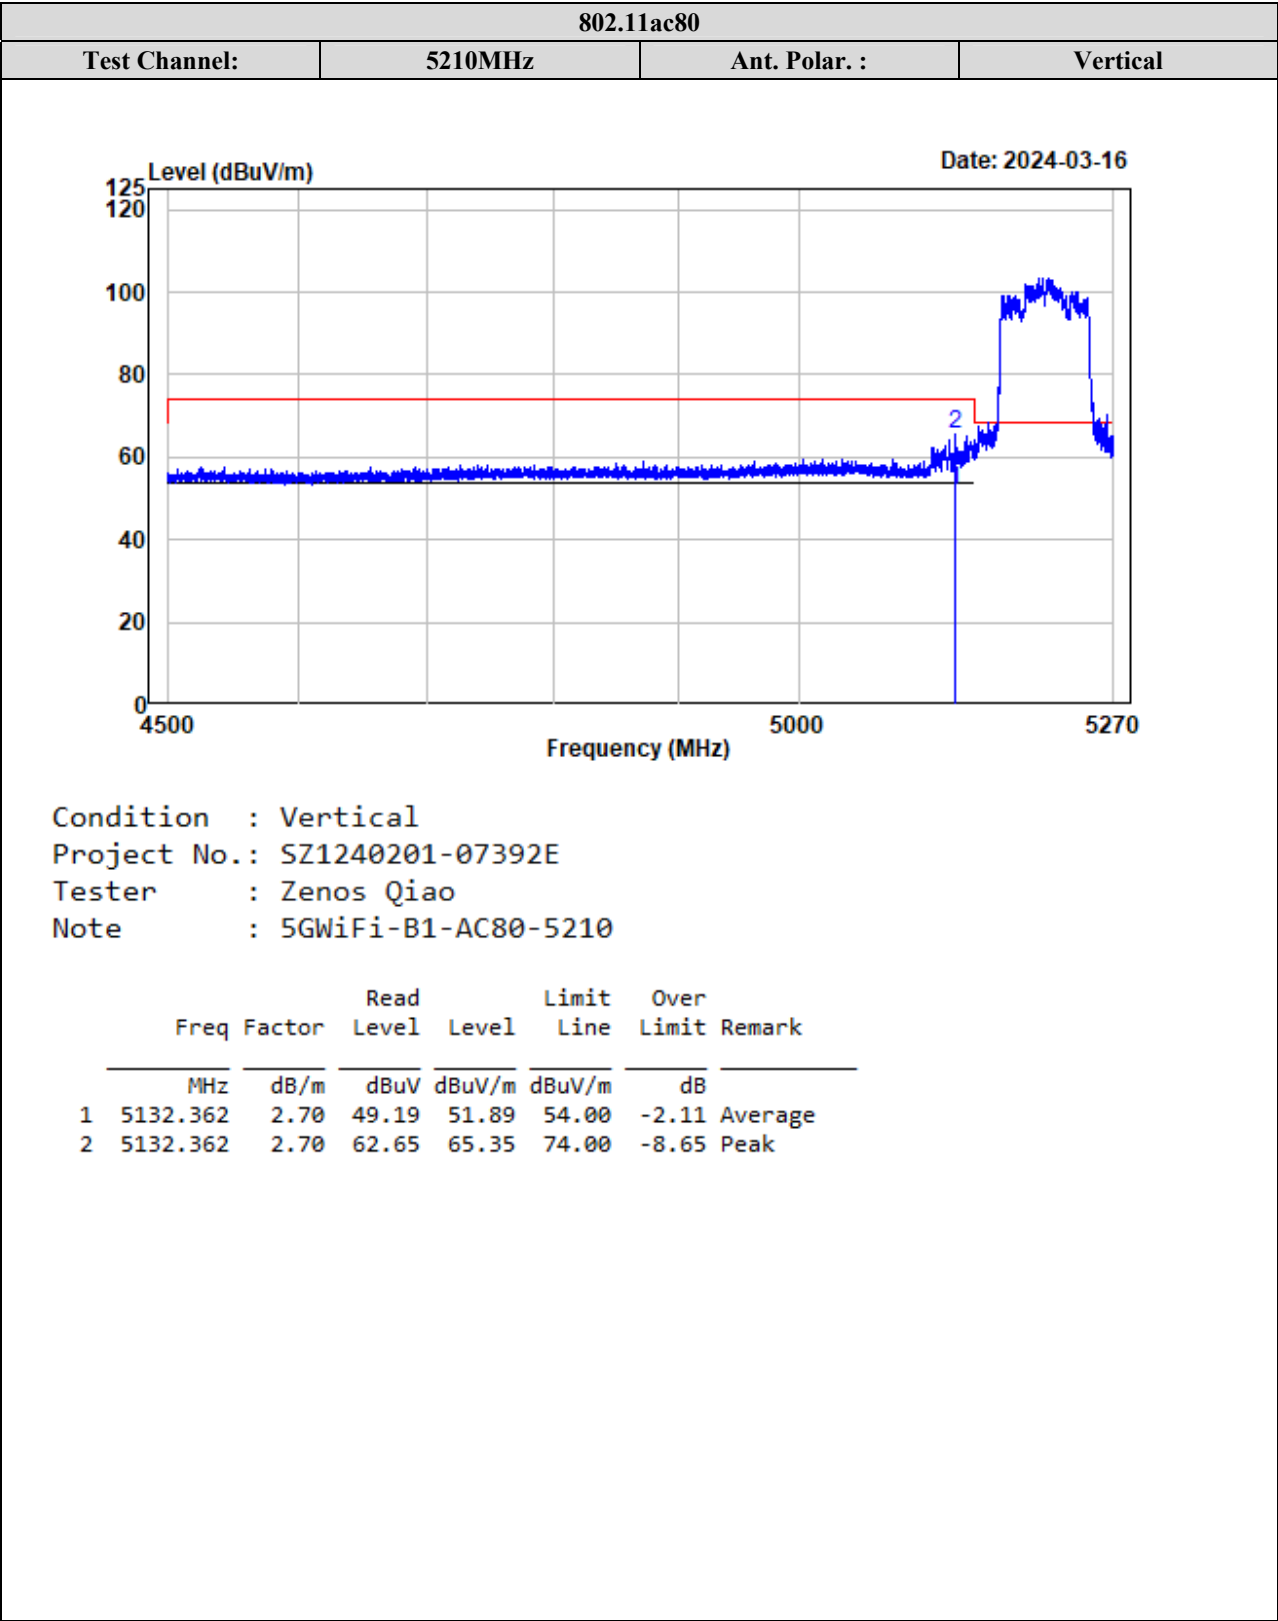


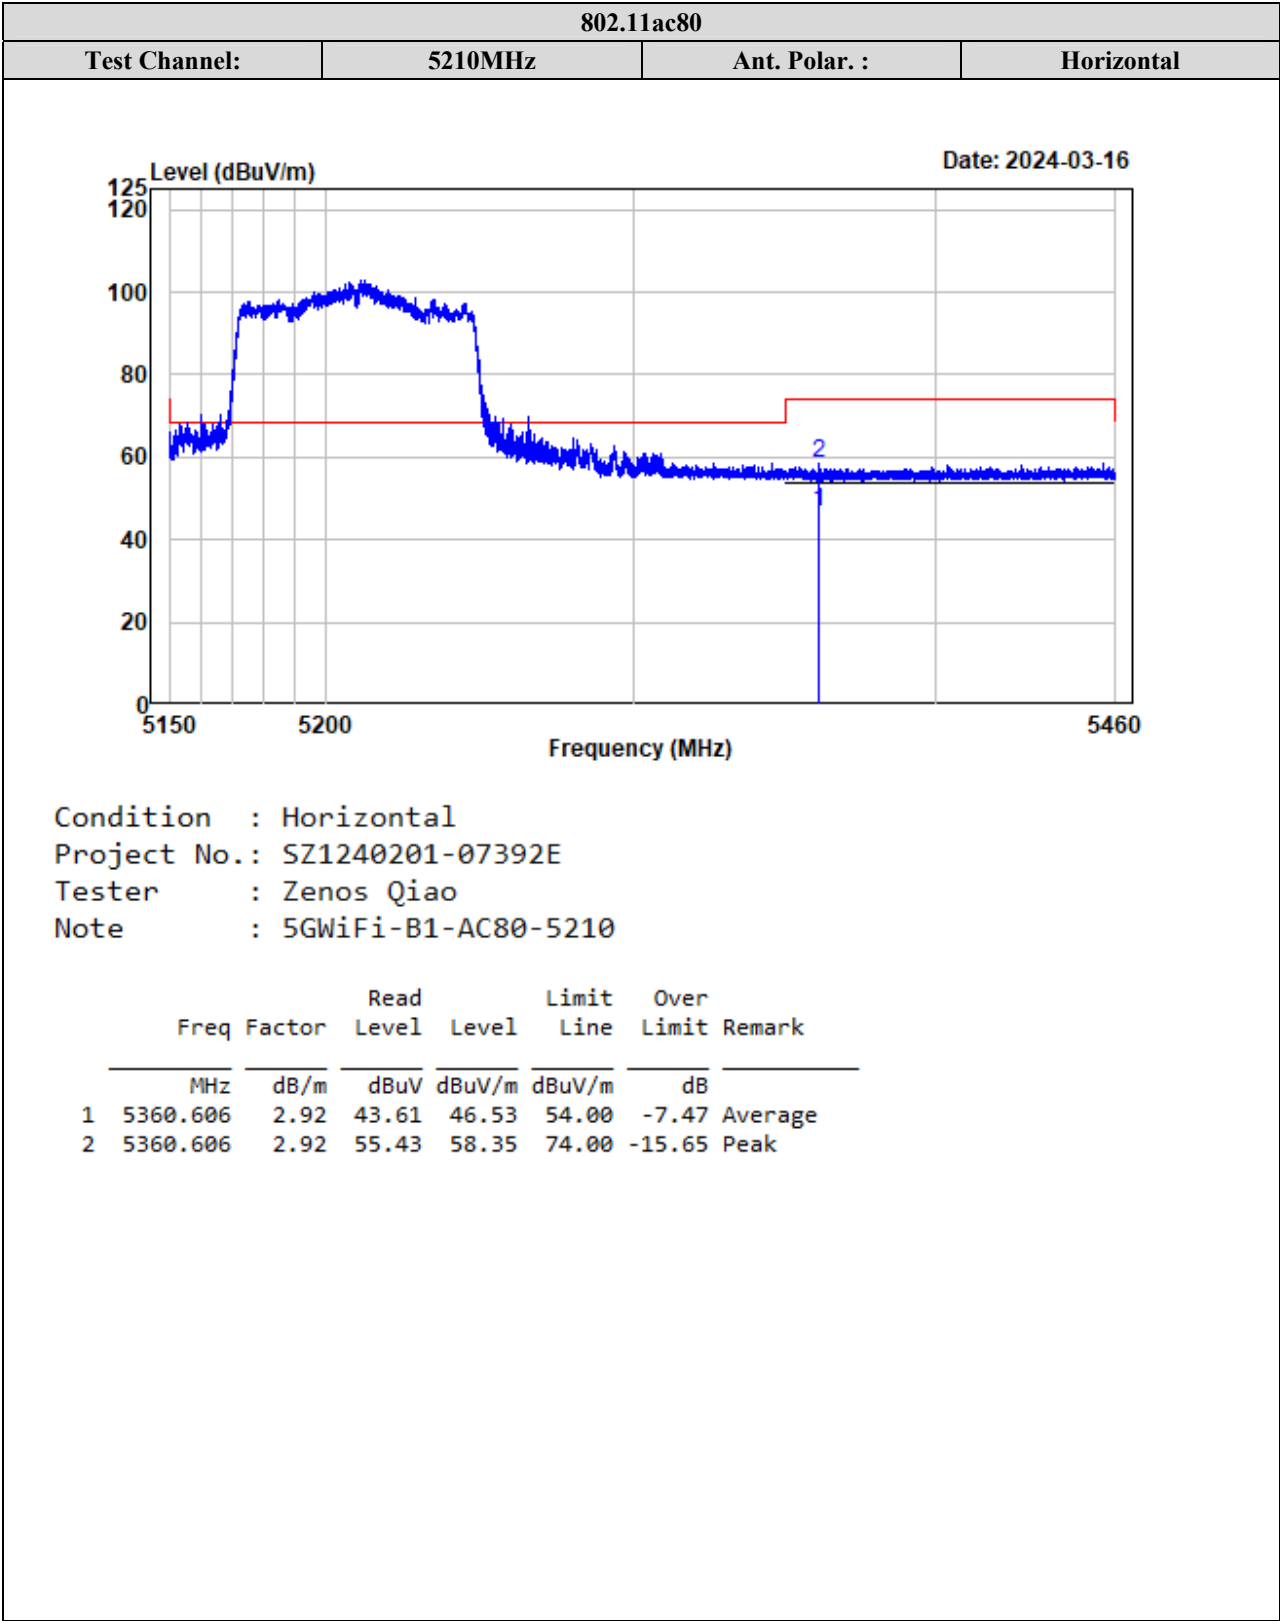


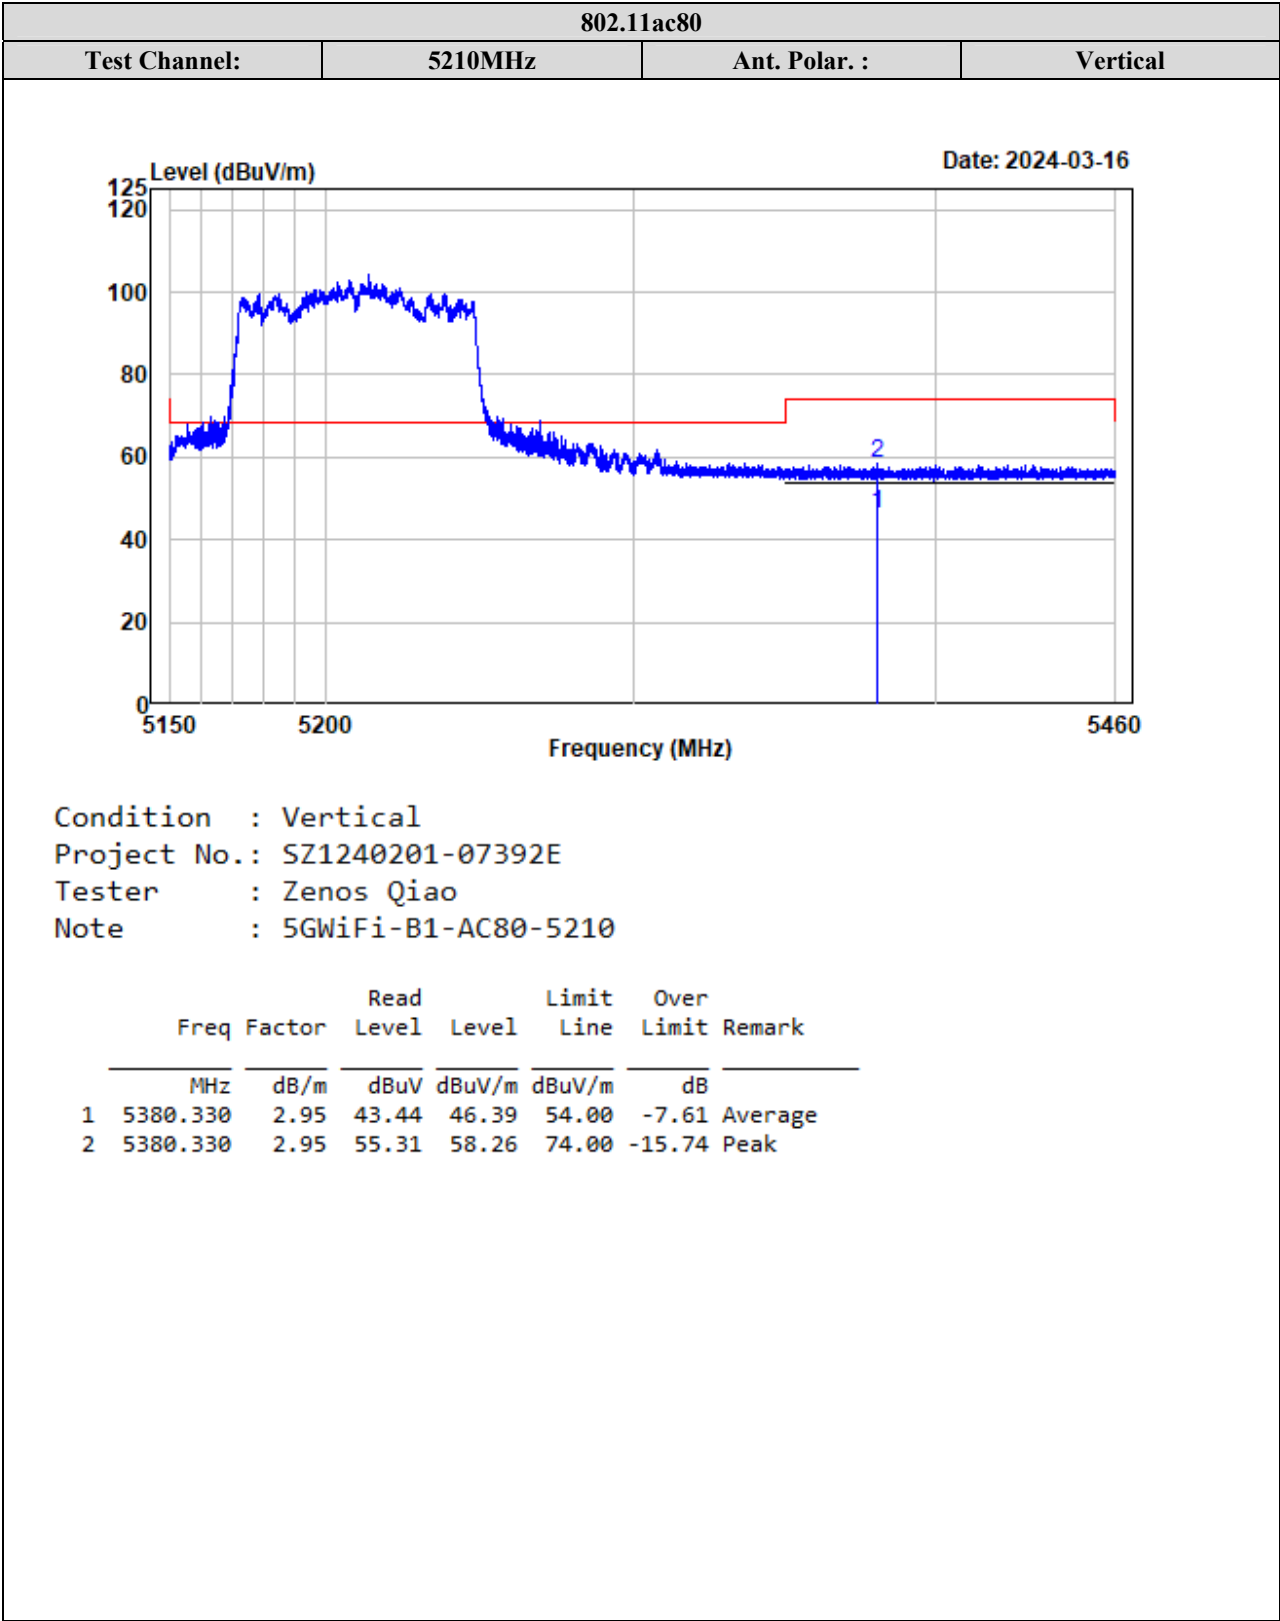


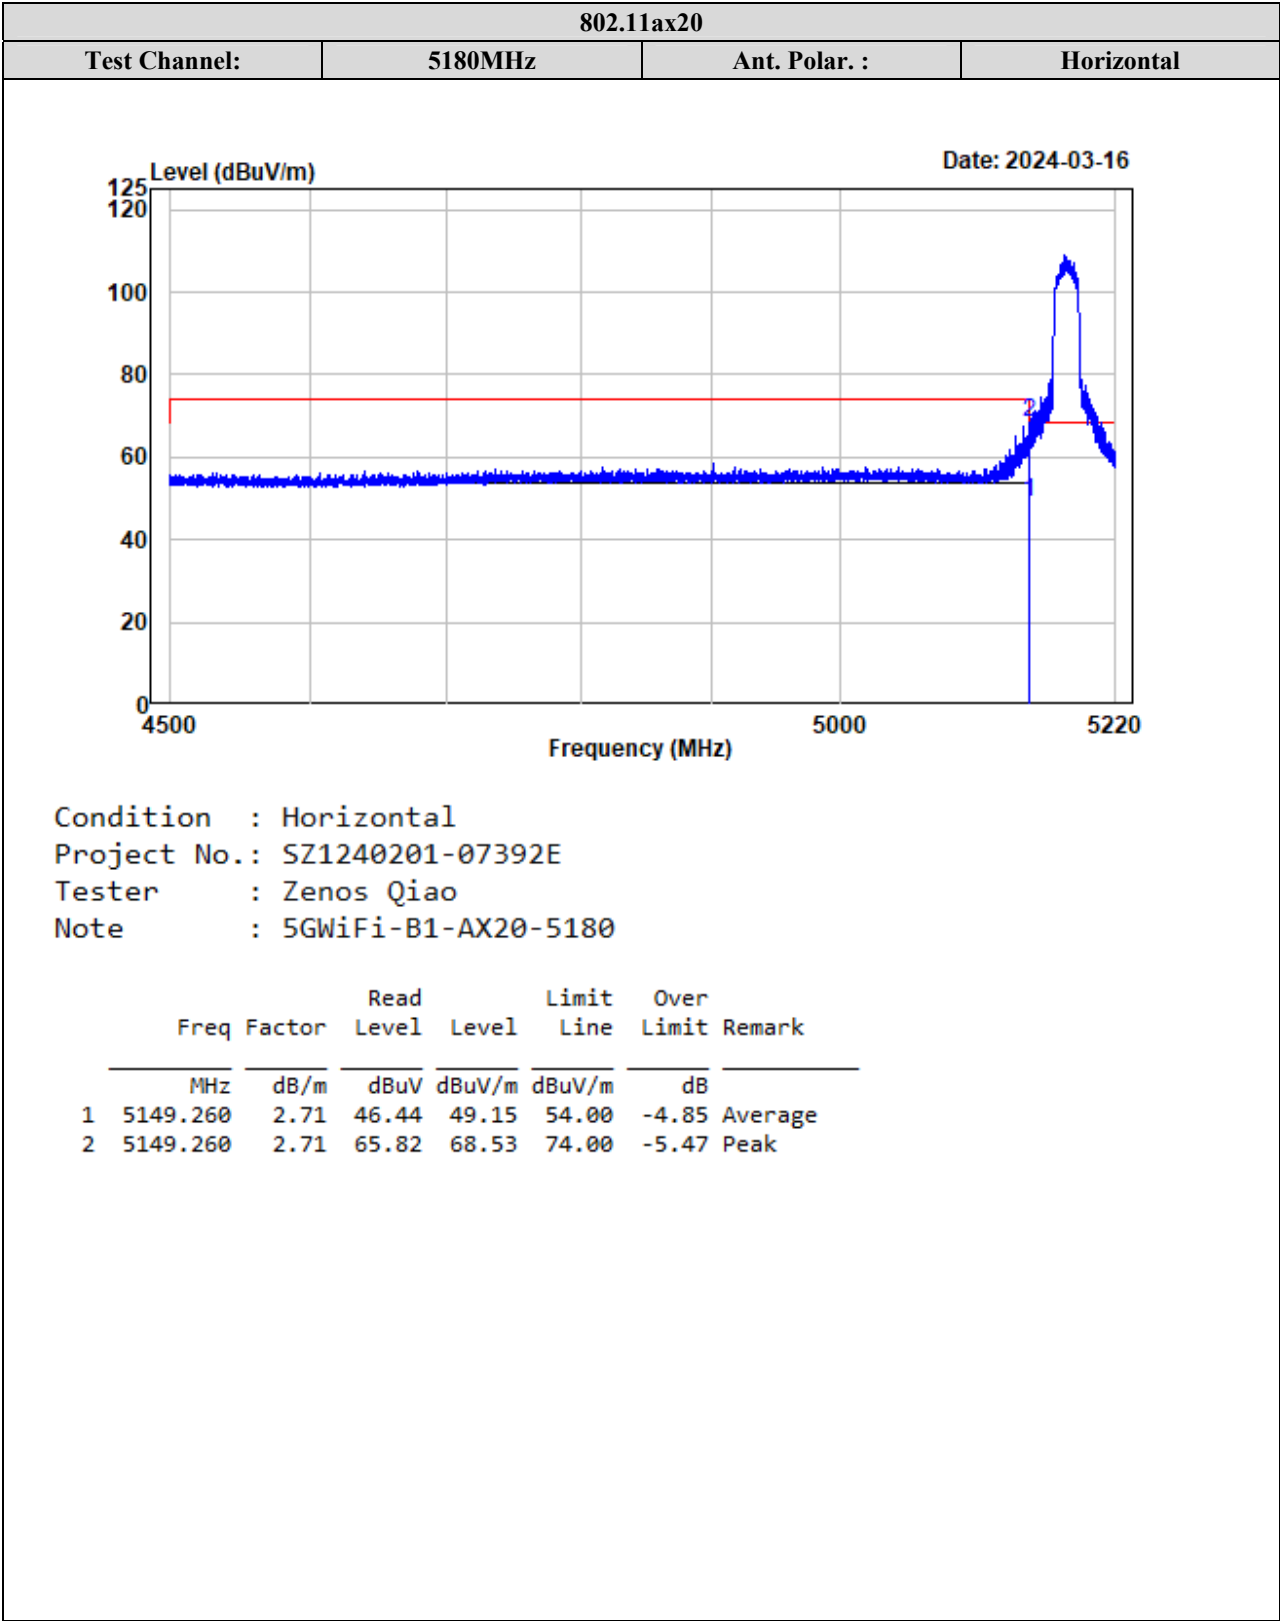


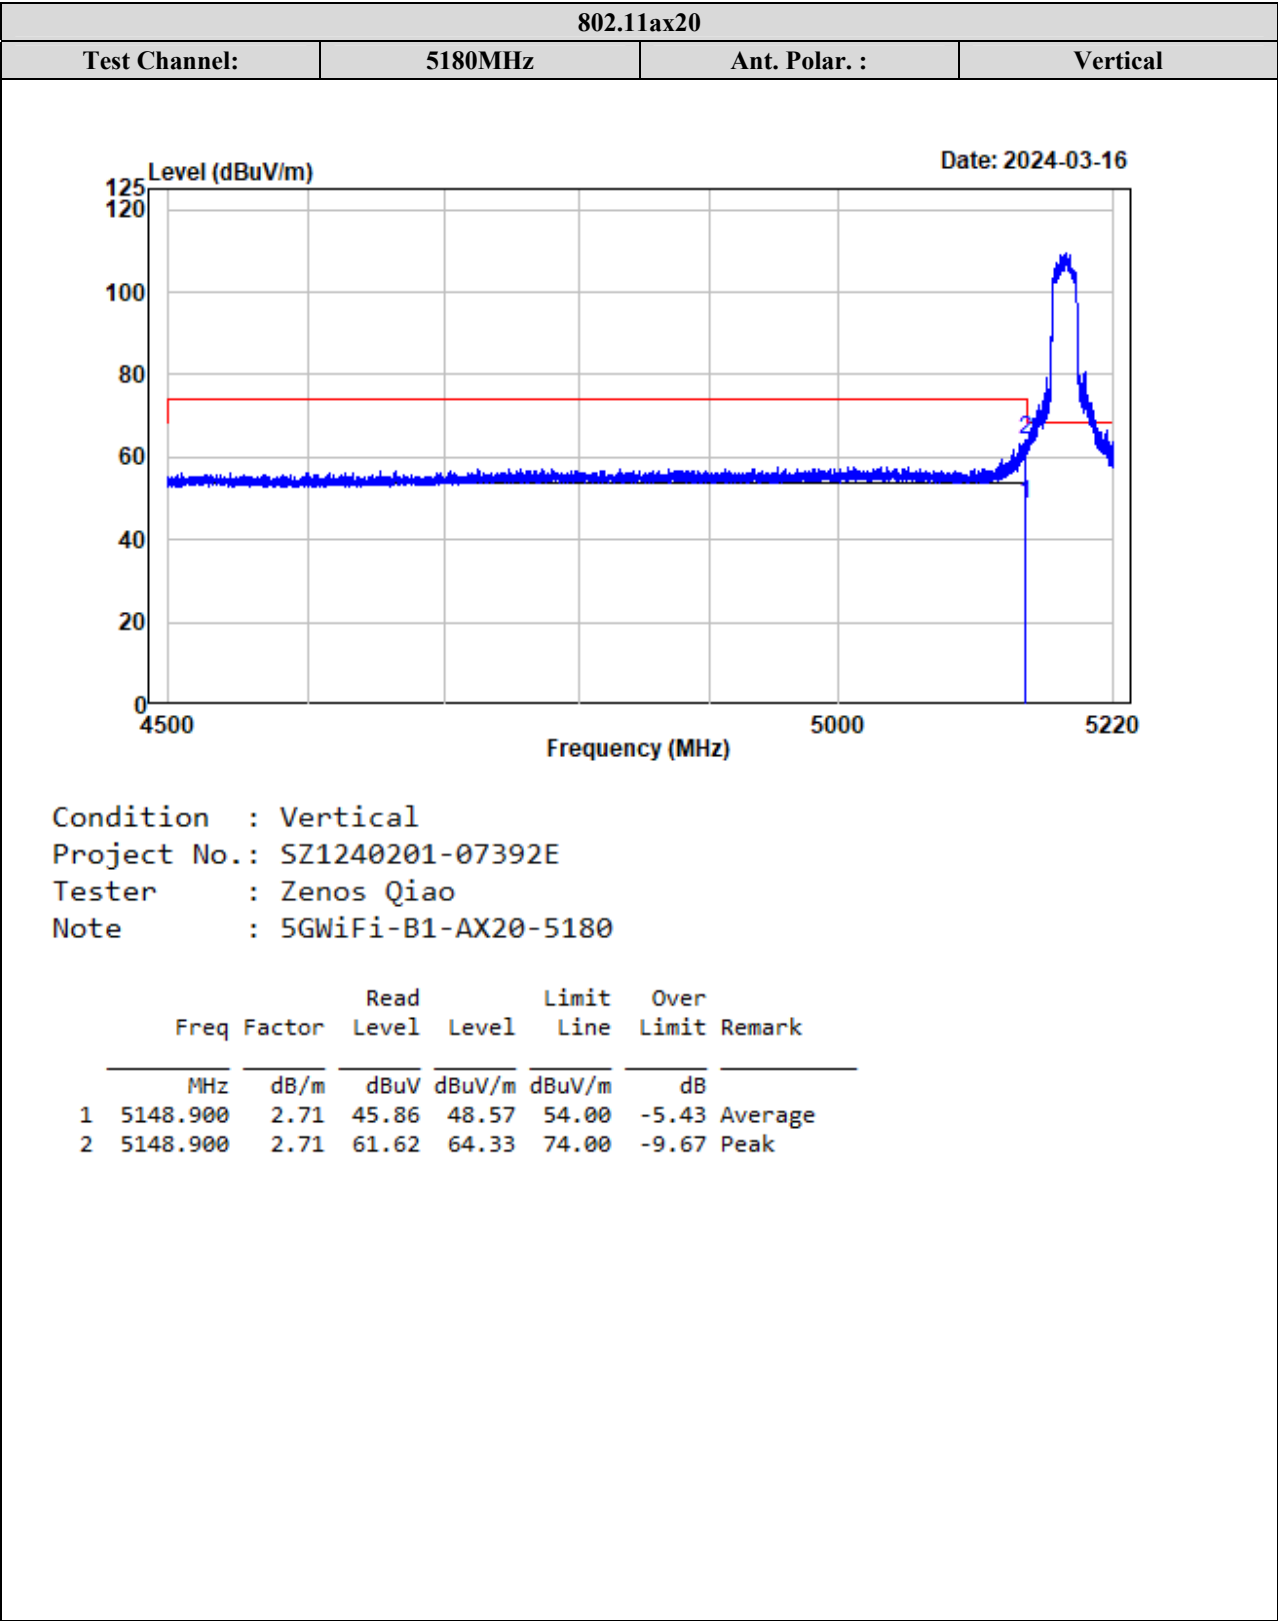


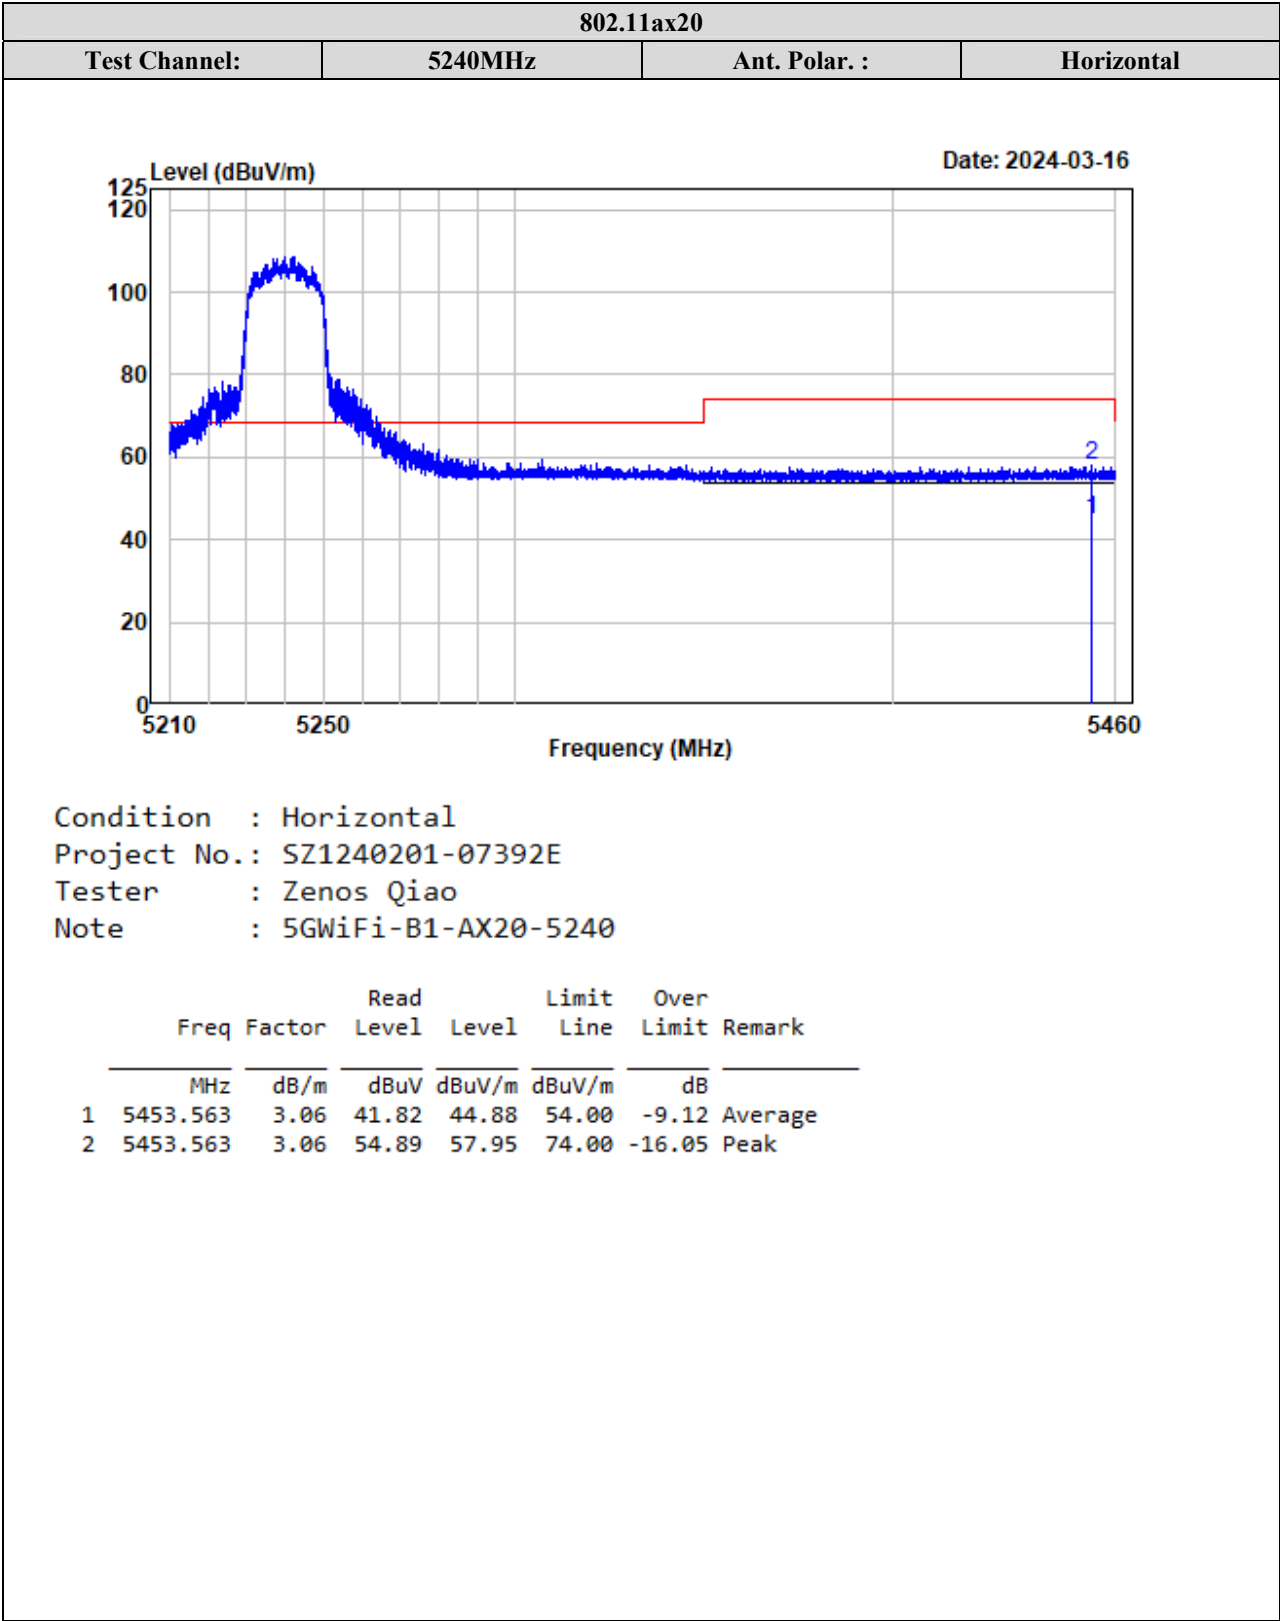


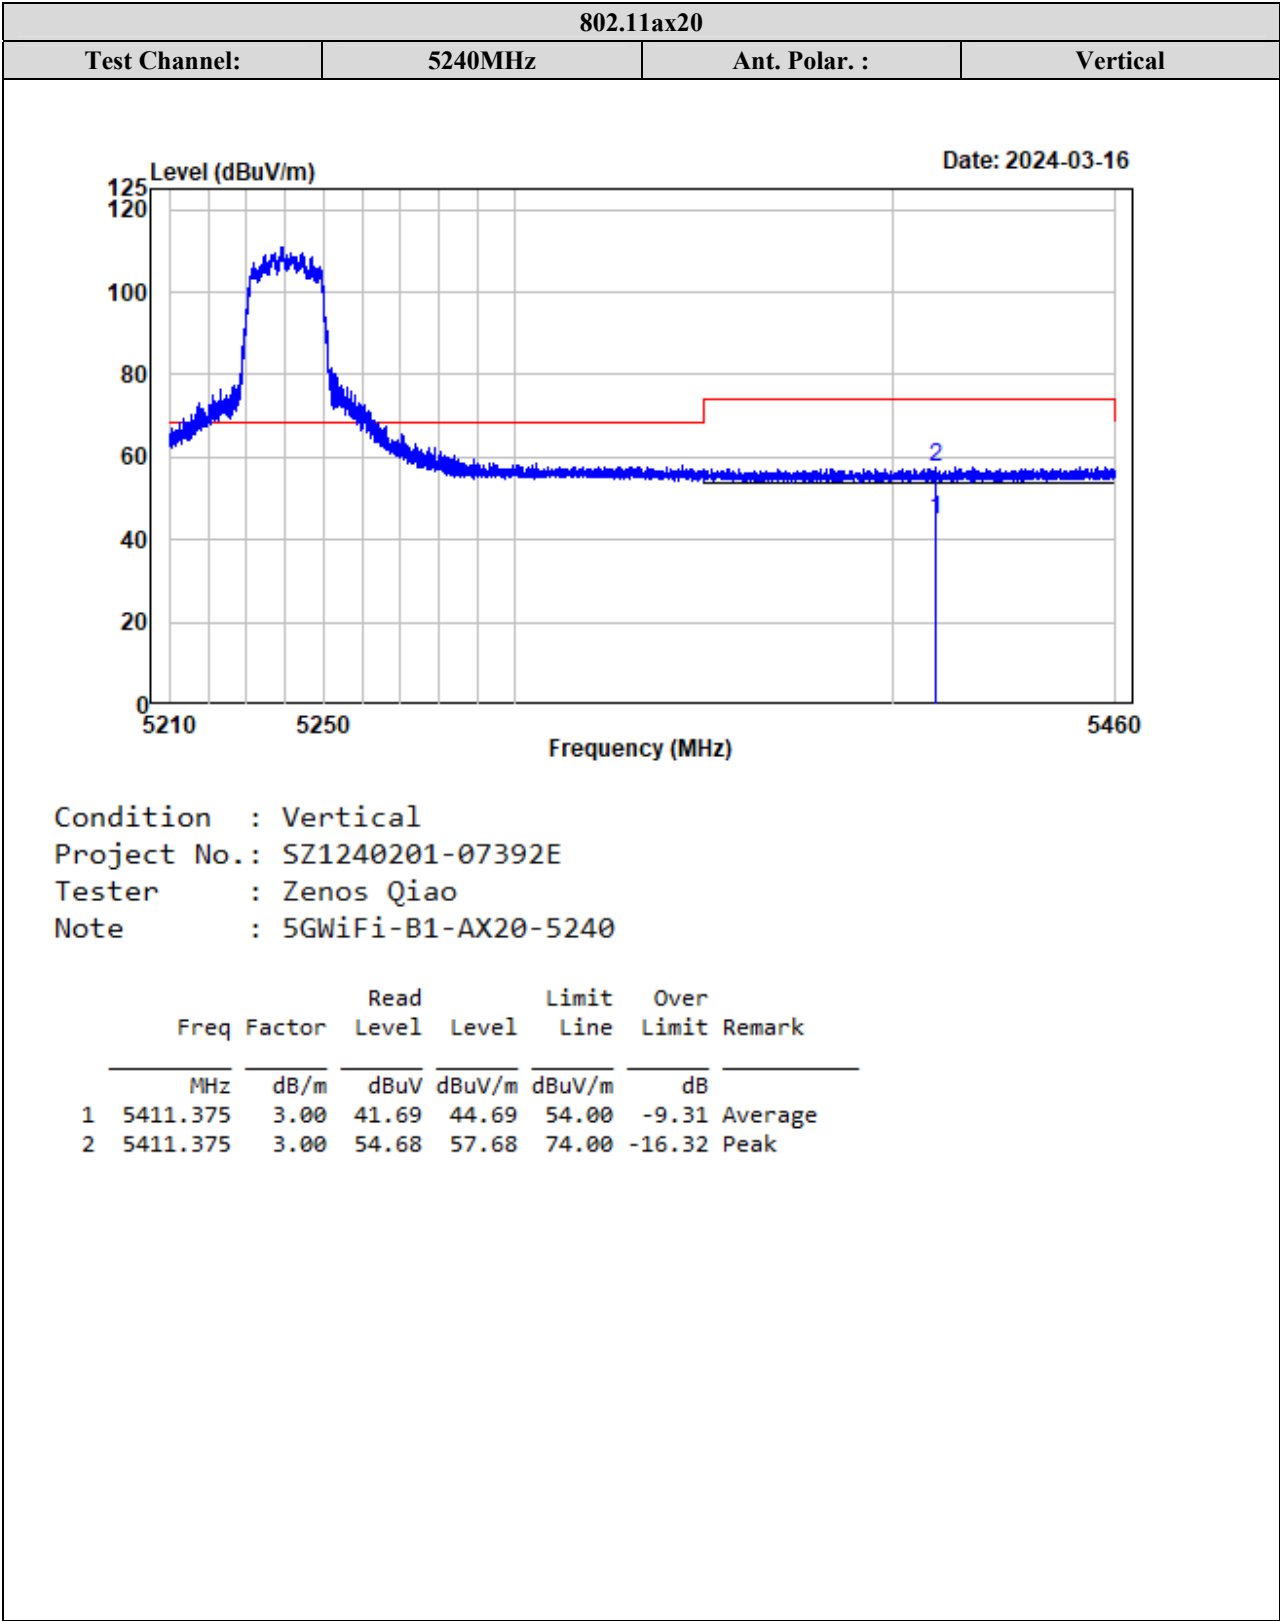


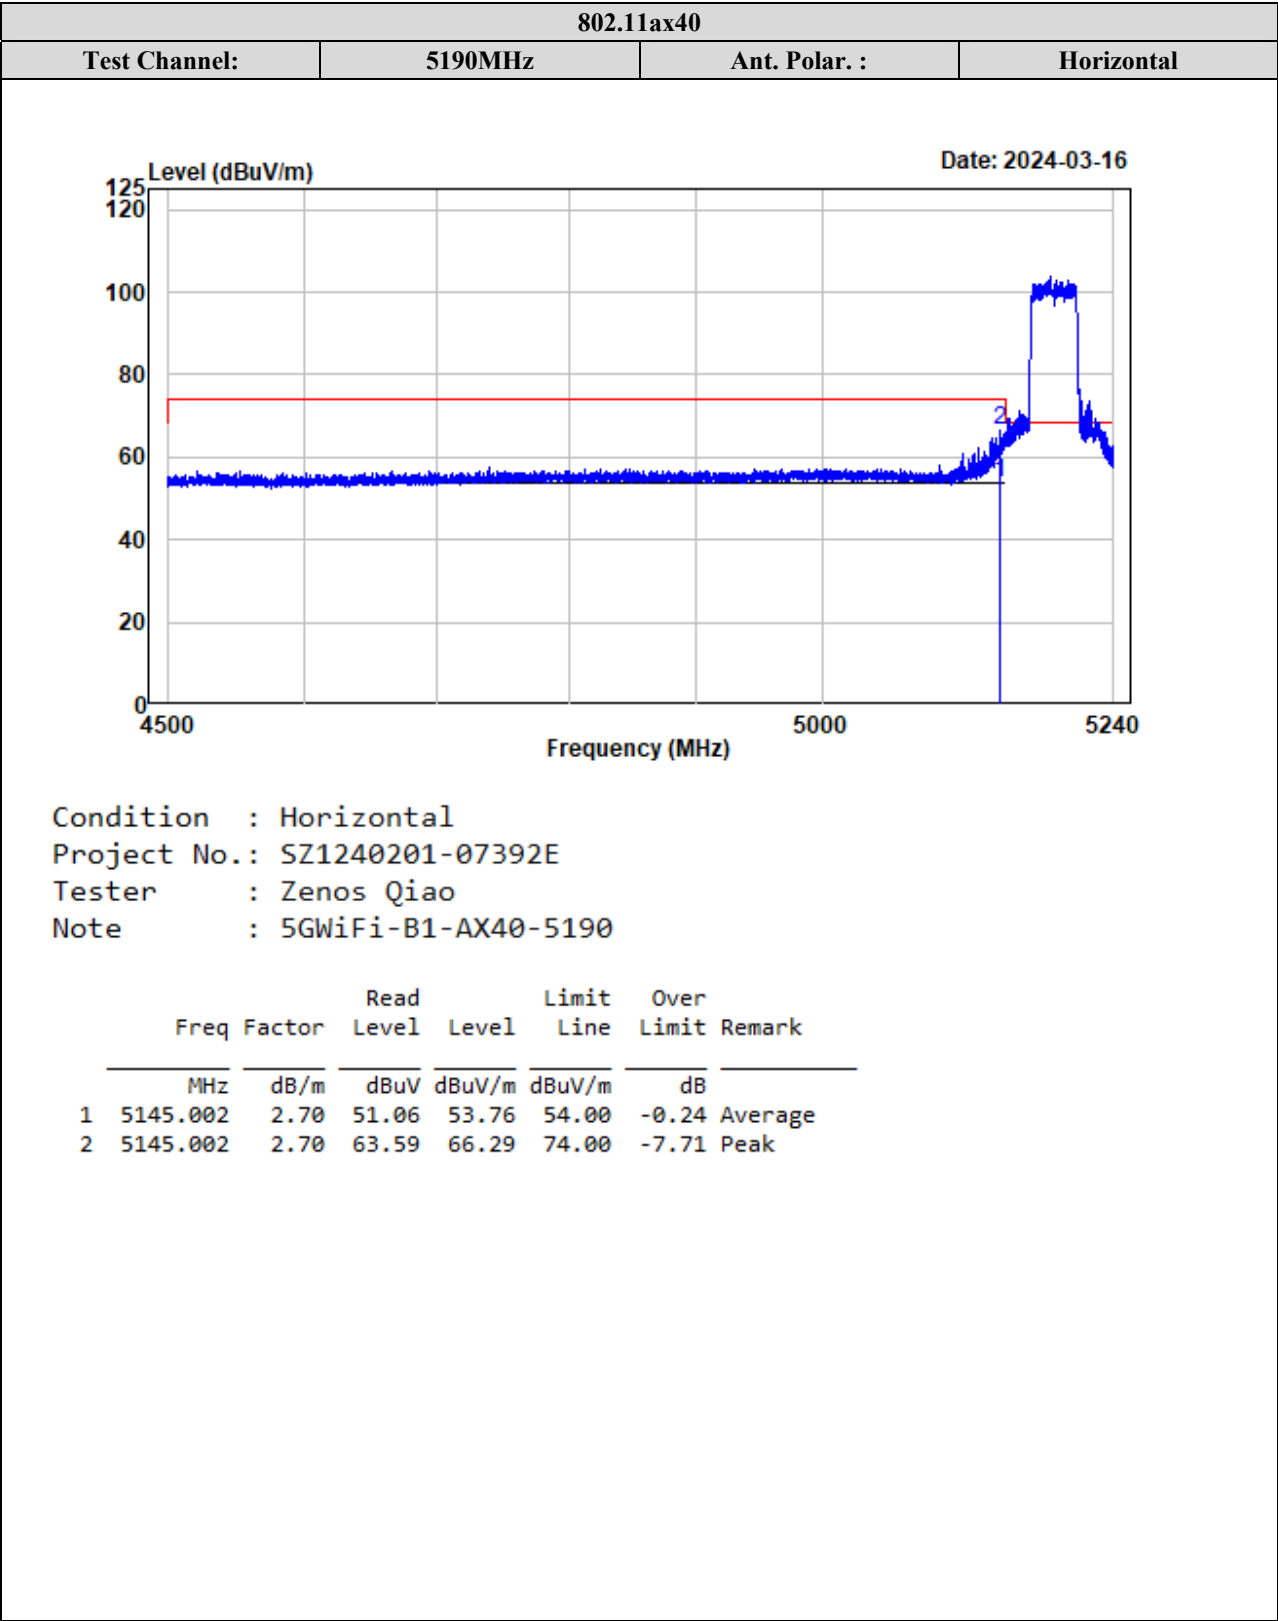


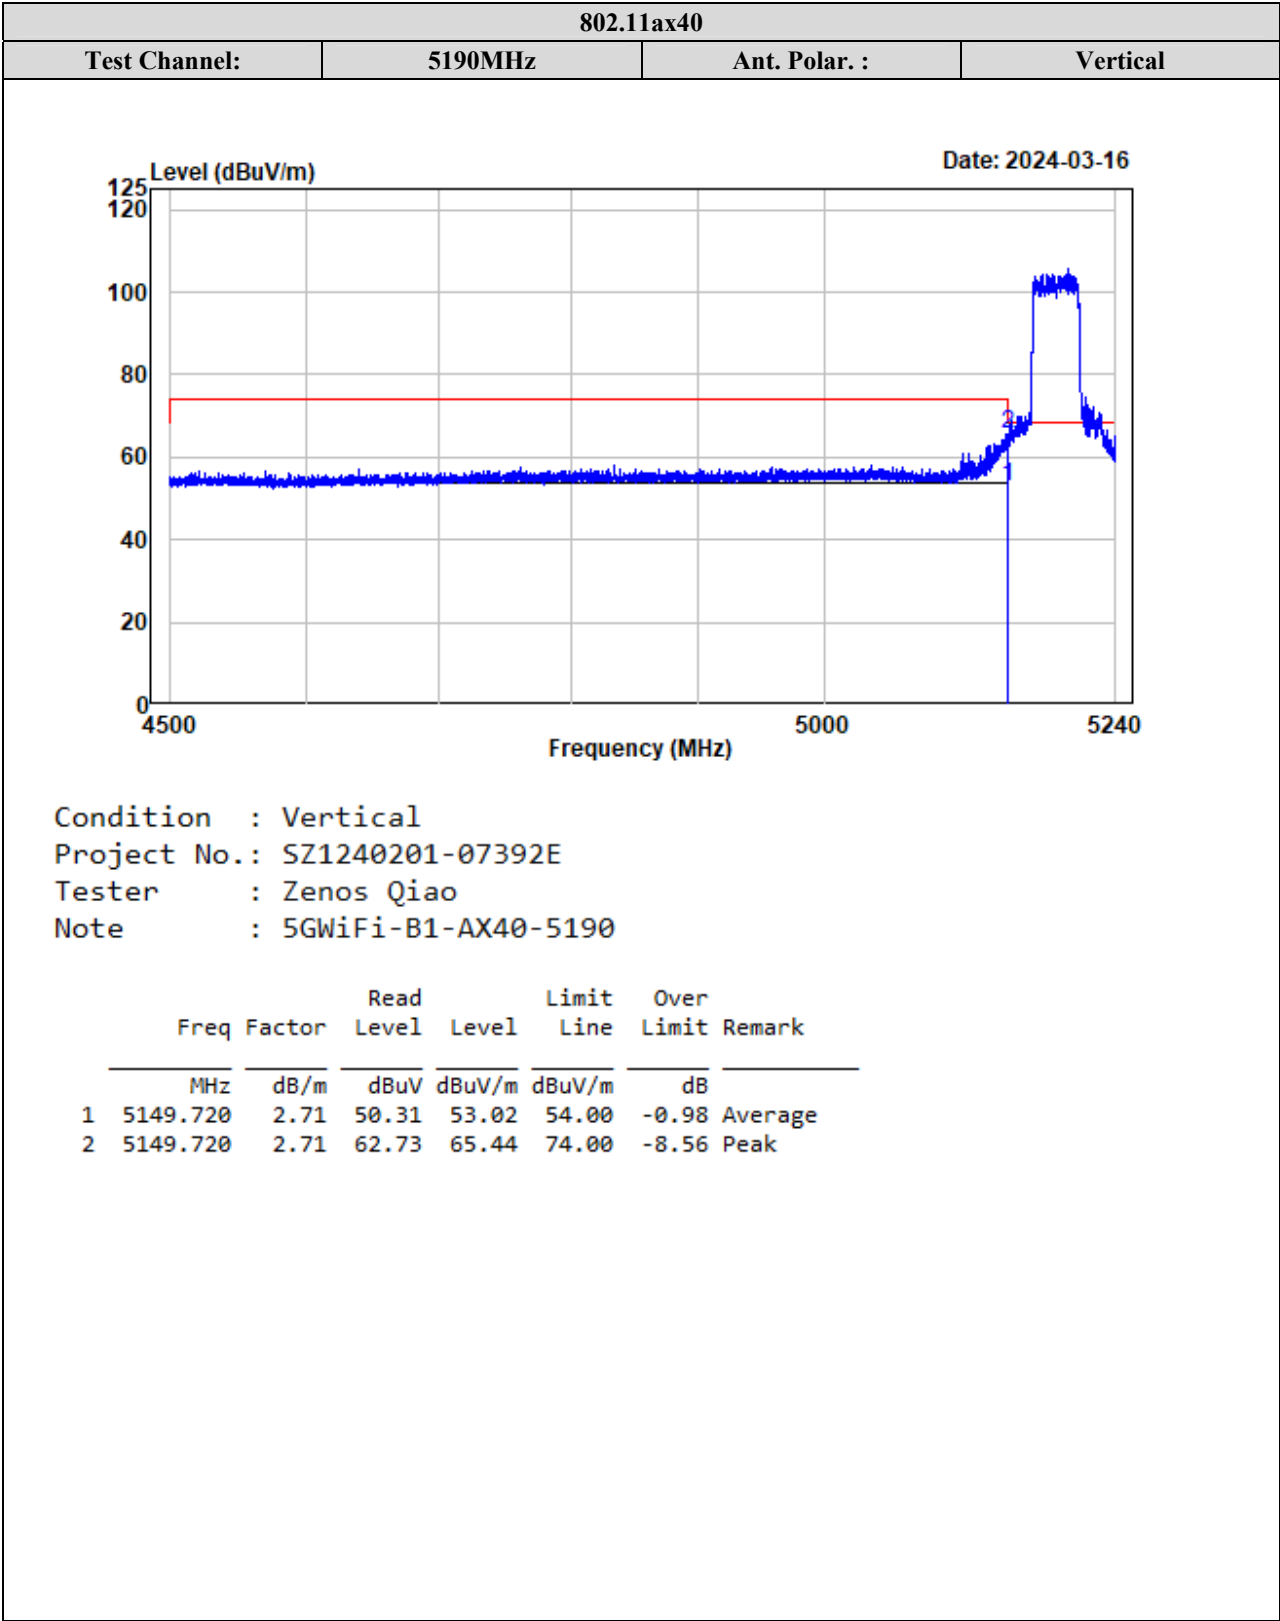


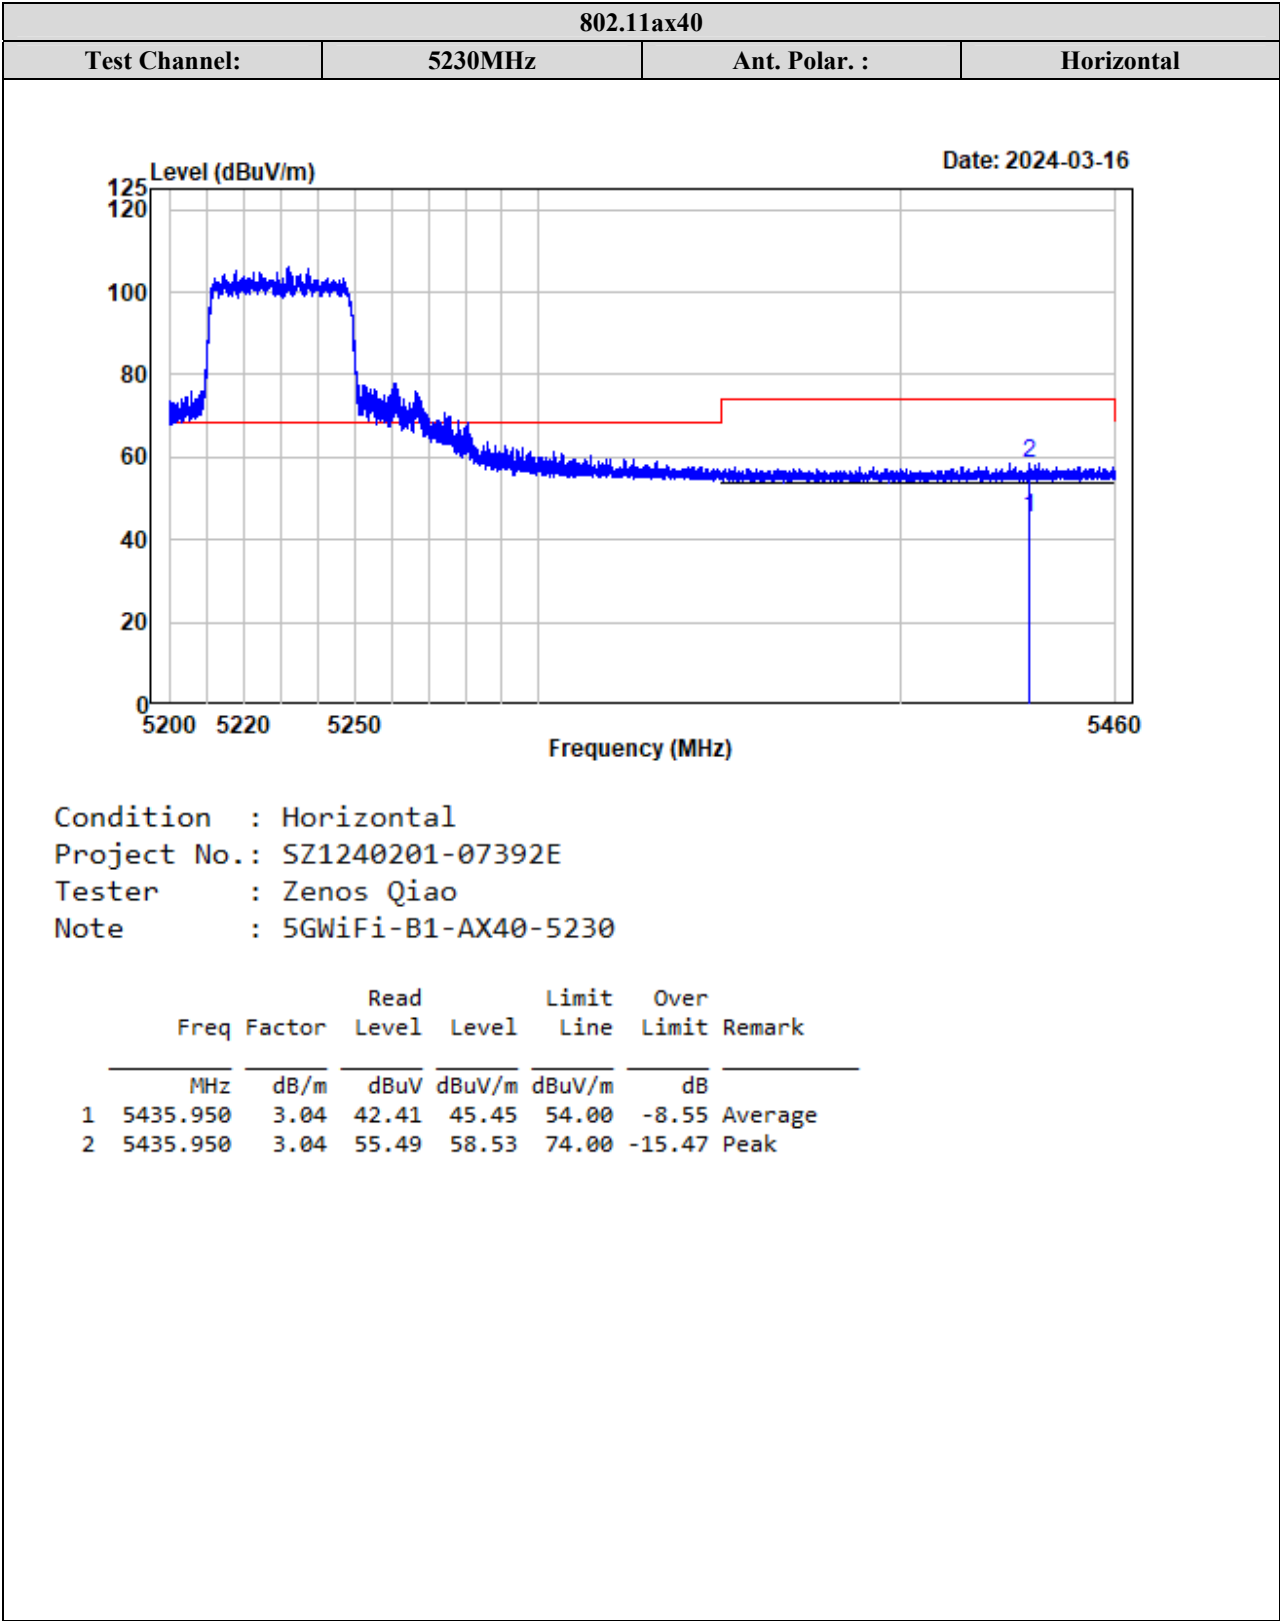


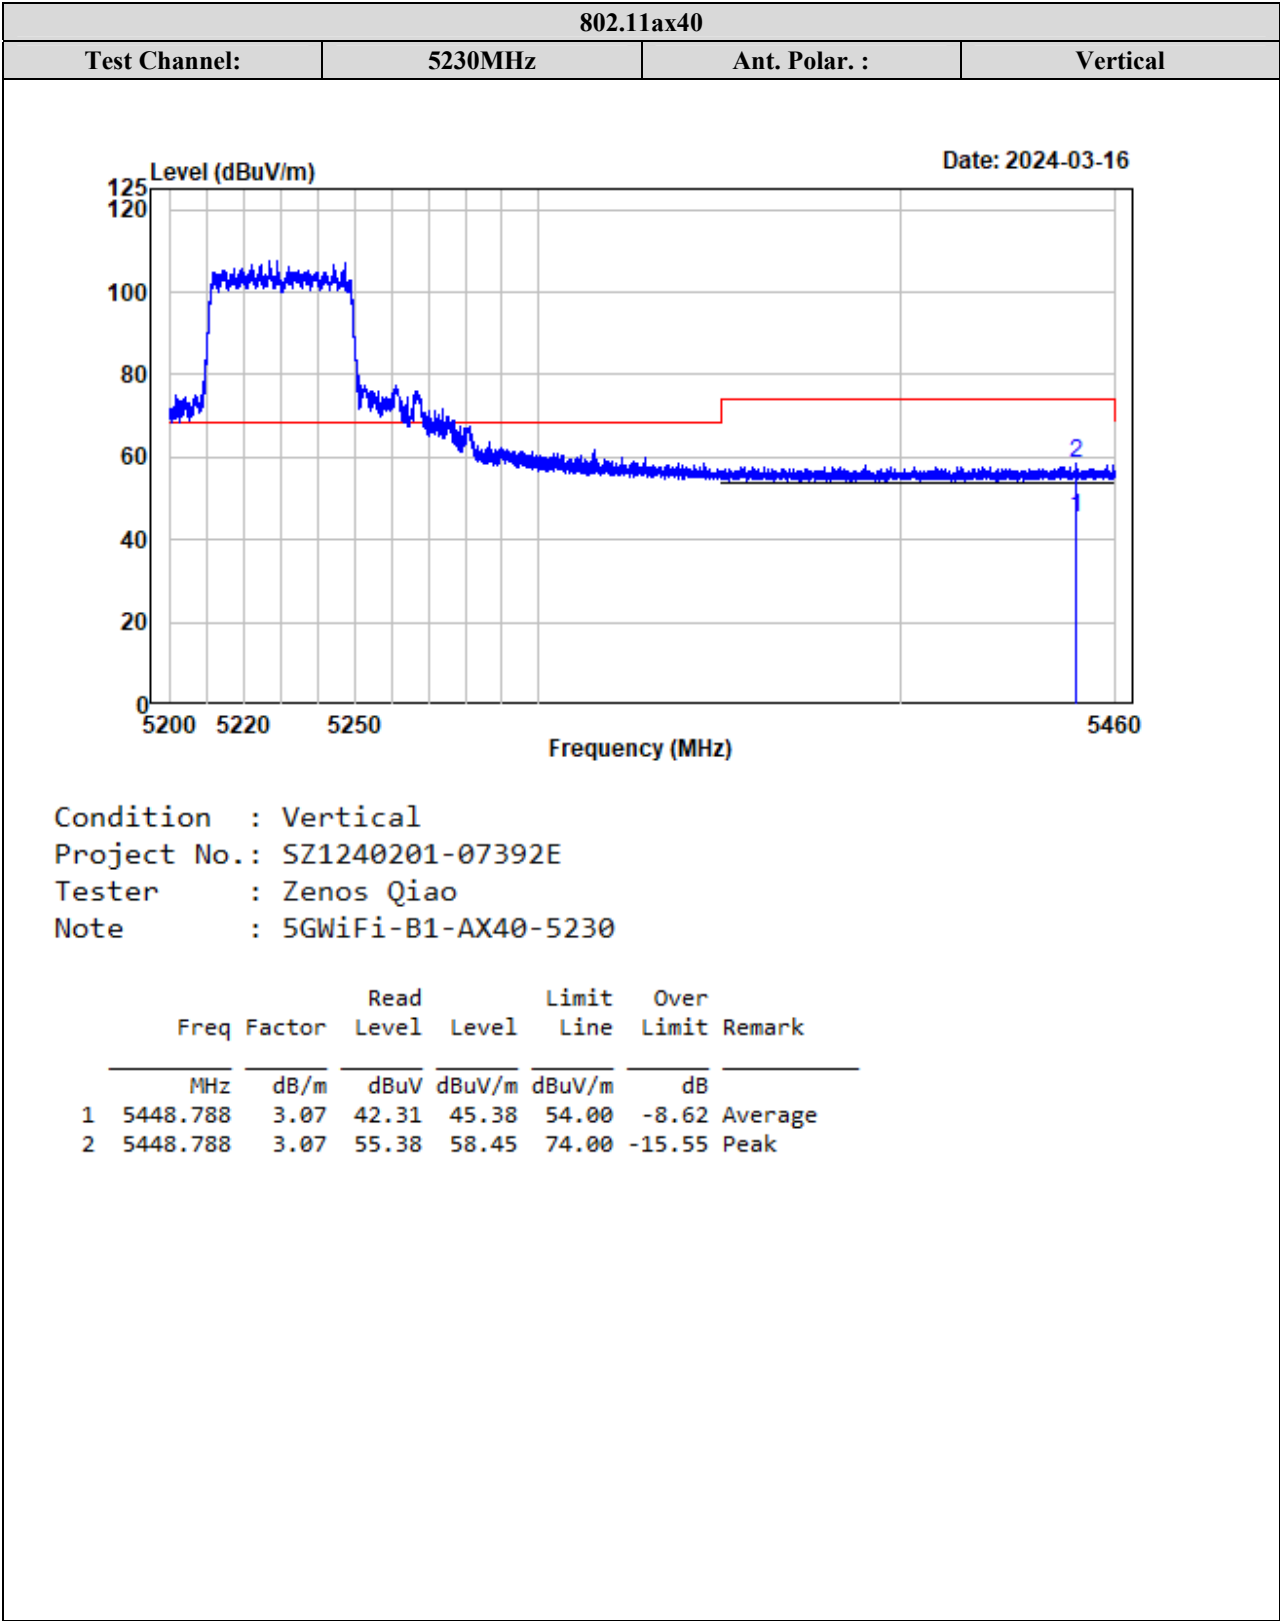

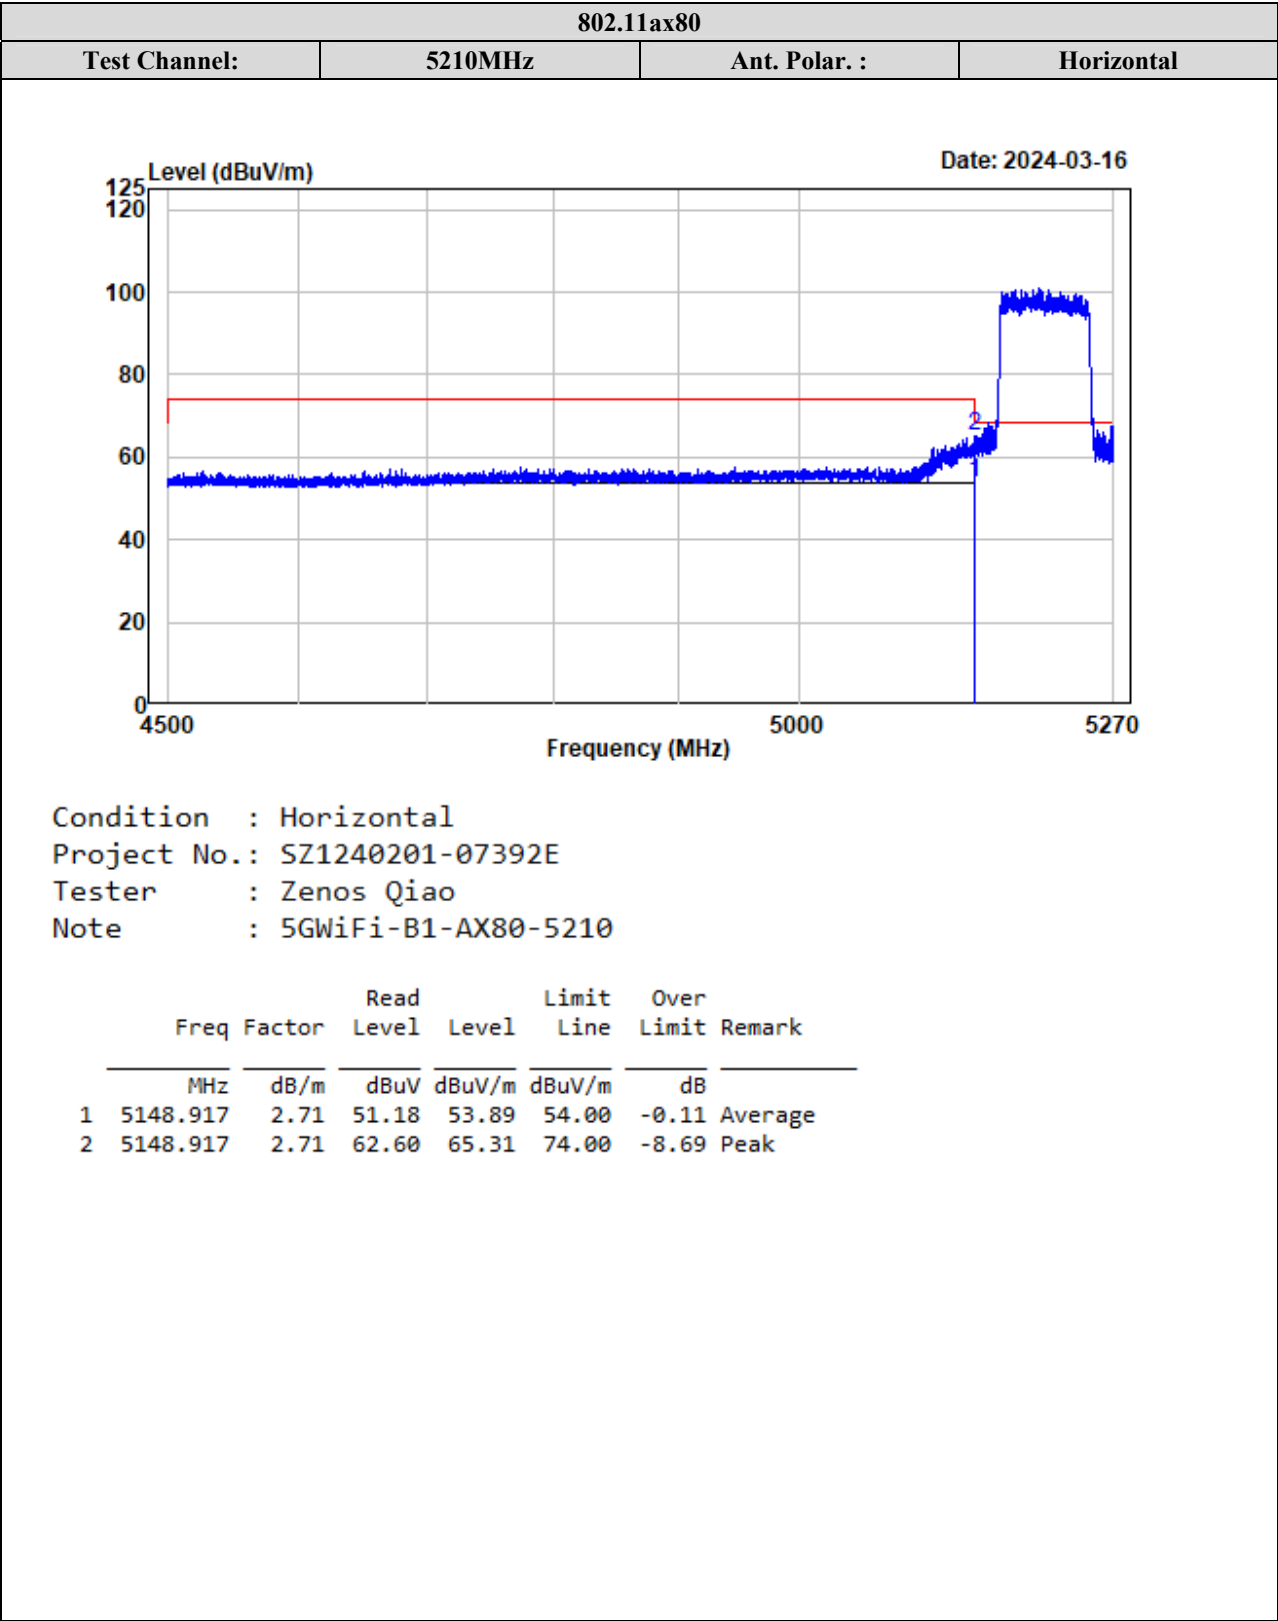


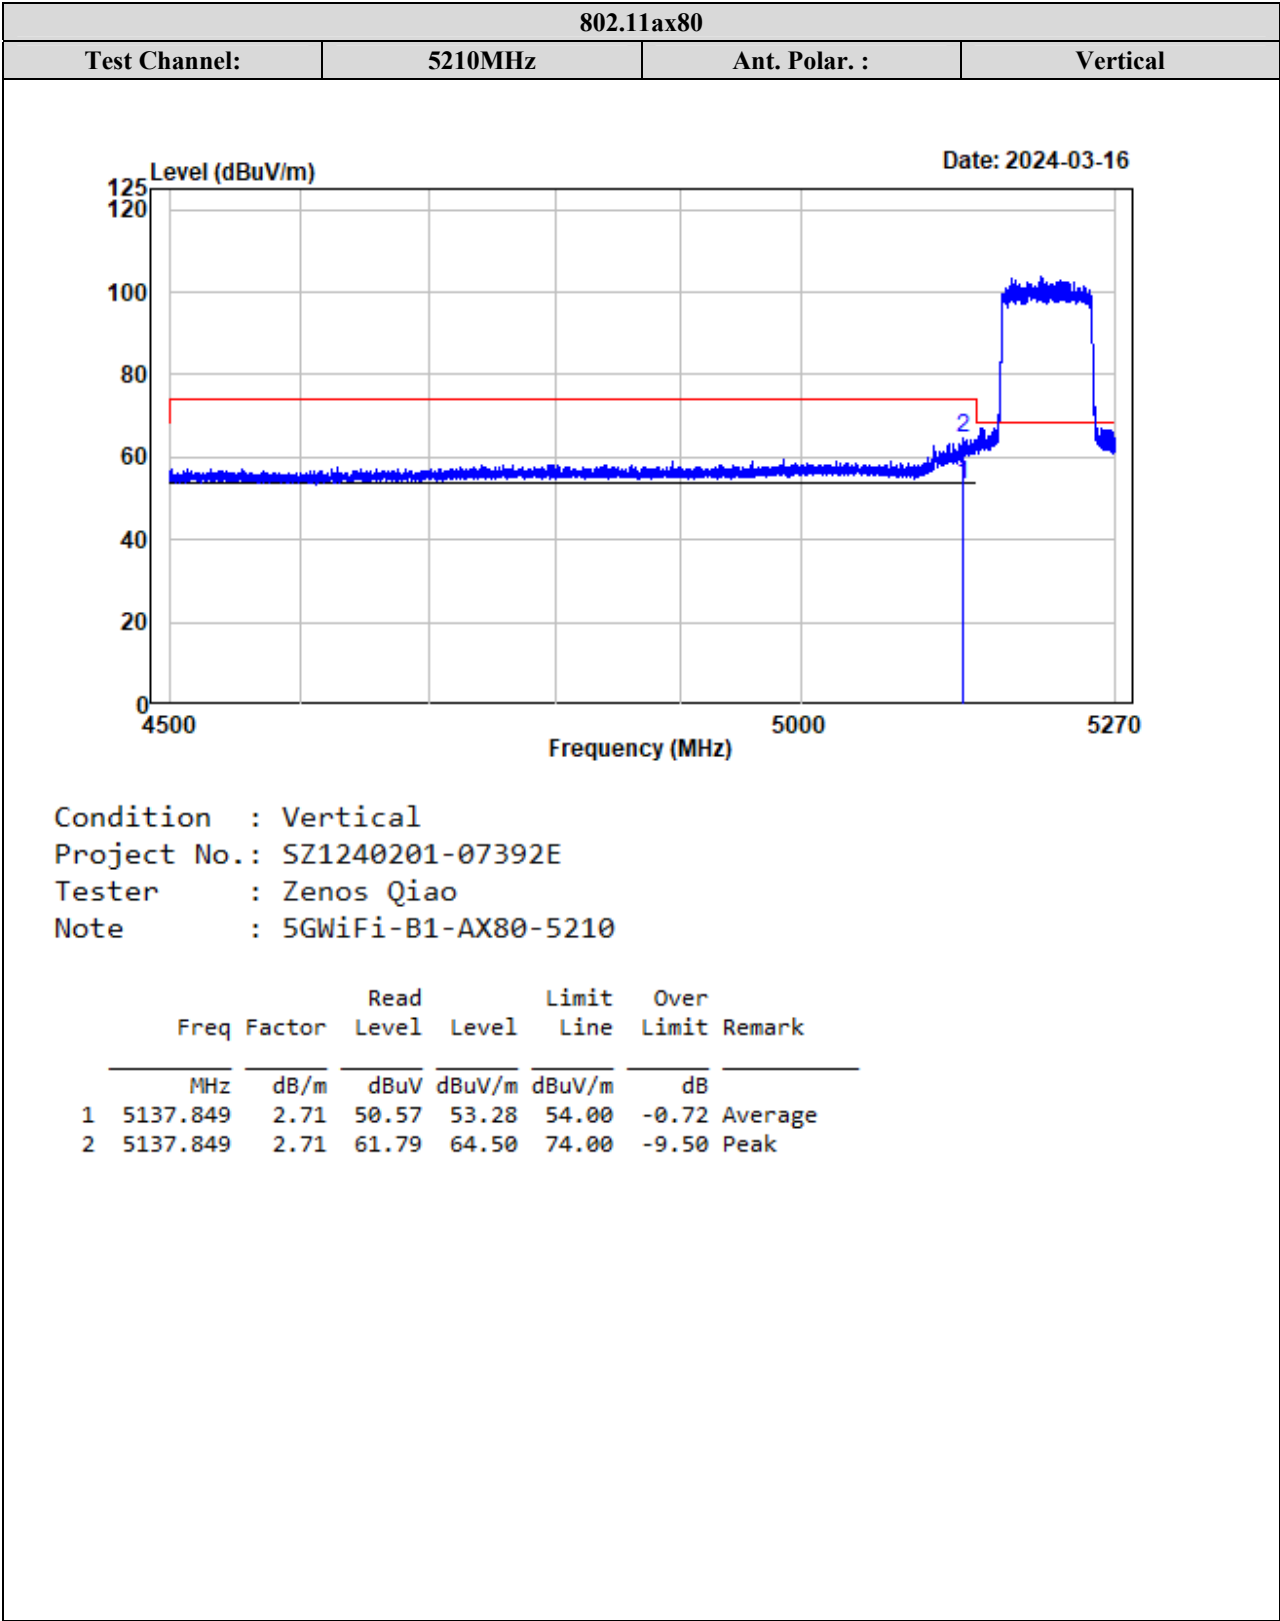


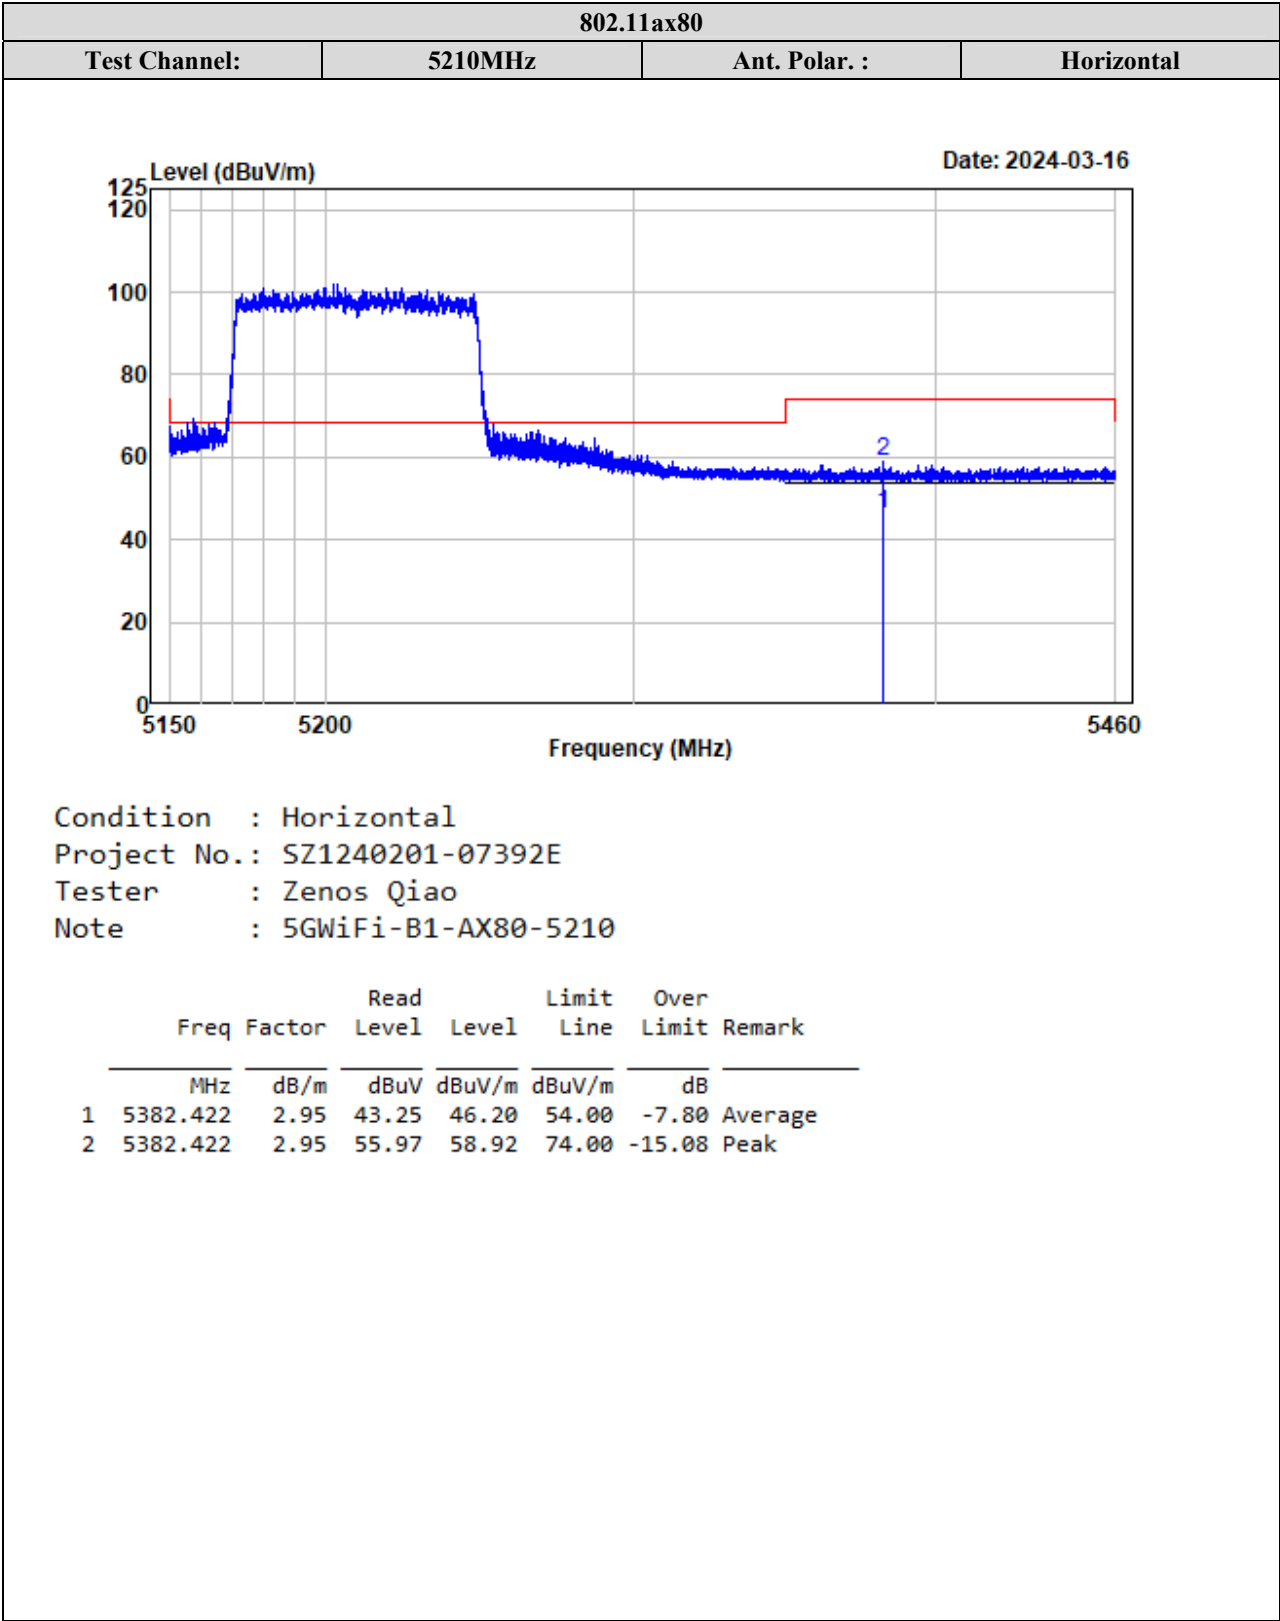


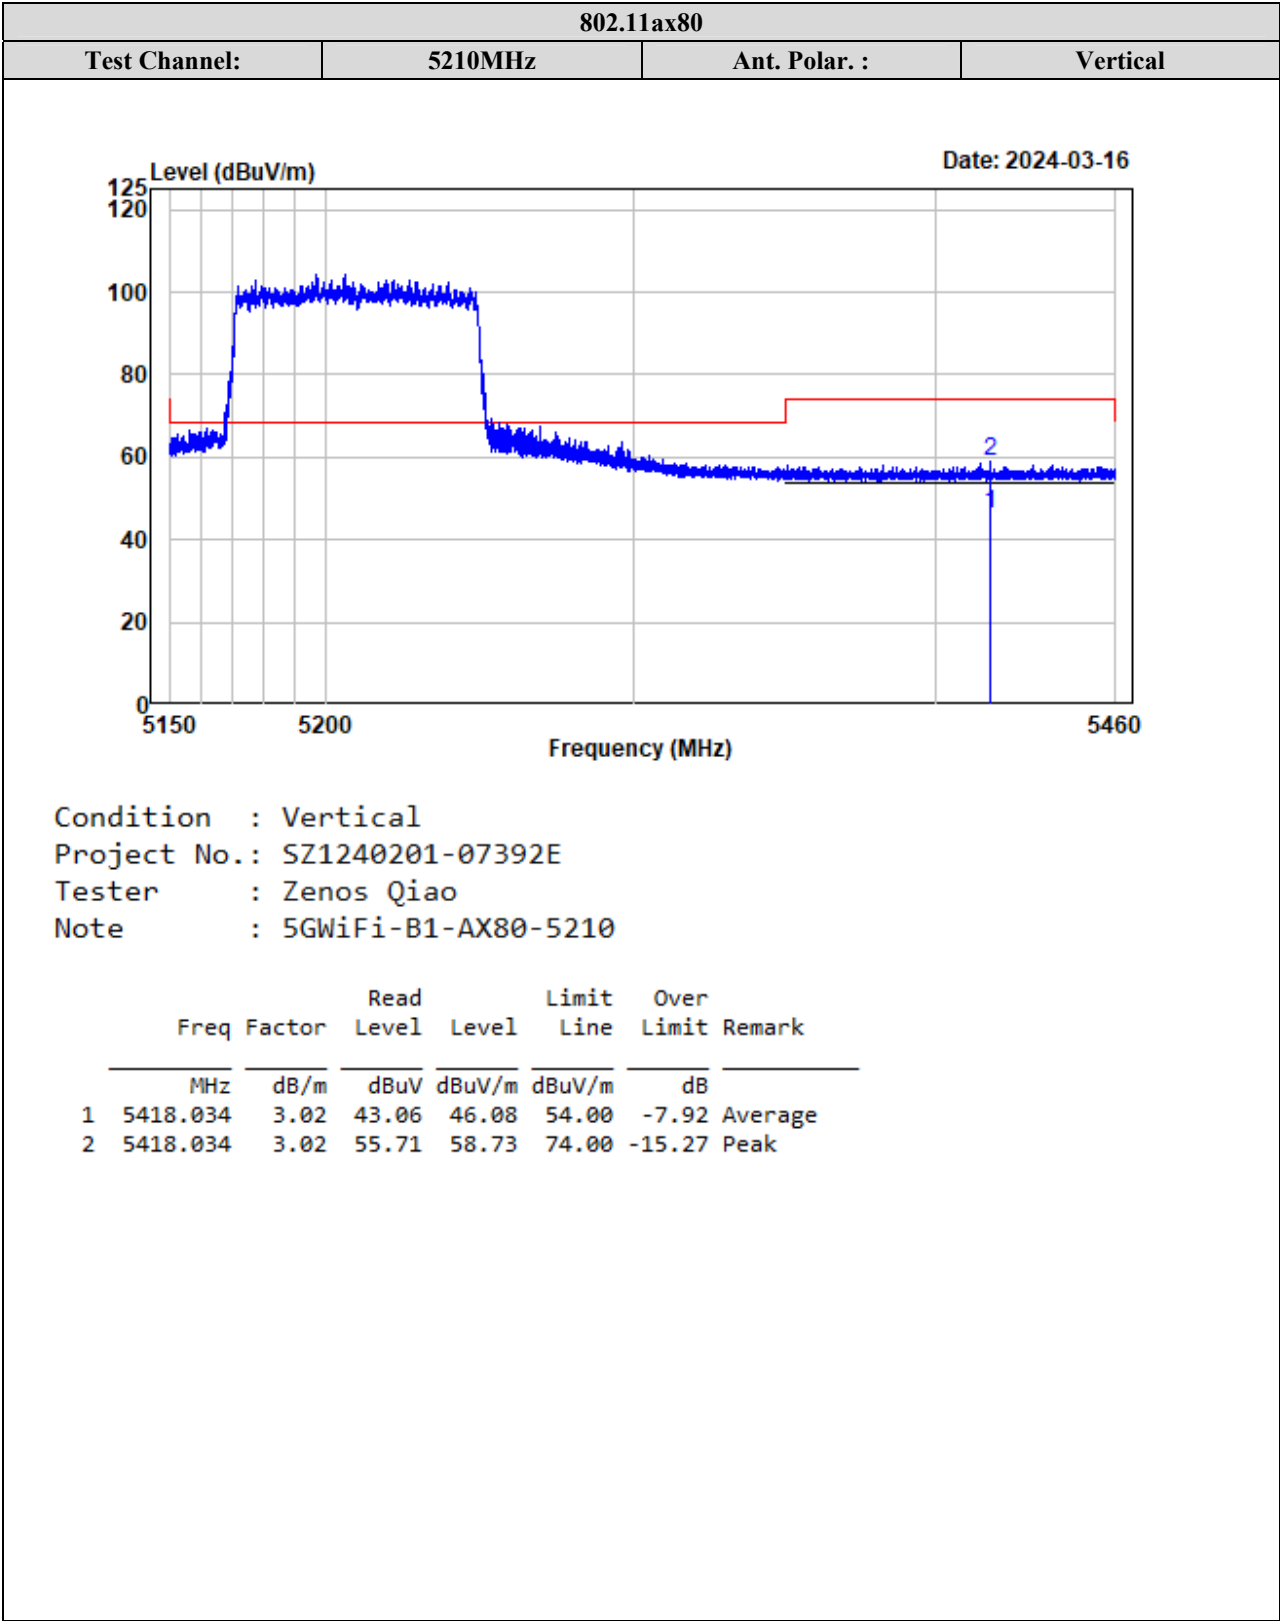


5250-5350MHz:

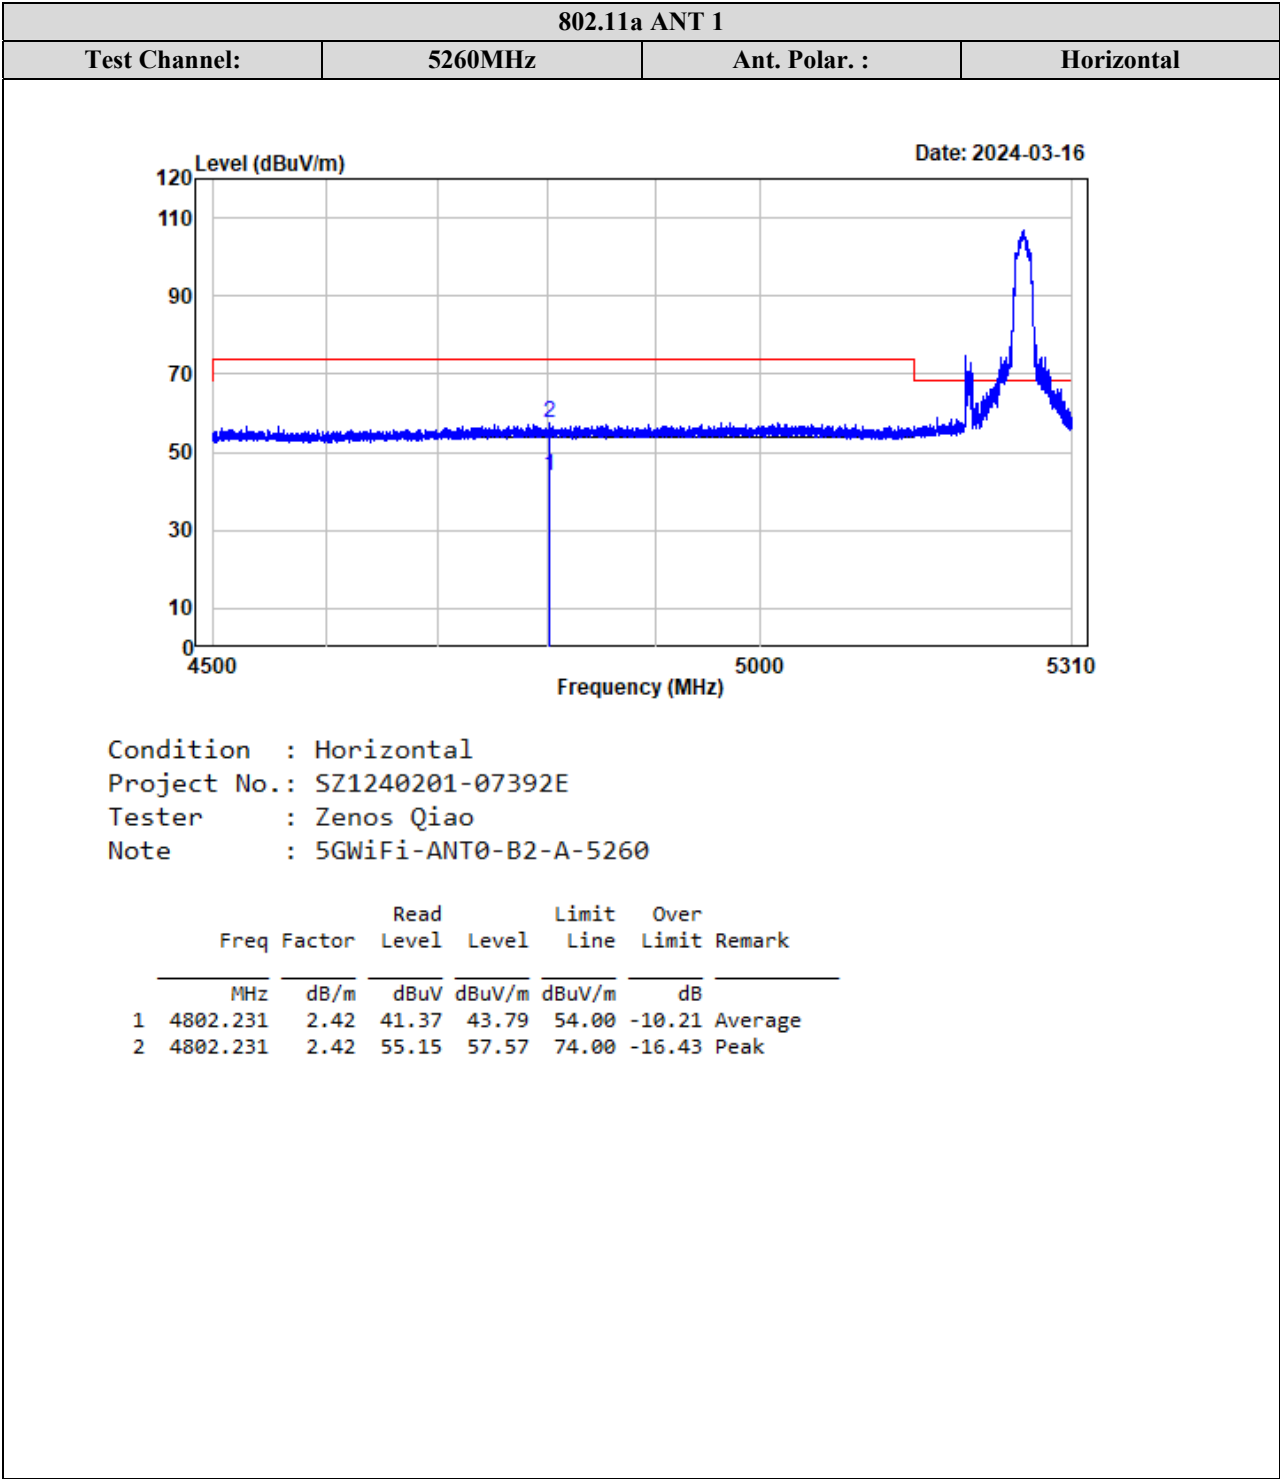

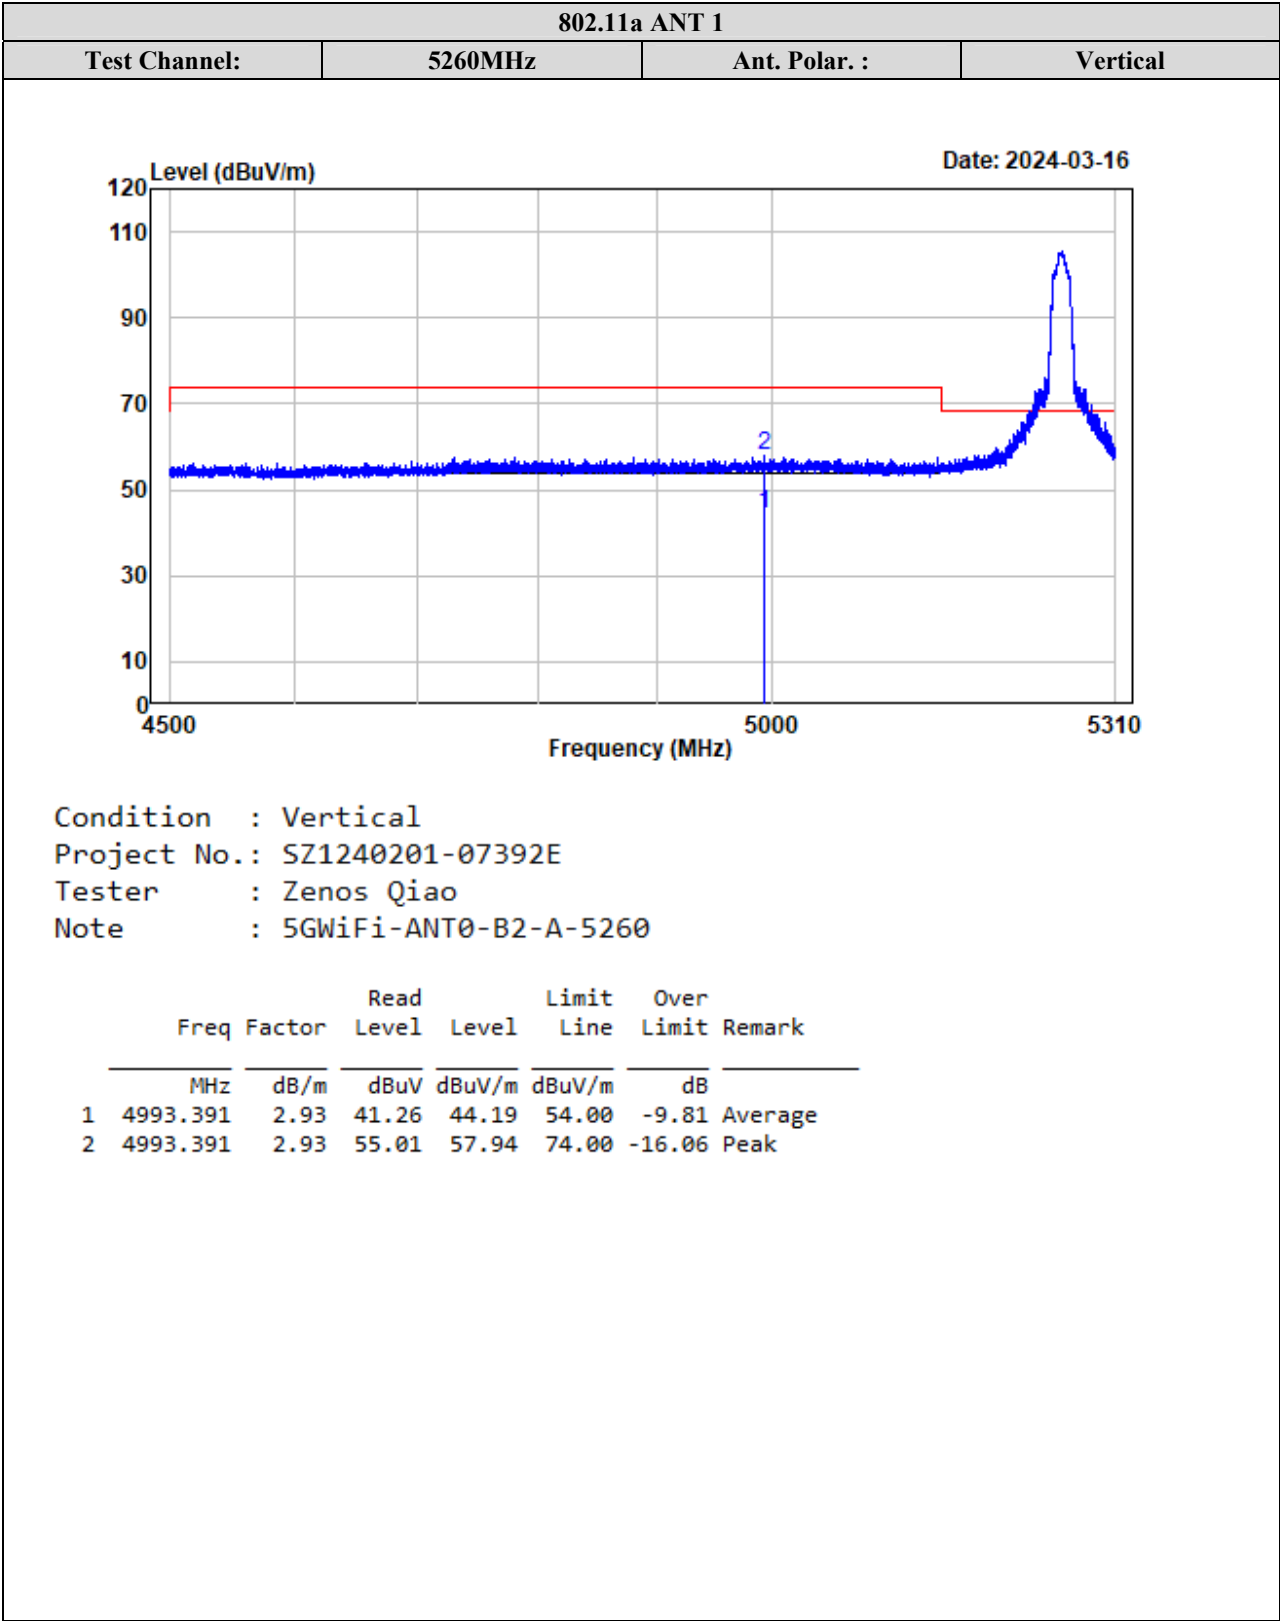

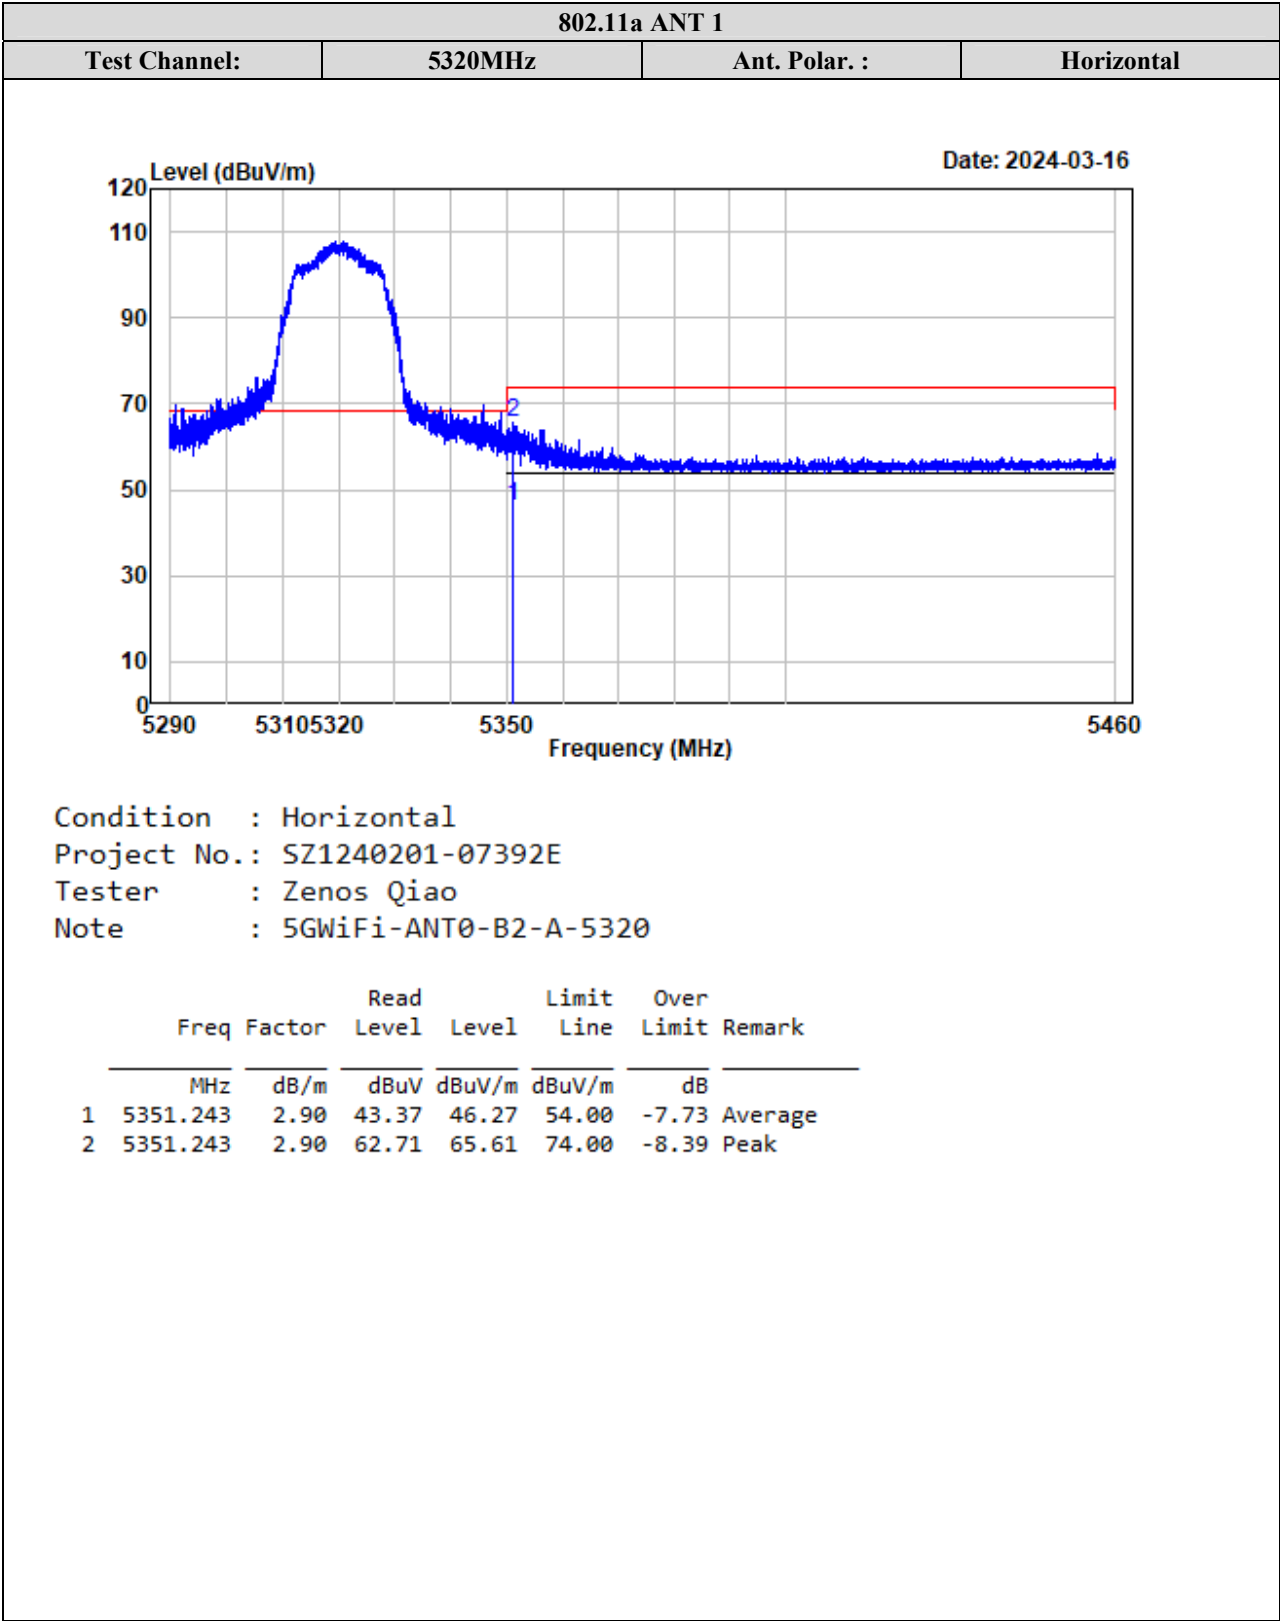


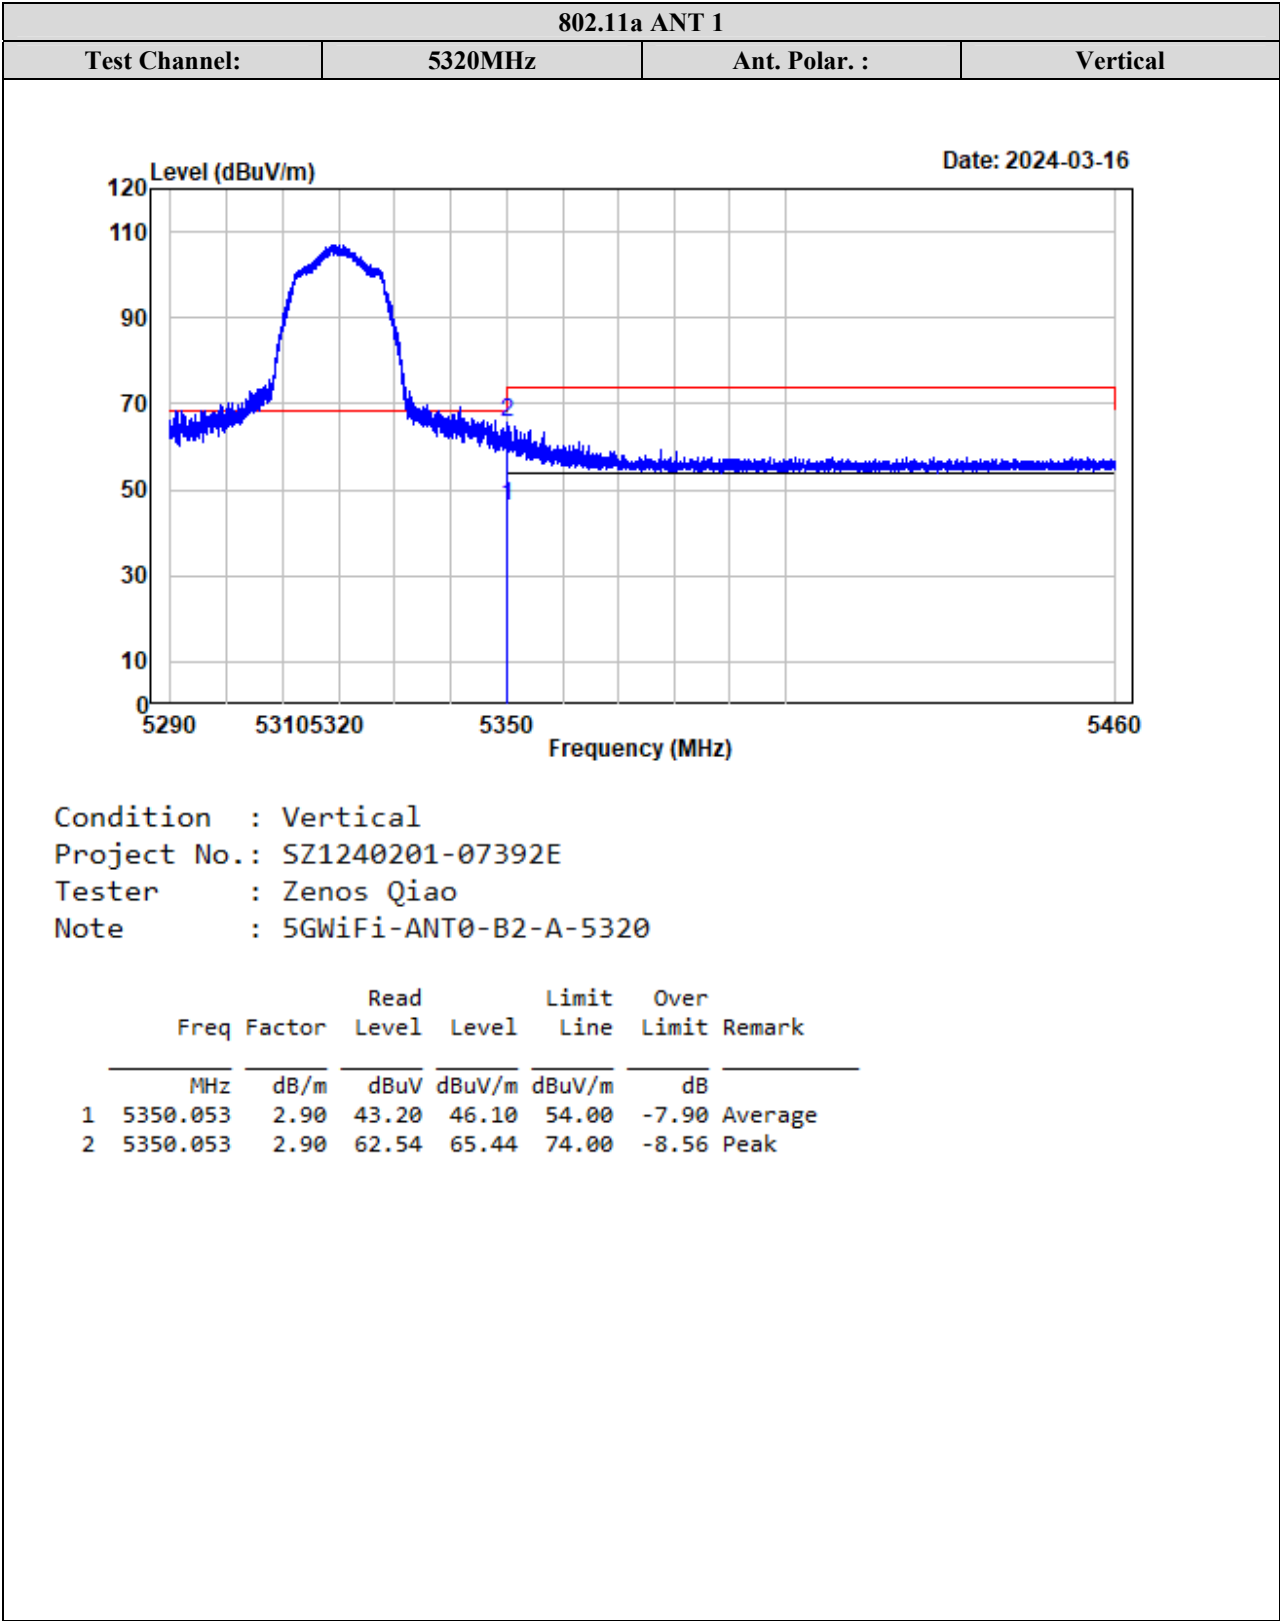



TR-EM-RF015


Page 88 of 258


Version 1.0 (2023/10/07)

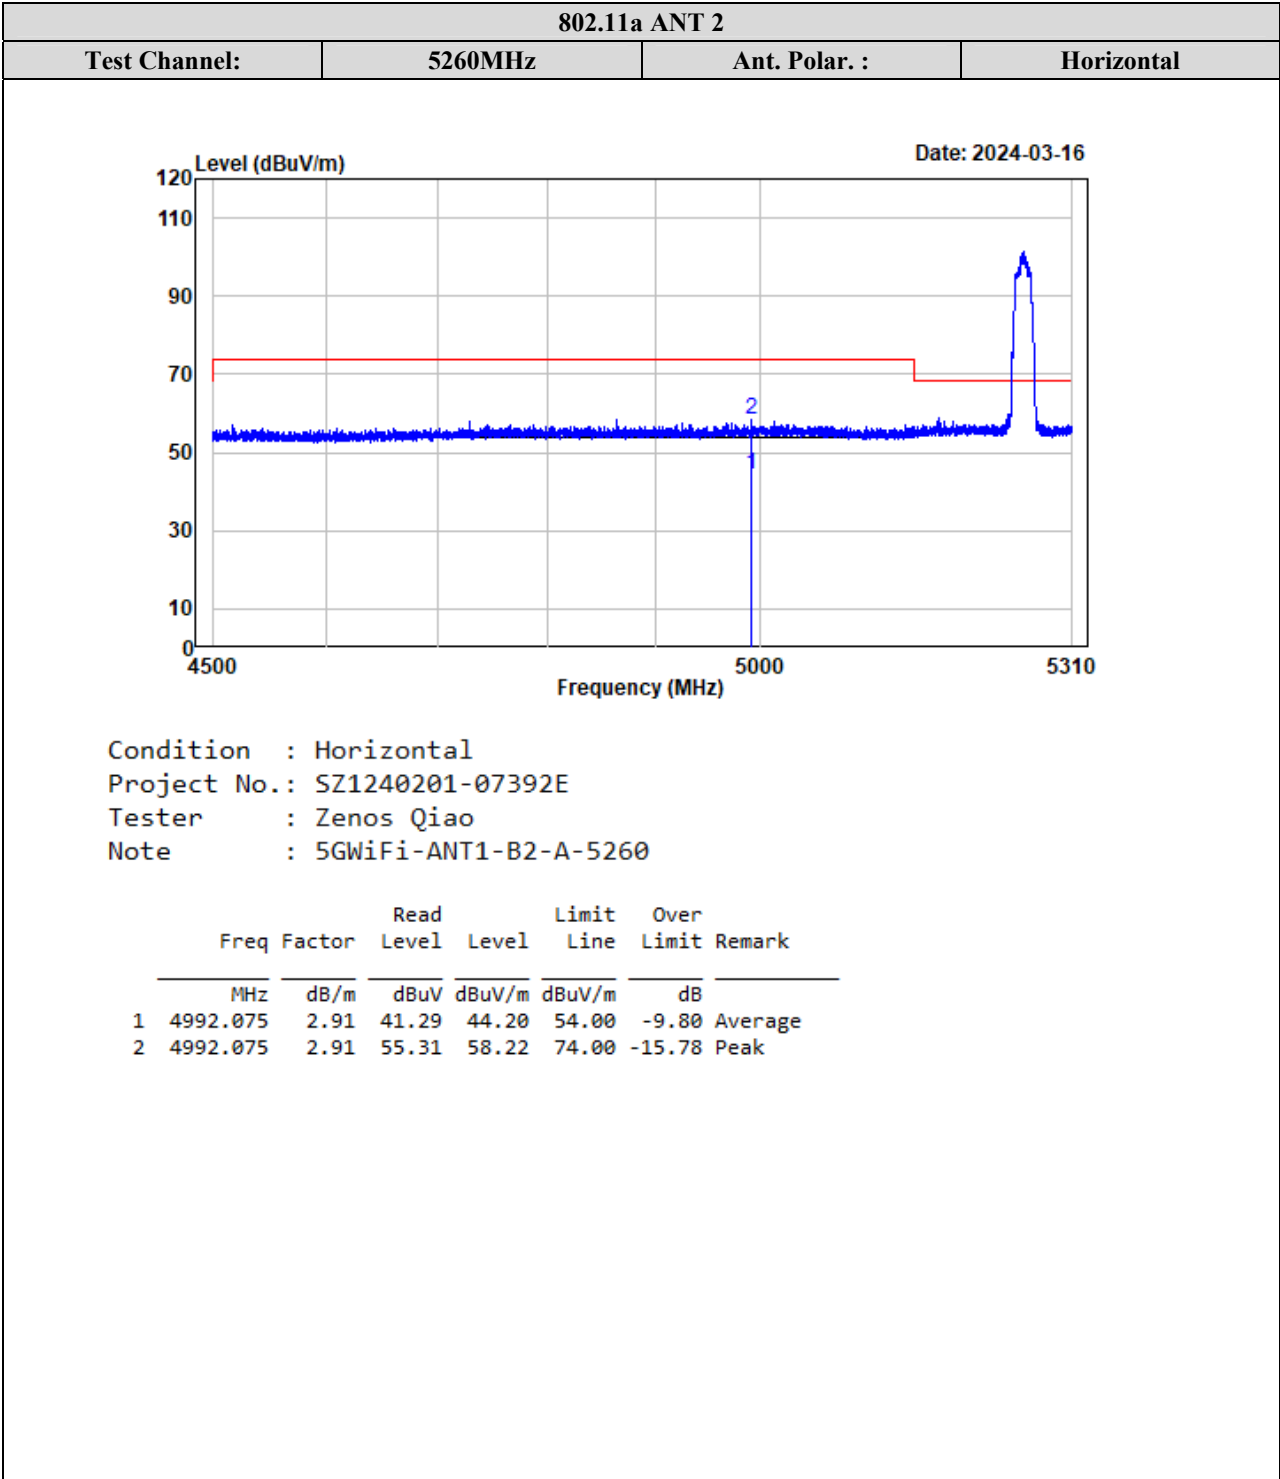


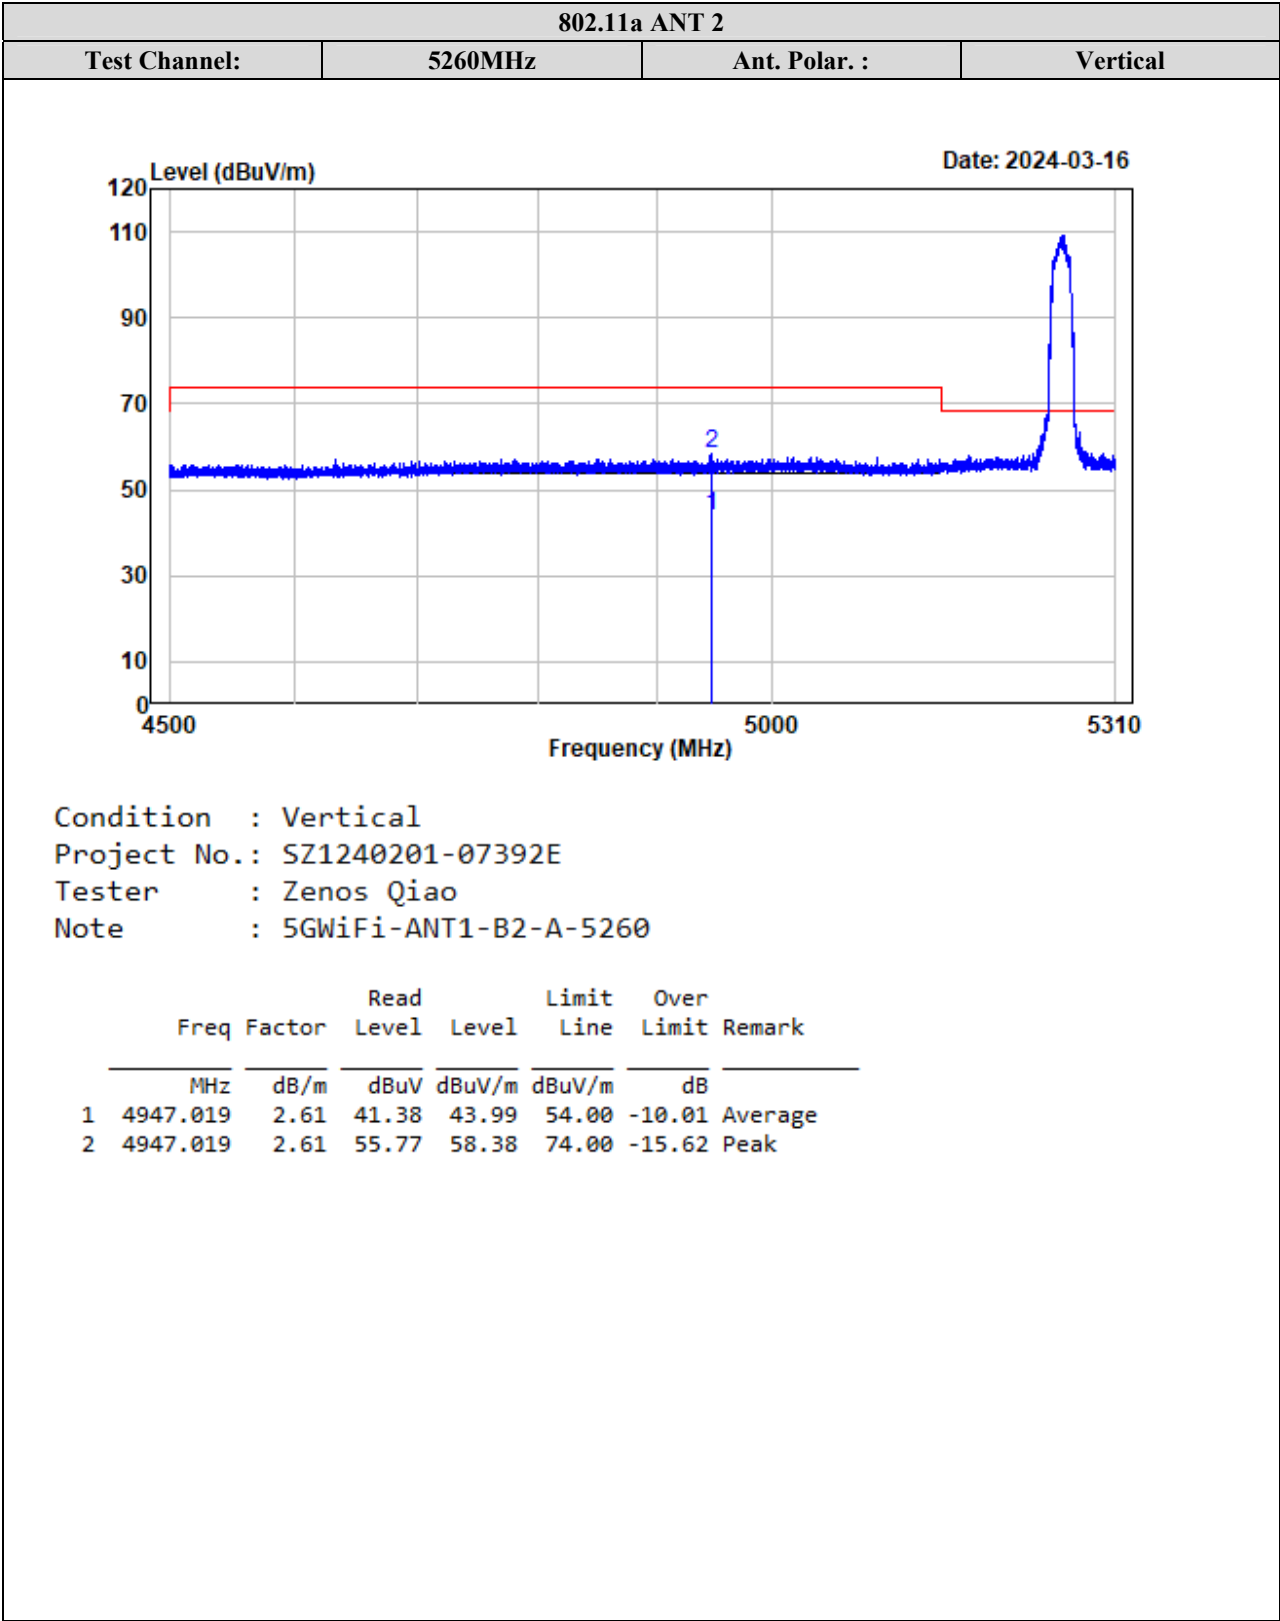


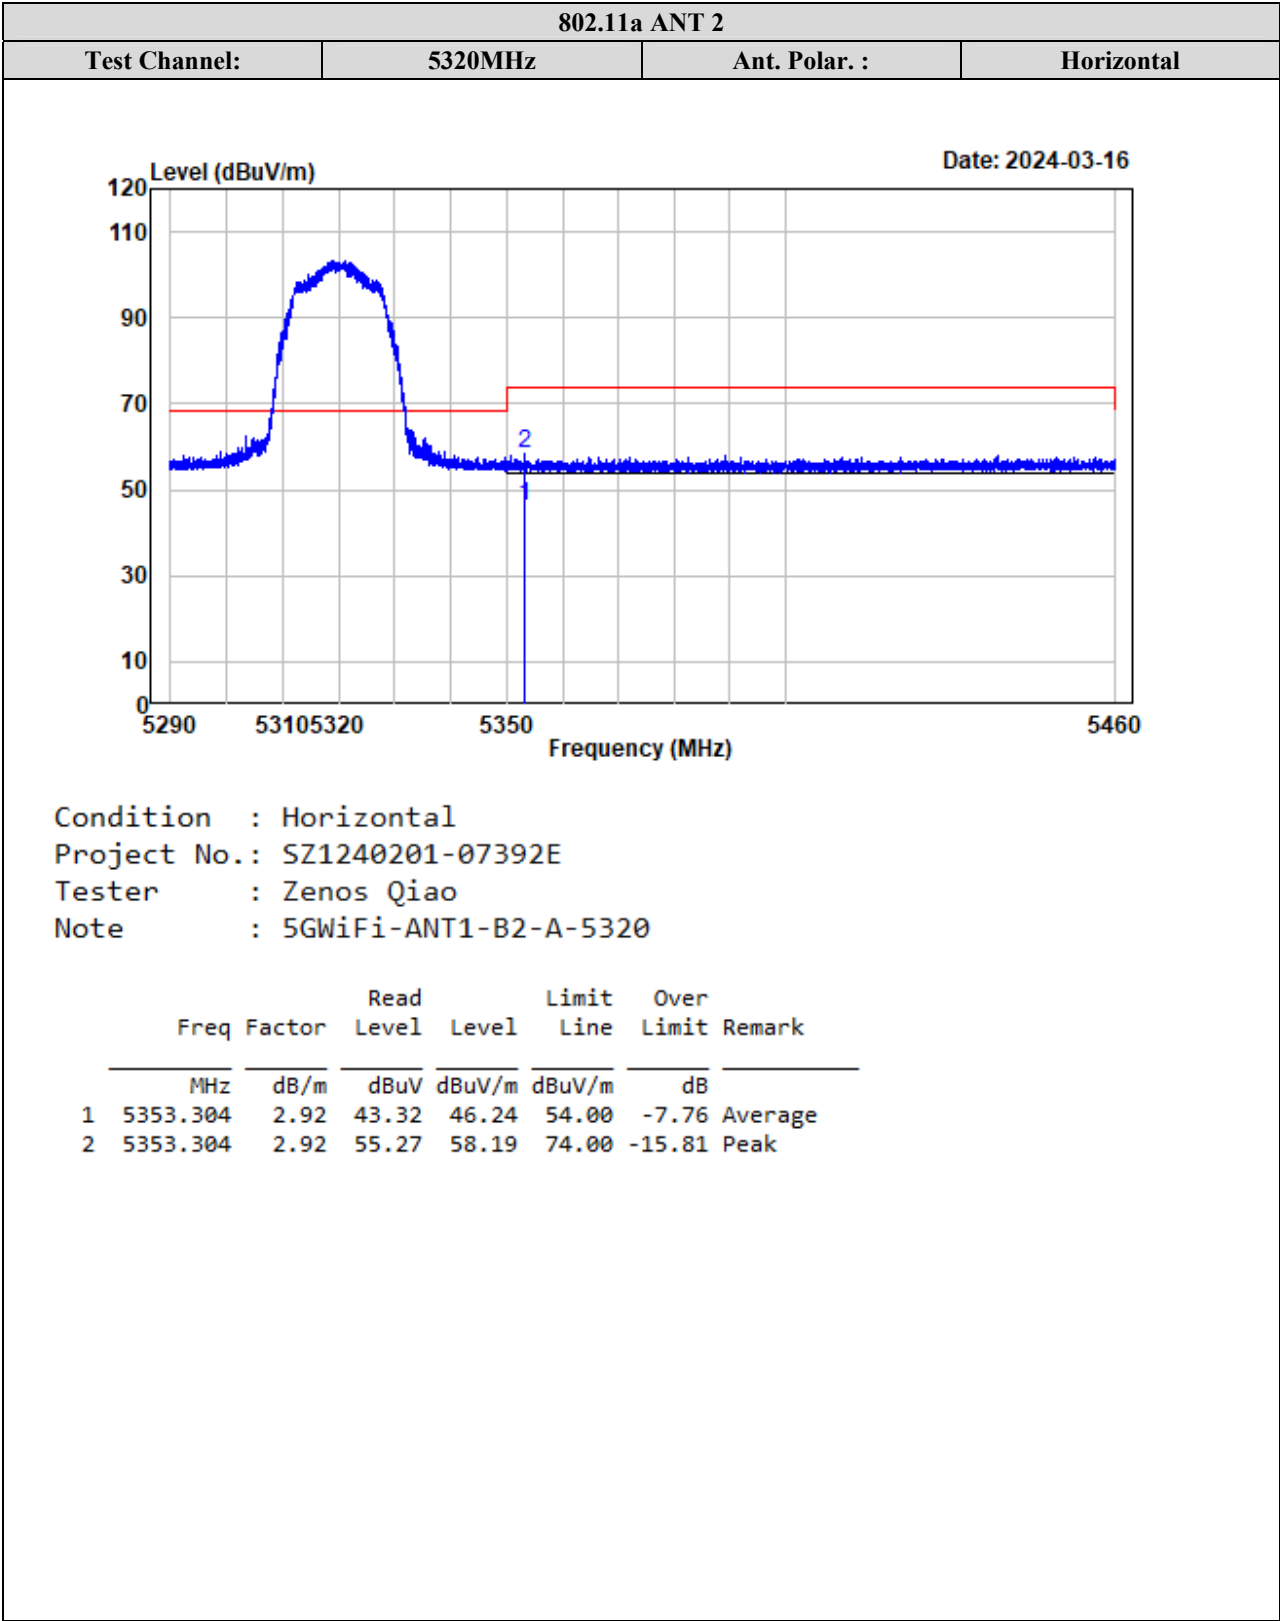


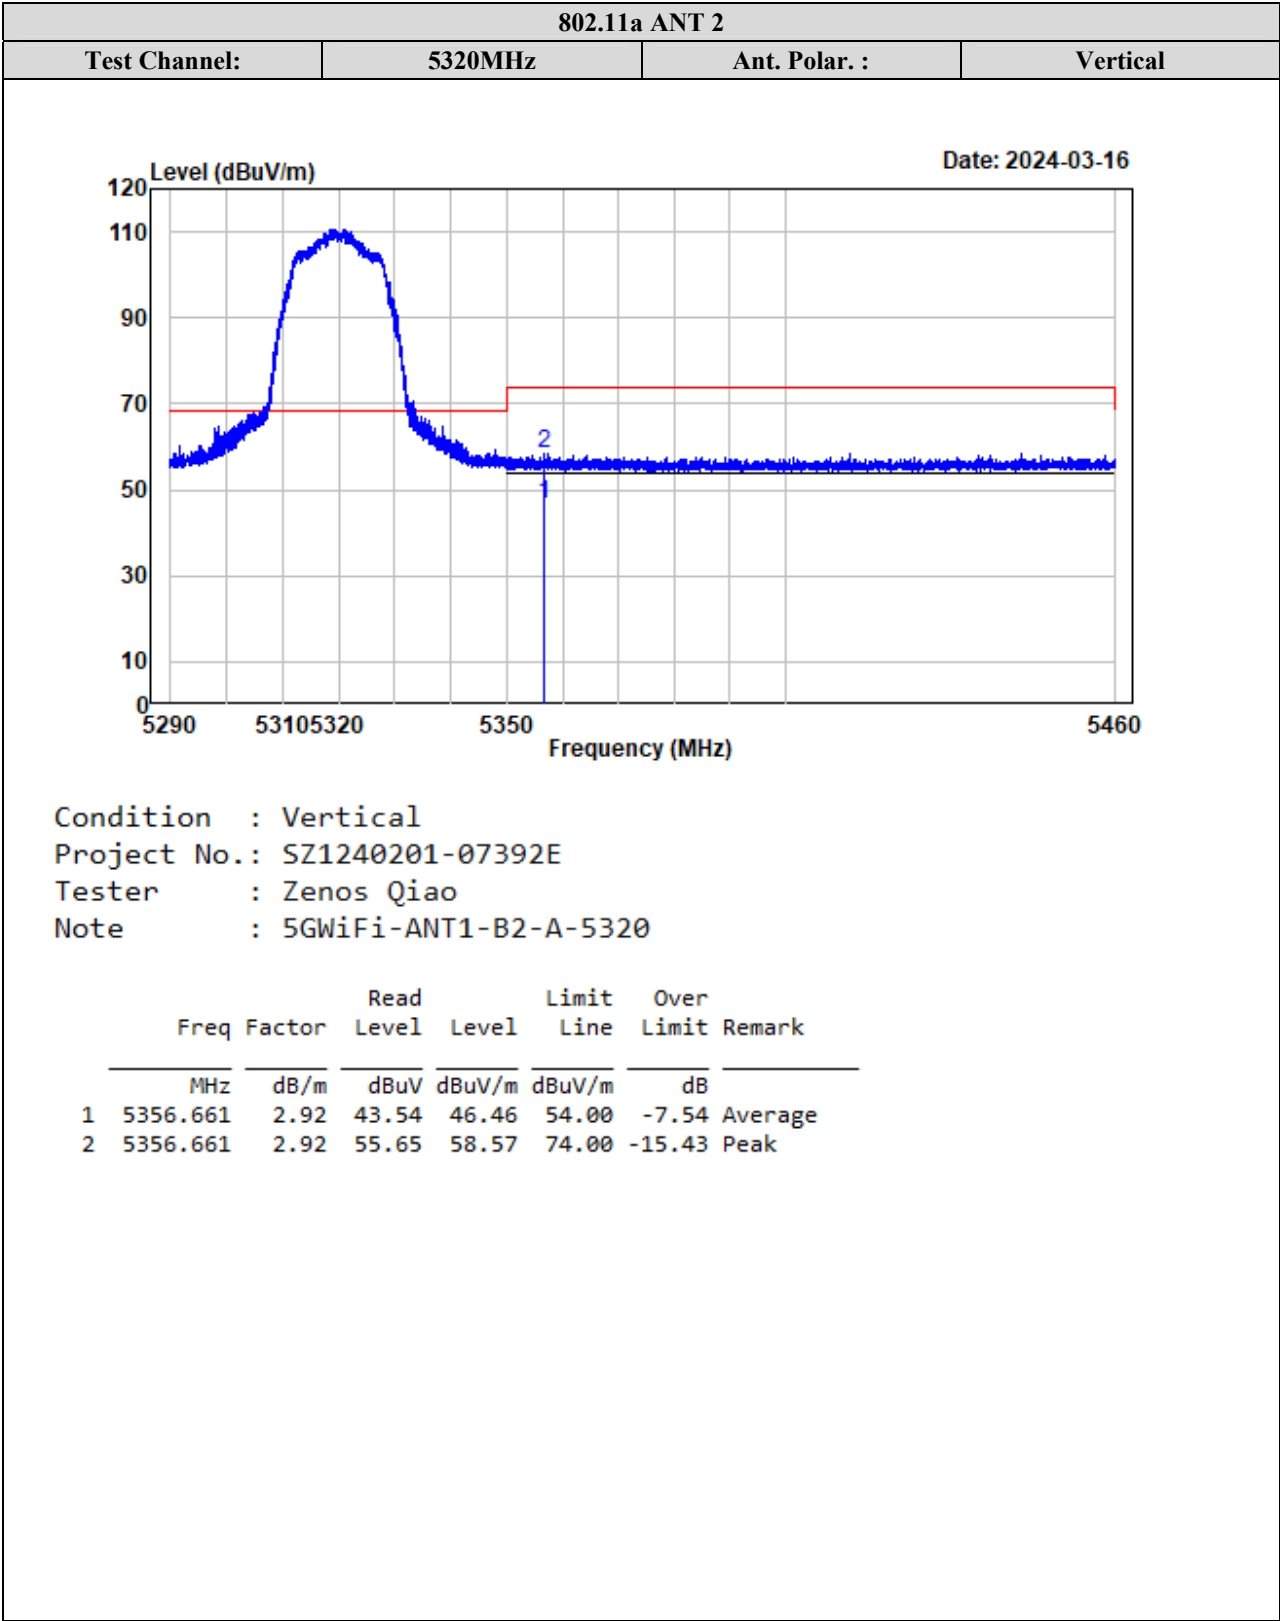


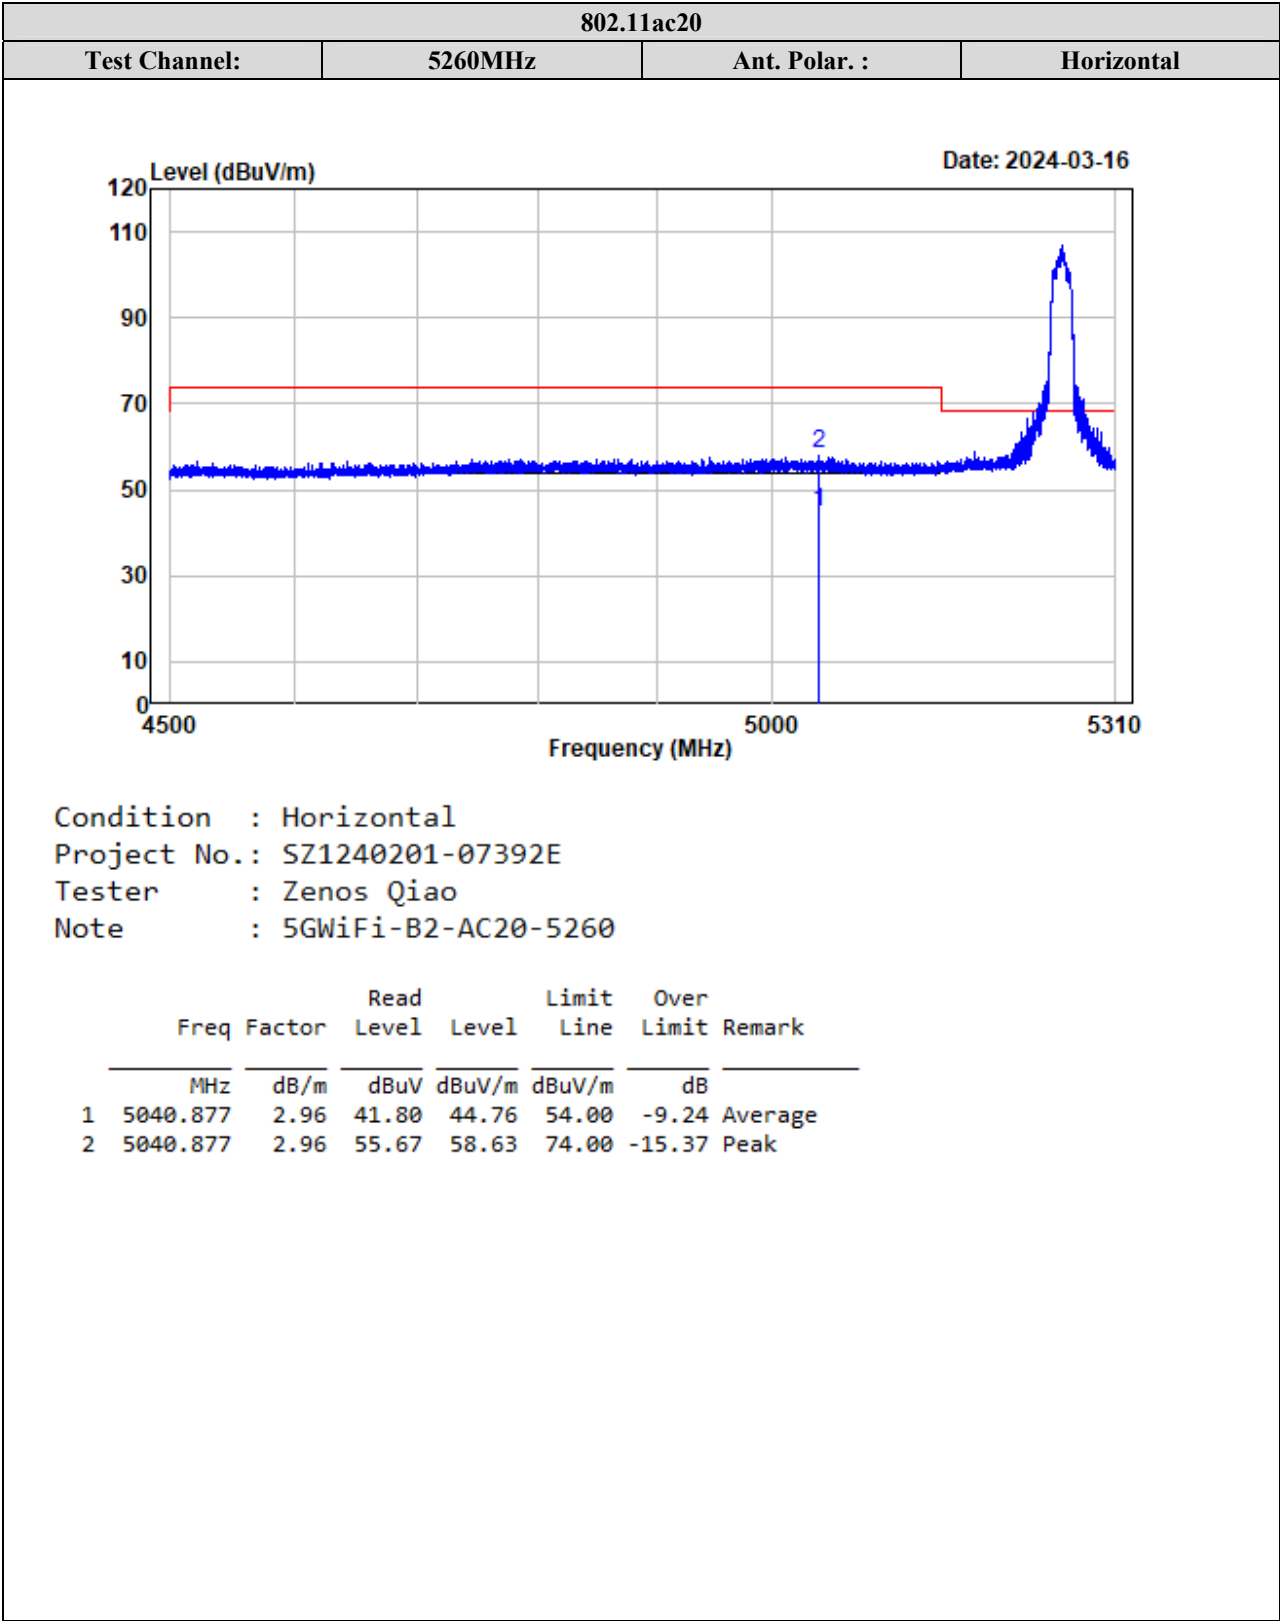


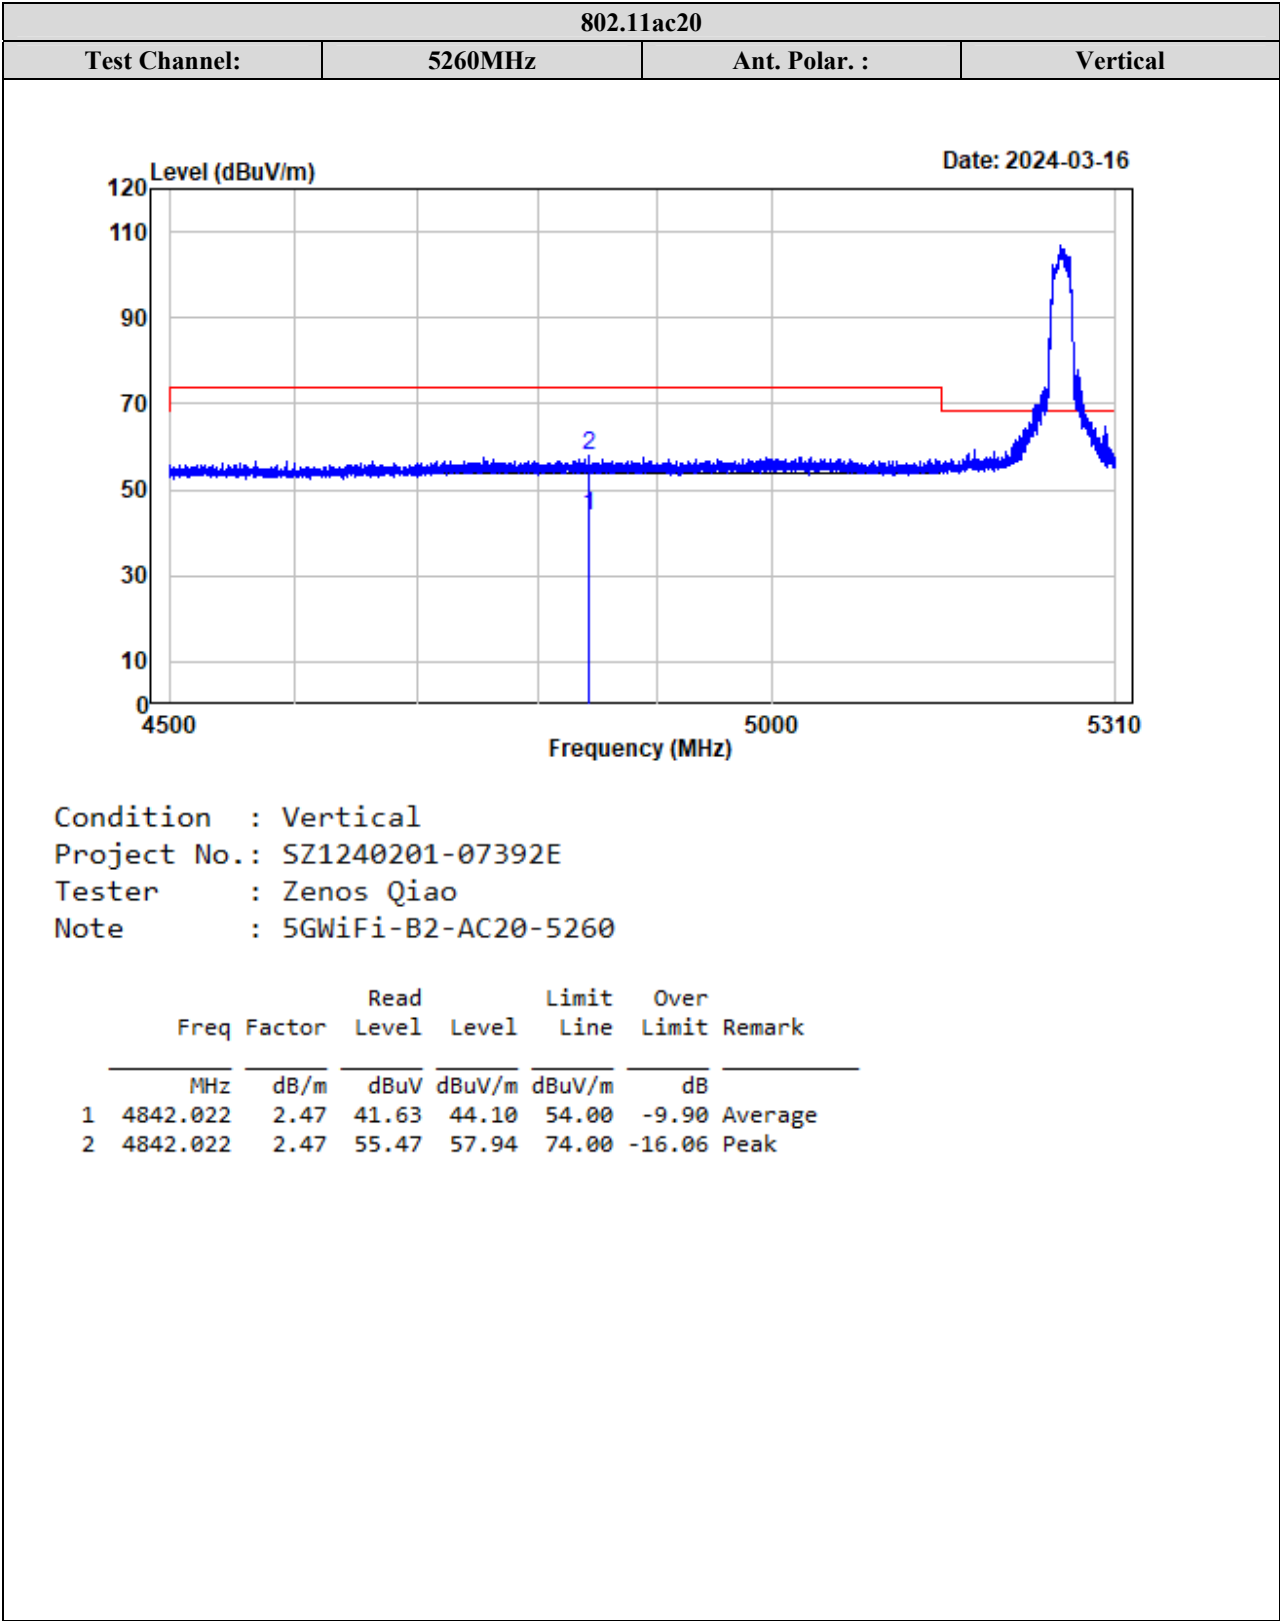


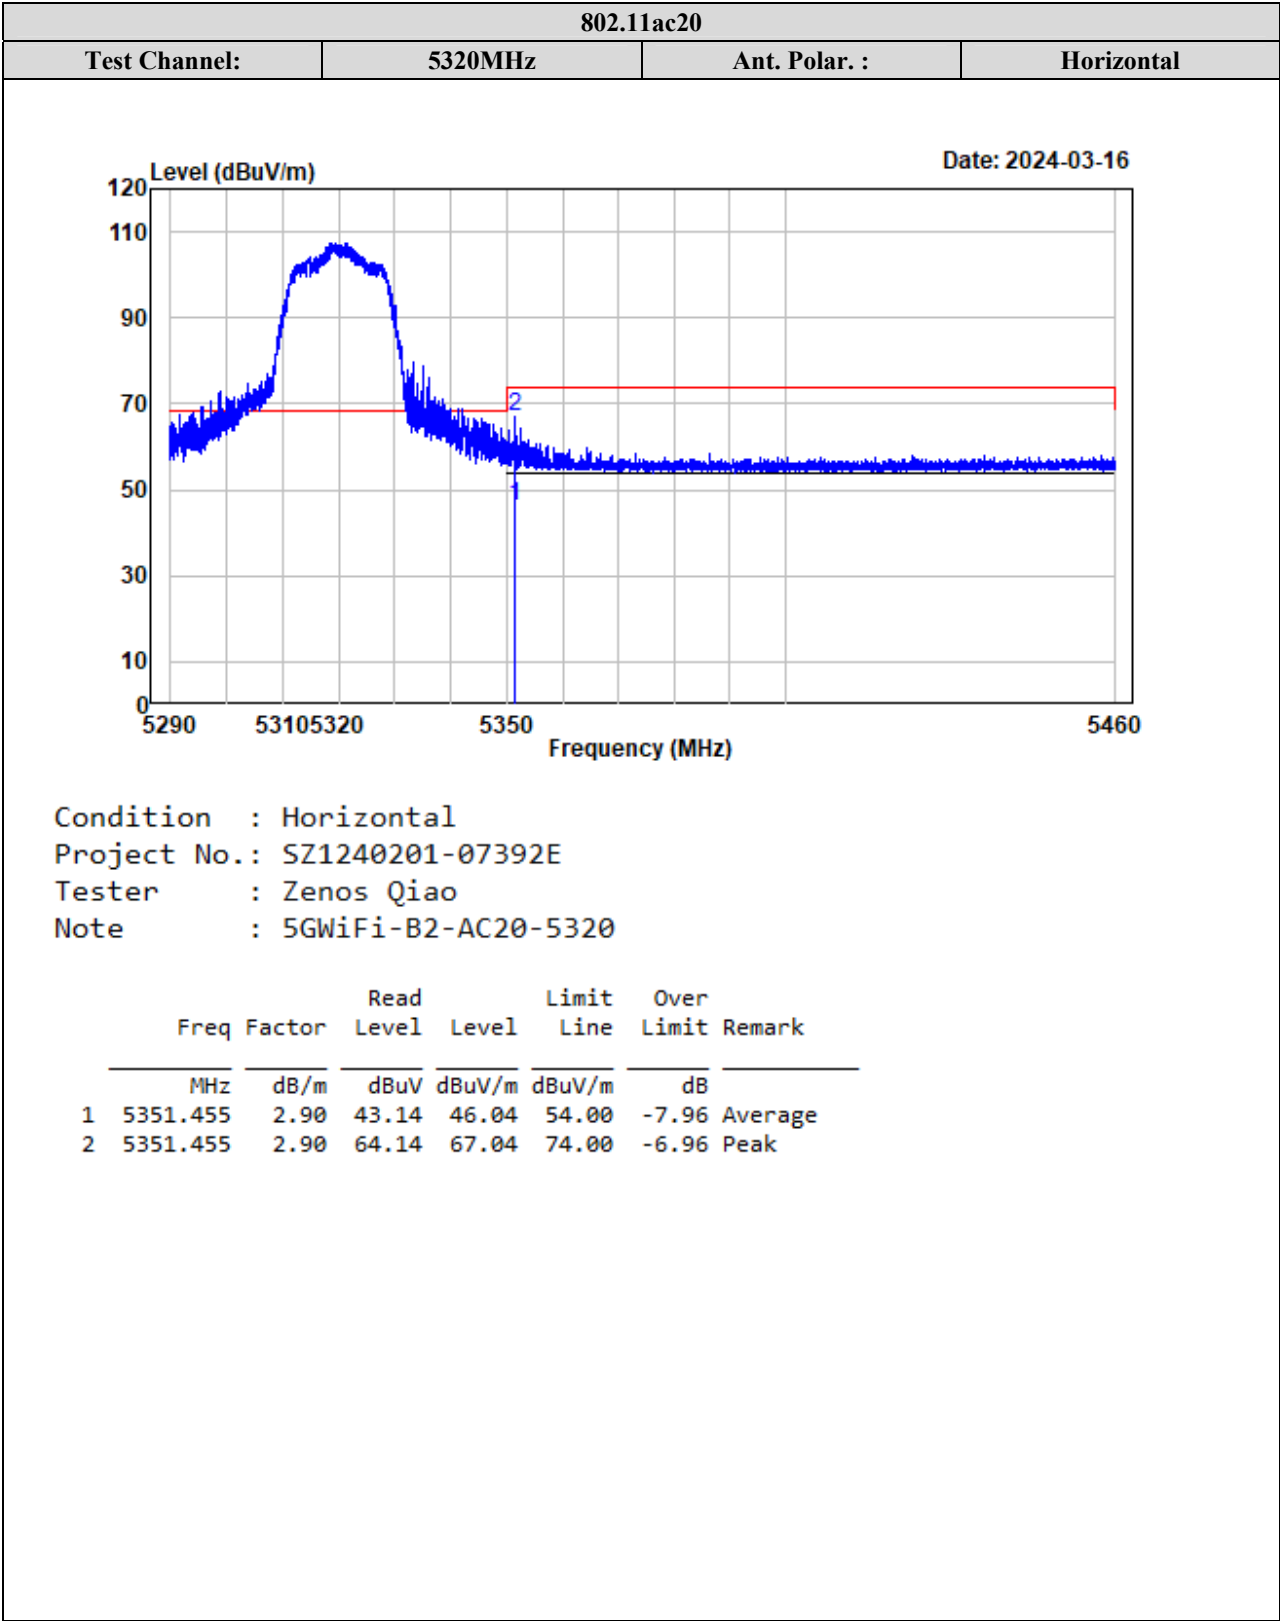


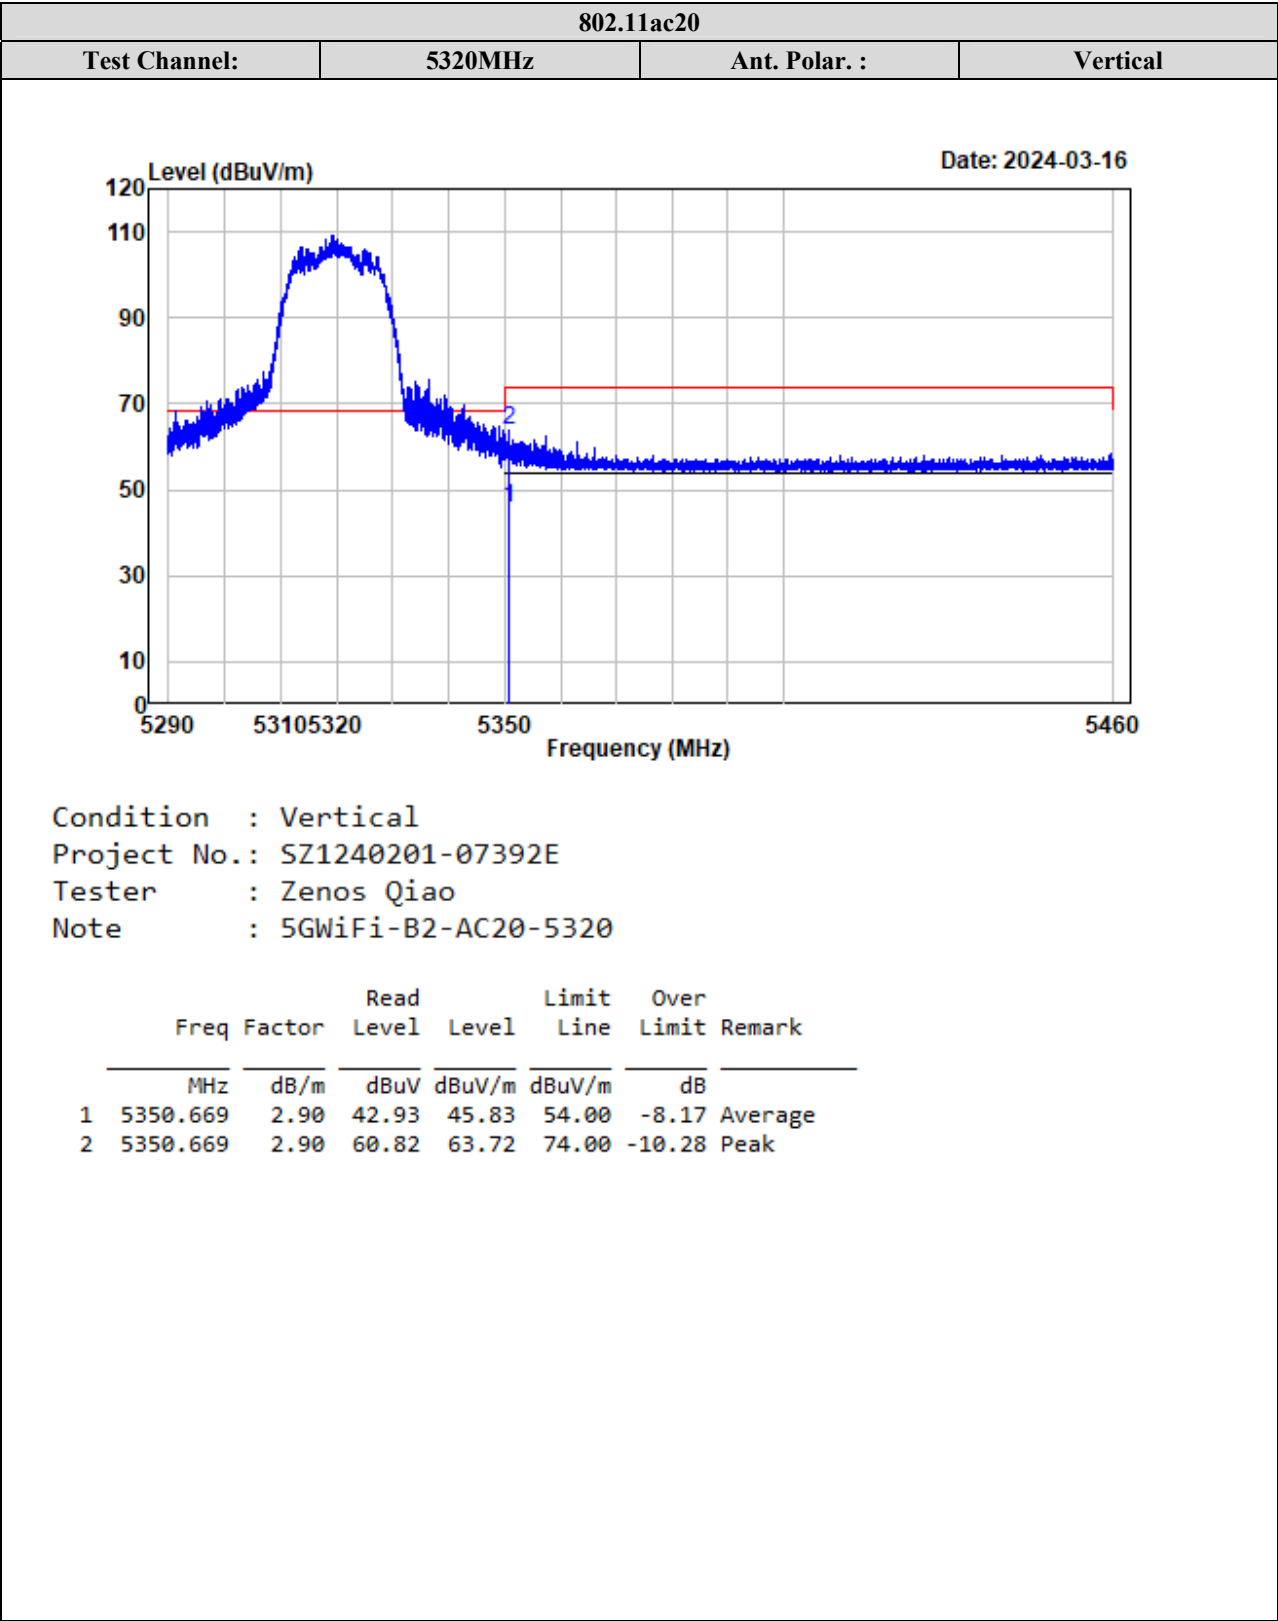


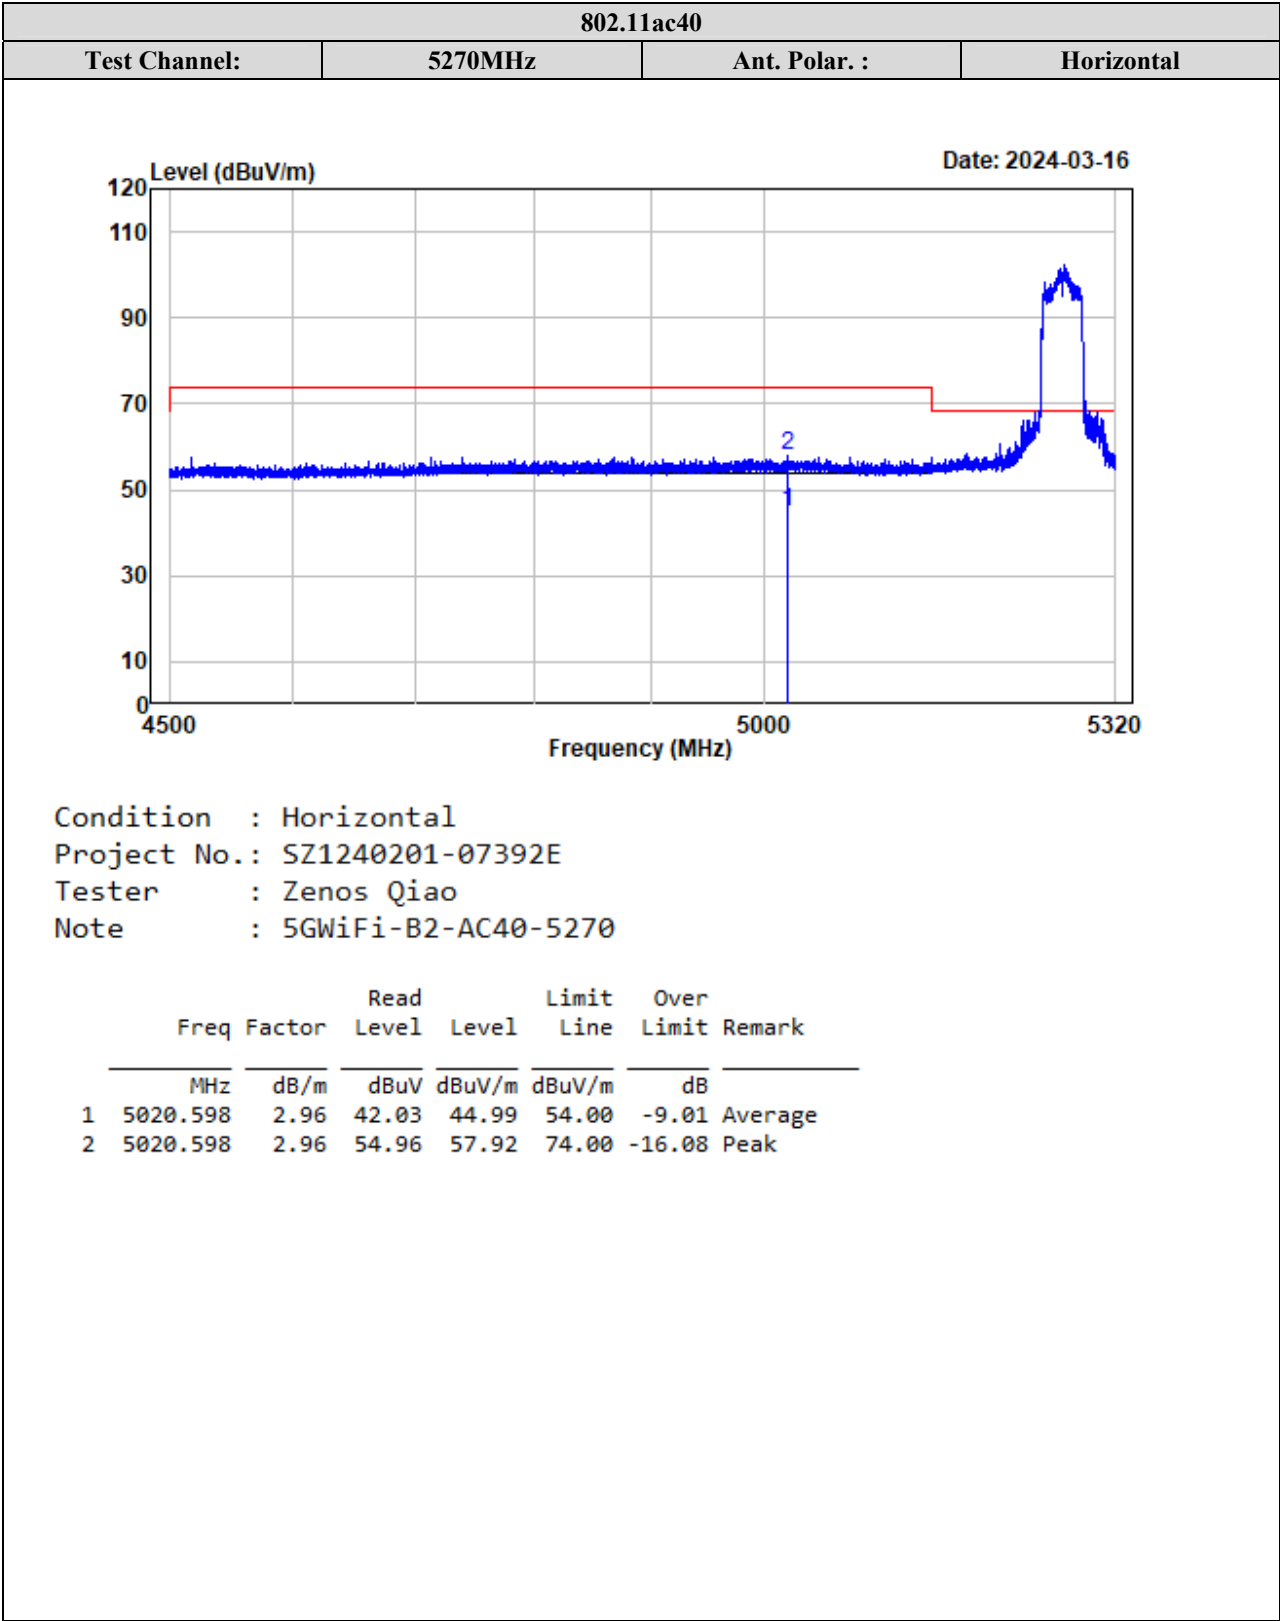


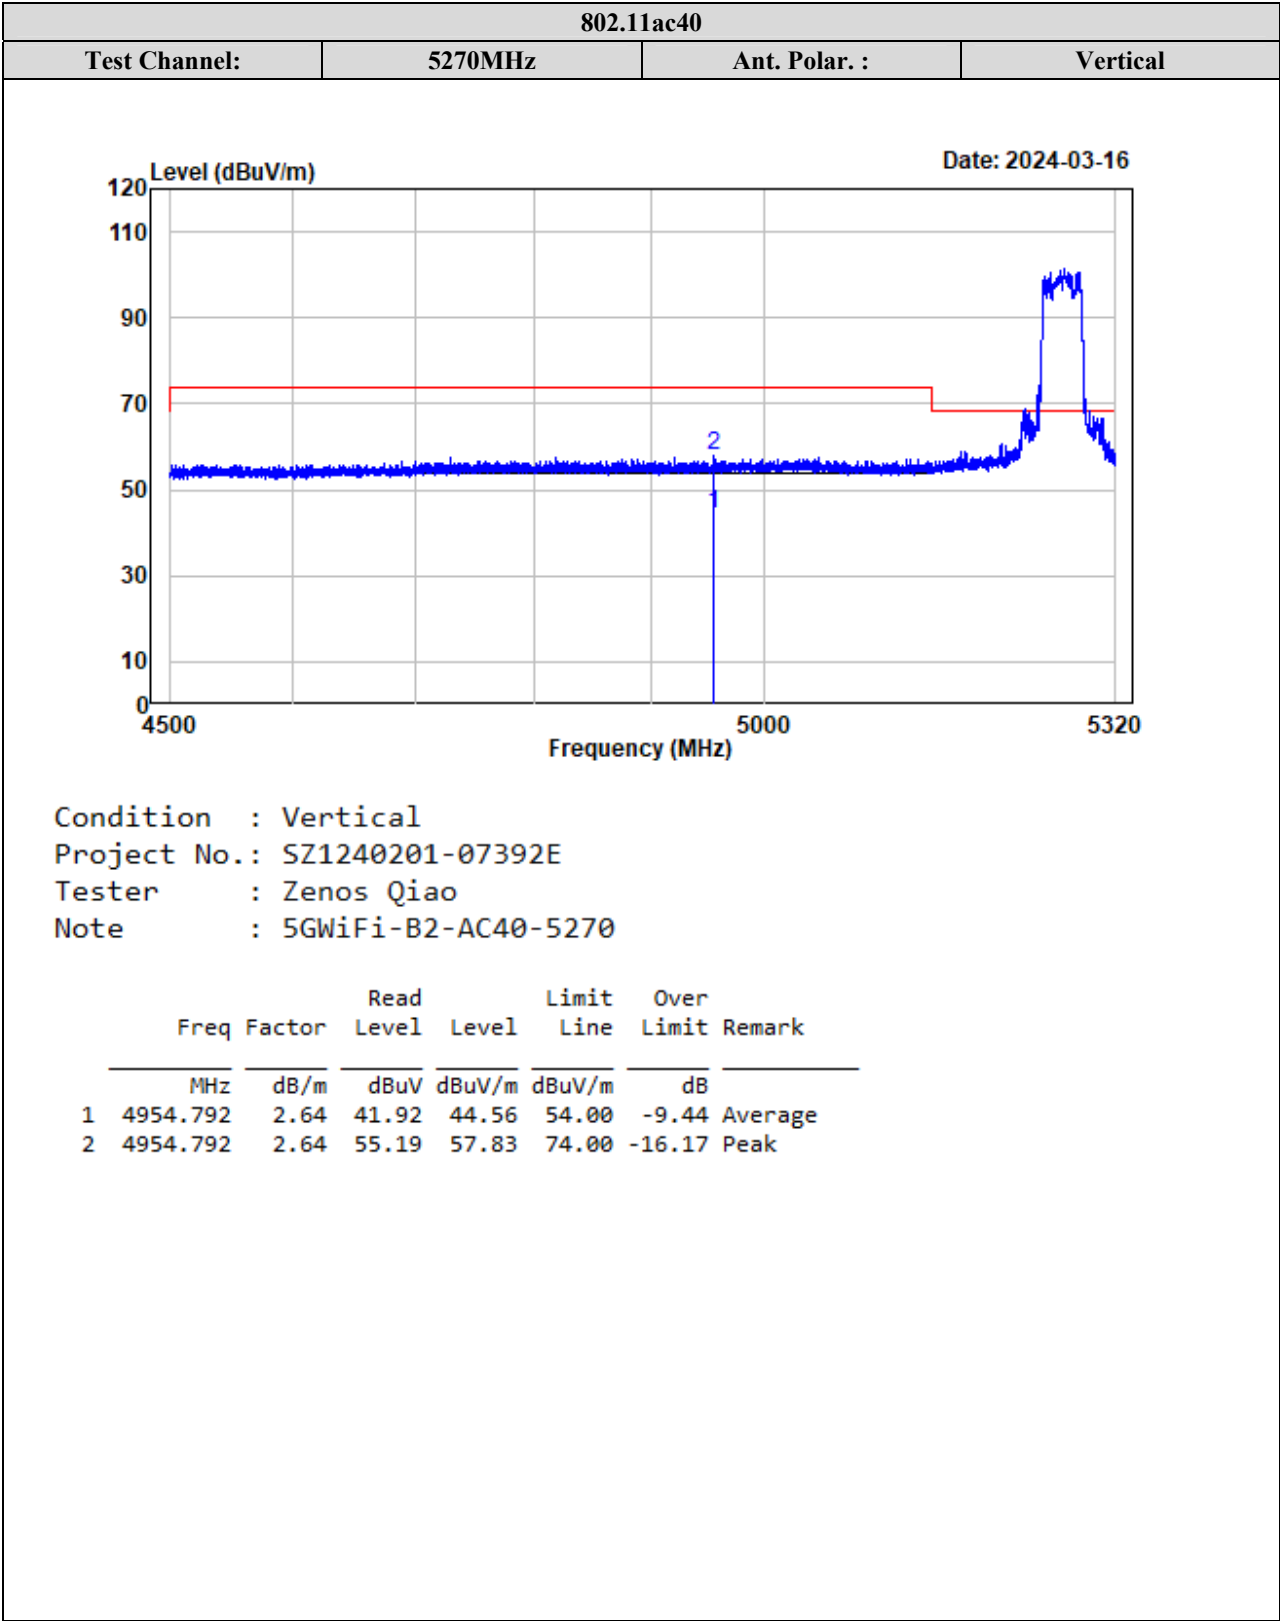


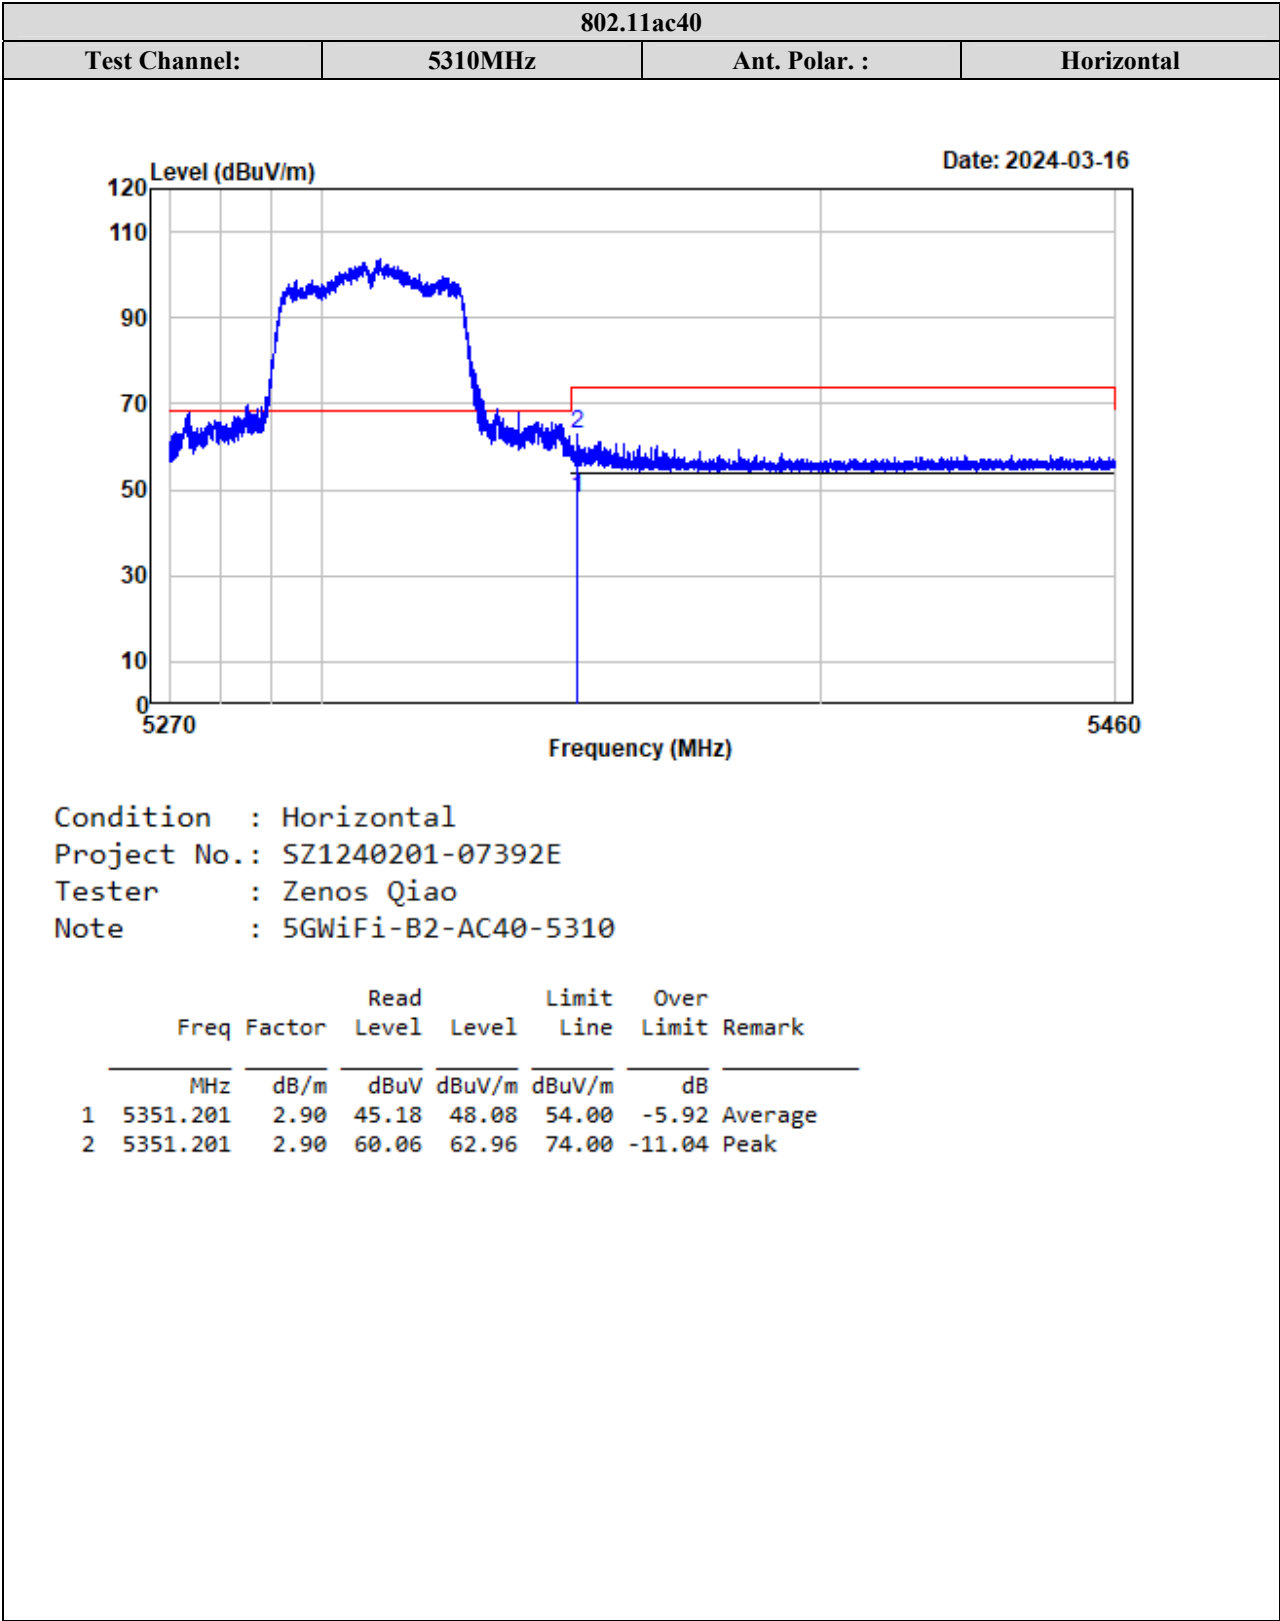


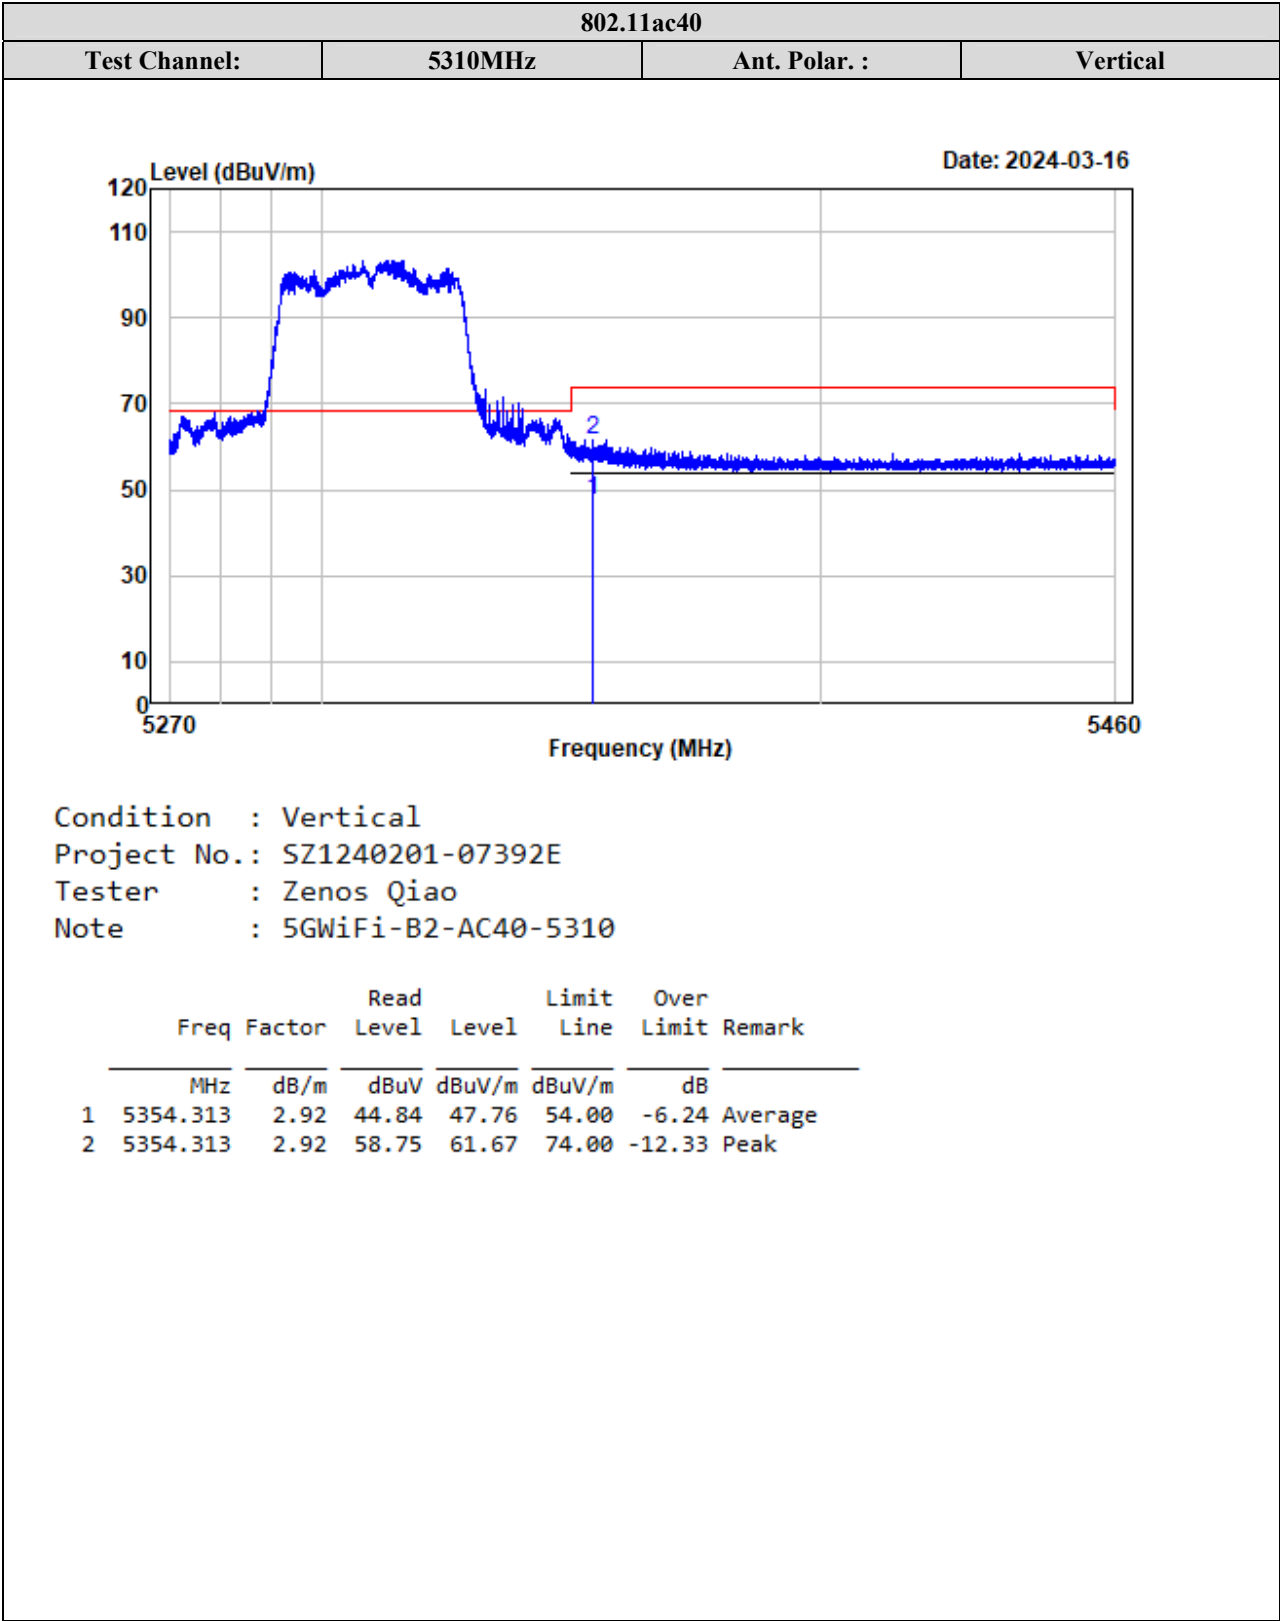


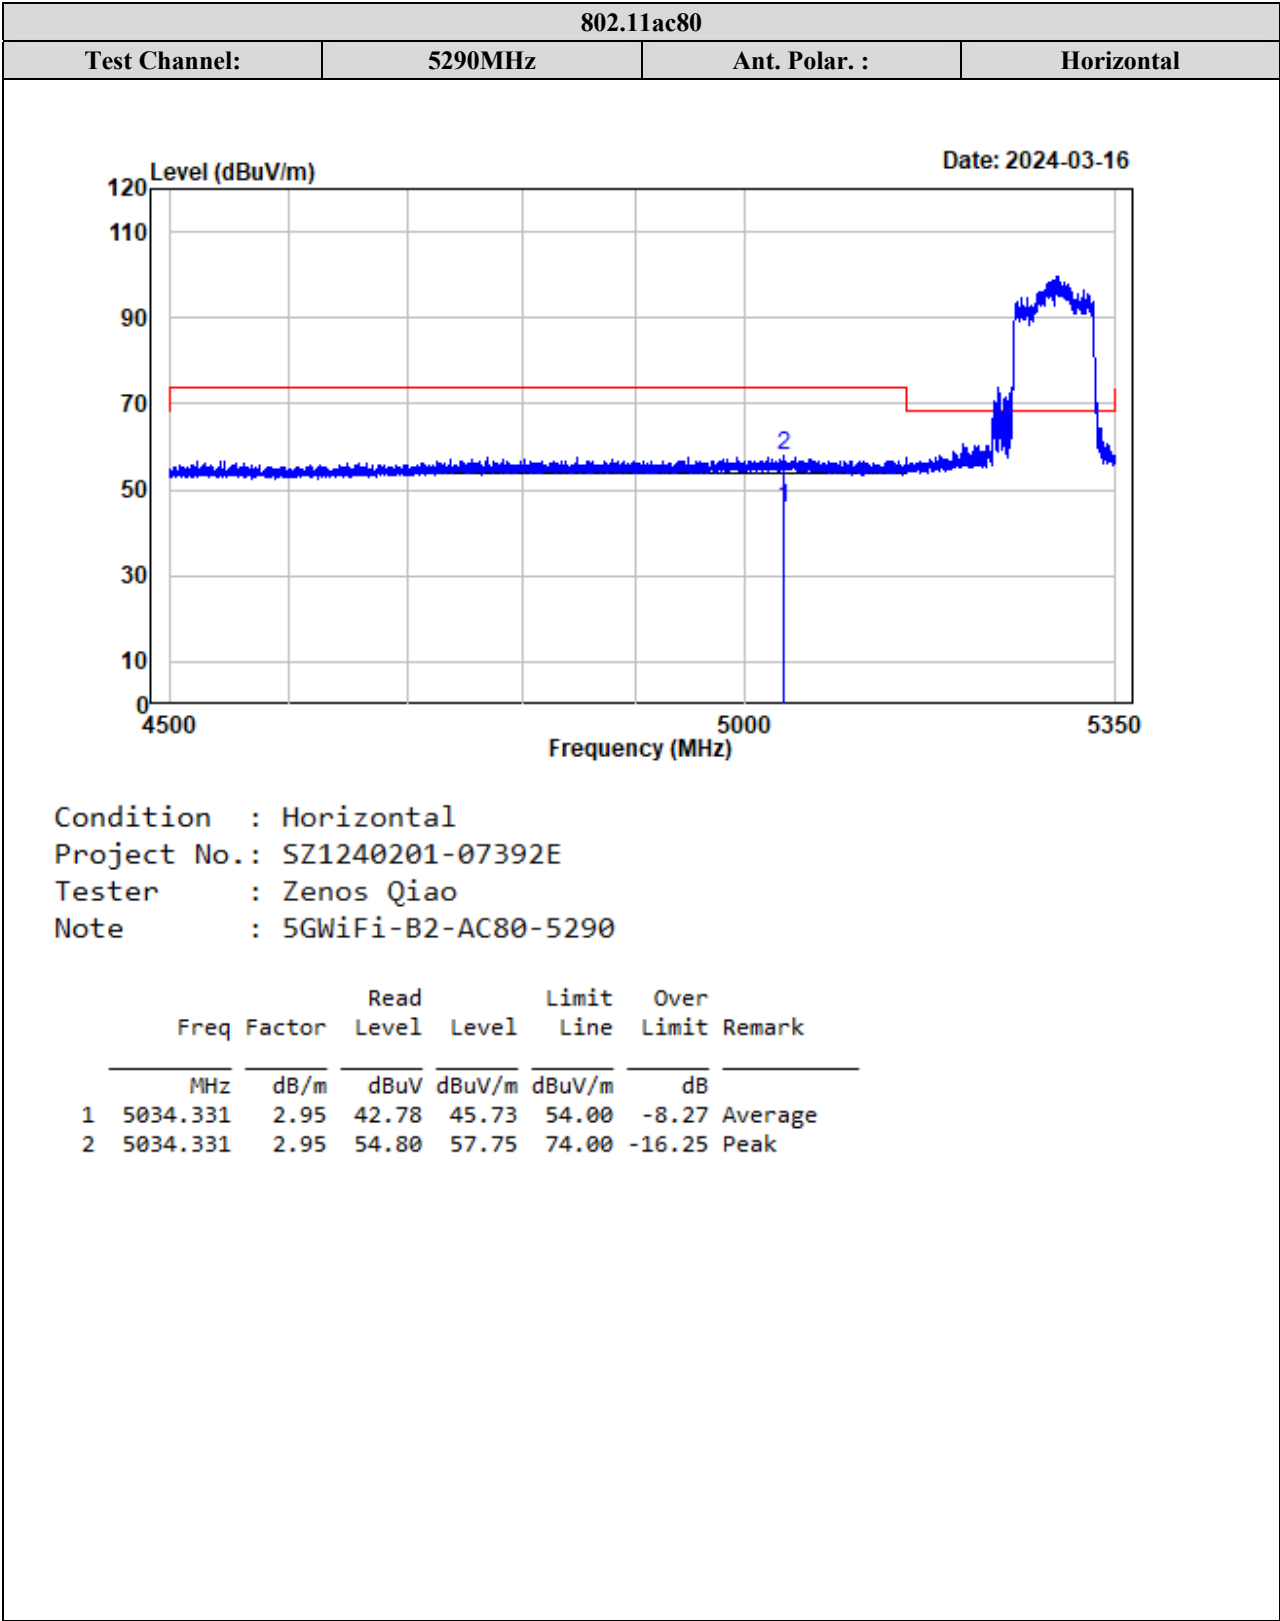


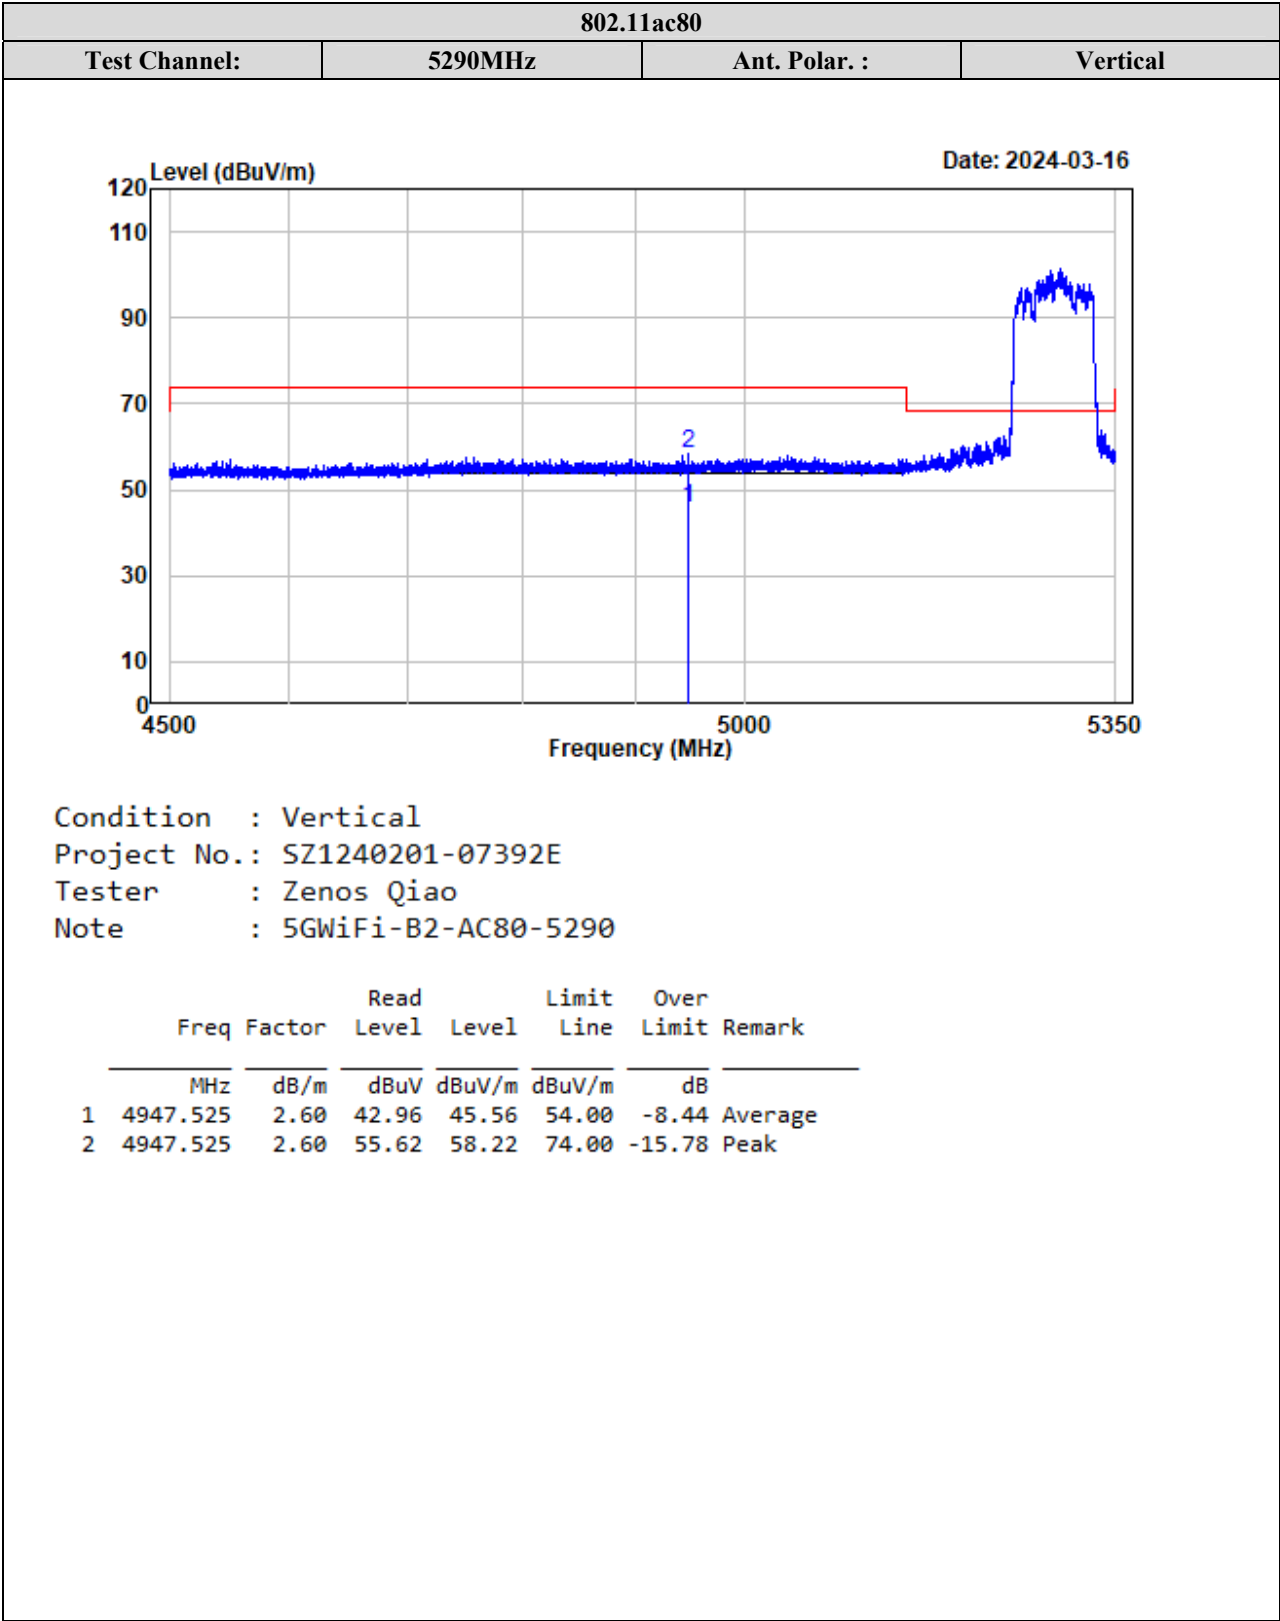


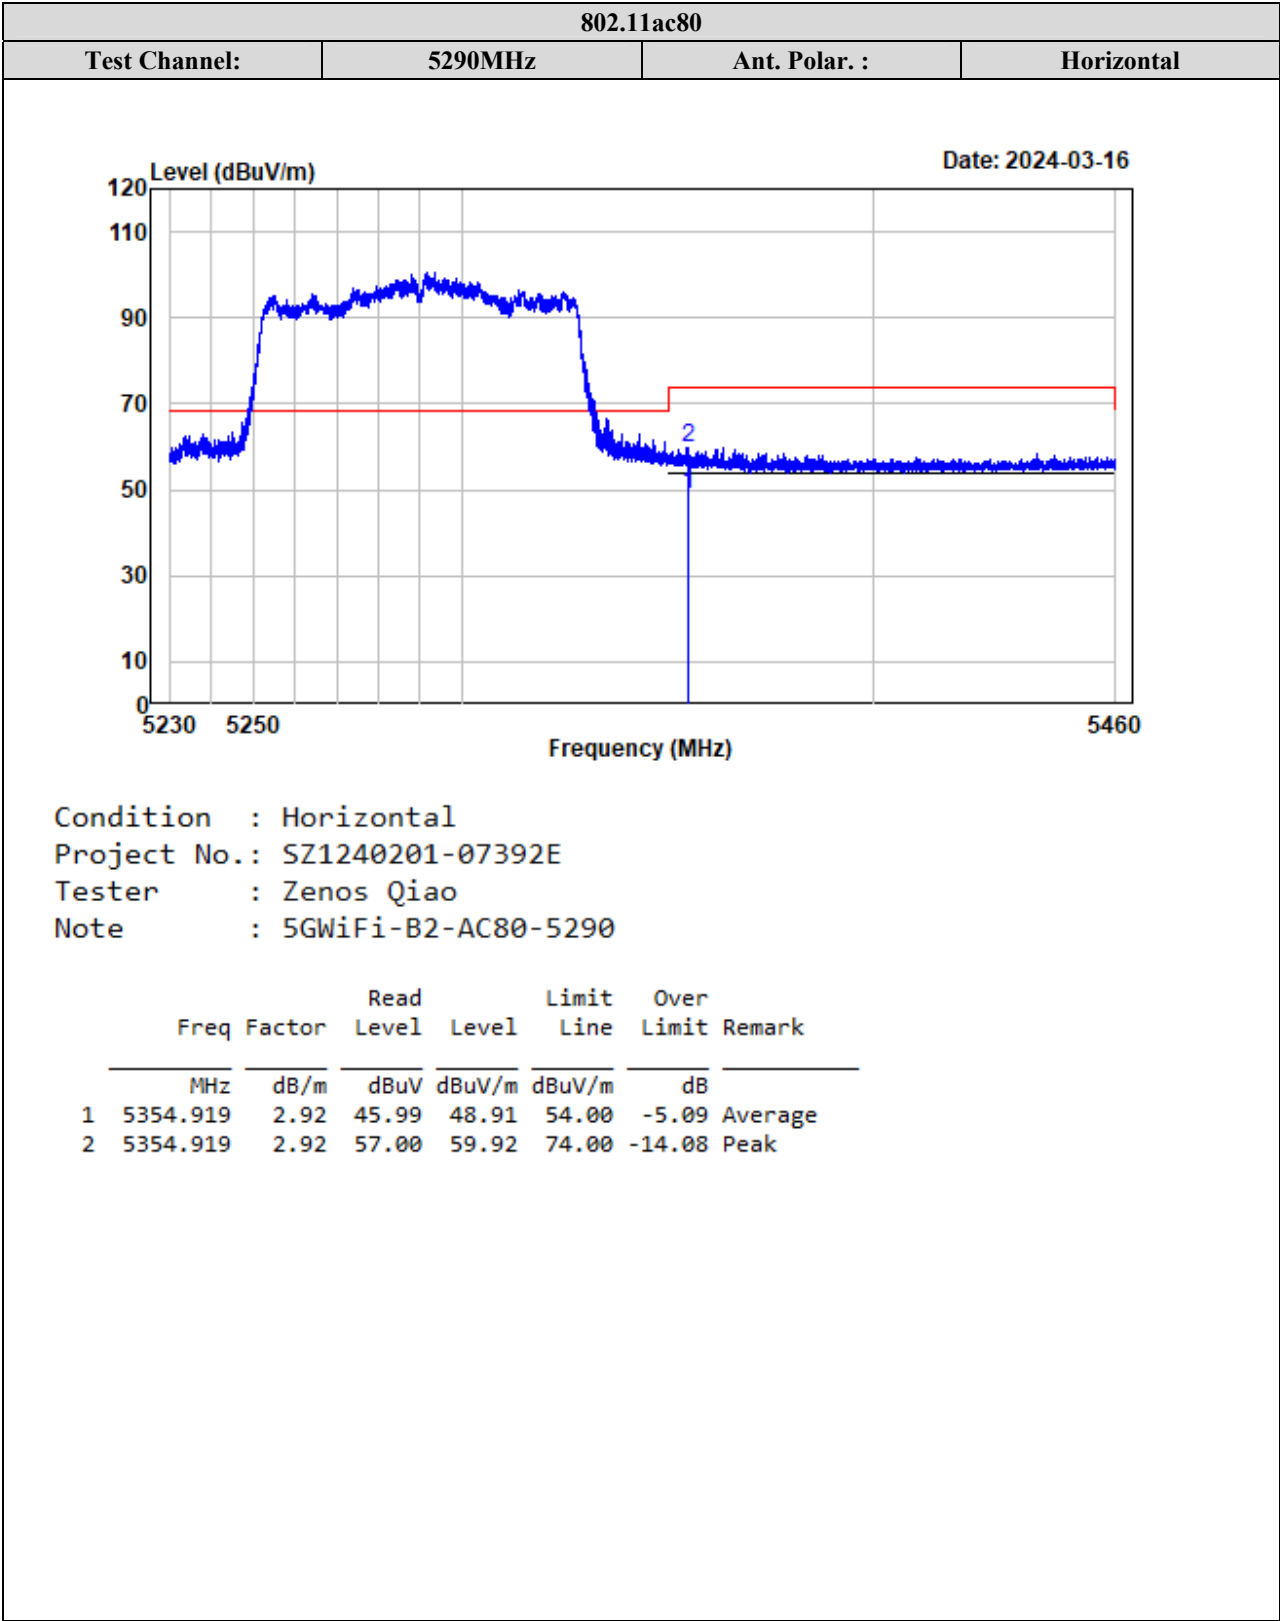


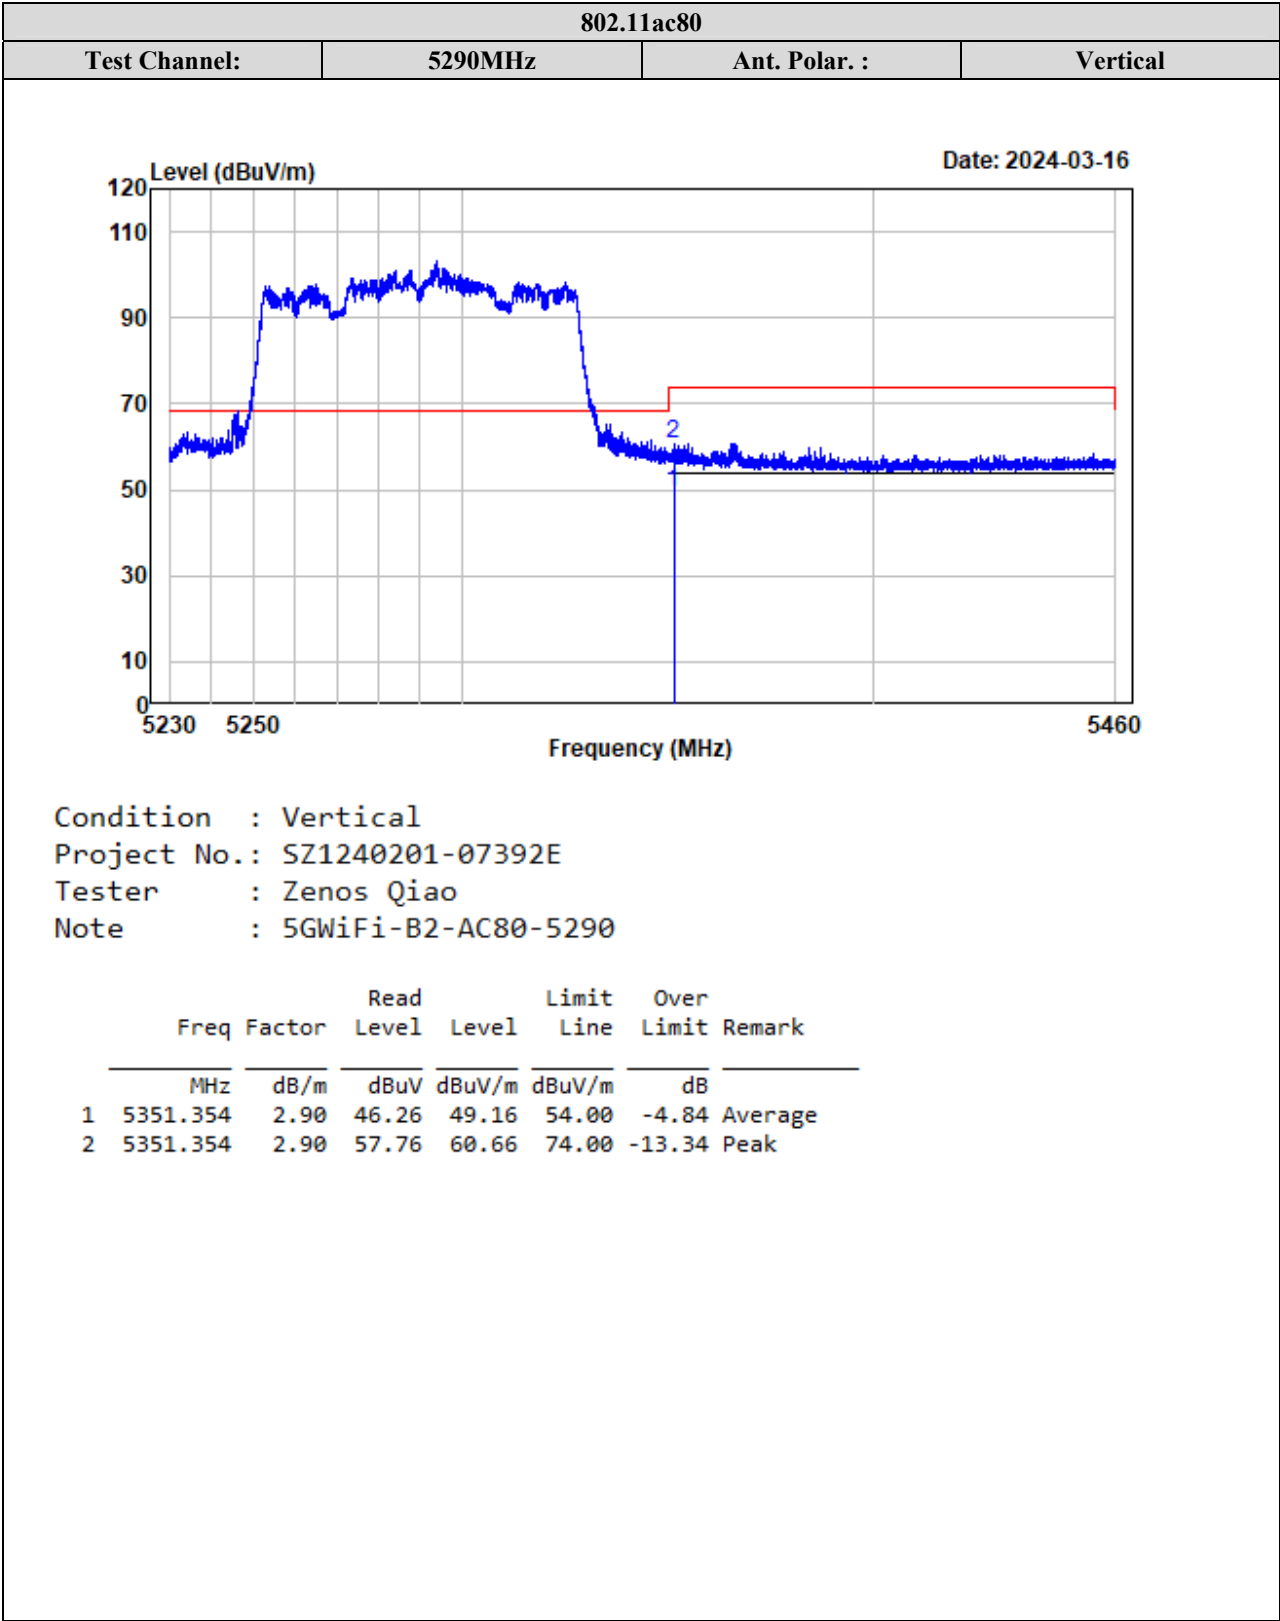


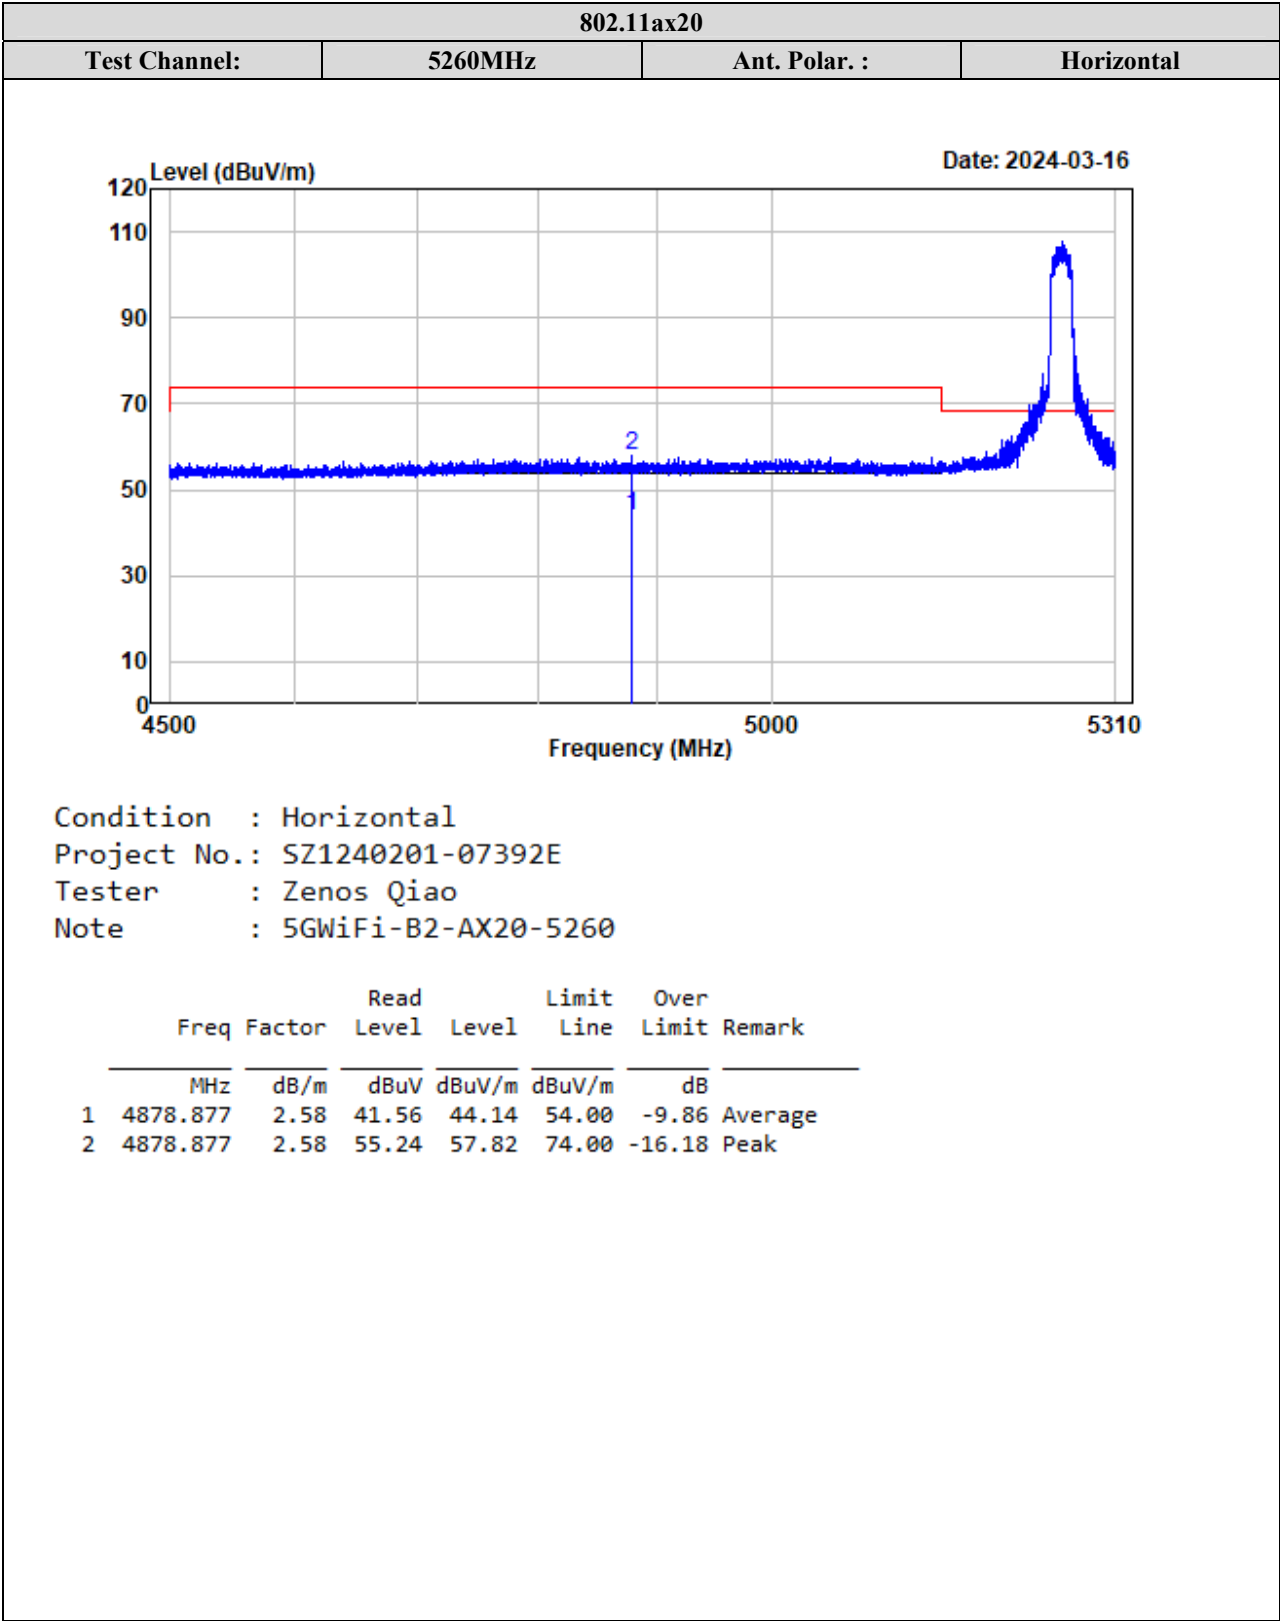


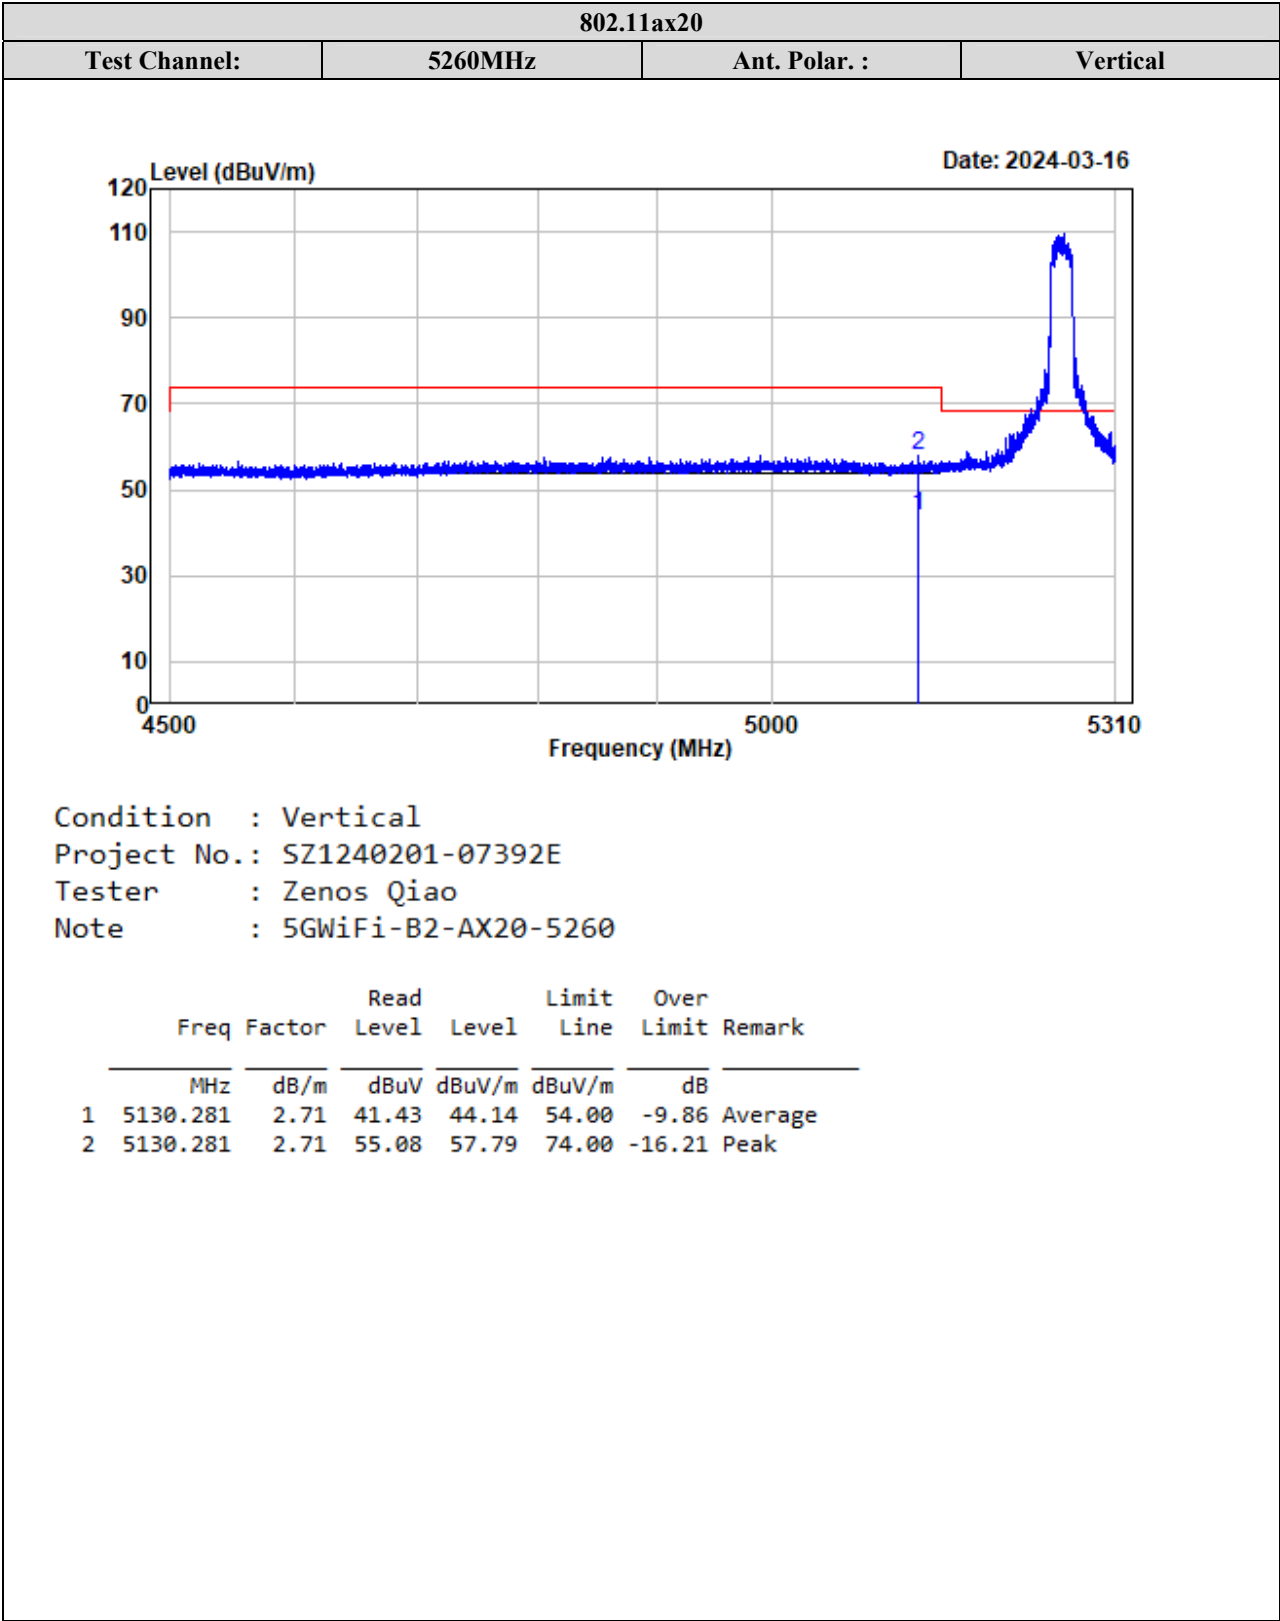


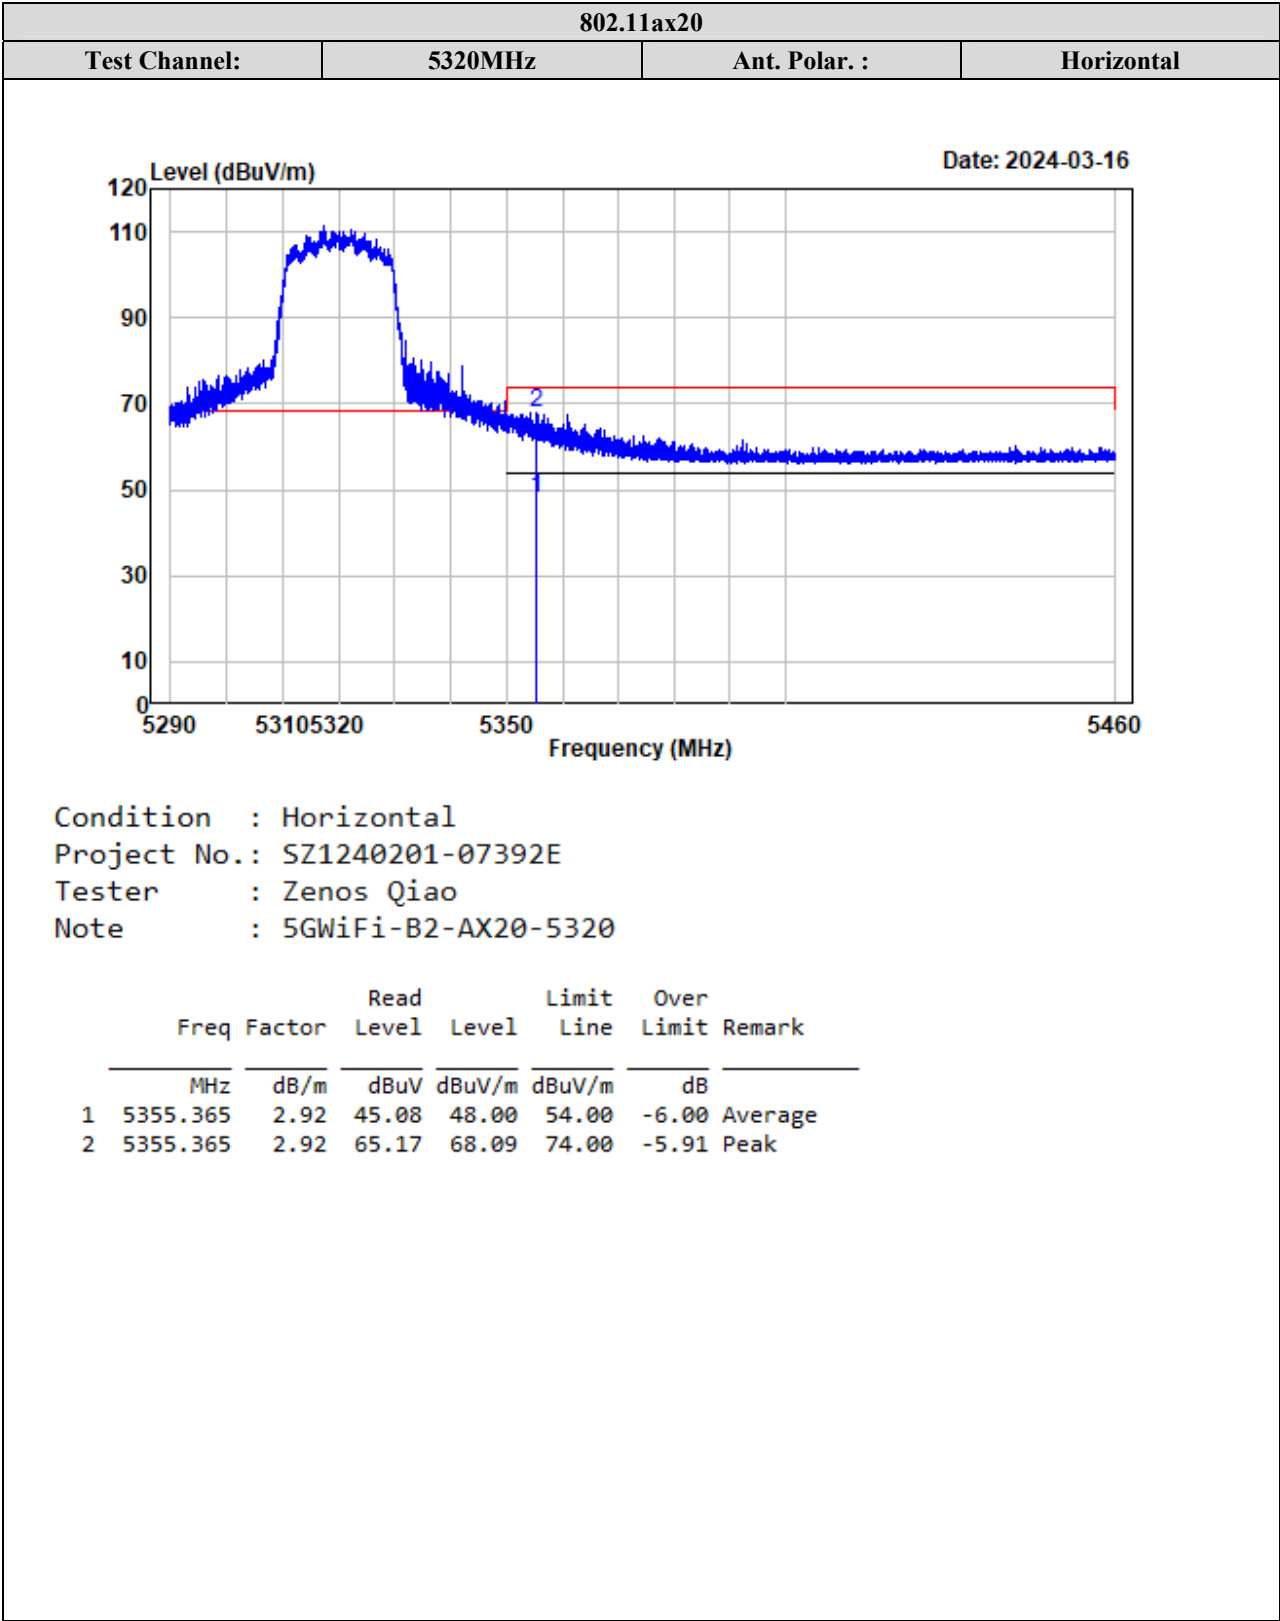


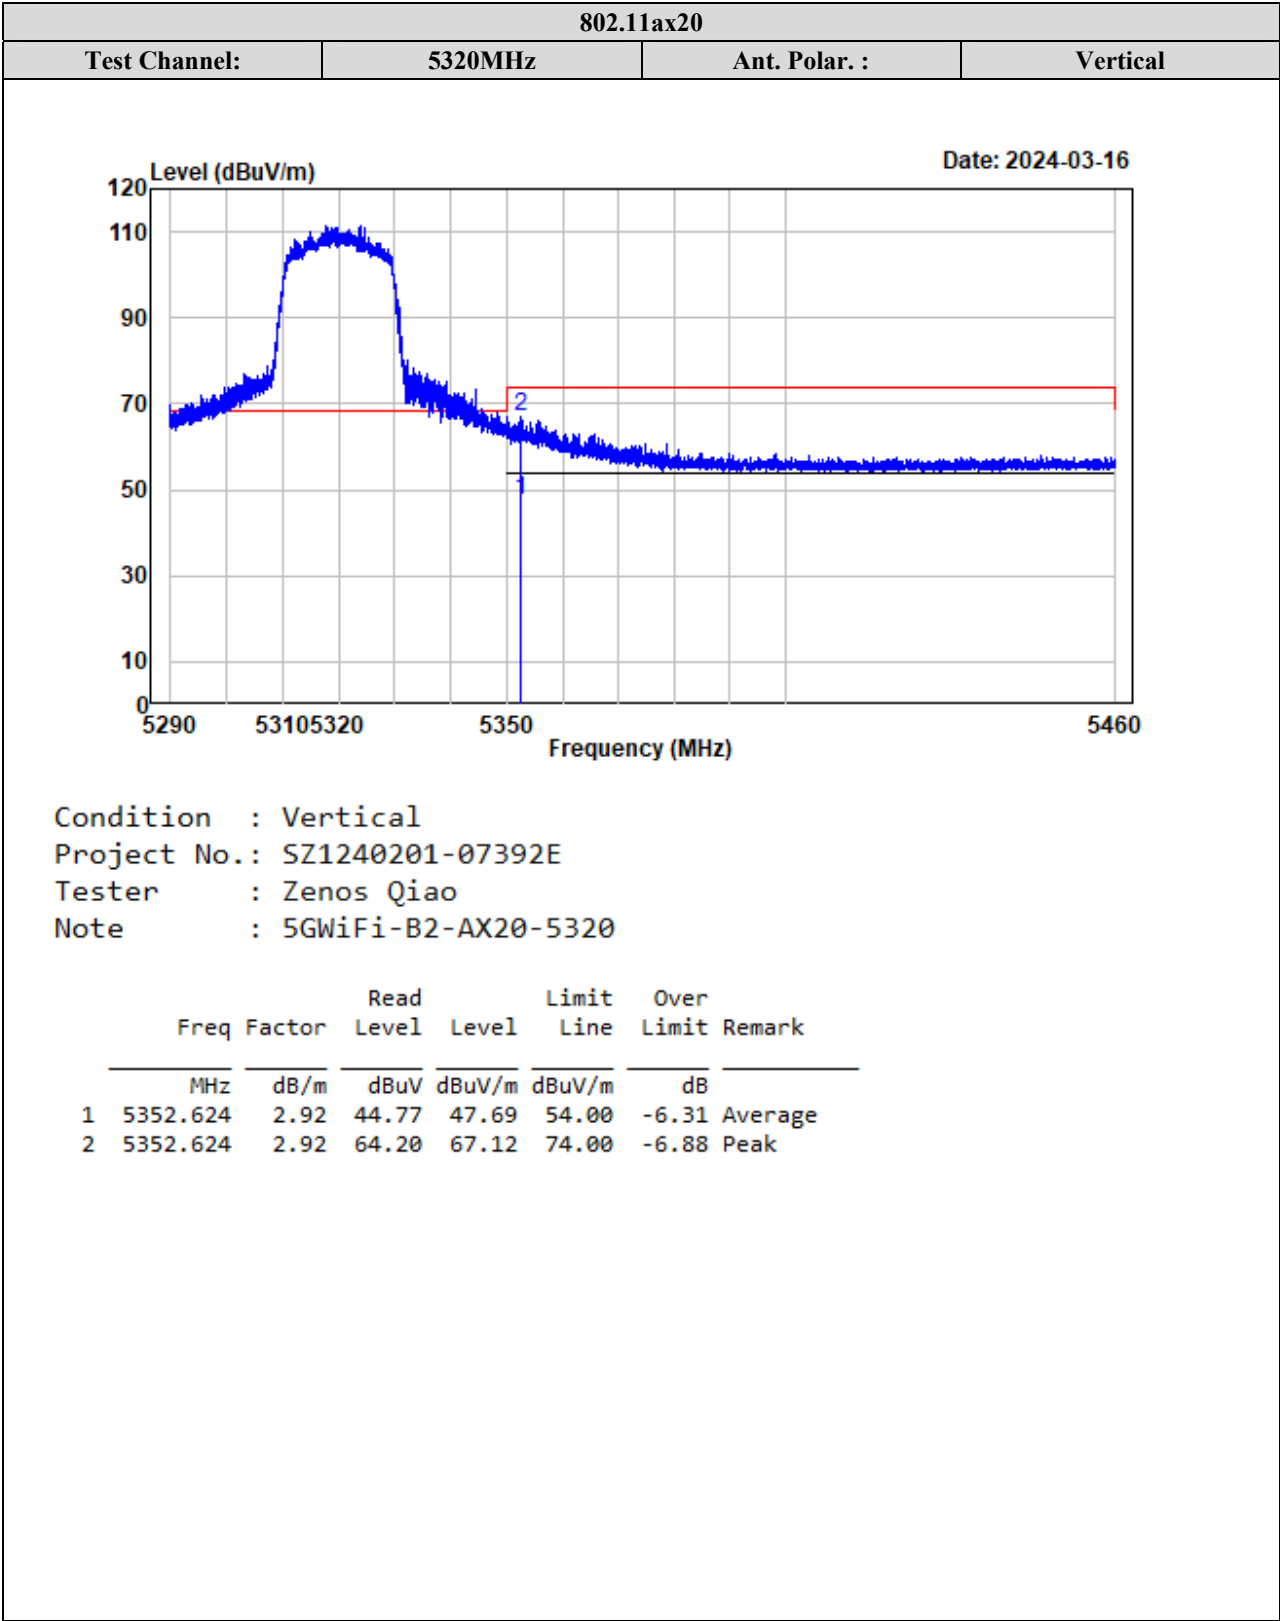


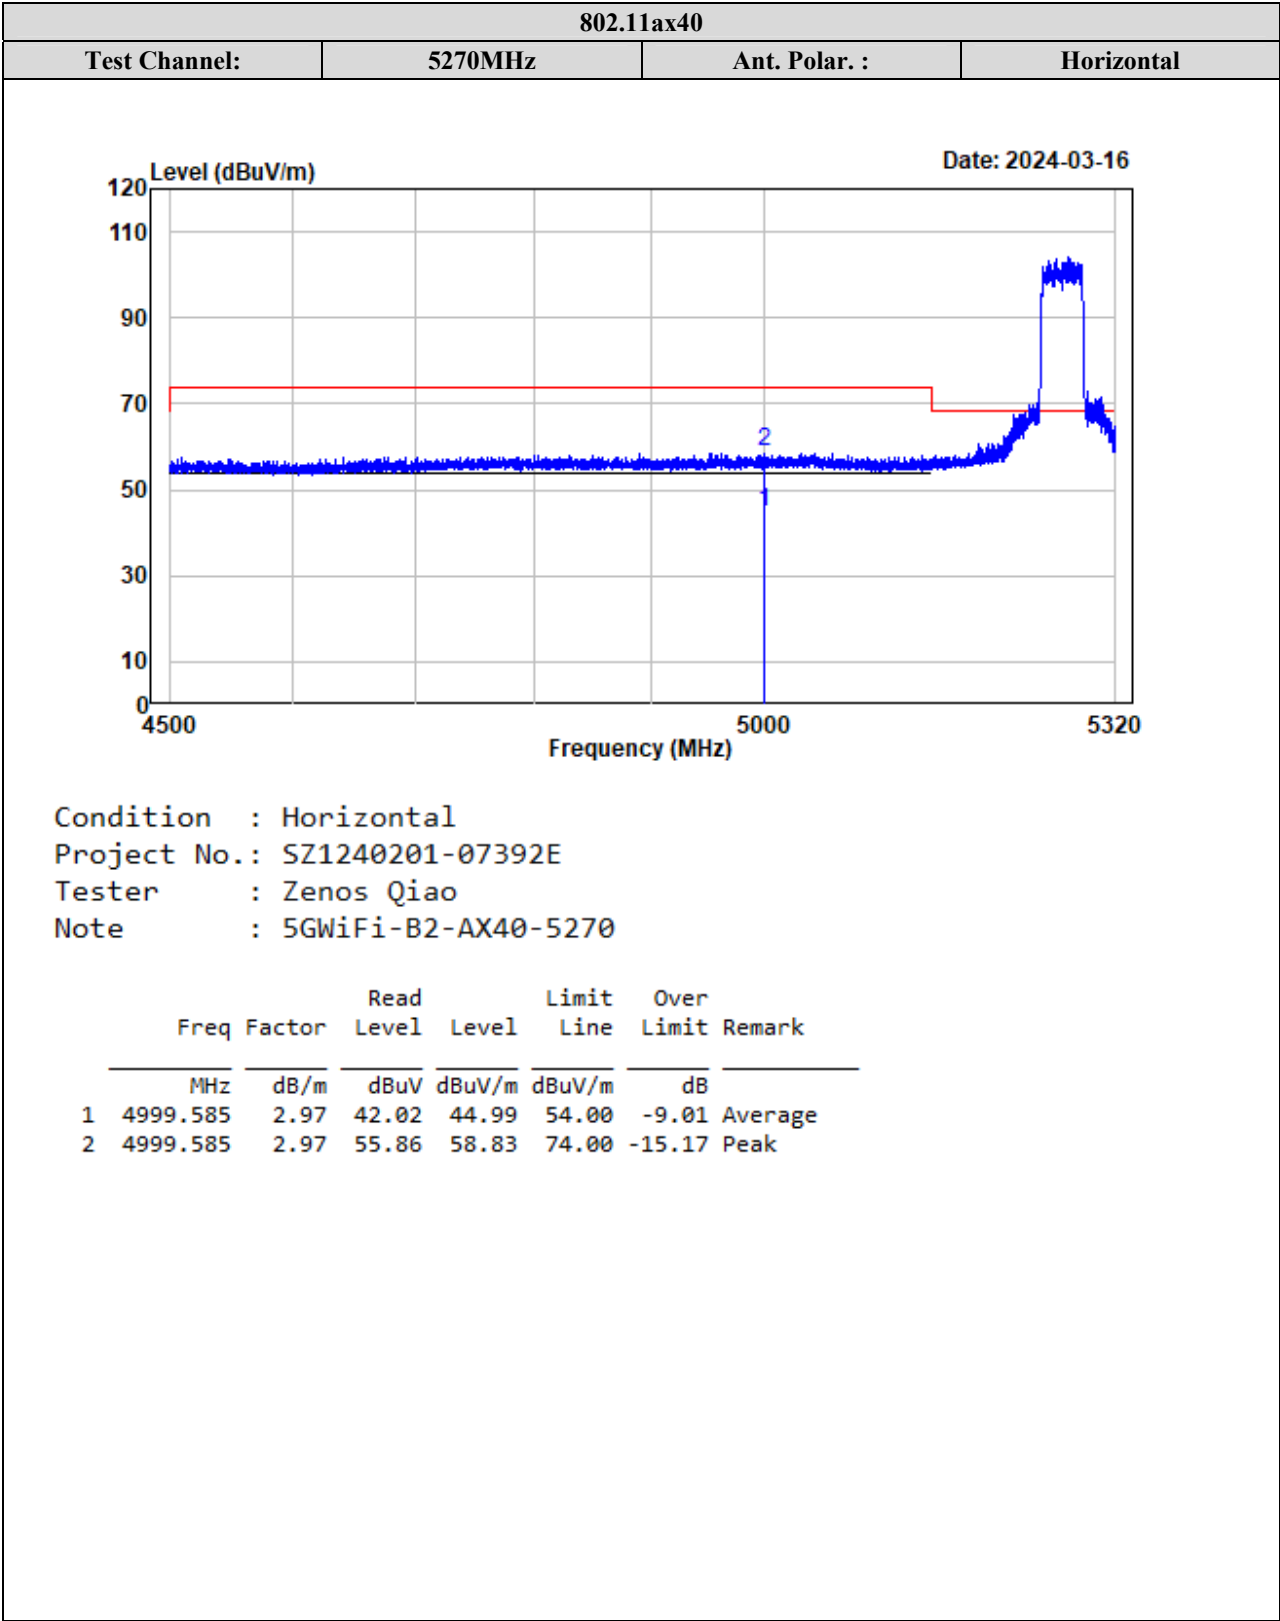


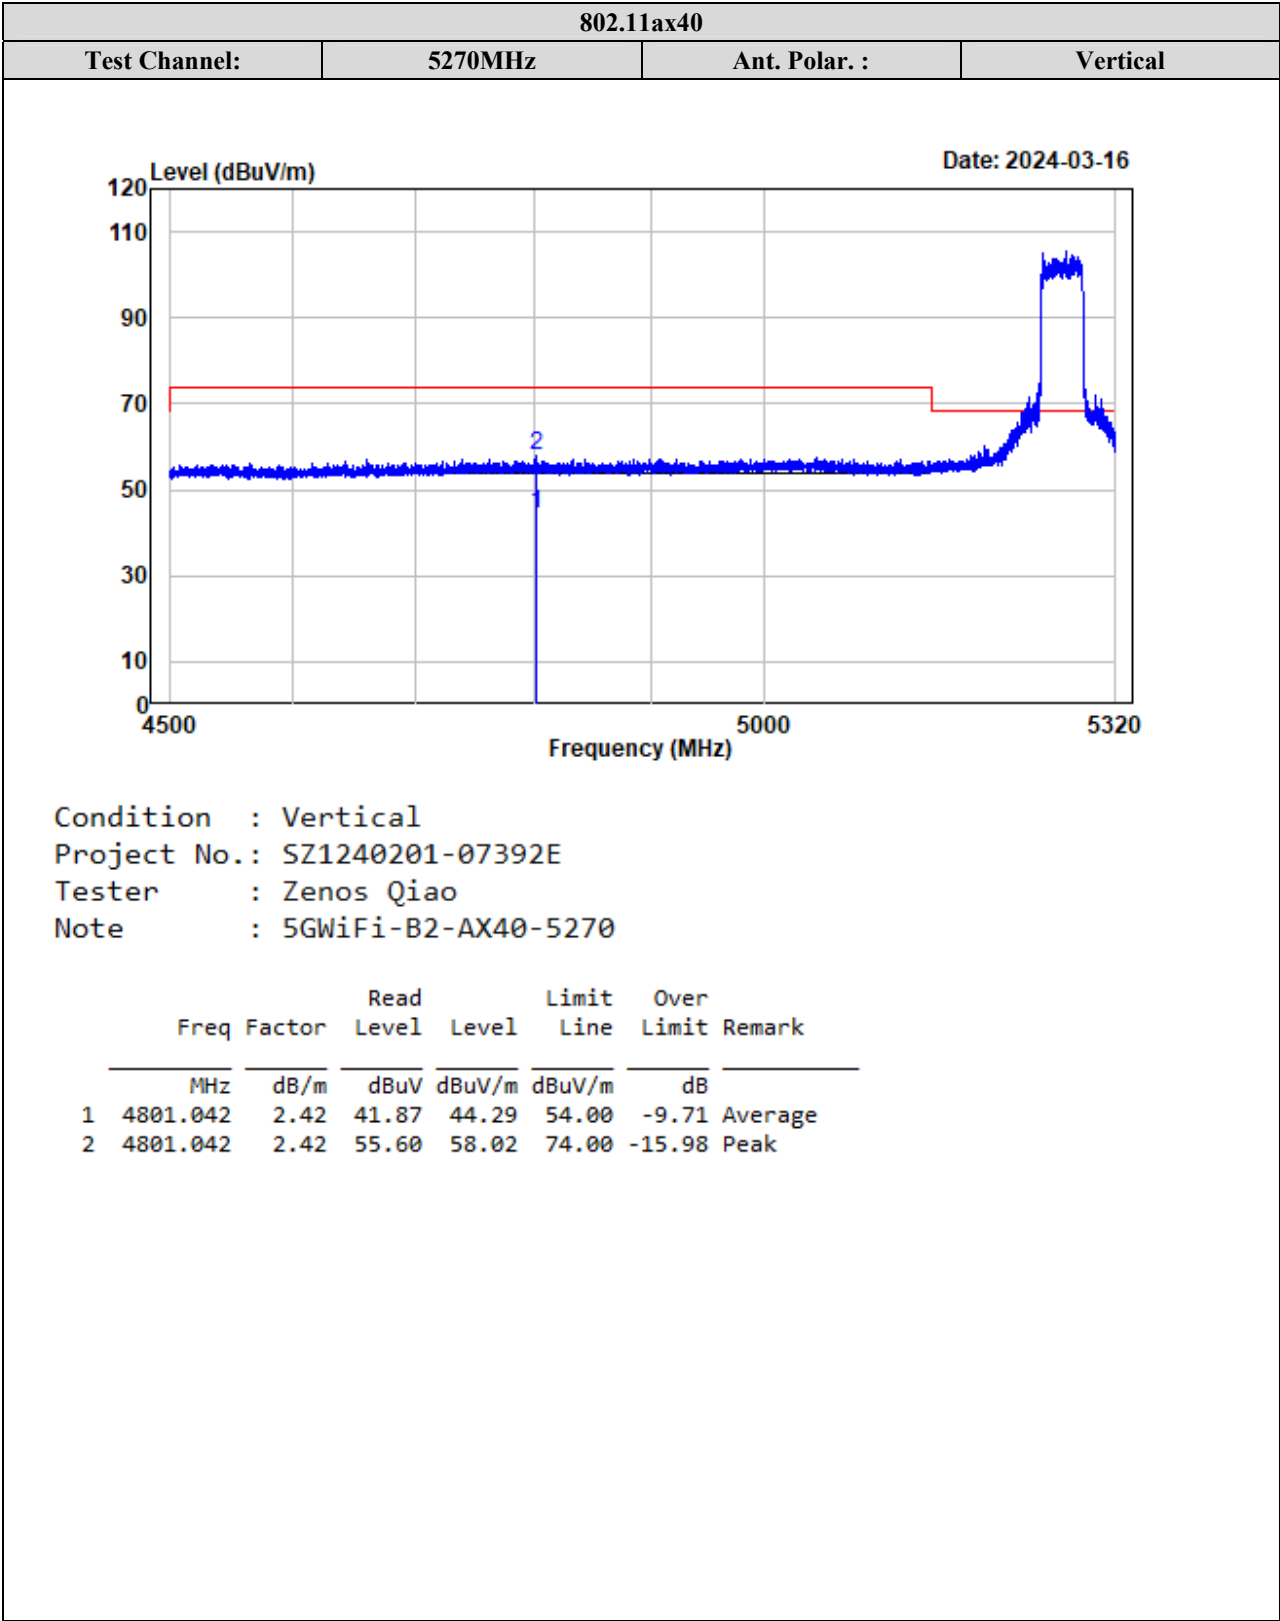


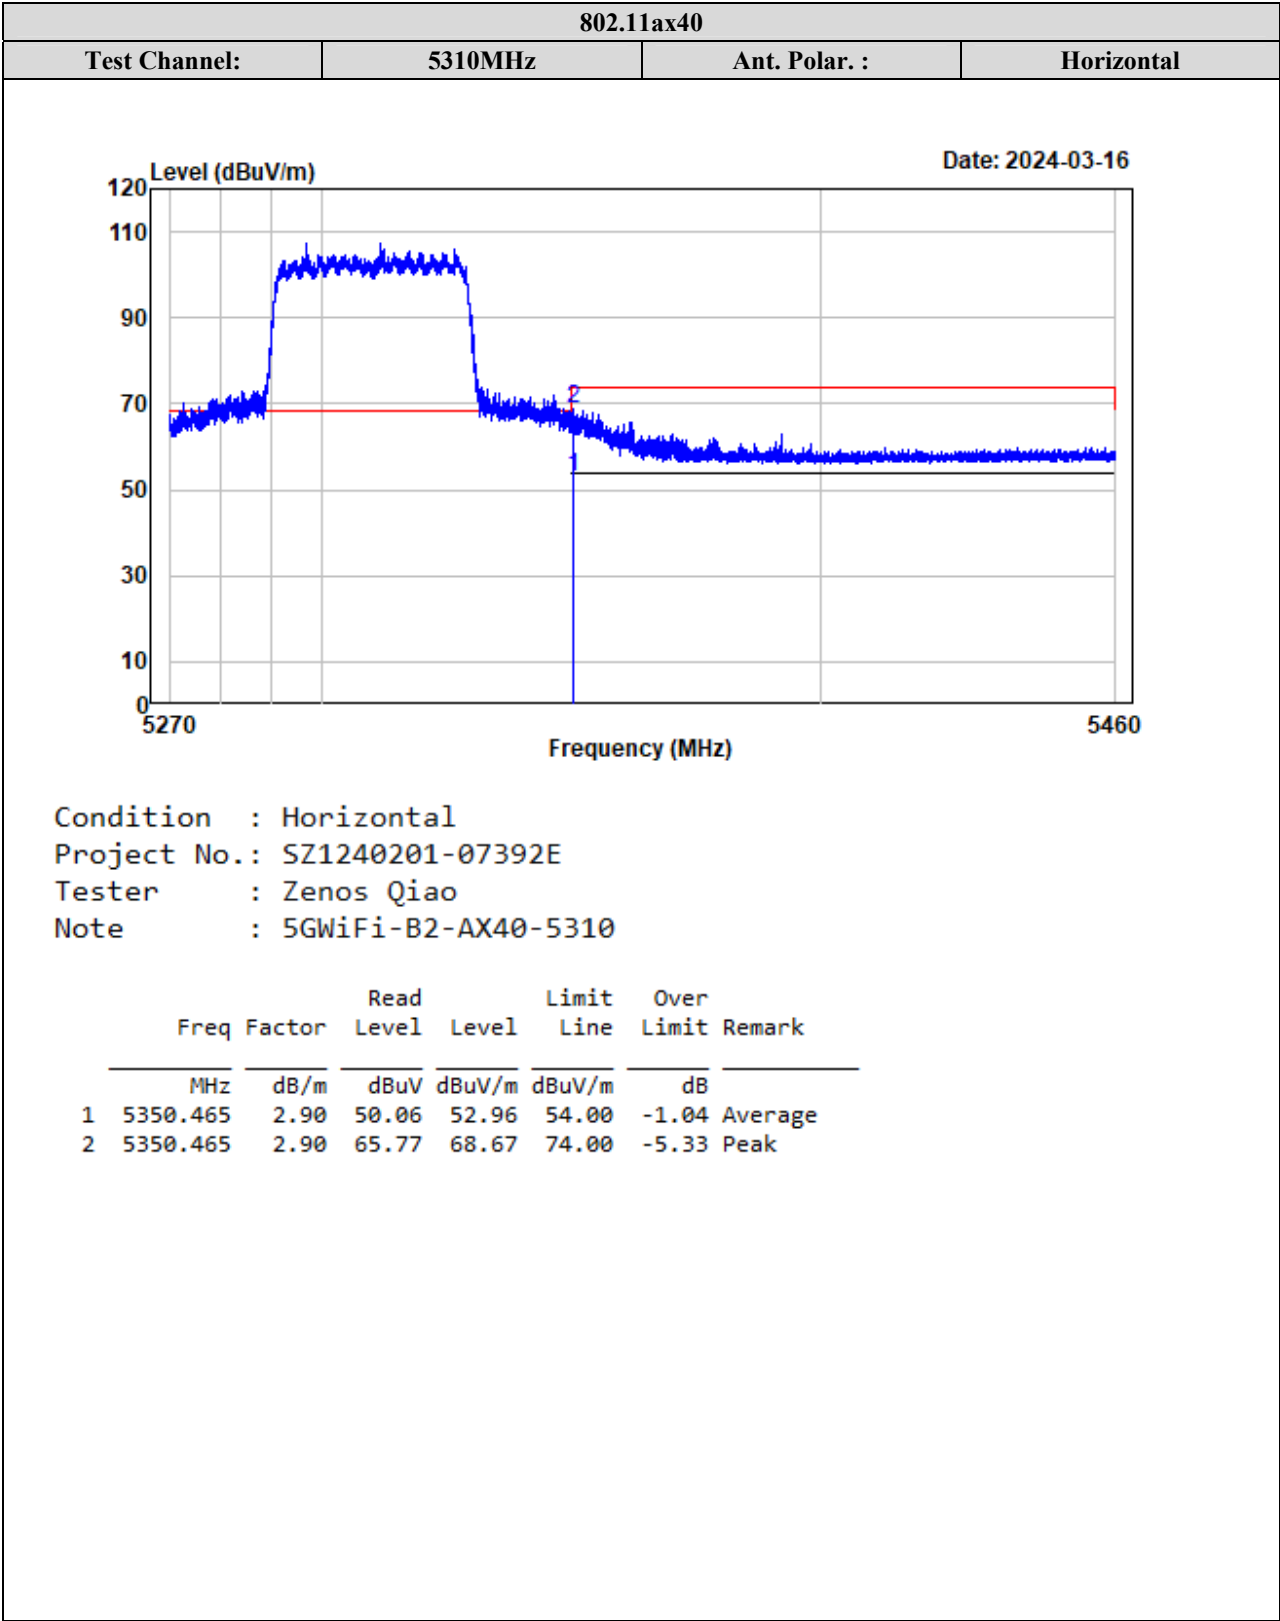


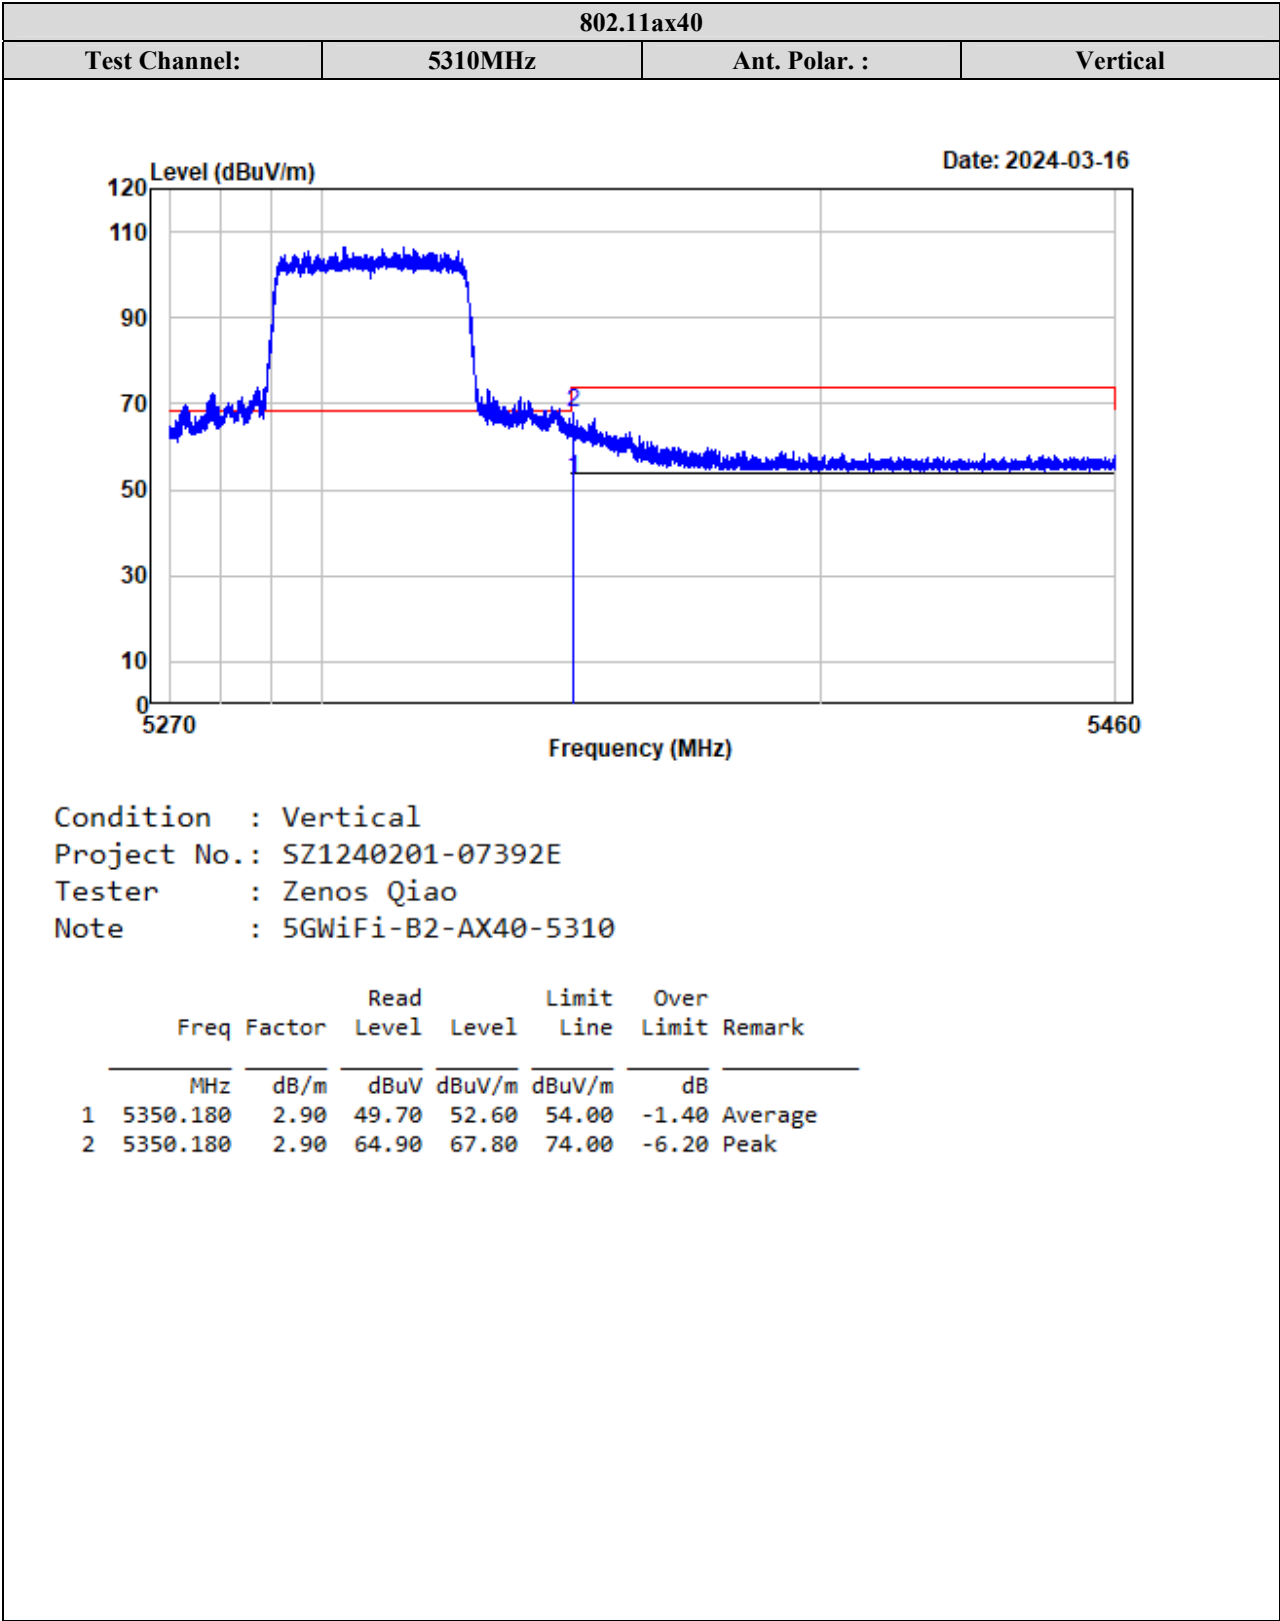

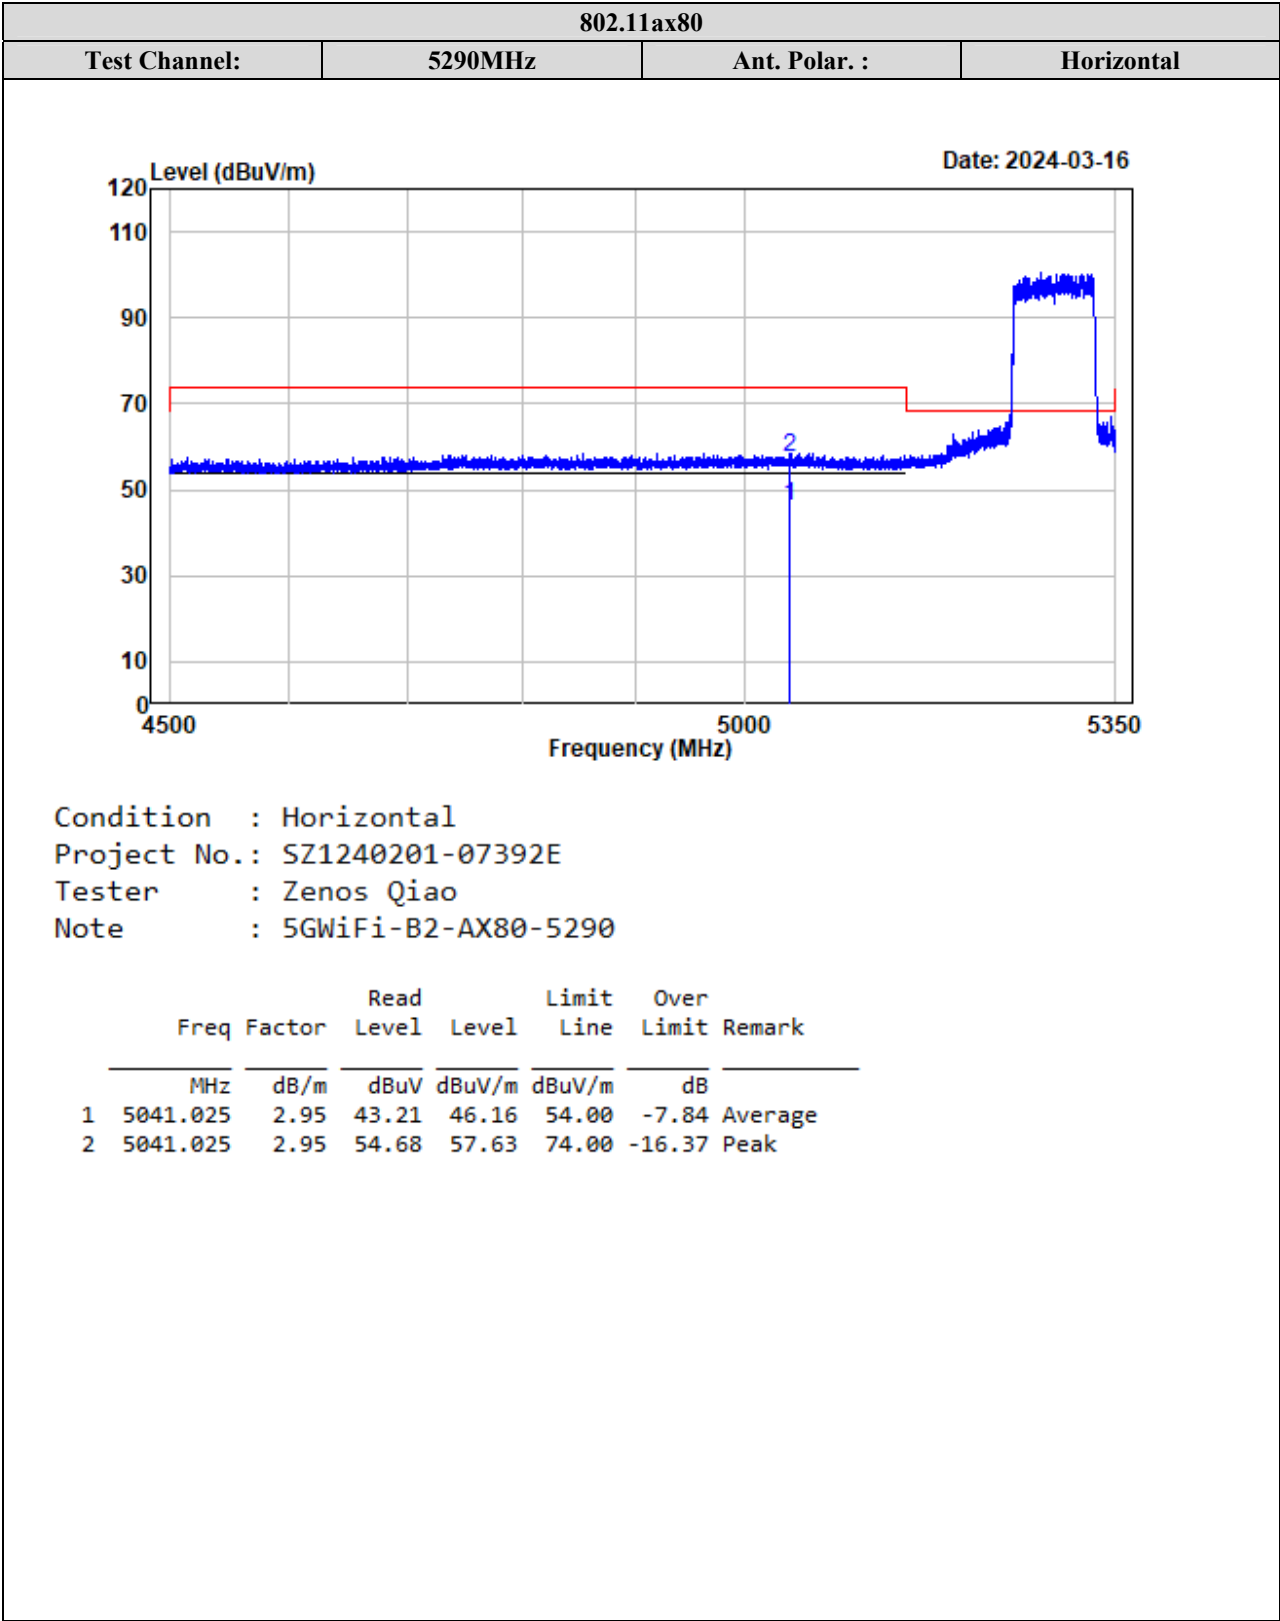


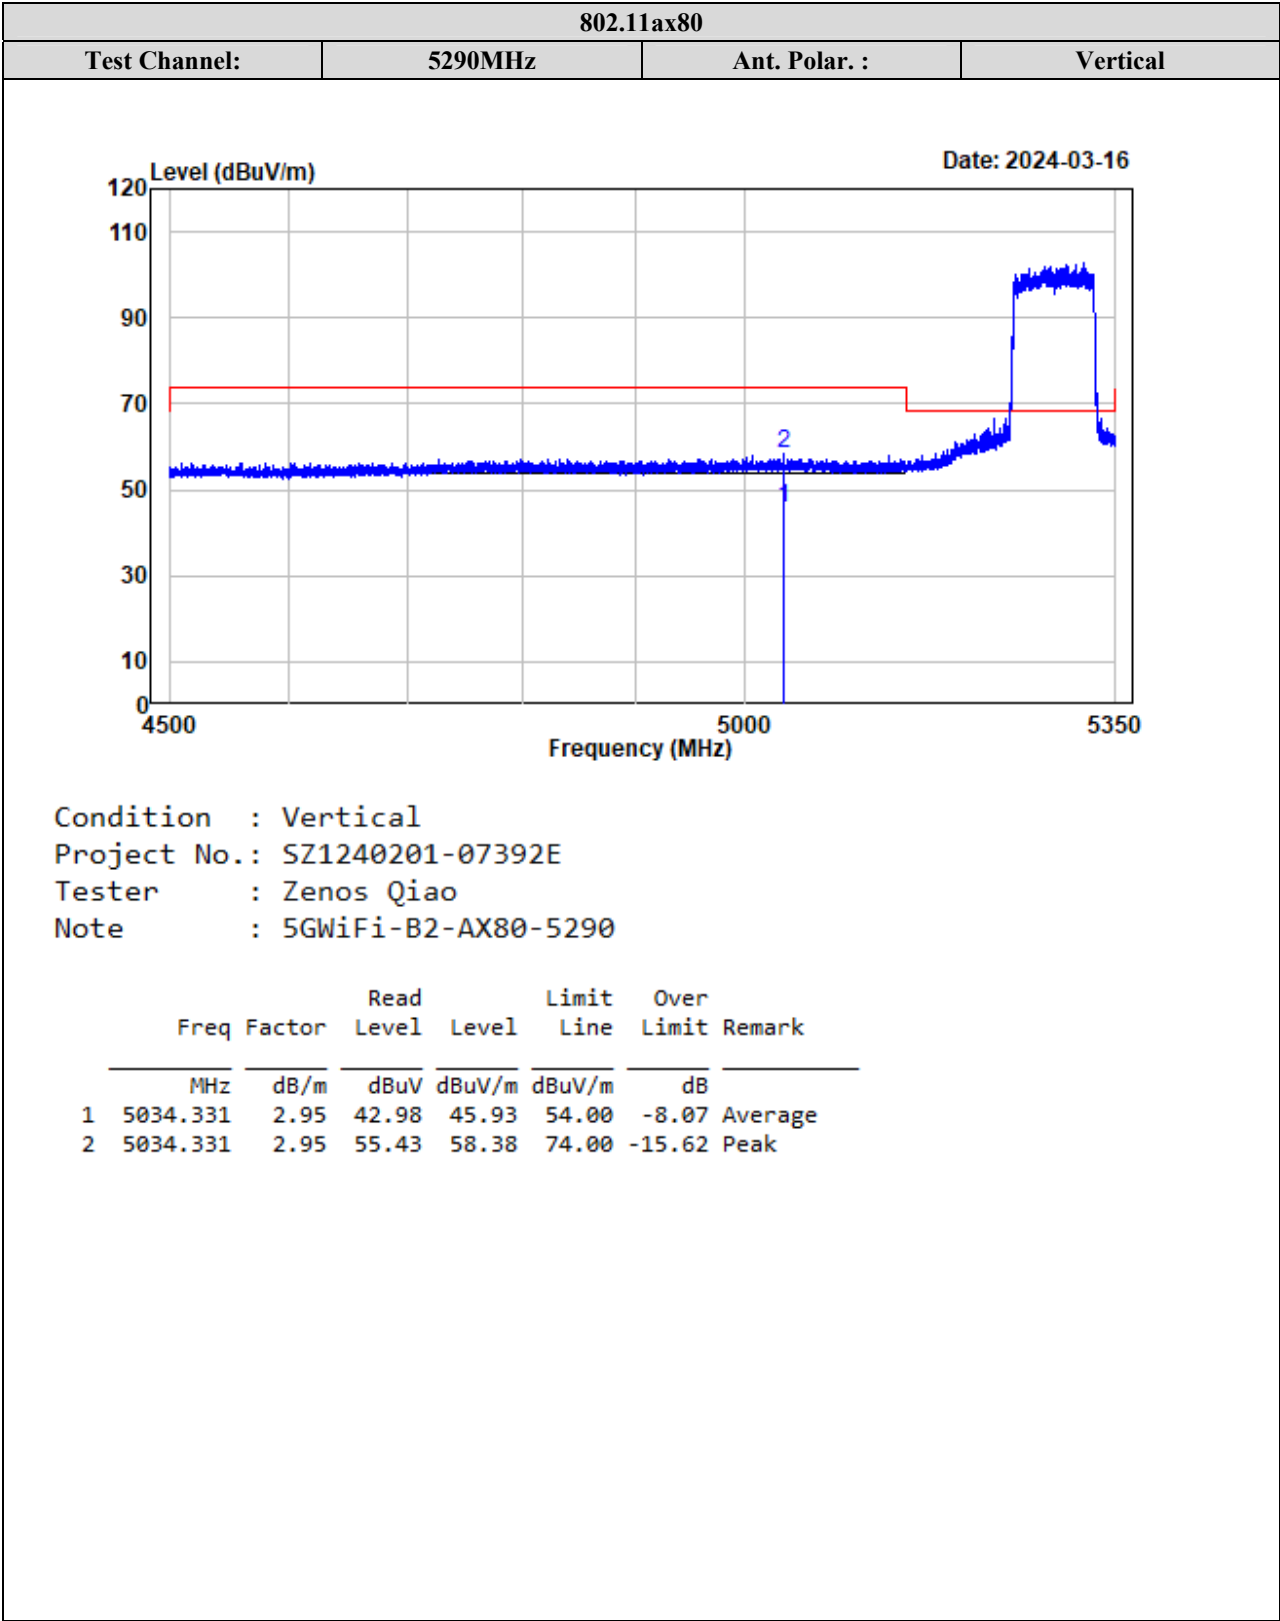


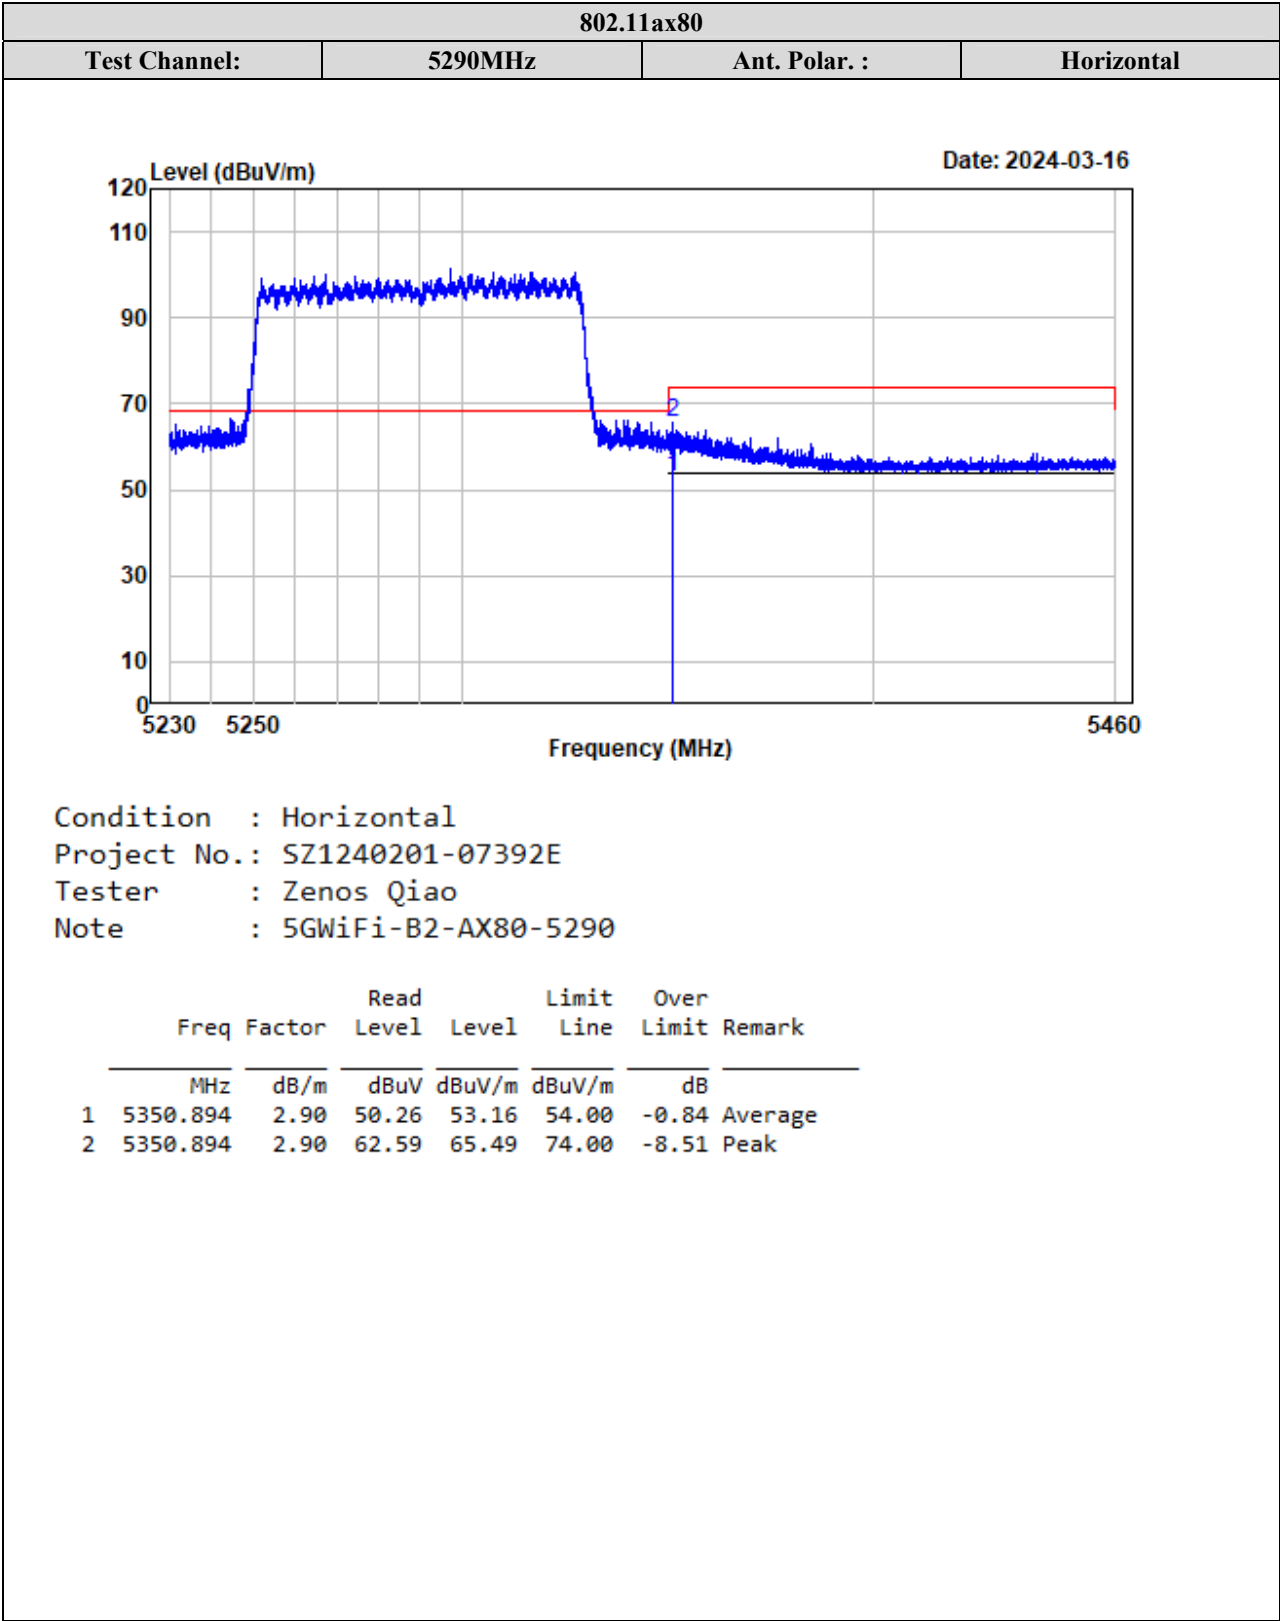


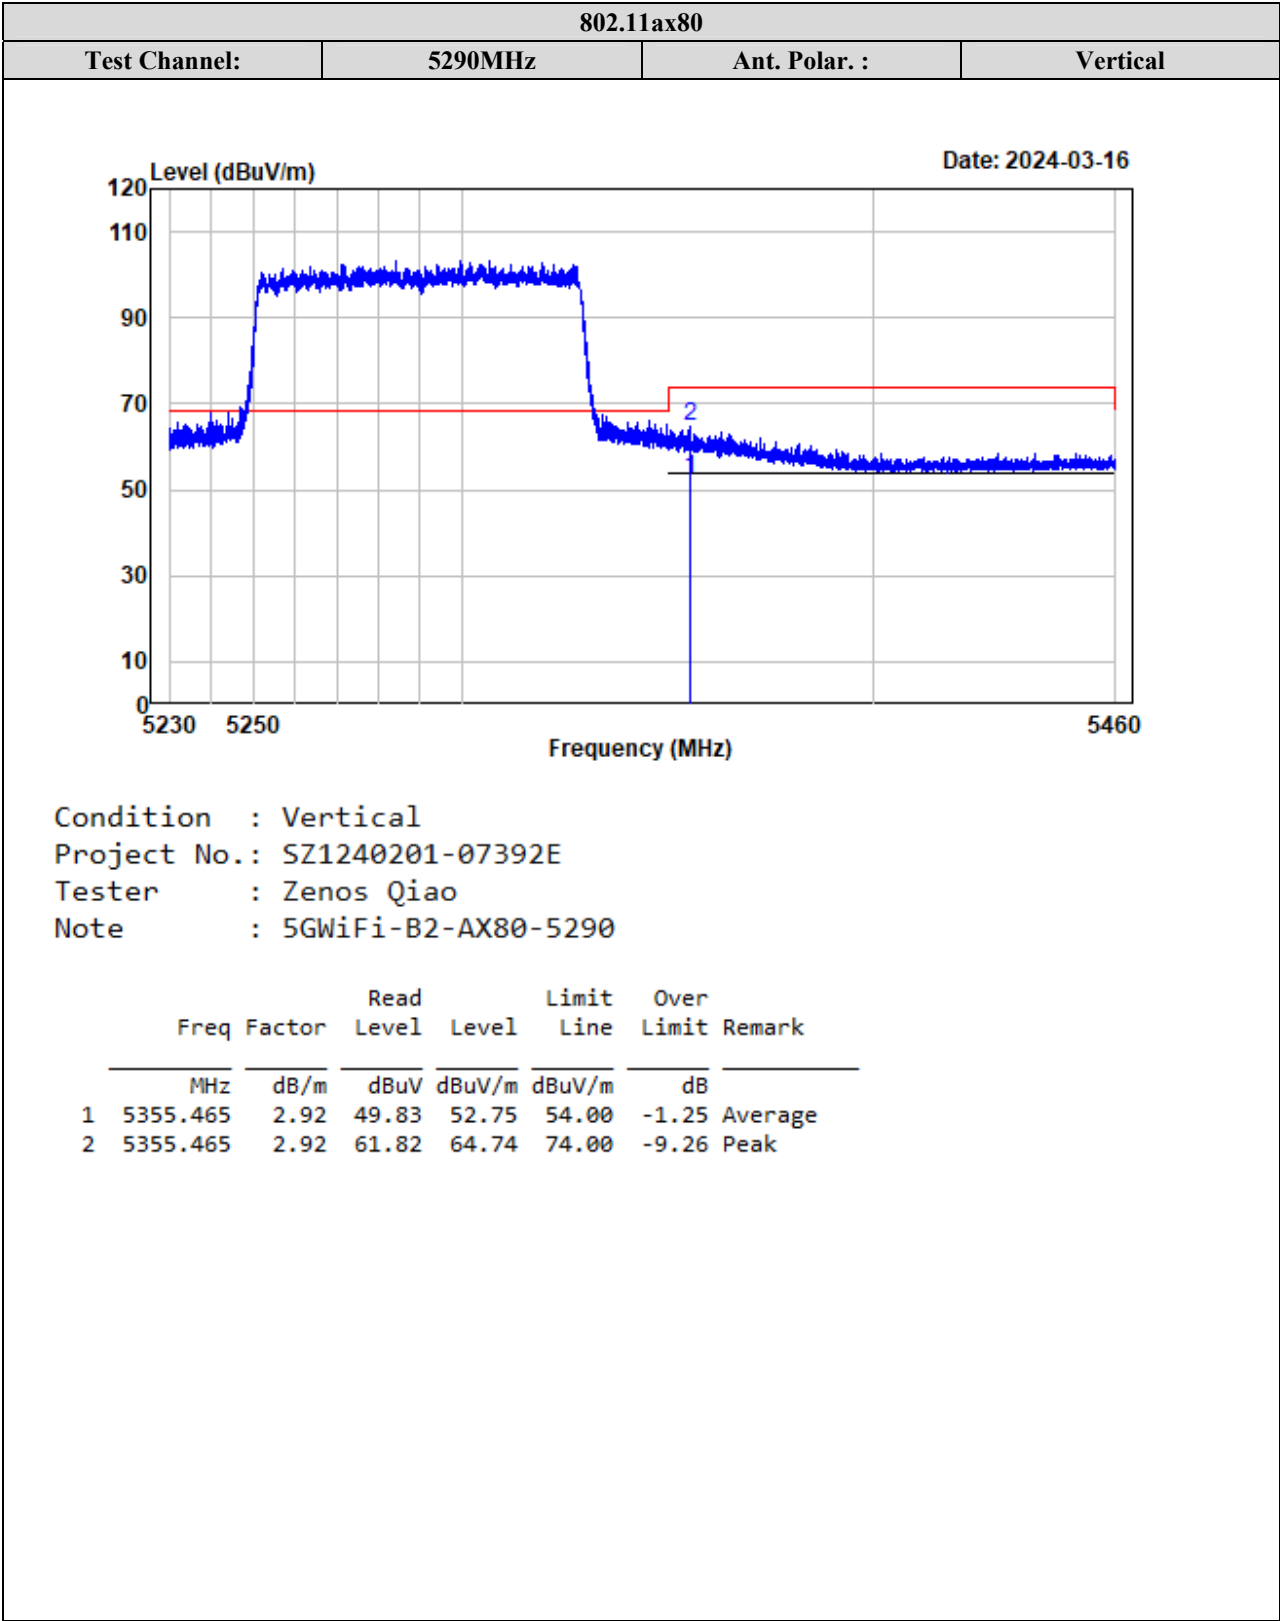



5470-5725MHz:

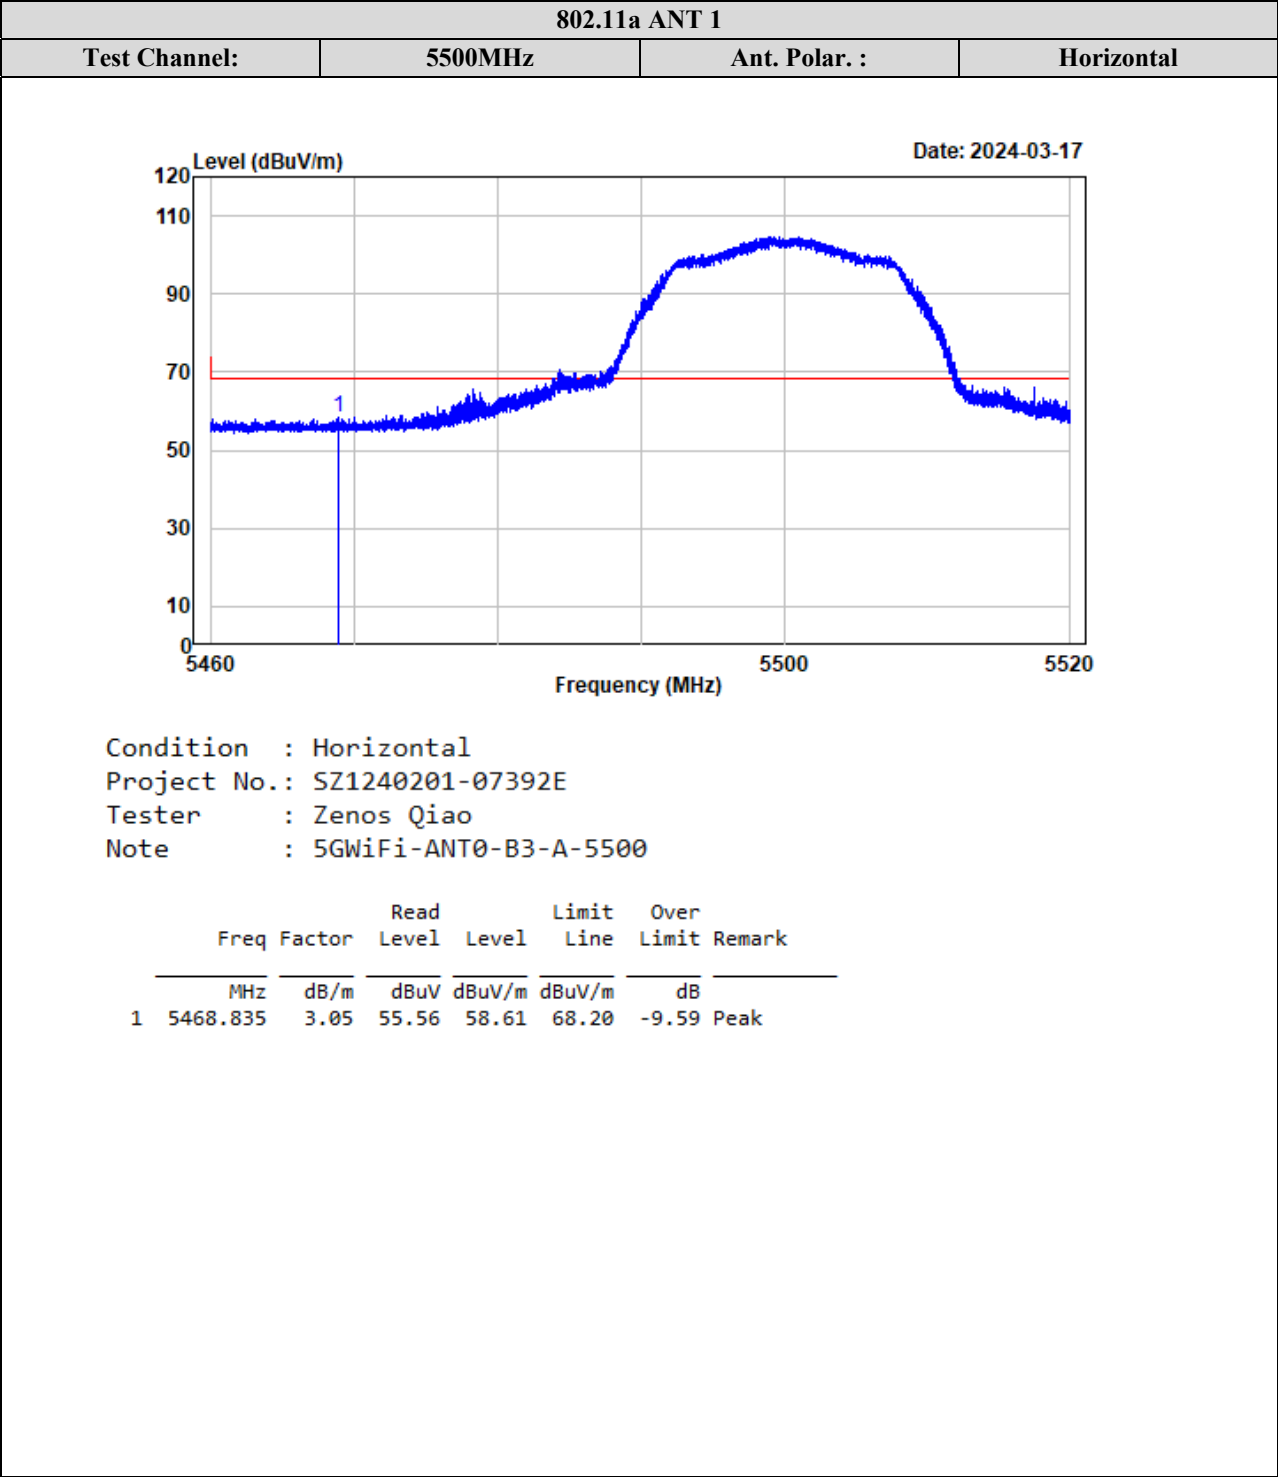


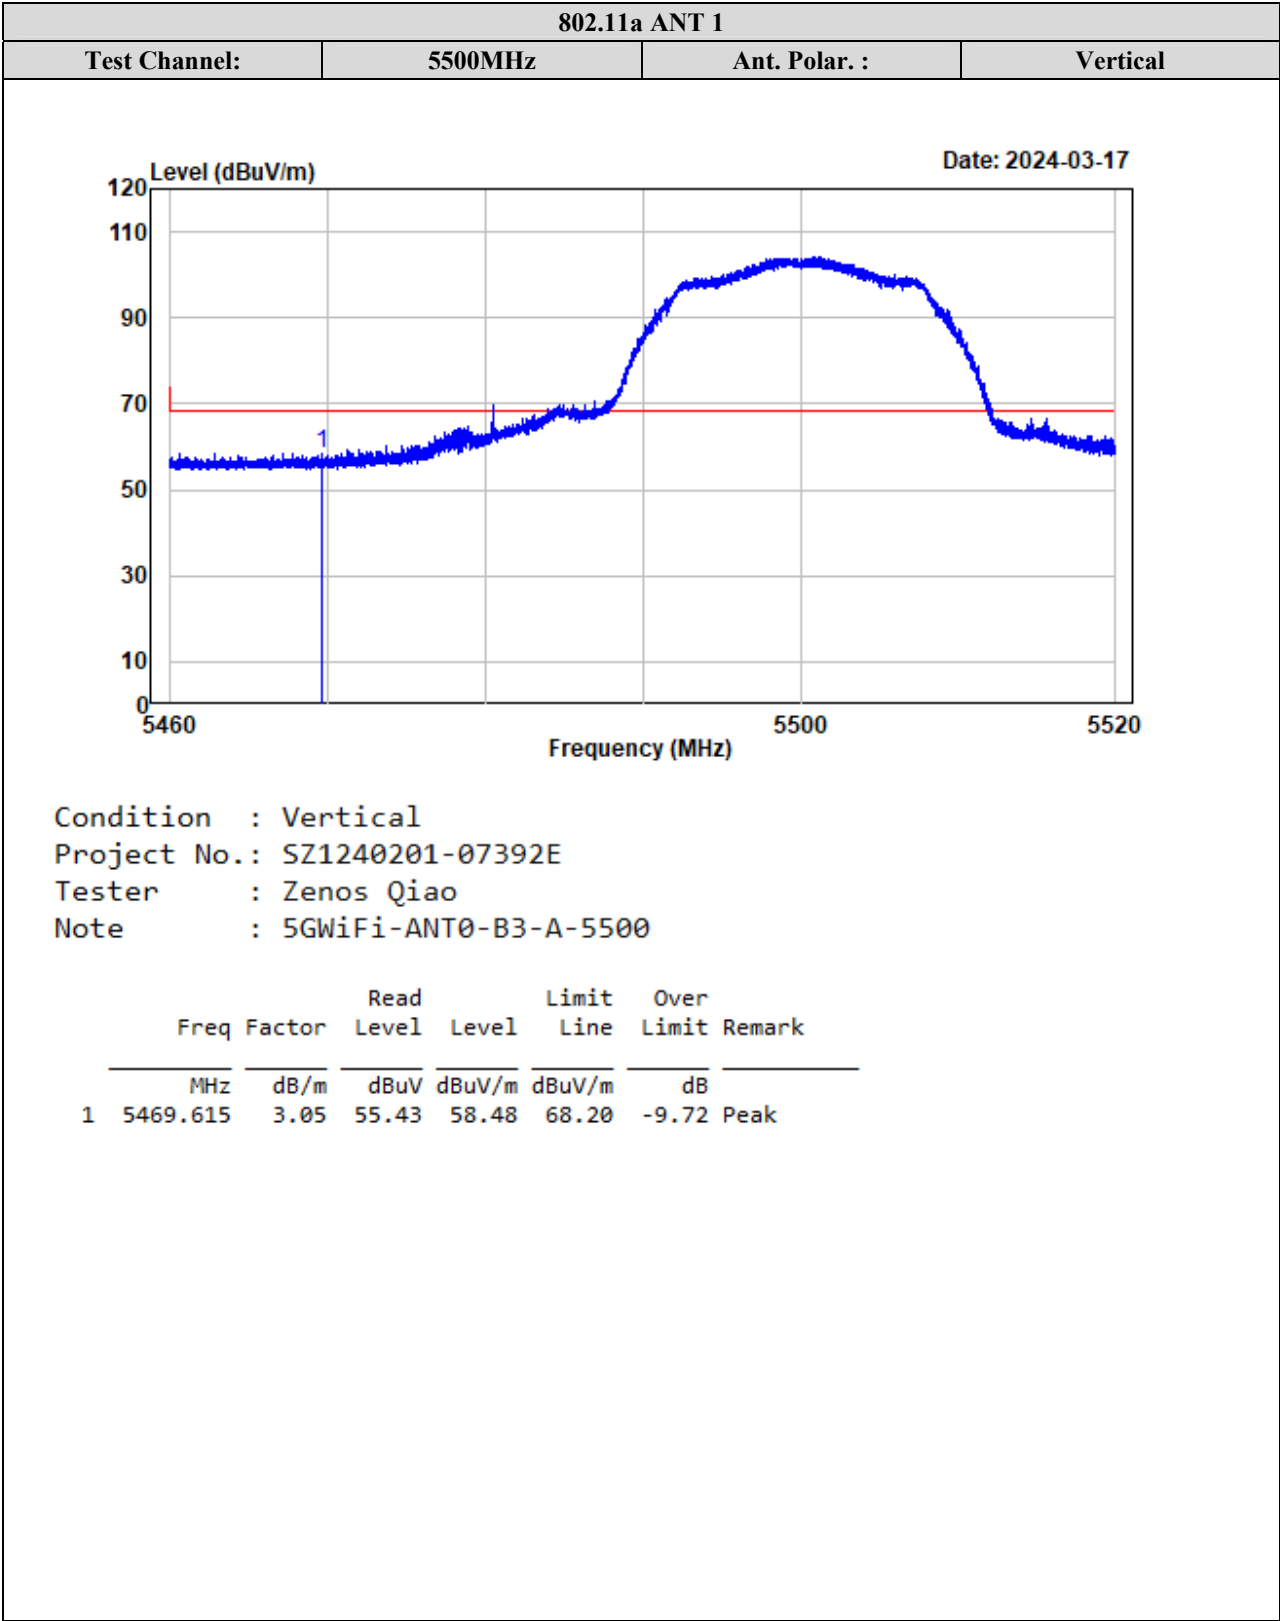


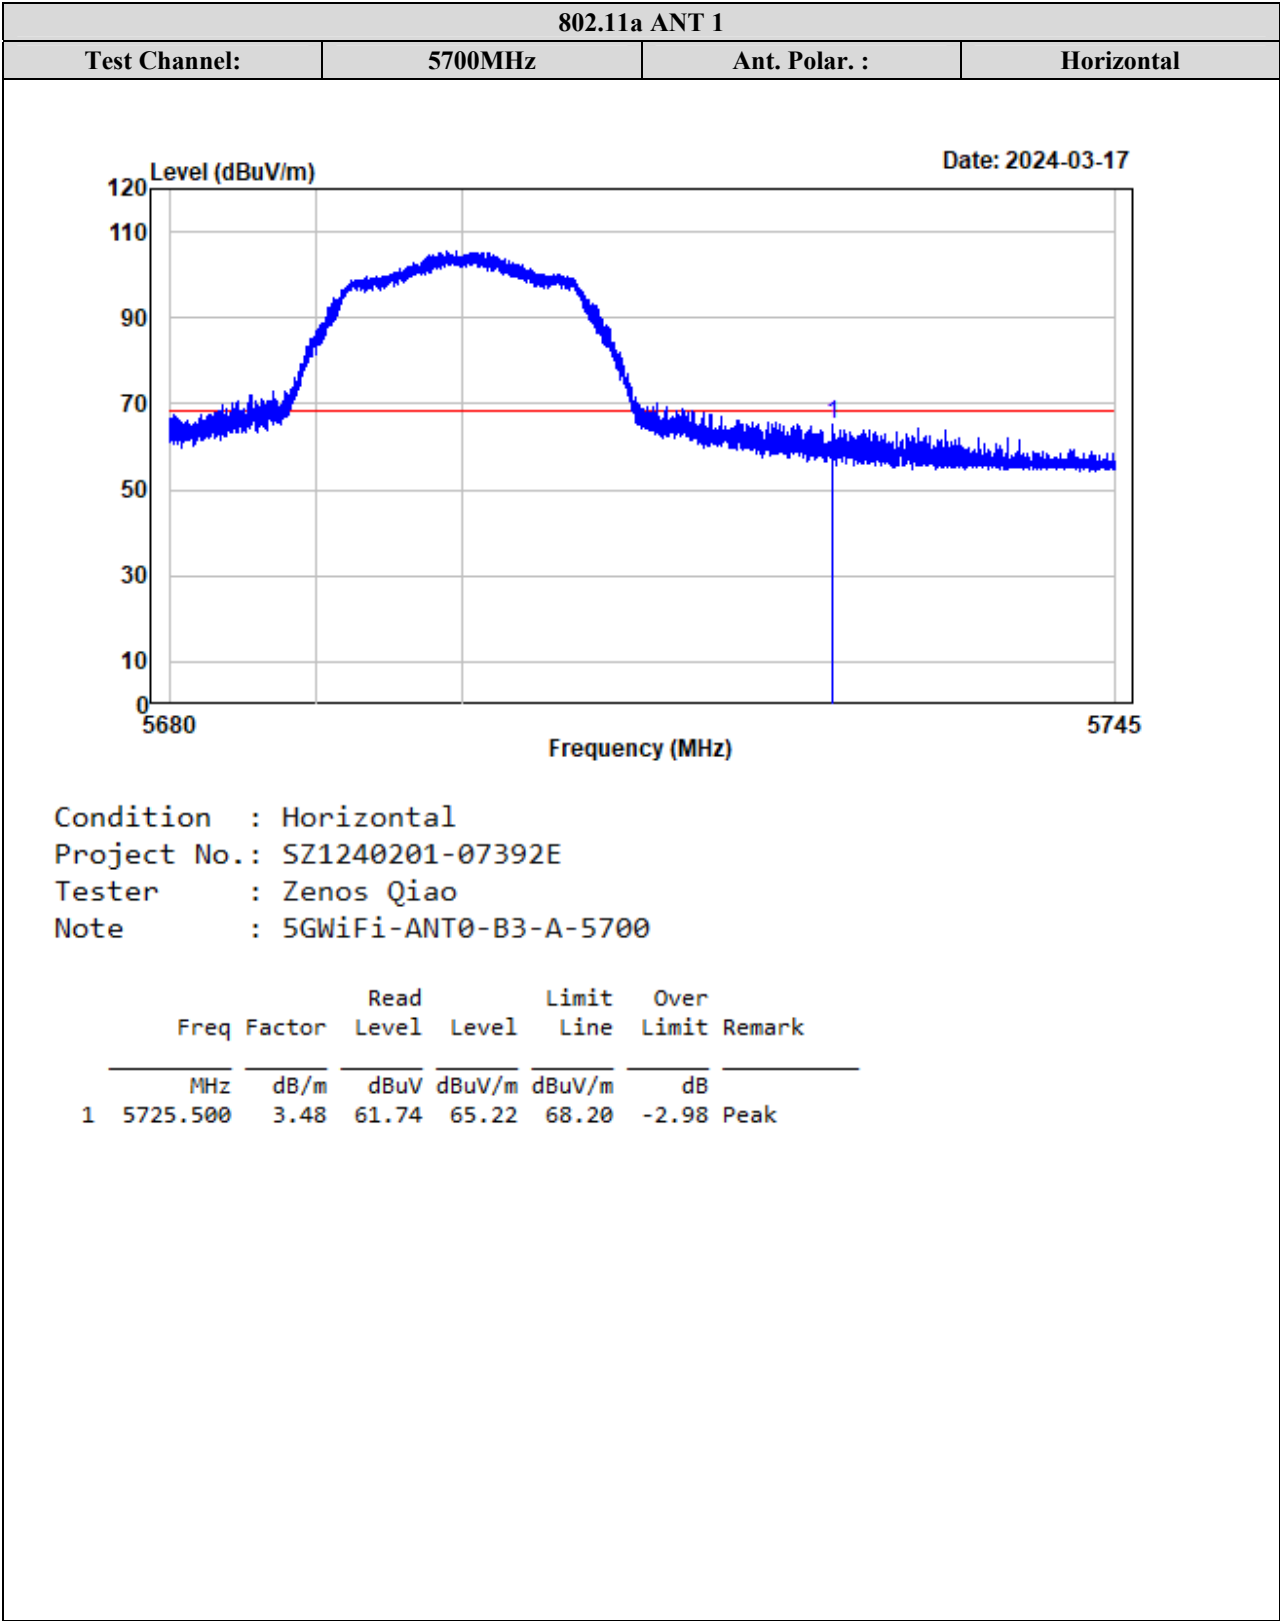


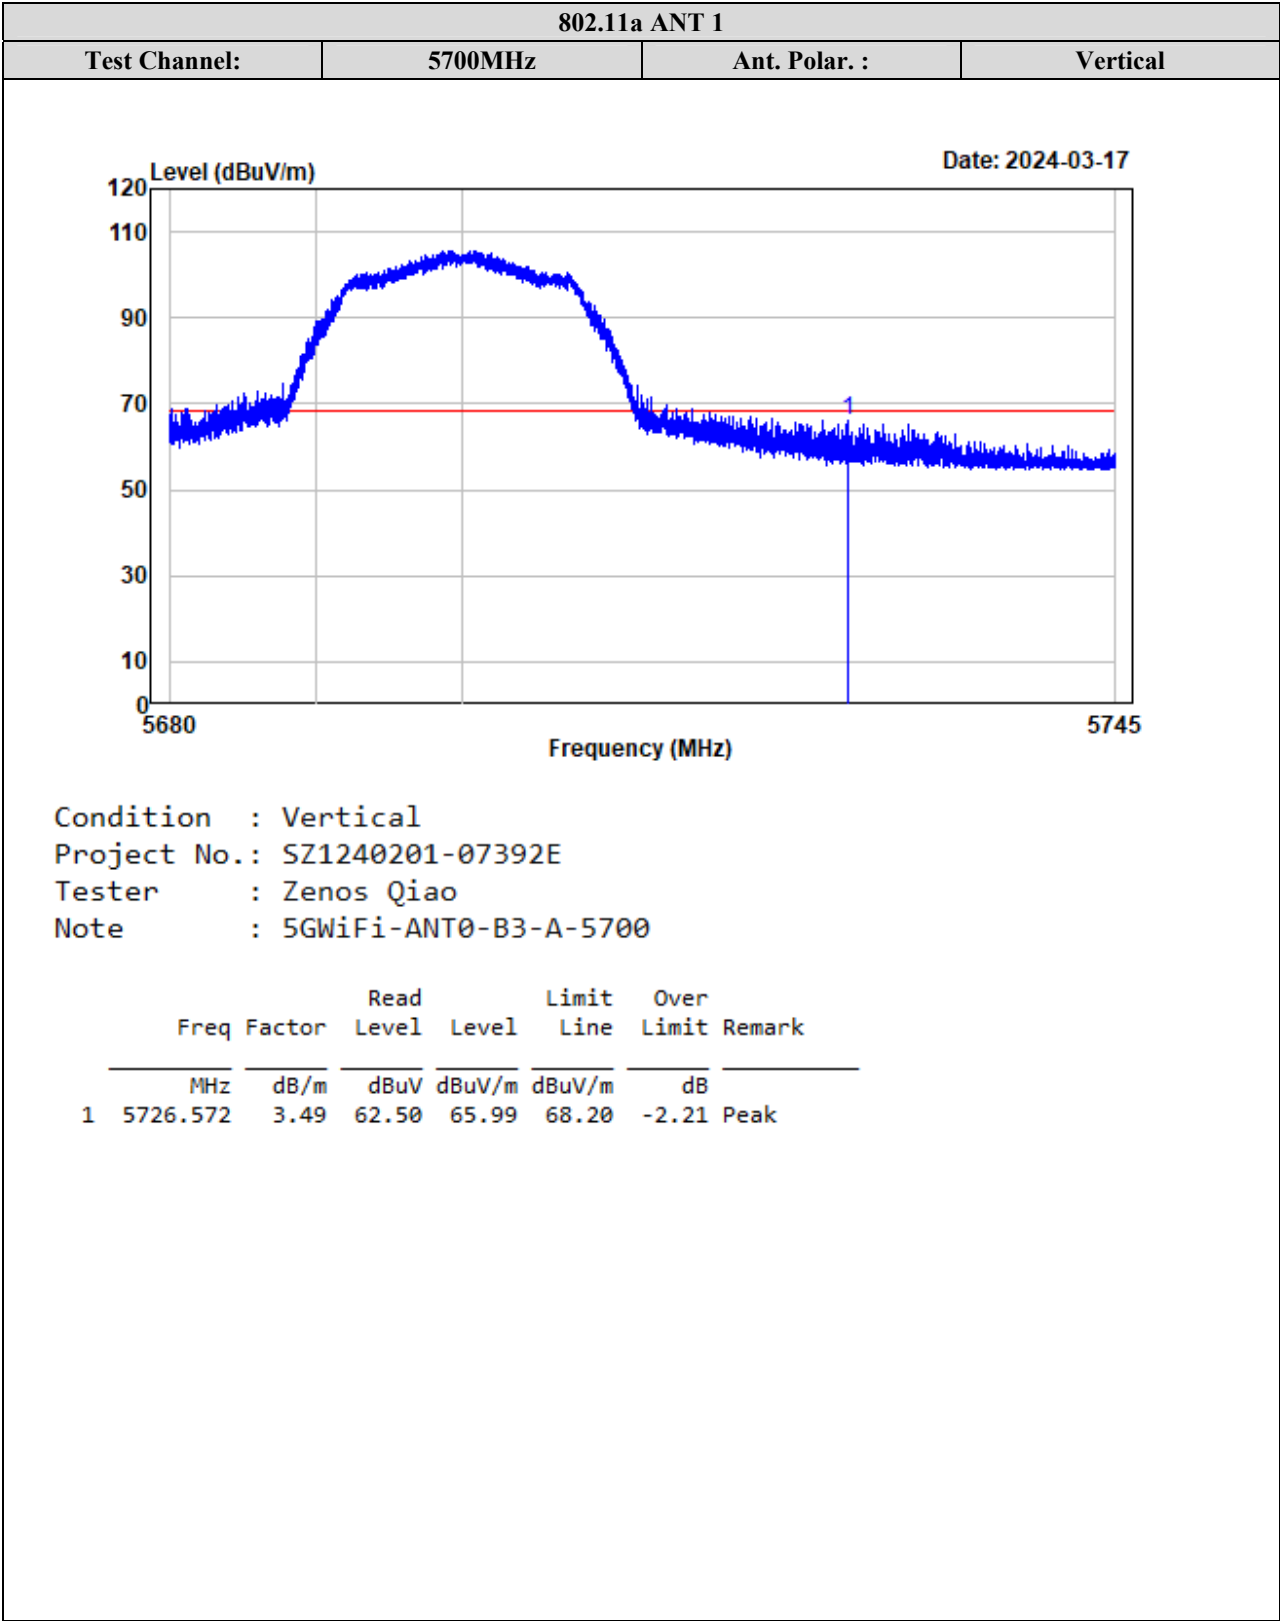


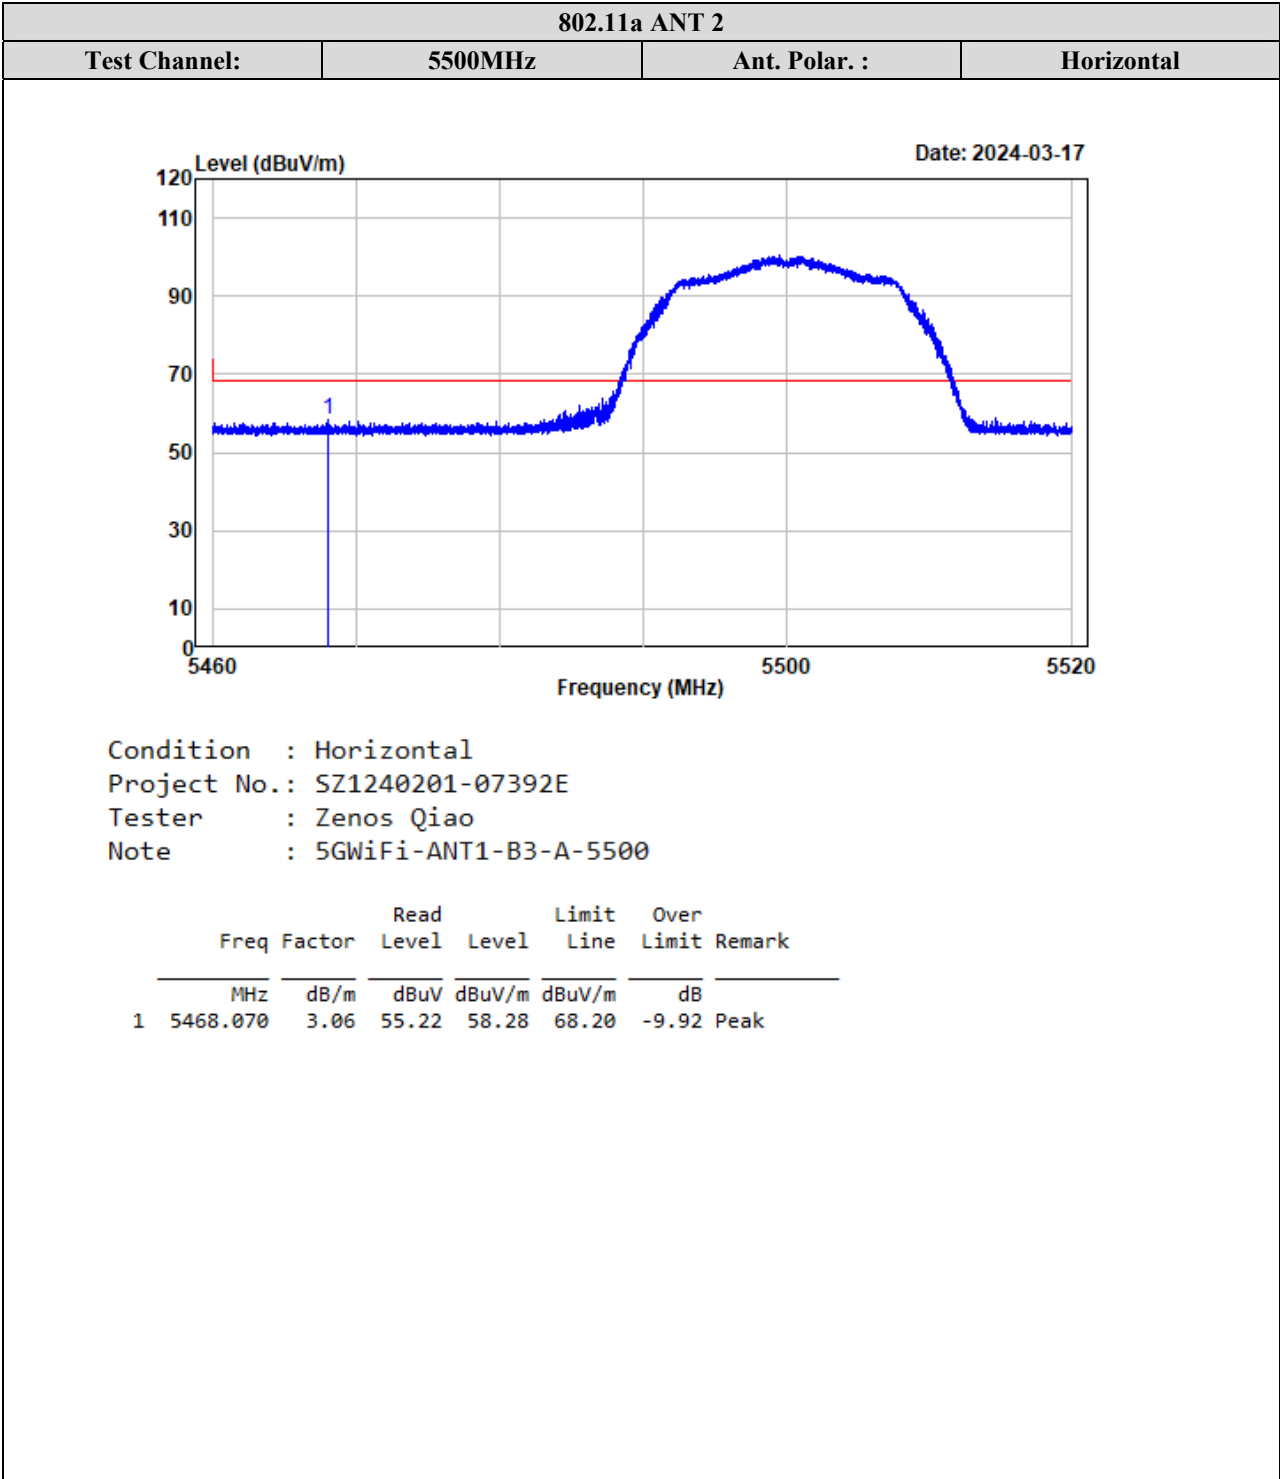


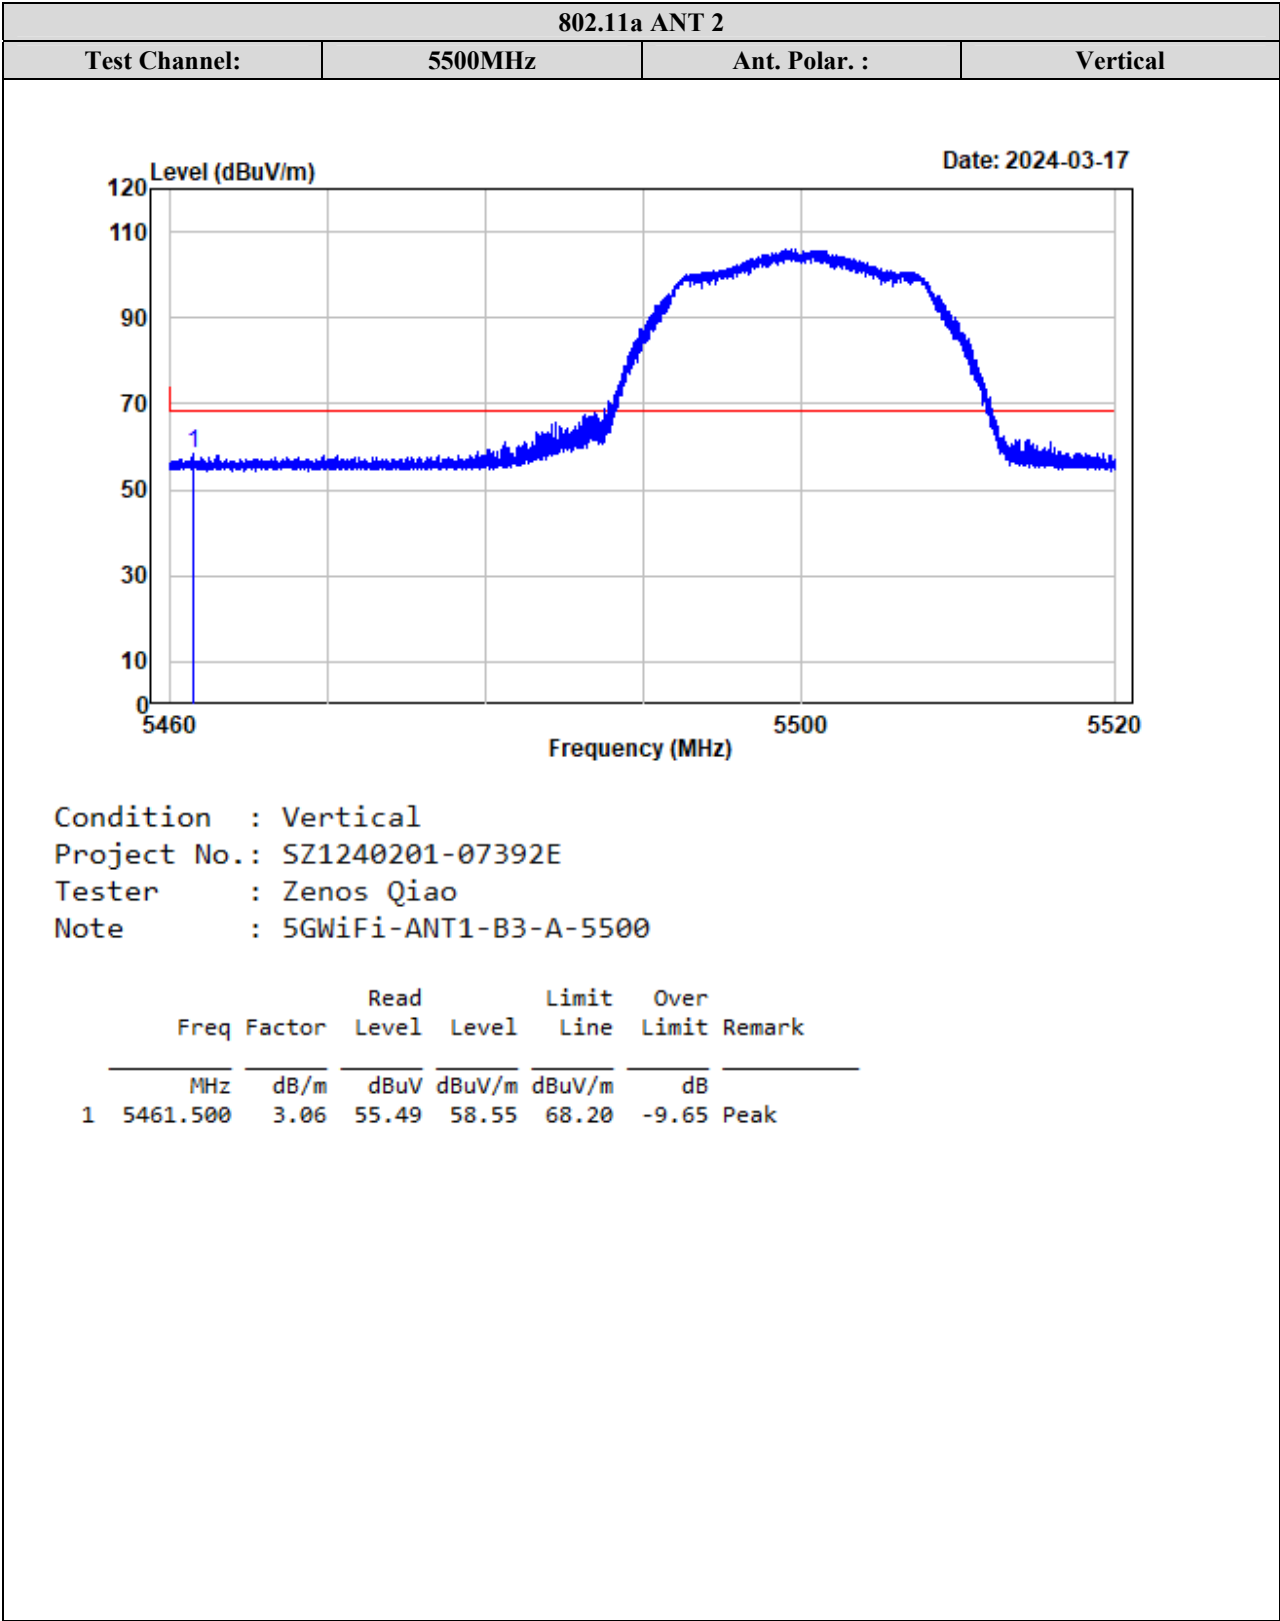


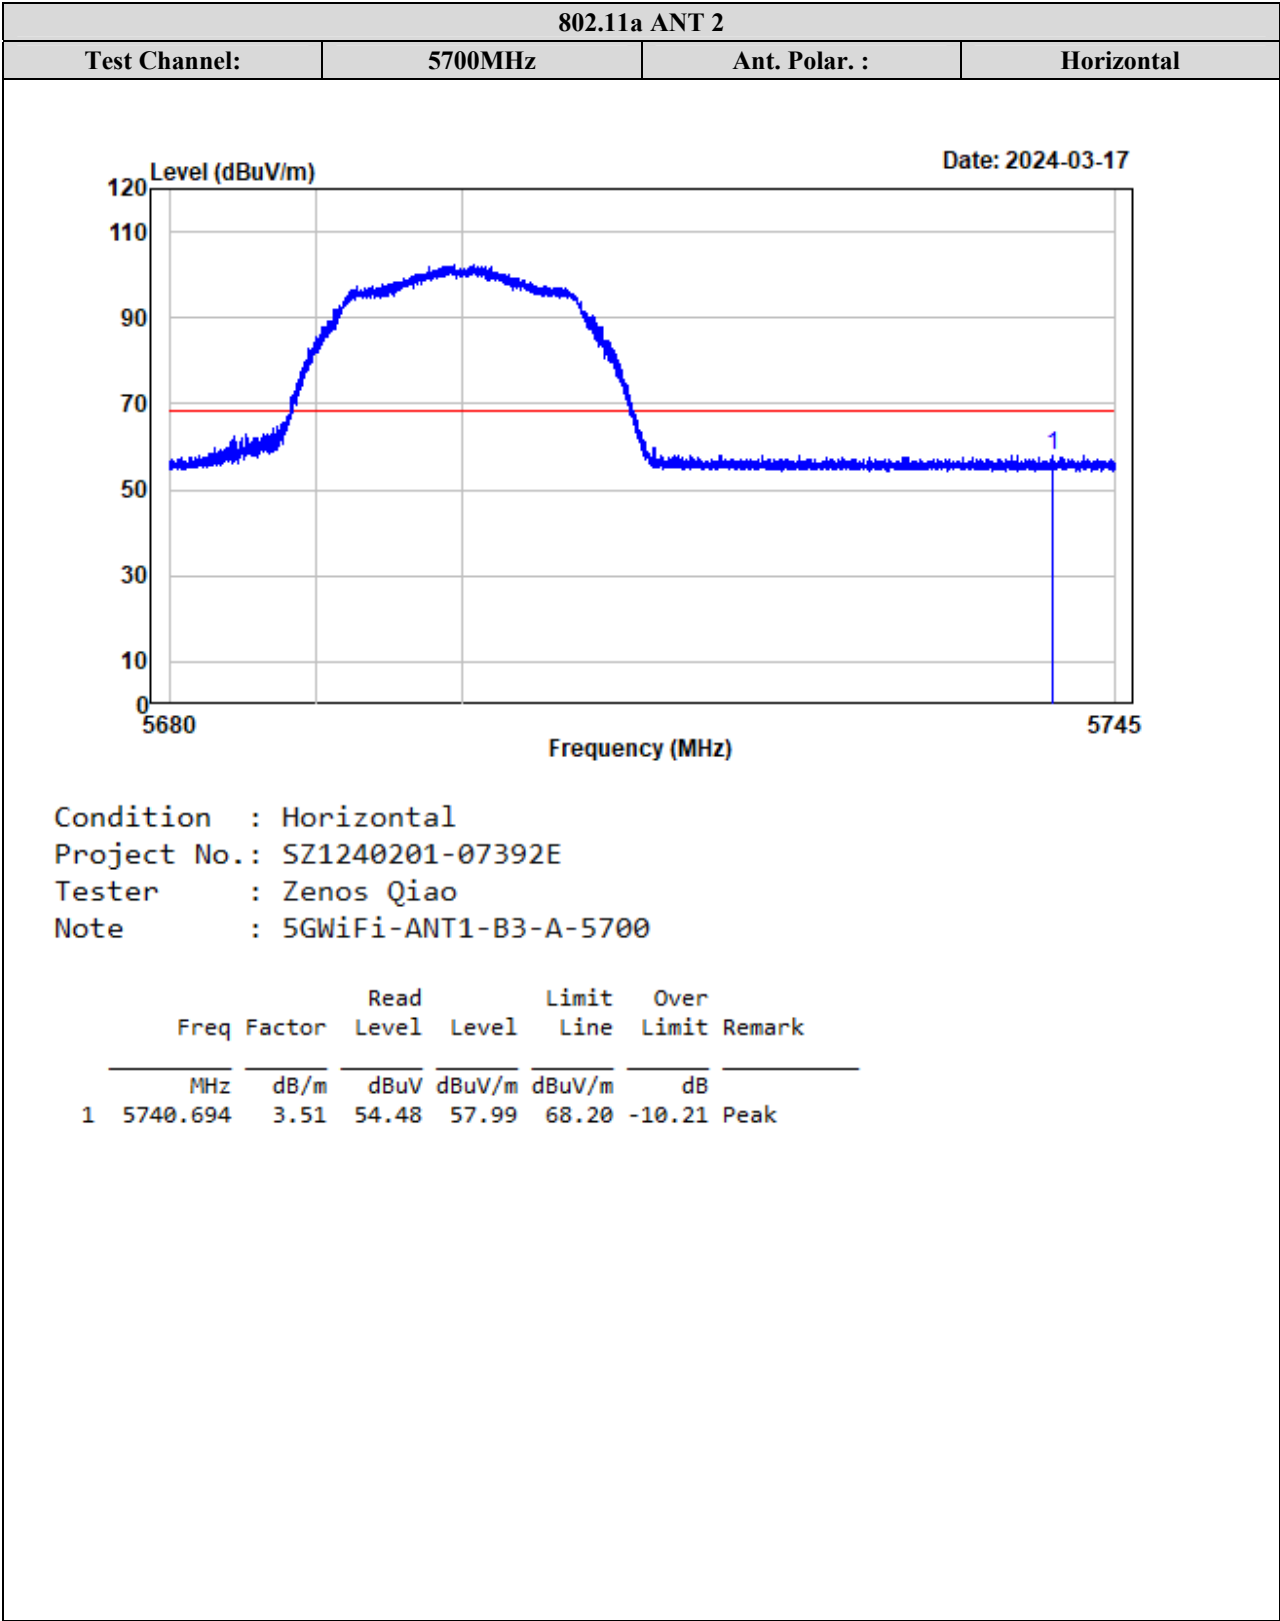


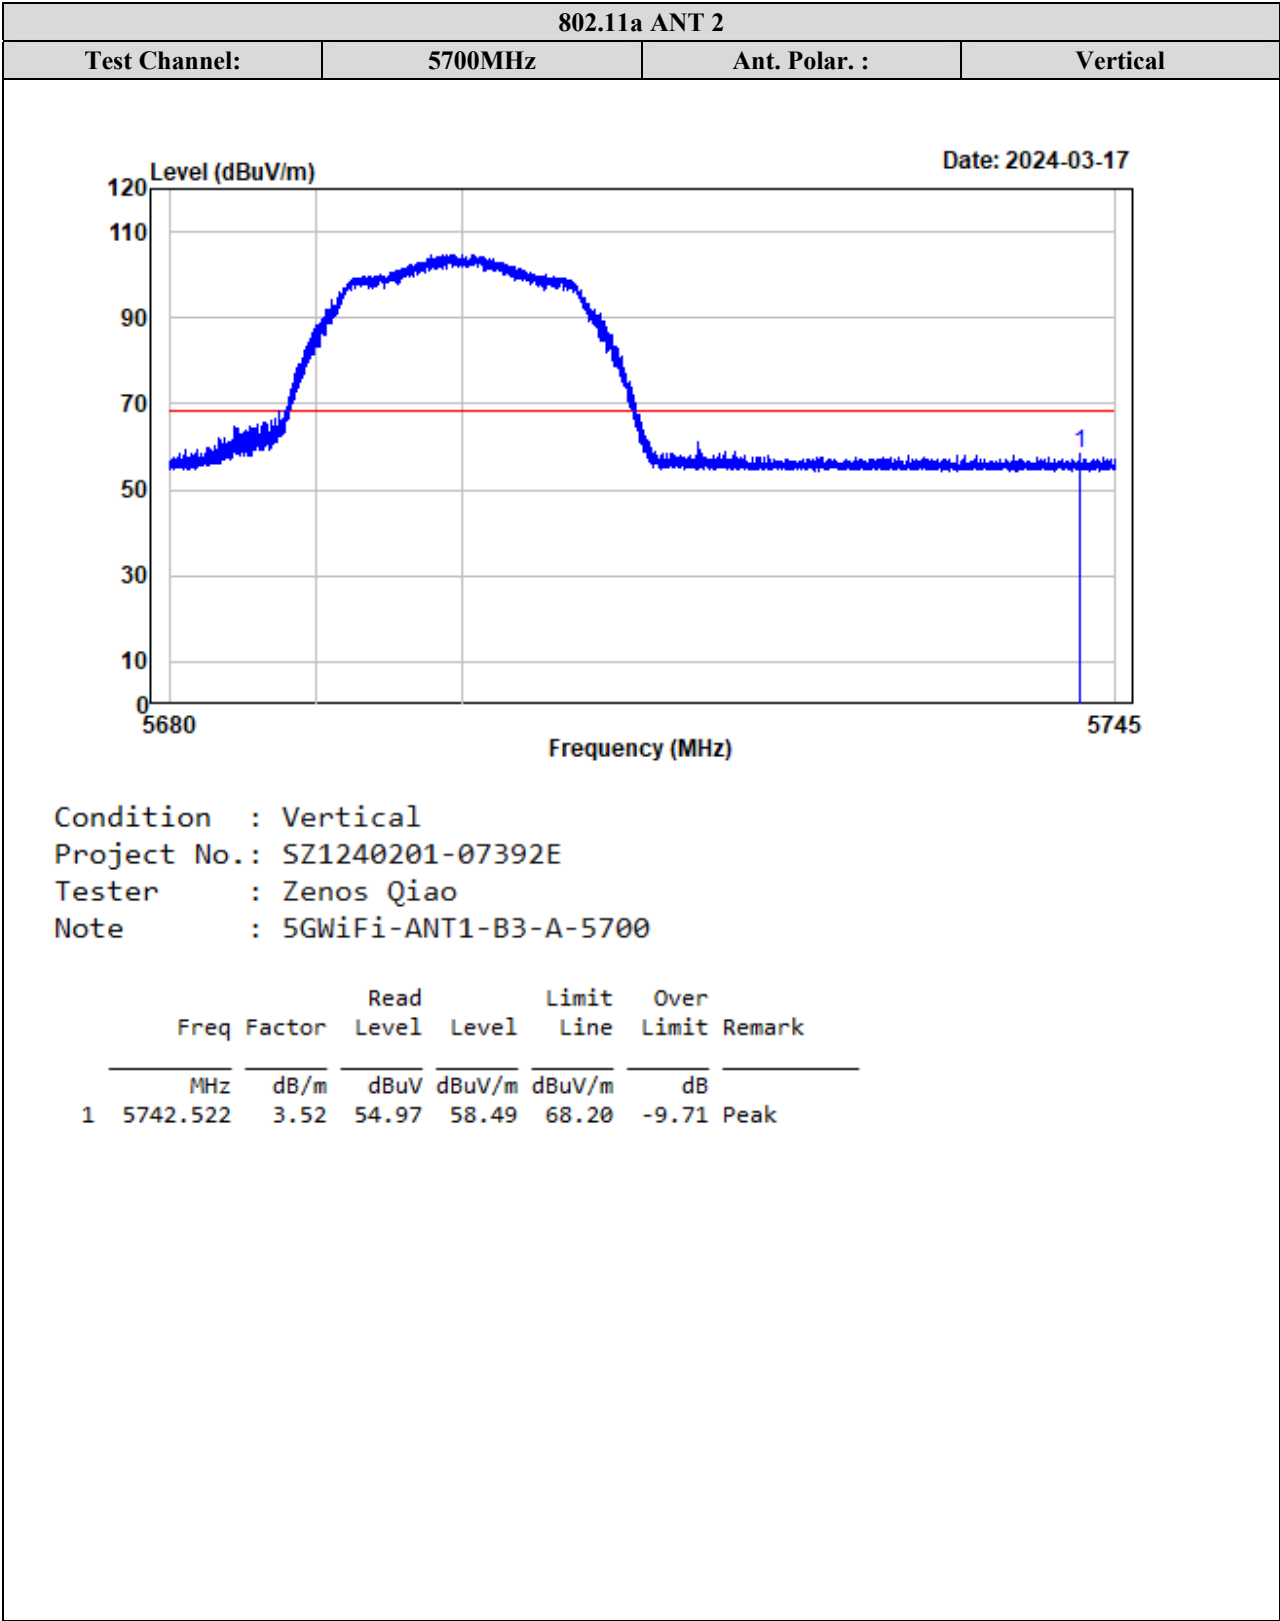


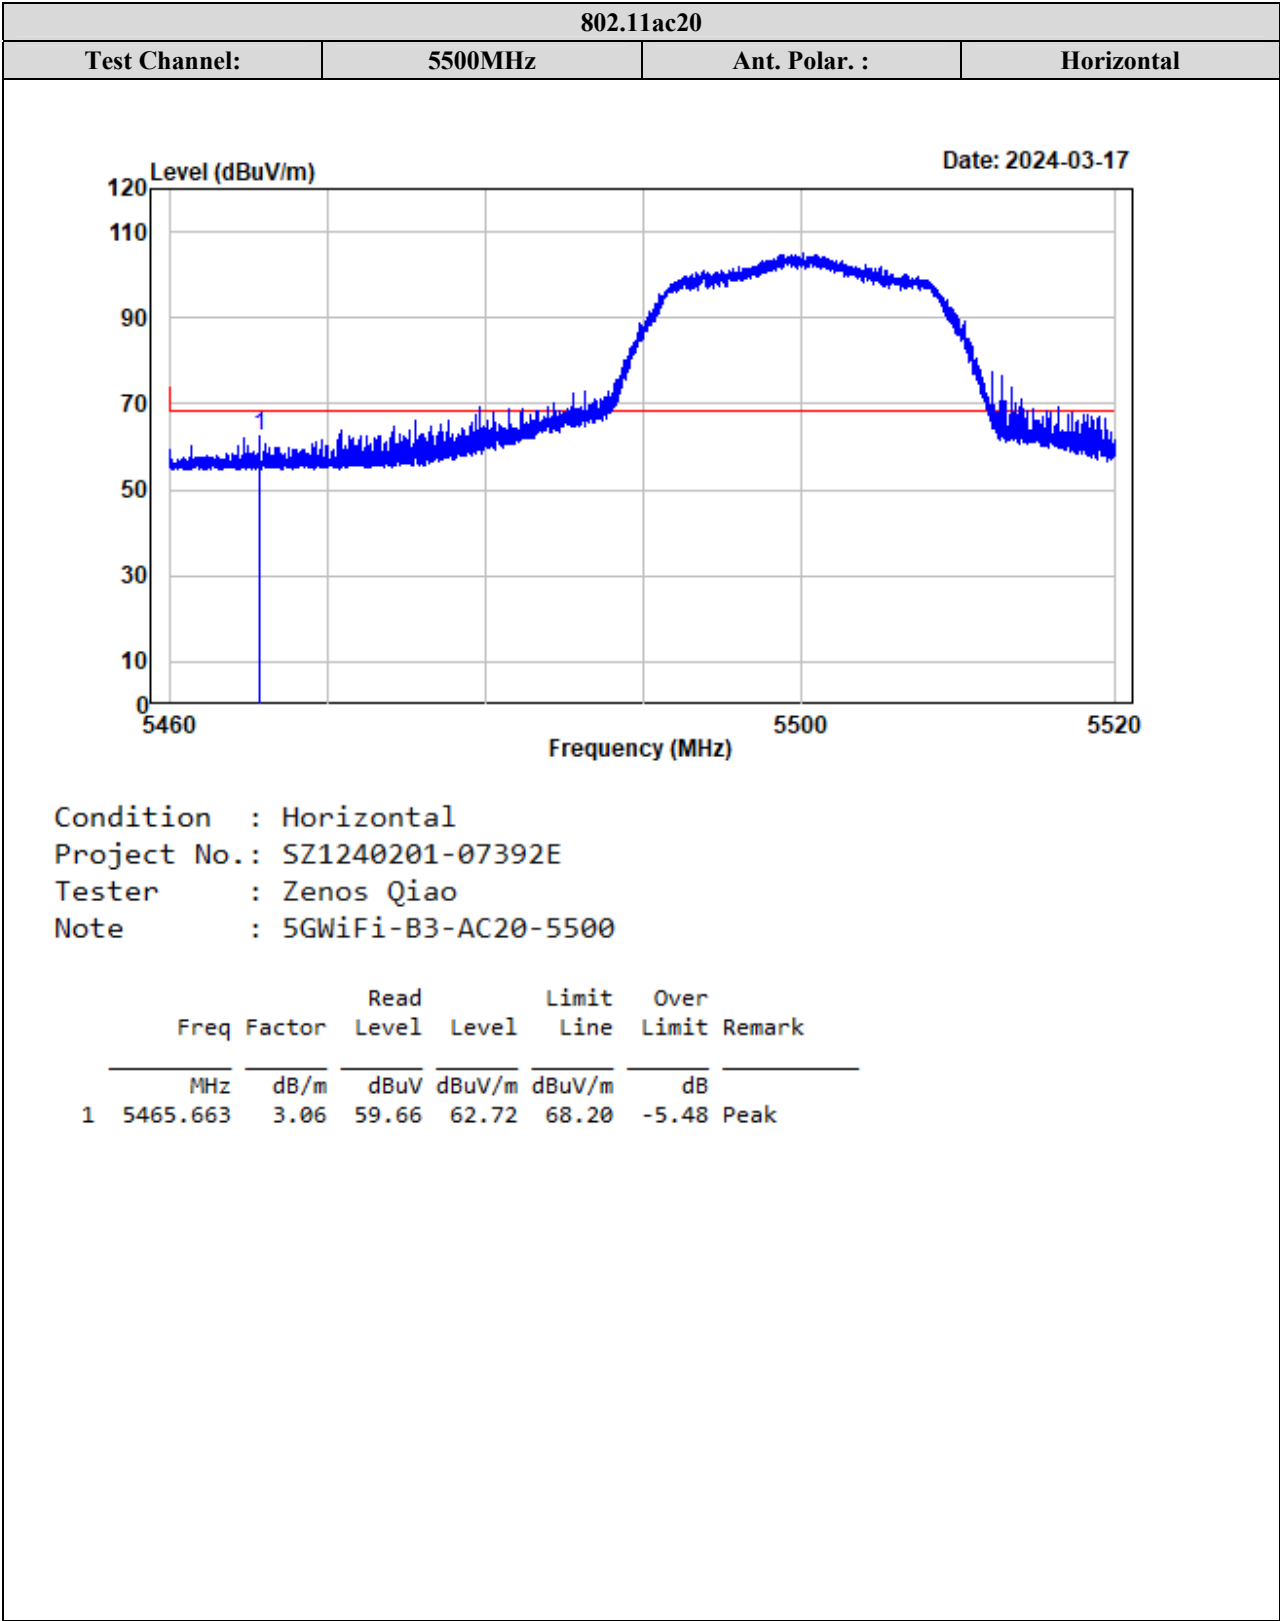


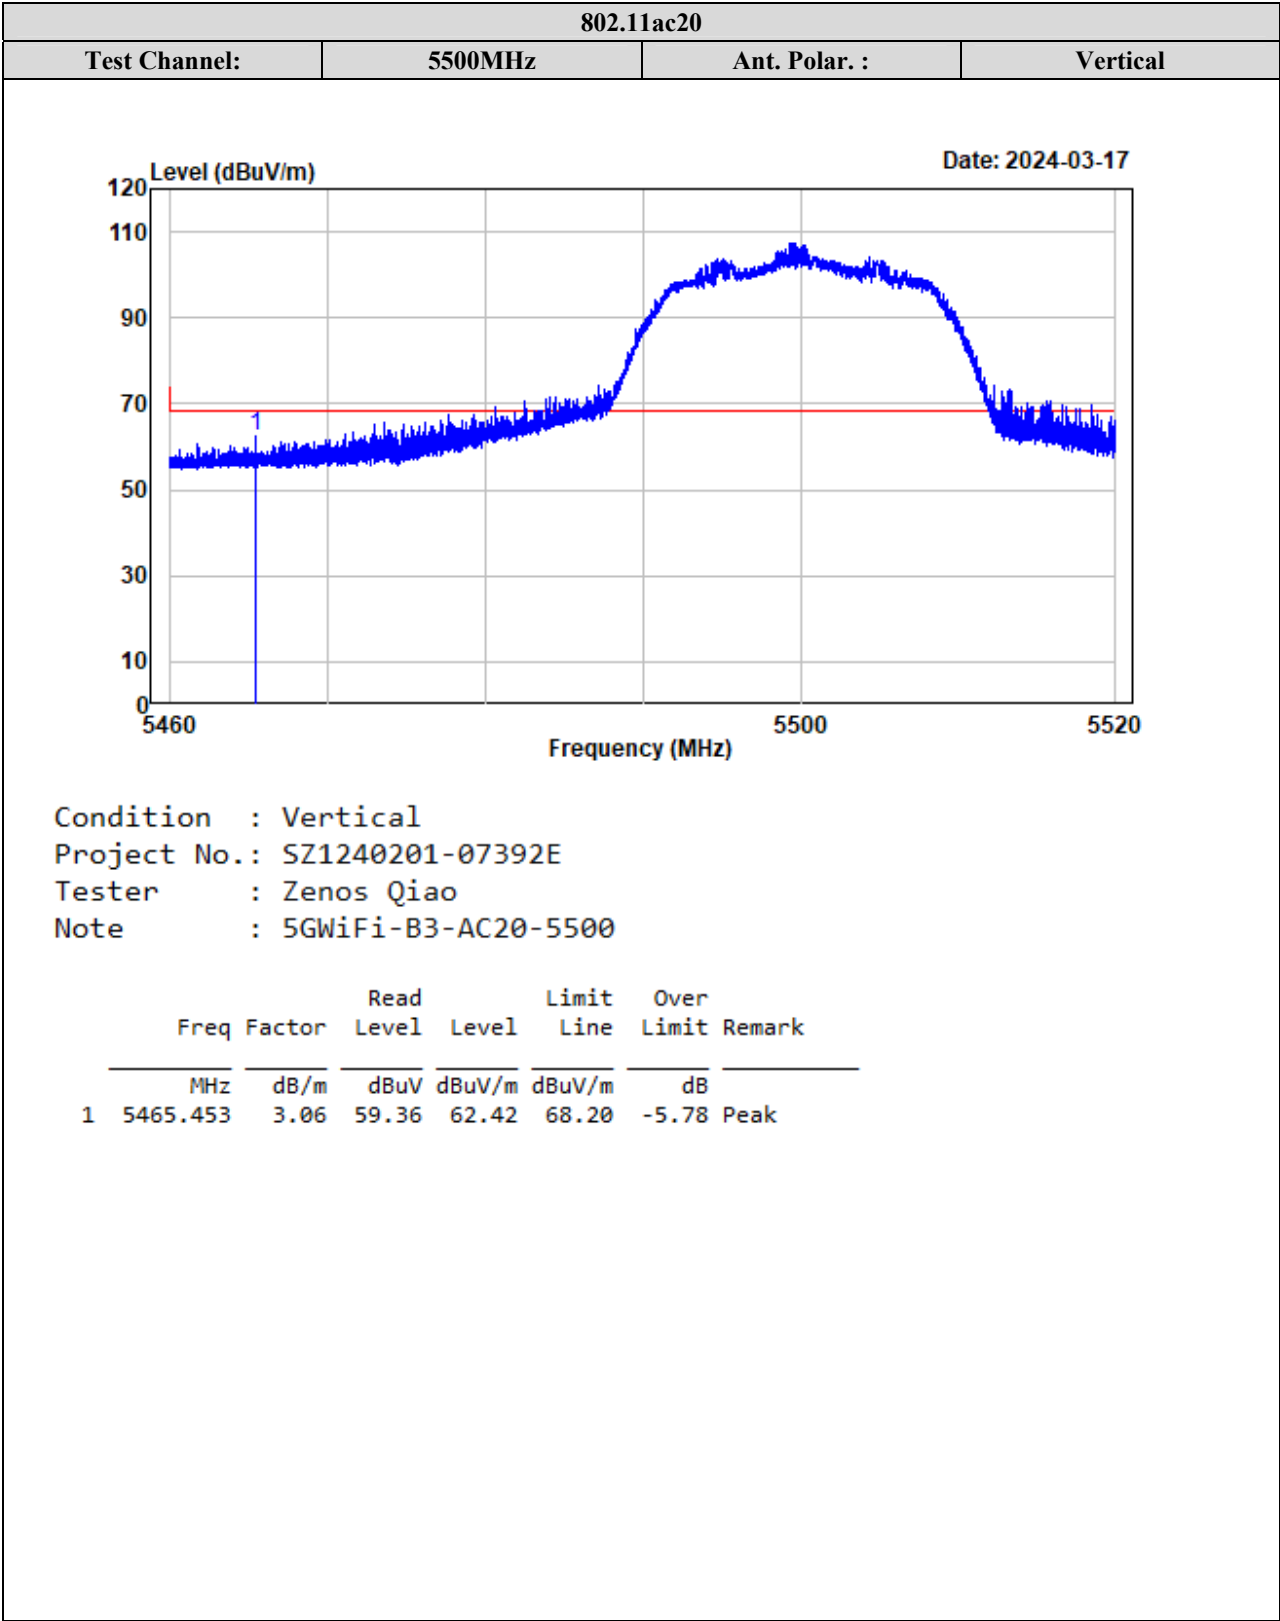


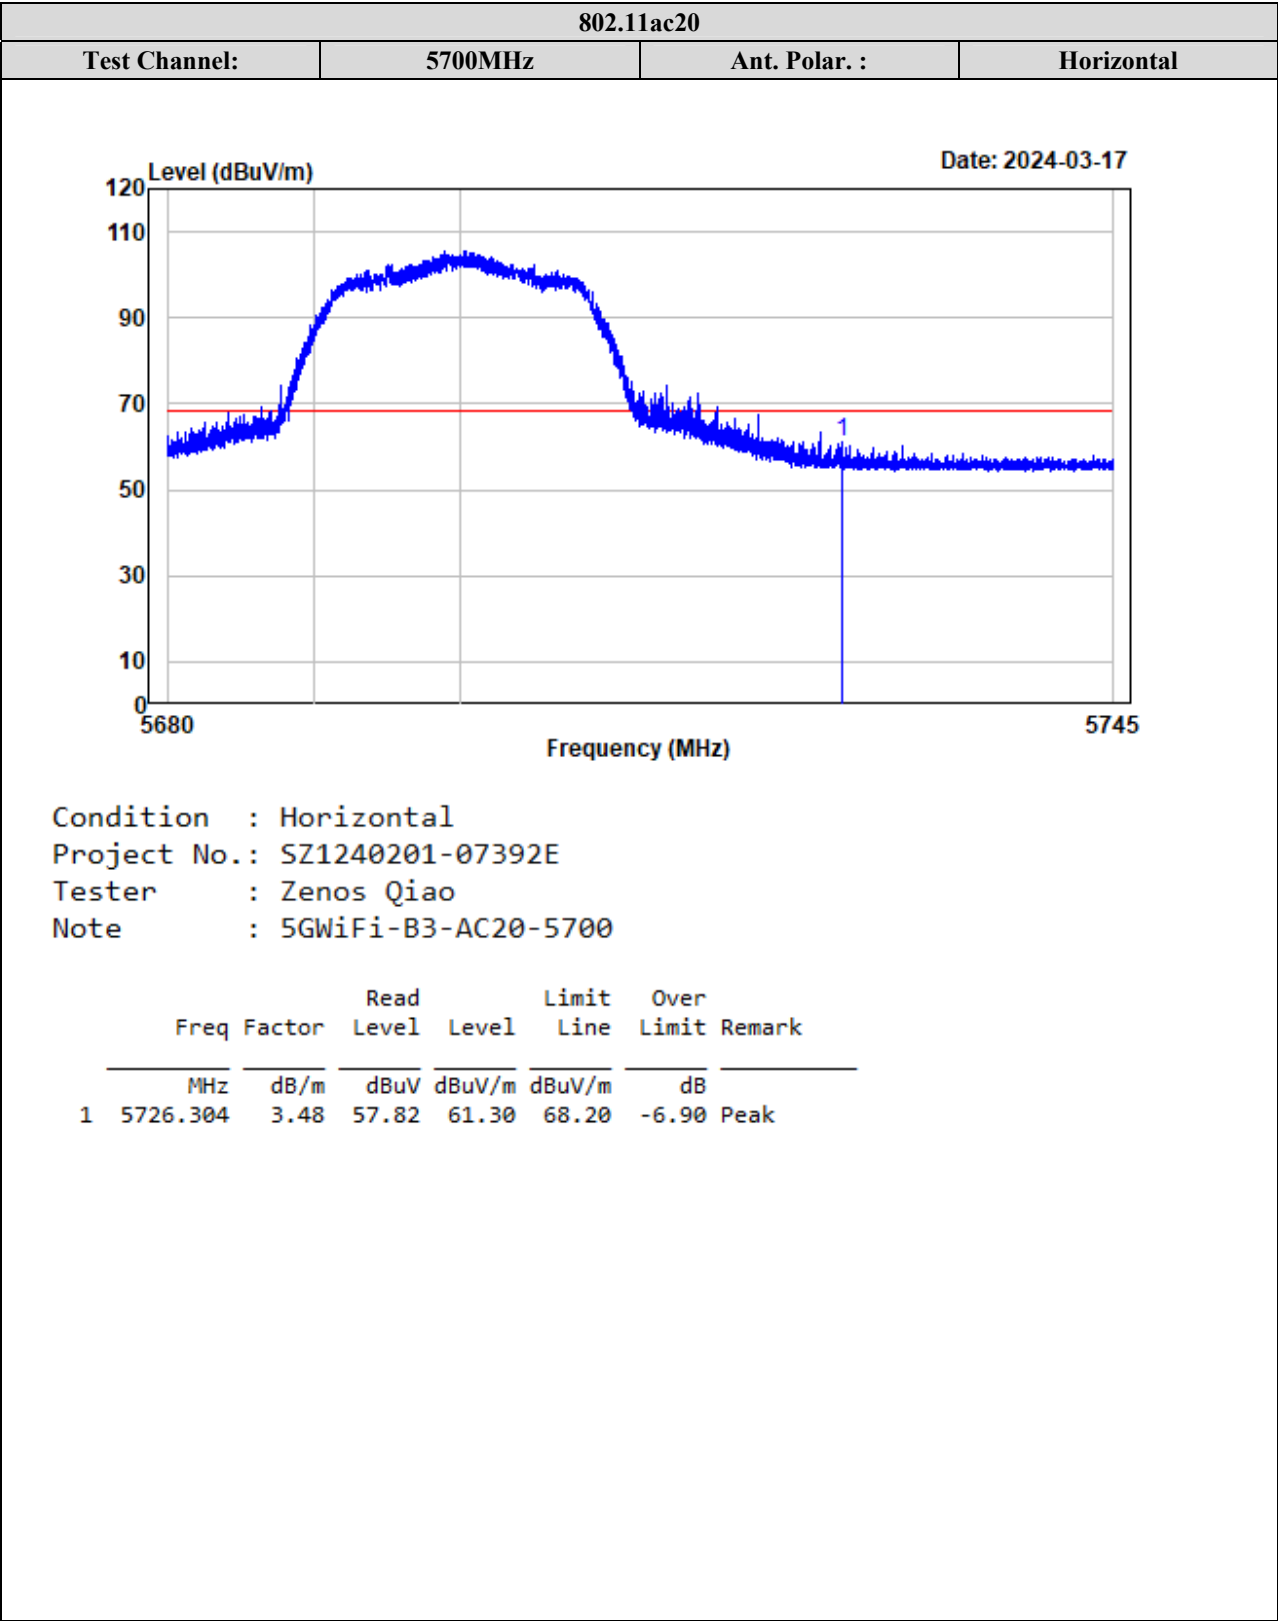


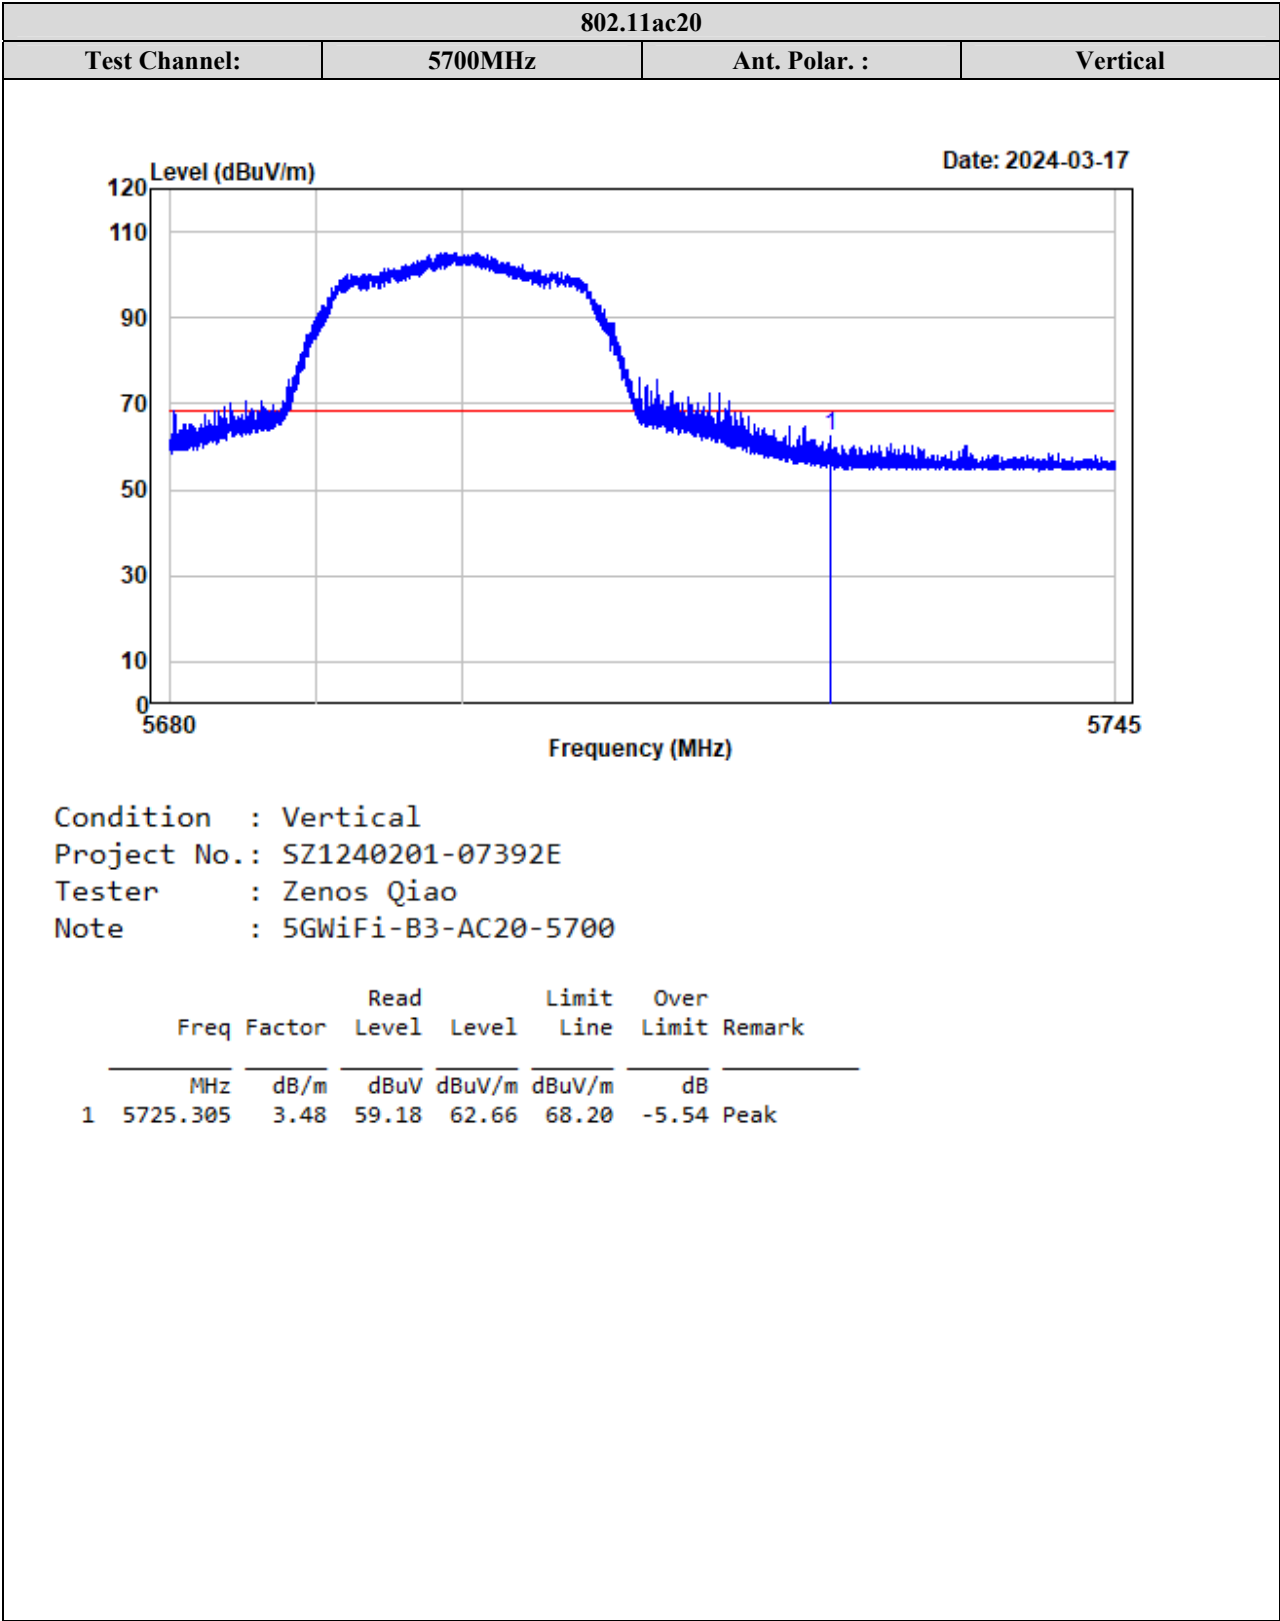


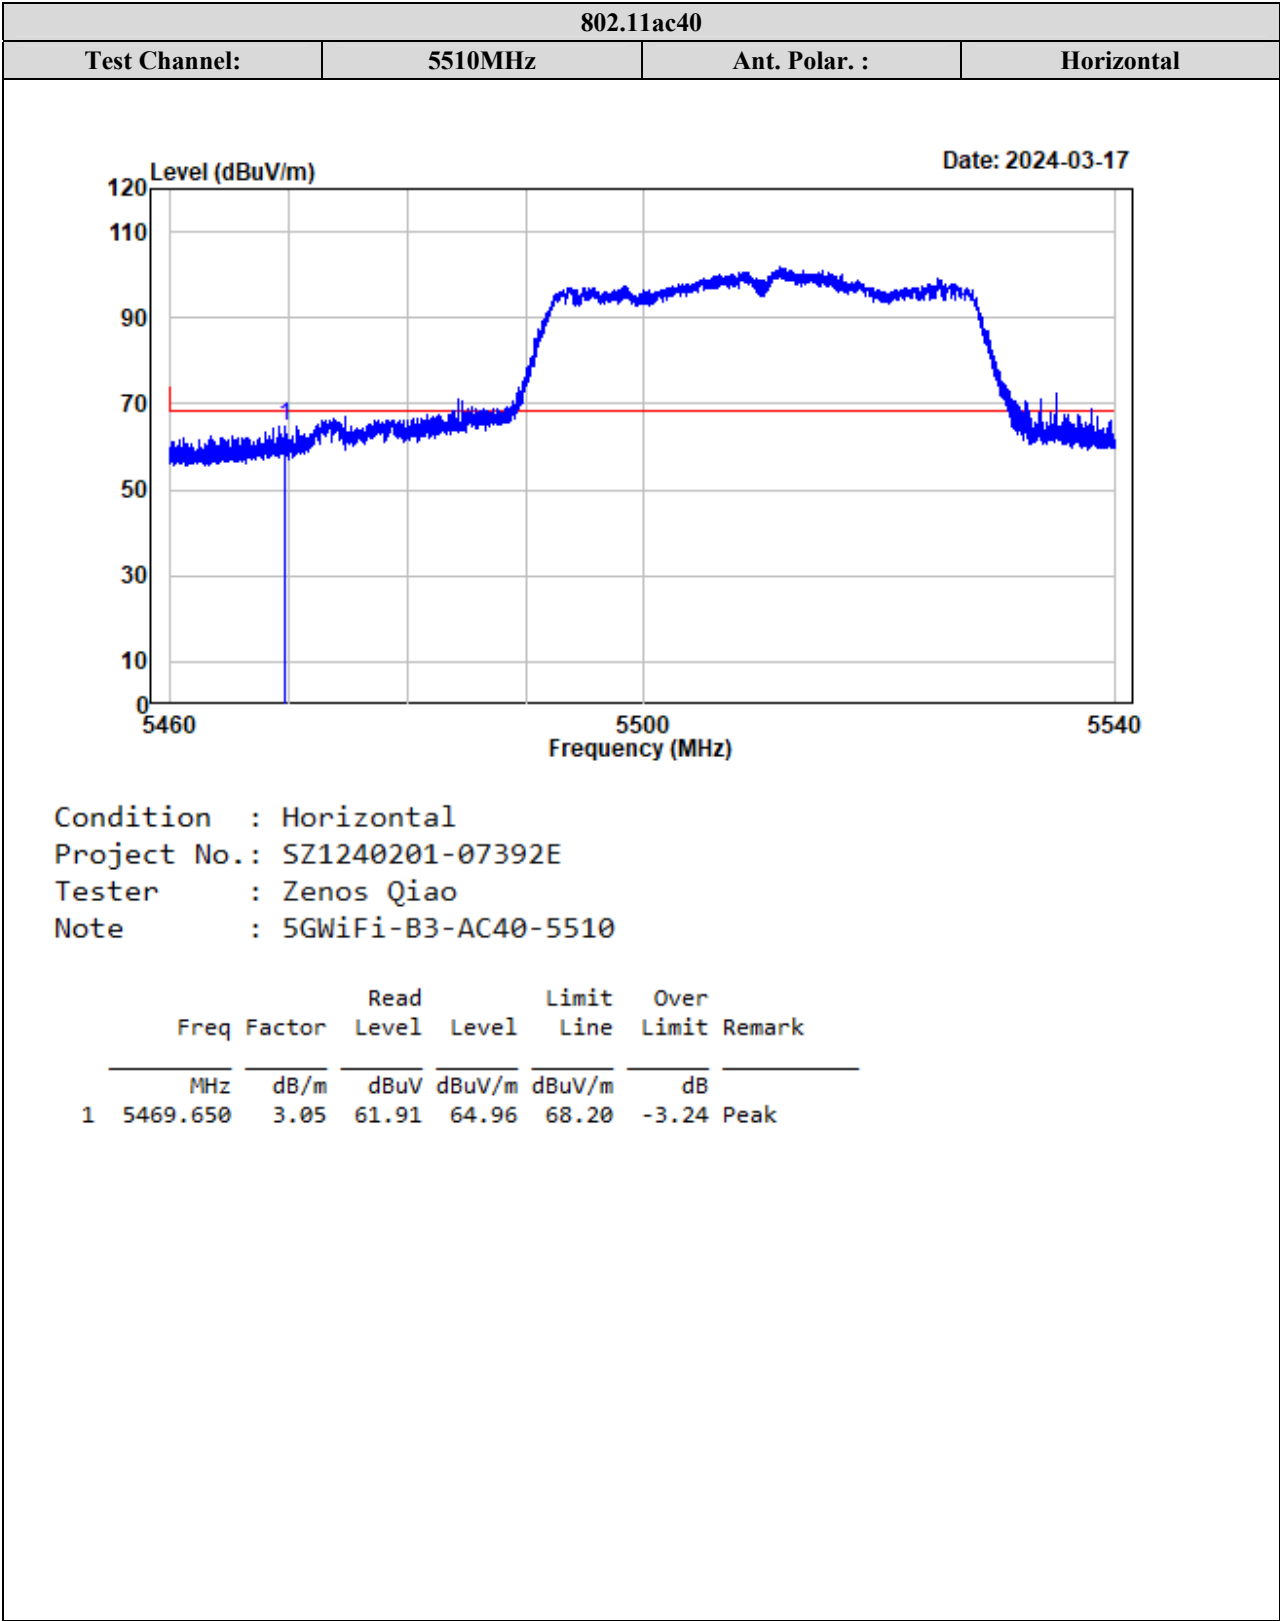


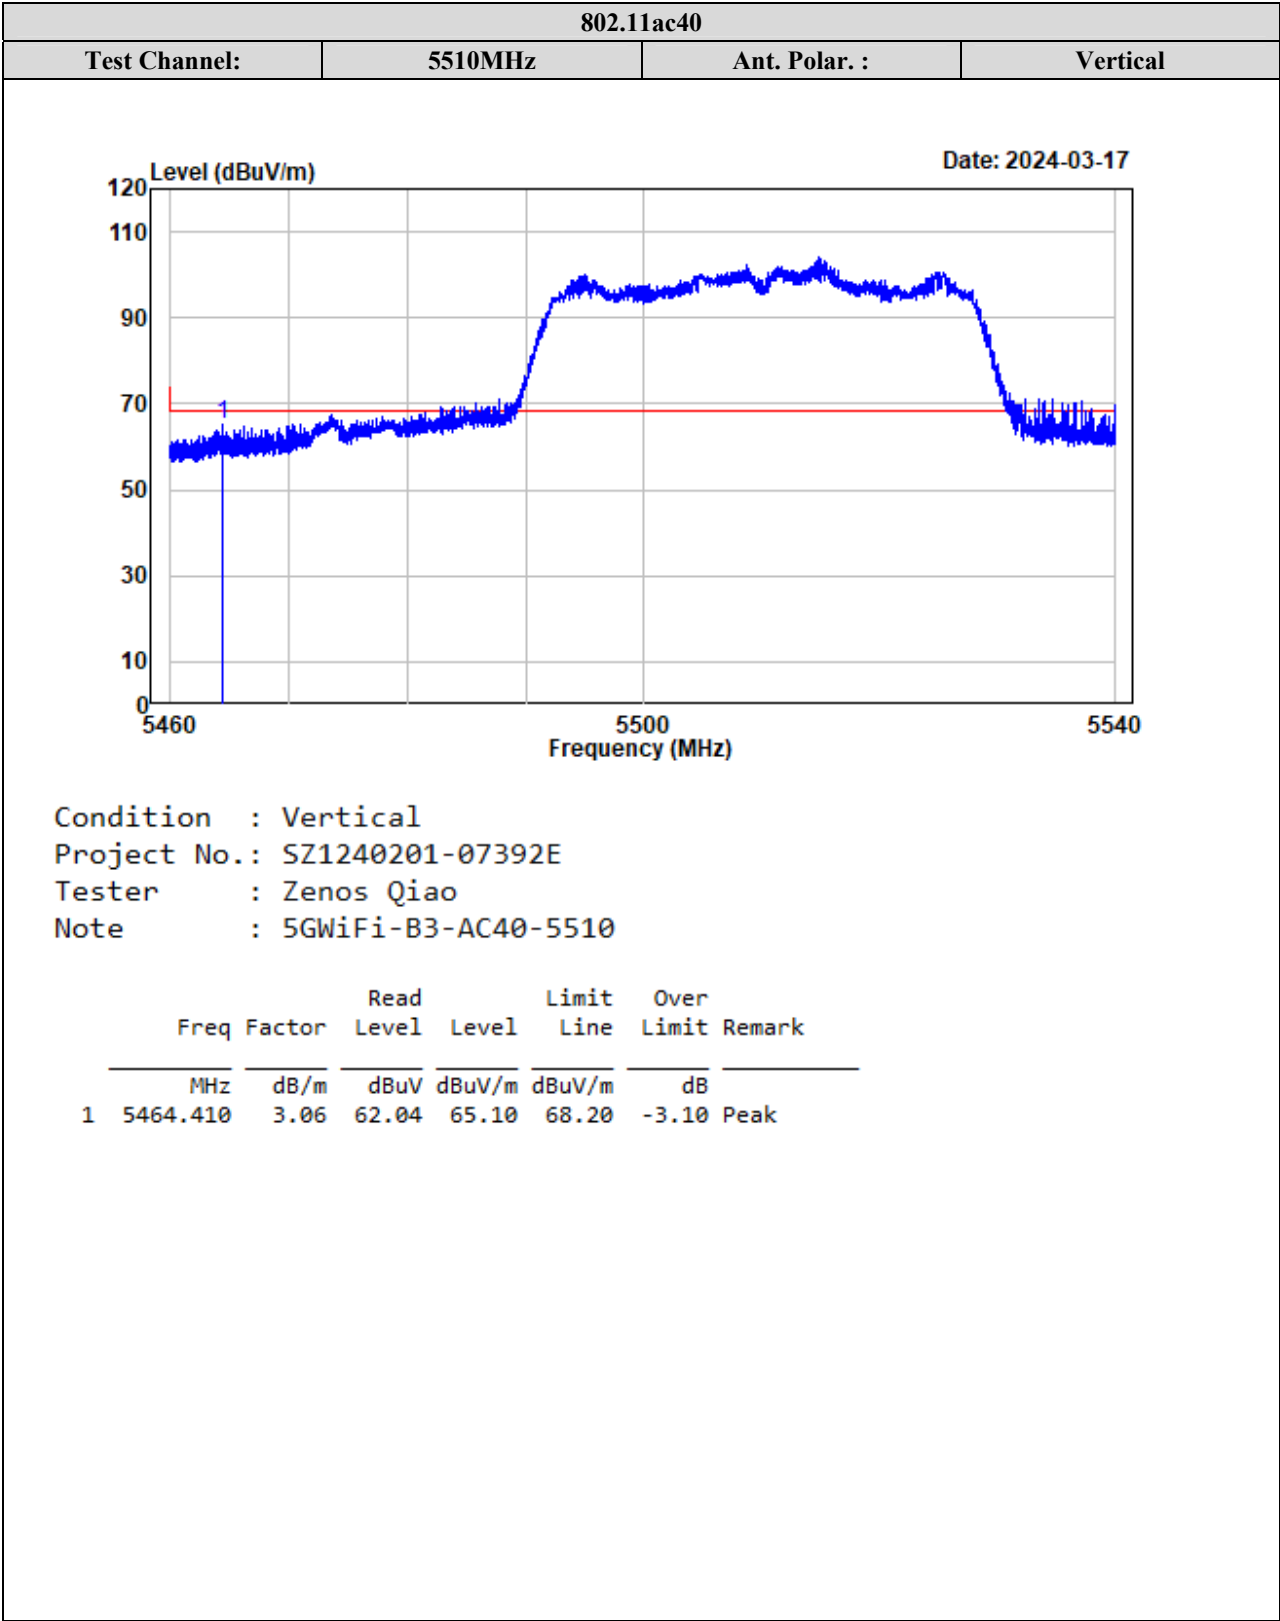


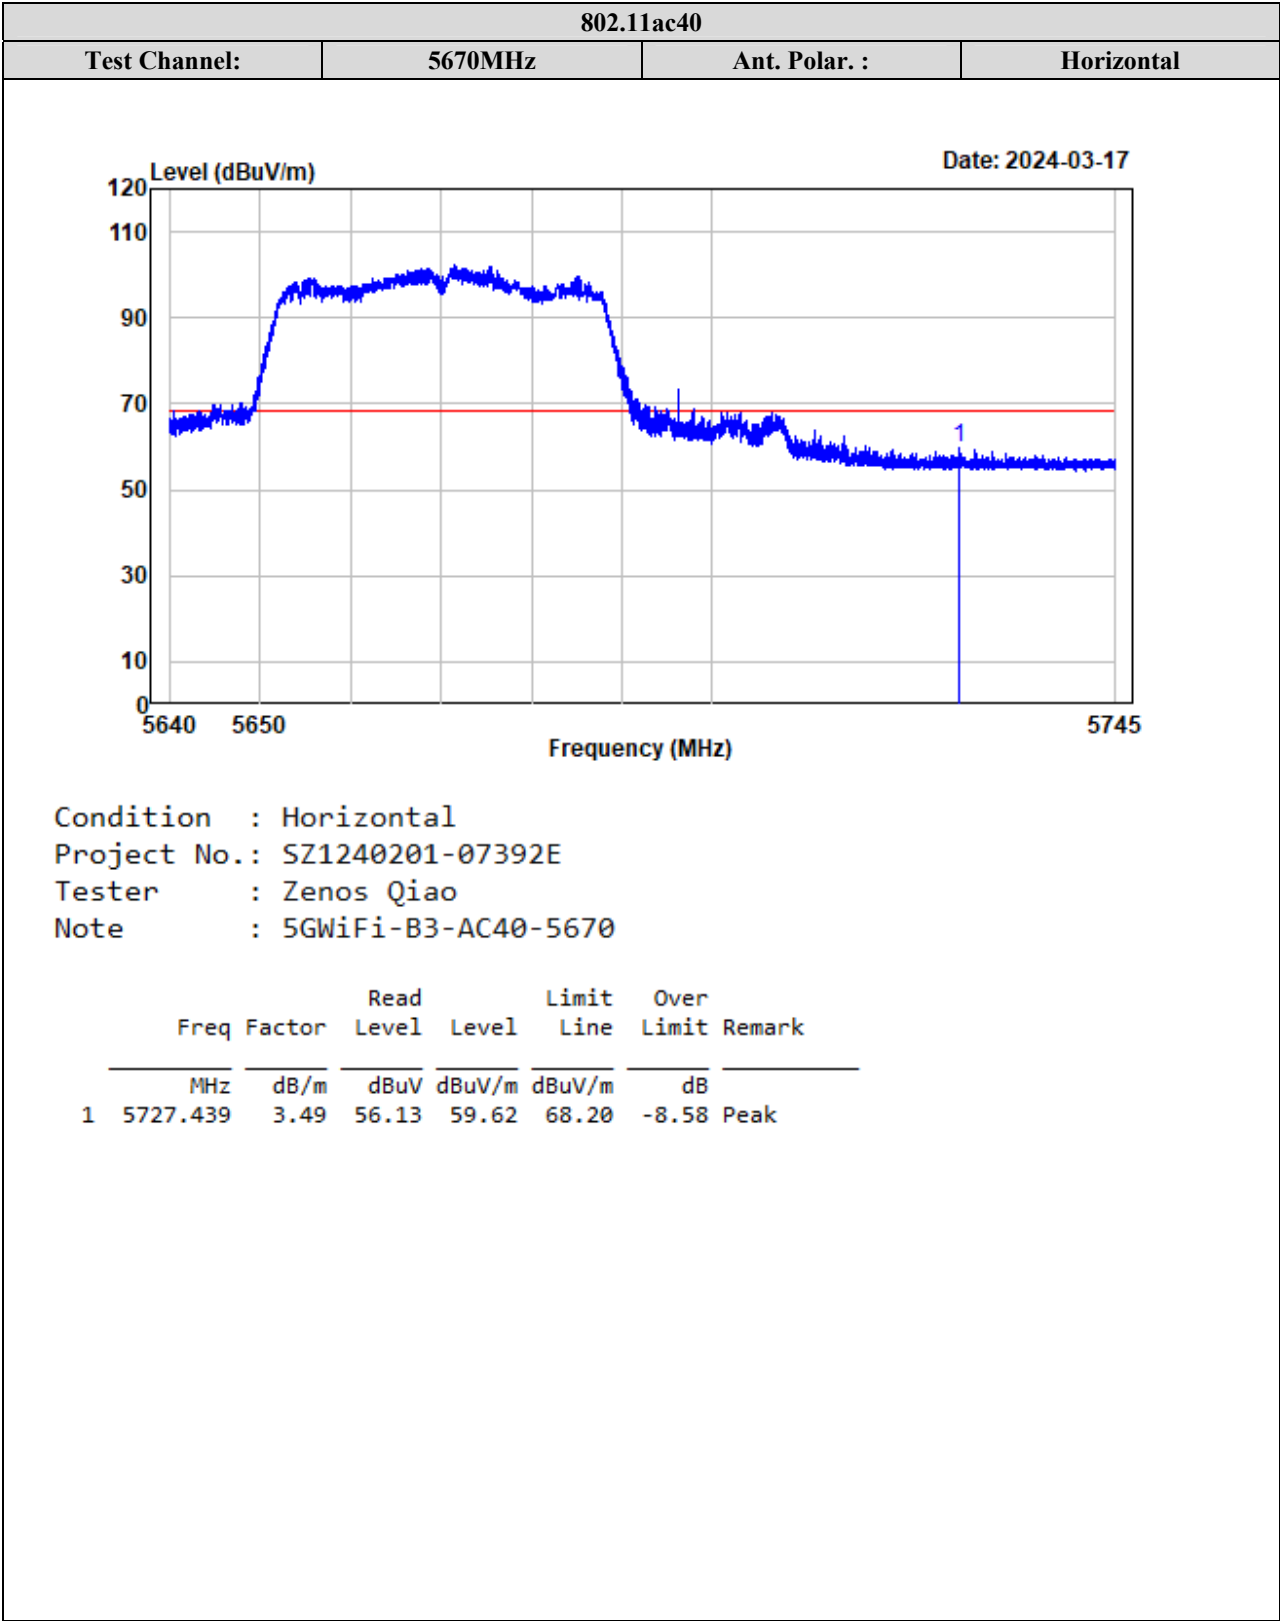


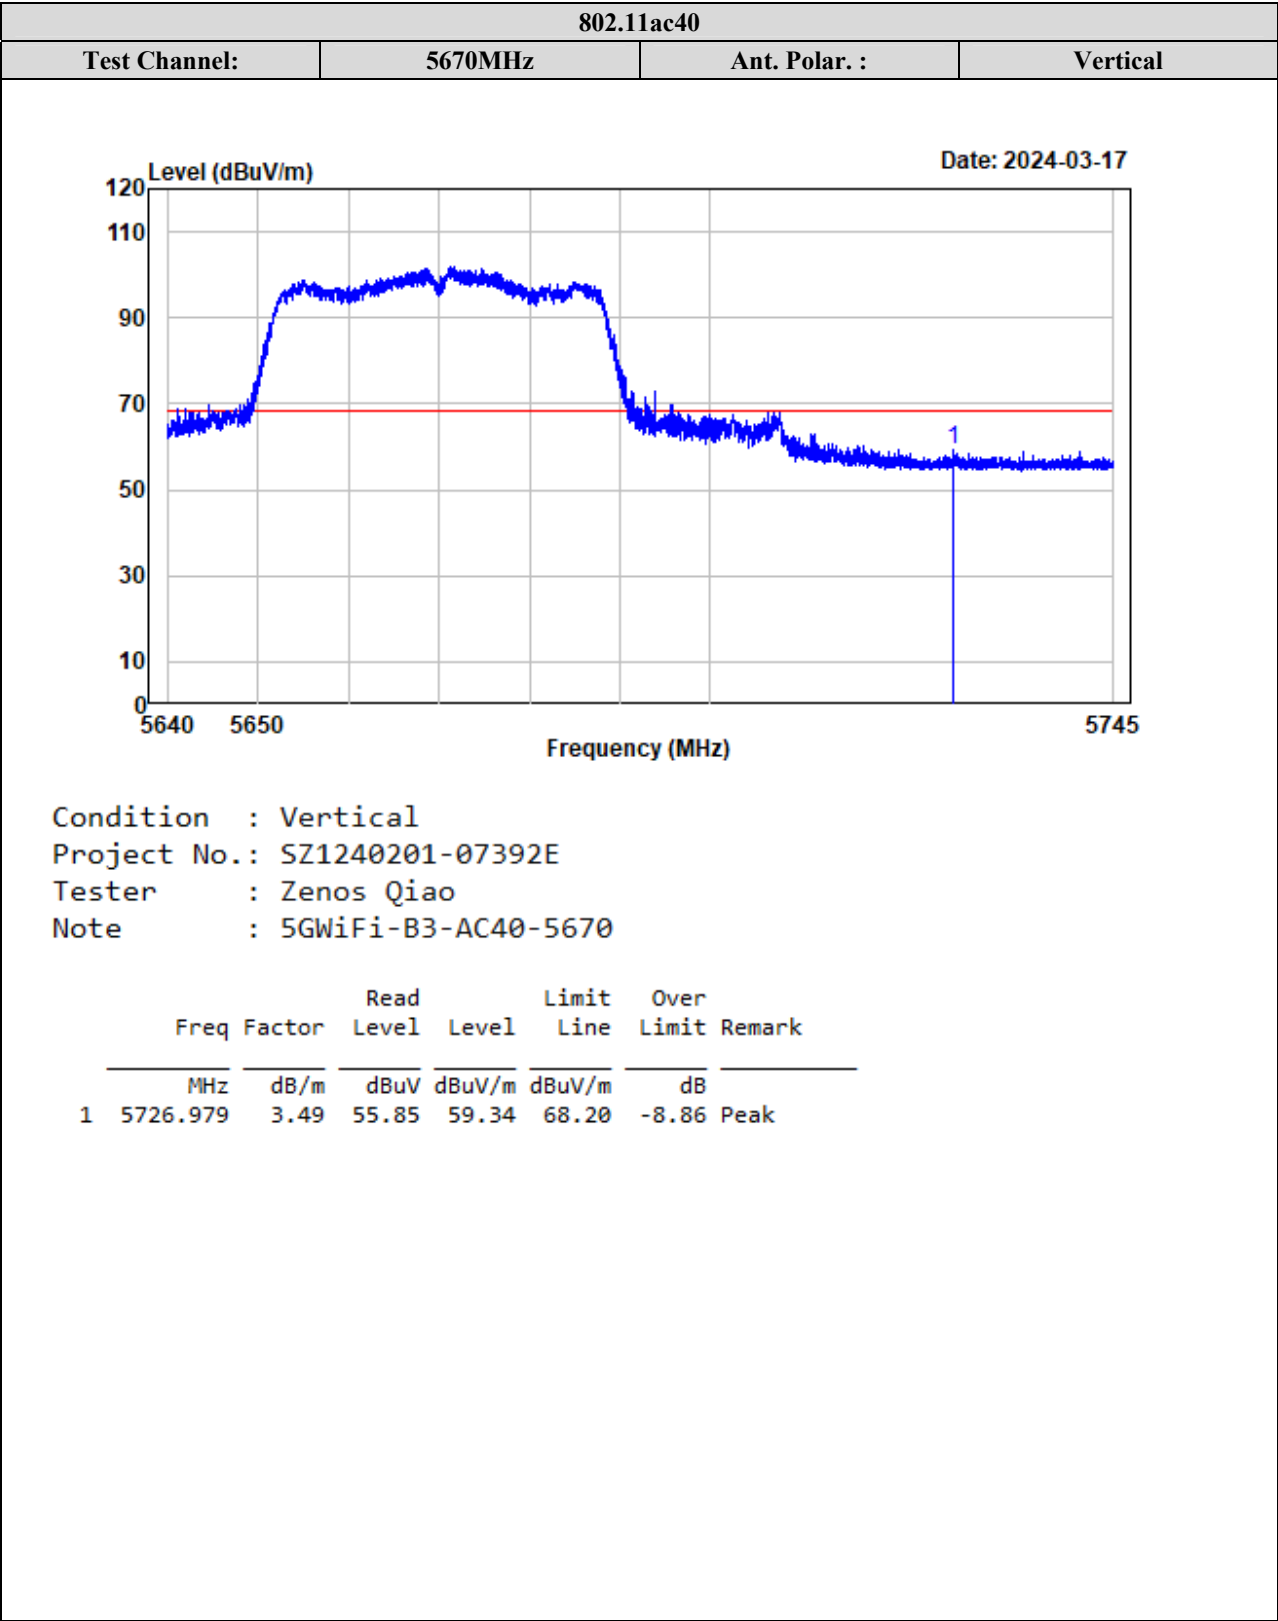


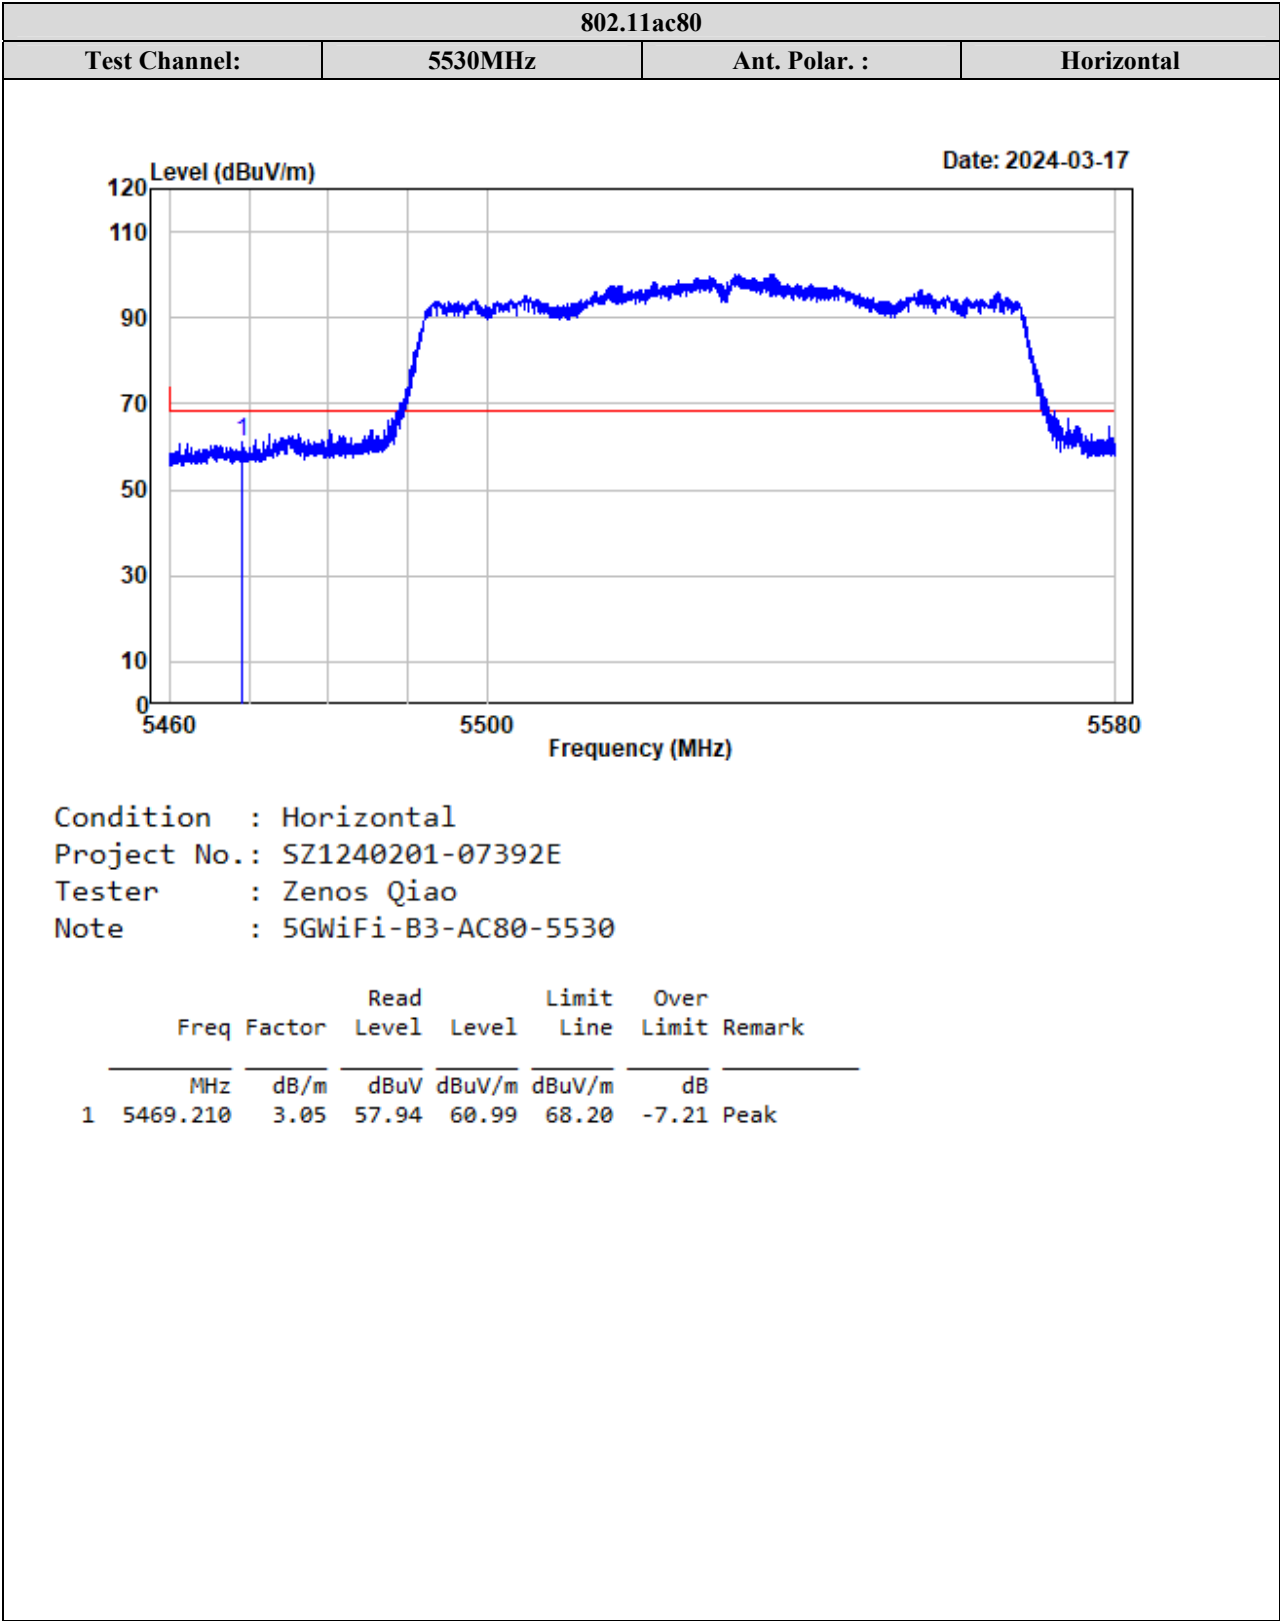


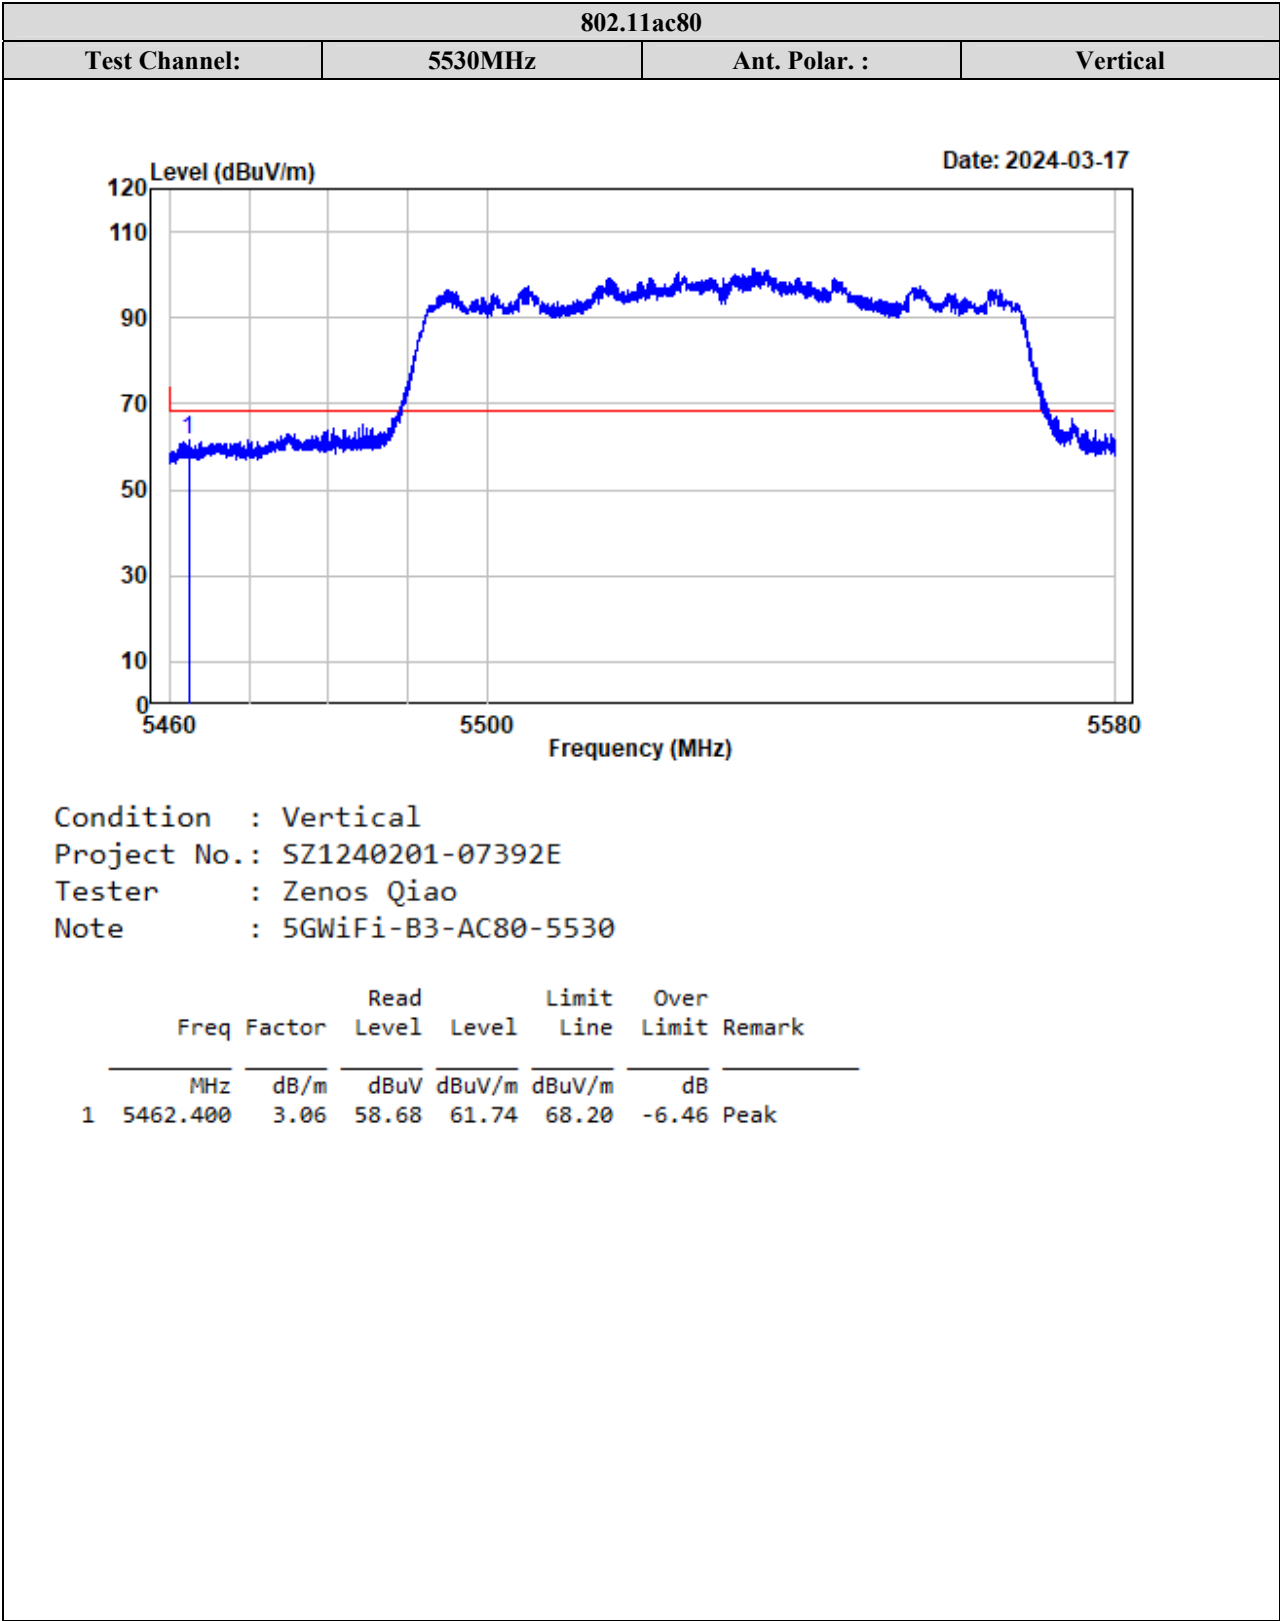


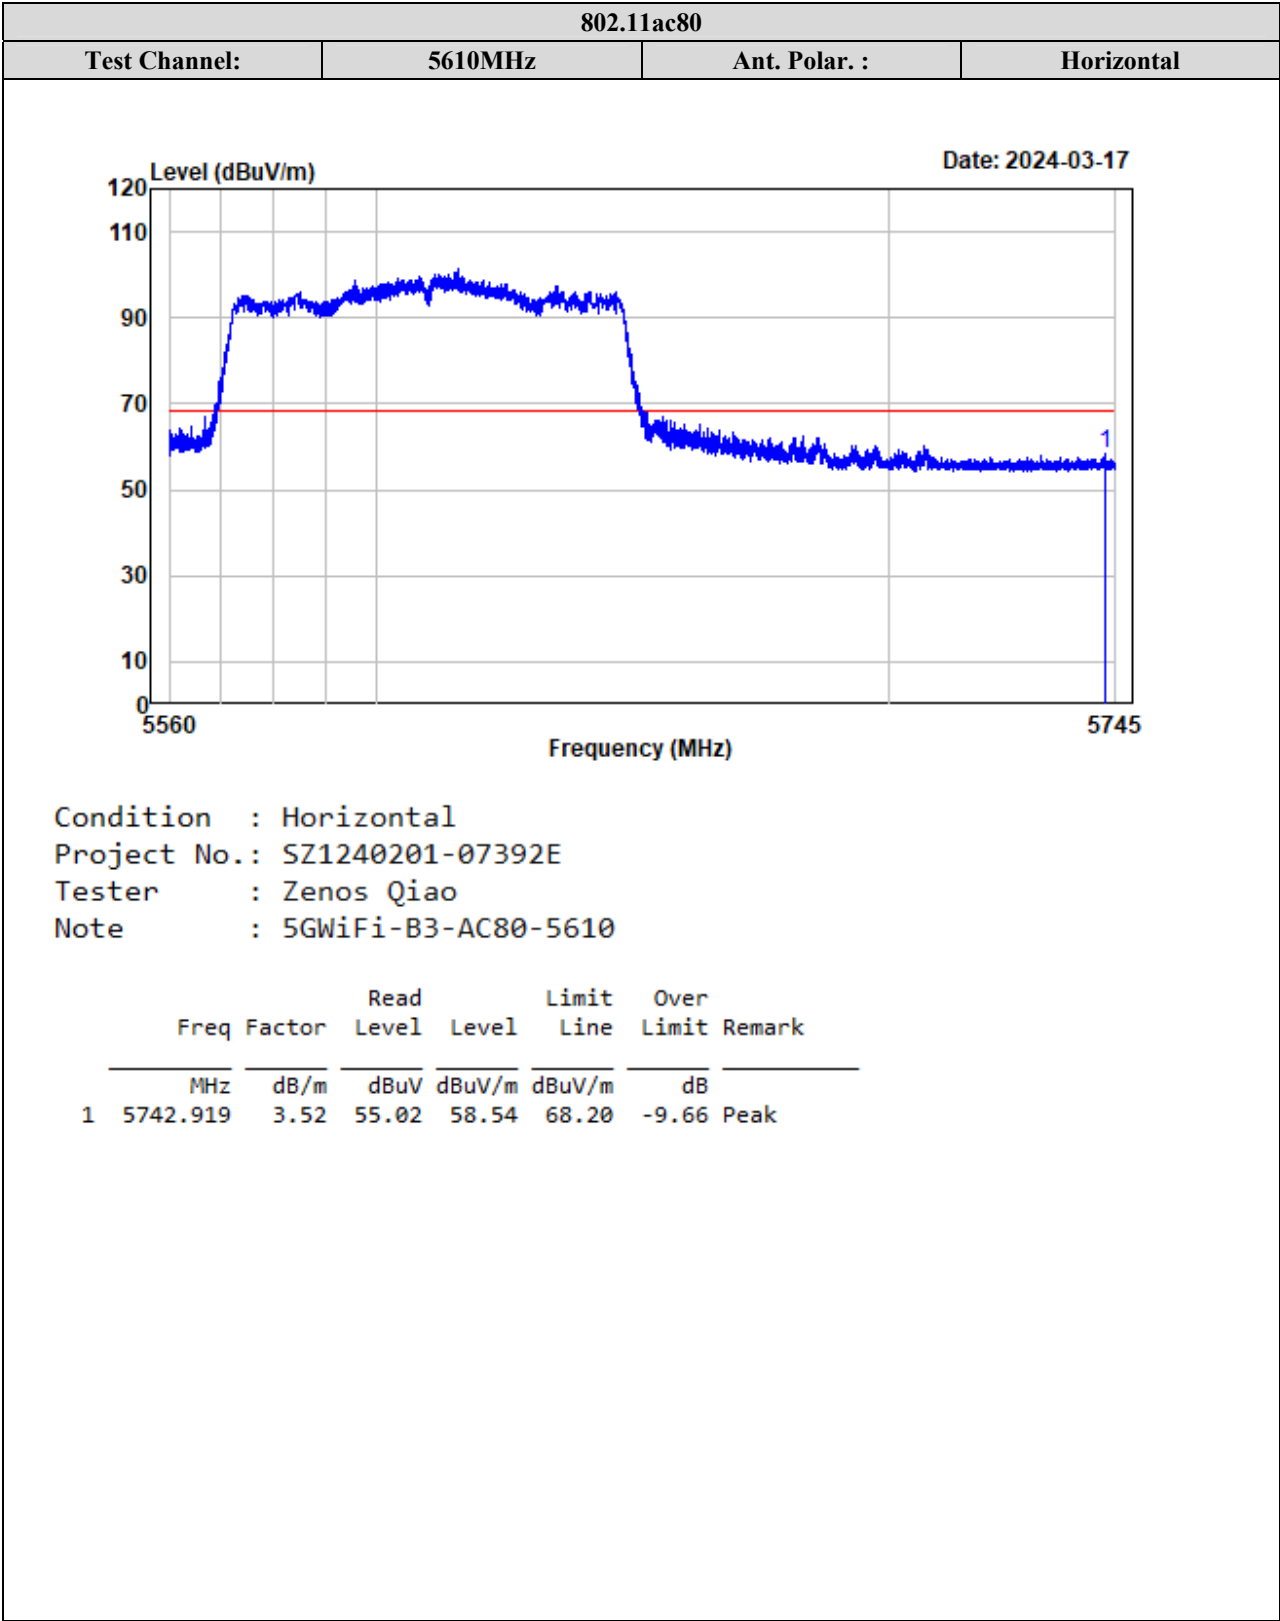


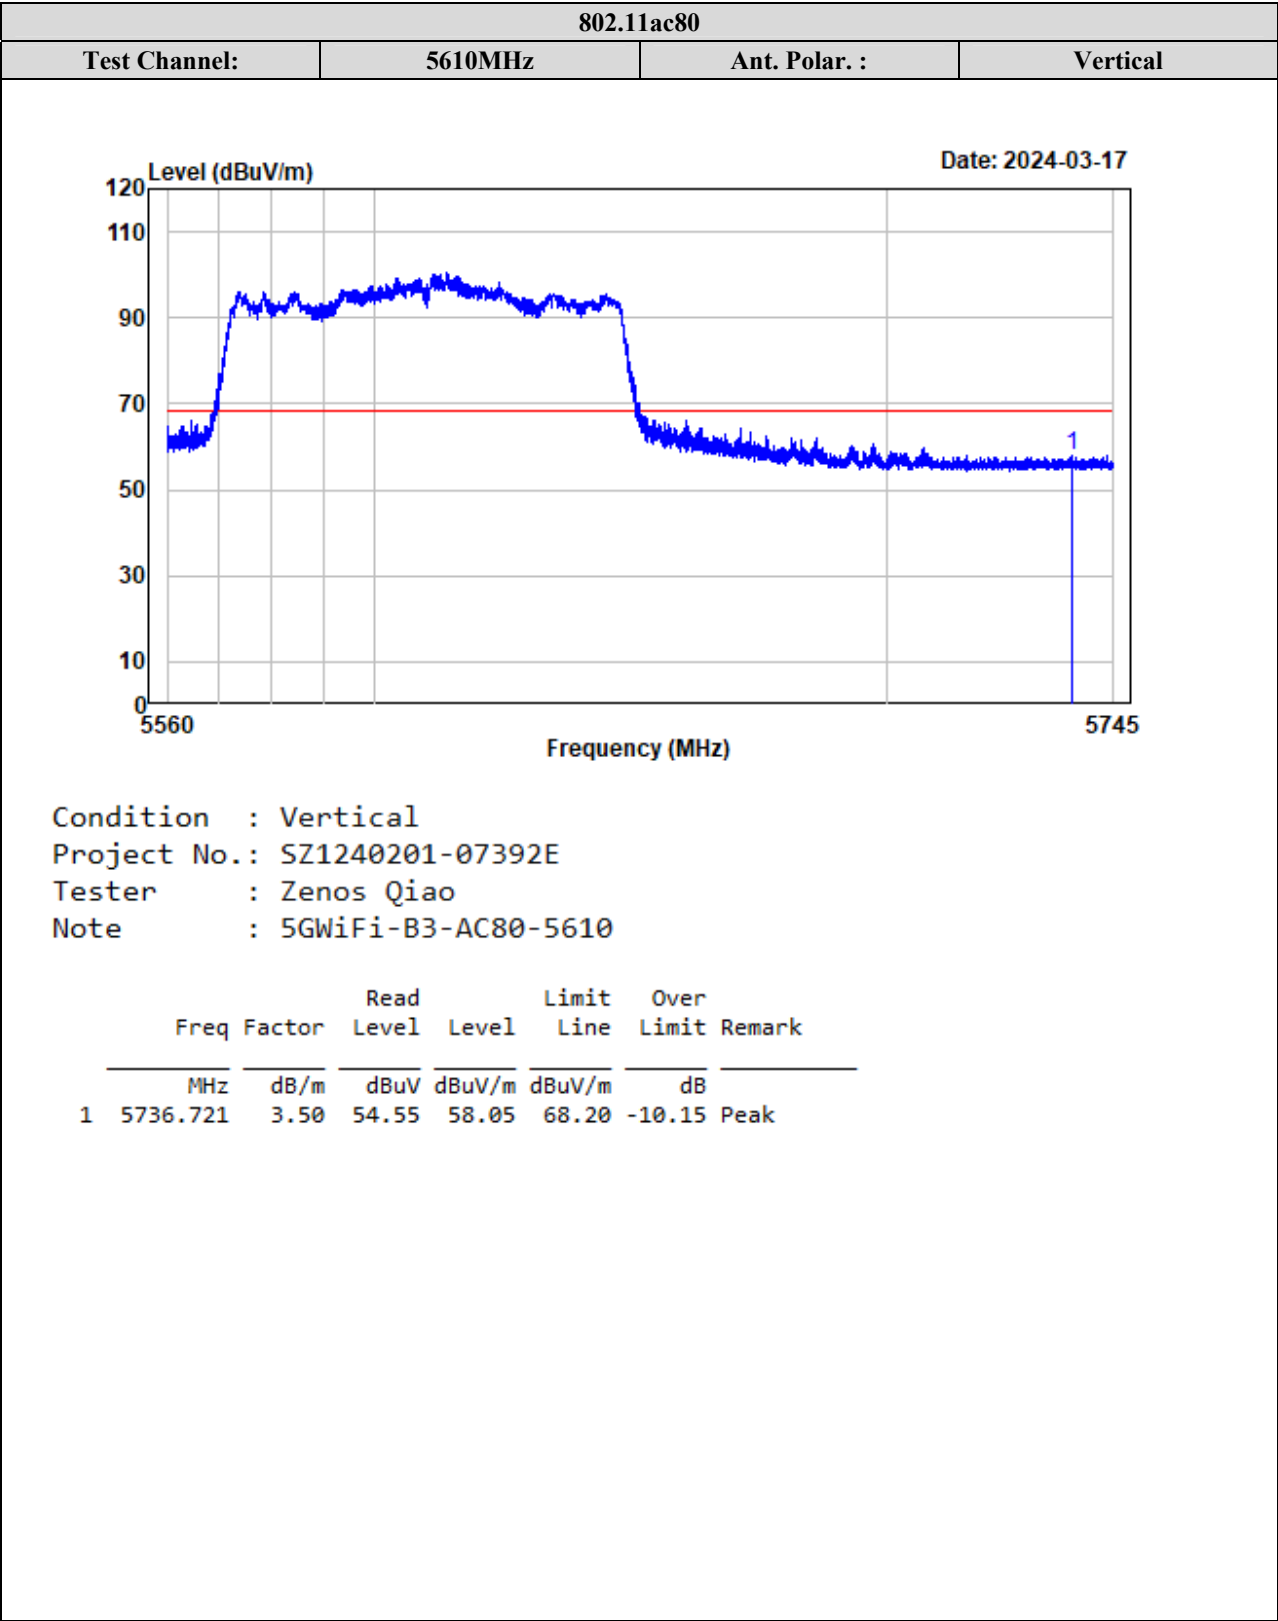


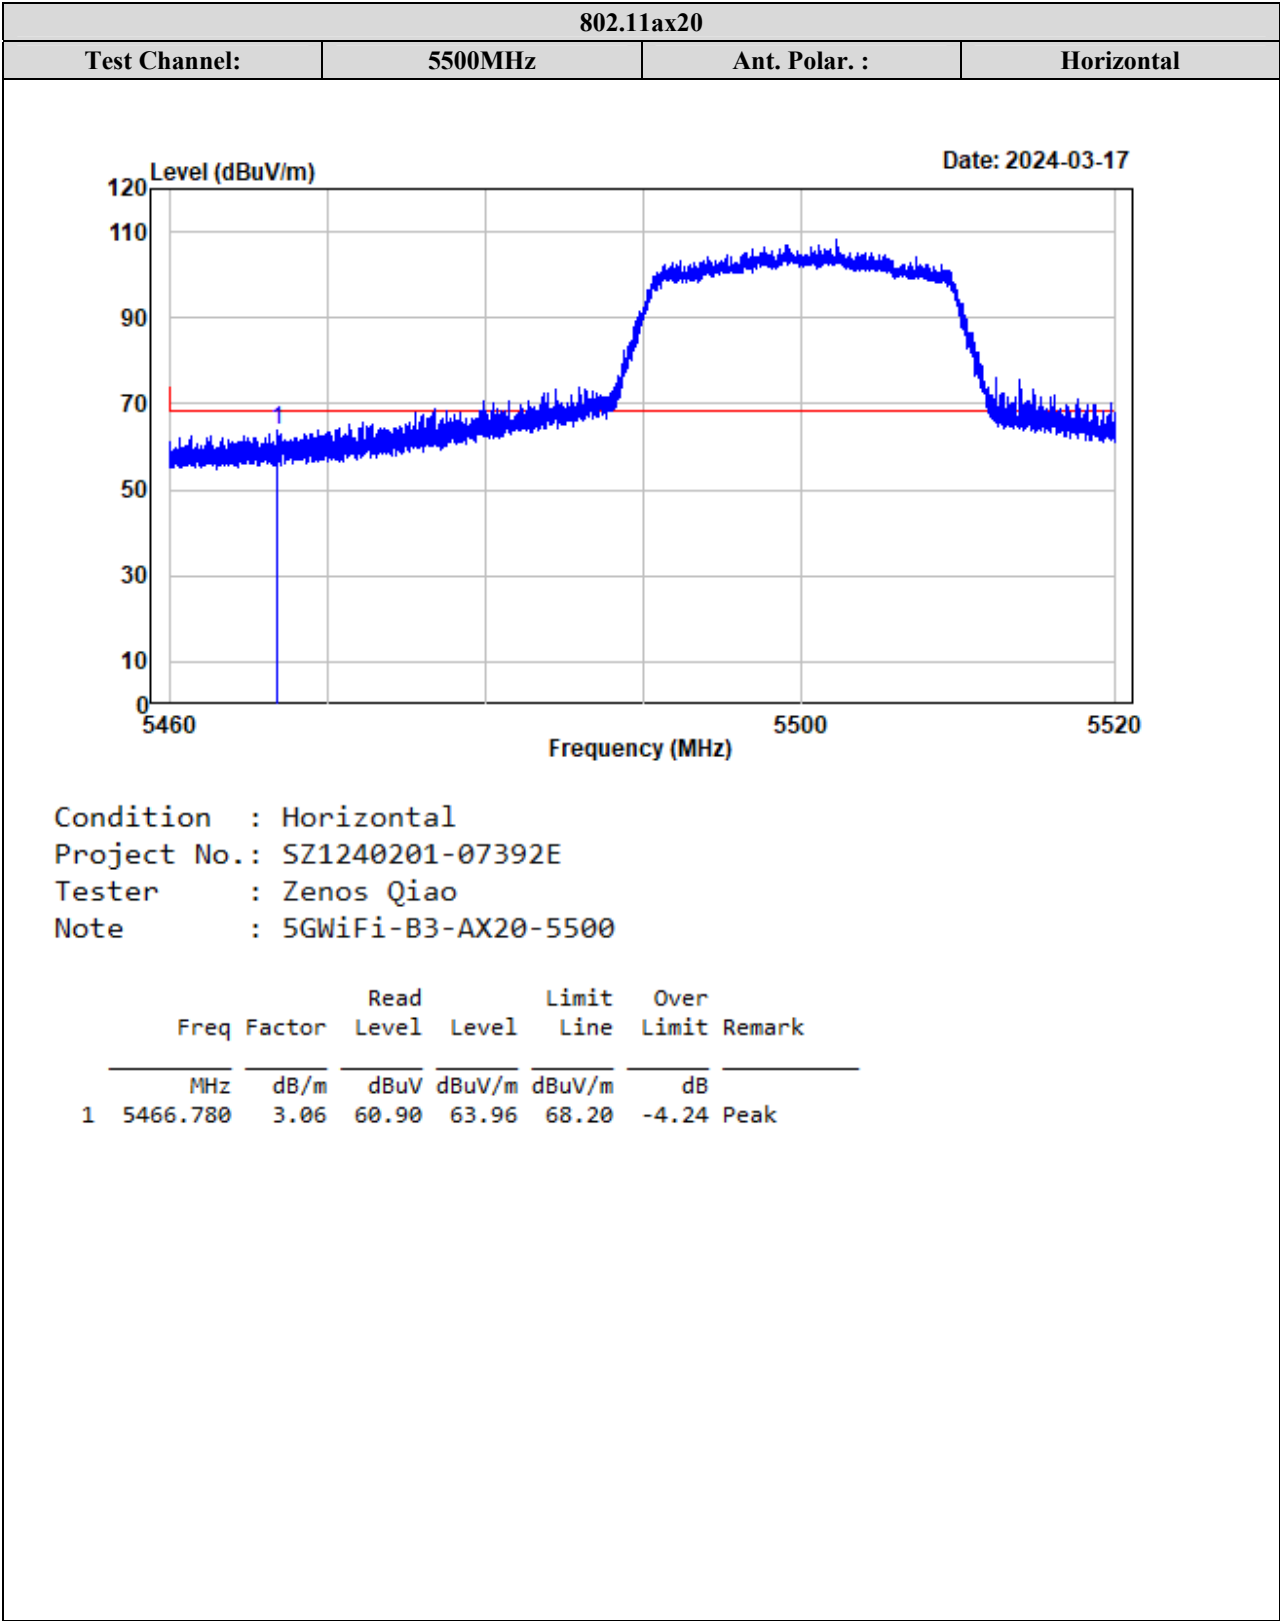


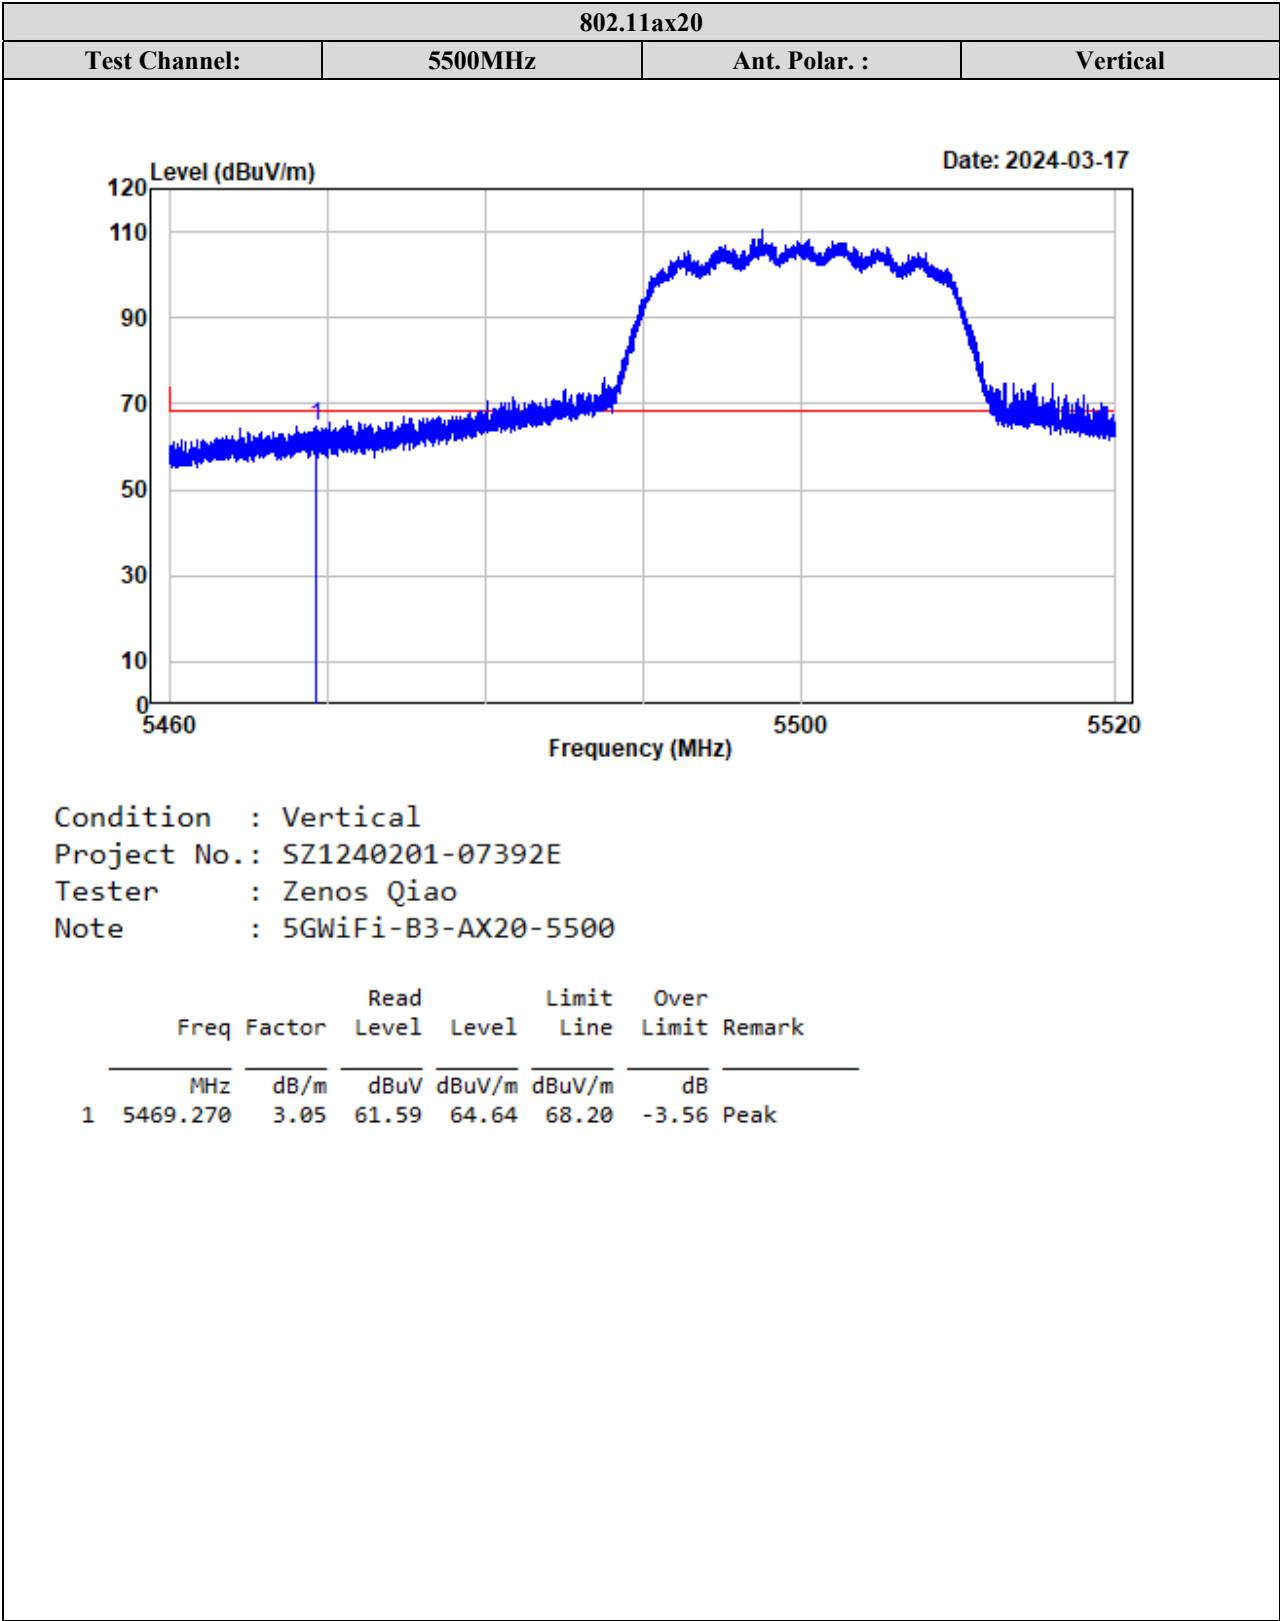


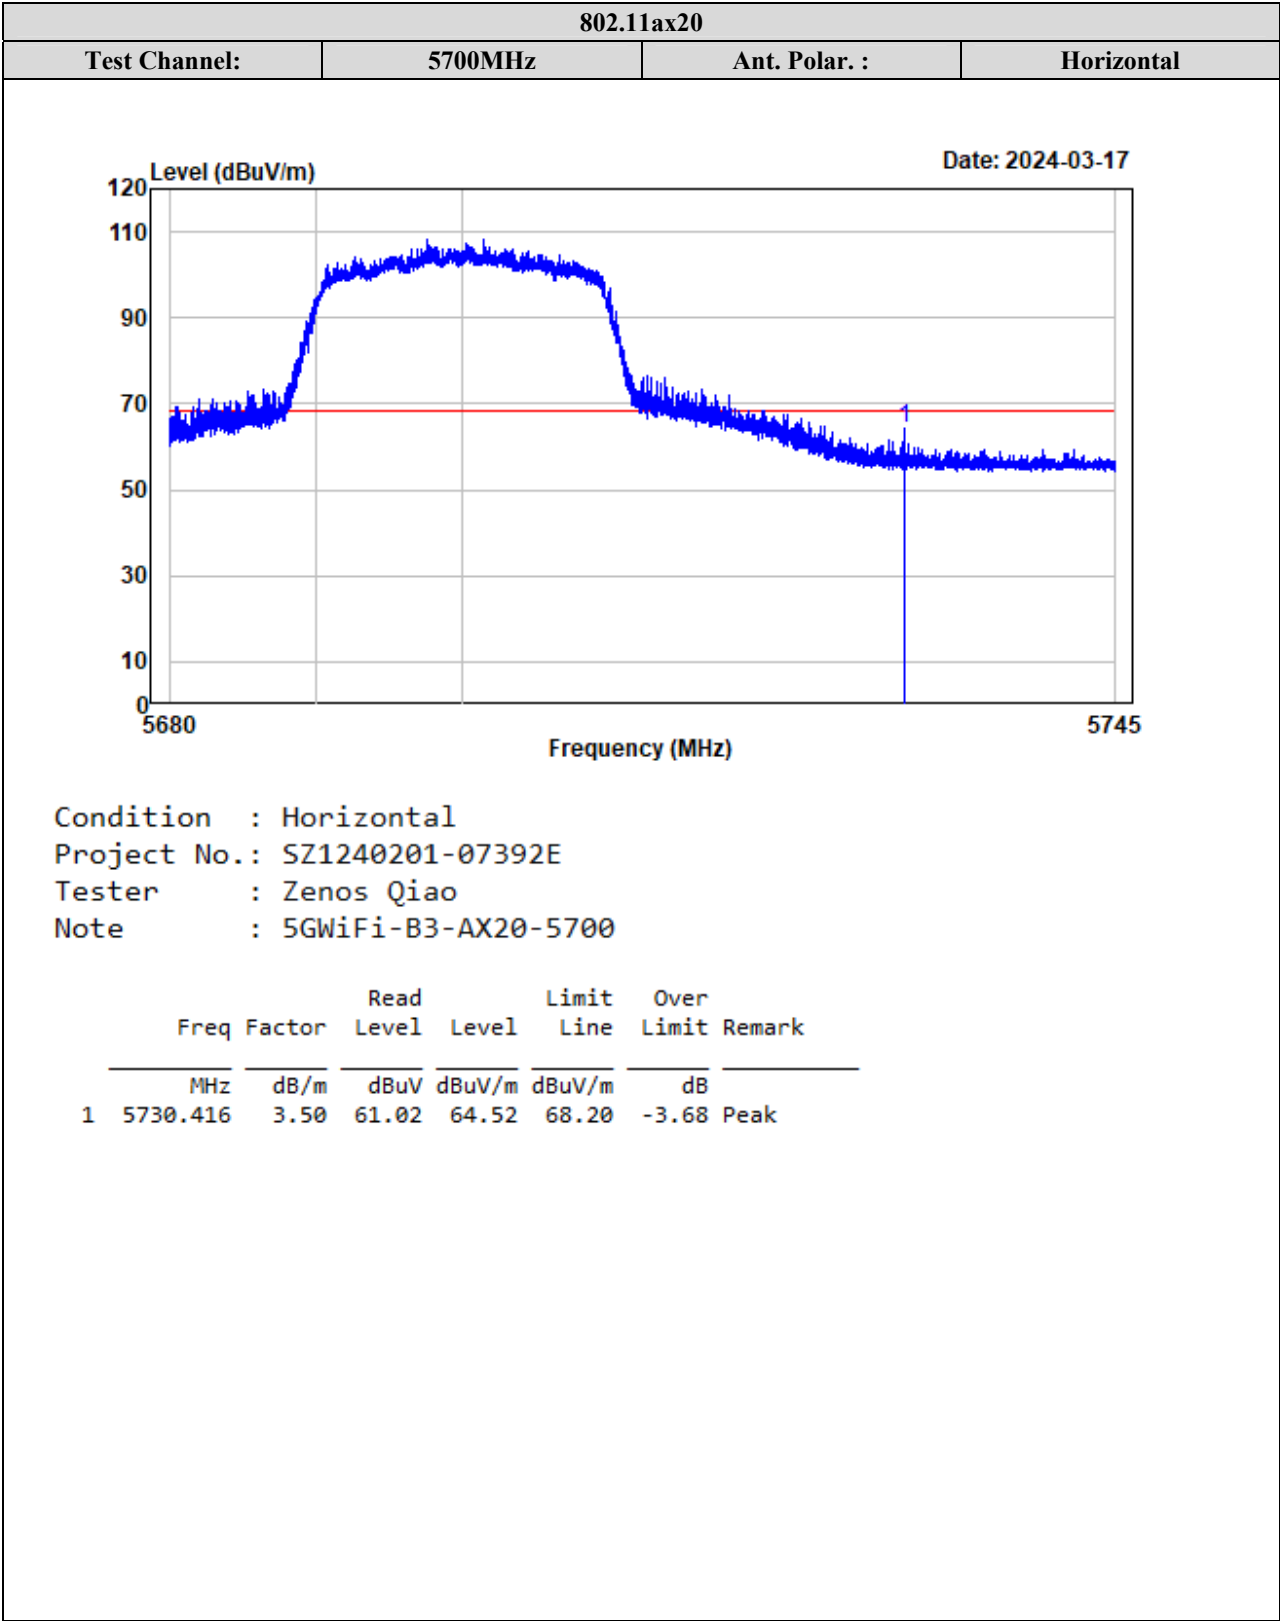


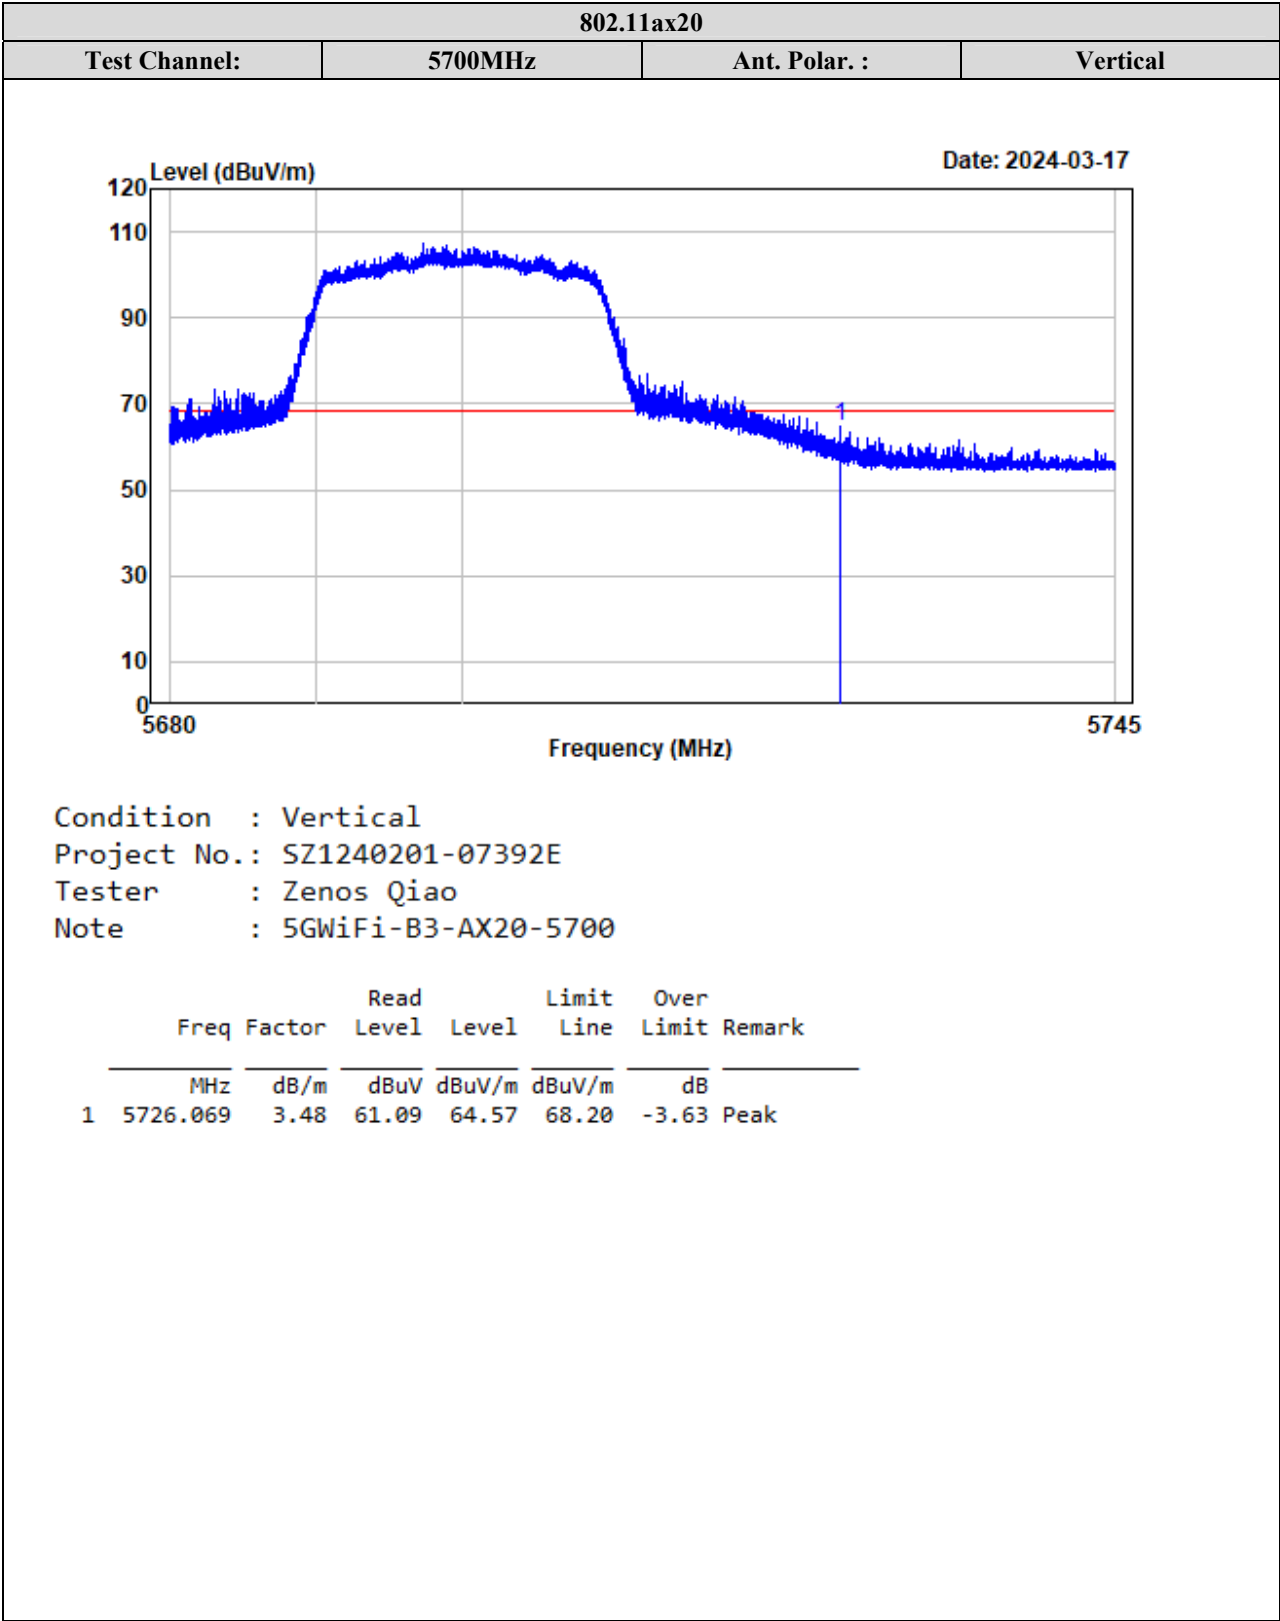


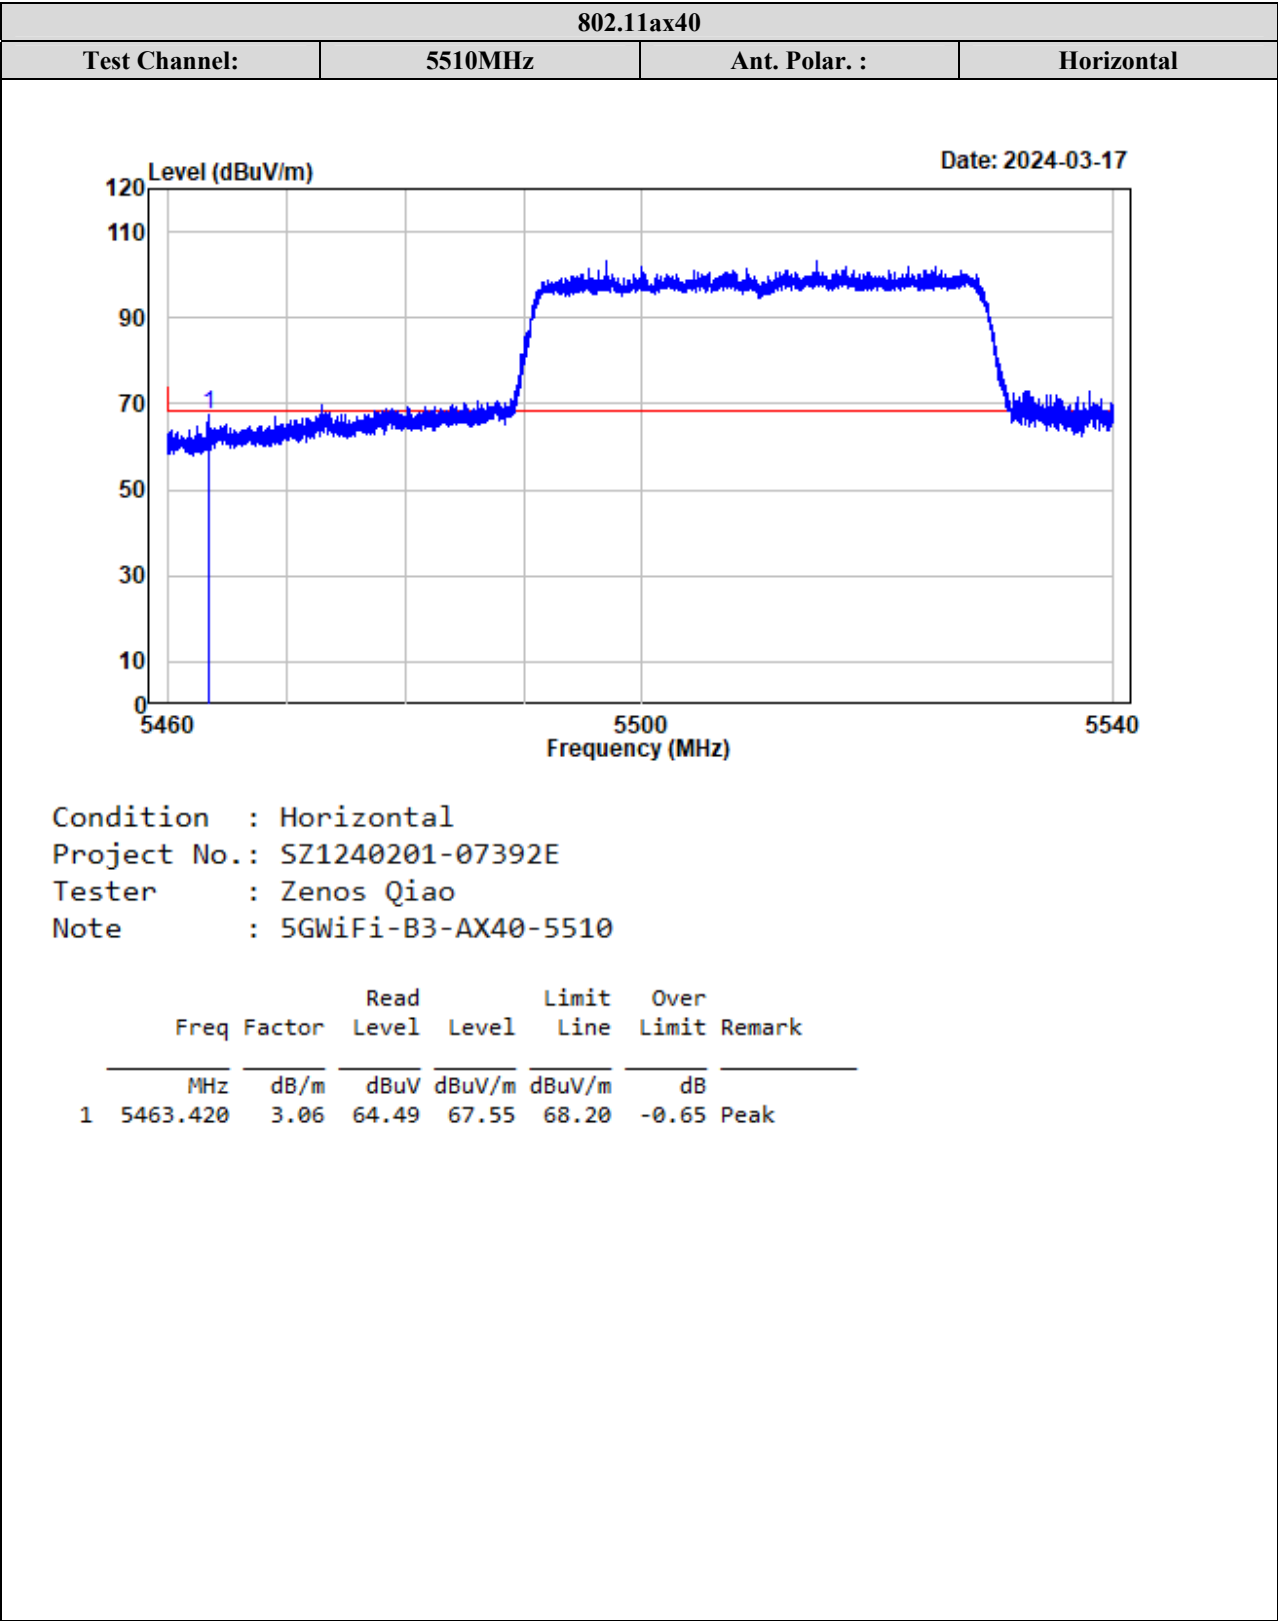


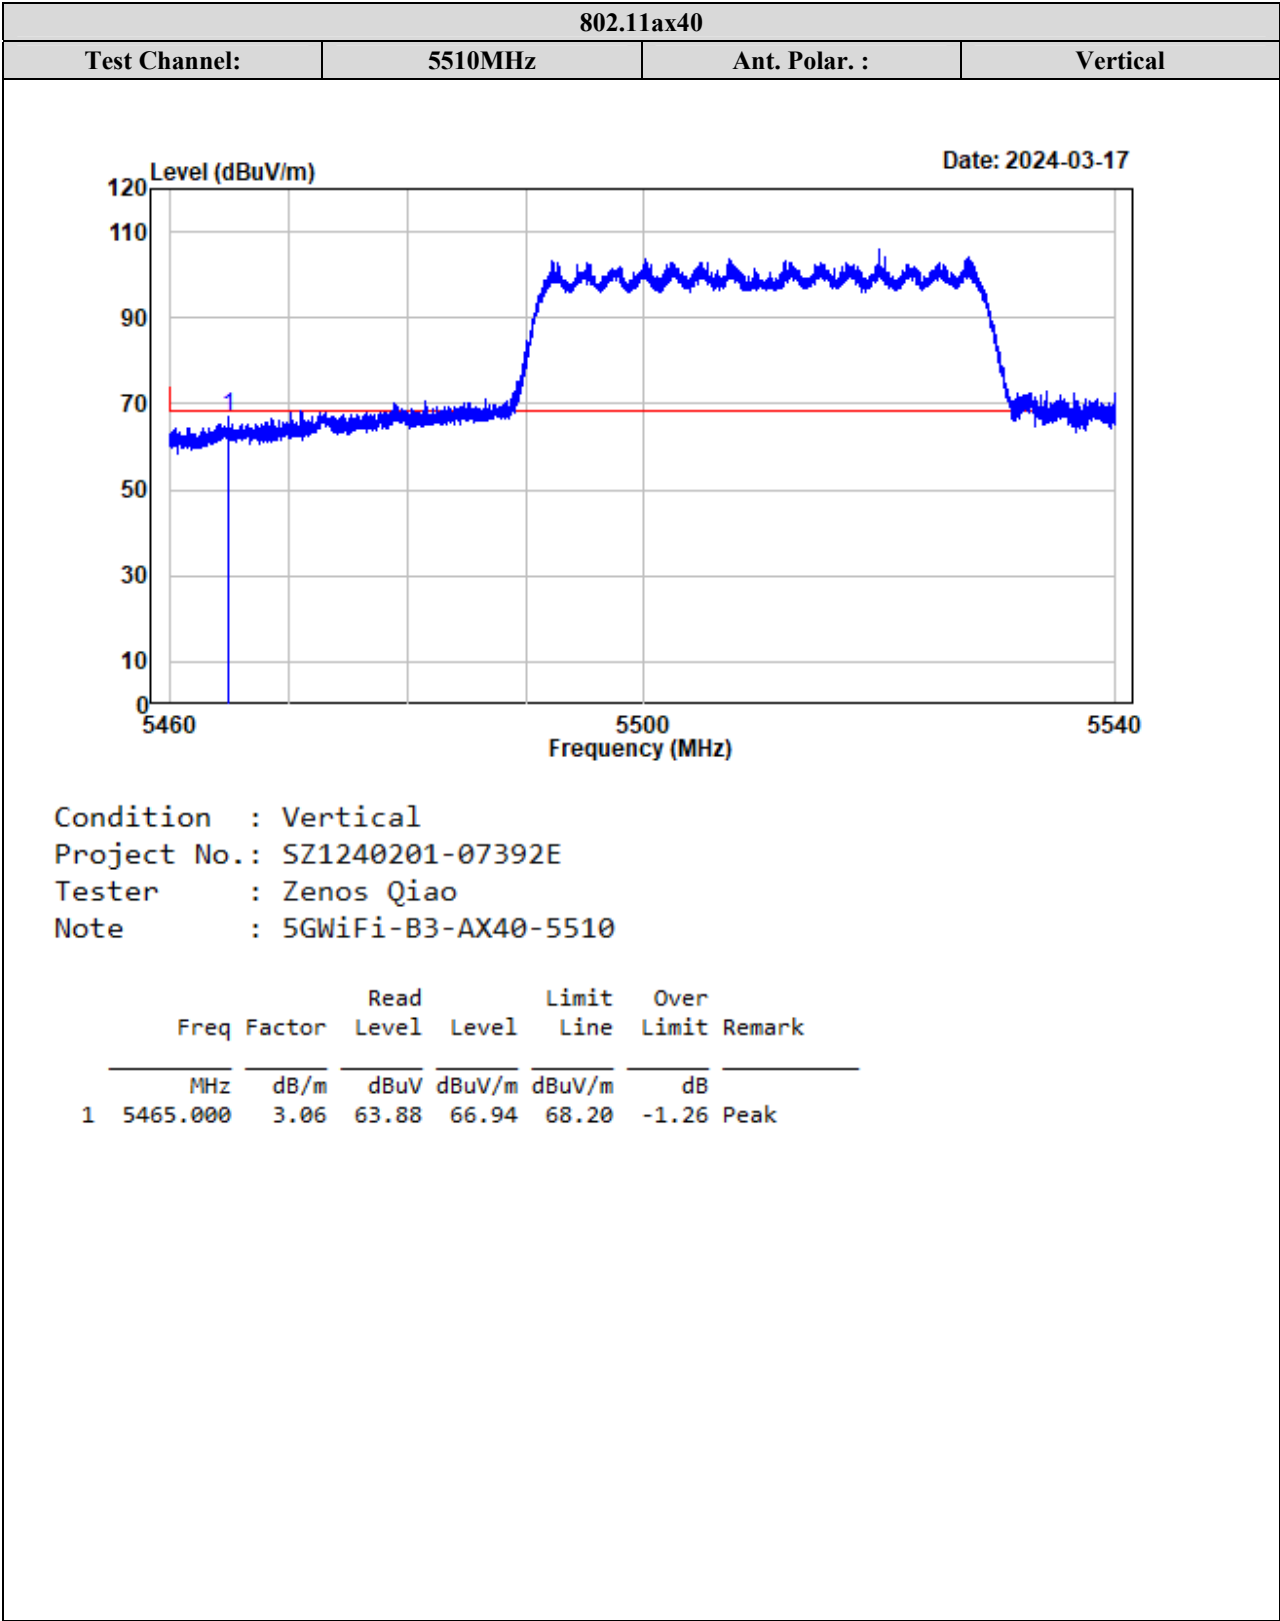


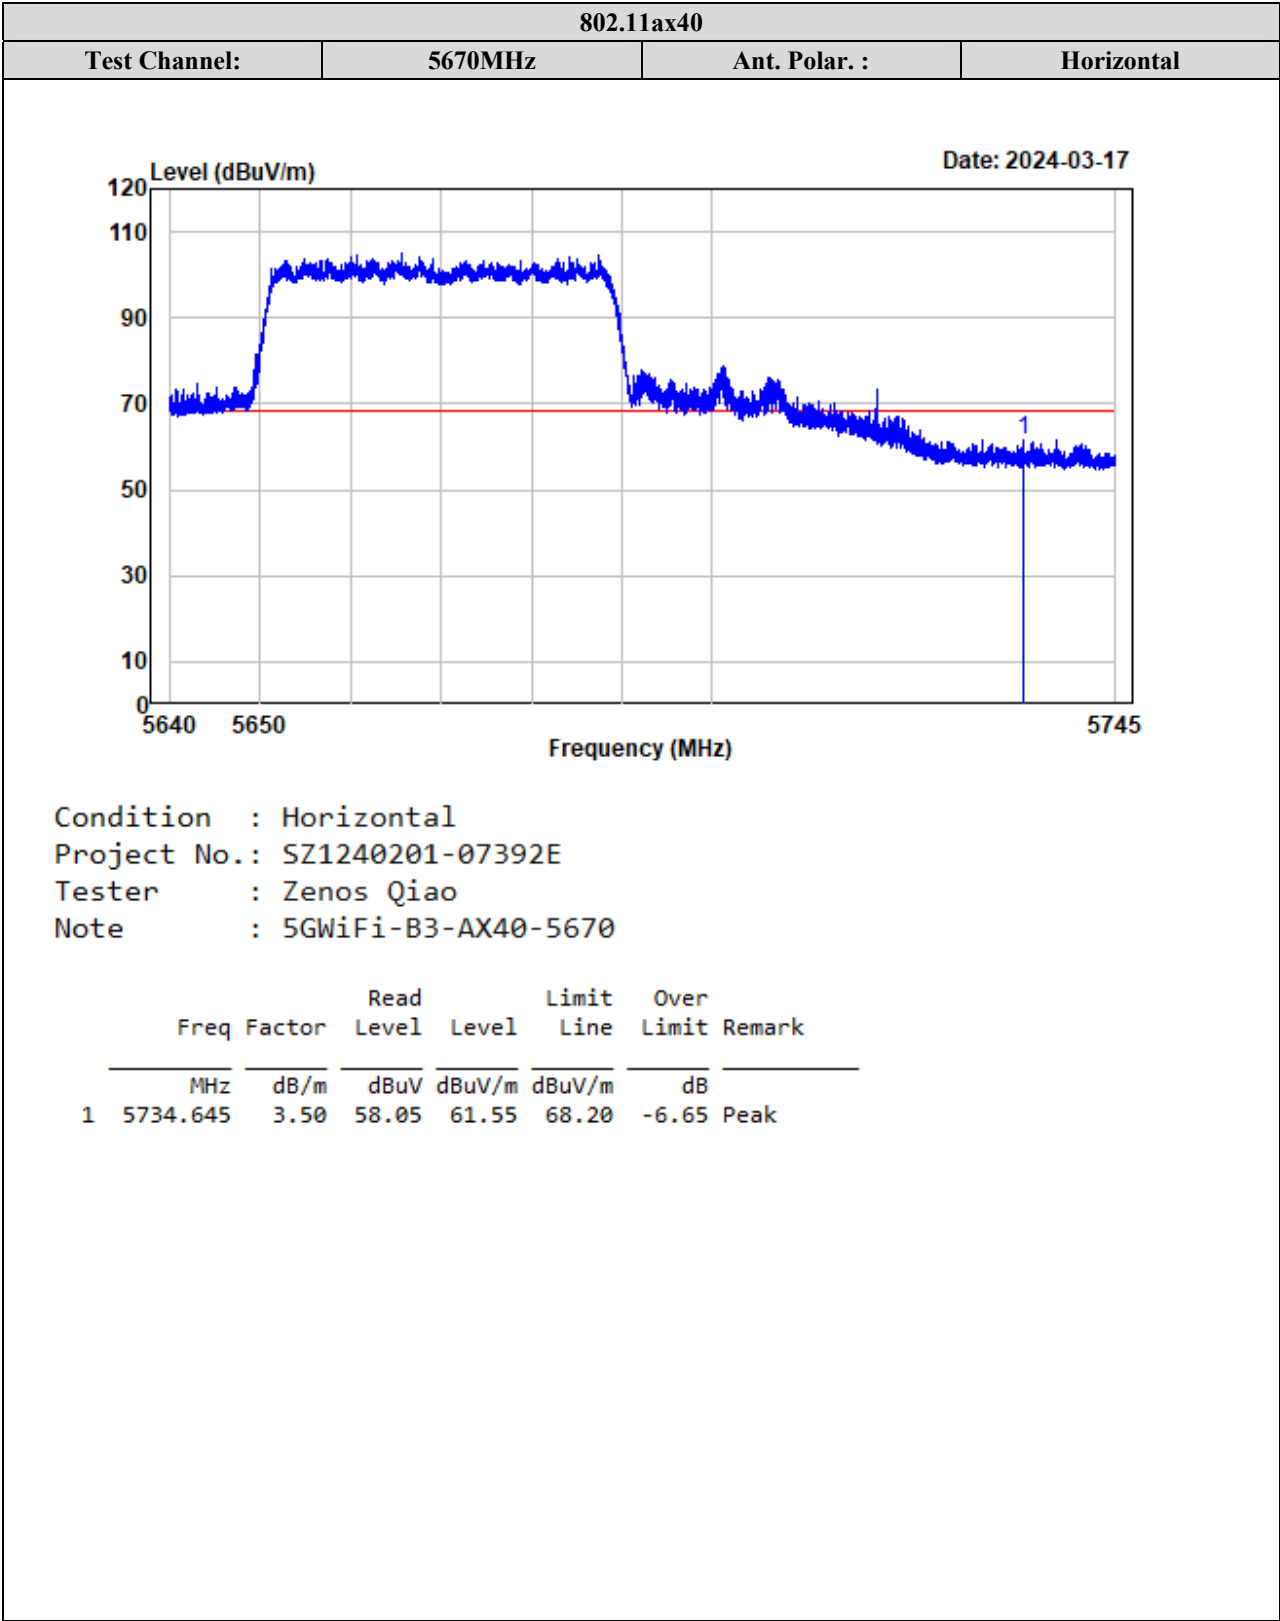


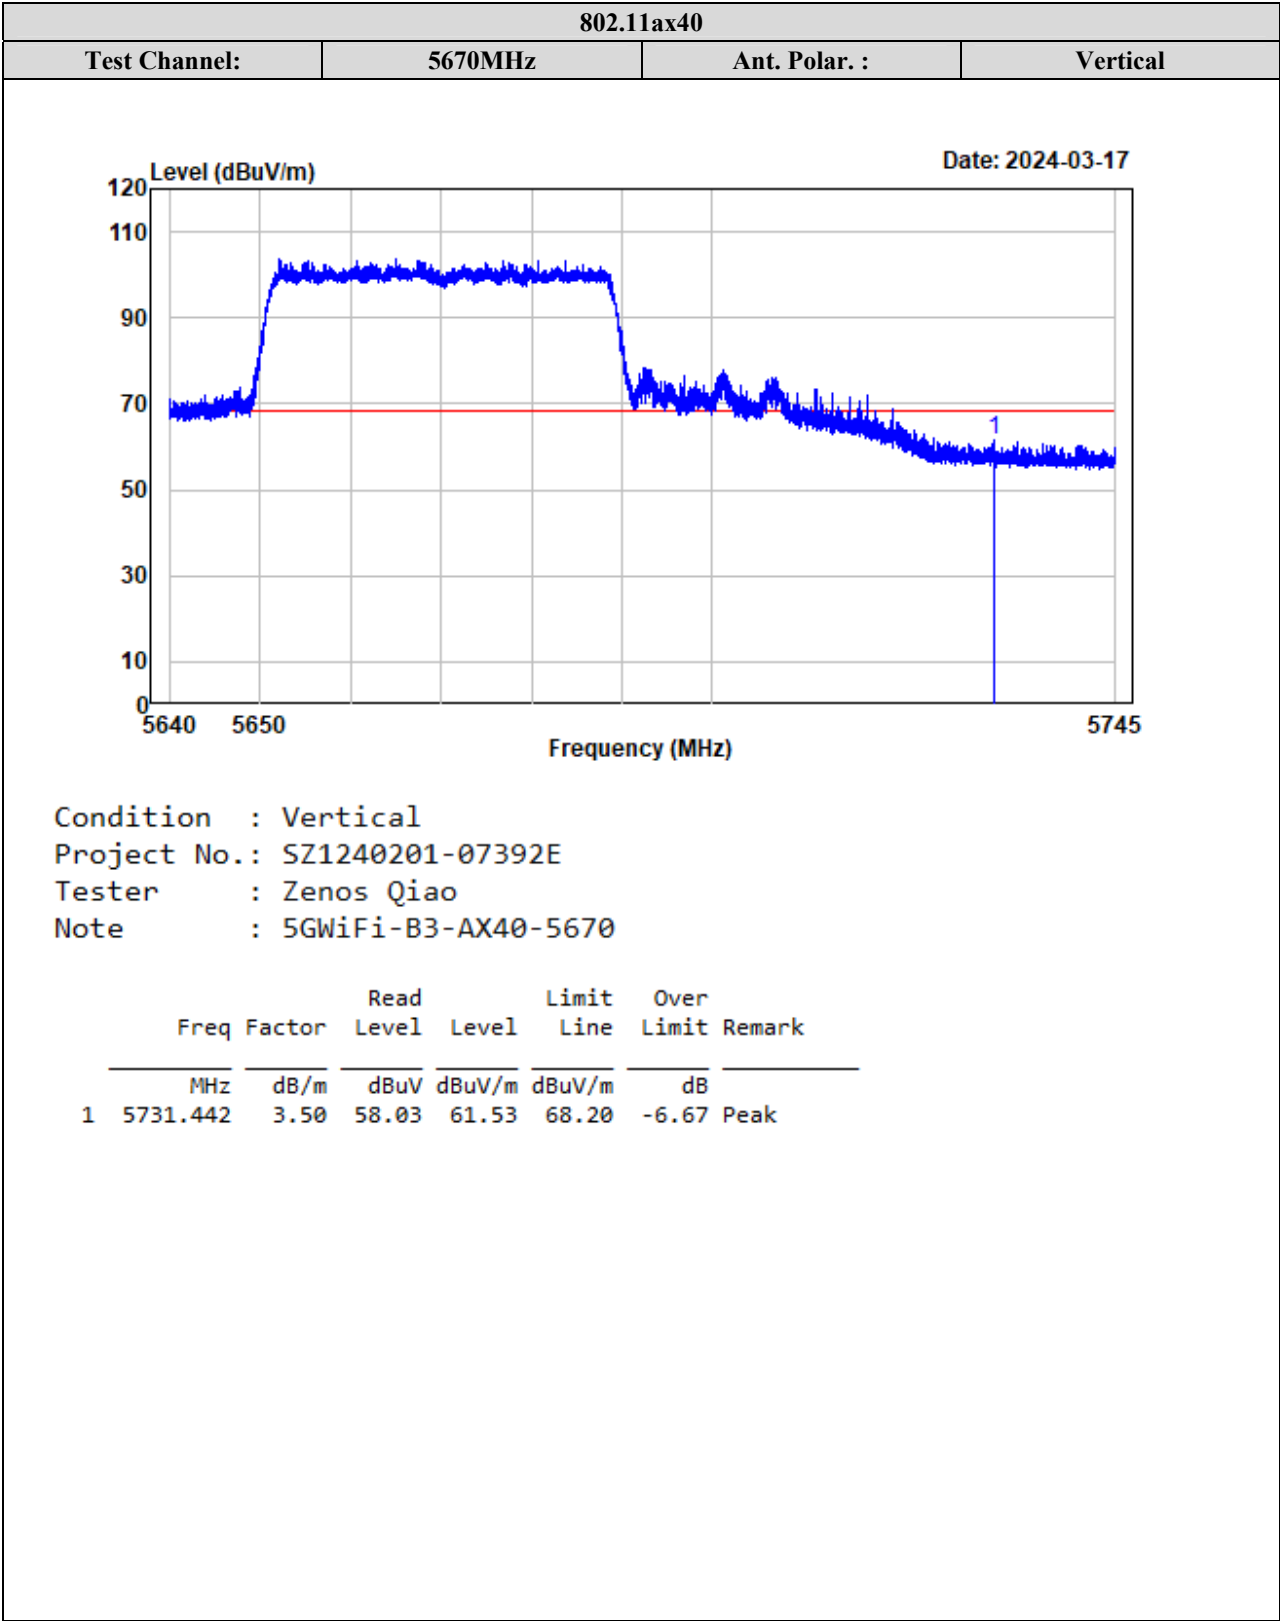

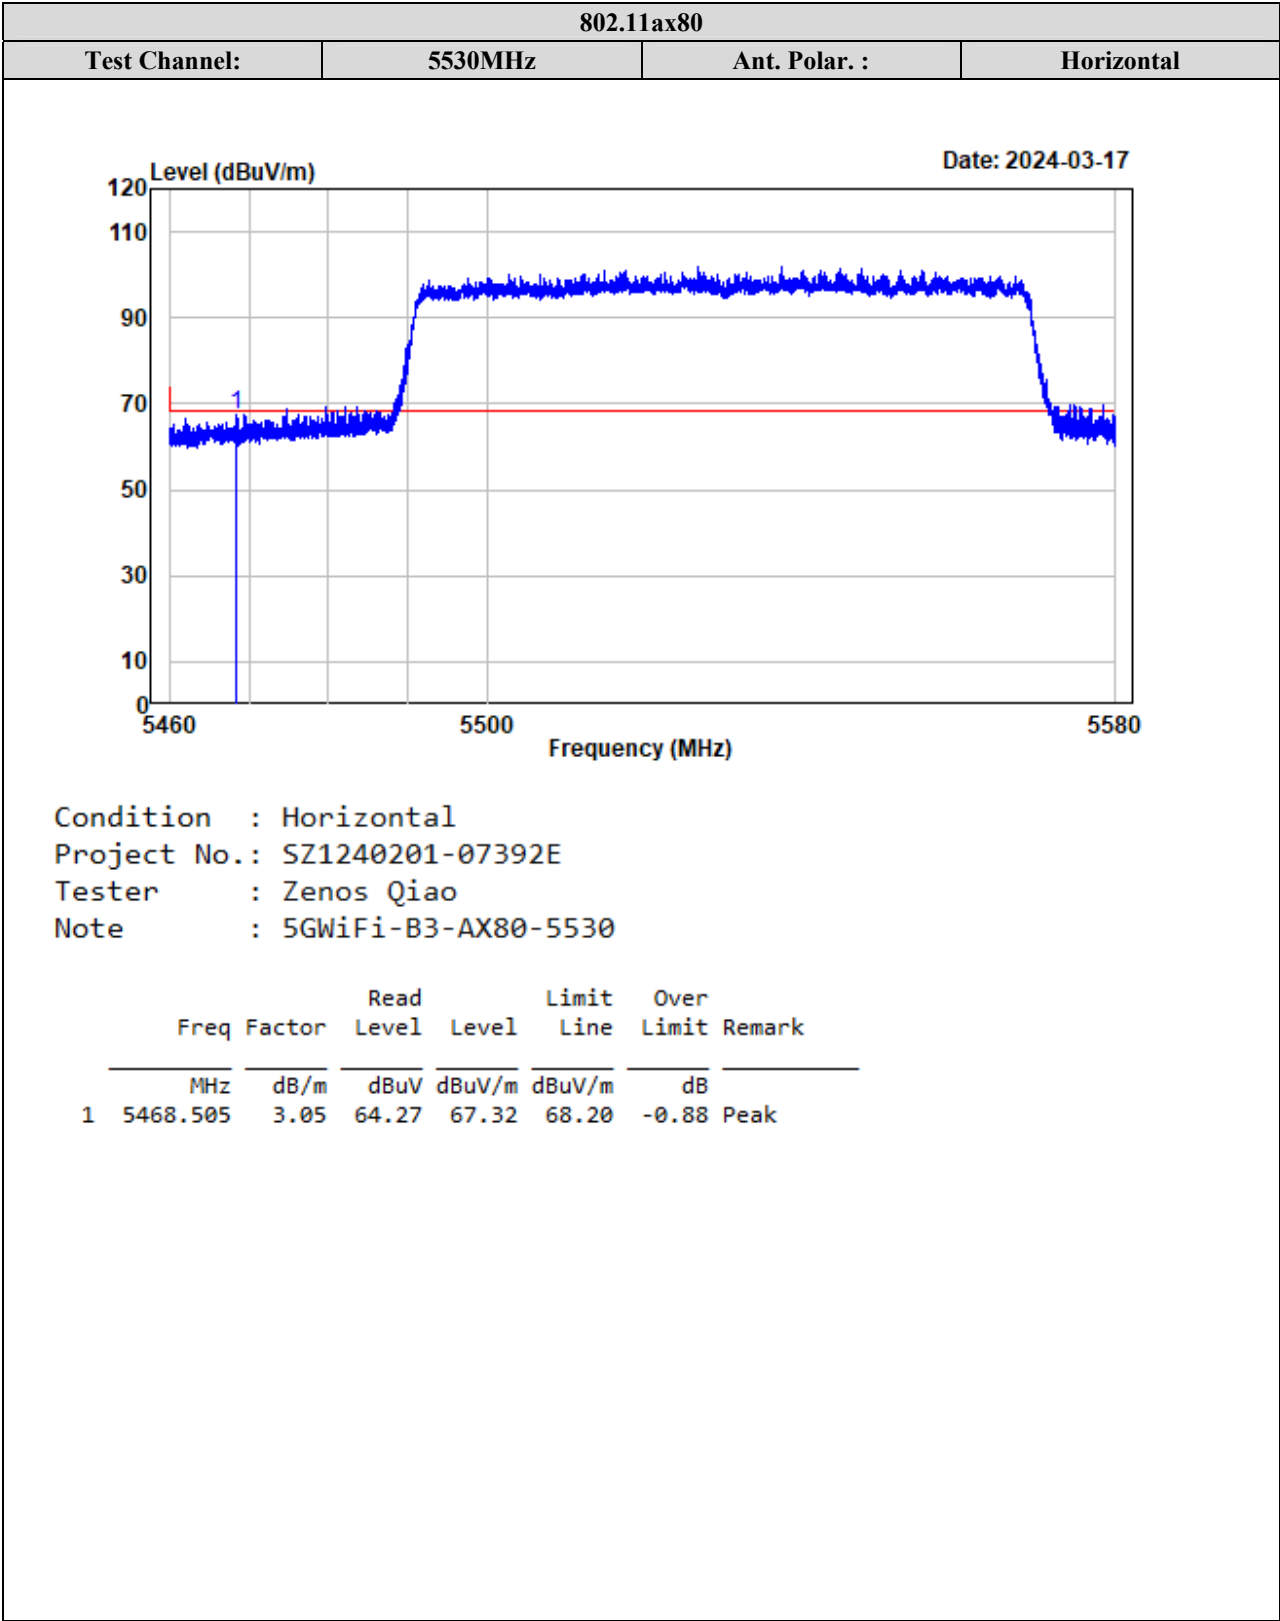


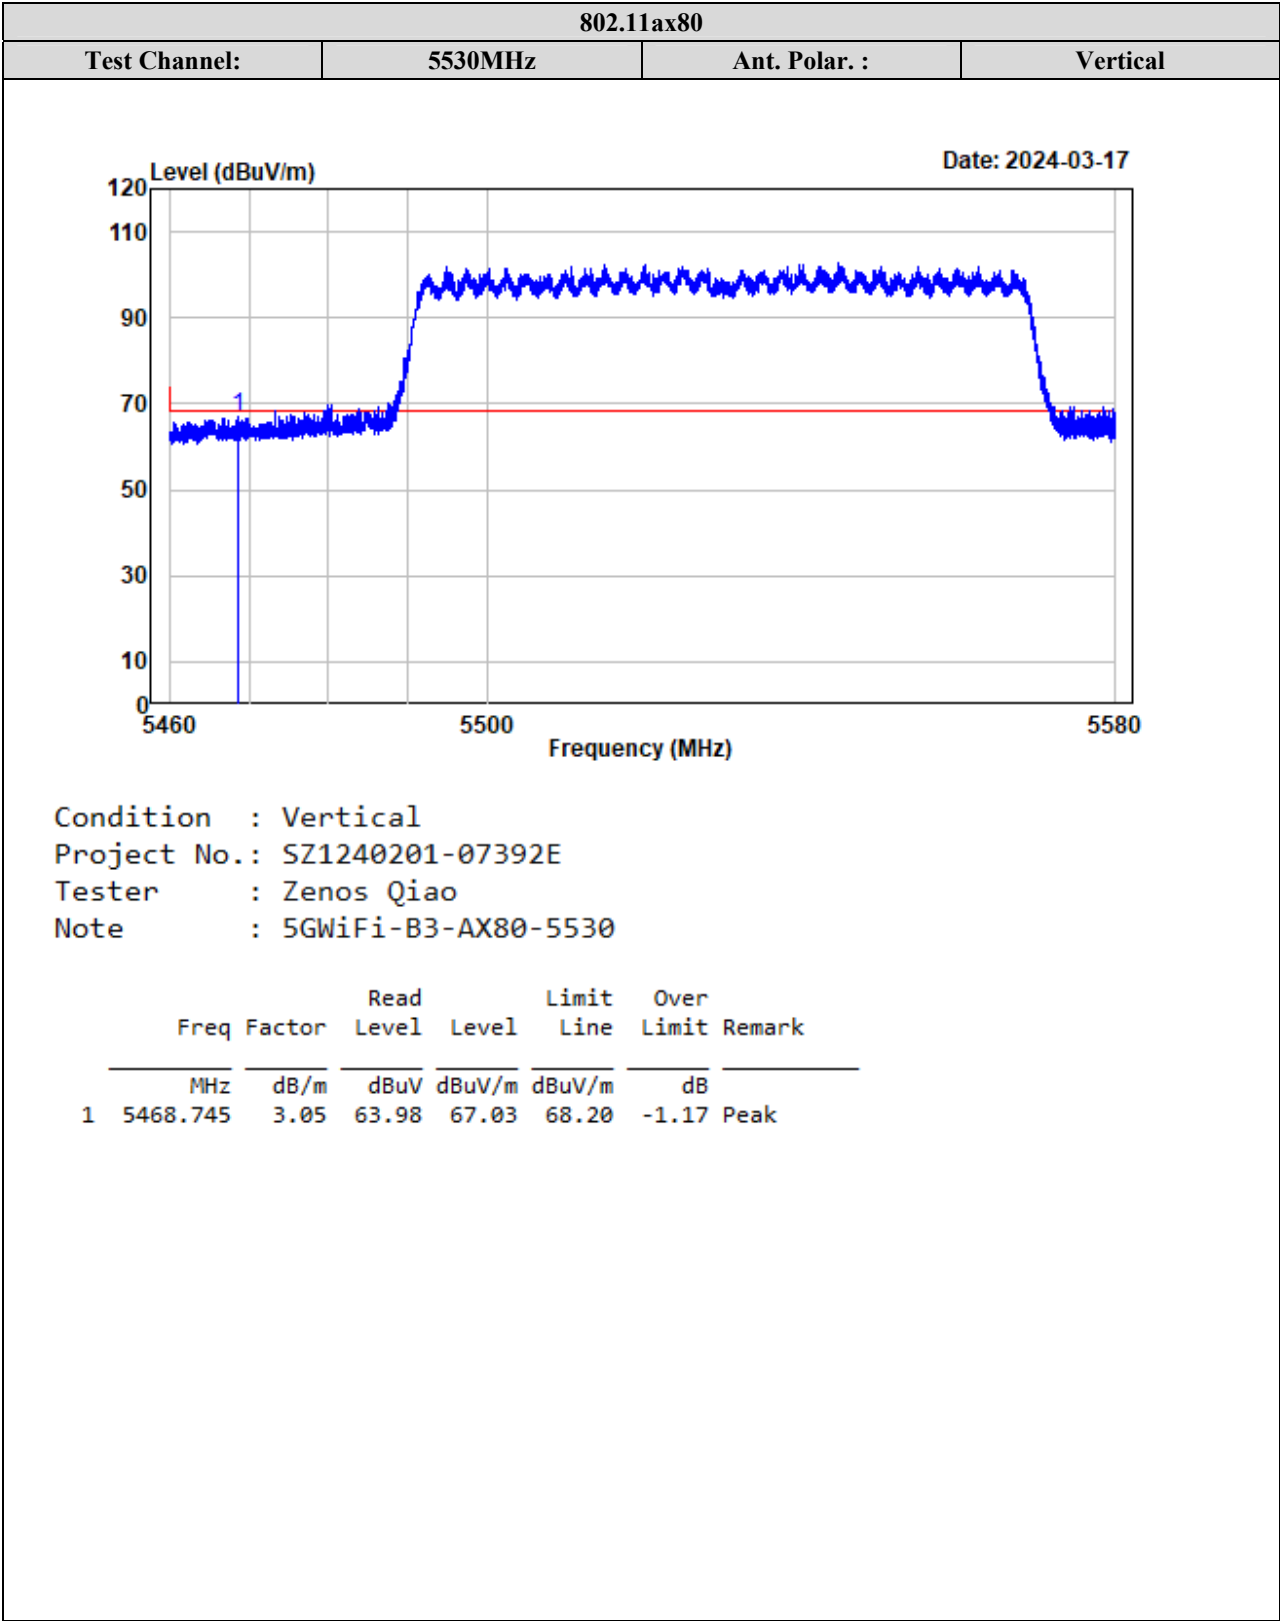


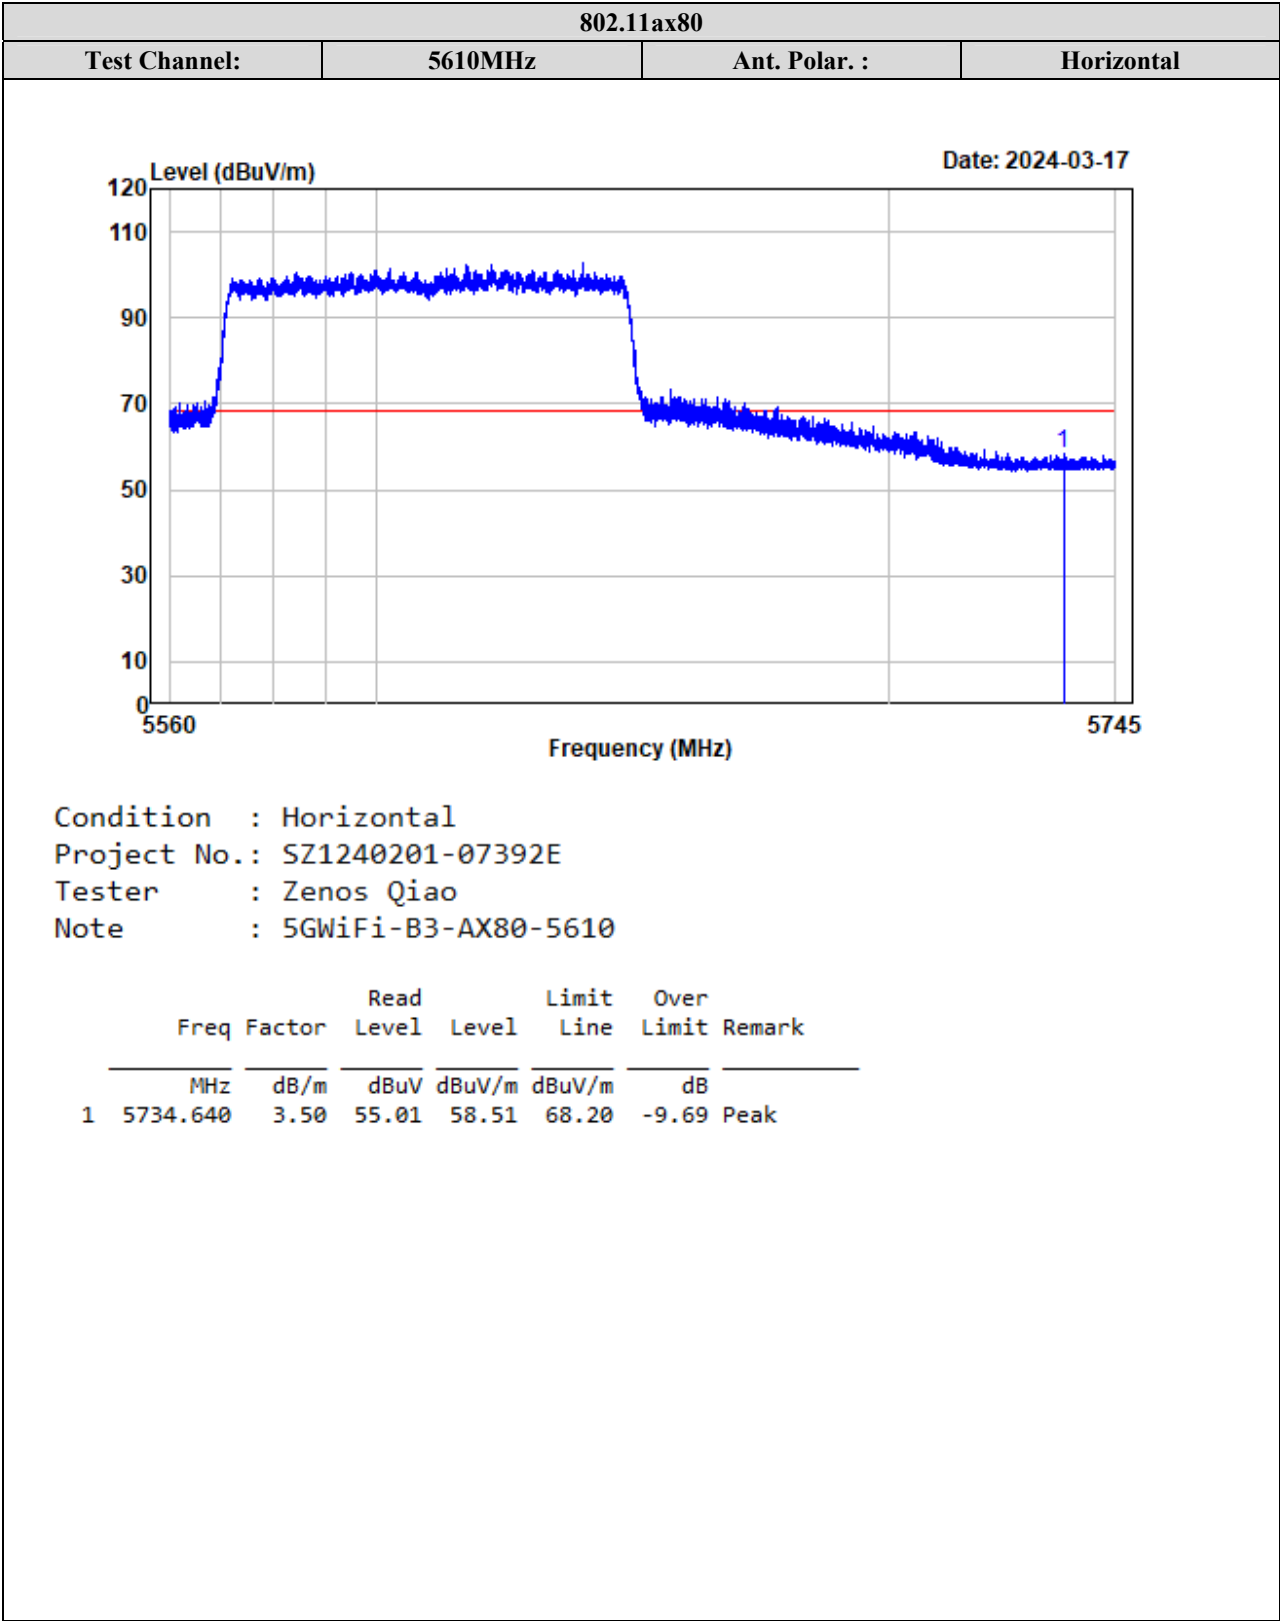


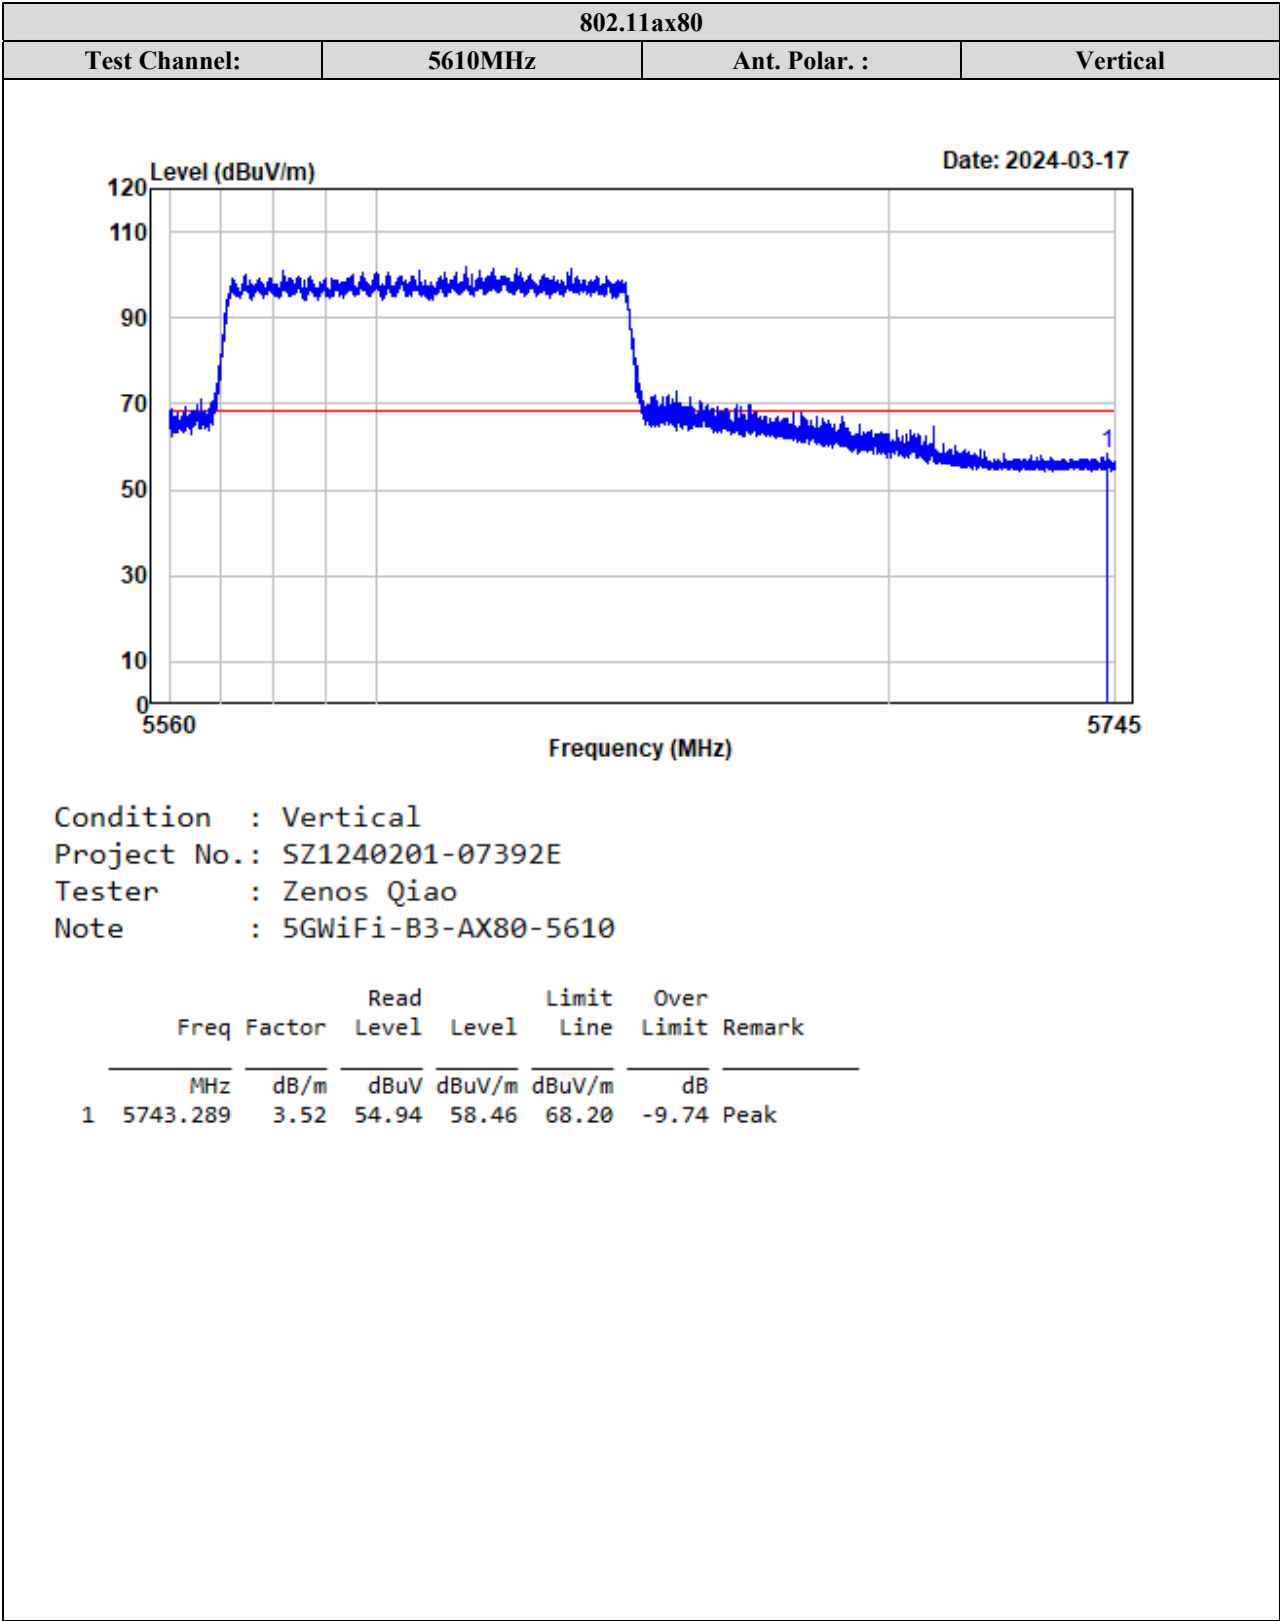


5725-5850MHz:

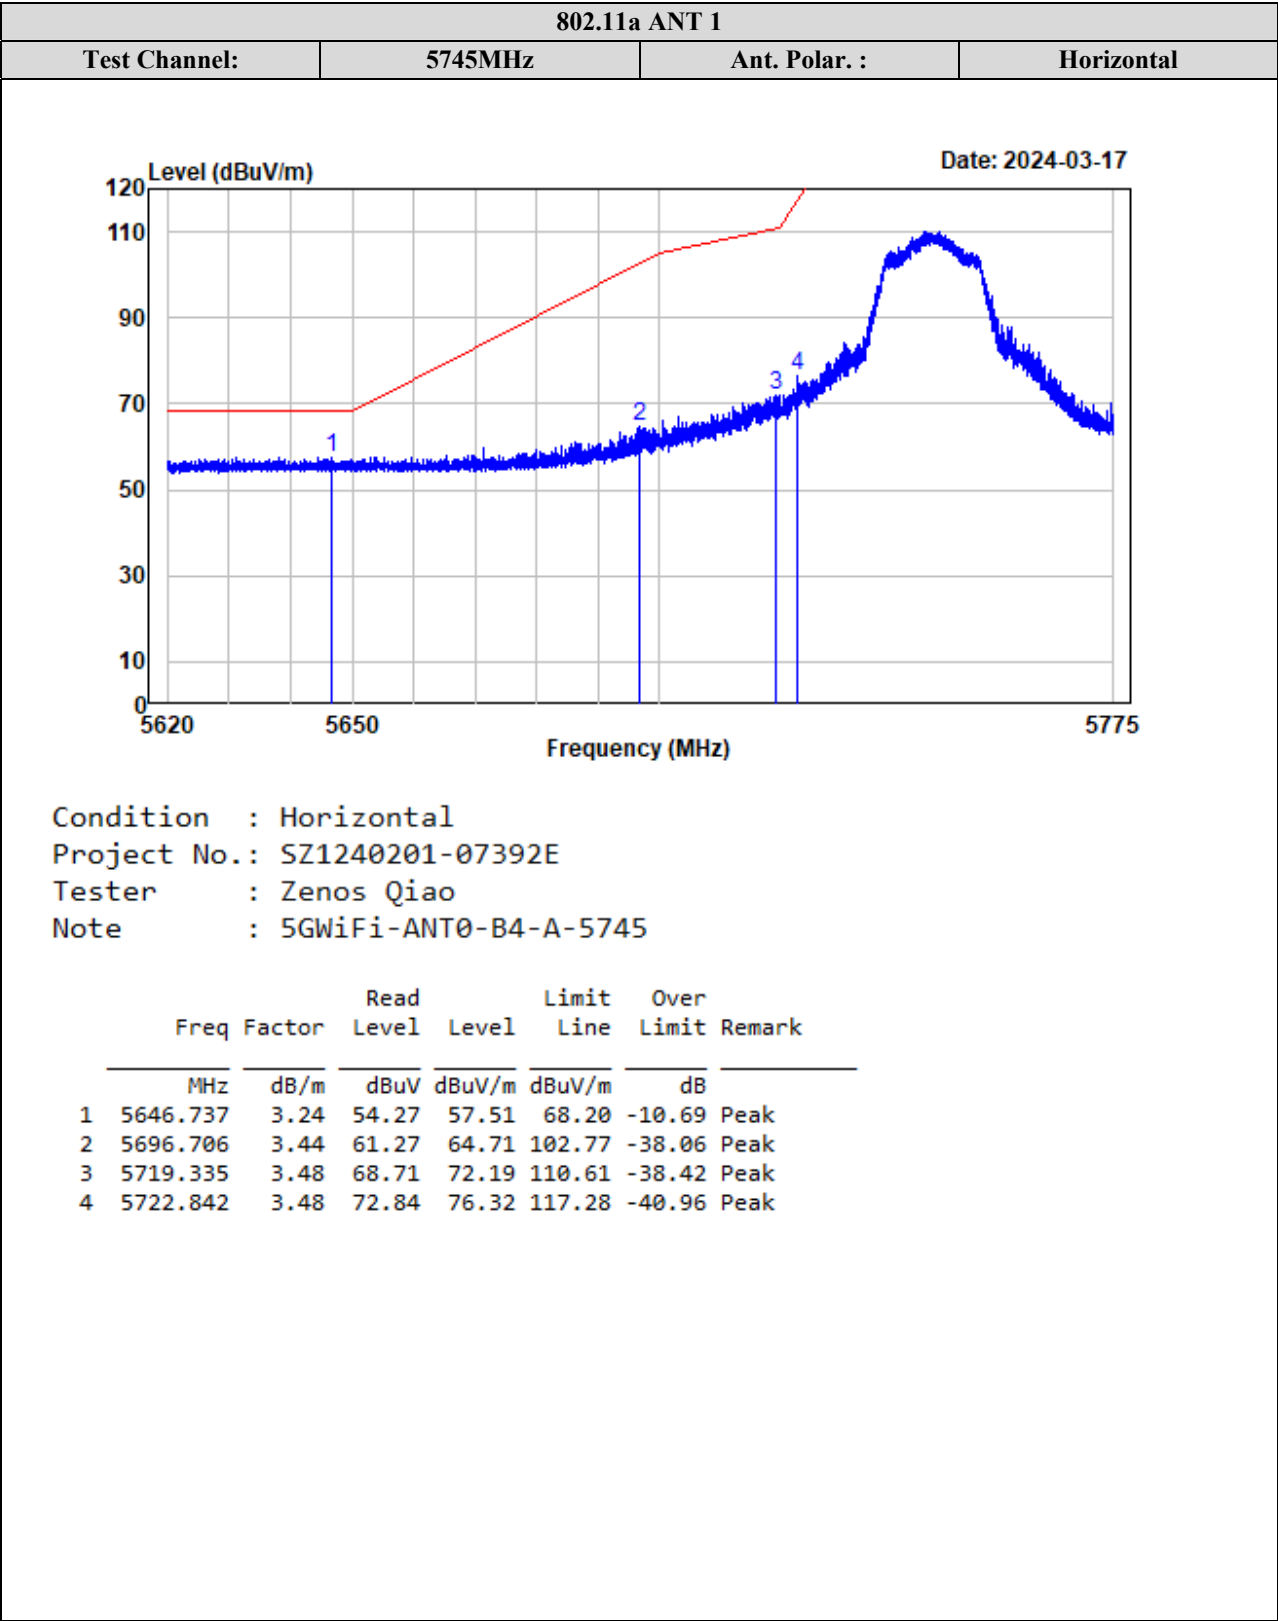

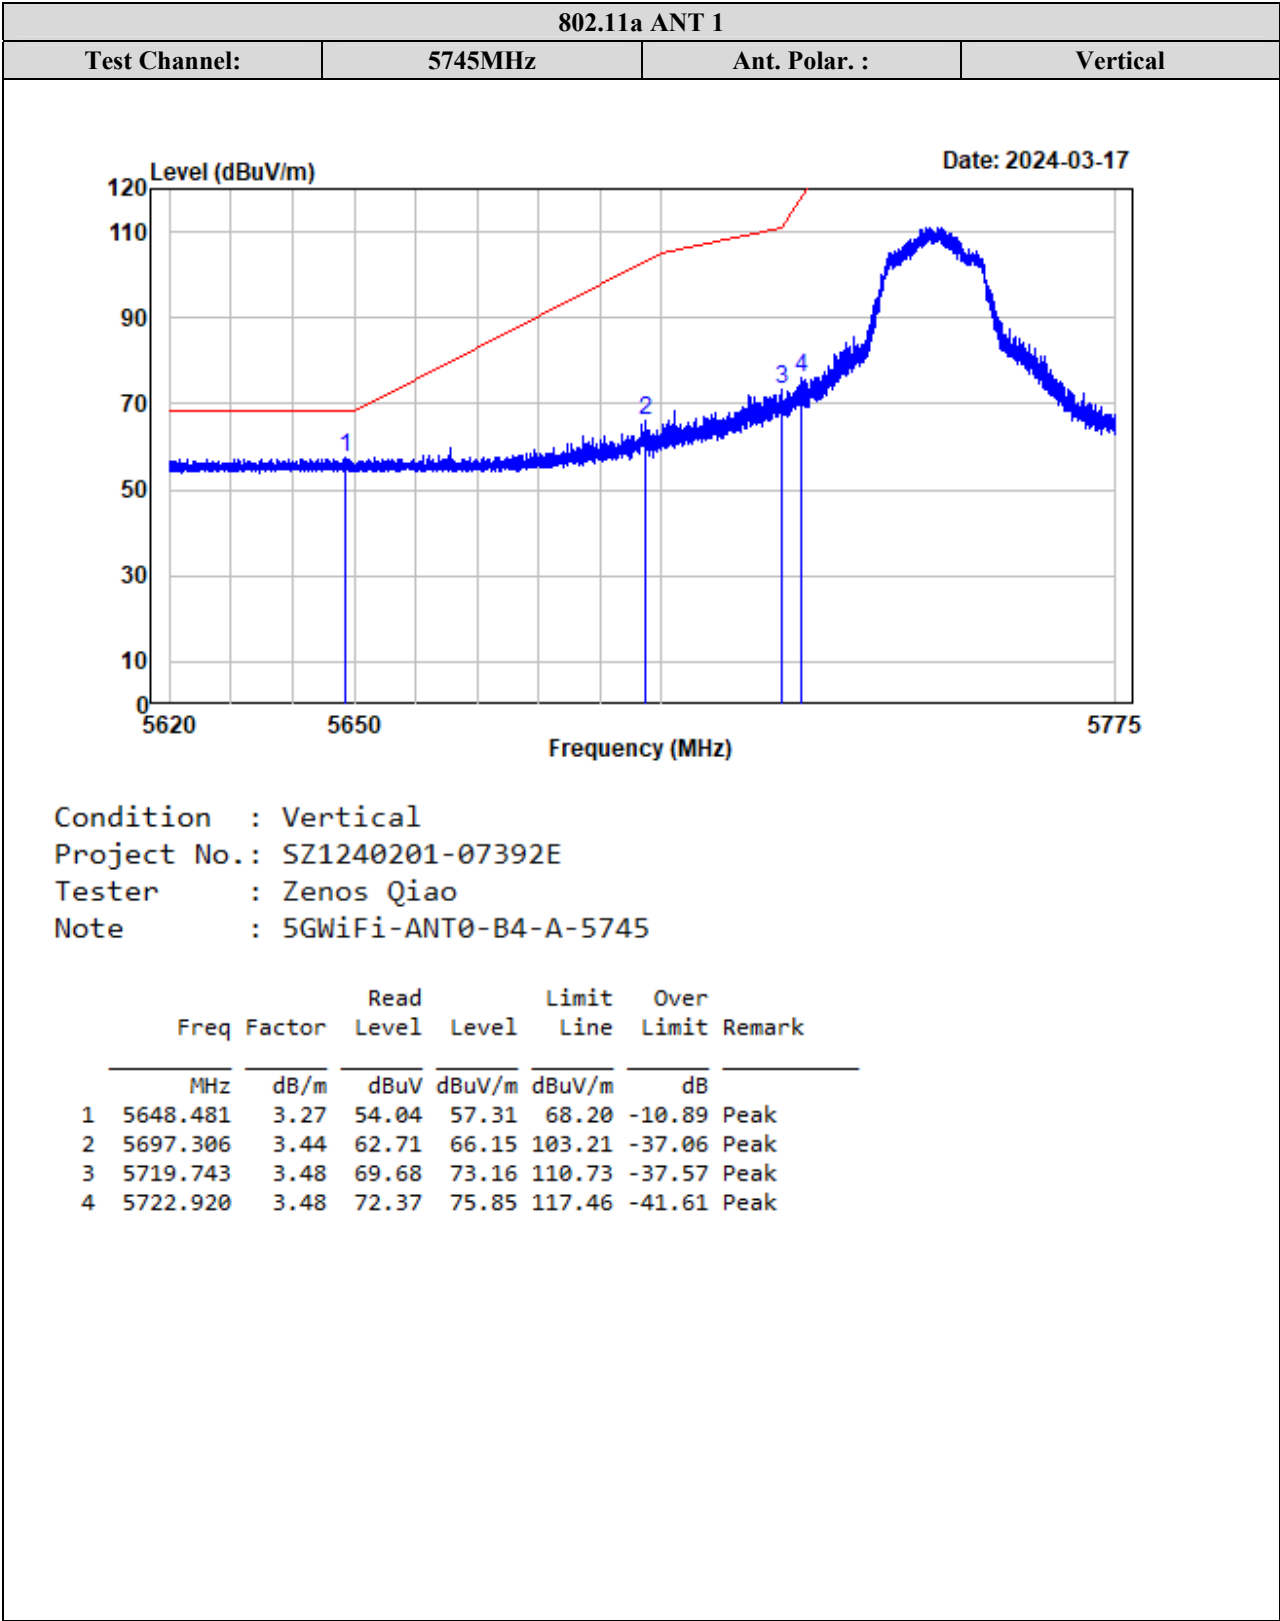

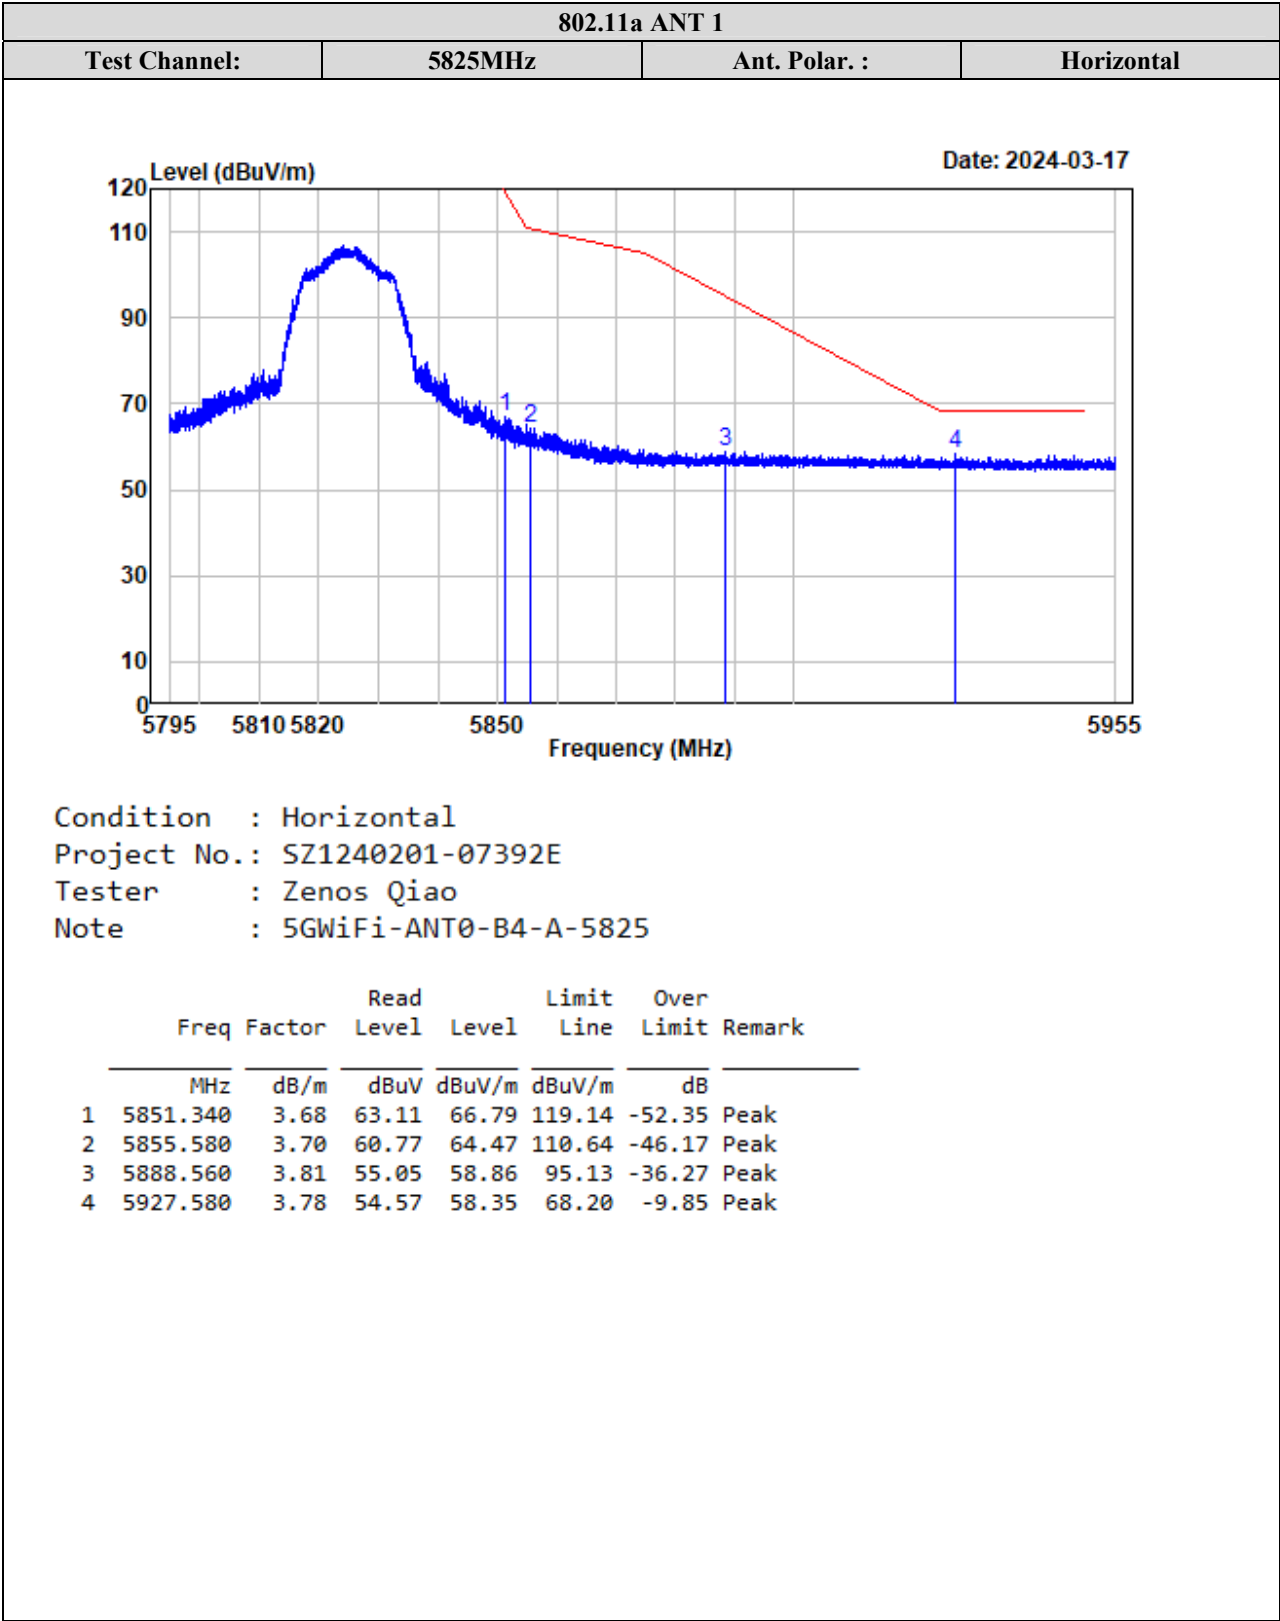


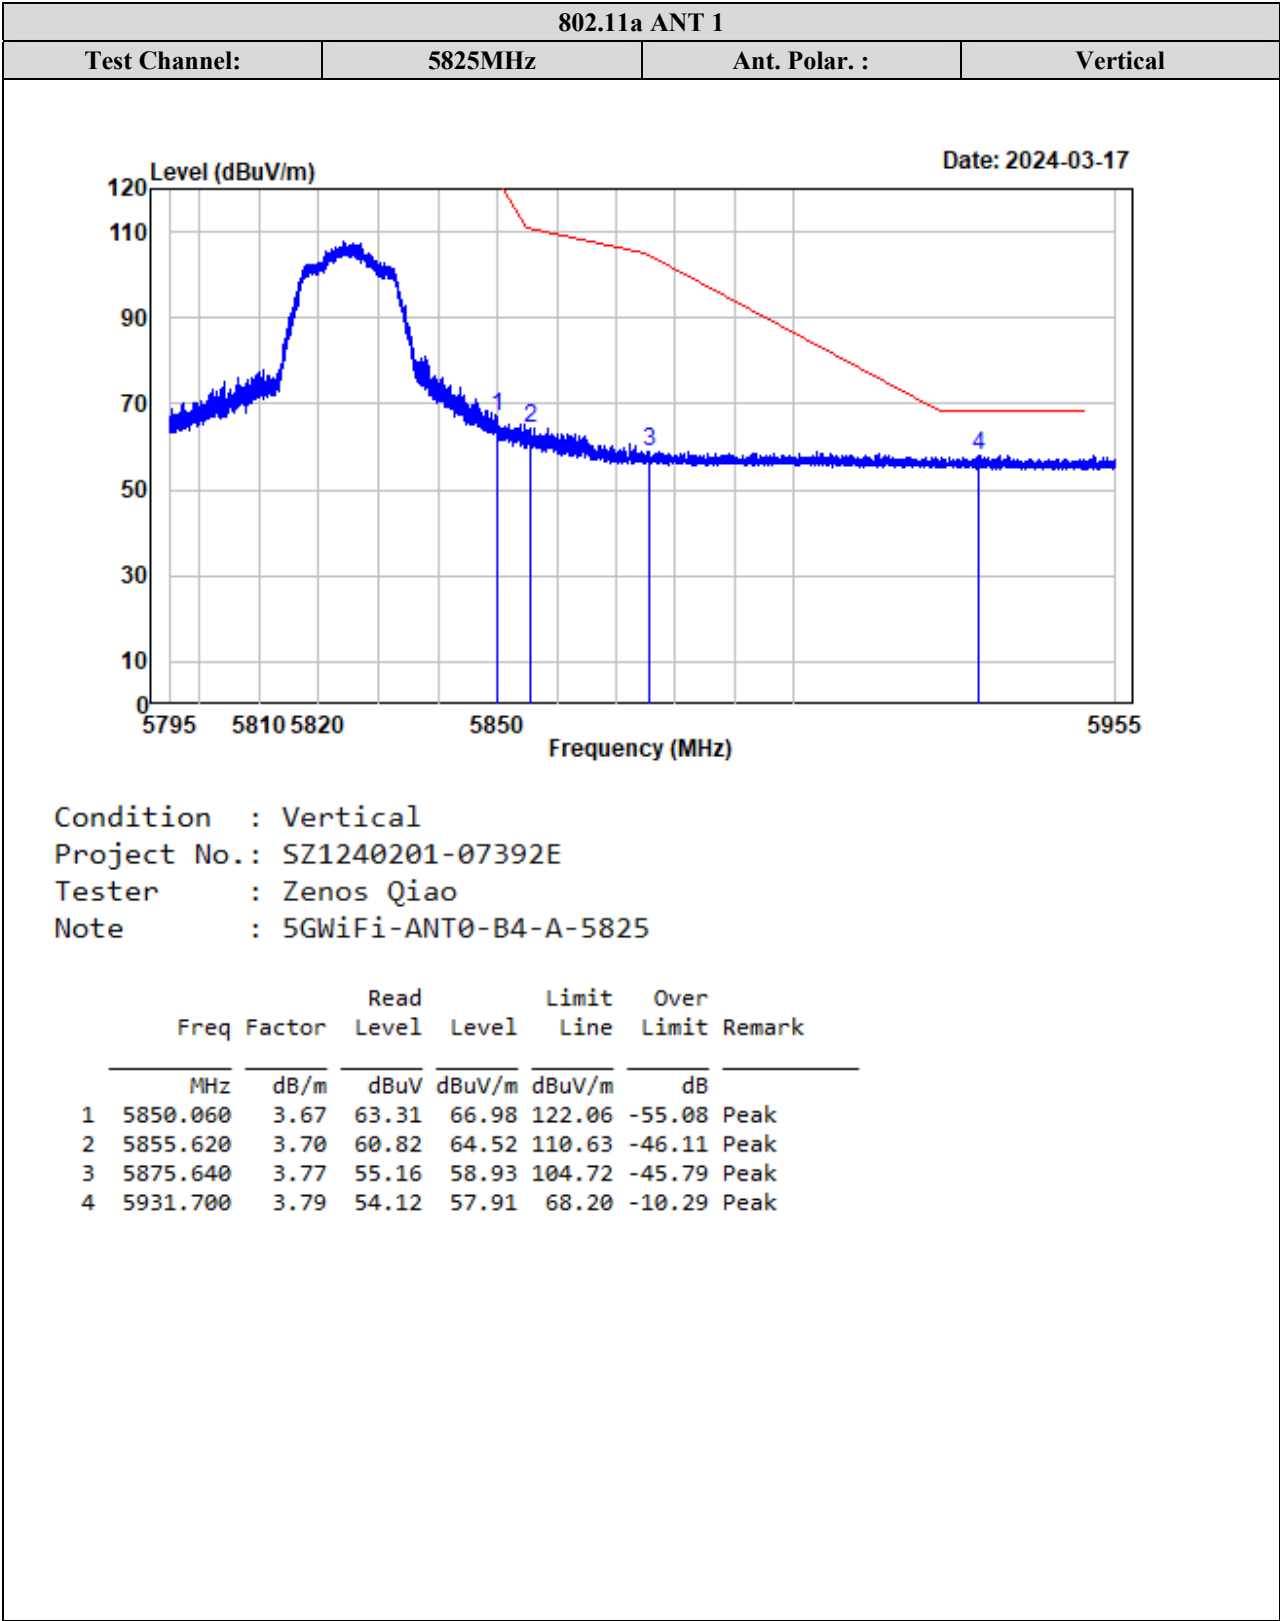



TR-EM-RF015


Page 152 of 258


Version 1.0 (2023/10/07)

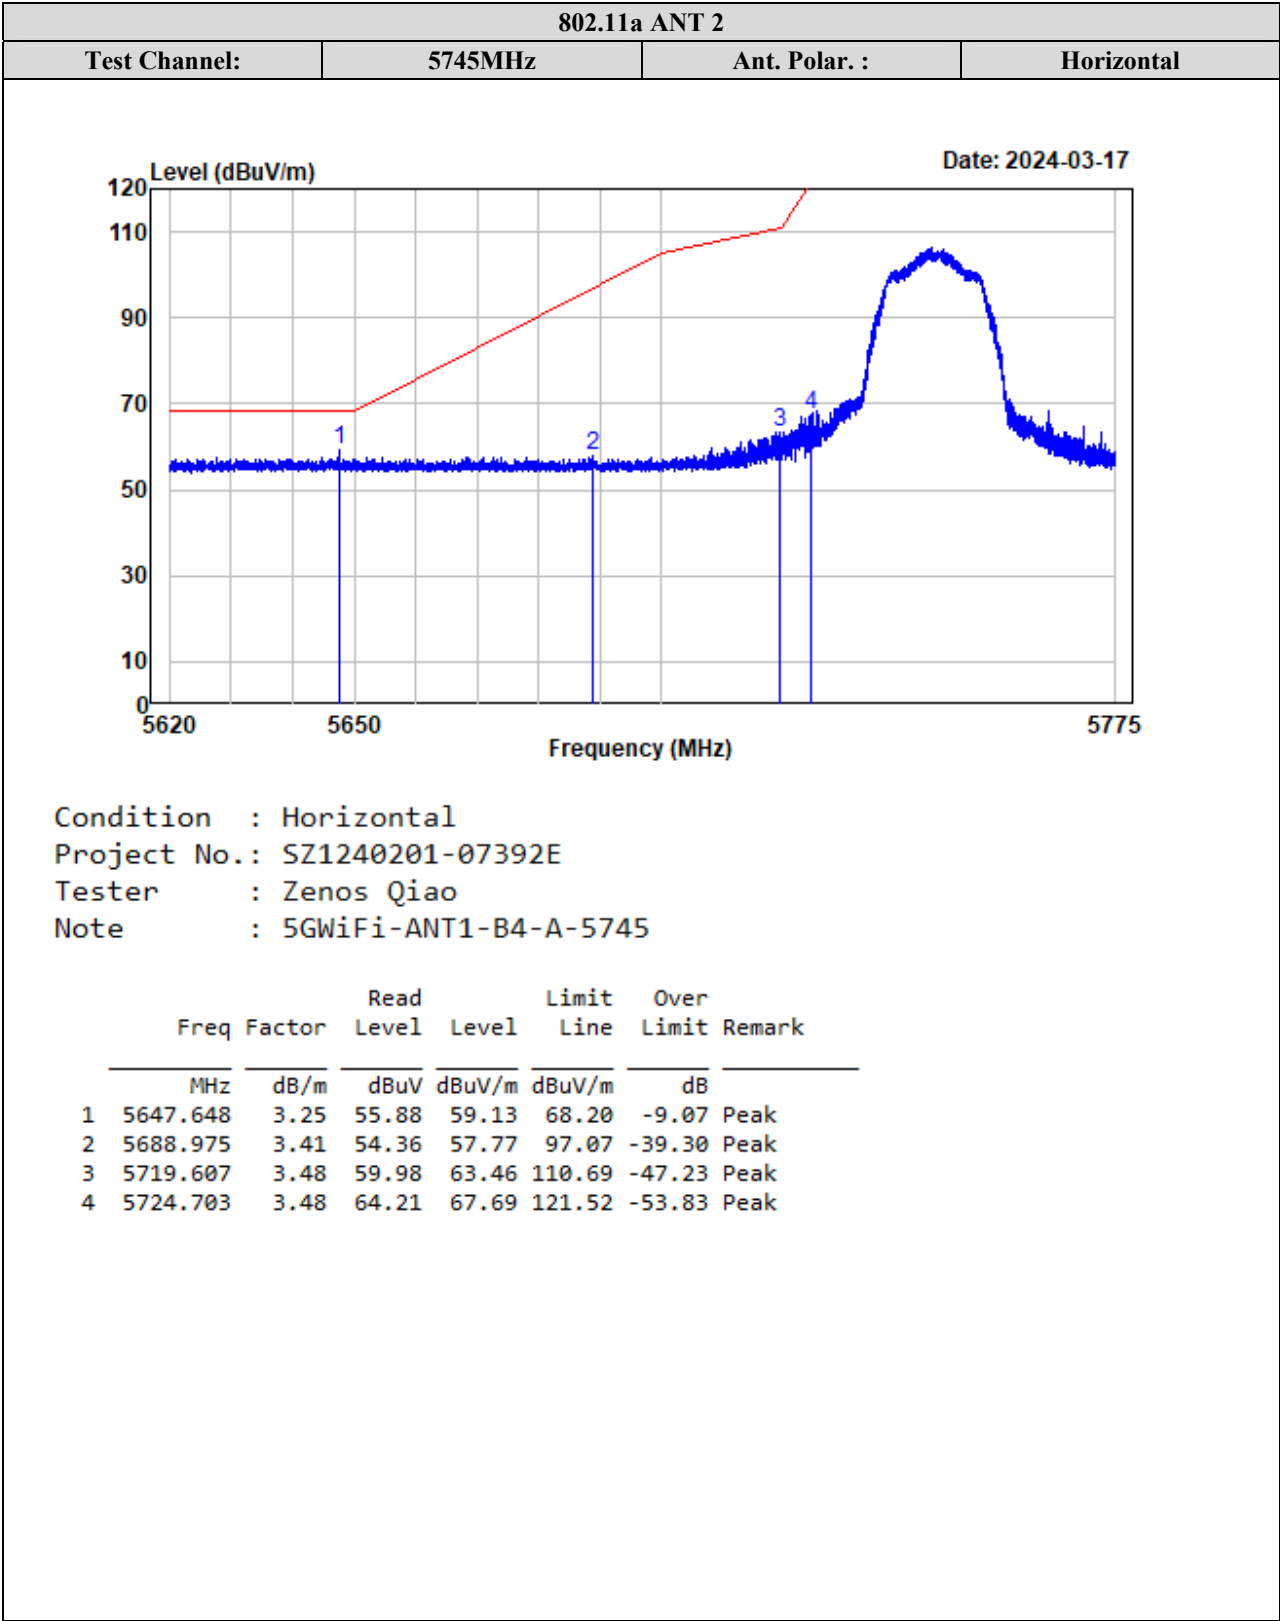


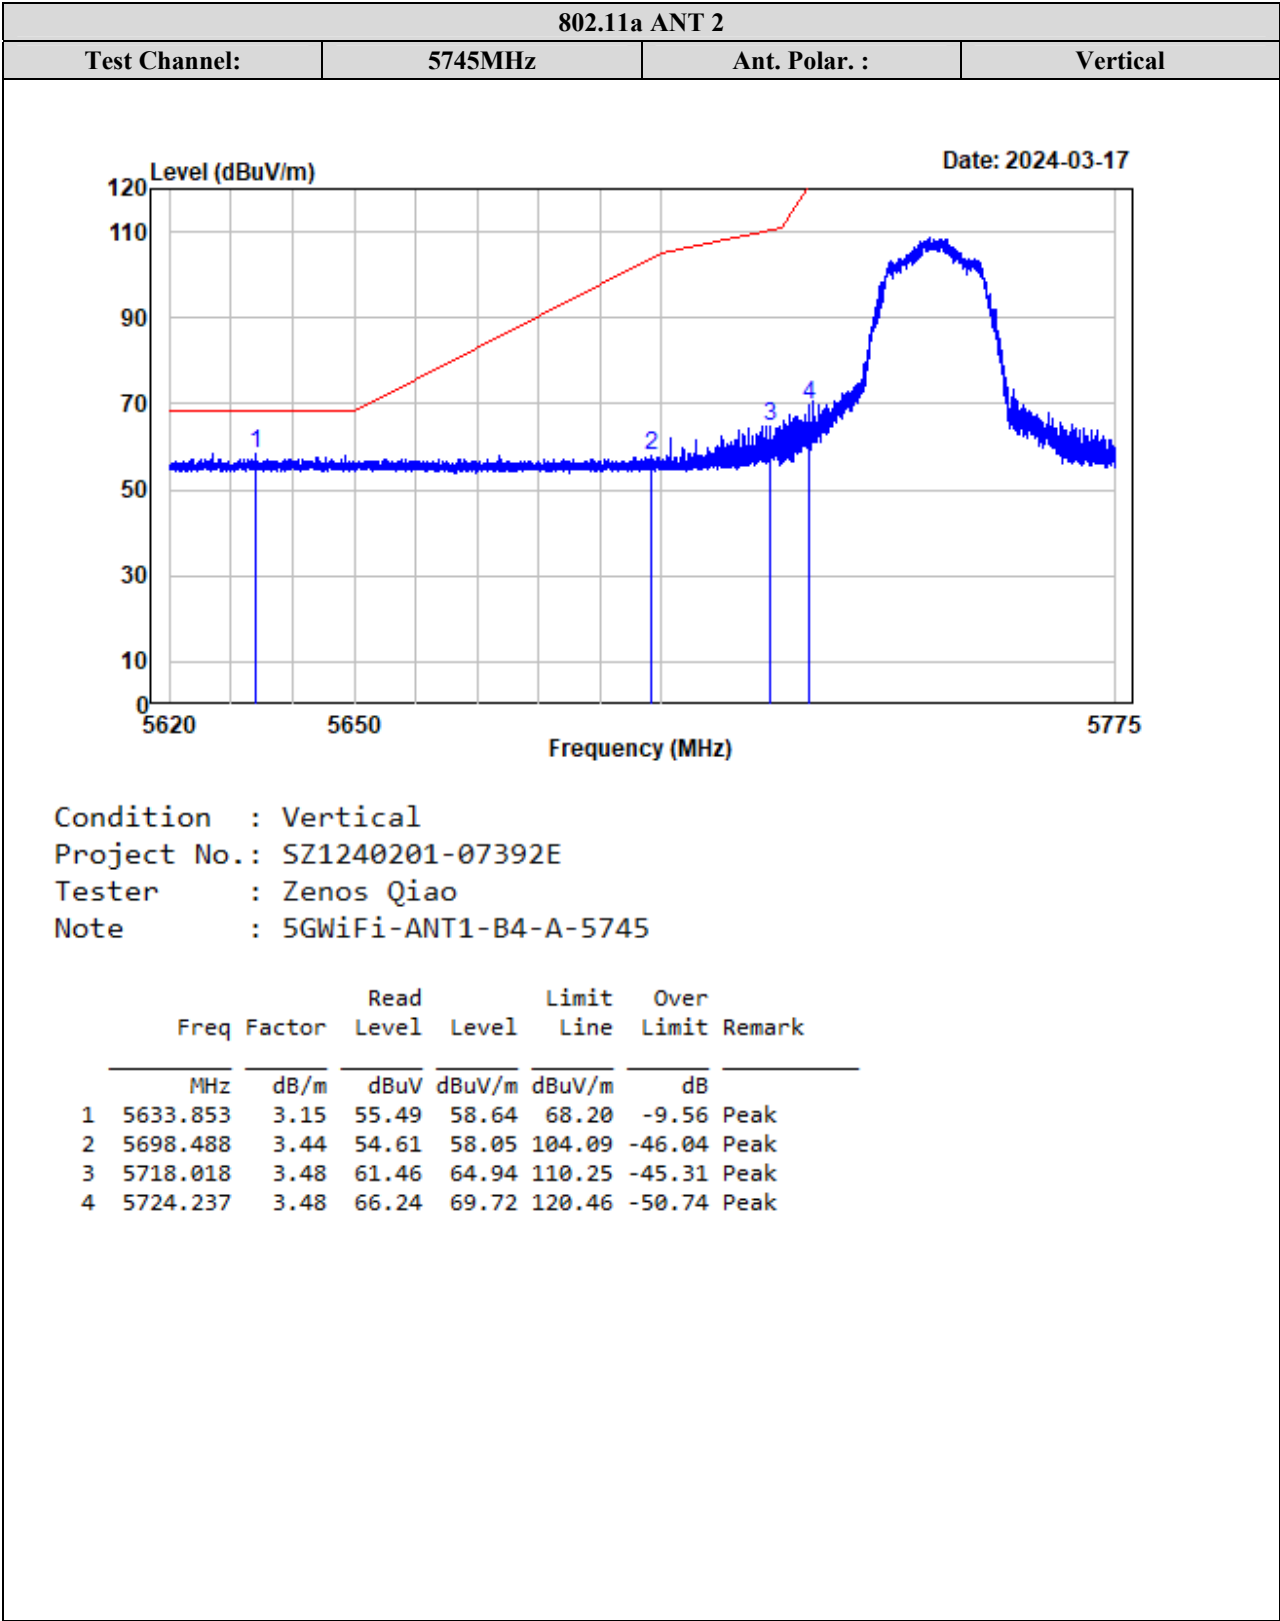


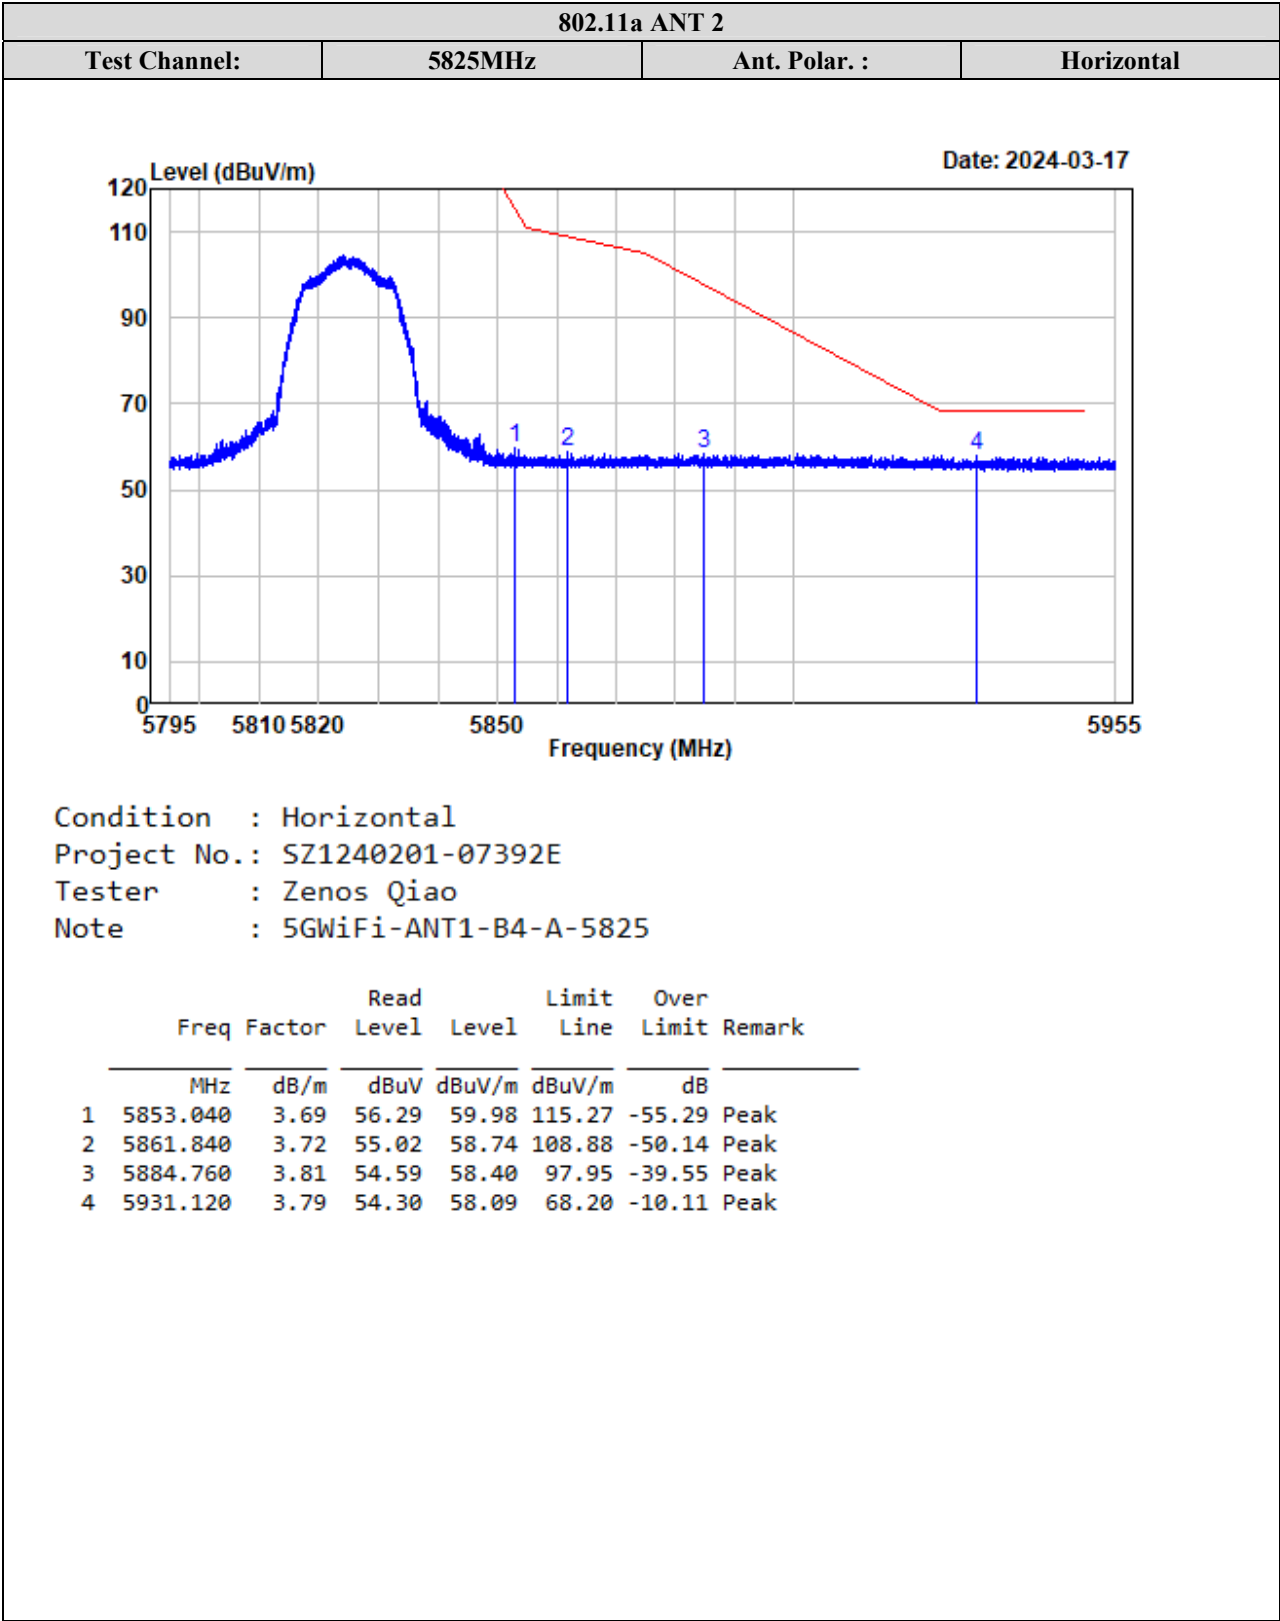


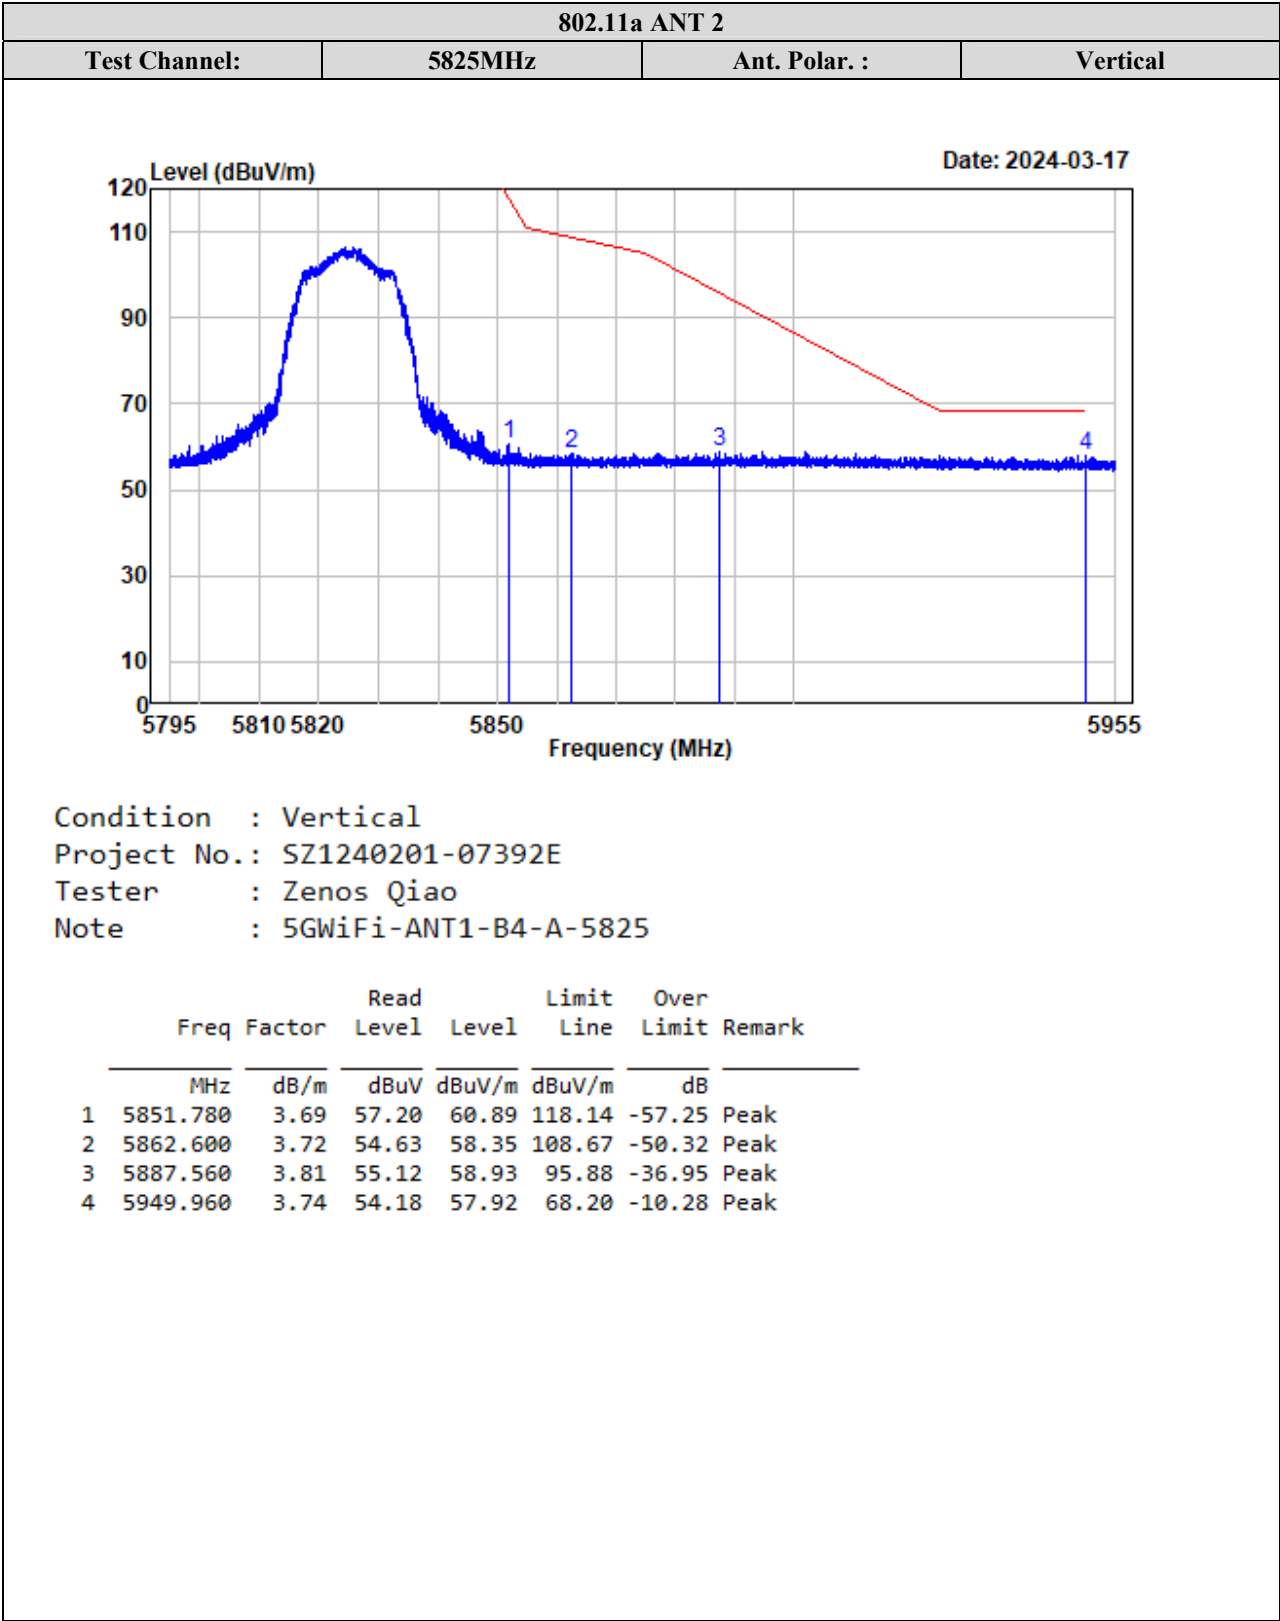

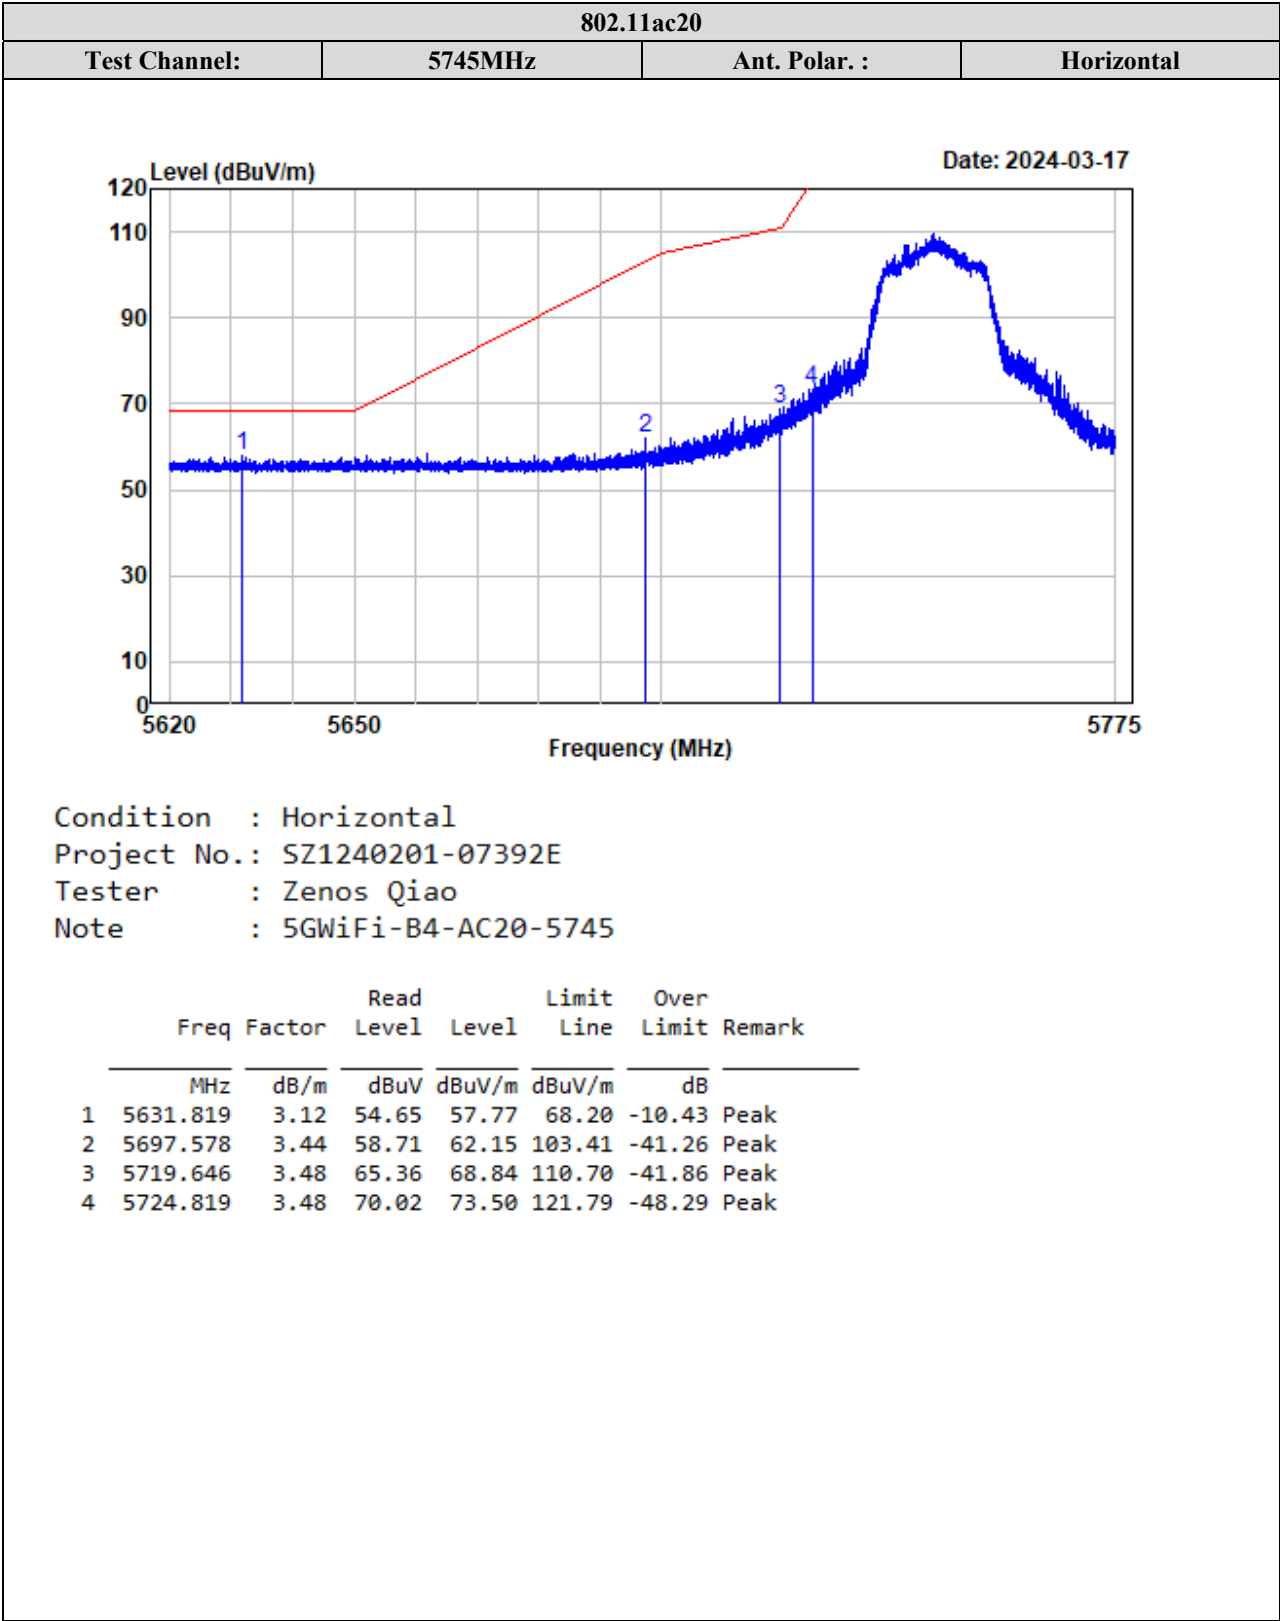

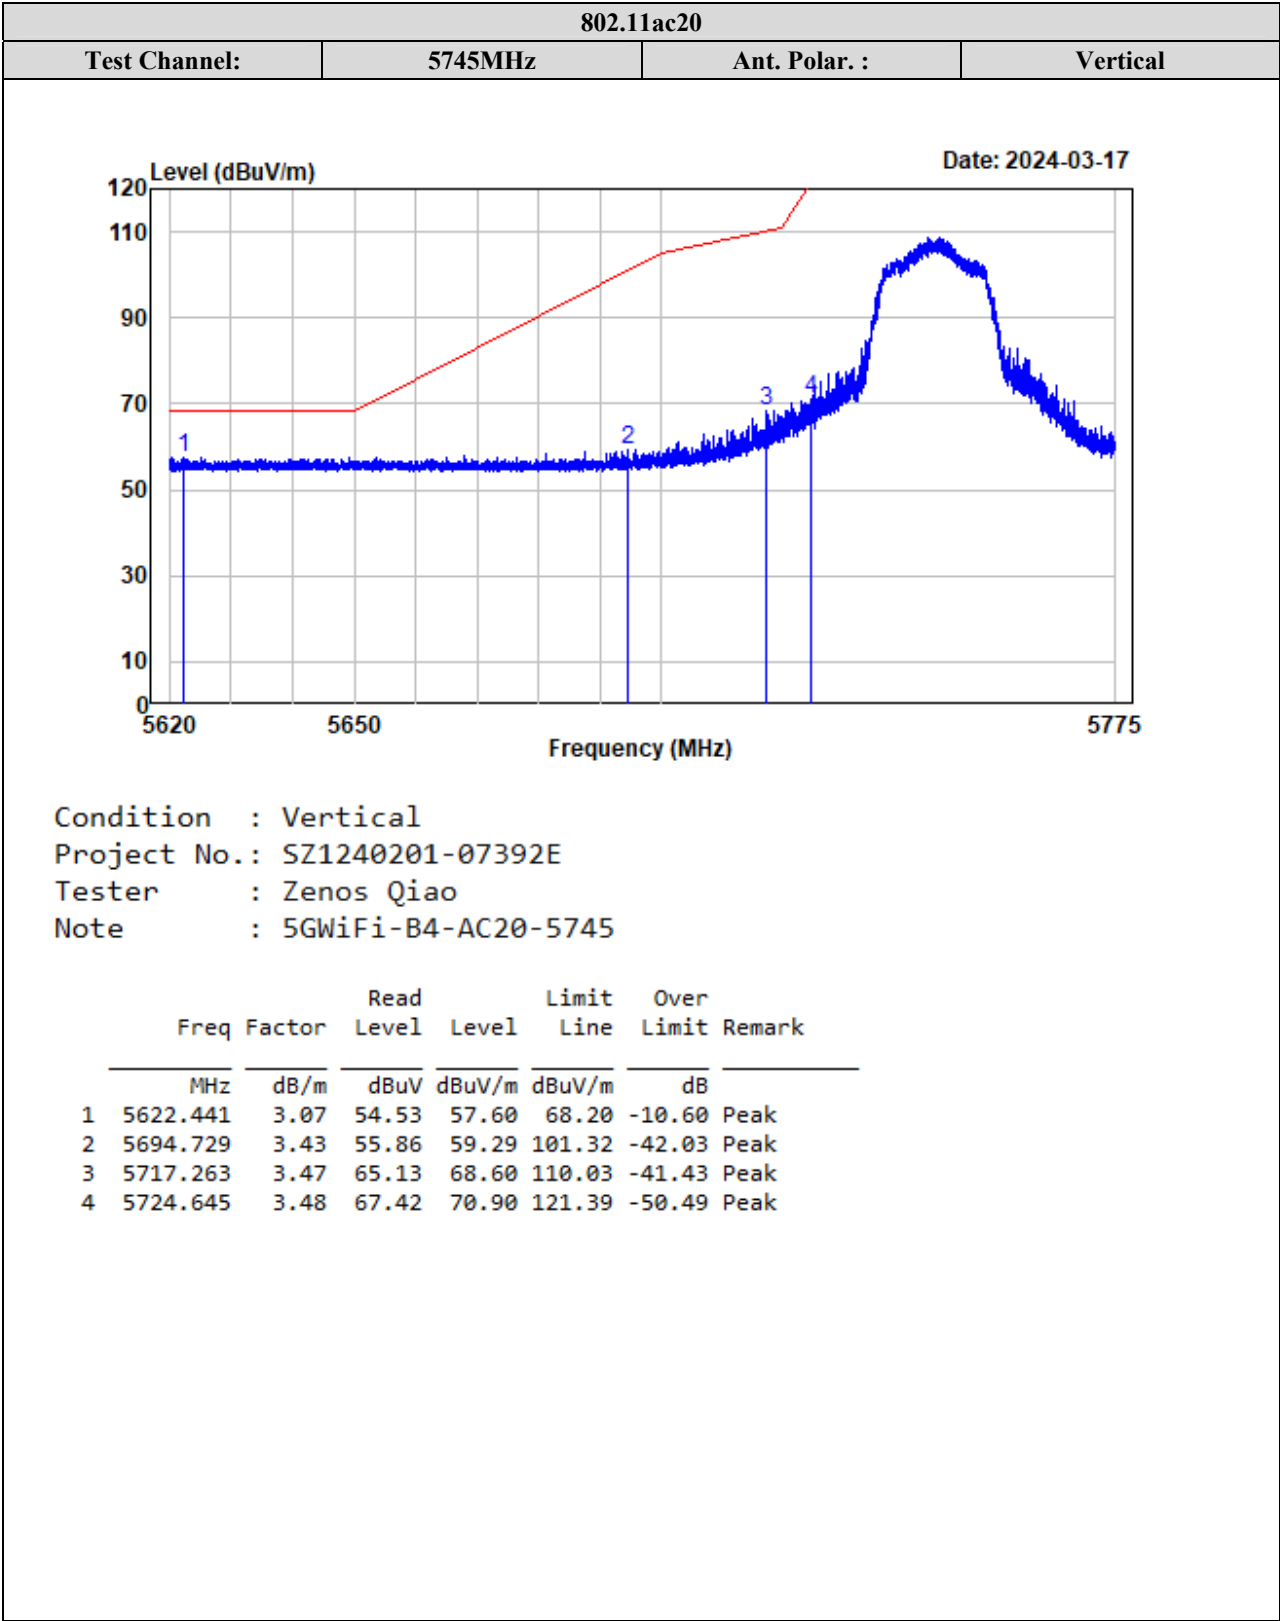

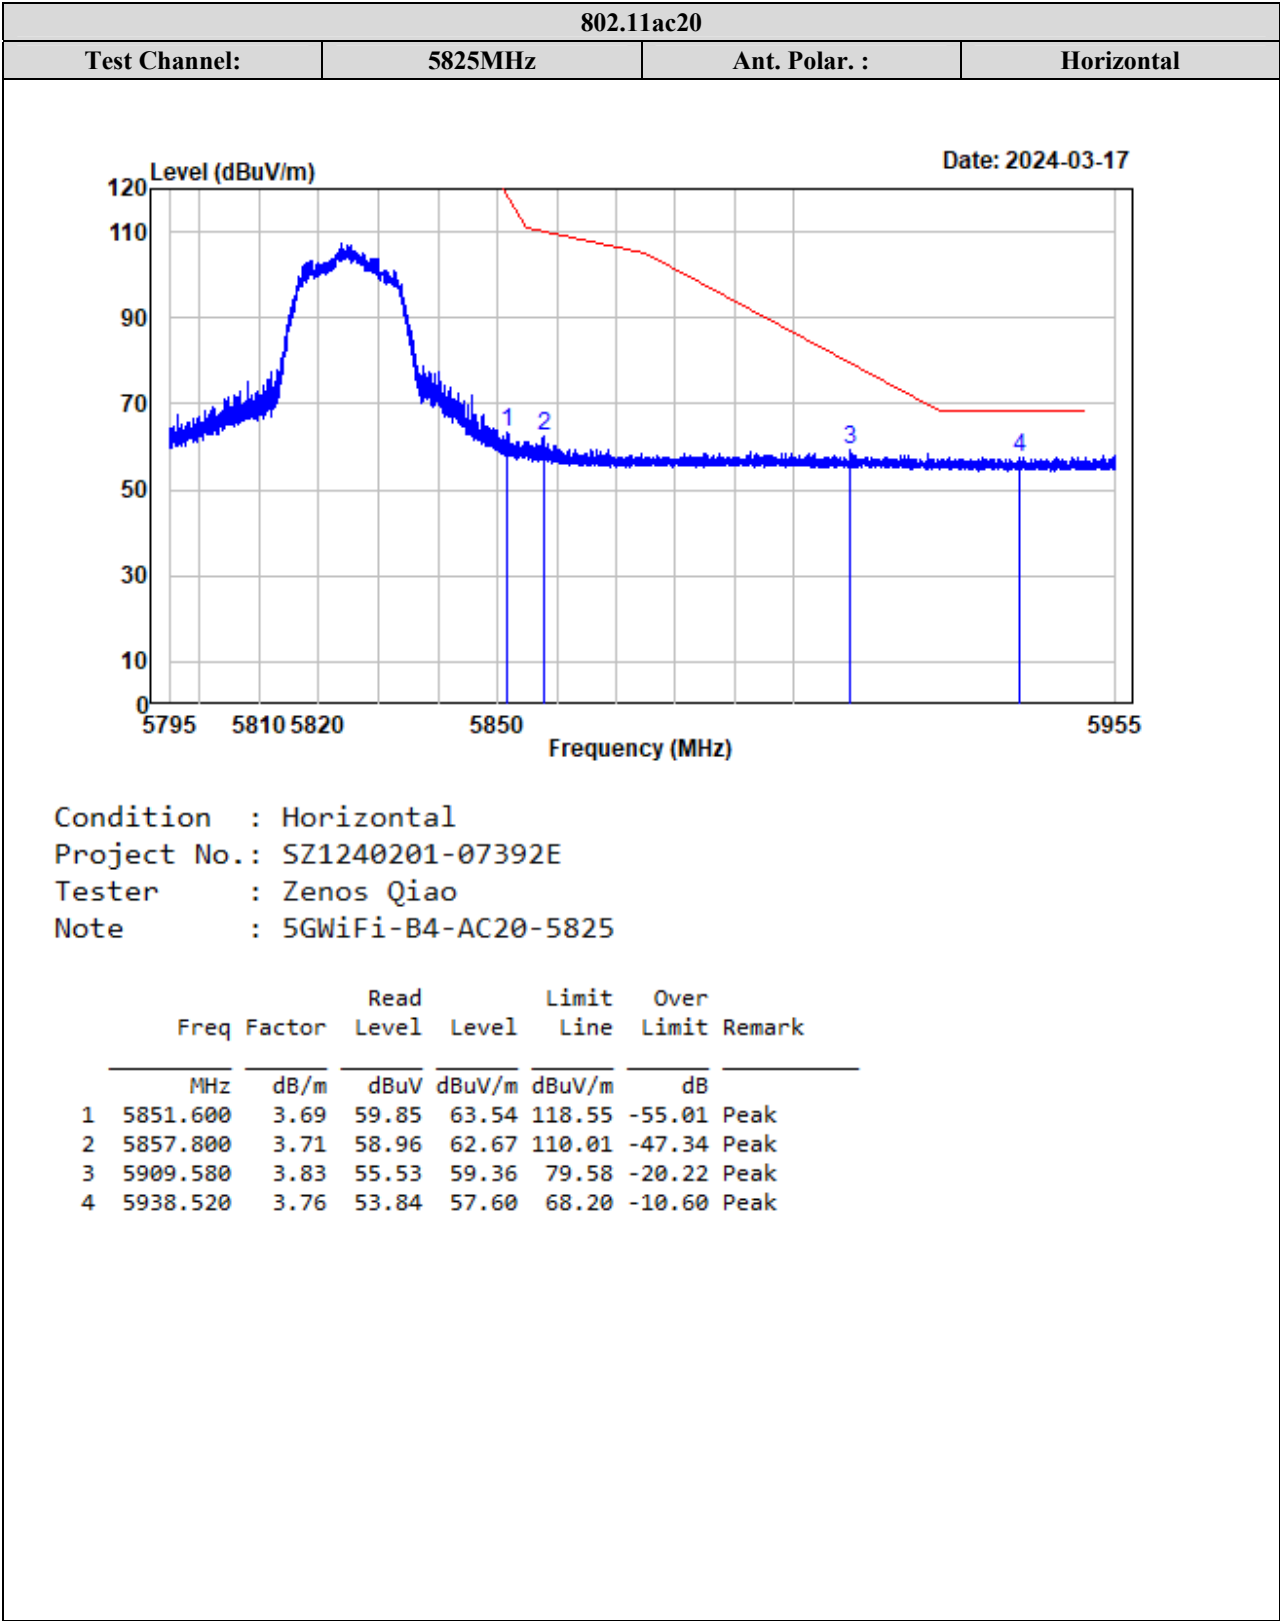


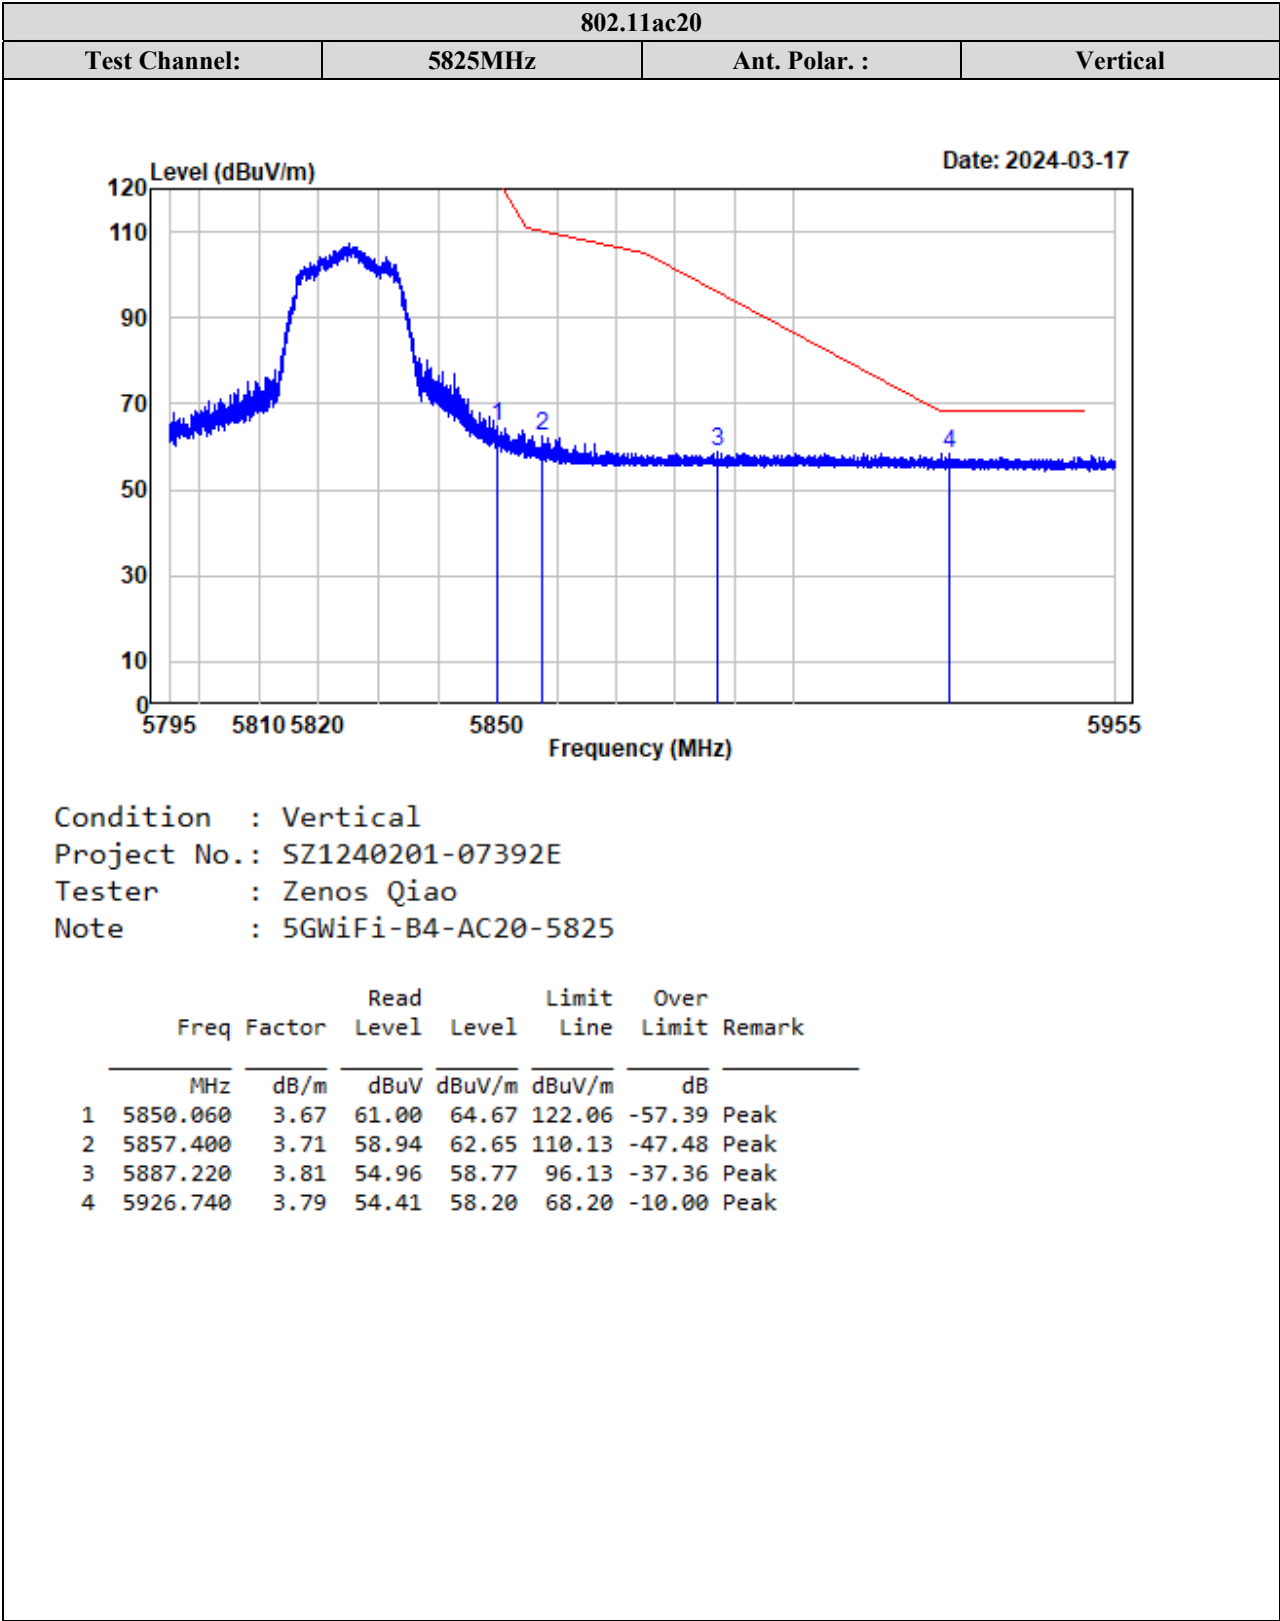



TR-EM-RF015


Page 160 of 258


Version 1.0 (2023/10/07)

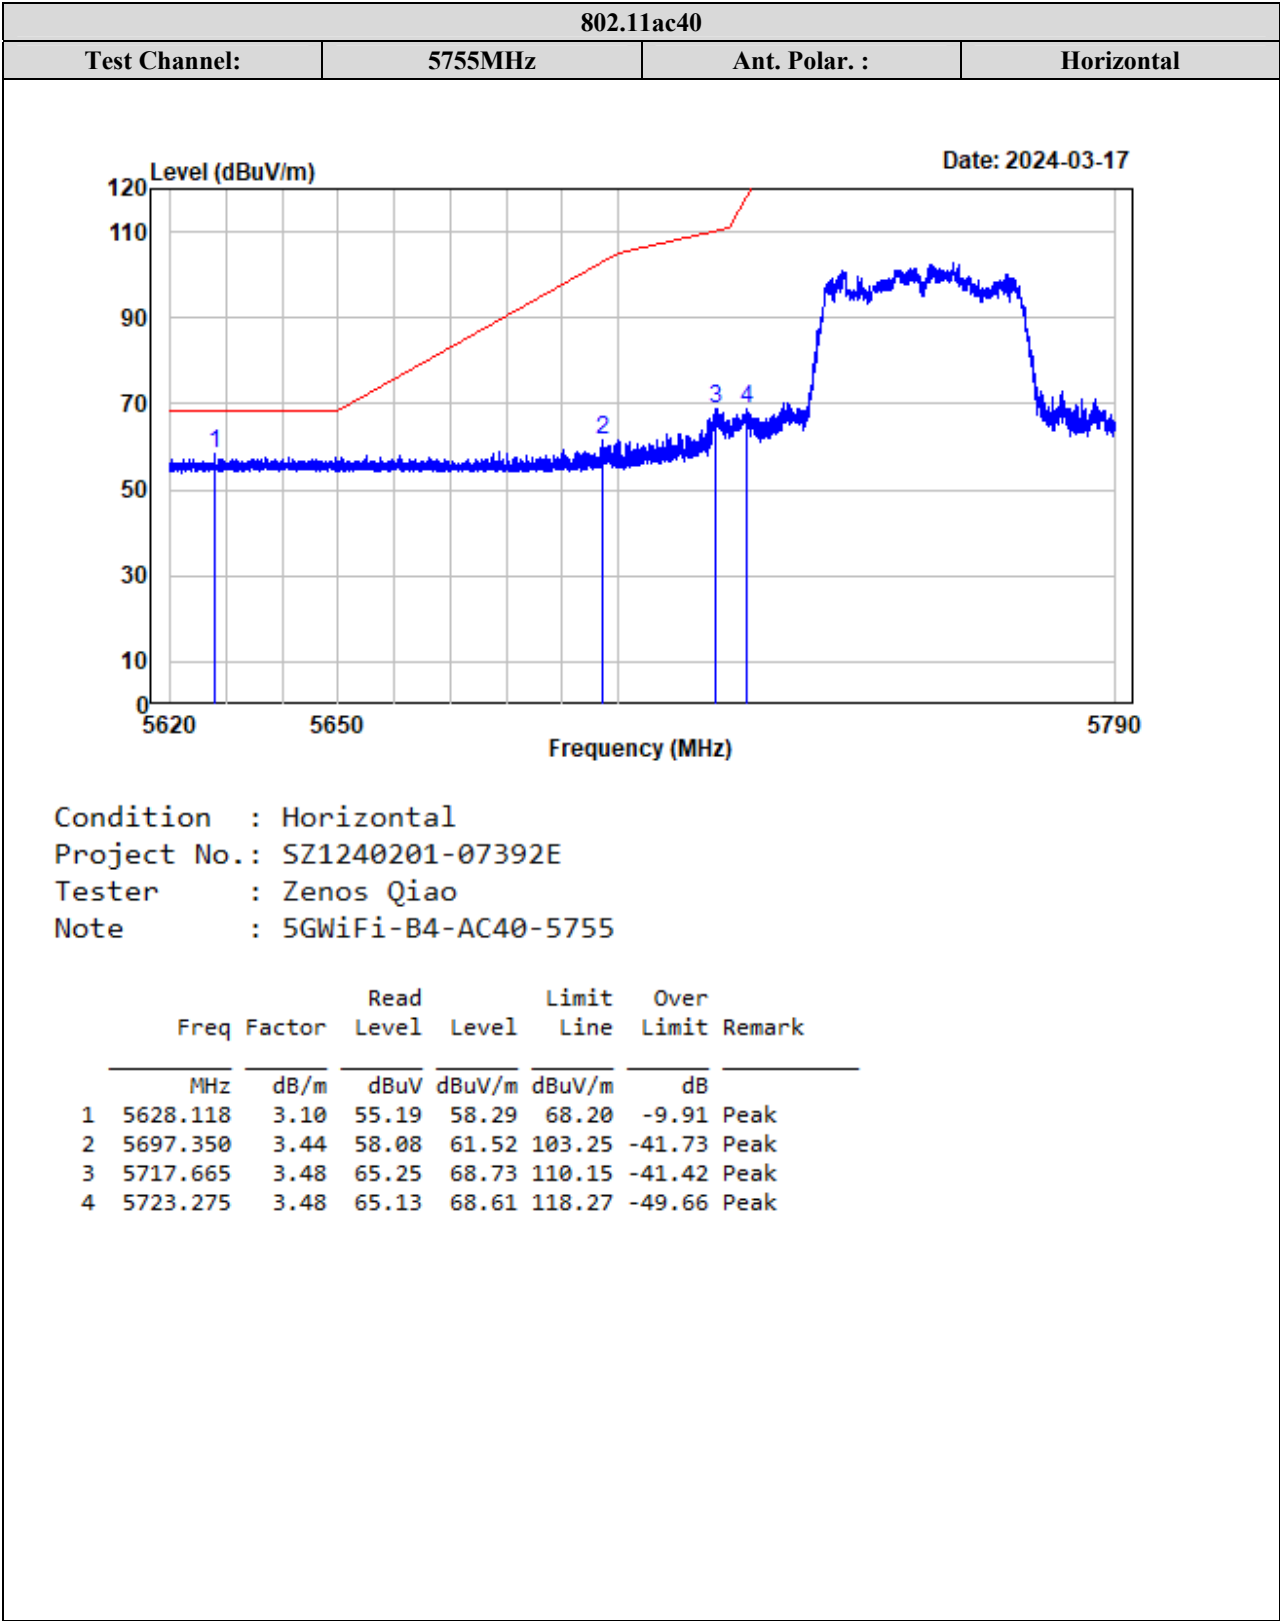


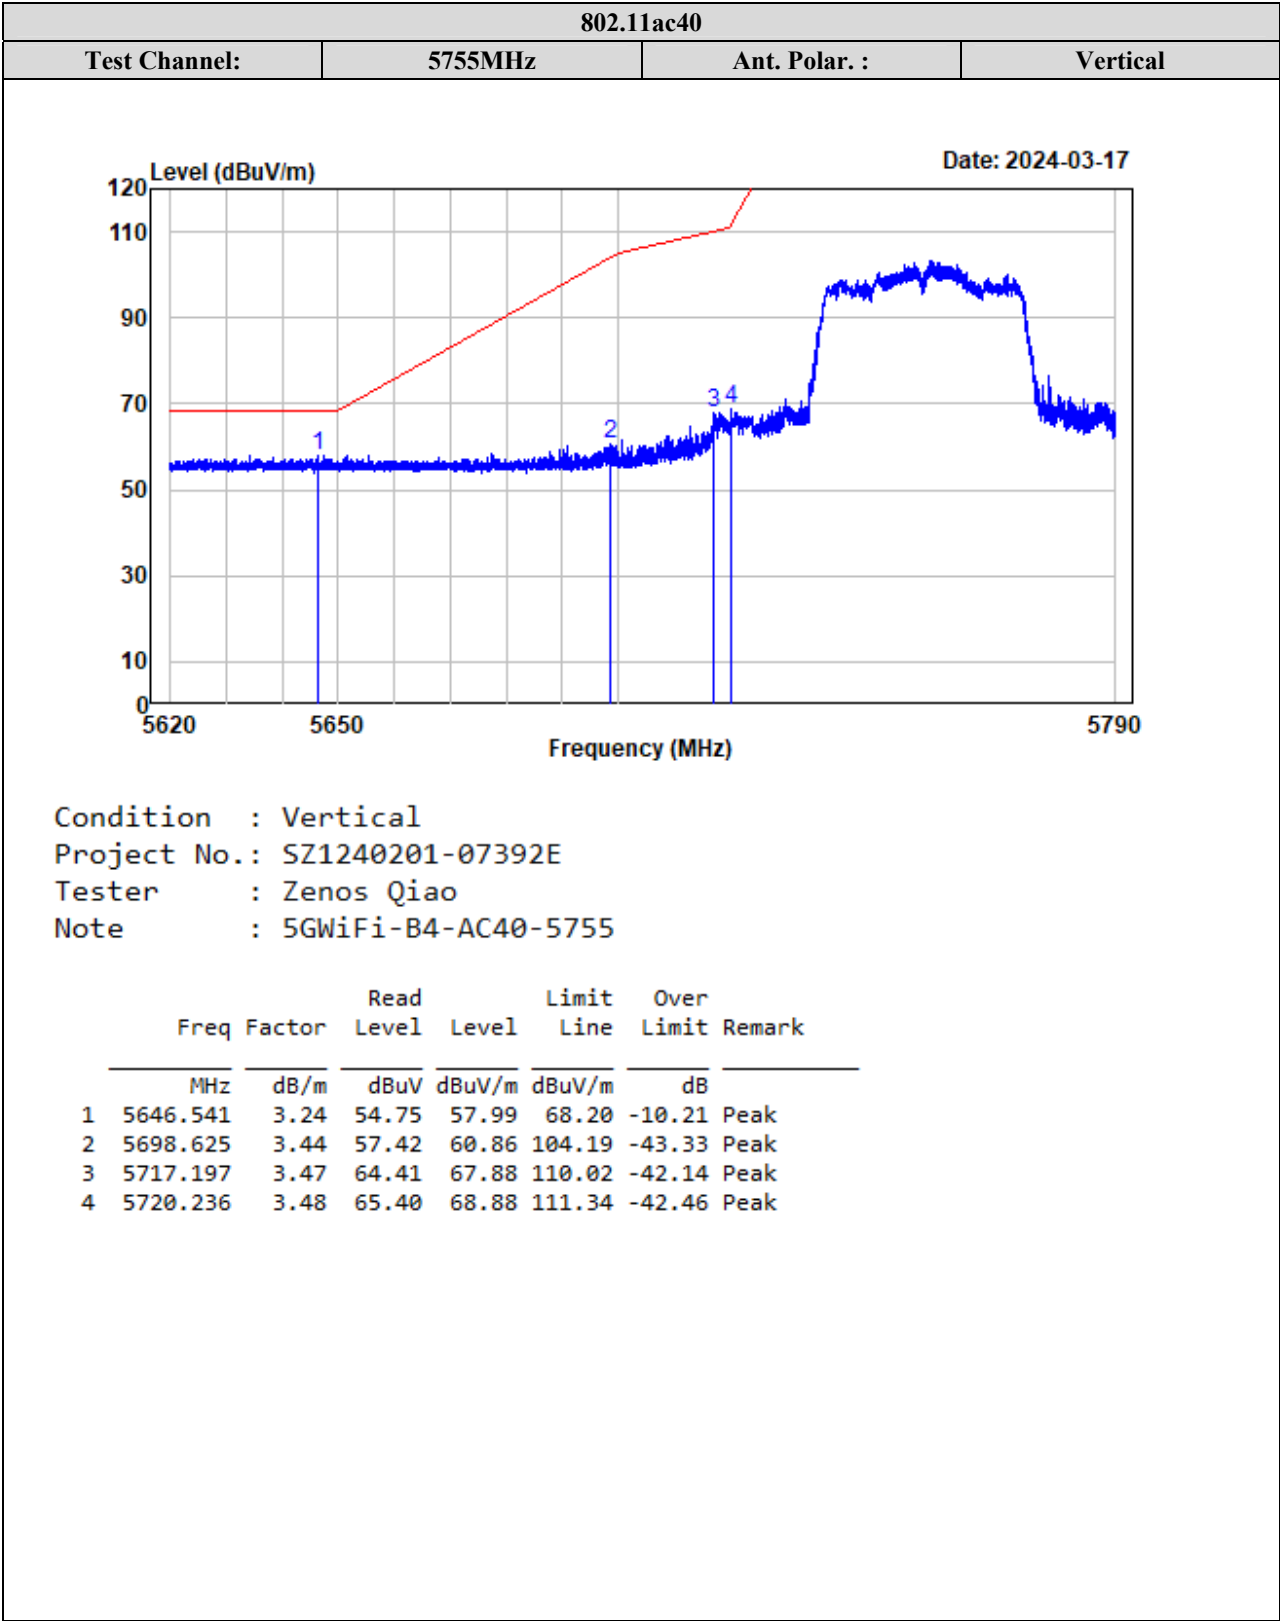


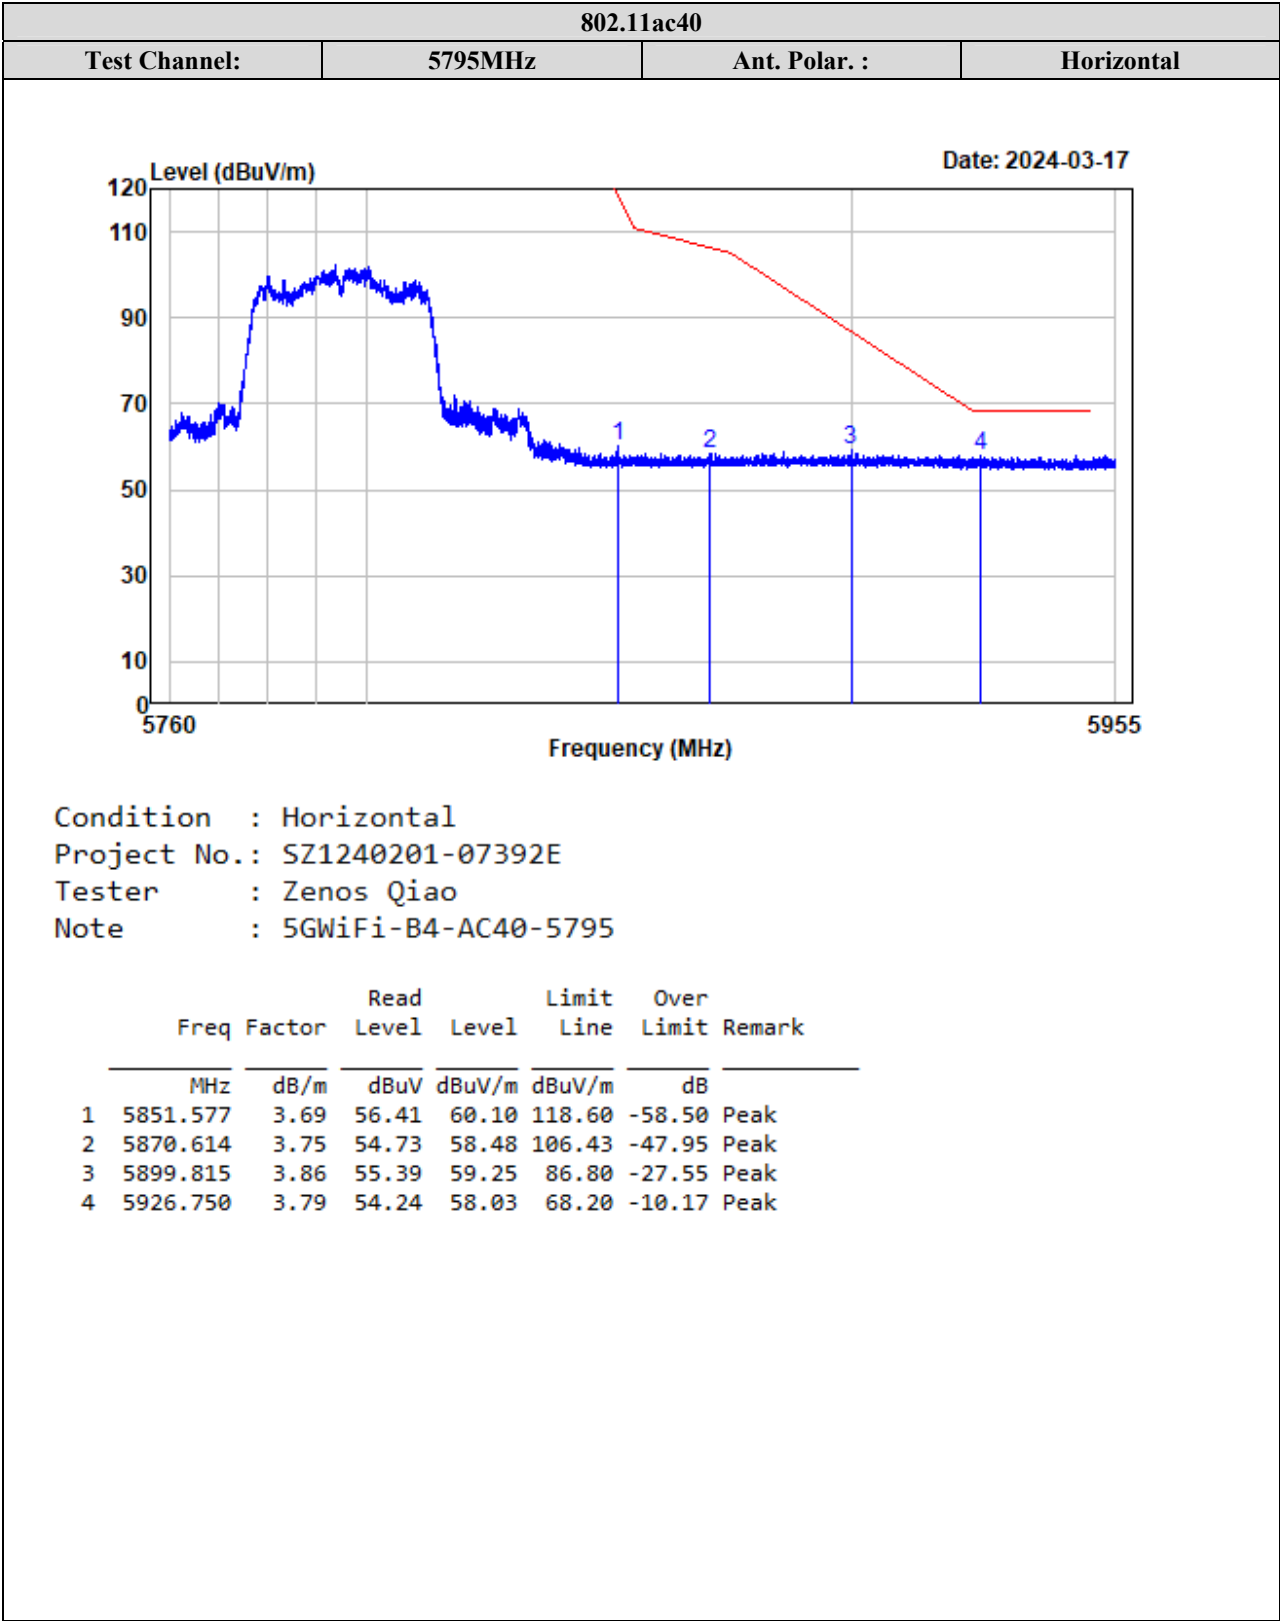


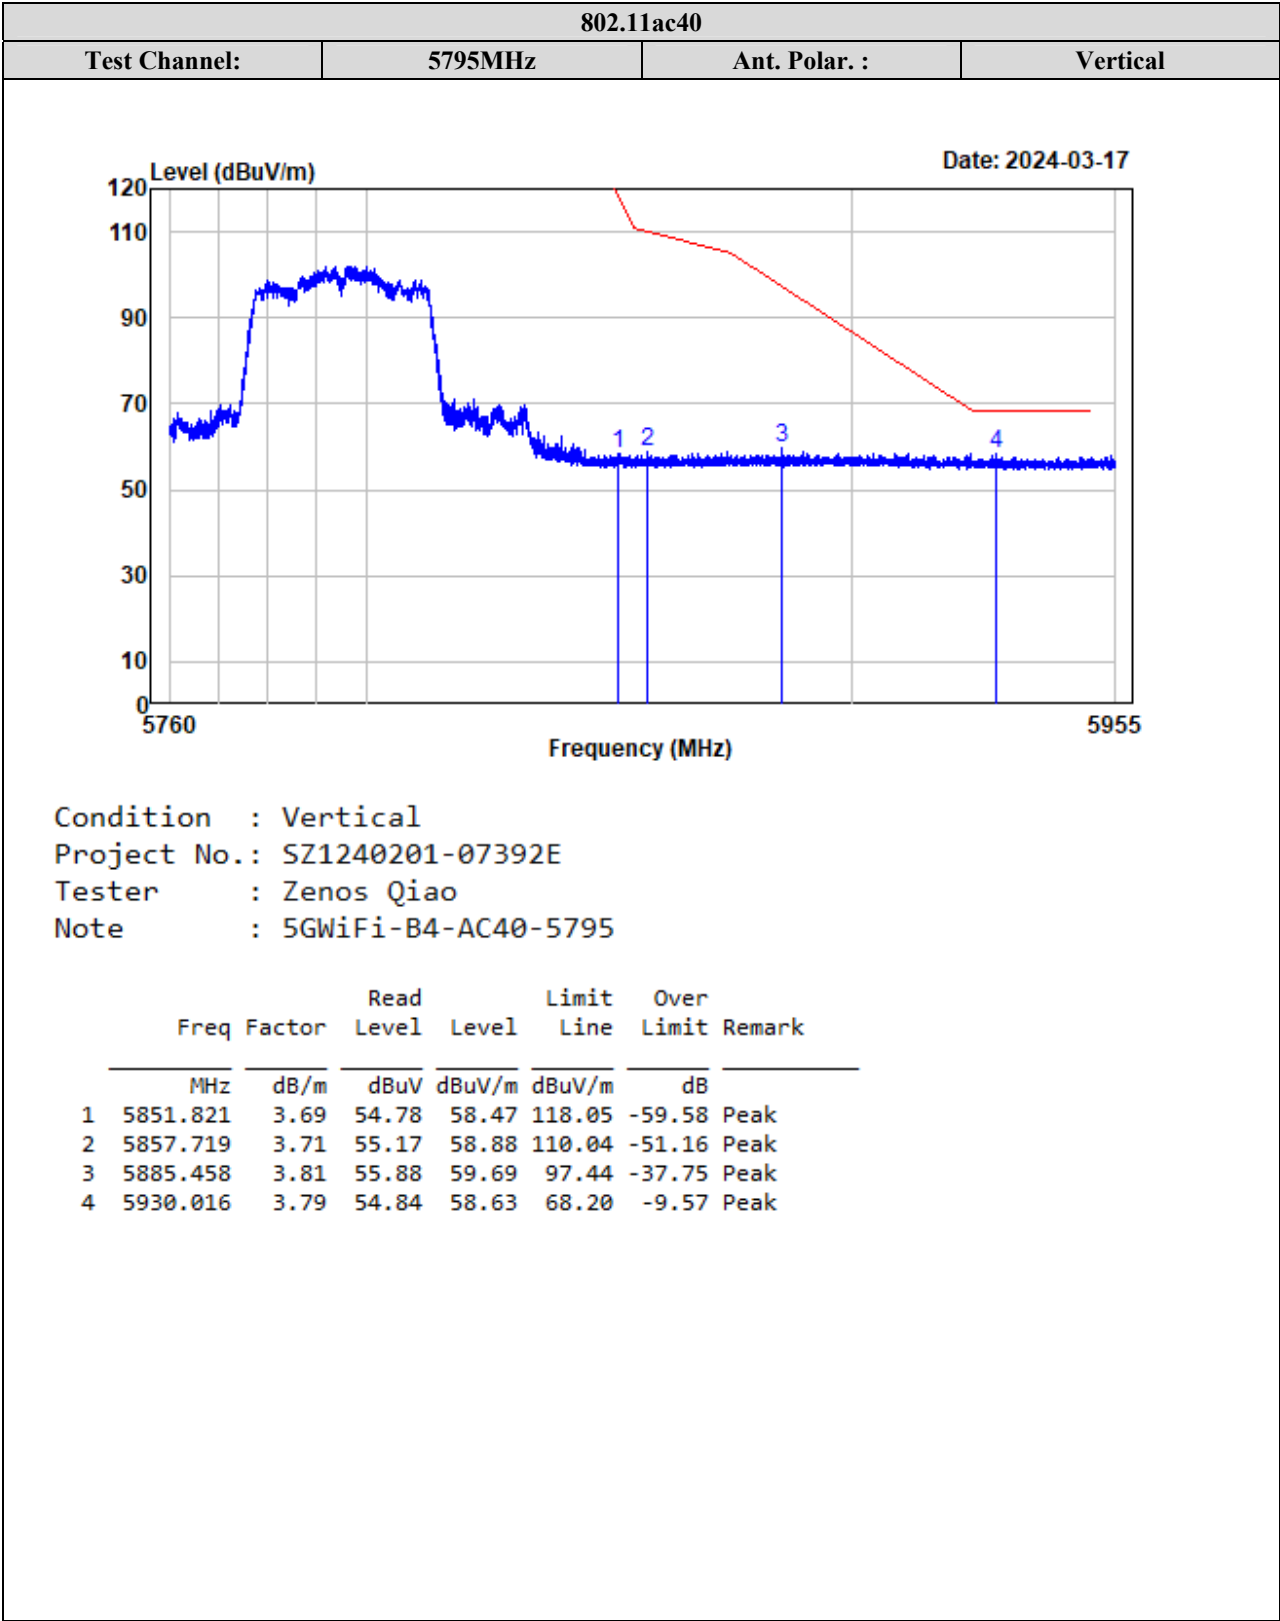


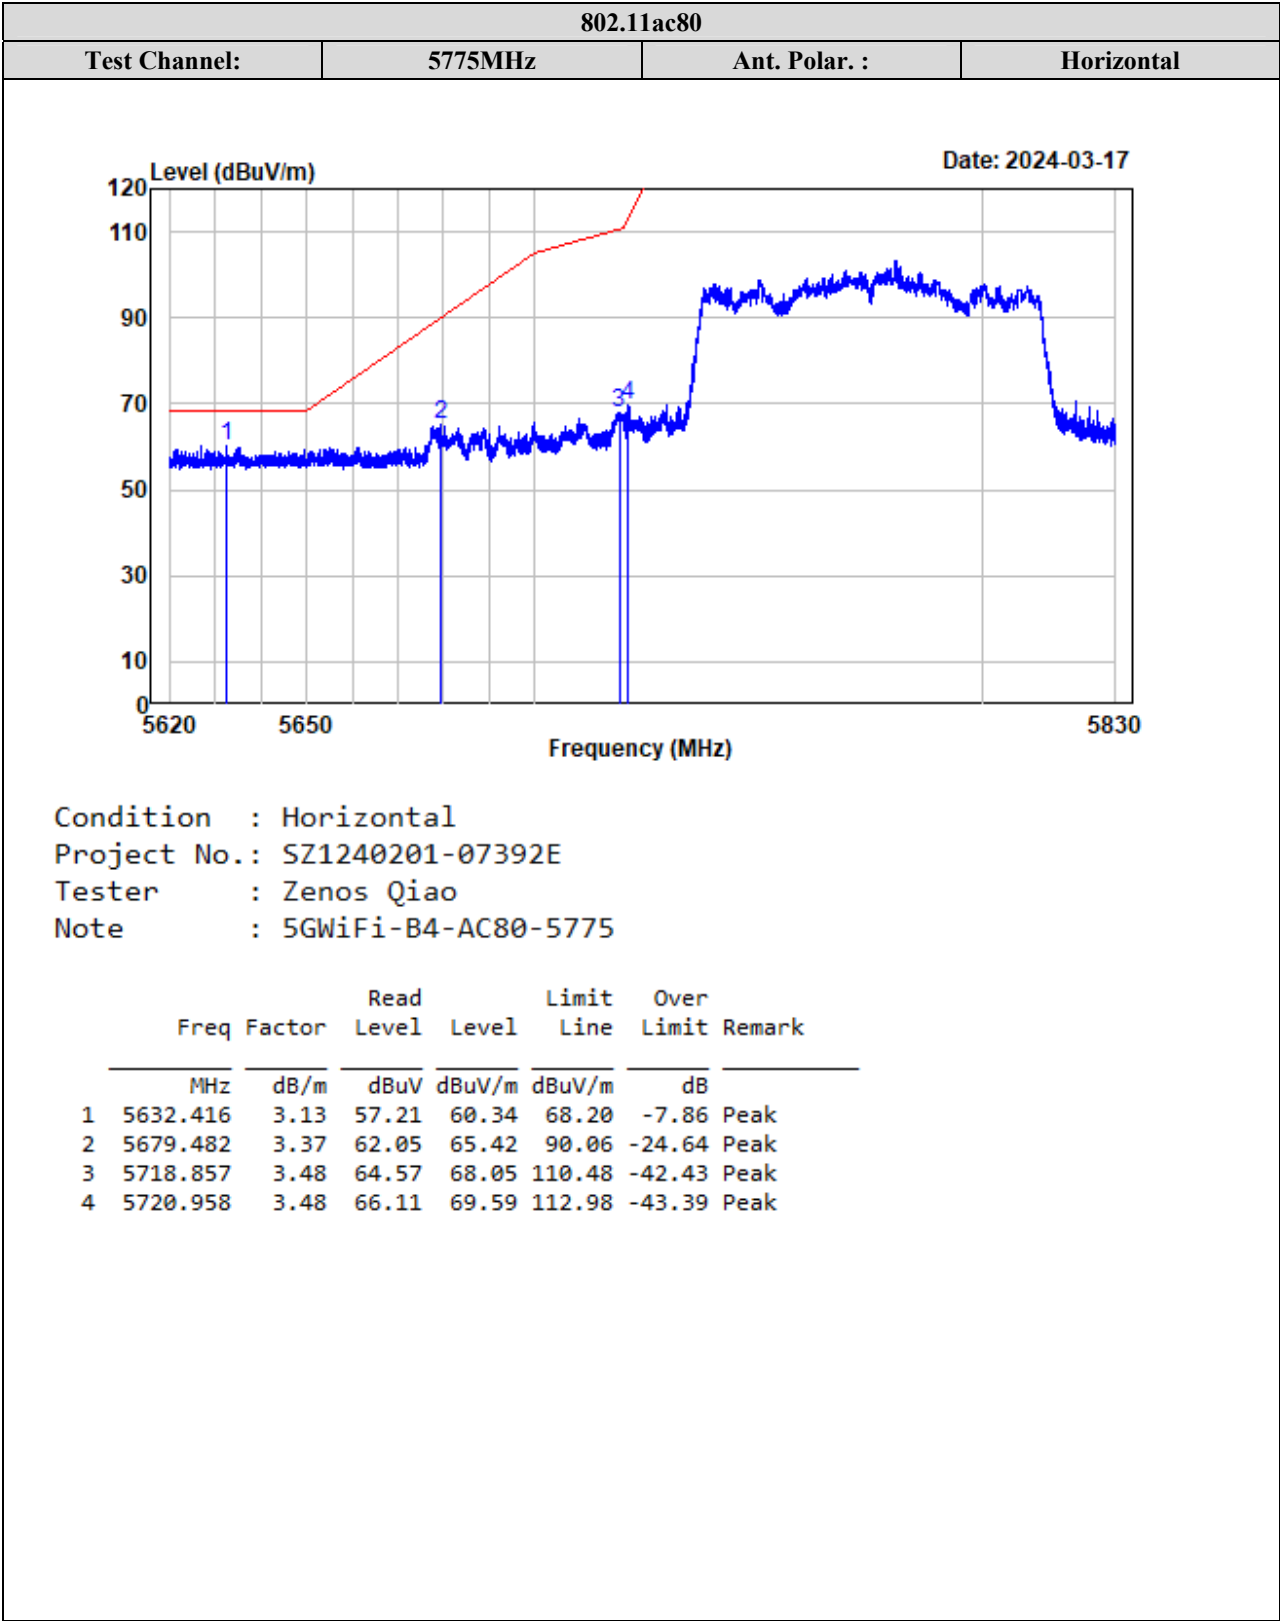


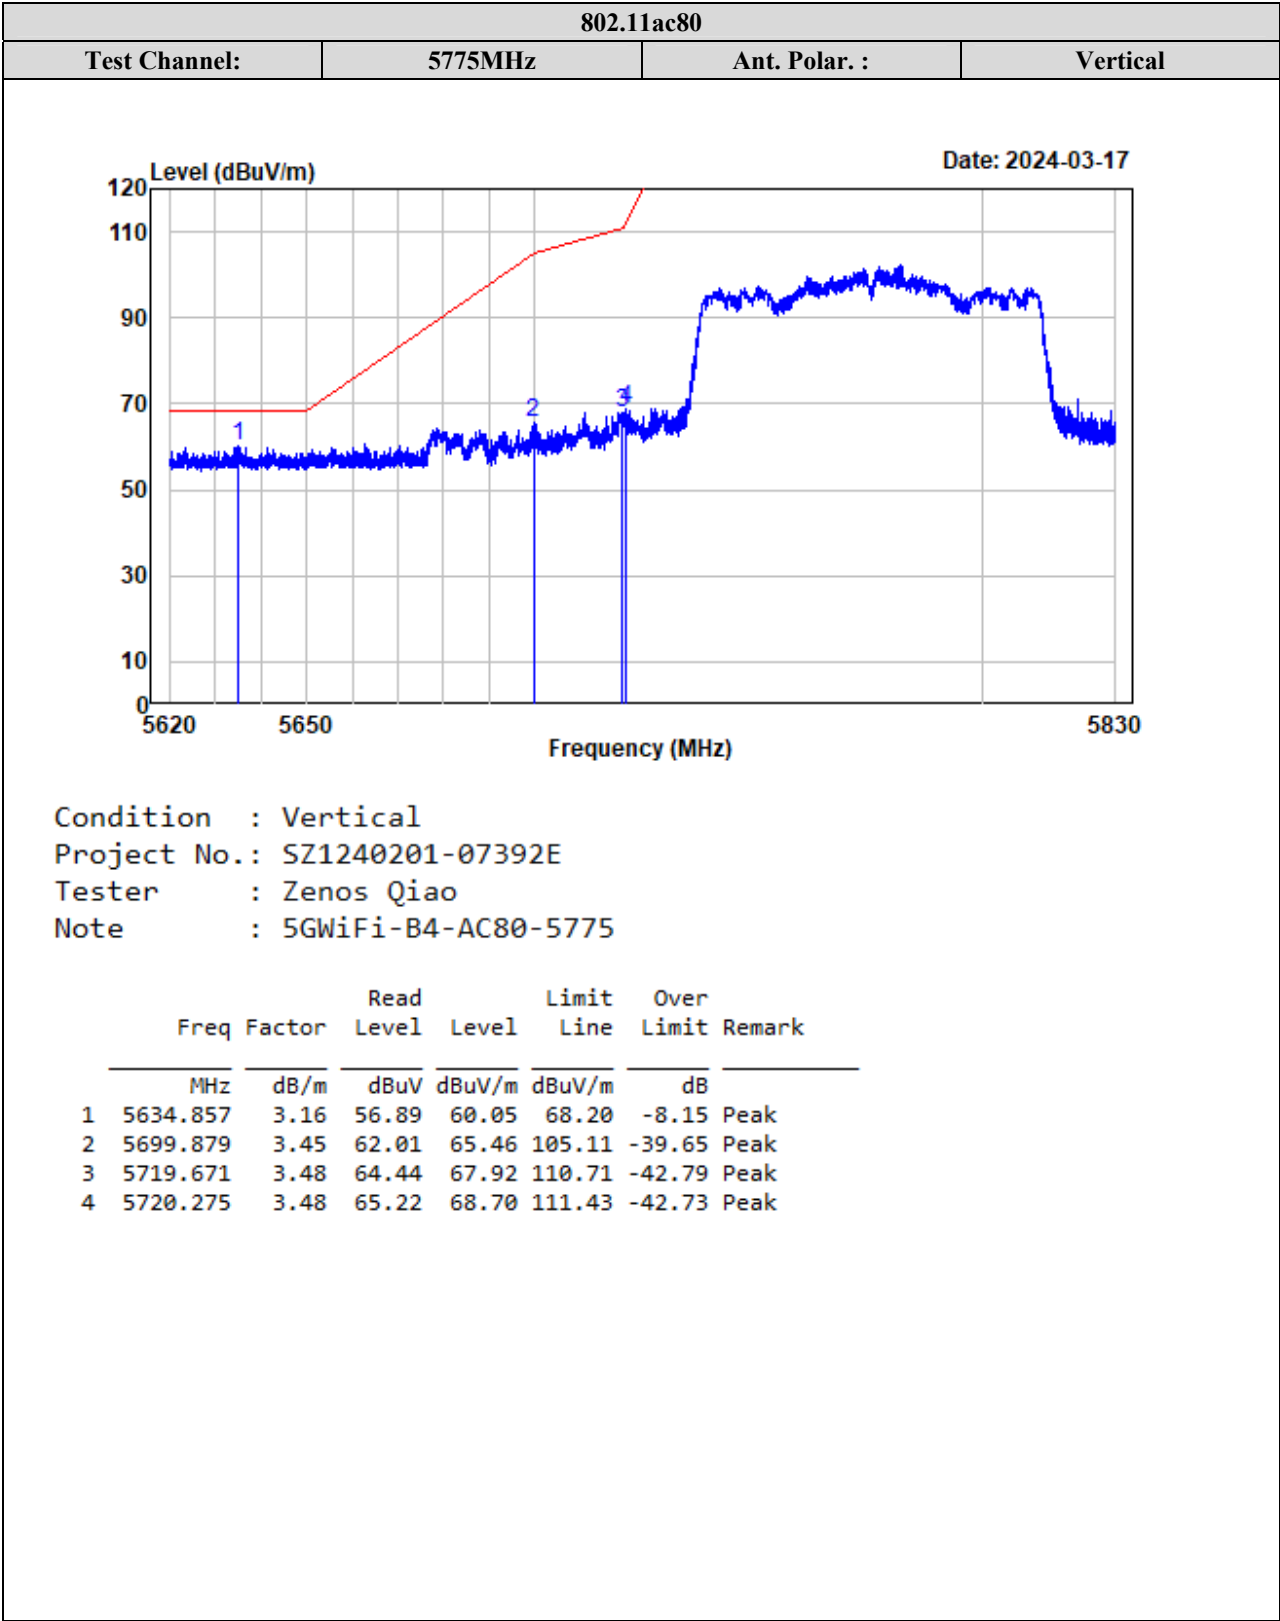


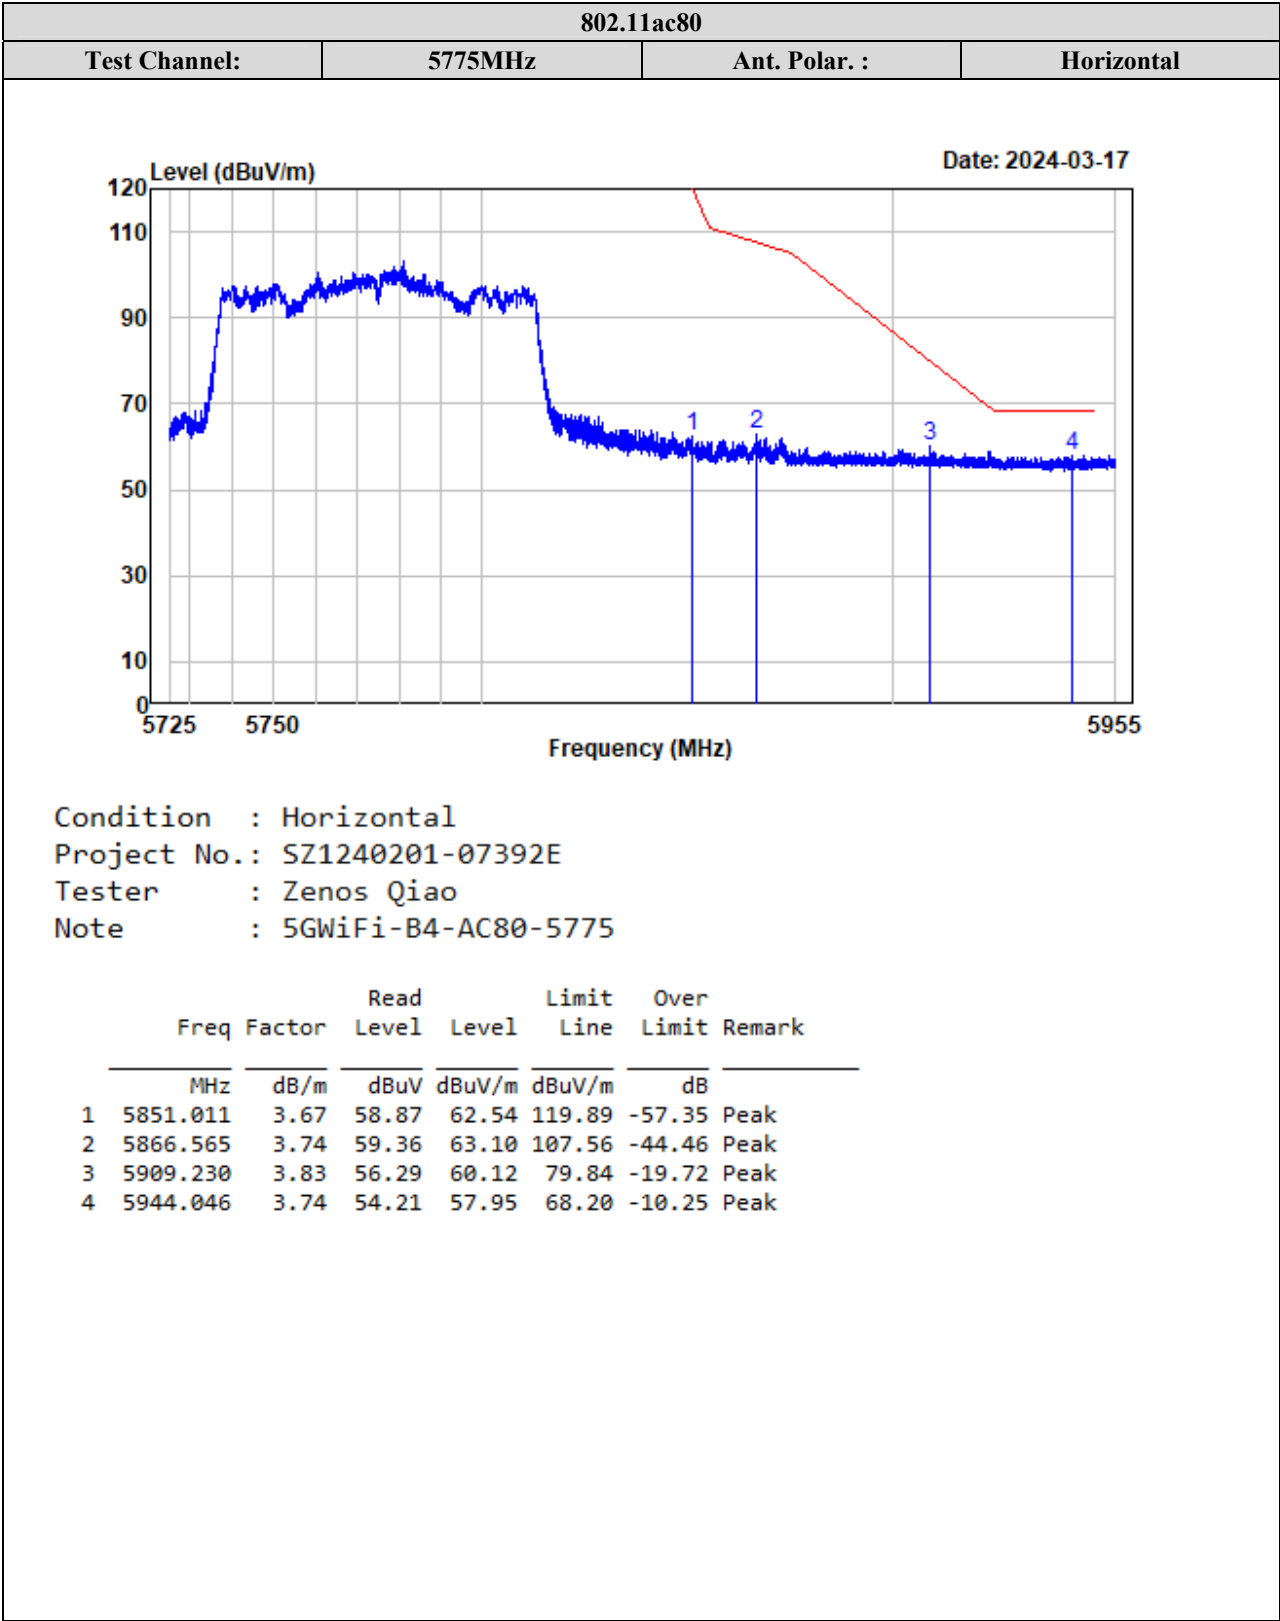


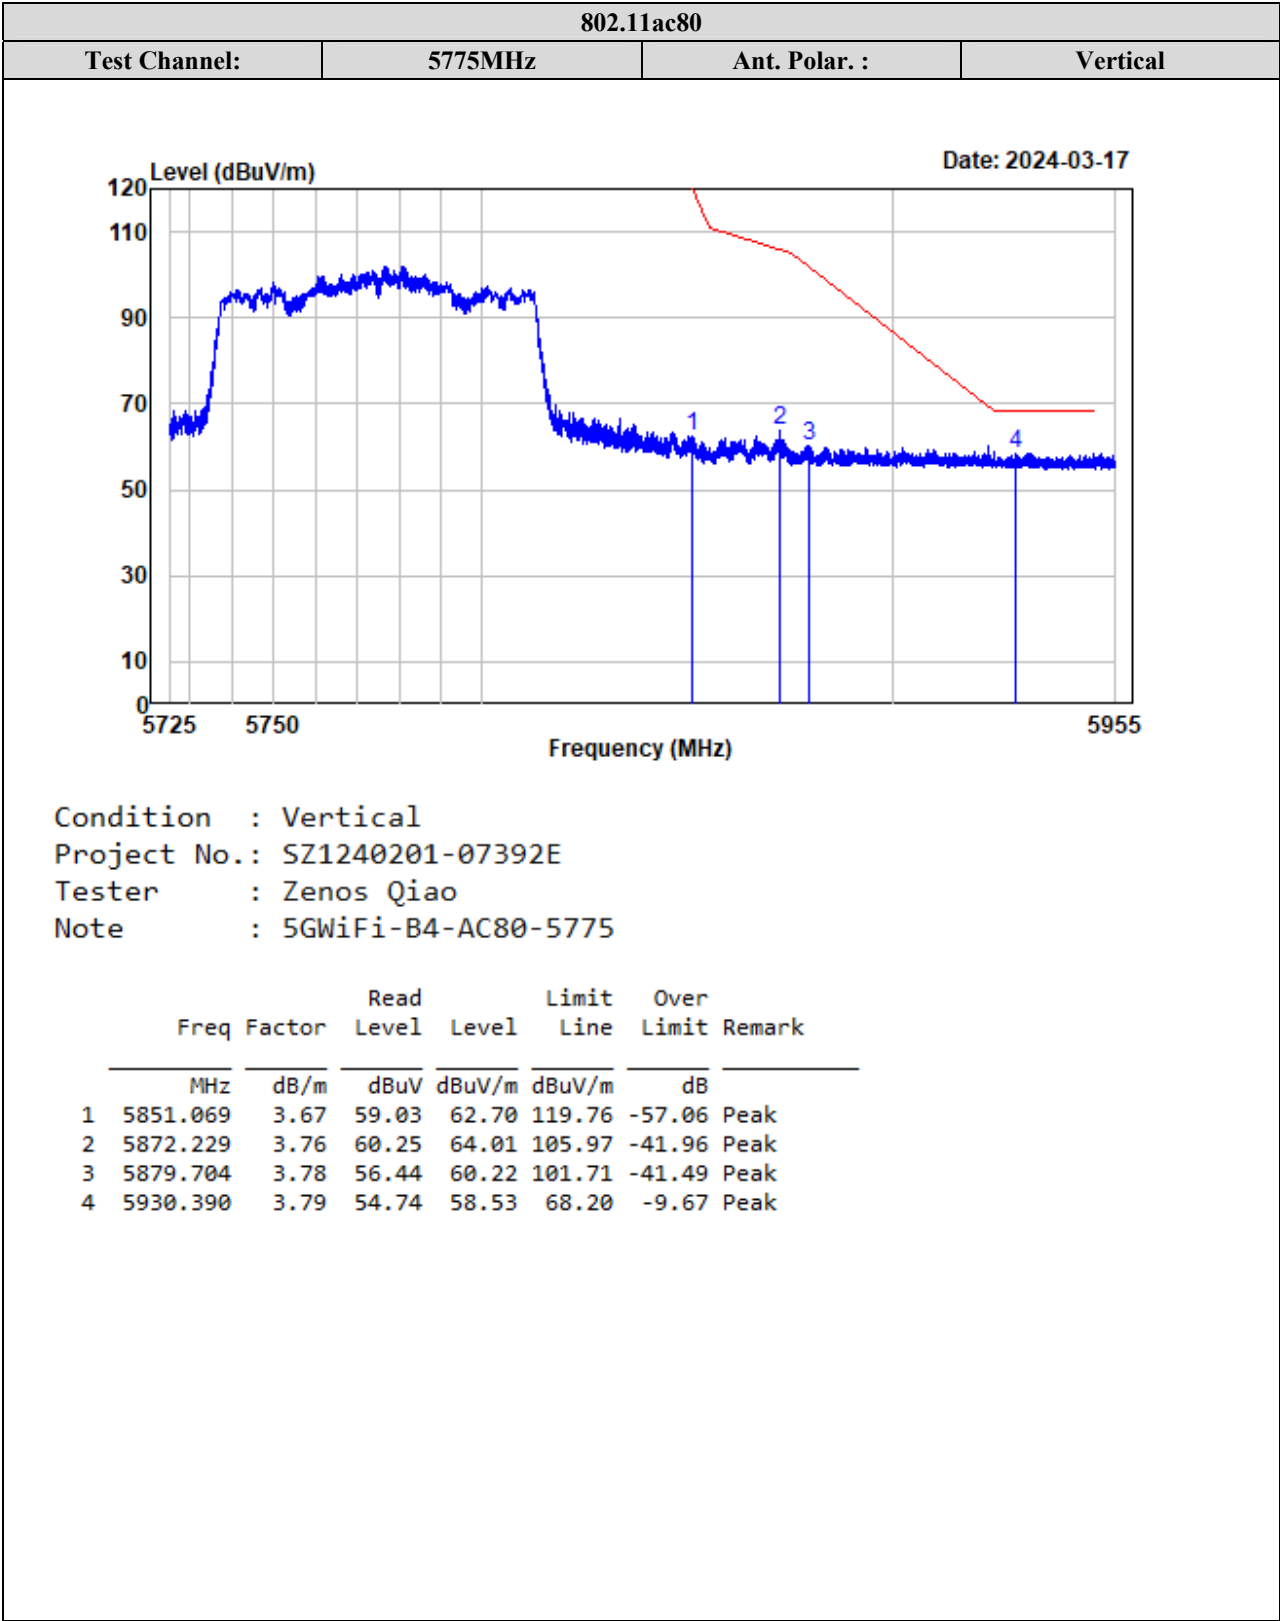


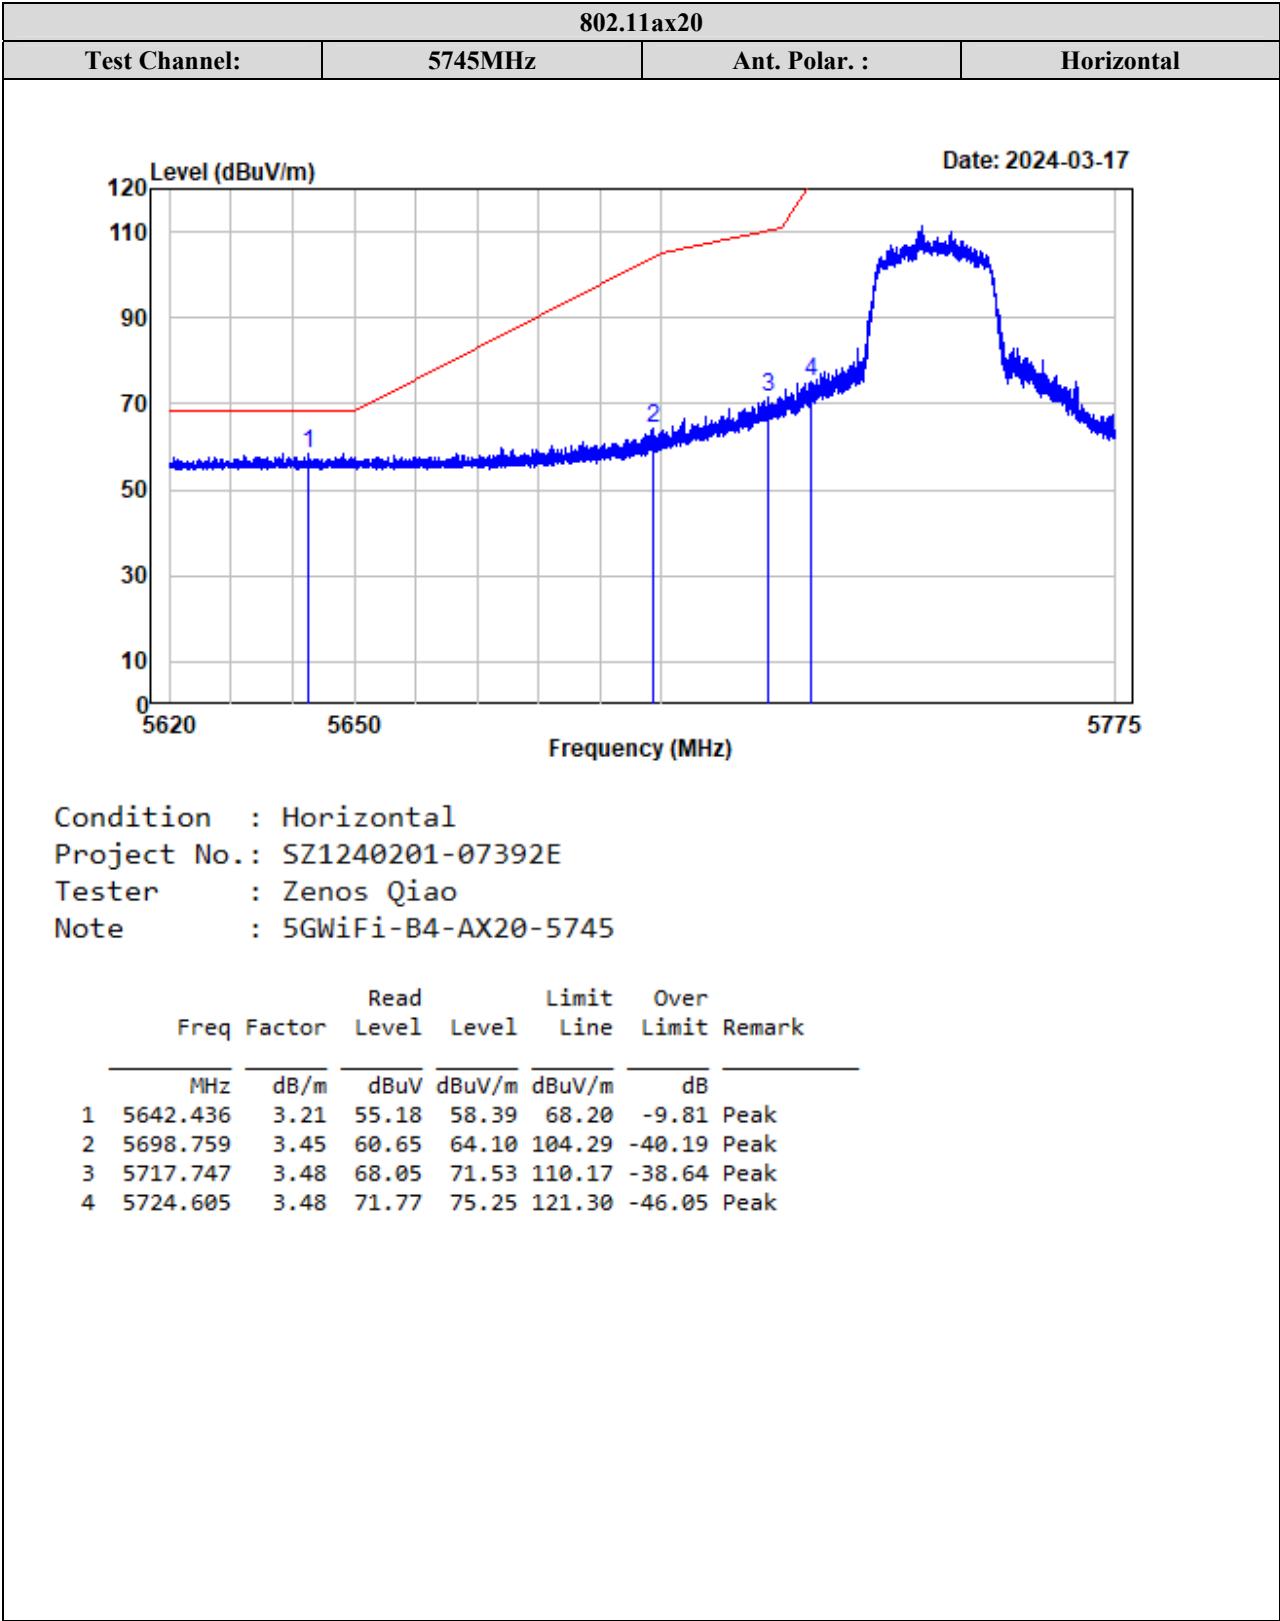


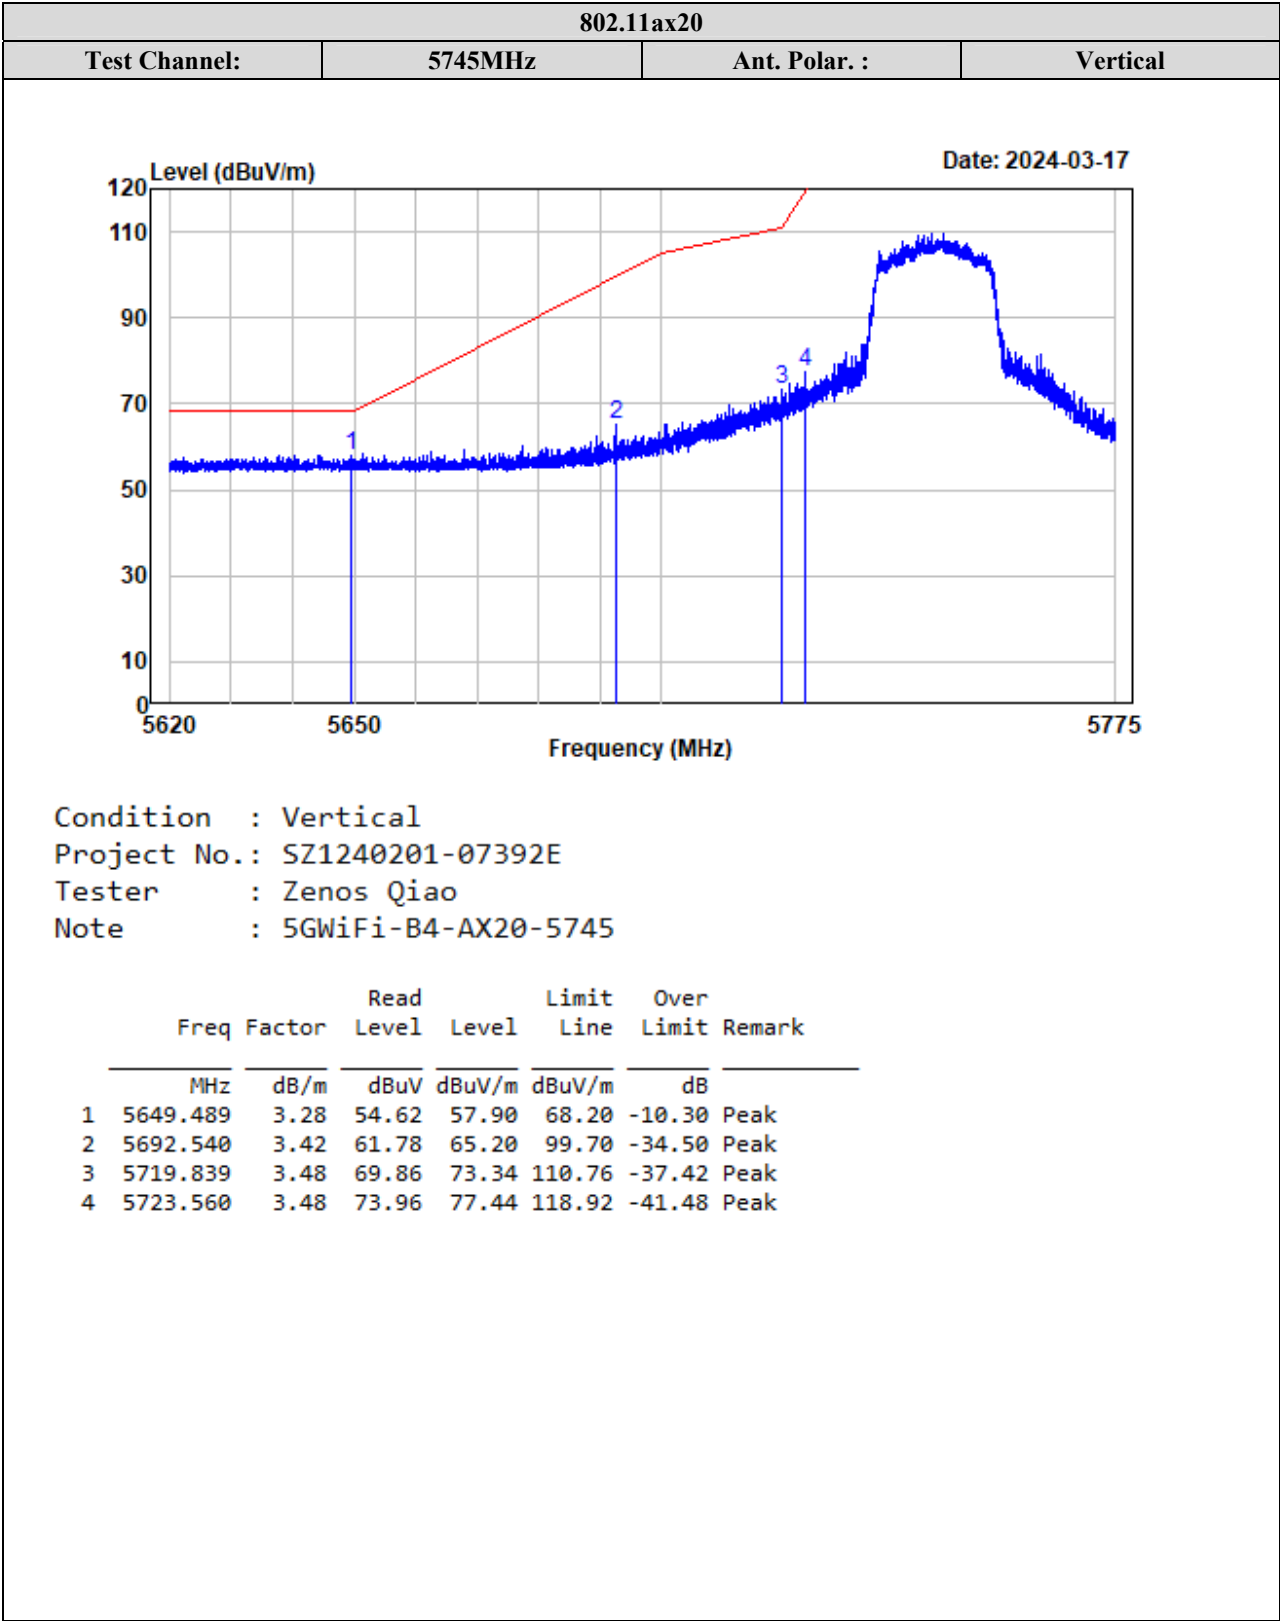


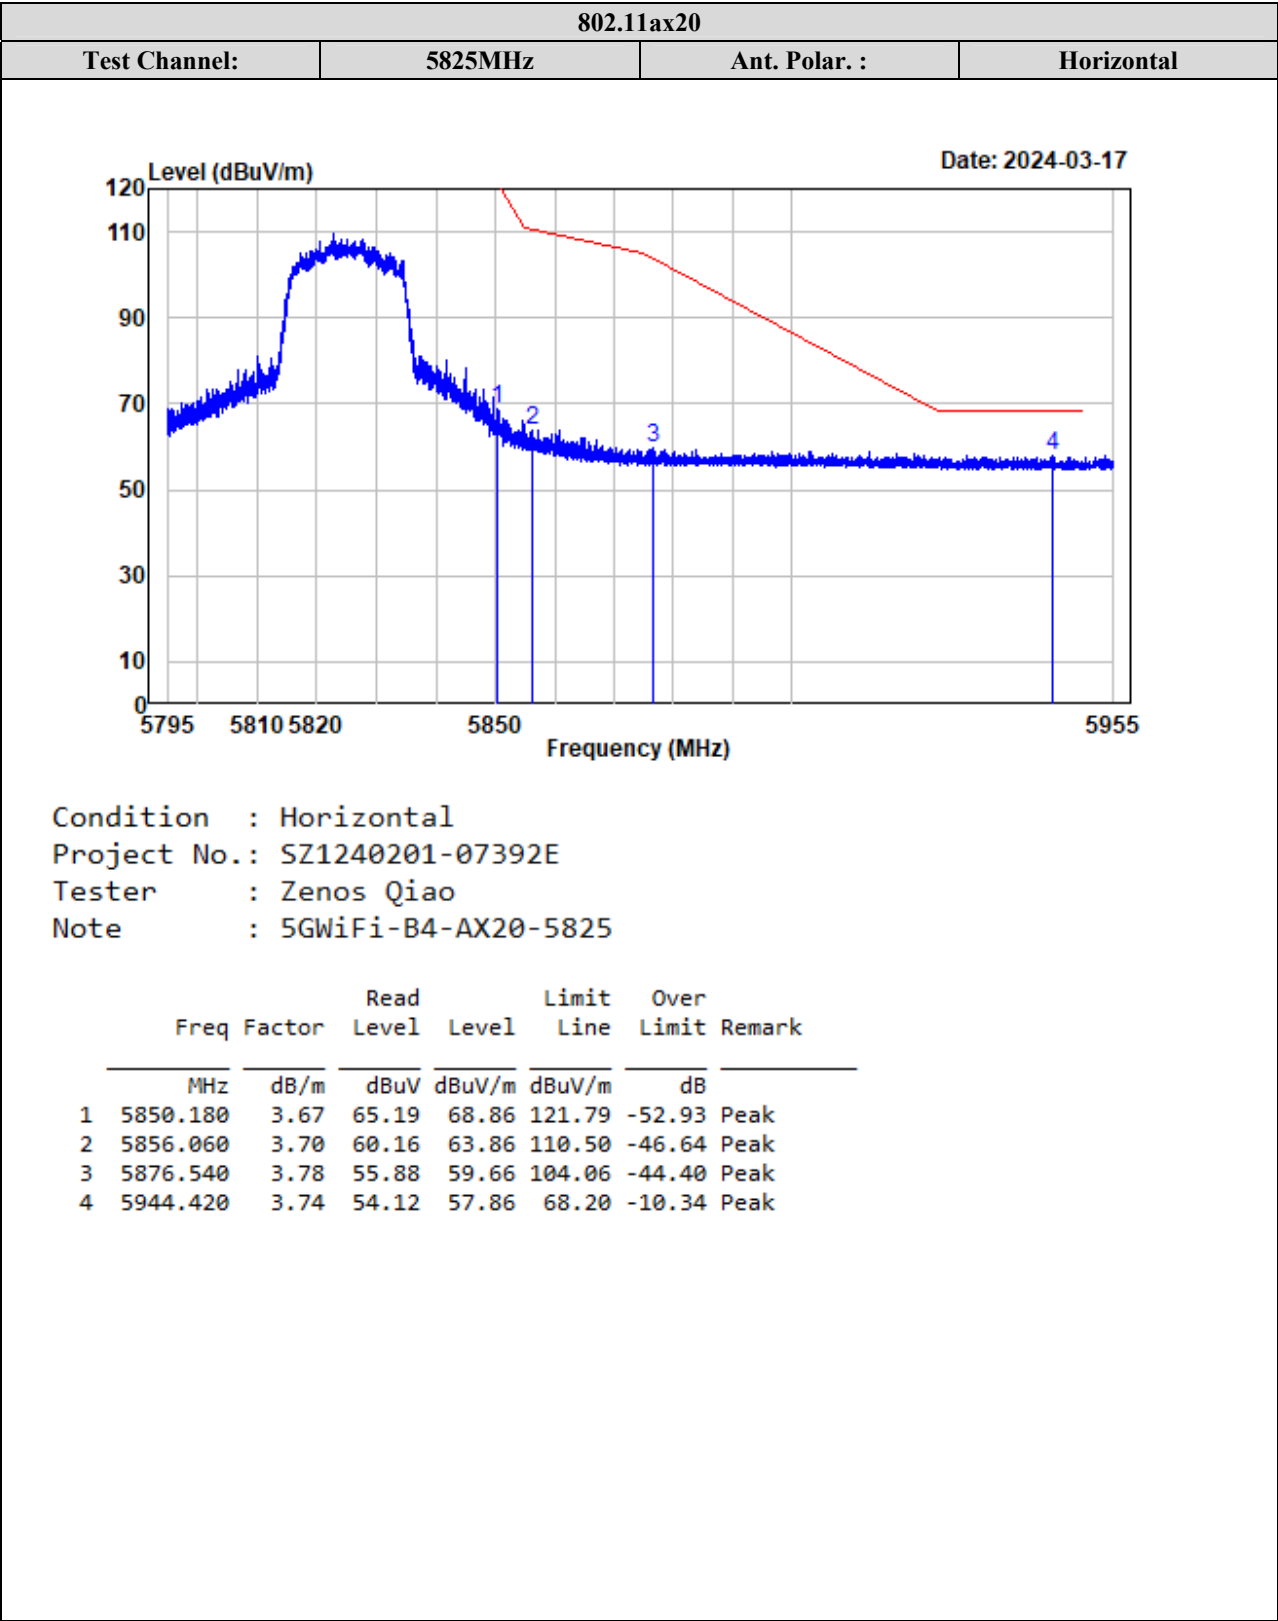


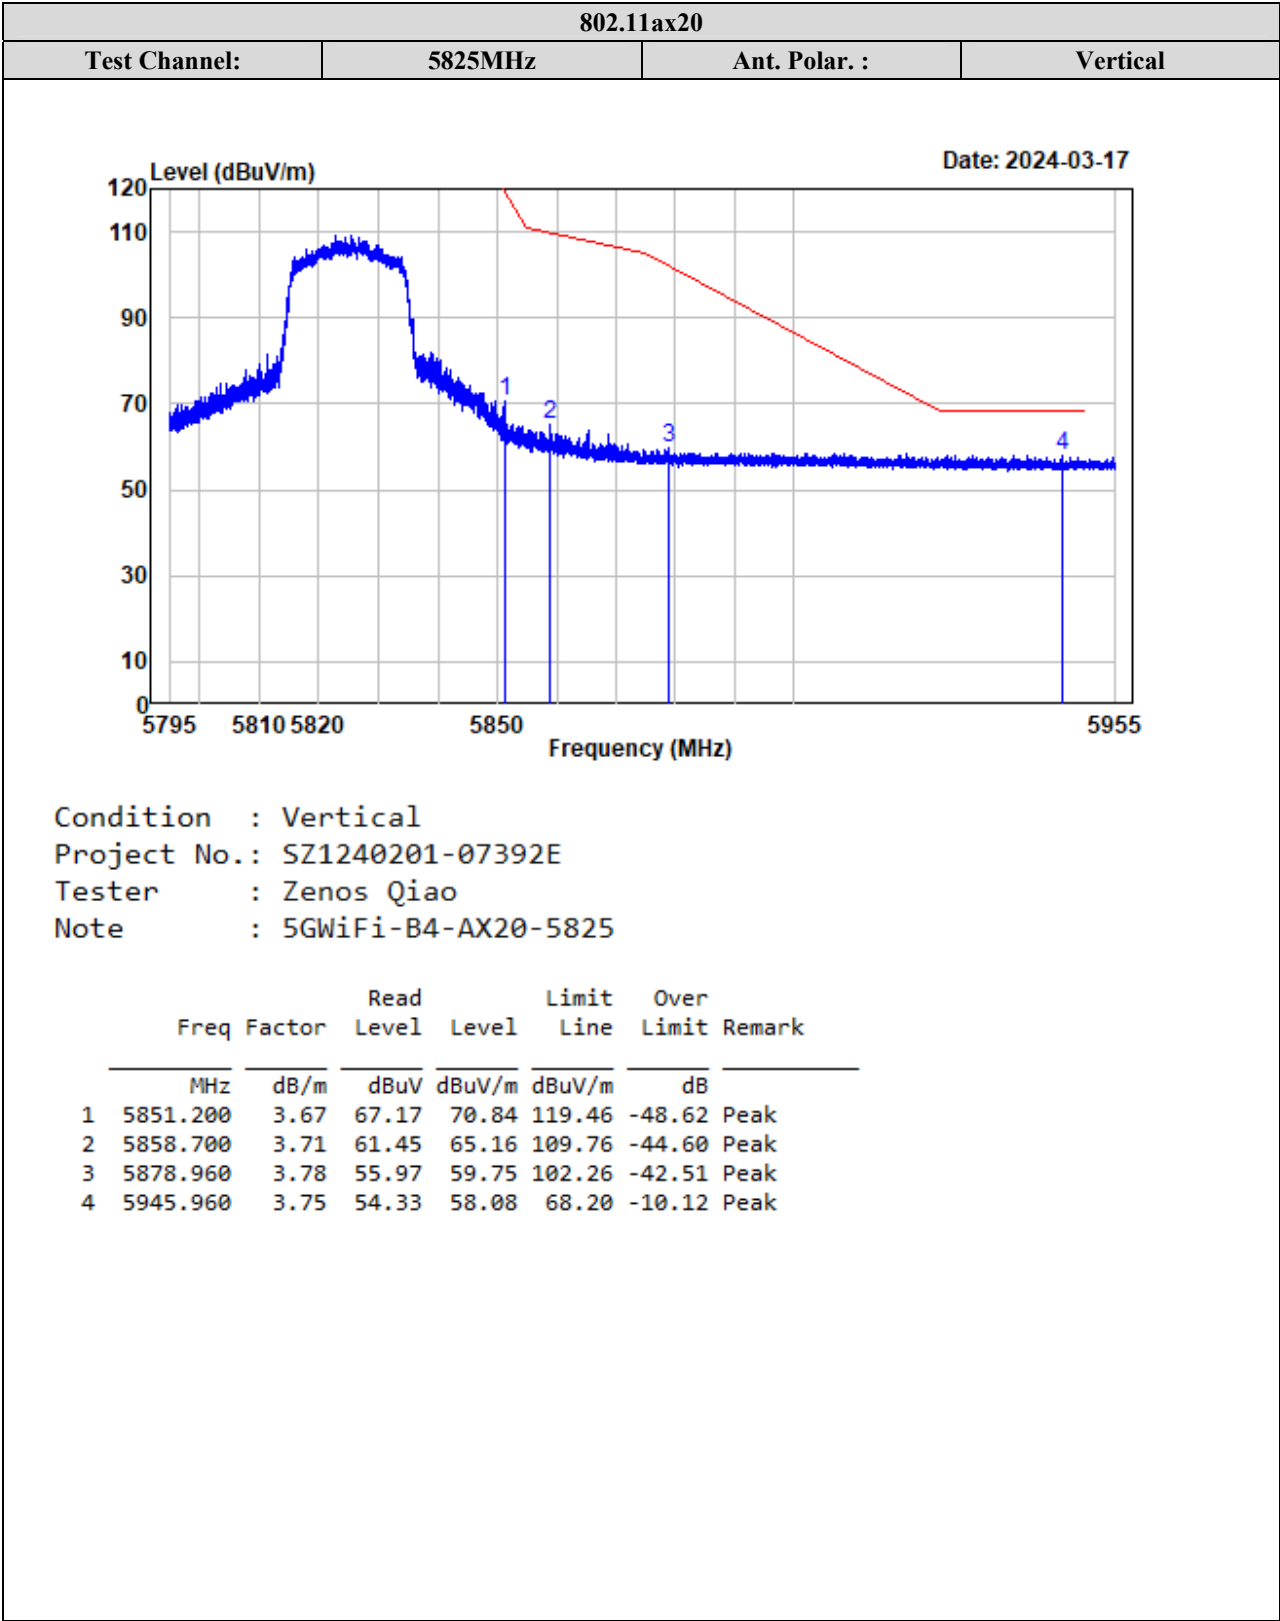


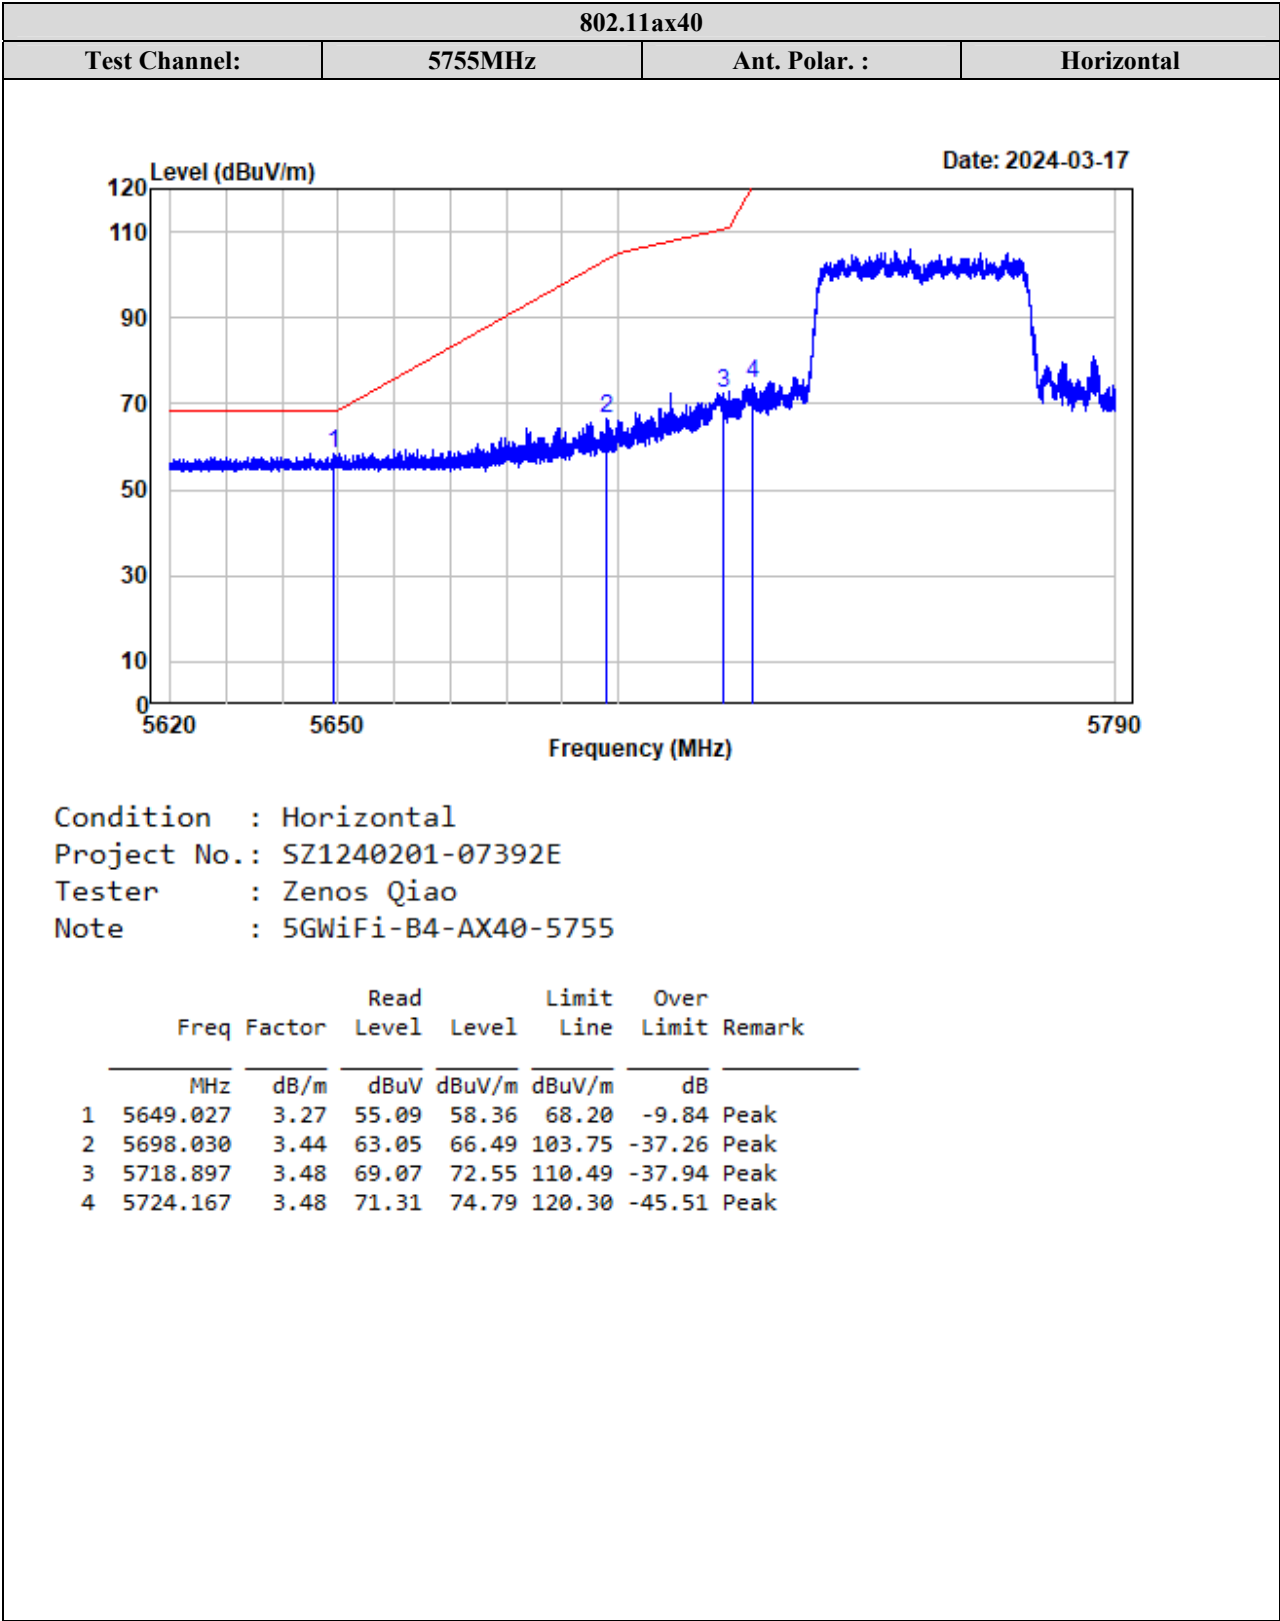


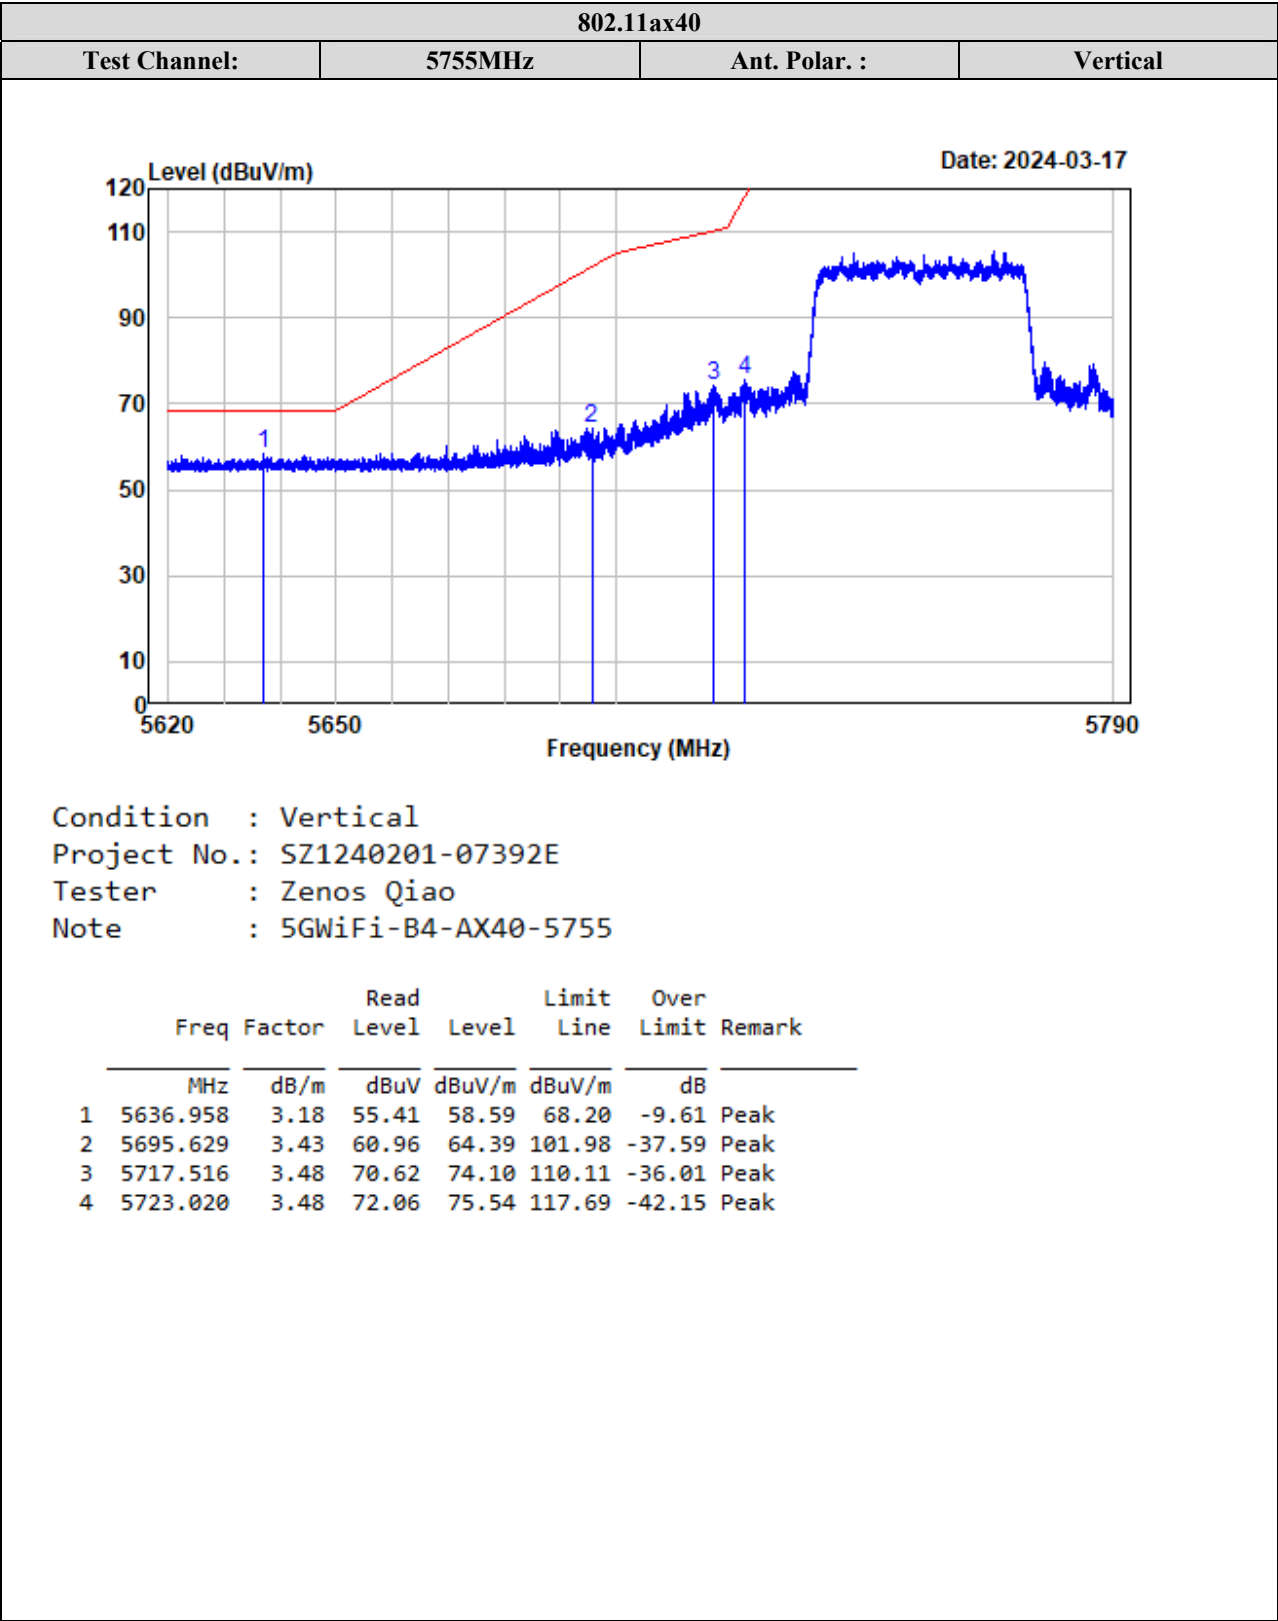


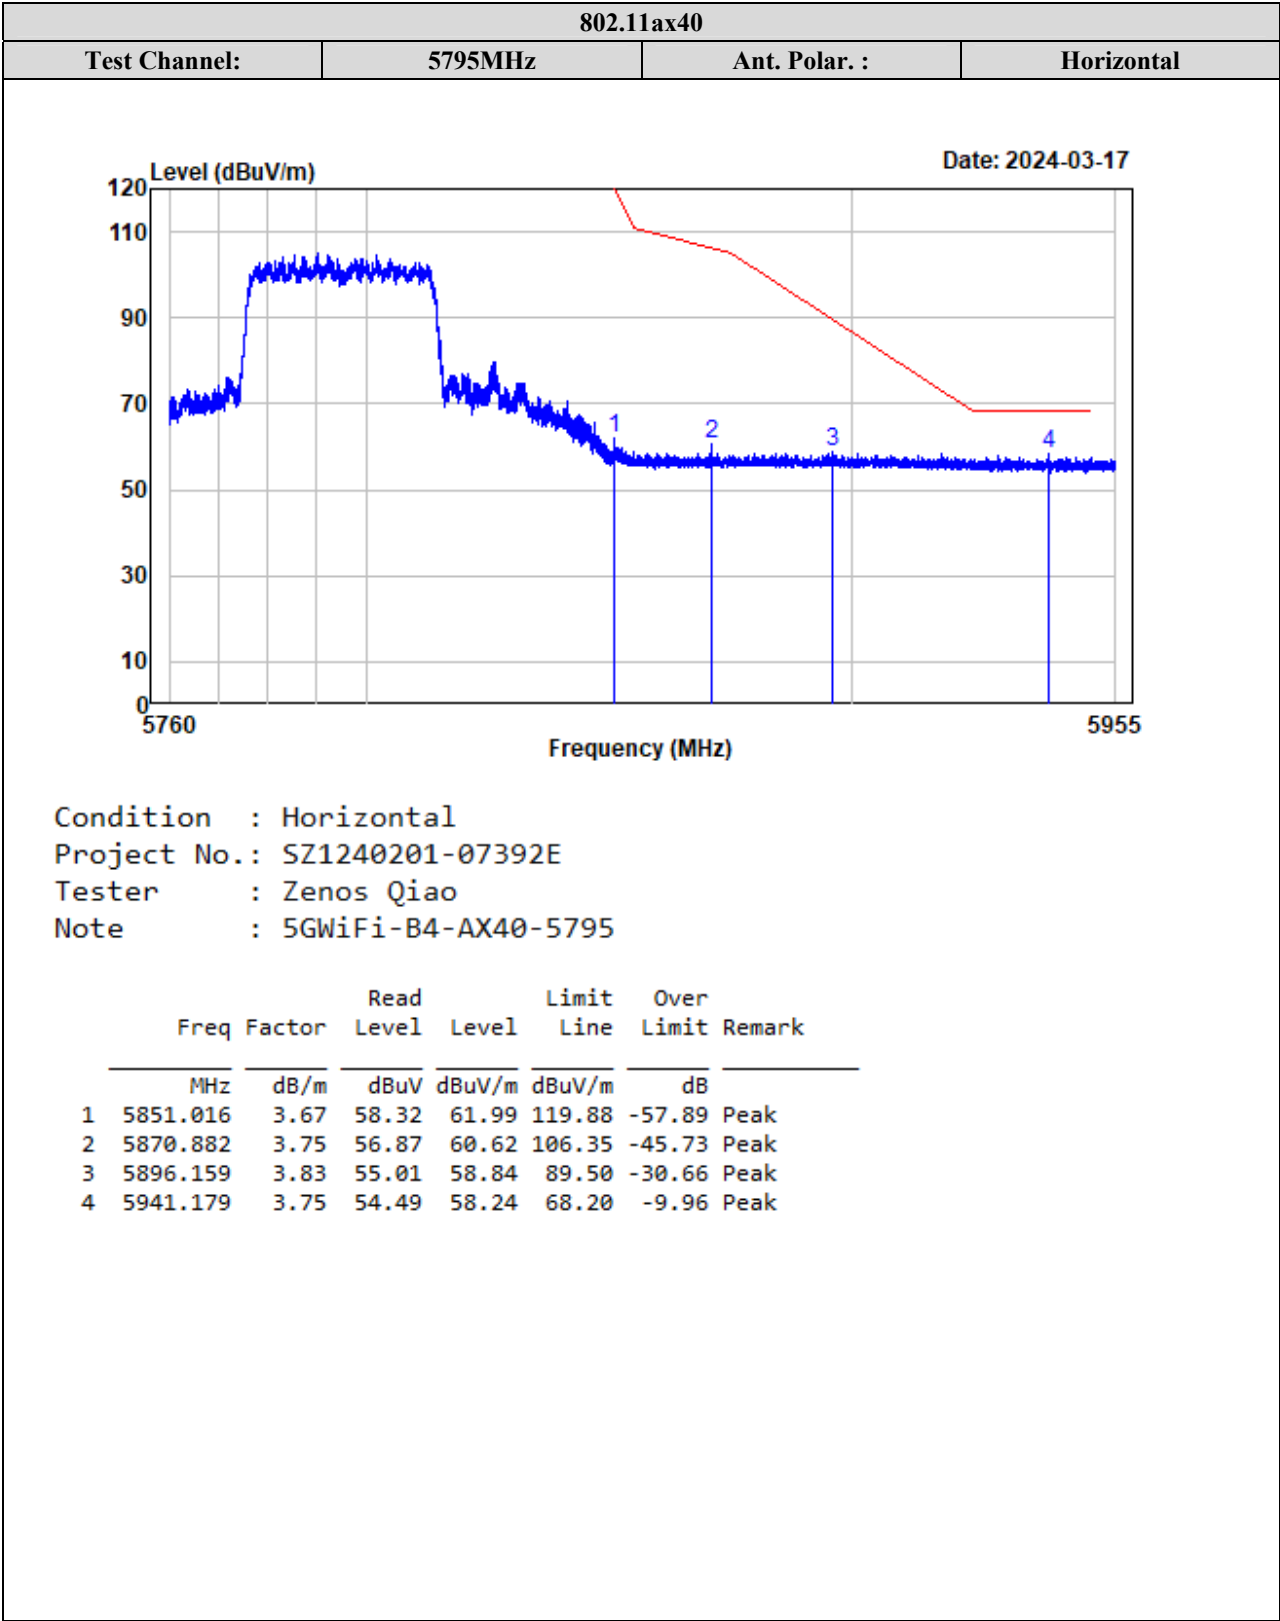


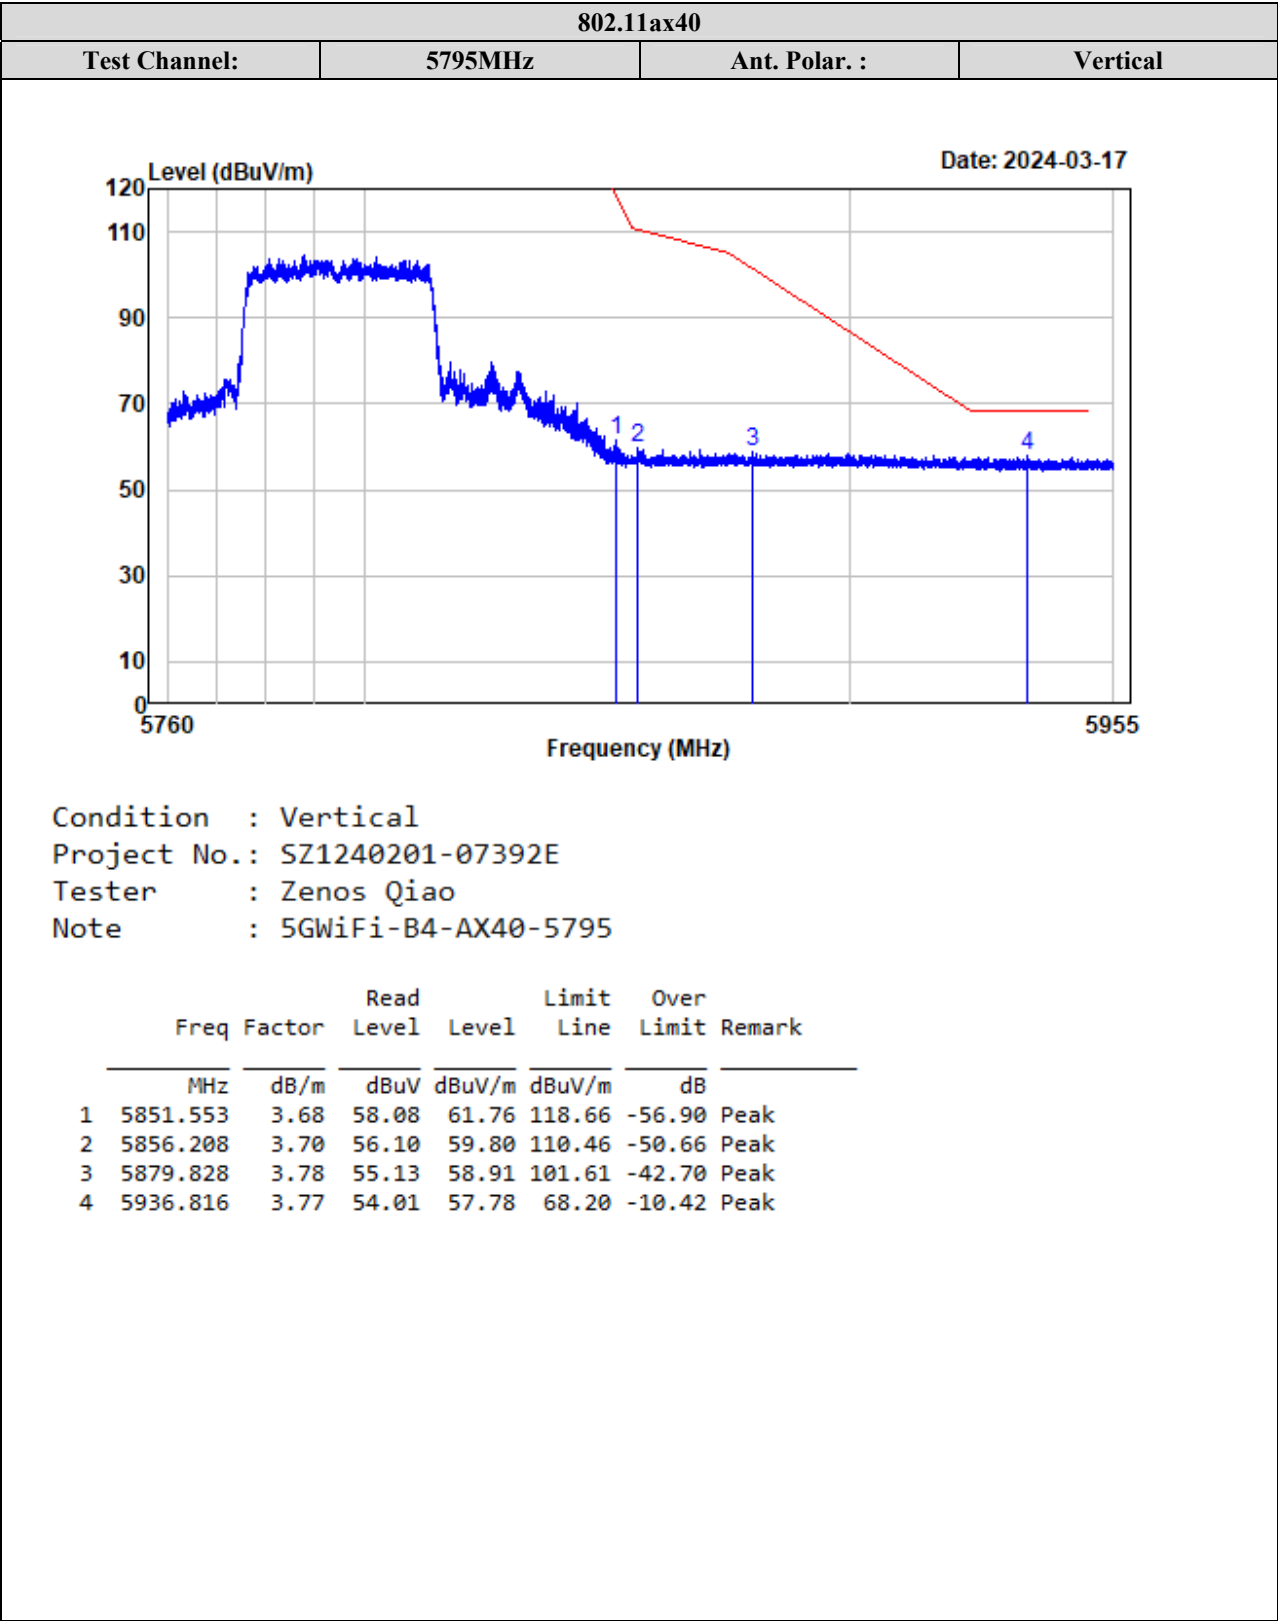

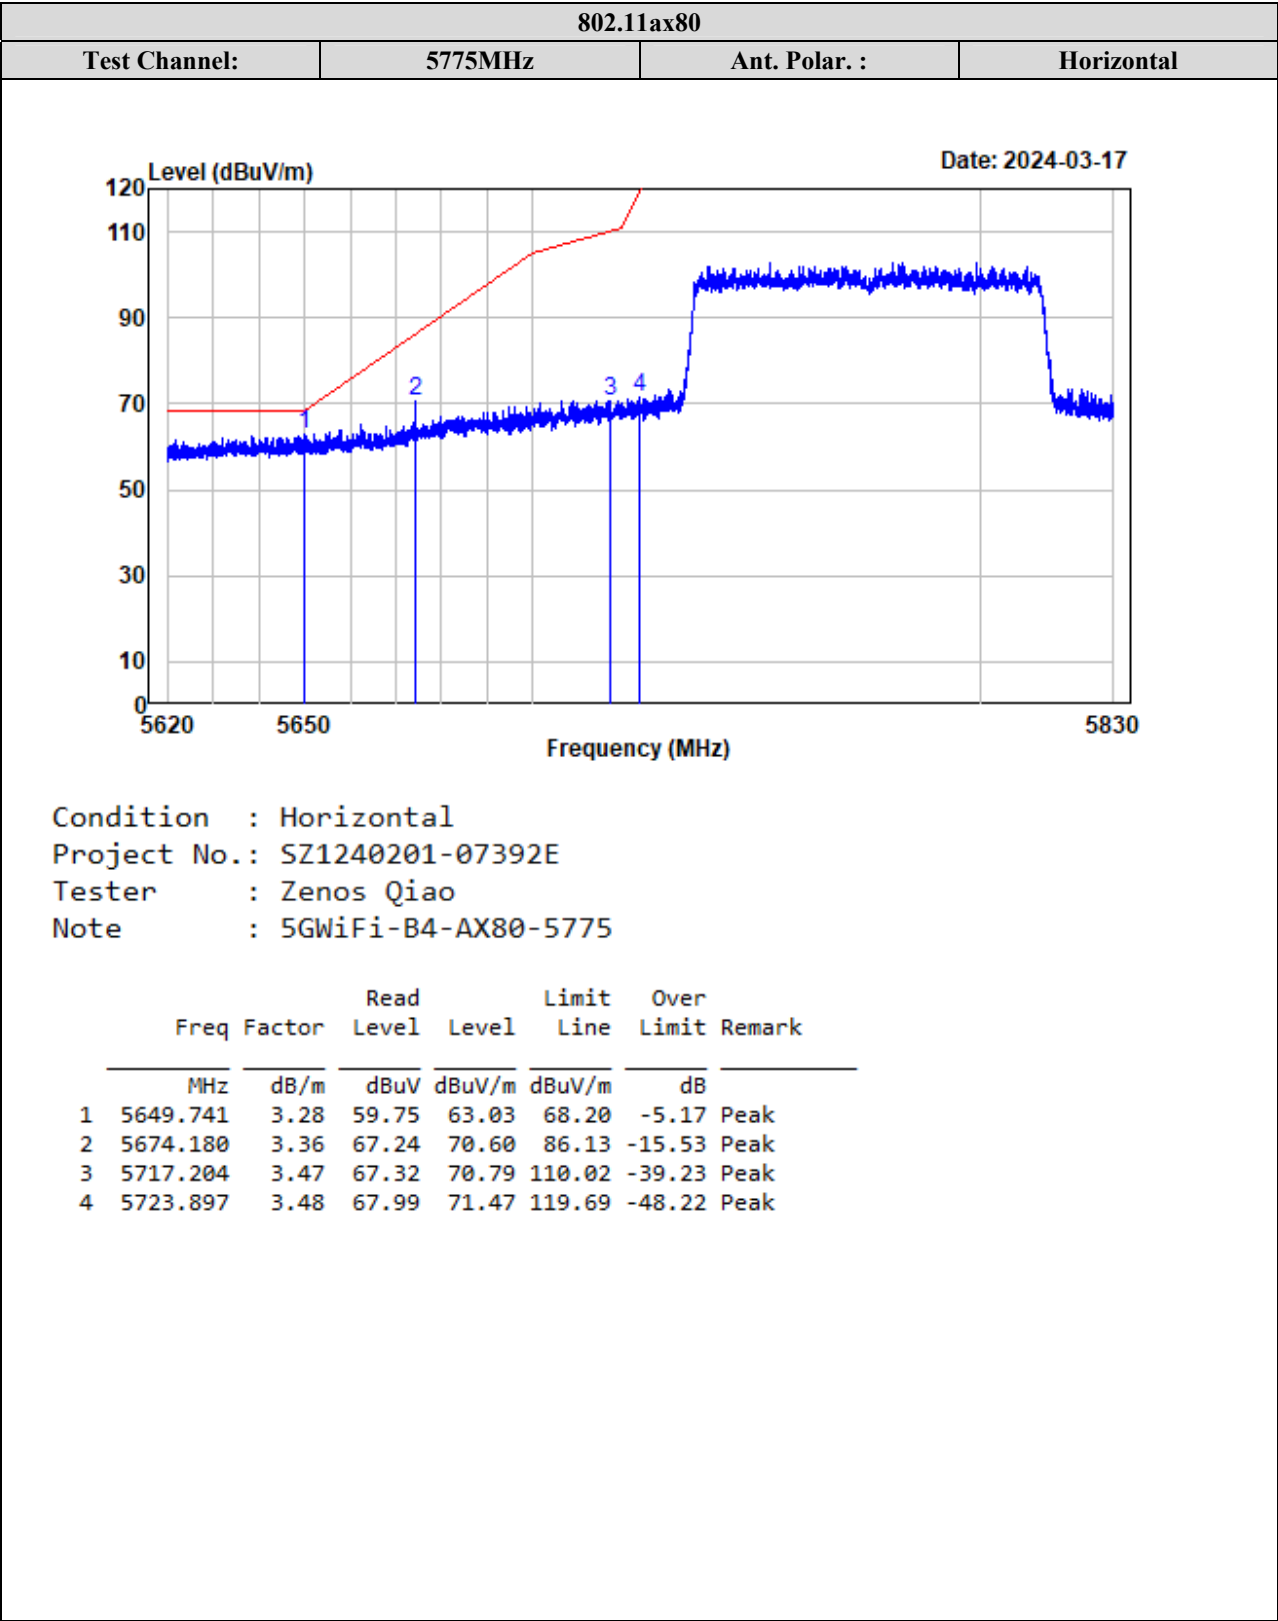

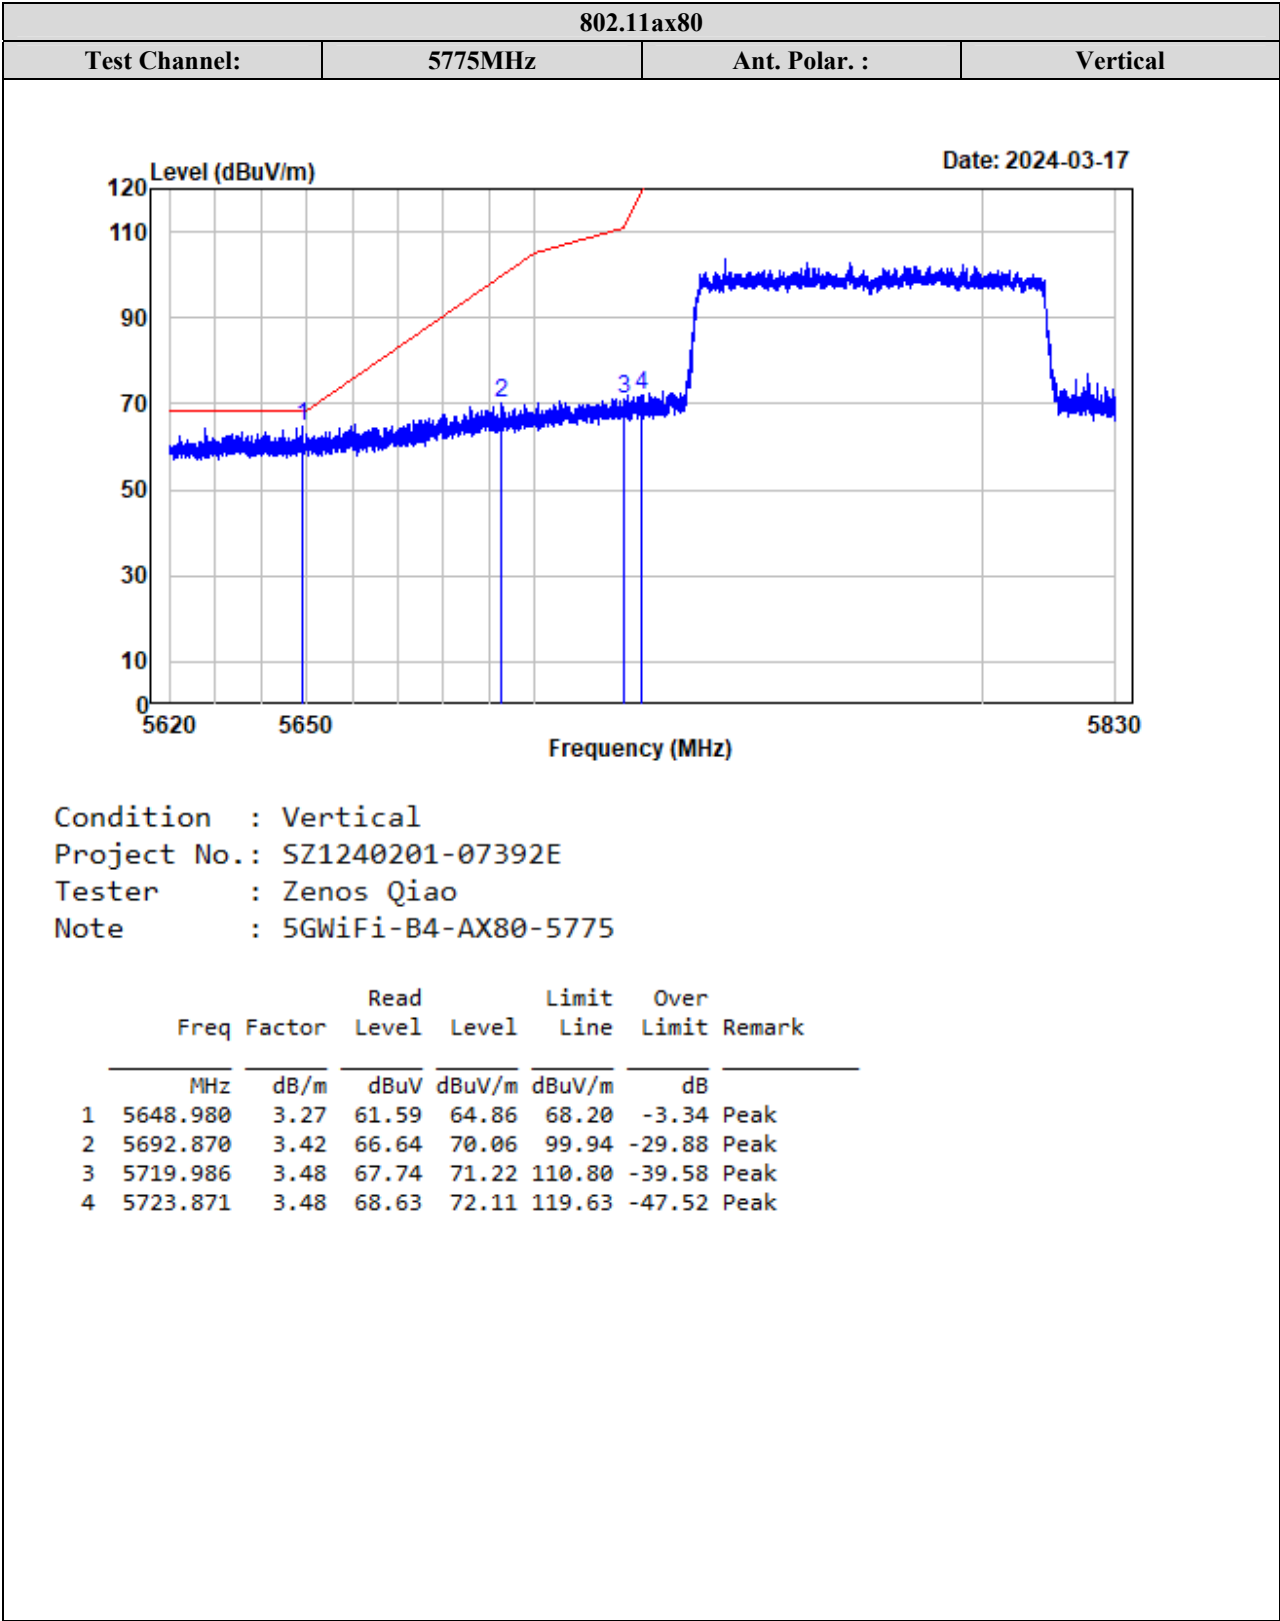


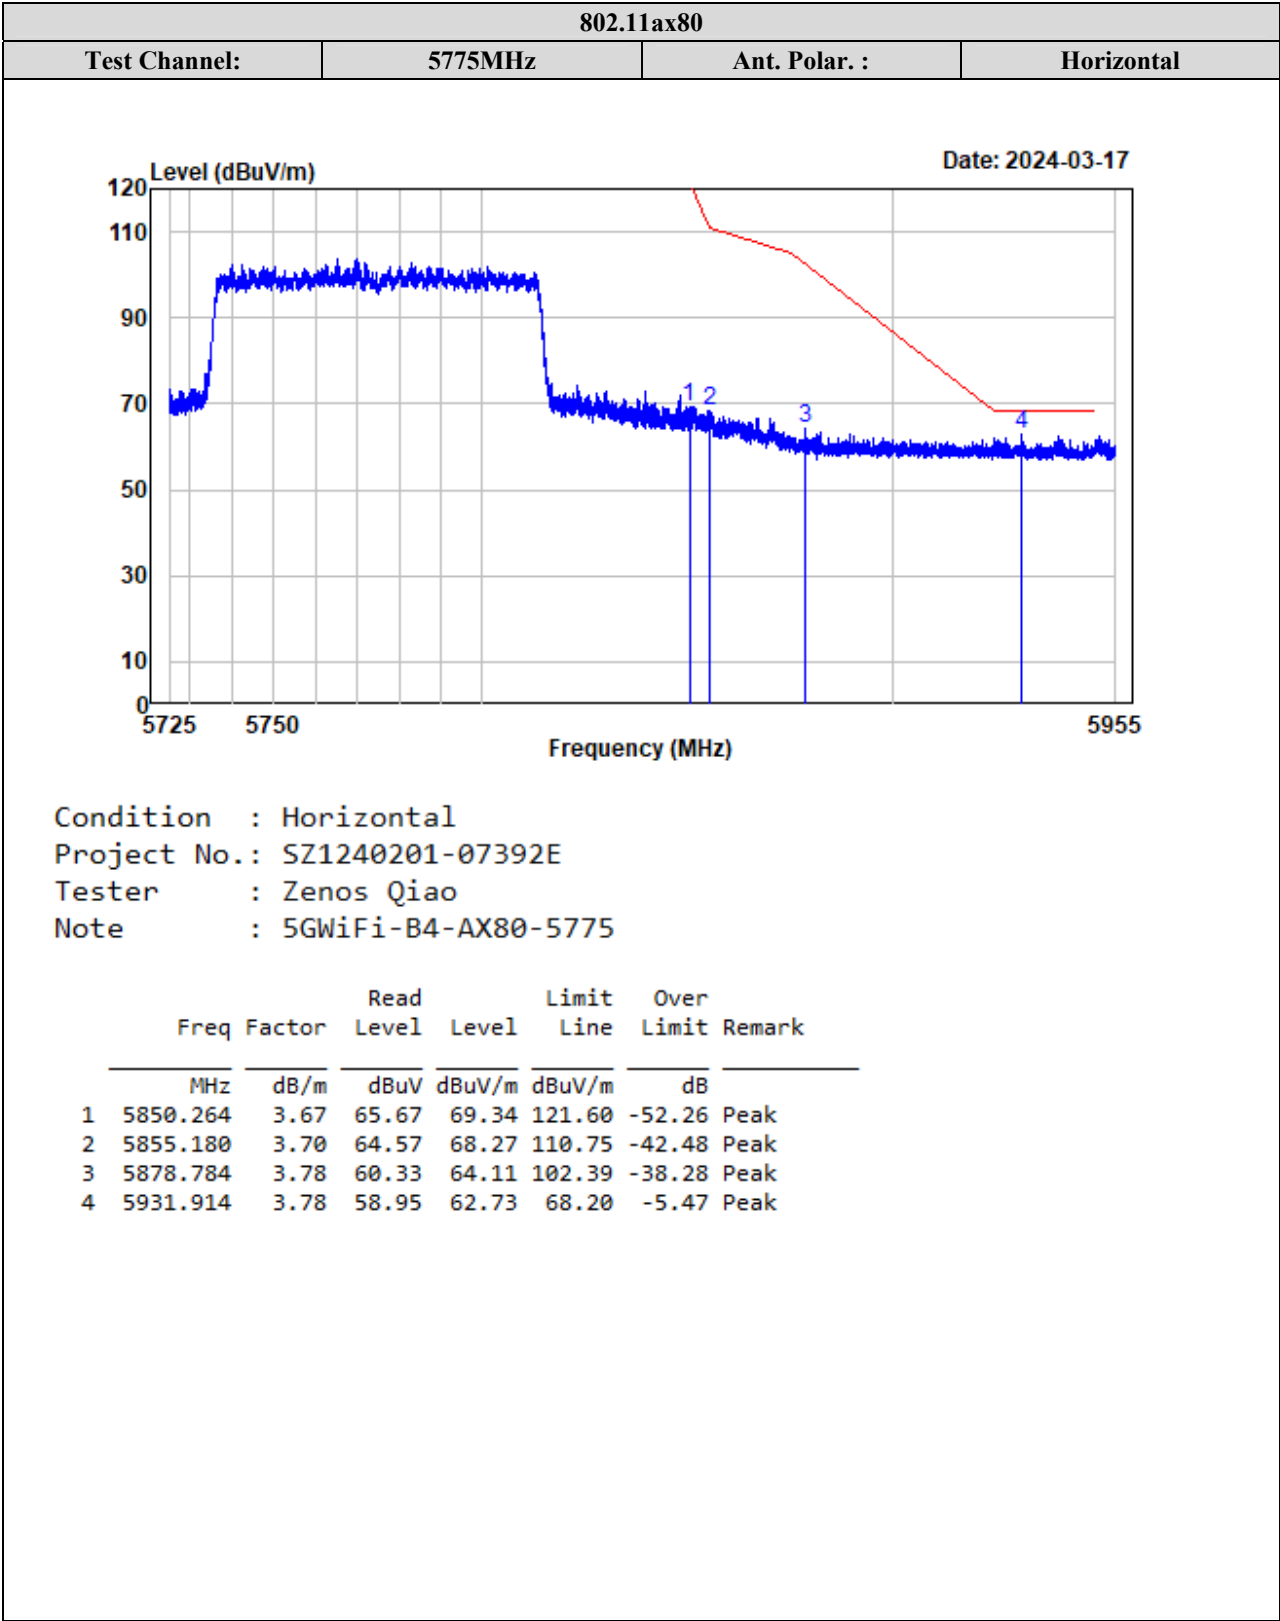


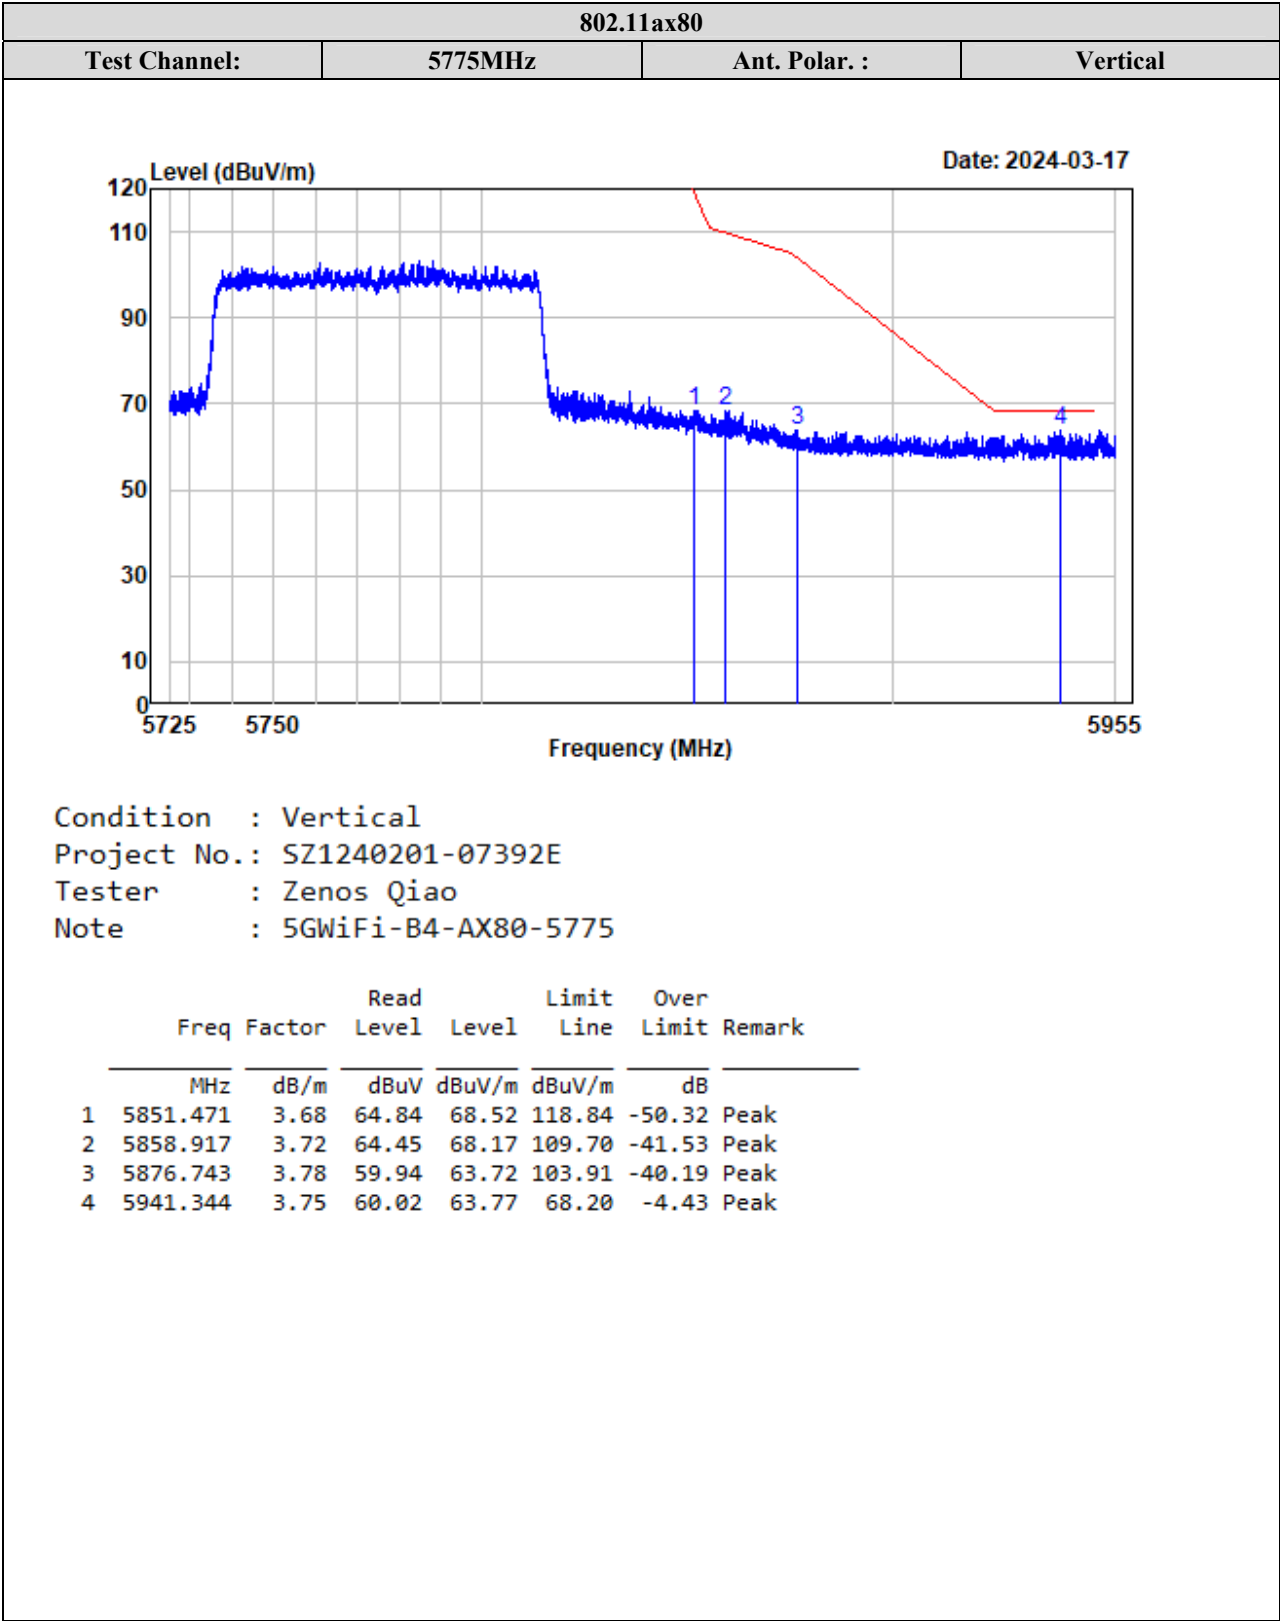



For Module YL43456


5150-5250MHz:

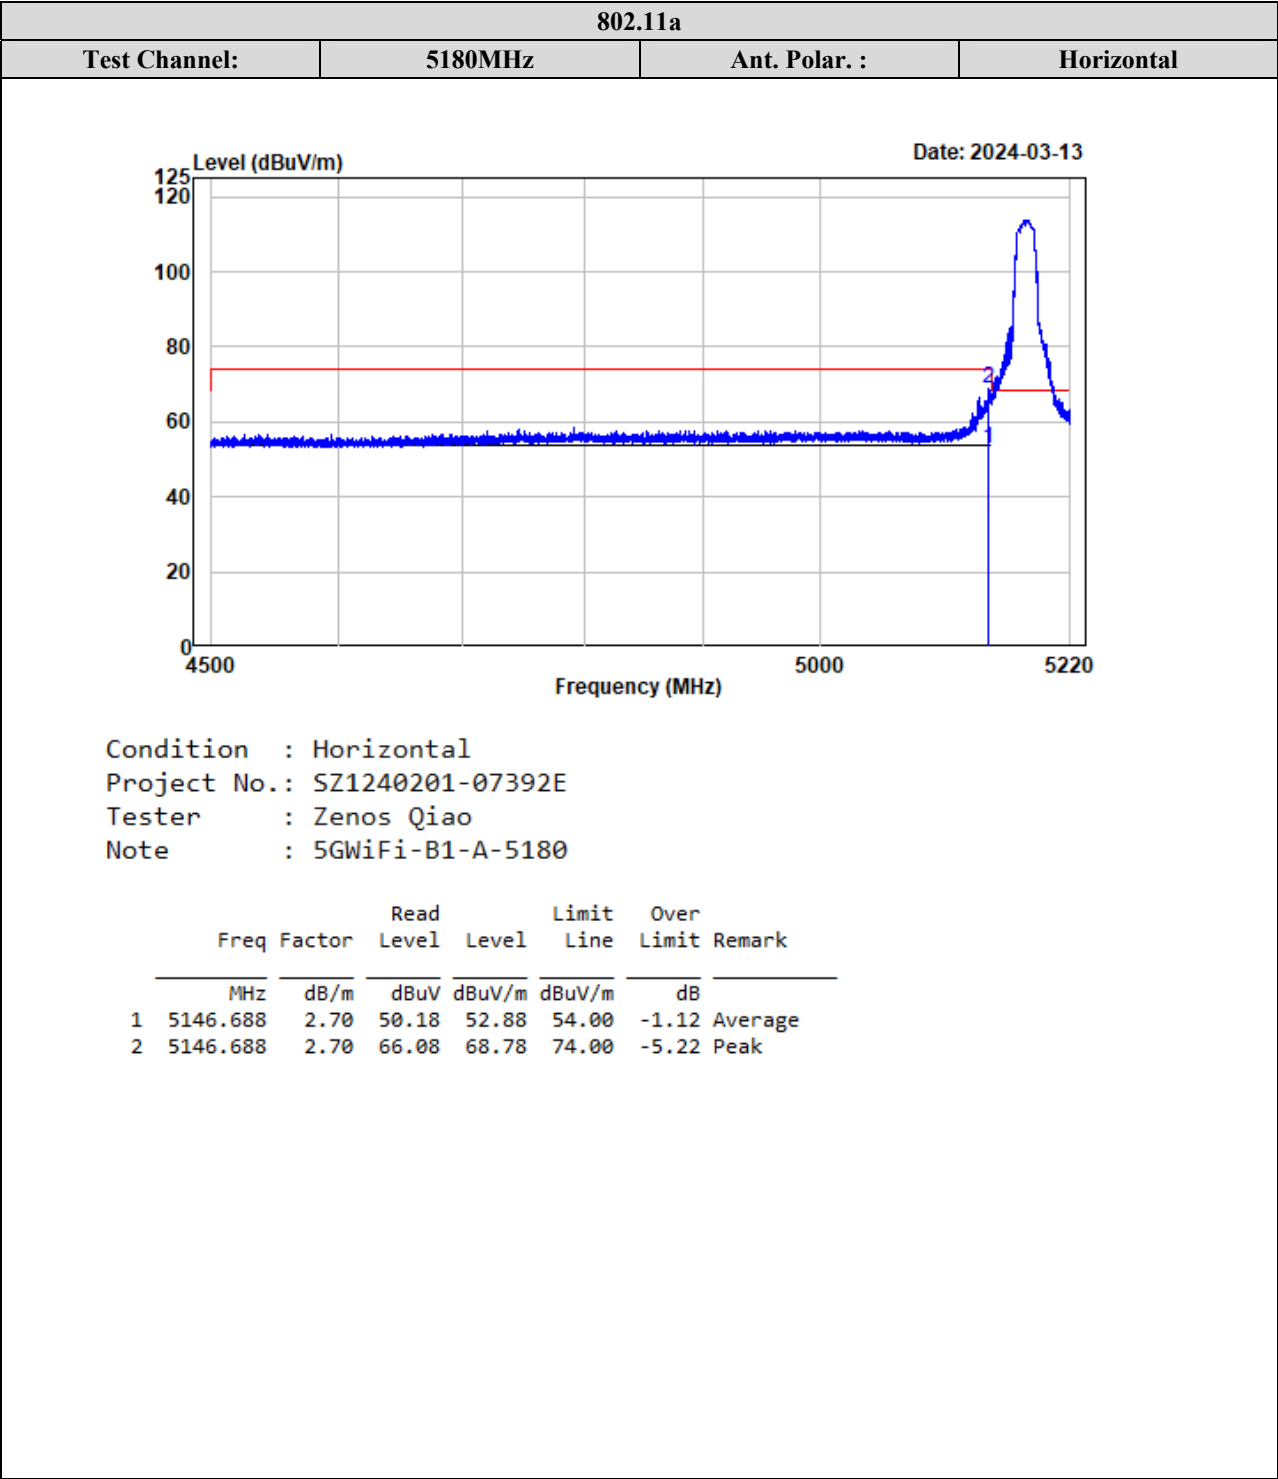


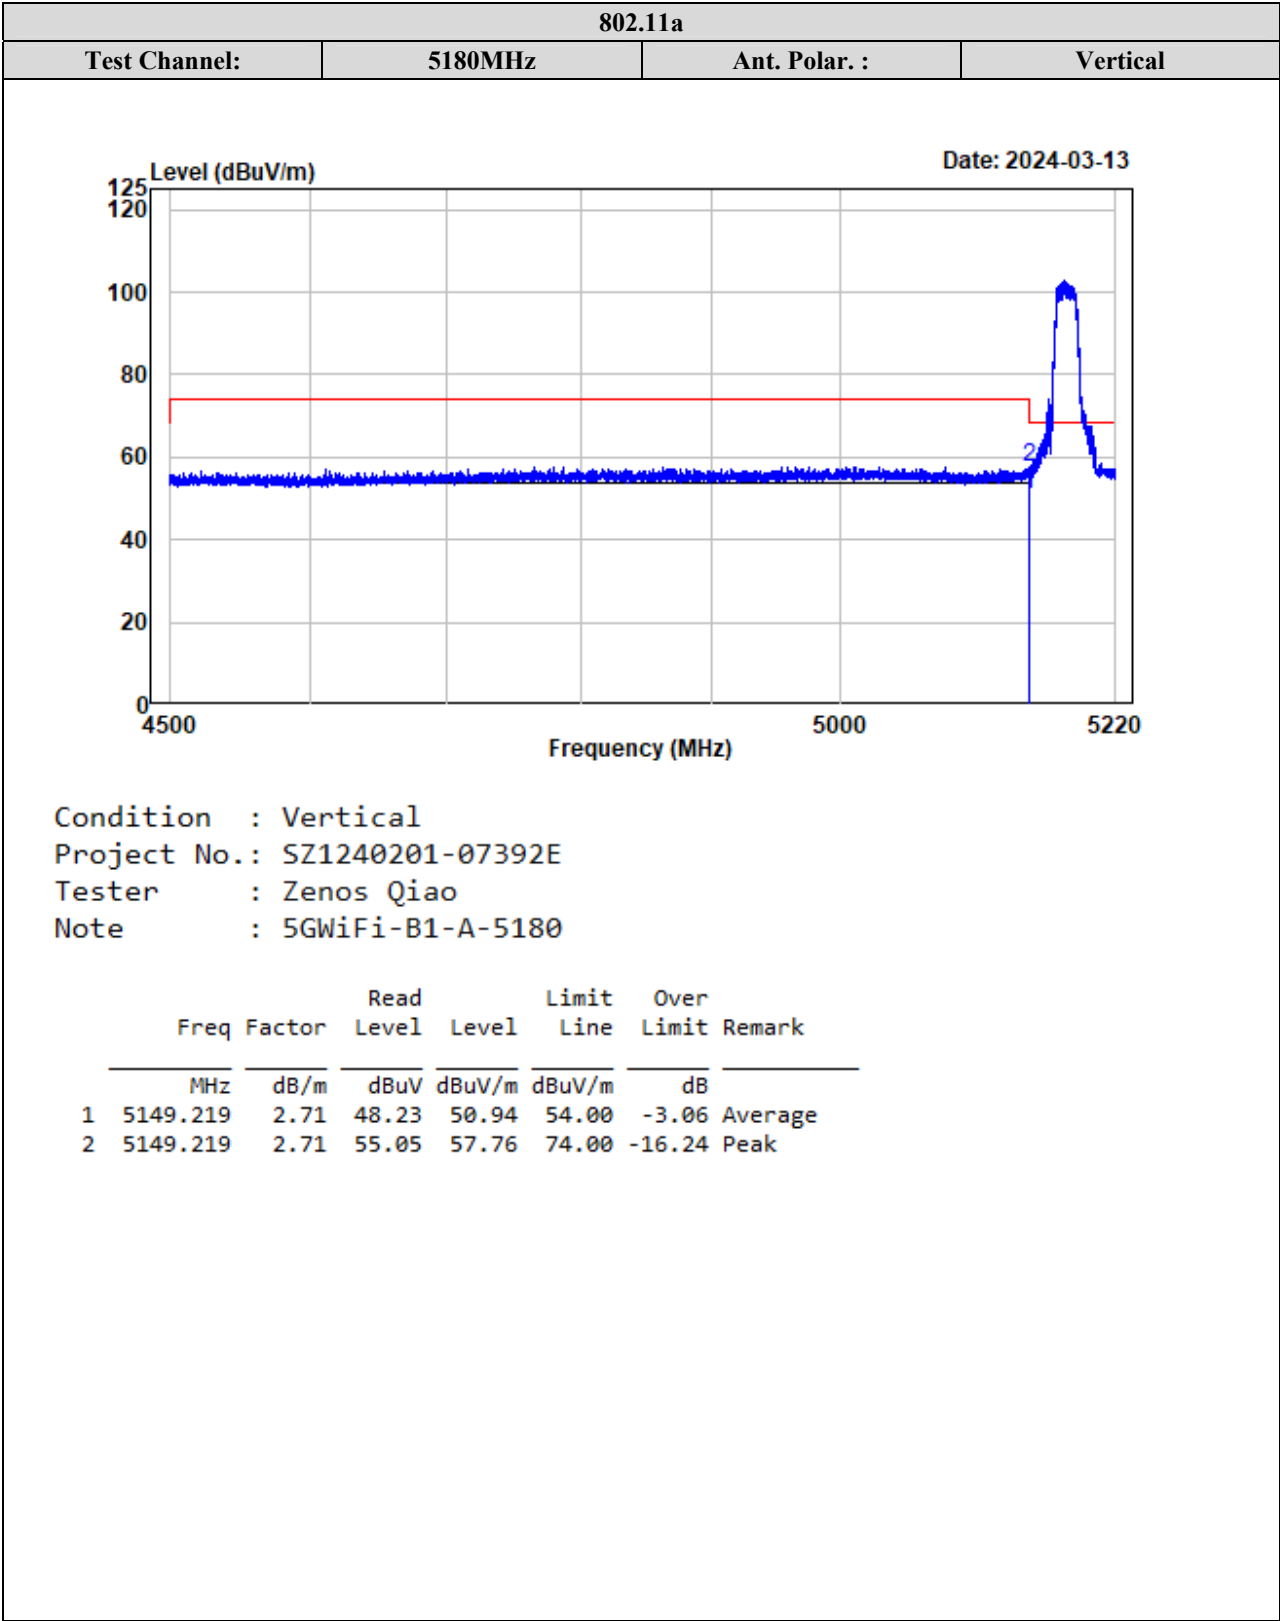


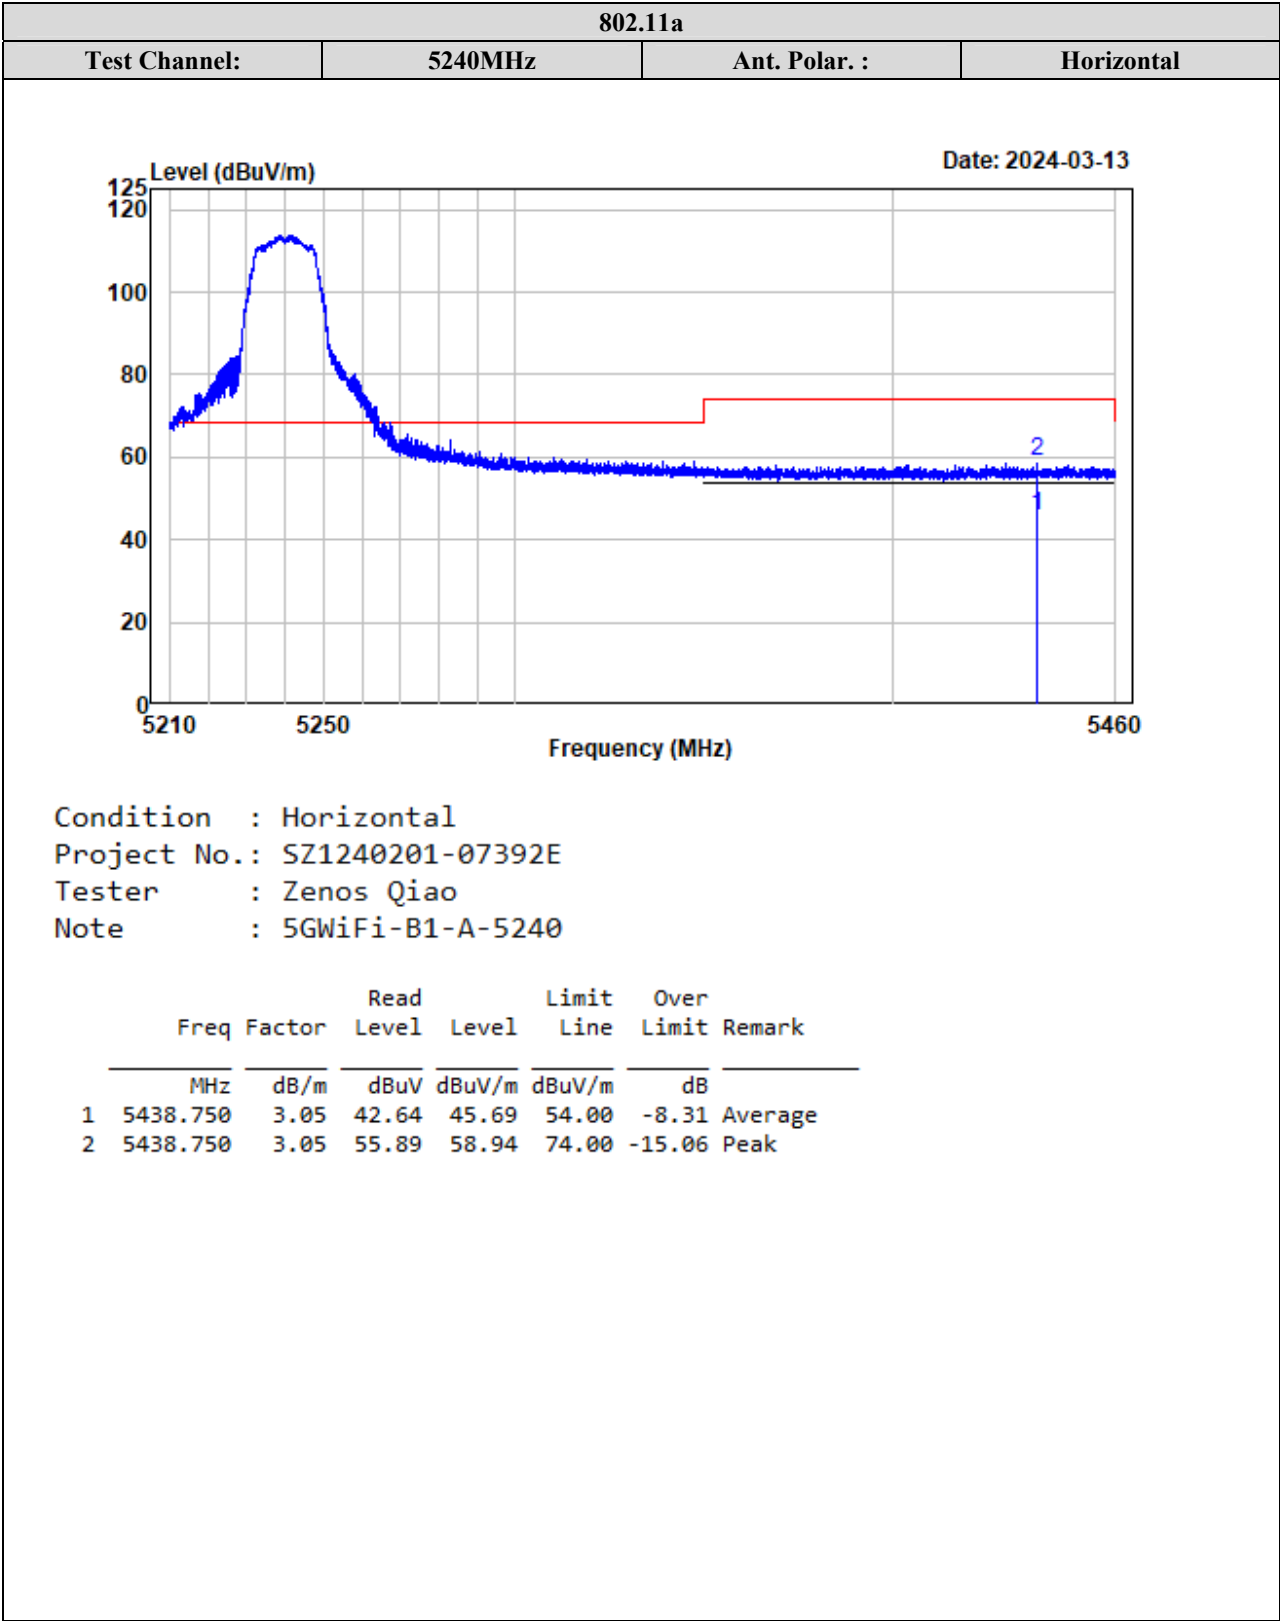


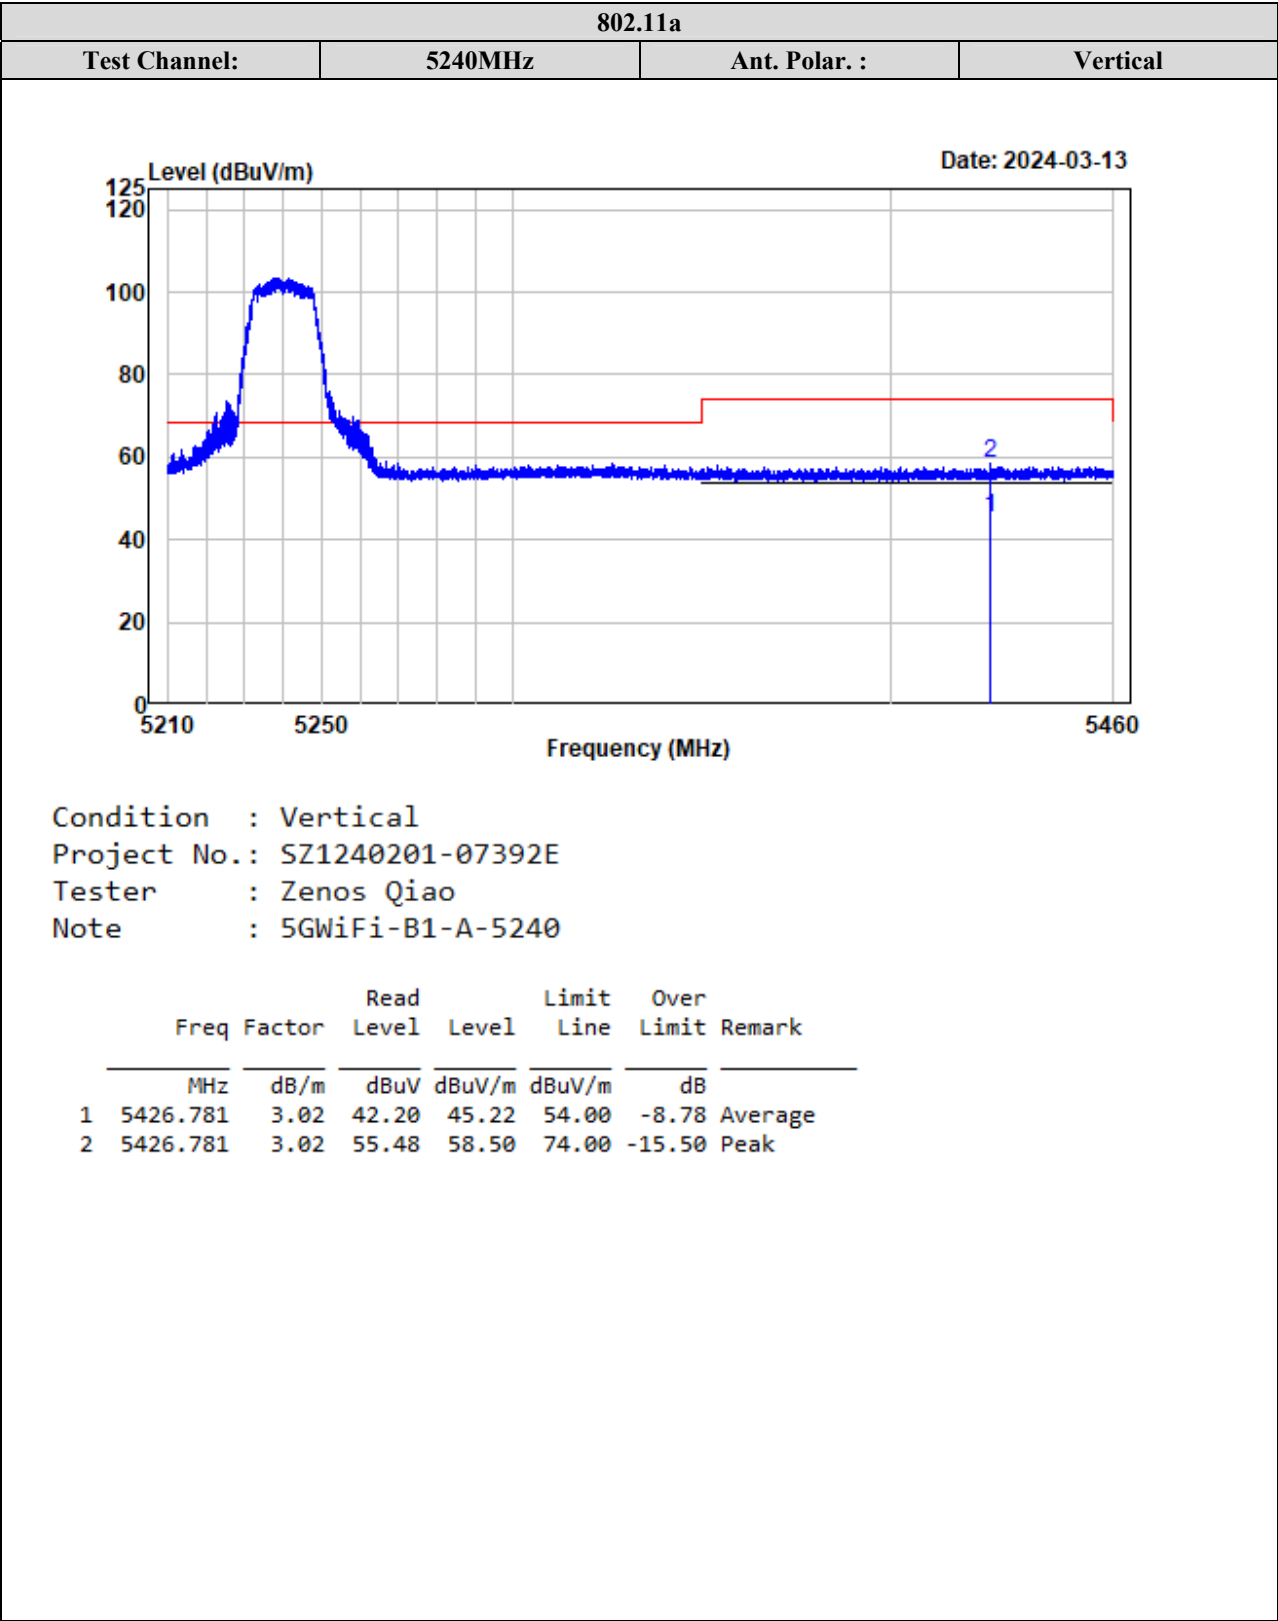


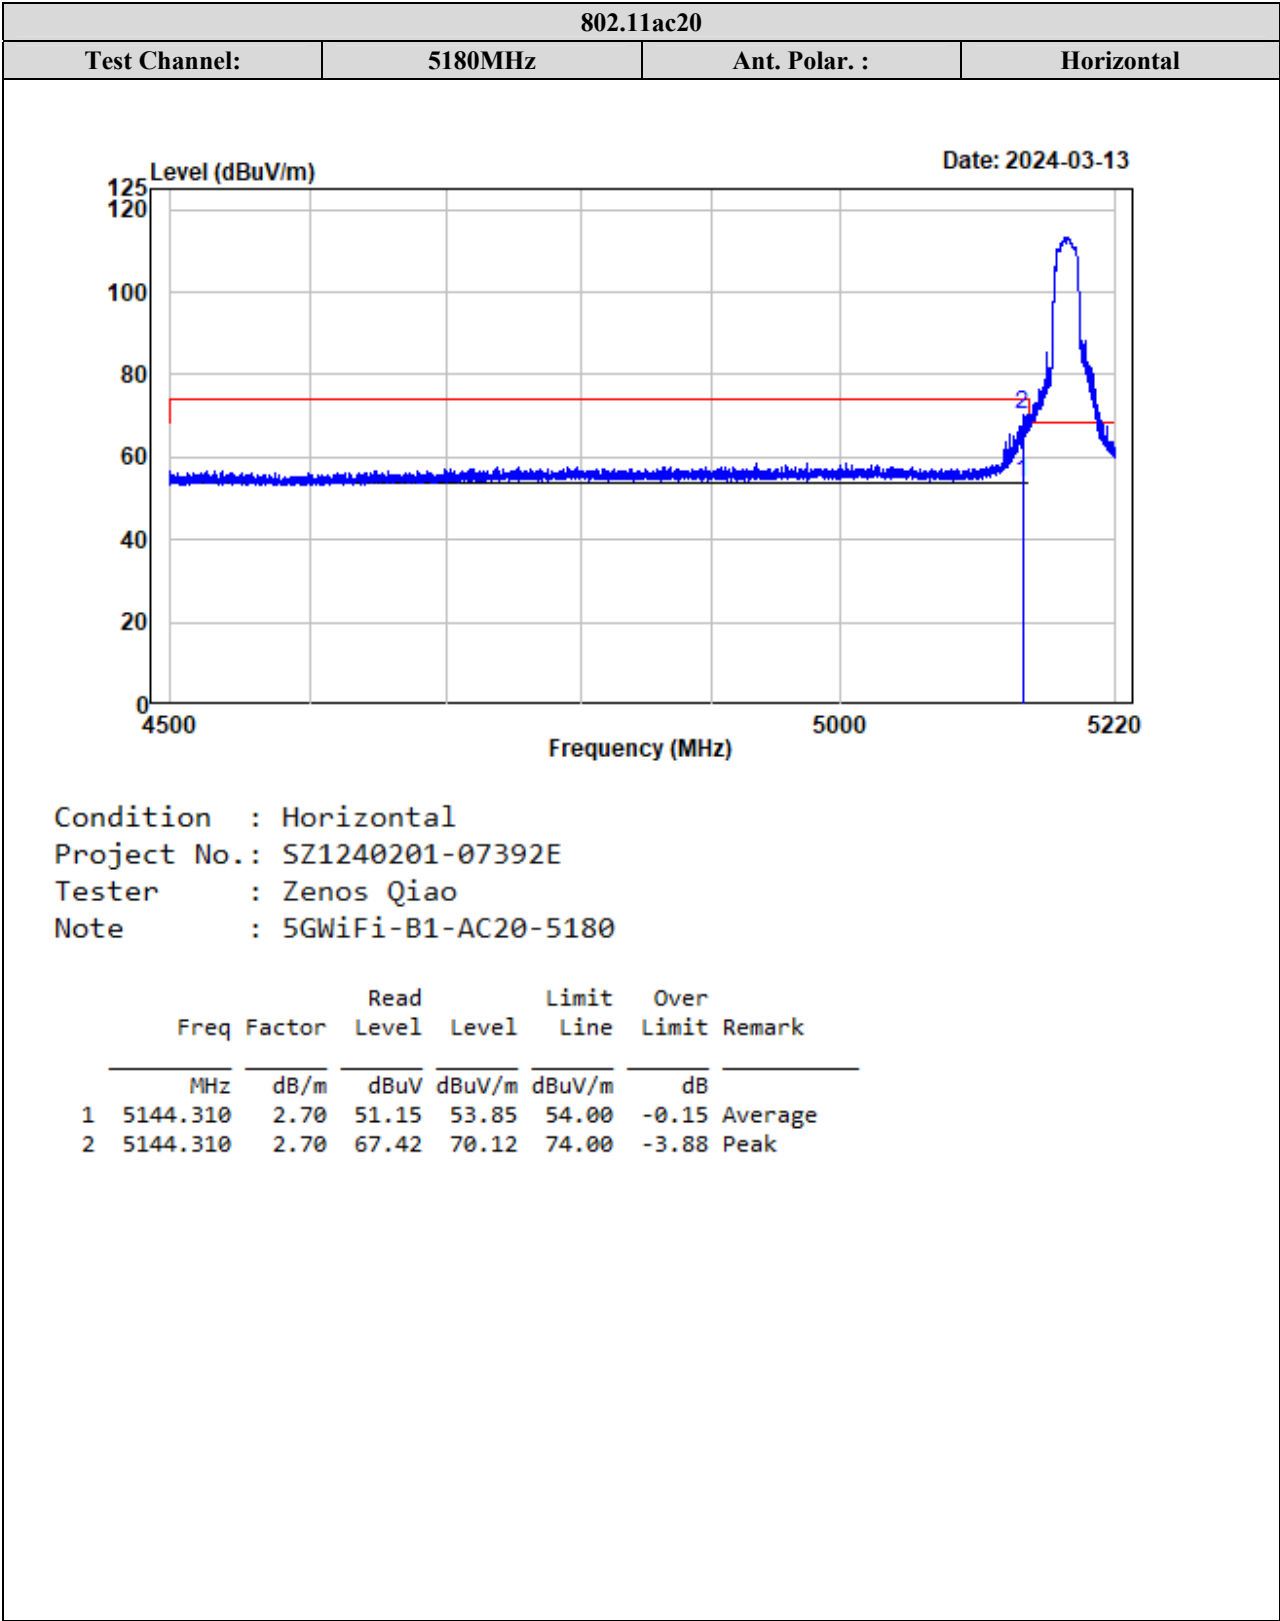


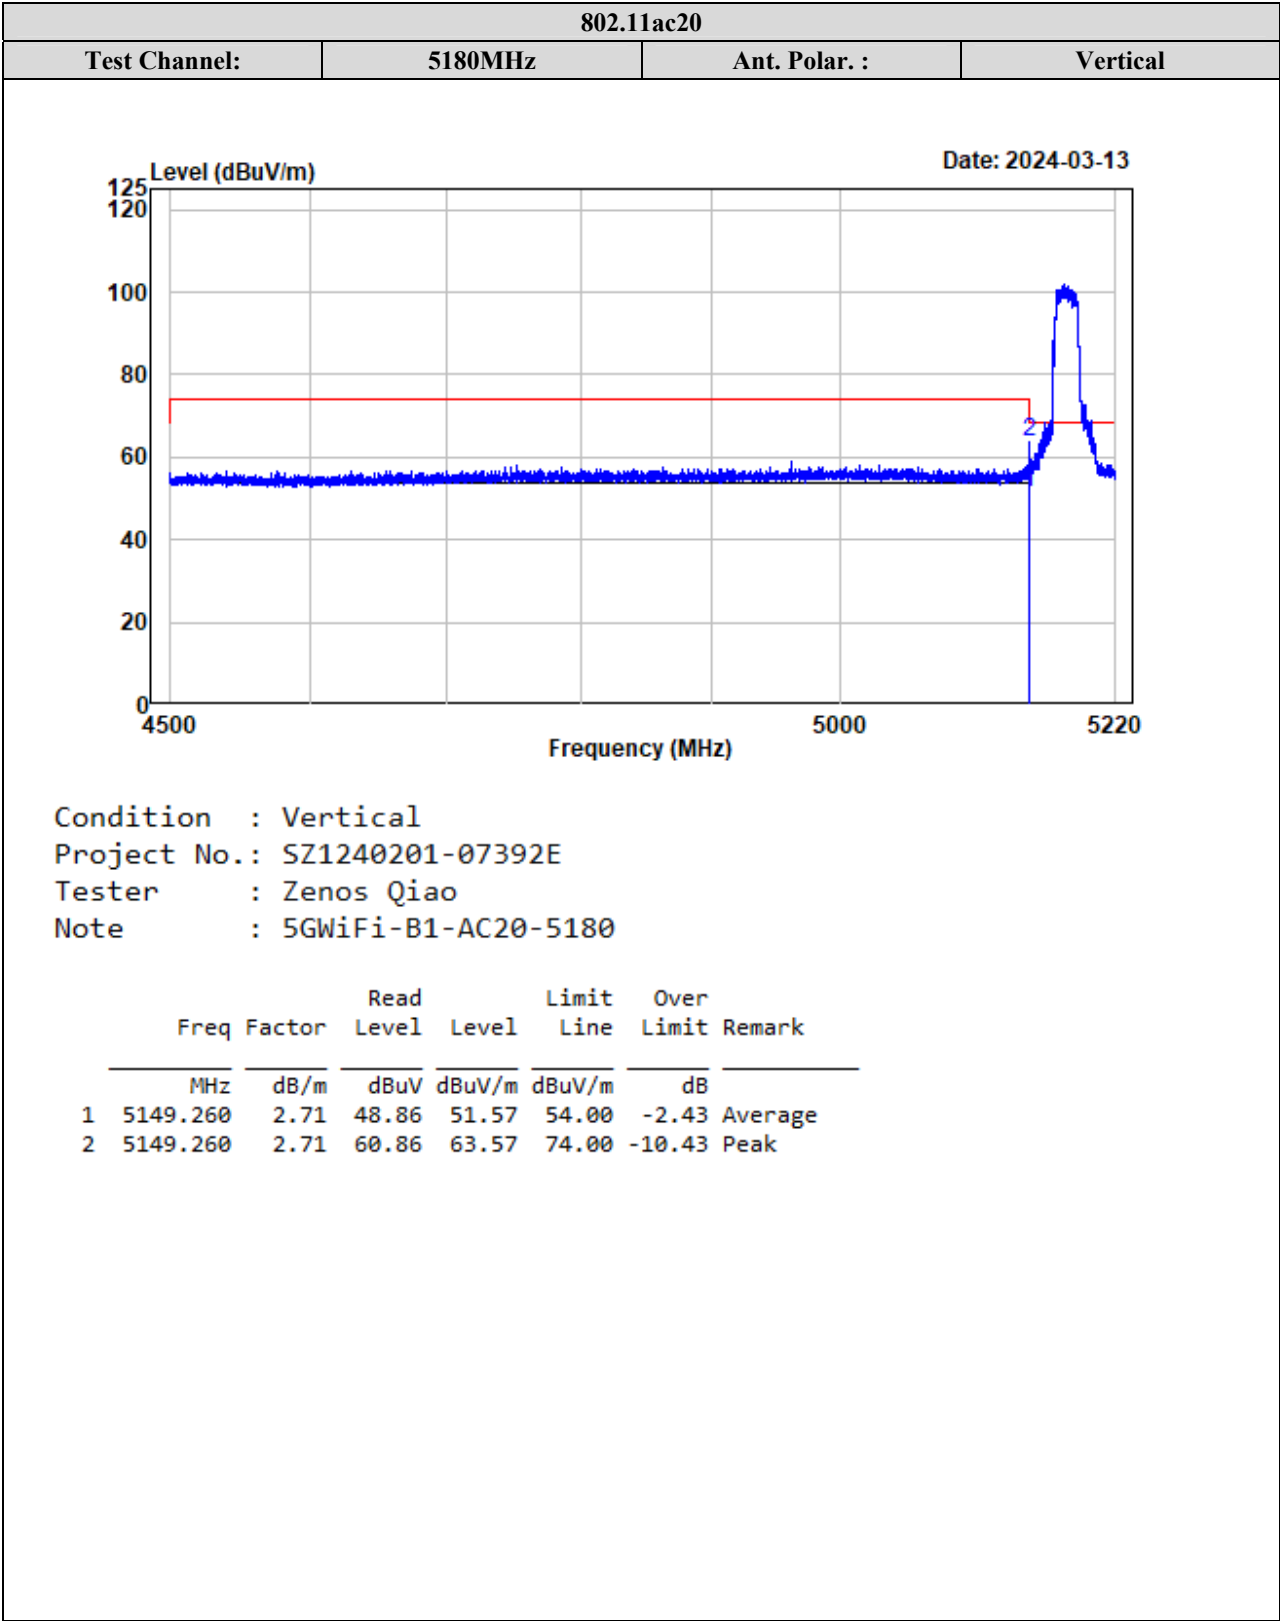


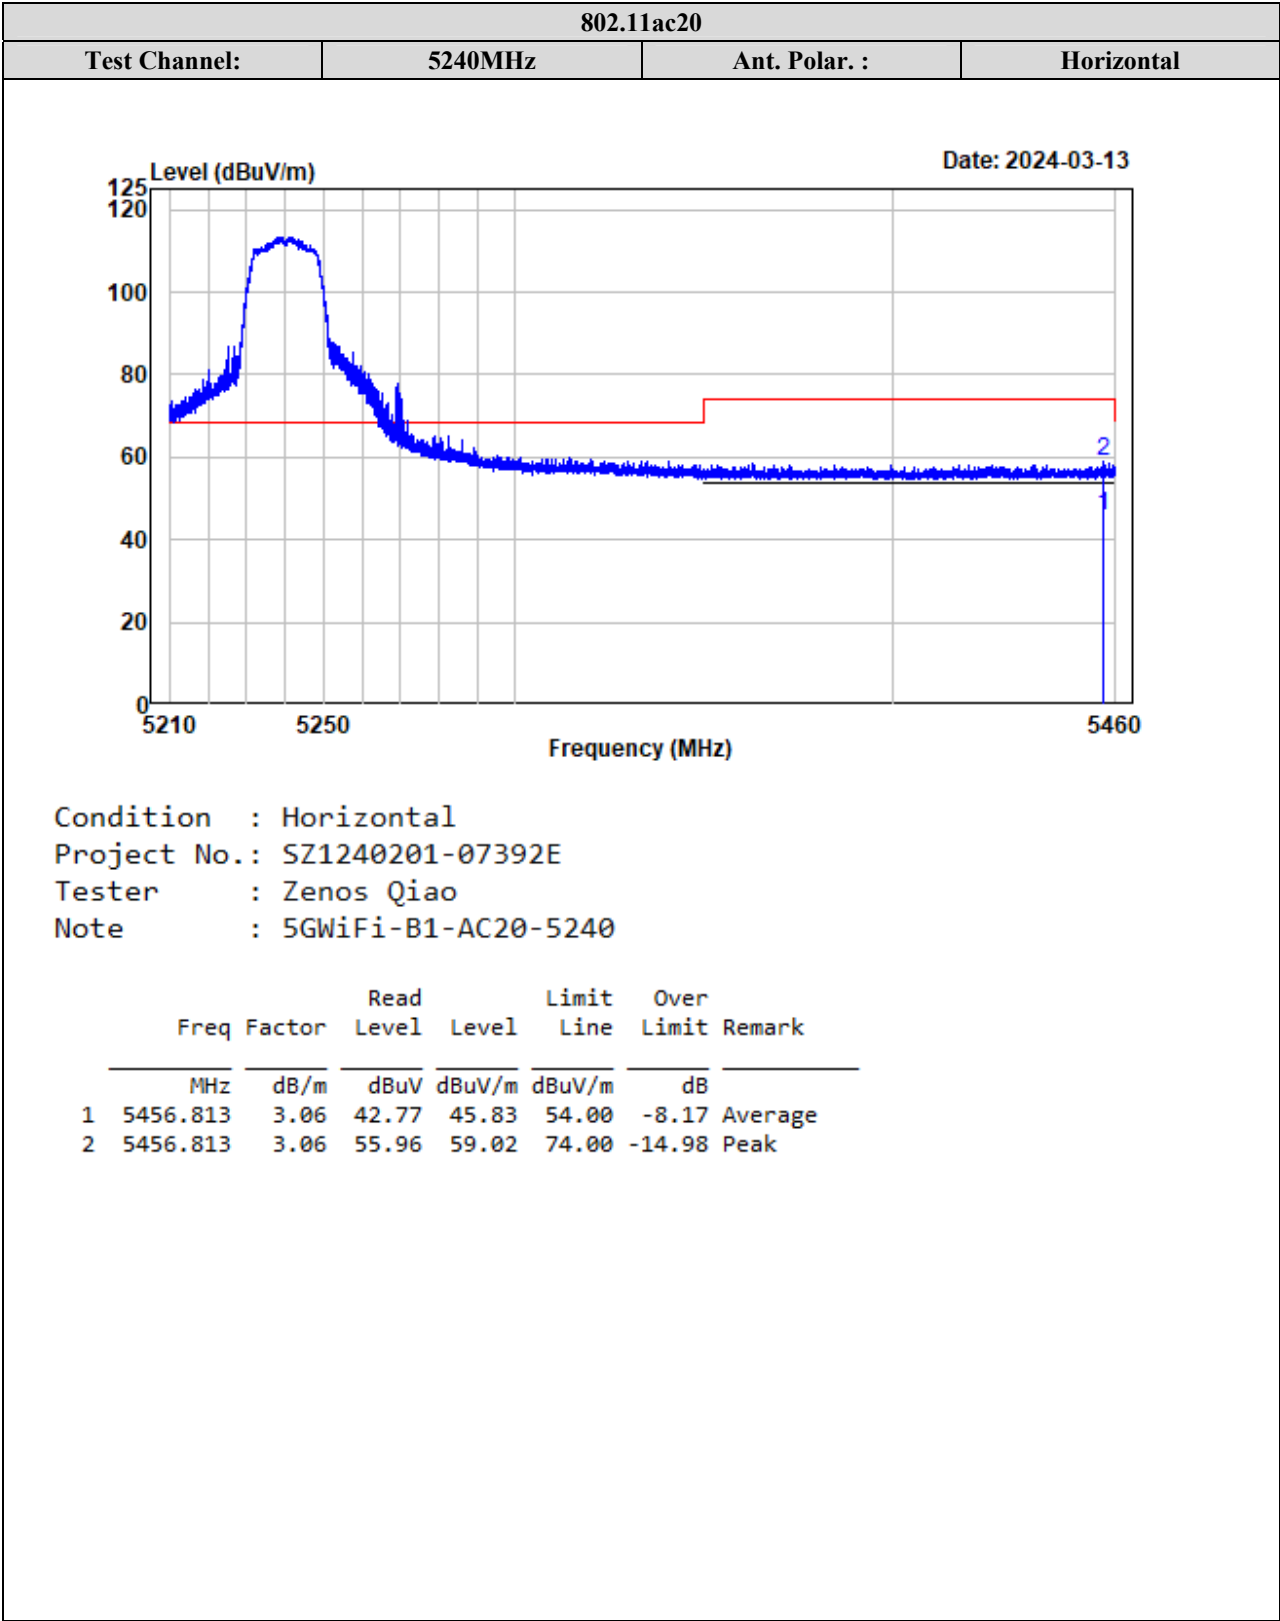


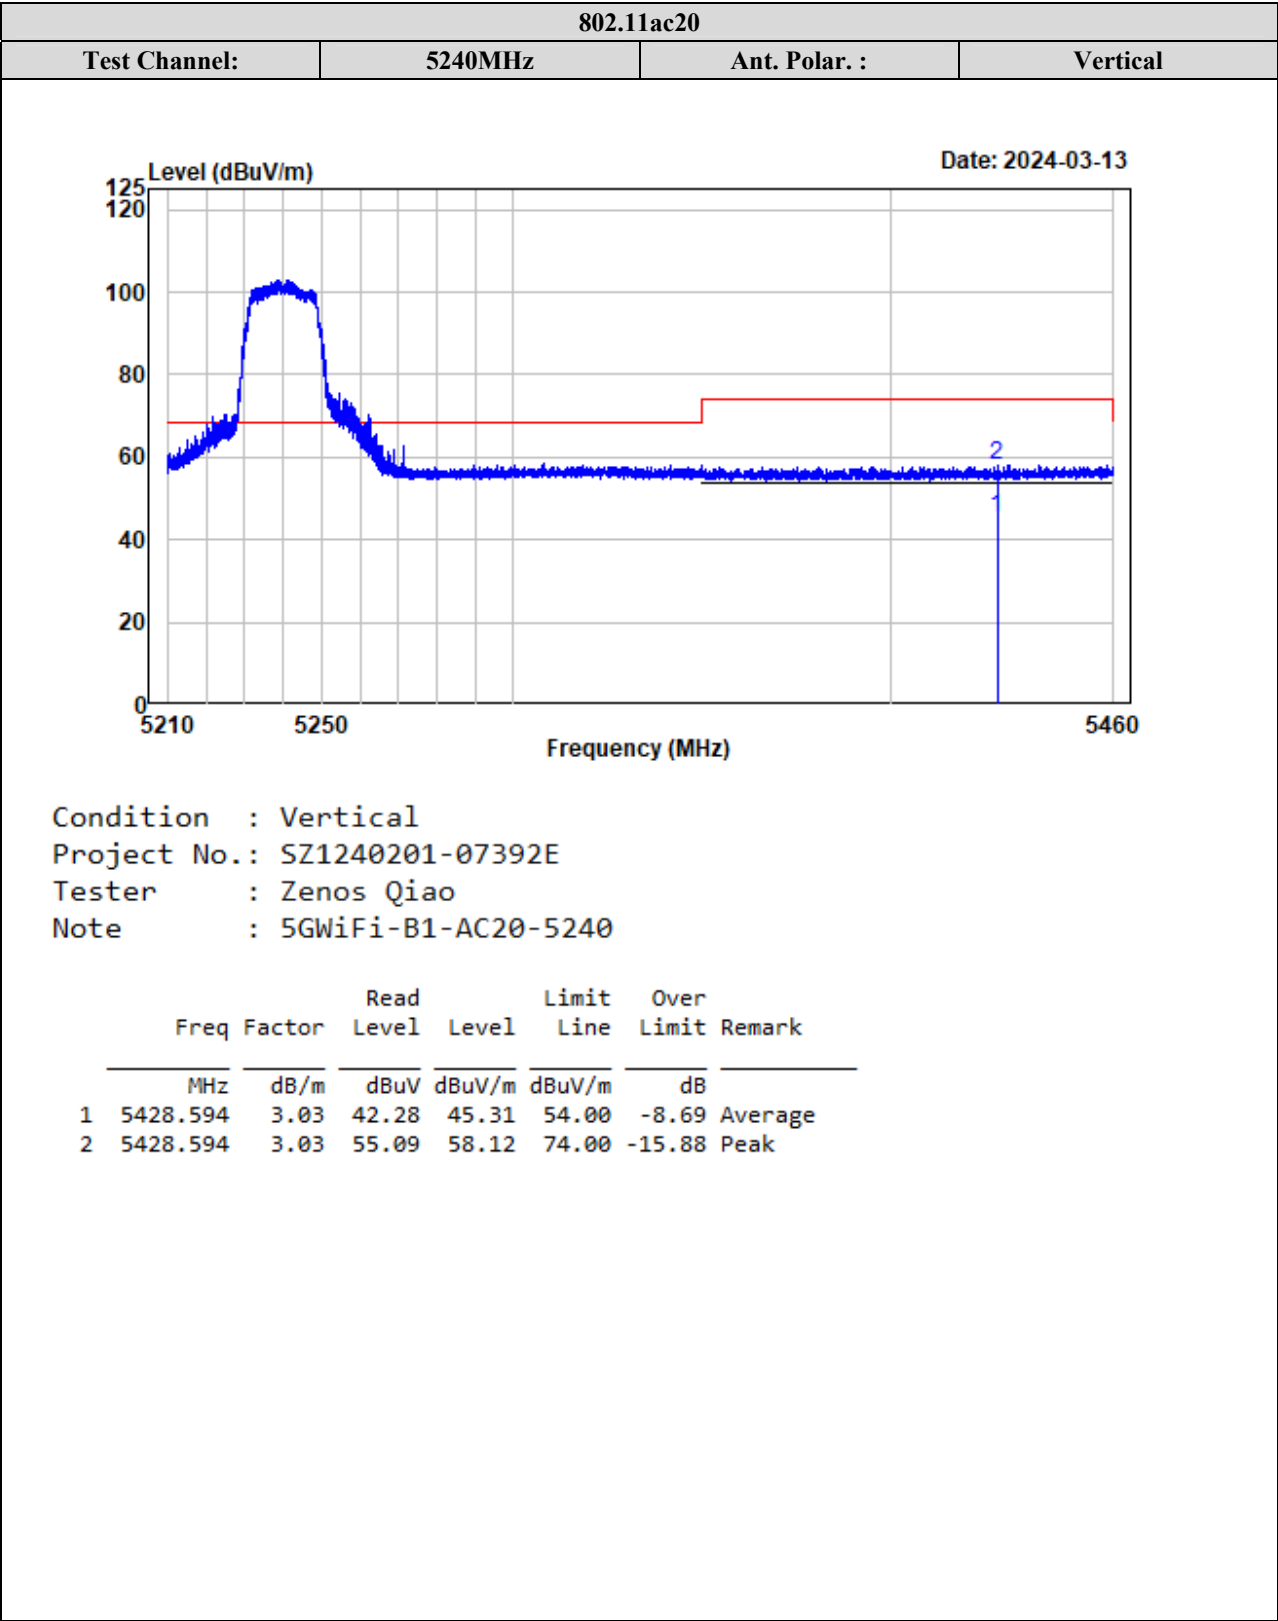


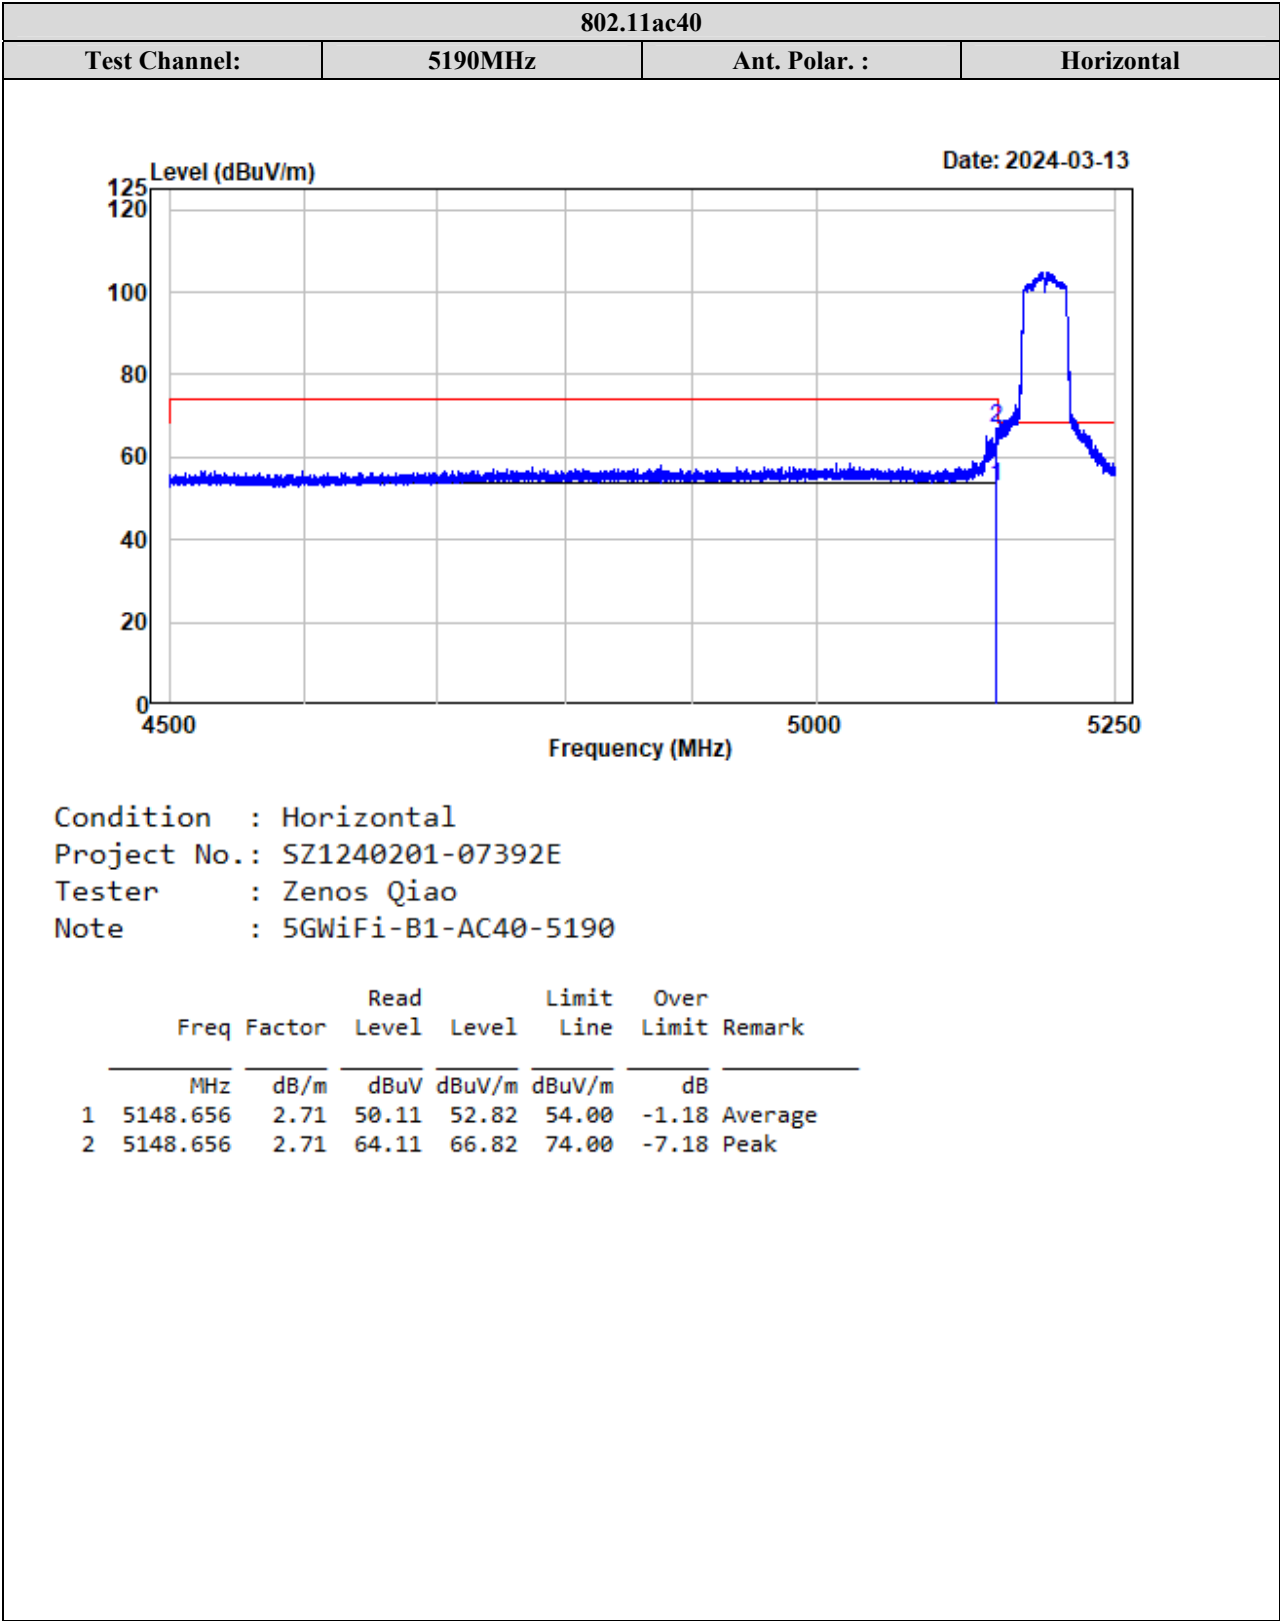


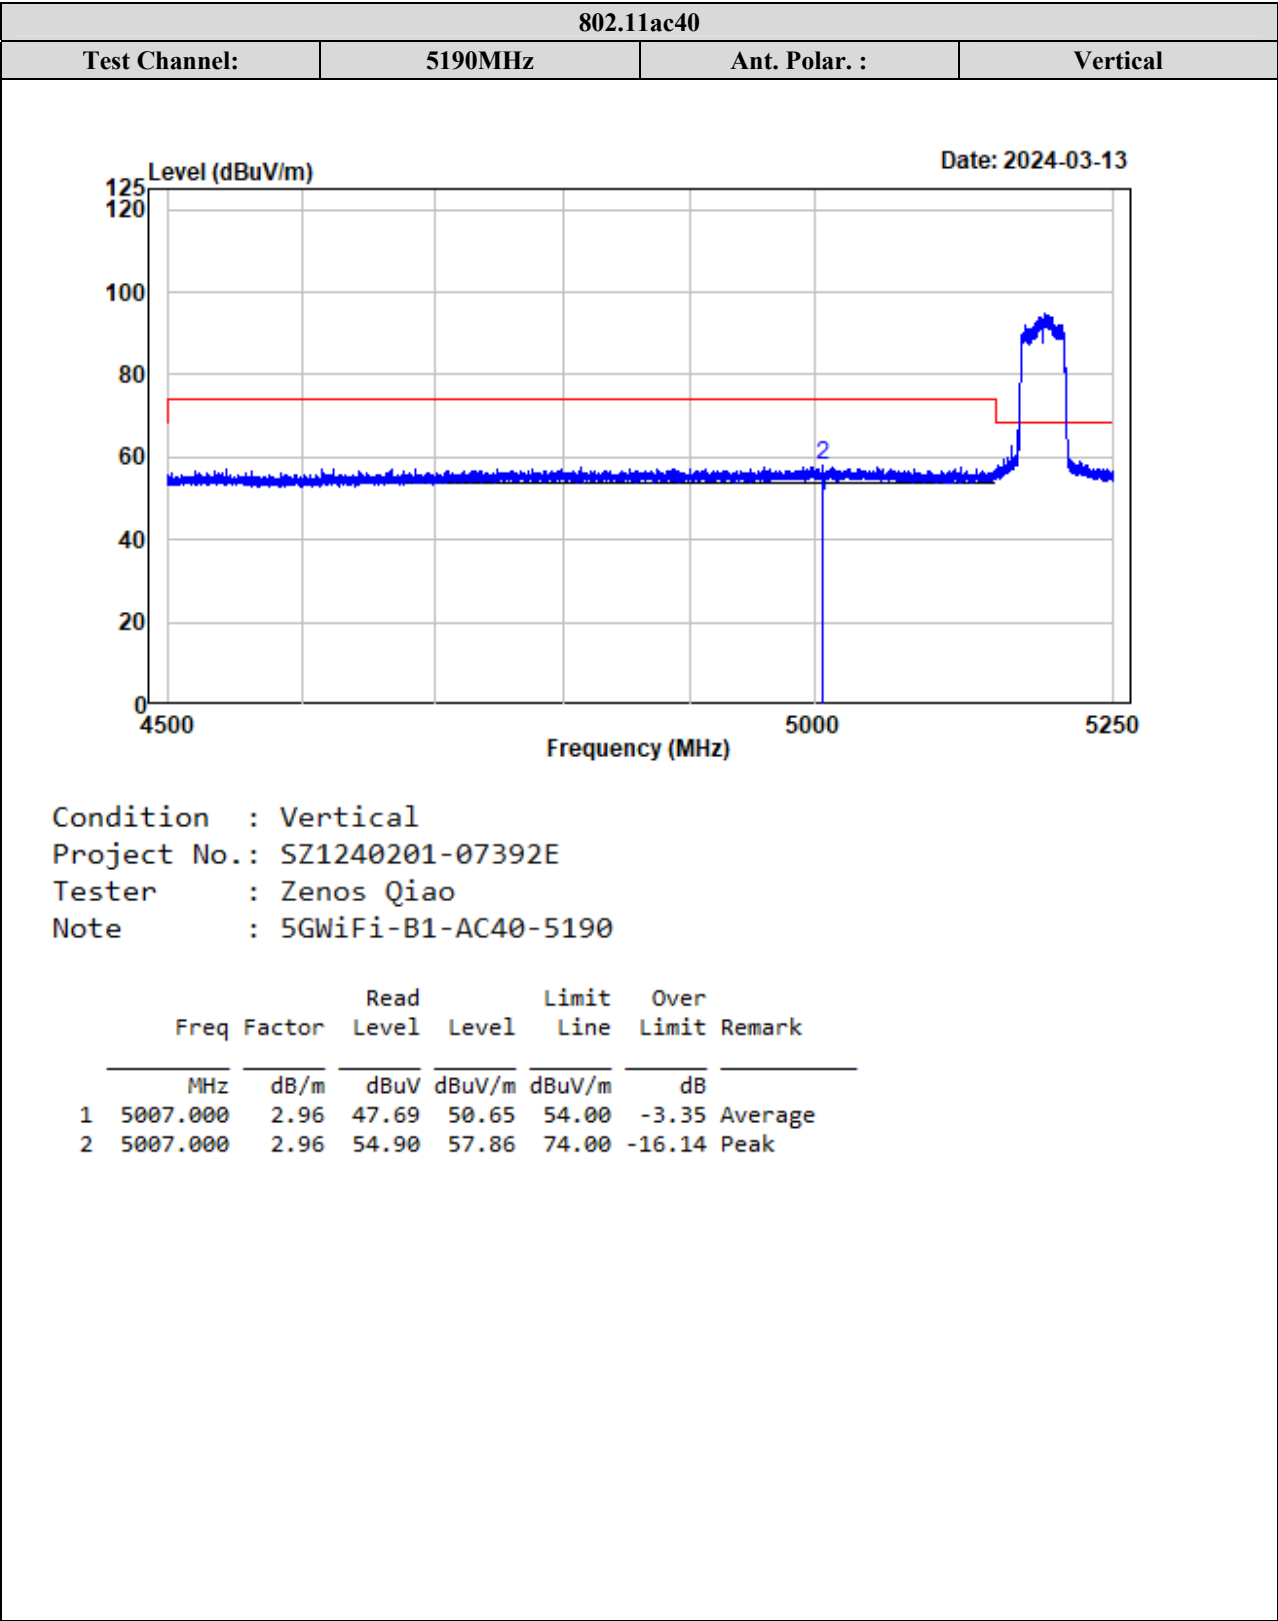


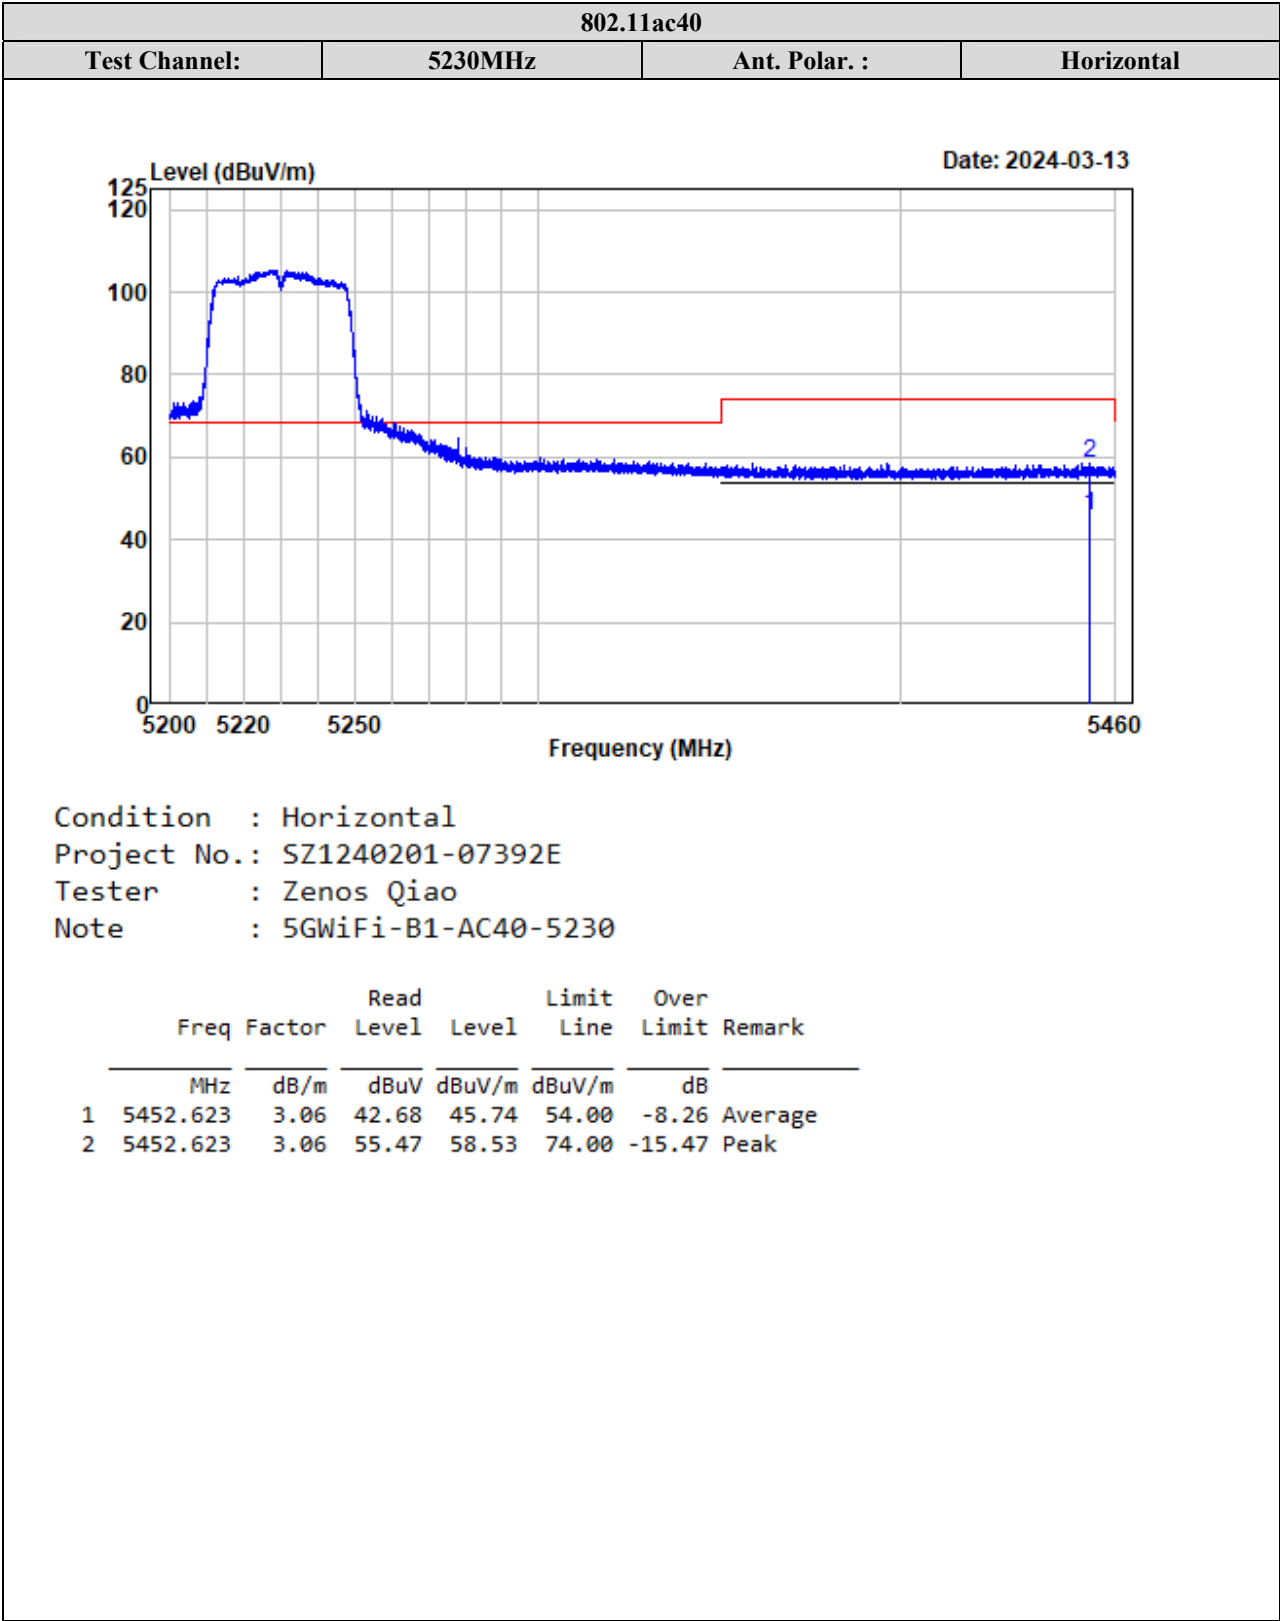


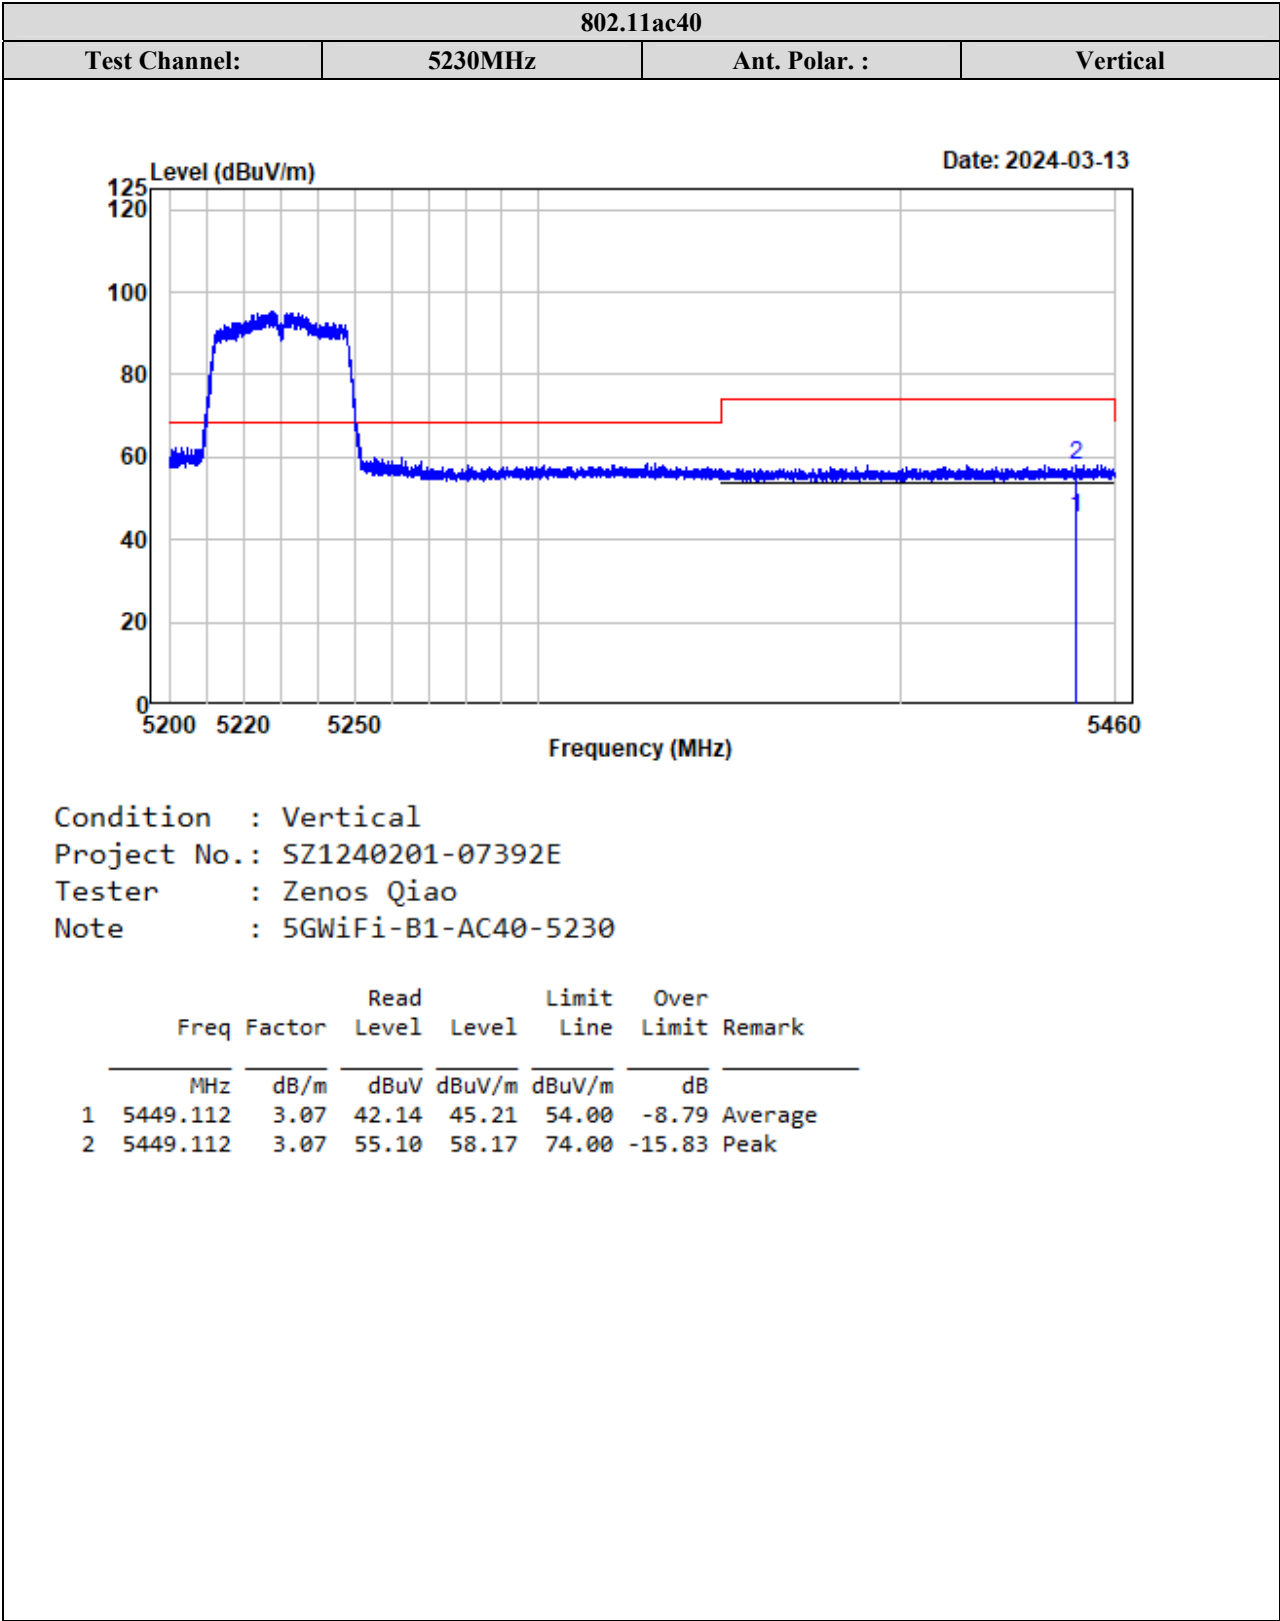

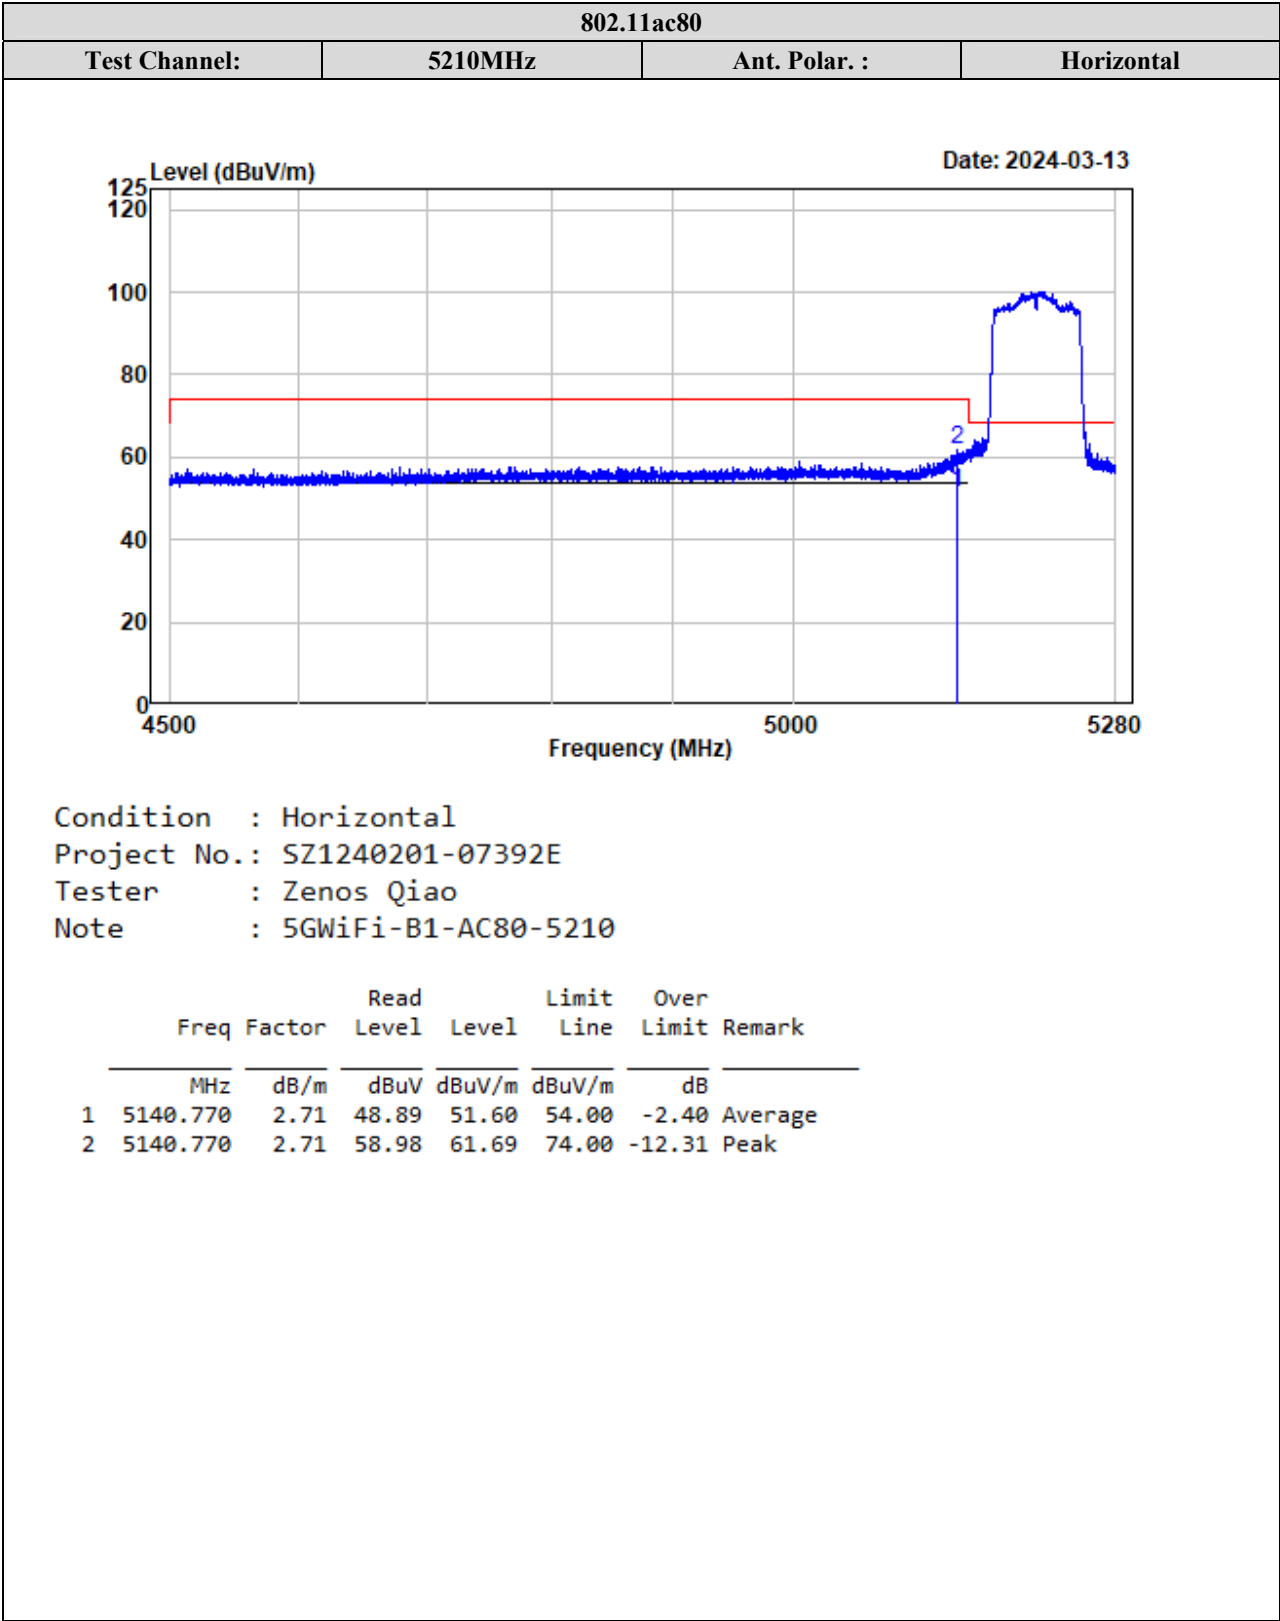


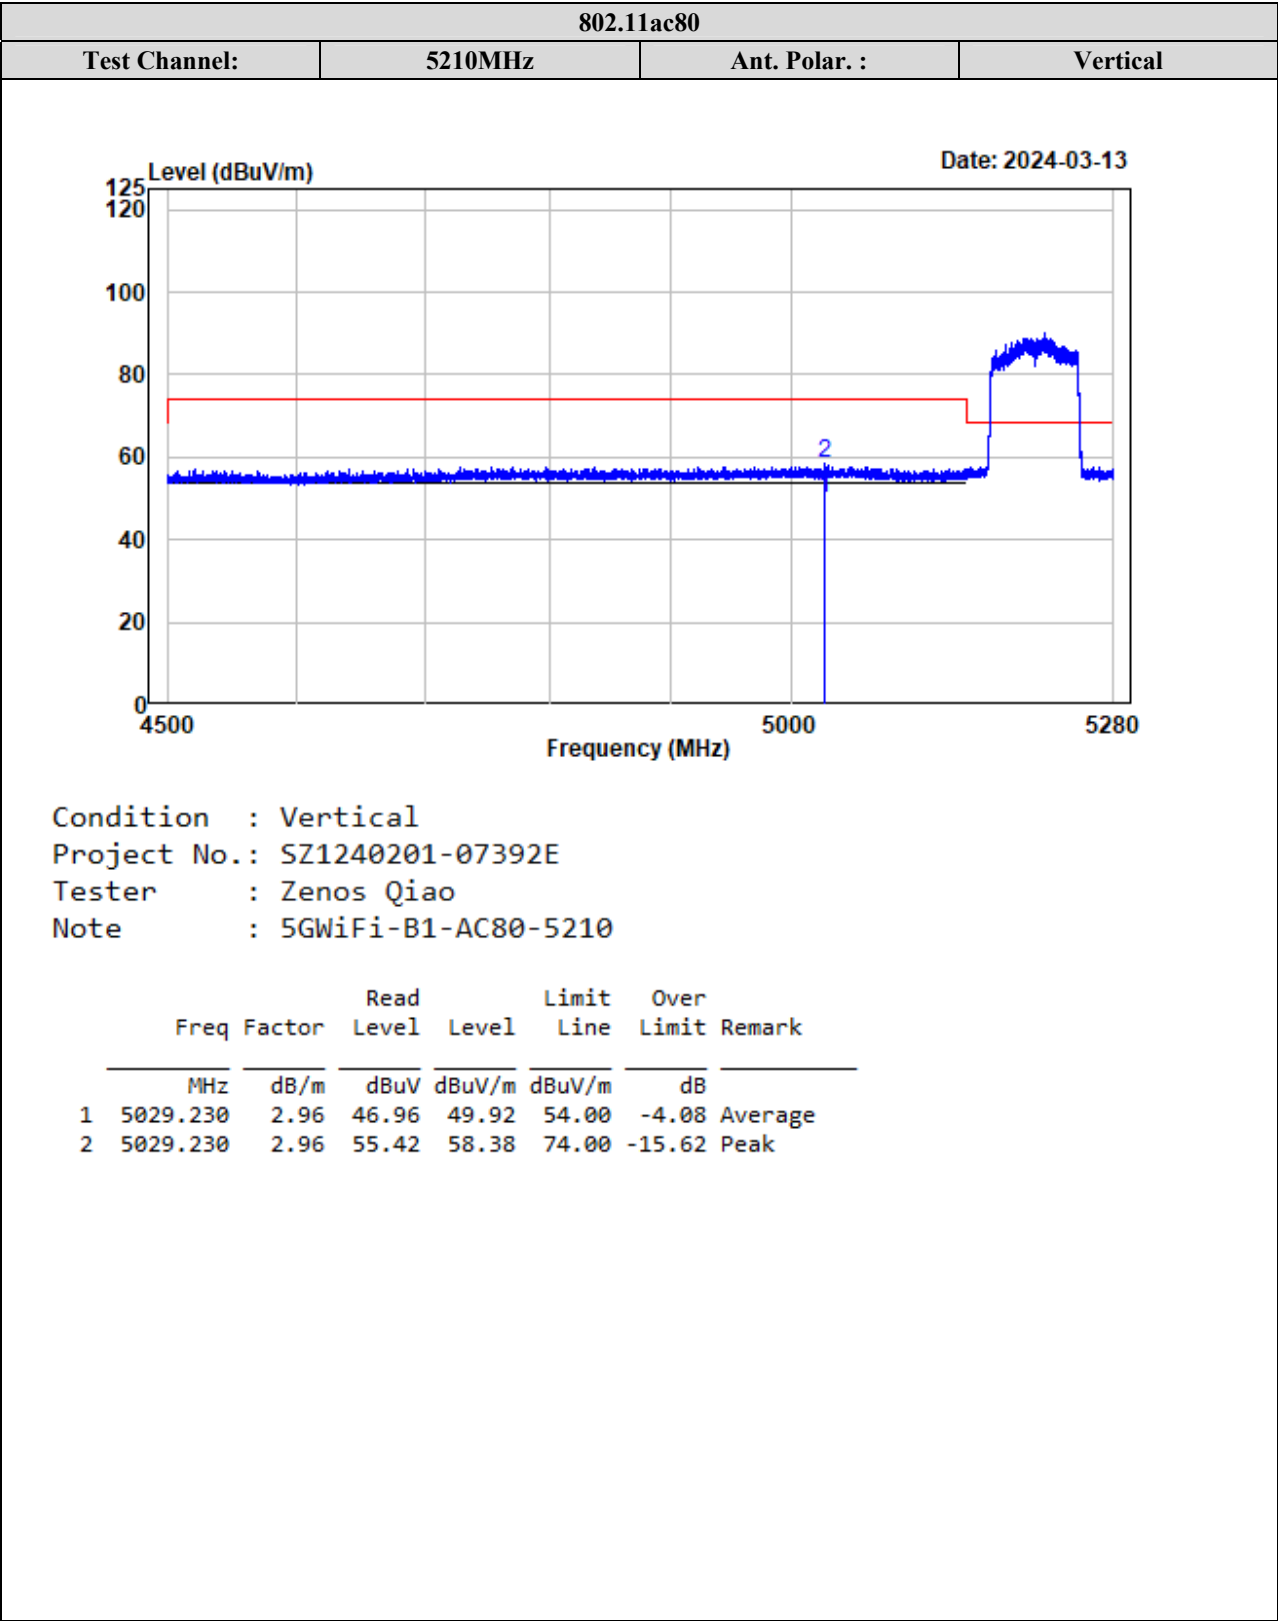


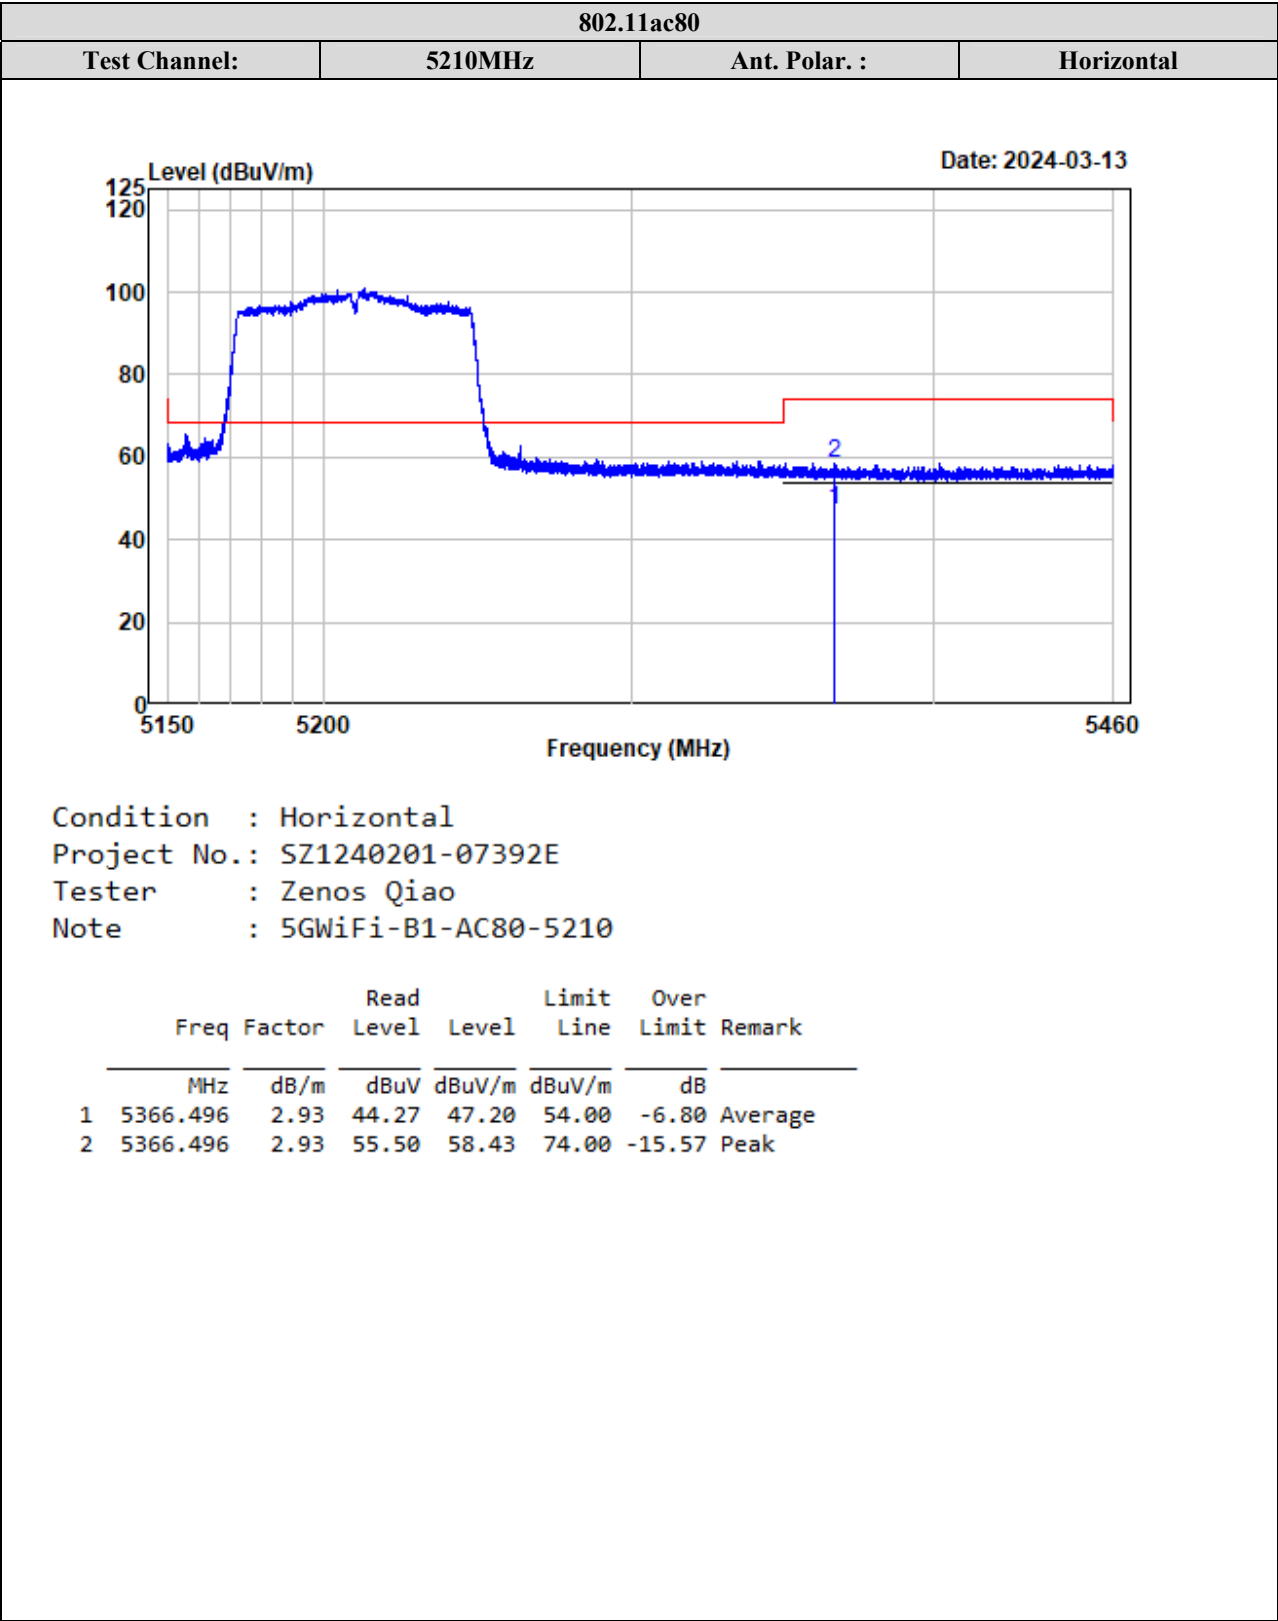


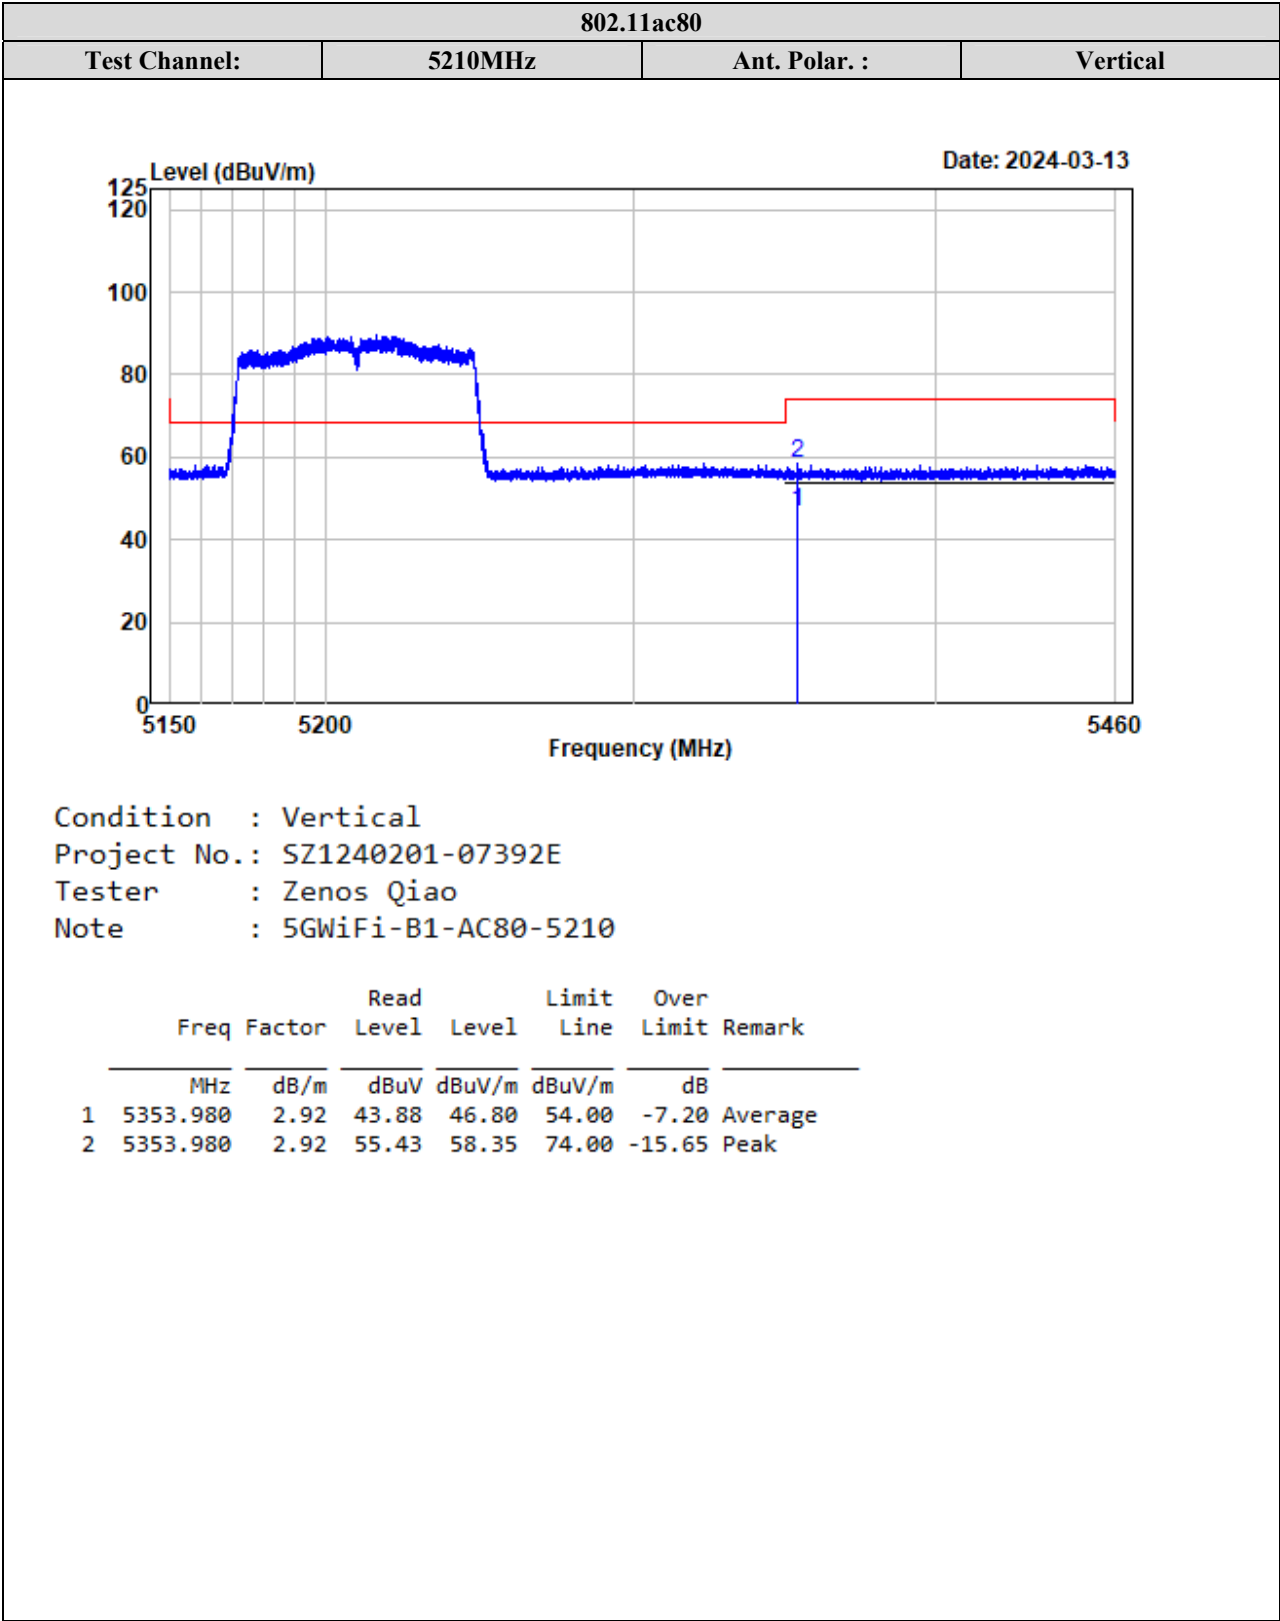



5250-5350MHz:

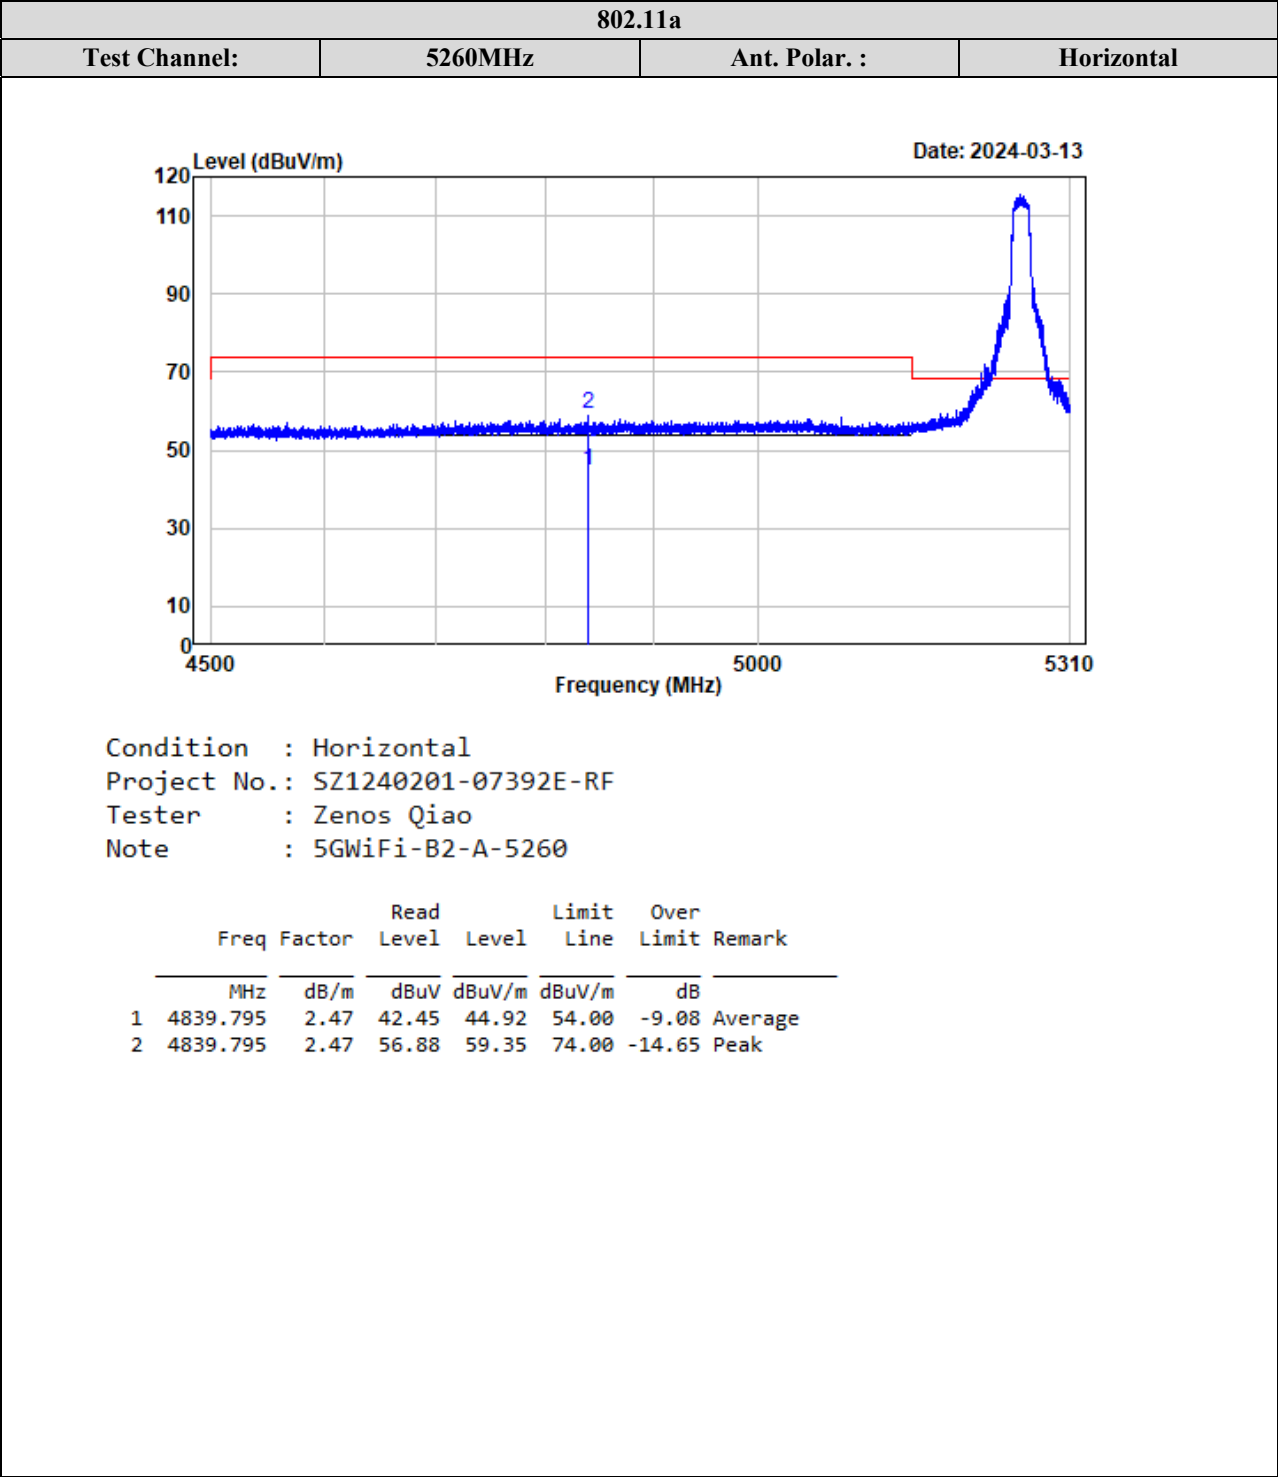


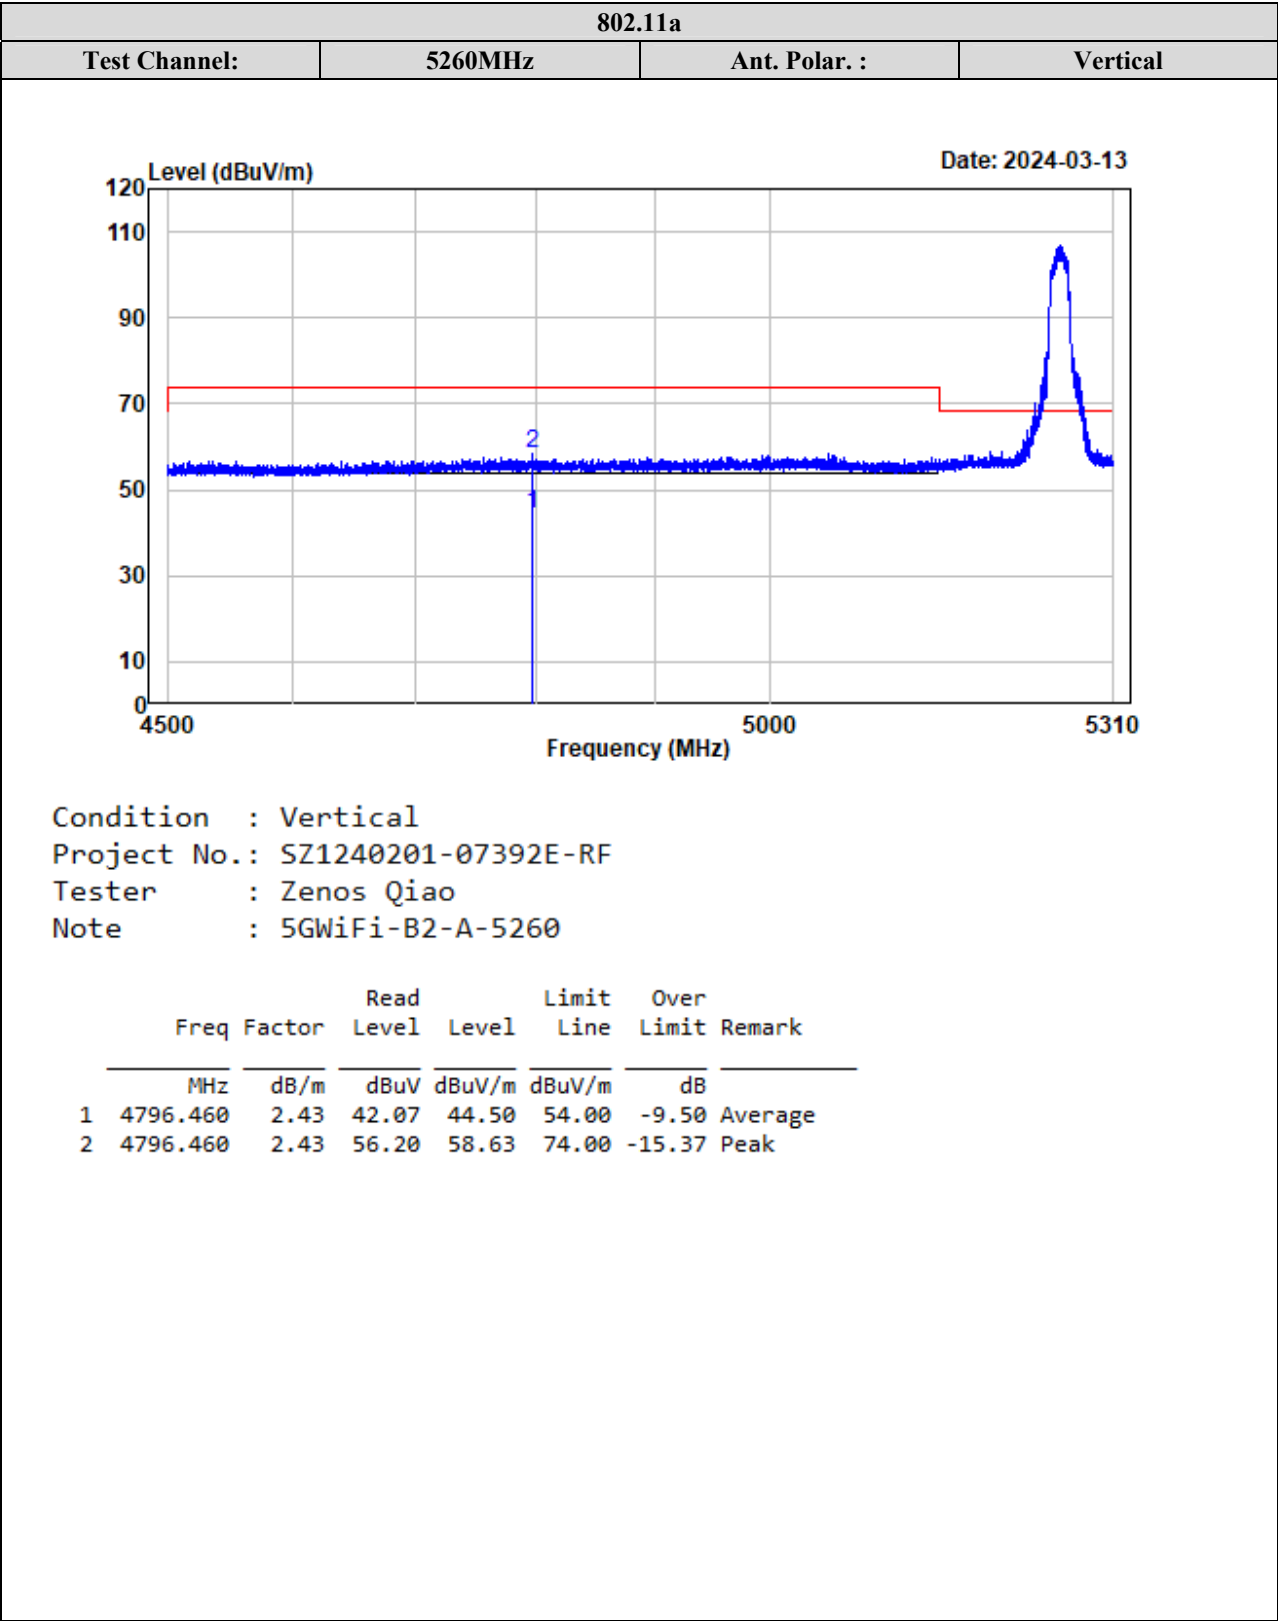


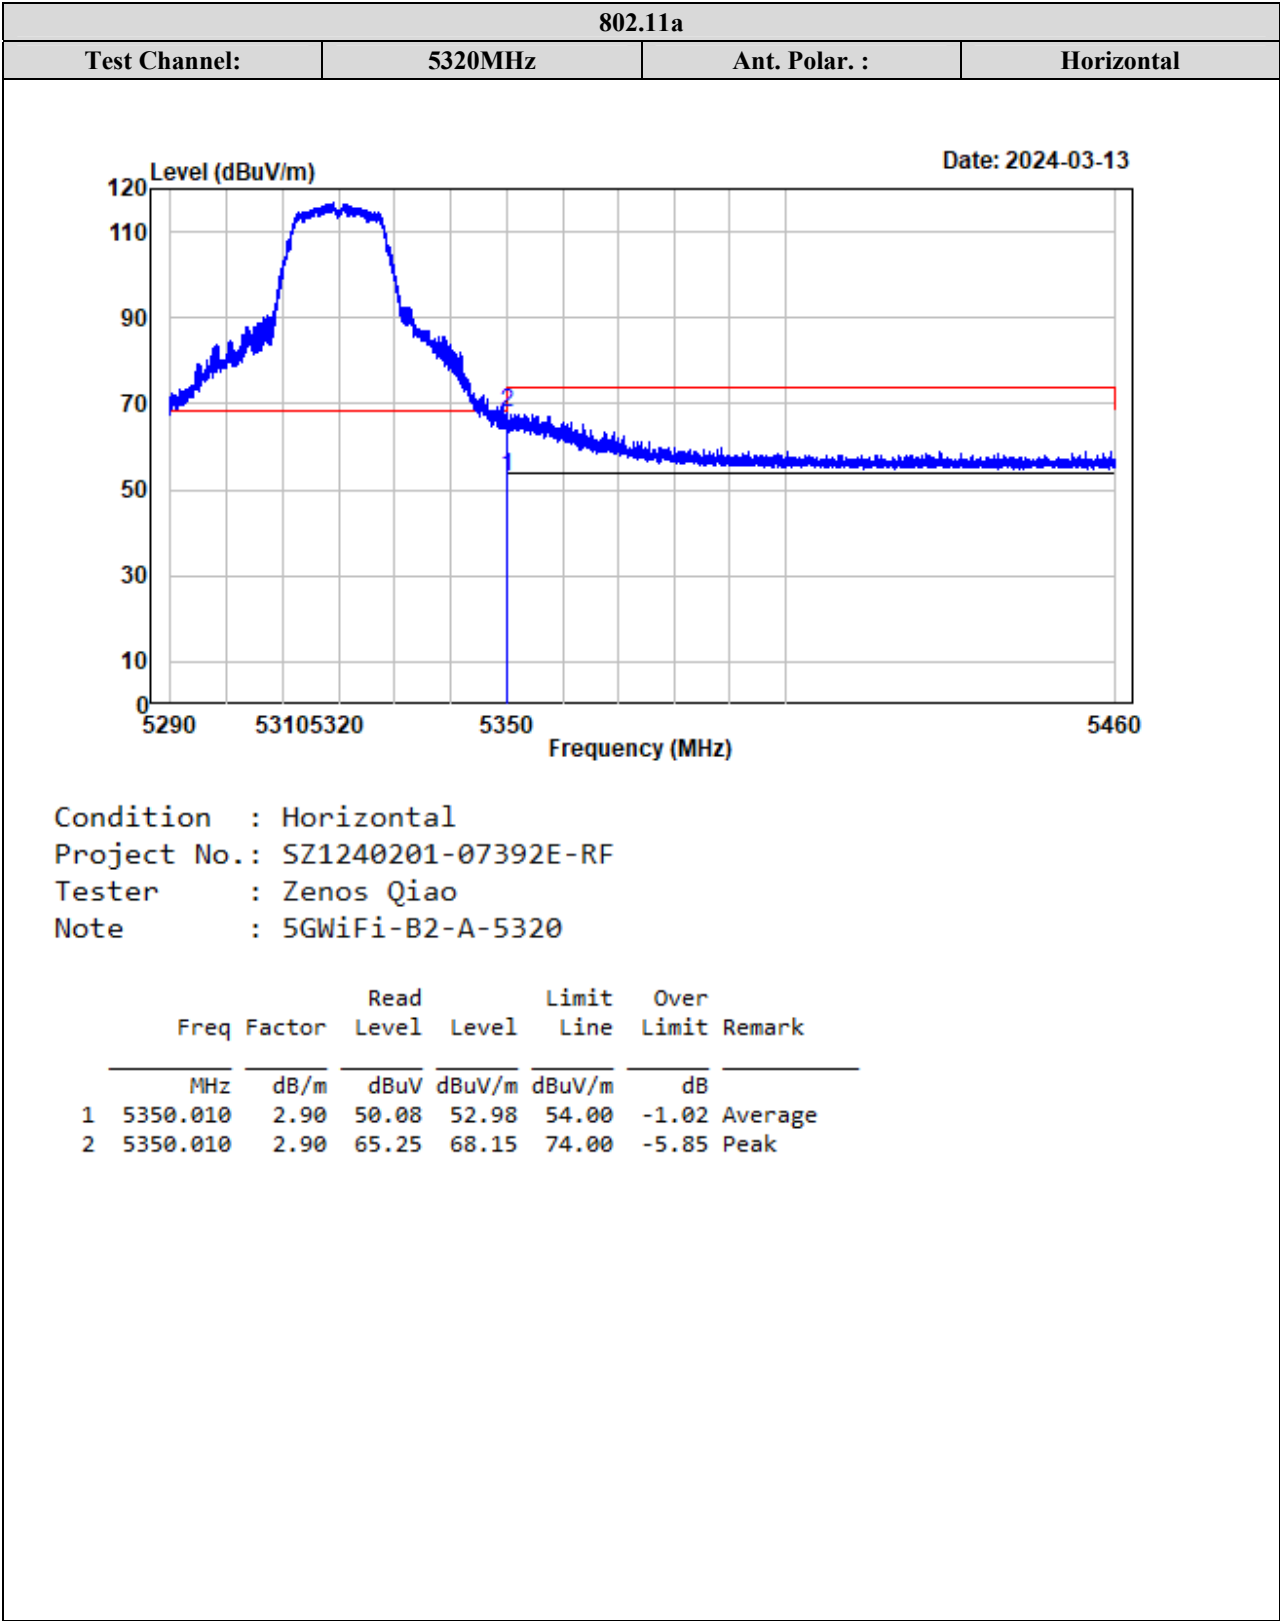


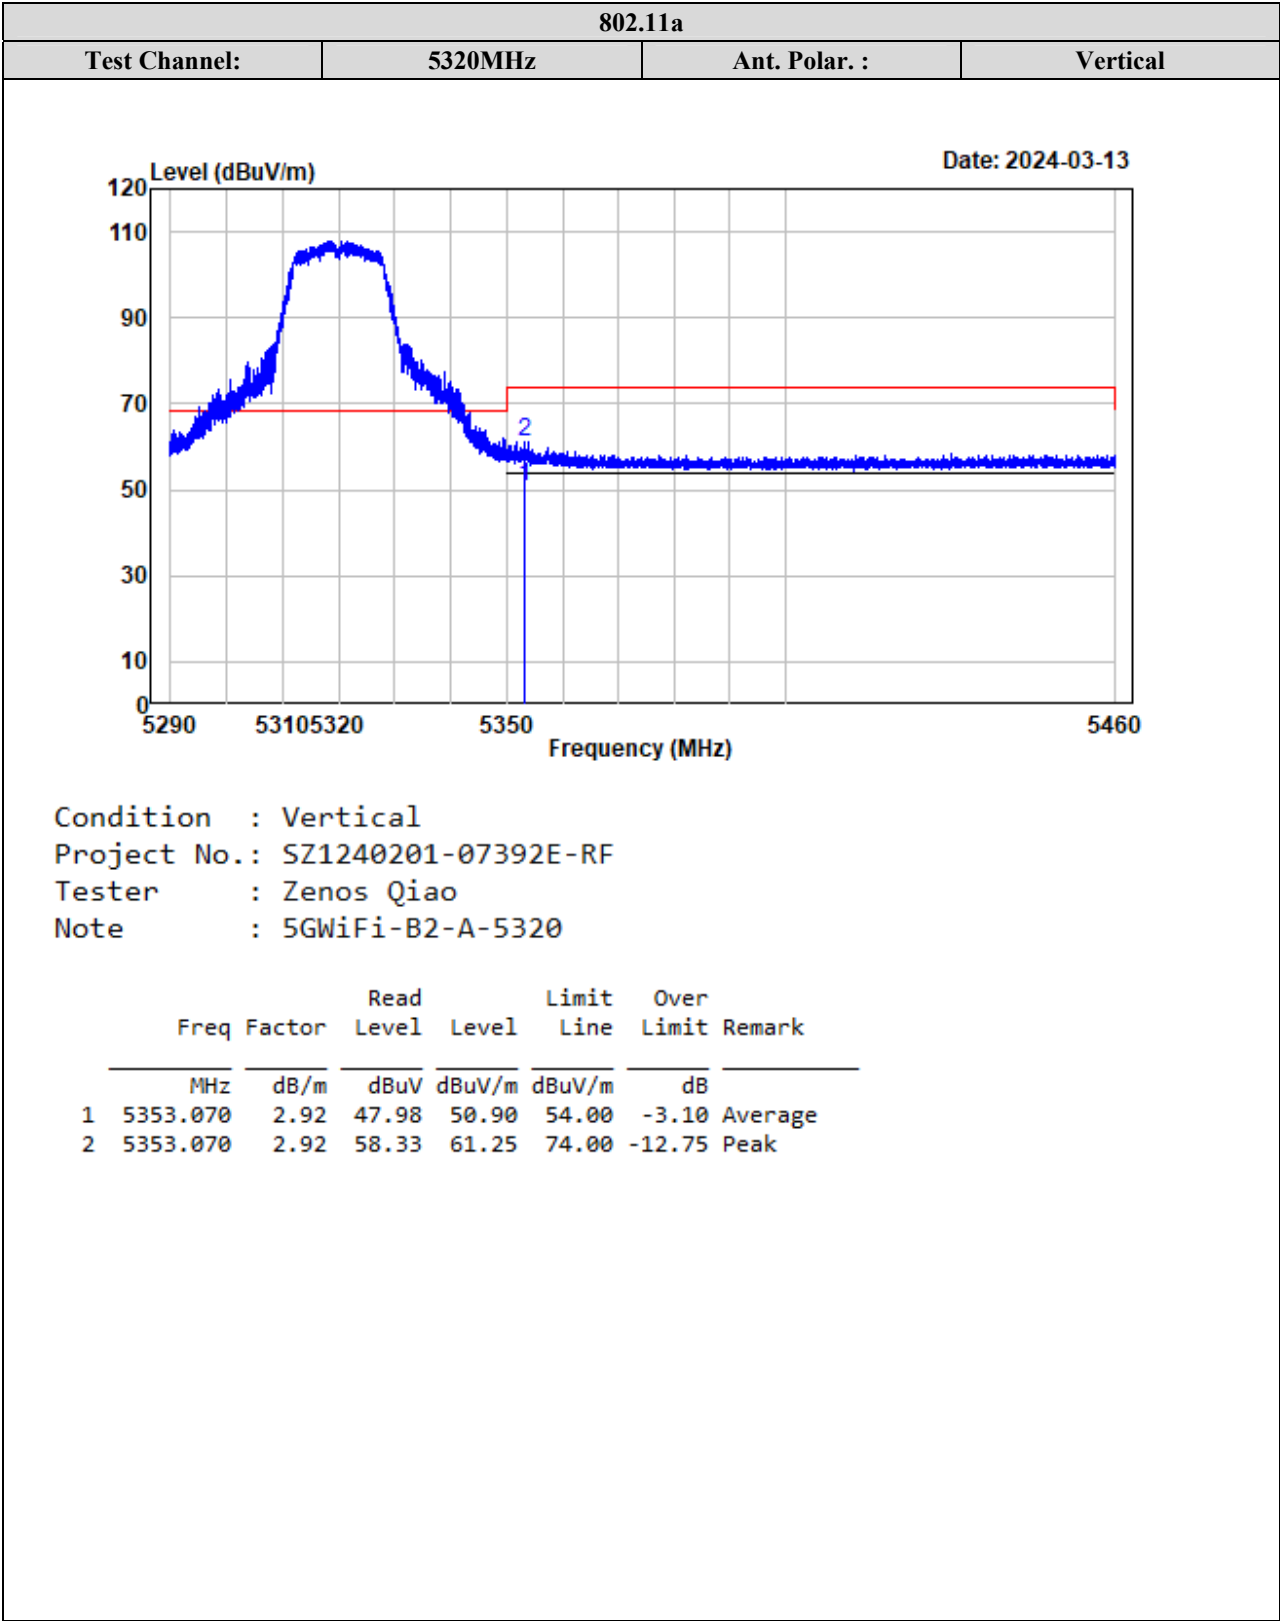

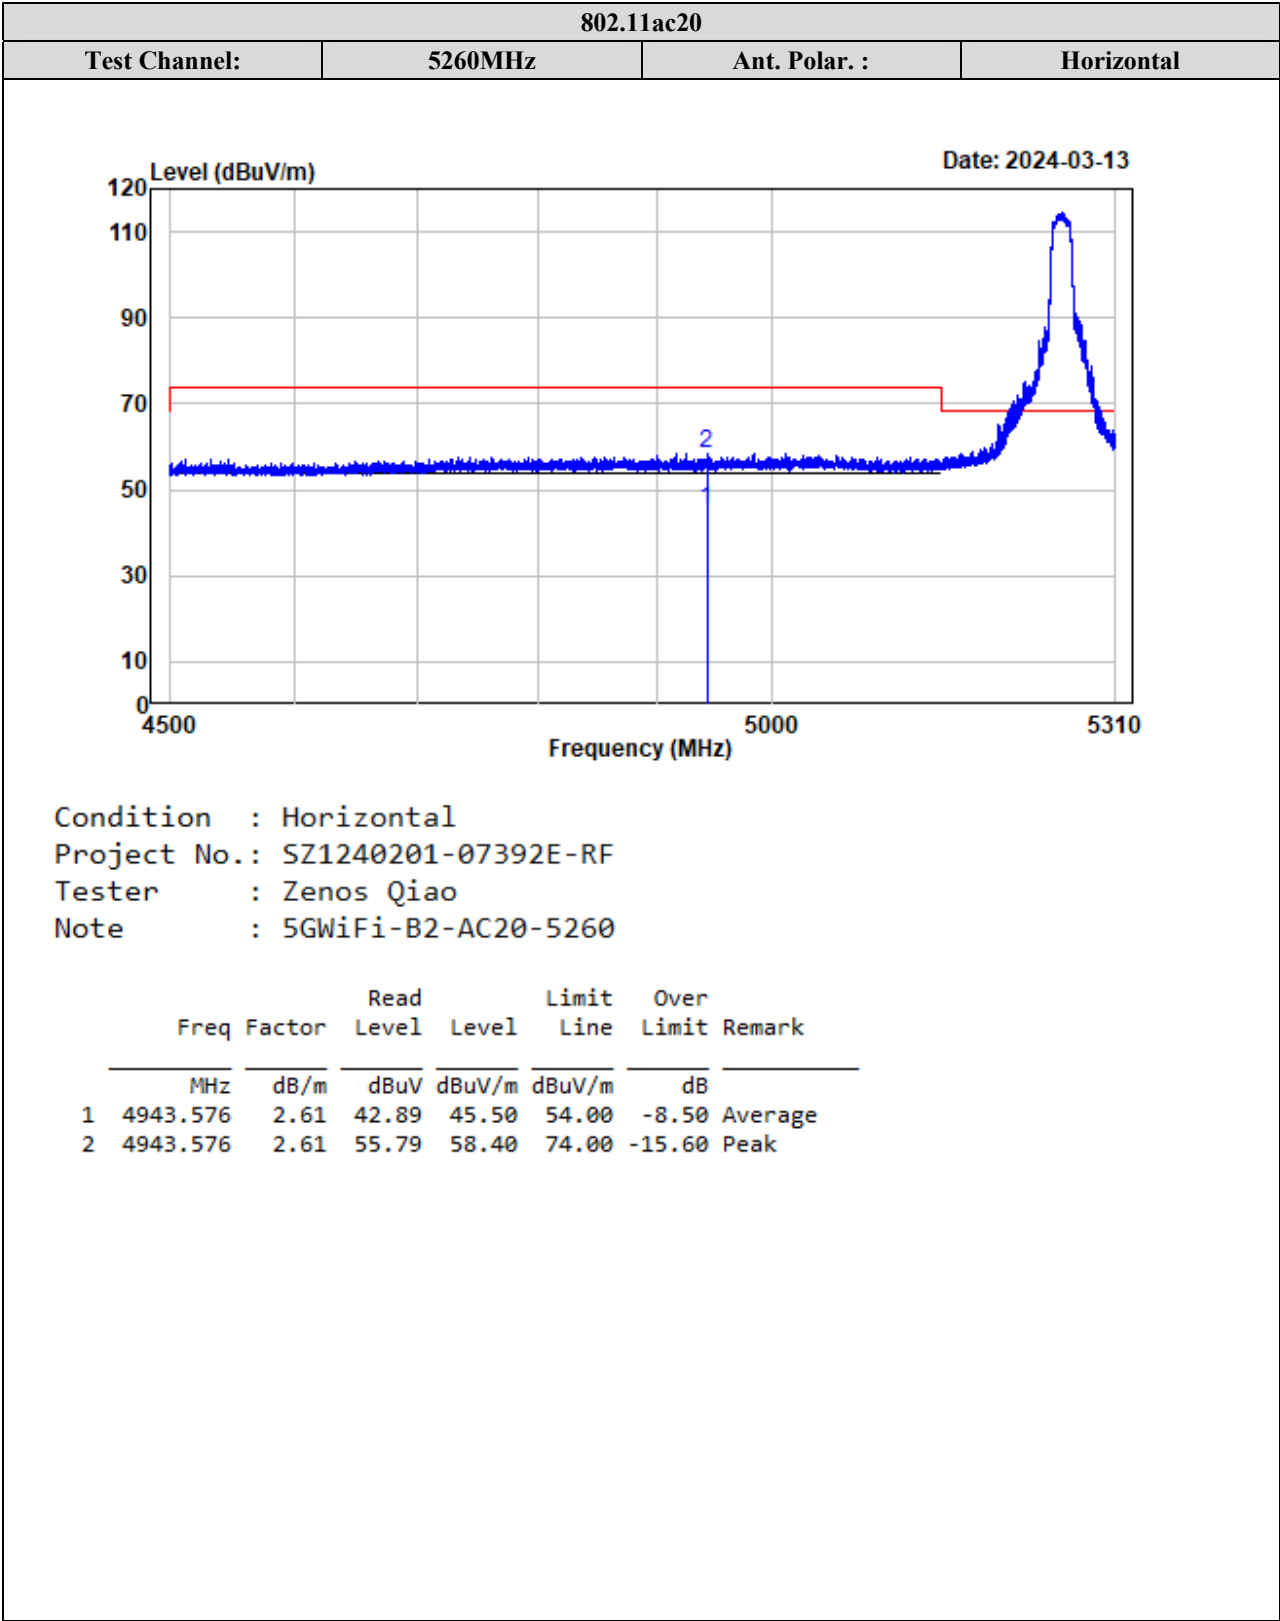

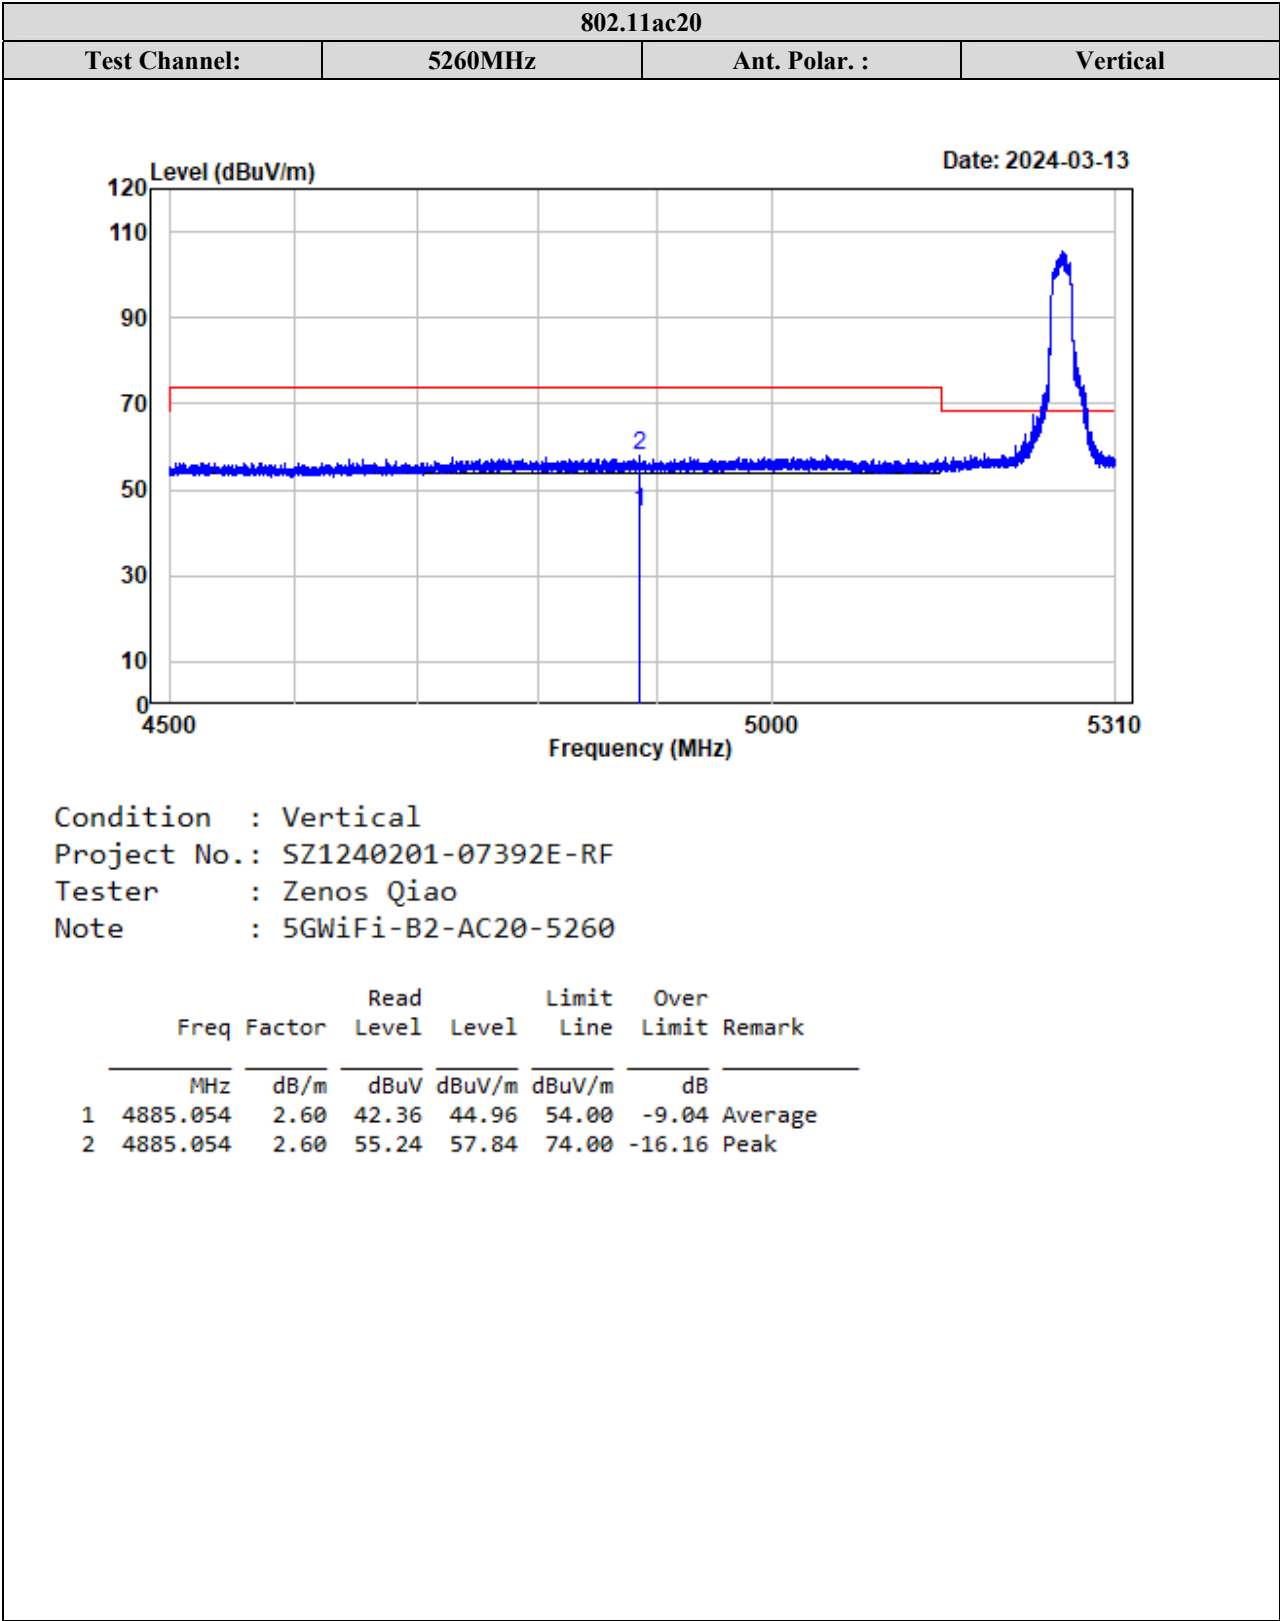

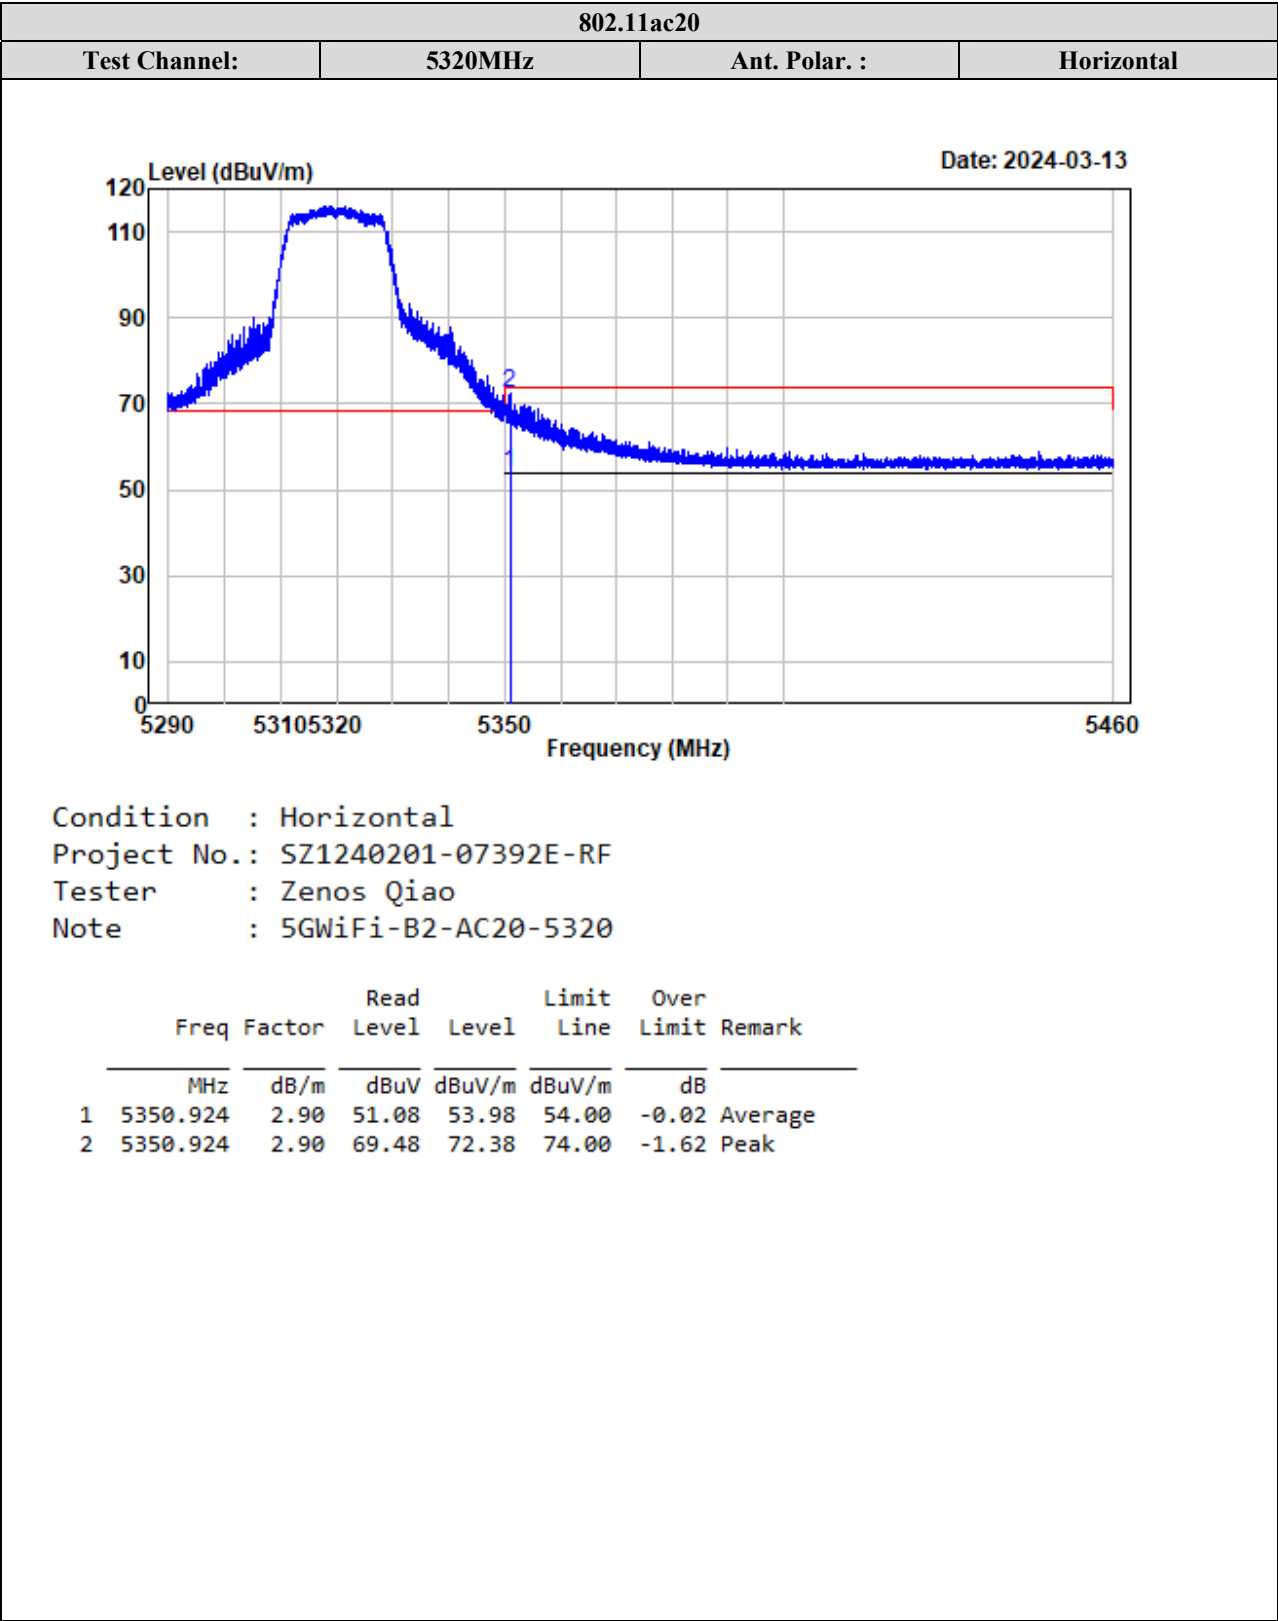


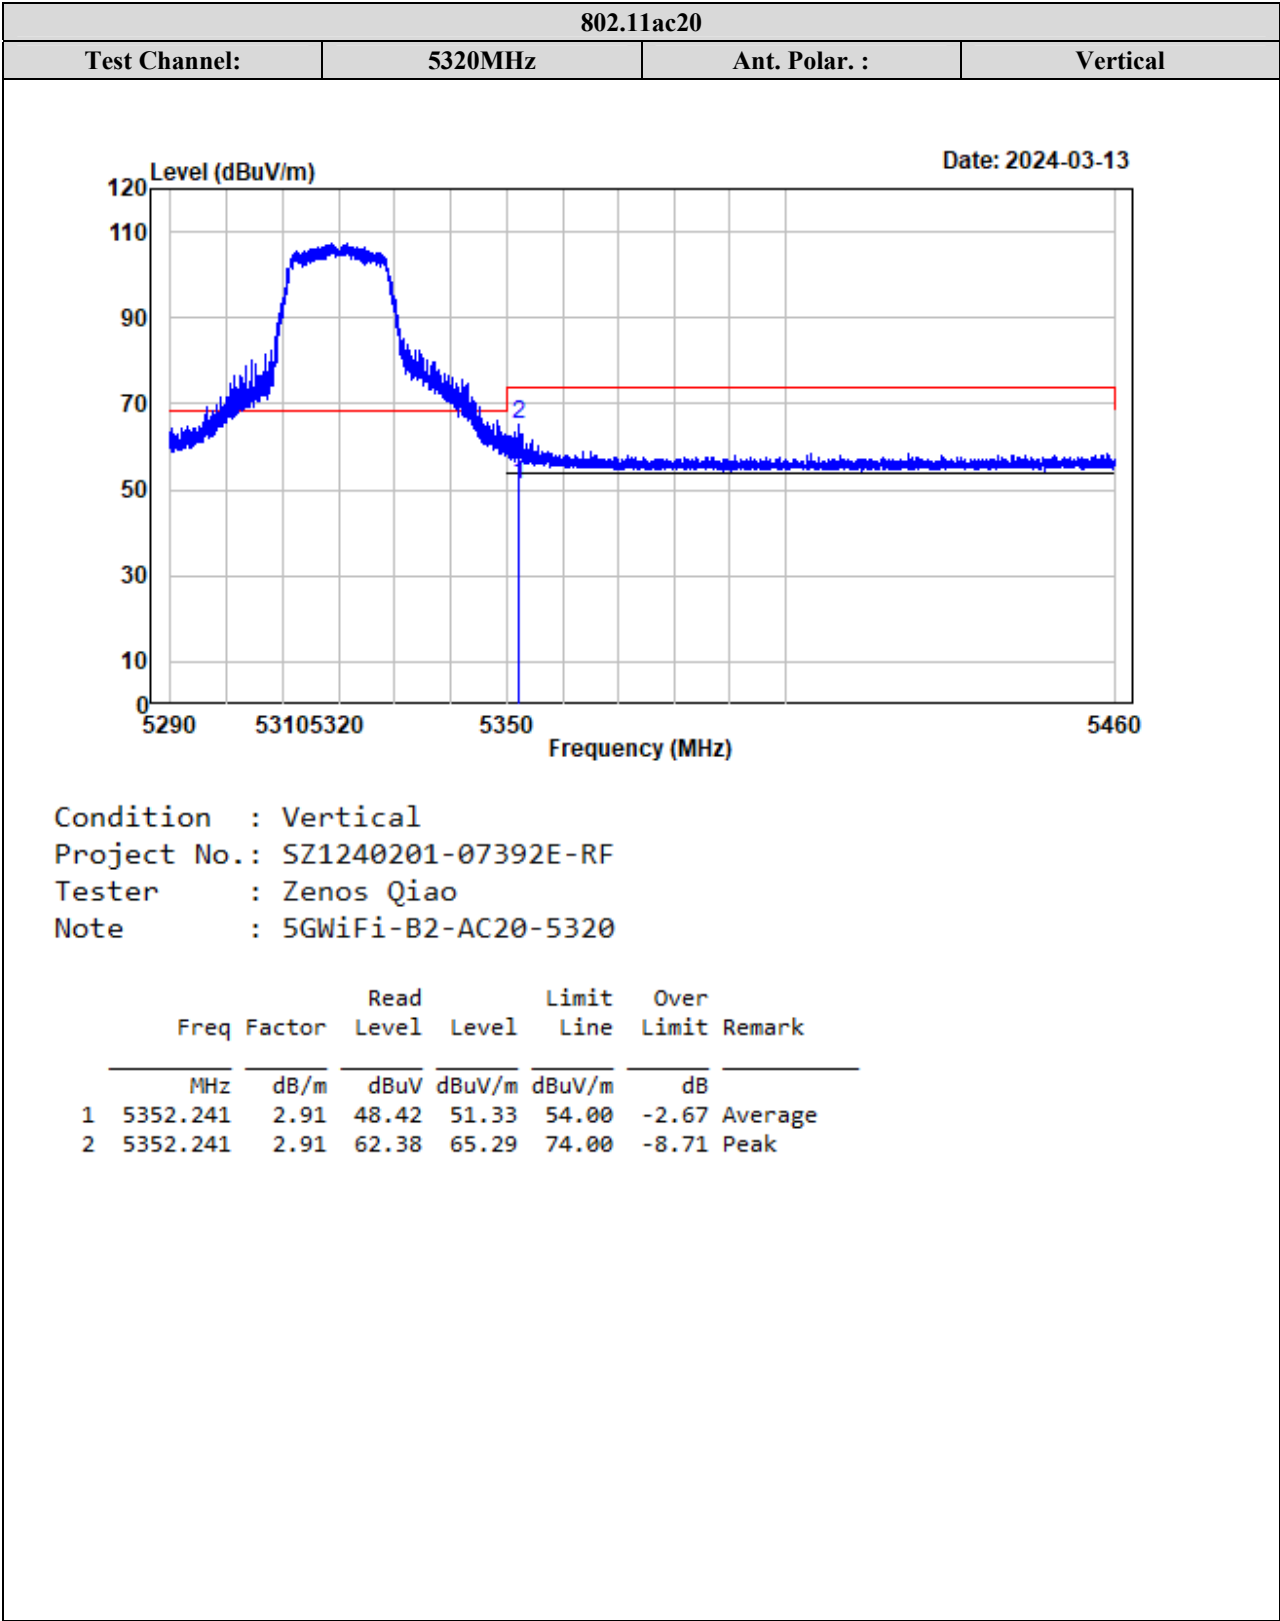



TR-EM-RF015


Page 204 of 258


Version 1.0 (2023/10/07)

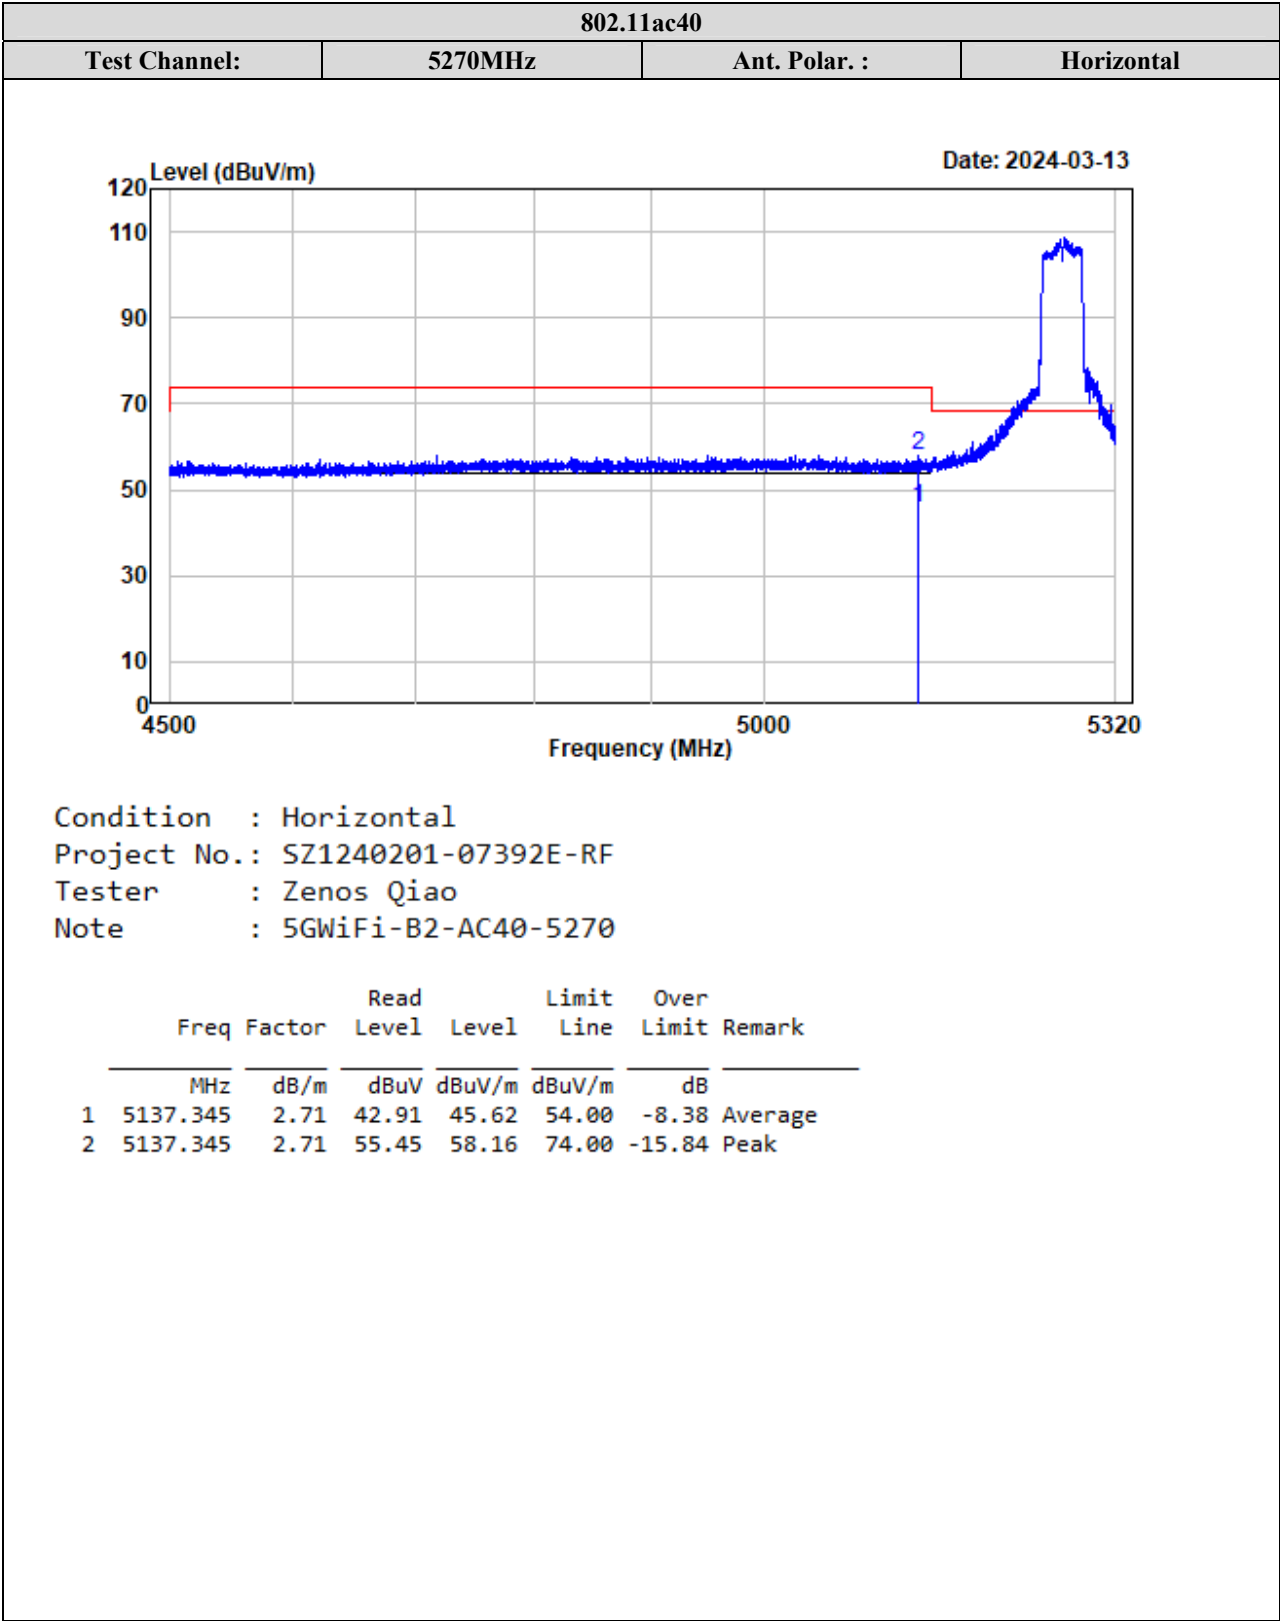


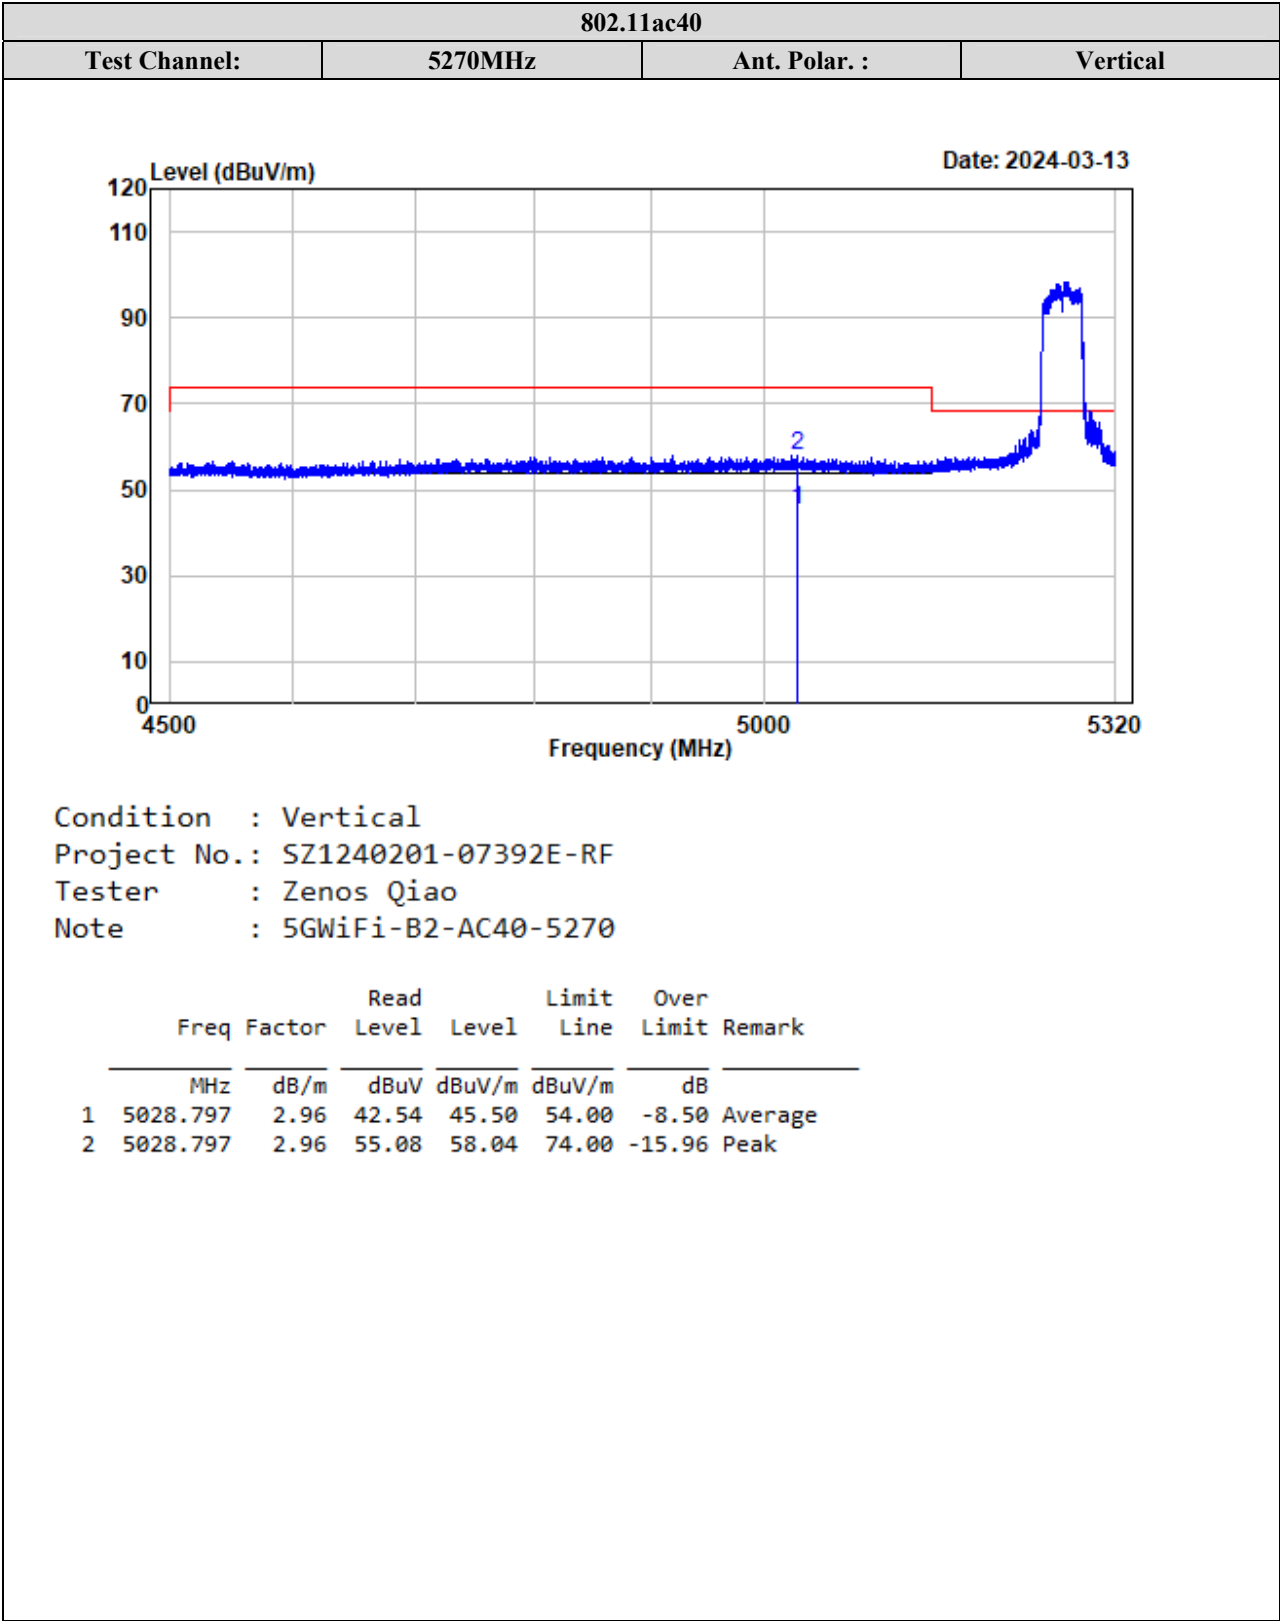


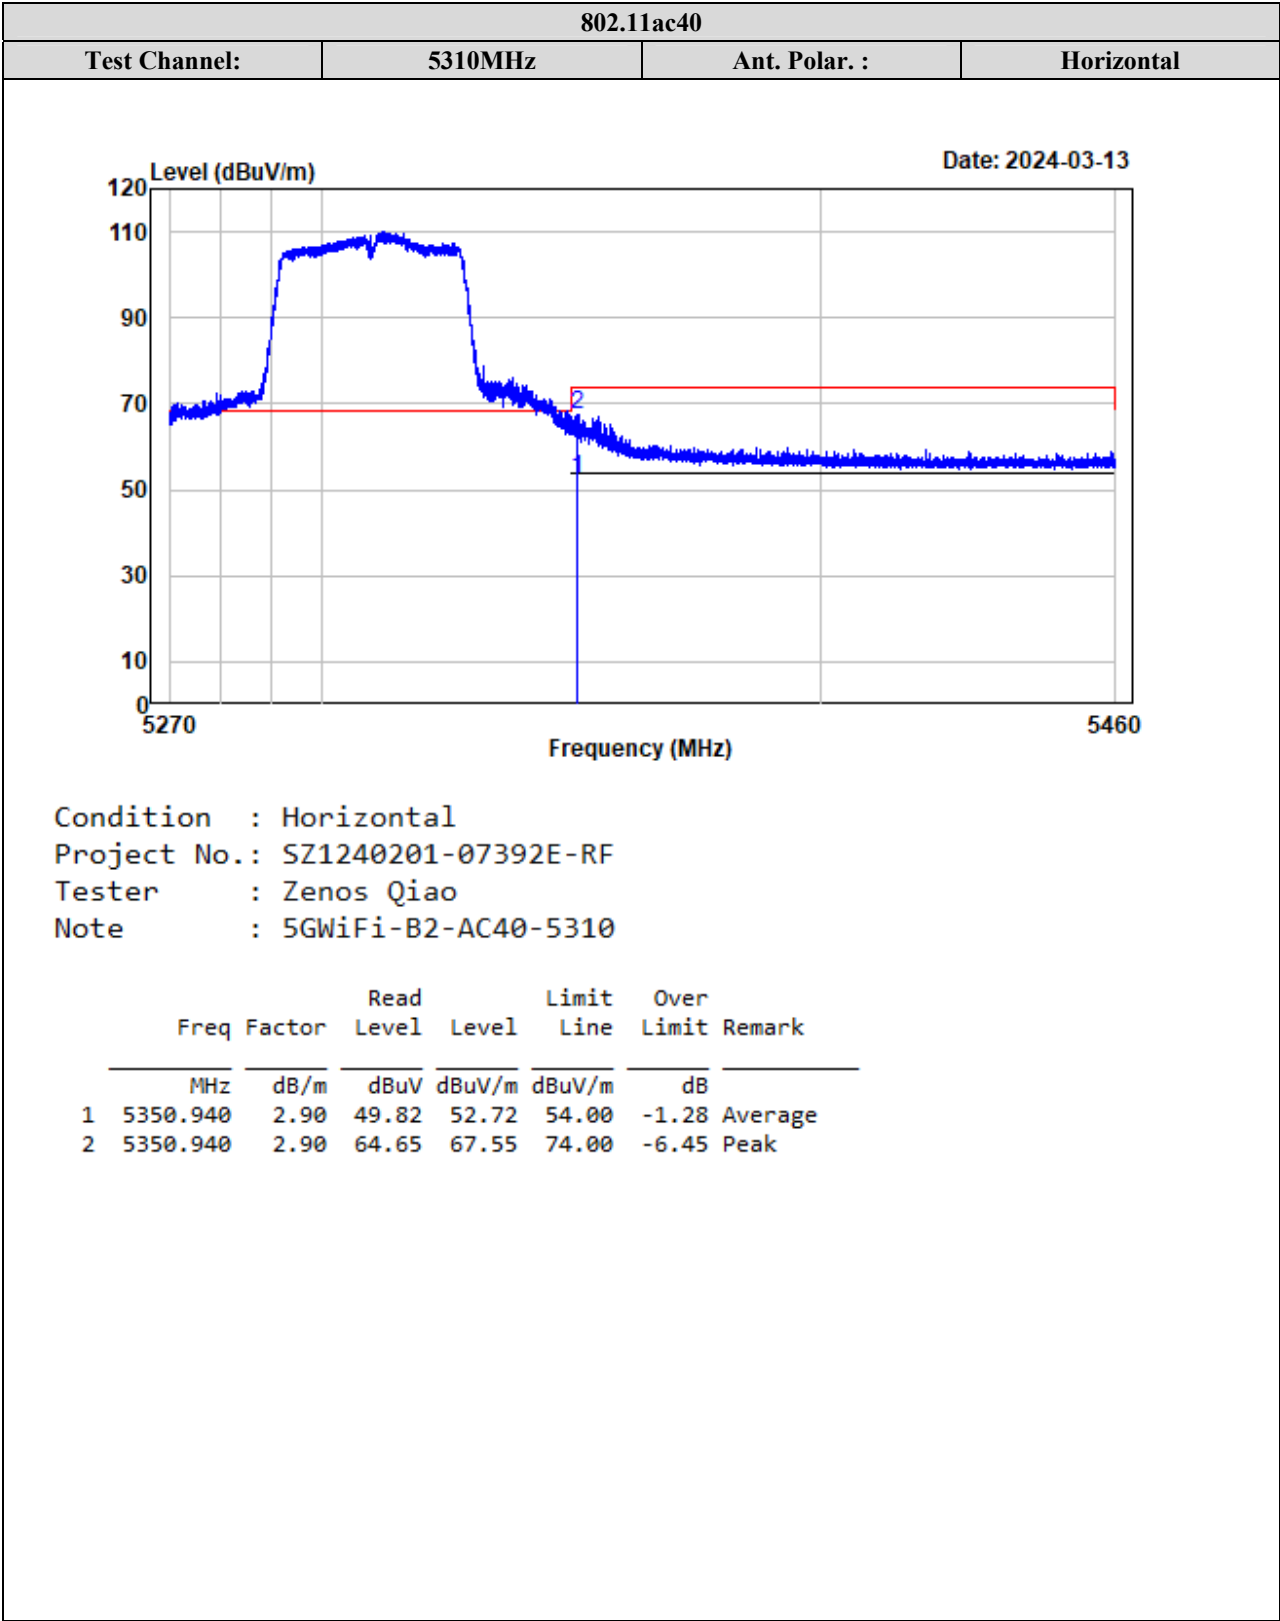


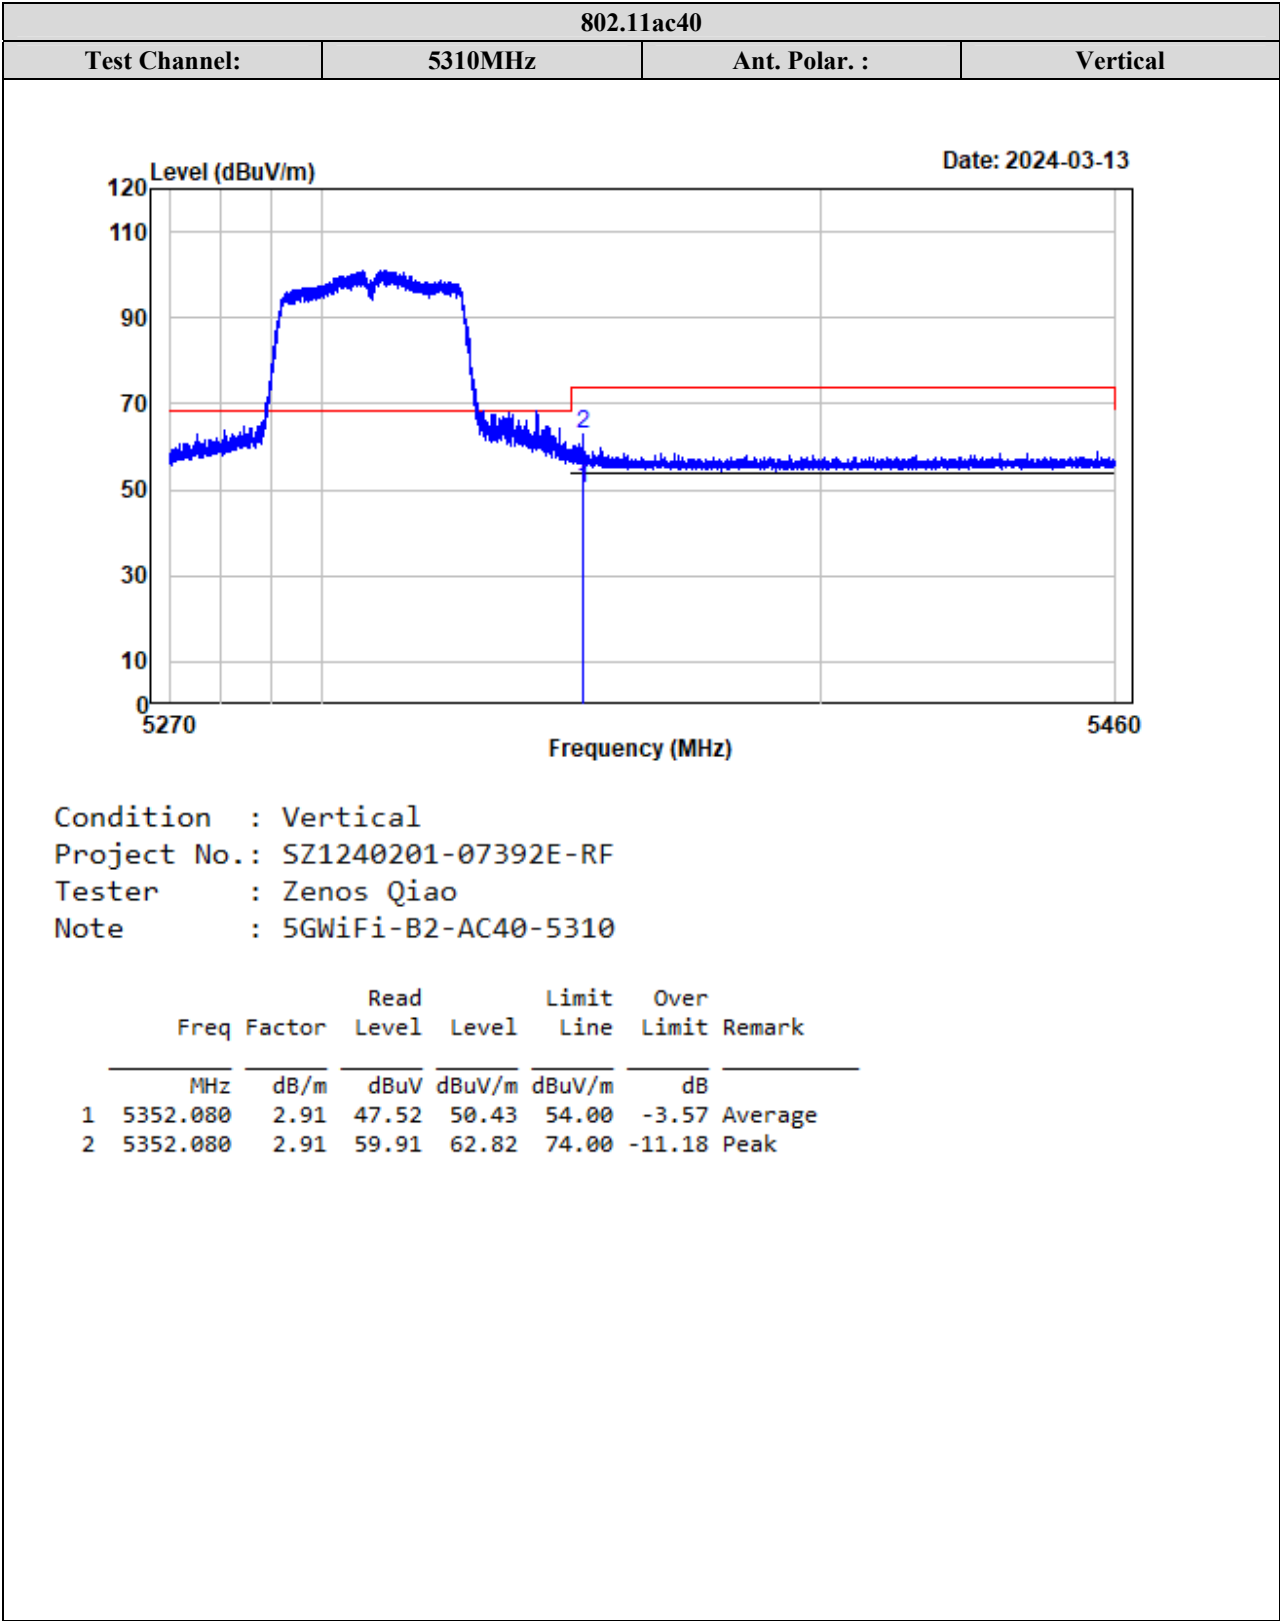

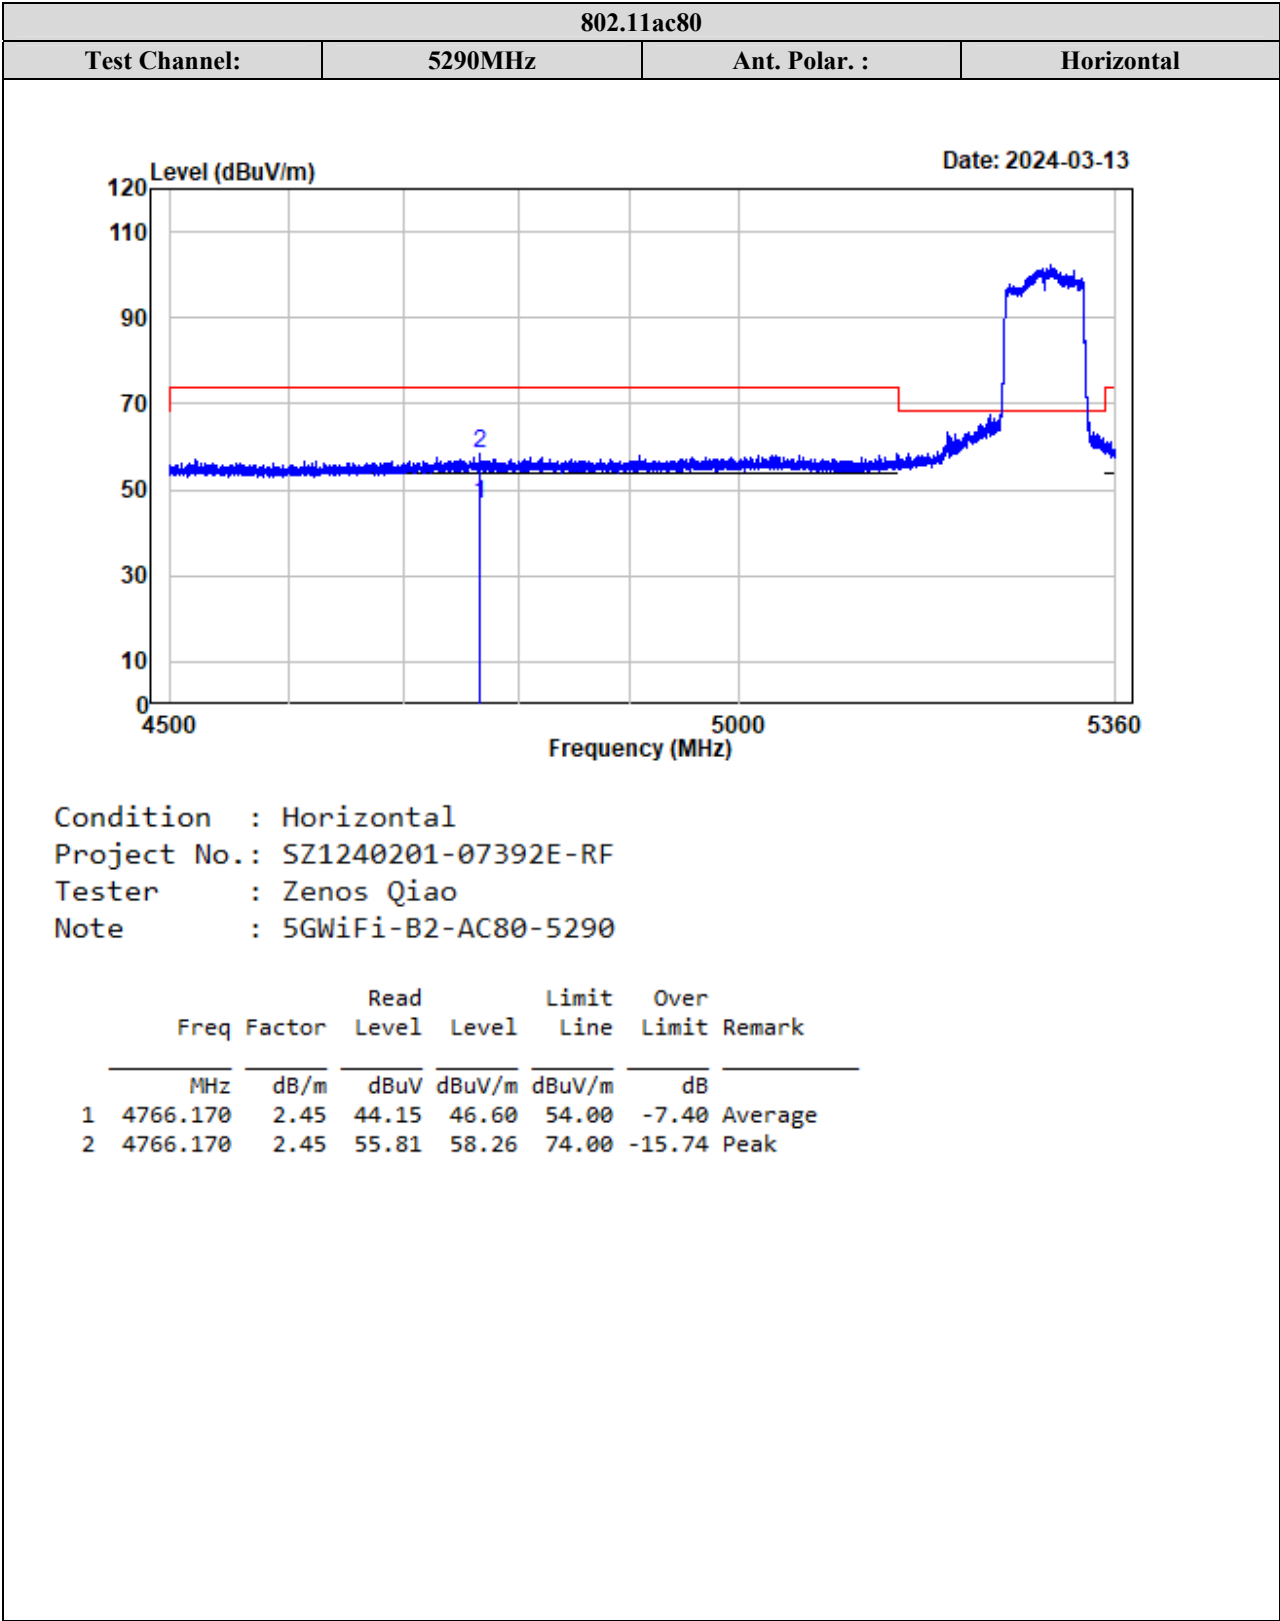


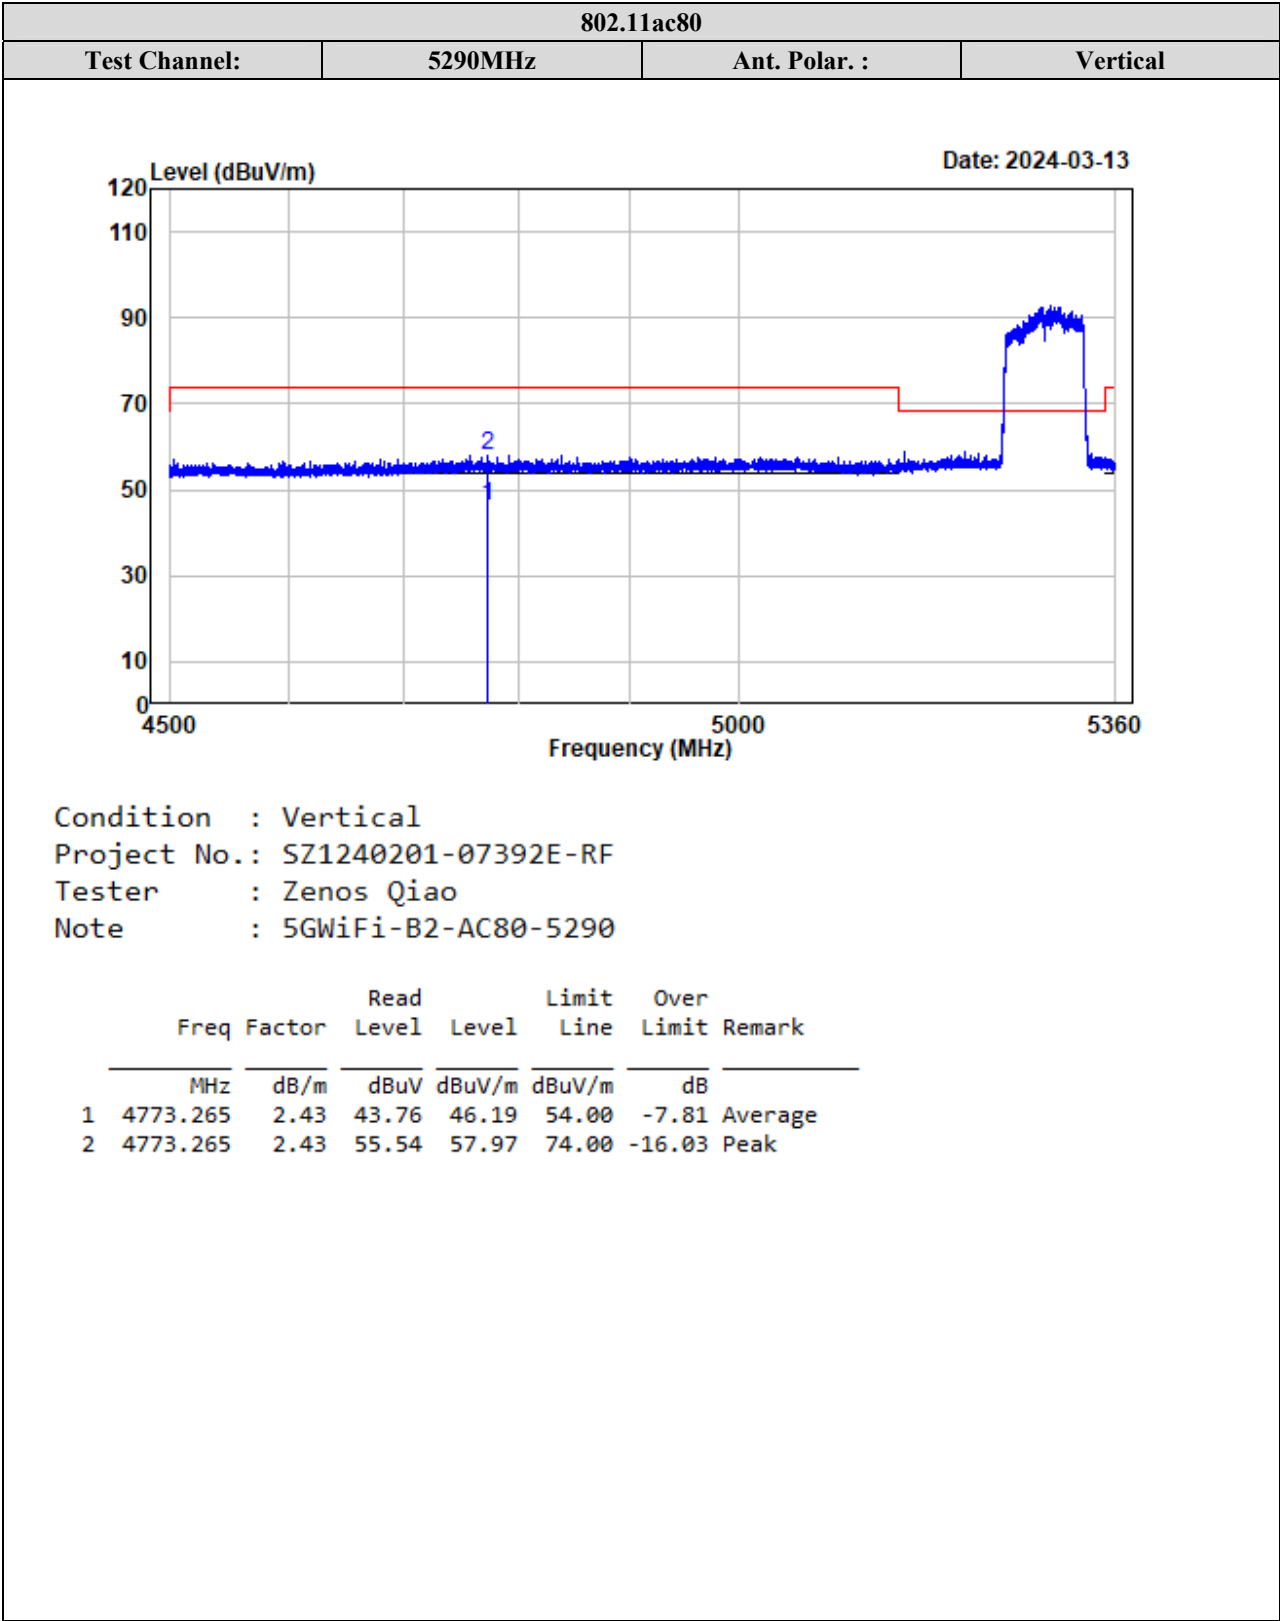


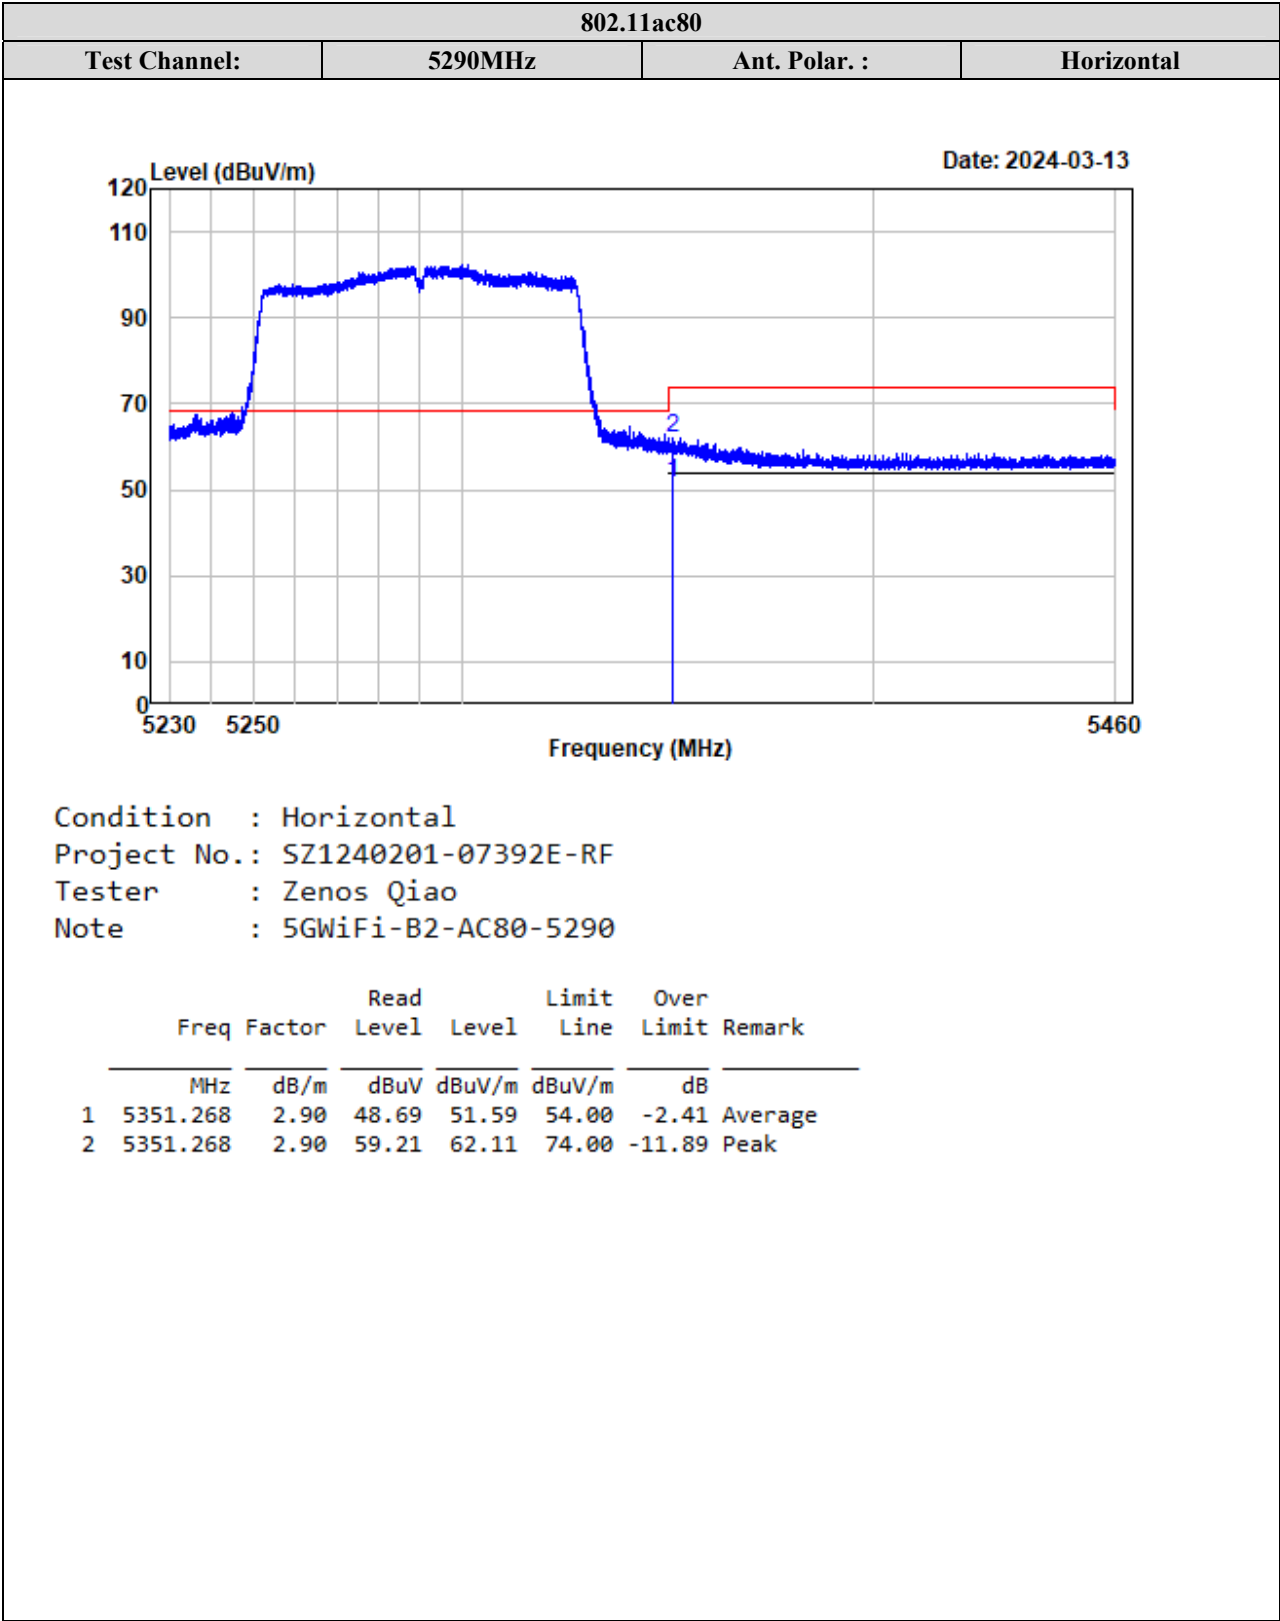


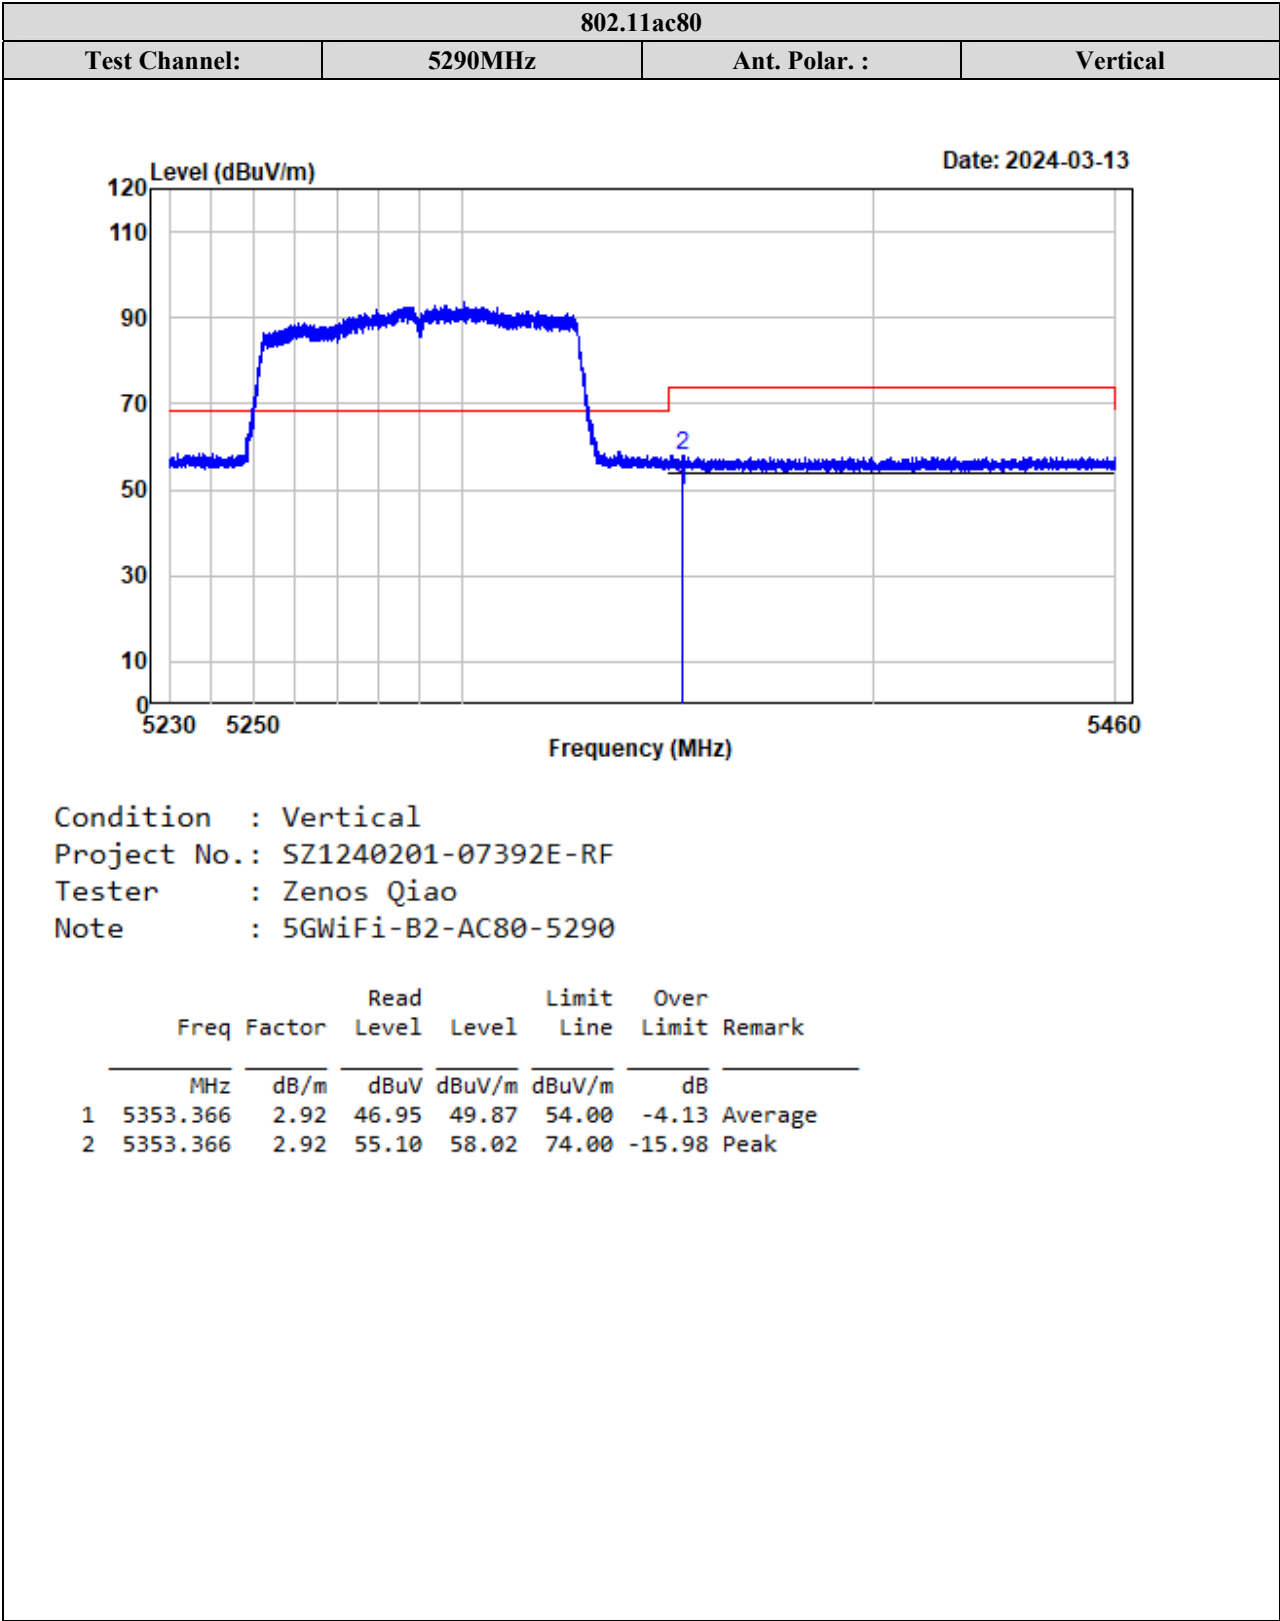



5470-5725MHz:

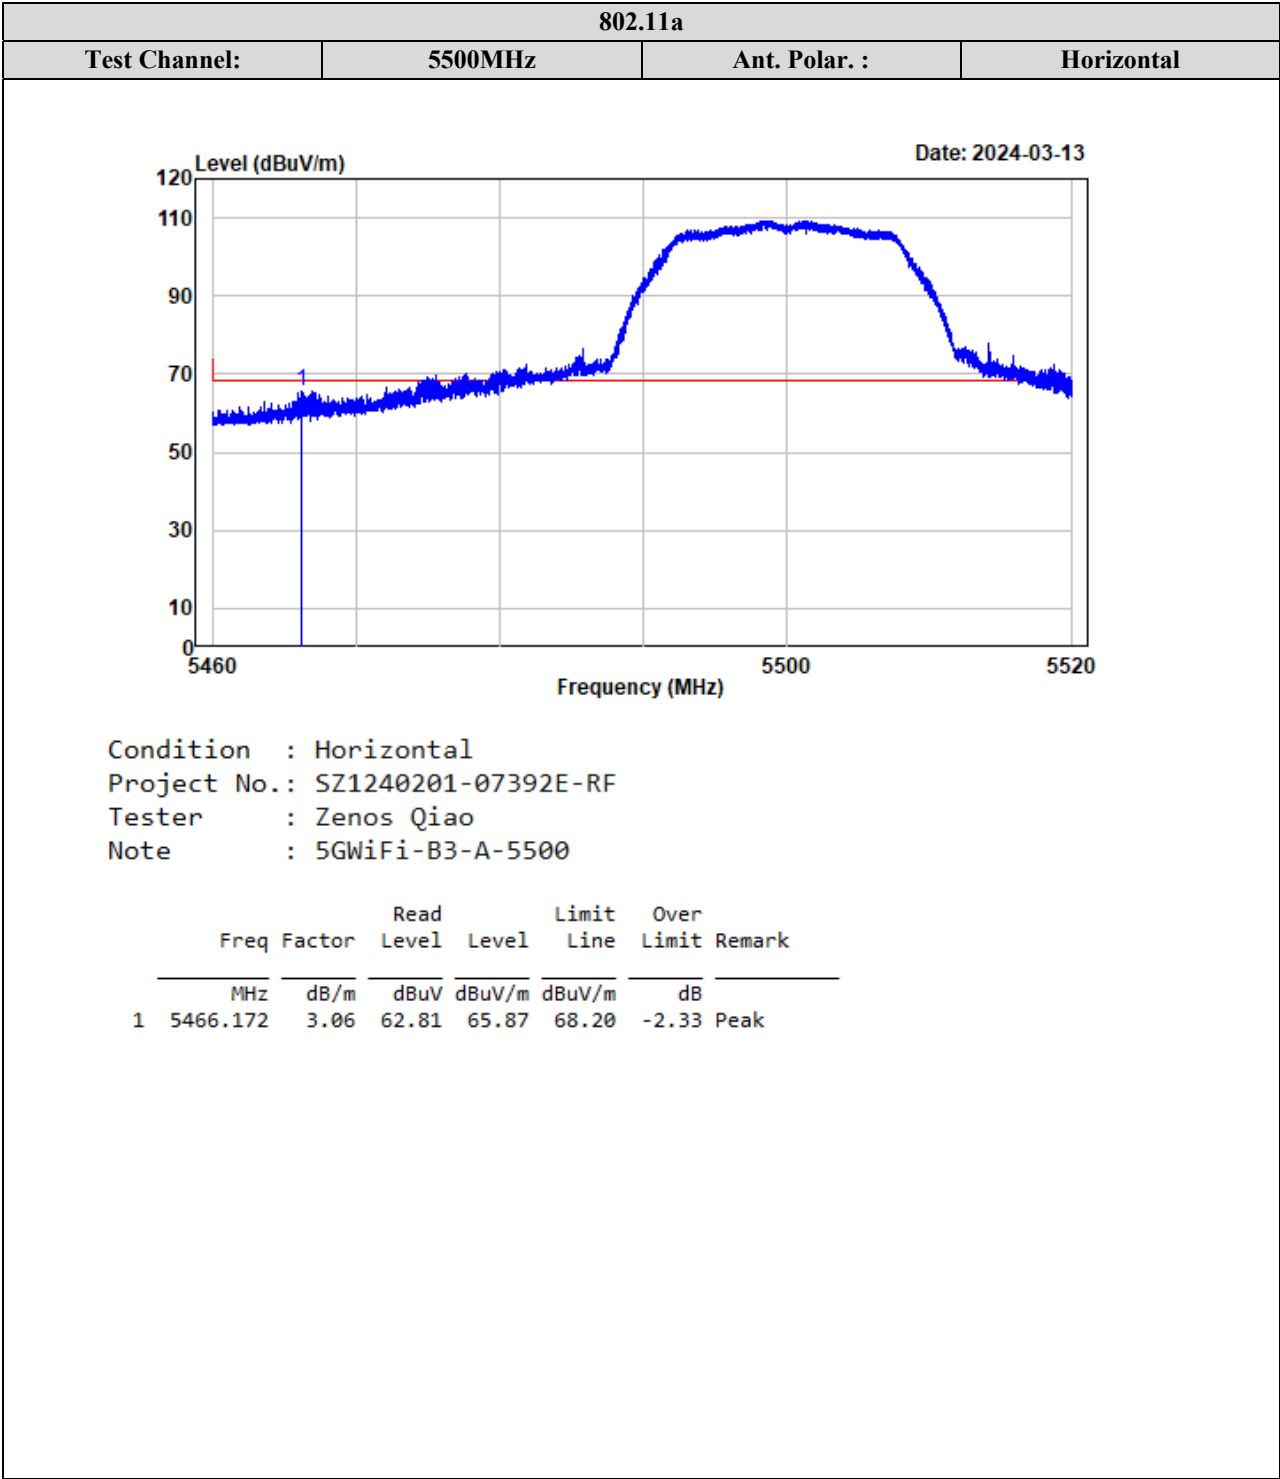


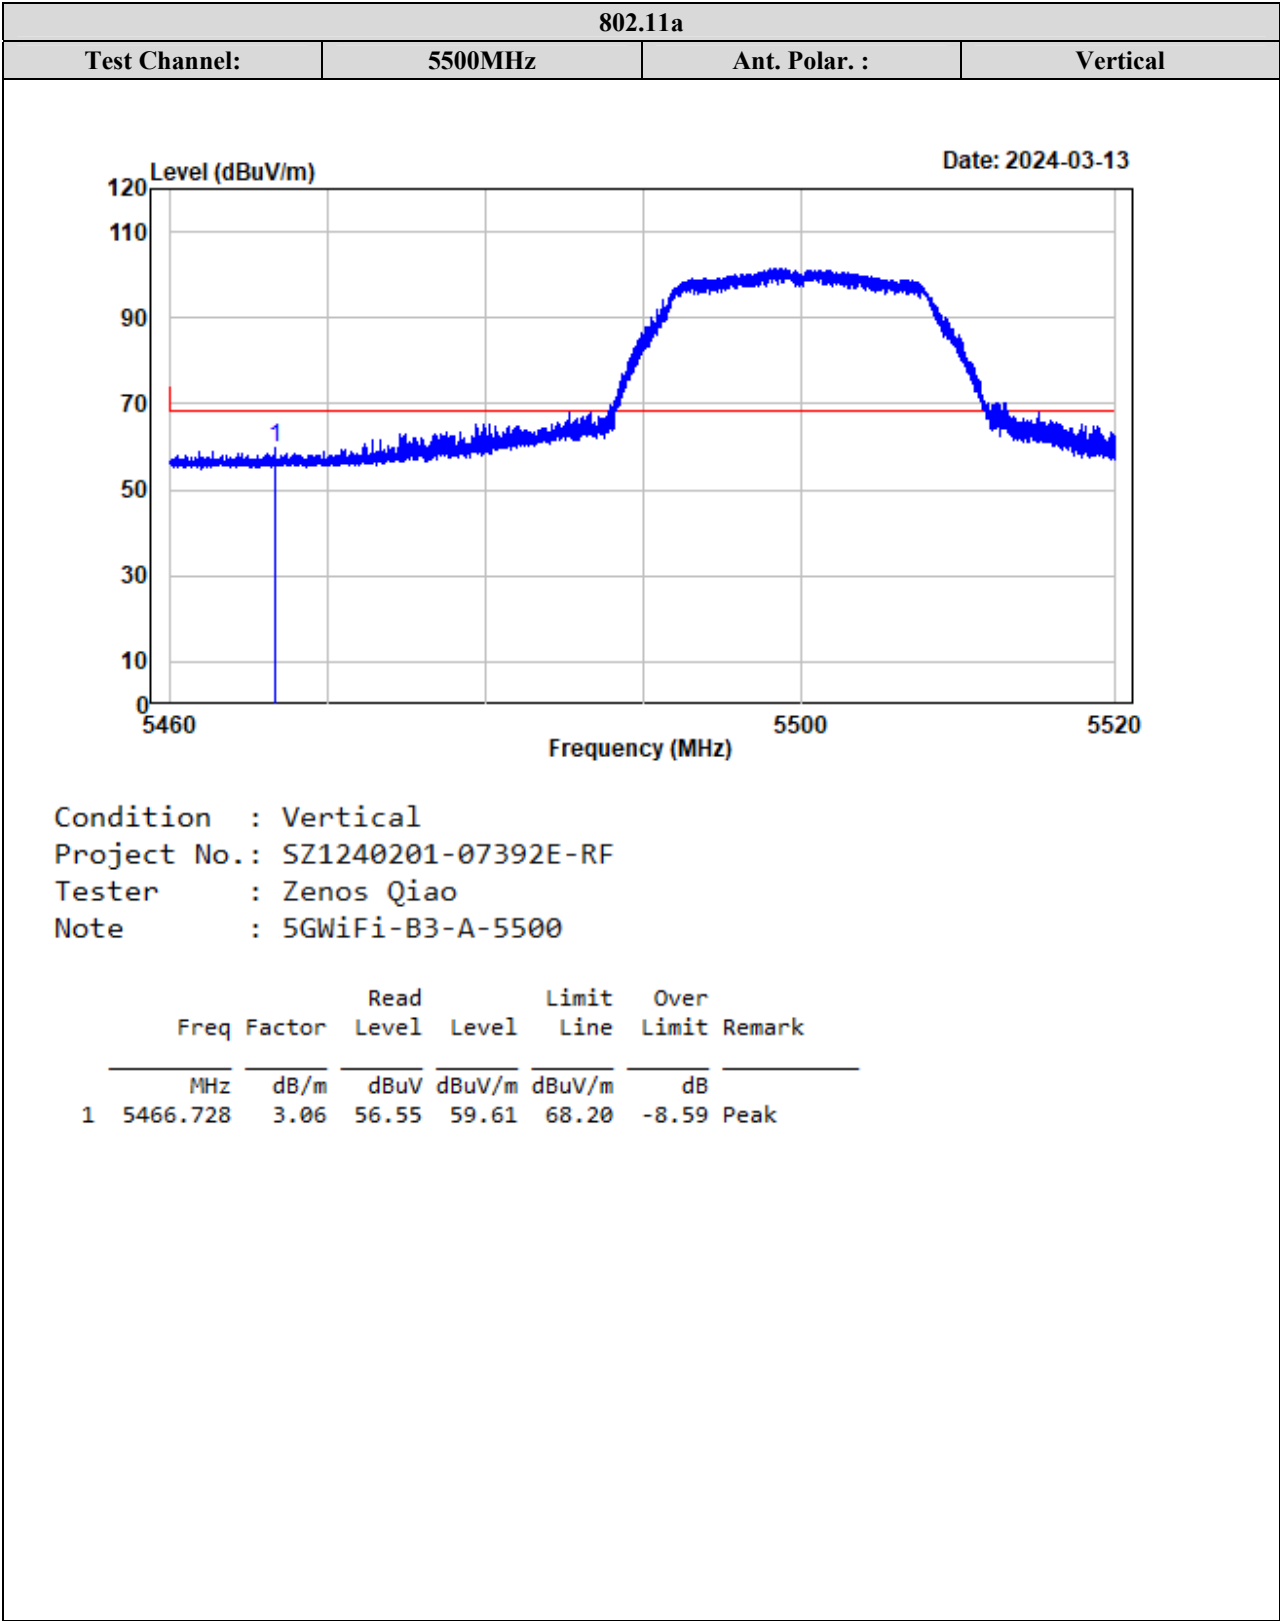


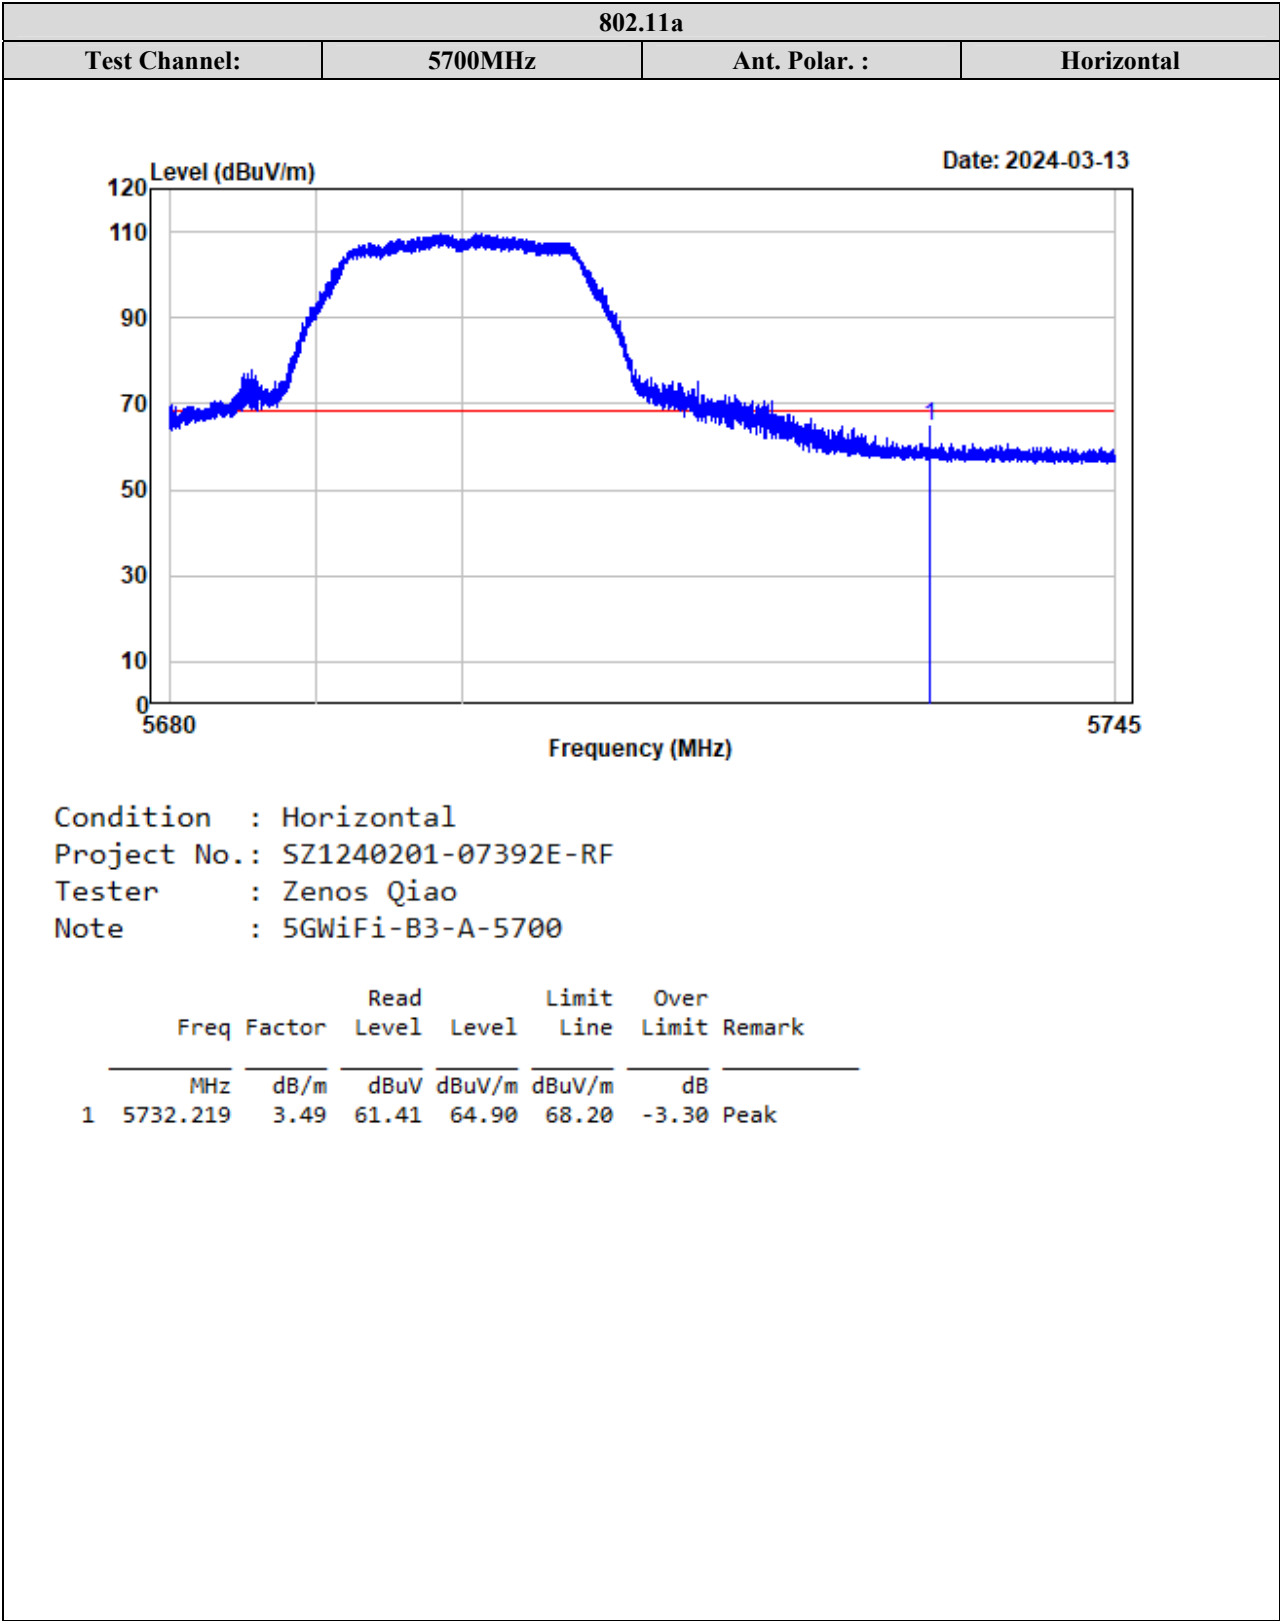


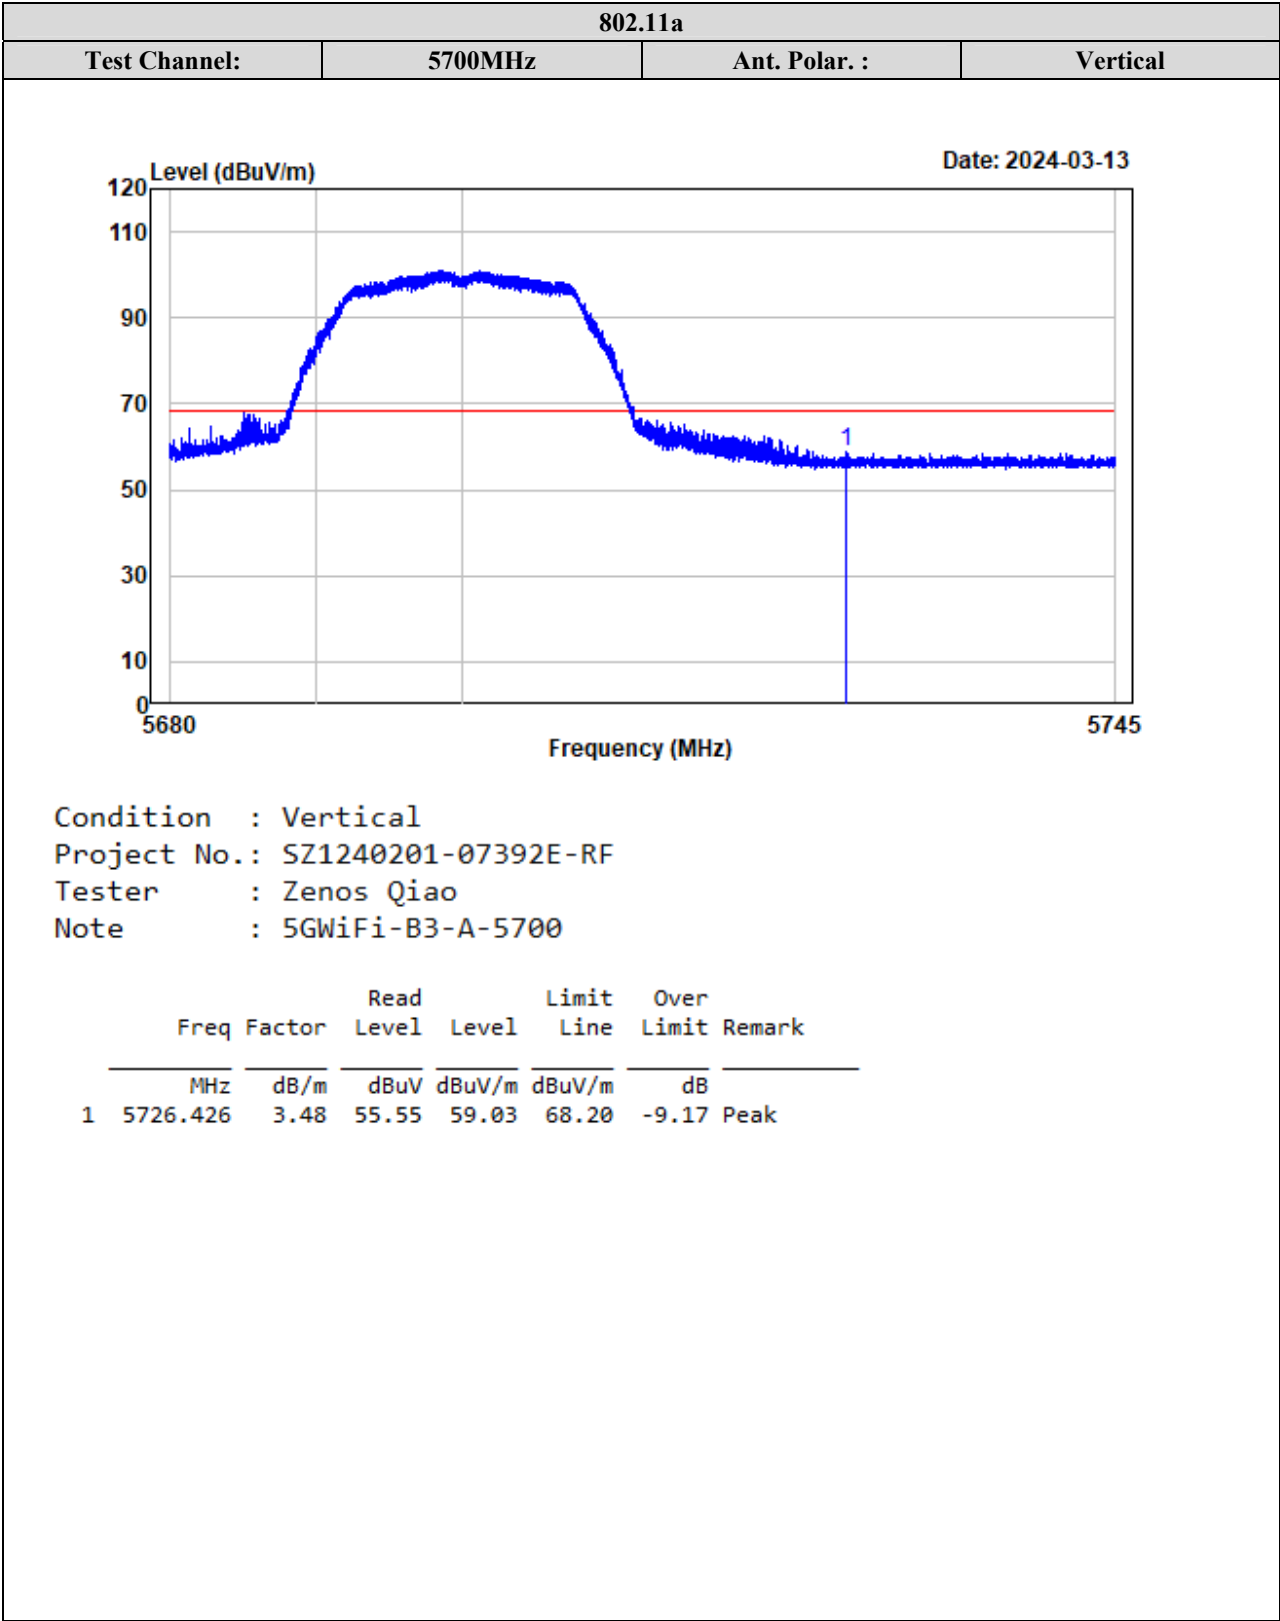


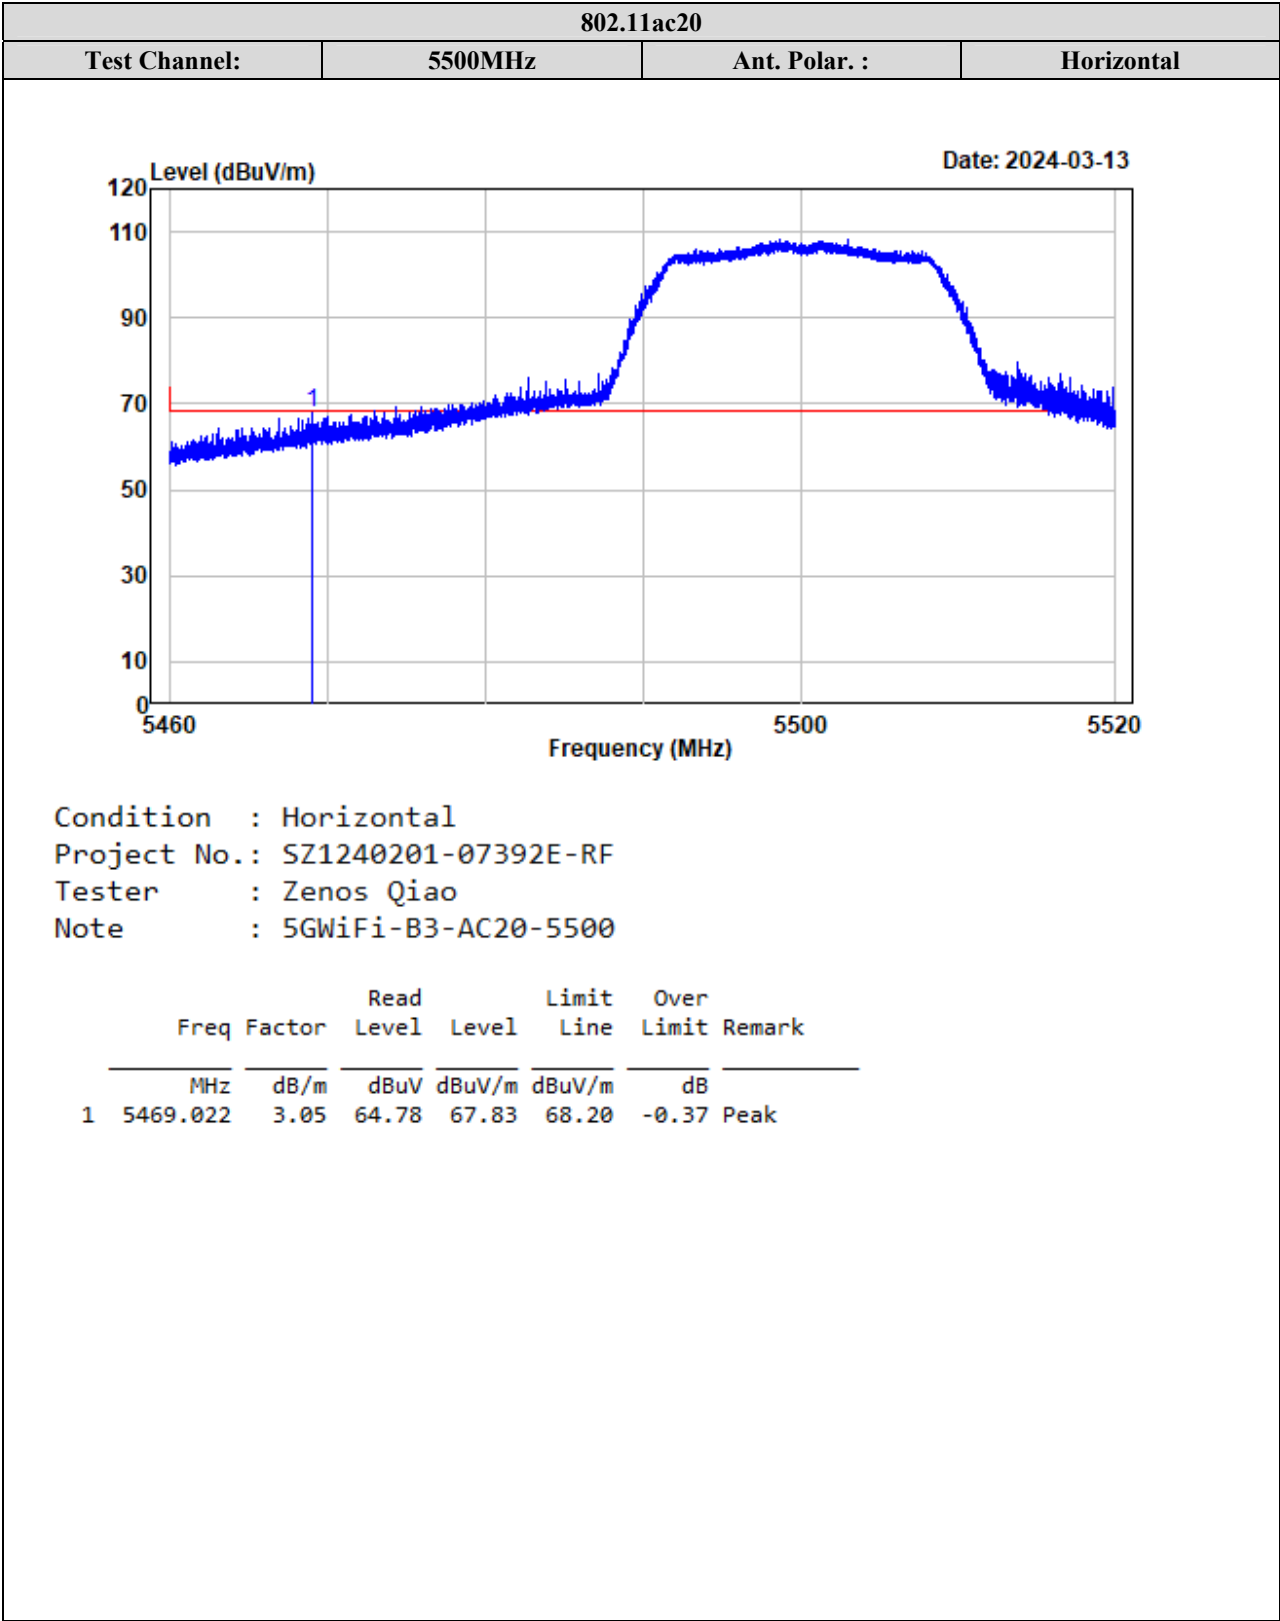


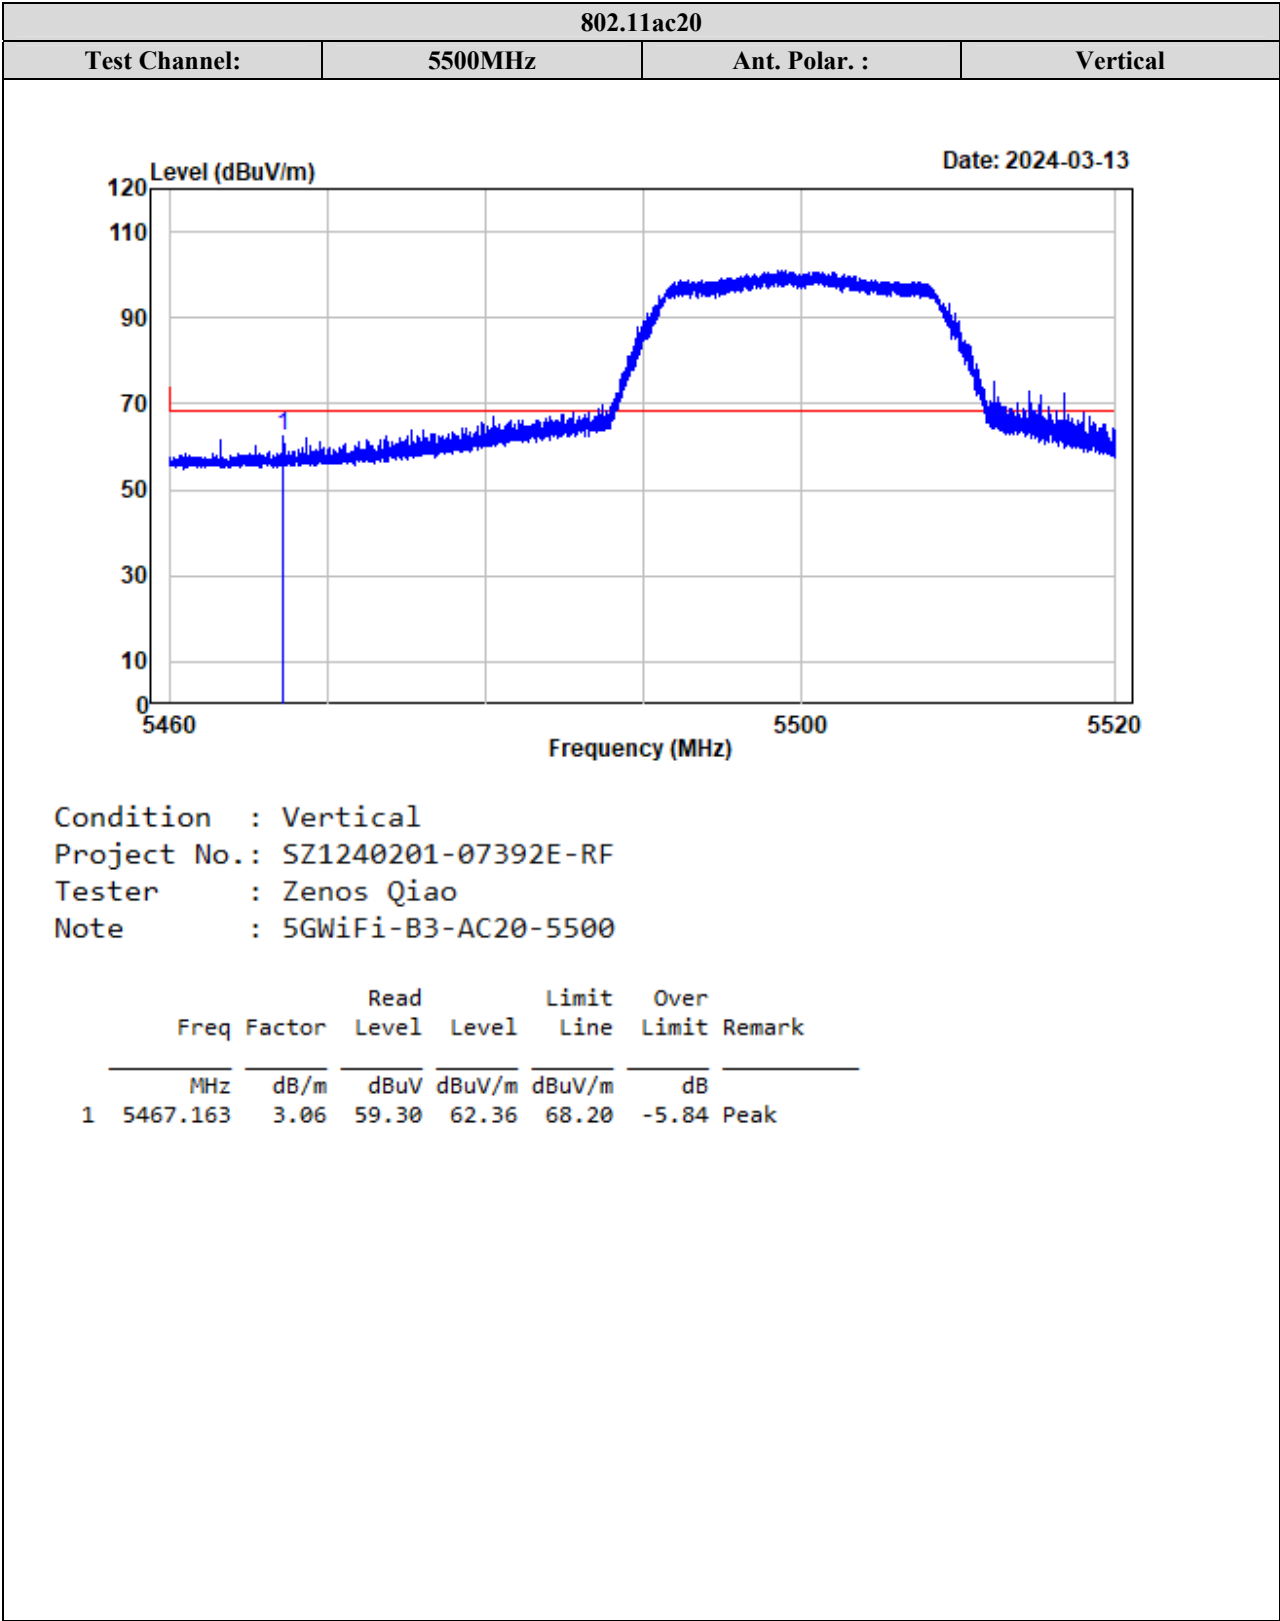


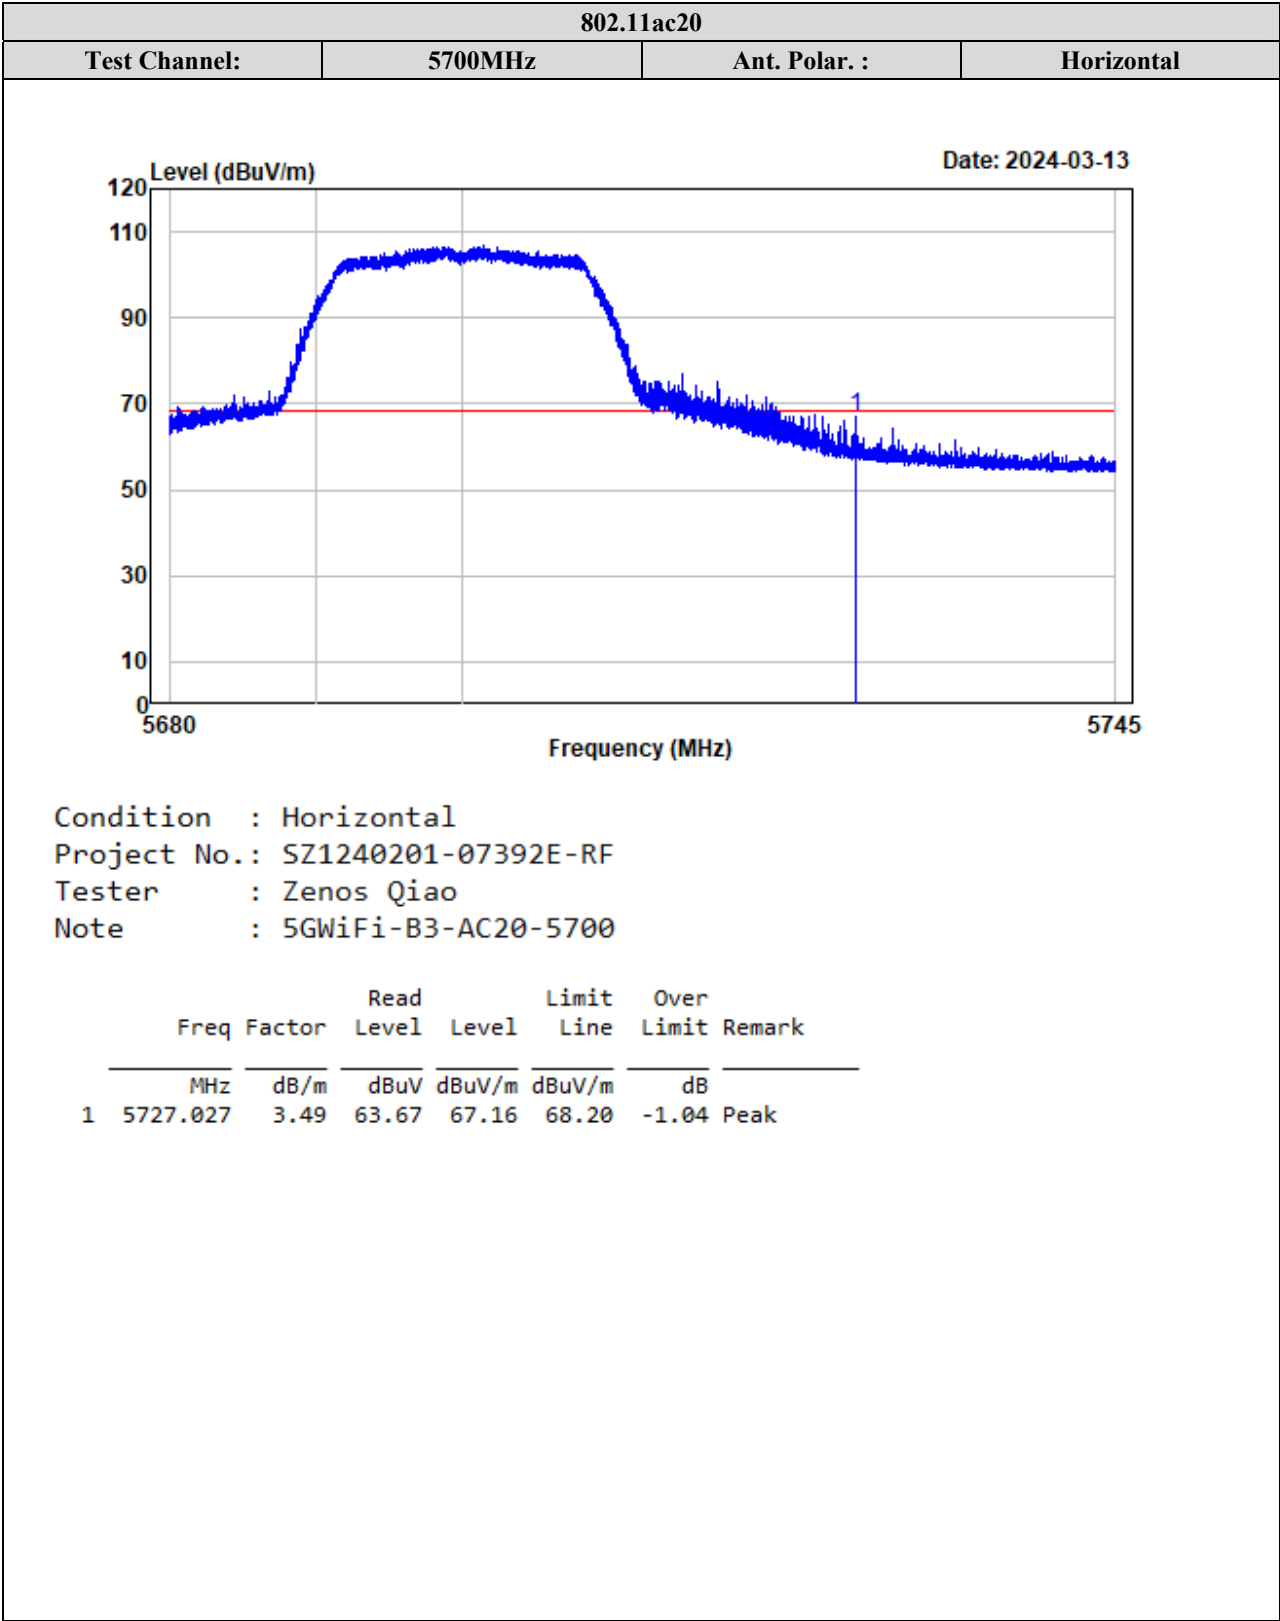


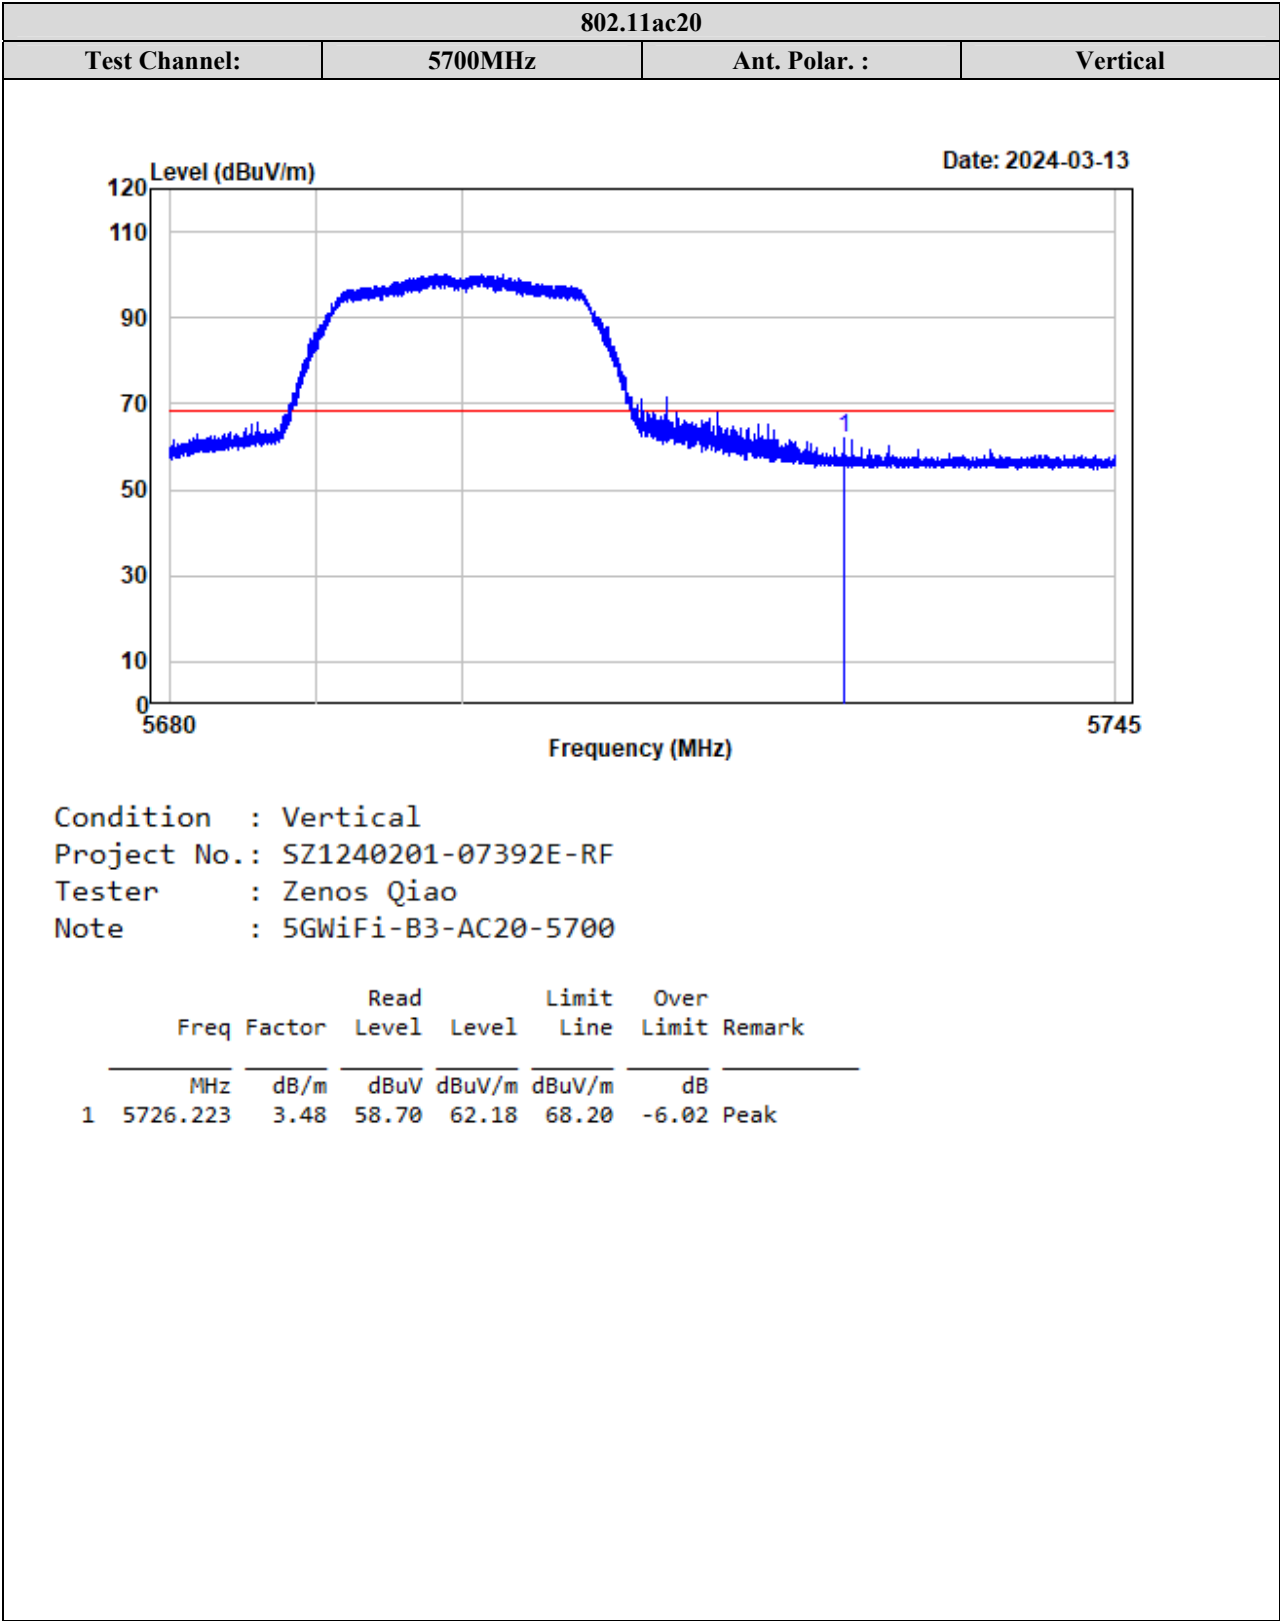


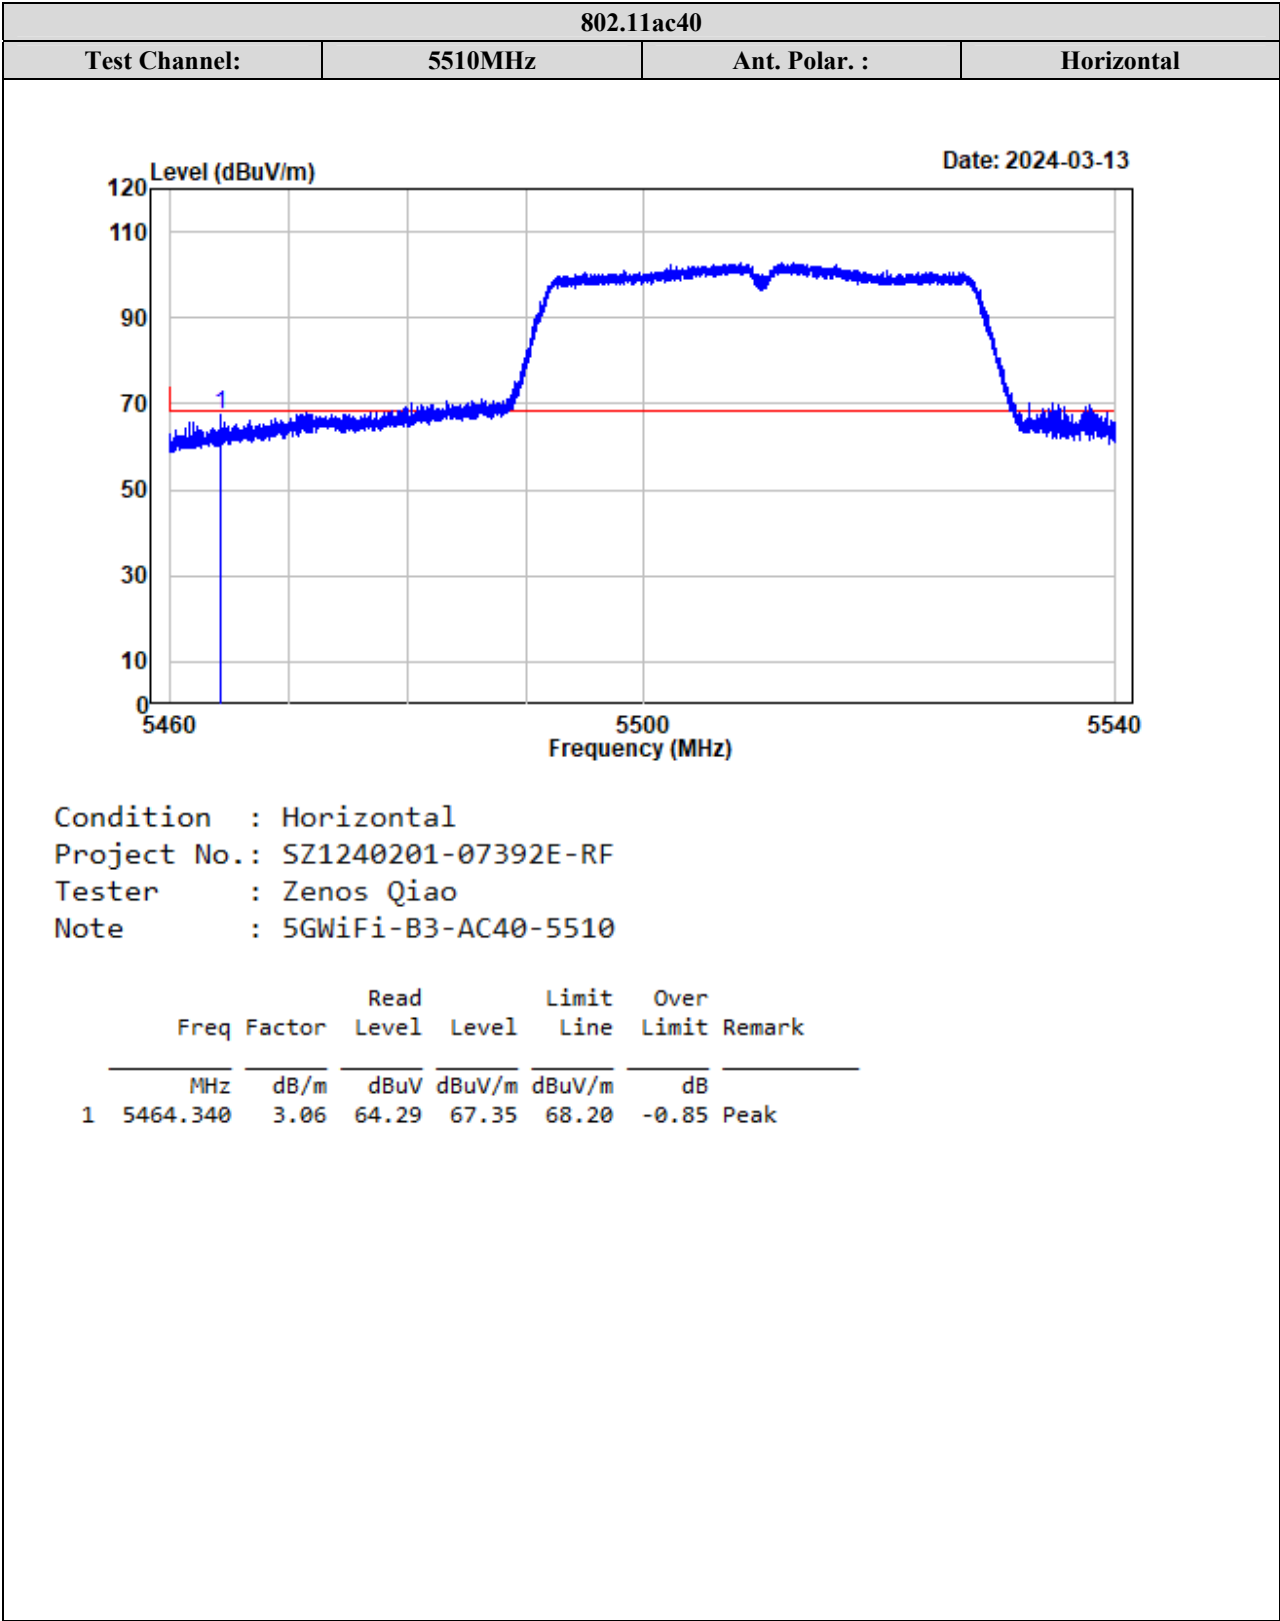


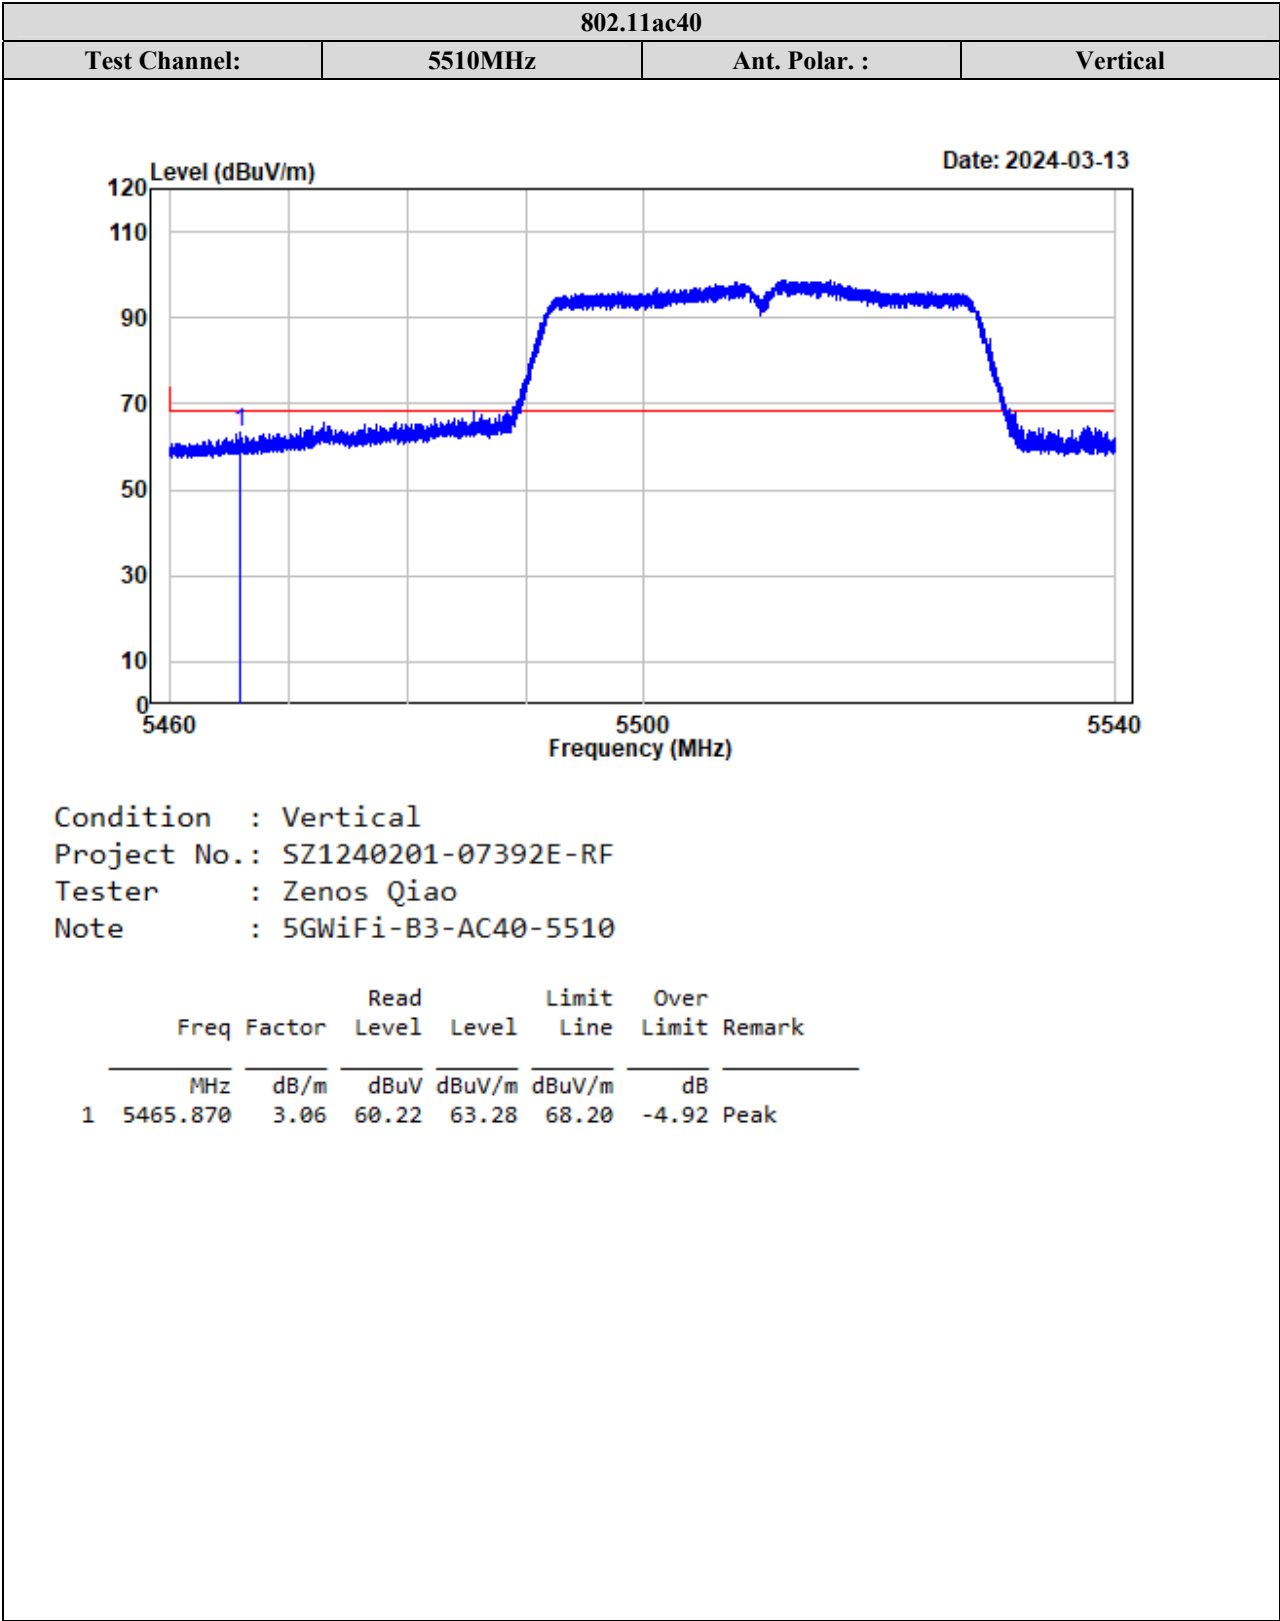


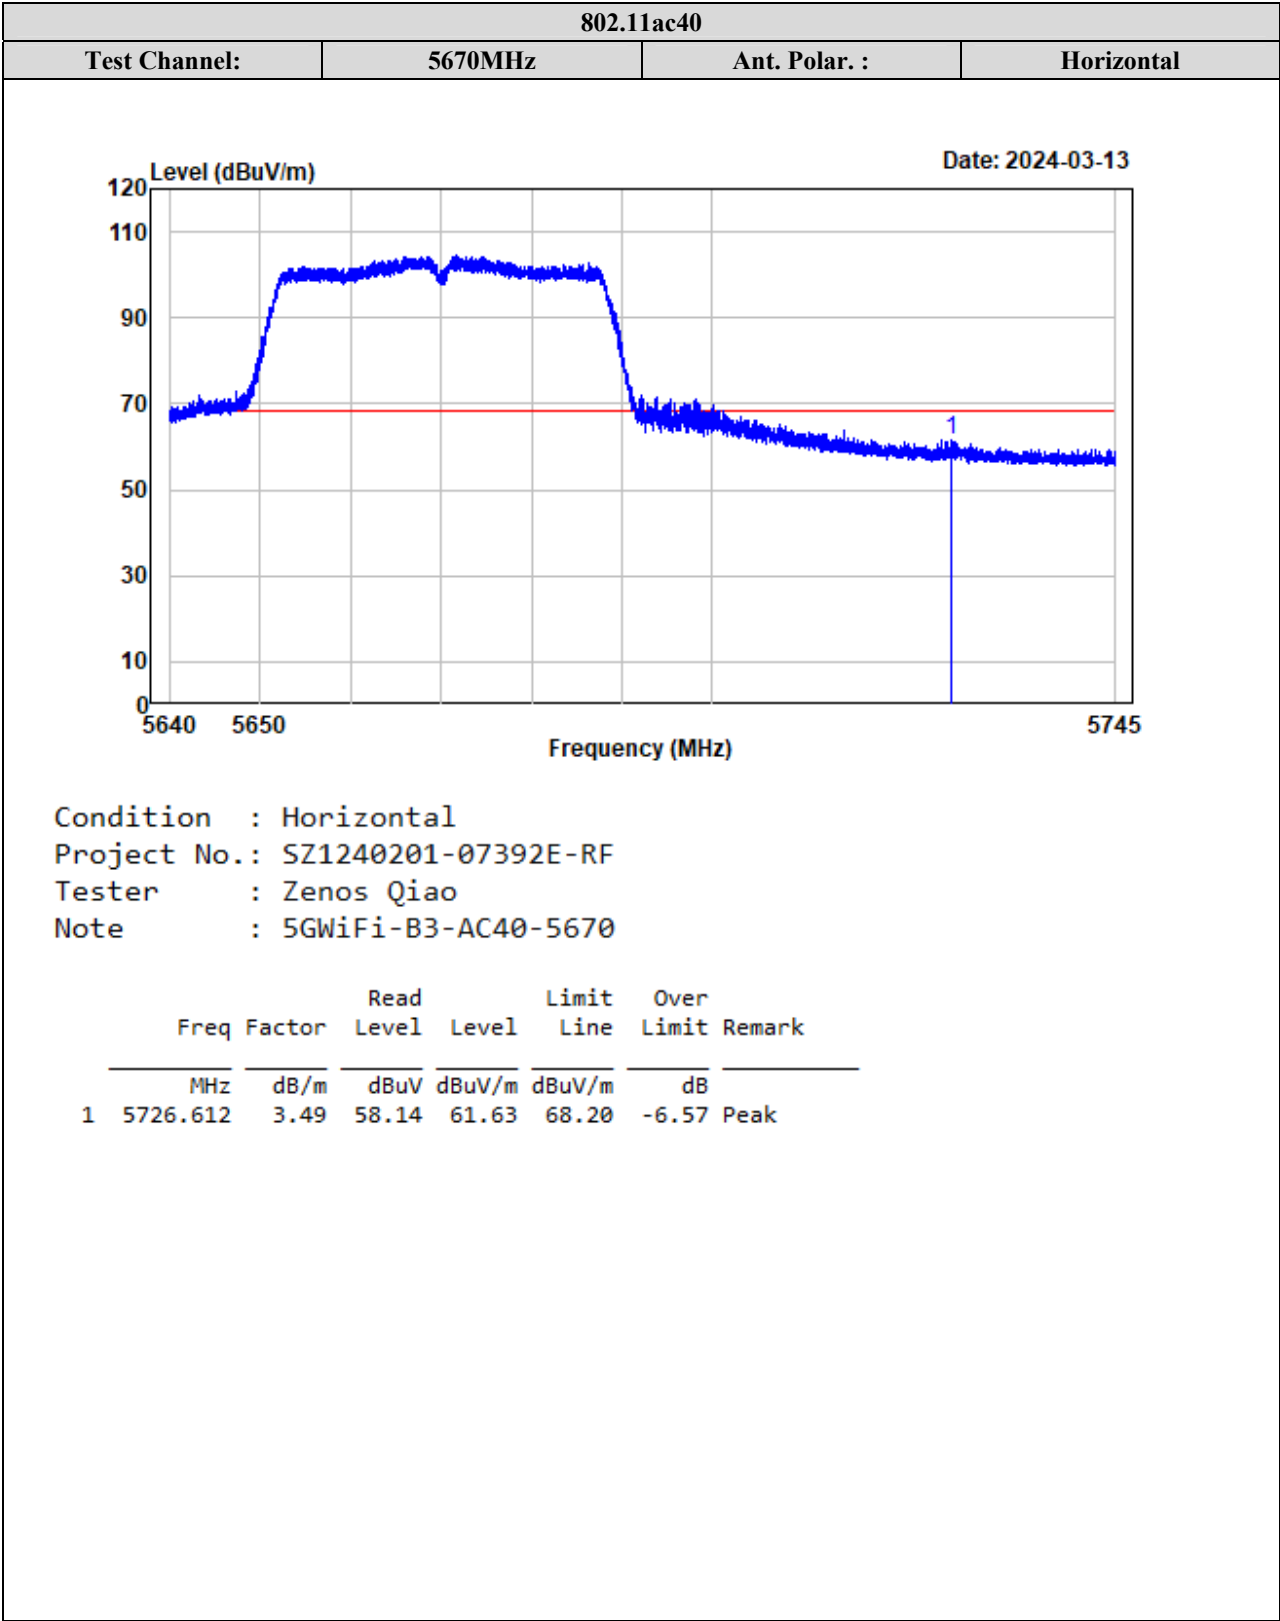


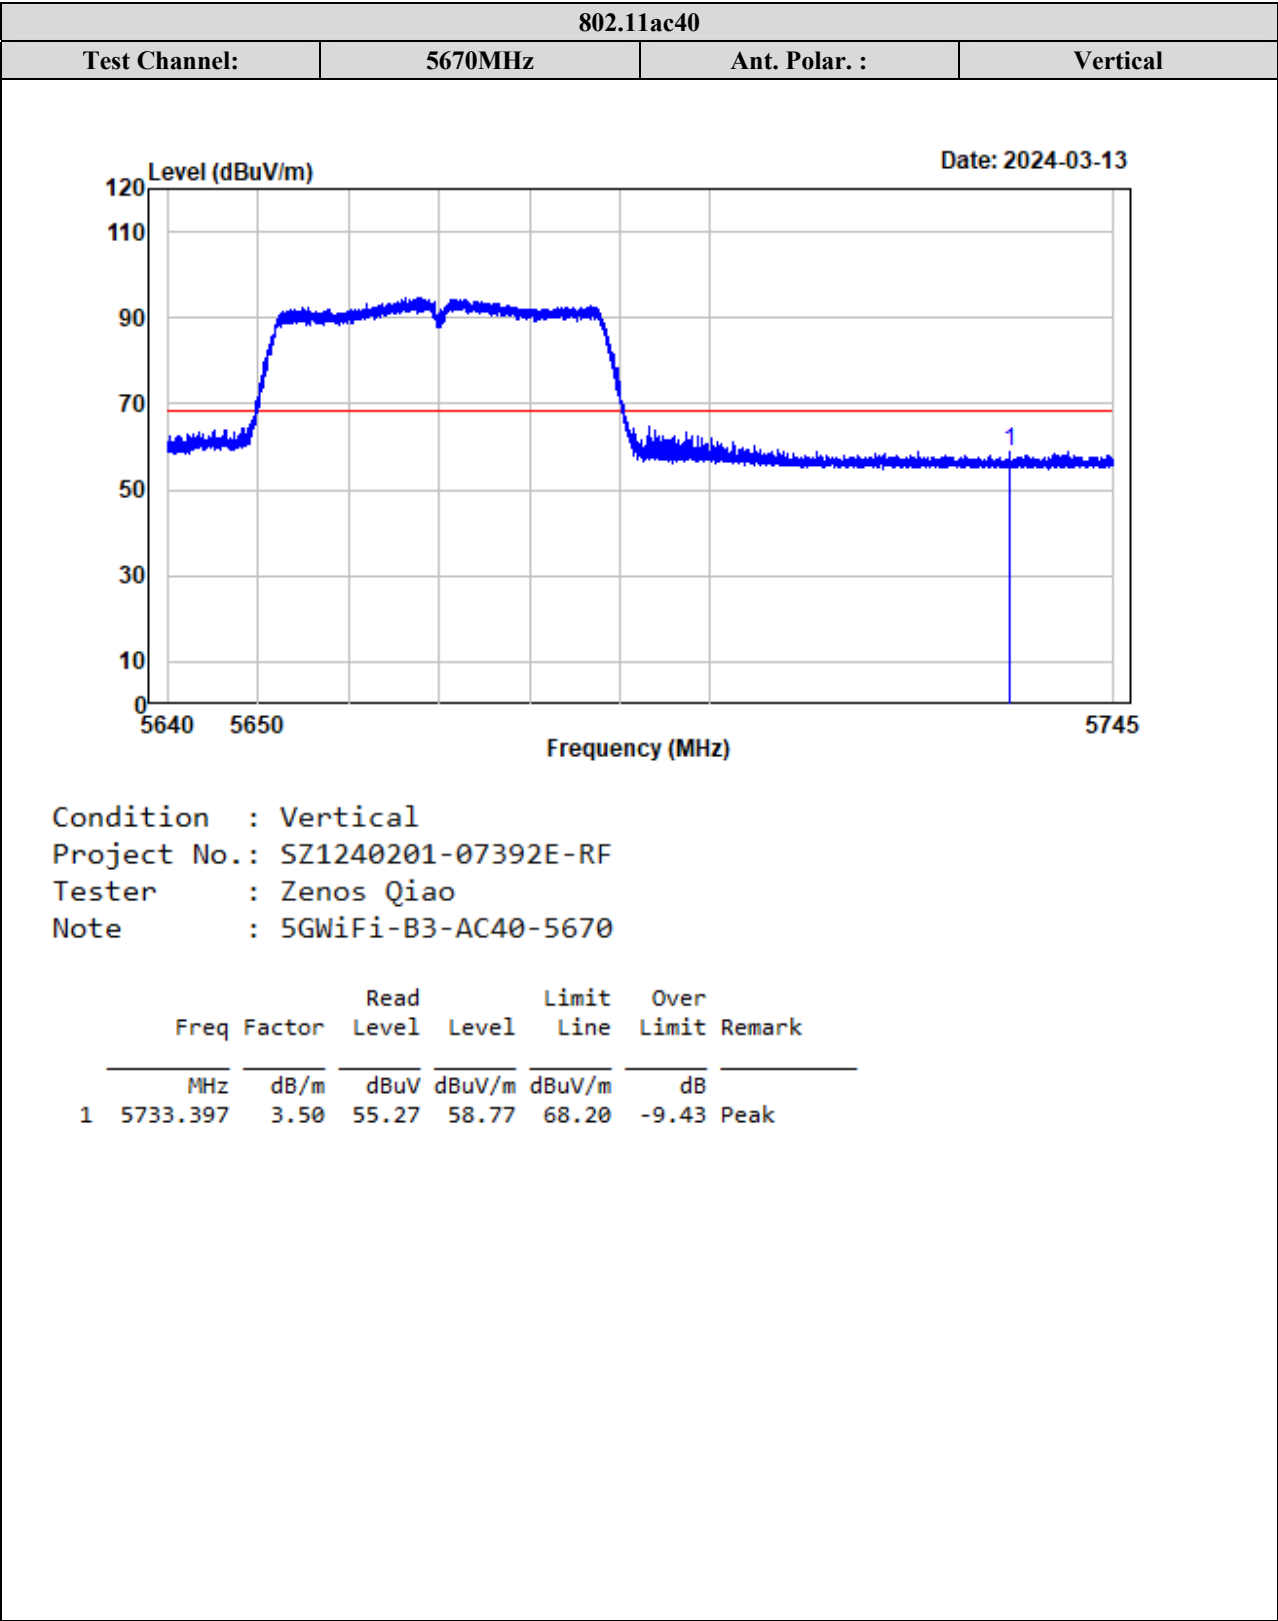

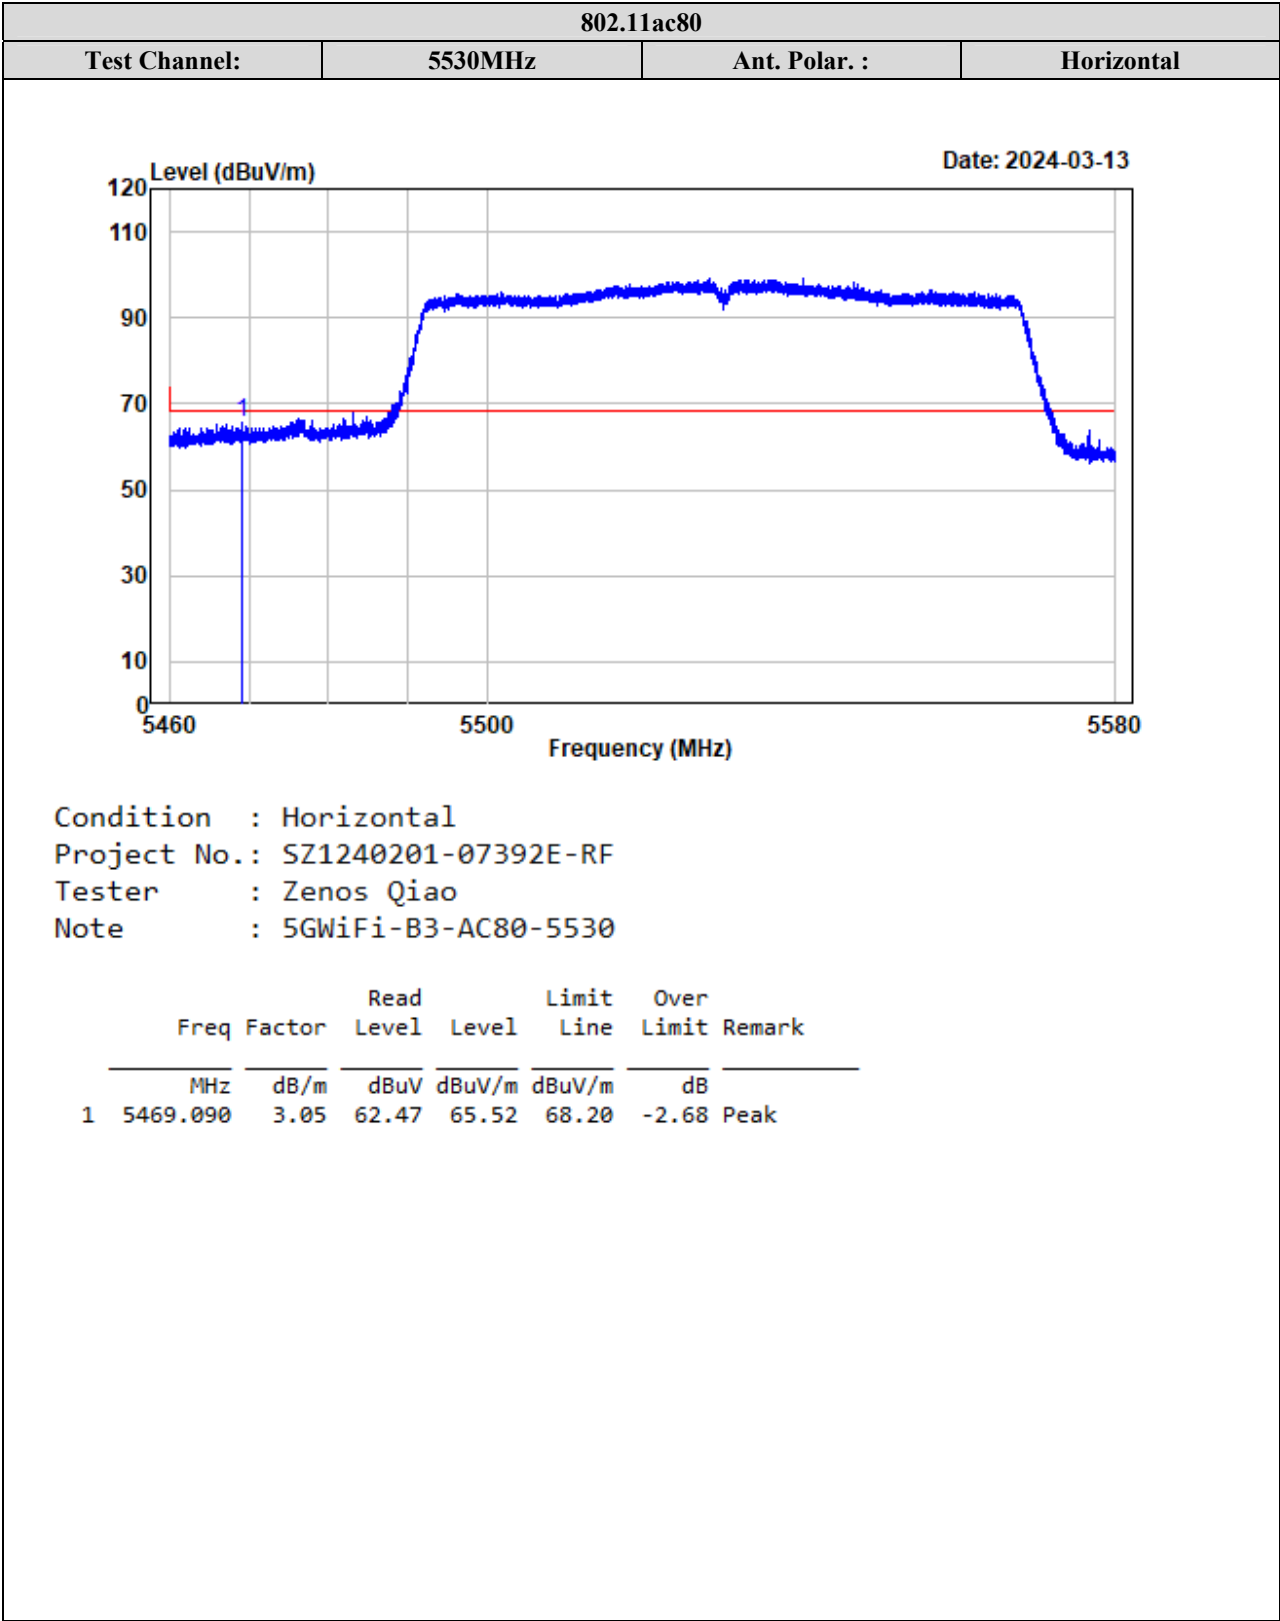


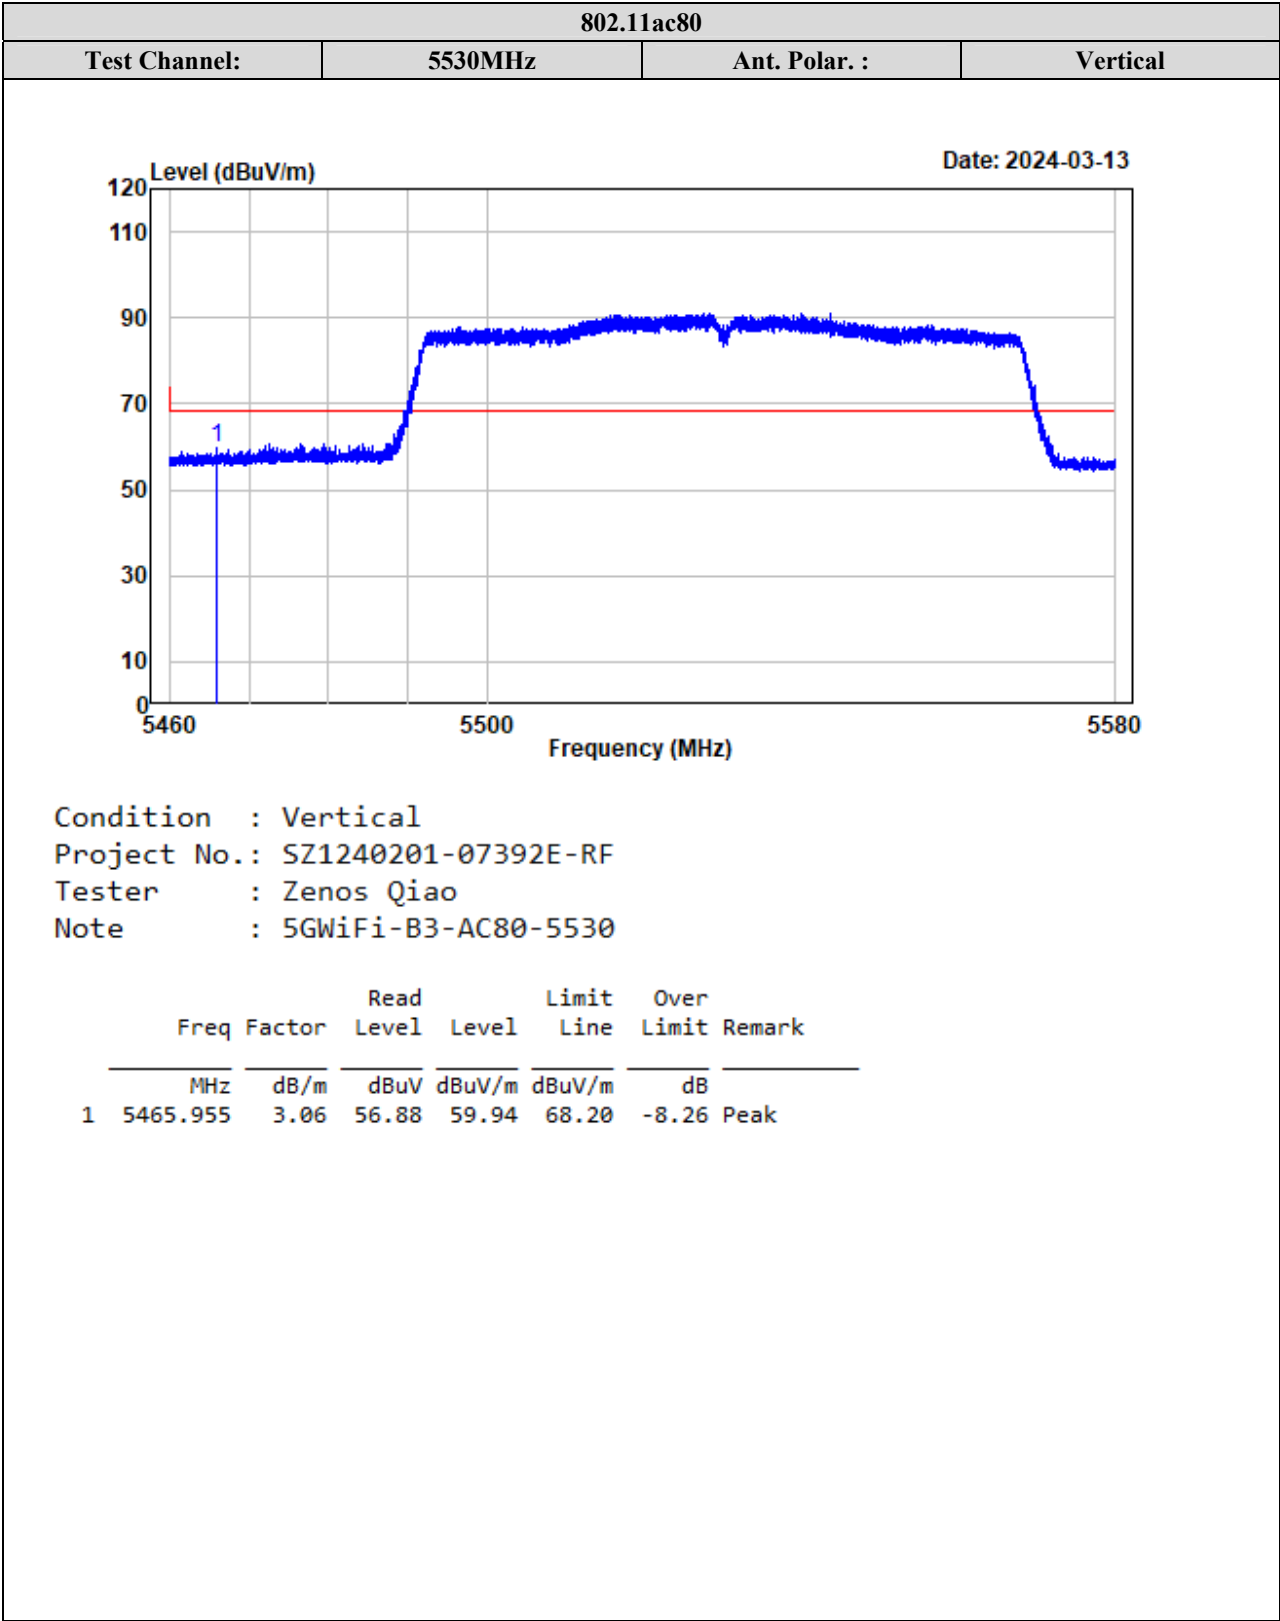


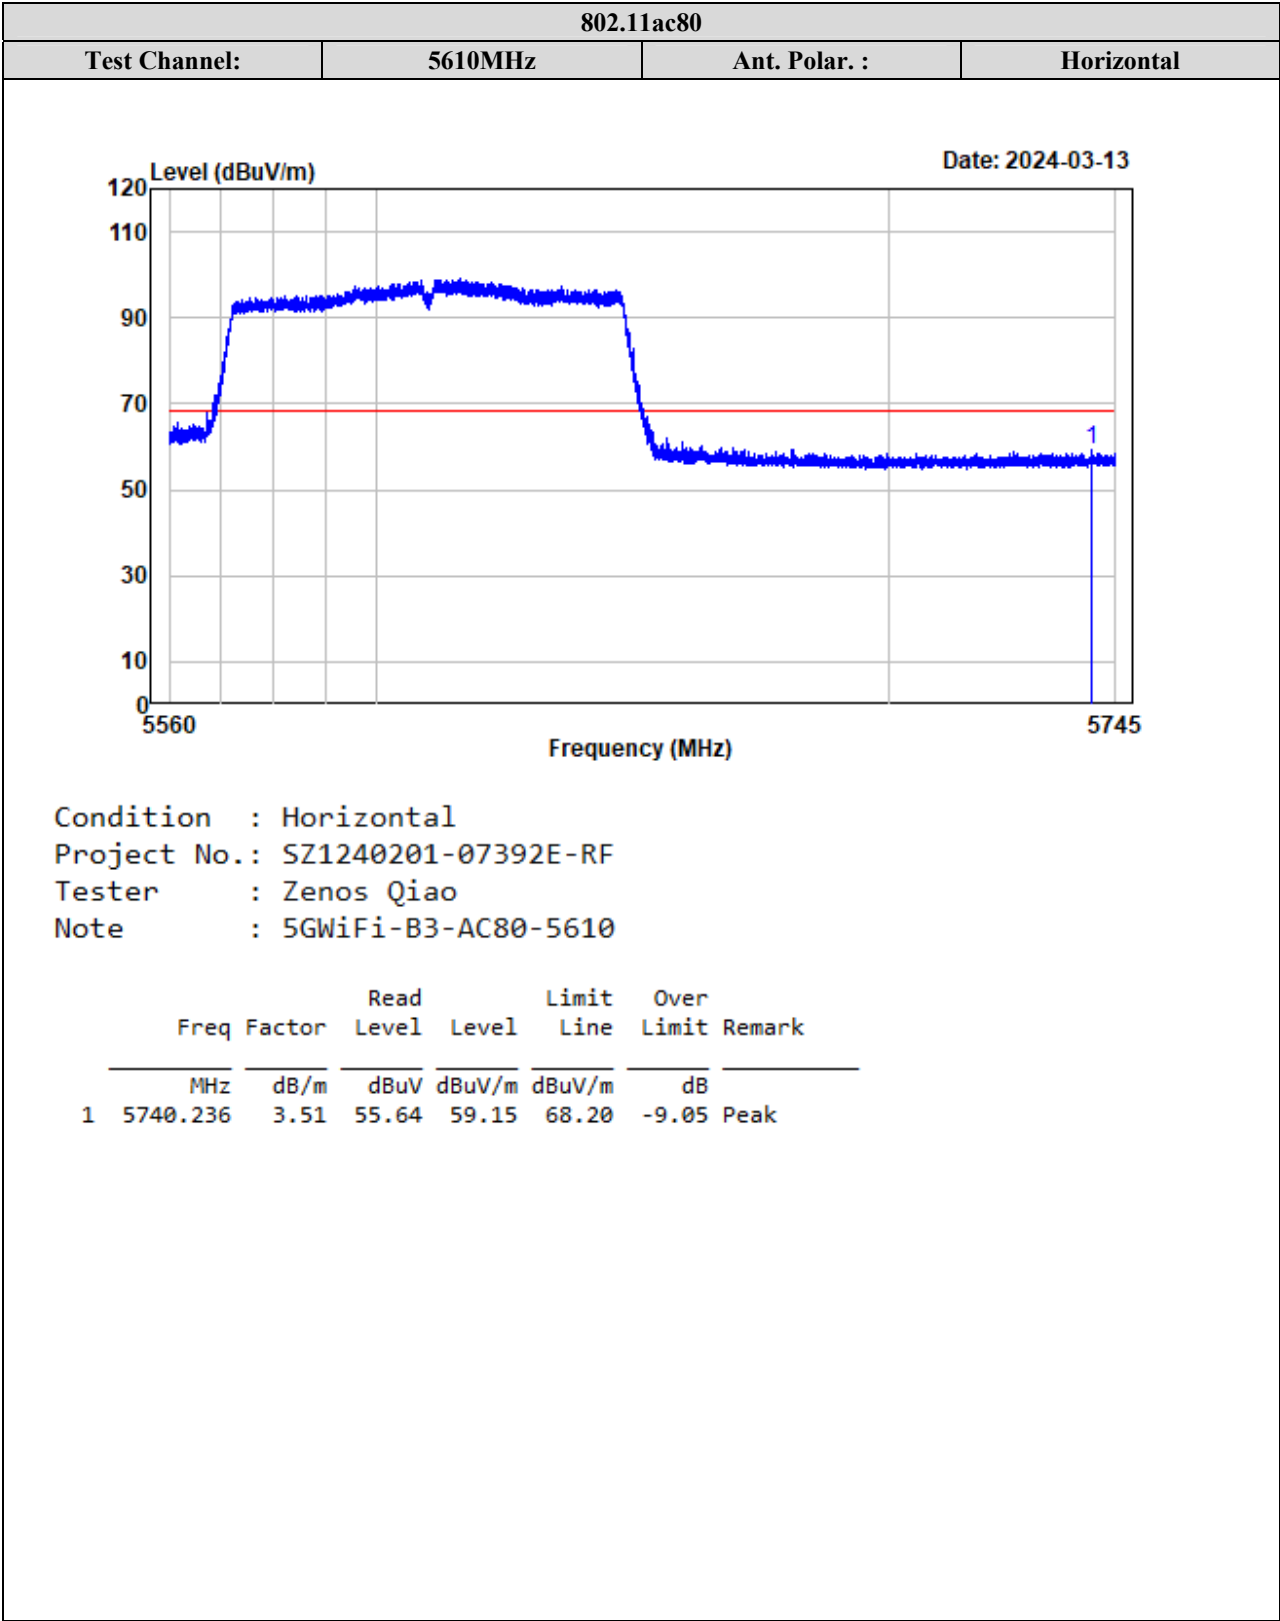


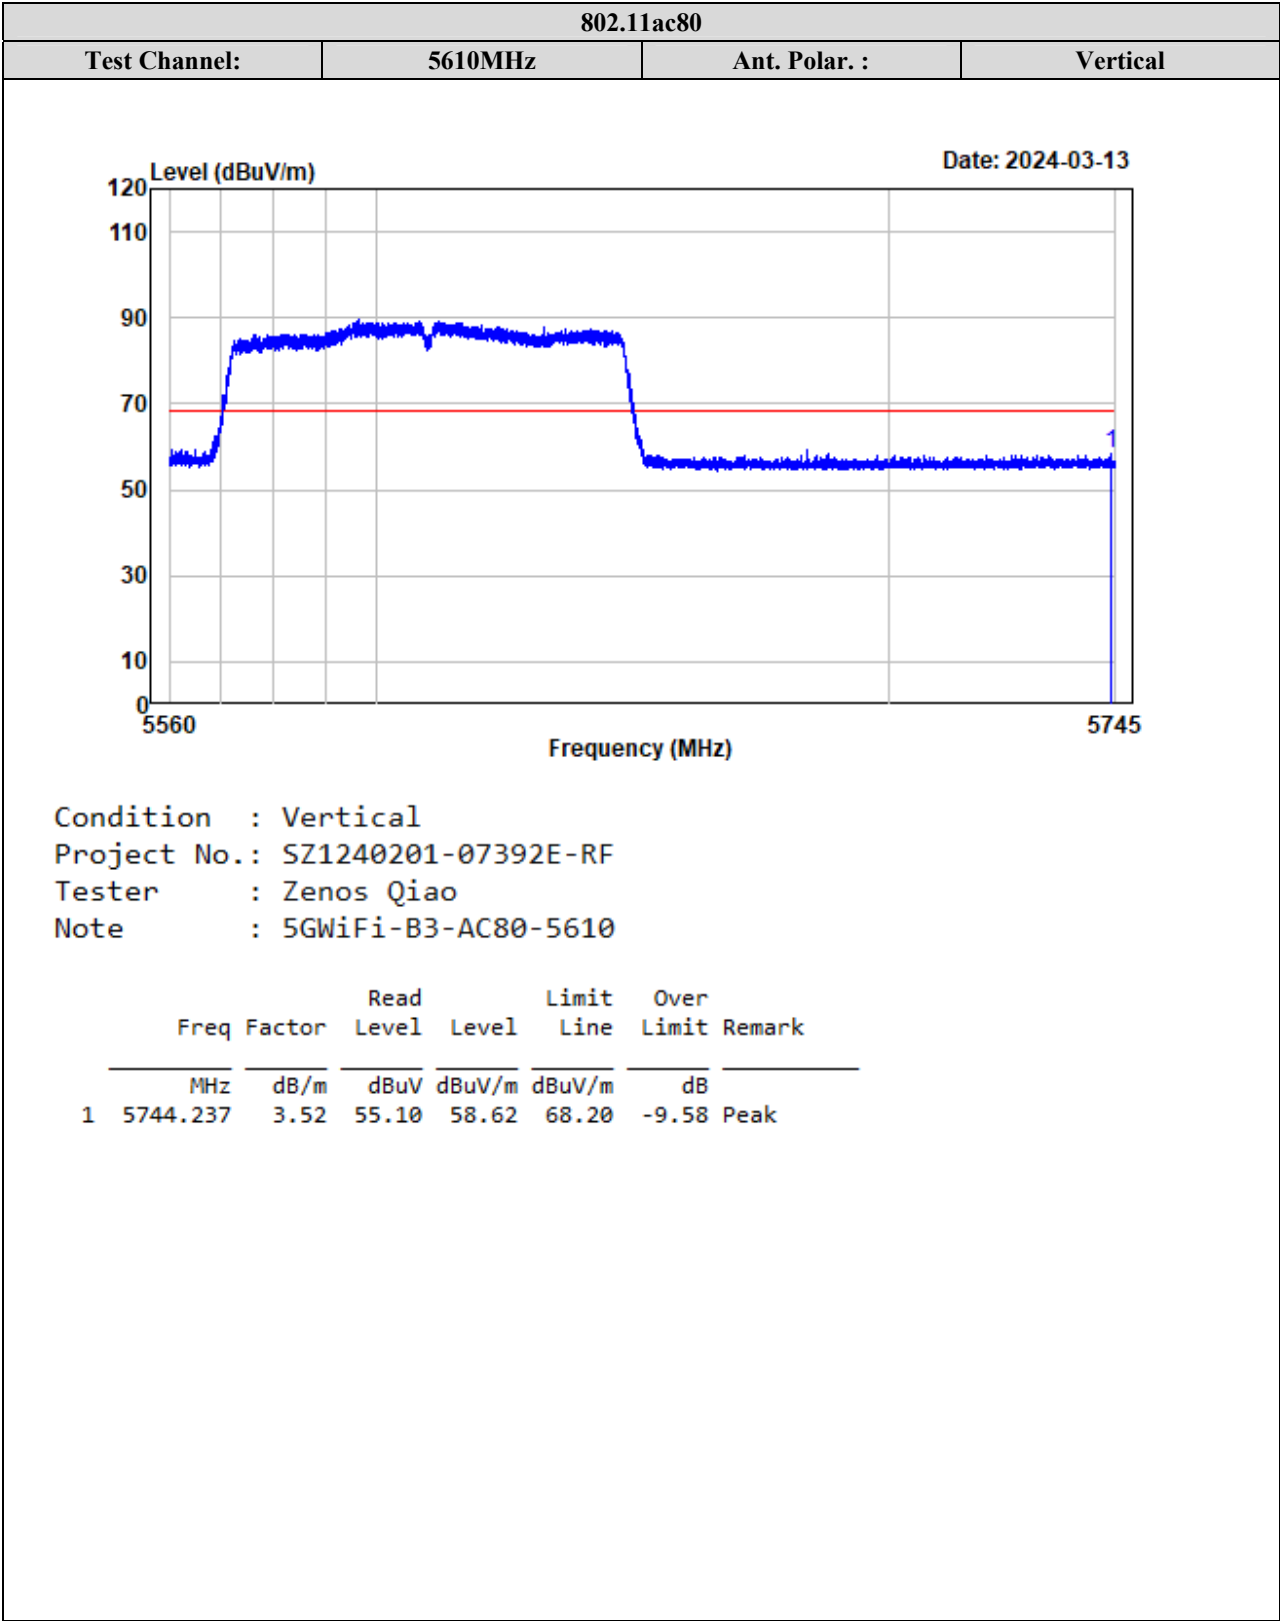



5725-5850MHz:

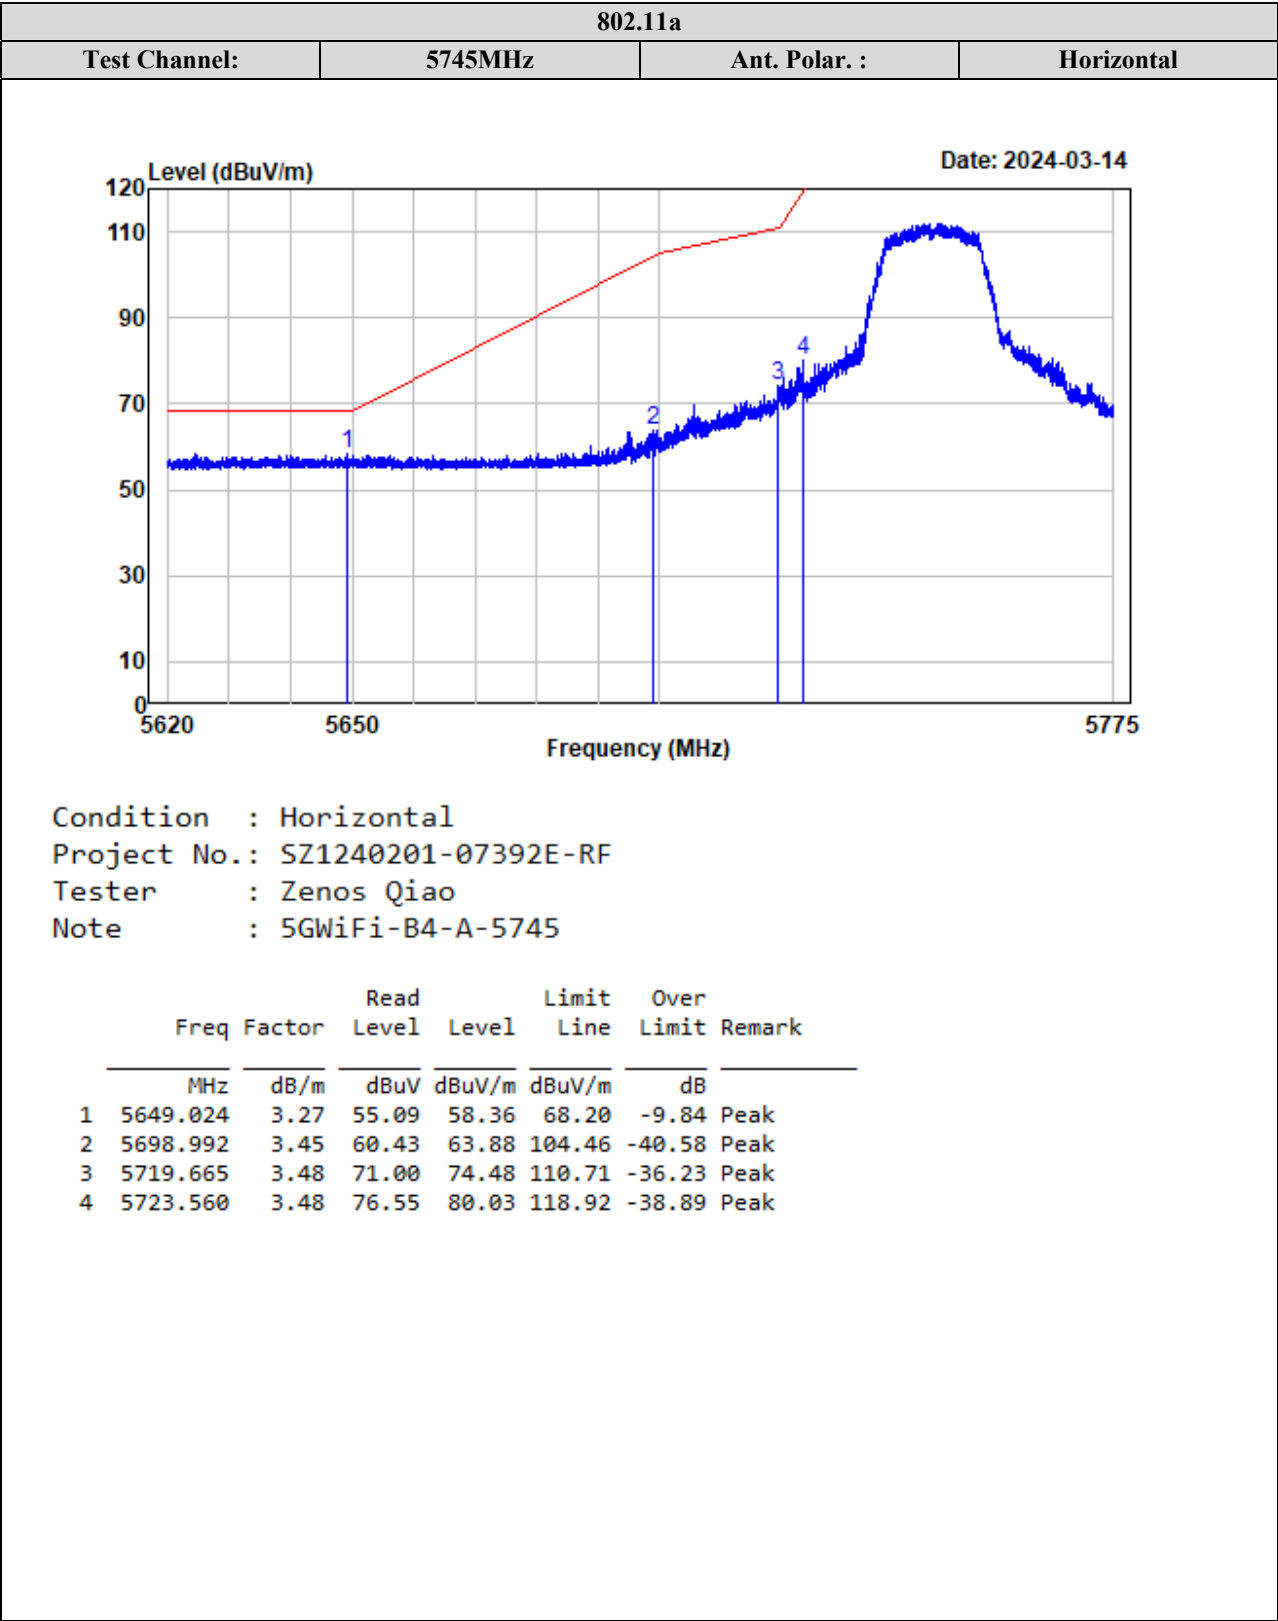


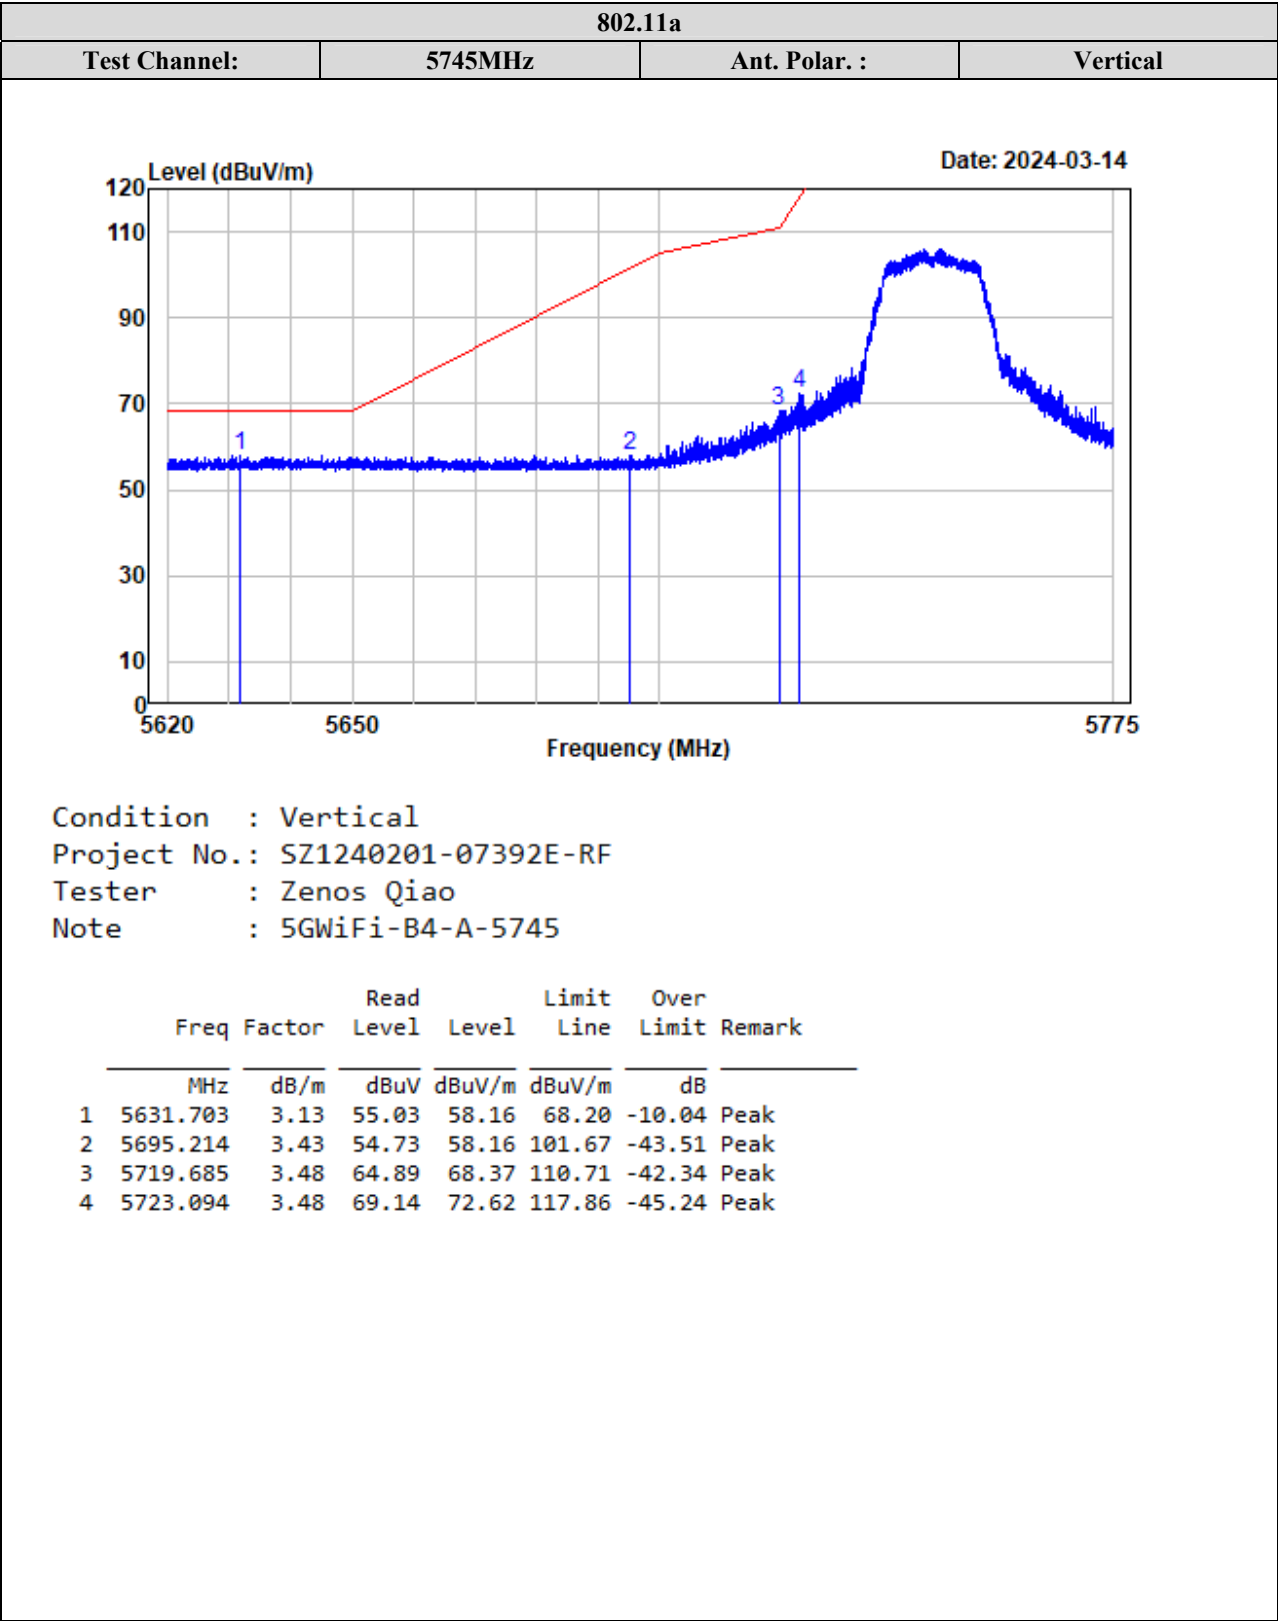


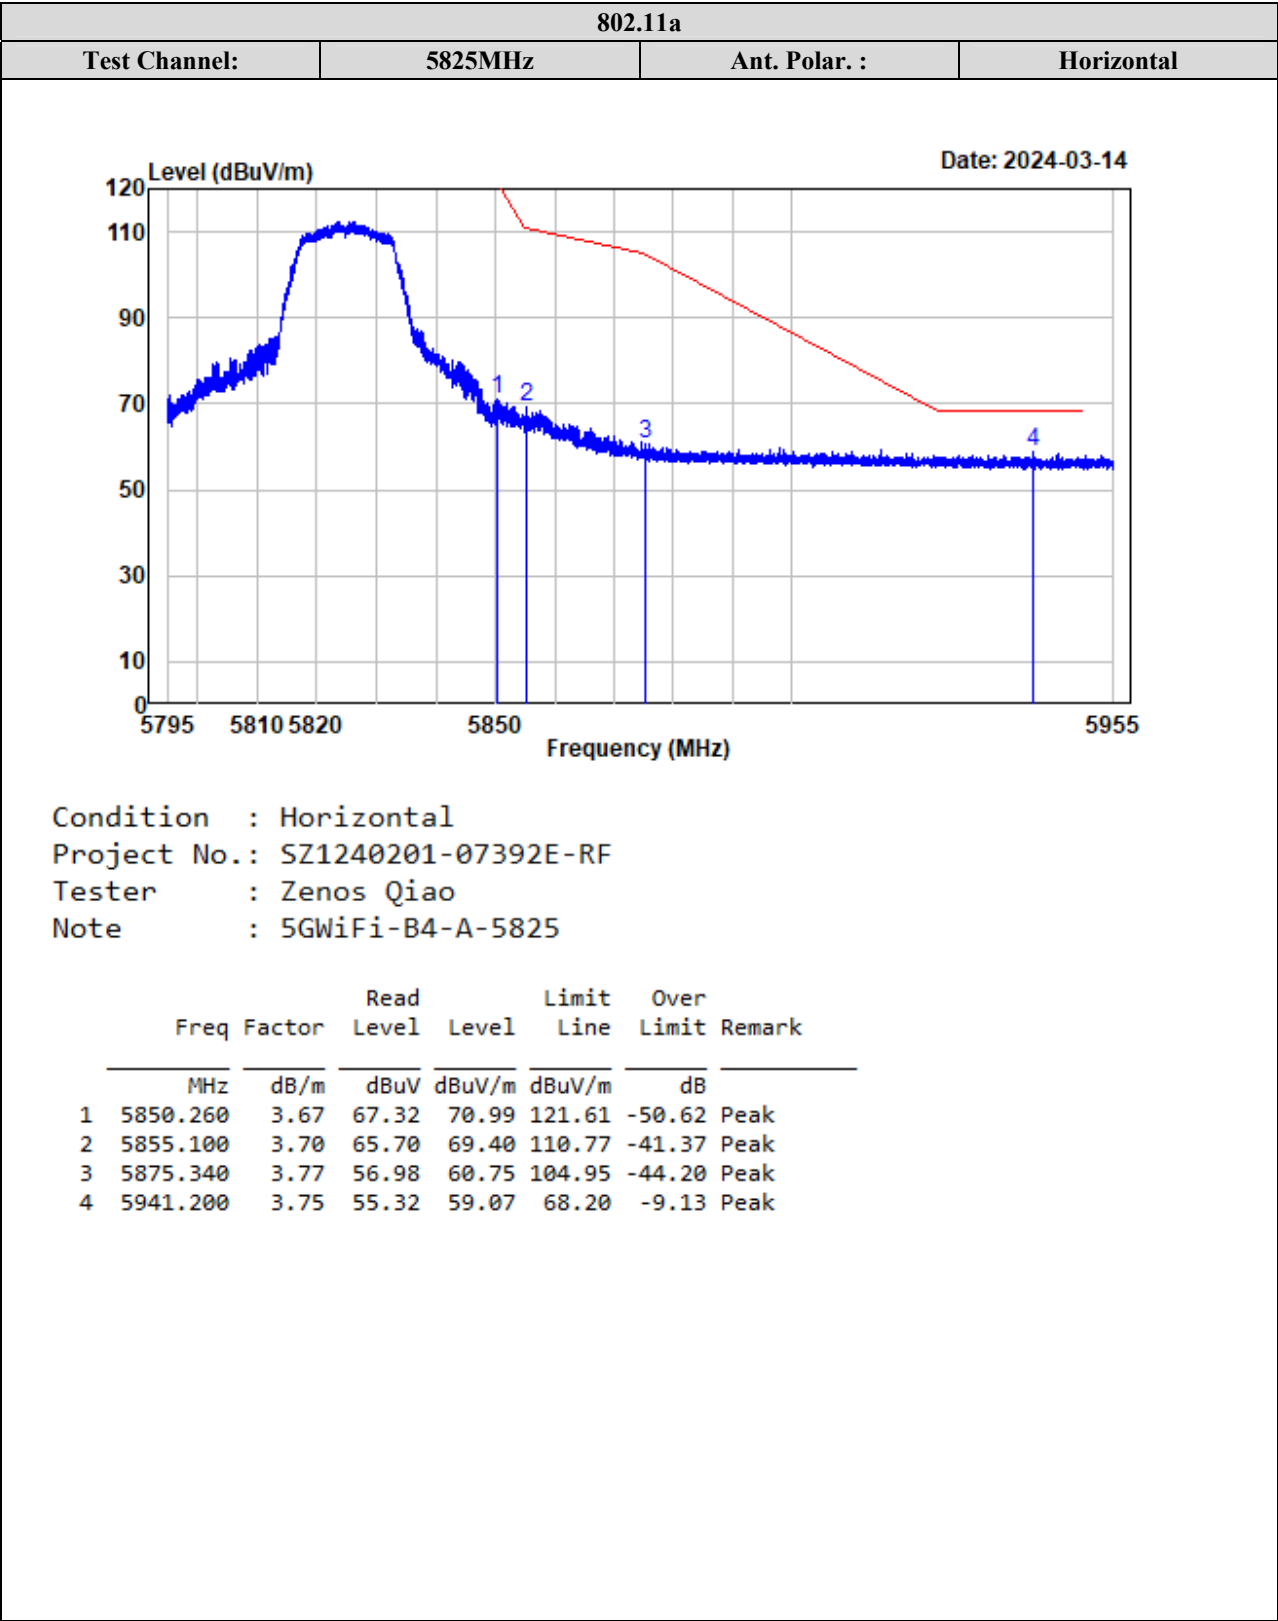

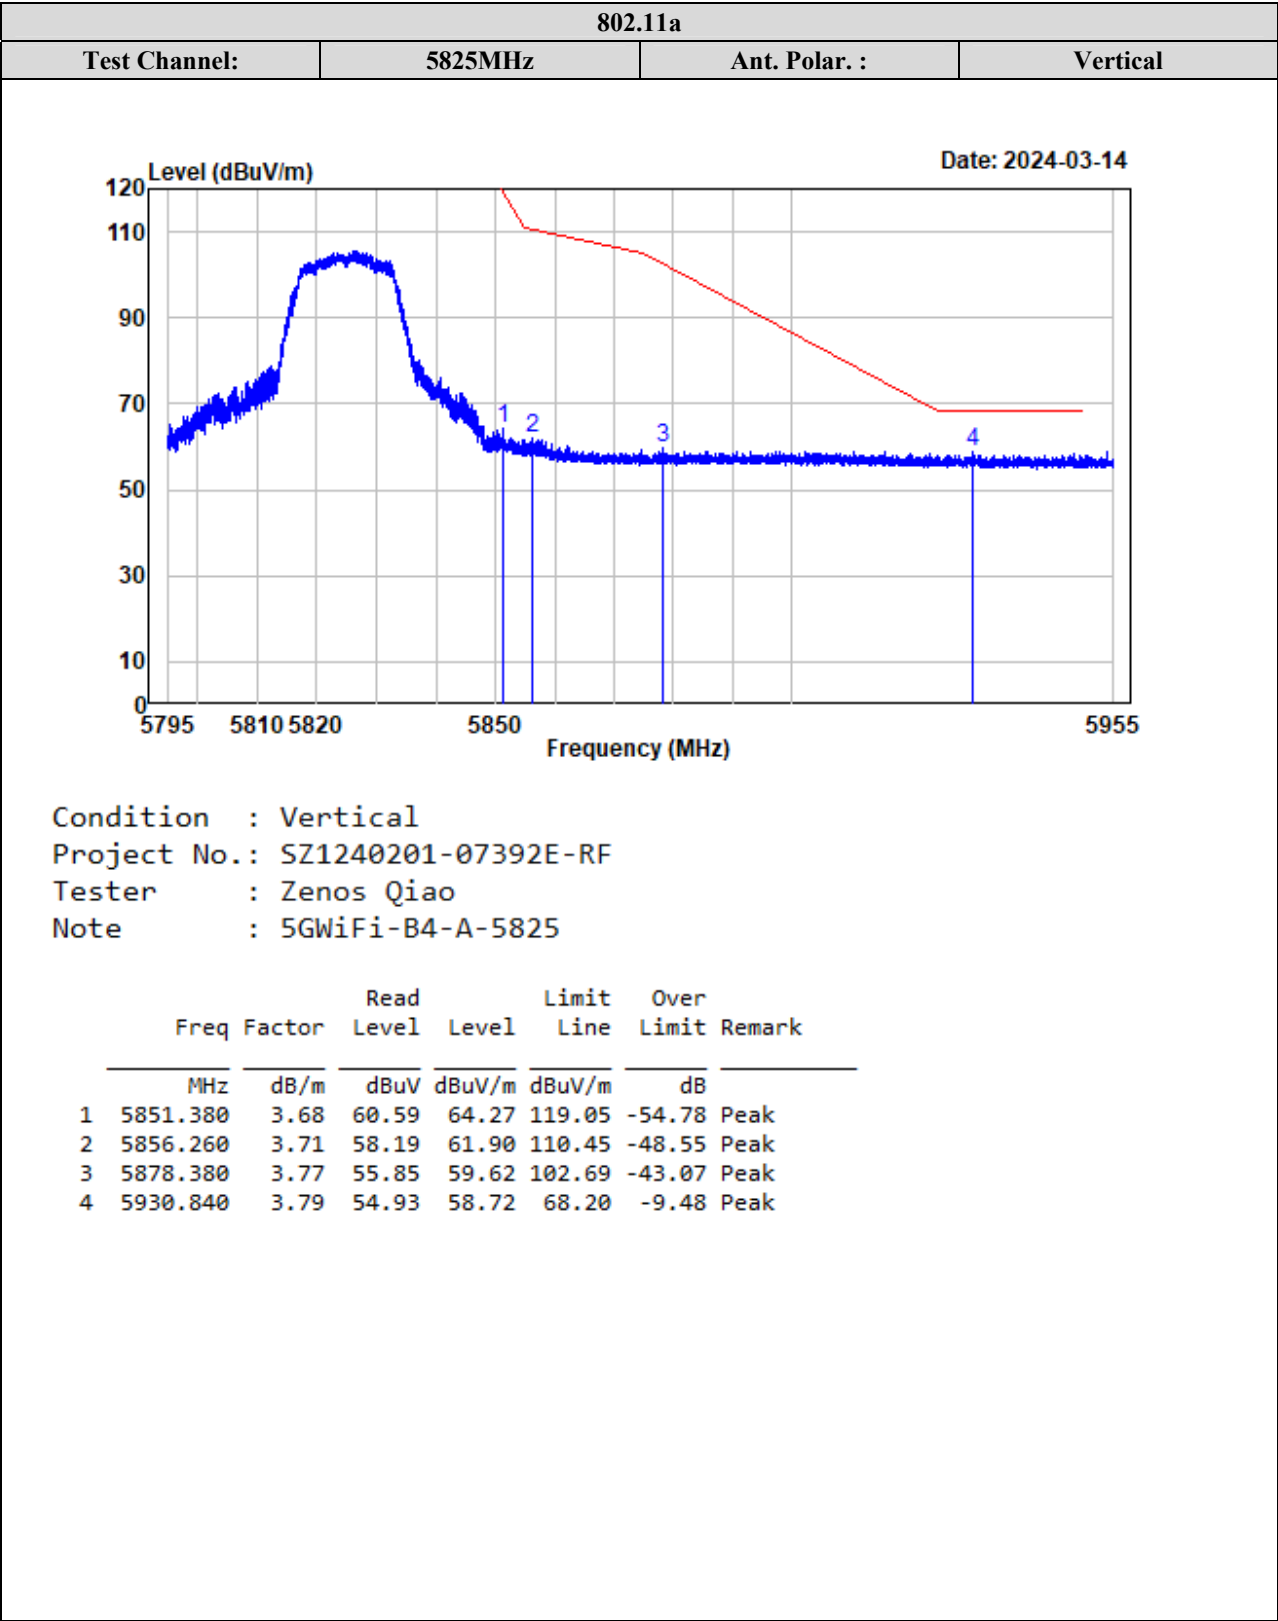

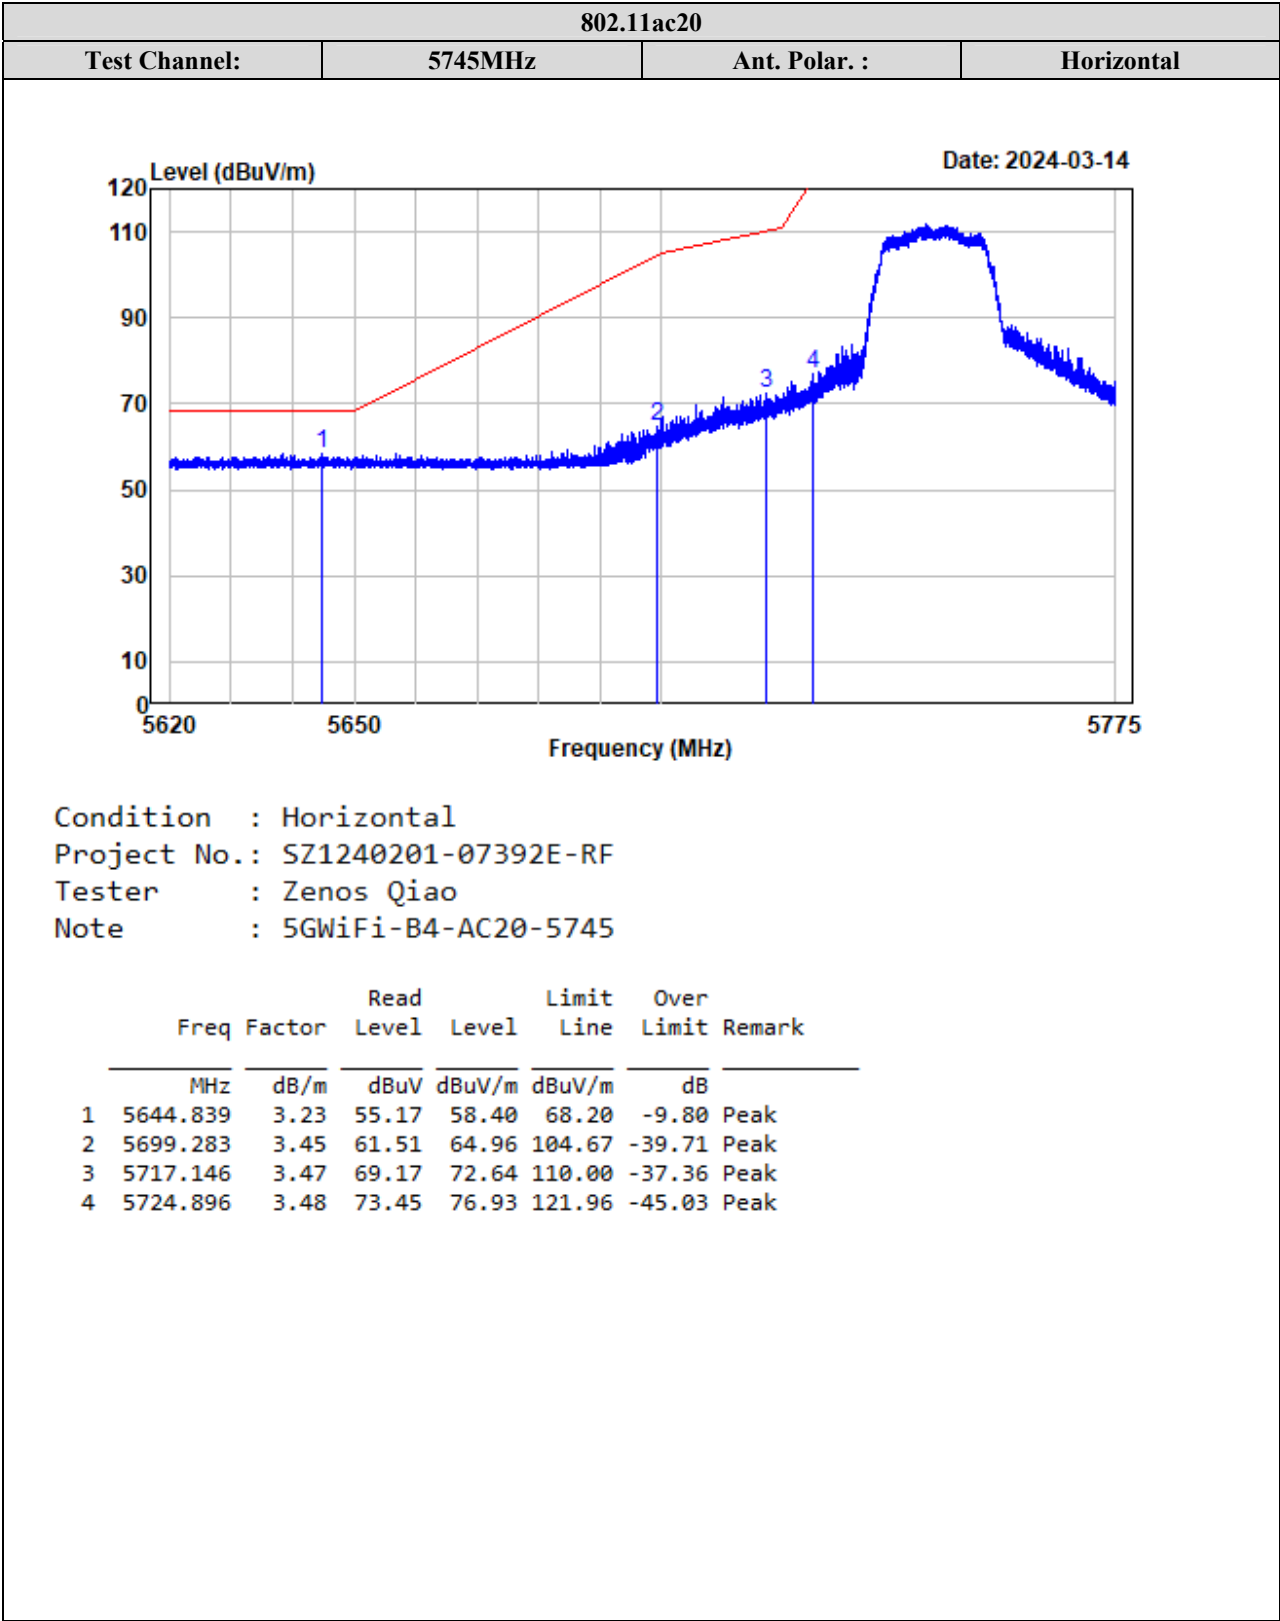

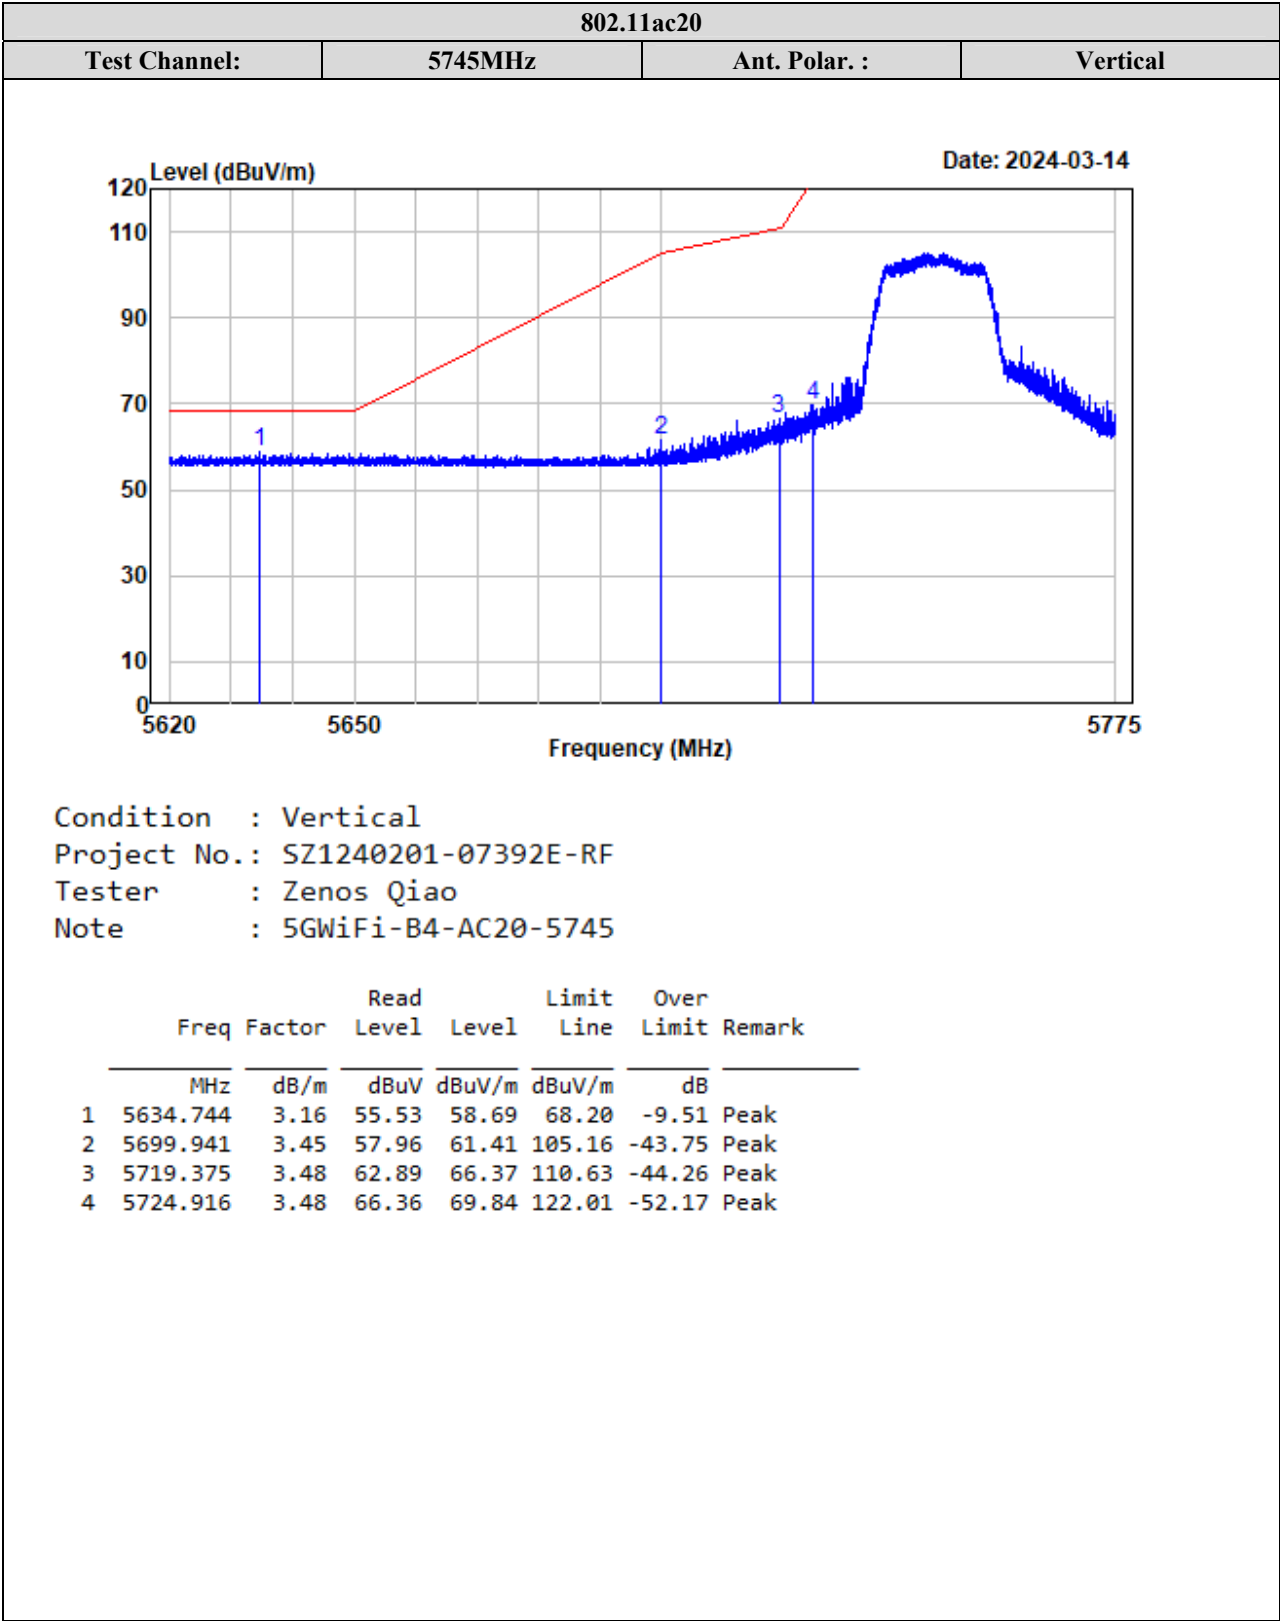


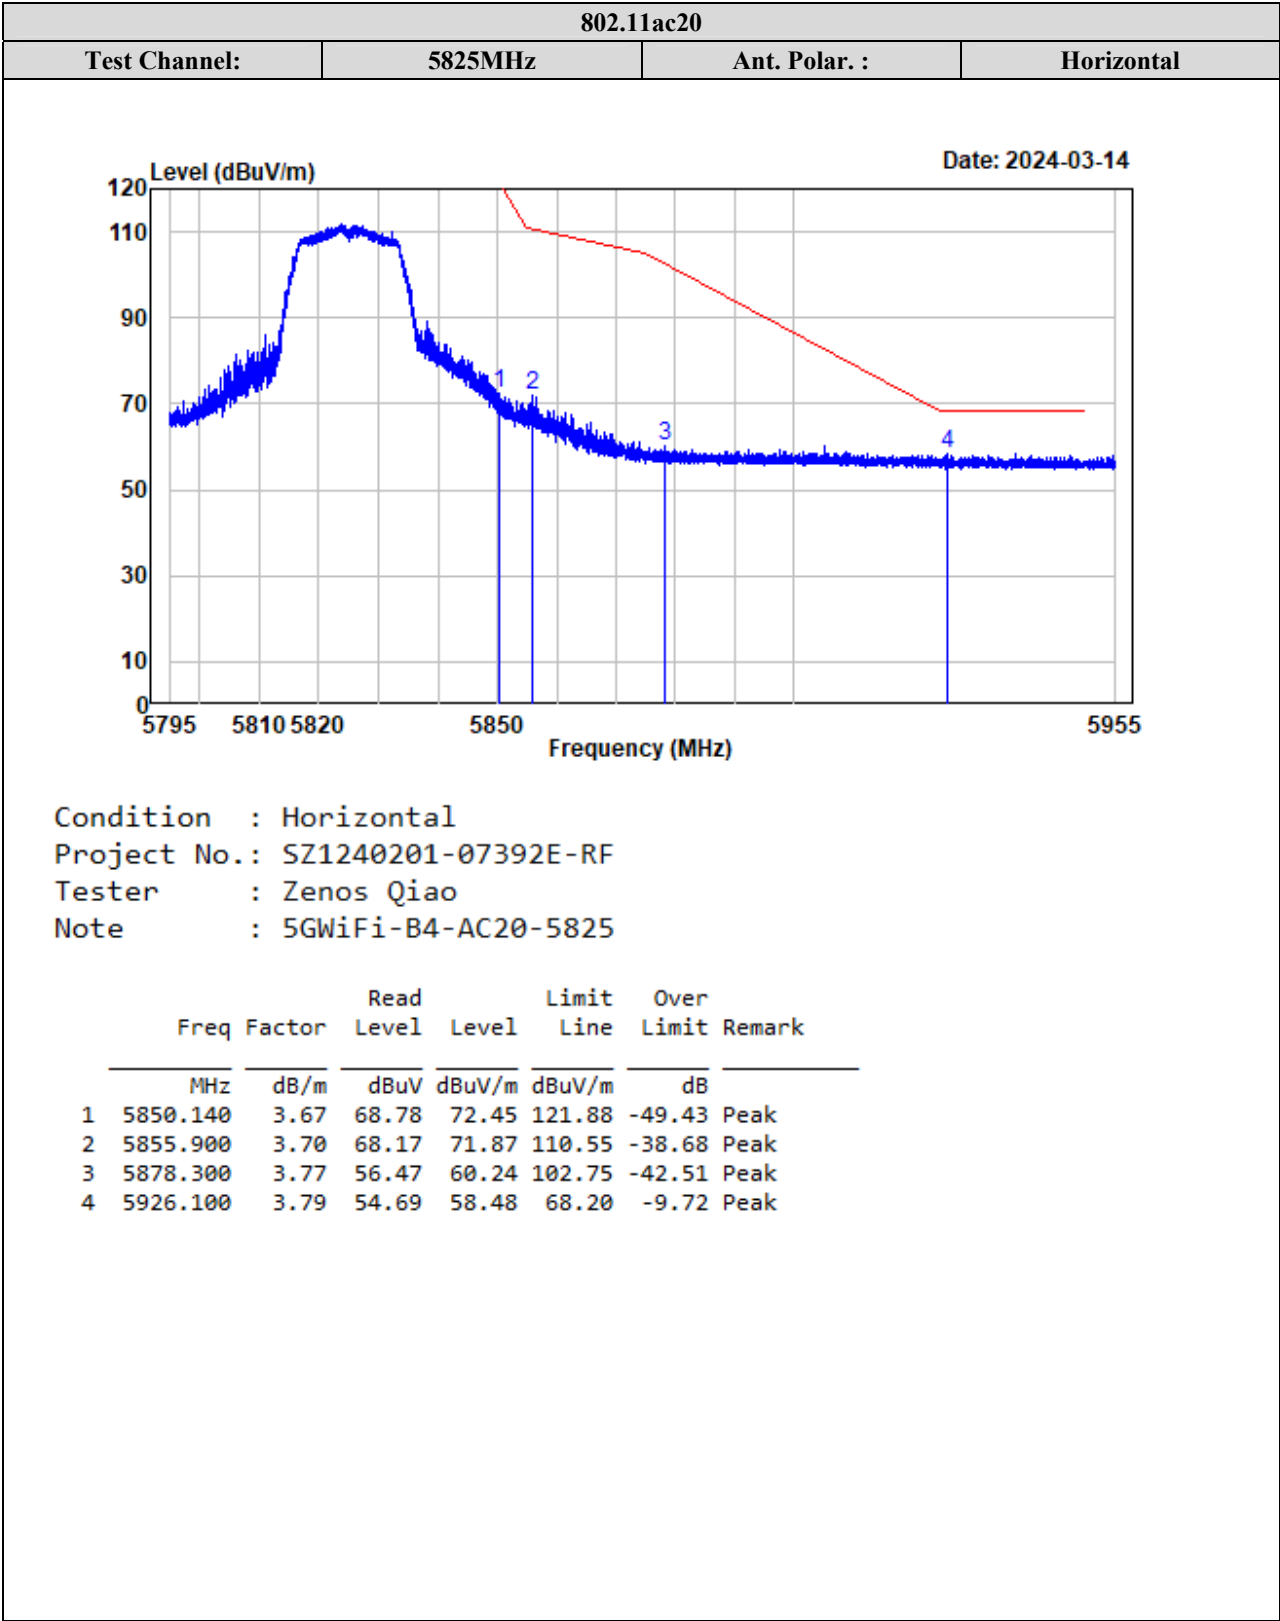

TR-EM-RF015

Page 235 of 258


Version 1.0 (2023/10/07)

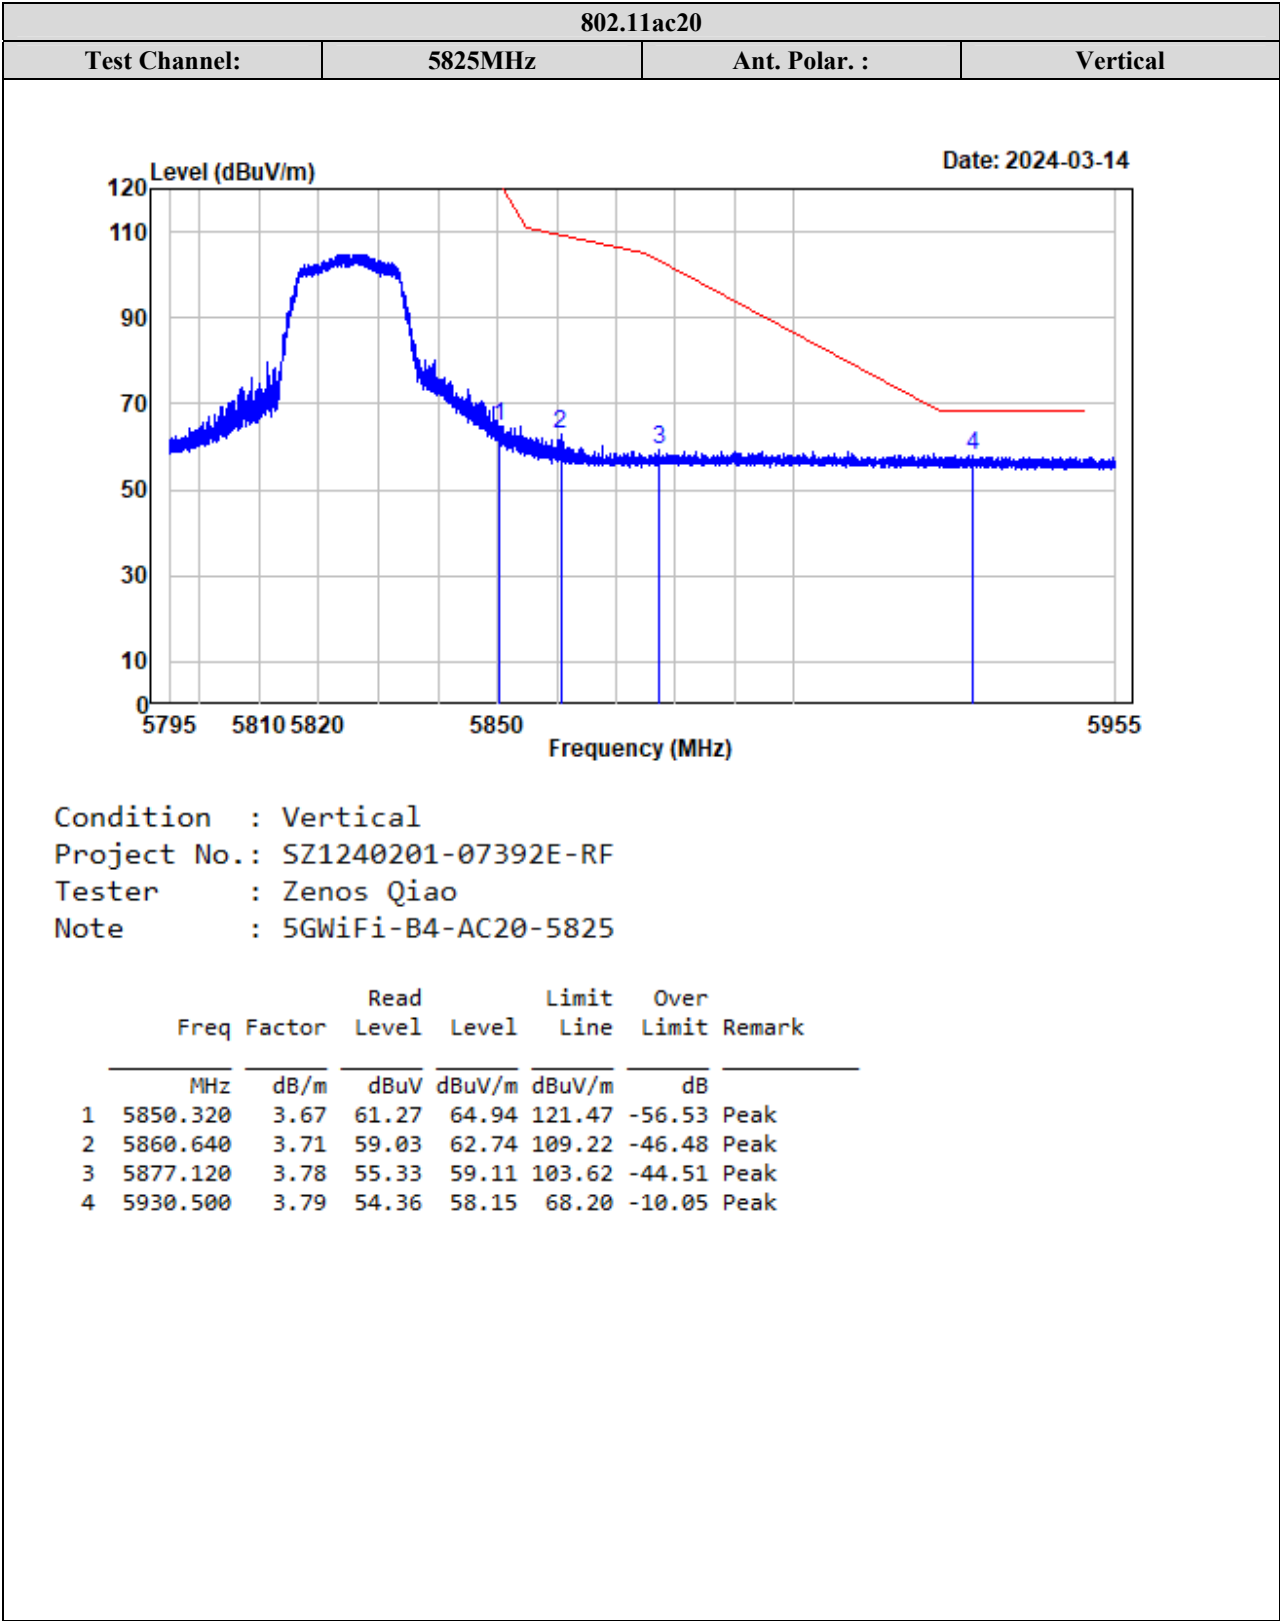



TR-EM-RF015


Page 236 of 258


Version 1.0 (2023/10/07)

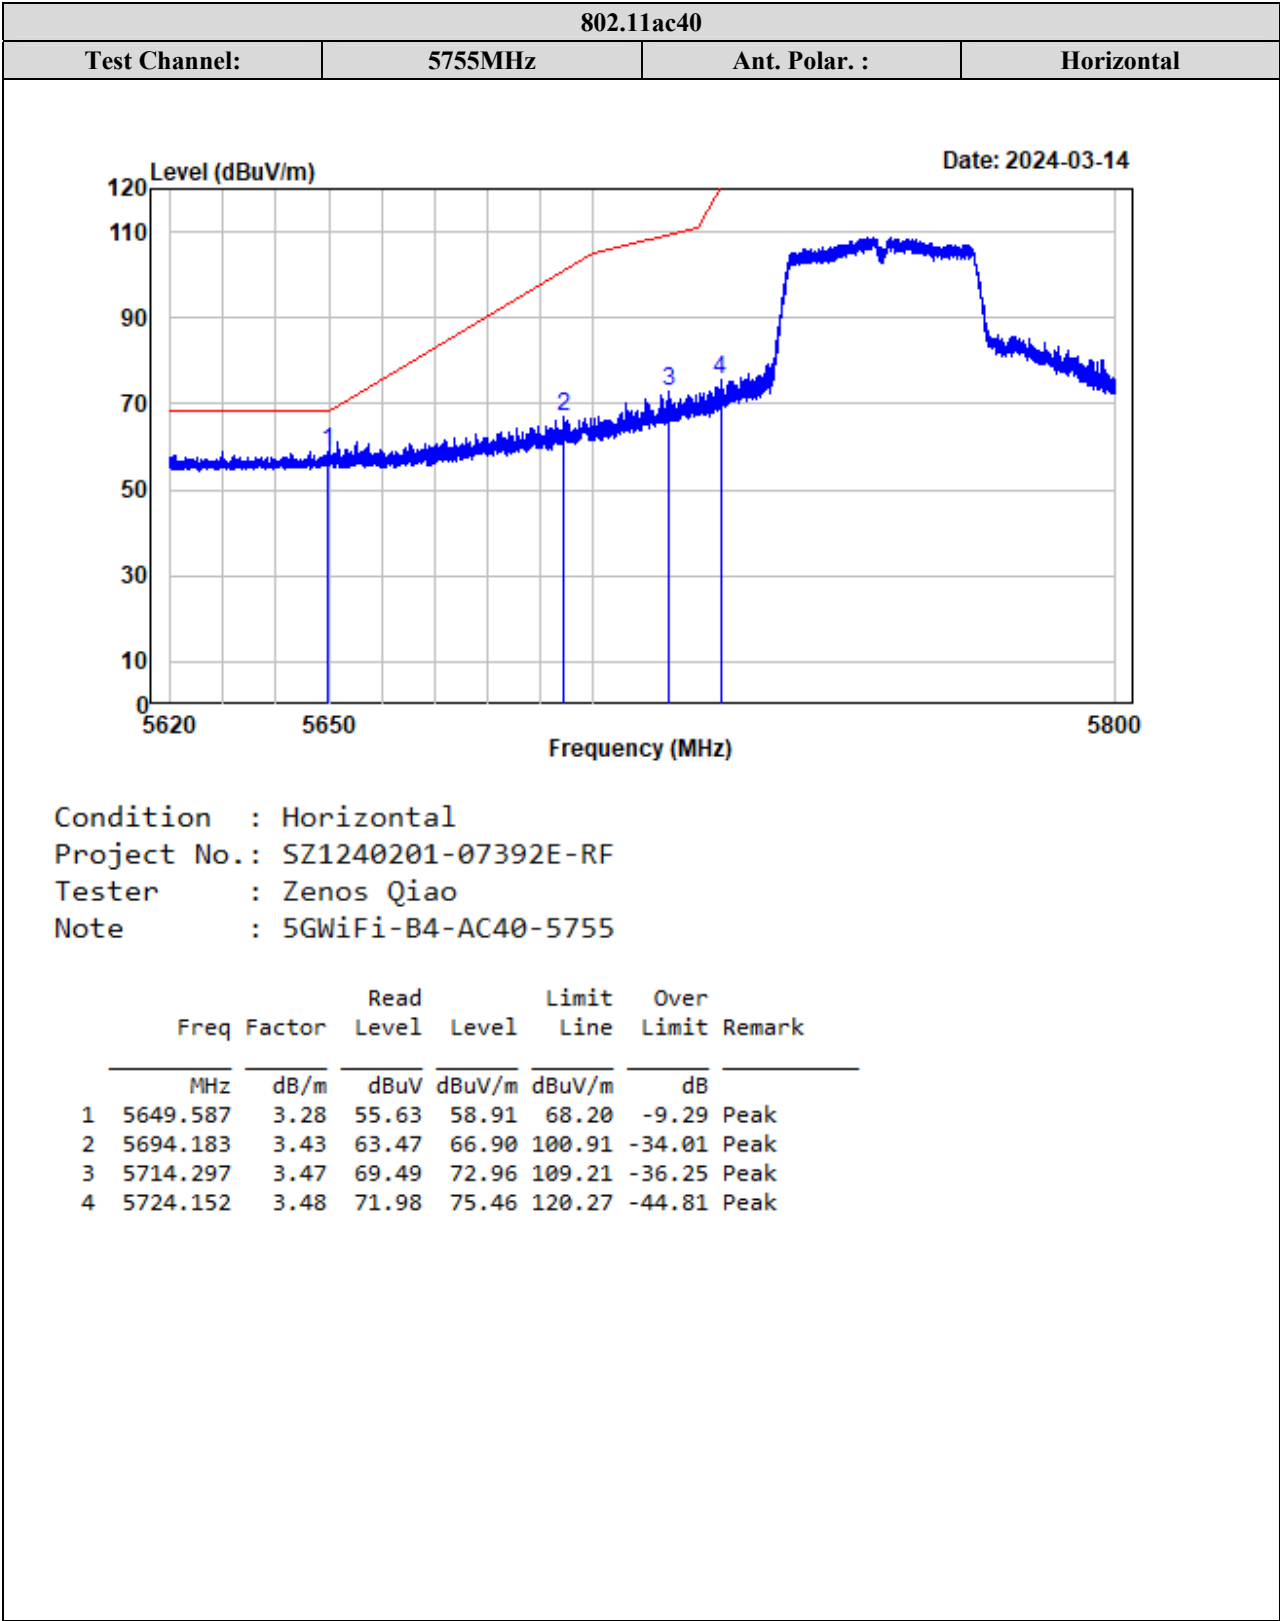


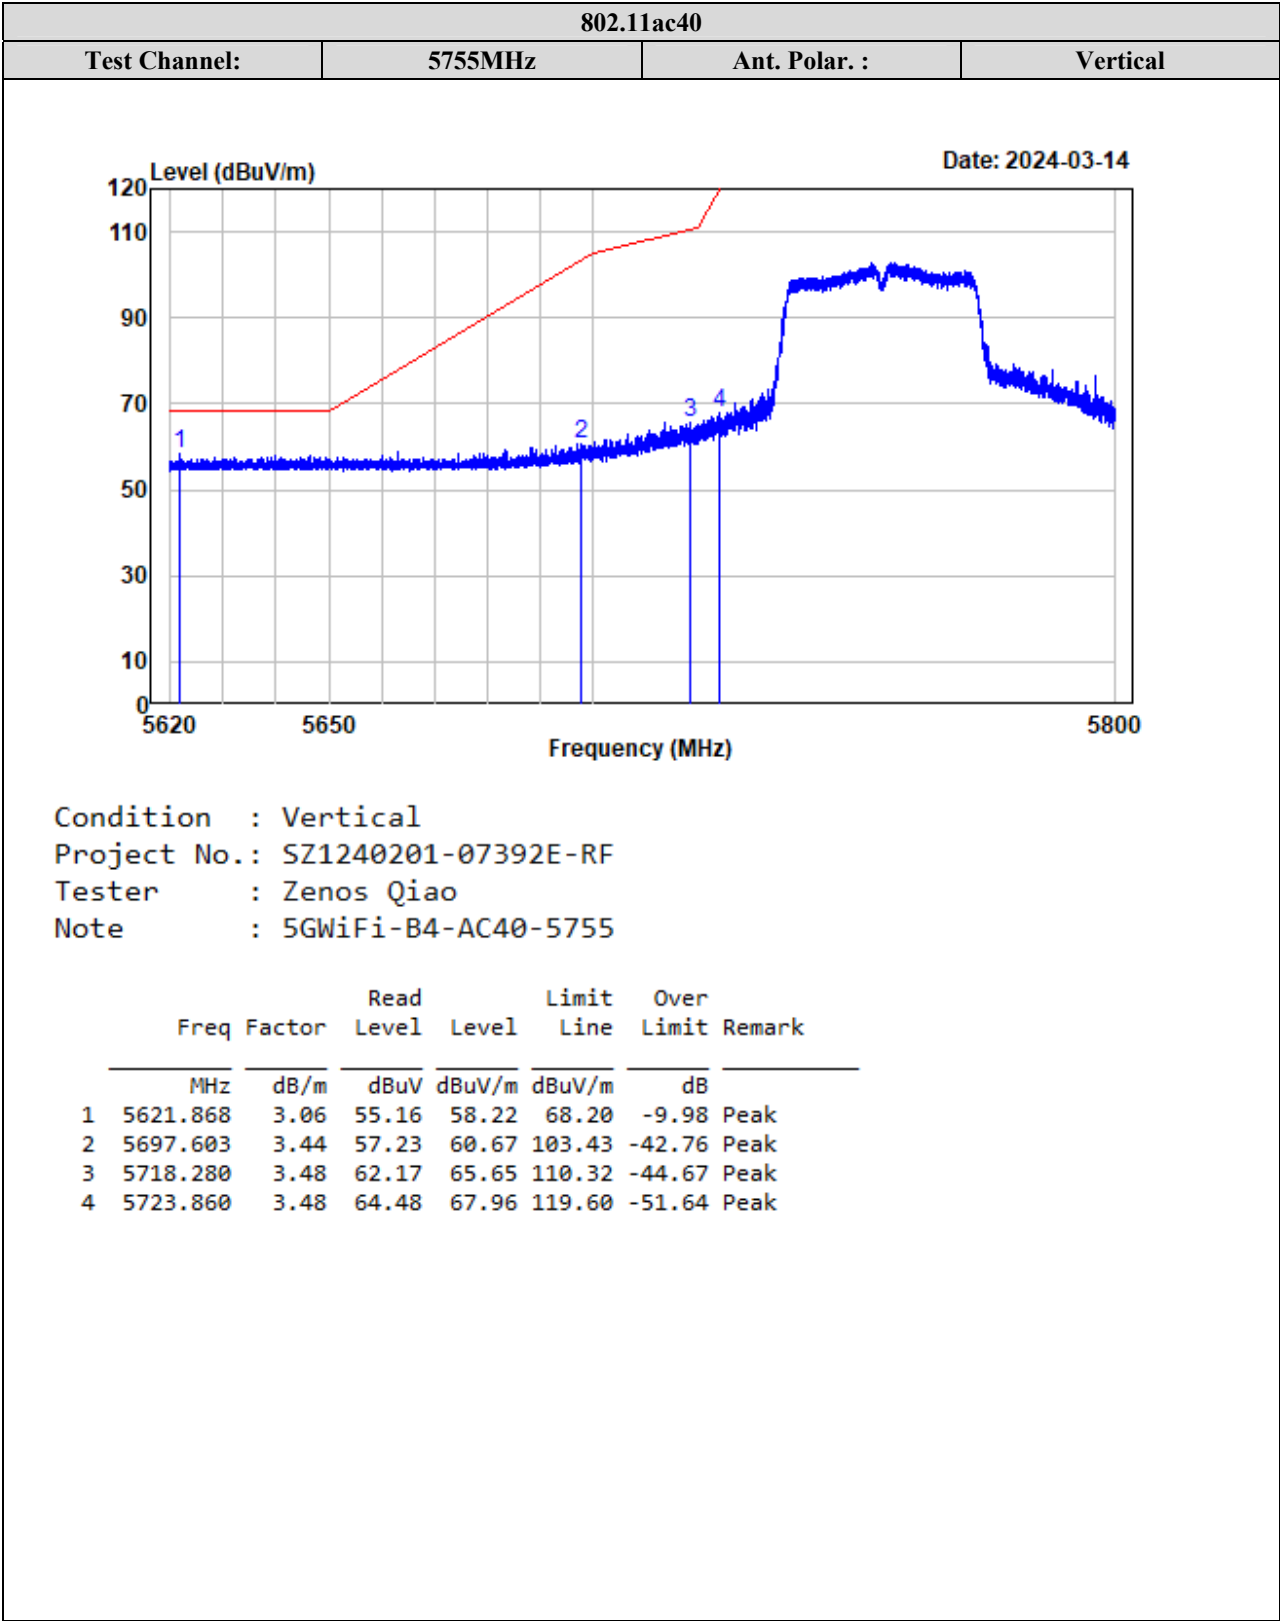


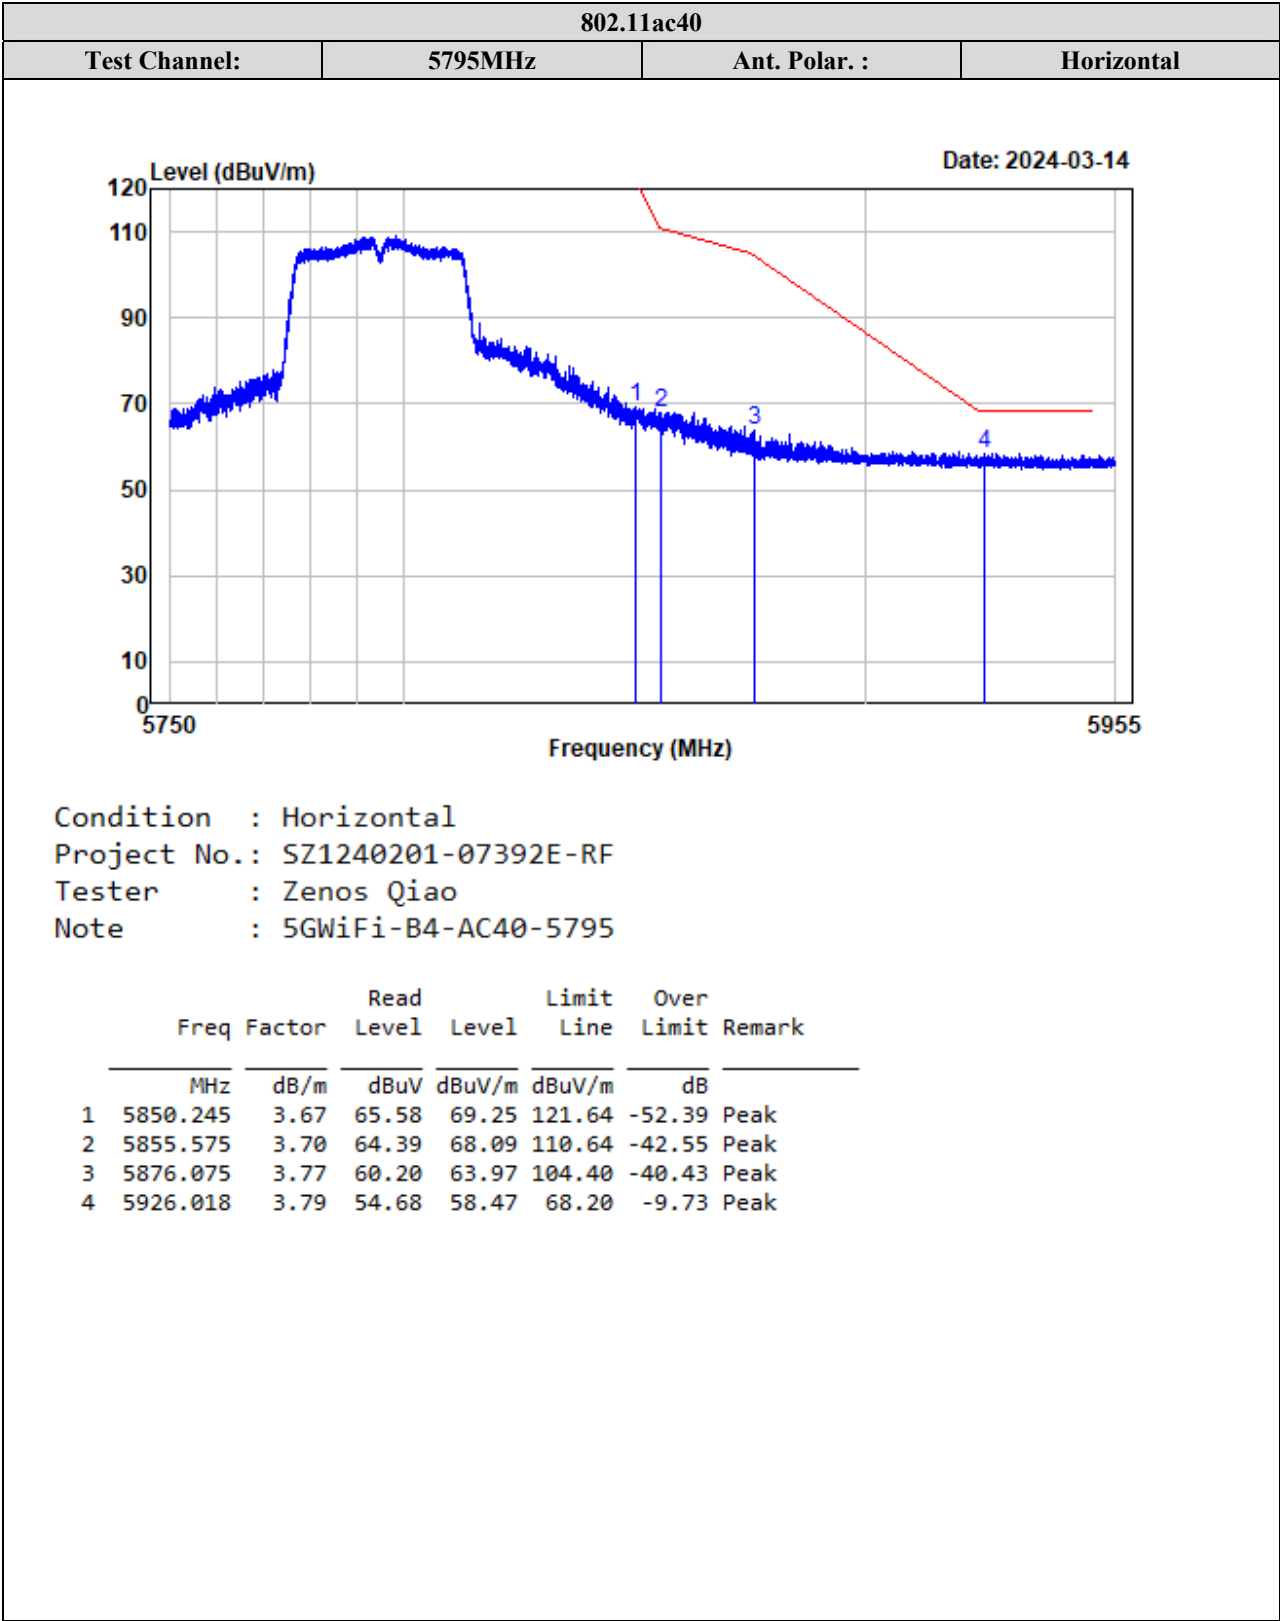


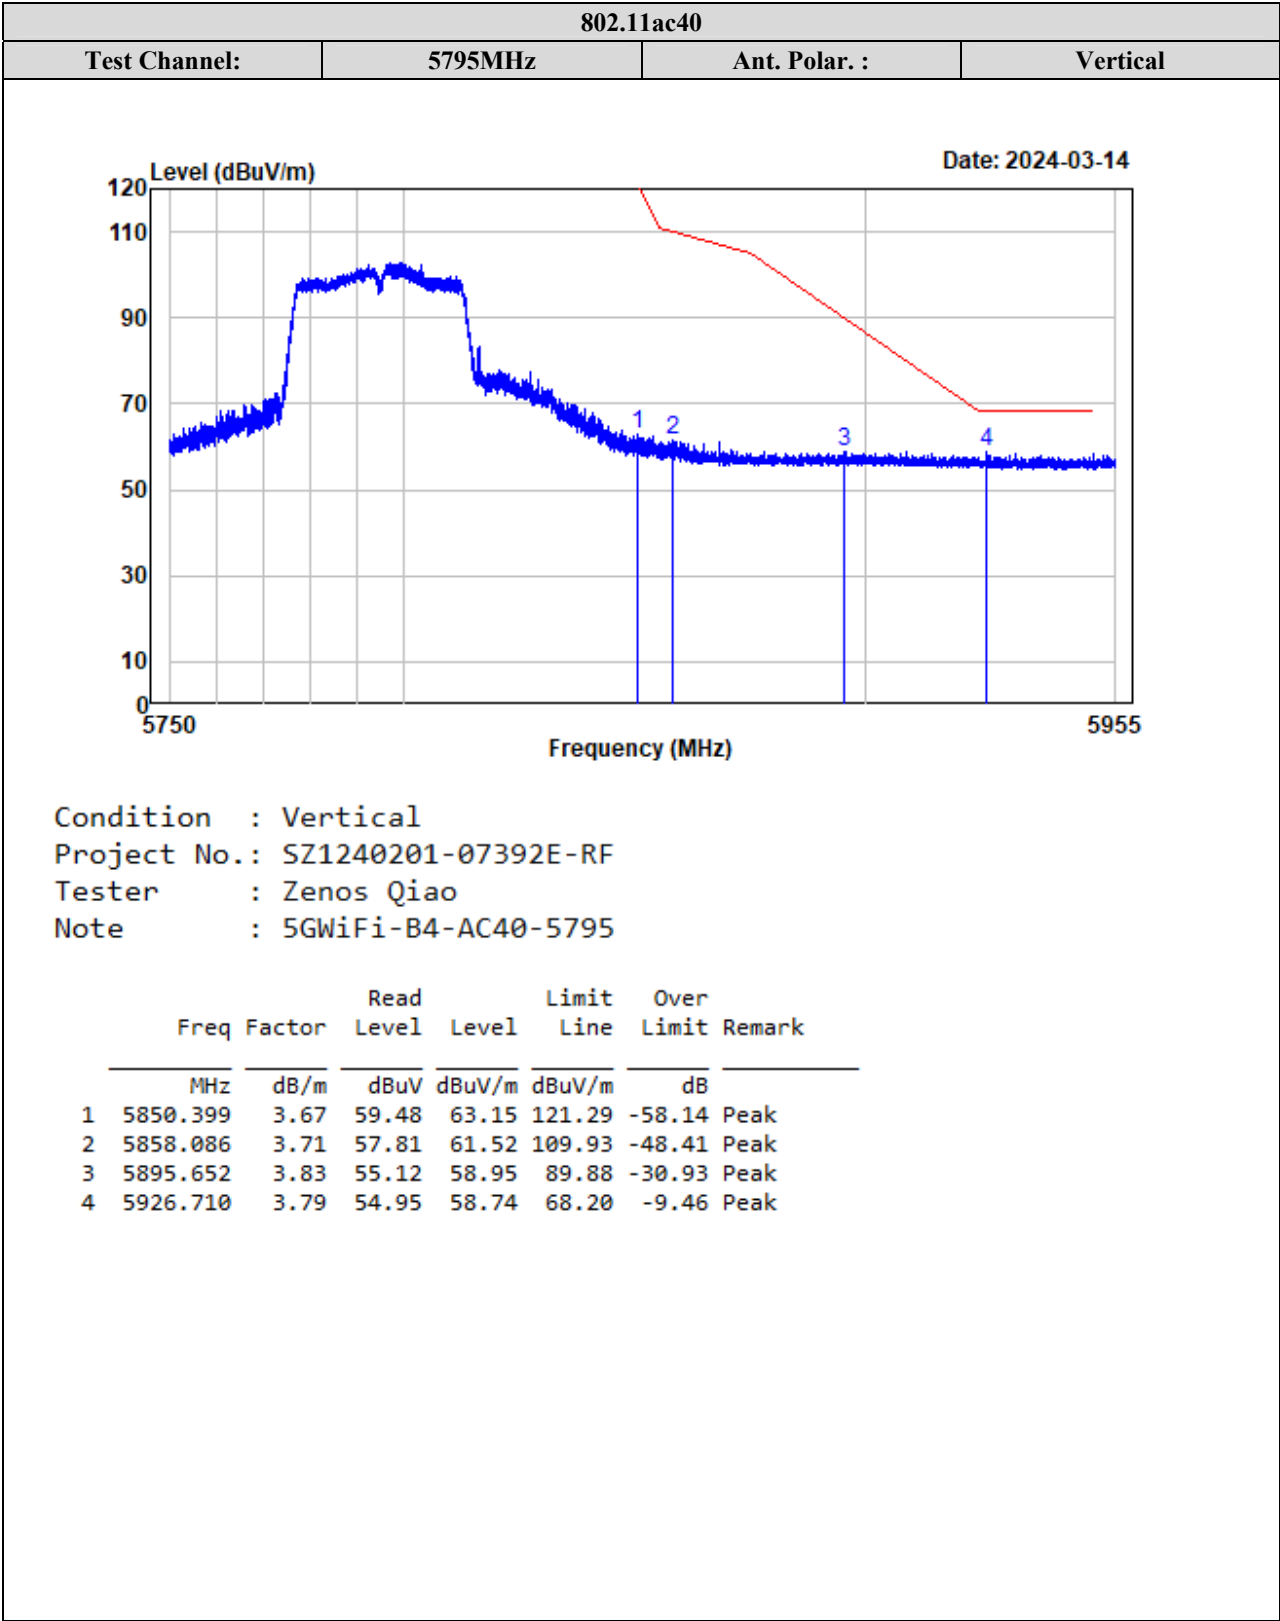

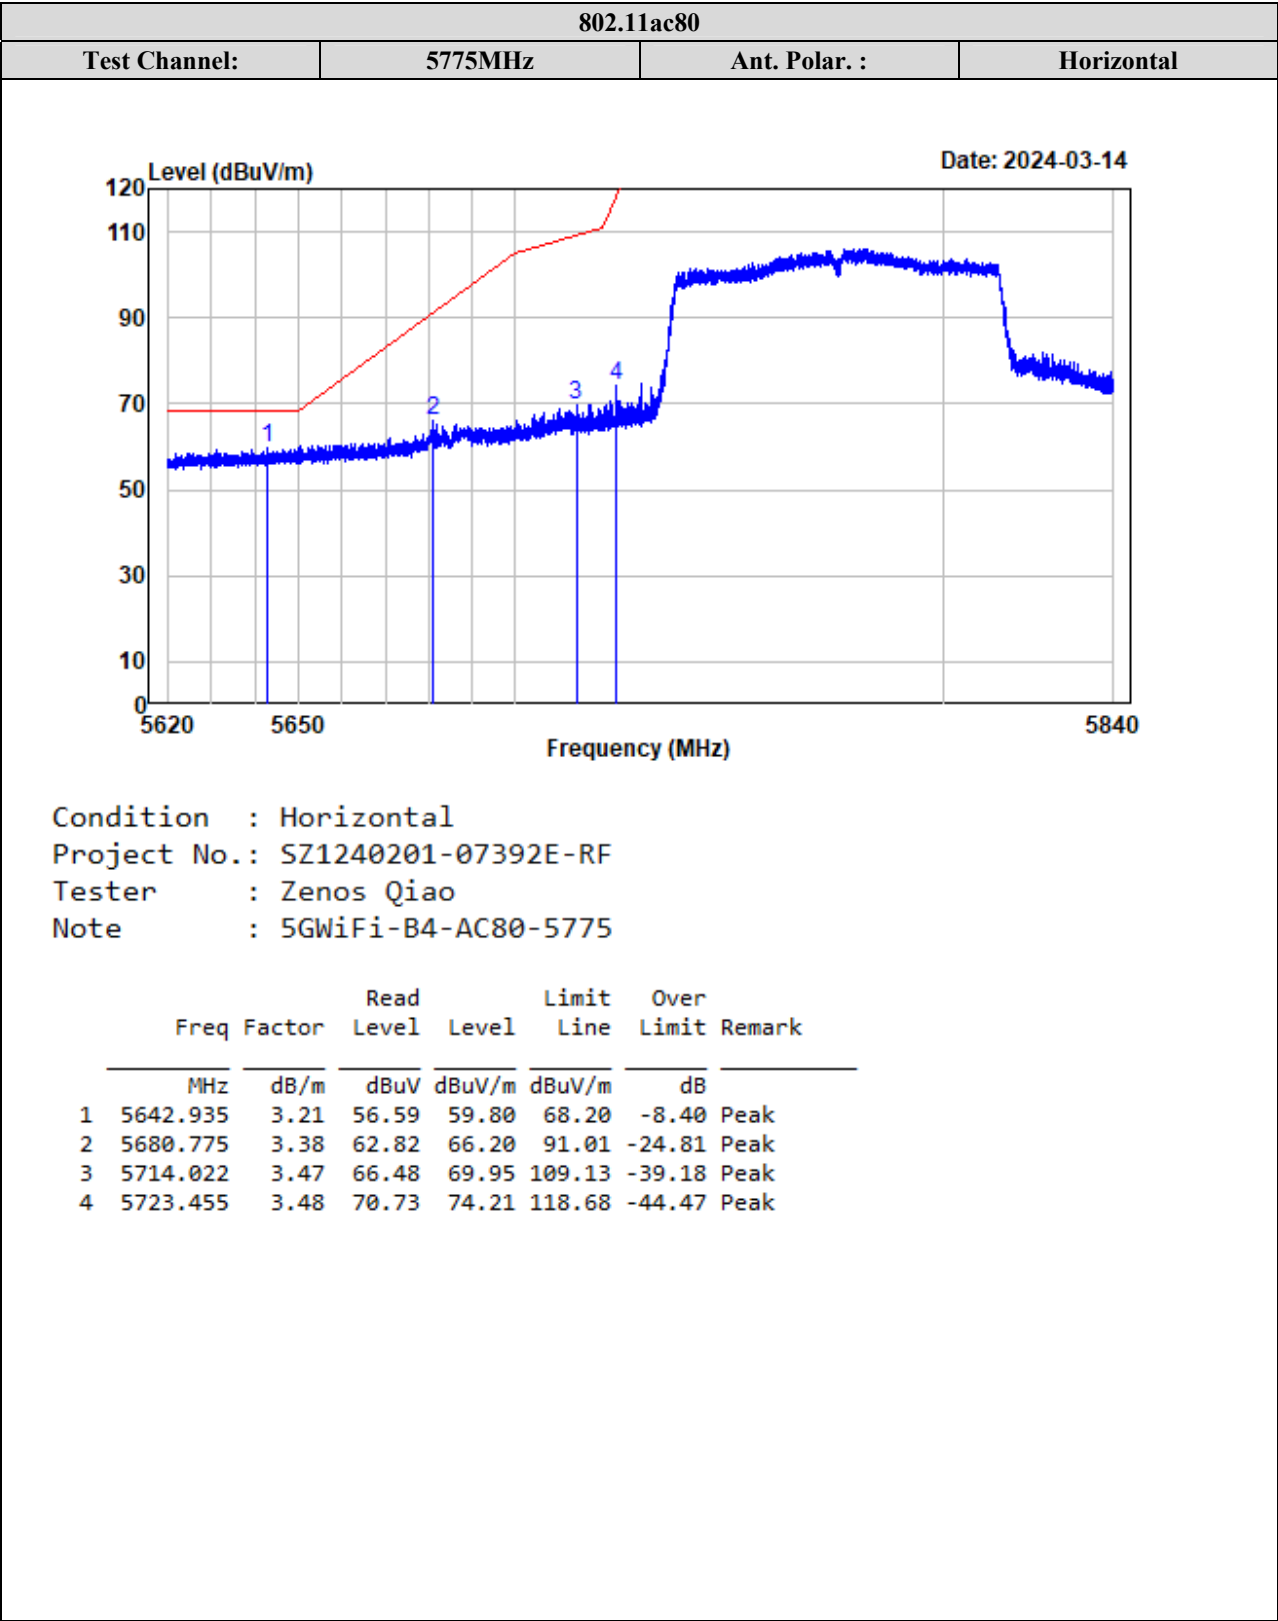

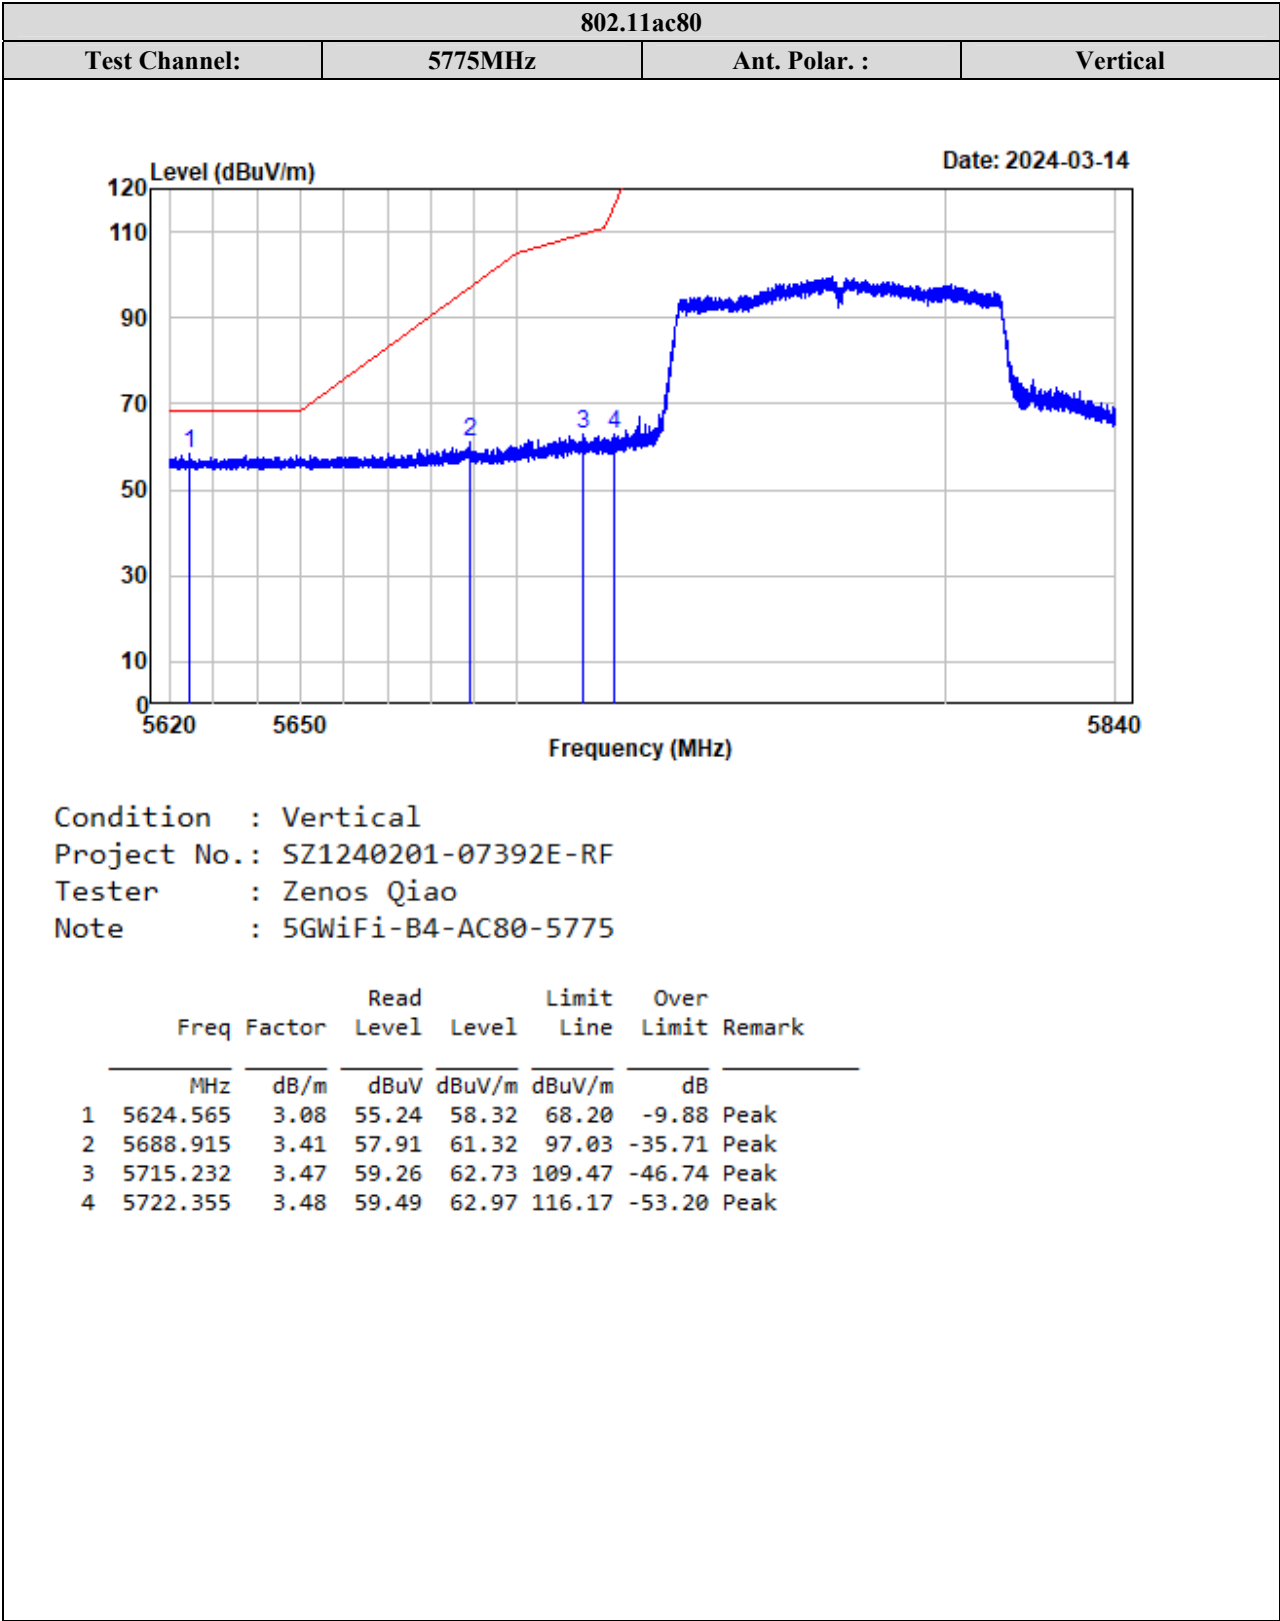

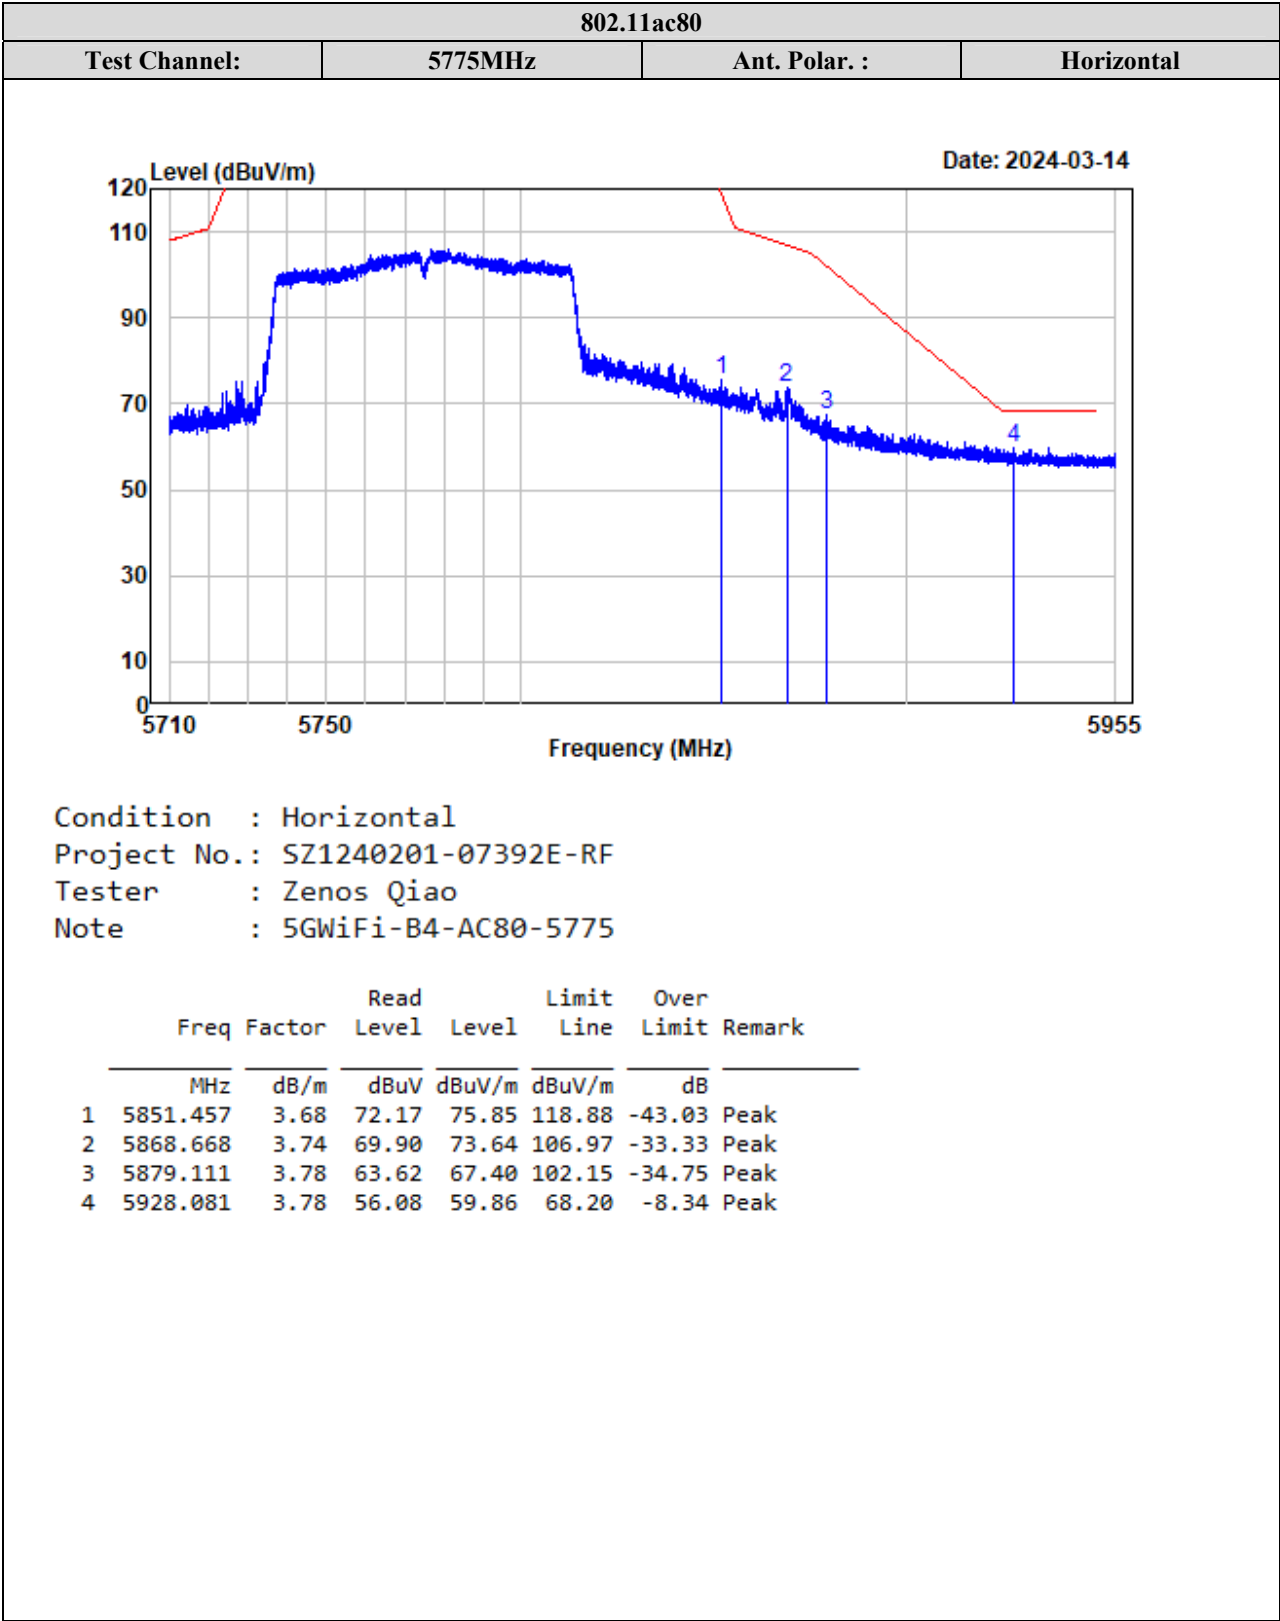


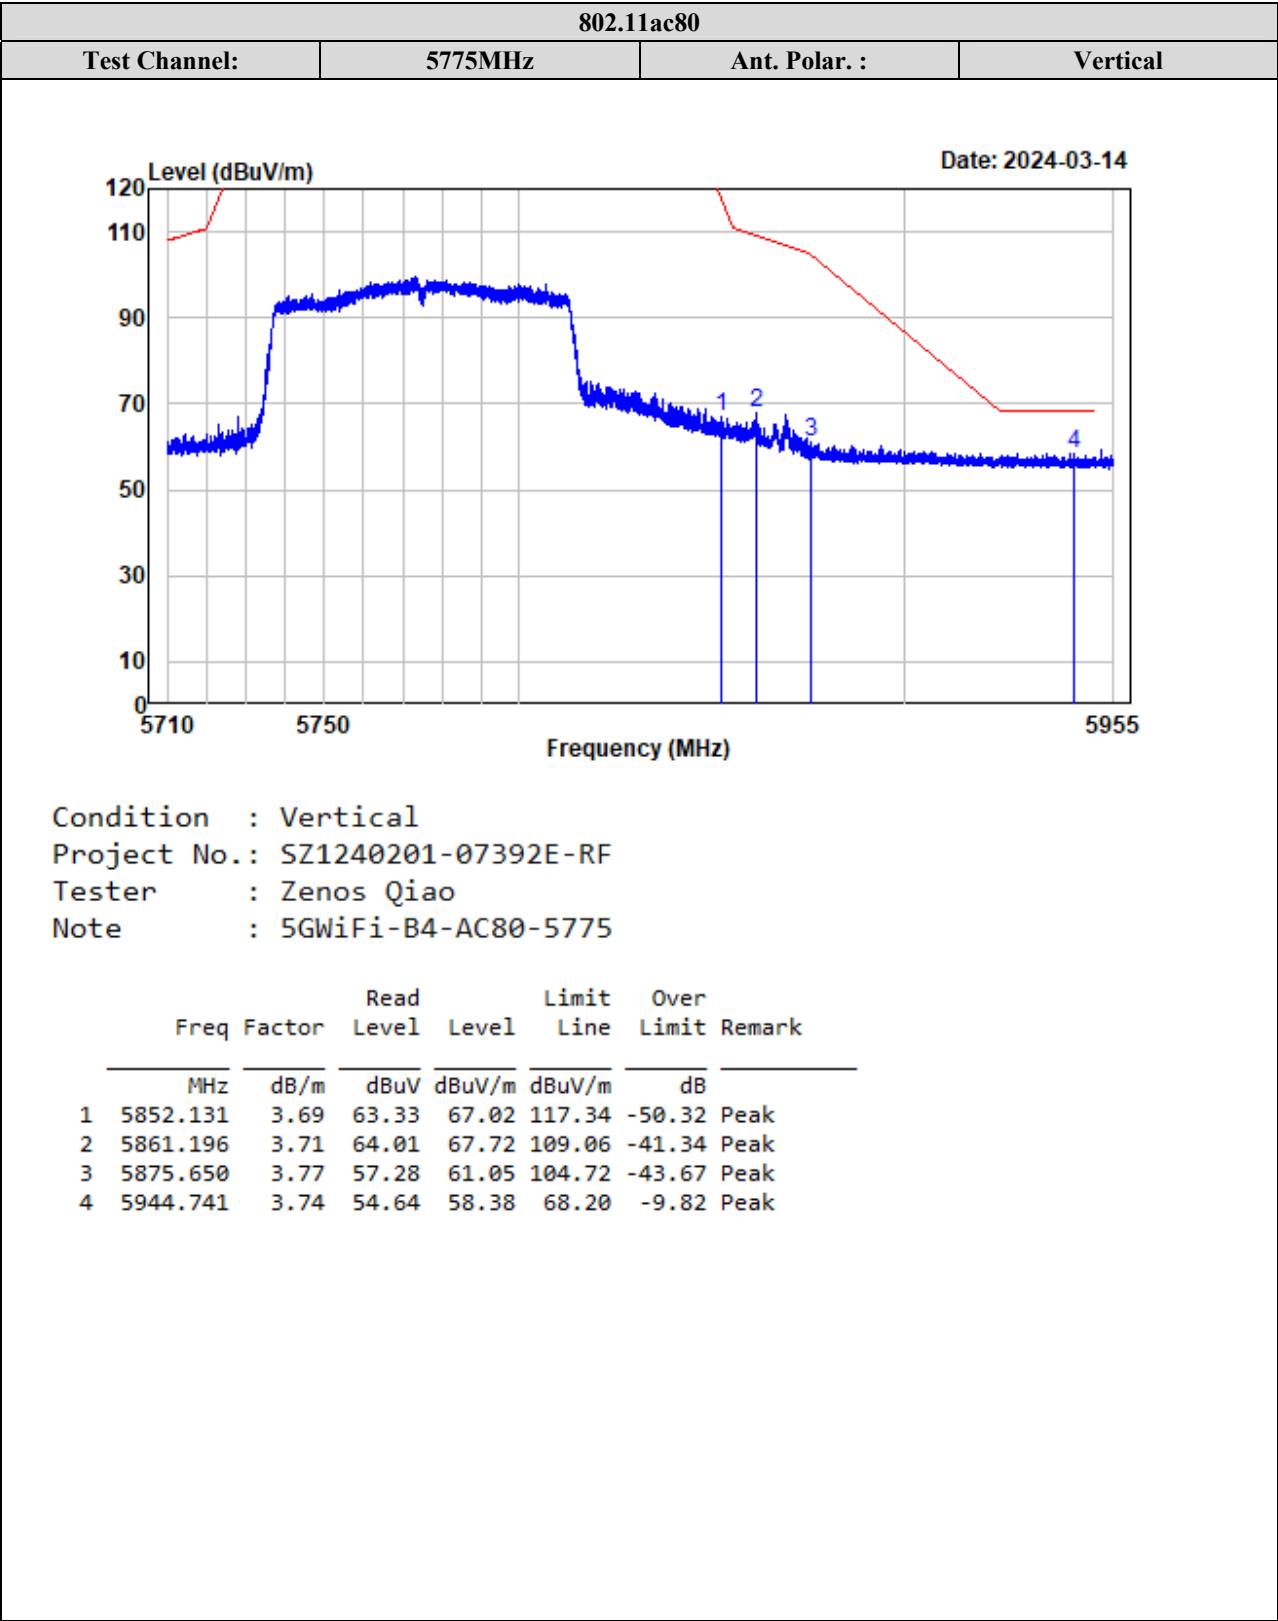



Listed with the worst harmonic margin test plot


For Module YL43752


Horizontal

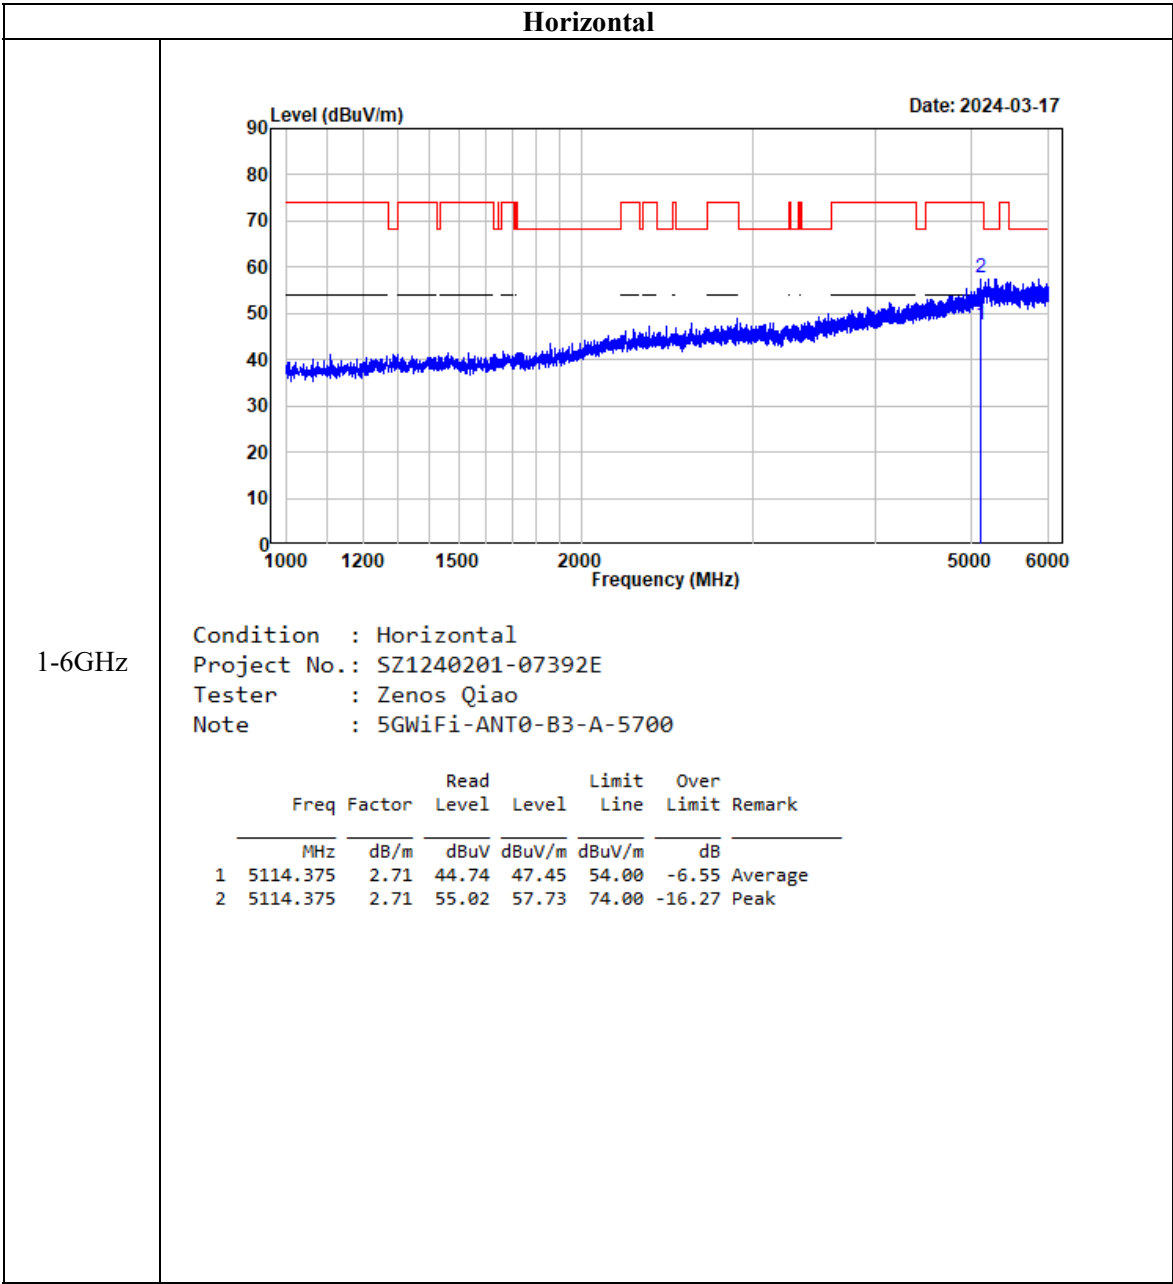


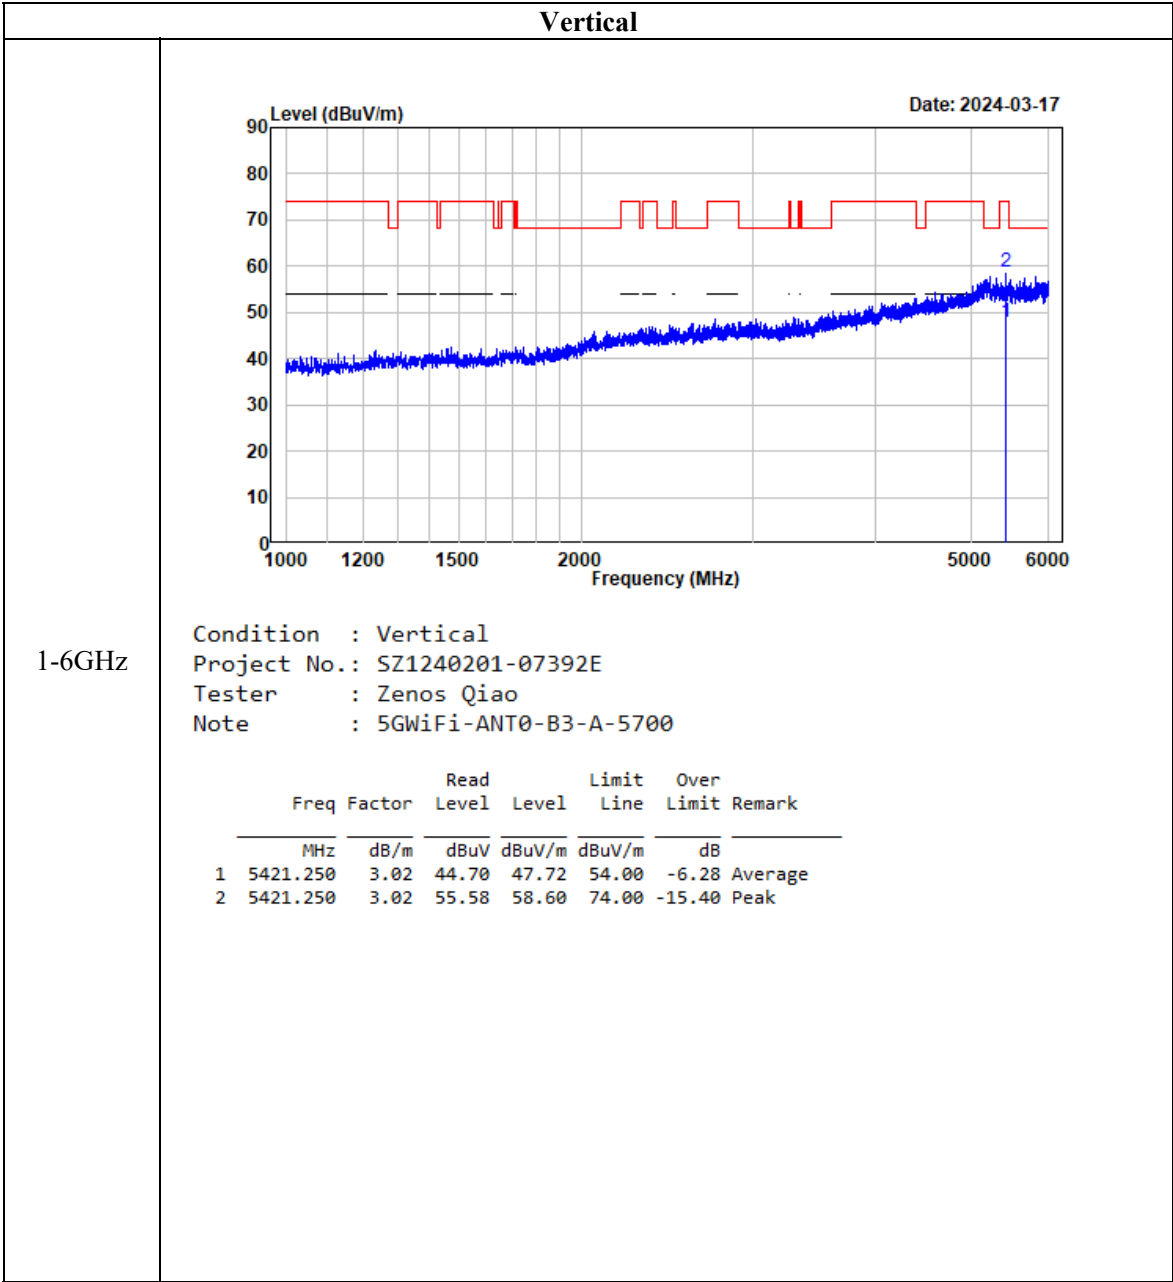

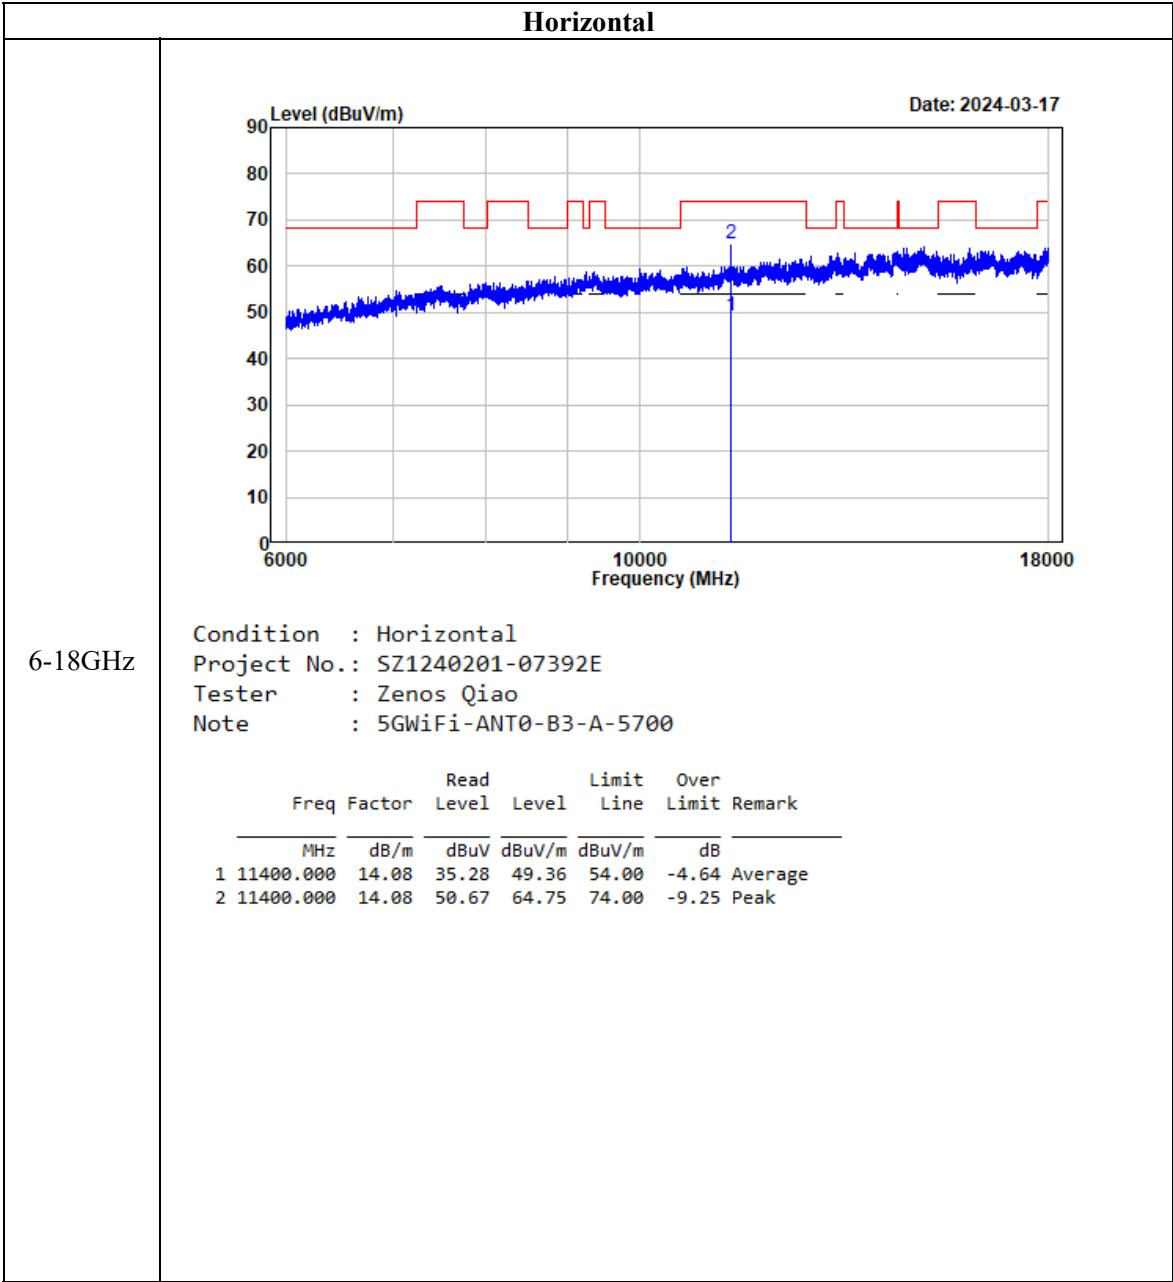

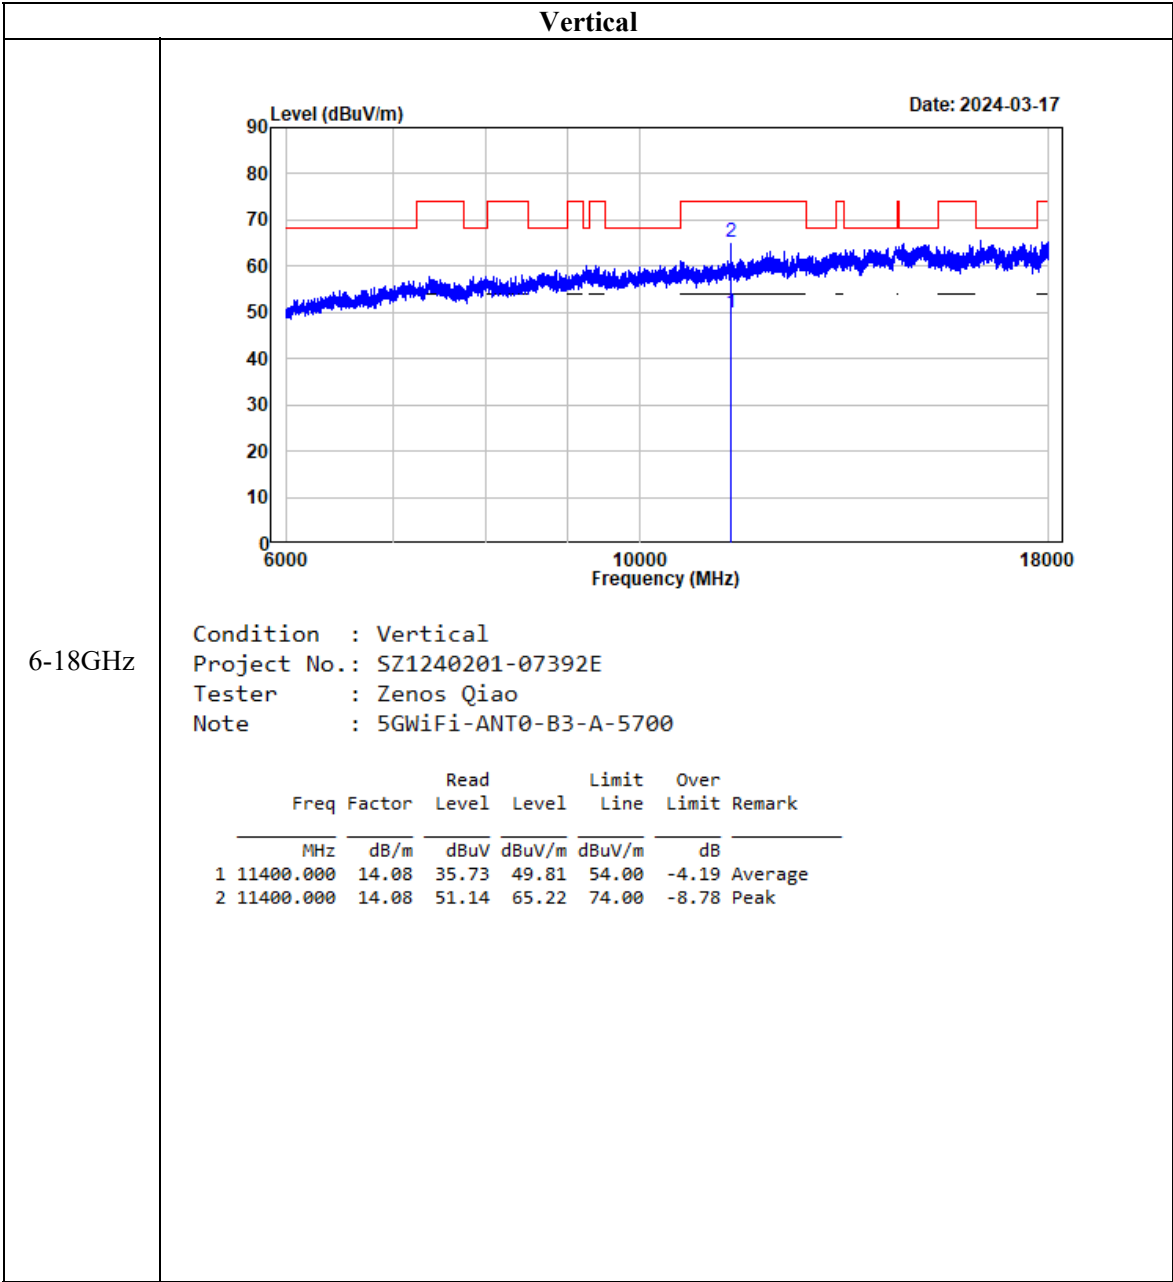

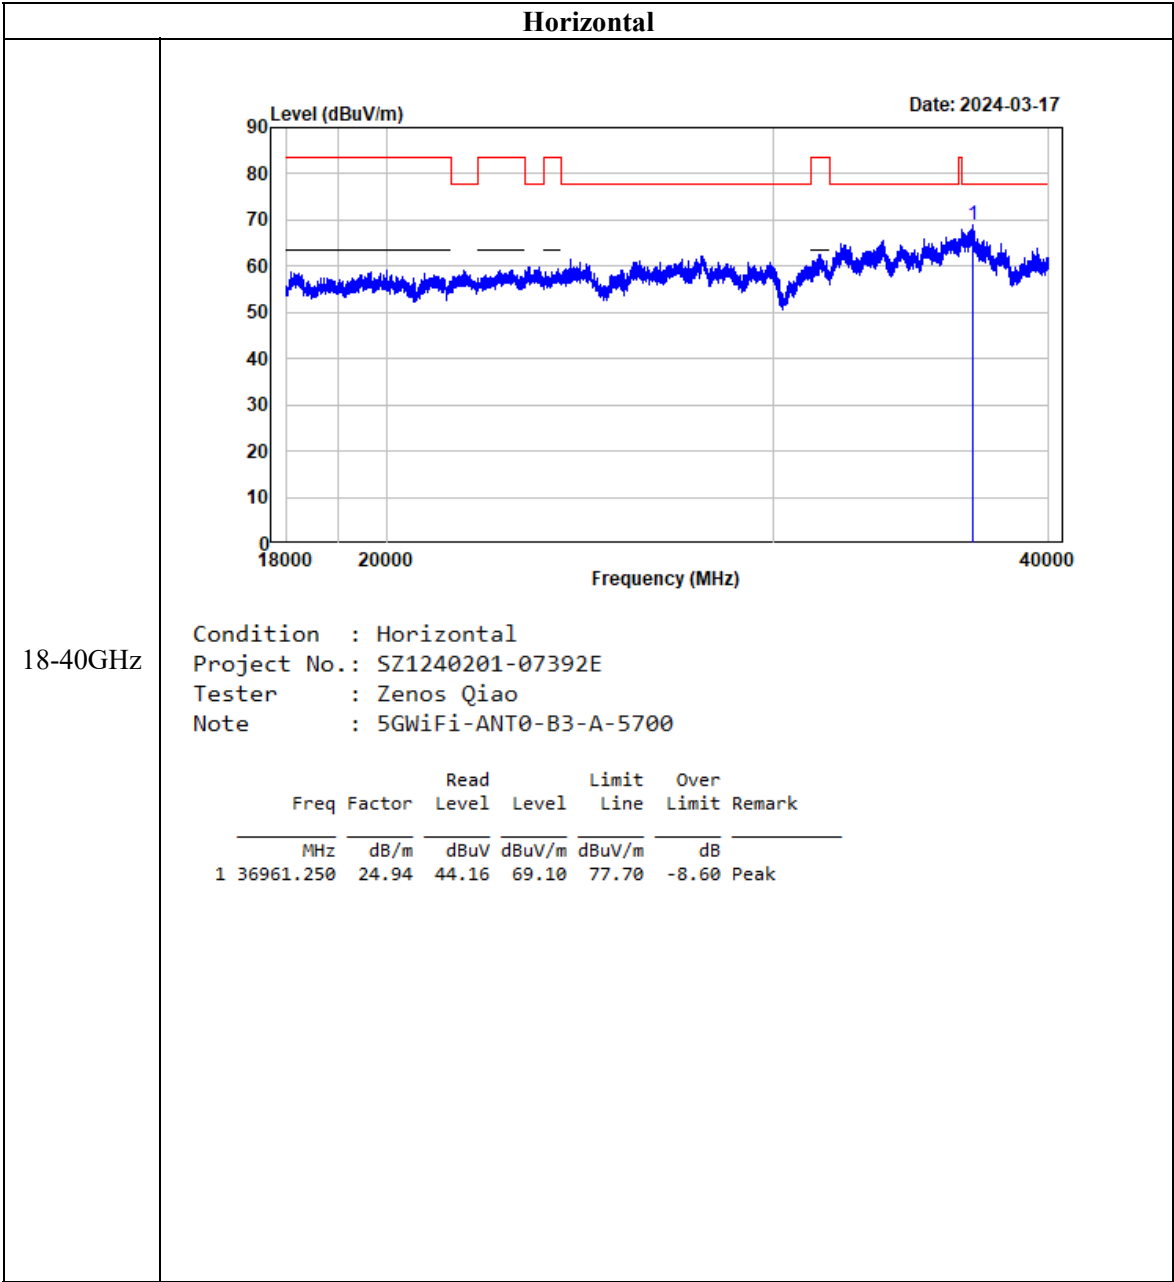


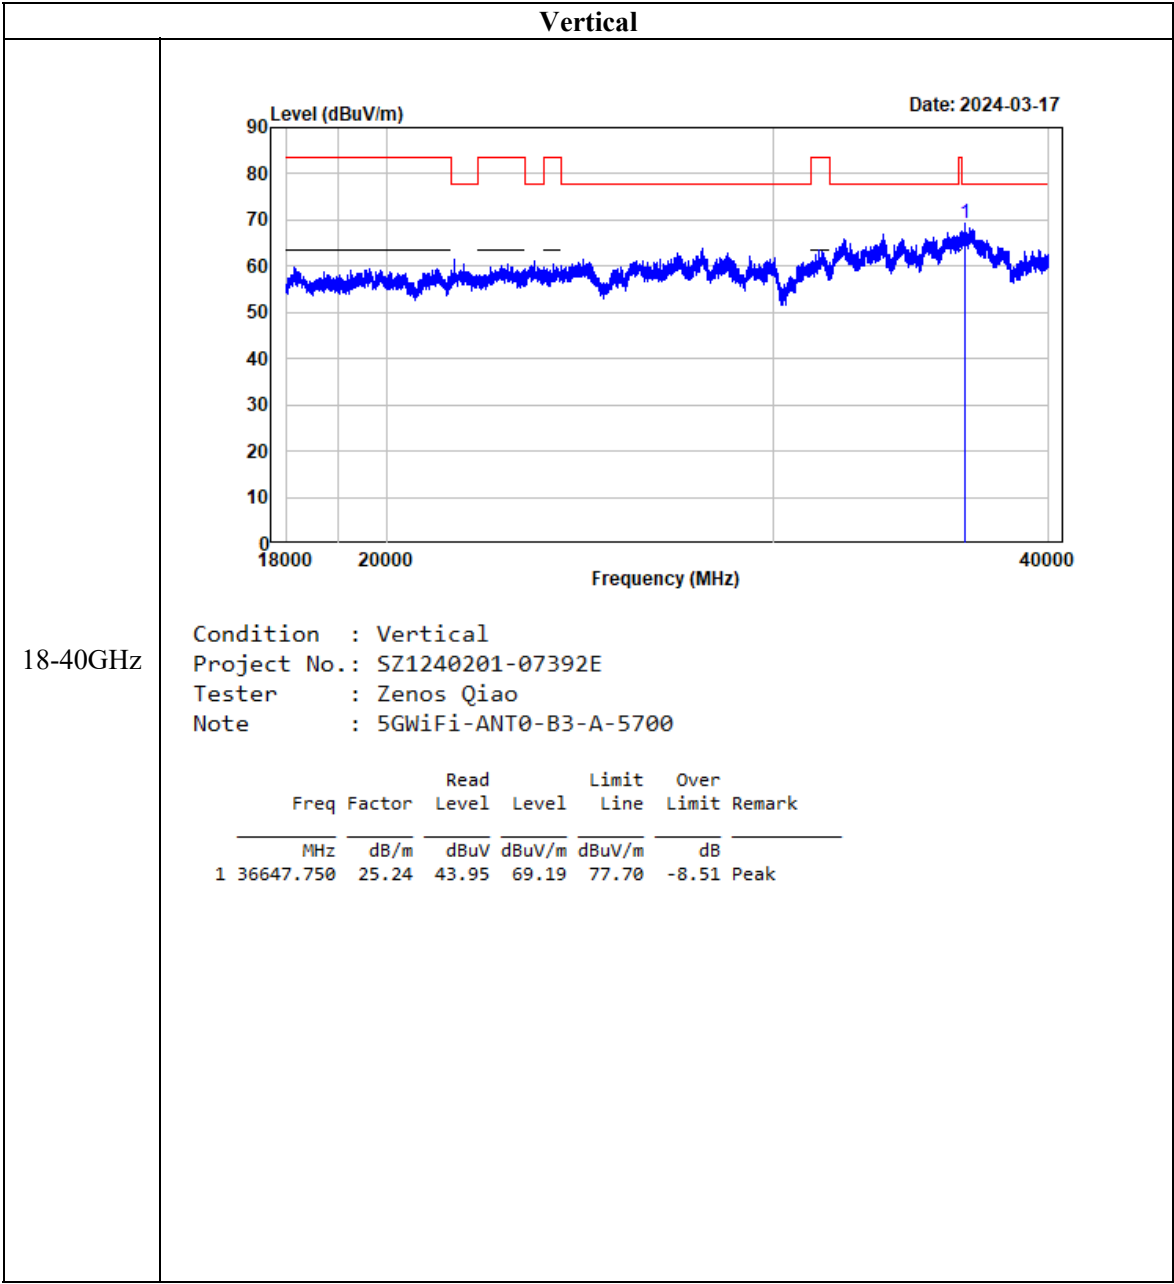

For Module YL43456


Horizontal


1-6GHz

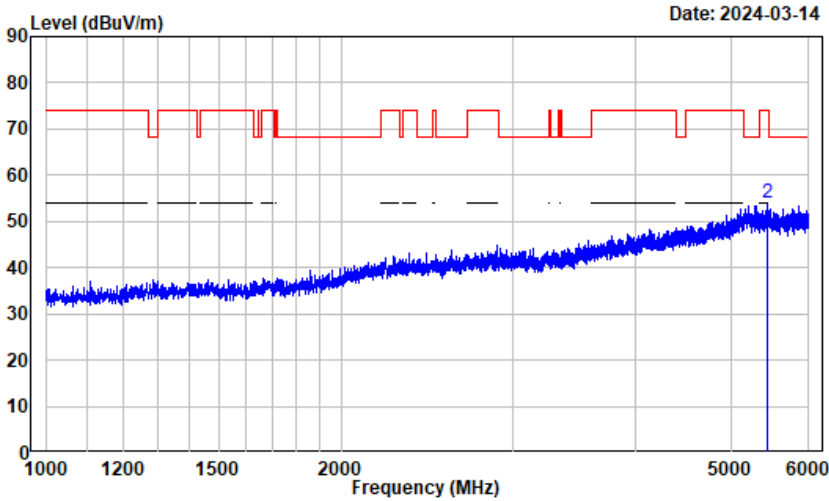



Condition : Horizontal
Project No.: SZ1240201-07392E-RF
Tester : Zenos Qiao
Note : 5GWiFi-Band4-AC80-5775


		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5453.125	3.06	44.63	47.69	54.00	-6.31 Average
2	5453.125	3.06	50.96	54.02	74.00	-19.98 Peak

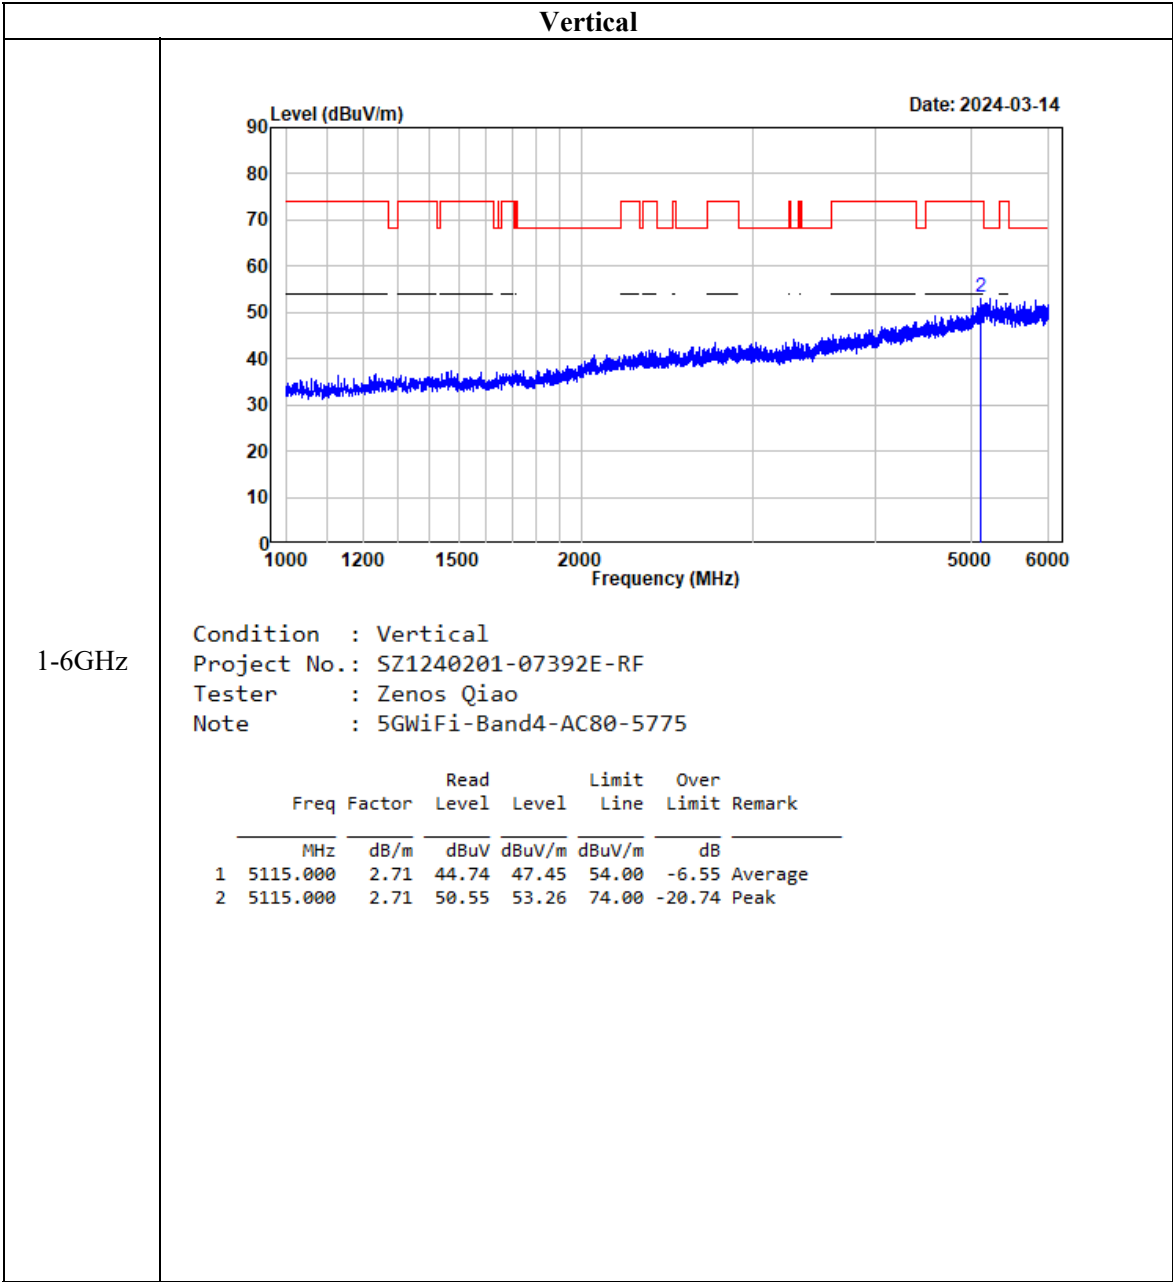

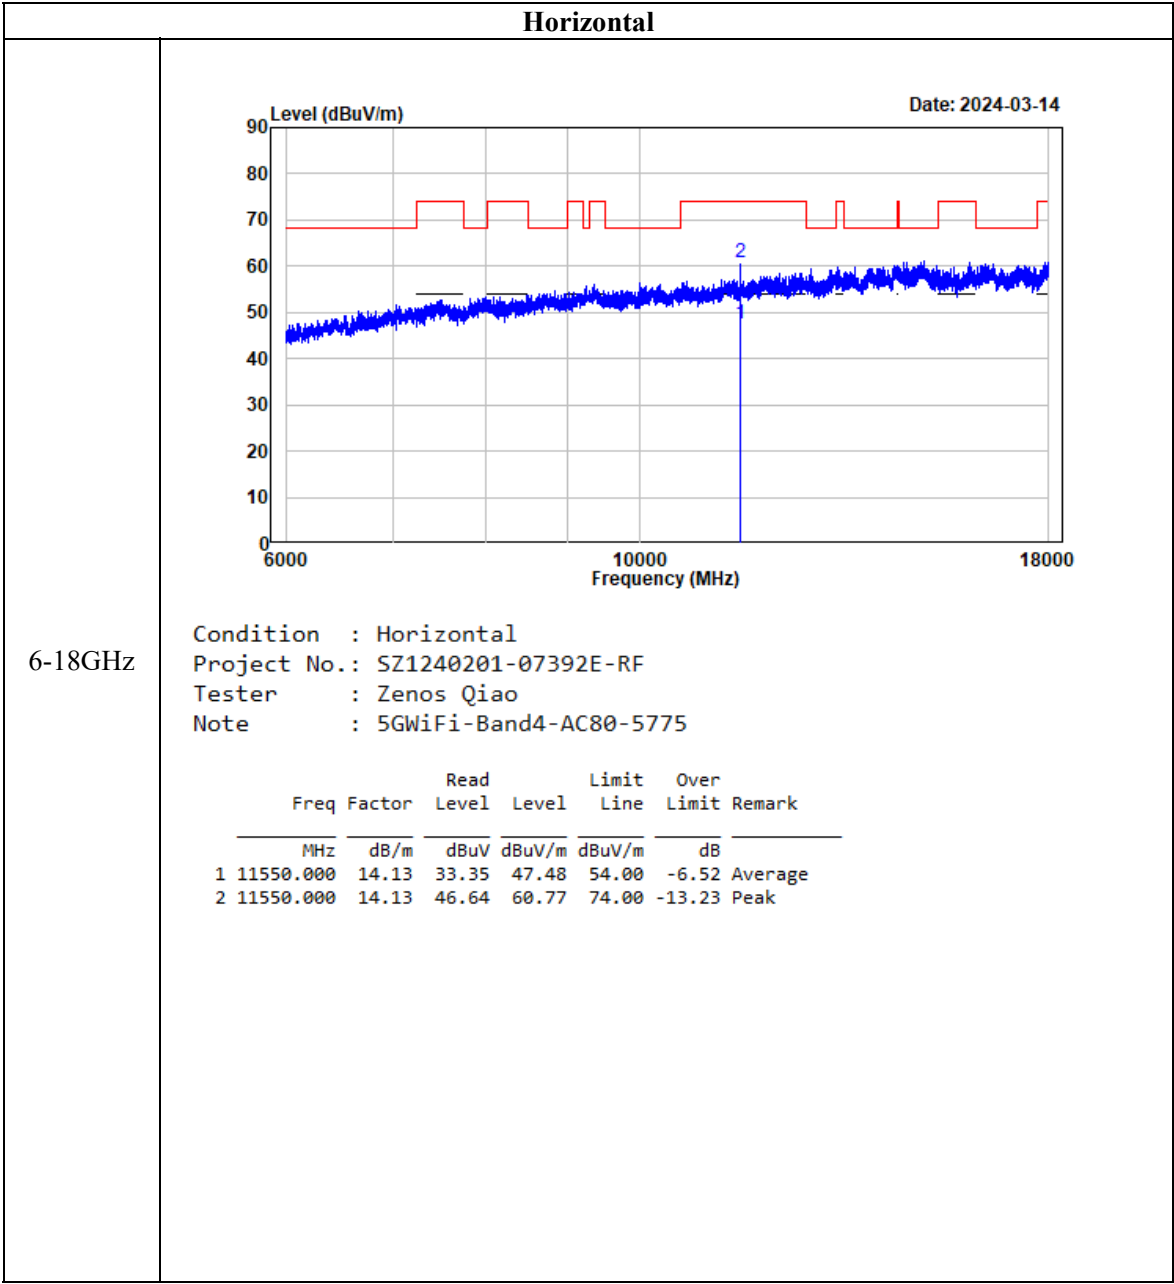

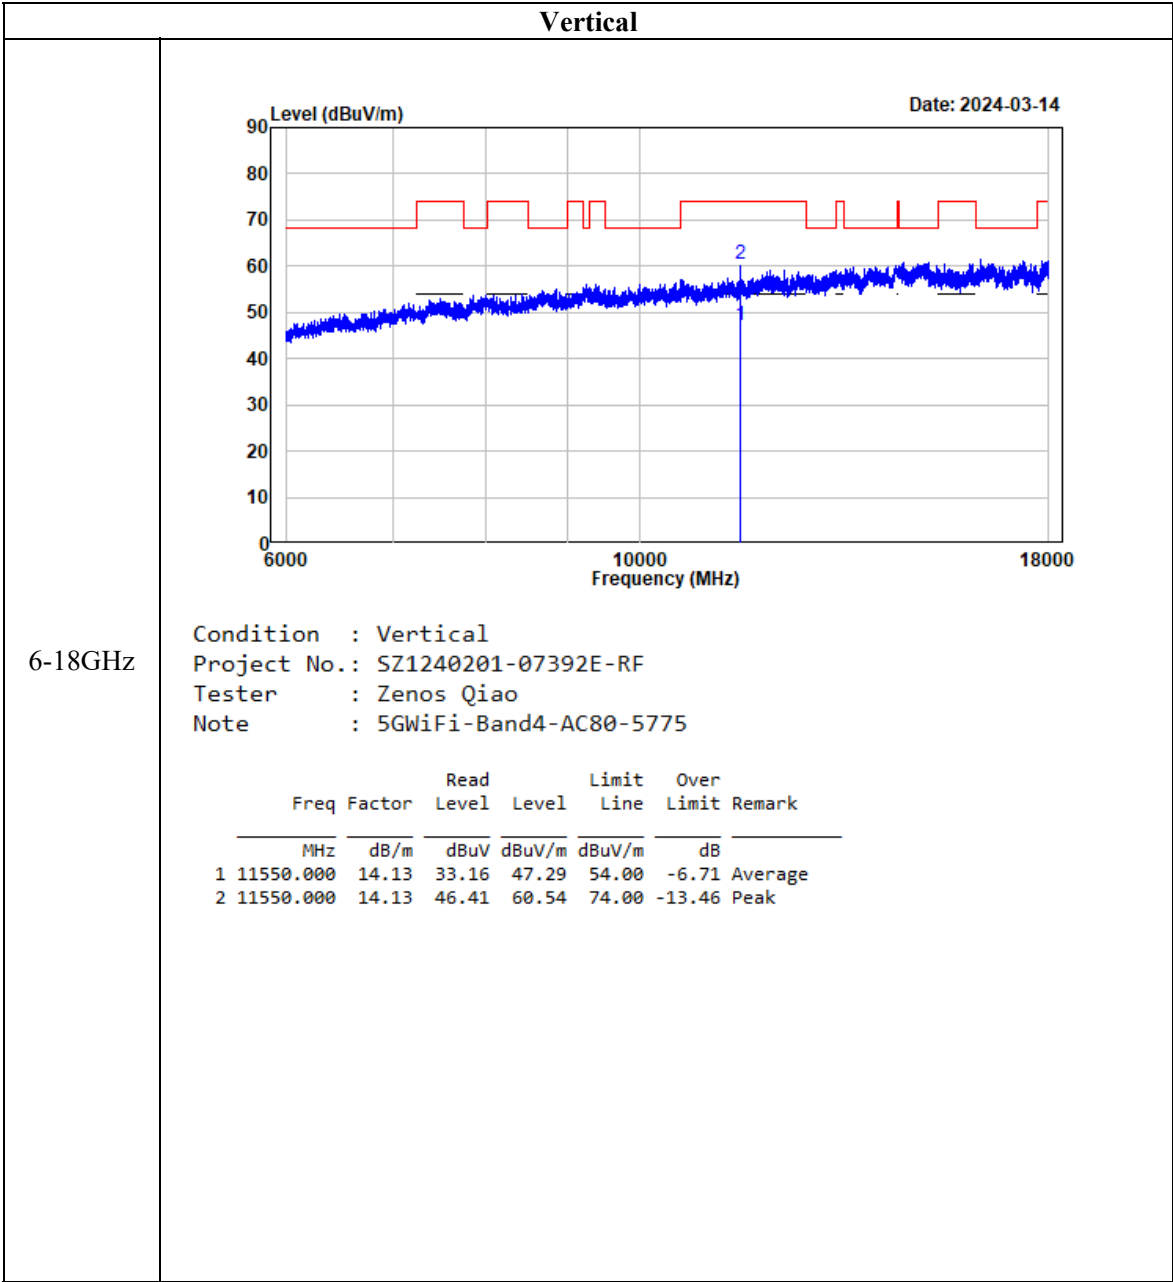

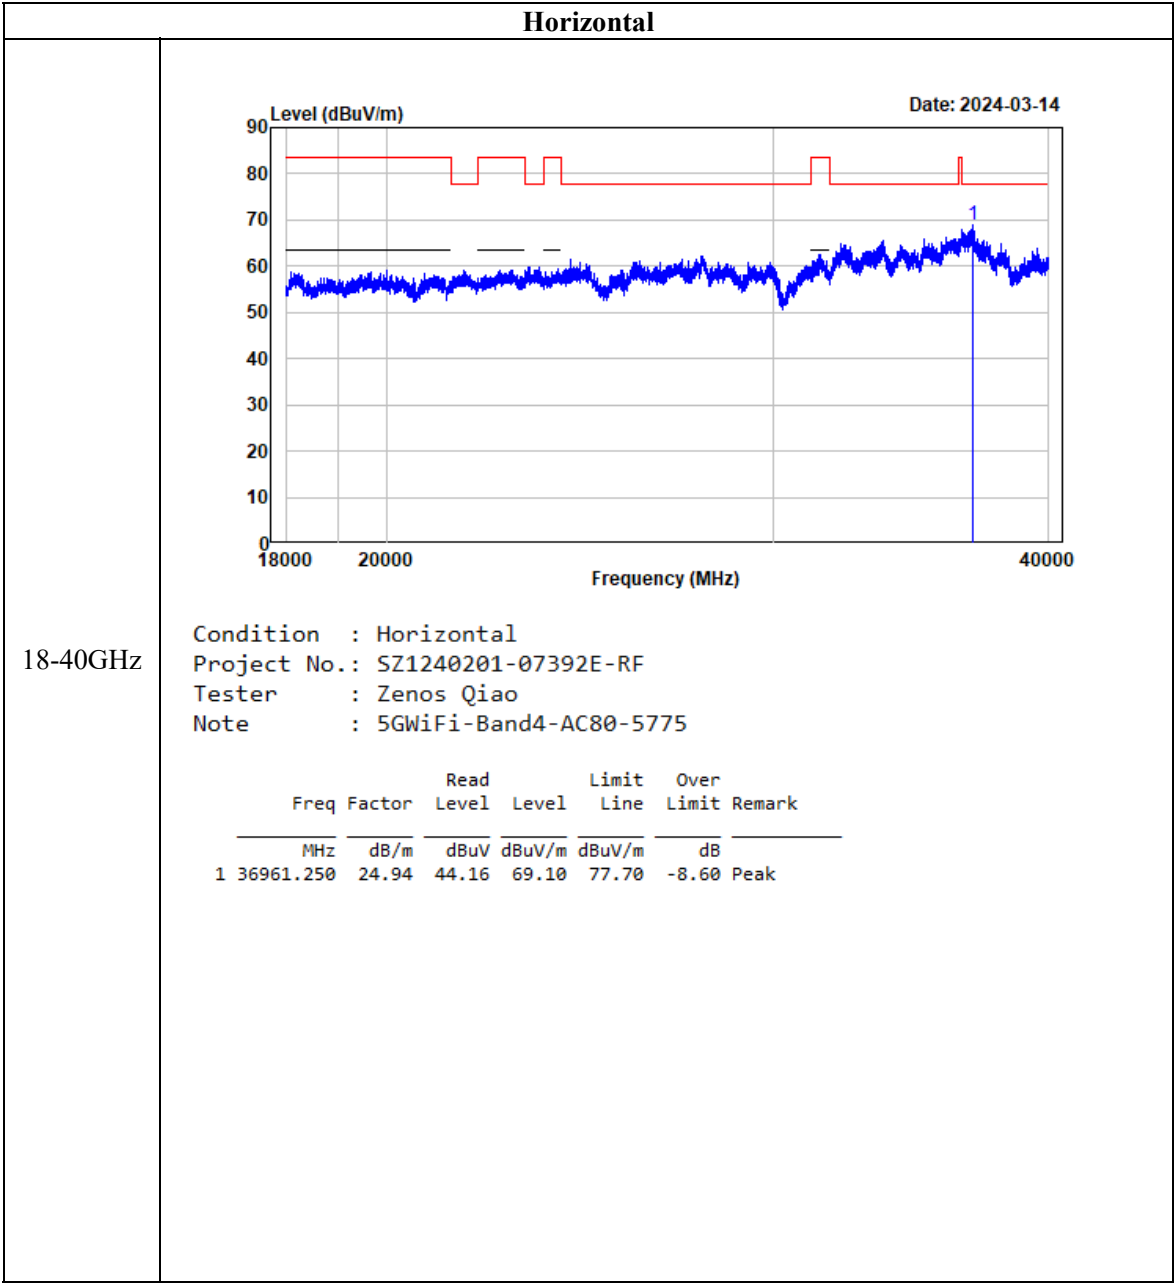

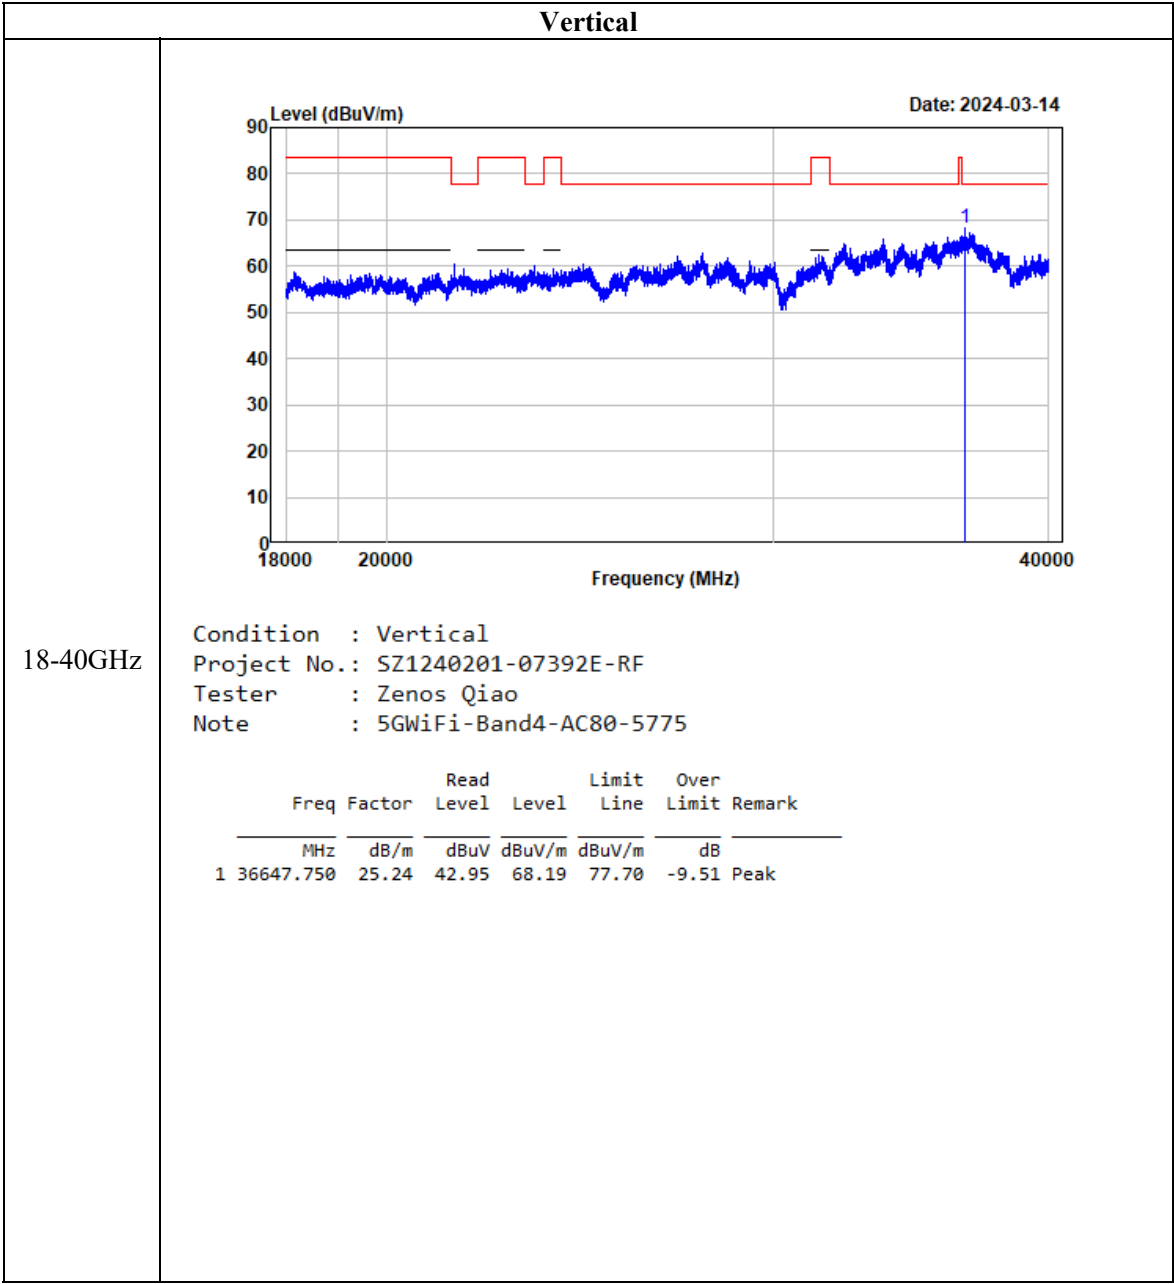

EUT PHOTOGRAPHS

Please refer to the attachment SZ1240201-07392E-RF External photo and SZ1240201-07392E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment SZ1240201-07392E-RF Test Setup photo.

******* END OF REPORT *******