



Certificate #4312.01

# TEST REPORT

**Product Name:** USB Speakerphone  
**Trade Mark:** Yealink  
**Model No.:** SP92  
**Report Number:** 24122515425RFC-2  
**Test Standards:** FCC 47 CFR Part 15 Subpart C  
 RSS-247 Issue 3  
 RSS-Gen Issue 5  
**FCC ID:** T2C-SP92  
**IC:** 10741A-SP92  
**Test Result:** PASS  
**Date of Issue:** February 11, 2025

Prepared for:

**YEALINK(XIAMEN) NETWORK TECHNOLOGY CO., LTD**  
**No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
**16/F, Block A, Building 6th, Baoneng Science and Technology Park,**  
**Longhua Street, Longhua District, Shenzhen, China**  
**TEL: +86-755-2823 0888**  
**FAX: +86-755-2823 0886**

Prepared by: David Chen  
 David Chen  
 Senior Project Engineer

Reviewed by: Henry Lu  
 Henry Lu  
 Team Leader

Approved by: Robben Chen  
 Robben Chen  
 Assistant Manager

Date: February 11, 2025

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

**Version**

Version No.	Date	Description
V1.0	February 11, 2025	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

# CONTENTS

<b>1. GENERAL INFORMATION</b>	<b>5</b>
1.1 CLIENT INFORMATION	5
1.2 EUT INFORMATION	5
1.2.1 GENERAL DESCRIPTION OF EUT	5
1.2.2 DESCRIPTION OF ACCESSORIES	5
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	6
1.4 OTHER INFORMATION	6
1.5 DESCRIPTION OF SUPPORT UNITS	7
1.6 TEST LOCATION	7
1.7 TEST FACILITY	7
1.8 DEVIATION FROM STANDARDS	7
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	7
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
1.11 MEASUREMENT UNCERTAINTY	8
<b>2. TEST SUMMARY</b>	<b>9</b>
<b>3. EQUIPMENT LIST</b>	<b>10</b>
<b>4. TEST CONFIGURATION</b>	<b>11</b>
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	11
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	11
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	11
4.2 TEST CHANNELS	11
4.3 EUT TEST STATUS	11
4.4 PRE-SCAN	12
4.4.1 WORST-CASE DATA PACKETS	12
4.4.2 TESTED CHANNEL DETAIL	12
4.5 TEST SETUP	13
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	13
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	14
4.5.3 FOR CONDUCTED RF TEST SETUP	15
4.6 SYSTEM TEST CONFIGURATION	15
4.7 DUTY CYCLE	16
<b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b>	<b>17</b>
5.1 REFERENCE DOCUMENTS FOR TESTING	17
5.2 ANTENNA REQUIREMENT	17
5.3 CONDUCTED PEAK OUTPUT POWER	18
5.4 20 dB BANDWIDTH & OCCUPIED BANDWIDTH	19
5.5 CARRIER FREQUENCIES SEPARATION	20
5.6 NUMBER OF HOPPING CHANNEL	21
5.7 DWELL TIME	22
5.8 CONDUCTED OUT OF BAND EMISSION	23
5.9 RADIATED SPURIOUS EMISSIONS	24
5.10 BAND EDGE MEASUREMENTS (RADIATED)	28
5.11 CONDUCTED EMISSION	31
<b>APPENDIX A RF TEST DATA</b>	<b>34</b>
A.1 OCCUPIED BANDWIDTH	34
A.2 20dB EMISSION BANDWIDTH	39
A.3 CARRIER FREQUENCY SEPARATION	44
A.4 DWELL TIME	46
A.5 NUMBER OF HOPPING CHANNELS	56
A.6 CONDUCTED OUT OF BAND EMISSION	58
A.7 CONDUCTED SPURIOUS EMISSION	65

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

**APPENDIX 1 PHOTOS OF TEST SETUP.....79**  
**APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS.....79**



# 1. GENERAL INFORMATION

## 1.1 CLIENT INFORMATION

<b>Applicant:</b>	YEALINK(XIAMEN) NETWORK TECHNOLOGY CO., LTD
<b>Address of Applicant:</b>	No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China
<b>Manufacturer:</b>	YEALINK(XIAMEN) NETWORK TECHNOLOGY CO., LTD
<b>Address of Manufacturer:</b>	No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China

## 1.2 EUT INFORMATION

### 1.2.1 General Description of EUT

<b>Product Name:</b>	USB Speakerphone	
<b>Model No.:</b>	SP92	
<b>Trade Mark:</b>	Yealink	
<b>DUT Stage:</b>	Identical Prototype	
<b>EUT Supports Function:</b> (Provided by the customer)	2.4 GHz ISM Band:	Bluetooth 5.2
<b>Software Version:</b>	38.410.253.8 (Provided by the customer)	
<b>Hardware Version:</b>	SP92MV (Provided by the customer)	
<b>Sample Received Date:</b>	December 18, 2024	
<b>Sample Tested Date:</b>	January 2, 2025 to January 8, 2025	

**Remark:**

The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.

### 1.2.2 Description of Accessories

<b>Adapter</b>	
<b>Model No.:</b>	YLPS052000UC1-US
<b>Input:</b>	100-240 V~50/60 Hz 0.5 A
<b>Output:</b>	5.0 V = 2.0 V
<b>AC Cable:</b>	N/A
<b>DC Cable:</b>	N/A

<b>Cable</b>	
<b>Description:</b>	USB Type-C Cable
<b>Cable Type:</b>	Unshielded without ferrite
<b>Length:</b>	1.2 Meter

<b>Battery</b>	
<b>Model No.:</b>	YLLR1865C2400WHTT
<b>Battery Type:</b>	Rechargeable Li-ion Battery
<b>Rated Voltage:</b>	3.65 Vdc
<b>Limited Charge Voltage:</b>	4.2 Vdc
<b>Rated Capacity:</b>	2400 mAh

### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

<b>Frequency Band:</b>	2400 MHz to 2483.5 MHz
<b>Frequency Range:</b>	2402 MHz to 2480 MHz
<b>Bluetooth Version:</b>	Bluetooth BR + EDR
<b>Modulation Technique:</b>	Frequency Hopping Spread Spectrum (FHSS)
<b>Type of Modulation:</b>	GFSK, $\pi/4$ DQPSK, 8DPSK
<b>Number of Channels:</b>	79
<b>Channel Separation:</b>	1 MHz
<b>Hopping Channel Type:</b>	Adaptive Frequency Hopping Systems
<b>Antenna Type:</b> (Provided by the customer)	PCB Antenna
<b>Antenna Gain:</b> (Provided by the customer)	2.23 dBi
<b>Maximum Peak Power:</b>	10.62 dBm
<b>Normal Test Voltage:</b>	3.65 Vdc

### 1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
$f = 2402 + k \text{ MHz}, k = 0, \dots, 78$	
Note:	
f	is the operating frequency (MHz);
k	is the operating channel.

Modulation Configure			
Modulation	Packet	Packet Type	Packet Size
GFSK	1-DH1	4	27
	1-DH3	11	183
	1-DH5	15	339
$\pi/4$ DQPSK	2-DH1	20	54
	2-DH3	26	367
	2-DH5	30	679
8DPSK	3-DH1	24	83
	3-DH3	27	552
	3-DH5	31	1021

## 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

### 1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	DELL	Latitude 3400	N/A	UnionTrust
Mouse	DELL	MS111	N/A	UnionTrust

### 2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.3 Meter	UnionTrust

## 1.6 TEST LOCATION

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

## 1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

### CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

### A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

### FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

## 1.8 DEVIATION FROM STANDARDS

None.

## 1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

### 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

### 1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated emission 9kHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.9 dB
5	Radiated emission 1GHz-18GHz	± 4.8 dB
6	Radiated emission 18GHz-26GHz	± 5.1 dB
7	Radiated emission 26GHz-40GHz	± 5.1 dB
8	Conducted spurious emissions	± 2.7 dB
9	RF Power, Conducted	± 0.68 dB
10	Occupied Bandwidth	± 1.86 %
11	Radio Frequency	2.4 GHz: ± 6.5 x 10 <sup>-8</sup>
12	Transmission Time	± 0.19 %



## 2. TEST SUMMARY

Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (b) RSS-Gen Issue 5, Section 6.8	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207 RSS-Gen Issue 5, Section 8.8	ANSI C63.10-2013 Section 6.2	PASS
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1) RSS-247 Issue 3, Section 5.4(b)	ANSI C63.10-2013 Section 7.8.5	PASS
20 dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 3, Section 5.1(a)	ANSI C63.10-2013 Section 6.9.2	PASS
Occupied Bandwidth	RSS-Gen Issue 5, section 6.7	RSS-Gen Issue 5 Section 6.7	PASS
Carrier Frequencies Separation	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 3, Section 5.1(b)	ANSI C63.10-2013 Section 7.8.2	PASS
Number of Hopping Channel	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)(iii) RSS-247 Issue 3, Section 5.1(d)	ANSI C63.10-2013 Section 7.8.3	PASS
Dwell Time	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 3, Section 5.1(d)	ANSI C63.10-2013 Section 7.8.4	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 3, Section 5.5	ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8	PASS
Radiated Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-Gen Issue 5, Section 6.13/8.9/8.10	ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6	PASS
Band Edge Measurement	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-247 Issue 3, Section 5.5	ANSI C63.10-2013 Section 6.10.5	PASS
<b>Disclaimer and Explanations:</b> The declared of product specification and data (e.g., antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.			

### 3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3m SAC	ETS-LINDGREN	3M	Euroshiedpn-CT001270-1317	11-Nov-2023	10-Nov-2026
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	25-Oct-2024	24-Oct-2025
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	29-Mar-2024	28-Mar-2025
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	28-Oct-2024	27-Oct-2025
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	29-Oct-2024	28-Oct-2025
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	29-Oct-2024	28-Oct-2025
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	25-Oct-2024	24-Oct-2025
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	01-Apr-2024	31-Mar-2025
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-Lindgren	00118385	00201874	01-Apr-2024	31-Mar-2025
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	28-Oct-2024	27-Oct-2025
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-Lindgren	00118384	00202652	28-Oct-2024	27-Oct-2025
<input checked="" type="checkbox"/>	Band Reject Filter (2400MHz~2500MHz)	Micro-Tronics	BRM50702	G590	17-Jan-2024	16-Jan-2025
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	Receiver	R&S	ESC13	1166.5950.03	25-Oct-2024	24-Oct-2025
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	25-Oct-2024	24-Oct-2025
<input checked="" type="checkbox"/>	LISN	R&S	EVN216	3560.6550.12	26-Sep-2024	25-Sep-2025
<input type="checkbox"/>	LISN	ETS-Lindgren	3816/2SH	00201088	25-Oct-2024	24-Oct-2025
<input checked="" type="checkbox"/>	Test Software	EZ-EMC	EZ-CON	Software Version: EMC-CON 3A1.1		

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	29-Mar-2024	28-Mar-2025
<input type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9020A	MY51286807	25-Oct-2024	24-Oct-2025
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	25-Oct-2024	24-Oct-2025

#### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage(V)	Relative Humidity (%)
NT/NV	+15 to +35	3.65	20 to 75
<b>Remark:</b>			
1) NV: Normal Voltage; NT: Normal Temperature			

#### 4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
AC Power Line Conducted Emission	21.0	45.3	100.7	S202412304964-ZJB02/2	Linson Xie
Conducted Peak Output Power	20.4	47.1	100.7	S202412304964-ZJB02/6	David Du
20 dB Bandwidth					
Carrier Frequencies Separation					
Number of Hopping Channel					
Dwell Time					
Conducted Out of Band Emission	20.8	40.9	100.3	S202412304964-ZJB01/2	Fire Huo
Radiated Emissions					
Band Edge Measurement					

### 4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
GFSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz
$\pi$ /4DQPSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz
8DPSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz

### 4.3 EUT TEST STATUS

Type of Modulation	Tx Function	Description
GFSK/ $\pi$ /4DQPSK/ 8DPSK	1Tx	1. Keep the EUT in continuously transmitting with Modulation test single 2. Keep the EUT in continuously transmitting with Modulation test Hopping Frequency.

Power Setting (Provided by the customer)
Power Setting: 61

Test Software (Provided by the customer)
AB1565/68 Lab Test Tool-3.8.0.1

### 4.4 PRE-SCAN

#### 4.4.1 Worst-case data packets

Type of Modulation	Worst-case data rates
GFSK	1-DH5
$\pi/4$ DQPSK	2-DH5
8DPSK	3-DH5



#### 4.4.2 Tested channel detail


Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data packets and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Type of Modulation	GFSK			$\pi/4$ DQPSK			8DPSK		
	1-DH 1	1-DH 3	1-DH 5	2-DH 1	2-DH 3	2-DH 5	3-DH 1	3-DH 3	3-DH 5
Data Packets									
Available Channel	0 to 78								
<b>Test Item</b>	<b>Test channel and choose of data packets</b>								
Conducted Peak Output Power	Channel 0 & 39 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
20 dB Bandwidth	Channel 0 & 39 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Carrier Frequencies Separation	Frequency Hopping Channel 0 to 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Number of Hopping Channel	Frequency Hopping Channel 0 to 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Dwell Time	Channel 39								
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Conducted Out of Band Emission	Channel 0 & 39 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Radiated Emissions	Channel 0 & 39 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Band Edge Measurements (Radiated)	Channel 0 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Remark:	1. The mark "☒" means is chosen for testing; 2. The mark "☐" means is not chosen for testing.								


### 4.5 TEST SETUP

#### 4.5.1 For Radiated Emissions test setup

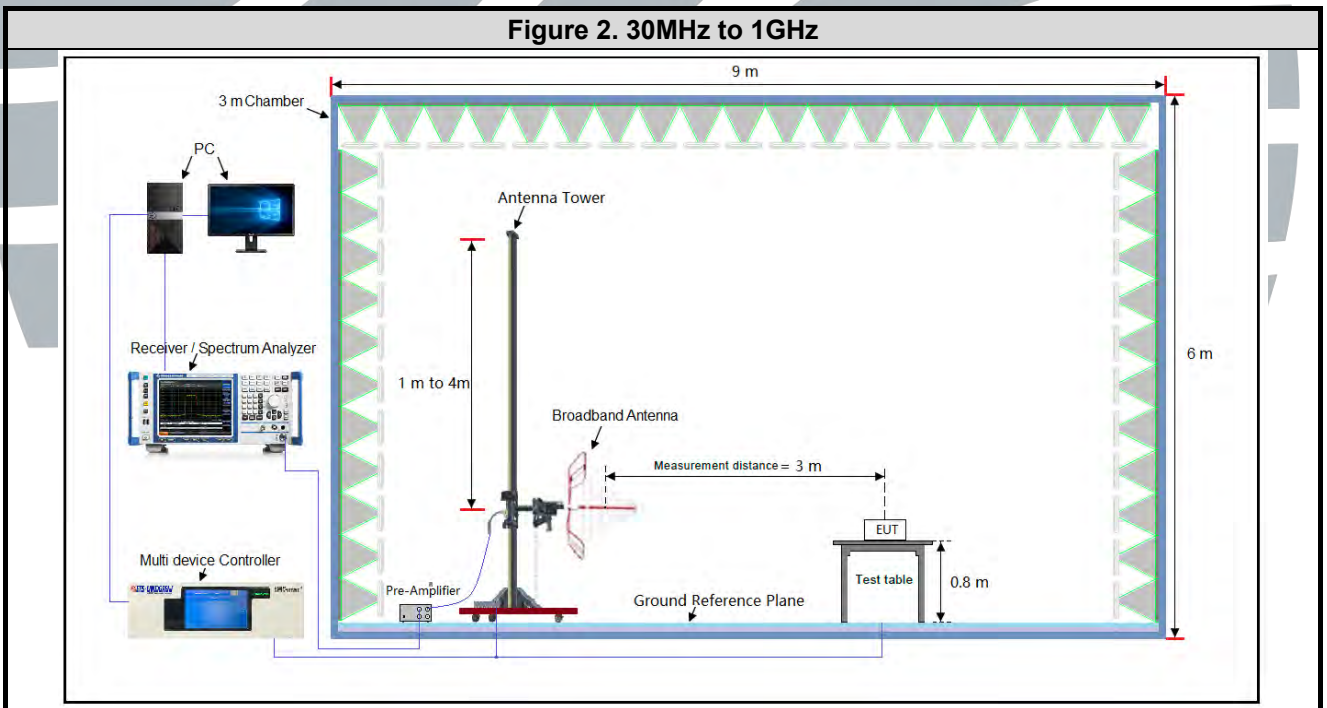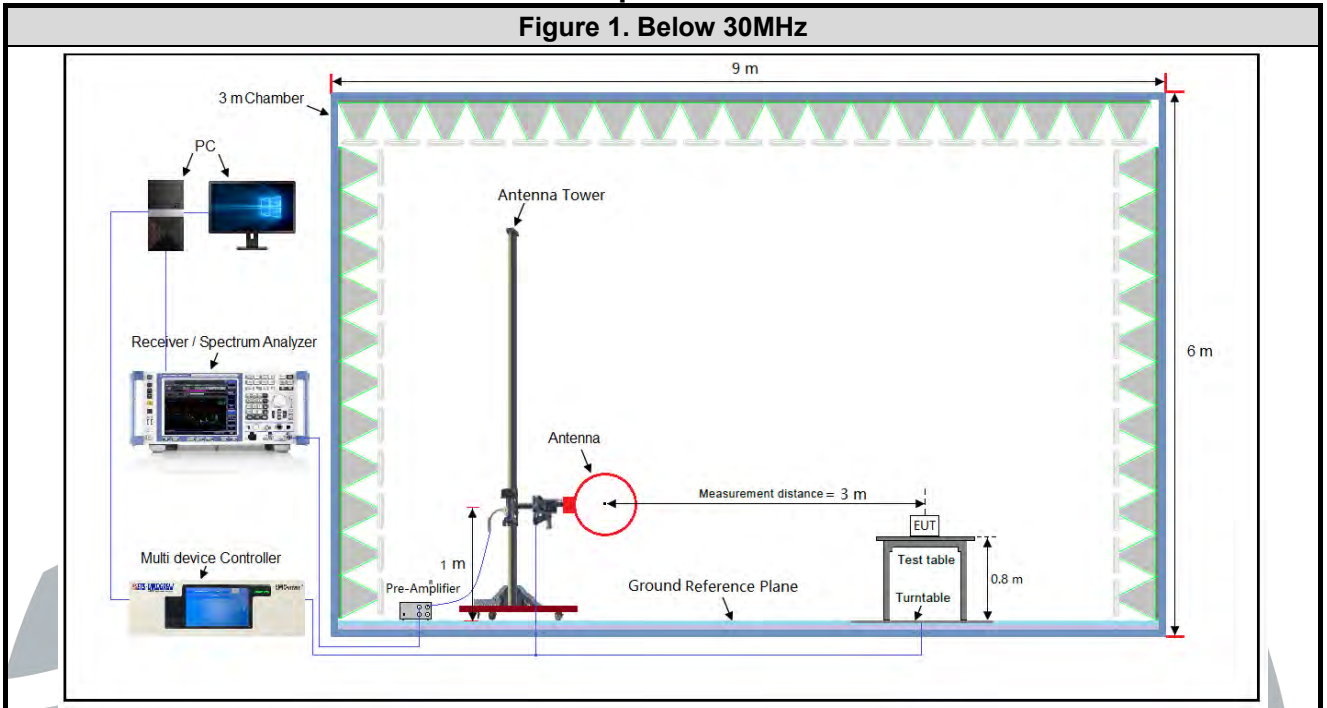


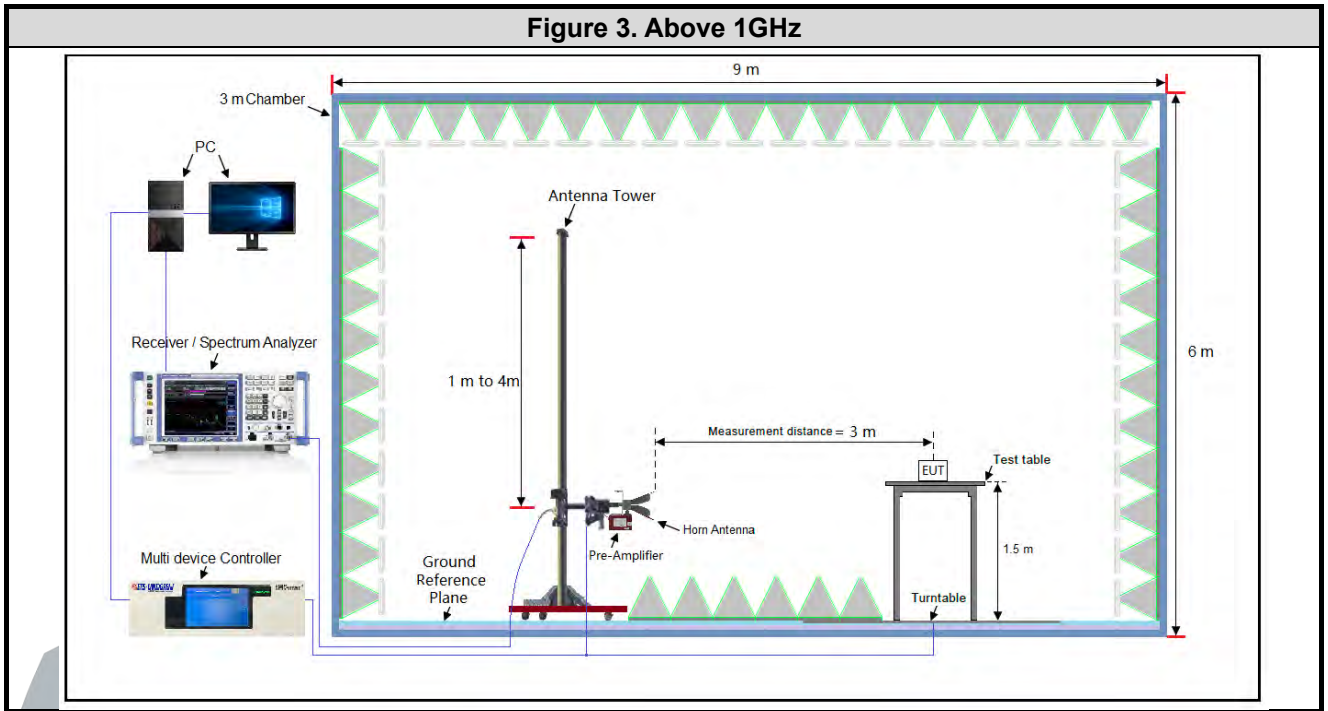

**4.5.2 For Conducted Emissions test setup**

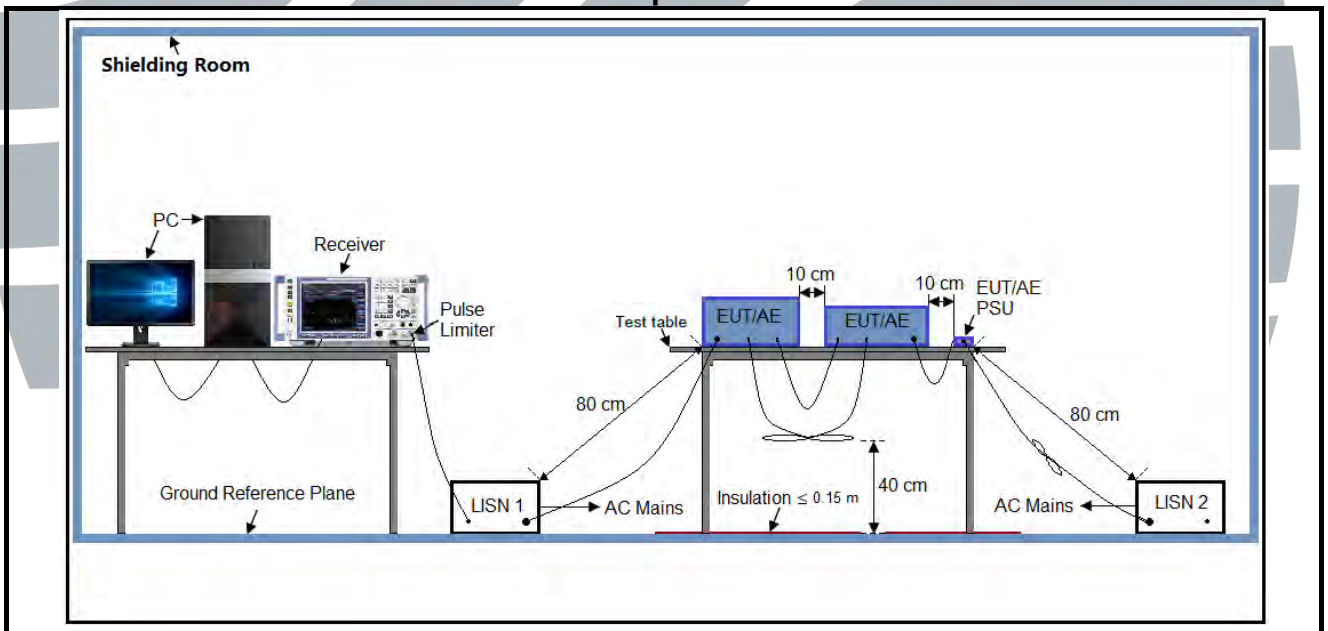

#### 4.5.3 For Conducted RF test setup

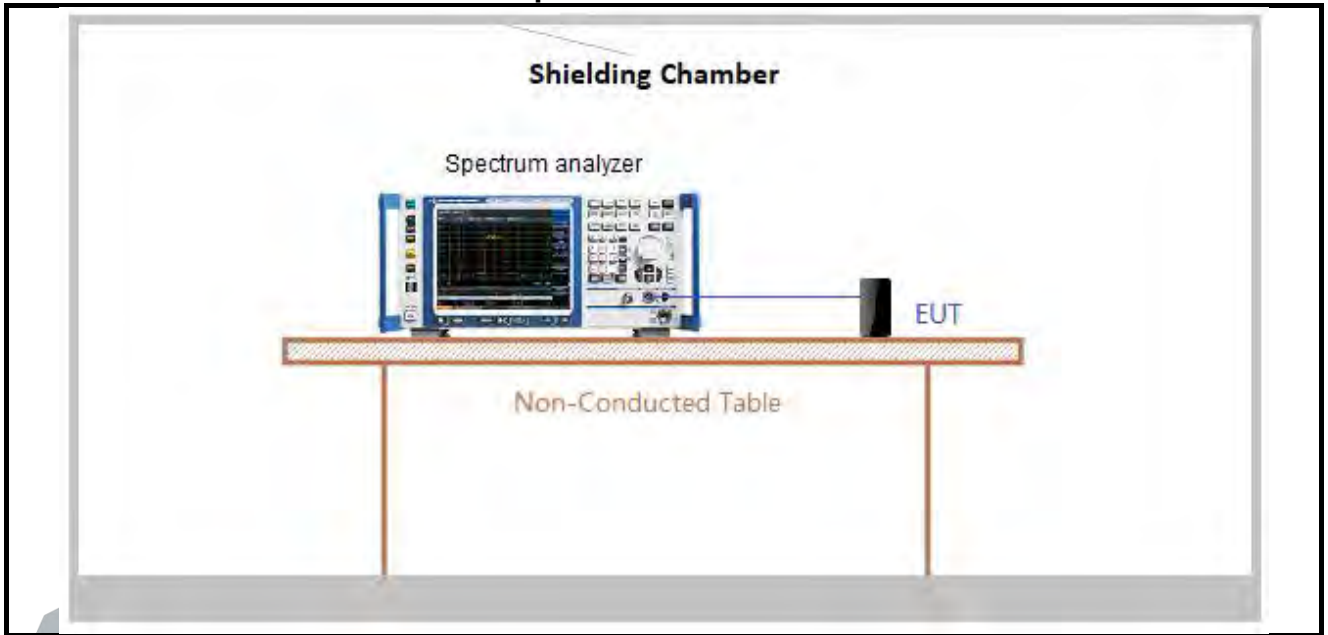

### 4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

## 4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


### Test Results

Modulation	Packets	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
GFSK	1-DH5	2.880	3.750	0.77	76.80	1.15	0.35

### Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor =  $10 * \log(1/ \text{Duty cycle})$ ;

The test plots as follows

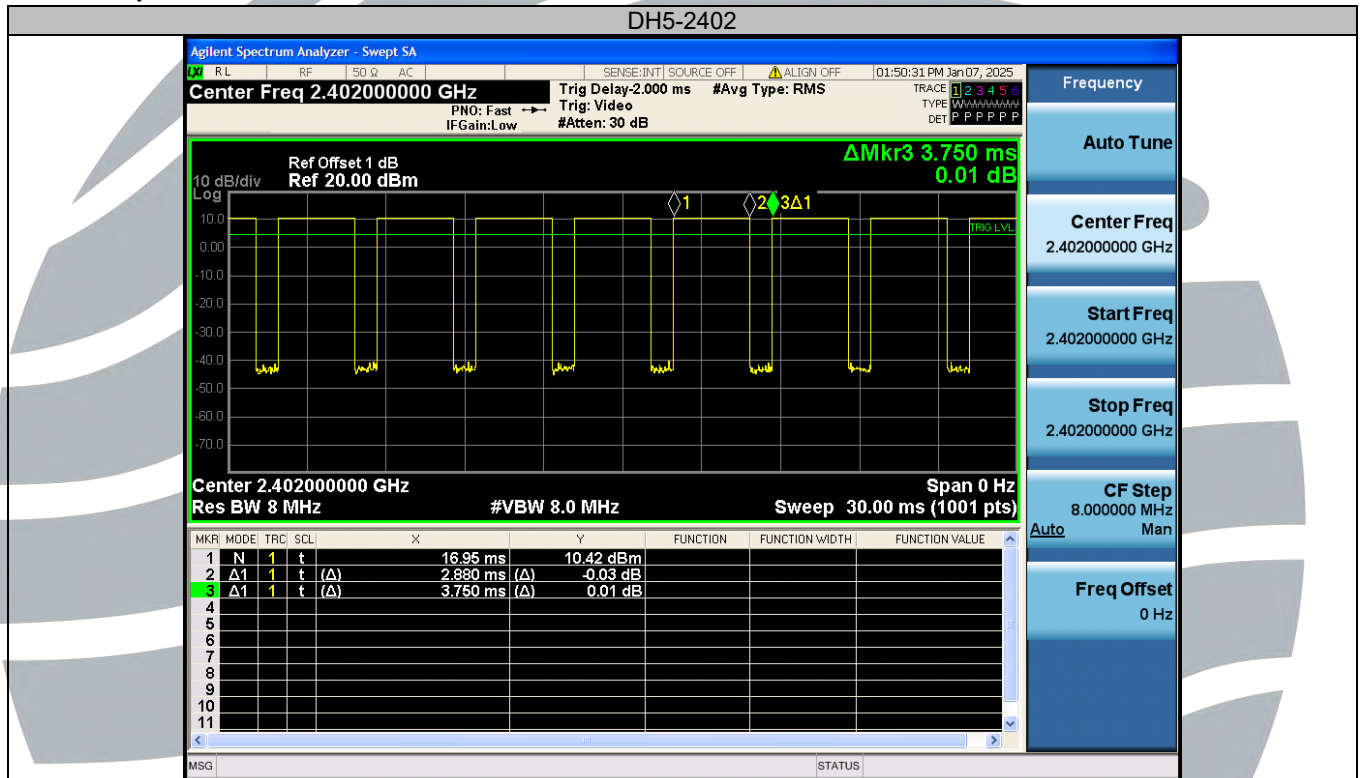



## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules
5	RSS-247 Issue 3	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
6	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus

### 5.2 ANTENNA REQUIREMENT

Standard Requirement
<p><b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>
<p><b>15.247(b) (4) requirement:</b> The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>
<p><b>RSS-Gen Issue 5, Section 6.8 requirement:</b> According to RSS-Gen Issue 5, Section 6.8, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns.</p>
<p><b>EUT Antenna:</b> Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 2.23 dBi.</p>

### 5.3 CONDUCTED PEAK OUTPUT POWER

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)  
 RSS-247 Issue 3, Section 5.4(b)  
**Test Method:** ANSI C63.10-2013 Section 7.8.5  
**Limit:** For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

- a) Use the following spectrum analyzer settings:
  - 1) Span: Approximately 5 x 20 dB bandwidth, centered on a hopping channel.
  - 2) RBW > 20 dB bandwidth of the emission being measured.
  - 3) VBW ≥ RBW.
  - 4) Sweep: Auto.
  - 5) Detector function: Peak.
  - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Results:** Pass

Modulation	Frequency	Max. Peak Power		Peak Power Limit	EIRP	EIRP Limit	Max. Avg. Power	Result
	(MHz)	(dBm)	(mW)	(dBm)	(dBm)	(dBm)	(dBm)	
GFSK	2402	10.57	11.40	20.97	12.80	36.02	9.29	Pass
	2441	10.49	11.19	20.97	12.72	36.02	<b>9.31</b>	Pass
	2480	10.51	11.25	20.97	12.74	36.02	9.21	Pass
π/4DQPSK	2402	10.51	11.25	20.97	12.74	36.02	7.26	Pass
	2441	10.43	11.04	20.97	12.66	36.02	7.29	Pass
	2480	10.48	11.17	20.97	12.71	36.02	7.24	Pass
8DPSK	2402	10.62	11.53	20.97	12.85	36.02	7.25	Pass
	2441	10.52	11.27	20.97	12.75	36.02	7.28	Pass
	2480	10.58	11.43	20.97	12.81	36.02	7.23	Pass

Note: The antenna gain of 2.23 dBi less than 6dBi maximum permission antenna gain value based on 125 mW peak output power limit.

## 5.420 DB BANDWIDTH& OCCUPIED BANDWIDTH

	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)
<b>Test Requirement:</b>	RSS-247 Issue 3, Section 5.1(a) RSS-Gen section 6.7
<b>Test Method:</b>	ANSI C63.10-2013 Section 6.9.2 RSS-Gen section 6.7
<b>Limit:</b>	None; for reporting purposes only.
<b>Test Procedure:</b>	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: <ul style="list-style-type: none"><li>a) Span = approximately 2 to 5 times the OBW, centered on a hopping channel.</li><li>b) RBW = 1% to 5% of the OBW.</li><li>c) VBW <math>\geq 3 \times</math> RBW</li><li>d) Sweep = auto;</li><li>e) Detector function = peak</li><li>f) Trace = max hold</li><li>g) All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.</li></ul>
	Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
<b>Test Setup:</b>	Refer to section 4.5.3 for details.
<b>Instruments Used:</b>	Refer to section 3 for details
<b>Test Mode:</b>	Link mode
<b>Test Results:</b>	<b>Please refer to Appendix A</b>

## 5.5 CARRIER FREQUENCIES SEPARATION

<b>Test Requirement:</b>	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 3, Section 5.1(b)
<b>Test Method:</b>	ANSI C63.10-2013 Section 7.8.2
<b>Limit:</b>	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
<b>Test Procedure:</b>	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: <ul style="list-style-type: none"><li>a) Span: Wide enough to capture the peaks of two adjacent channels.</li><li>b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.</li><li>c) Video (or average) bandwidth (VBW) <math>\geq</math> RBW.</li><li>d) Sweep: Auto.</li><li>e) Detector function: Peak.</li><li>f) Trace: Max hold.</li><li>g) Allow the trace to stabilize.</li><li>h) Use the marker-delta function to determine the separation between the peaks of the adjacent channels.</li></ul> <p>Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.</p>
<b>Test Setup:</b>	Refer to section 4.5.3 for details.
<b>Instruments Used:</b>	Refer to section 3 for details
<b>Test Mode:</b>	Link mode
<b>Test Results:</b>	<b>Please refer to Appendix A</b>

## 5.6 NUMBER OF HOPPING CHANNEL

<b>Test Requirement:</b>	FCC 47 CFR Part 15 Subpart C Section 15.247(b)(1) RSS-247 Issue 3, Section 5.1(d)
<b>Test Method:</b>	ANSI C63.10-2013 Section 7.8.3
<b>Limit:</b>	Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.
<b>Test Procedure:</b>	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: <ol style="list-style-type: none"><li>Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.</li><li>RBW &lt; 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.</li><li>VBW ≥ RBW.</li><li>Sweep: Auto.</li><li>Detector function: Peak.</li><li>Trace: Max hold.</li><li>Allow the trace to stabilize.</li></ol> <p>Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.</p>
<b>Test Setup:</b>	Refer to section 4.5.3 for details.
<b>Instruments Used:</b>	Refer to section 3 for details
<b>Test Mode:</b>	Link mode
<b>Test Results:</b>	<b>Please refer to Appendix A</b>

## 5.7 DWELL TIME

<b>Test Requirement:</b>	FCC 47 CFR Part 15 Subpart C Section 15.247(a)(1) RSS-247 Issue 3, Section 5.1(d)
<b>Test Method:</b>	ANSI C63.10-2013 Section 7.8.4
<b>Limit:</b>	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
<b>Test Procedure:</b>	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: <ul style="list-style-type: none"><li>a) Span = zero span, centered on a hopping channel</li><li>b) RBW shall be <math>\leq</math> channel spacing and where possible RBW should be set <math>\gg 1 / T</math>, where T is the expected dwell time per channel.</li><li>c) Sweep = As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.</li><li>d) Detector function = peak</li><li>e) Trace = max hold</li><li>f) Use the marker-delta function to determine the dwell time</li></ul> <p>Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.</p>
<b>Test Setup:</b>	Refer to section 4.5.3 for details.
<b>Instruments Used:</b>	Refer to section 3 for details
<b>Test Mode:</b>	Link mode
<b>Test Results:</b>	<b>Please refer to Appendix A</b>

## 5.8 CONDUCTED OUT OF BAND EMISSION

<b>Test Requirement:</b>	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 3, Section 5.5
<b>Test Method:</b>	ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8
<b>Limit:</b>	In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.
<b>Test Procedure:</b>	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings:

### Step 1: Measurement Procedure REF

- a) Set instrument center frequency to 2400 MHz or 2483.5 MHz.
- b) Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
- c) Set the RBW = 100 kHz.
- d) Set the VBW  $\geq 3 \times$  RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Sweep points  $\geq 2 \times$  Span/RBW
- h) Trace mode = max hold.
- i) Allow the trace to stabilize.
- j) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

### Step 2: Measurement Procedure OOBE

- a) Set RBW = 100 kHz.
- b) Set VBW  $\geq 300$  kHz.
- c) Detector = peak.
- d) Sweep = auto couple.
- e) Trace Mode = max hold.
- f) Allow trace to fully stabilize.
- g) Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

<b>Test Setup:</b>	Refer to section 4.5.3 for details.
<b>Instruments Used:</b>	Refer to section 3 for details
<b>Test Mode:</b>	Hopping Frequencies Transmitter mode
<b>Test Results:</b>	<b>Please refer to Appendix A</b>

### 5.9 RADIATED SPURIOUS EMISSIONS

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.205/15.209  
RSS-Gen Issue 5, Section 6.13/8.9/8.10

**Test Method:** ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6

**Receiver Setup:**

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

**Limits:**

#### Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dBµV/m )	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

**Remark:**

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

**Test Setup:** Refer to section 4.5.1 for details.

#### Test Procedures:

- From 30 MHz to 1GHz test procedure as below:
  - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
  - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
  - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
  - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
  - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
  - If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Above 1GHz test procedure as below:
  - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).

#### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1



- 2) Test the EUT in the lowest channel, middle channel, the Highest channel
- 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Y axis positioning which it is worse case.
- 4) Repeat above procedures until all frequencies measured was complete.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

**The worst measurement data as follows:**


**Radiated Emission Test Data (9 kHz ~ 30 MHz):**

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.


**Radiated Emission Test Data (30 MHz ~ 1 GHz):**

**Worst-Case Configuration**

**Horizontal**

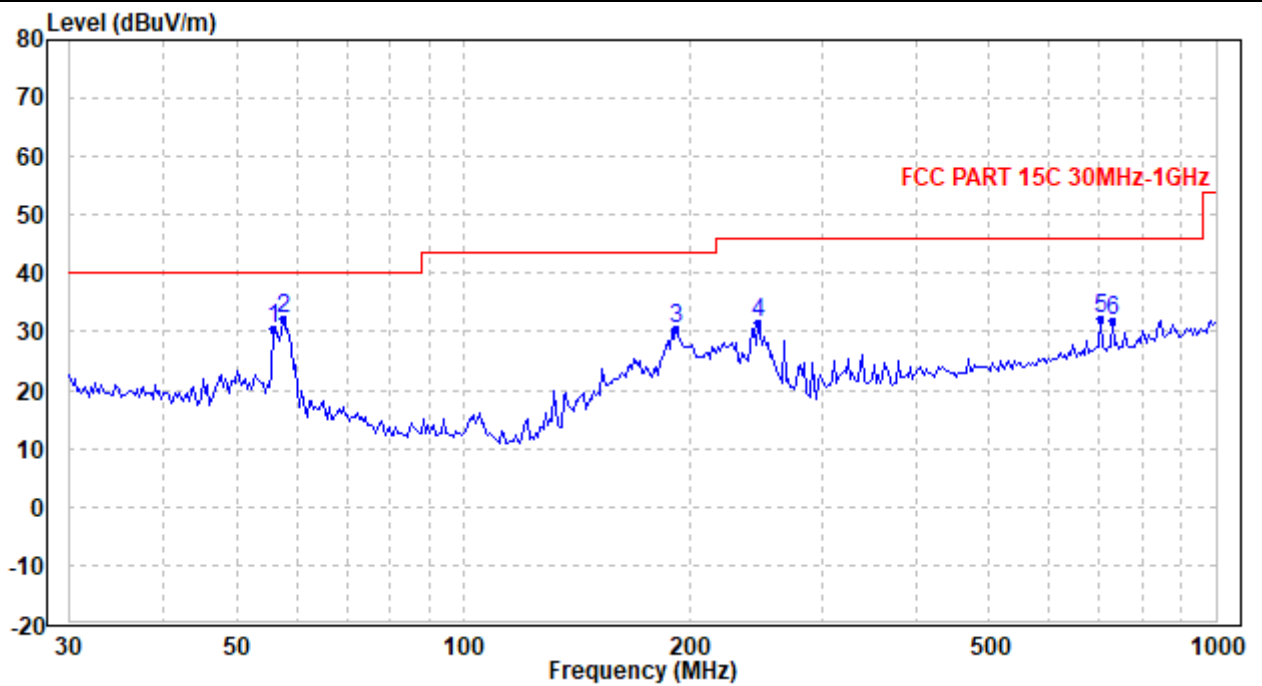

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	56.071	47.53	-17.15	30.38	40.00	-9.62	QP
2	57.669	49.76	-17.65	32.11	40.00	-7.89	QP
3	191.784	42.32	-11.82	30.50	43.50	-13.00	QP
4	246.990	42.01	-10.63	31.38	46.00	-14.62	QP
5	703.731	30.72	1.38	32.10	46.00	-13.90	QP
6	728.897	30.45	1.57	32.02	46.00	-13.98	QP

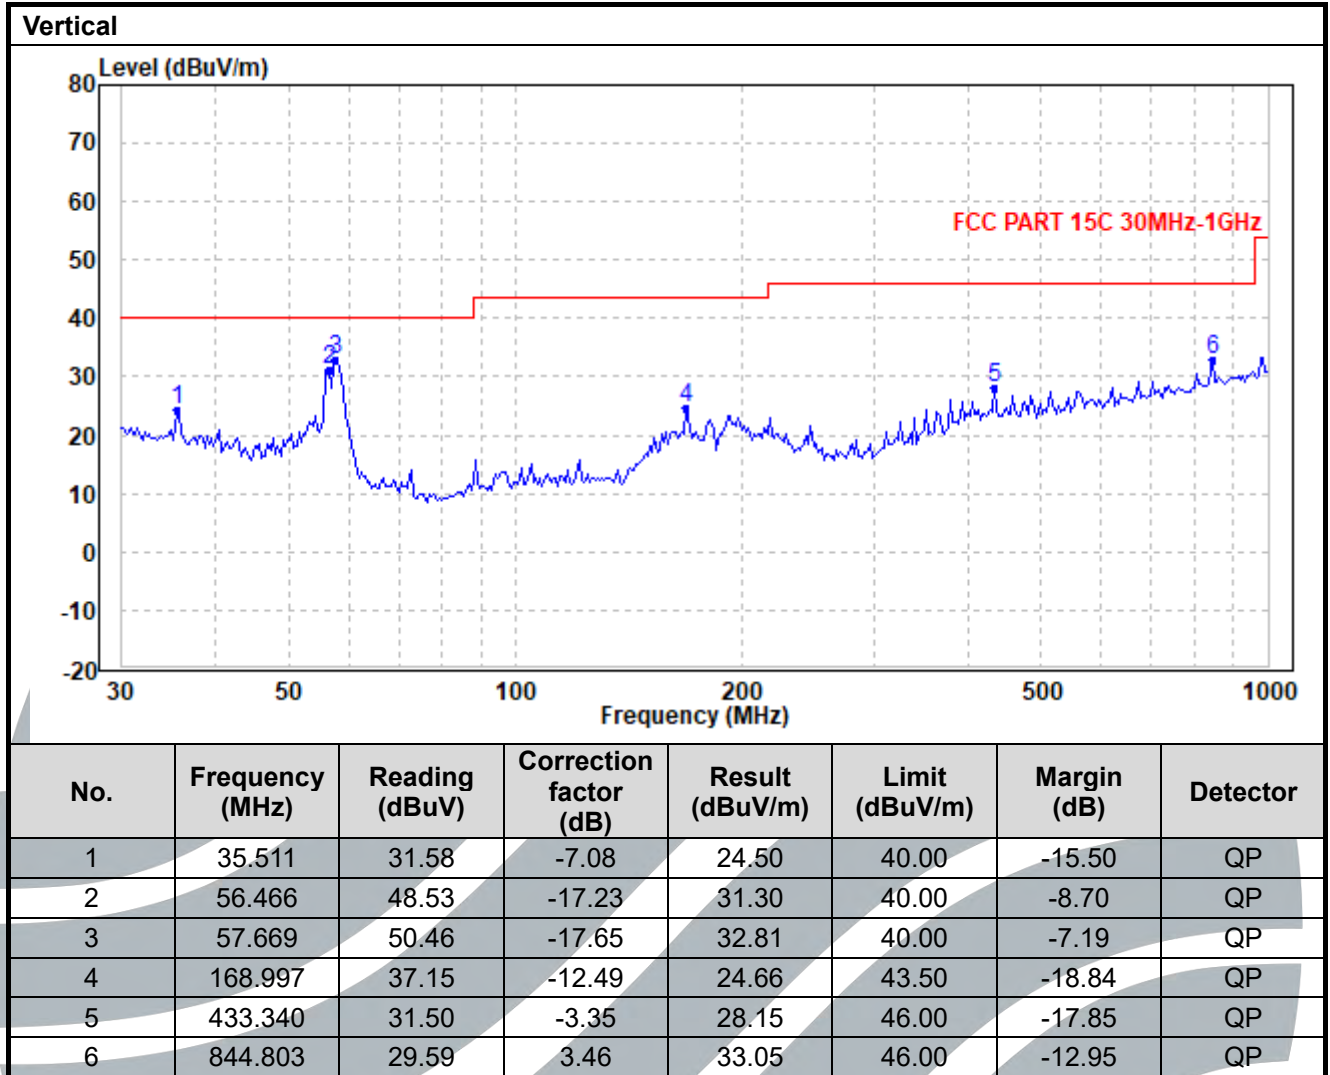

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

Radiated Emission Test Data (Above 1GHz):								
Lowest Channel:								
No.	Frequency (MHz)	Reading (dB $\mu$ V)	Correction factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Antenna Polaxis
1	4804	35.47	-2.08	33.39	54.00	-20.61	Average	Horizontal
2	4804	50.03	-2.08	47.95	74.00	-26.05	Peak	Horizontal
3	7206	33.66	1.3	34.96	54.00	-19.04	Average	Horizontal
4	7206	45.48	1.3	46.78	74.00	-27.22	Peak	Horizontal
5	4804	35.51	-2.08	33.43	54.00	-20.57	Average	Vertical
6	4804	49.45	-2.08	47.37	74.00	-26.63	Peak	Vertical
7	7206	33.56	1.3	34.86	54.00	-19.14	Average	Vertical
8	7206	46.11	1.3	47.41	74.00	-26.59	Peak	Vertical
Middle Channel:								
1	4882	37.27	-2.05	35.22	54.00	-18.78	Average	Horizontal
2	4882	52.78	-2.05	50.73	74.00	-23.27	Peak	Horizontal
3	7323	34.43	1.31	35.74	54.00	-18.26	Average	Horizontal
4	7323	46.96	1.31	48.27	74.00	-25.73	Peak	Horizontal
5	4882	35.57	-2.05	33.52	54.00	-20.48	Average	Vertical
6	4882	50.60	-2.05	48.55	74.00	-25.45	Peak	Vertical
7	7323	34.37	1.31	35.68	54.00	-18.32	Average	Vertical
8	7323	48.01	1.31	49.32	74.00	-24.68	Peak	Vertical
Highest Channel:								
1	4960	36.69	-2.02	34.67	54.00	-19.33	Average	Horizontal
2	4960	52.35	-2.02	50.33	74.00	-23.67	Peak	Horizontal
3	7440	35.01	1.32	36.33	54.00	-17.67	Average	Horizontal
4	7440	49.40	1.32	50.72	74.00	-23.28	Peak	Horizontal
5	4960	35.94	-2.02	33.92	54.00	-20.08	Average	Vertical
6	4960	50.17	-2.02	48.15	74.00	-25.85	Peak	Vertical
7	7440	35.22	1.32	36.54	54.00	-17.46	Average	Vertical
8	7440	51.49	1.32	52.81	74.00	-21.19	Peak	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit

### 5.10 BAND EDGE MEASUREMENTS (RADIATED)

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.205/15.209  
RSS-247 Issue 3, Section 5.5

**Test Method:** ANSI C63.10-2013 Section 6.10.5

**Limits:**

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Frequency	Limit (dBµV/m @3m)	Remark
30 MHz-88 MHz	40.0	Quasi-peak Value
88 MHz-216 MHz	43.5	Quasi-peak Value
216 MHz-960 MHz	46.0	Quasi-peak Value
960 MHz-1 GHz	54.0	Quasi-peak Value
Above 1 GHz	54.0	Average Value
	74.0	Peak Value

**Test Setup:** Refer to section 4.5.1 for details.

**Test Procedures:**



Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels).

1. Use radiated spurious emission test procedure described in clause 5.10. The transmitter output (antenna port) was connected to the test receiver.
2. Set the PK and AV limit line.
3. Record the fundamental emission and emissions out of the band-edge.
4. Determine band-edge compliance as required.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

**The worst measurement data as follows:**

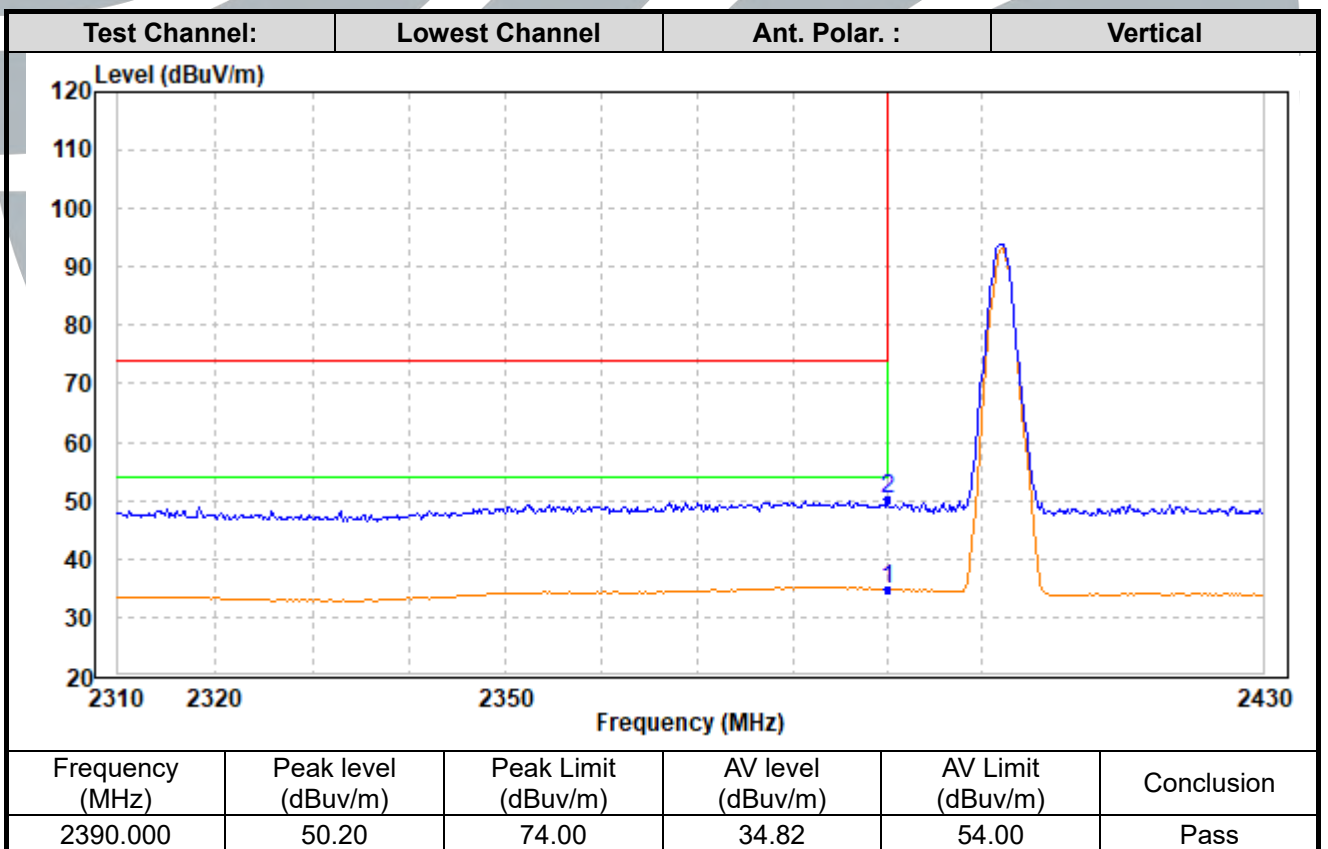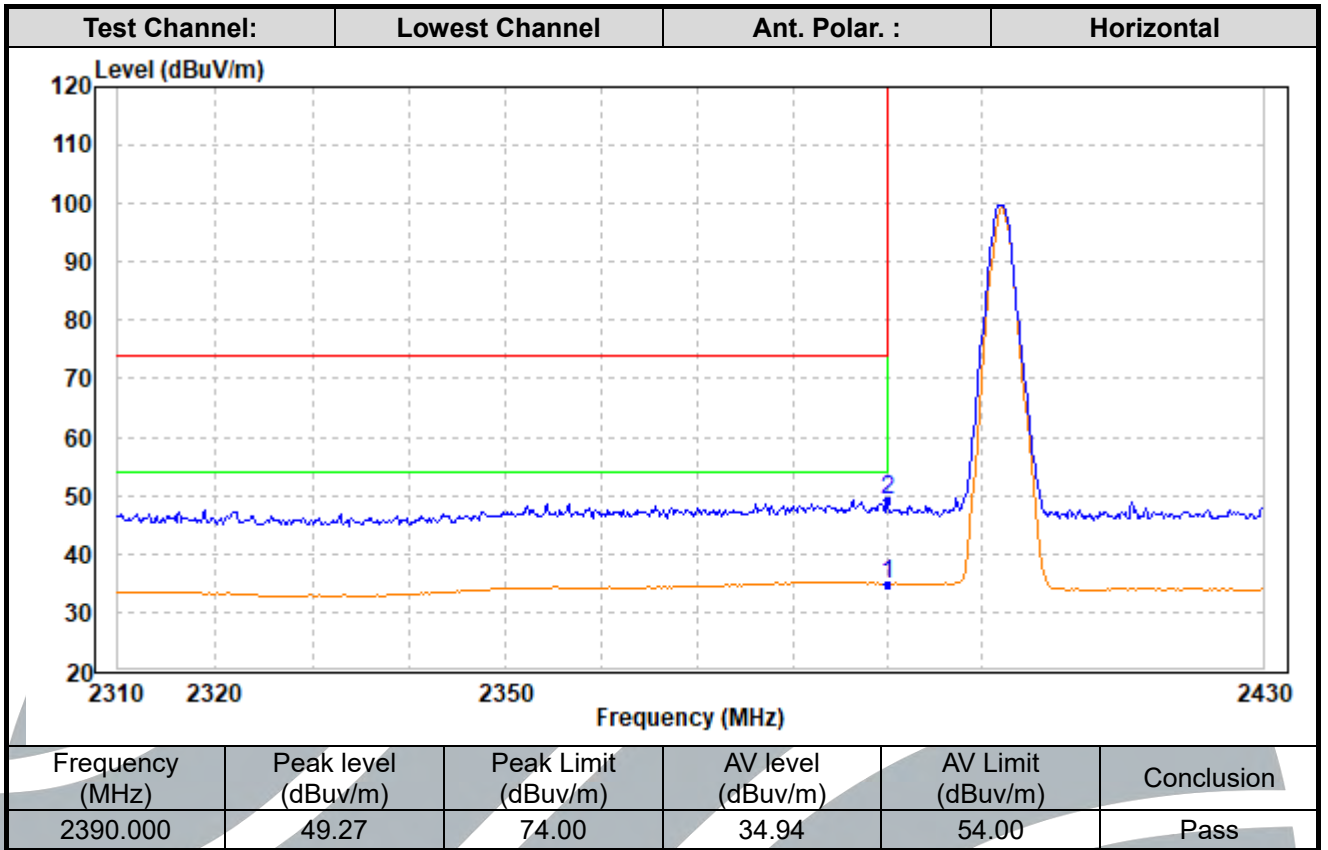

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

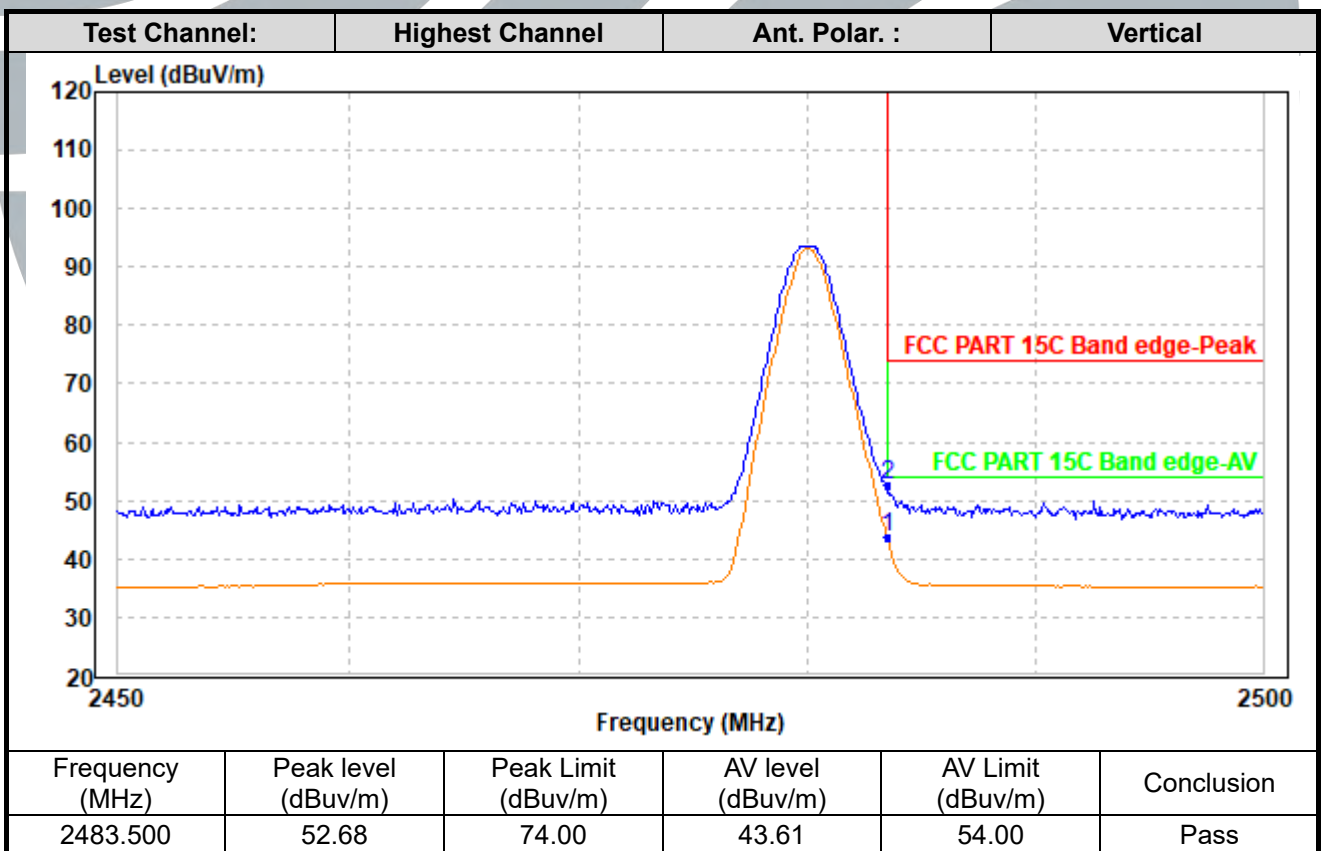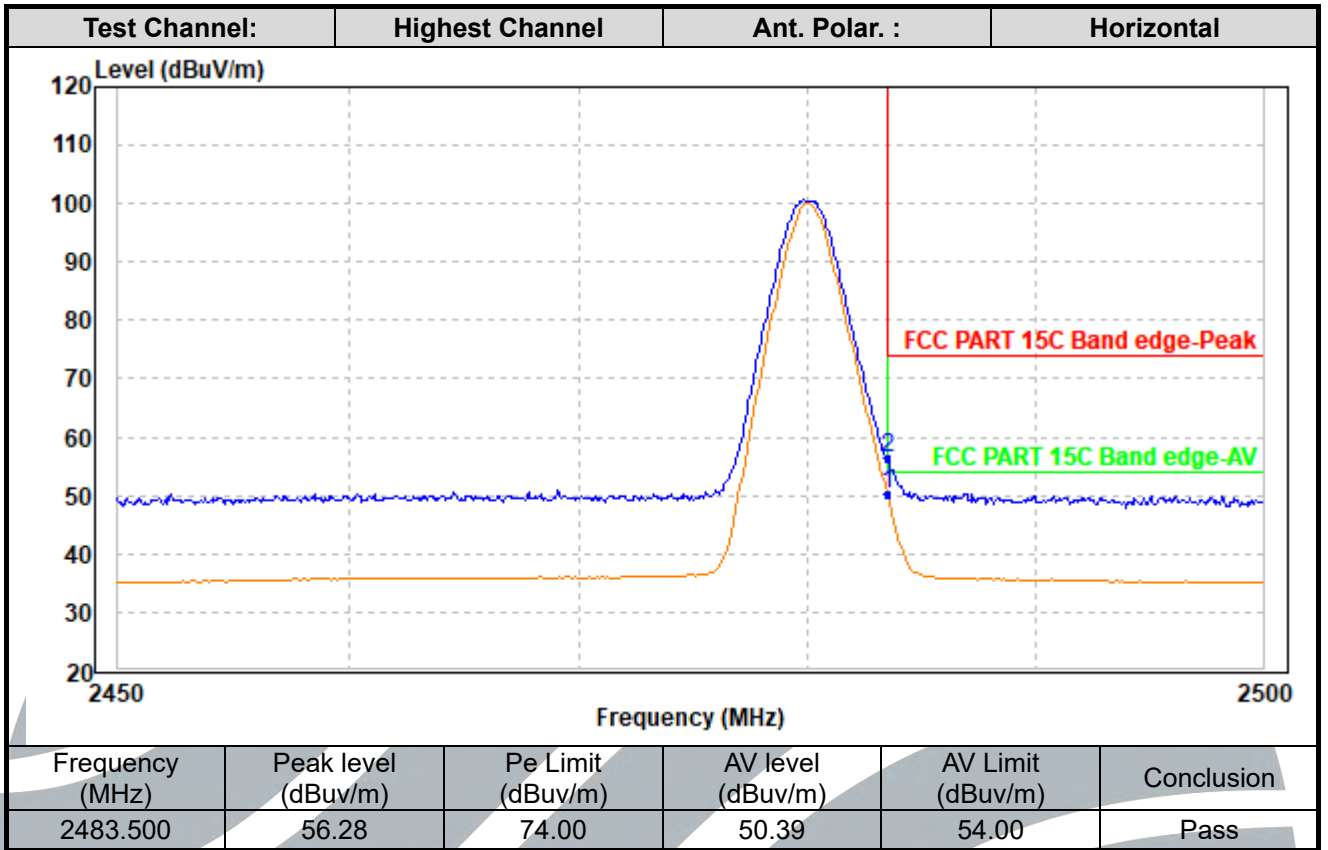

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

### 5.11 CONDUCTED EMISSION

**Test Requirement:** 47 CFR Part 15C Section 15.207  
 RSS-Gen Issue 5, Section 8.8  
**Test Method:** ANSI C63.10-2013 Section 6.2

**Limits:**

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

**Remark:**

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

**Test Setup:** Refer to section 4.5.2 for details.

**Test Procedures:**


Test frequency range :150KHz-30MHz

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

The worst measurement data as follows:  
 Quasi Peak and Average:  
 Mode: BT Link

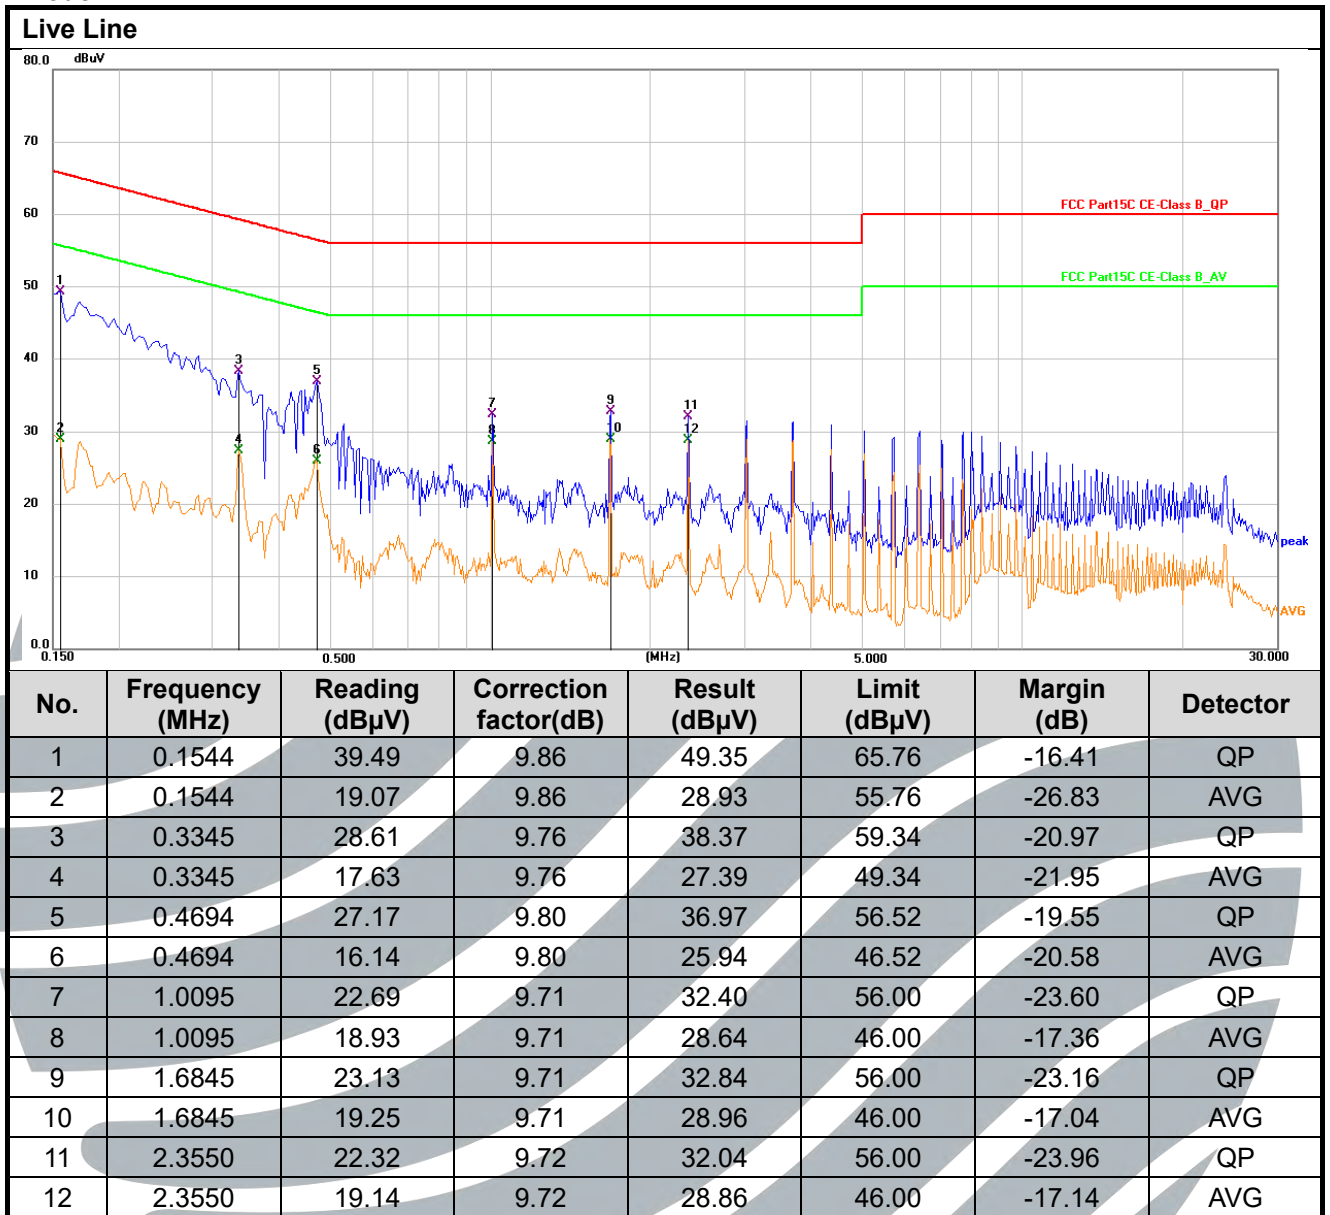

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1



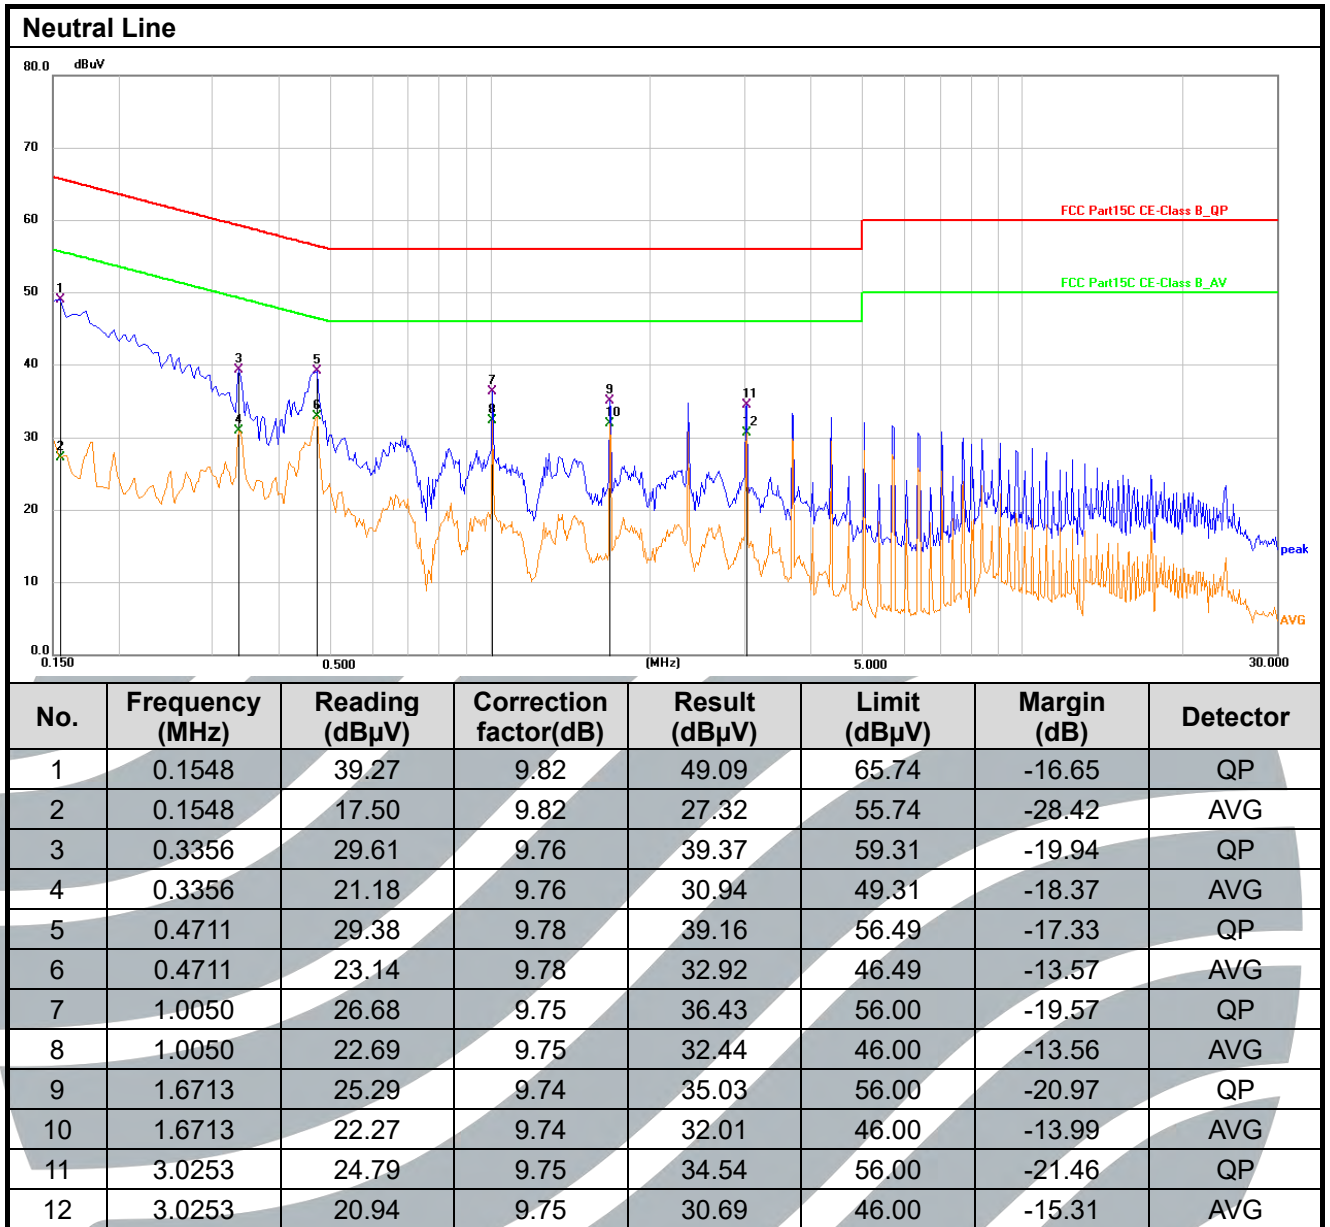


Remark:


1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

## APPENDIX A RF TEST DATA


### A.1 OCCUPIED BANDWIDTH

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]
DH5	Ant1	2402	0.88120
DH5	Ant1	2441	0.89235
DH5	Ant1	2480	0.87754
2DH5	Ant1	2402	1.1804
2DH5	Ant1	2441	1.1862
2DH5	Ant1	2480	1.1865
3DH5	Ant1	2402	1.1944
3DH5	Ant1	2441	1.2005
3DH5	Ant1	2480	1.1862

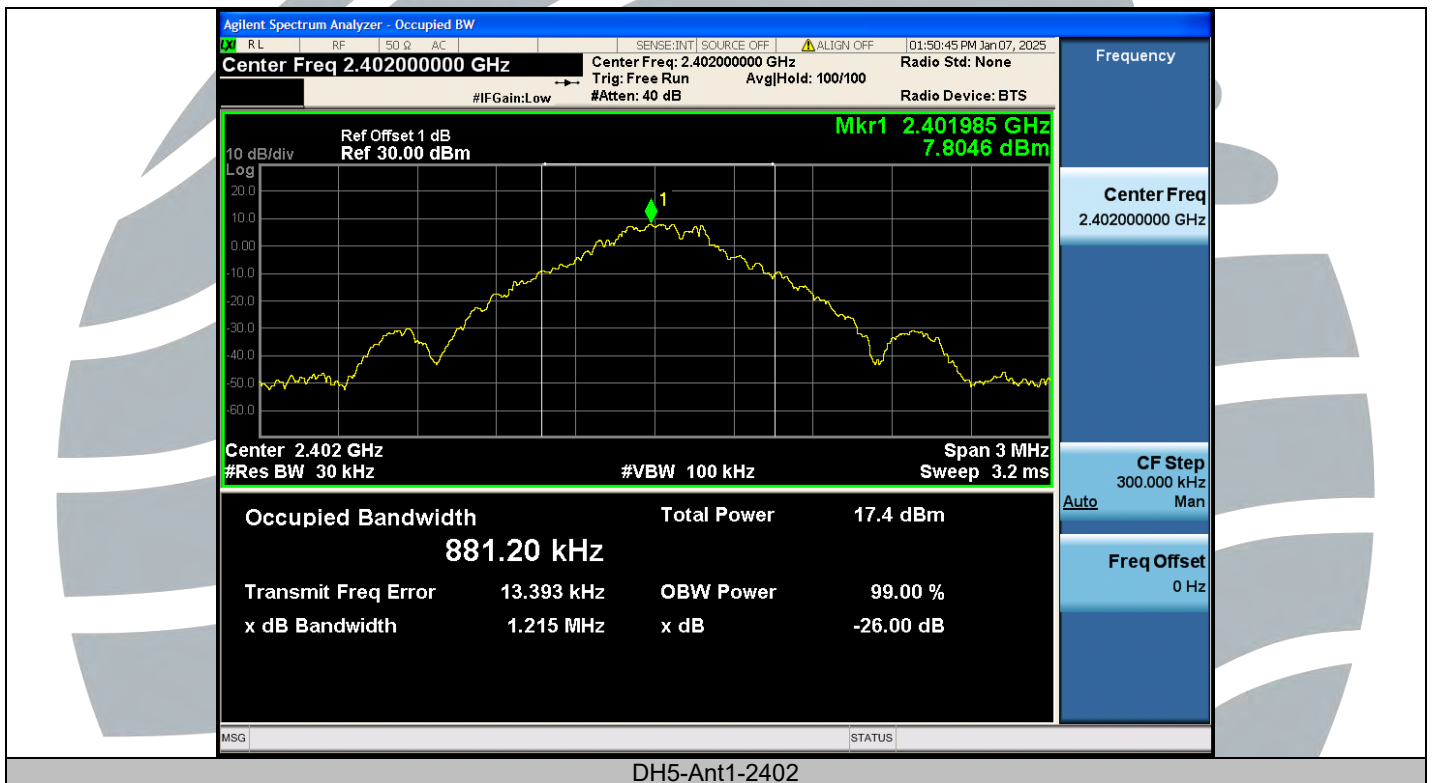

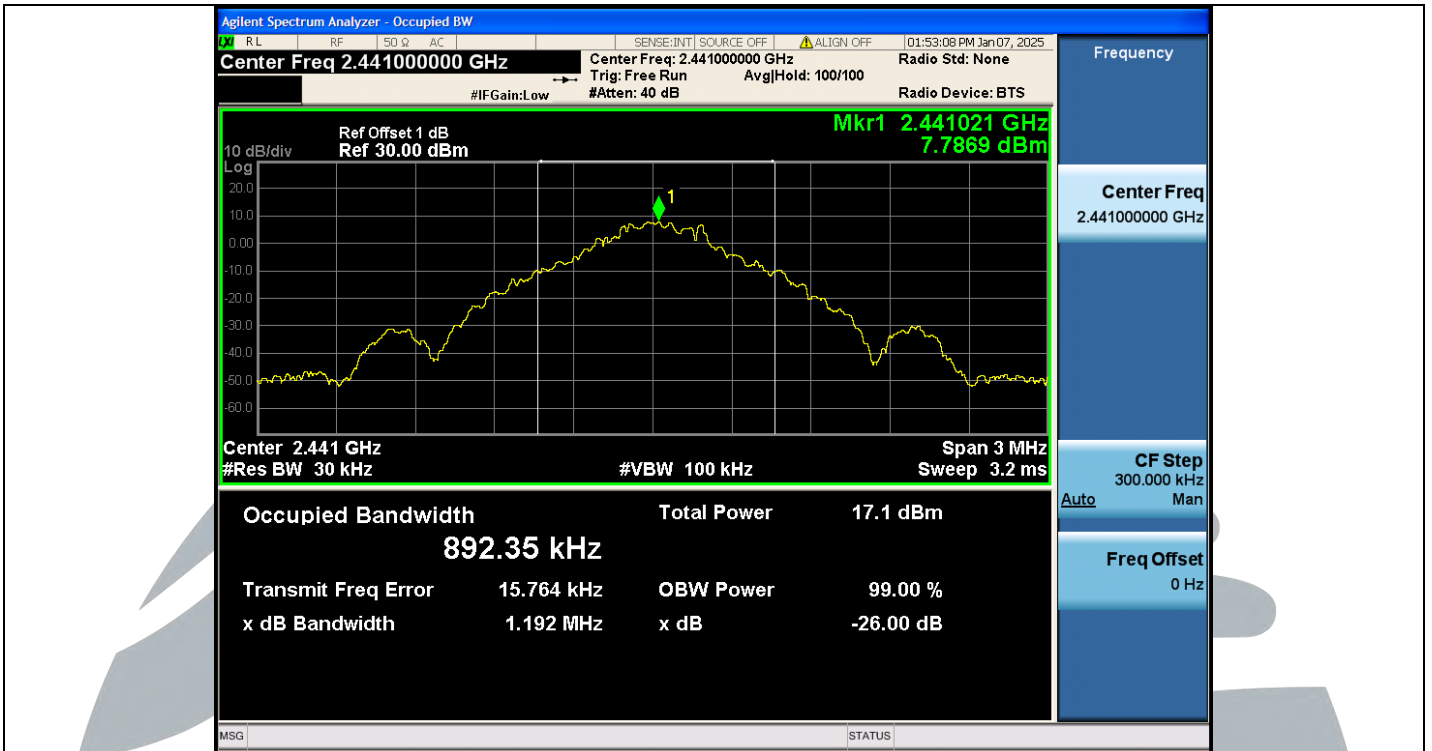

DH5-Ant1-2441

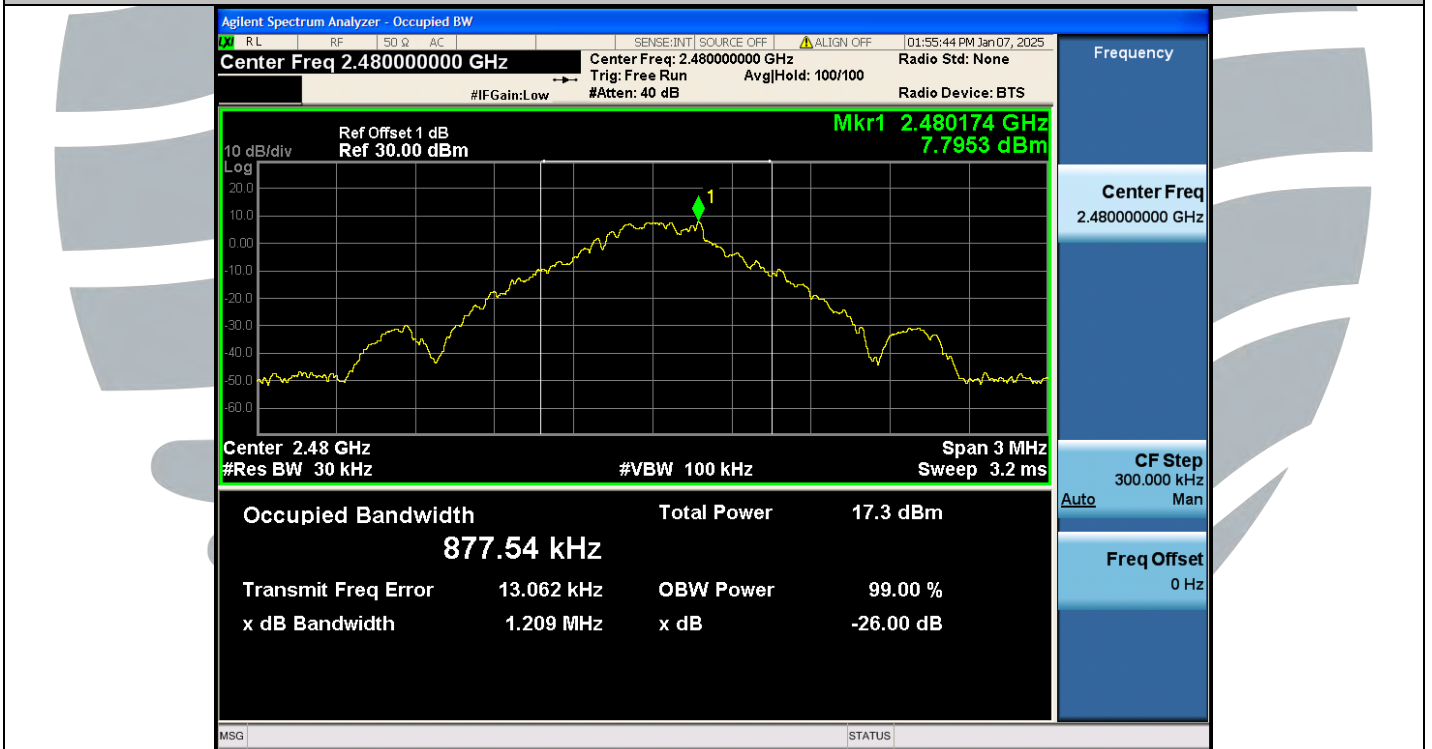

DH5-Ant1-2480

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

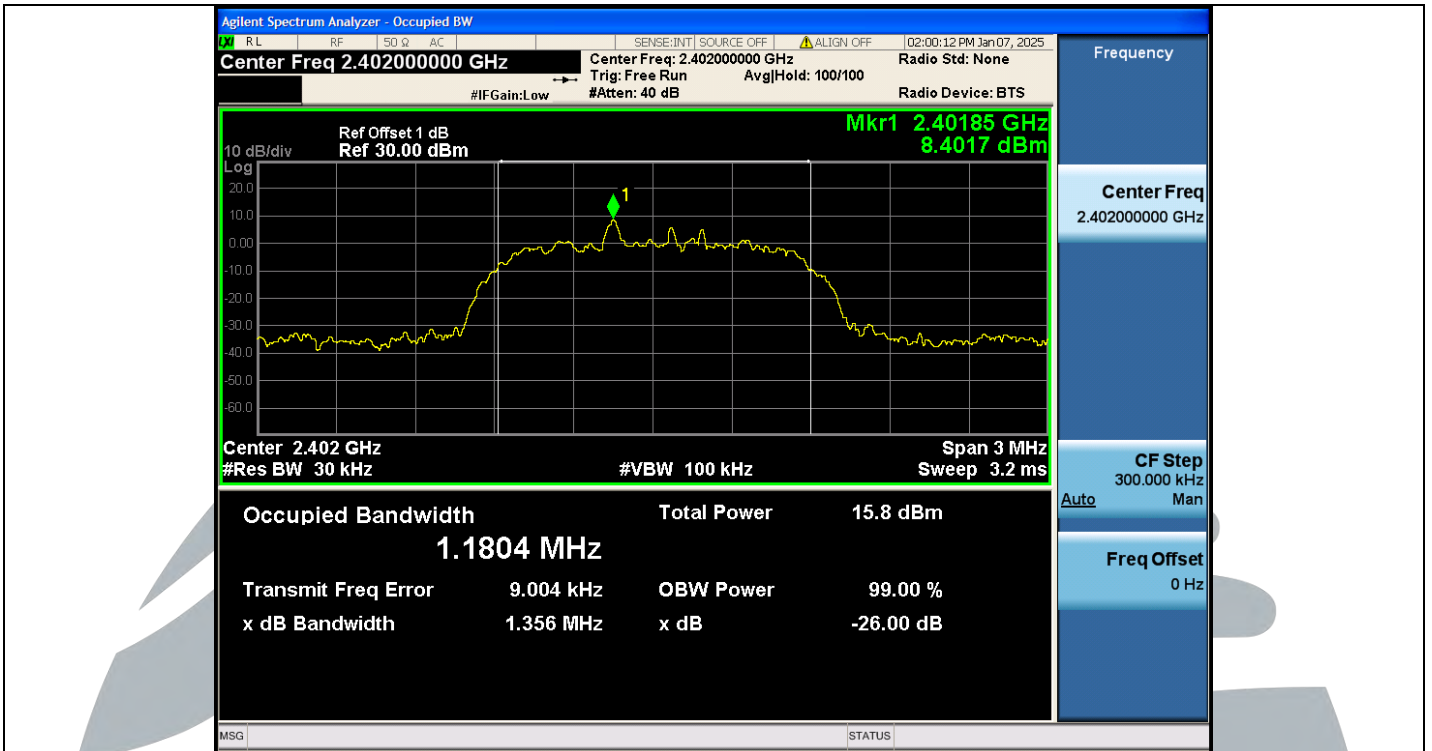

2DH5-Ant1-2402

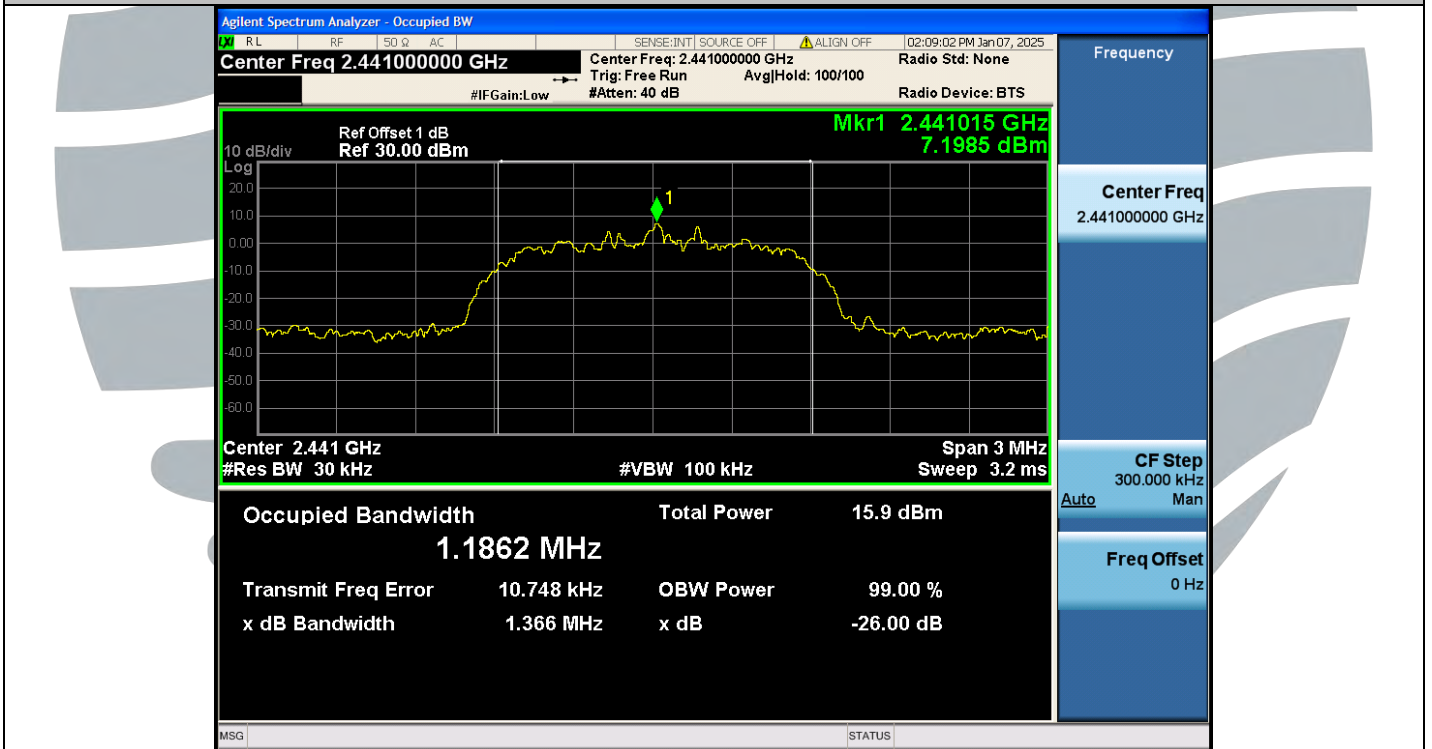

2DH5-Ant1-2441

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

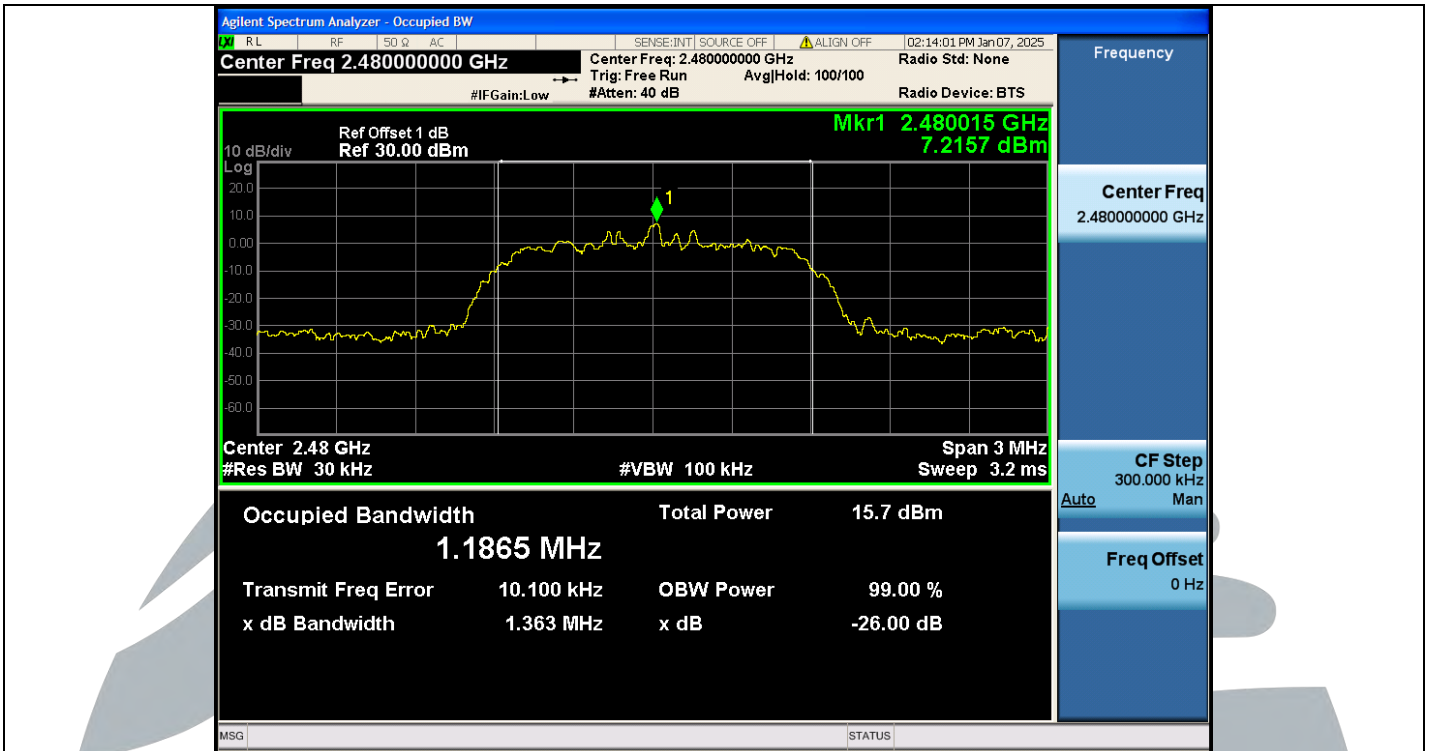

2DH5-Ant1-2480

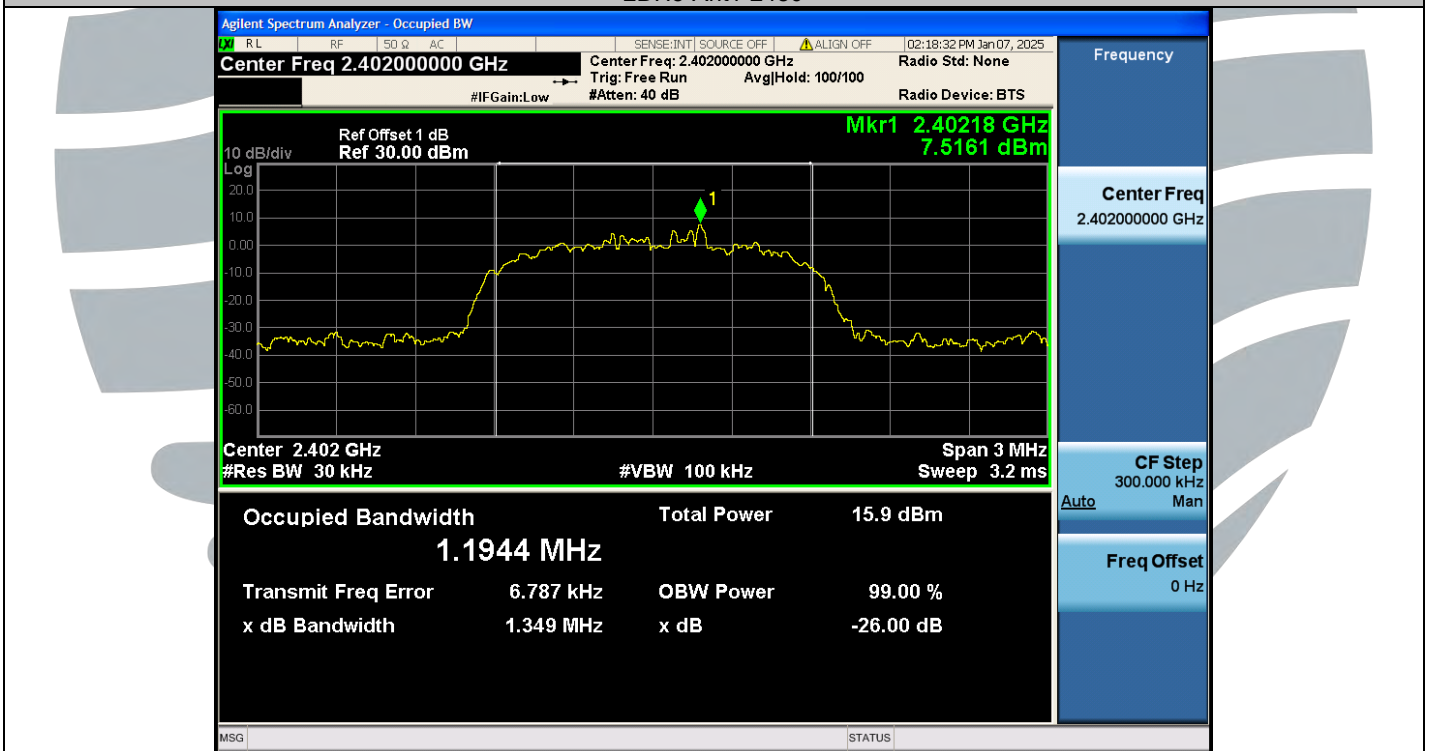

3DH5-Ant1-2402

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

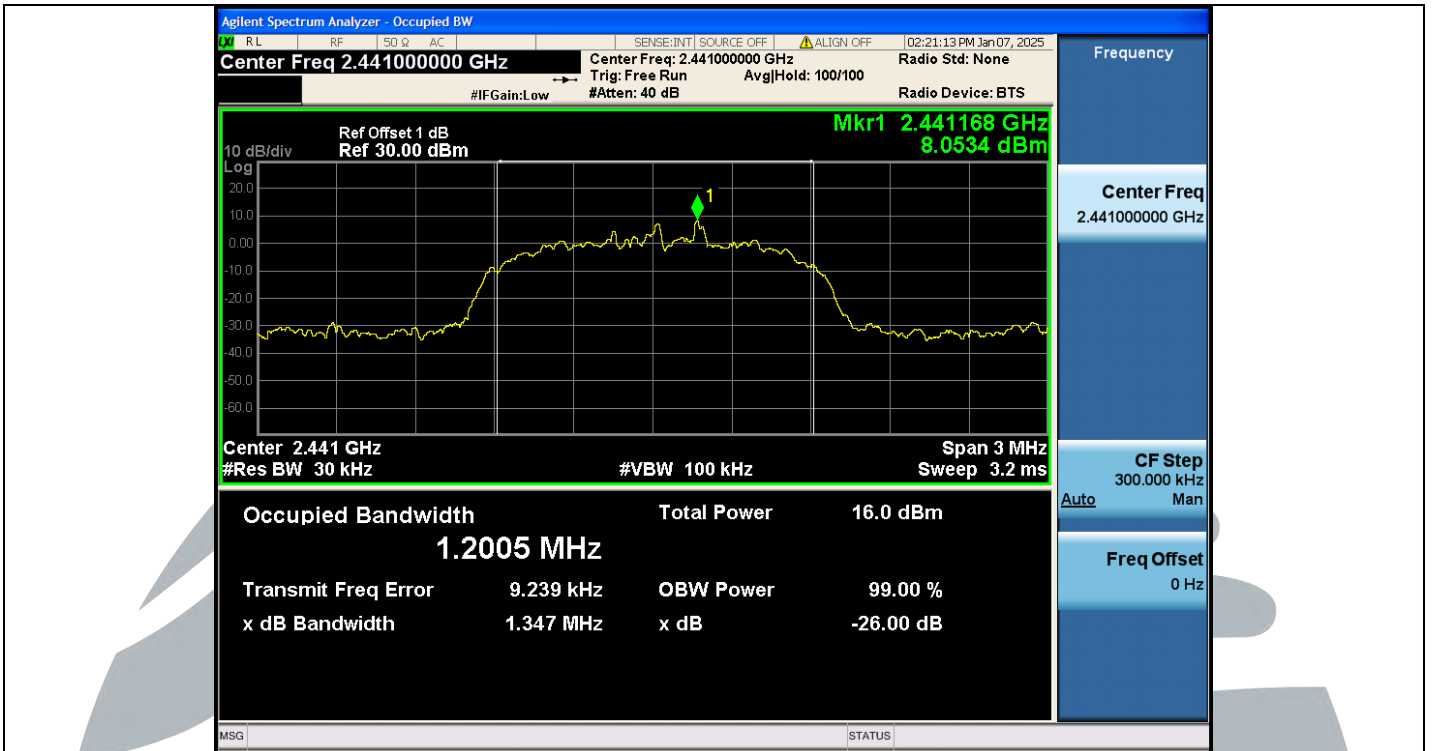

3DH5-Ant1-2441

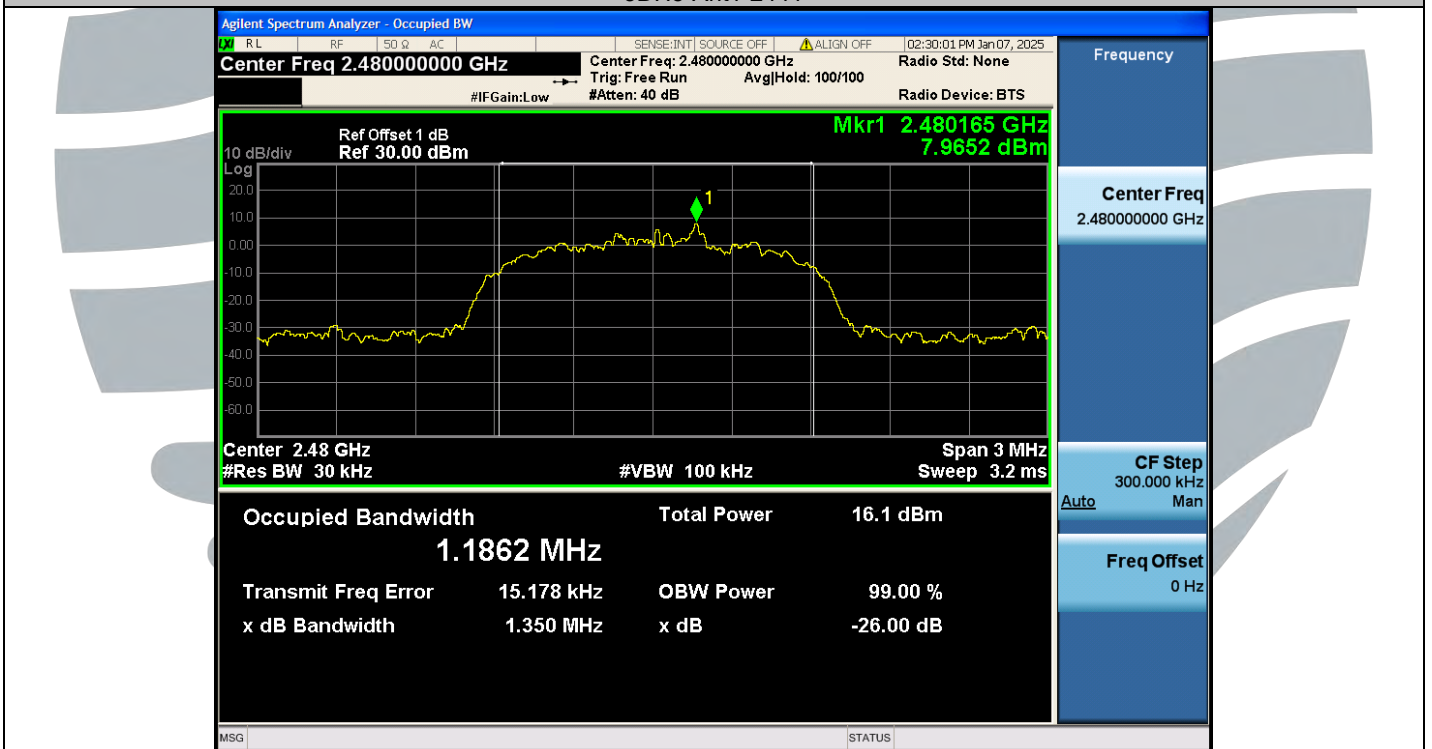

3DH5-Ant1-2480

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1


## A.2 20DB EMISSION BANDWIDTH

Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]
DH5	Ant1	2402	0.9659
DH5	Ant1	2441	1.027
DH5	Ant1	2480	0.9649
2DH5	Ant1	2402	1.258
2DH5	Ant1	2441	1.307
2DH5	Ant1	2480	1.254
3DH5	Ant1	2402	1.278
3DH5	Ant1	2441	1.302
3DH5	Ant1	2480	1.283

### Test Graphs

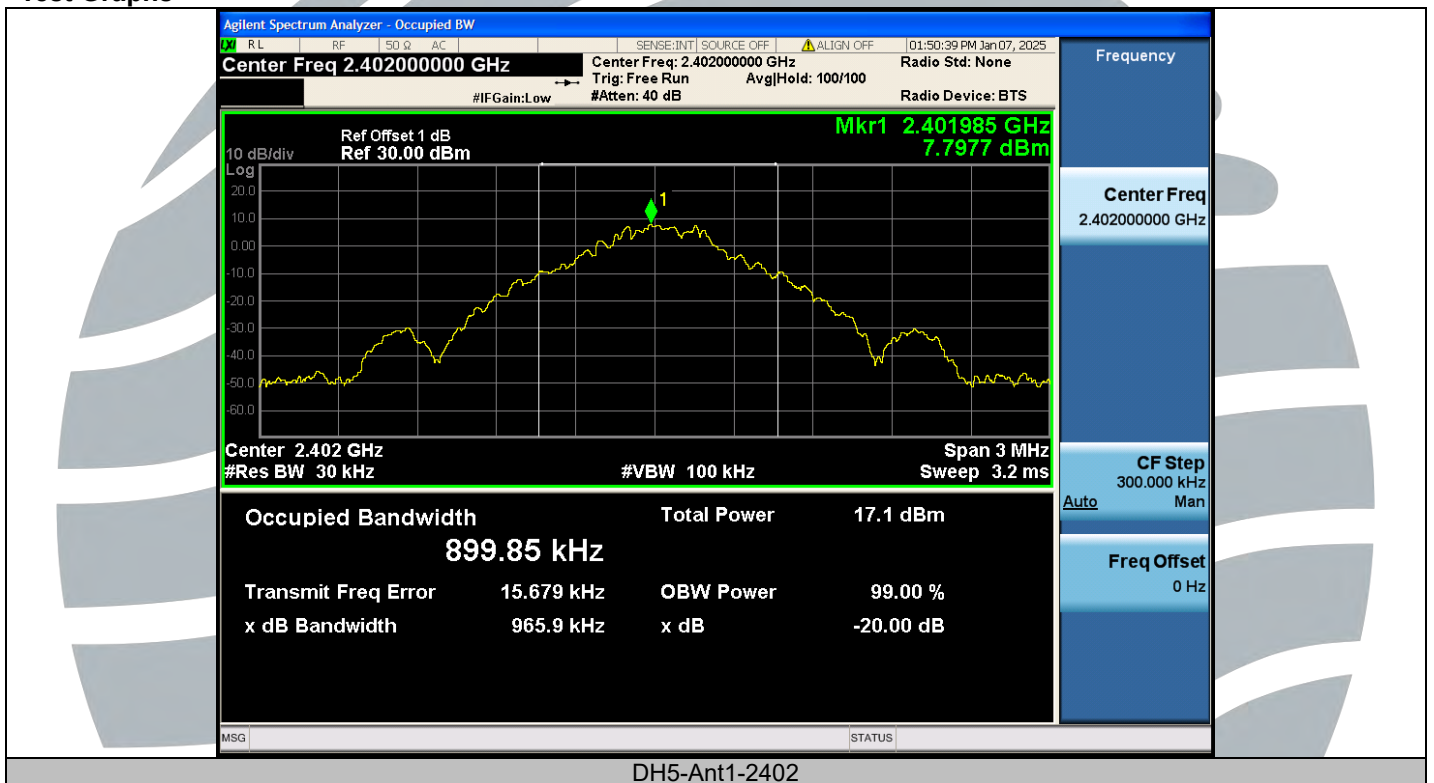

DH5-Ant1-2402

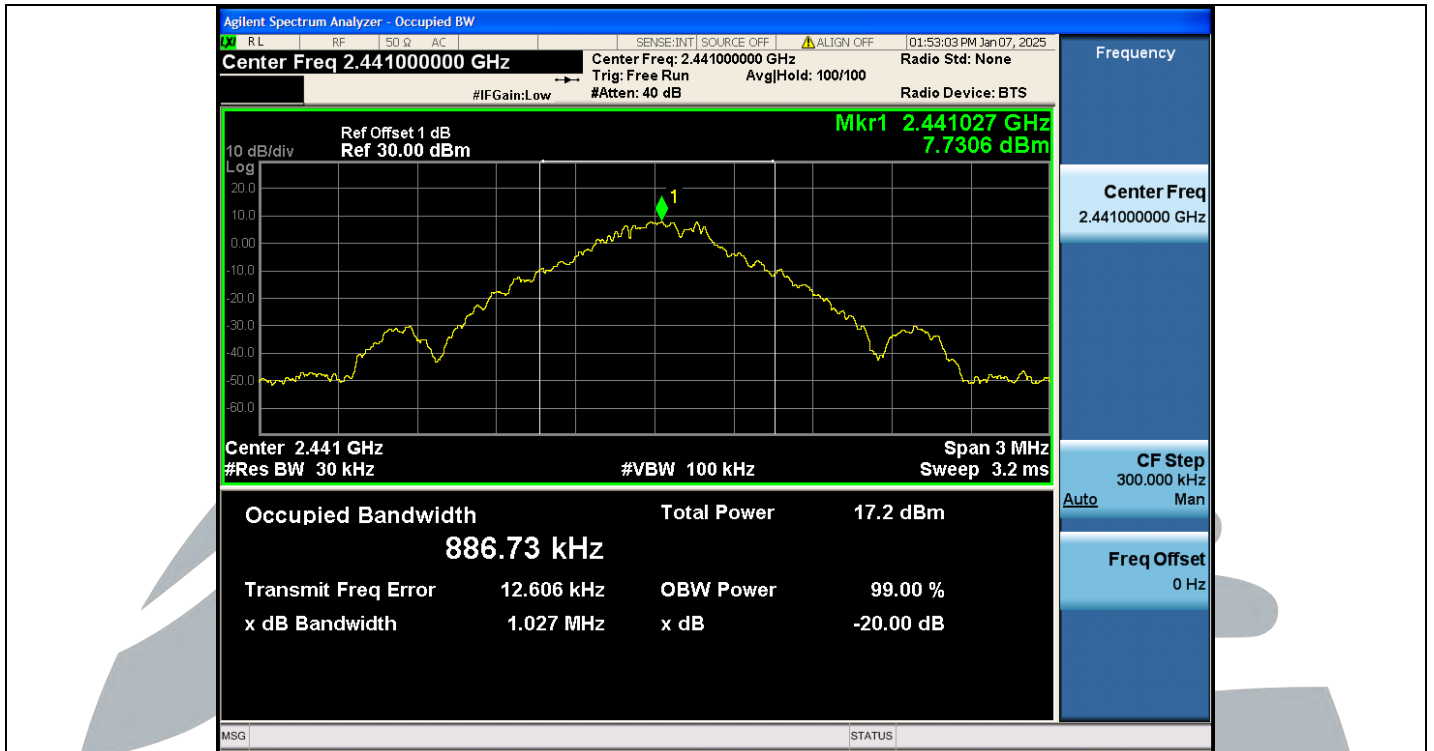

DH5-Ant1-2441



DH5-Ant1-2480

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1



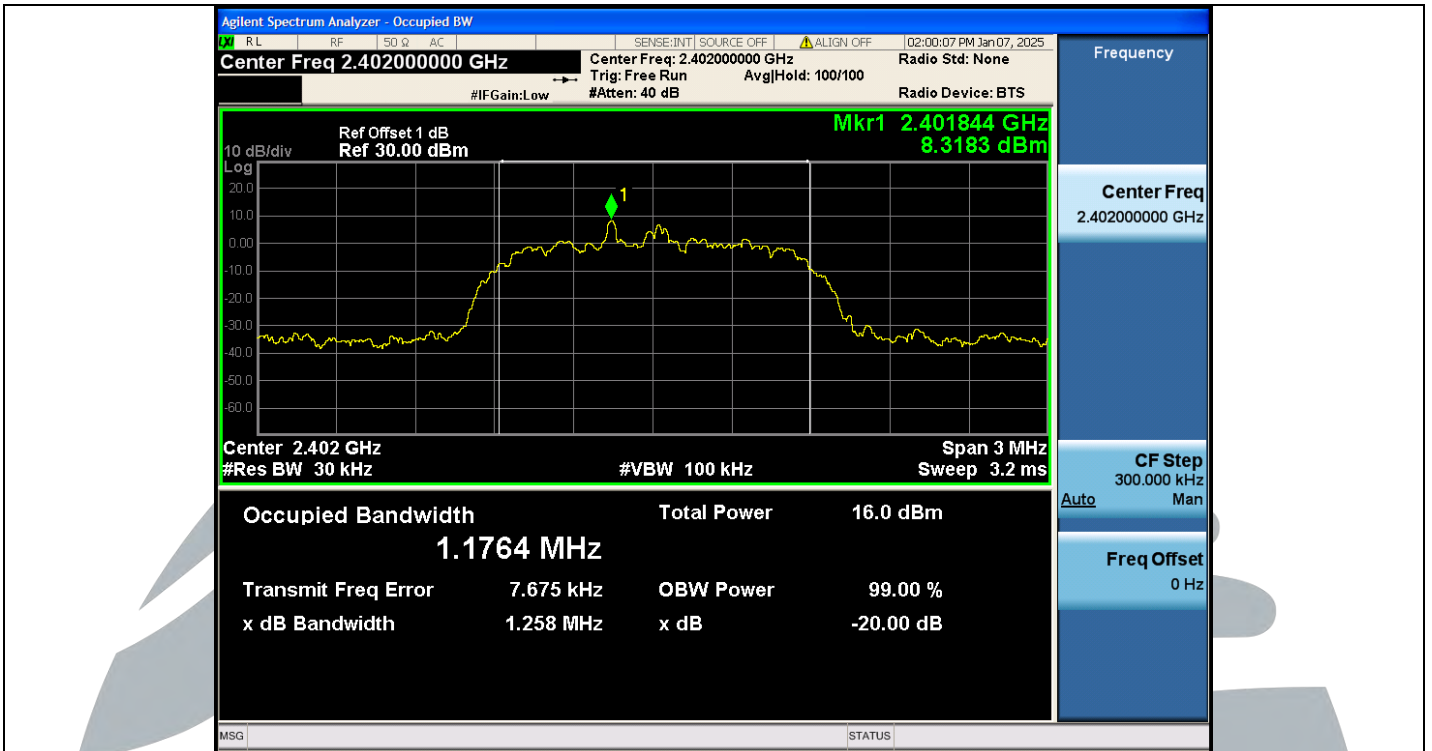

2DH5-Ant1-2402

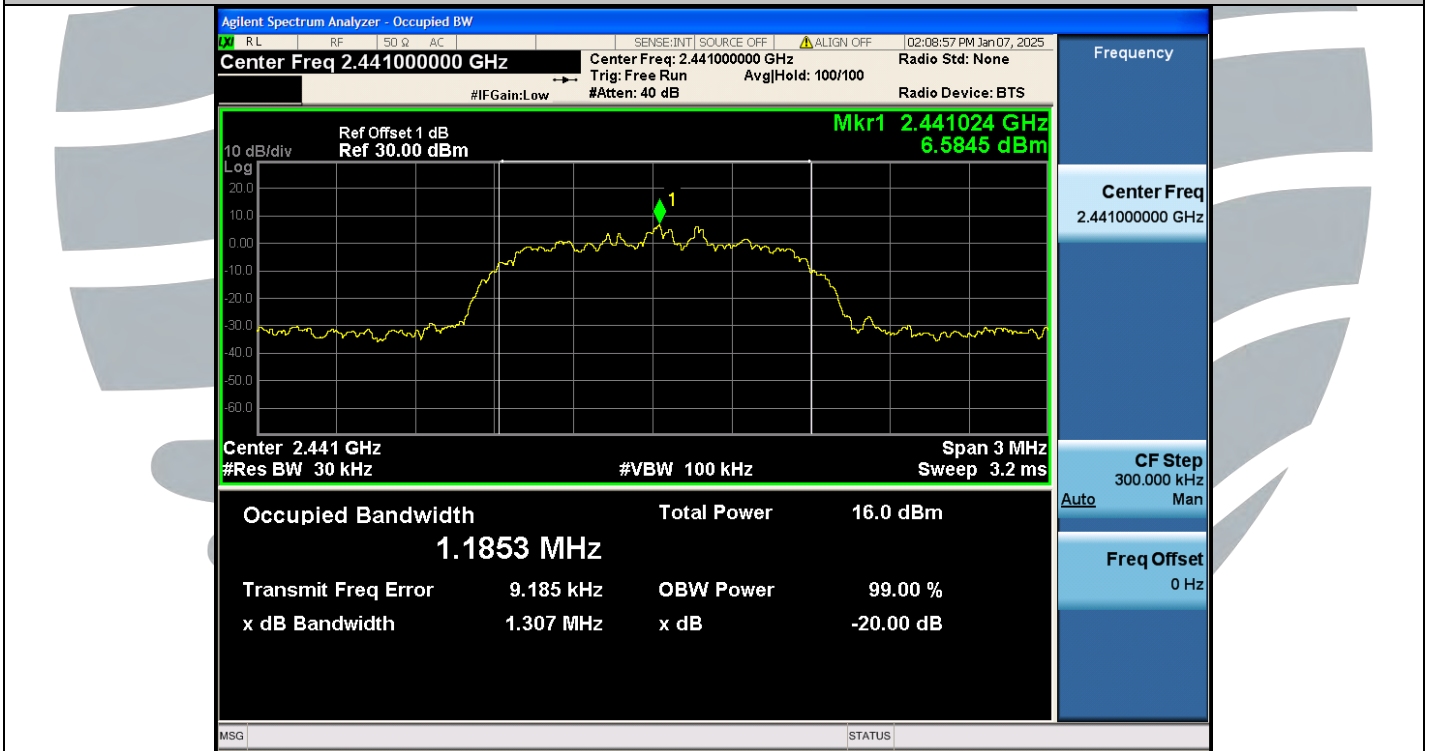

2DH5-Ant1-2441

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

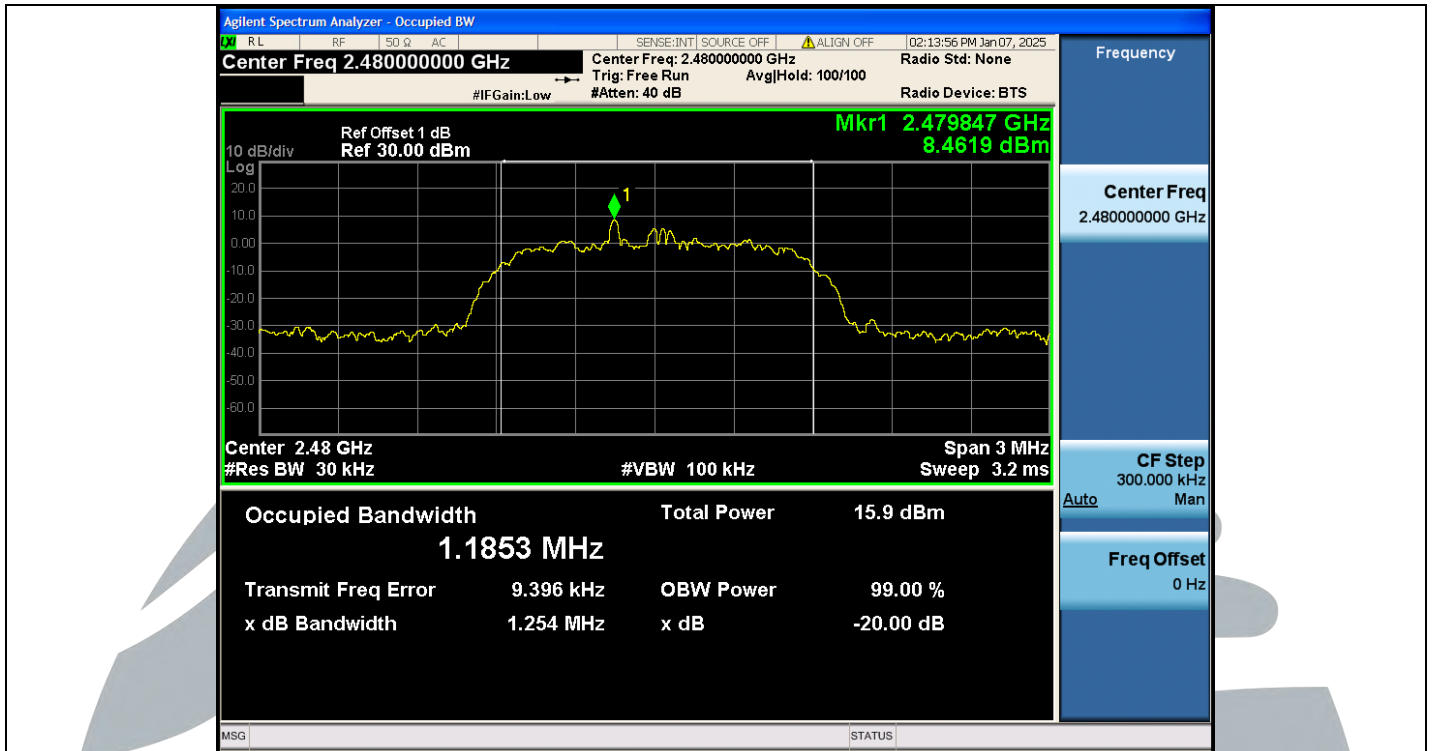

2DH5-Ant1-2480

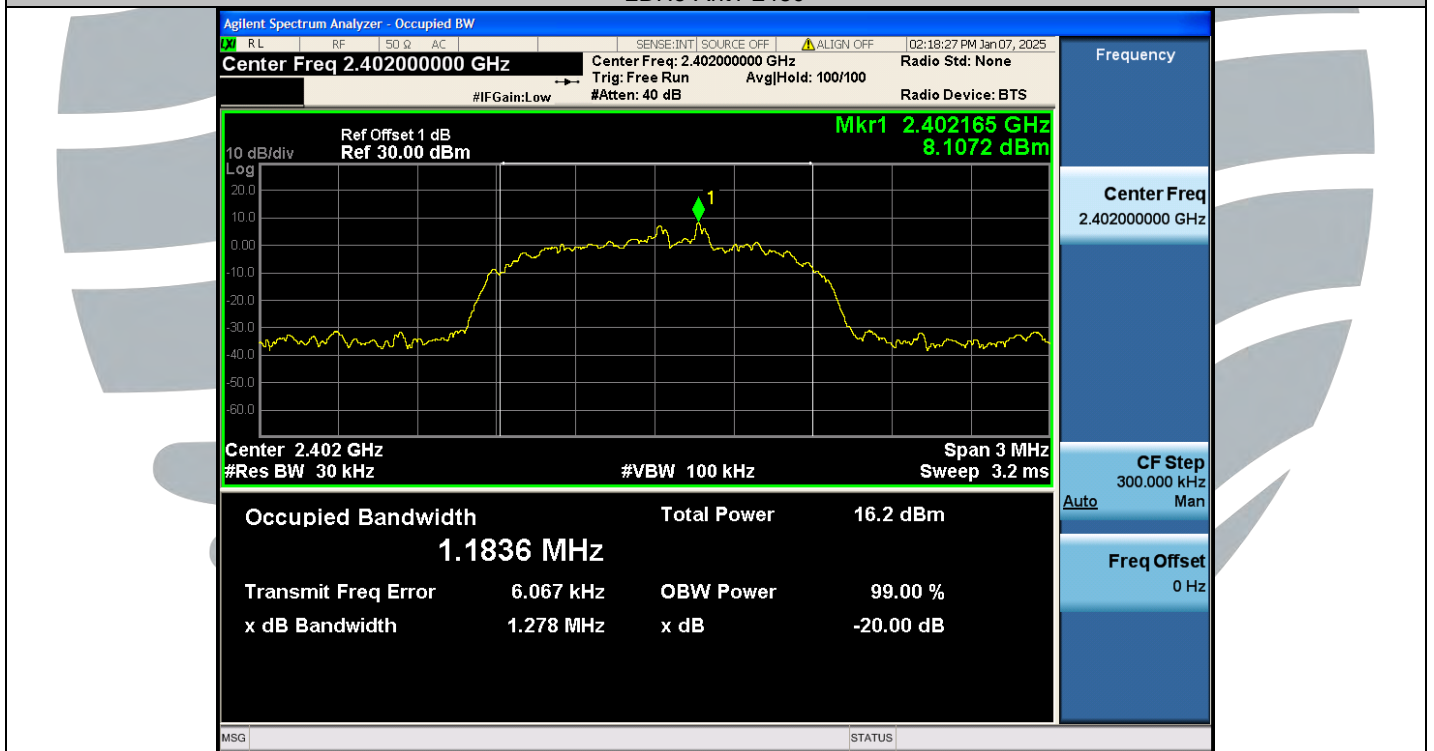

3DH5-Ant1-2402

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

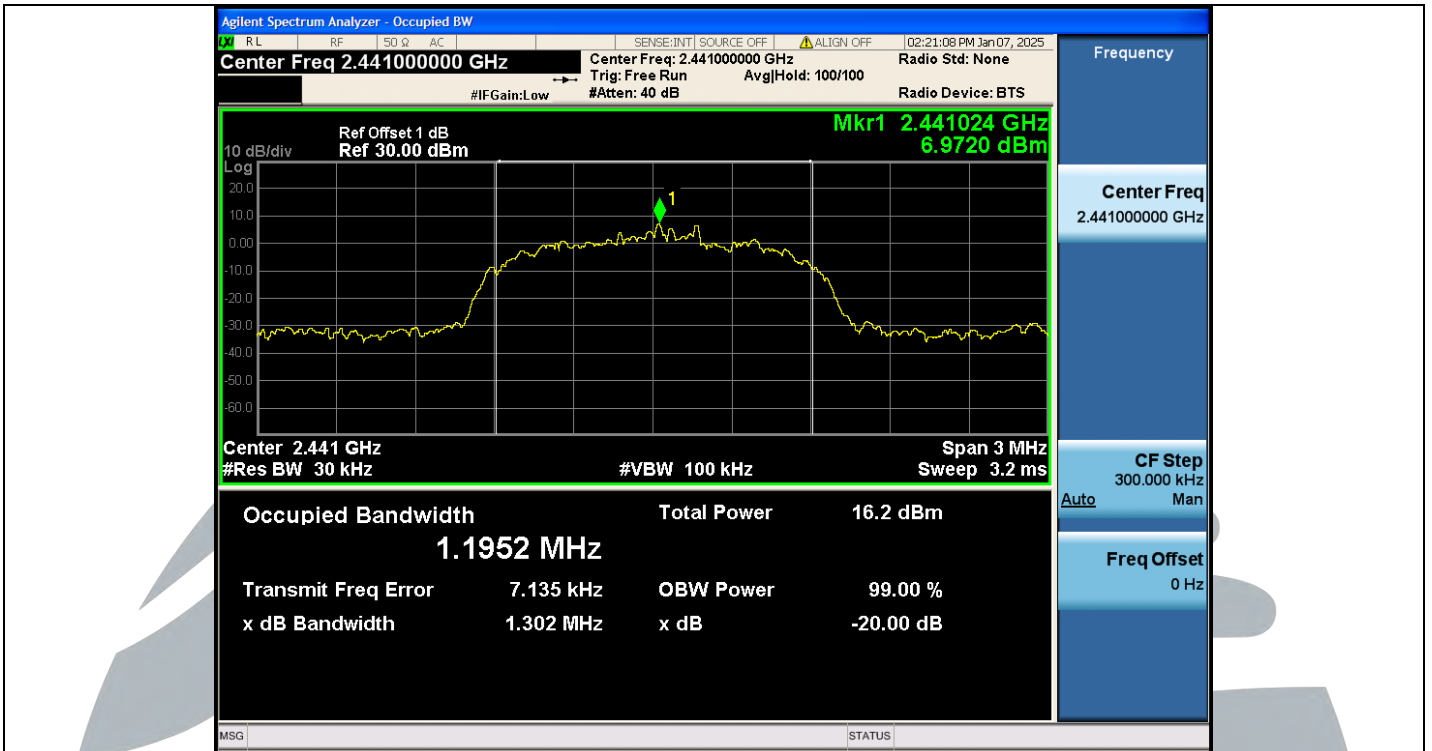

3DH5-Ant1-2441

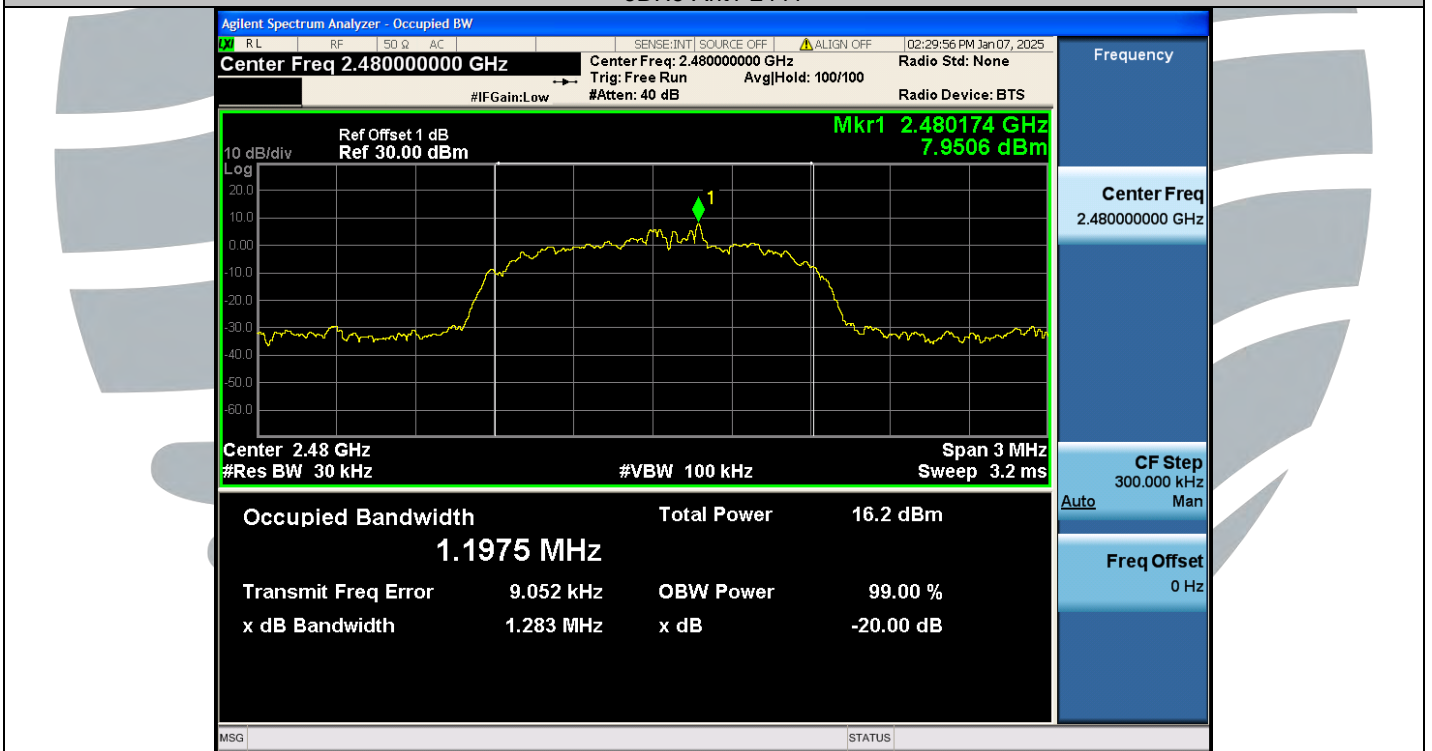

3DH5-Ant1-2480

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

## A.3 CARRIER FREQUENCY SEPARATION

Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	0.998	≥0.685	PASS
2DH5	Ant1	Hop	1	≥0.871	PASS
3DH5	Ant1	Hop	0.982	≥0.868	PASS

### Test Graphs

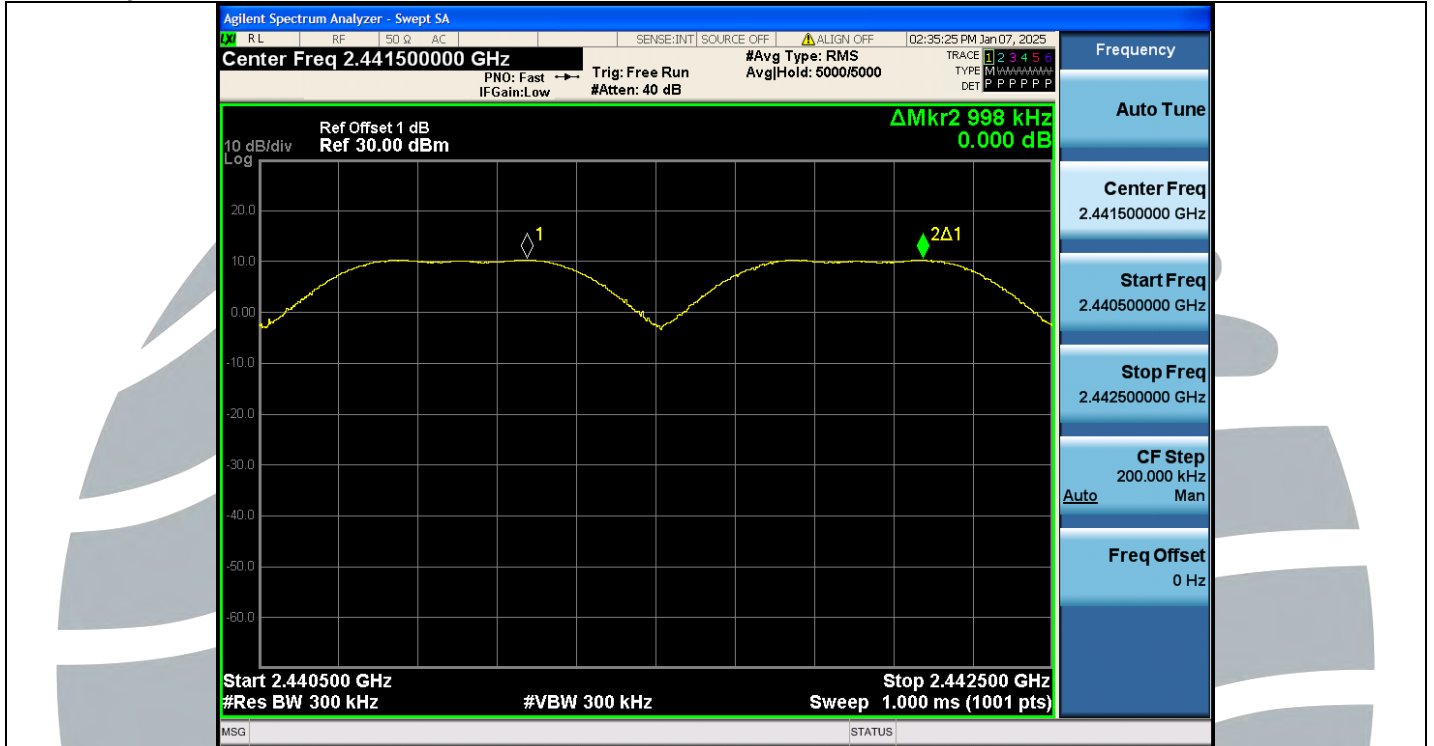

DH5-Ant1-Hop-PASS



2DH5-Ant1-Hop-PASS



3DH5-Ant1-Hop-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>


UTTR-RF-FCCPART15.247-V1.1

## A.4 DWELL TIME

Test Mode	Antenna	Frequency [MHz]	Burst Width [ms]	Total Hops [Num]	Result [s]	Limit [s]	Verdict
DH1	Ant1	Hop	0.367	319	0.117	≤0.4	PASS
DH3	Ant1	Hop	1.630	160	0.261	≤0.4	PASS
DH5	Ant1	Hop	2.878	107	0.308	≤0.4	PASS
2DH1	Ant1	Hop	0.367	319	0.117	≤0.4	PASS
2DH3	Ant1	Hop	1.633	160	0.261	≤0.4	PASS
2DH5	Ant1	Hop	2.880	107	0.308	≤0.4	PASS
3DH1	Ant1	Hop	0.367	319	0.117	≤0.4	PASS
3DH3	Ant1	Hop	1.631	160	0.261	≤0.4	PASS
3DH5	Ant1	Hop	2.882	107	0.308	≤0.4	PASS

### Test Graphs

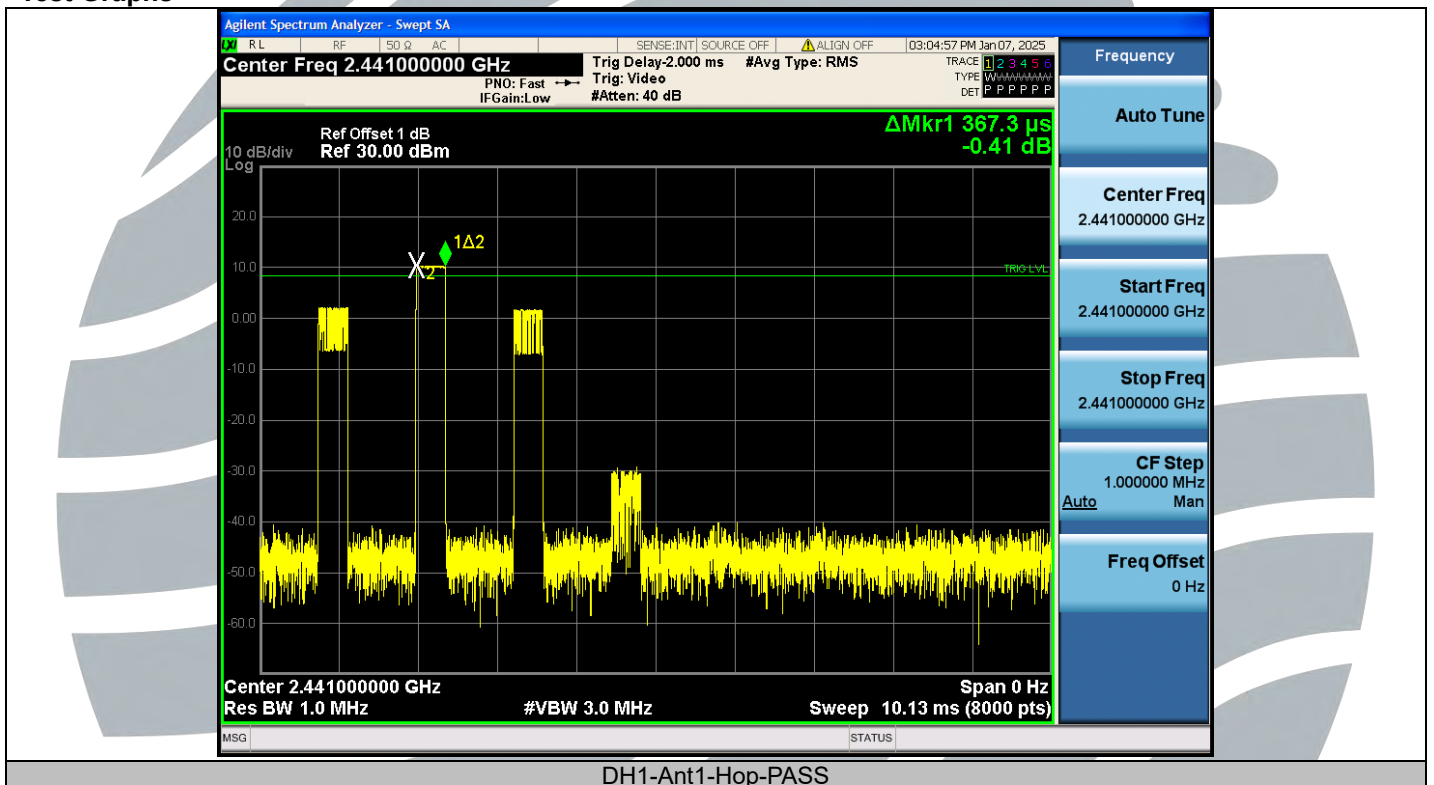

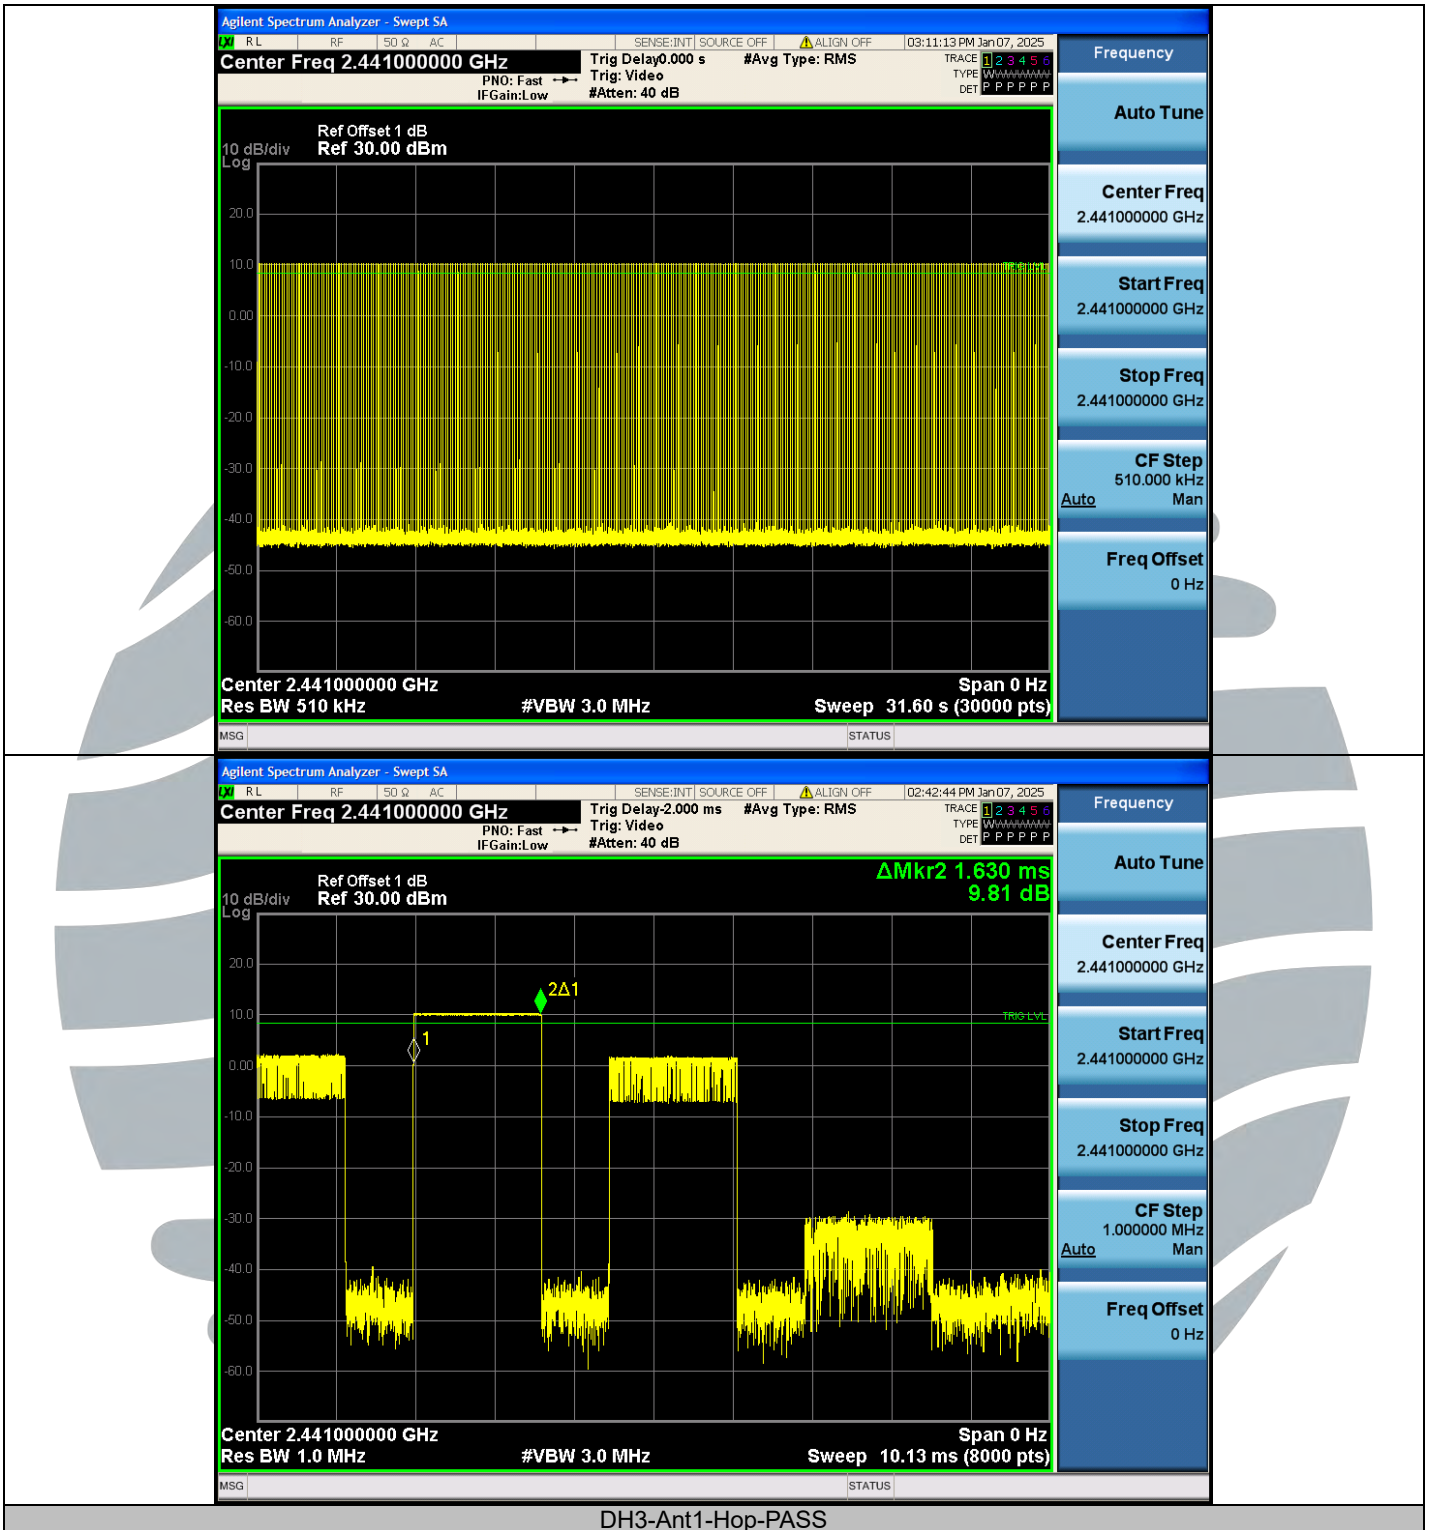

DH3-Ant1-Hop-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

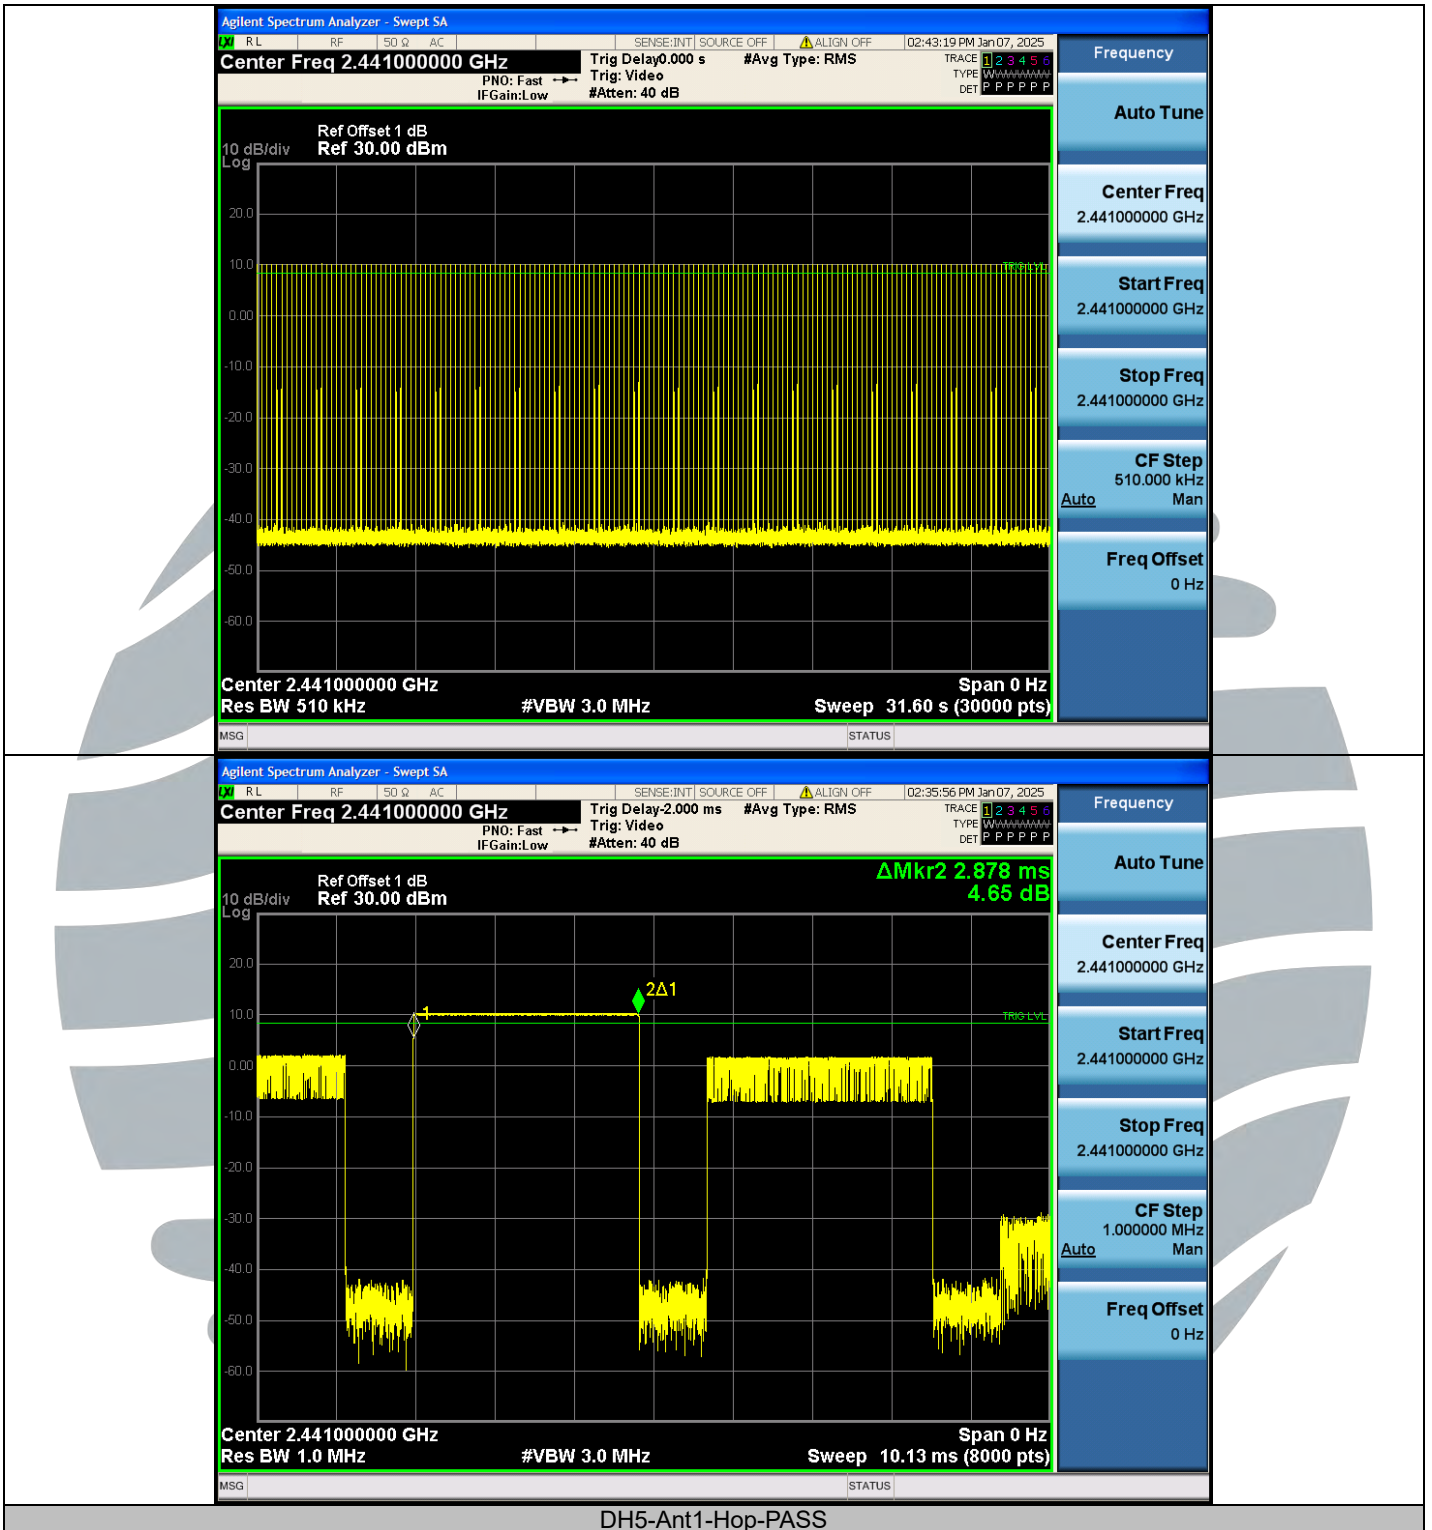

DH5-Ant1-Hop-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1



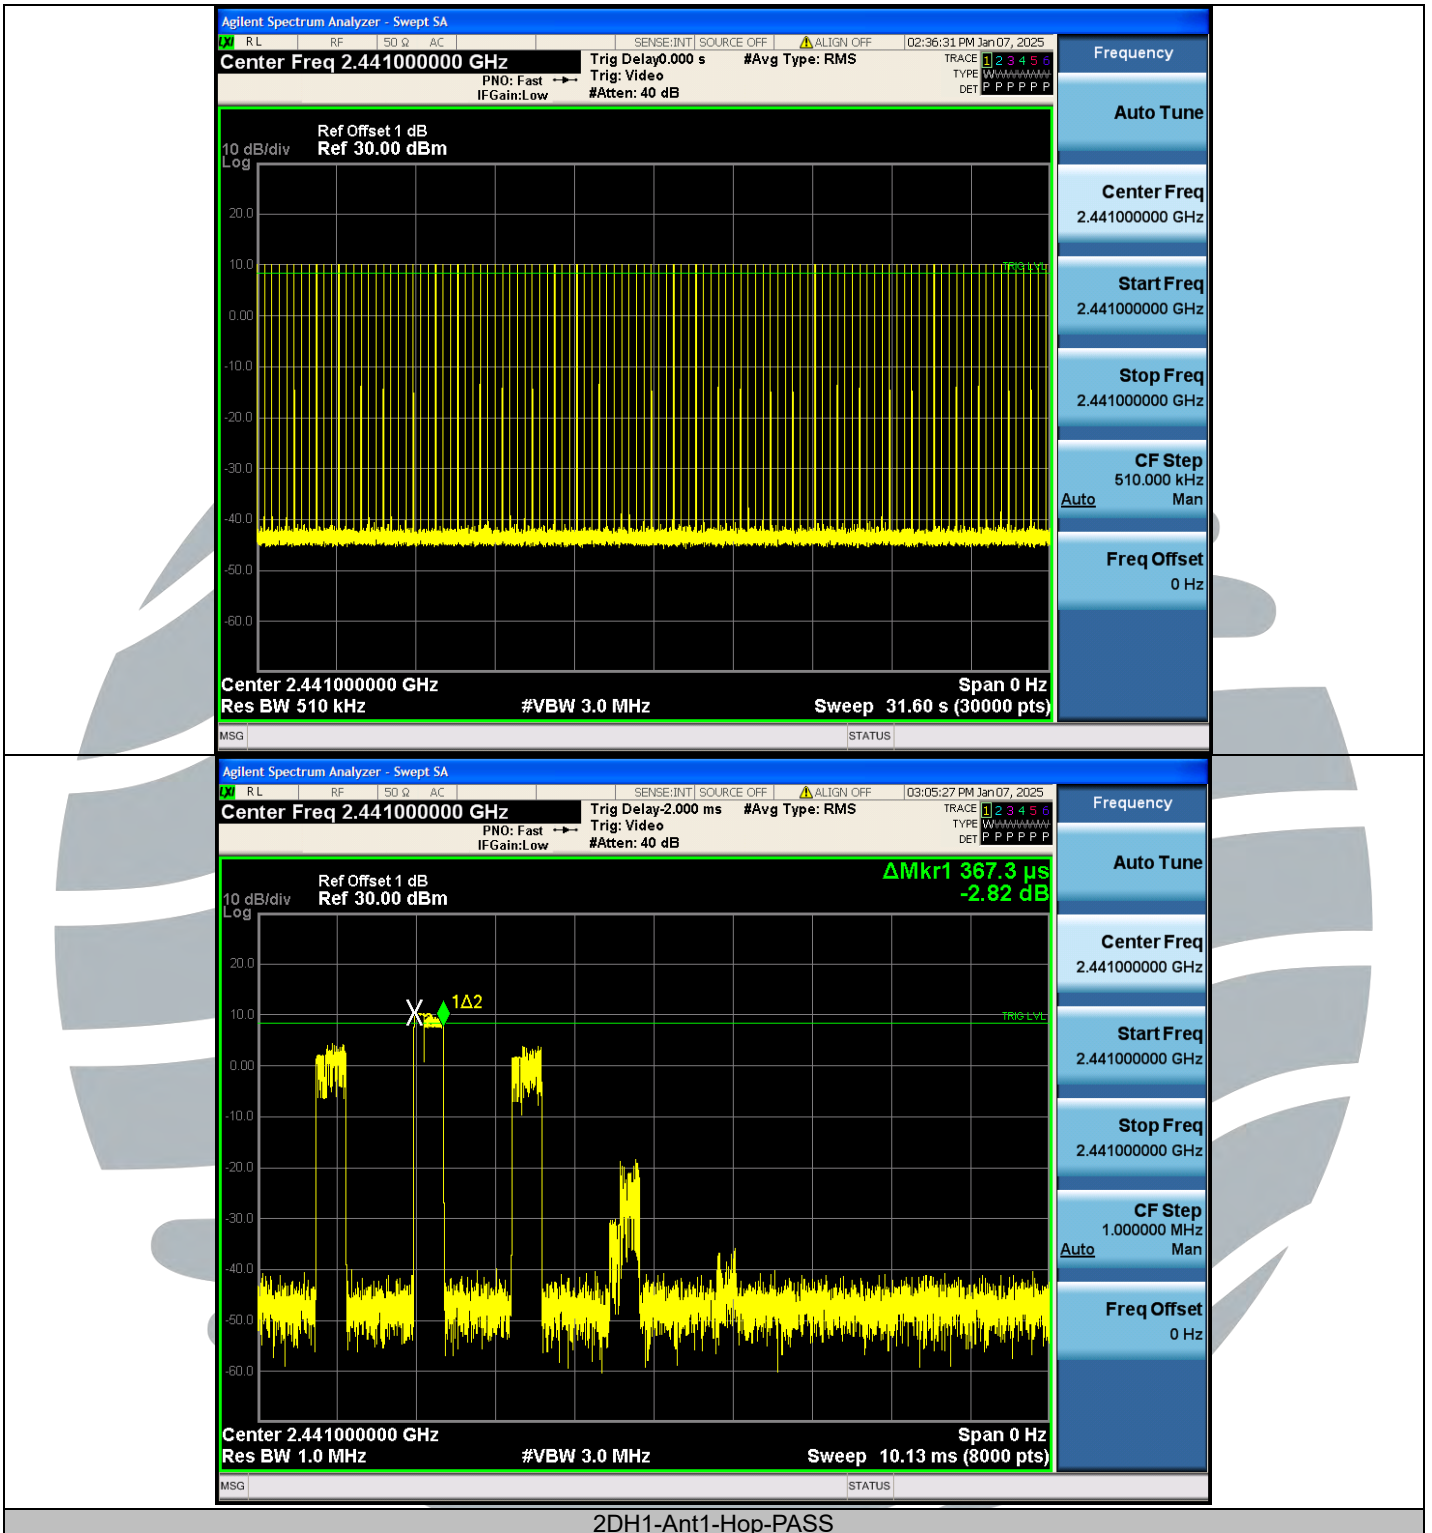

2DH1-Ant1-Hop-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

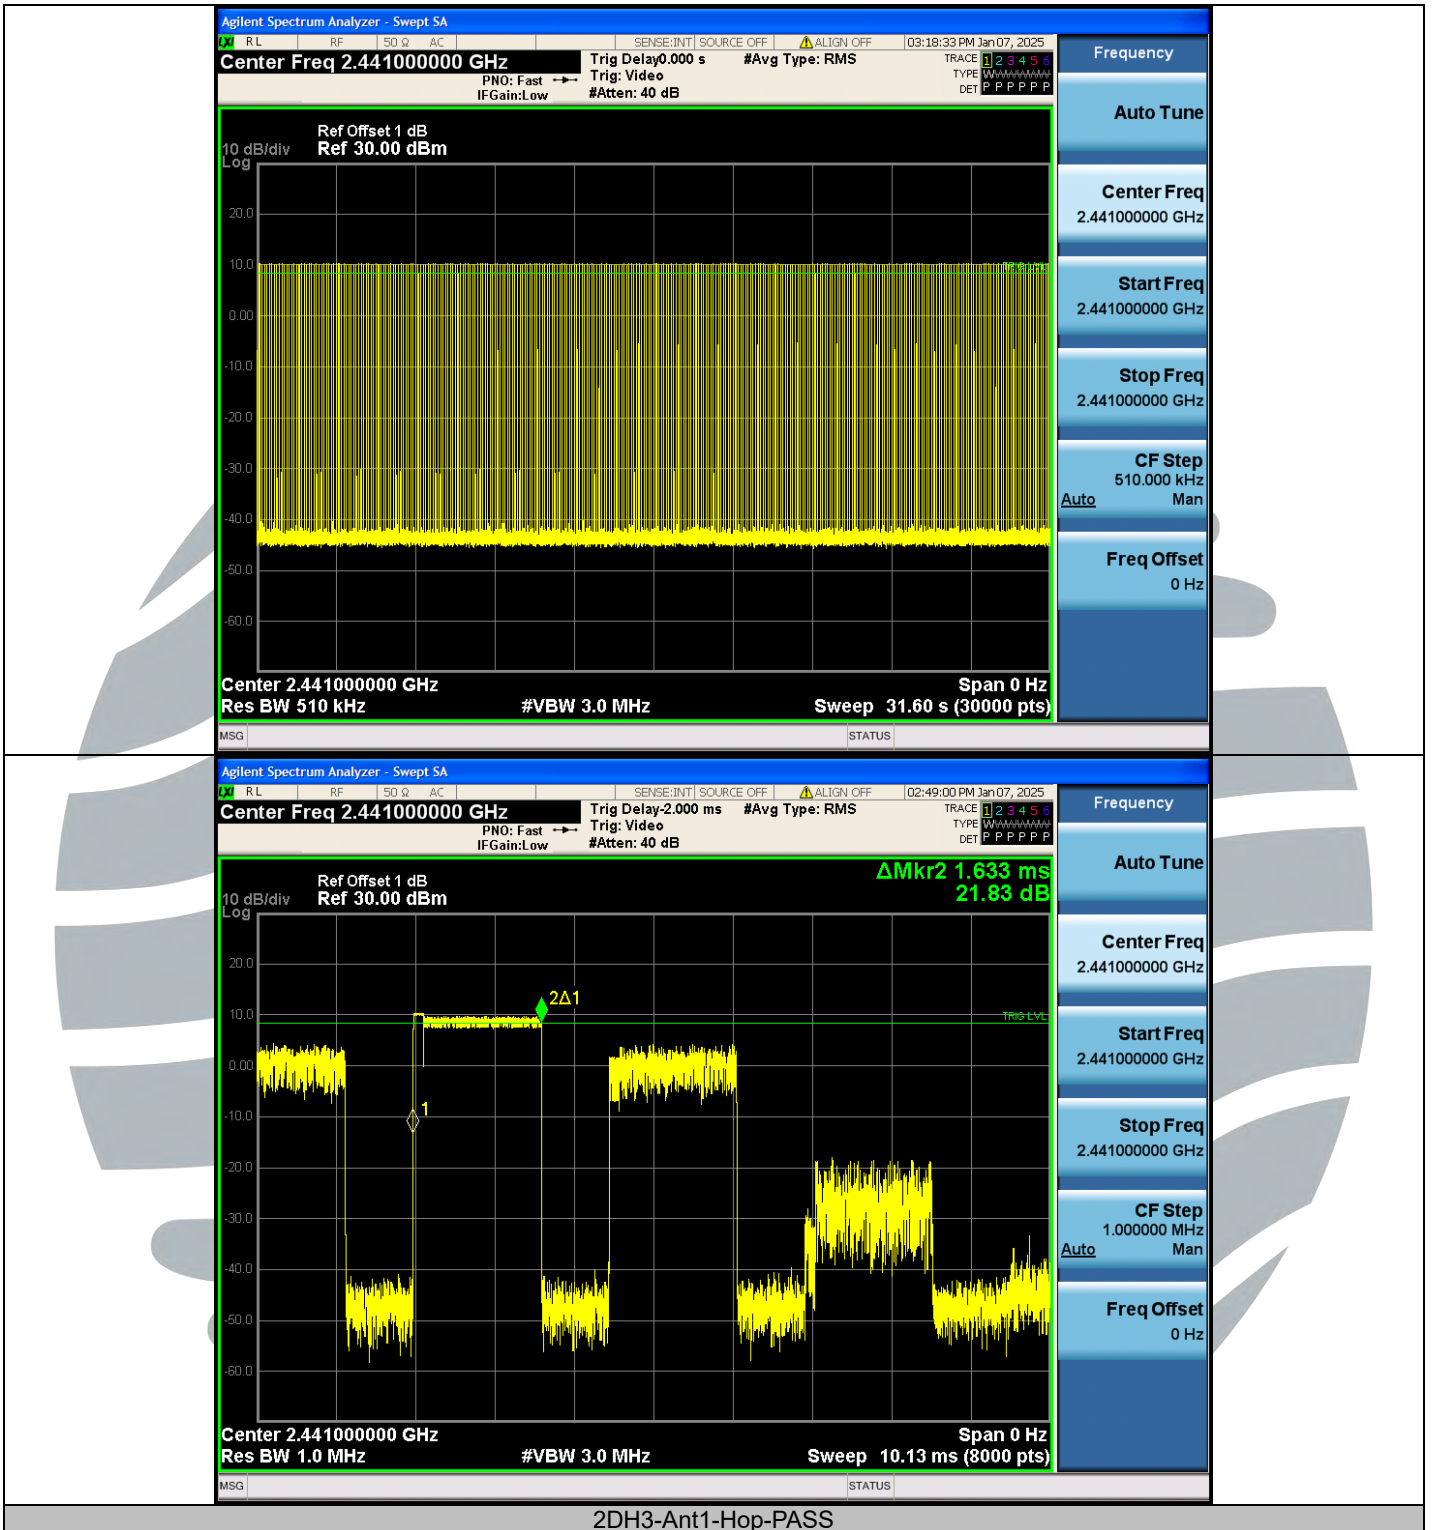

2DH3-Ant1-Hop-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

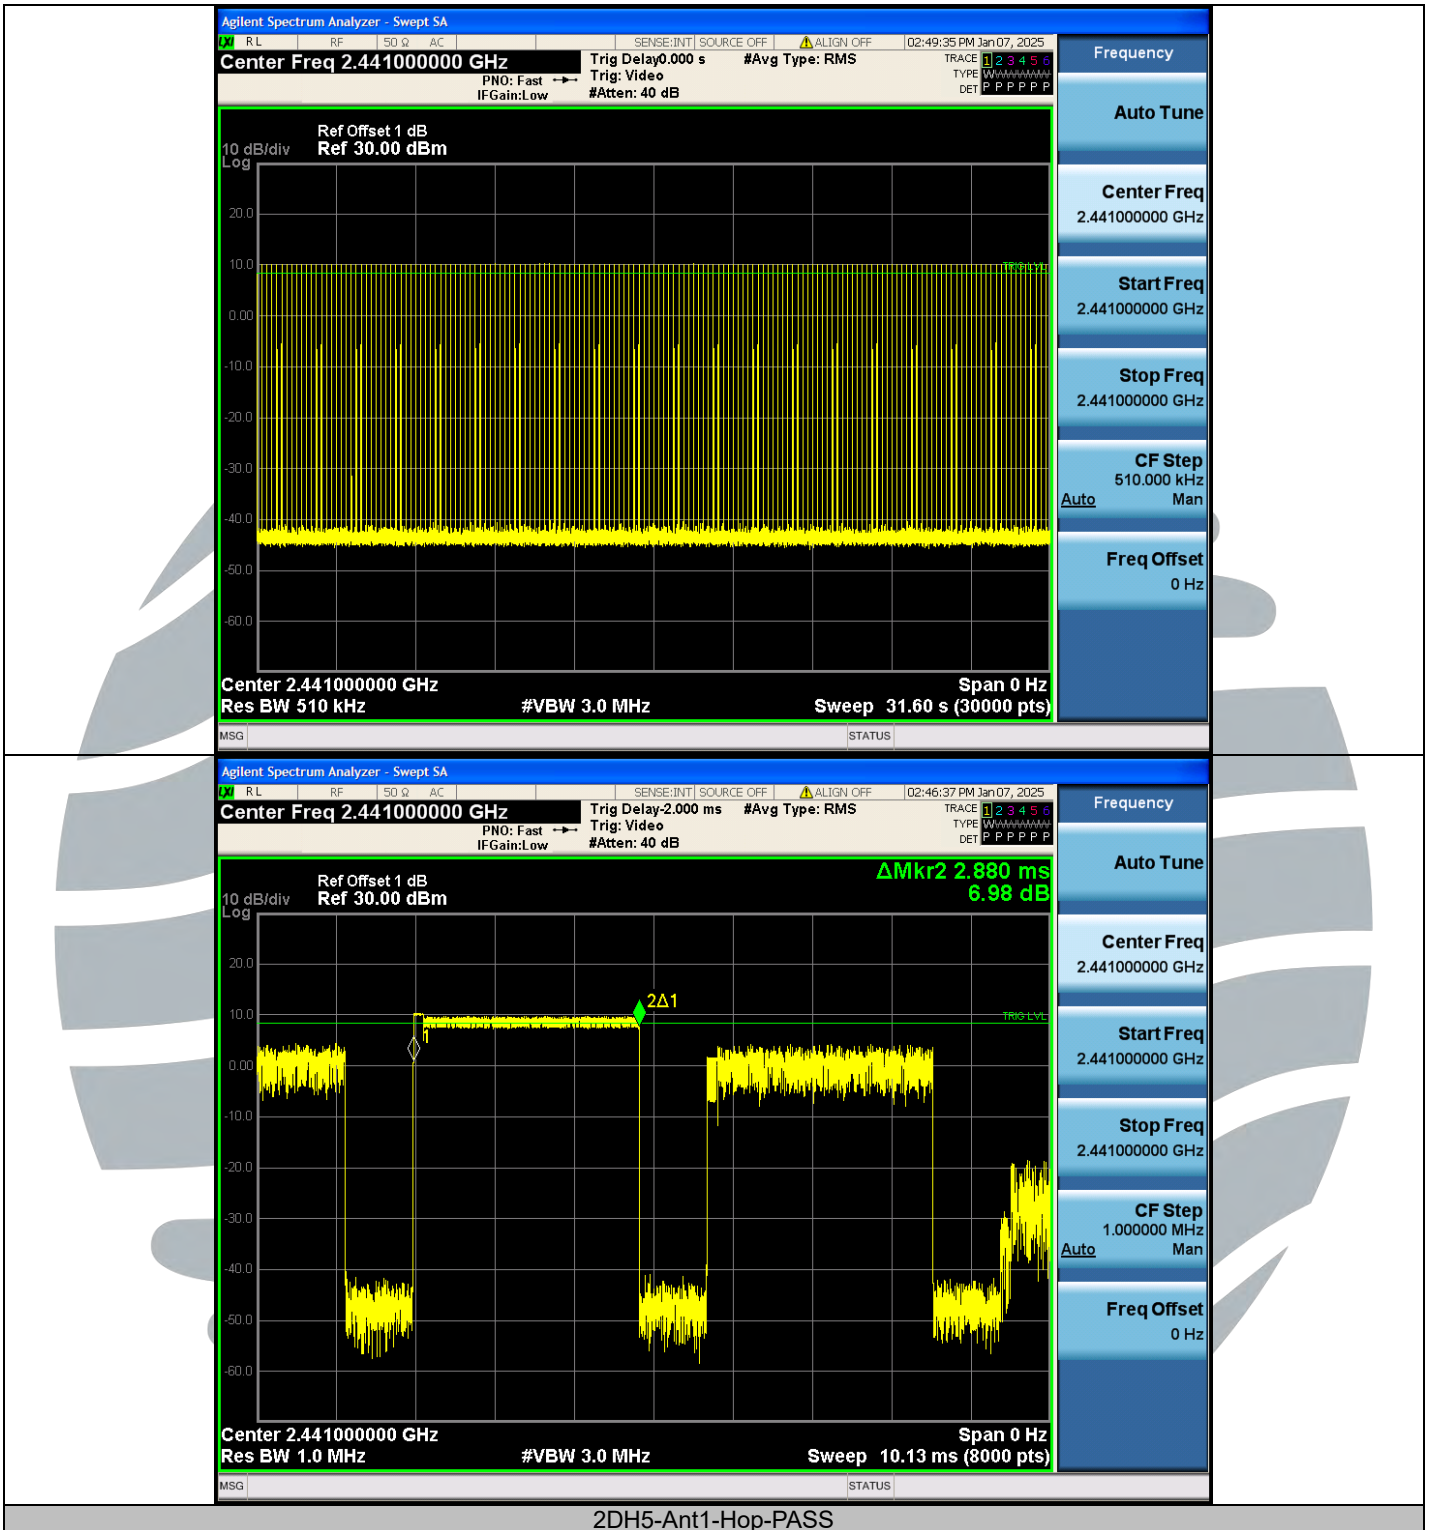

2DH5-Ant1-Hop-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

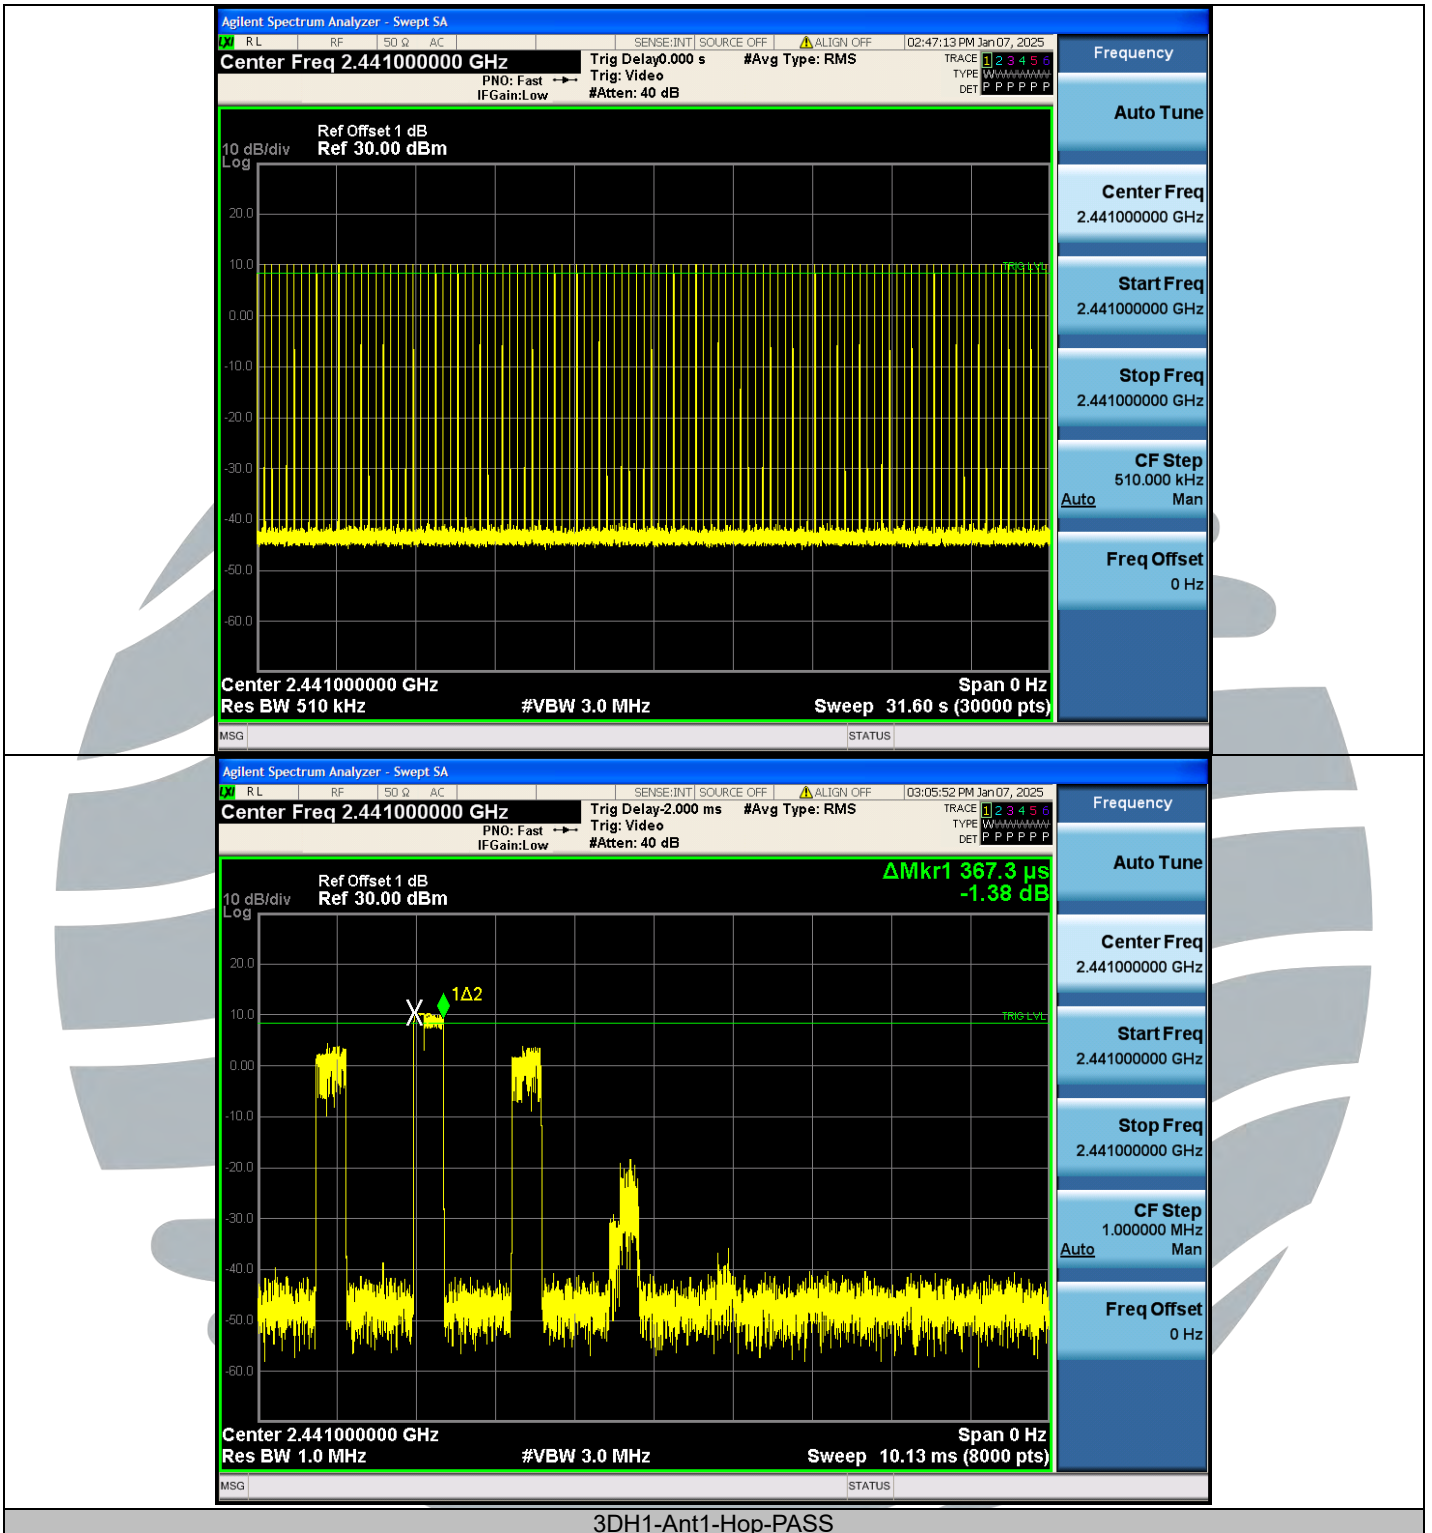

3DH1-Ant1-Hop-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

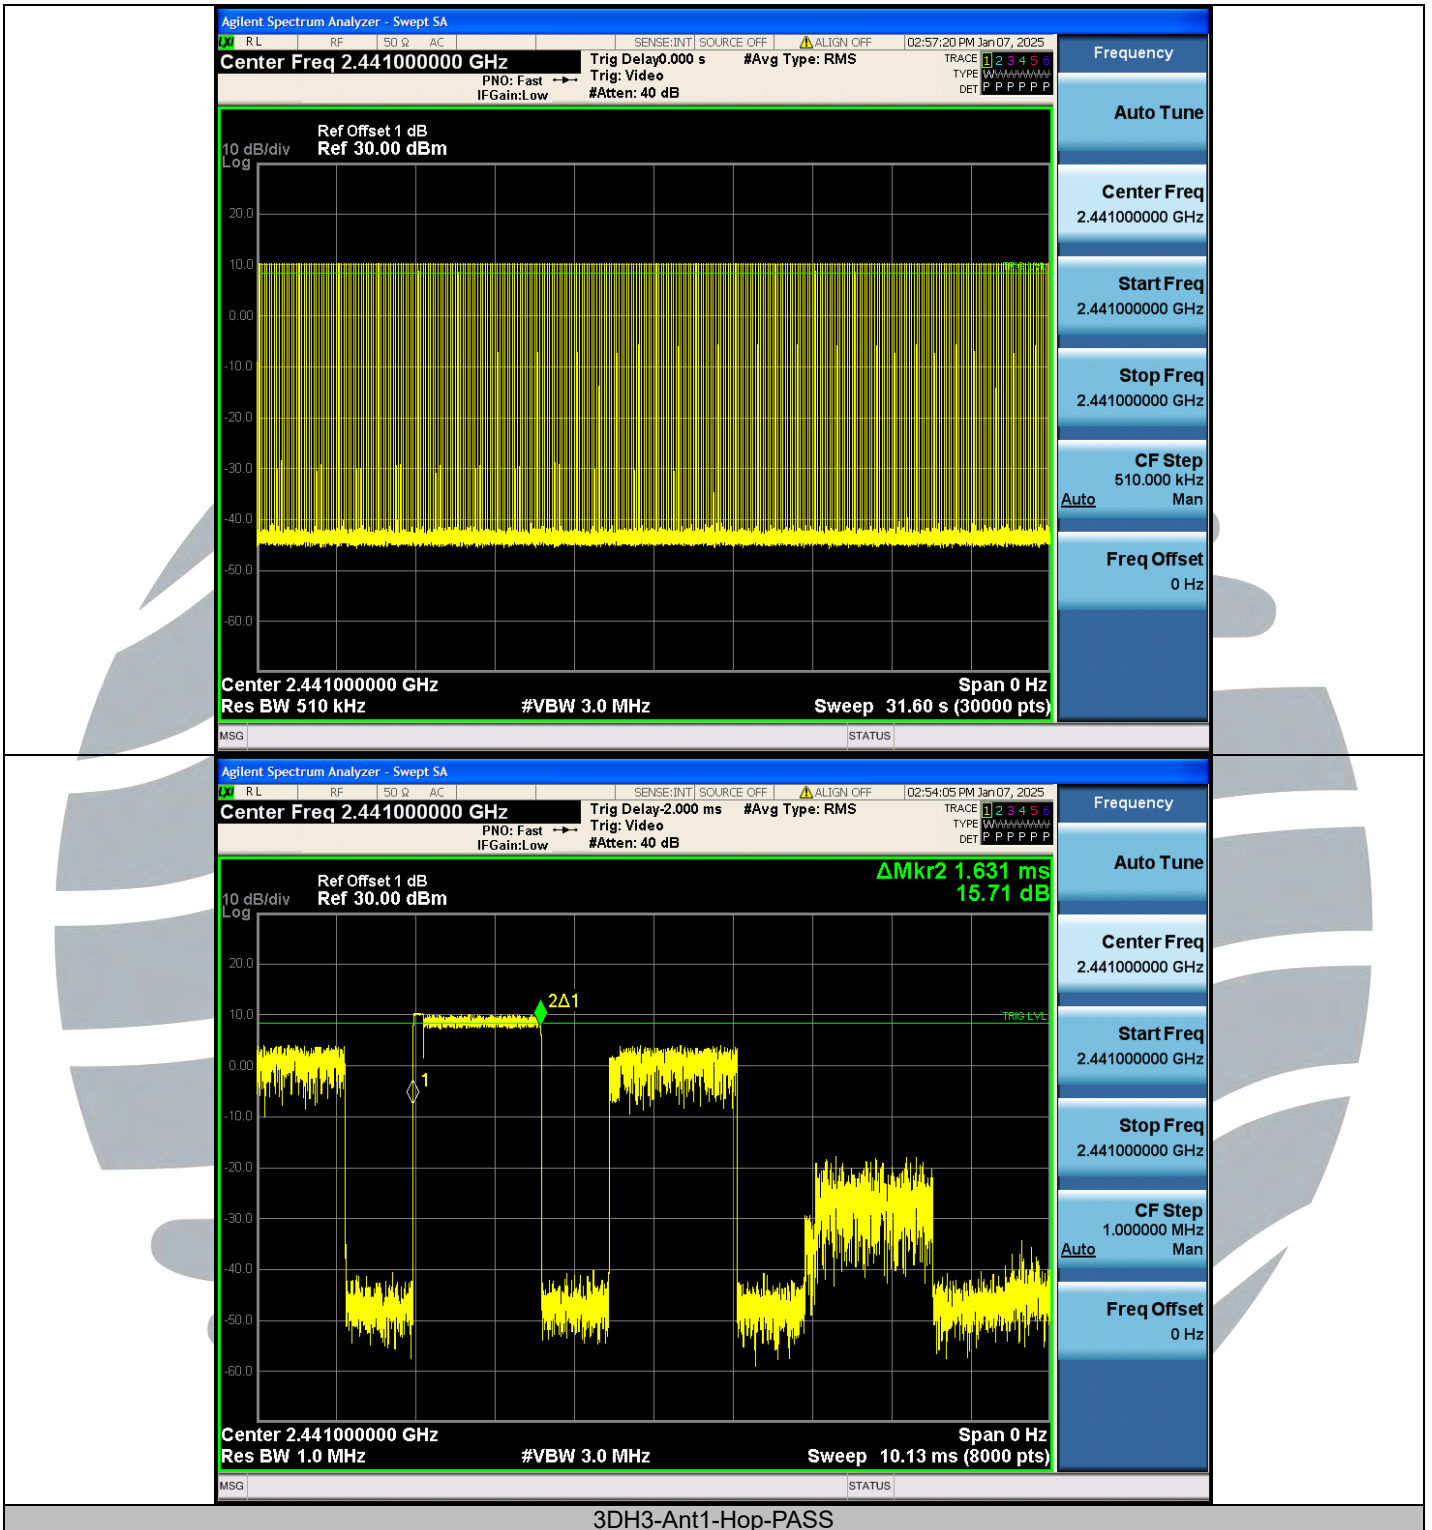

3DH3-Ant1-Hop-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

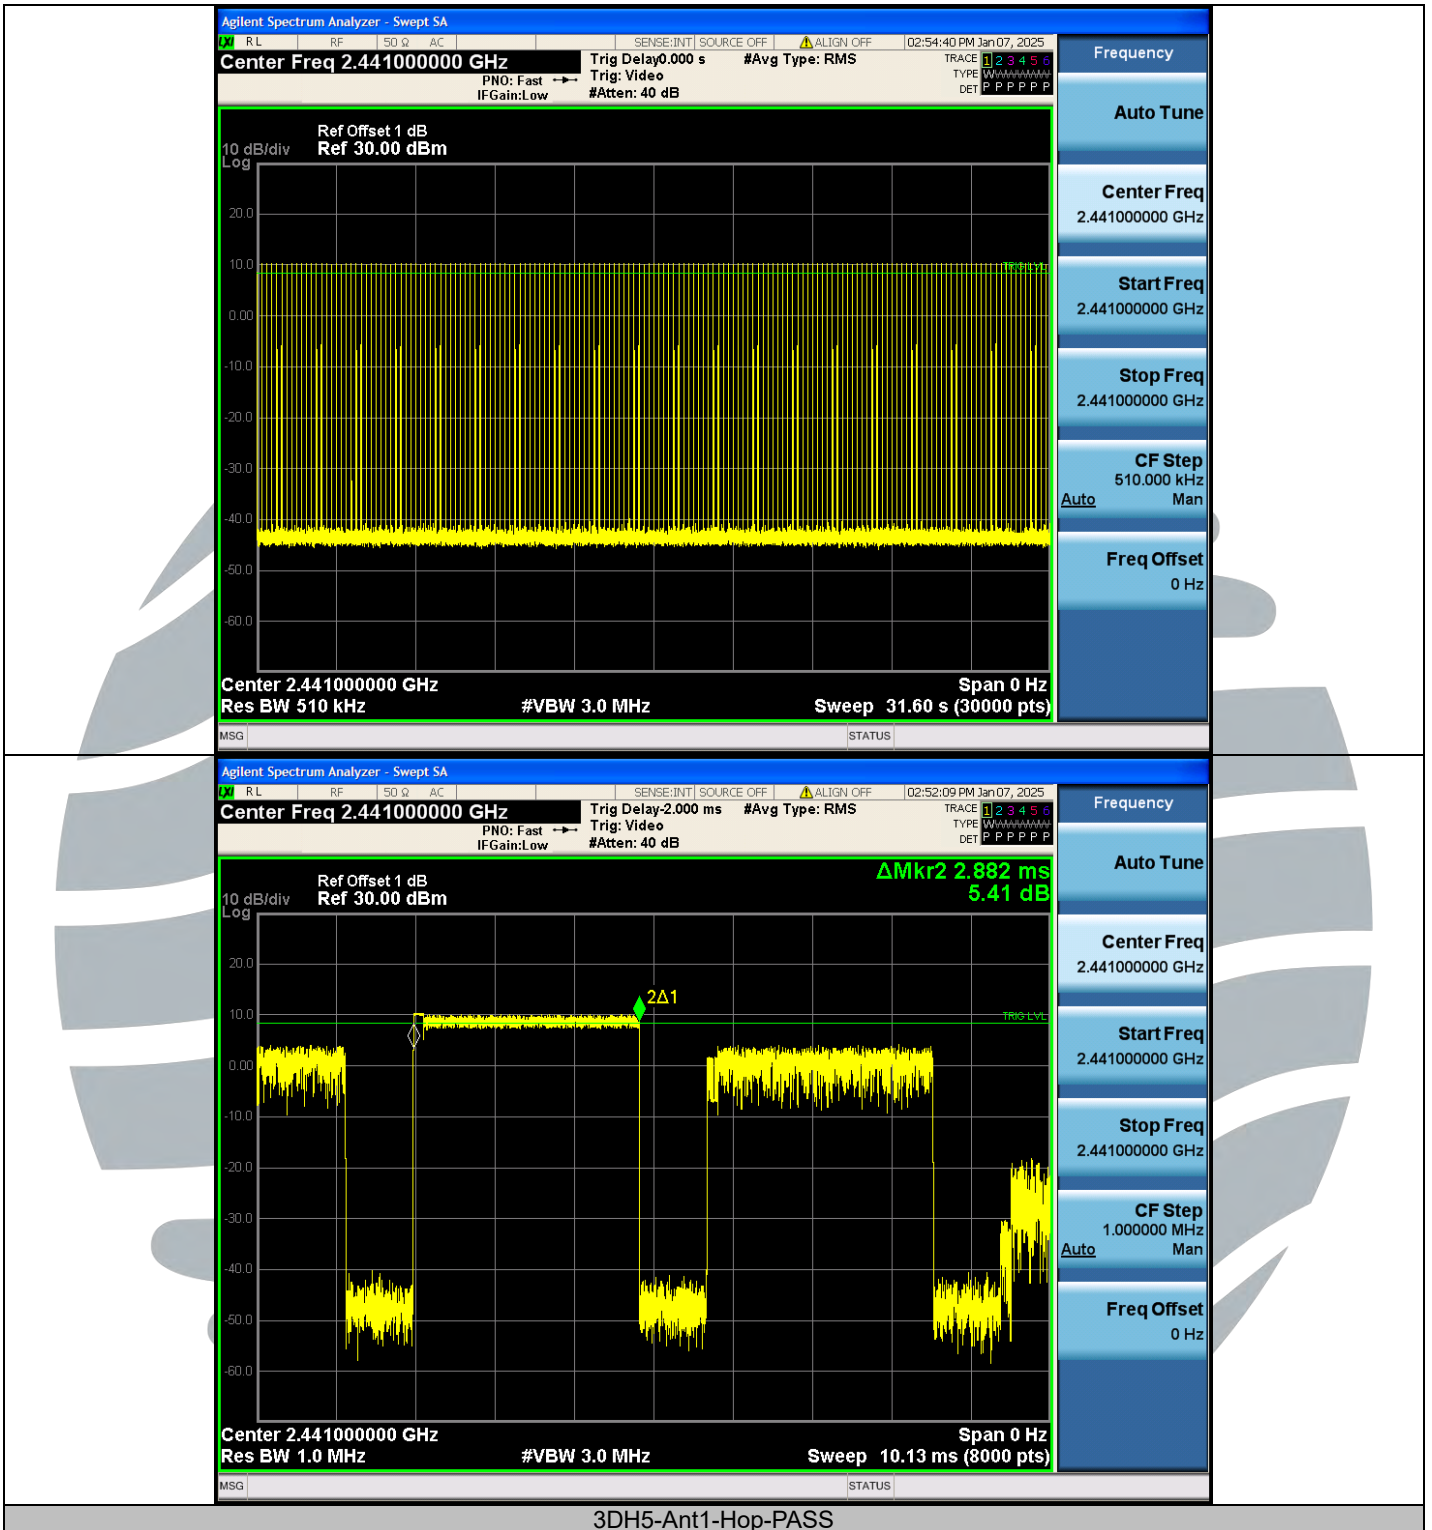

3DH5-Ant1-Hop-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

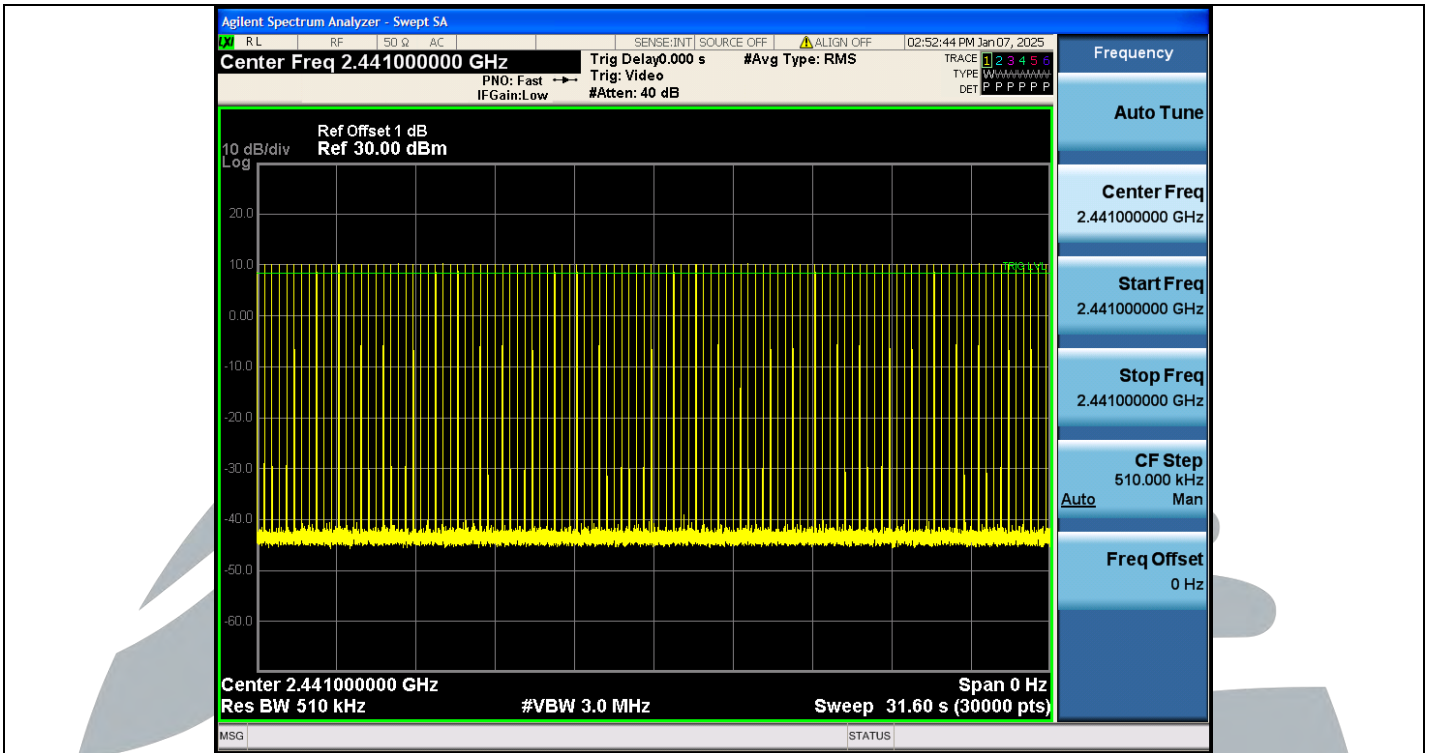

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1


## A.5 NUMBER OF HOPPING CHANNELS

Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

### Test Graphs

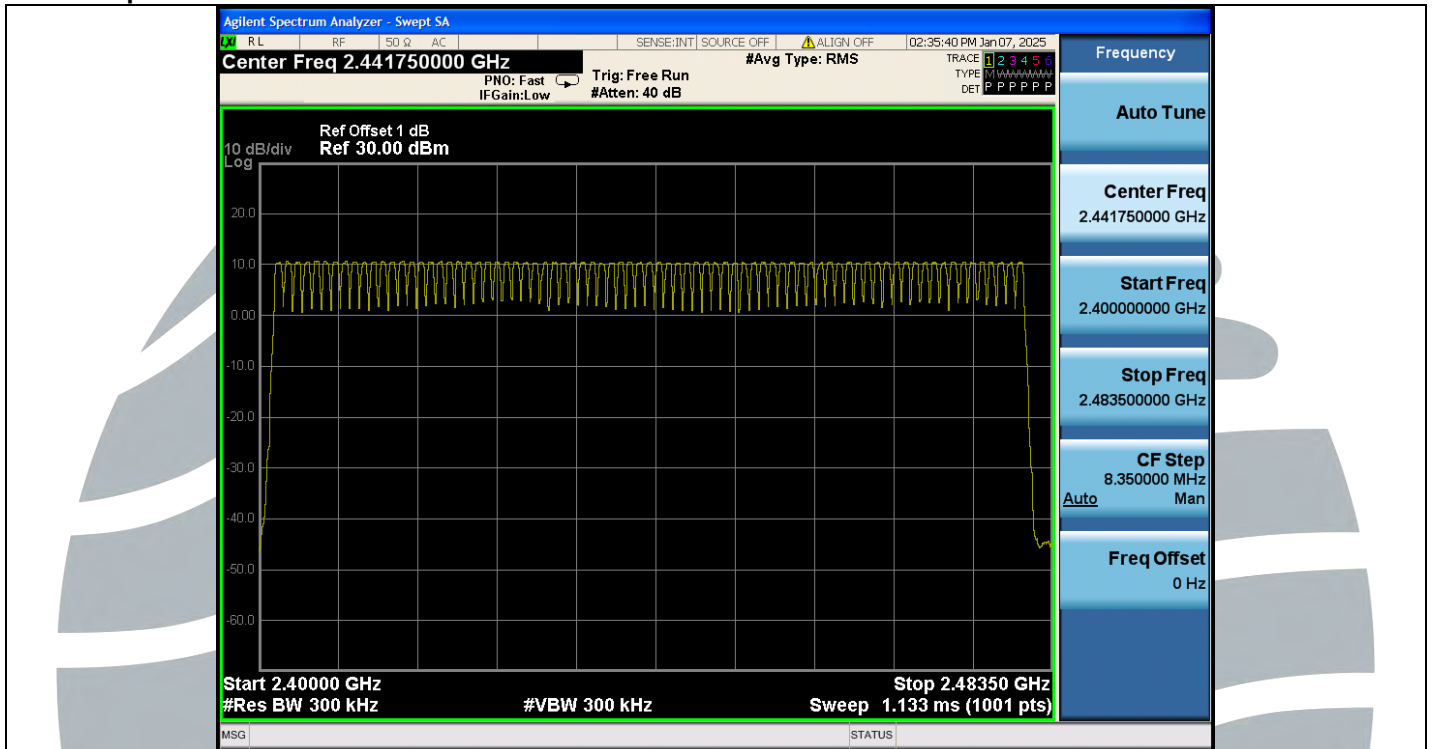

DH5-Ant1-Hop-PASS

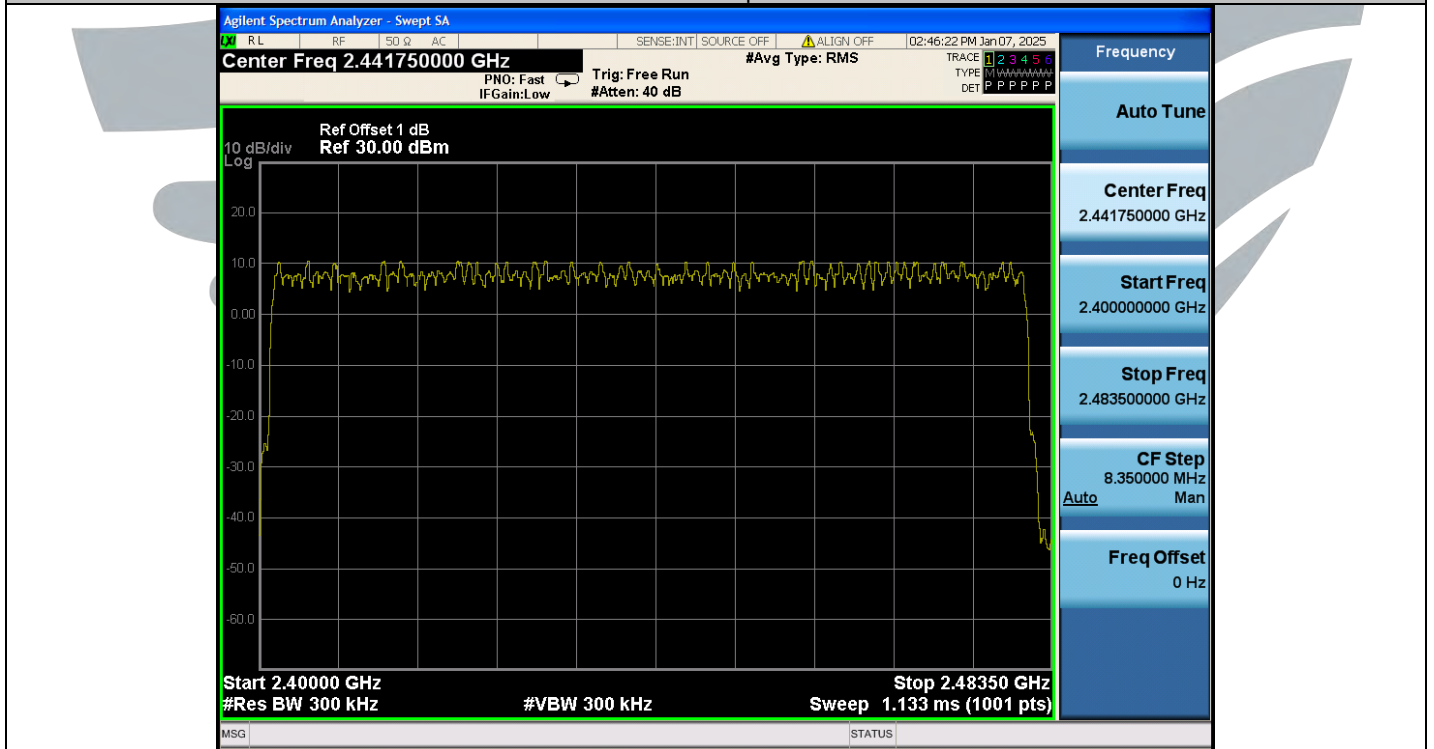

2DH5-Ant1-Hop-PASS

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1



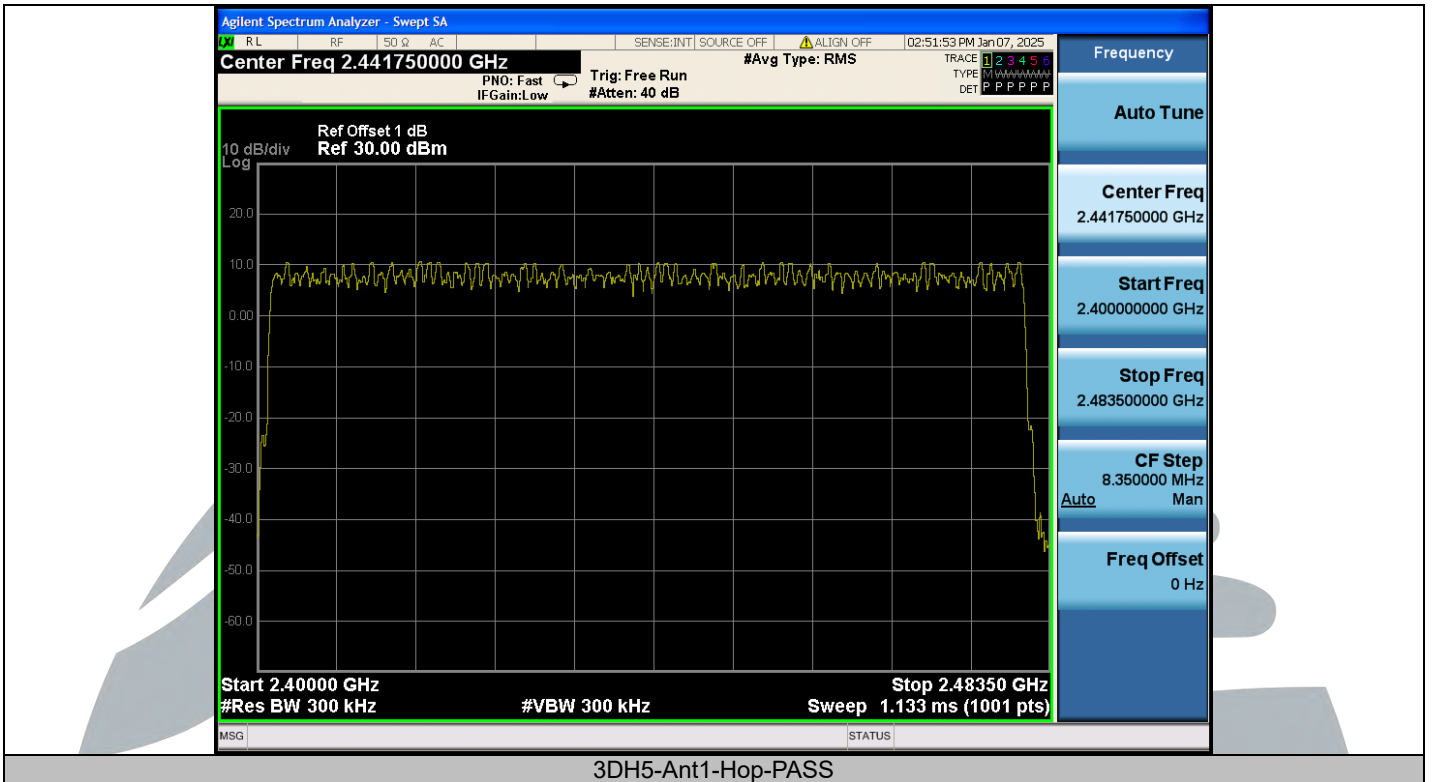

3DH5-Ant1-Hop-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1


### A.6 CONDUCTED OUT OF BAND EMISSION

Test Mode	Antenna	Ch Name	Frequency [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	9.83	-51.68	≤-10.17	PASS
DH5	Ant1	High	2480	9.98	-56.18	≤-10.02	PASS
DH5	Ant1	Low	Hop_2402	10.13	-50.67	≤-9.87	PASS
DH5	Ant1	High	Hop_2480	10.24	-57.31	≤-9.76	PASS
2DH5	Ant1	Low	2402	6.71	-46.2	≤-13.29	PASS
2DH5	Ant1	High	2480	8.39	-55.71	≤-11.61	PASS
2DH5	Ant1	Low	Hop_2402	9.46	-45.99	≤-10.55	PASS
2DH5	Ant1	High	Hop_2480	10.28	-55.55	≤-9.72	PASS
3DH5	Ant1	Low	2402	10.35	-44.15	≤-9.65	PASS
3DH5	Ant1	High	2480	8.89	-54.14	≤-11.11	PASS
3DH5	Ant1	Low	Hop_2402	8.50	-49.17	≤-11.5	PASS
3DH5	Ant1	High	Hop_2480	10.33	-56.14	≤-9.67	PASS


#### Test Graphs

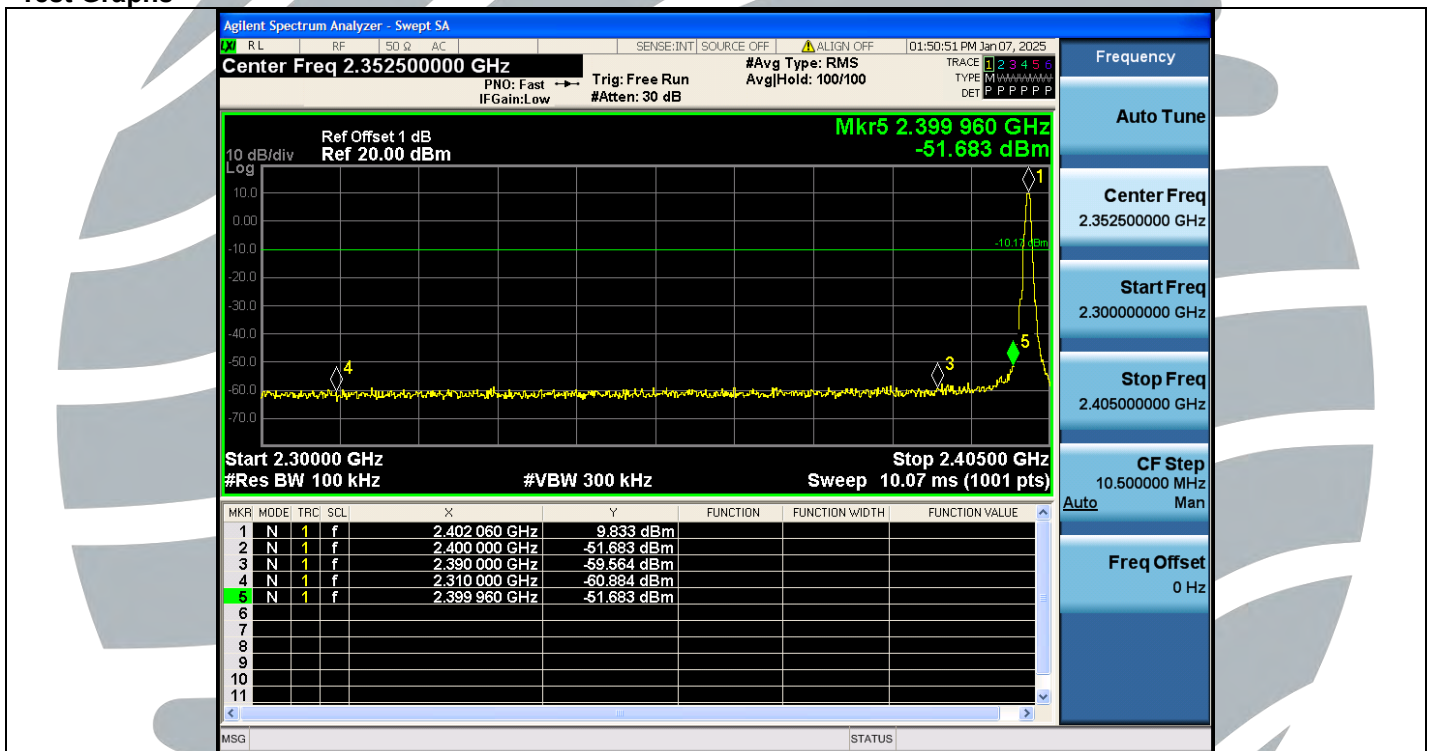

DH5-Ant1-2402-PASS

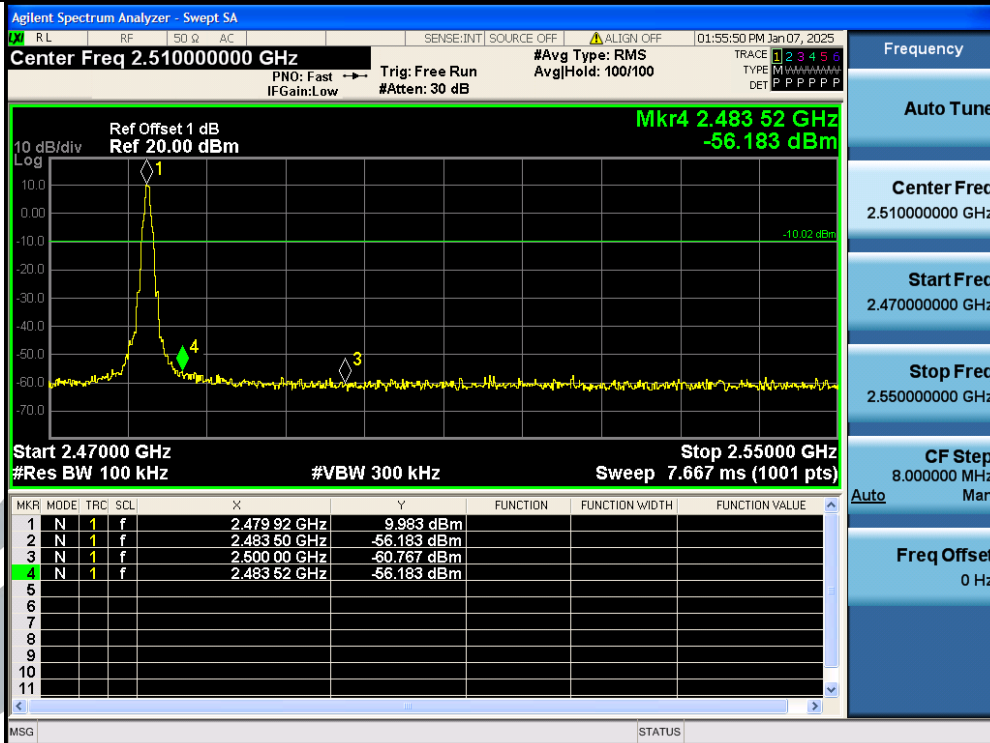

DH5-Ant1-2480-PASS

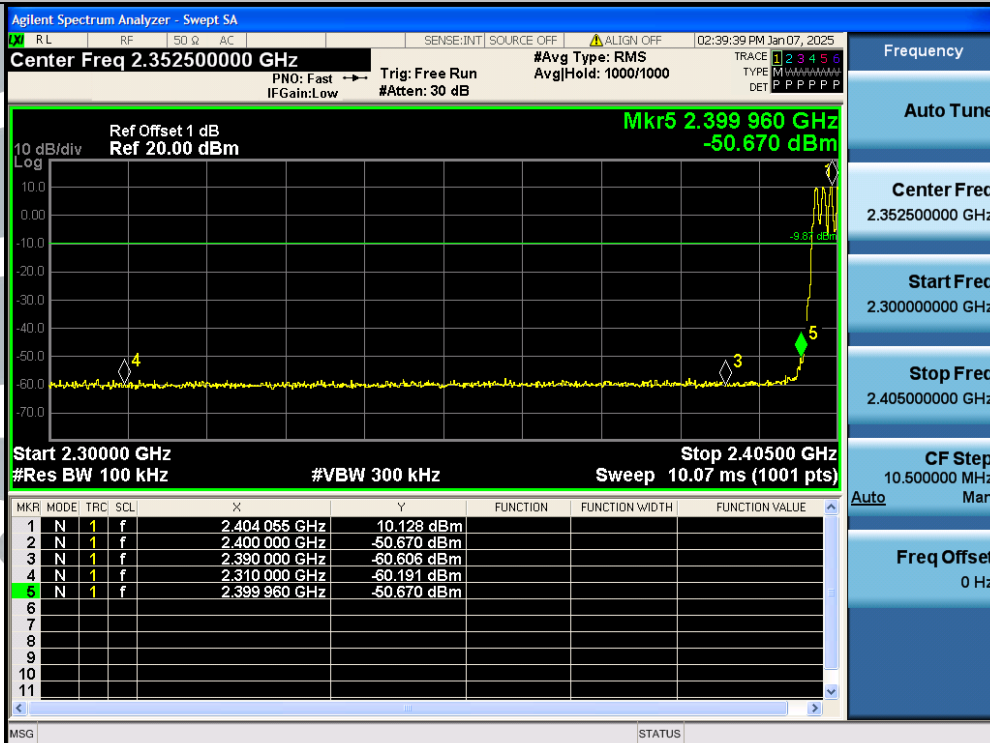

DH5-Ant1-Hop\_2402-PASS

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

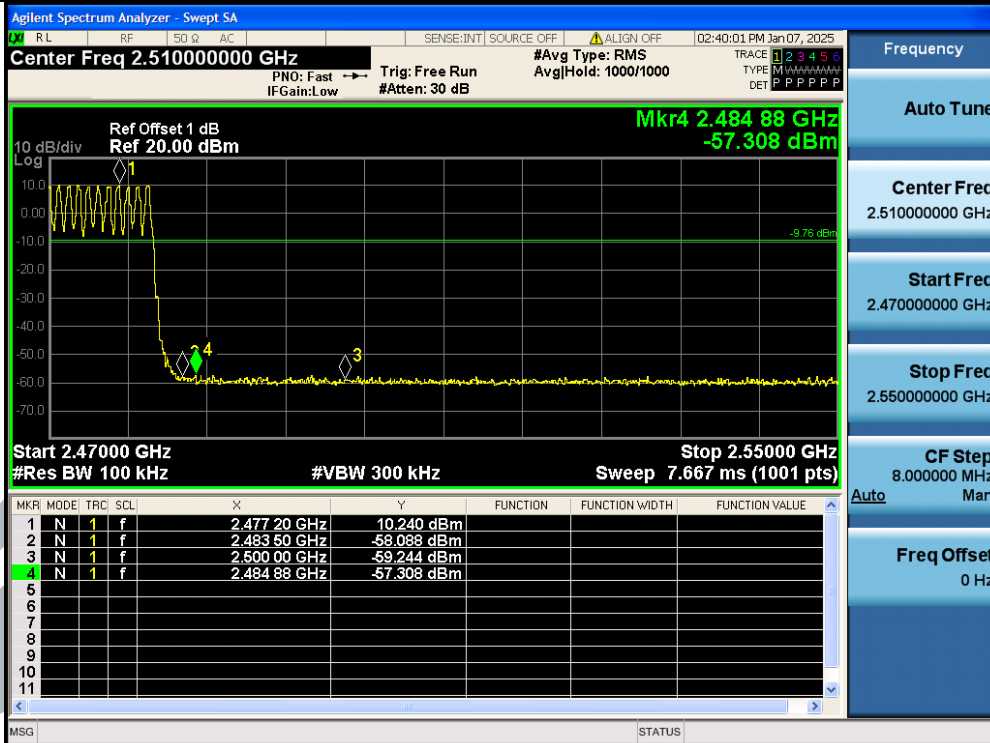

DH5-Ant1-Hop 2480-PASS

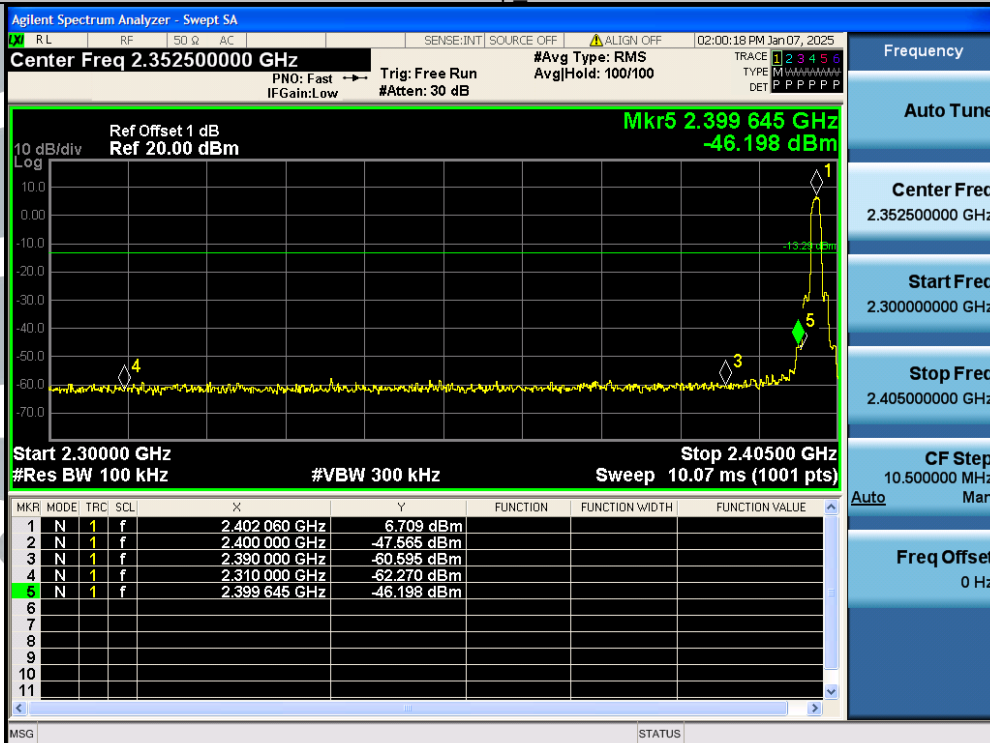

2DH5-Ant1-2402-PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

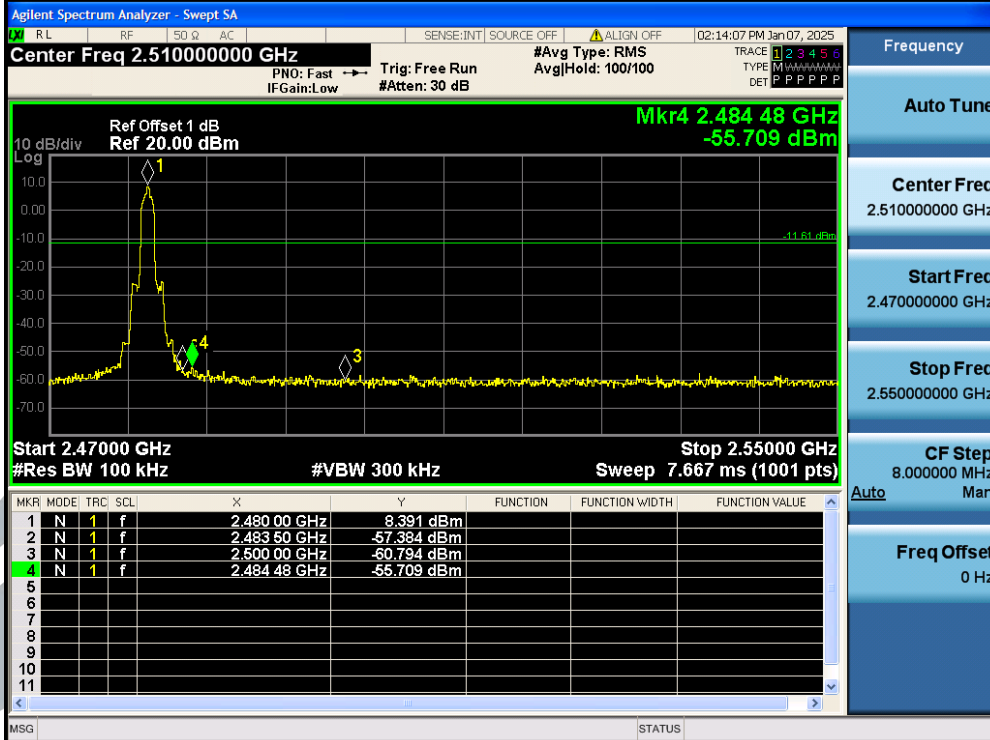

2DH5-Ant1-2480-PASS

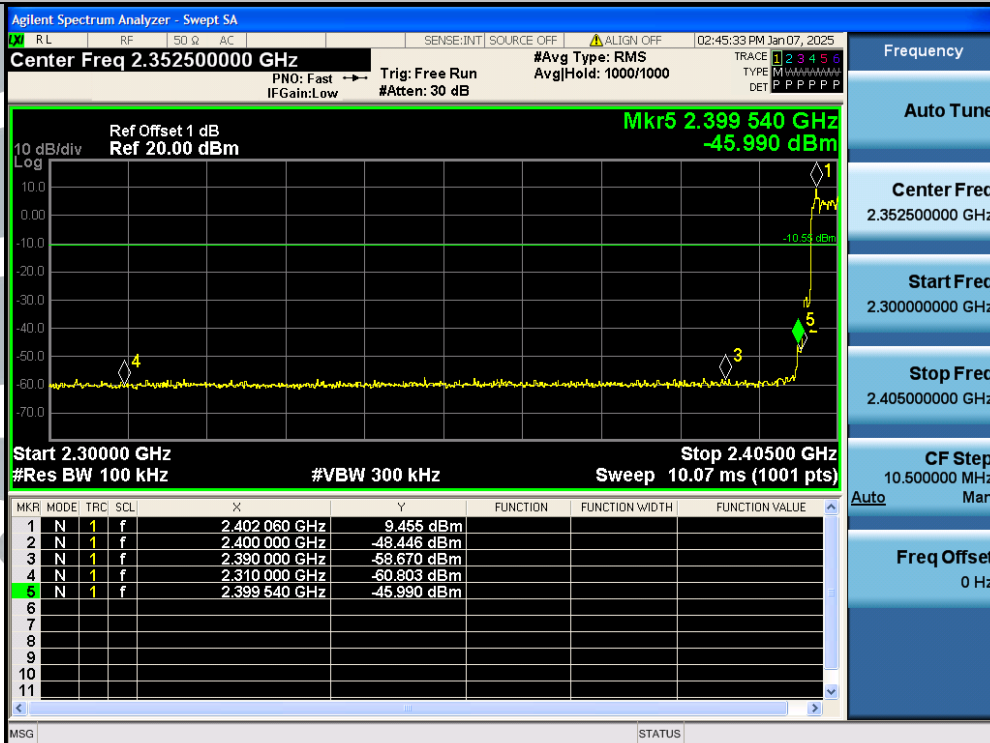

2DH5-Ant1-Hop\_2402-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

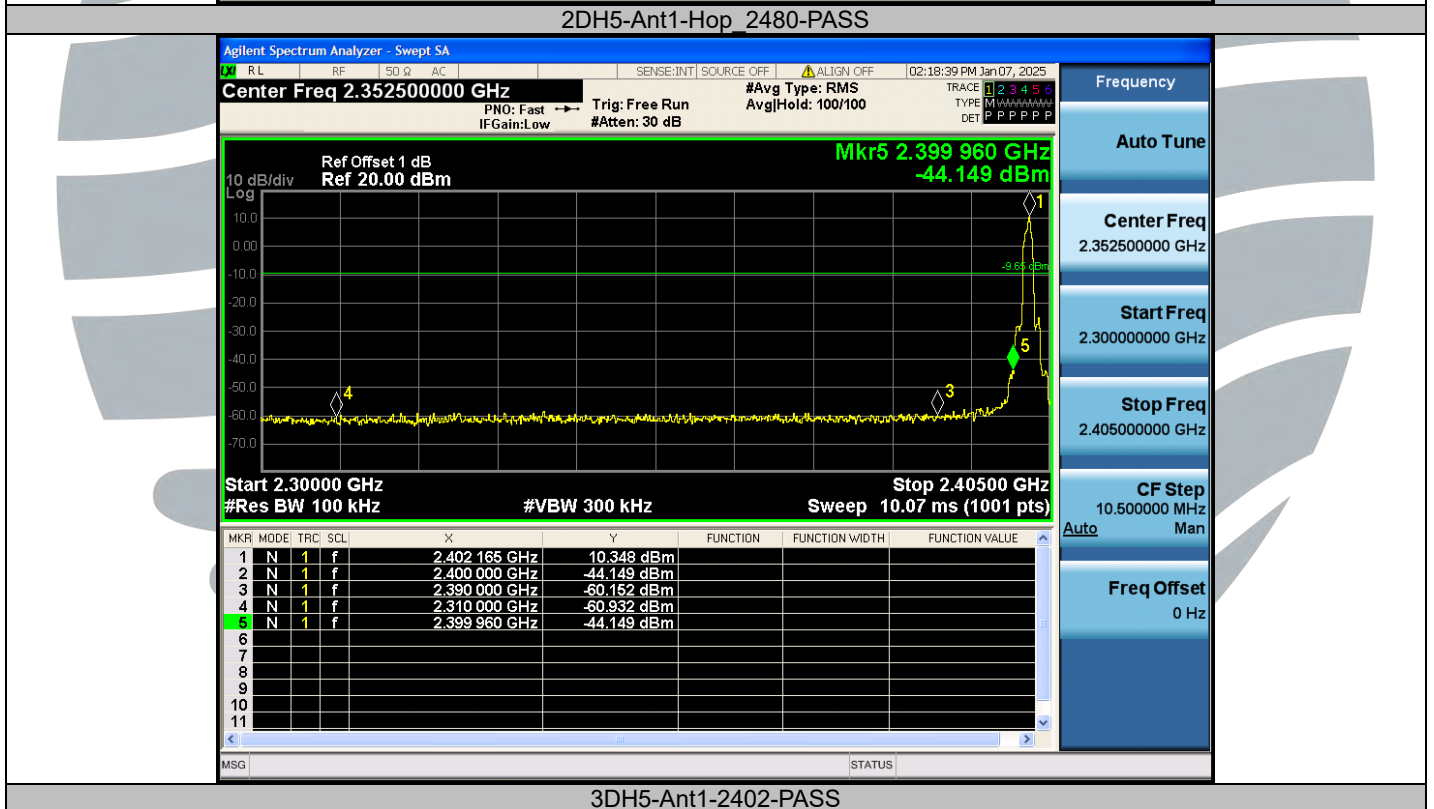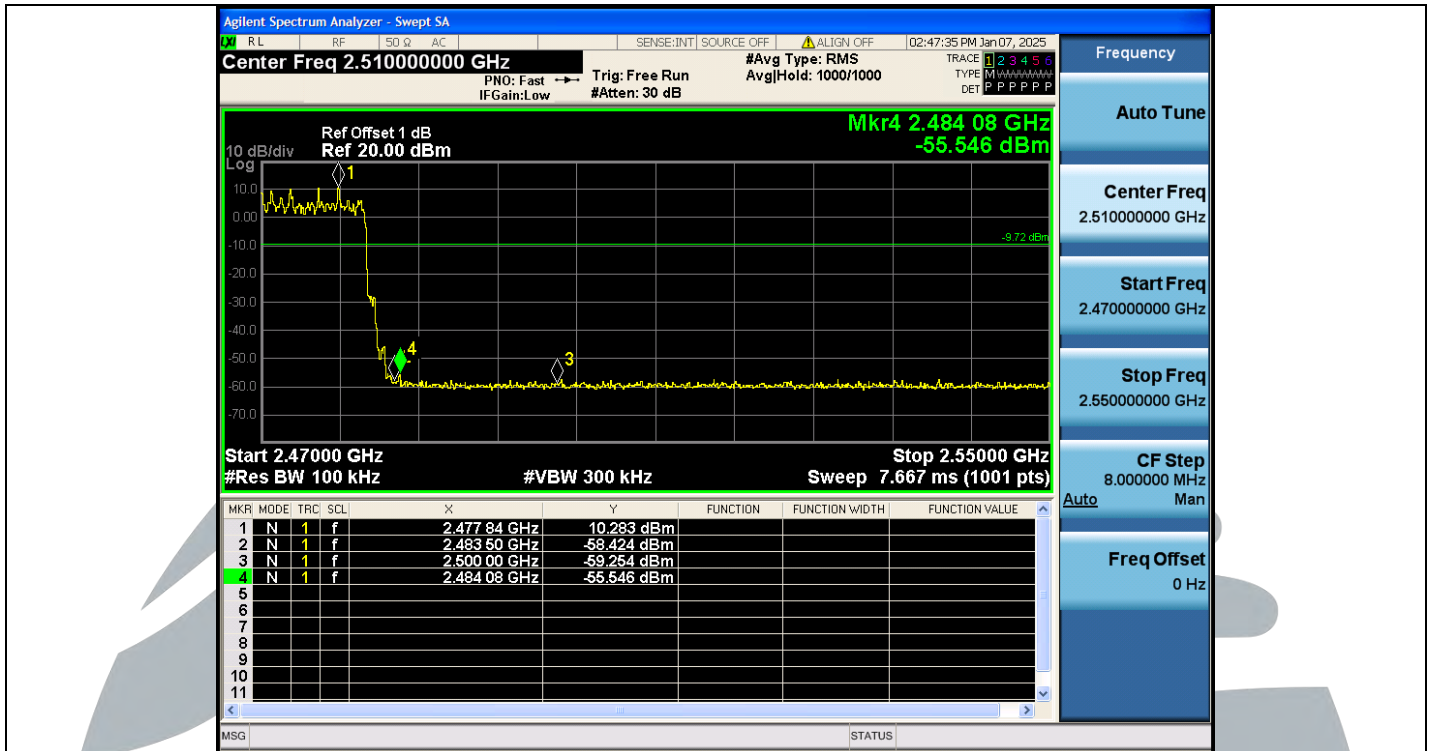

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

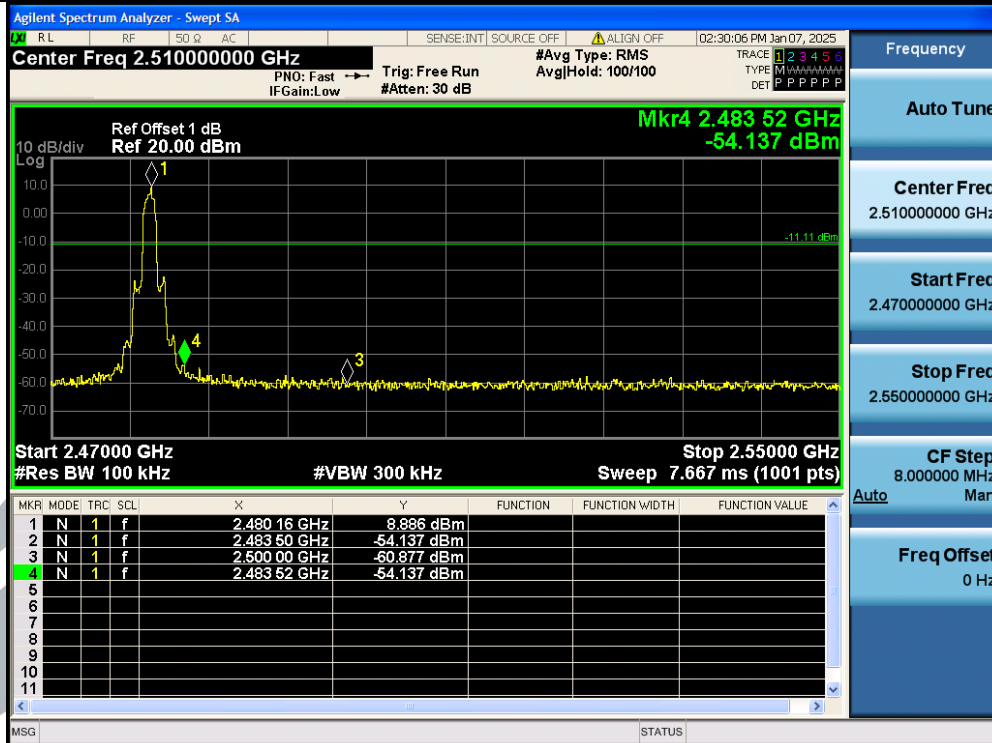

3DH5-Ant1-2480-PASS

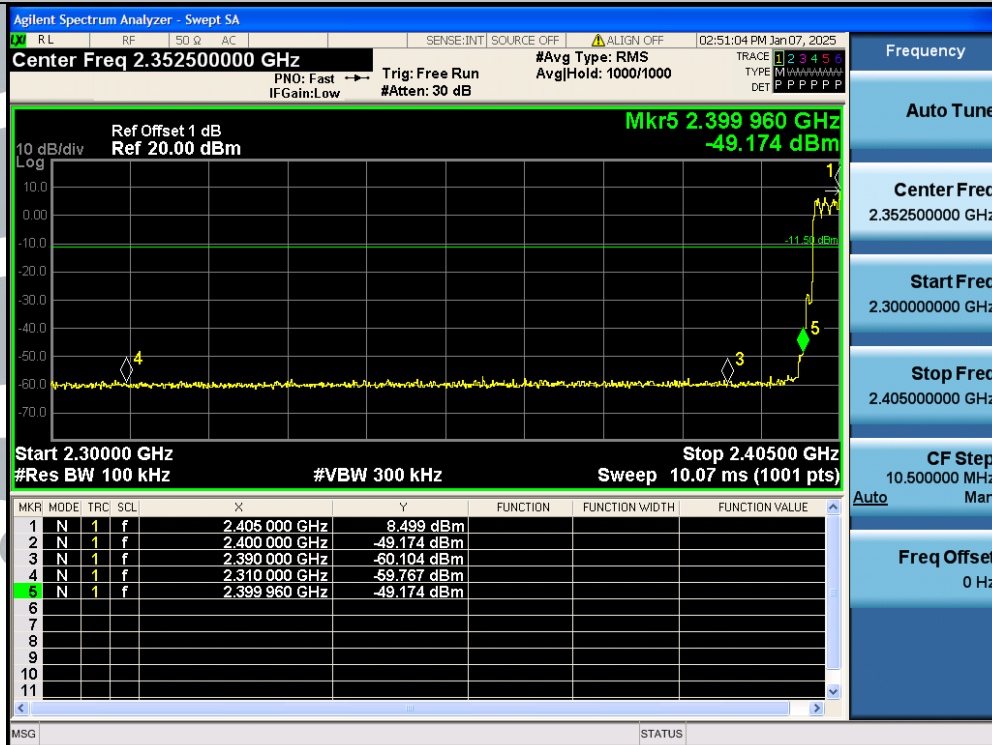

3DH5-Ant1-Hop\_2402-PASS

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

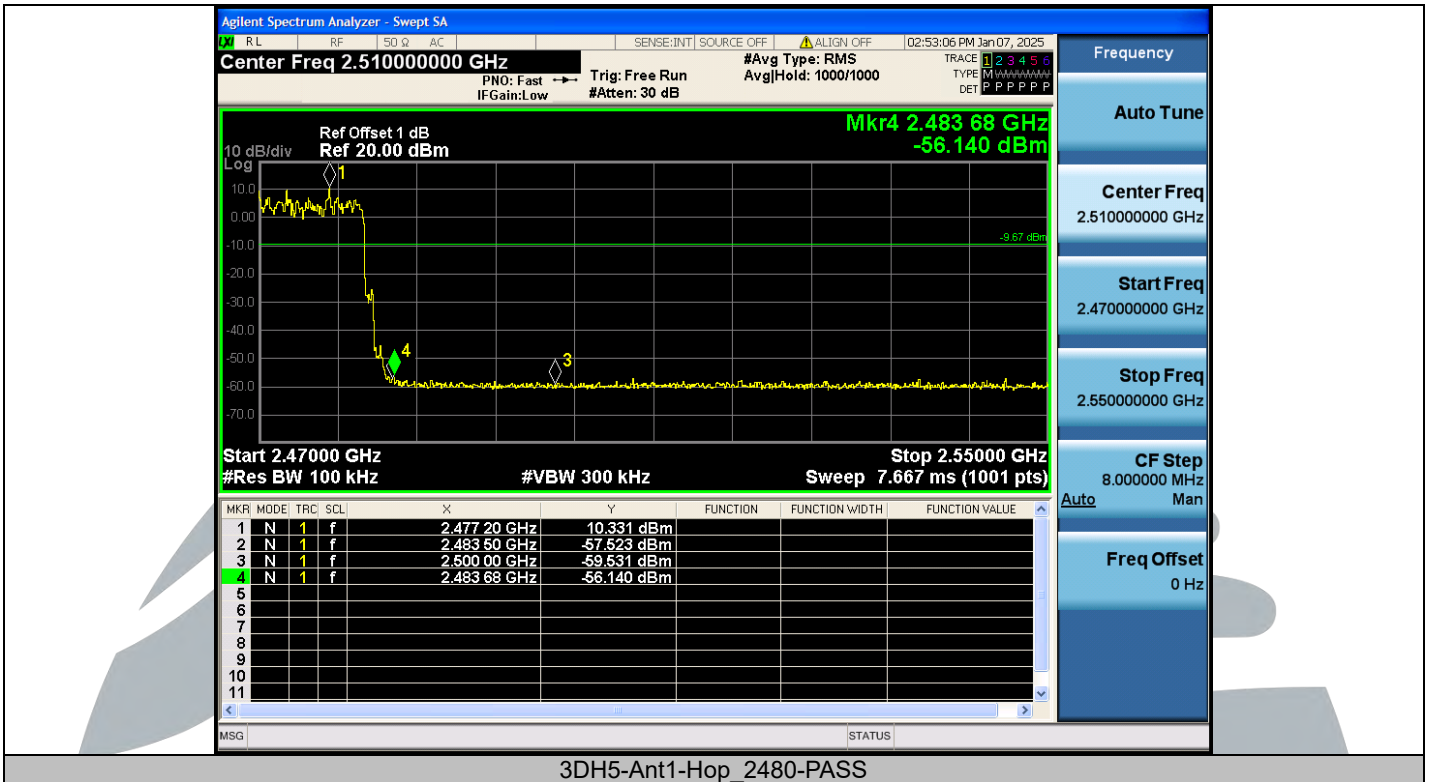

3DH5-Ant1-Hop\_2480-PASS

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1



### A.7 CONDUCTED SPURIOUS EMISSION

Test Mode	Antenna	Frequency [MHz]	Freq Range [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	9.60	9.60	---	PASS
DH5	Ant1	2402	30~1000	9.60	-70.12	≤-10.4	PASS
DH5	Ant1	2402	1000~26500	9.60	-50.79	≤-10.4	PASS
DH5	Ant1	2441	0~Reference	8.97	8.97	---	PASS
DH5	Ant1	2441	30~1000	8.97	-69.57	≤-11.03	PASS
DH5	Ant1	2441	1000~26500	8.97	-50.23	≤-11.03	PASS
DH5	Ant1	2480	0~Reference	9.48	9.48	---	PASS
DH5	Ant1	2480	30~1000	9.48	-69.97	≤-10.52	PASS
DH5	Ant1	2480	1000~26500	9.48	-51.72	≤-10.52	PASS
2DH5	Ant1	2402	0~Reference	6.30	6.30	---	PASS
2DH5	Ant1	2402	30~1000	6.30	-69.44	≤-13.7	PASS
2DH5	Ant1	2402	1000~26500	6.30	-51.78	≤-13.7	PASS
2DH5	Ant1	2441	0~Reference	9.71	9.71	---	PASS
2DH5	Ant1	2441	30~1000	9.71	-69.97	≤-10.29	PASS
2DH5	Ant1	2441	1000~26500	9.71	-51.78	≤-10.29	PASS
2DH5	Ant1	2480	0~Reference	6.25	6.25	---	PASS
2DH5	Ant1	2480	30~1000	6.25	-69.02	≤-13.75	PASS
2DH5	Ant1	2480	1000~26500	6.25	-52.72	≤-13.75	PASS
3DH5	Ant1	2402	0~Reference	6.11	6.11	---	PASS
3DH5	Ant1	2402	30~1000	6.11	-70	≤-13.89	PASS
3DH5	Ant1	2402	1000~26500	6.11	-50.59	≤-13.89	PASS
3DH5	Ant1	2441	0~Reference	6.00	6.00	---	PASS
3DH5	Ant1	2441	30~1000	6.00	-69.32	≤-14	PASS
3DH5	Ant1	2441	1000~26500	6.00	-54.14	≤-14	PASS
3DH5	Ant1	2480	0~Reference	5.90	5.90	---	PASS
3DH5	Ant1	2480	30~1000	5.90	-69.63	≤-14.1	PASS
3DH5	Ant1	2480	1000~26500	5.90	-51.84	≤-14.1	PASS

#### Test Graphs



#### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

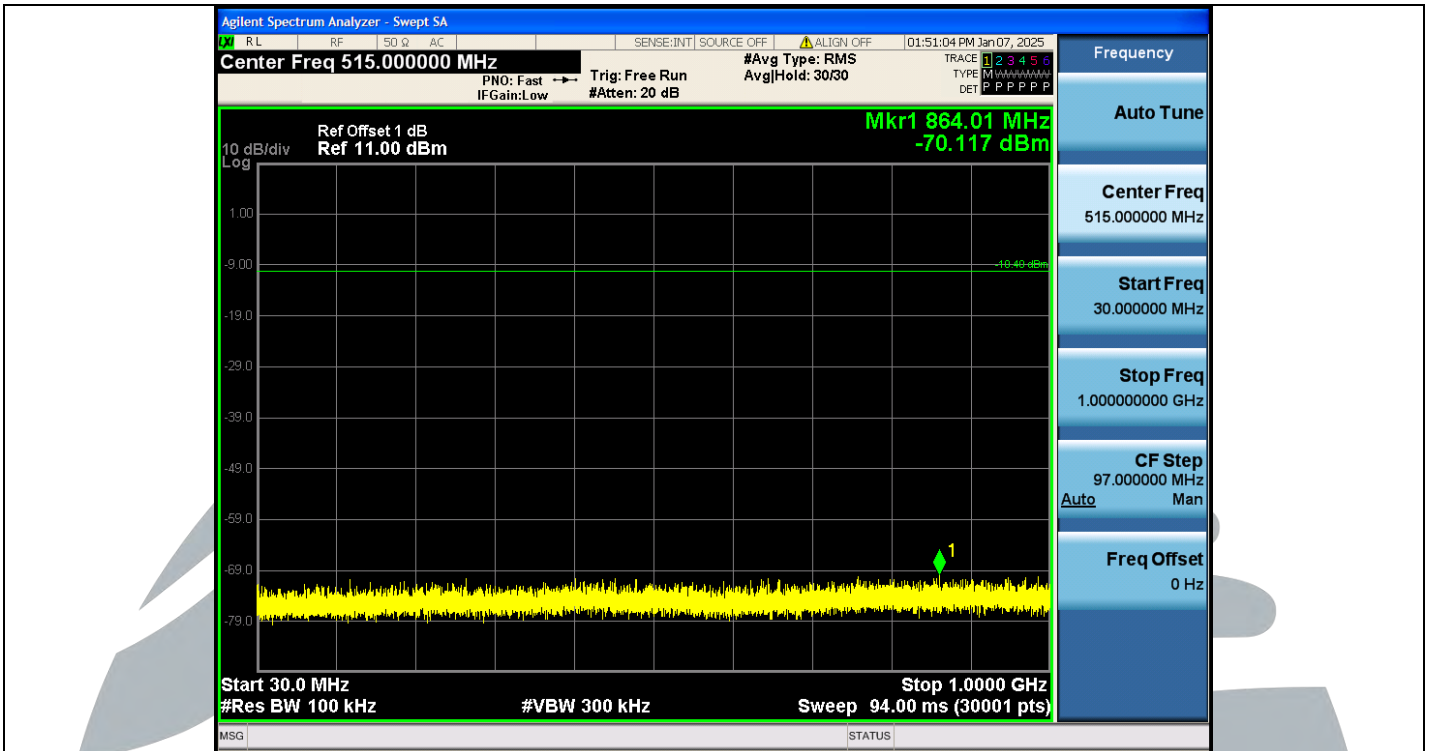

DH5-Ant1-2402-30~1000-PASS

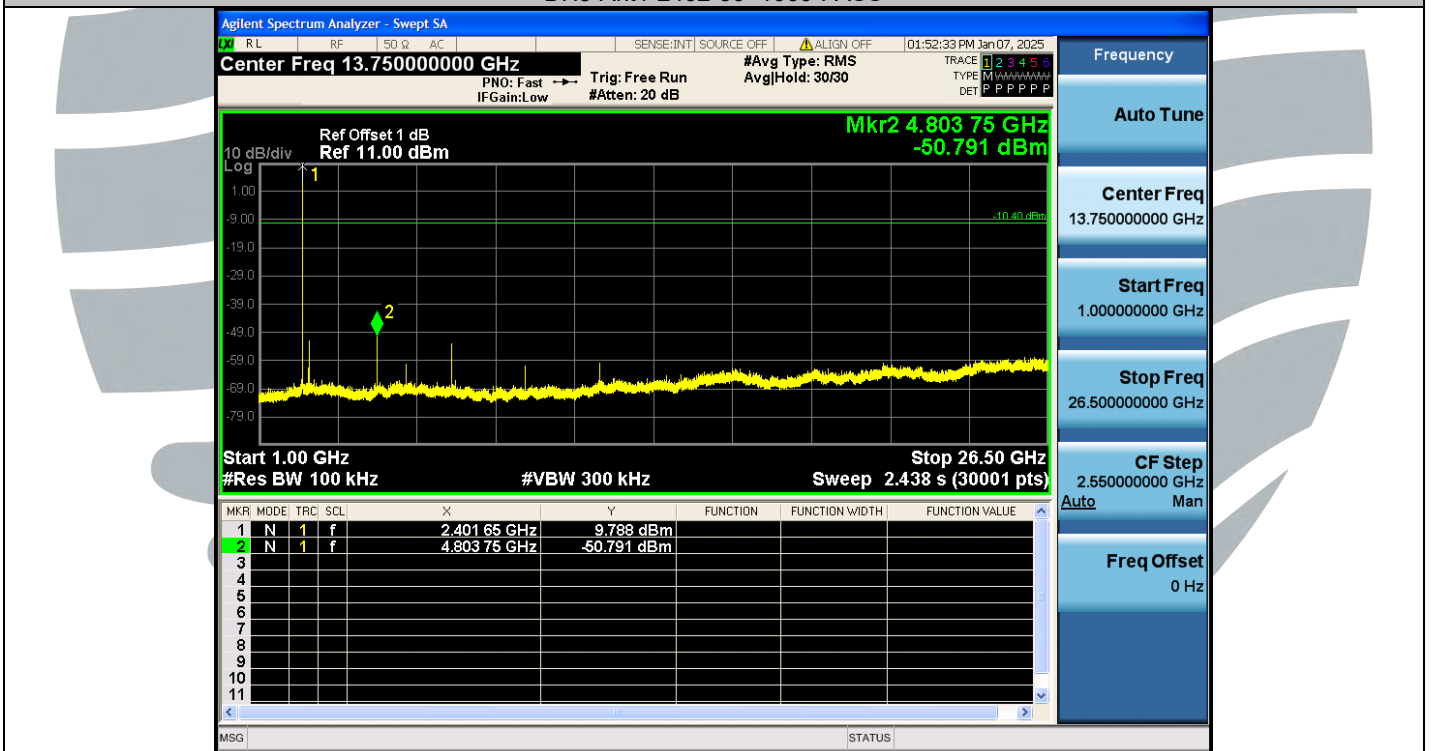

DH5-Ant1-2402-1000~26500-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1



DH5-Ant1-2441-0~Reference-PASS

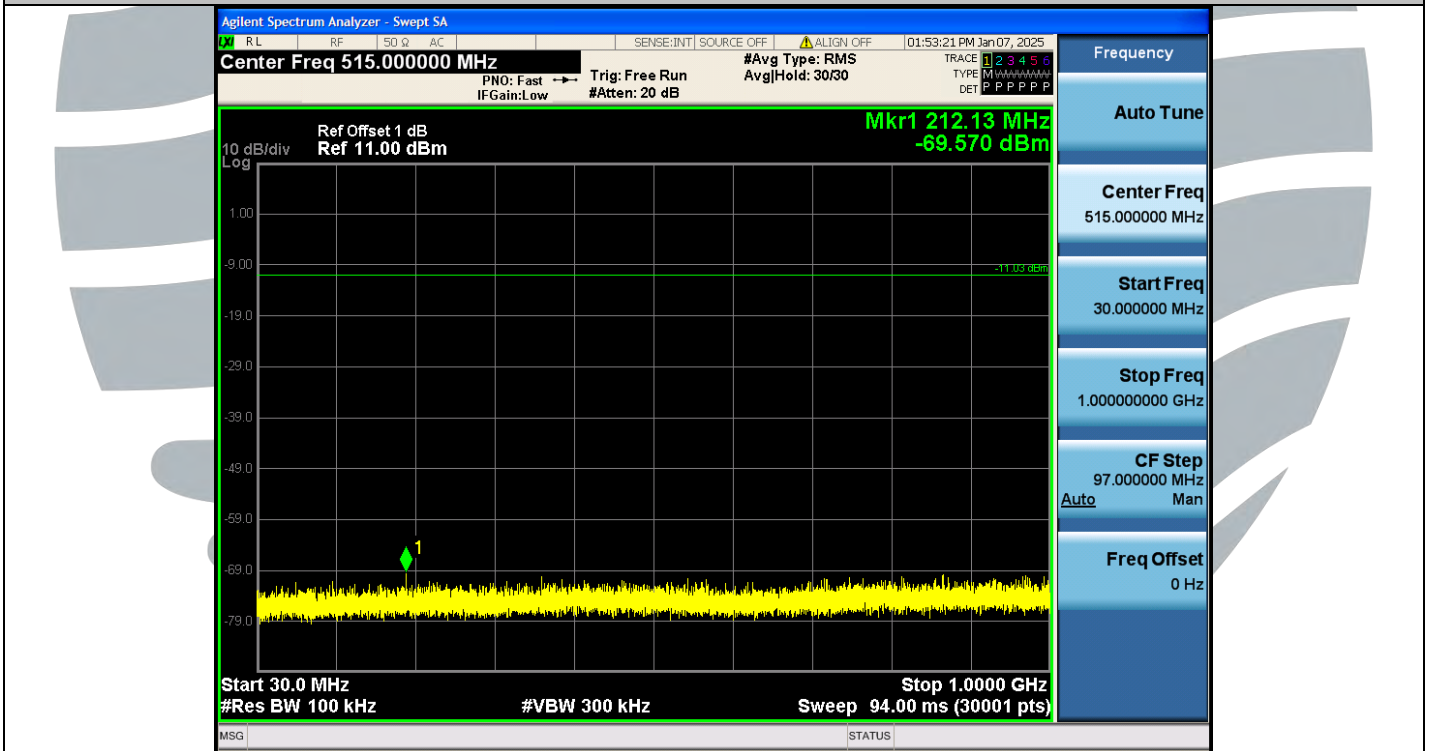

DH5-Ant1-2441-30~1000-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

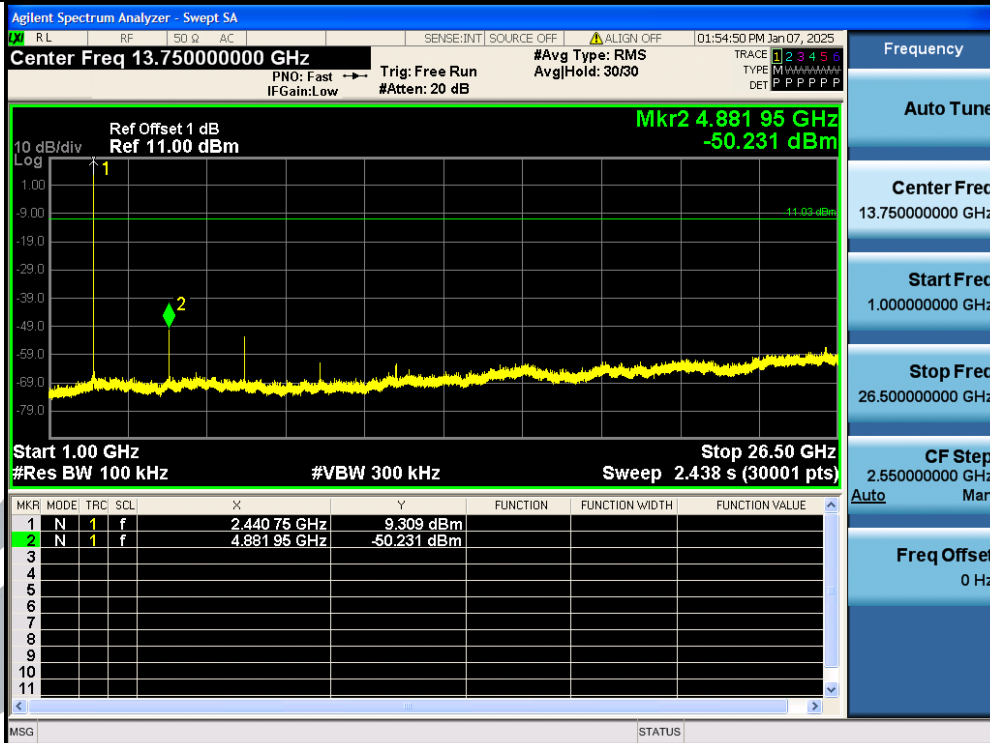

DH5-Ant1-2441-1000~26500-PASS



DH5-Ant1-2480-0~Reference-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

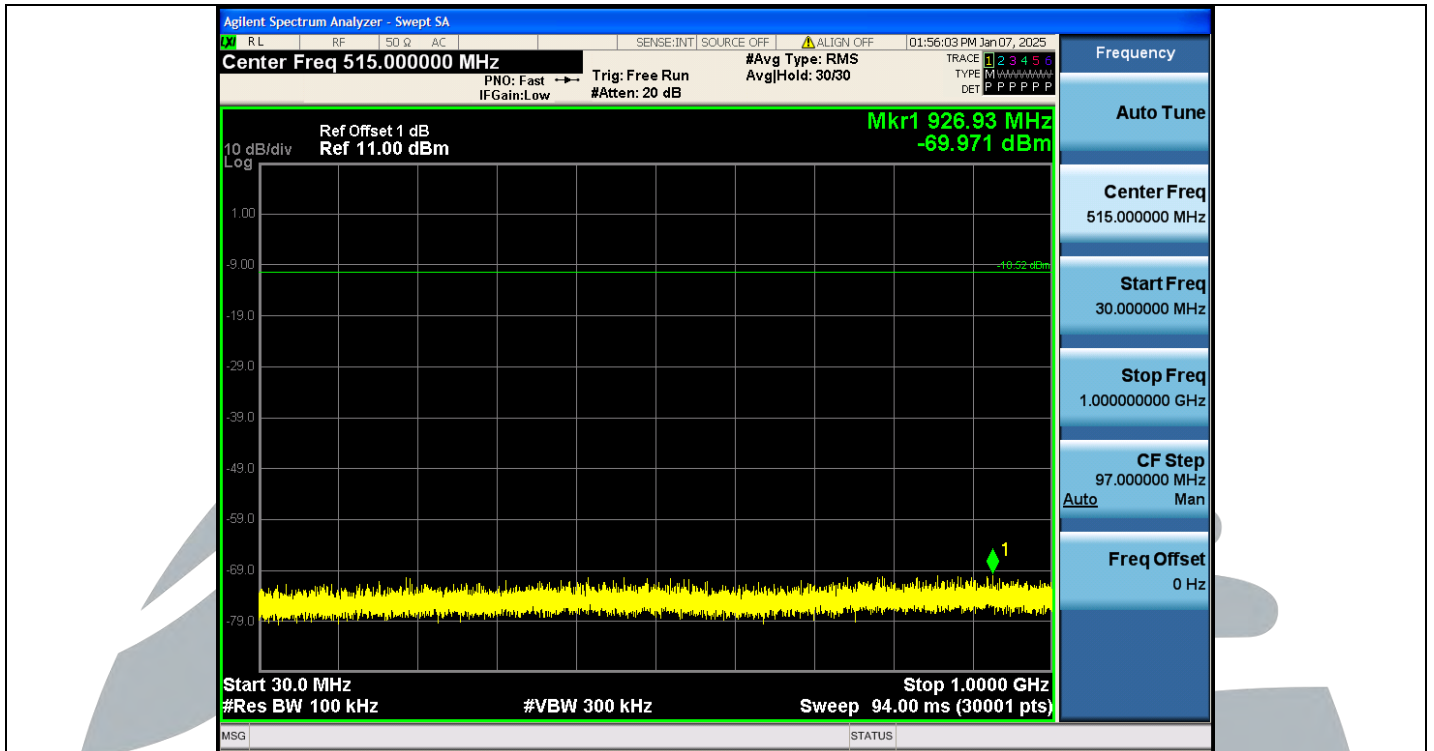

DH5-Ant1-2480-30~1000-PASS

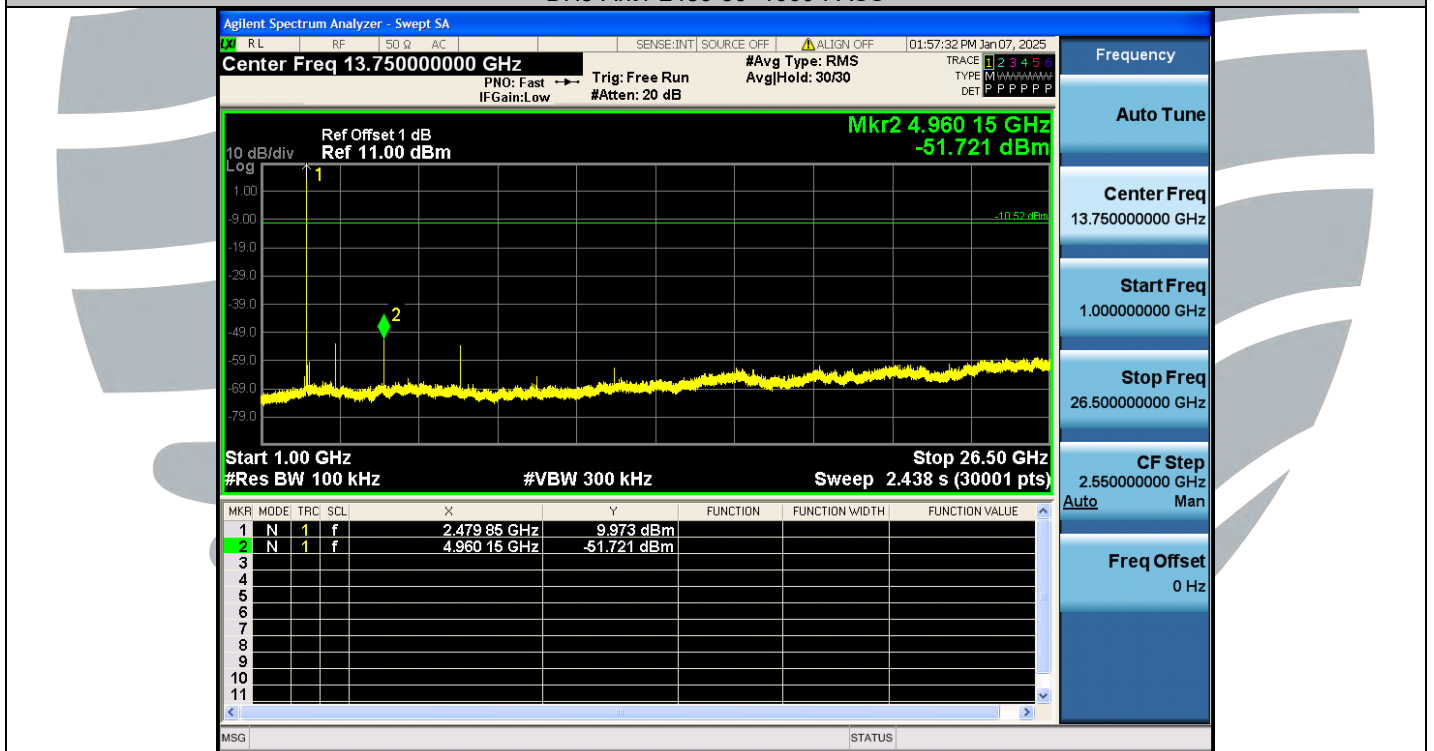

DH5-Ant1-2480-1000~26500-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1



2DH5-Ant1-2402-0~Reference-PASS

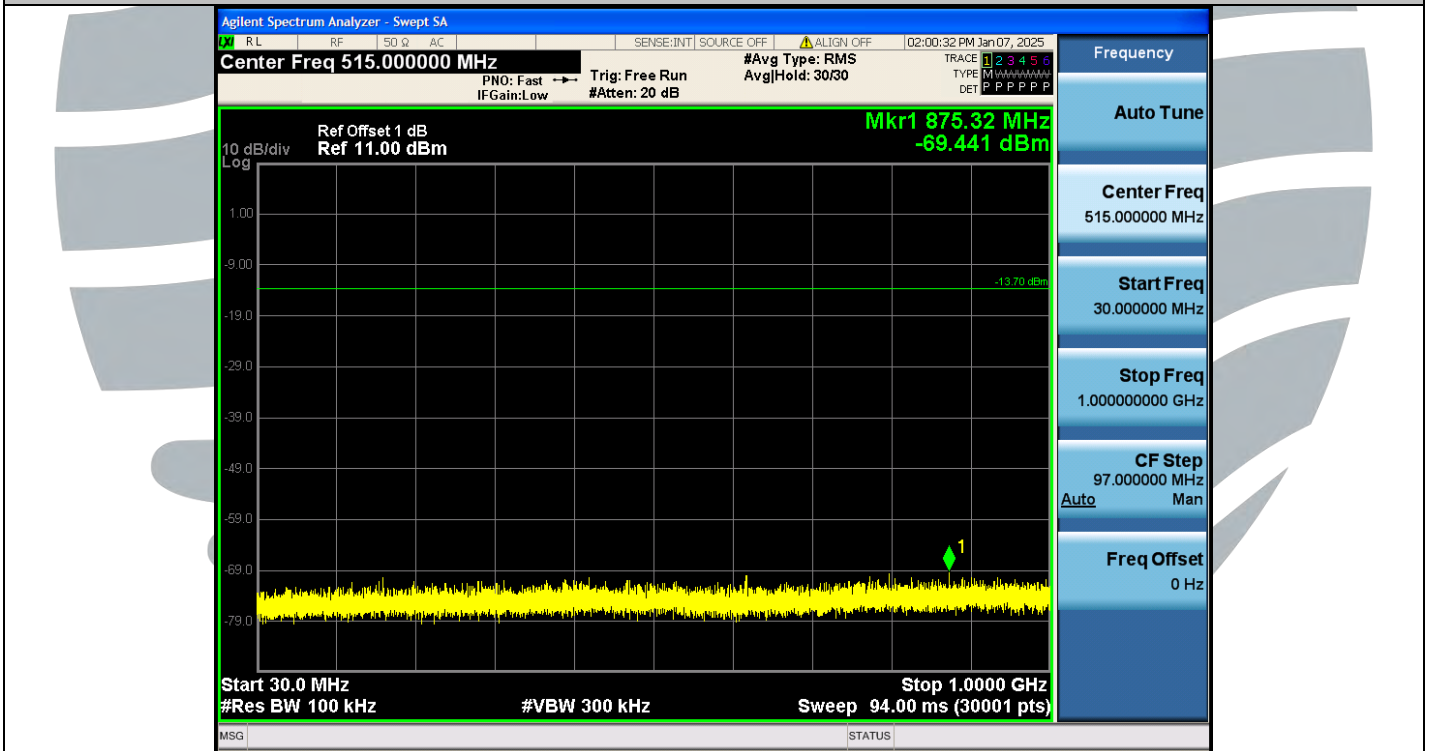

2DH5-Ant1-2402-30~1000-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

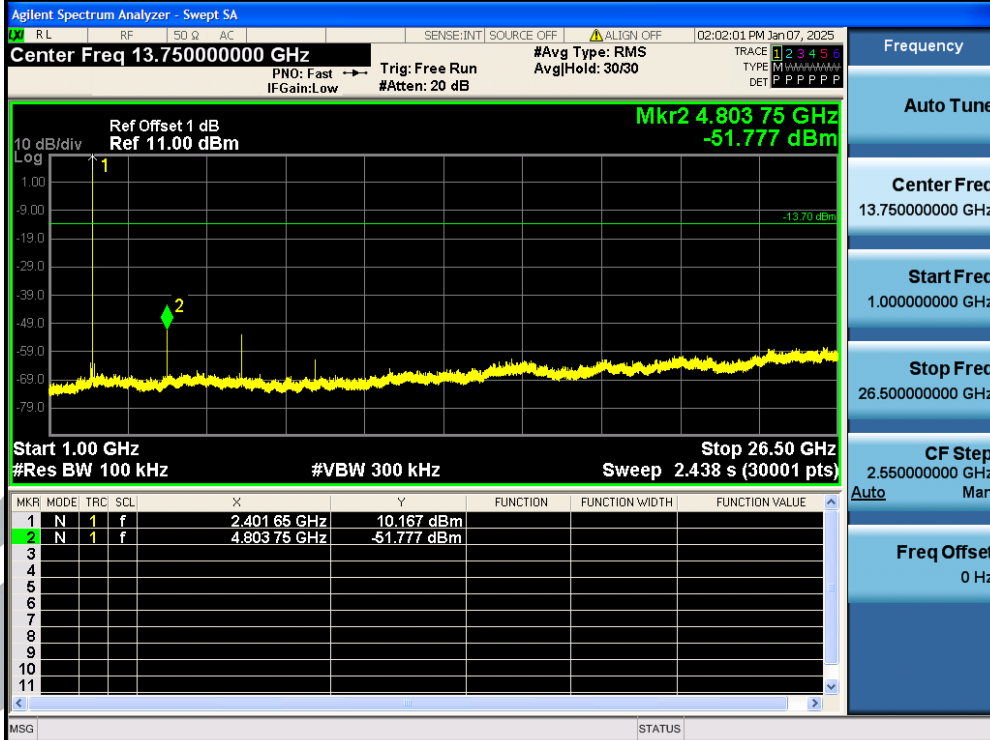

2DH5-Ant1-2402-1000~26500-PASS



2DH5-Ant1-2441-0~Reference-PASS

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

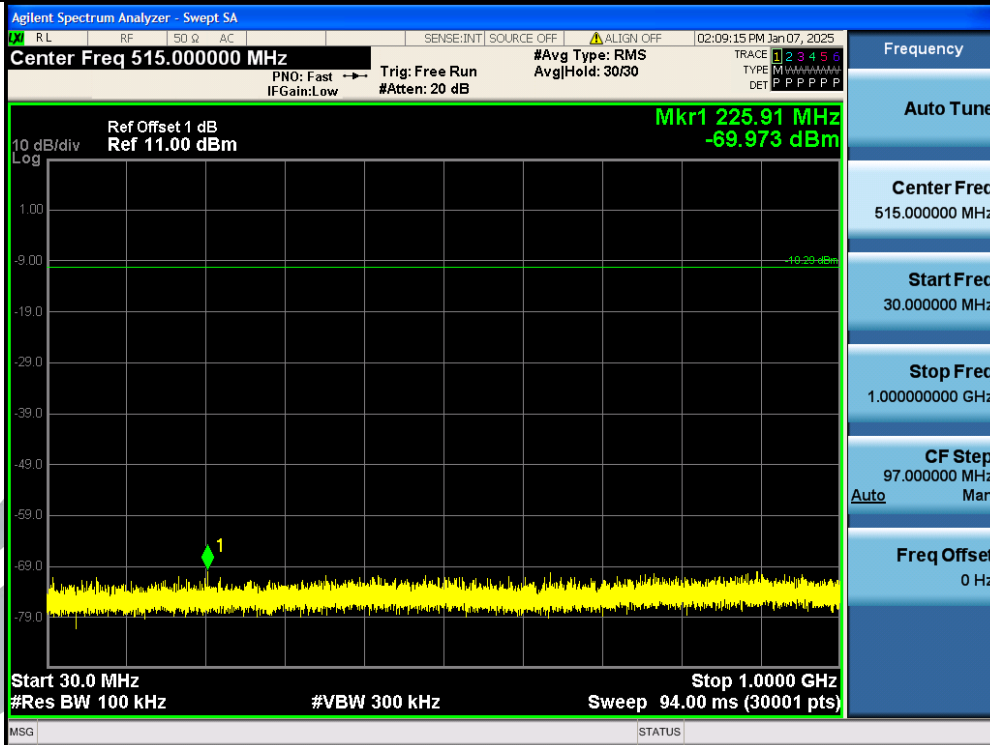

2DH5-Ant1-2441-30~1000-PASS

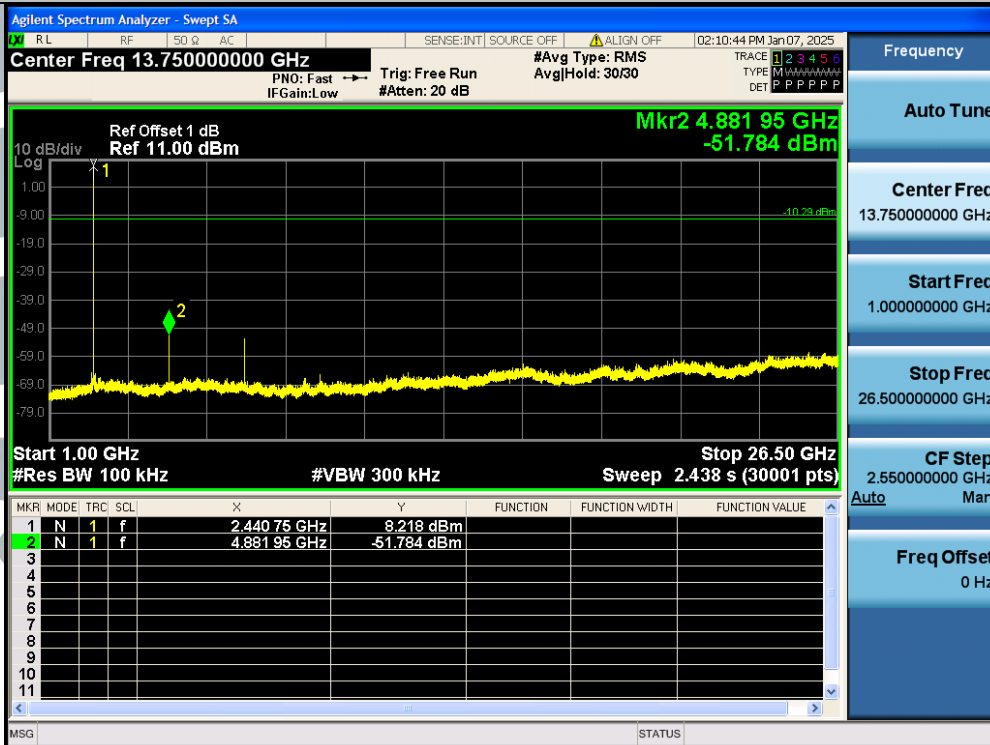

2DH5-Ant1-2441-1000~26500-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1



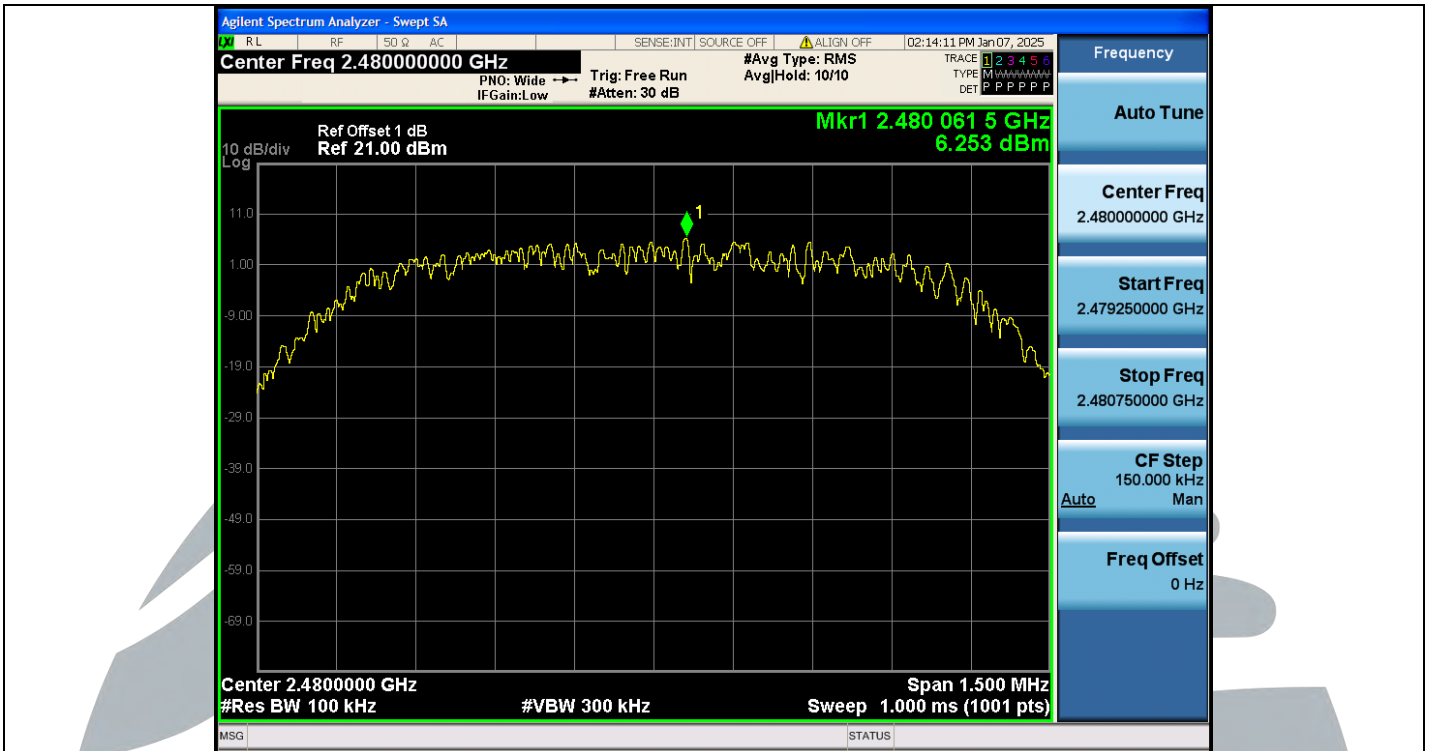

2DH5-Ant1-2480-0~Reference-PASS

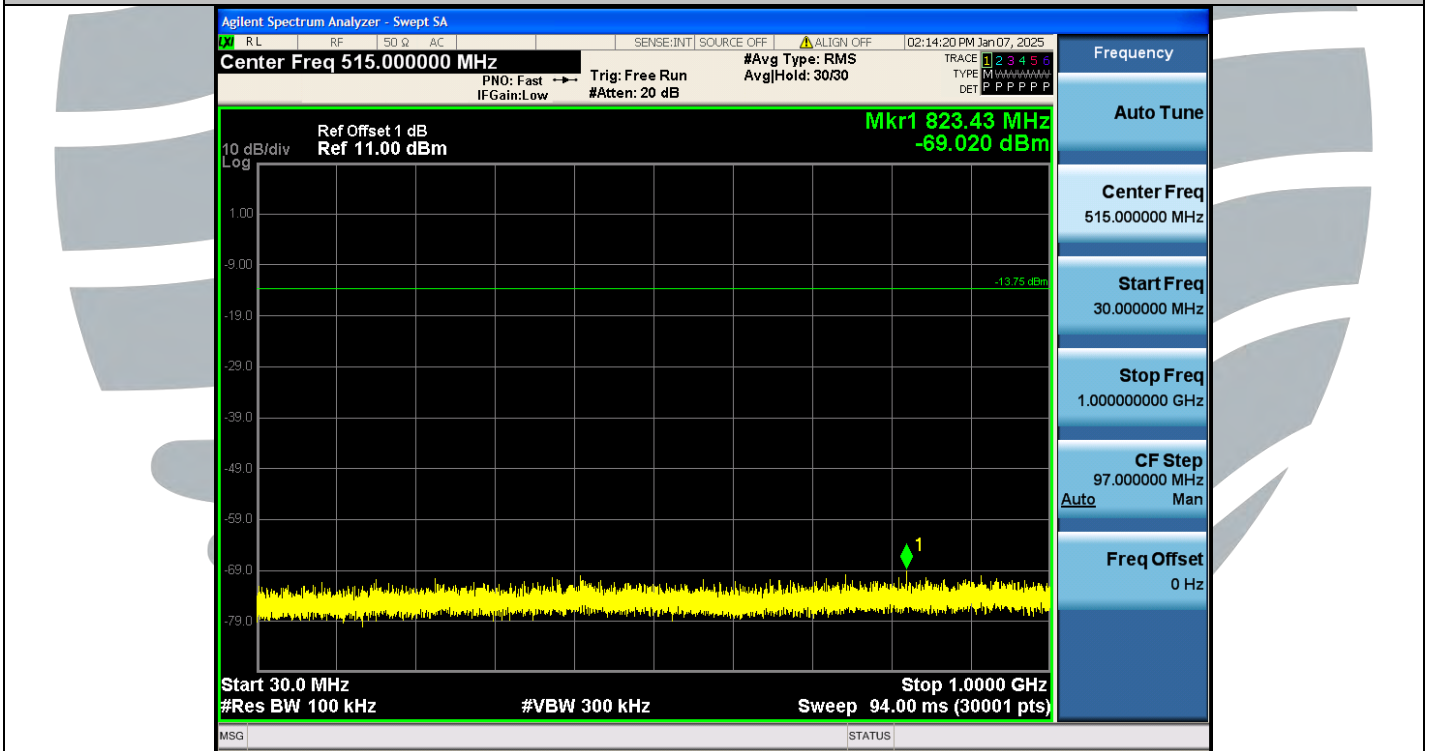

2DH5-Ant1-2480-30~1000-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

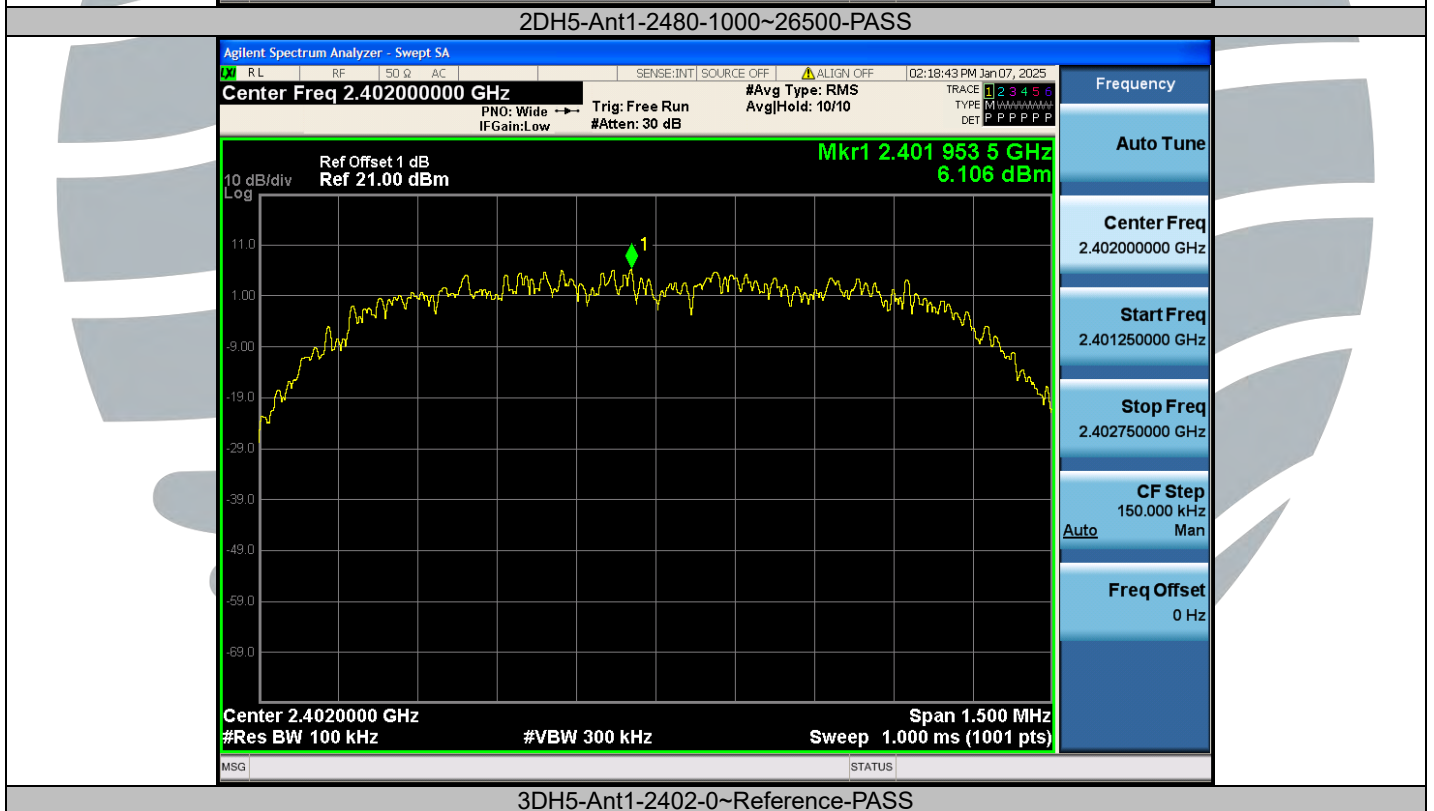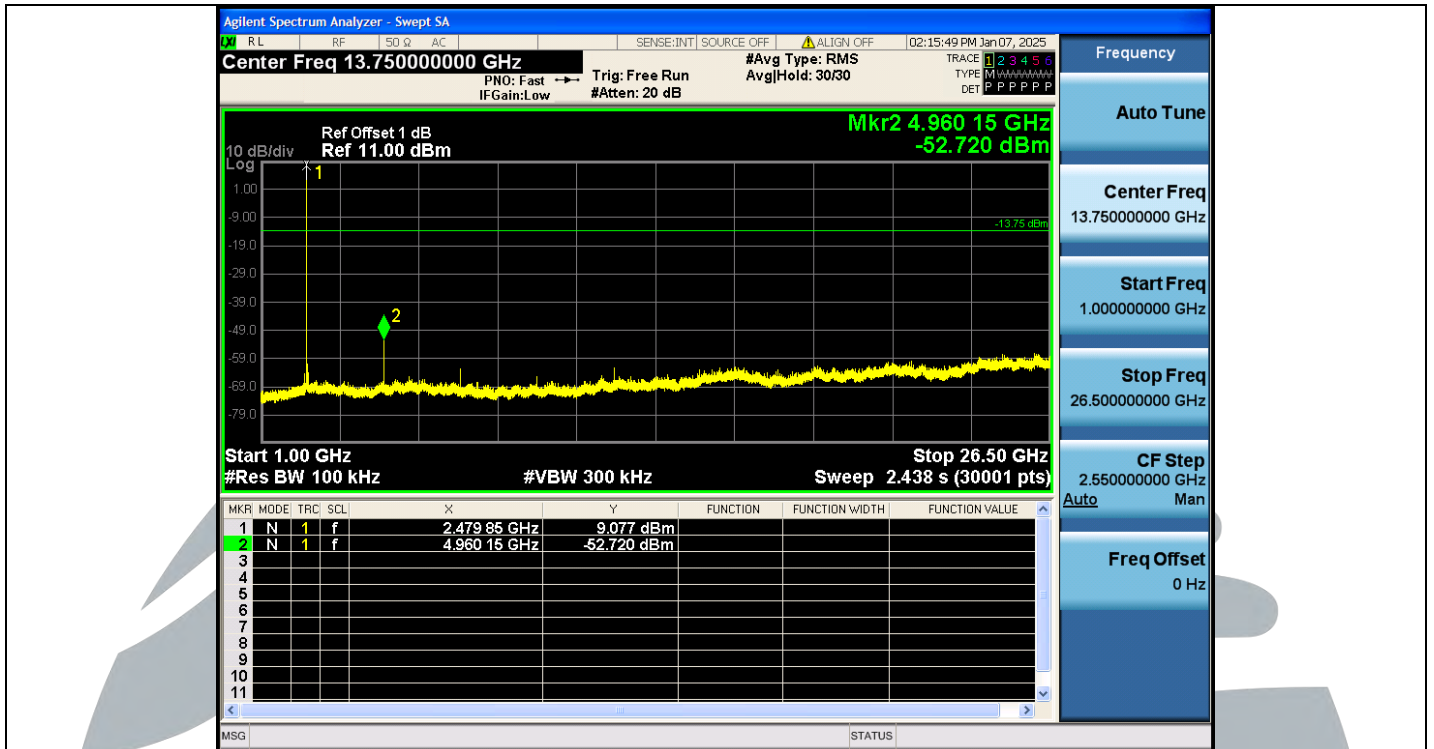

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

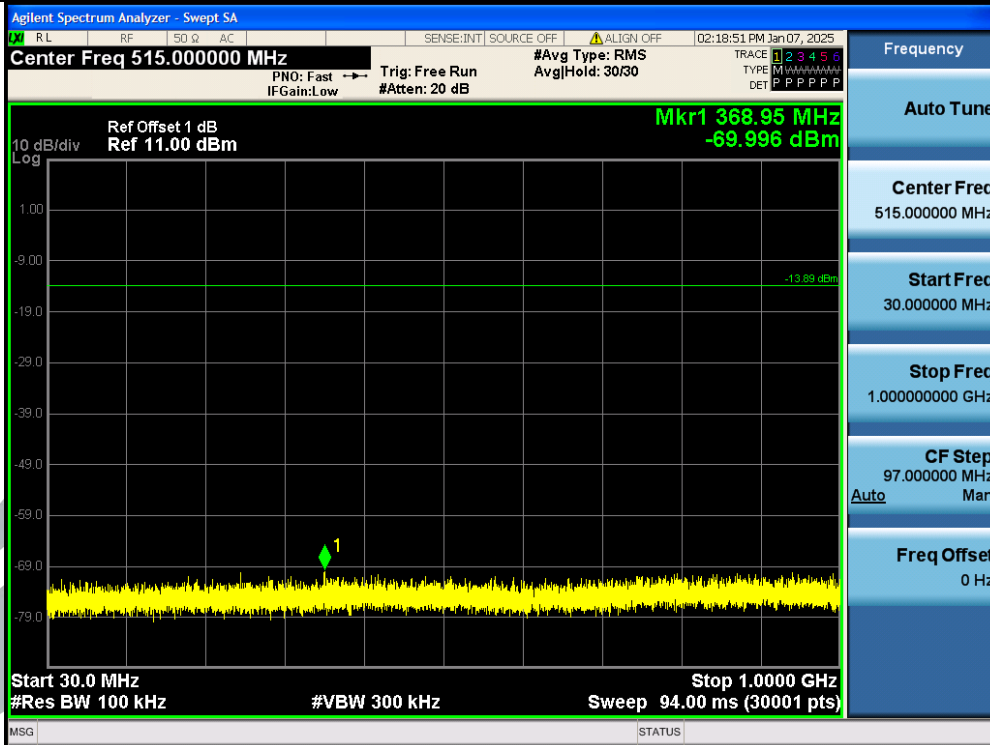

3DH5-Ant1-2402-30~1000-PASS

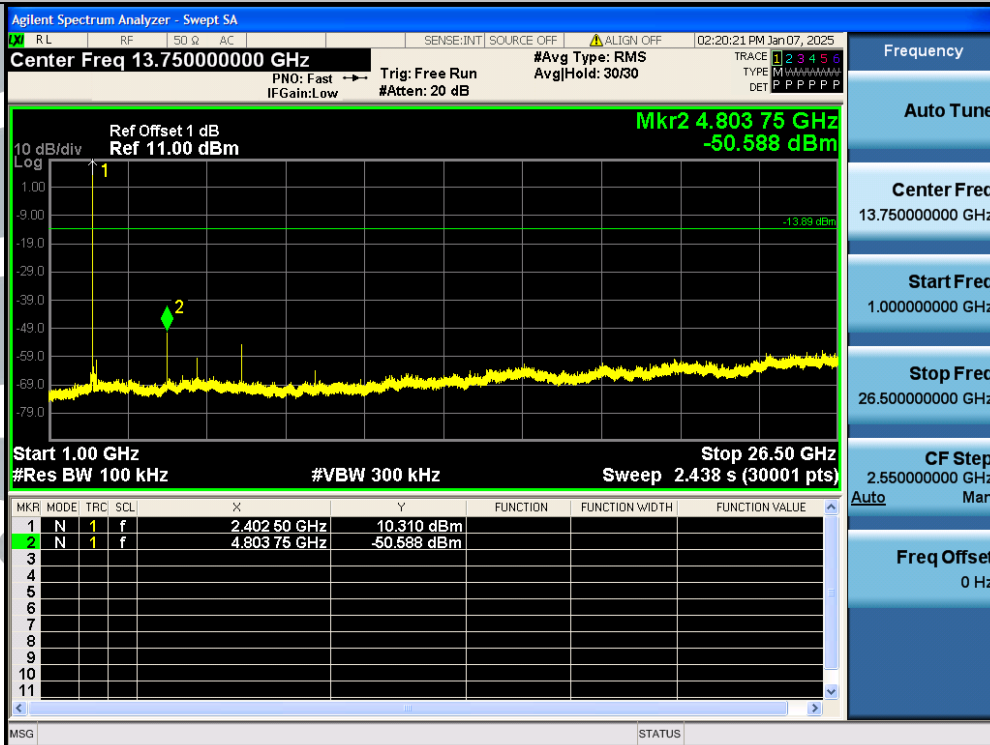

3DH5-Ant1-2402-1000~26500-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1



3DH5-Ant1-2441-0~Reference-PASS

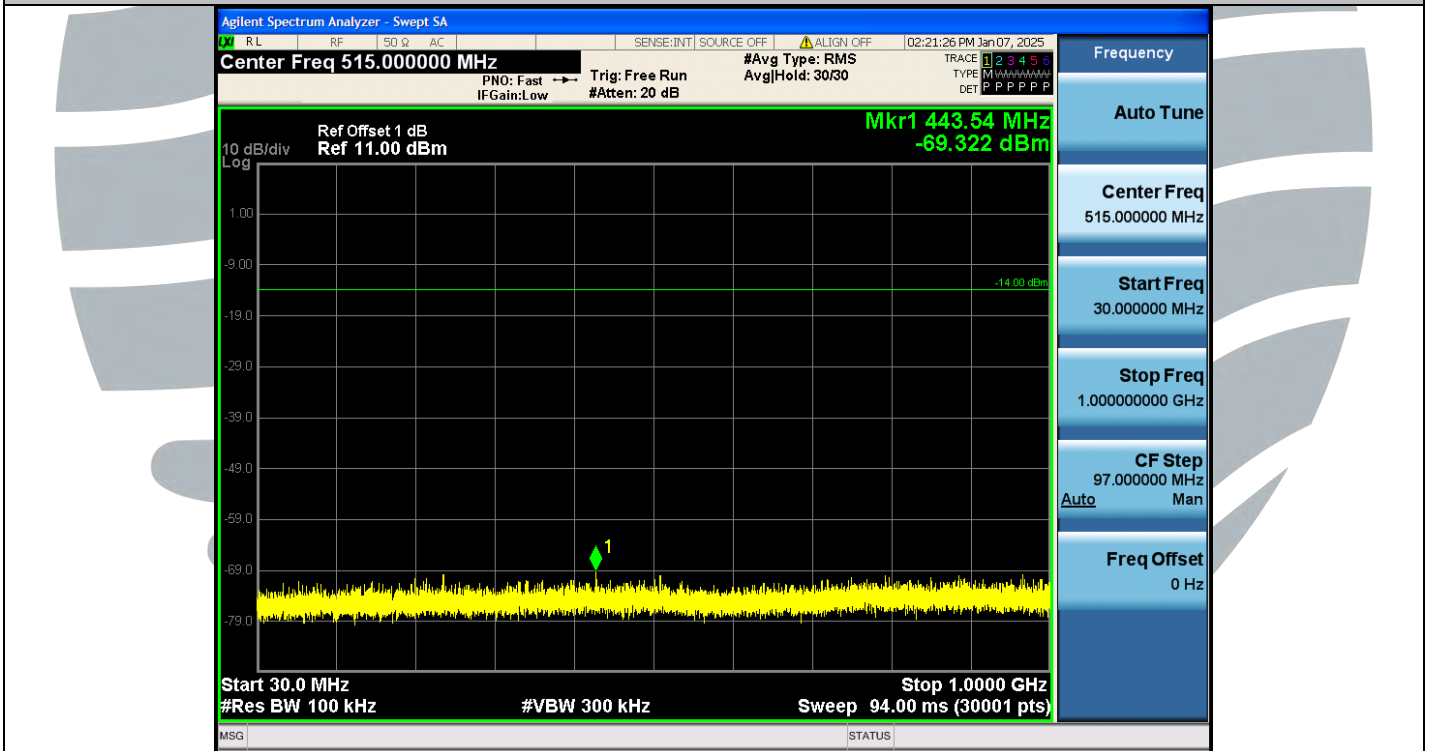

3DH5-Ant1-2441-30~1000-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

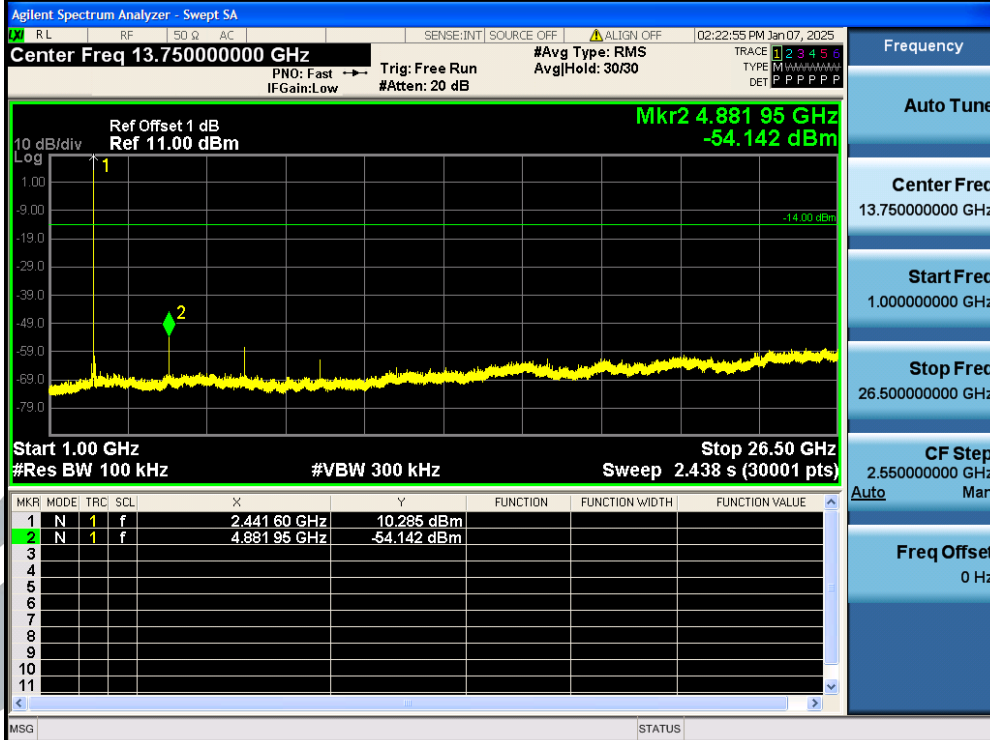

3DH5-Ant1-2441-1000~26500-PASS



3DH5-Ant1-2480-0~Reference-PASS

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

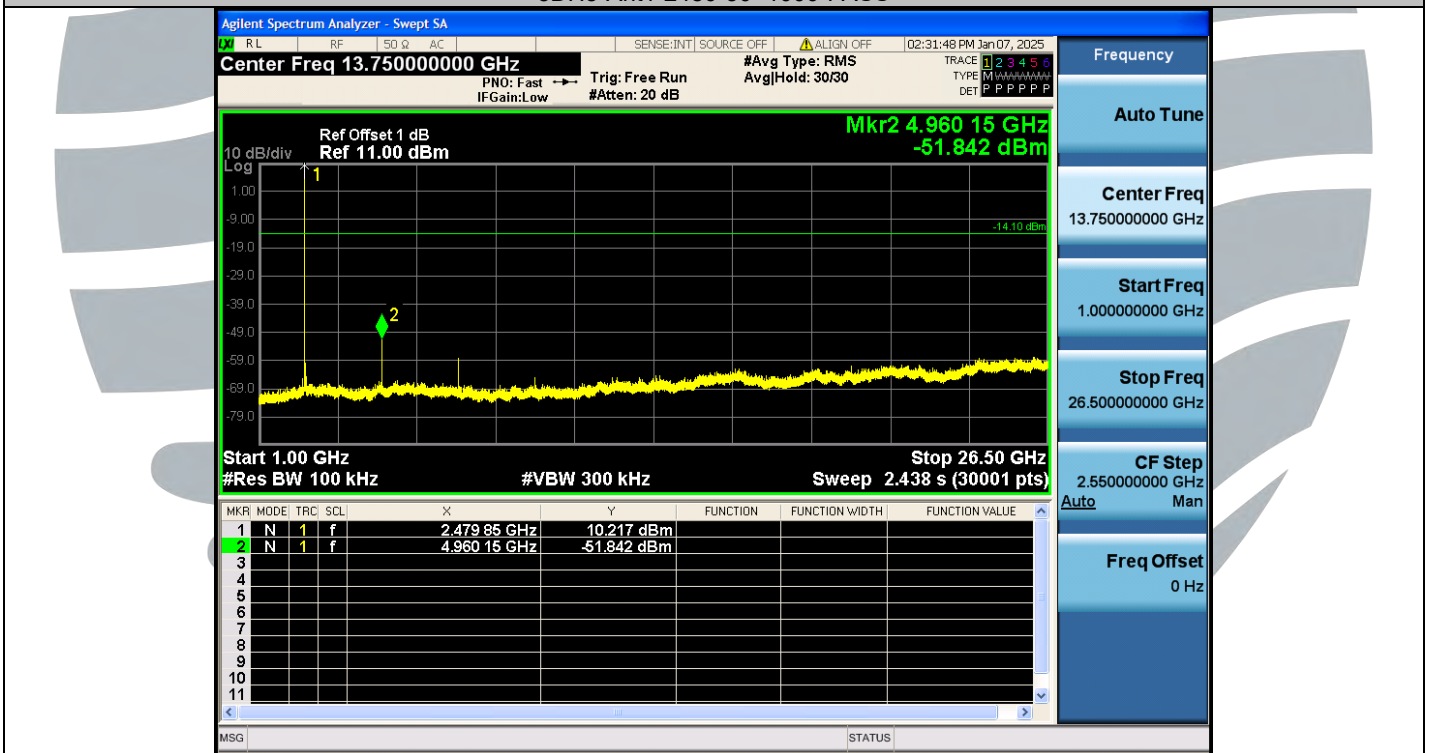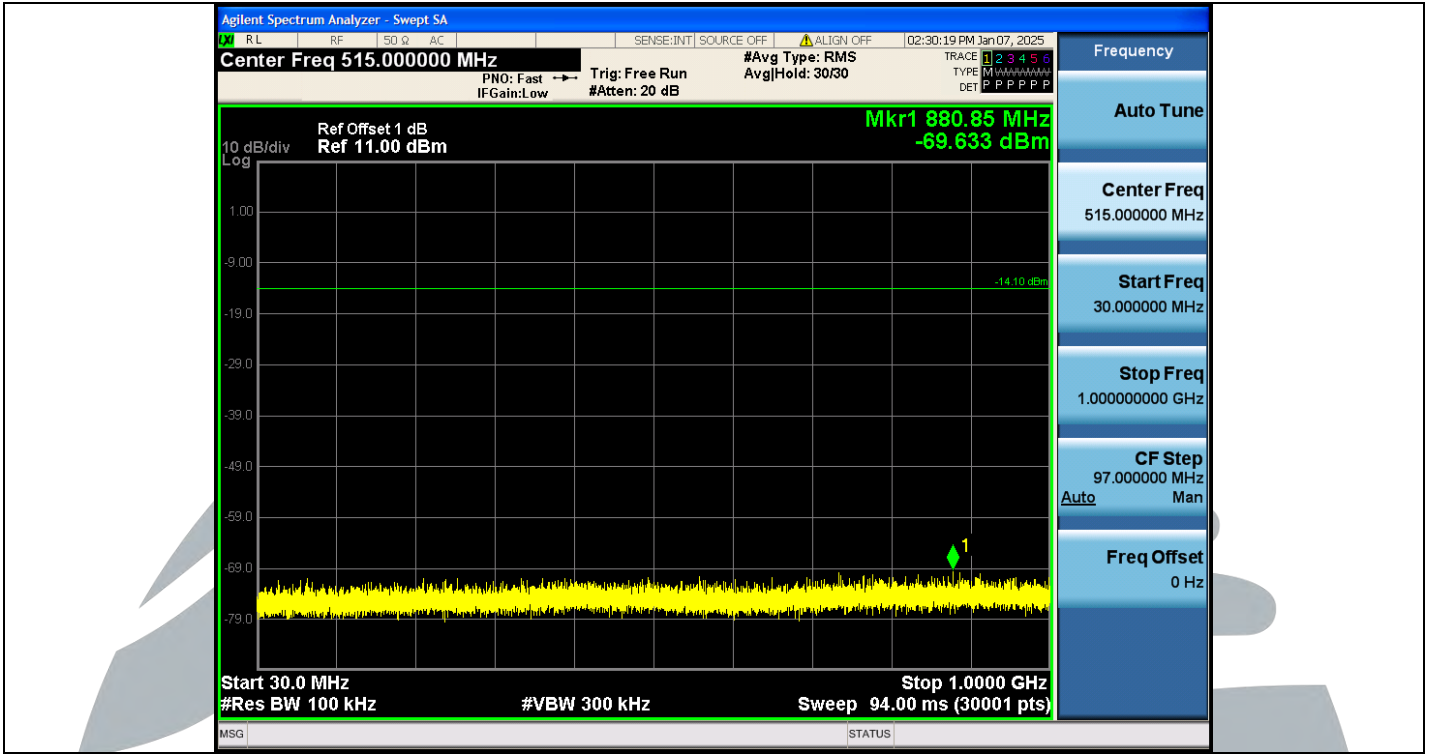

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

**APPENDIX 1 PHOTOS OF TEST SETUP**

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

**APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS**

Refer to Appendix 2 for EUT external and internal photos.

\*\*\* End of Report \*\*\*

---

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.

---