

TEST REPORT

REPORT NUMBER: I12GWD760-RF-2G

ON

Type of Equipment: GSM QUAD BAND AND UMTS 850 / 1900

Model of Equipment: C3560

**Marketing Name: C3560, C3560CA, C3560EN, C3560CL,
C3560PR, C3560CP**

**Applicant: Cellon Communications Technology(ShenZhen)Co.,
Ltd.**

China Telecommunication Technology Labs

Month date, year

Nov 15th, 2012

Signature



Ma Xin

Vice Director

FCC ID: T38C3560
Report Date: 2012-11-15

Test Firm Name: China Telecommunication Technology Labs
Registration Number: 840587

Statement

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Parts 2, 22, and 24. The sample tested was found to comply with the requirements defined in the applied rules.

CONTENTS

1 GENERAL INFORMATION	4
1.1 NOTES	4
1.2 TESTERS	5
1.3 TESTING LABORATORY INFORMATION	6
1.4 DETAILS OF APPLICANT OR MANUFACTURER	7
2 TEST ITEM	8
2.1 GENERAL INFORMATION.....	8
2.2 OUTLINE OF EUT	8
2.3 MODIFICATIONS INCORPORATED IN EUT.....	8
2.4 EQUIPMENT CONFIGURATION	8
2.5 OTHER INFORMATION.....	9
3 SUMMARY OF TEST RESULTS.....	10
4 TEST RESULTS OF MODE	11
4.1 RADIATED SPURIOUS EMISSION.....	11
4.2 OUTPUT POWER.....	15
4.3 CONDUCTED EMISSION.....	21
4.4 OCCUPIED BANDWIDTH	24
4.5 EMISSION BANDWIDTH	36
4.6 FREQUENCY STABILITY	48
4.7 CONDUCTED SPURIOUS EMISSION	54
4.8 BAND EDGE COMPLIANCE.....	65
4.9 MODULATION CHARACTERISTICS	73
5 TEST EQUIPMENTS AND ANCILLARIES USED FOR TESTS	74
5.1 TEST EQUIPMENTS FOR RF TEST	74
5.2 TEST EQUIPMENTS FOR RSE TEST	75
ANNEX A EXTERNAL PHOTOS.....	76
ANNEX B DEVIATIONS FROM PRESCRIBED TEST METHODS	78

1 General Information

1.1 Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Parts 2 (2011), 22 (2011) and 24 (2011).

The test results of this test report relate exclusively to the item(s) tested as specified in section 2.

The following deviation from, additions to, or exclusions from the test specifications have been made. See Annex C.

China Telecommunication Technology Labs.(CTTL) authorizes the applicant or manufacturer (see section 1.4) to reproduce this report provided, and the test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTTL Mr. He Guili.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. CTTL accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

1.2 Testers

Name: Li Peng

Position: Engineer

Signature:




Technical responsibility for area of testing:

Name: Ma Zhiguo

Position: Manager

Date: 2012-11-15

Signature:



1.3 Testing Laboratory information

1.3.1 Location

Name: China Telecommunication Technology Labs.

Address: No. 11, Yue Tan Nan Jie, Xi Cheng District

BEIJING

P. R. CHINA, 100083

Tel: +86 10 68094053

Fax: +86 10 68011404

Email: emc@chinattl.com

1.3.2 Details of accreditation status

Accredited by: China National Accreditation Service for Conformity
Assessment (CNAS)

Registration number: CNAS Registration No. CNAS L0570

Standard: ISO/IEC 17025

1.3.3 Test location, where different from section 1.3.1

Name: -----

Street: -----

City: -----

Country: -----

Telephone: -----

Fax: -----

Postcode: -----

1.4 Details of applicant or manufacturer

1.4.1 Applicant

Name: Cellon Communications Technology(ShenZhen)
Co., Ltd.
Address: 13/F, Skyworth Building C Gaoxin S. Ave. 1st,
High-Tech industrial Park NanShan, ShenZhen
Country: CHINA
Telephone: +86-755-86365704
Fax: +86-755-86365686
Contact: Maggie Xu
Email: maggie.xu@cellon.com

1.4.2 Manufacturer (if different from applicant in section 1.4.1)

Name: --
Address: --

1.4.3 Manufactory (if different from applicant in section 1.4.1)

Name: --
Address: --

2 Test Item

2.1 General Information

Manufacturer: Cellon Communications Technology(ShenZhen)
Co., Ltd.
Name: GSM QUAD BAND AND UMTS 850/1900
Model Number: C3560
Serial Number: --
Production Status: Product
Receipt date of test item: 2012-04-16
Transmitter Frequency range: GSM850: 824.2-848.8 MHz,
PCS1900: 1850.2-1909.8MHz
Receiver Frequency Range: GSM850: 869.2-893.8 MHz,
PCS1900: 1930.2-1989.8MHz
Bluetooth Frequency Range: 2400MHz~2480MHz
High Voltage Level: 4.2 V
Nominal Voltage Level: 3.8 V
Low Voltage Level: 3.4 V

2.2 Outline of EUT

E.U.T. is a GSM multi-mode mobile phone.

2.3 Modifications Incorporated in EUT

The EUT has not been modified from what is described by the brand name and unique type identification stated above.

2.4 Equipment Configuration

Equipment configuration list:

Item	Generic Description	Manufacturer	Type	Serial No.	Remarks
A	handset	Cellon Communications Technology(ShenZhen) Co., Ltd.	C3560	--	None
B	adapter	Aquilstar	CNR1218	--	None
C	battery	BAK	BTR380	--	None

2.5 Other Information

(a) Modulation is GMSK for GSM and GPRS, and 8PSK for EGPRS.

(b) Version of hardware and software

HW Version: A3560_MB_P1B

SW Version: A3560_1.0_Lab_Test_Only

(c) Battery information:

Nominal Voltage: 3.7 V

Capacity: 720 mAh

Test Report

3 Summary of Test Results

A brief summary of the tests carried out is shown as following.

GSM mode:		
FCC Specification Clause	Name of Test	Result
2.1051, 24.238, 22.917	Radiated Spurious Emission	Pass
22.913, 24.232	Output Power	Pass
15.107, 15.207	Conducted Emission	Pass
2.1049,22.917(b), 24.238(b)	Occupied Bandwidth	Pass
22.917(b), 24.238(b)	Emission Bandwidth	Pass
2.1055,22.355, 24.235	Frequency Stability	Pass
2.1057,22.917, 24.238	Conducted spurious emissions	Pass
22.917(b), 24.238(b)	Band Edge Compliance	Pass

GPRS mode:		
FCC Specification Clause	Name of Test	Result
2.1051, 24.238, 22.917	Radiated Spurious Emission	Pass
22.913, 24.232	Conducted Emission	Pass
15.107, 15.207	Occupied Bandwidth	Pass
2.1049,22.917(b), 24.238(b)	Emission Bandwidth	Pass
22.917(b), 24.238(b)	Frequency Stability	Pass
2.1055,22.355, 24.235	Conducted spurious emissions	Pass
2.1057,22.917, 24.238	Band Edge Compliance	Pass

EGPRS mode:		
FCC Specification Clause	Name of Test	Result
2.1051, 24.238, 22.917	Radiated Spurious Emission	Pass
22.913, 24.232	Conducted Emission	Pass
15.107, 15.207	Occupied Bandwidth	Pass
2.1049,22.917(b), 24.238(b)	Emission Bandwidth	Pass
22.917(b), 24.238(b)	Frequency Stability	Pass
2.1055,22.355, 24.235	Conducted spurious emissions	Pass
2.1057,22.917, 24.238	Band Edge Compliance	Pass

FCC Specification Clause	Name of Test	Result
2.1047	Modulation characteristics	Pass

4 Test Results of mode

4.1 Radiated Spurious Emission

Specifications:	2.1051, 24.238, 22.917
Test conditions:	Ambient Temperature:15℃-35℃ Relative Humidity:30%-60% Air pressure: 86-106kPa
Operation Mode	TX on, channel 190 and 661
Test Results:	Pass

Limit Level Construction:

According to Part 24.238 (a), i.e., Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB, so the limit level is:
 $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$

Limits for Radiated spurious emissions(UE)	
Frequency range	Limit Level / Resolution Bandwidth
30 MHz to 20000 MHz	-13dBm/1MHz

Test Setup:

The EUT was placed in an anechoic chamber, see figure SP. The Wireless Communications Test Set was used to set the TX channel and power level and modulate the TX signal with different bit patterns. The test was done using an automated test system, where all test equipments were controlled by a computer.

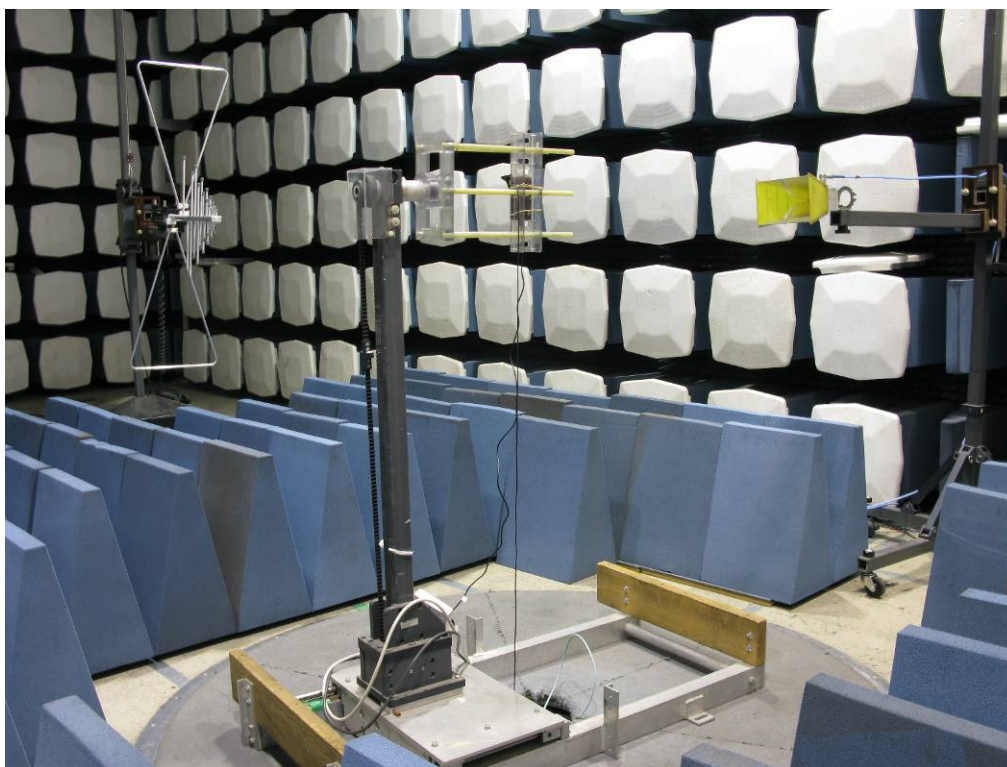


Figure SP

Test Method:

The measurement was performed accordance with section 2.2.12 of TIA-603-C-2004: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.


- 1 The maximum spurious emissions were searched by turning the azimuth of the turntable, shifting the polarization of the measuring antenna and changing the pose of the EUT.
- 2 Levels of EUT's transmitter harmonics and suspicious signals were recorded.
- 3 The recorded levels were corrected in the automated test system with the correction factors given by a substitution calibration made before the measurement.
- 4 The corrected values of radiated spurious emissions indicated as EIRP are reported.

Note:

- 1 The investigated ARFCNs are 190 (836.6 MHz) and 661 (1880.0 MHz).
- 2 The investigated frequency range is 30 MHz to the 10th harmonic of the highest Frequency generated within the equipment.

Test Results for GSM mode:


GSM850 Tx 30-3GHz Test

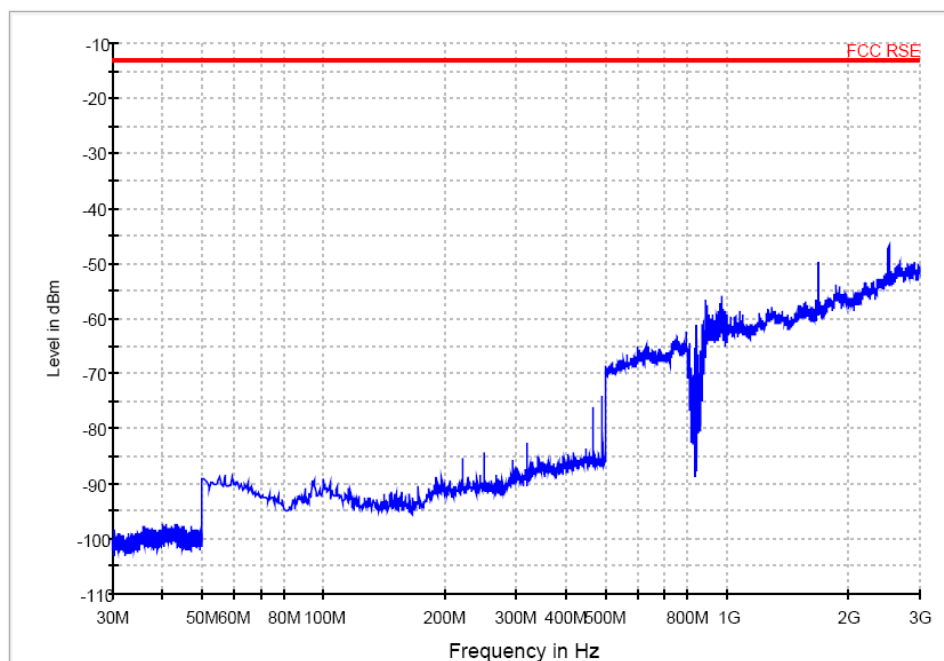

— FCC RSE LimitLine — Preview Result 1

Channel 190 for 850MHz – 30MHz to 3GHz


GSM850 Tx 3-12.75GHz-FCC Test

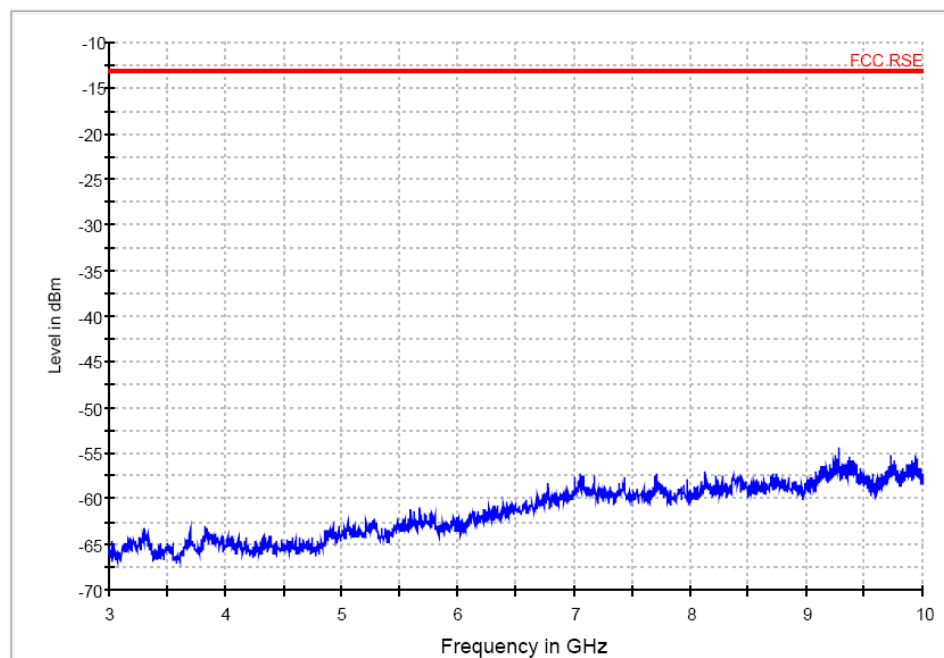

— FCC RSE LimitLine — Preview Result 1

Channel 190 for 850MHz – 3GHz to 12.75GHz


GSM1900 Tx 30-3GHz Test

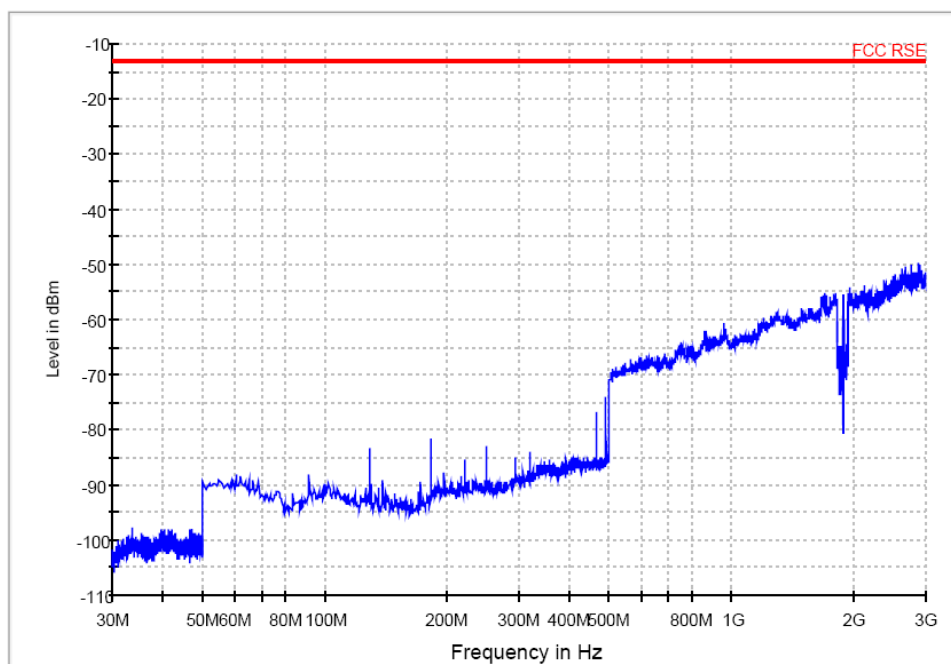

— FCC RSE — Preview Result 1

Channel 661 for 1900MHz– 30MHz to 3GHz

GSM1900 Tx 3-20GHz-FCC Test

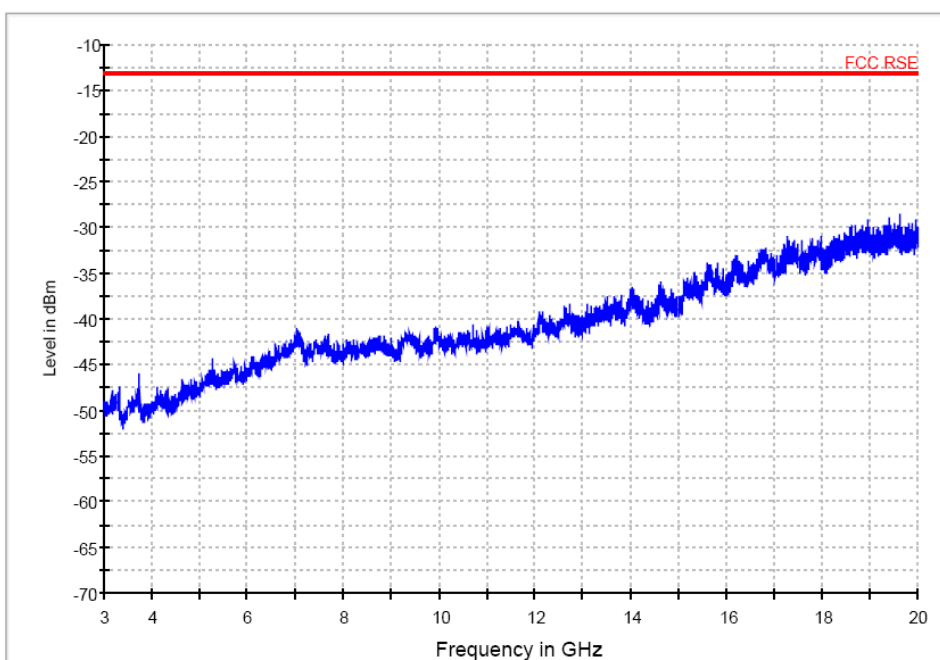

— FCC RSE LimitLine — Preview Result 1

Channel 661 for 1900MHz– 3GHz to 20GHz


4.2 Output Power

4.2.1. Conducted Output Power

Specifications:	22.913, 24.232
Test conditions:	Ambient Temperature:15℃-35℃ Relative Humidity:30%-60% Air pressure: 86-106kPa
Operation Mode	TX on, channel 128, 190, 251, 512, 661 and 810
Test Results:	Pass

Test Setup:

During the process of testing, the EUT was controlled via the Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by Rhode & Schwarz EMI test receiver (ES126).

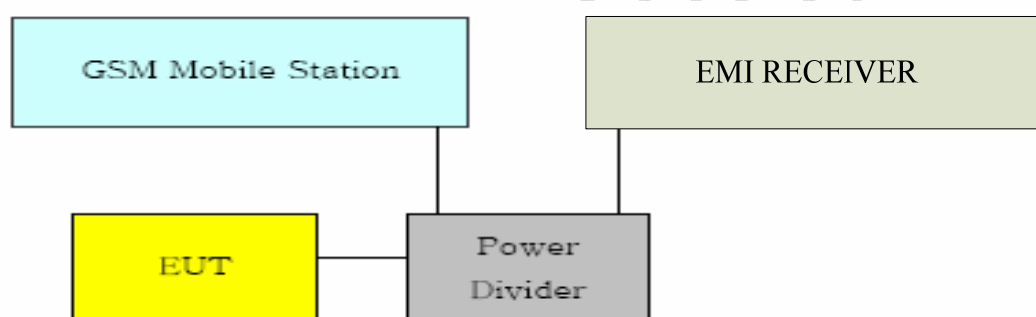

Test Method

- 1) The EUT was coupled to the EMI test receiver analyzer mode and the base station simulator through a power divider. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables the test system is calibrated to correct the readings.
- 2) The spectrum analyzer was set to Max-peak Detector function and Maximum hold mode.
- 3) The resolution bandwidth of the spectrum analyzer was comparable to the emission bandwidth.

Note: --

Test Result for GSM mode:**GSM 850 band:****Limit**

	Nominal Peak Output Power [dBm]
GSM	33 (2W)
GPRS	33 (2W)
EGPRS	27(0.5W)

GSM

ARFCN	Output Power [dBm]
128	32.66
190	32.47
251	32.31

GPRS

ARFCN	Output Power (4XTslot) [dBm]
128	27.35
190	27.06
251	26.90

EGPRS

ARFCN	Output Power (4XTslot) [dBm]
128	27.30
190	27.05
251	26.89

GSM 1900 band:**Limit**

	Nominal Peak Output Power [dBm]
GSM	30 (1W)
GPRS	30 (1W)
EGPRS	26 (0.4W)

GSM

ARFCN	Output Power [dBm]
512	29.81
661	29.82
810	29.32

GPRS

ARFCN	Output Power (4XTslot) [dBm]
512	24.59
661	24.47
810	23.85

EGPRS

ARFCN	Output Power (4XTslot) [dBm]
512	24.56
661	24.45
810	23.83

4.2.2. Radiated Output Power

Test Setup:

The EUT was set in an anechoic chamber, which is connected to the Wireless Communications Test Set located outside the chamber over the air. The test was done using an automated test system, where all test equipments were controlled by a computer.

Test Method

The measurement was performed accordance with section 2.2.17 of ANSI/TIA-603-B-2002: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.

1 The maximum power was searched by turning the azimuth of the turntable, shifting the polarization of the measuring antenna and changing the pose of the EUT.

2 The measured levels are EIRP values corrected in the automated test system with the correction factors given by a substitution calibration made before the measurement. The calibration is made separately for vertical and horizontal polarization and the system uses different correction factors depending on the measuring antenna polarization.

3 The corrected maximum levels were reported for EIRP values, and ERP values can be calculated from EIRP values.

Note:

$ERP\text{ dBm} = EIRP\text{ dBm} - 2.15\text{dB}$.

ERP Value for GSM 850 band mode:

Limits

	Burst Peak ERP (dBm)
GSM	≤ 38.45 (7W)
GPRS	≤ 38.45 (7W)
EGPRS	≤ 38.45 (7W)

GSM

ARFCN	Frequency [MHz]	ERP [dBm]
128	824.228	25.88
190	836.553	27.65
251	848.777	28.56

GPRS

ARFCN	Frequency [MHz]	ERP [dBm]
128	824.128	24.10
190	836.553	23.82
251	848.777	24.01

EGPRS

ARFCN	Frequency [MHz]	ERP [dBm]
128	824.128	22.89
190	836.553	22.81
251	848.877	23.12

EIRP Value for GSM 1900 band mode:**Limits**

	Burst Peak EIRP (dBm)
GSM	≤ 33 (2W)
GPRS	≤ 33 (2W)
EGPRS	≤ 33 (2W)

GSM

ARFCN	Frequency [MHz]	EIRP [dBm]
512	1850.100	29.60
661	1880.080	28.76
810	1909.739	28.62

GPRS

ARFCN	Frequency [MHz]	EIRP [dBm]
512	1850.100	25.84
661	1880.080	24.14
810	1909.899	23.46

EGPRS

ARFCN	Frequency [MHz]	EIRP [dBm]
512	1850.100	26.81
661	1879.919	26.07
810	1909.739	23.83

4.3 Conducted Emission

Specifications:	15.107, 15.207
Test conditions:	Ambient Temperature:15℃-35℃ Relative Humidity:30%-60% Air pressure: 86-106kPa
Operation Mode	TX on, channel 190 and 661
Test Results:	Pass

Test Method


The Measure procedure is TIA-603-C-2004 is used. Conducted Emission is measured with travel charger.

Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 - 30	60	50
Note: * Decreases with logarithm of the frequency		

Test Result GSM 850MHz


ESH2-Z5 Scan-FCC

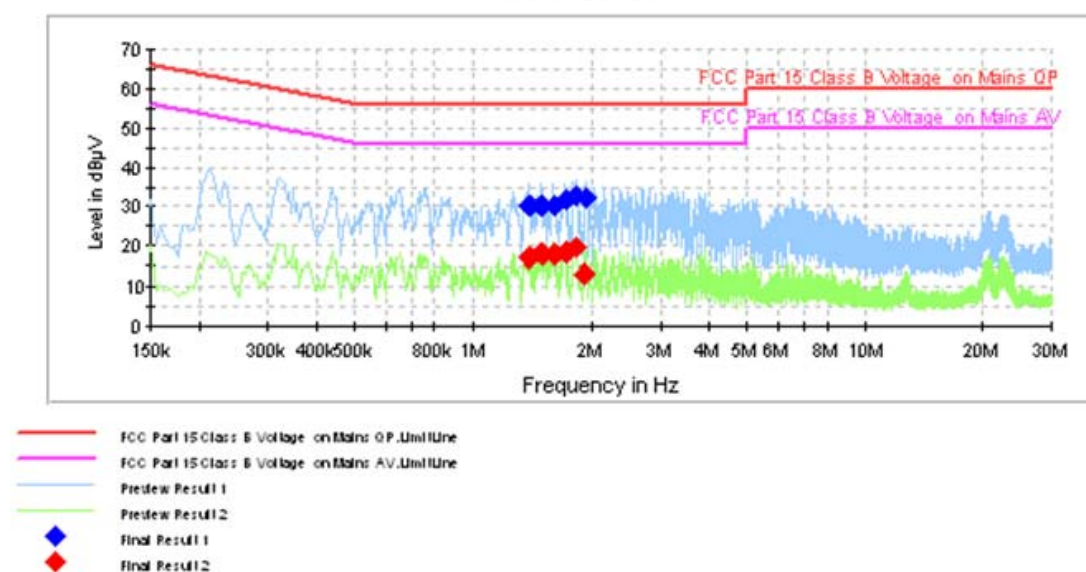

Frequency (MHz)	QuasiPeak (dB μV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
1.387500	30.1	FLO	L1	10.1	25.9	56.0
1.495500	30.1	FLO	L1	10.1	25.9	56.0
1.612500	30.3	FLO	L1	10.1	25.7	56.0
1.711500	31.8	FLO	L1	10.1	24.2	56.0
1.819500	32.9	FLO	L1	10.1	23.1	56.0
1.927500	32.1	FLO	L1	10.1	23.9	56.0

Frequency (MHz)	CAverage (dB μV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
1.387500	17.0	FLO	L1	10.1	29.0	46.0
1.495500	17.9	FLO	L1	10.1	28.1	46.0
1.612500	18.1	FLO	L1	10.1	27.9	46.0
1.711500	18.7	FLO	L1	10.1	27.3	46.0
1.819500	19.5	FLO	L1	10.1	26.5	46.0
1.918500	13.2	FLO	N	10.1	32.8	46.0

GSM 1900MHz

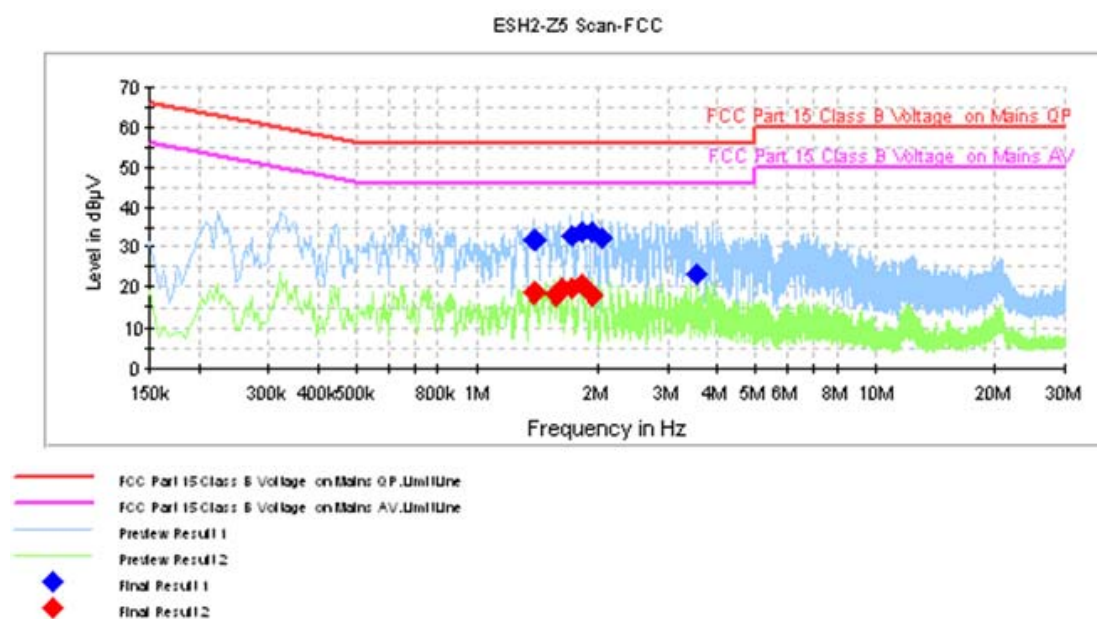

Frequency (MHz)	QuasiPeak (dB μV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
1.392000	31.6	FLO	L1	10.1	24.4	56.0
1.716000	32.7	FLO	L1	10.1	23.3	56.0
1.833000	33.6	FLO	L1	10.1	22.4	56.0
1.932000	33.6	FLO	L1	10.1	22.4	56.0
2.040000	32.2	FLO	L1	10.1	23.8	56.0
3.543000	23.2	FLO	N	10.2	32.8	56.0

Frequency (MHz)	CAverage (dB μV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
1.392000	18.4	FLO	L1	10.1	27.6	46.0
1.558500	17.9	FLO	L1	10.1	28.1	46.0
1.617000	19.5	FLO	L1	10.1	26.5	46.0
1.716000	19.4	FLO	L1	10.1	26.6	46.0
1.824000	20.5	FLO	L1	10.1	25.5	46.0
1.923000	18.0	FLO	L1	10.1	28.0	46.0

4.4 Occupied bandwidth

Specifications:	2.1049,22.917(b),24.238(b)
Operation Mode	TX on, channel 128, 190, 251, 512, 661 and 810
Test Results:	Pass

Test Setup

The situation under which maximum EIRP values were found in the measurement of the radiated RF power output was used to determine the 99% occupied bandwidth. The Wireless Communications Test Set was used to set the TX channel, power level and modulation.

Test Method


The 99% occupied bandwidth was calculated from the spectrum analyzer. Markers in the spectrum analyzer were then placed between the calculated frequencies to show the calculated 99% power band.

Note: --

Results data of GSM mode:


EUT channel	99% occupied bandwidth [kHz]
128	248.40
190	241.99
251	241.98
512	243.59
661	245.19
810	246.79

Graphical results for GSM mode:

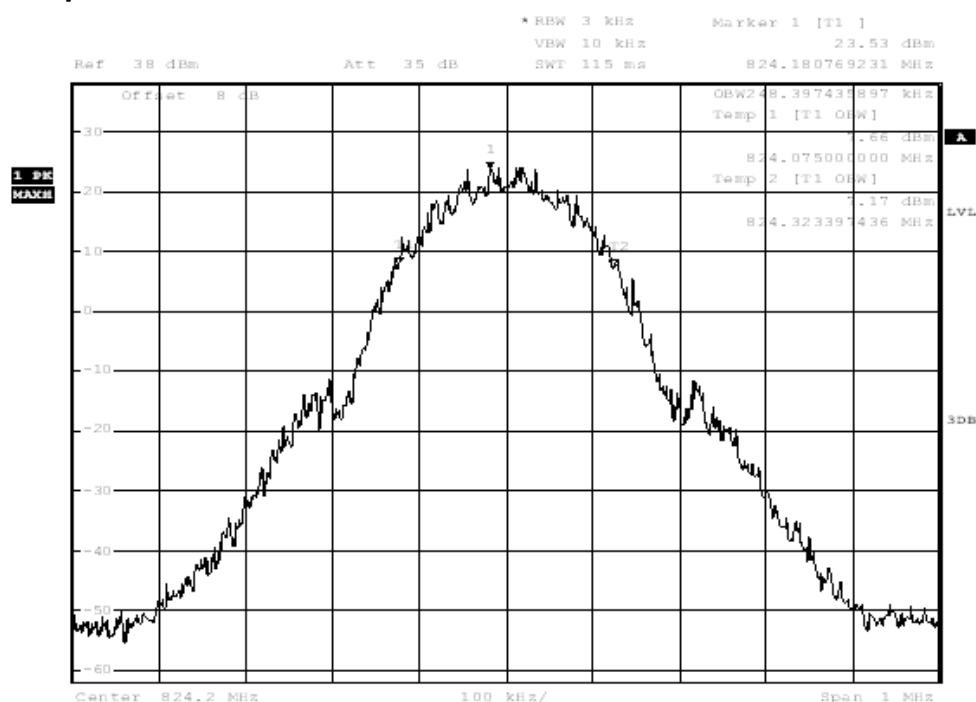

Date: 19.APR.2012 17:34:10


Channel 128

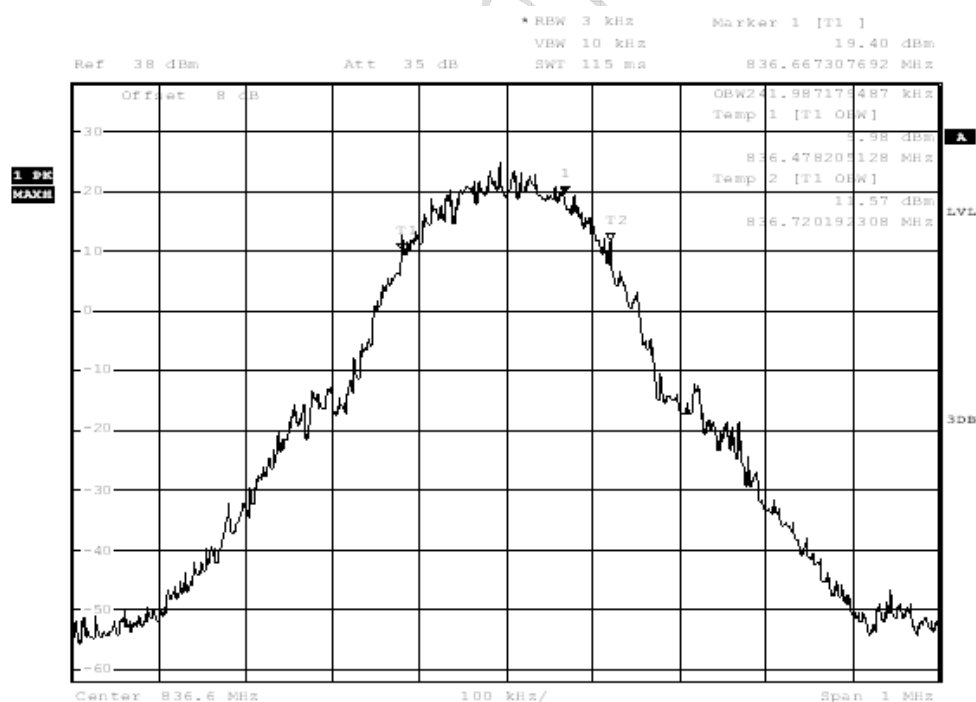

Date: 19.APR.2012 17:34:57


Channel 190

I12GWD760-RF-2G

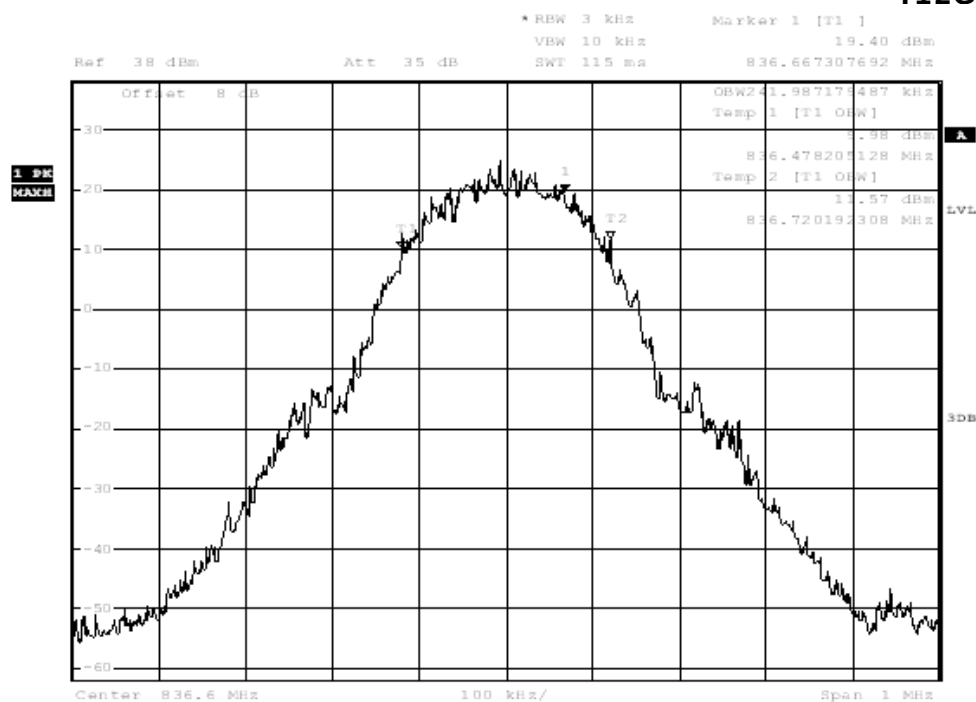

Date: 19.APR.2012 17:34:57


Channel 251

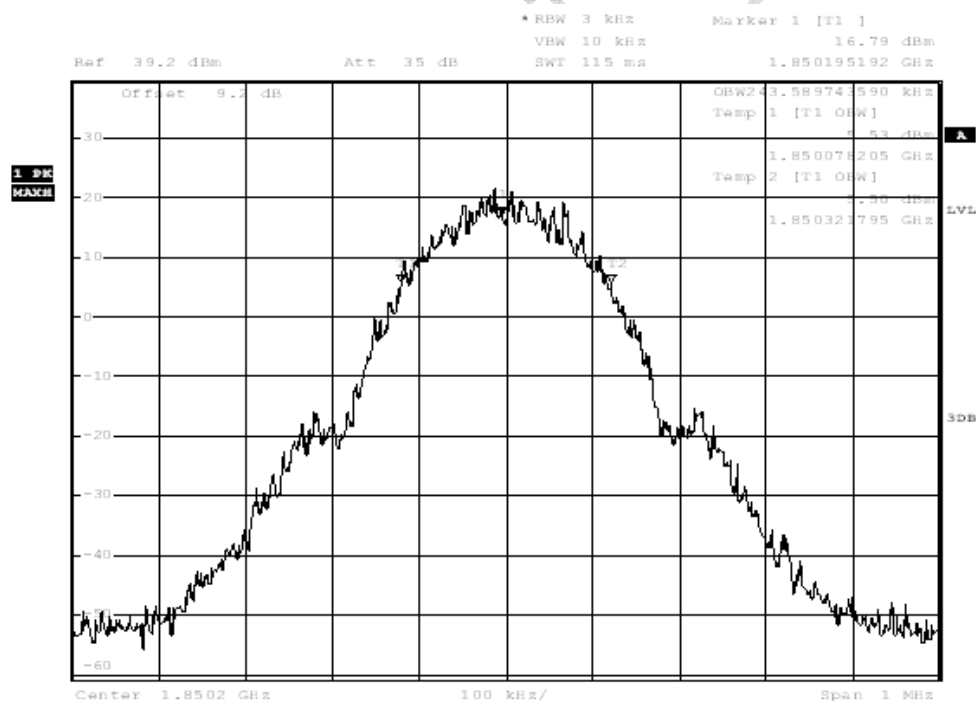

Date: 19.APR.2012 19:28:38


Channel 512

I12GWD760-RF-2G

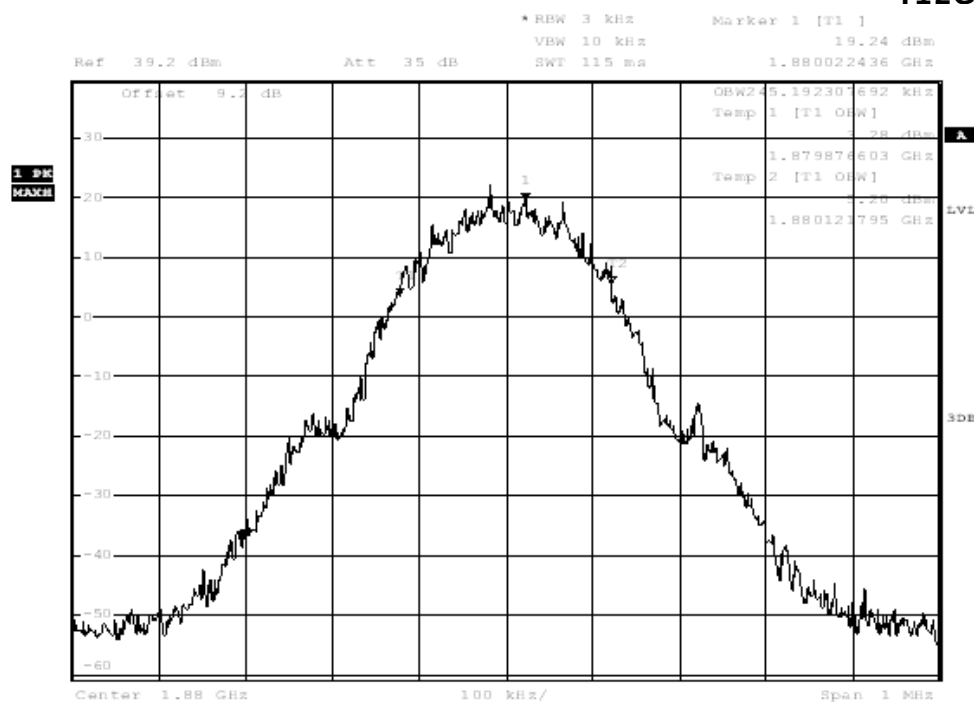

Date: 19. APR. 2012 19:29:24

Channel 661

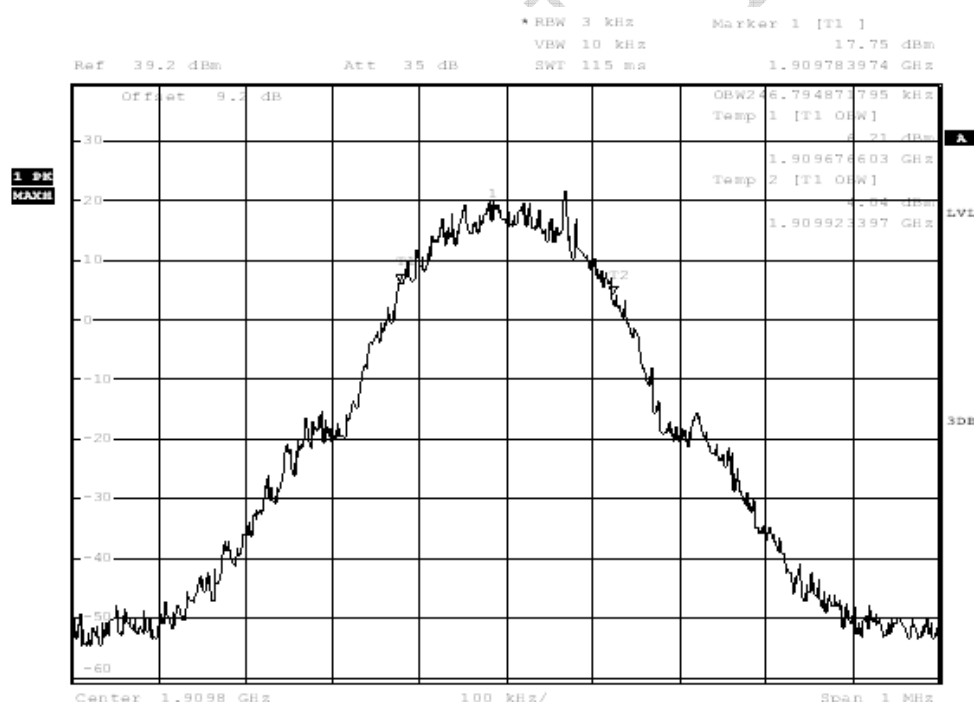


Date: 19. APR. 2012 19:30:11

Channel 810

Results data of GPRS mode:

EUT channel	99% occupied bandwidth [kHz]
128	246.79
190	243.59
251	243.59
512	246.79
661	243.59
810	243.59


Graphical results for GPRS mode:

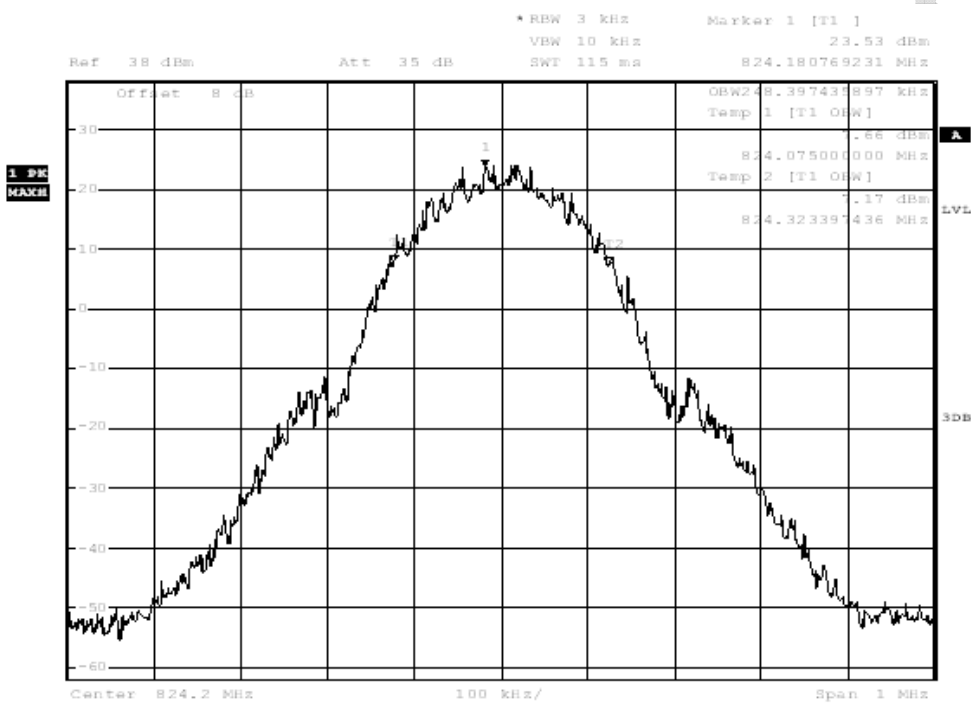

Date: 19.APR.2012 17:34:10


Channel 128

I12GWD760-RF-2G

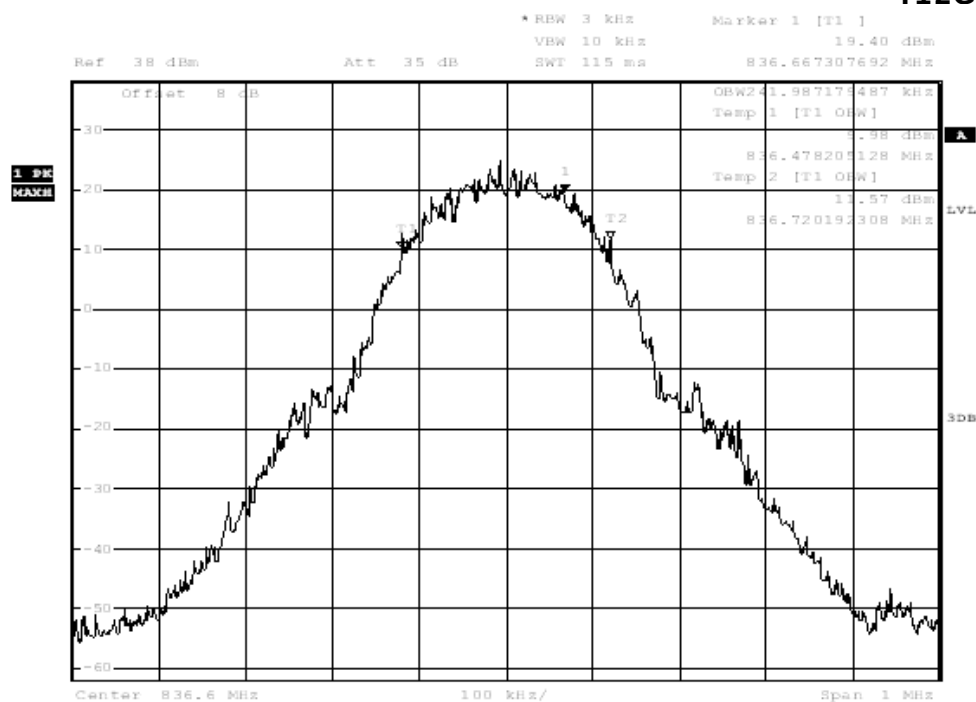

Date: 19.APR.2012 17:34:57


Channel 190

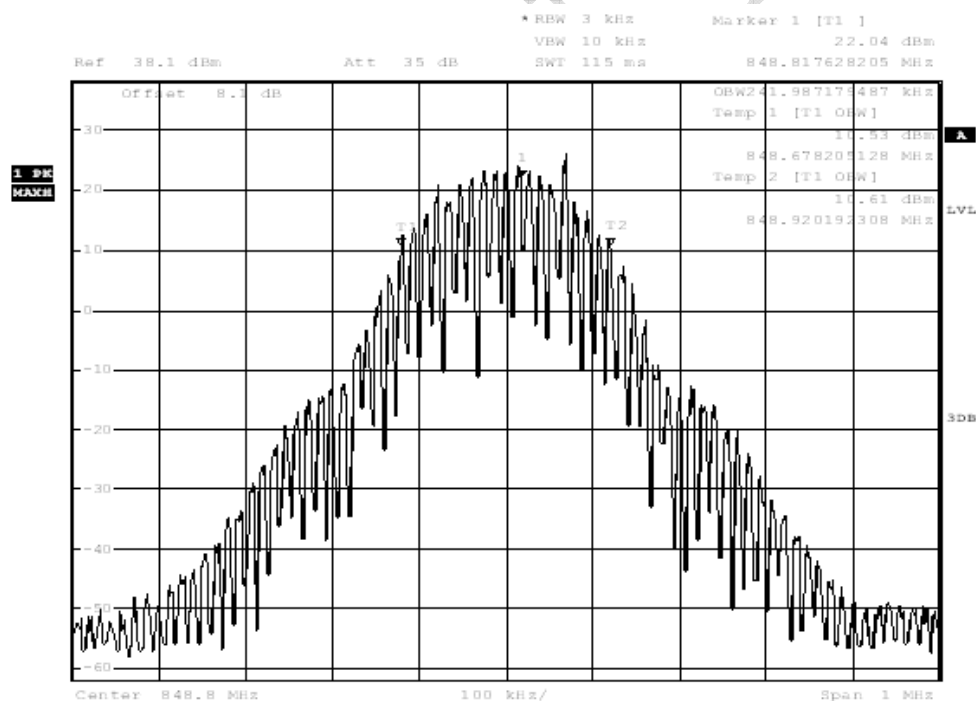

Date: 19.APR.2012 17:35:44


Channel 251

I12GWD760-RF-2G

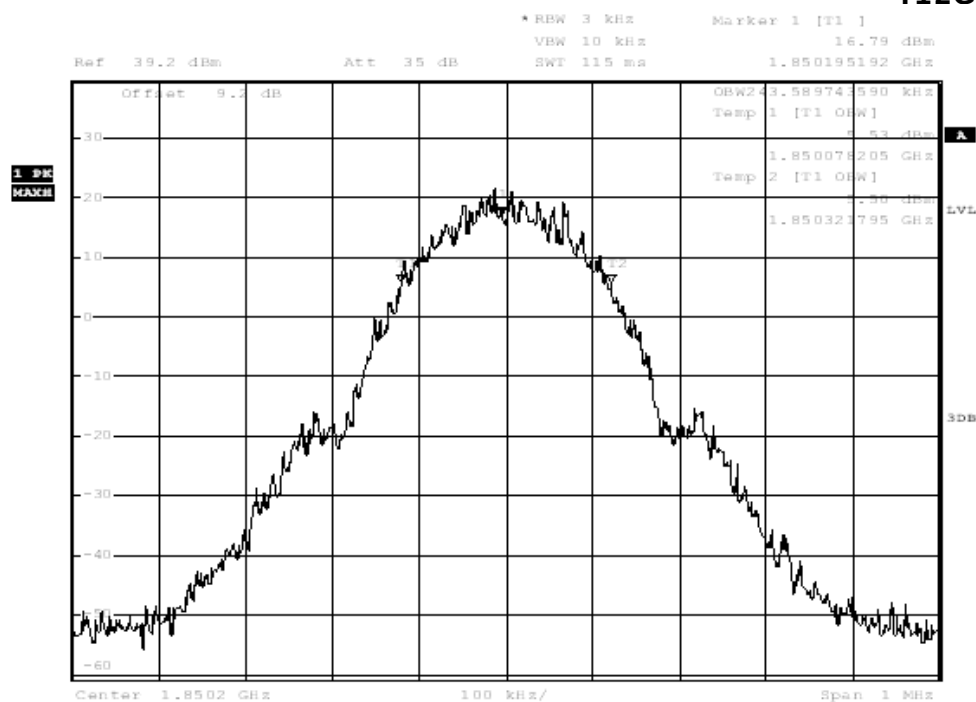

Date: 19. APR. 2012 19:28:38


Channel 512

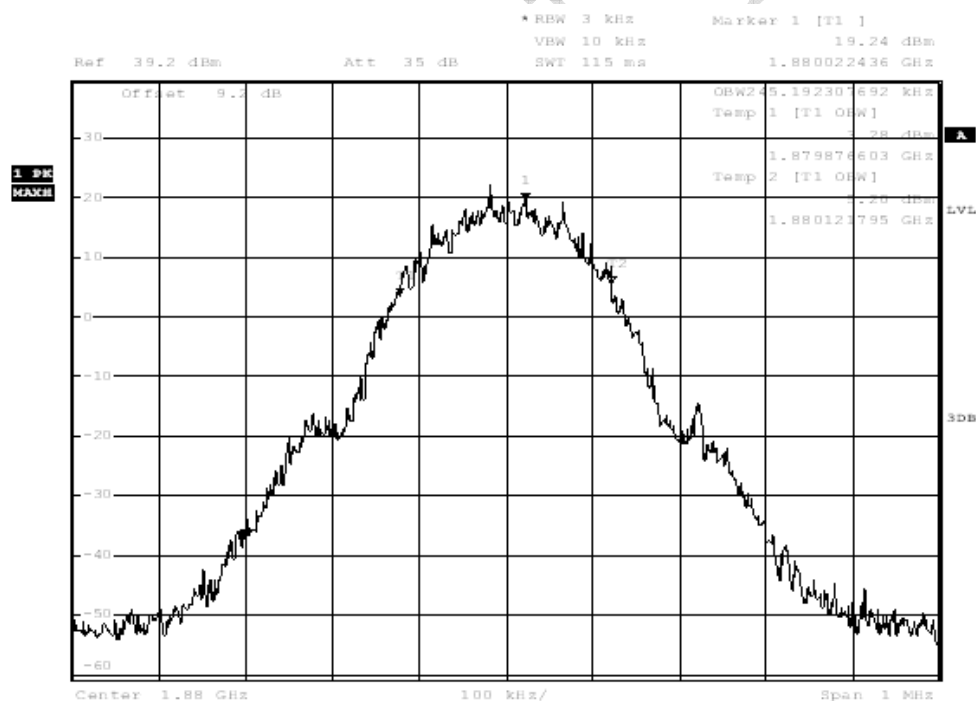

Date: 19. APR. 2012 19:29:24

Channel 661

I12GWD760-RF-2G

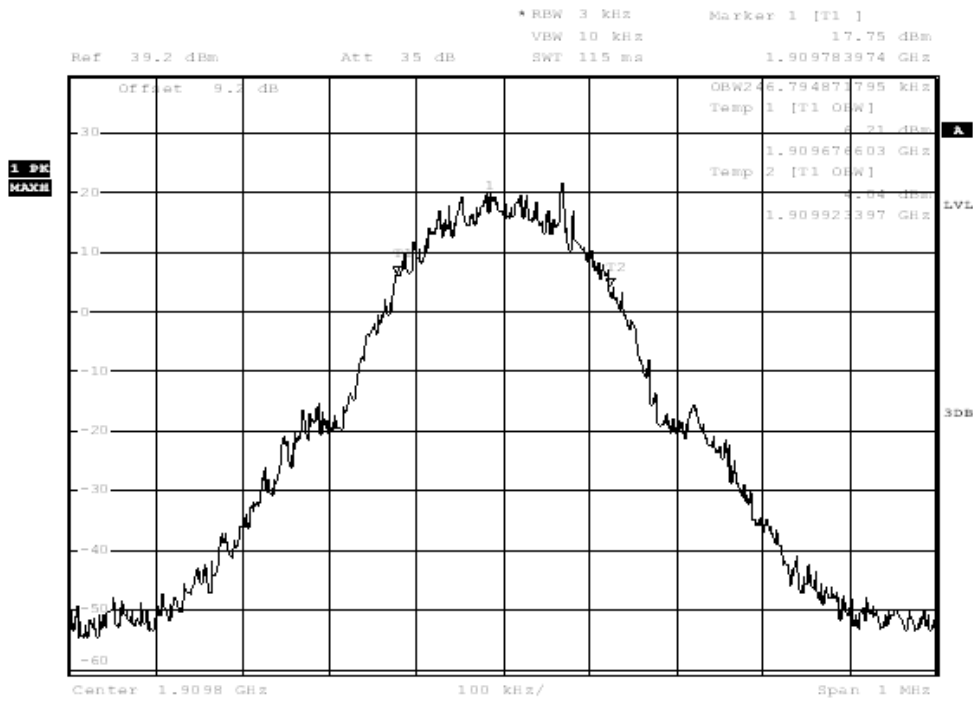


Date: 19.APR.2012 19:30:11

Channel 810

Results data of EGPRS mode:

EUT channel	99% occupied bandwidth [kHz]
128	245.19
190	245.19
251	241.99
512	245.19
661	243.59
810	245.19


Graphical results for EGPRS mode:

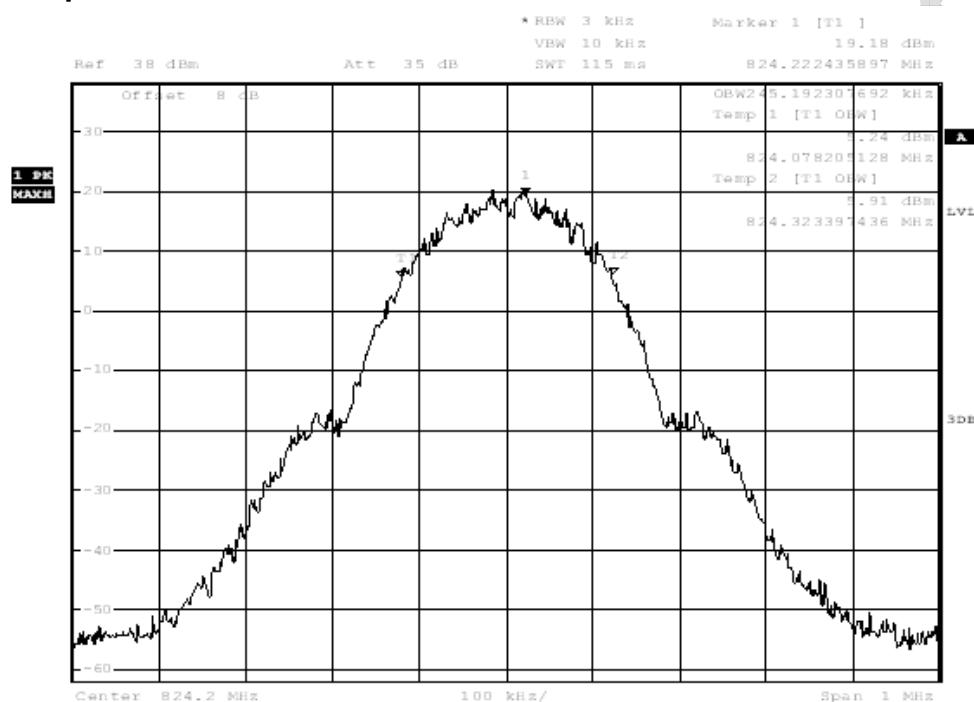

Date: 19.APR.2012 18:51:40


Channel 128

I12GWD760-RF-2G

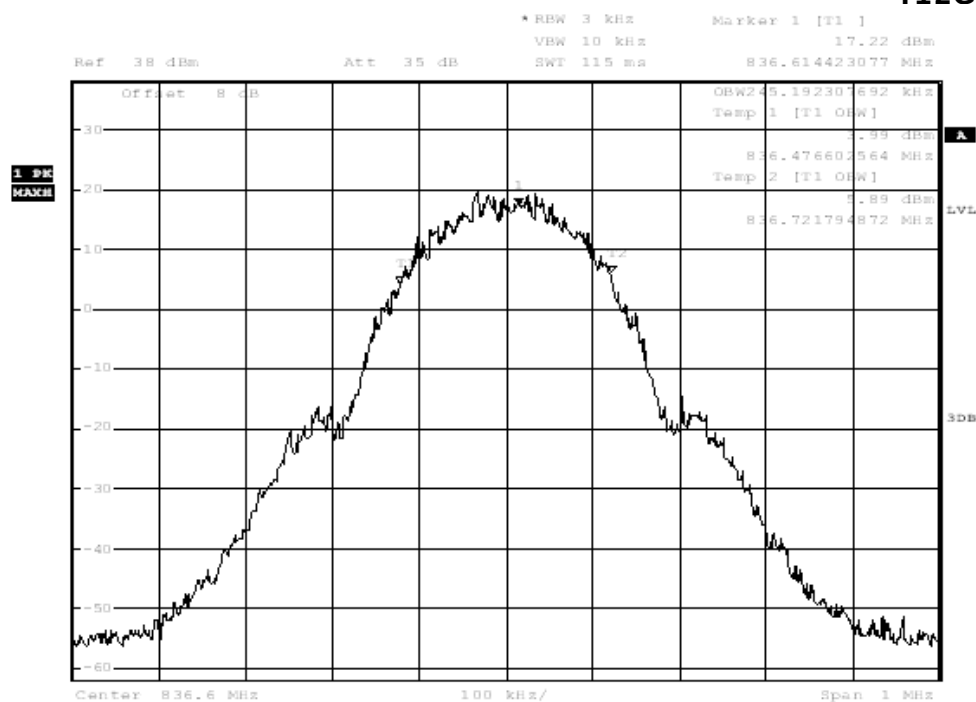

Date: 19.APR.2012 18:52:31


Channel 190

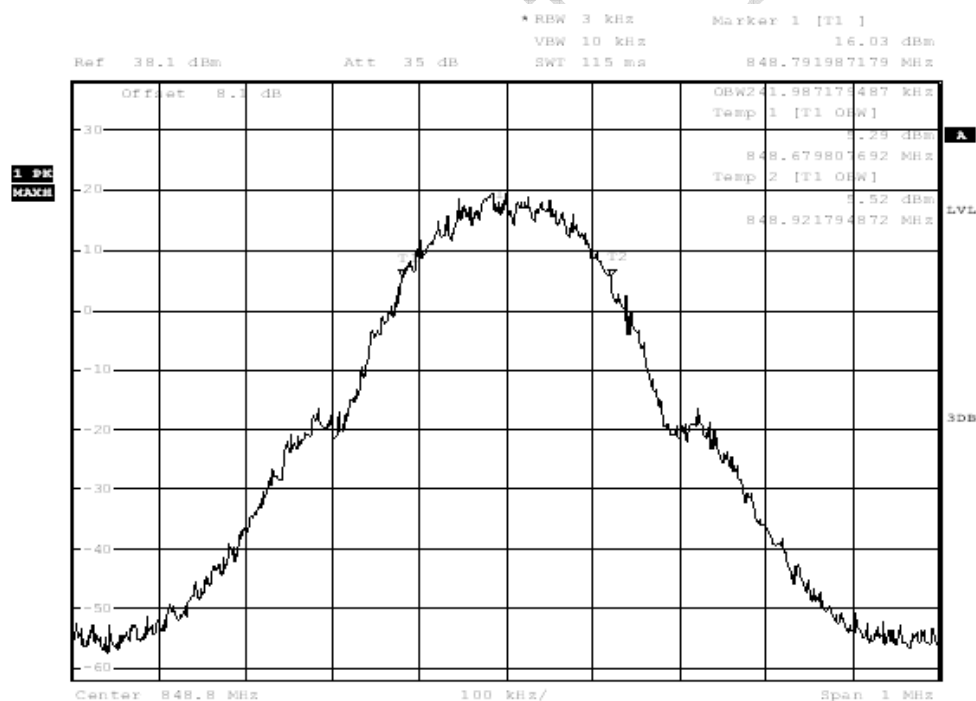

Date: 19.APR.2012 18:53:23


Channel 251

I12GWD760-RF-2G

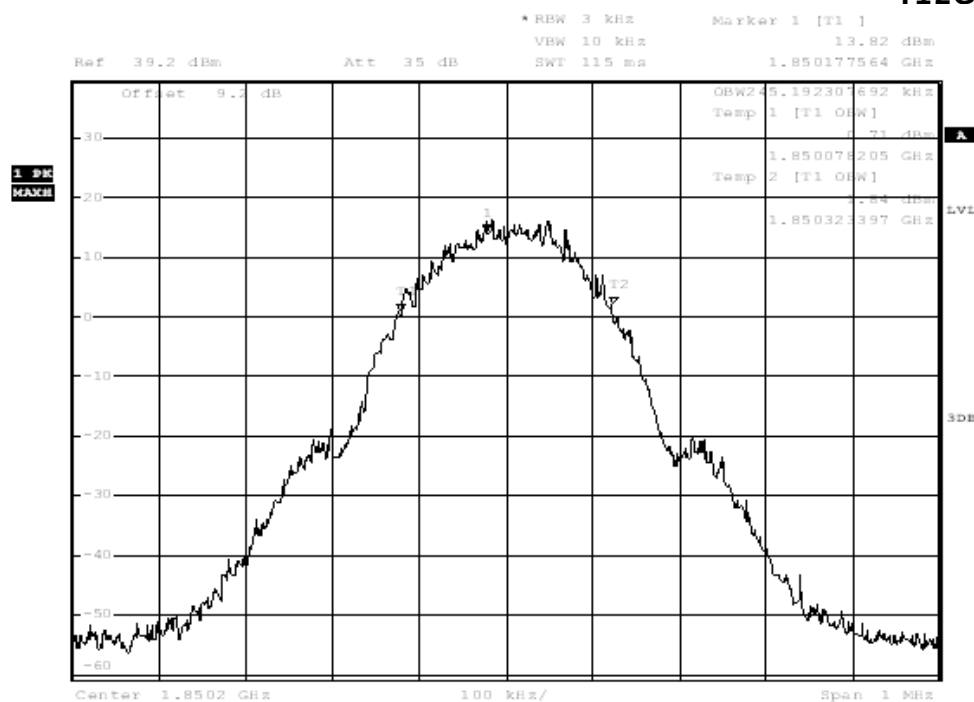

Date: 19. APR. 2012 20:39:34


Channel 512

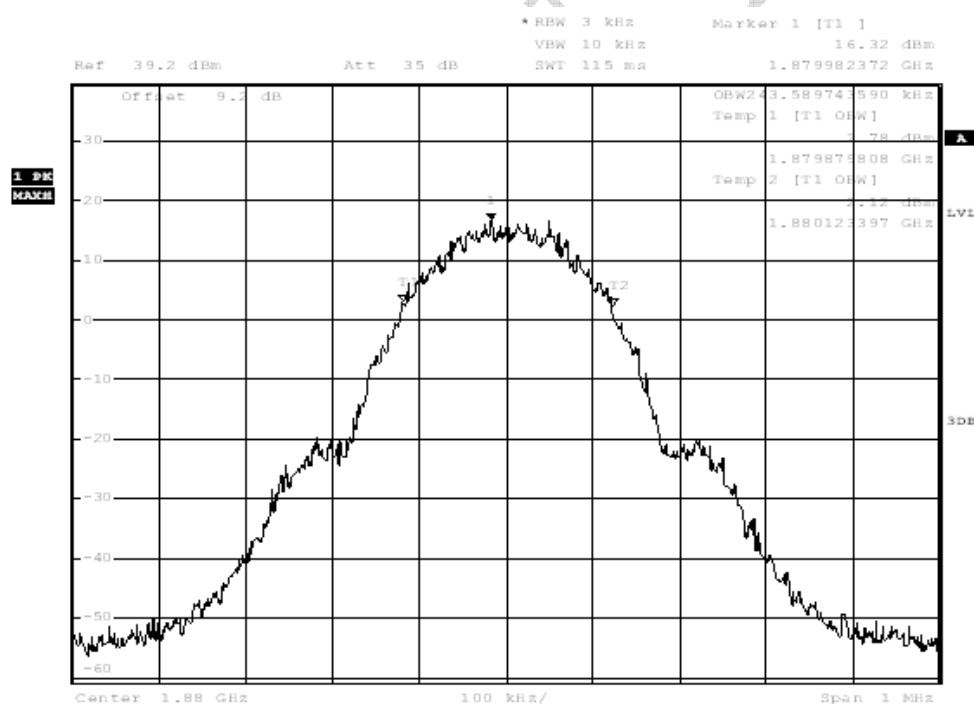

Date: 19. APR. 2012 20:40:25

Channel 661

I12GWD760-RF-2G

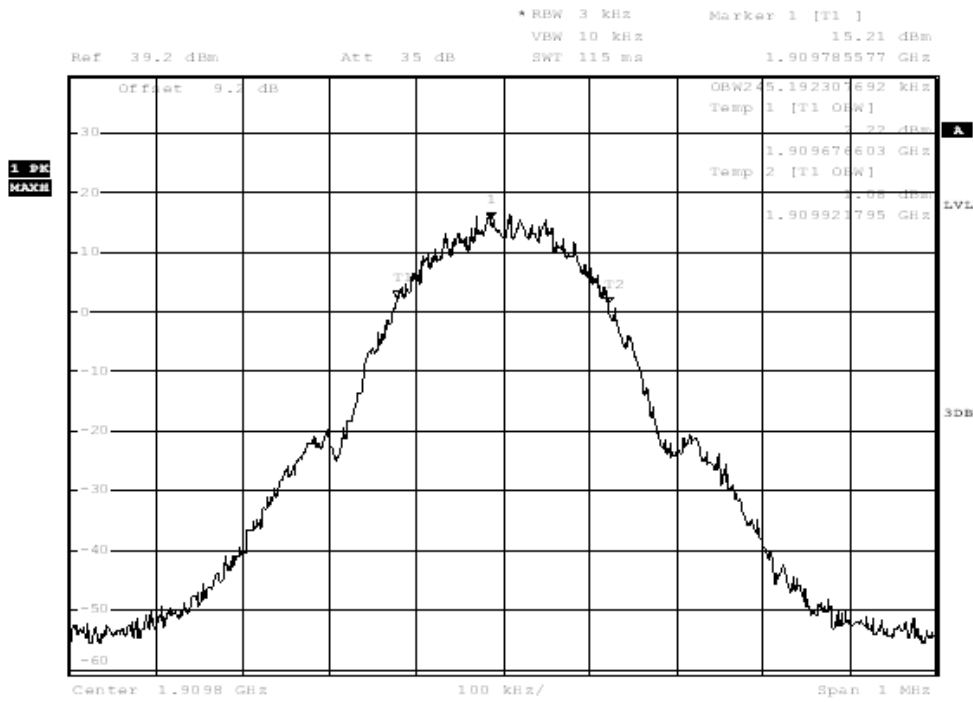

Date: 19.APR.2012 20:41:16

Channel 810

4.5 Emission bandwidth

Specifications:	22.917(b), 24.238(b)
Operation Mode	TX on, channel 128, 190, 251, 512, 661 and 810
Test Results:	Pass

Test Setup

The setup of emission bandwidth is similar to conducted emissions.

Test Method


The emission bandwidth measures -26dBc Spectrum analyzer plots from frequencies of PCS 1900 band and GSM 850 band.

Note: --

Results data of GSM mode:


EUT channel	-26dBc Emission bandwidth [kHz]
128	315.71
190	306.09
251	315.71
512	315.71
661	315.71
810	306.09

Graphical results for GSM mode:

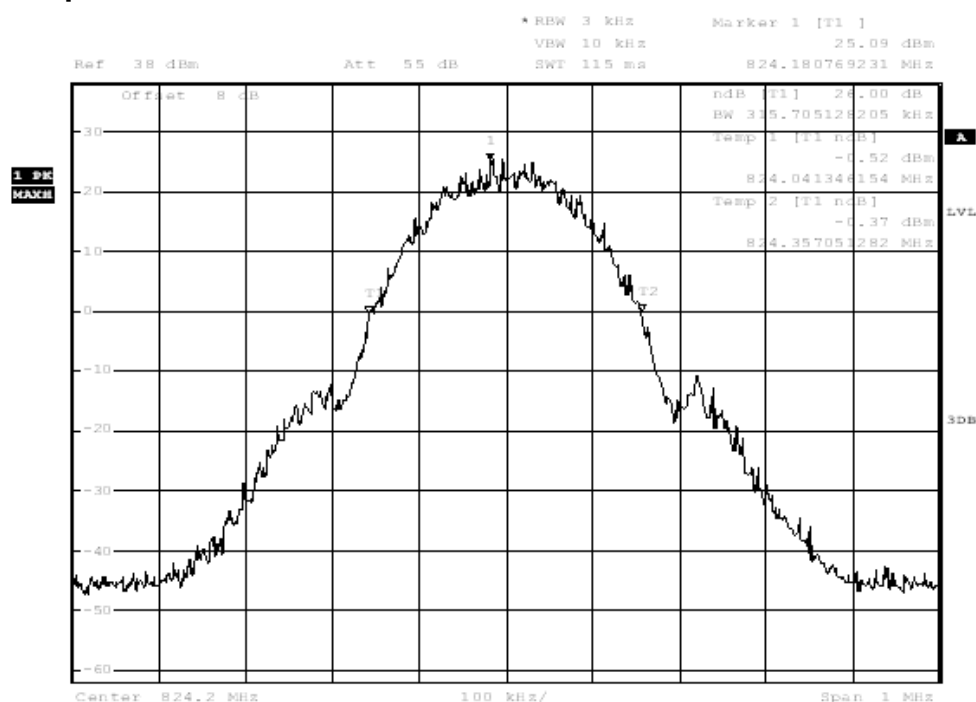

Date: 19.APR.2012 17:33:49


Channel 128

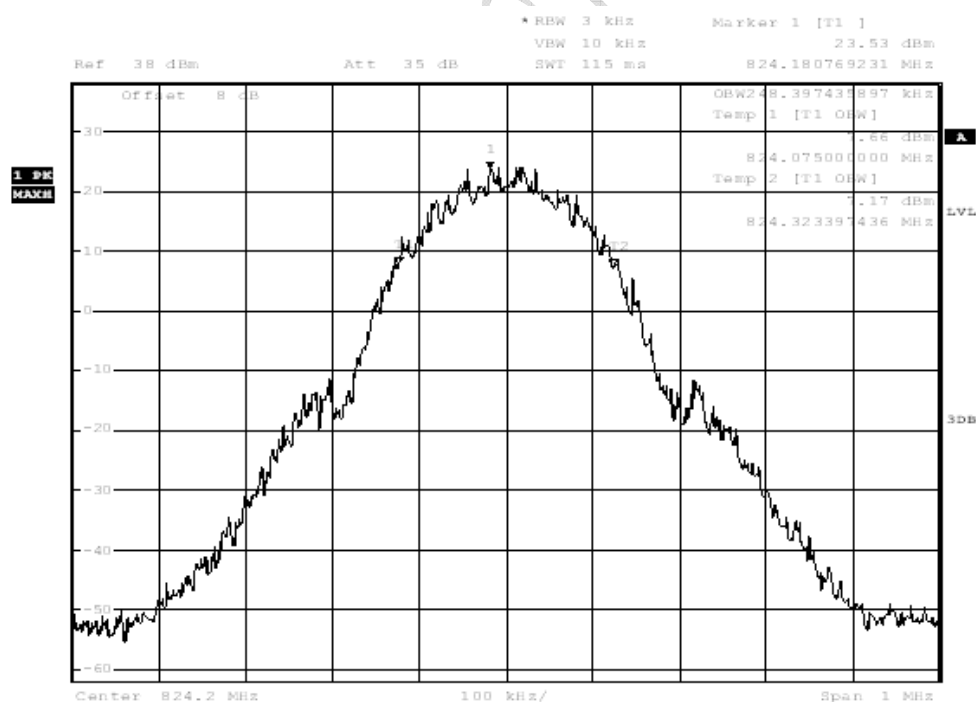

Date: 19.APR.2012 17:34:10


Channel 190

I12GWD760-RF-2G

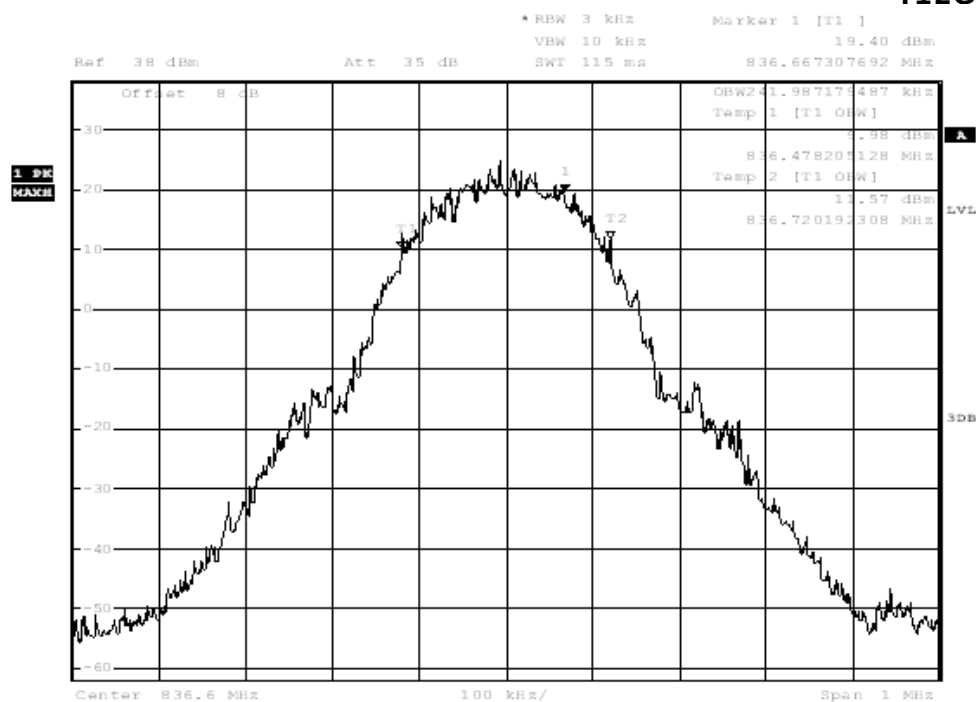

Date: 19.APR.2012 17:34:57


Channel 251

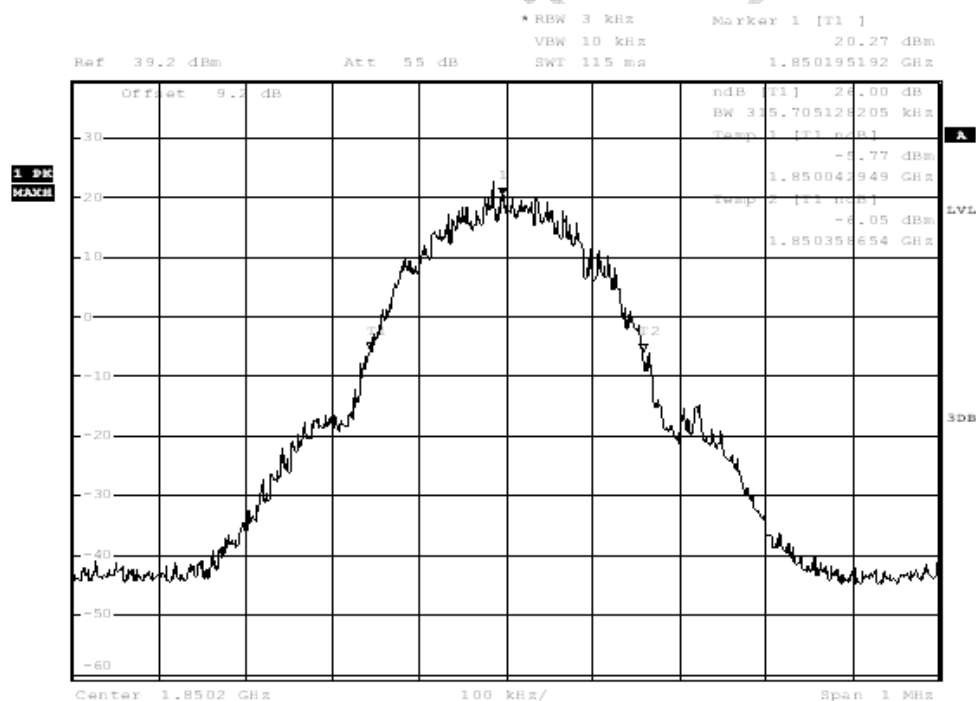

Date: 19.APR.2012 19:28:16


Channel 512

I12GWD760-RF-2G

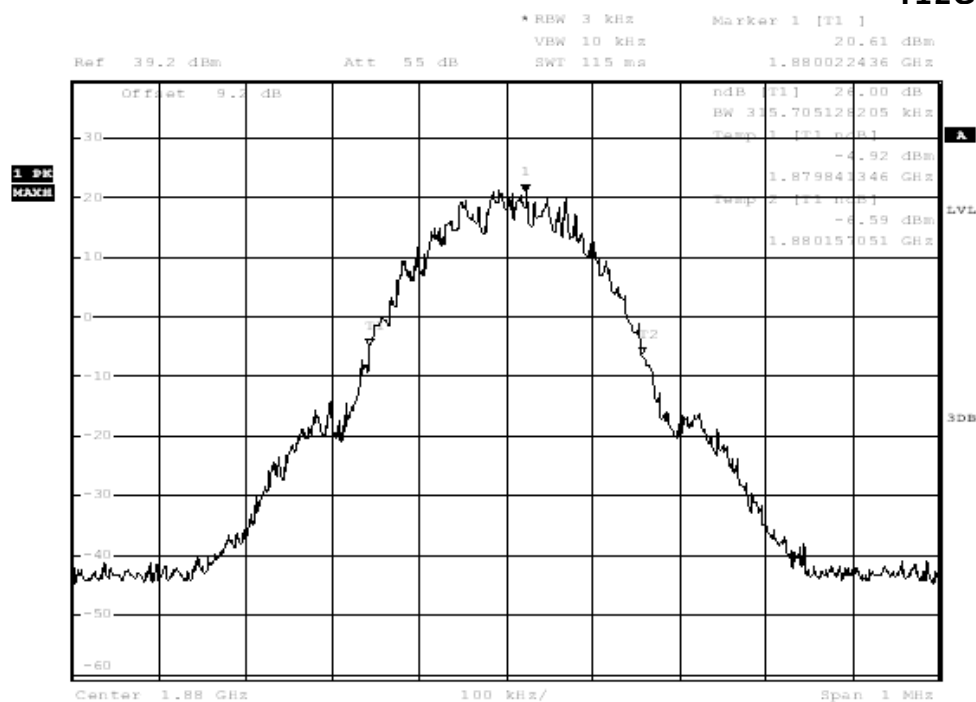

Date: 19. APR. 2012 19:29:03

Channel 661

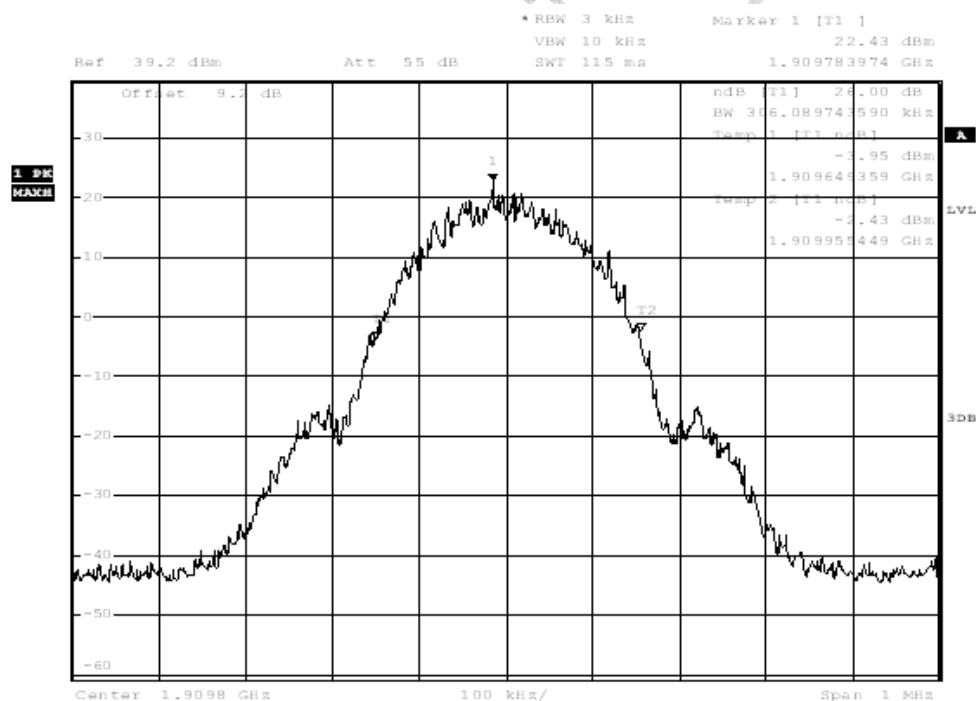


Date: 19. APR. 2012 19:29:50

Channel 810

Results data of GPRS mode:

EUT channel	-26dBc Emission bandwidth [kHz]
128	317.31
190	318.91
251	320.51
512	317.31
661	315.71
810	322.12


Graphical results for GPRS mode:

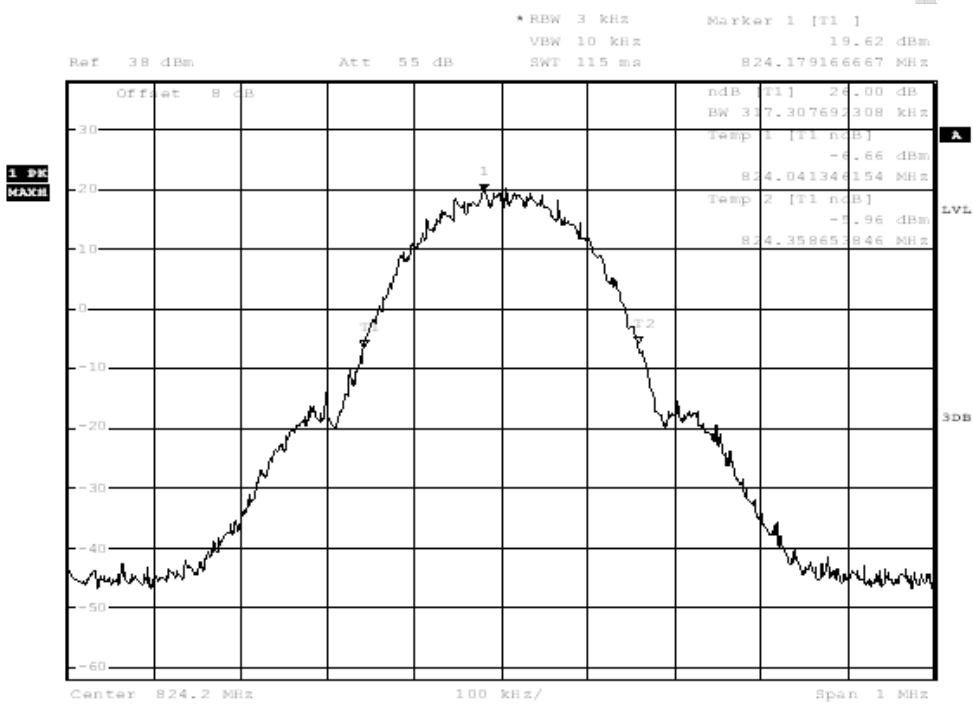

Date: 19.APR.2012 18:12:42


Channel 128

I12GWD760-RF-2G

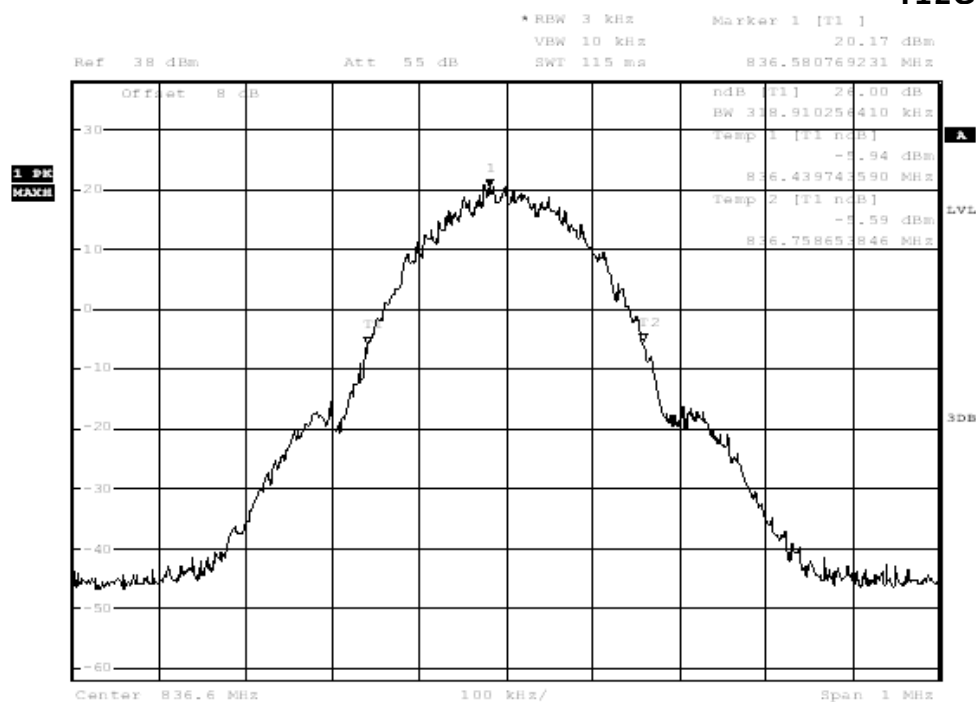

Date: 19.APR.2012 18:13:33


Channel 190

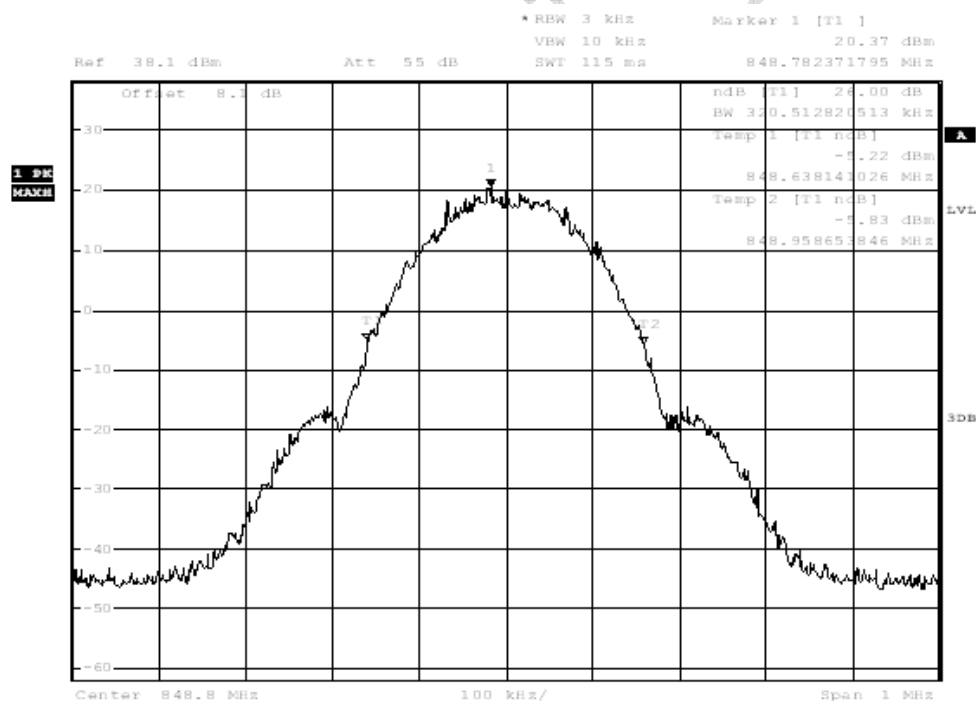

Date: 19.APR.2012 18:14:24


Channel 251

I12GWD760-RF-2G

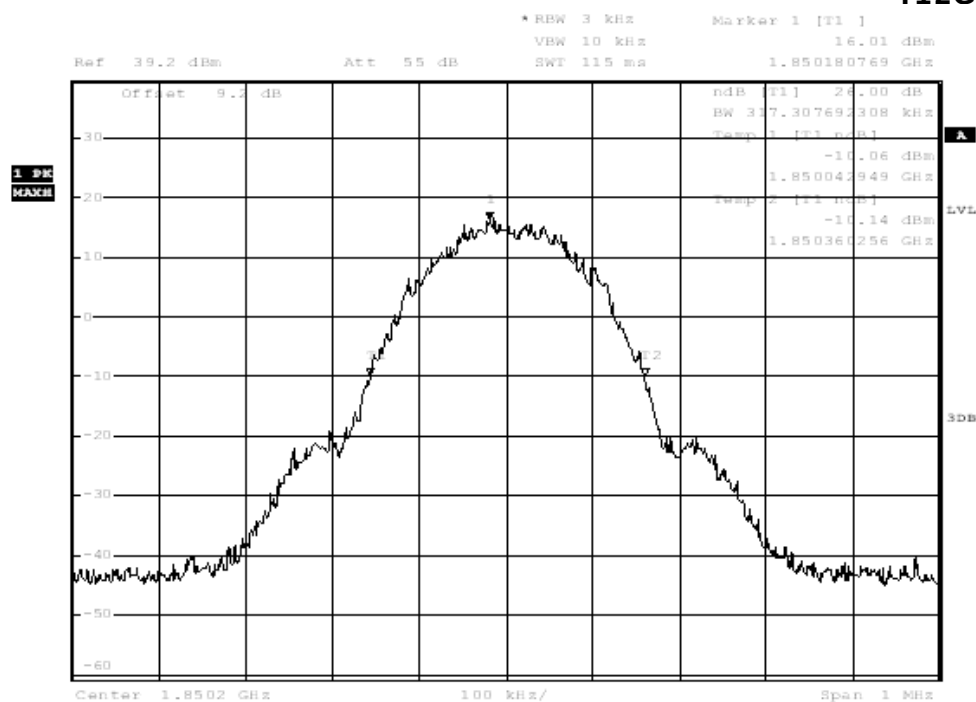

Date: 19.APR.2012 19:58:29


Channel 512

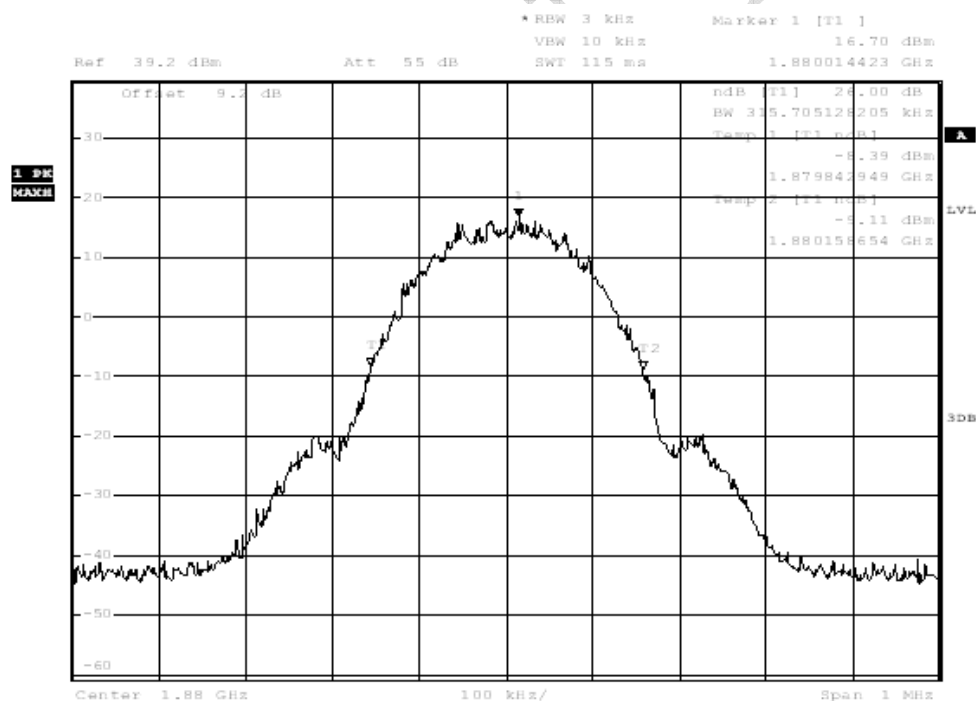

Date: 19.APR.2012 19:59:21

Channel 661

I12GWD760-RF-2G

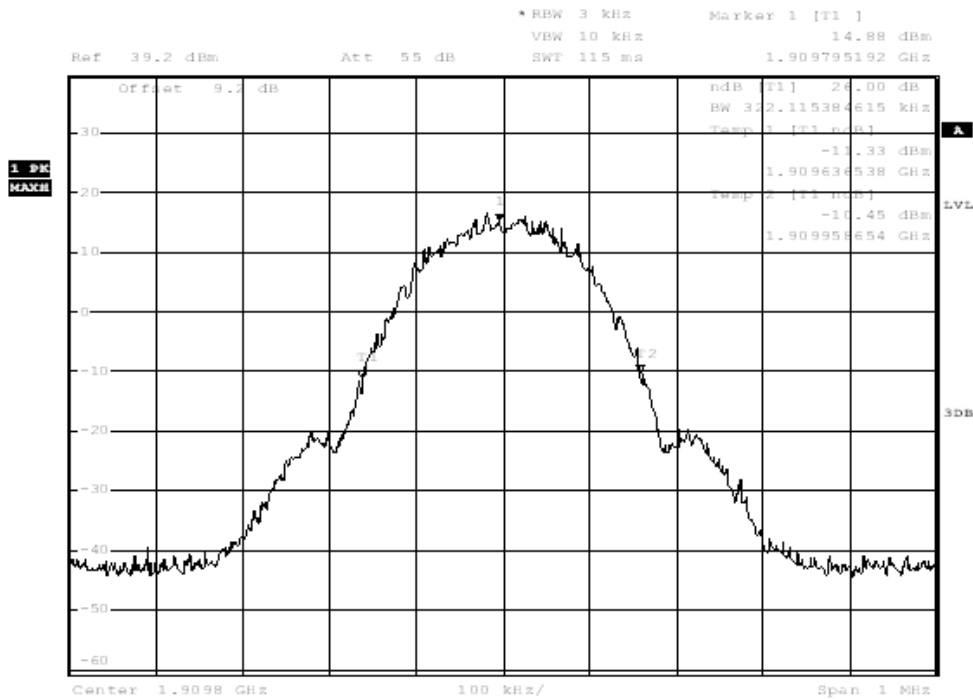


Date: 19.APR.2012 20:00:12

Channel 810

Results data of EGPRS mode:

EUT channel	-26dBc Emission bandwidth [kHz]
128	318.91
190	318.91
251	318.91
512	317.31
661	317.31
810	318.91


Graphical results for EGPRS mode:

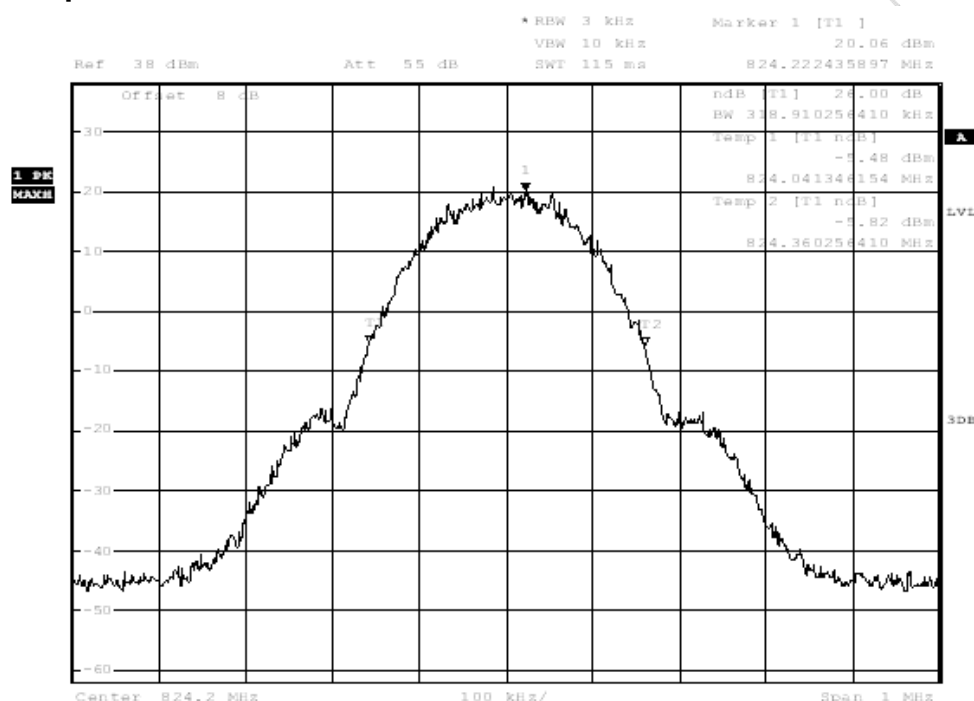

Date: 19.APR.2012 18:51:19


Channel 128

I12GWD760-RF-2G

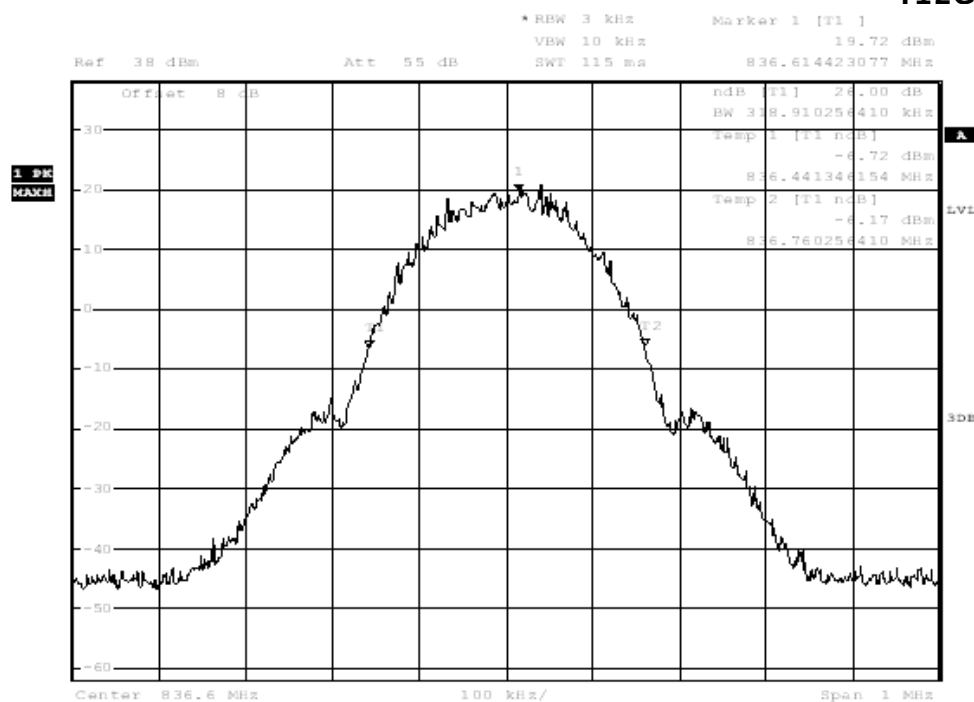

Date: 19.APR.2012 18:52:10


Channel 190

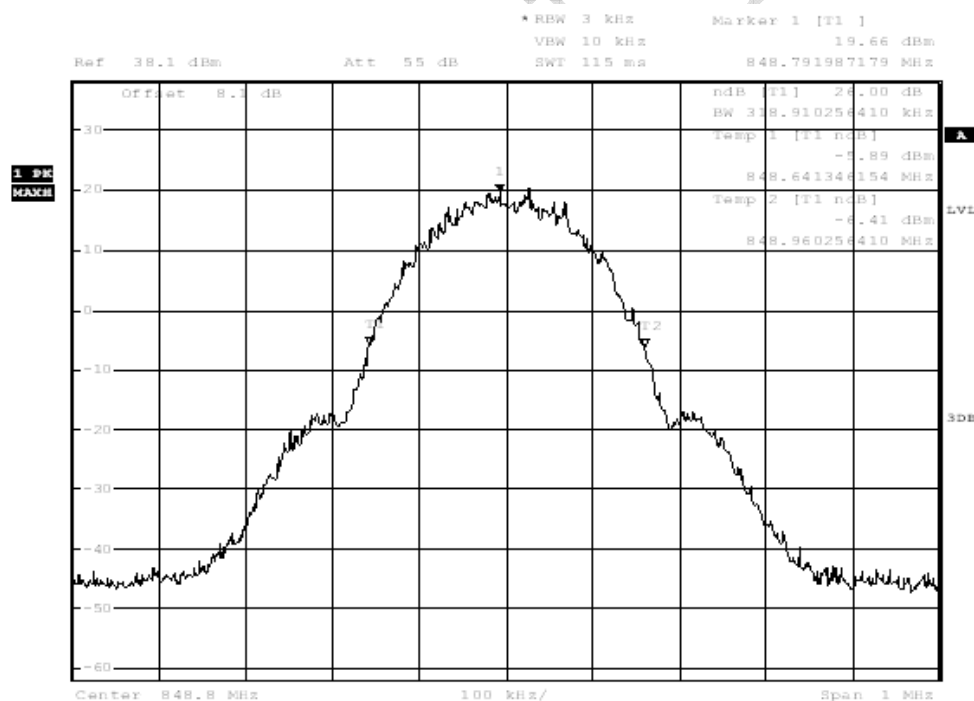

Date: 19.APR.2012 18:53:01


Channel 251

I12GWD760-RF-2G

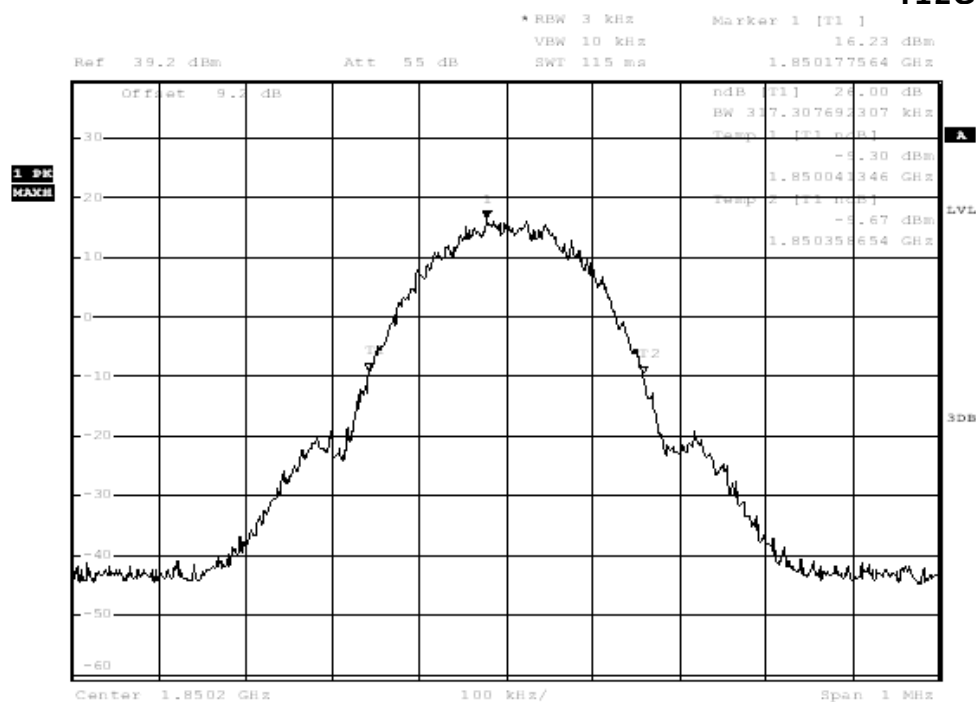

Date: 19.APR.2012 20:39:12


Channel 512

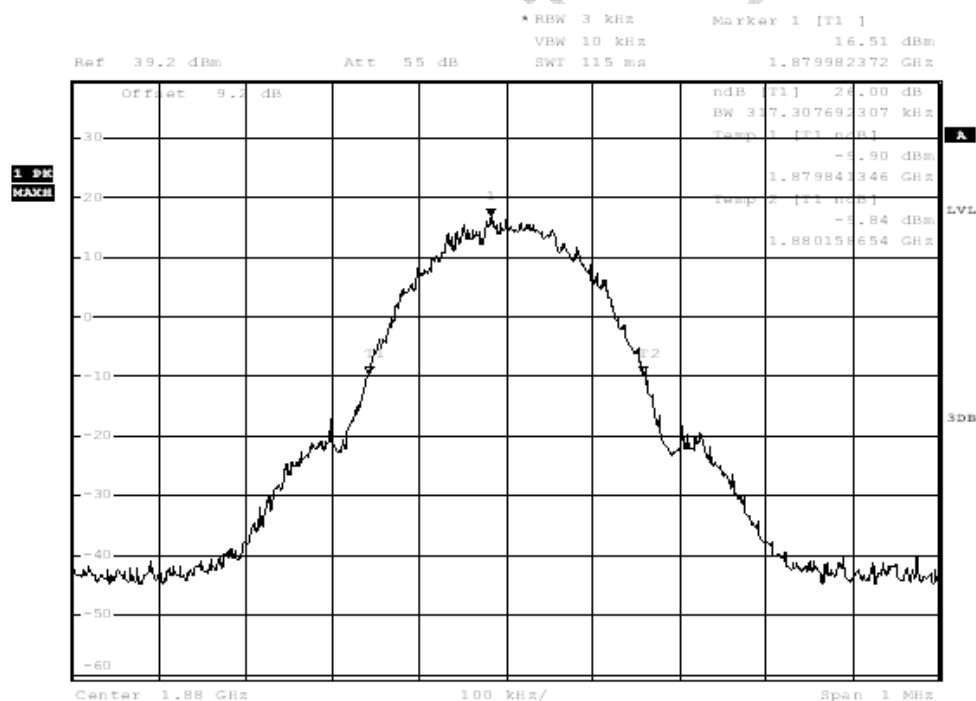

Date: 19.APR.2012 20:40:04

Channel 661

I12GWD760-RF-2G

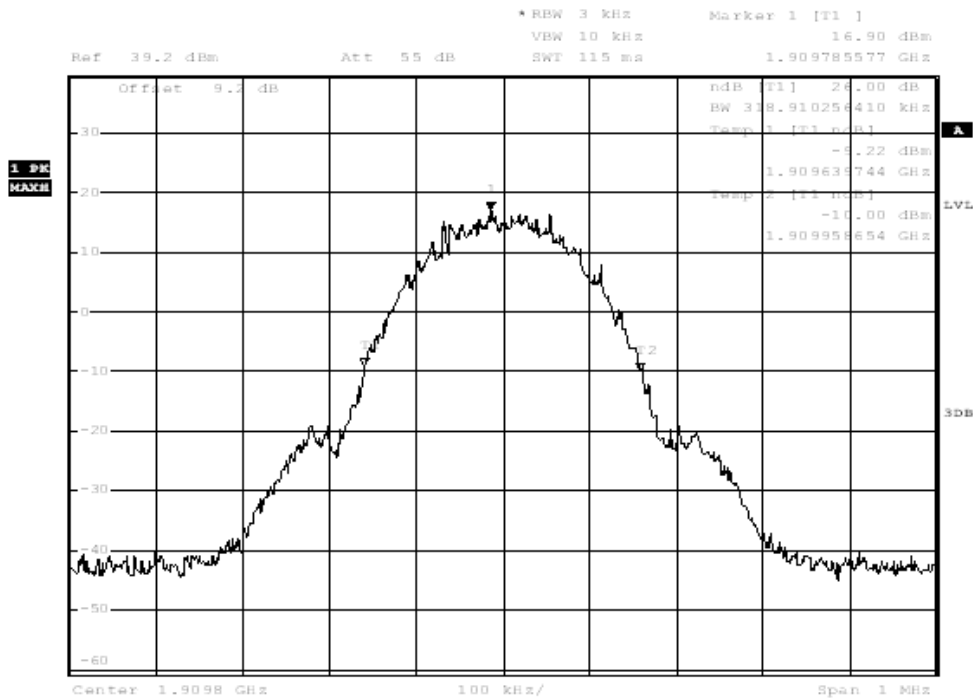

Date: 19.APR.2012 20:40:55

Channel 810

4.6 Frequency Stability

Specifications:	2.1055,22.355, 24.235
Test conditions:	Ambient Temperature:-30℃-50℃ Relative Humidity:30%-60% Air pressure: 86-106kPa
Operation Mode	TX on, channel 190 and 661
Test Results:	Pass
Limit	
Frequency deviation [ppm]	±2.5

4.6.1 Frequency stability over temperature variation

Test Setup

The EUT was placed in a temperature chamber, demonstrated as figure T. The wireless communications test set (test simulator) was used to set the TX channel and power levels, modulate the TX signal with different bit patterns and measure the frequency of TX.

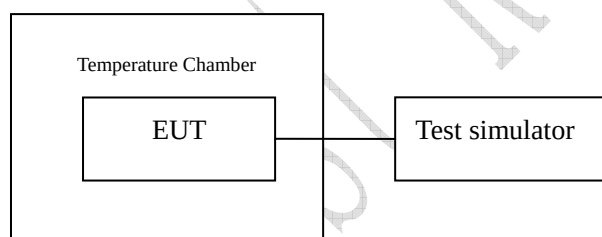


Figure T: setup for measurement of frequency stability over temperature variation

Test Method

1. The EUT was turned off and placed in the temperature chamber.
2. The temperature of the chamber was set to -30℃ and allowed to stabilize.
3. The EUT temperature was allowed to stabilize for 45 minutes.
4. The EUT was turned on and set to transmit with CMU200.
5. The maximum transmit frequency deviation during one minute period was measured by Wireless Communications Test Set.
6. The steps 3-5 were repeated for -20℃, -10℃, 0℃, 10℃, 20℃, 30℃, 40℃ and 50℃.

Test results data for GSM mode:

Channel 190:

Temperature[℃]	Deviation[Hz]	Remarks
-30	1	Pass
-20	0	Pass
-10	1	Pass
0	2	Pass
10	1	Pass
20	1	Pass
30	0	Pass
40	3	Pass
50	3	Pass

Channel 661:

Temperature[℃]	Deviation[Hz]	Remarks
-30	10	Pass
-20	8	Pass
-10	9	Pass
0	6	Pass
10	4	Pass
20	4	Pass
30	5	Pass
40	3	Pass
50	3	Pass

Test results data for GPRS mode:

Channel 190:

Temperature[℃]	Deviation[Hz]	Remarks
-30	8	Pass
-20	7	Pass
-10	7	Pass
0	5	Pass
10	4	Pass
20	3	Pass
30	3	Pass
40	2	Pass
50	2	Pass

Channel 661:

Temperature[℃]	Deviation[Hz]	Remarks
-30	23	Pass
-20	20	Pass
-10	18	Pass
0	16	Pass
10	14	Pass
20	13	Pass
30	10	Pass
40	9	Pass
50	7	Pass

Test results data for EGPRS mode:

Channel 190:

Temperature[℃]	Deviation[Hz]	Remarks
-30	0	Pass
-20	0	Pass
-10	1	Pass
0	1	Pass
10	1	Pass
20	2	Pass
30	2	Pass
40	3	Pass
50	3	Pass

Channel 661:

Temperature[℃]	Deviation[Hz]	Remarks
-30	18	Pass
-20	17	Pass
-10	15	Pass
0	16	Pass
10	14	Pass
20	14	Pass
30	13	Pass
40	13	Pass
50	12	Pass

4.6.2 Frequency Stability over Voltage Variation

Specifications:	2.1055,22.355,24.235
Test conditions:	Ambient Temperature:15℃-35℃ Relative Humidity:30%-60% Air pressure: 86-106kPa
Operation Mode	TX on, channel 190 and 661
Test Results:	Pass
Limit	
Frequency deviation [ppm]	±2.5

Test Setup

The EUT was placed in a shielding chamber and powered by the dummy battery which is connected to a DC power source, demonstrated as figure V. The wireless communications test set was used to set the TX channel and power level, modulate the TX signal with different bit patterns and measure the frequency of TX.

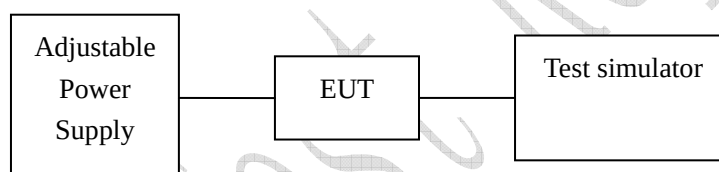


Figure V: test setup for measurement of frequency stability over voltage variation

Test Results data for GSM mode:

Channel 190:

Level	Voltage[V]	Deviation[Hz]	Remarks
Maximum	4.2	2	Pass
Nominal	3.8	5	Pass
Minimum	3.4	4	Pass

Channel 661:

Level	Voltage[V]	Deviation[Hz]	Remarks
Maximum	4.2	3	Pass
Nominal	3.8	8	Pass
Minimum	3.4	2	Pass

Test Results data for GPRS mode:

Channel 190:

Level	Voltage[V]	Deviation[Hz]	Remarks
Maximum	4.2	4	Pass
Nominal	3.8	7	Pass
Minimum	3.4	3	Pass

Channel 661:

Level	Voltage[V]	Deviation[Hz]	Remarks
Maximum	4.2	20	Pass
Nominal	3.8	16	Pass
Minimum	3.4	20	Pass

Test Results data for EGPRS mode:

Channel 190:

Level	Voltage[V]	Deviation[Hz]	Remarks
Maximum	4.2	0	Pass
Nominal	3.8	0	Pass
Minimum	3.4	3	Pass

Channel 661:

Level	Voltage[V]	Deviation[Hz]	Remarks
Maximum	4.2	2	Pass
Nominal	3.8	8	Pass
Minimum	3.4	5	Pass

4.7 Conducted Spurious Emission

Specifications:	2.1051,22.917,24.238
Test conditions:	Ambient Temperature:15℃-35℃ Relative Humidity:30%-60% Air pressure: 86-106kPa
Operation Mode	TX on, channel 128, 190, 251, 512, 661 and 810
Test Results:	Pass

Limit Level Construction:


According to Part 24.238 (a), i.e., Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB, so the limit level is:
 $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$

Limits for Radiated spurious emissions(UE)

Frequency range	Limit Level /Resolution Bandwidth
30 MHz to 20000 MHz	-13dBm/1MHz

Test Setup:

During the process of testing, the EUT was controlled via Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by Rhode & Schwarz EMI test receiver (ES126)

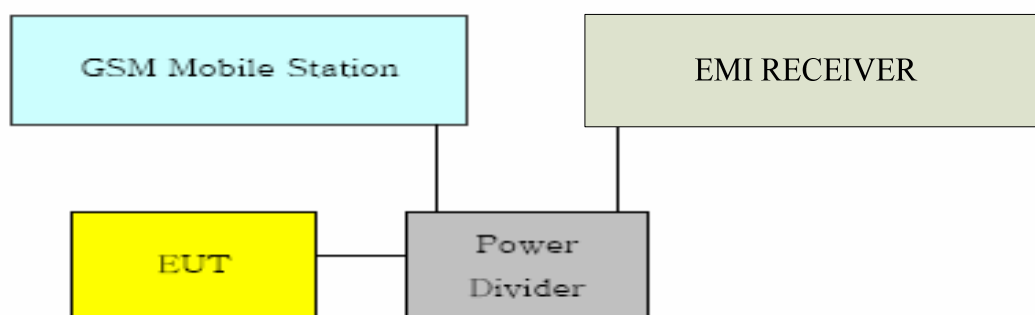

Test Method

The measurement was performed accordance with section 2.2.13 of ANSI/TIA-603-B-2002: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.

The following steps outline the procedure used to measure the conducted emissions from the EUT.


1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment under test, this equates to a frequency range of 30 MHz to 19.1 GHz,

data taken from 30 MHz to 20 GHz.

2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

Note: --


Graphical results for GSM mode:

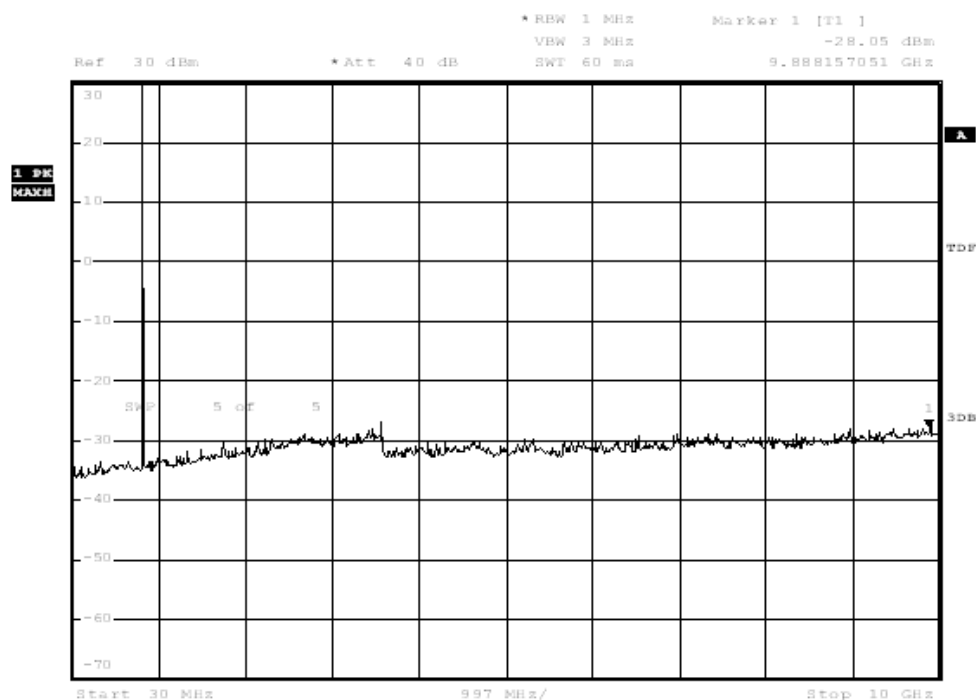

Date: 19.APR.2012 17:26:05


Channel 128

I12GWD760-RF-2G

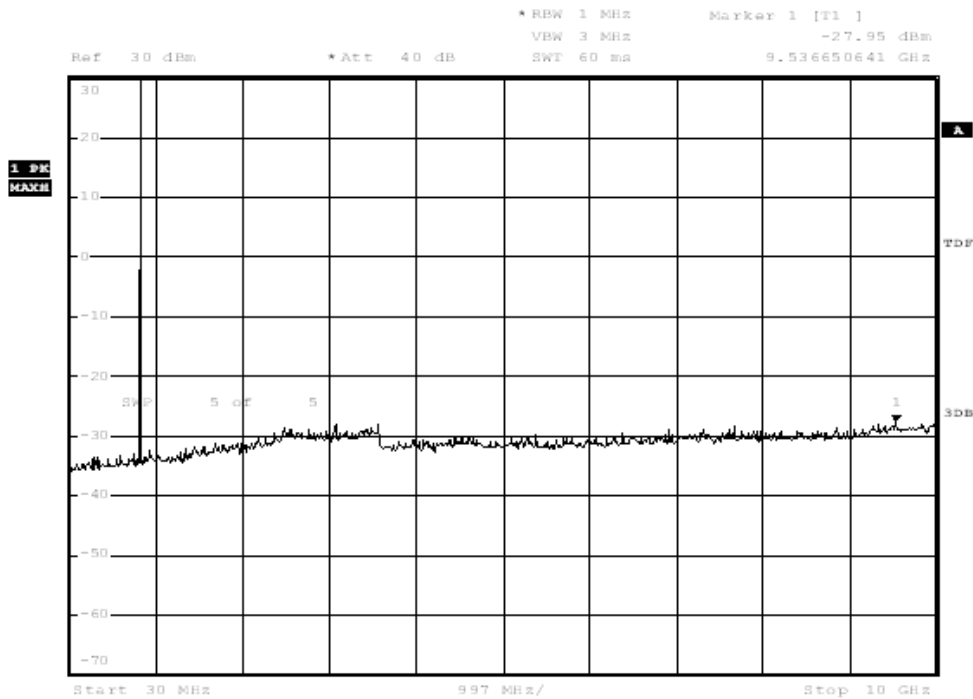

Date: 19.APR.2012 17:36:26


Channel 190

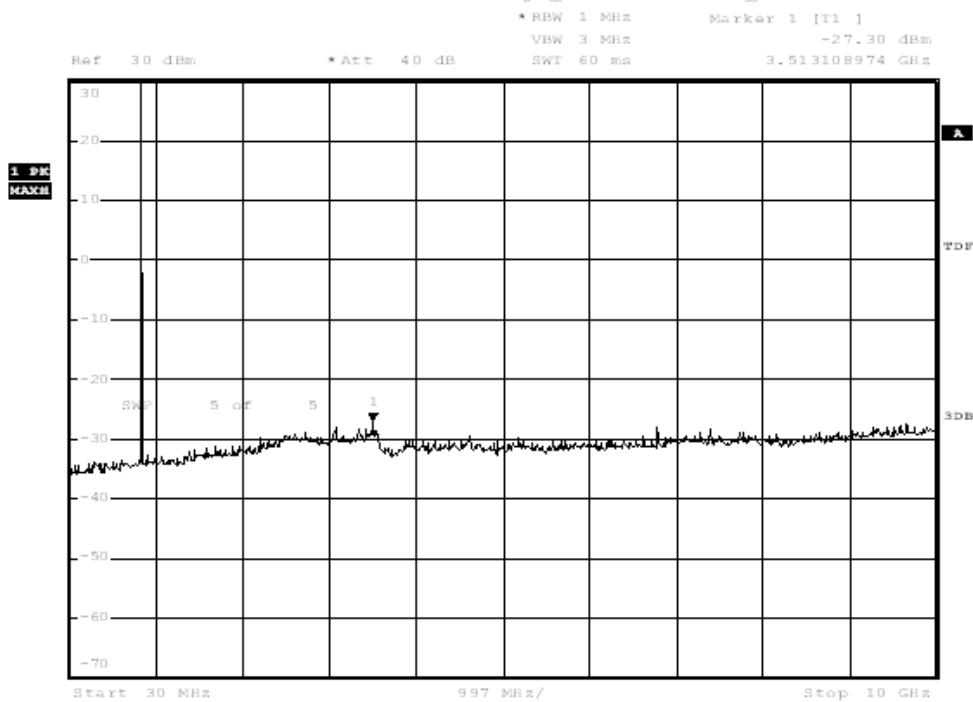

Date: 19.APR.2012 17:36:46


Channel 251

I12GWD760-RF-2G

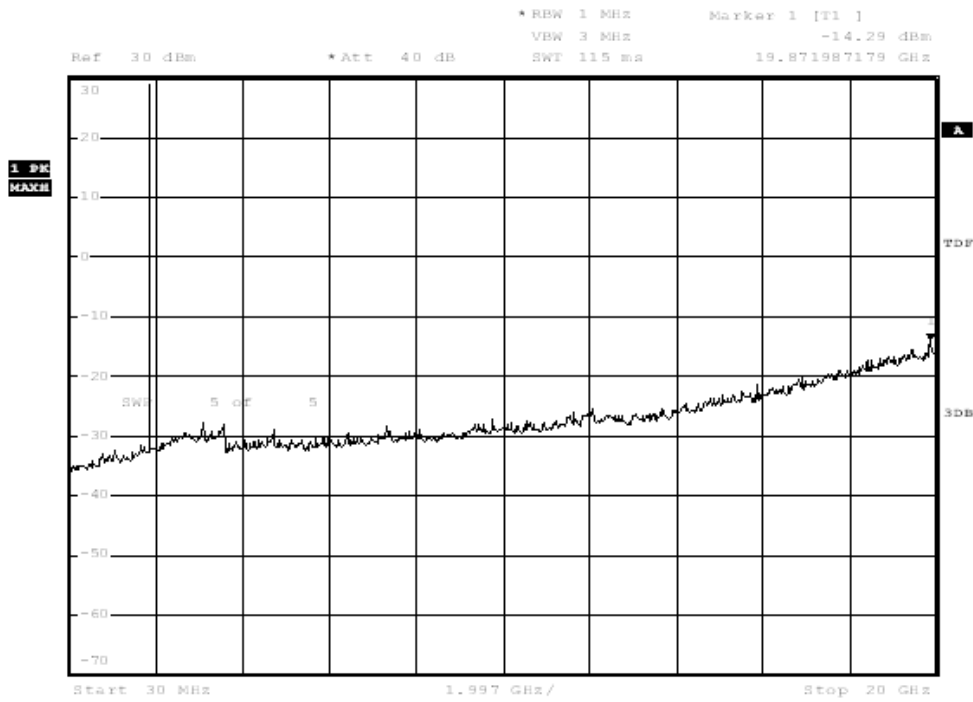

Date: 19. APR. 2012 19:30:32


Channel 512

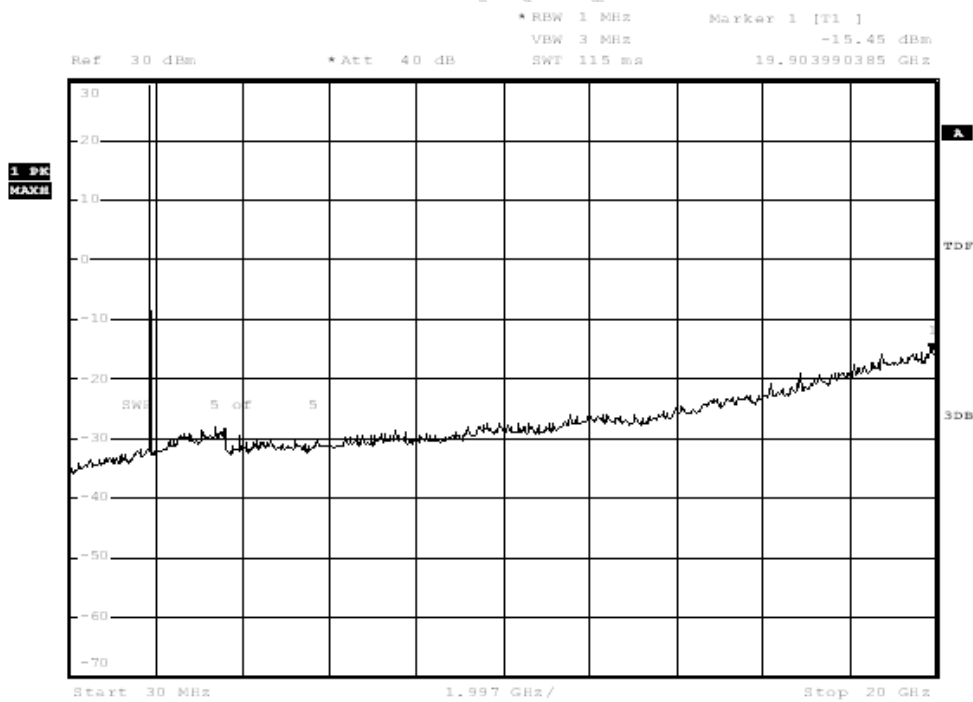

Date: 19. APR. 2012 19:30:52

Channel 661


I12GWD760-RF-2G

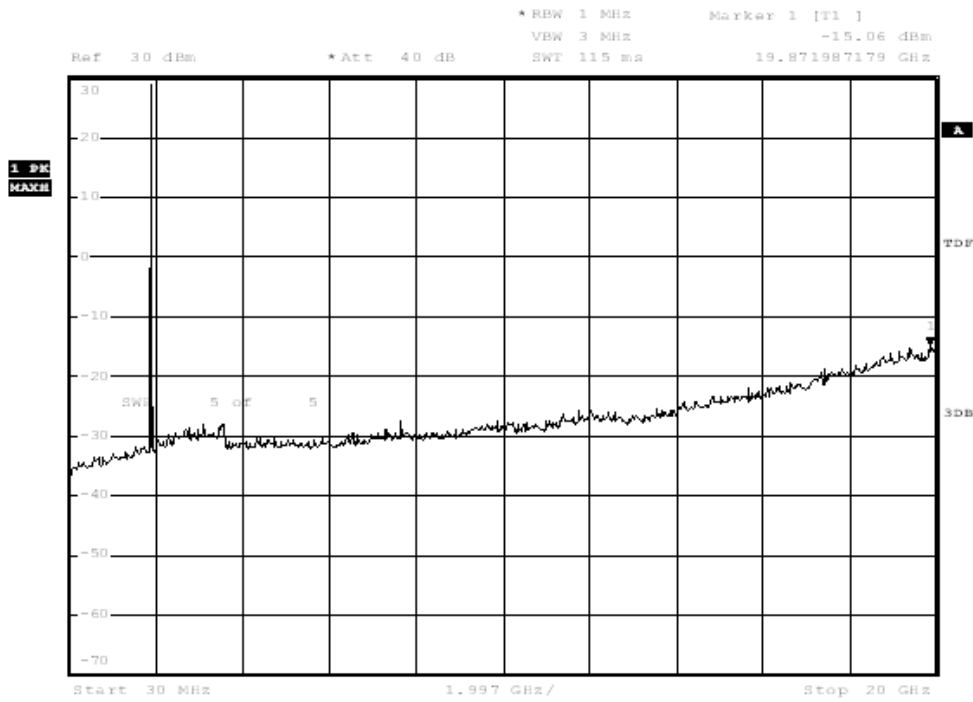

Date: 19.APR.2012 19:31:13


Channel 810

Graphical results for GPRS mode:

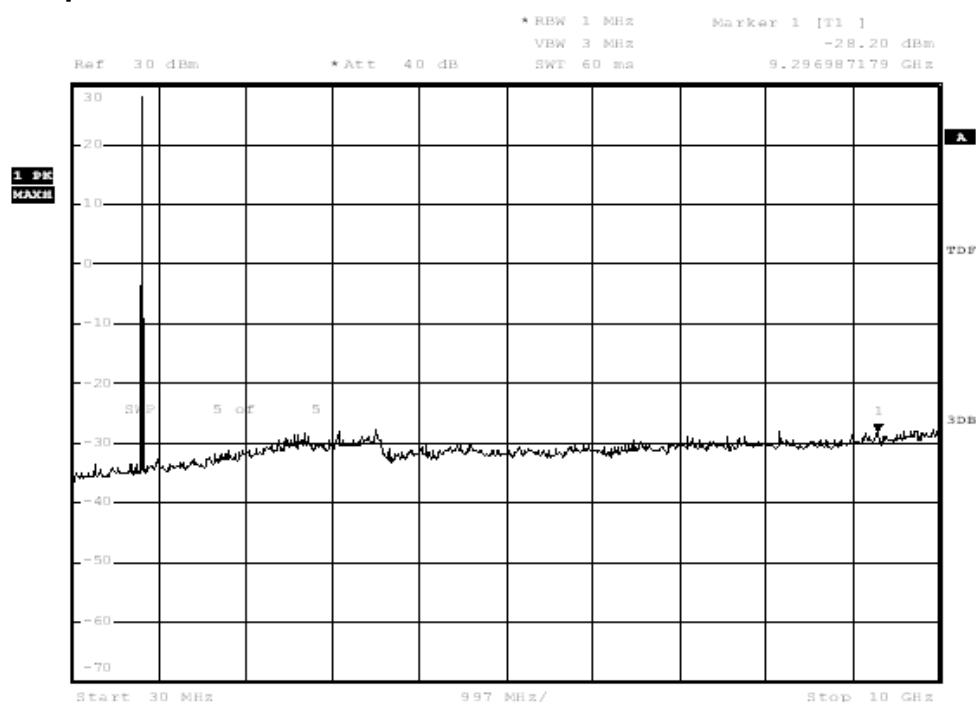

Date: 19.APR.2012 18:15:08


Channel 128

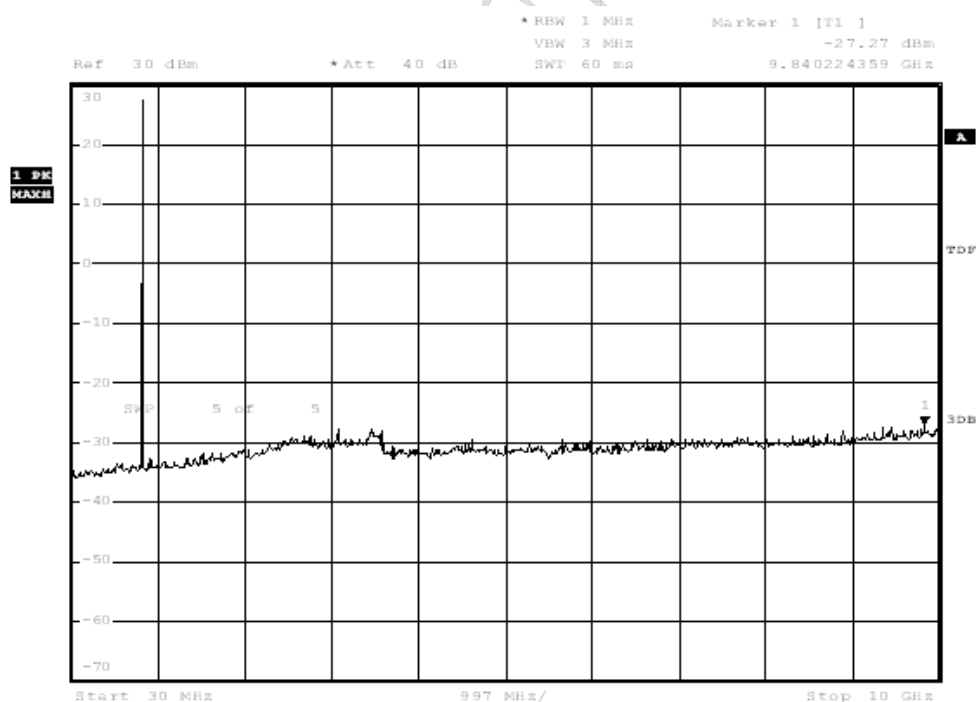

Date: 19.APR.2012 18:15:28


Channel 190

I12GWD760-RF-2G

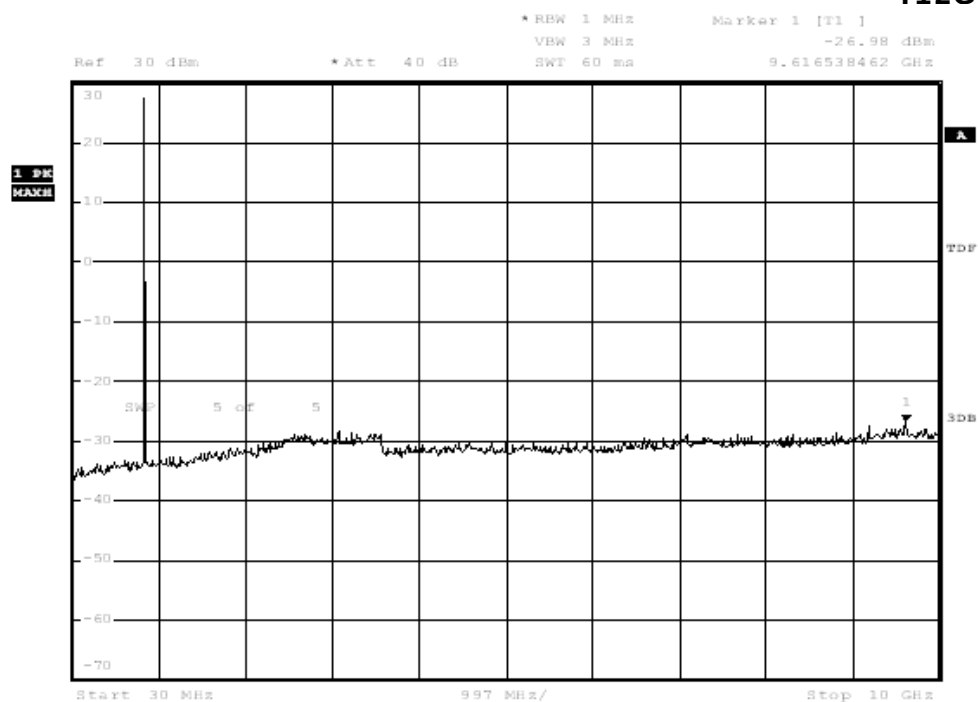

Date: 19.APR.2012 18:15:48


Channel 251

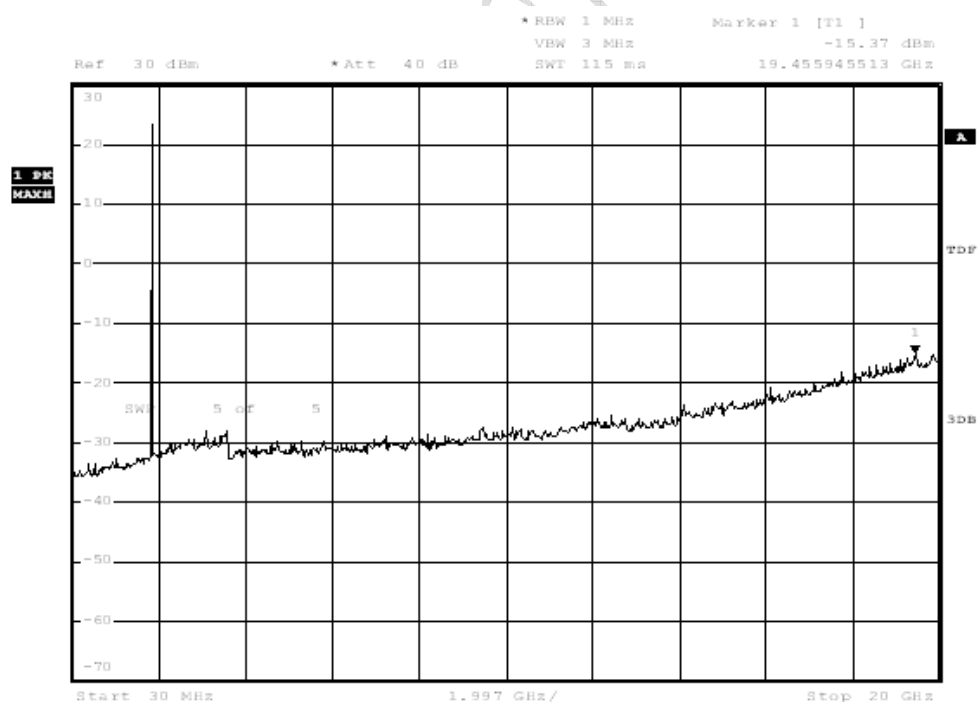

Date: 19.APR.2012 20:00:55


Channel 512

I12GWD760-RF-2G

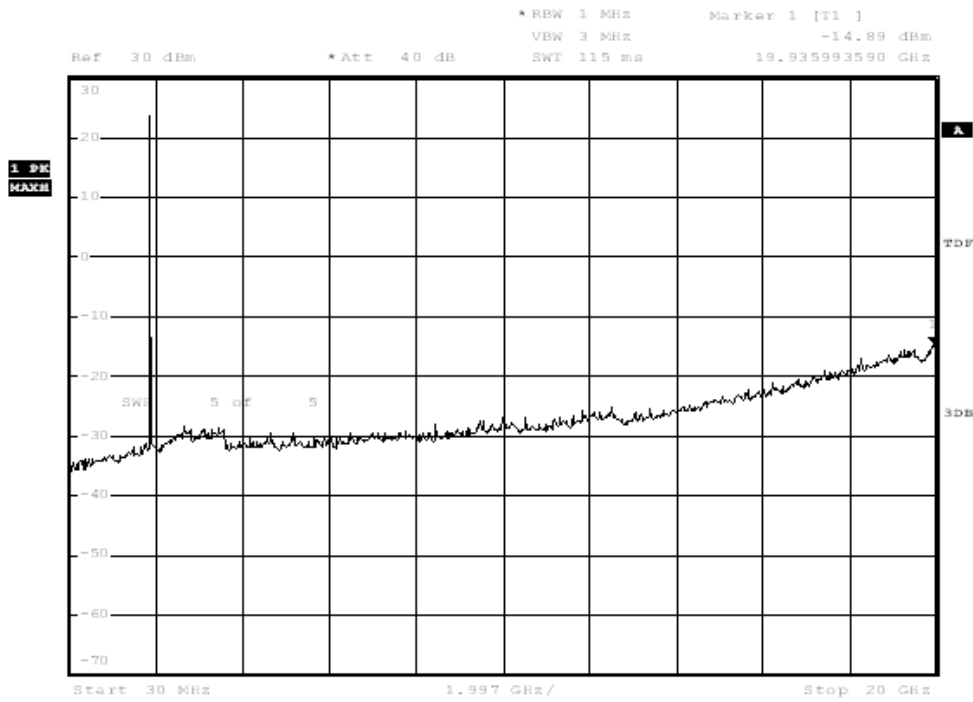

Date: 19.APR.2012 20:01:15


Channel 661

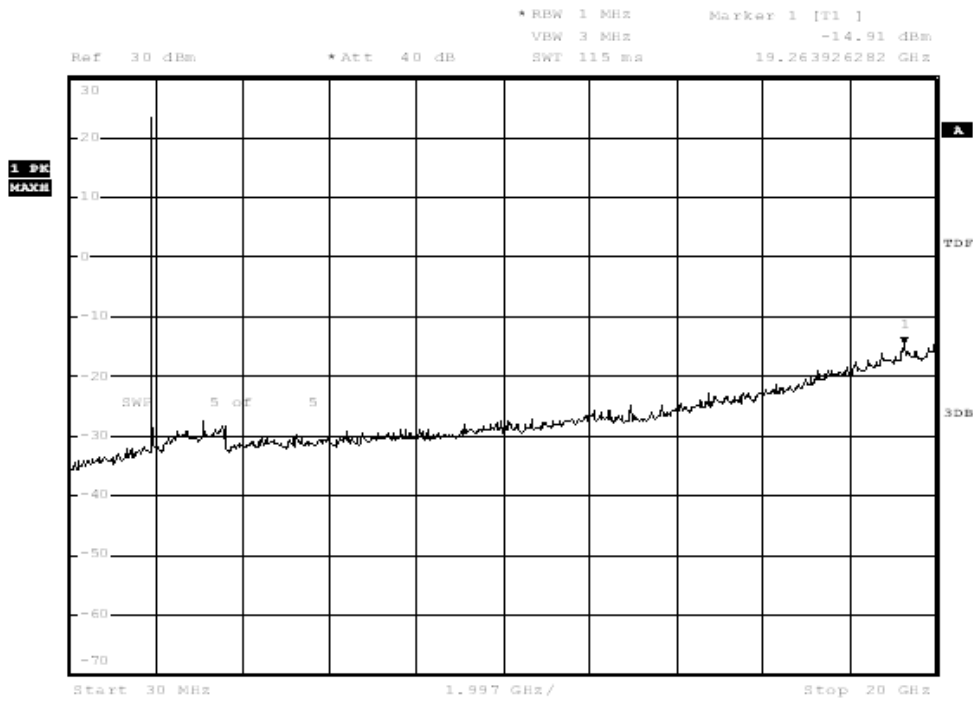

Date: 19.APR.2012 20:01:35


Channel 810

Graphical results for EGPRS mode:

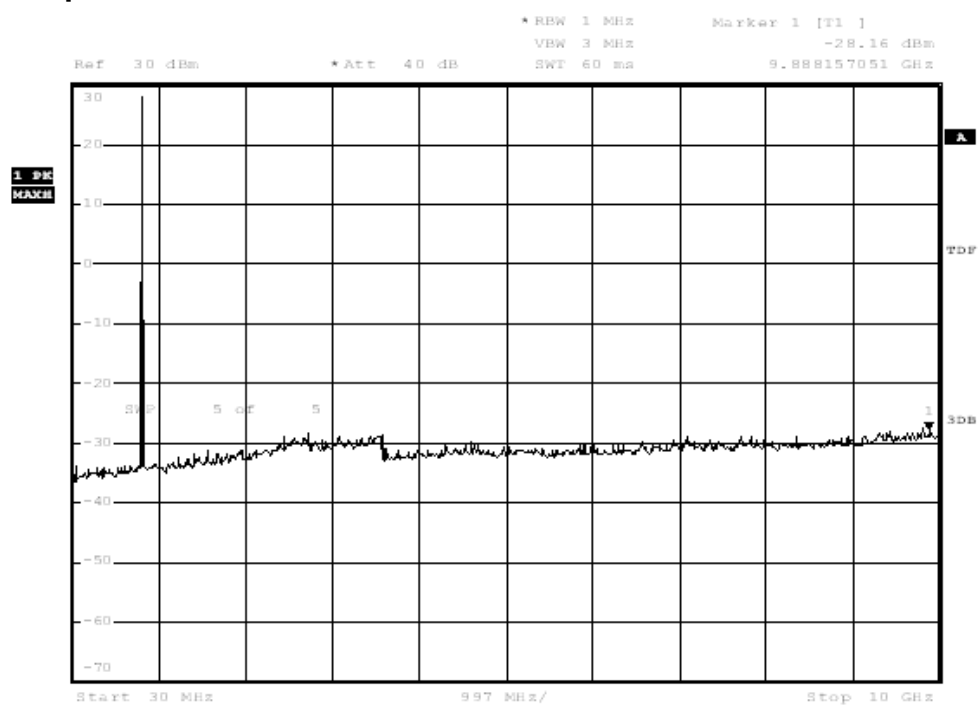

Date: 19.APR.2012 18:53:45


Channel 128

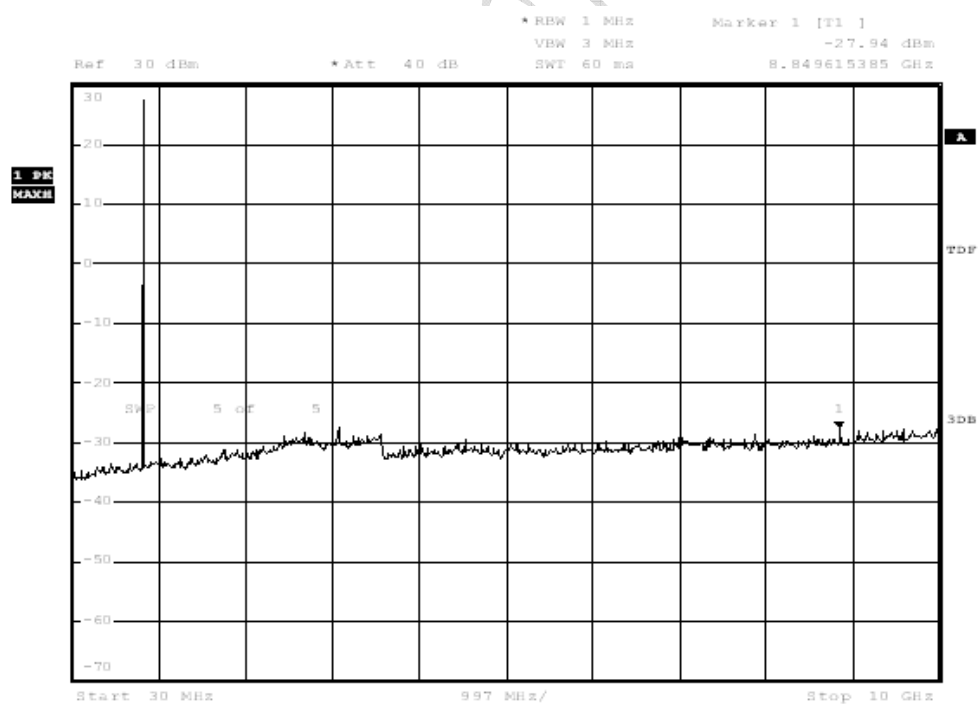

Date: 19.APR.2012 18:54:05


Channel 190

I12GWD760-RF-2G

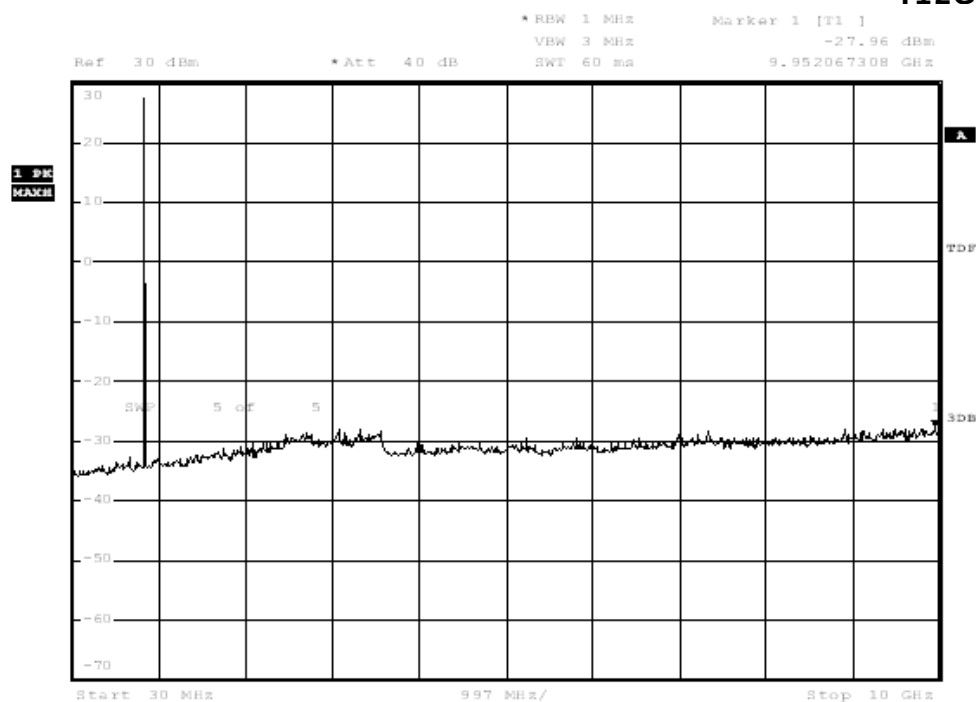

Date: 19.APR.2012 18:54:25


Channel 251

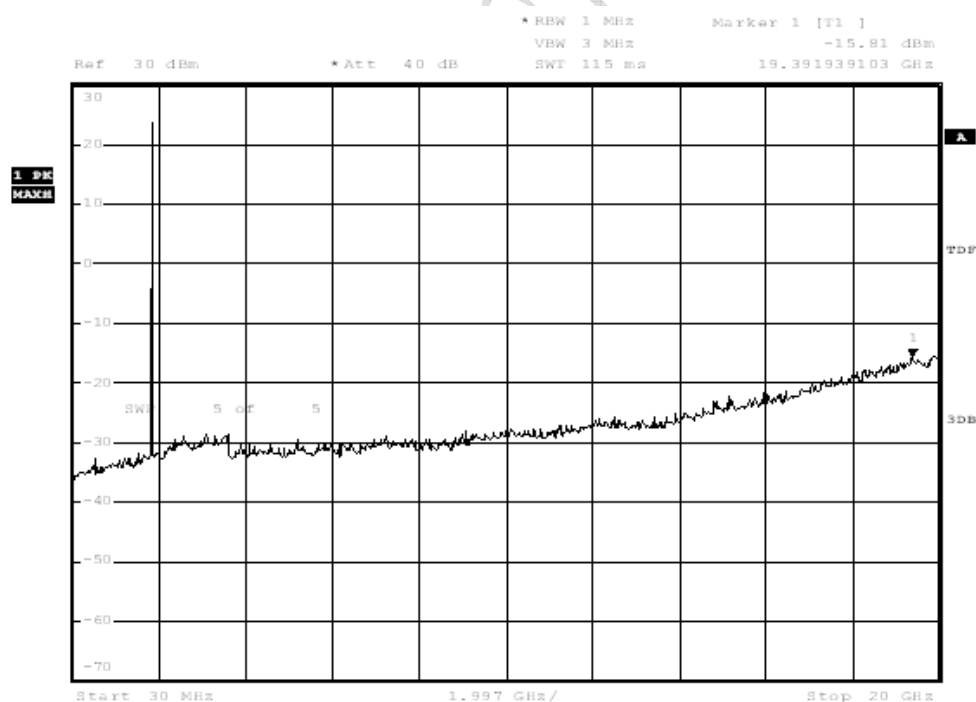

Date: 19.APR.2012 20:41:39


Channel 512

I12GWD760-RF-2G

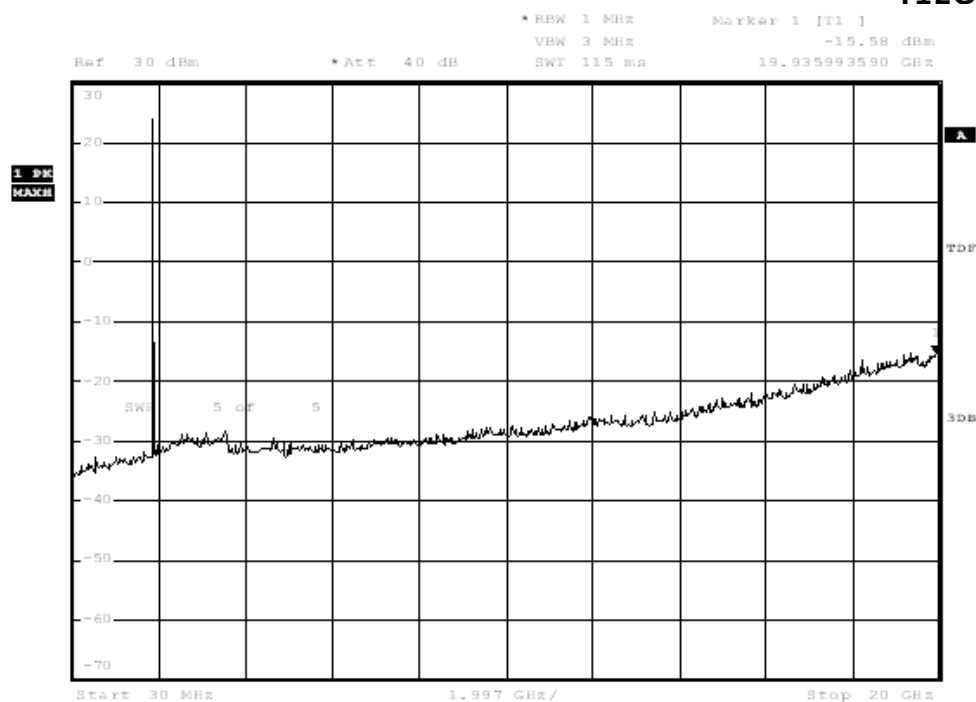

Date: 19. APR. 2012 20:41:59

Channel 661

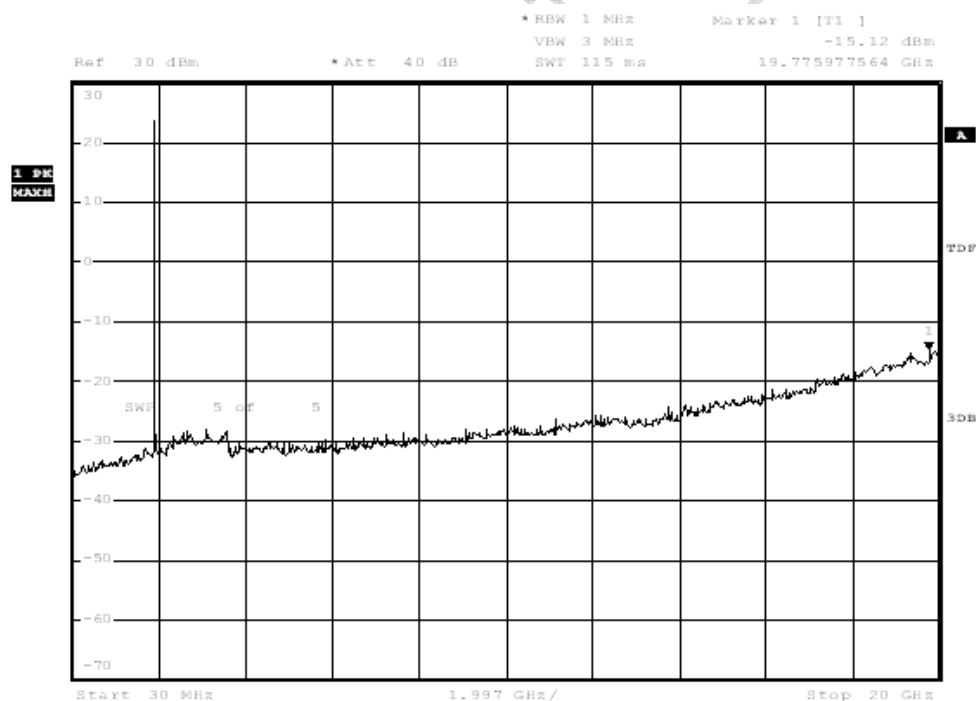

Date: 19. APR. 2012 20:42:19

Channel 810

4.8 Band Edge Compliance

Specifications:	22.917(b), 24.238(b)
Test conditions:	Ambient Temperature:15℃-35℃ Relative Humidity:30%-60% Air pressure: 86-106kPa
Operation Mode	TX on, channel 128, 251, 512 and 810
Test Results:	Pass

Limit Level Construction:


According to Part 24.238 (a), i.e., Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB, so the limit level is:
 $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$

Limits for Radiated spurious emissions(UE)

Frequency range	Limit Level /Resolution Bandwidth
30 MHz to 20000 MHz	-13dBm/1MHz

Test Setup:

During the process of testing, the EUT was controlled via the Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by Rhode & Schwarz EMI test receiver (ES126).

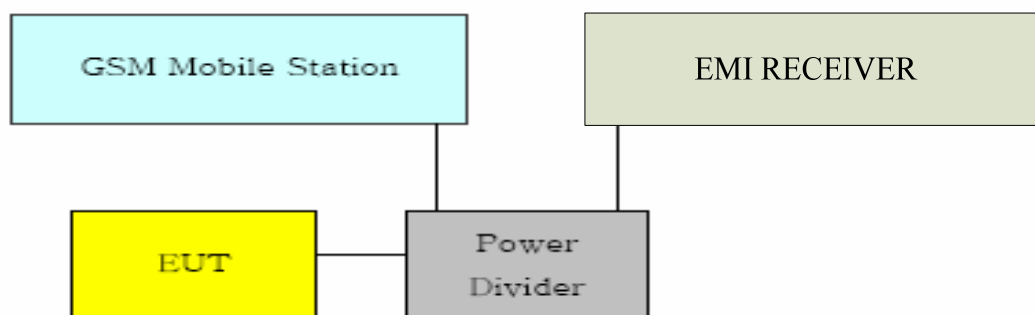

Test Method

- 1) The EUT was coupled to the EMI test receiver analyzer mode and the base station simulator through a power divider. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The attenuation of every cables of the test system is being taken into account by calibration to ensure measurement accuracy
- 2) The spectrum analyzer was set to Maxpeak Detector function and Maximum hold mode.
- 3) The resolution bandwidth of the spectrum analyzer was comparable to the

emission bandwidth.

Note: --

Test Results:

GSM mode:

Band-edge emission		
EUT Channel	Frequency [MHz]	Level [dBm]
128 Left band edge	824.000	-20.27
251 Right band edge	849.000	-19.09
512 Left band edge	1850.000	-20.87
810 Right band edge	1910.000	-23.32

GPRS mode:

Band-edge emission		
EUT Channel	Frequency [MHz]	Level [dBm]
128 Left band edge	824.000	-18.32
251 Right band edge	849.000	-20.74
512 Left band edge	1850.000	-22.16
810 Right band edge	1910.000	-22.04

EGPRS mode:


Band-edge emission		
EUT Channel	Frequency [MHz]	Level [dBm]
128 Left band edge	824.000	-19.71
251 Right band edge	849.000	-20.07
512 Left band edge	1850.000	-20.25
810 Right band edge	1910.000	-21.63



GSM channel 128 Left band edge



GSM channel 251 Right band edge

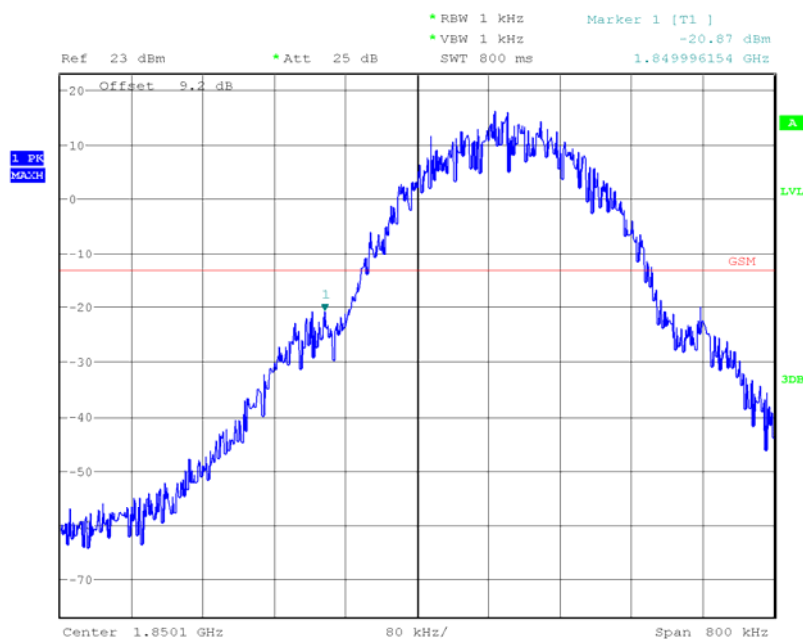


Date: 16.MAY.2012 19:00:50

GSM channel 512 Left band edge




Date: 16.MAY.2012 18:59:08

GSM channel 810 Right band edge

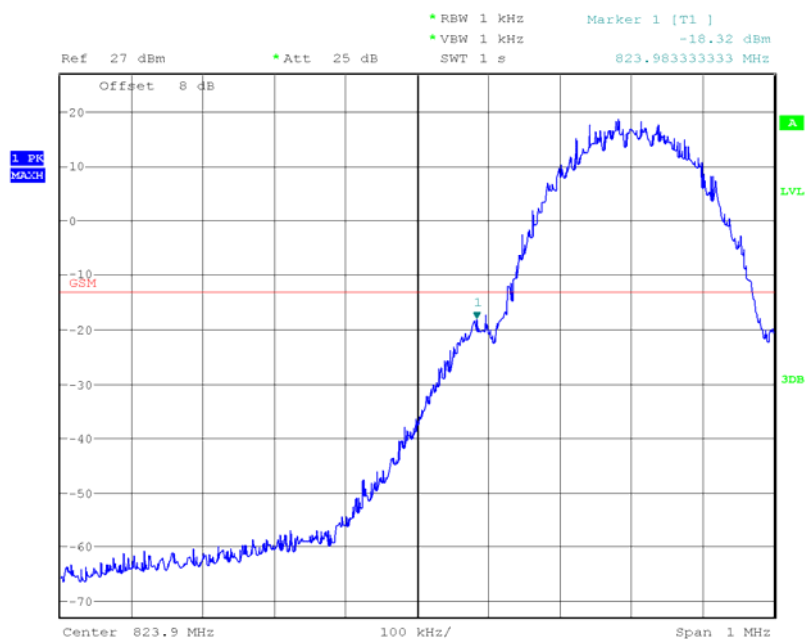


Date: 16.MAY.2012 18:40:36

GPRS channel 128 Left band edge

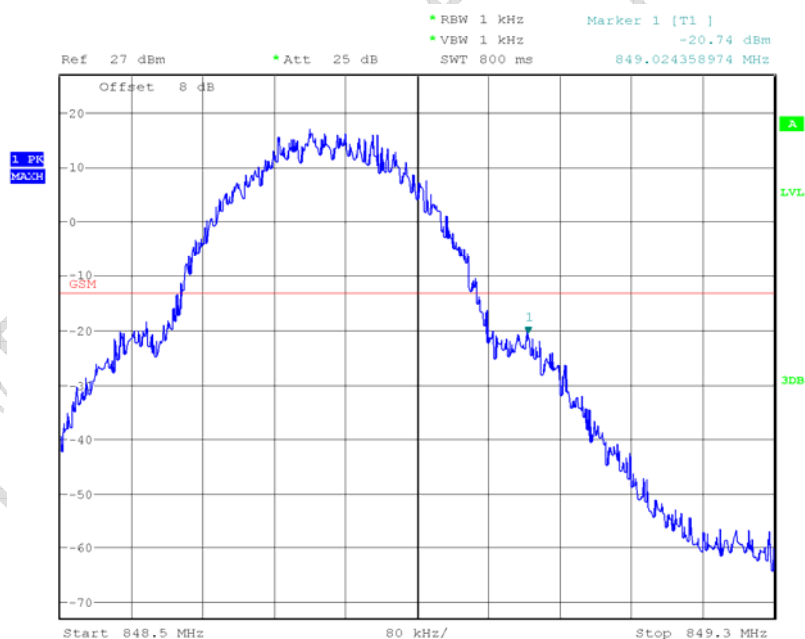


Date: 16.MAY.2012 18:42:15

GPRS channel 251 Right band edge

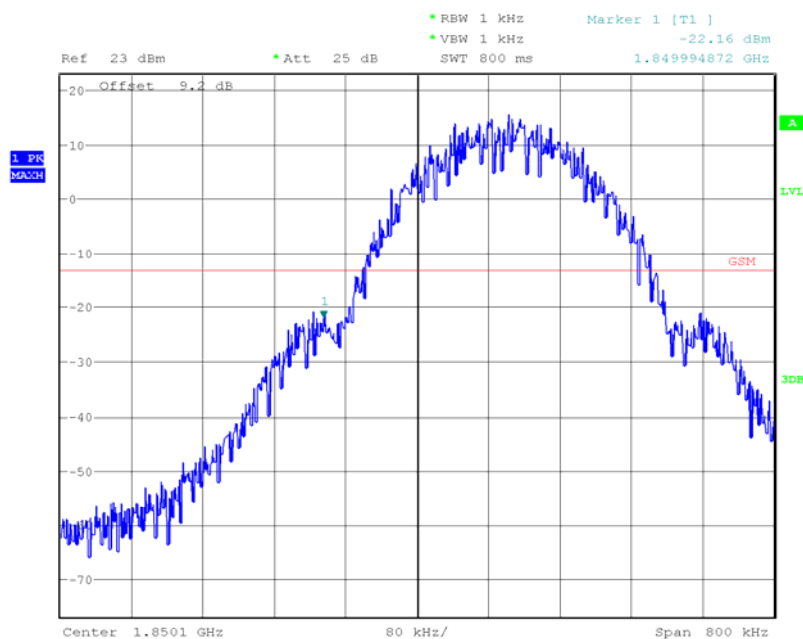


Date: 16.MAY.2012 19:03:48

GPRS channel 512 Left band edge

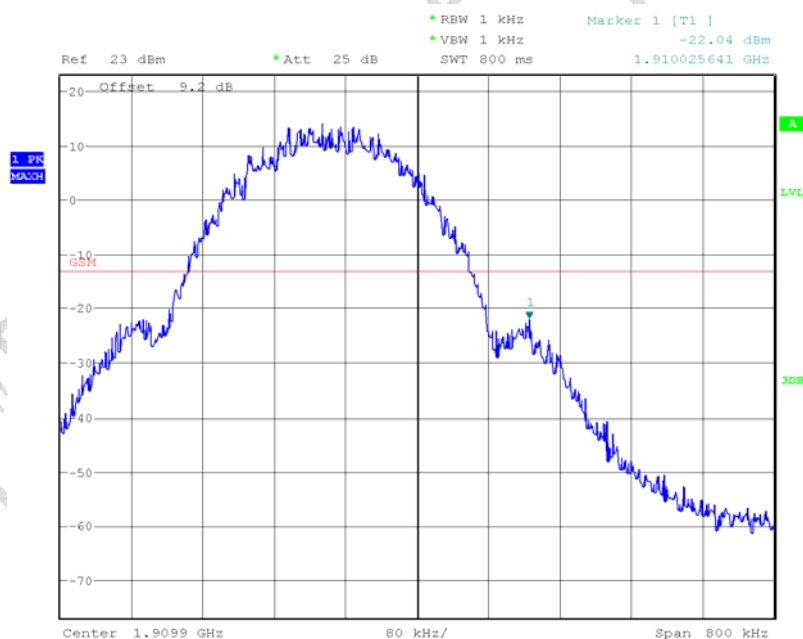


Date: 16.MAY.2012 19:05:24

GPRS channel 810 Right band edge

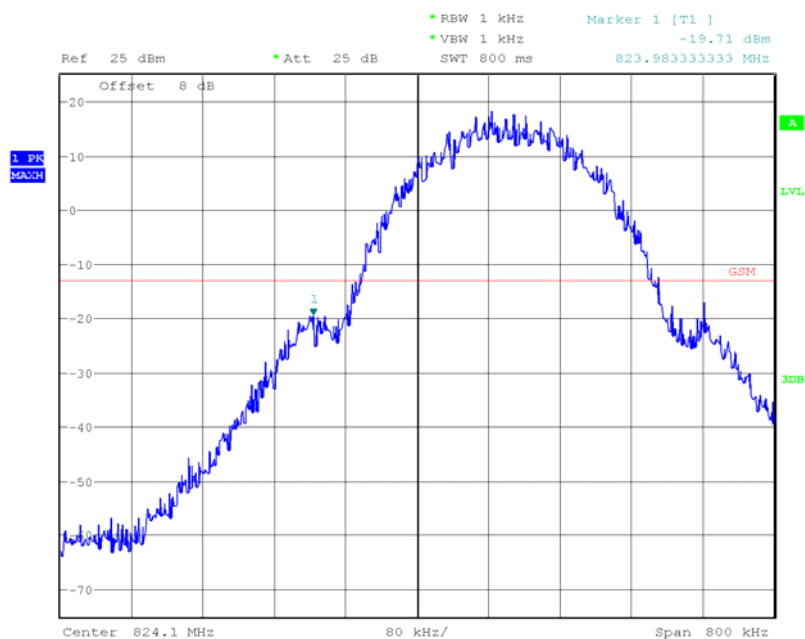


Date: 16.MAY.2012 18:50:27

EGPRS channel 128 Left band edge

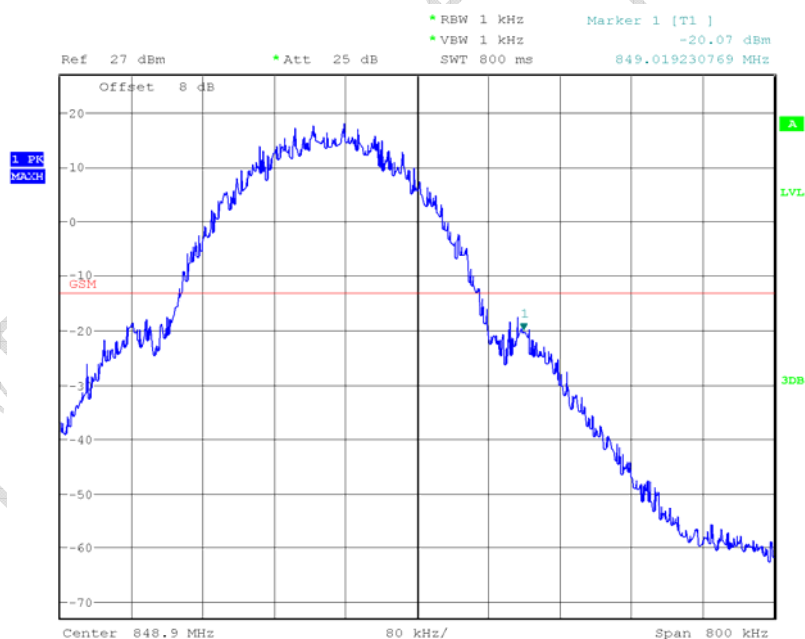


Date: 16.MAY.2012 18:48:02

EGPRS channel 251 Right band edge

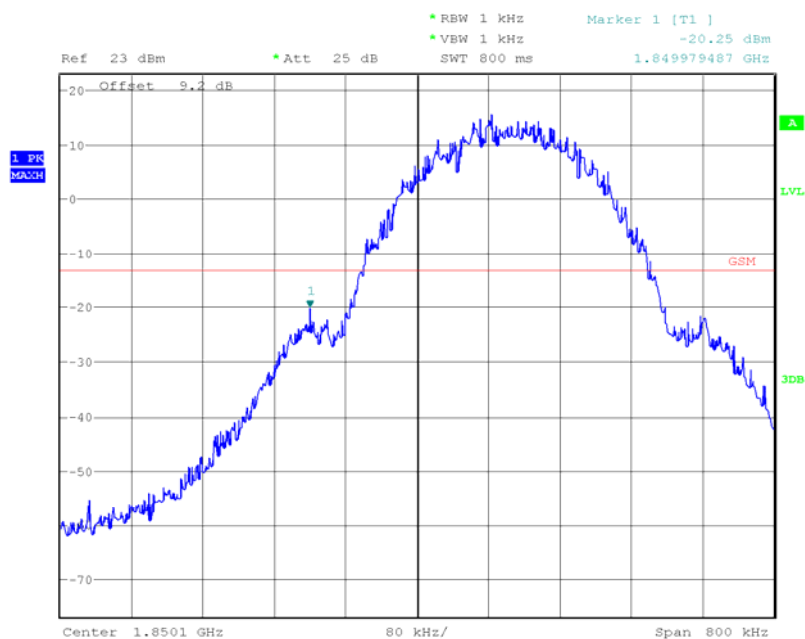

Date: 16.MAY.2012 19:08:59

EGPRS channel 512 Left band edge

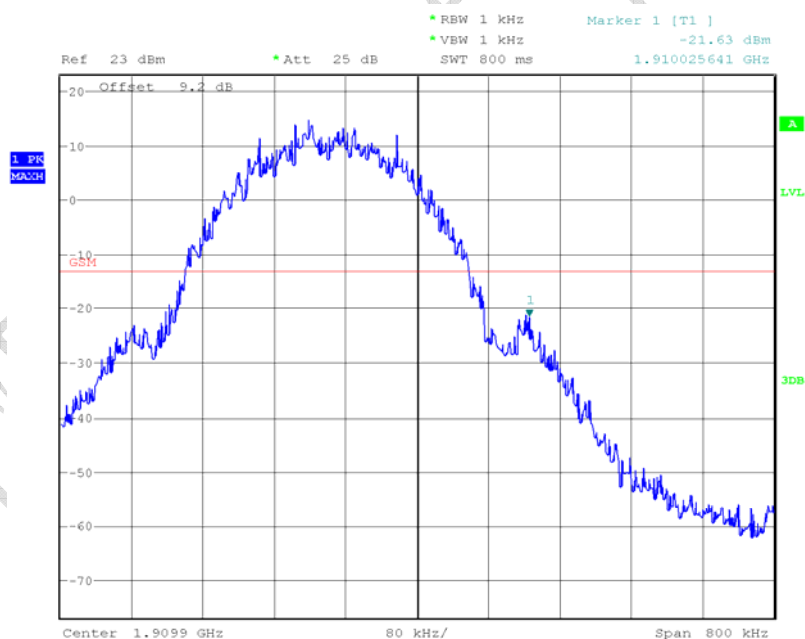

Date: 16.MAY.2012 19:07:13

EGPRS channel 810 Right band edge


4.9 Modulation characteristics

Specifications:	2.1047
Test conditions:	Ambient Temperature:15℃-35℃ Relative Humidity:30%-60% Air pressure: 86-106kPa
Operation Mode	--
Test Results:	Pass

Test Method

The EUT operates with GPRS(GMSK) and EDGE(GMSK)mode, in which the information is digitized and coded into a bit stream.

Test Results for GPRS & EDGE

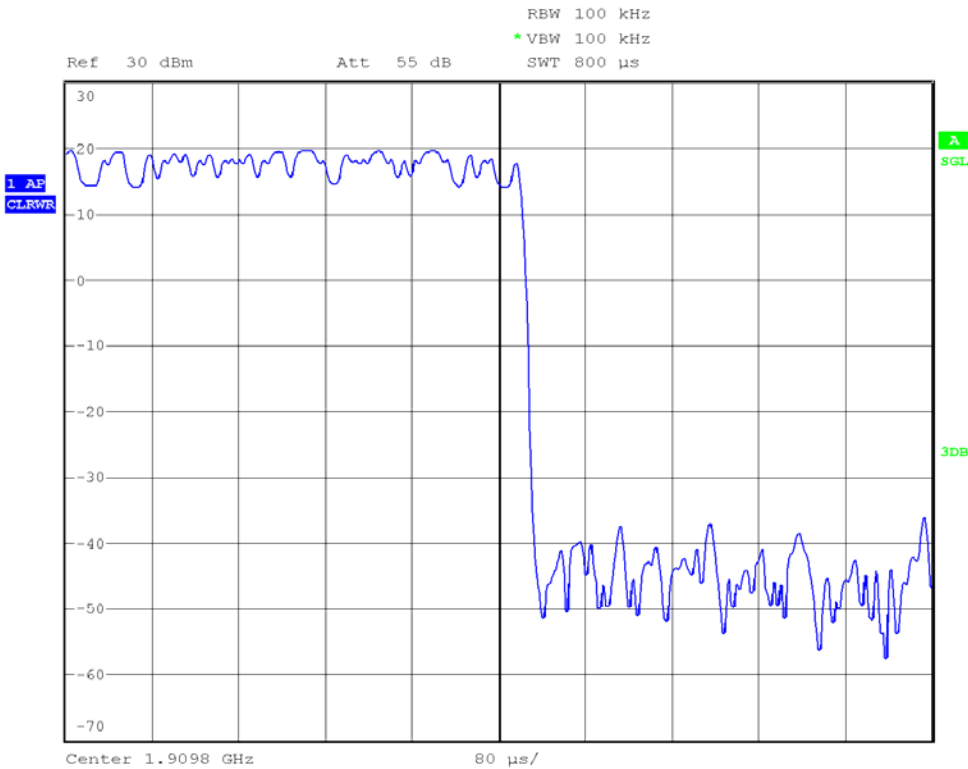

Date: 16.MAY.2012 22:29:12

5 Test Equipments and Ancillaries Used For Tests

The test equipments and ancillaries used are as follows.

5.1 Test Equipments for RF Test

Ref No.	Instrument / Ancillary	Type	Manufacturer	Serial No.	Cal Due Date
1	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	114828	2013.01.19
2	Spectrum Analyzer	FSU	Rohde&Schwarz	200679	2013.01.18
3	Temperature Chamber	SH-241	ESPEC	92007516	2013.02.24
4	DC Power Supply	U3606A	Agilent Technologies	MY50450012	2013.11.15
5	RF Switch Matrix	OSP130	Rohde&Schwarz	100086	2013.03.28
6	Vector Signal Generator	SMU200A	Rohde&Schwarz	104072	2013.03.28
7	MXG Analog Signal Generator	N5183A	Agilent Technologies	MY50140012	2013.11.15

5.2 Test Equipments for RSE Test

Ref No.	Instrument / Ancillary	Type	Manufacturer	Serial No.	Cal Due Date
1	Universal Radio Communication	CMU200	Rohde&Schwarz	114545	2013.03.23
2	Test Receiver	ESCI	Rohde&Schwarz	100701	2013.12.30
3	BiLog Antenna	9163	Schwarzbeck	9163-330	2014.03.02
4	Double-Ridged Waveguide Horn Antenna	3164-05	ETS-Lindgren	00085724	2014.02.18
5	Spectrum Analyzer	FSP40	Rohde&Schwarz	100378	2013.12.23
6	Fully Anechoic Chamber	n/a	ETS-Lindgren	n/a	2013.04.17


Annex A External Photos



Front view



Back view

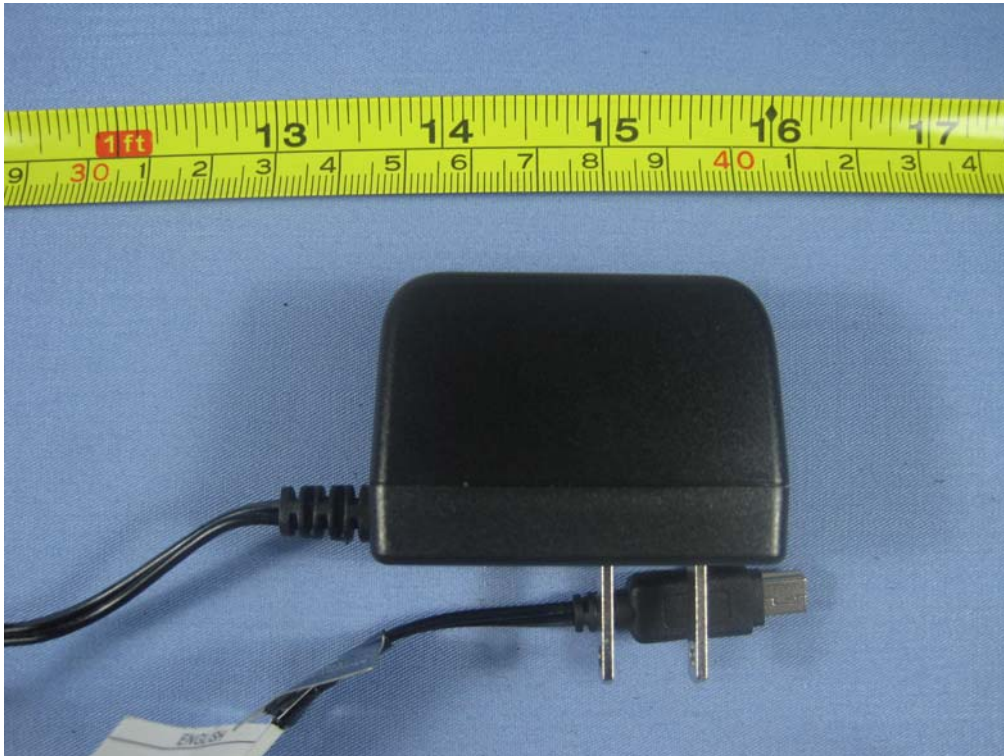

Adaptor and cable



battery

ANNEX B Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

———— The End of this Report ————

CTL Test Report