



FCC PART 15C TEST REPORT

No. 2012EEB00456-WLAN

For

Cellon Communications Technology(ShenZhen)Co., Ltd.

GSM QUAD BAND AND UMTS 850/1900

Model Name: C3560

**Market Name: C3560, C3560CA, C3560EN, C3560CL,
C3560PR, C3560CP**

With

Hardware Version: A3560_MB_P1B

Software Version: A3560_1.0_Lab_Test_Only

FCC ID: T38C3560

Issued Date: Nov 13th, 2012

Test Laboratory:

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2678 , Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

CONTENTS

1.	TEST LABORATORY	5
1.1.	TESTING LOCATION	5
1.2.	TESTING ENVIRONMENT.....	5
1.3.	PROJECT DATA	5
1.4.	SIGNATURE	5
2.	CLIENT INFORMATION.....	6
2.1.	APPLICANT INFORMATION	6
2.2.	MANUFACTURER INFORMATION	6
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1.	ABOUT EUT	7
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
4.	REFERENCE DOCUMENTS	8
4.1.	DOCUMENTS SUPPLIED BY APPLICANT	8
4.2.	REFERENCE DOCUMENTS FOR TESTING	8
5.	LABORATORY ENVIRONMENT.....	9
6.	SUMMARY OF TEST RESULTS	10
6.1.	SUMMARY OF TEST RESULTS.....	10
6.2.	STATEMENTS.....	10
6.3.	TERMS USED IN THE RESULT TABLE	10
7.	TEST EQUIPMENTS UTILIZED	11
ANNEX A: EUT PHOTOGRAPH		12
ANNEX B: MEASUREMENT RESULTS.....		14
B.1.	MEASUREMENT METHOD	14
B.2.	MAXIMUM PEAK OUTPUT POWER	15
B.3.	PEAK POWER SPECTRAL DENSITY	16
FIG. 1	POWER SPECTRAL DENSITY (802.11B, CH 1).....	17
FIG. 2	POWER SPECTRAL DENSITY (802.11B, CH 6).....	17
FIG. 3	POWER SPECTRAL DENSITY (802.11B, CH 11).....	18
FIG. 4	POWER SPECTRAL DENSITY (802.11G, CH 1).....	18
FIG. 5	POWER SPECTRAL DENSITY (802.11G, CH 6).....	19
FIG. 6	POWER SPECTRAL DENSITY (802.11G, CH 11).....	19
B.4.	OCCUPIED 6DB BANDWIDTH	20
FIG. 7	OCCUPIED 6DB BANDWIDTH (802.11B, CH 1).....	21
FIG. 8	OCCUPIED 6DB BANDWIDTH (802.11B, CH 6).....	21
FIG. 9	OCCUPIED 6DB BANDWIDTH (802.11B, CH 11).....	22
FIG. 10	OCCUPIED 6DB BANDWIDTH (802.11G, CH 1).....	22

FIG. 11	OCCUPIED 6dB BANDWIDTH (802.11G, CH 6)	23
FIG. 12	OCCUPIED 6dB BANDWIDTH (802.11G, CH 11)	23
B.5. BAND EDGES COMPLIANCE		24
FIG. 13	BAND EDGES (802.11B, CH 1)	25
FIG. 14	BAND EDGES (802.11B, CH 11)	25
FIG. 15	BAND EDGES (802.11G, CH 1)	26
FIG. 16	BAND EDGES (802.11G, CH 11).....	26
B.6. TRANSMITTER SPURIOUS EMISSION.....		27
B.6.1 TRANSMITTER SPURIOUS EMISSION - CONDUCTED		27
FIG. 17	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, CENTER FREQUENCY)	28
FIG. 18	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 30 MHz-3 GHz).....	28
FIG. 19	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 3 GHz-18 GHz)	29
FIG. 20	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, CENTER FREQUENCY)	29
FIG. 21	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 30 MHz-3 GHz).....	30
FIG. 22	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 3 GHz-18 GHz)	30
FIG. 23	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, CENTER FREQUENCY)	31
FIG. 24	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 30 MHz-3 GHz).....	31
FIG. 25	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 3 GHz-18 GHz).....	32
FIG. 26	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, CENTER FREQUENCY)	32
FIG. 27	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 30 MHz-3 GHz).....	33
FIG. 28	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 3 GHz-18 GHz).....	33
FIG. 29	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, CENTER FREQUENCY)	34
FIG. 30	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 30 MHz-3 GHz).....	34
FIG. 31	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 3 GHz-18 GHz).....	35
FIG. 32	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, CENTER FREQUENCY).....	35
FIG. 33	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 30 MHz-3 GHz)	36
FIG. 34	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 3 GHz-18 GHz).....	36
FIG. 35	CONDUCTED SPURIOUS EMISSION (ALL CHANNELS, 18 GHz-26 GHz).....	37
B.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED		38
FIG. 36	RADIATED SPURIOUS EMISSION (802.11B, CH1, 30 MHz-1 GHz).....	42
FIG. 37	RADIATED SPURIOUS EMISSION (802.11B, CH1, 1 GHz-3 GHz)	42
FIG. 38	RADIATED SPURIOUS EMISSION (802.11B, CH1, 3 GHz-18 GHz)	43
FIG. 39	RADIATED SPURIOUS EMISSION (802.11B, CH6, 30 MHz-1 GHz).....	43
FIG. 40	RADIATED SPURIOUS EMISSION (802.11B, CH6, 1 GHz-3 GHz)	44
FIG. 41	RADIATED SPURIOUS EMISSION (802.11B, CH6, 3 GHz-18 GHz)	44
FIG. 42	RADIATED SPURIOUS EMISSION (802.11B, CH11, 30 MHz-1 GHz).....	45
FIG. 43	RADIATED SPURIOUS EMISSION (802.11B, CH11, 1 GHz-3 GHz)	45
FIG. 44	RADIATED SPURIOUS EMISSION (802.11B, CH11, 3 GHz-18 GHz)	46
FIG. 45	RADIATED SPURIOUS EMISSION (802.11G, CH1, 30 MHz-1 GHz).....	46
FIG. 46	RADIATED SPURIOUS EMISSION (802.11G, CH1, 1 GHz-3 GHz)	47
FIG. 47	RADIATED SPURIOUS EMISSION (802.11G, CH1, 3 GHz-18 GHz)	47
FIG. 48	RADIATED SPURIOUS EMISSION (802.11G, CH6, 30 MHz-1 GHz).....	48
FIG. 49	RADIATED SPURIOUS EMISSION (802.11G, CH6, 1 GHz-3 GHz)	48
FIG. 50	RADIATED SPURIOUS EMISSION (802.11G, CH6, 3 GHz-18 GHz)	49

FIG. 51	RADIATED SPURIOUS EMISSION (802.11G, CH11, 30 MHz-1 GHz).....	49
FIG. 52	RADIATED SPURIOUS EMISSION (802.11G, CH11, 1 GHz-3 GHz).....	50
FIG. 53	RADIATED SPURIOUS EMISSION (802.11G, CH11, 3 GHz-18 GHz).....	50
FIG. 54	RADIATED EMISSION: 18 GHz - 26.5 GHz	51
B.8.	AC POWERLINE CONDUCTED EMISSION	52
FIG. 55	AC POWERLINE CONDUCTED EMISSION-802.11B	53
FIG. 56	AC POWERLINE CONDUCTED EMISSION-802.11G	54

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304793


1.2. Testing Environment

Normal Temperature: 15°C~30°C
Extreme Temperature: -20°C/+55°C
Relative Humidity: 30%~60%

1.3. Project data


Project Leader: Zhou Yi
Test Engineer: Yang Zi'an
Testing Start Date: Apr 11th, 2012
Testing End Date: Apr 25th, 2012

1.4. Signature



Yang Zi'an

(Prepared this test report)



Zhou Yi

(Reviewed this test report)



Lu Minniu

Director of the laboratory

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Cellon Communications Technology(ShenZhen)Co., Ltd.
Address /Post: 13/F, Skyworth Building C Gaoxin S. Ave. 1st, High-Tech industrial
Park NanShan, ShenZhen
City: Shenzhen
Postal Code: 518000
Country: China
Telephone: 0755-86365704
Fax: 0755-86365686

2.2. Manufacturer Information

Company Name: Cellon Communications Technology(ShenZhen)Co., Ltd.
Address /Post: 13/F, Skyworth Building C Gaoxin S. Ave. 1st, High-Tech industrial
Park NanShan, ShenZhen
City: Shenzhen
Postal Code: 518000
Country: China
Telephone: 0755-86365704
Fax: 0755-86365686

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM QUAD BAND AND UMTS 850/1900
Type	C3560
Market Name	C3560,C3560CA,C3560EN,C3560CL,C3560PR,C3560CP
FCC ID	T38C3560

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	357428021081999	A3560_MB_P1B	A3560_1.0_Lab_Test_Only

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	Charger	CNR1218	/
AE2	Li-ion Battery	BTR380	/

*AE ID: is used to identify the test accessory in the lab internally.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	Oct, 2011 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003
KDB558074	Measurement of Digital Transmission Systems Operating under Section 15.247	April, 2012

5. Laboratory Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing::

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Shielding Room2 (7.30 meters×4.00 meters×3.80 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

6. Summary of Test Results

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Verdict
Maximum Peak Output Power	15.247 (a)	P
Peak Power Spectral Density	15.247 (e)	P
Occupied 6dB Bandwidth	15.247 (a)	P
Band Edges Compliance	15.247 (d)	P
Transmitter Spurious Emission - Conducted	15.247(d)	P
Transmitter Spurious Emission - Radiated	15.247, 15.209, 15.209	P
AC Powerline Conducted Emission	15.107, 15.207	P

6.2. Statements

TMC has evaluated the test cases requested by the applicant/manufacture as listed in section 6.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2

6.3. Terms used in the result table

Terms used in Verdict column

P	Pass
NA	Not Available
F	Fail

Abbreviations

AC	Alternating Current
AFH	Adaptive Frequency Hopping
BW	Band Width
E.I.R.P.	equivalent isotropical radiated power
ISM	Industrial, Scientific and Medical
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
Tx	Transmitter

7. Test Equipments Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	2012-07-19
2	Spectrum Analyzer	MS2687B	6200819812	Anritsu	2012-09-22
3	Test Receiver	ESS	847151/015	Rohde & Schwarz	2012-10-30
4	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	2012-08-12

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Test Receiver	ESI40	831564/002	Rohde & Schwarz	2012-08-11
2	BiLog Antenna	3142B	9908-1403	EMCO	2013-03-15
3	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO	2012-12-25

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren.

ANNEX A: EUT photograph




Pic A-1 Mobile phone



Pic A-2 Mobile phone



Pic A-3 Battery

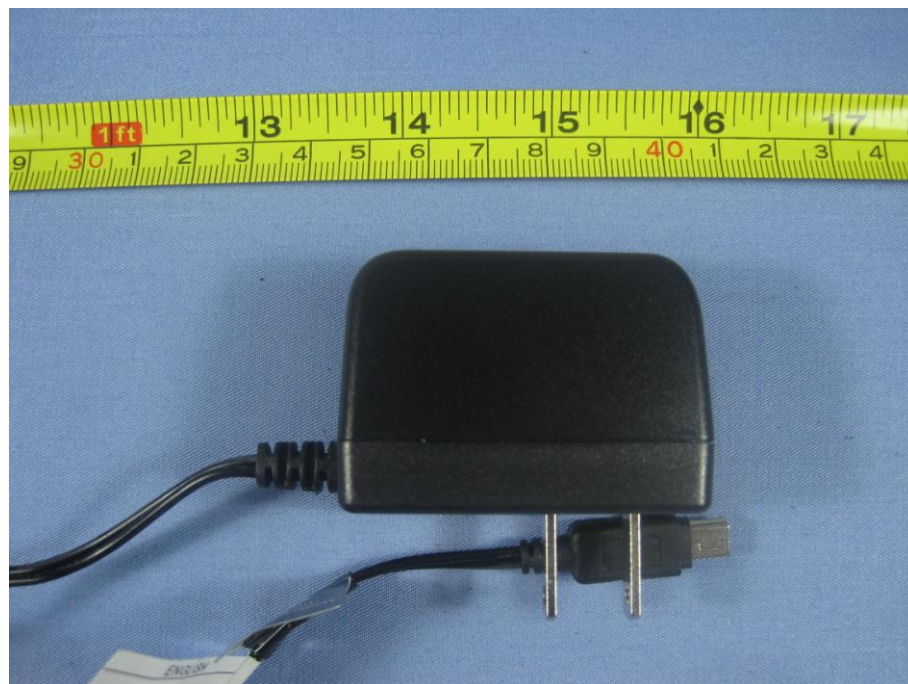


Pic A-4 Charger

ANNEX B: MEASUREMENT RESULTS

B.1. Measurement Method

B.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

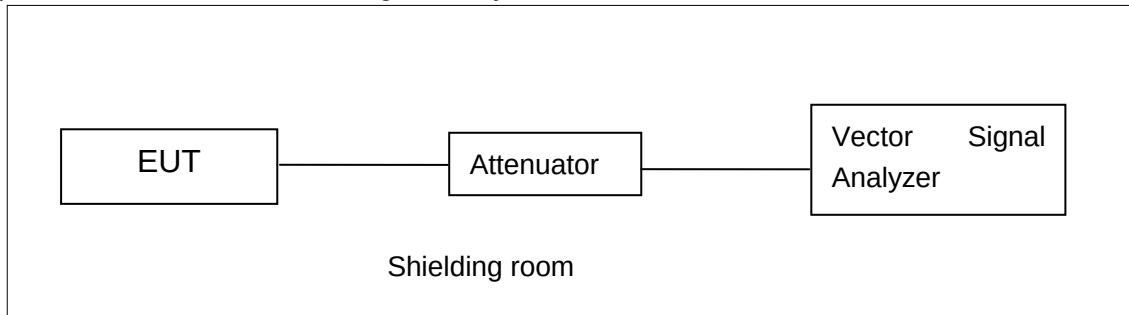


B.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

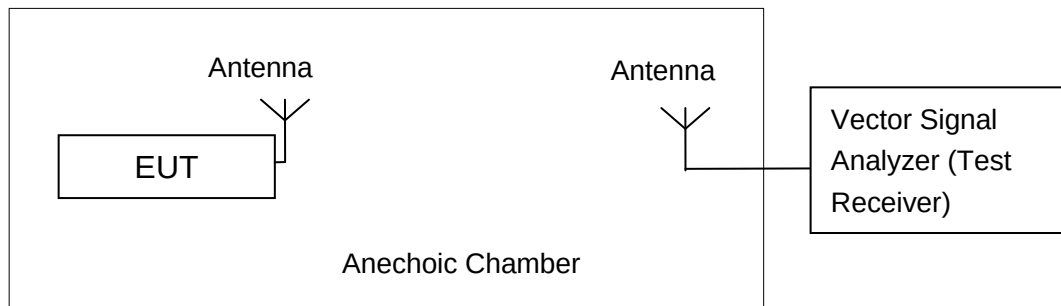

The measurement is made according to ANSI C63.4 and KDB558074

B.2. Maximum Peak Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

The measurement is made according to ANSI C63.4 and KDB558074, and power output option 1 (RBW=20MHz) in KDB558074 is used for the test. EUT is operating in continuous transmitting mode

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	17.94	17.65	17.92
	2	17.98	17.43	17.83
	5.5	17.79	17.71	17.37
	11	18.21	17.65	17.88
802.11g	6	17.51	16.17	17.16
	9	17.68	16.81	16.77
	12	17.81	16.12	17.01
	18	17.56	16.29	16.57
	24	18.03	16.72	17.08
	36	18.11	16.42	16.59
	48	18.07	16.53	16.73
	54	18.03	16.63	16.43

The data rate 11Mbps and 36Mbps are selected as worse condition, and the following cases are performed with this condition.

Conclusion: PASS

B.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(d)	< 8 dBm/3 kHz

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

802.11b/g mode

Mode	Channel	Power Spectral Density (8 dBm/3 kHz)		Conclusion
802.11b	1	Fig.1	-11.19	P
	6	Fig.2	-11.39	P
	11	Fig.3	-11.20	P
802.11g	1	Fig.4	-13.27	P
	6	Fig.5	-12.64	P
	11	Fig.6	-13.51	P

Conclusion: PASS

Test graphs as below:

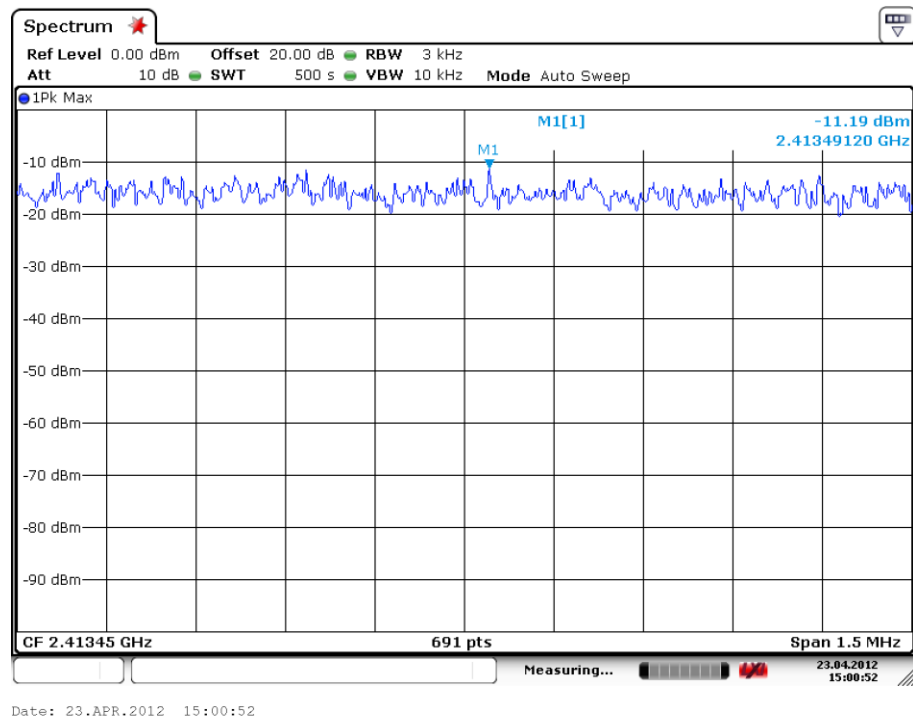


Fig. 1 Power Spectral Density (802.11b, Ch 1)

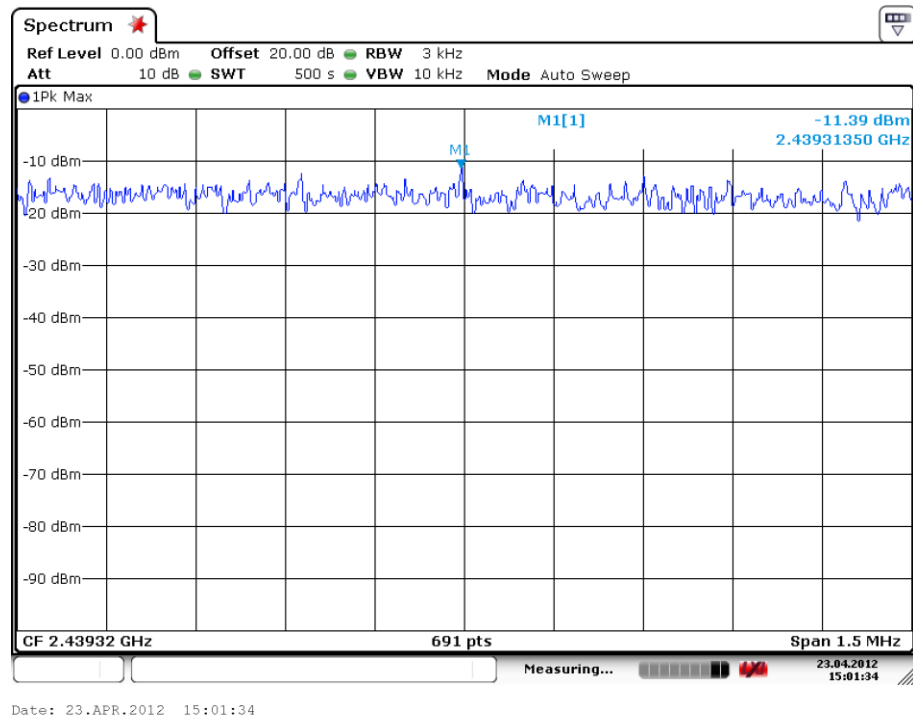


Fig. 2 Power Spectral Density (802.11b, Ch 6)

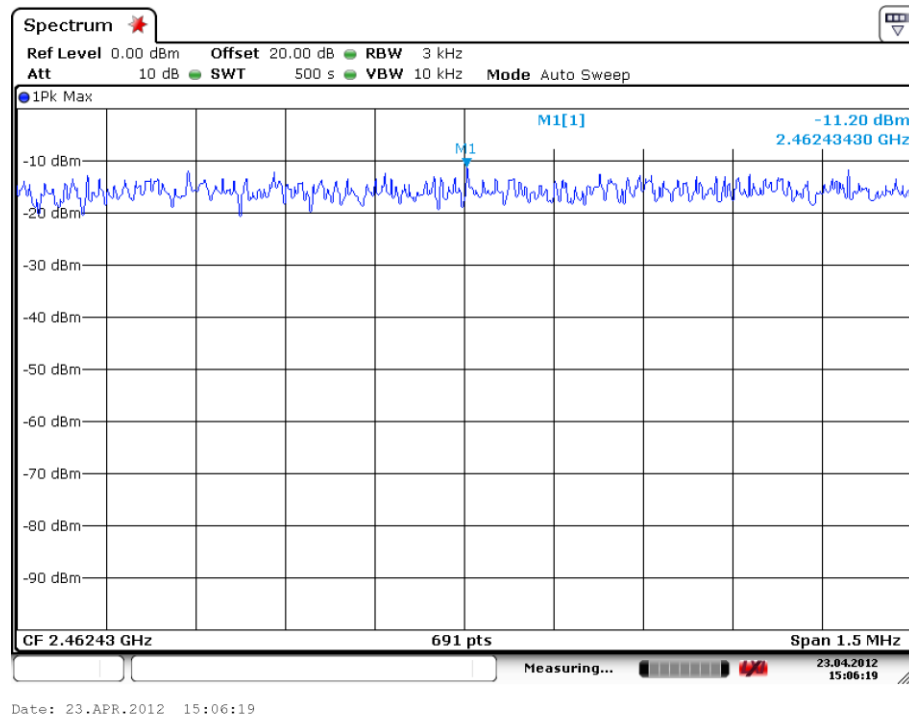


Fig. 3 Power Spectral Density (802.11b, Ch 11)

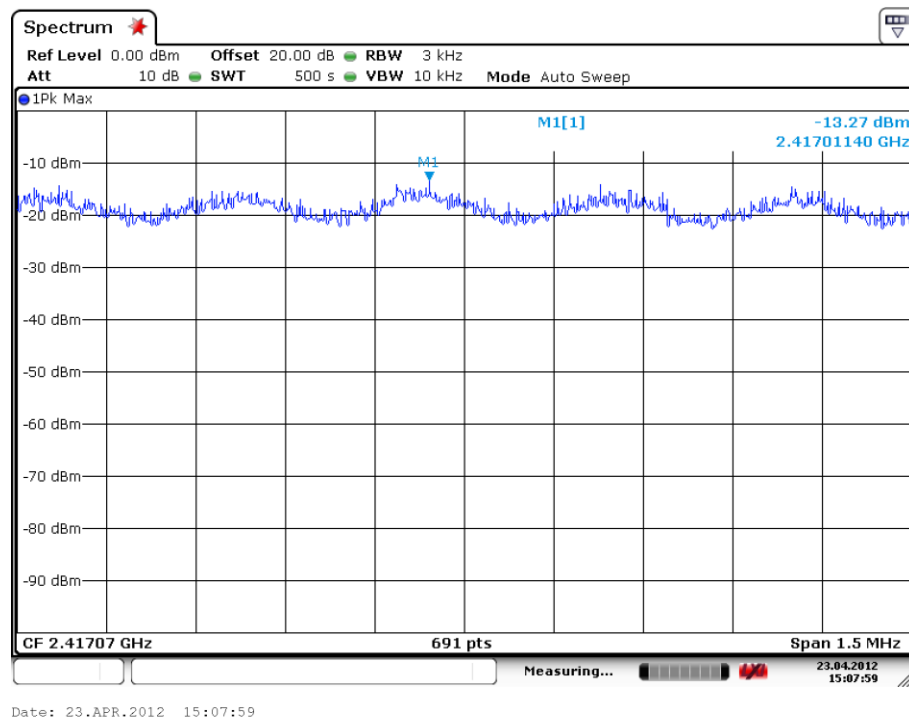


Fig. 4 Power Spectral Density (802.11g, Ch 1)

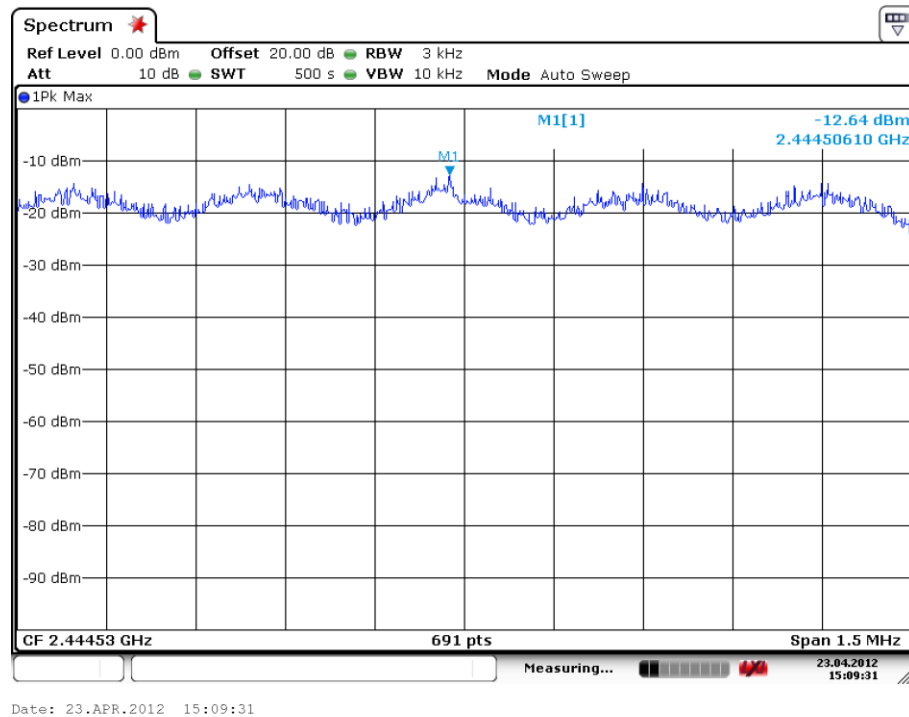


Fig. 5 Power Spectral Density (802.11g, Ch 6)

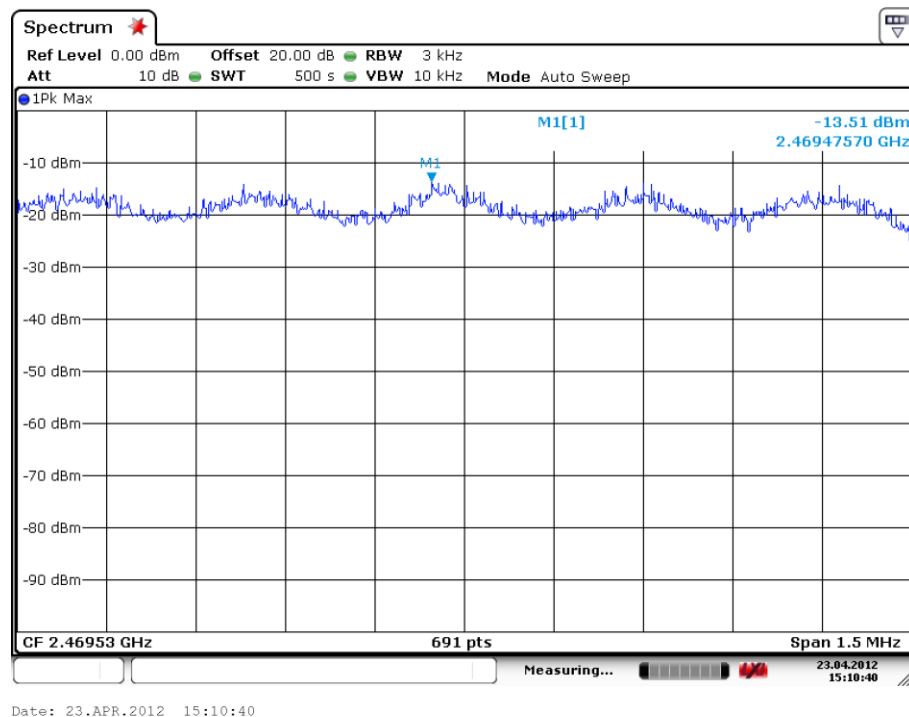


Fig. 6 Power Spectral Density (802.11g, Ch 11)

B.4. Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

802.11b/g mode

Mode	Channel	Occupied 6dB Bandwidth (kHz)		conclusion
802.11b	1	Fig.7	8230	P
	6	Fig.8	9558	P
	11	Fig.9	9225	P
802.11g	1	Fig.10	16606	P
	6	Fig.11	16569	P
	11	Fig.12	16569	P

Conclusion: PASS

Test graphs as below:

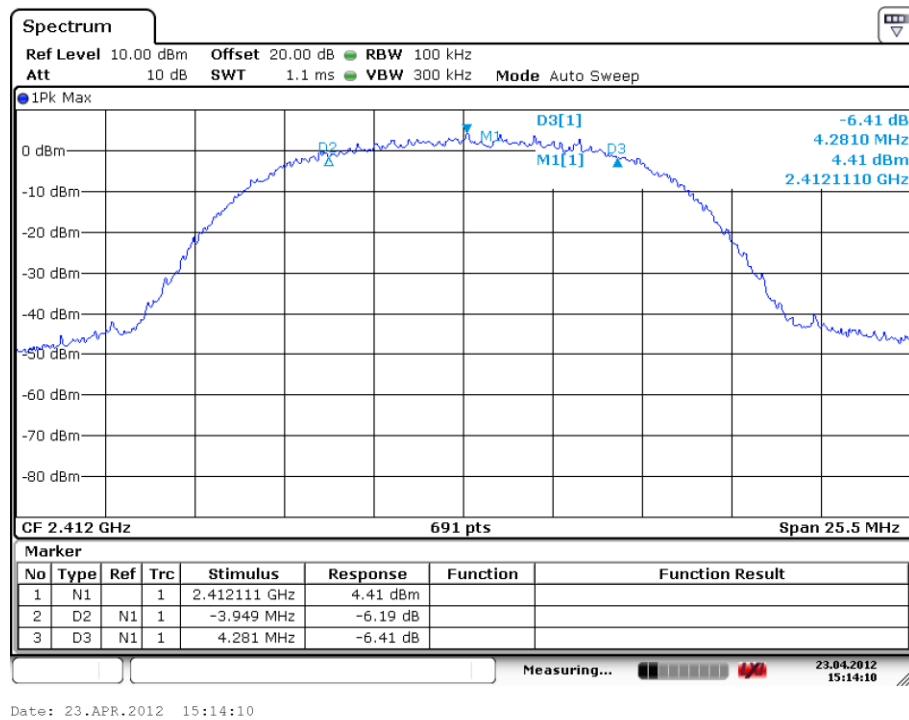


Fig. 7 Occupied 6dB Bandwidth (802.11b, Ch 1)

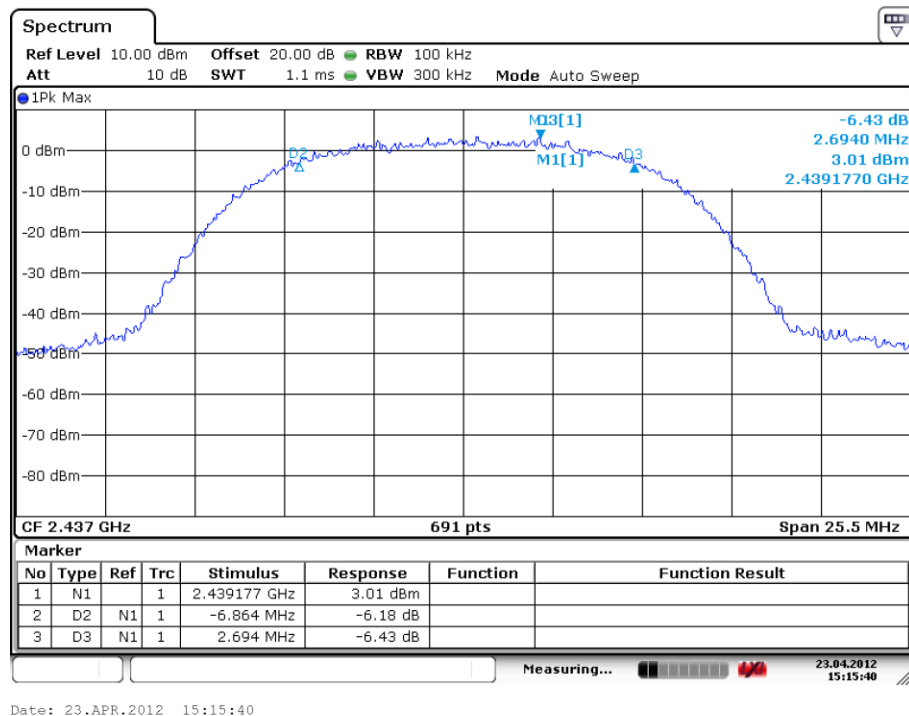


Fig. 8 Occupied 6dB Bandwidth (802.11b, Ch 6)

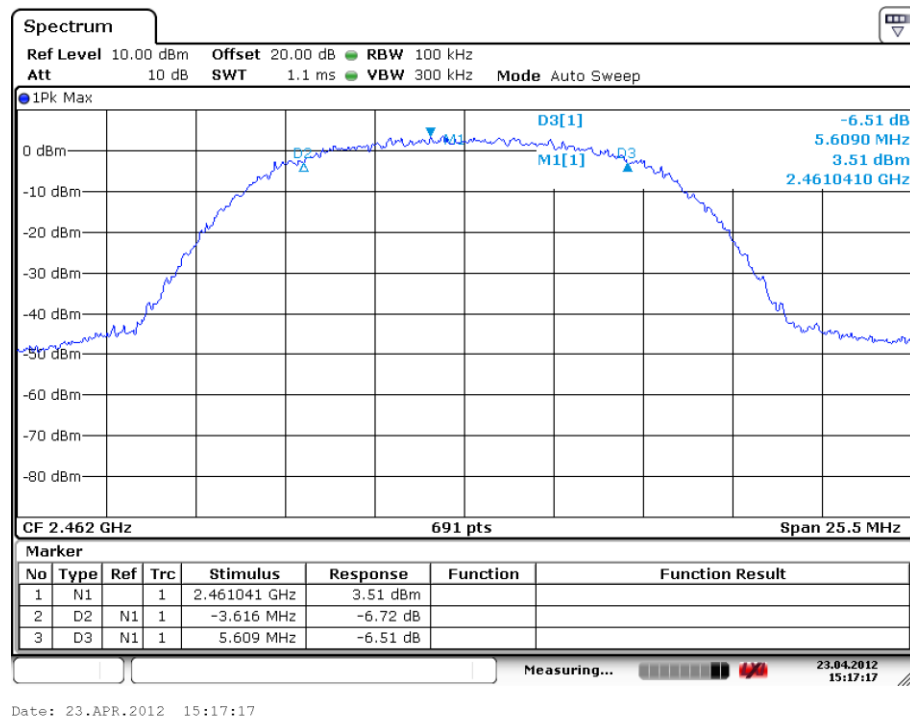


Fig. 9 Occupied 6dB Bandwidth (802.11b, Ch 11)

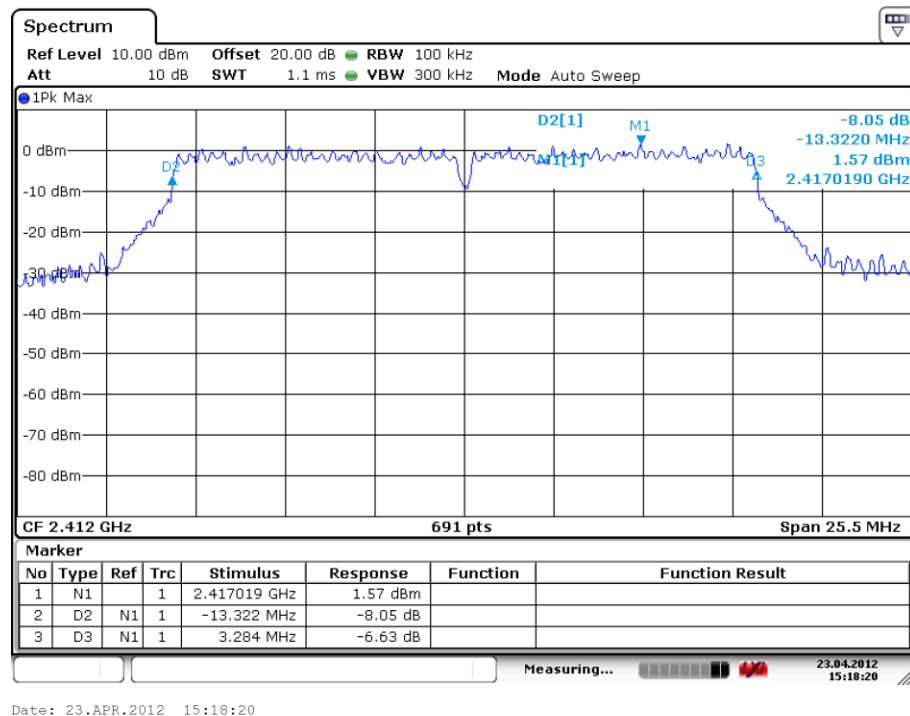


Fig. 10 Occupied 6dB Bandwidth (802.11g, Ch 1)

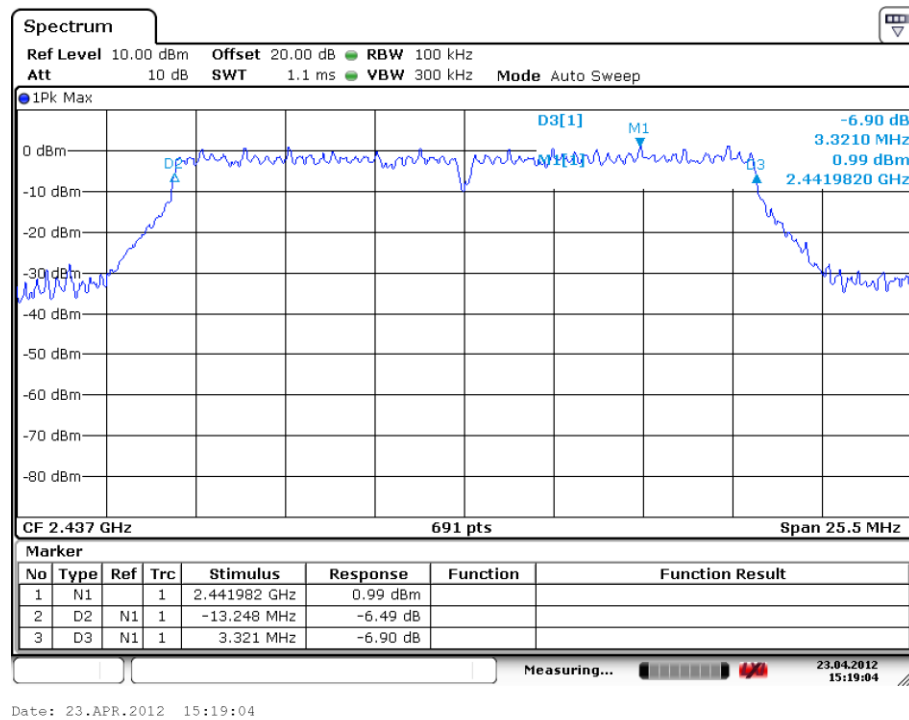


Fig. 11 Occupied 6dB Bandwidth (802.11g, Ch 6)

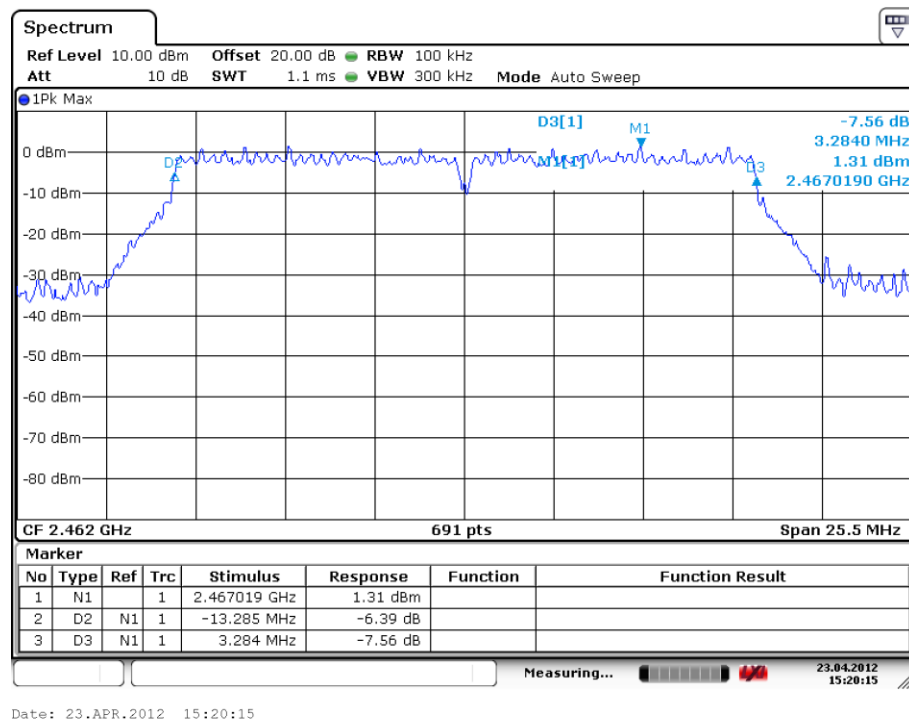


Fig. 12 Occupied 6dB Bandwidth (802.11g, Ch 11)

B.5. Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.13	P
	11	Fig.14	P
802.11g	1	Fig.15	P
	11	Fig.16	P

Conclusion: PASS

Test graphs as below:

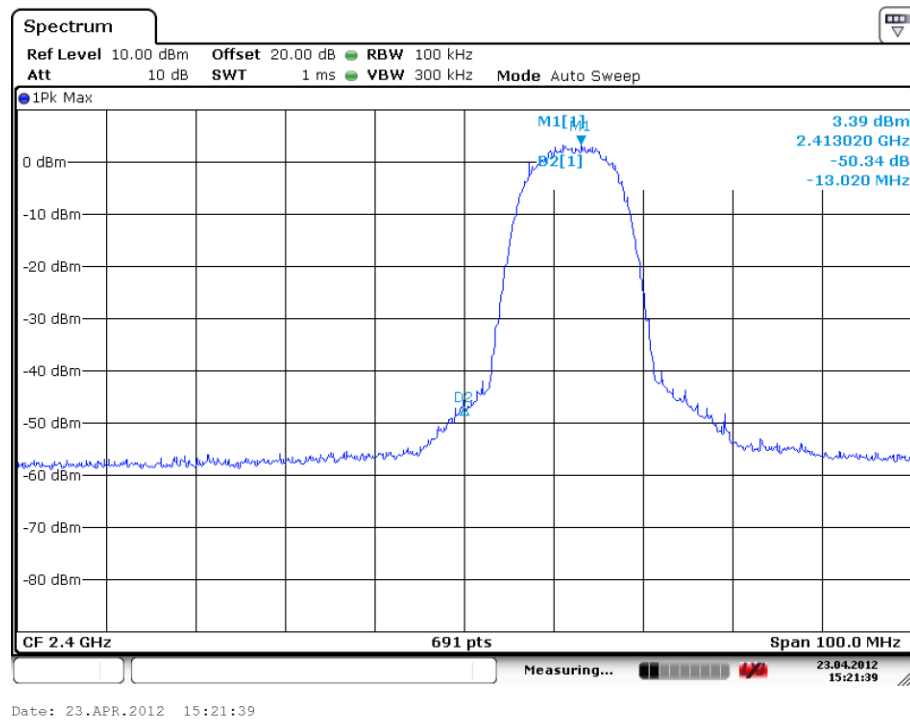


Fig. 13 Band Edges (802.11b, Ch 1)

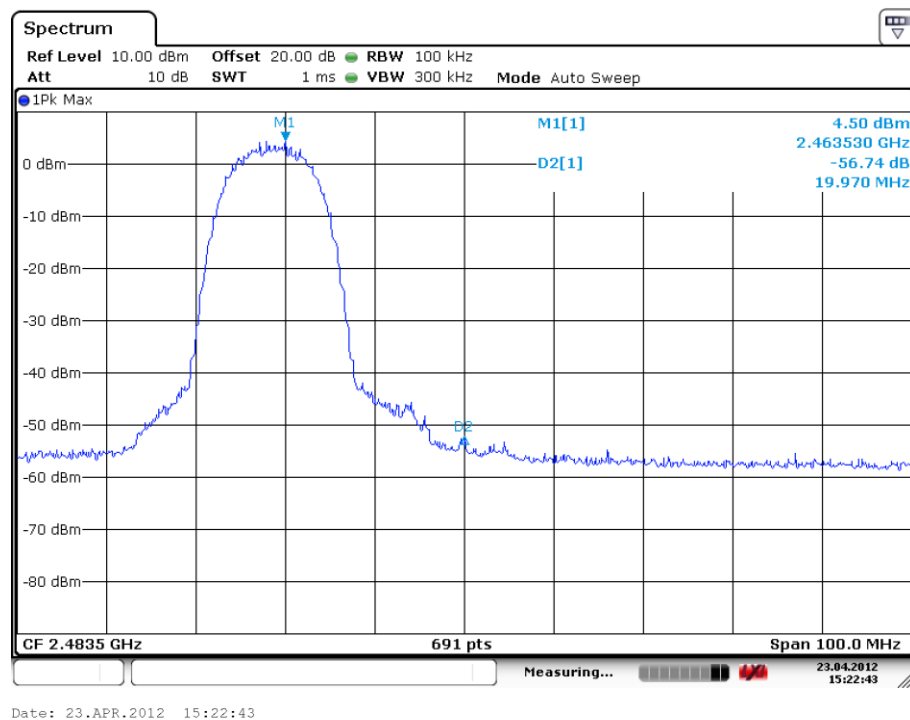


Fig. 14 Band Edges (802.11b, Ch 11)

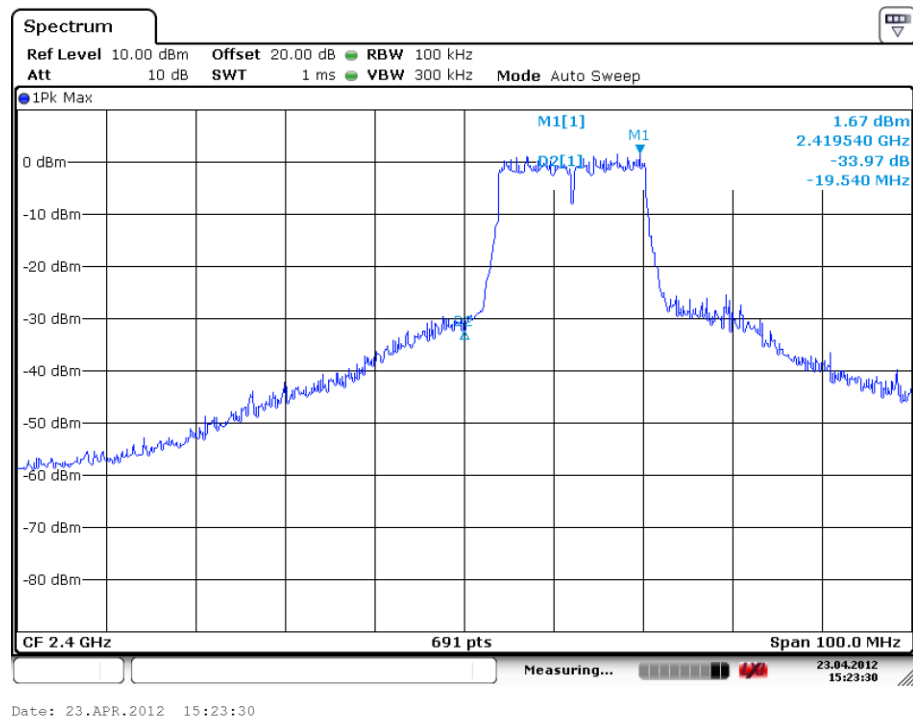


Fig. 15 Band Edges (802.11g, Ch 1)

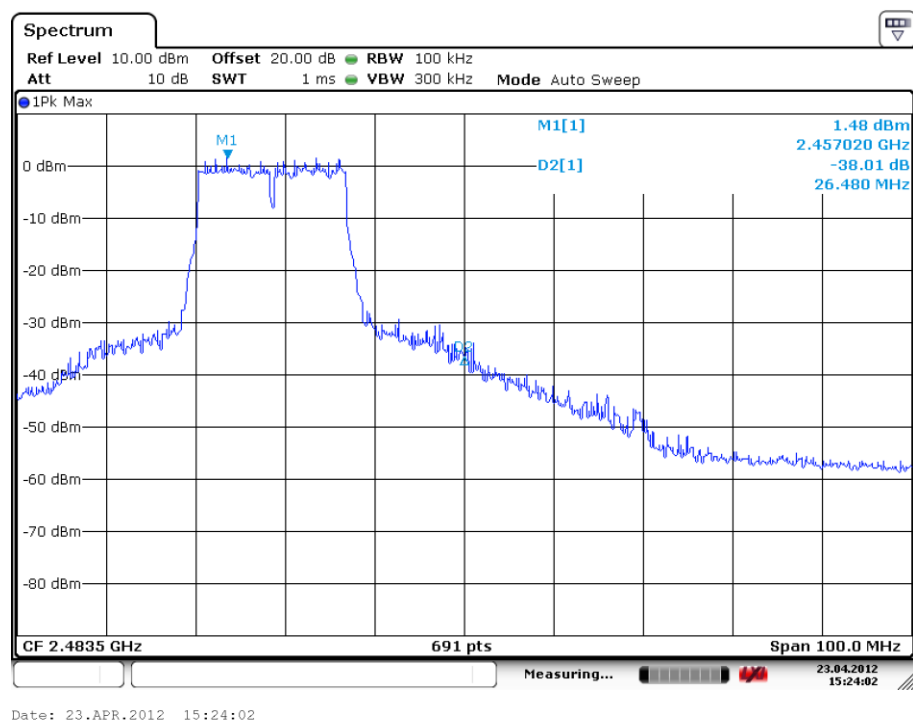


Fig. 16 Band Edges (802.11g, Ch 11)

B.6. Transmitter Spurious Emission

B.6.1 Transmitter Spurious Emission - Conducted

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Frequency Range	Uncertainty
$30\text{MHz} \leq f \leq 2\text{GHz}$	0.63
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	0.82
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.55
$8\text{GHz} \leq f \leq 20\text{GHz}$	1.86
$20\text{GHz} \leq f \leq 22\text{GHz}$	1.90
$22\text{GHz} \leq f \leq 26\text{GHz}$	2.20

Measurement Results:

802.11b/g mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.17	P
		30 MHz-3 GHz	Fig.18	P
		3GHz-18GHz	Fig.19	P
	6	2.437 GHz	Fig.20	P
		30 MHz-3 GHz	Fig.21	P
		3GHz-18GHz	Fig.22	P
	11	2.462 GHz	Fig.23	P
		30 MHz-3 GHz	Fig.24	P
		3GHz-18GHz	Fig.25	P
802.11g	1	2.412 GHz	Fig.26	P
		30 MHz-3 GHz	Fig.27	P
		3GHz-18GHz	Fig.28	P
	6	2.437 GHz	Fig.29	P
		30 MHz-3 GHz	Fig.30	P
		3GHz-18GHz	Fig.31	P
	11	2.462 GHz	Fig.32	P
		30 MHz-3 GHz	Fig.33	P
		3GHz-18GHz	Fig.34	P
/	All channels	18GHz-26GHz	Fig.35	P

Conclusion: PASS

Test graphs as below:

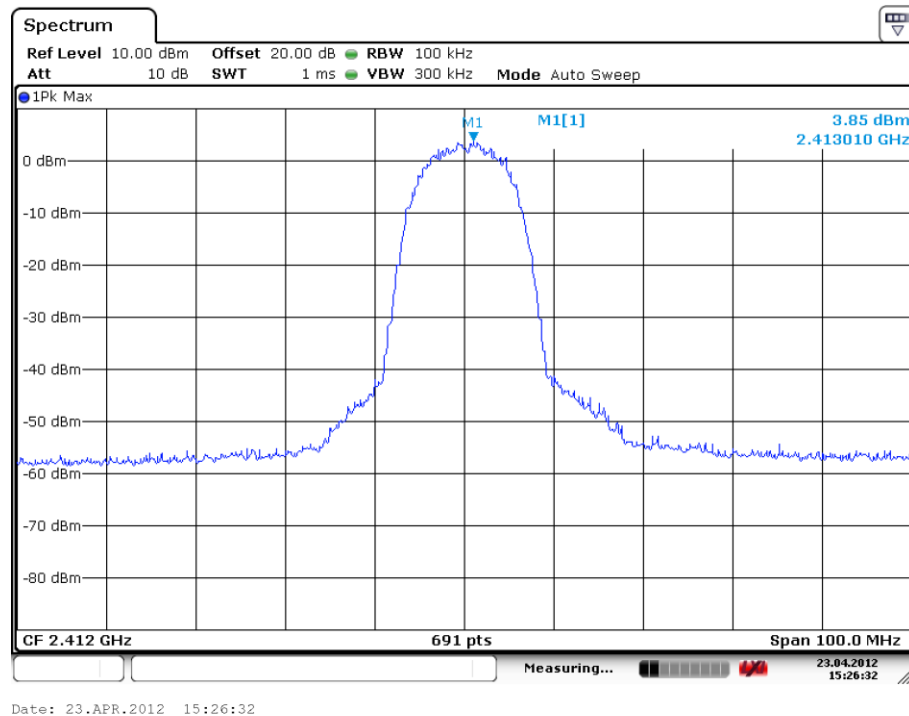


Fig. 17 Conducted Spurious Emission (802.11b, Ch1, Center Frequency)

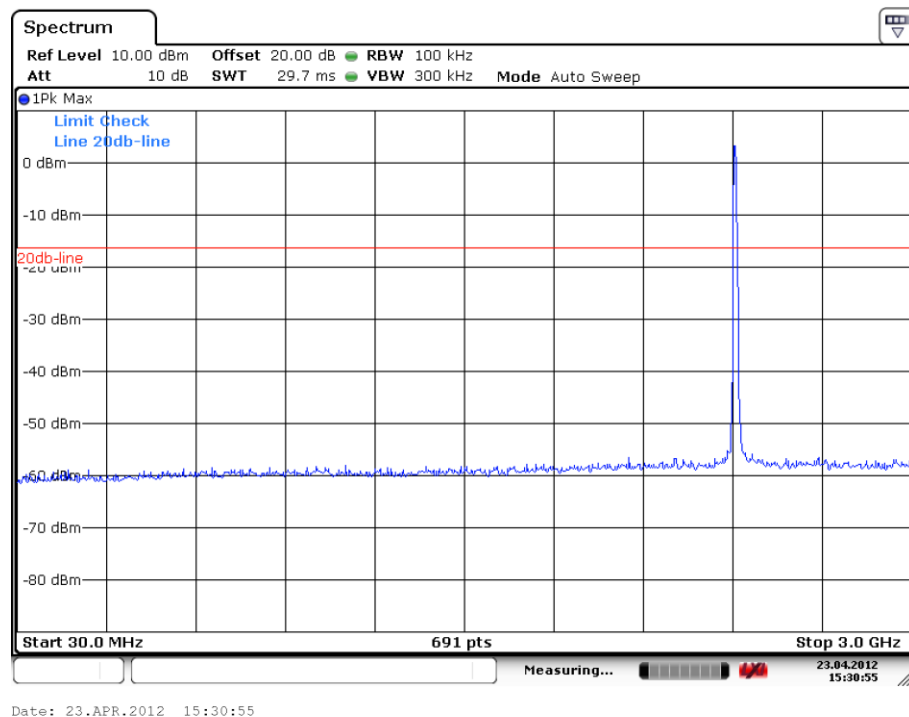


Fig. 18 Conducted Spurious Emission (802.11b, Ch1, 30 MHz-3 GHz)

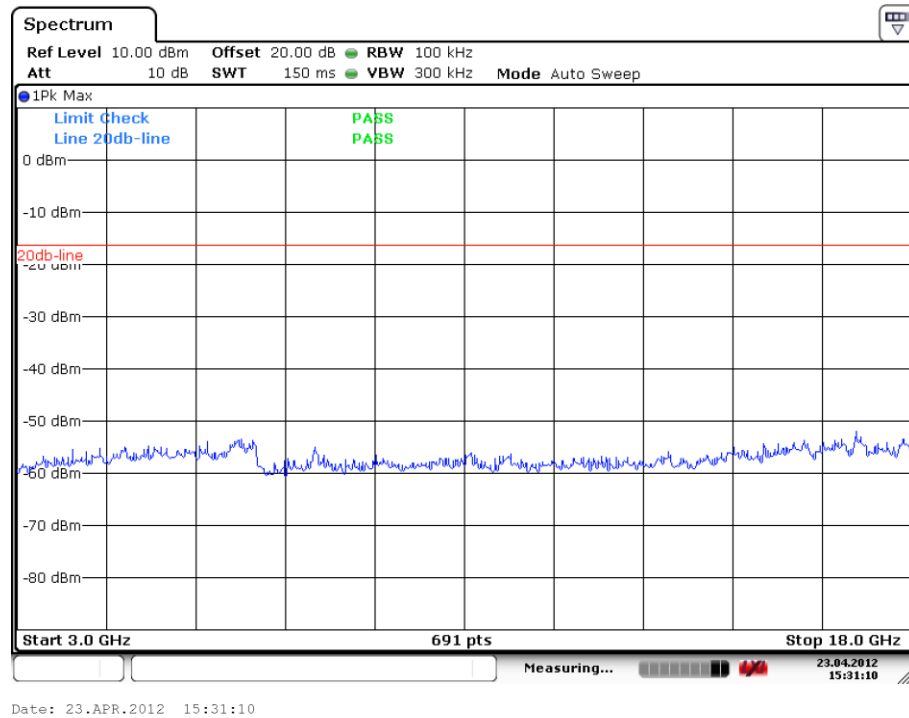


Fig. 19 Conducted Spurious Emission (802.11b, Ch1, 3 GHz-18 GHz)

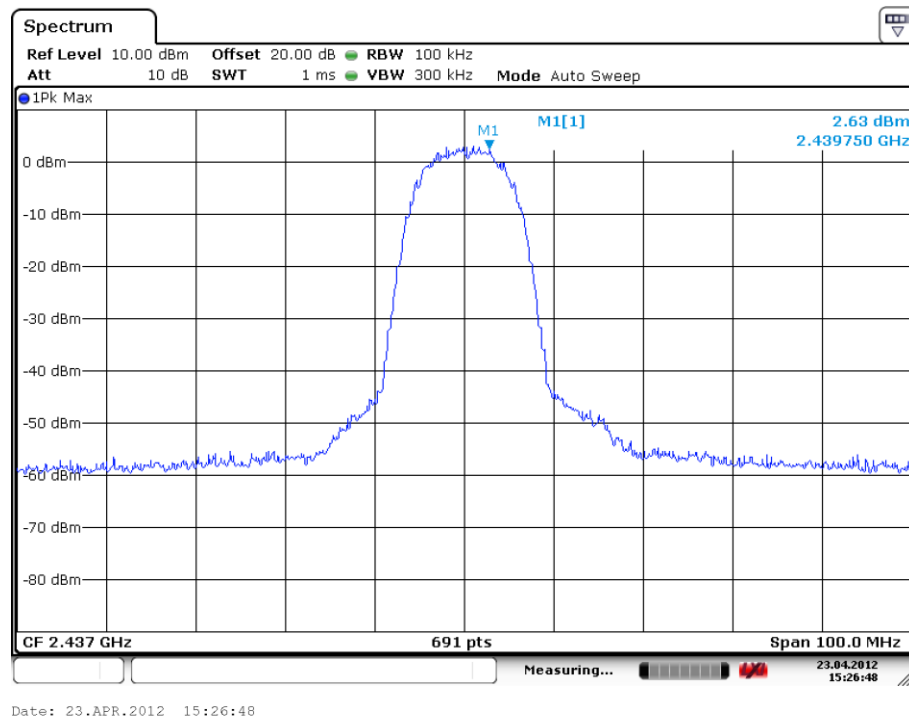


Fig. 20 Conducted Spurious Emission (802.11b, Ch6, Center Frequency)

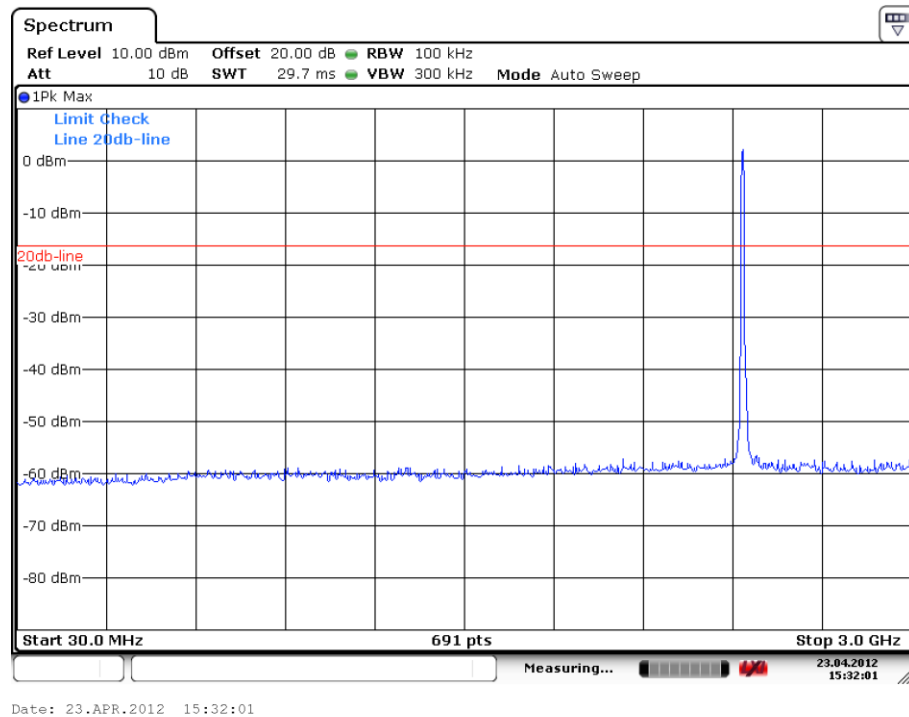


Fig. 21 Conducted Spurious Emission (802.11b, Ch6, 30 MHz-3 GHz)

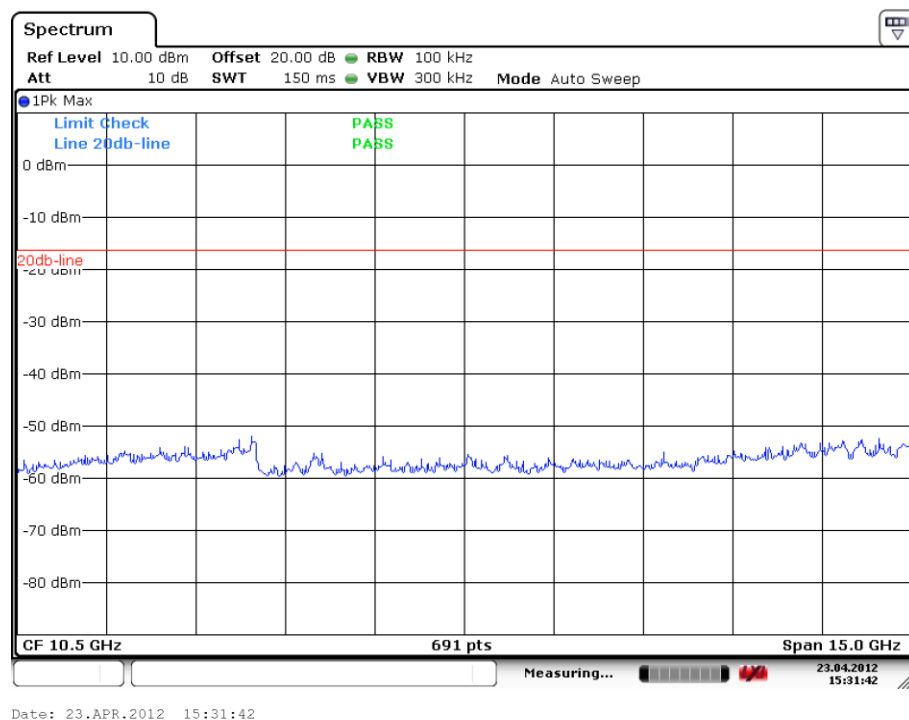


Fig. 22 Conducted Spurious Emission (802.11b, Ch6, 3 GHz-18 GHz)

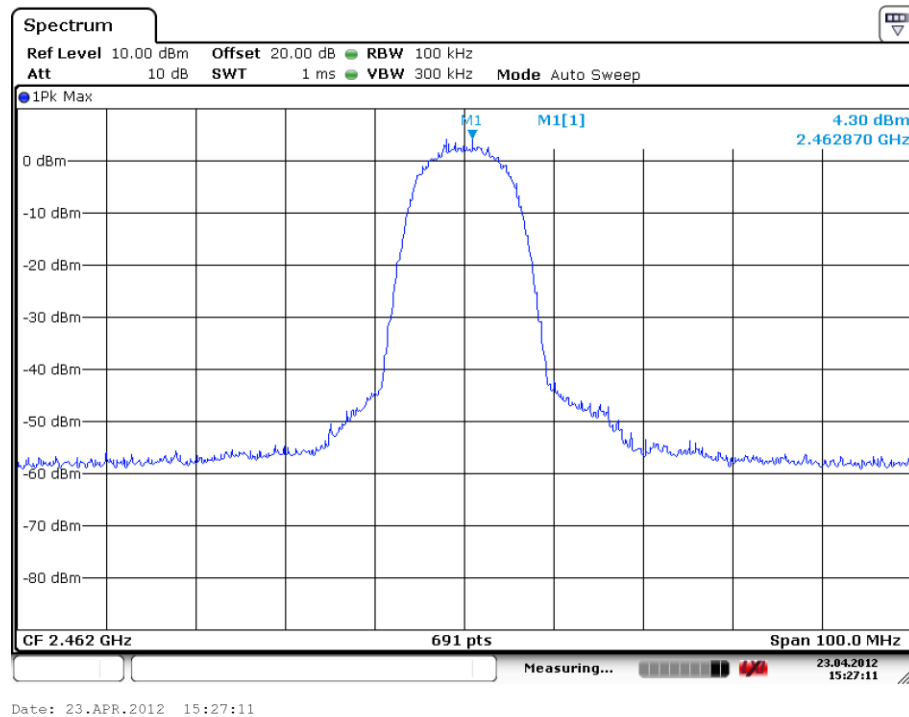


Fig. 23 Conducted Spurious Emission (802.11b, Ch11, Center Frequency)

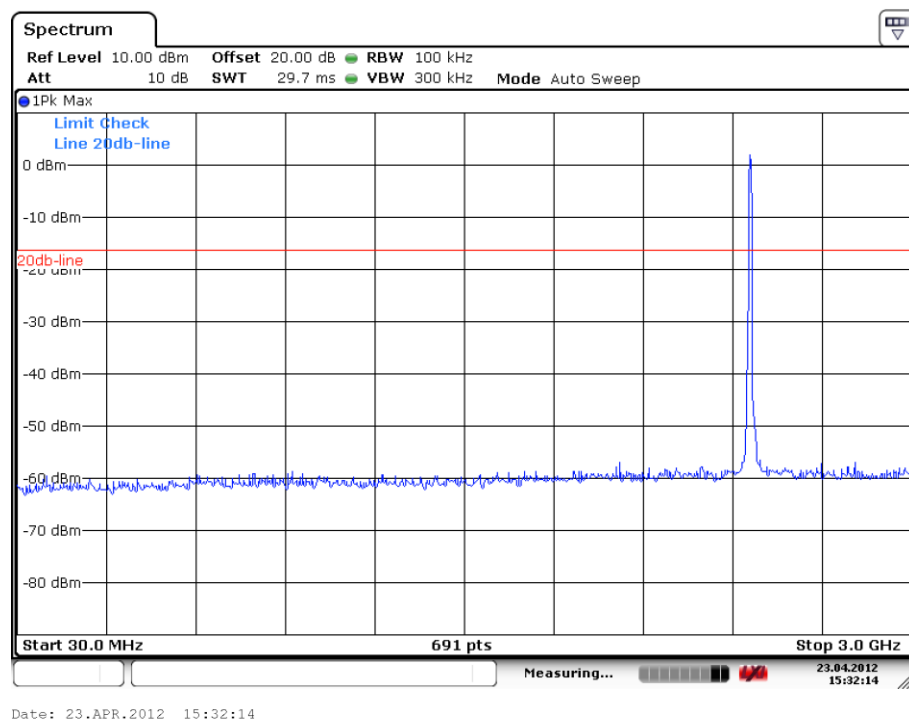


Fig. 24 Conducted Spurious Emission (802.11b, Ch11, 30 MHz-3 GHz)

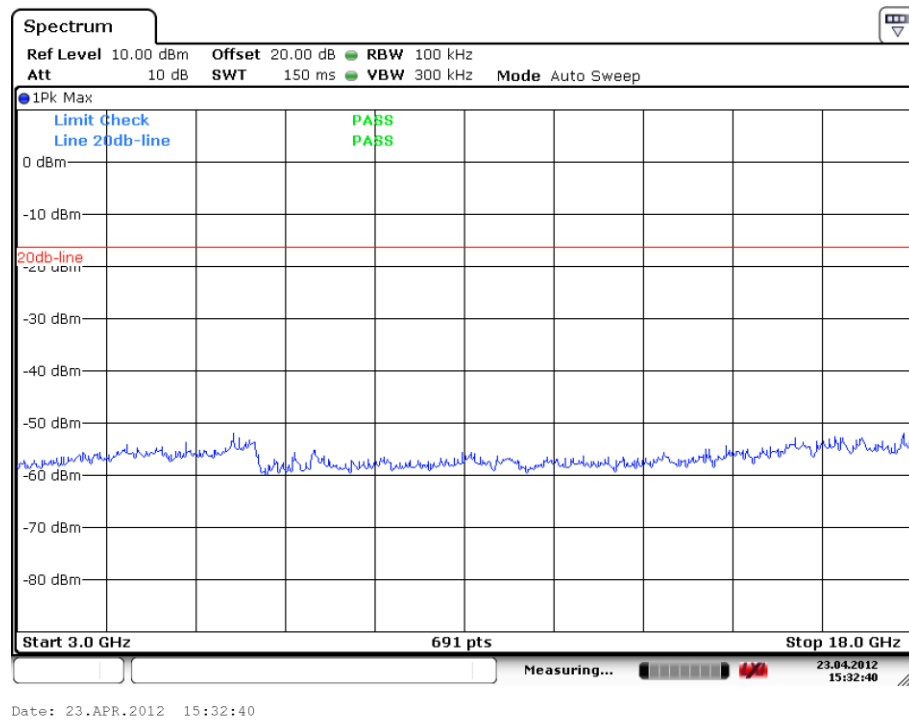


Fig. 25 Conducted Spurious Emission (802.11b, Ch11, 3 GHz-18 GHz)

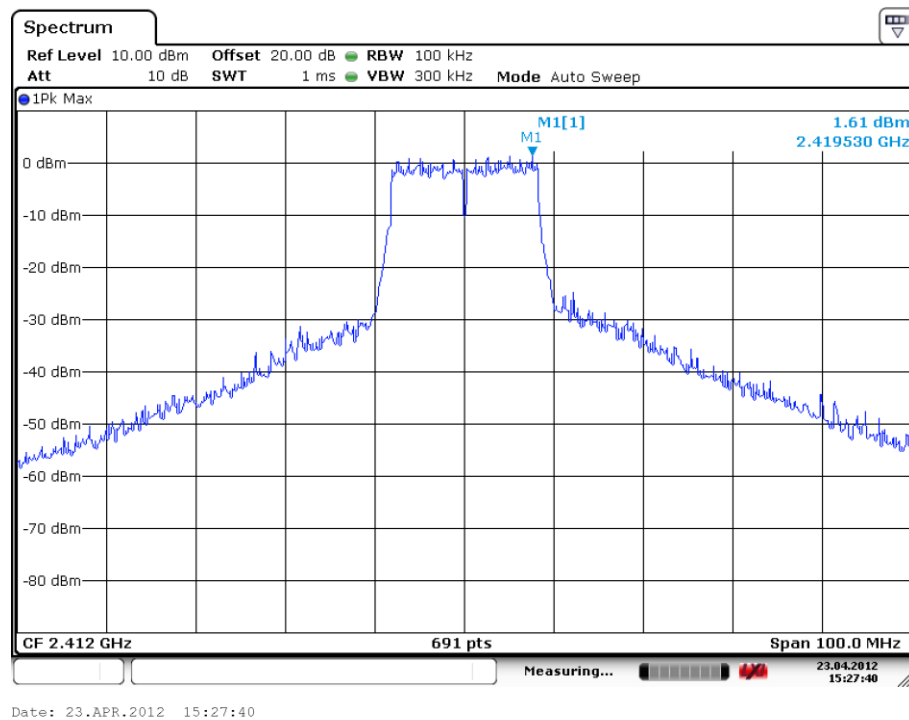


Fig. 26 Conducted Spurious Emission (802.11g, Ch1, Center Frequency)

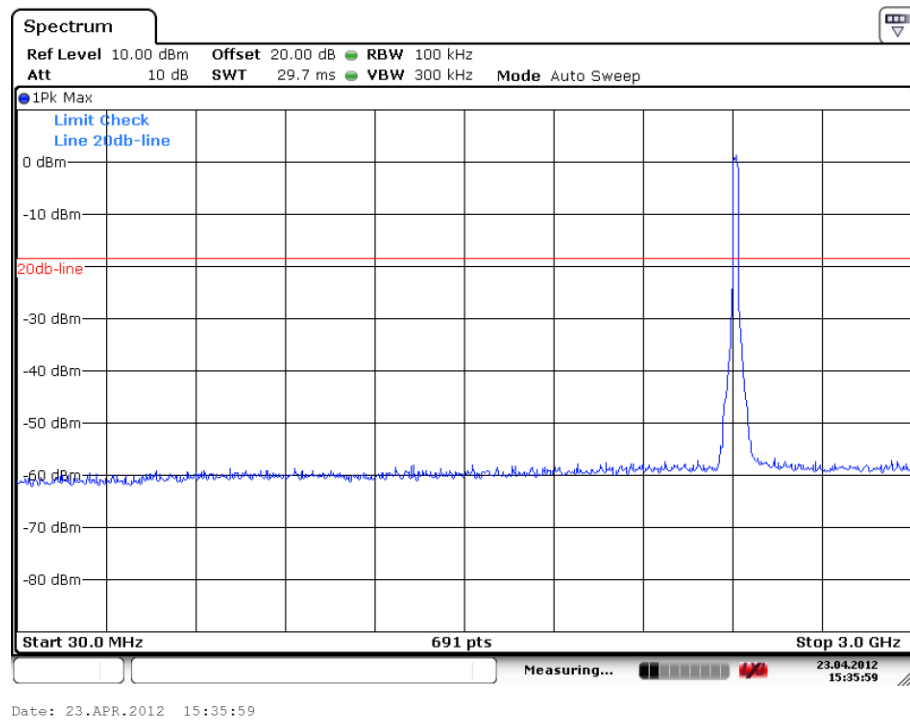


Fig. 27 Conducted Spurious Emission (802.11g, Ch1, 30 MHz-3 GHz)

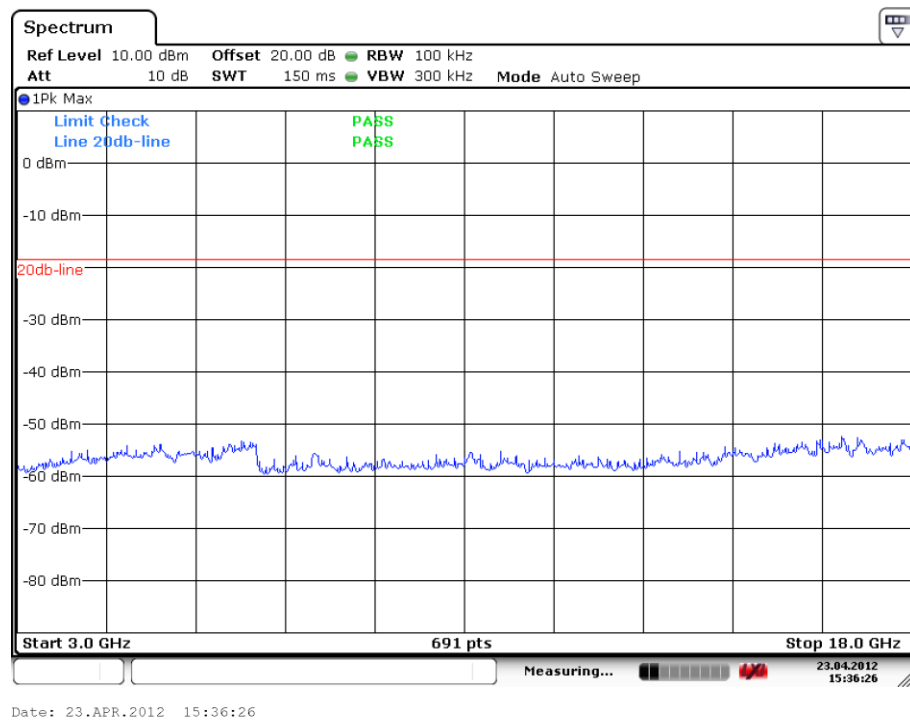


Fig. 28 Conducted Spurious Emission (802.11g, Ch1, 3 GHz-18 GHz)

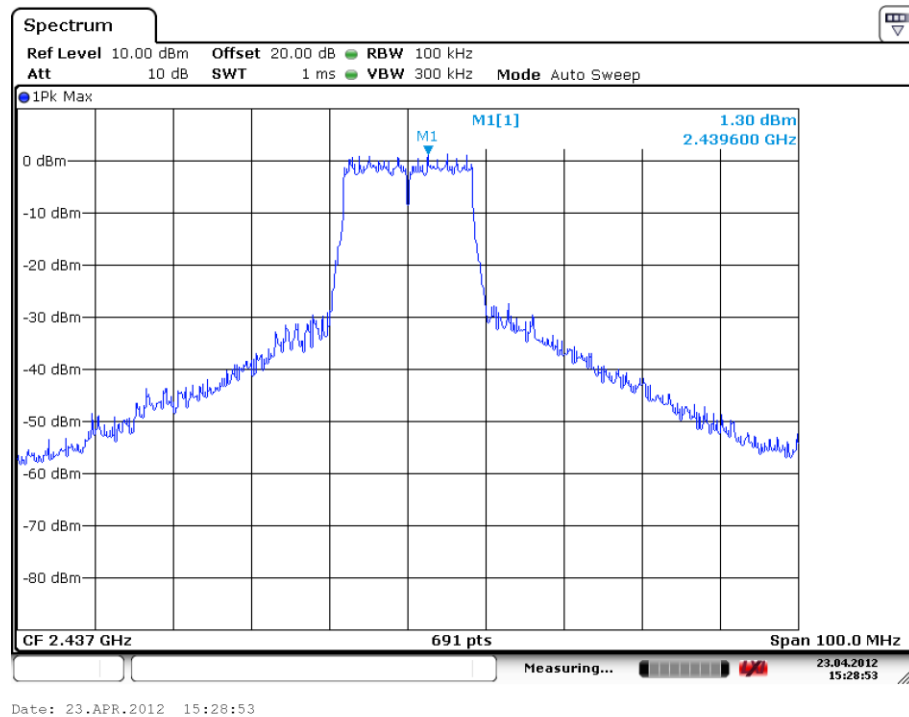


Fig. 29 Conducted Spurious Emission (802.11g, Ch6, Center Frequency)

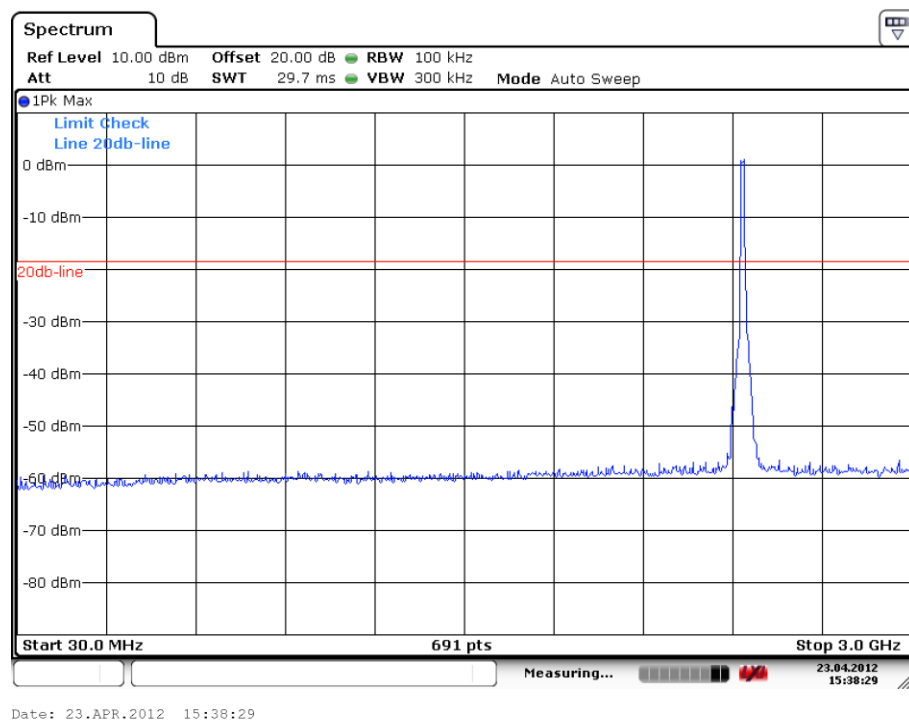


Fig. 30 Conducted Spurious Emission (802.11g, Ch6, 30 MHz-3 GHz)

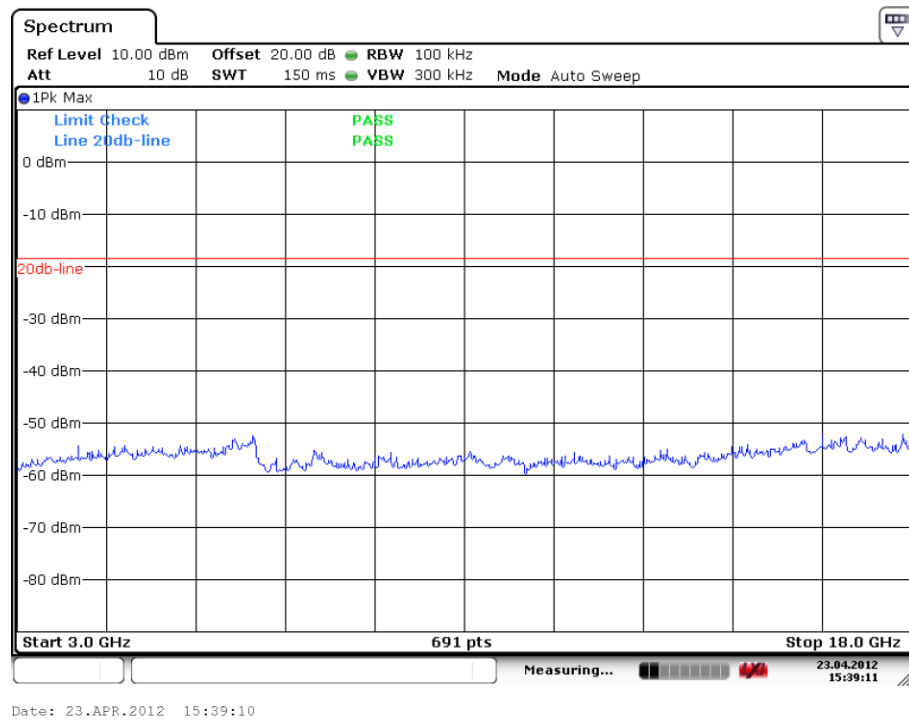


Fig. 31 Conducted Spurious Emission (802.11g, Ch6, 3 GHz-18 GHz)

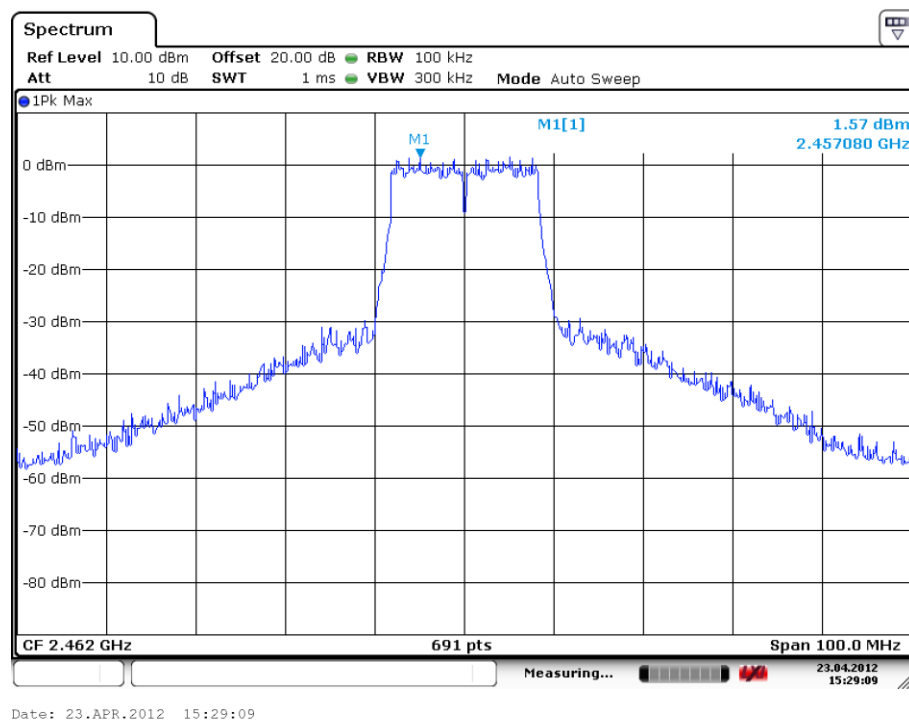


Fig. 32 Conducted Spurious Emission (802.11g, Ch11, Center Frequency)

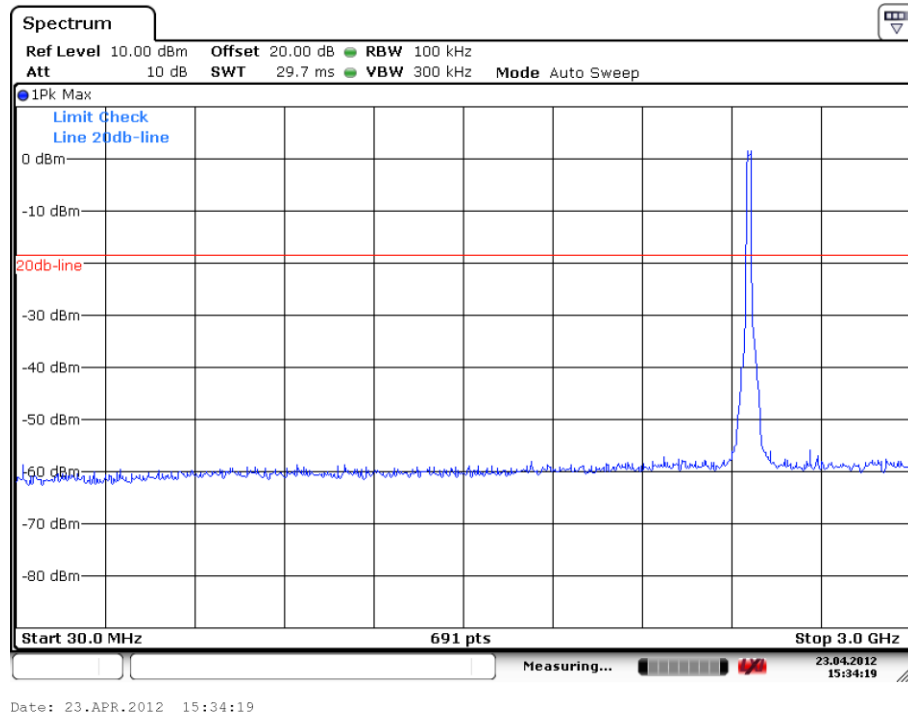


Fig. 33 Conducted Spurious Emission (802.11g, Ch11, 30 MHz-3 GHz)

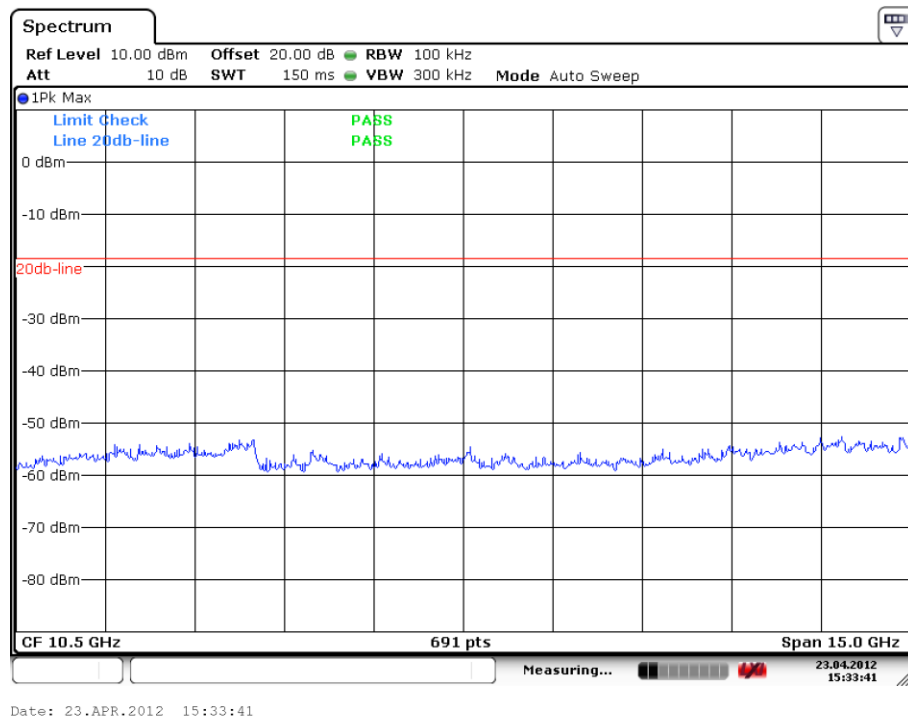


Fig. 34 Conducted Spurious Emission (802.11g, Ch11, 3 GHz-18 GHz)

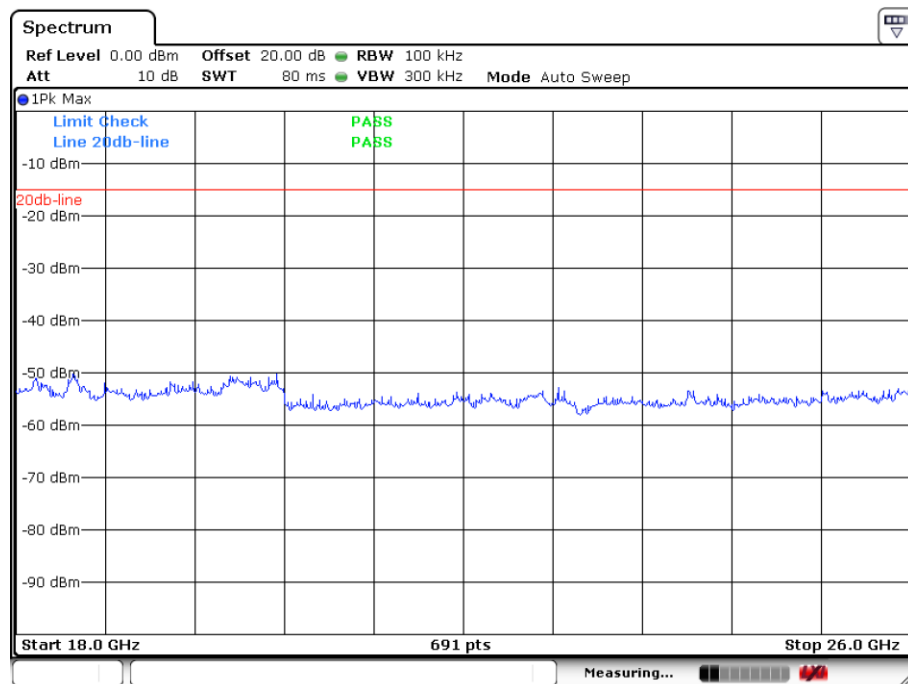


Fig. 35 Conducted Spurious Emission (All channels, 18 GHz-26 GHz)

B.6.2 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.4 and KDB558074.

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Measurement Results:

802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	30 MHz ~1 GHz	Fig.36	P
		1 GHz ~ 3 GHz	Fig.37	P
		3 GHz ~ 18 GHz	Fig.38	P
	6	30 MHz ~1 GHz	Fig.39	P
		1 GHz ~ 3 GHz	Fig.40	P
		3 GHz ~ 18 GHz	Fig.41	P
	11	30 MHz ~1 GHz	Fig.42	P
		1 GHz ~ 3 GHz	Fig.43	P
		3 GHz ~ 18 GHz	Fig.44	P
802.11g	1	30 MHz ~1 GHz	Fig.45	P
		1 GHz ~ 3 GHz	Fig.46	P
		3 GHz ~ 18 GHz	Fig.47	P
	6	30 MHz ~1 GHz	Fig.48	P
		1 GHz ~ 3 GHz	Fig.49	P
		3 GHz ~ 18 GHz	Fig.50	P
	11	30 MHz ~1 GHz	Fig.51	P
		1 GHz ~ 3 GHz	Fig.52	P
		3 GHz ~ 18 GHz	Fig.53	P
/	All channels	18 GHz~ 26.5 GHz	Fig.54	P

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= $P_{Mea}+A_{Rpl}= P_{Mea}+Cable Loss+Antenna Factor$

802.11b
Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss + Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2404.00	69.3	1.8	67.5	V
2408.00	91.4	1.8	89.6	H
2412.00	93.7	1.8	91.9	V
2416.00	91.9	1.8	90.1	V
2420.00	70.1	1.8	68.3	V
2424.00	45.4	1.8	43.6	V

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss + Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2429.00	67.9	1.8	66.1	V
2433.00	88.8	1.8	87	V
2437.00	90.1	1.8	88.3	H
2441.00	86.3	1.9	84.4	H
2445.00	63.5	1.9	61.6	V
2449.00	39.4	1.9	37.5	V

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss + Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2454.00	74.1	1.9	72.2	V
2458.00	94.5	1.9	92.6	H
2462.00	94.6	1.9	92.7	H
2466.00	94.1	1.9	92.2	V
2470.00	74.4	1.9	72.5	V
2474.00	50.2	1.9	48.3	V

802.11g
Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss + Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2404.00	89.8	1.8	88	H
2408.00	90	1.8	88.2	V
2412.00	88	1.8	86.2	H
2416.00	89.4	1.8	87.6	H
2420.00	88.6	1.8	86.8	V
2424.00	52.2	1.8	50.4	V

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss + Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2429.00	80.7	1.8	78.9	V
2433.00	81.7	1.8	79.9	H
2437.00	78	1.8	76.2	H
2441.00	77.7	1.9	75.8	V
2445.00	74.7	1.9	72.8	V
2449.00	38.7	1.9	36.8	H

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss + Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2454.00	78.3	1.9	76.4	H
2458.00	81.7	1.9	79.8	V
2462.00	79.4	1.9	77.5	V
2466.00	82.5	1.9	80.6	V
2470.00	80.2	1.9	78.3	V
2474.00	43.5	1.9	41.6	V

Test graphs as below:

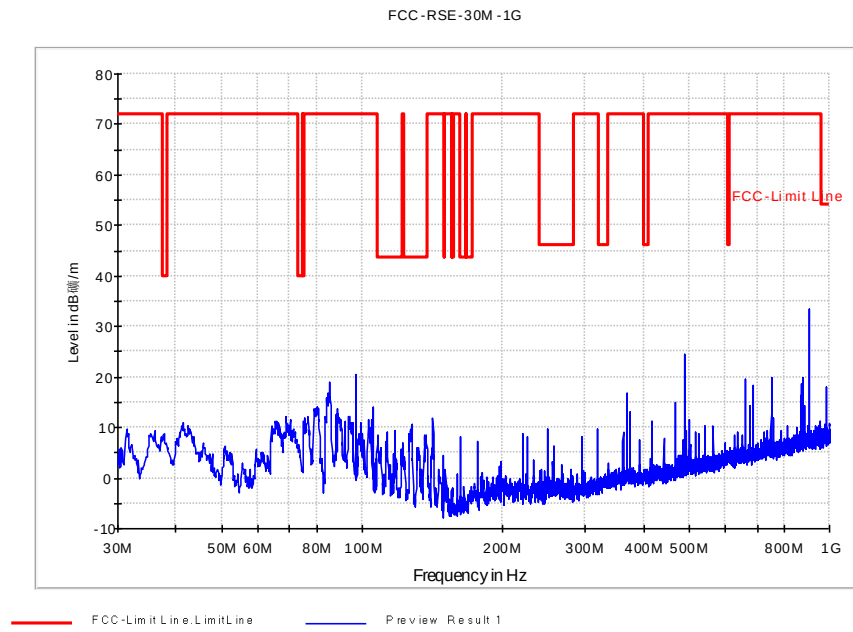


Fig. 36 Radiated Spurious Emission (802.11b, Ch1, 30 MHz-1 GHz)

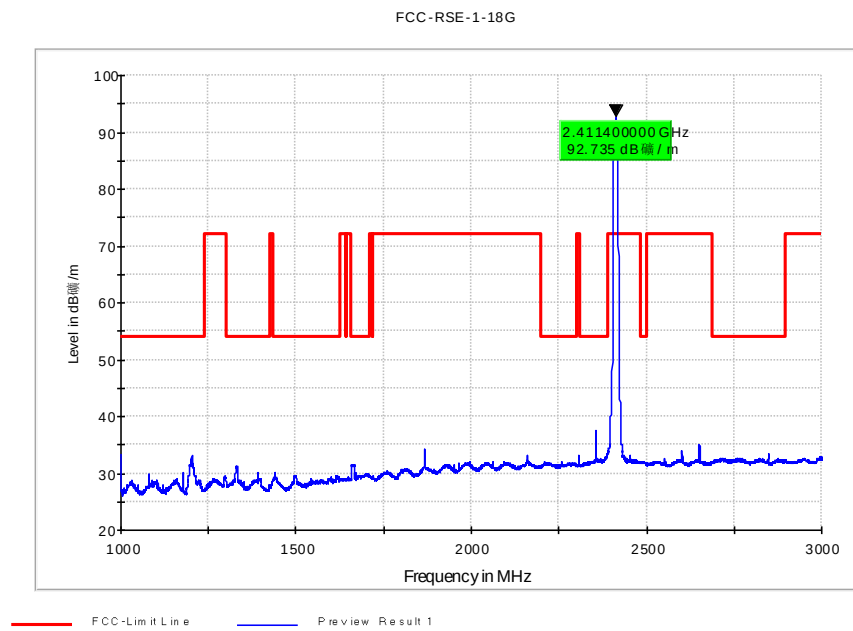


Fig. 37 Radiated Spurious Emission (802.11b, Ch1, 1 GHz-3 GHz)

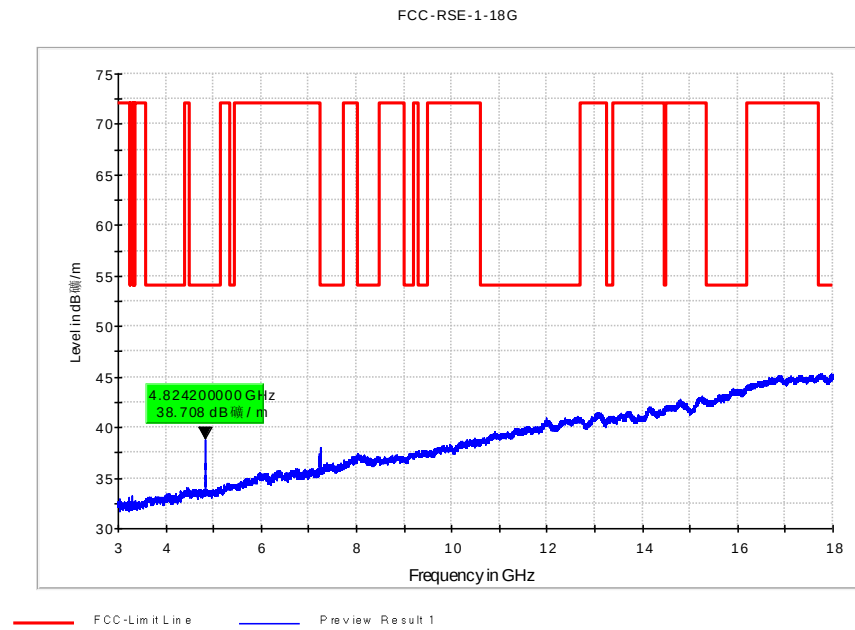


Fig. 38 Radiated Spurious Emission (802.11b, Ch1, 3 GHz-18 GHz)

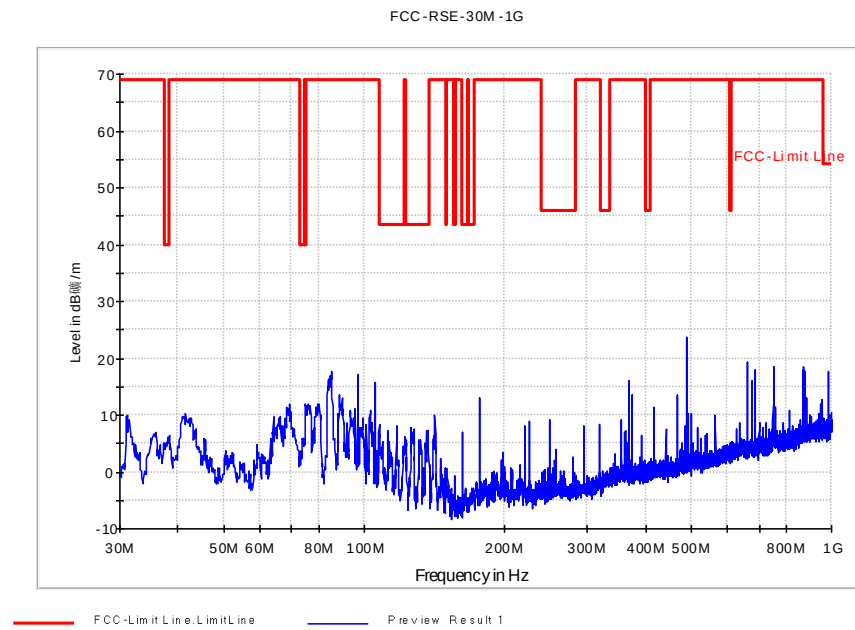


Fig. 39 Radiated Spurious Emission (802.11b, Ch6, 30 MHz-1 GHz)

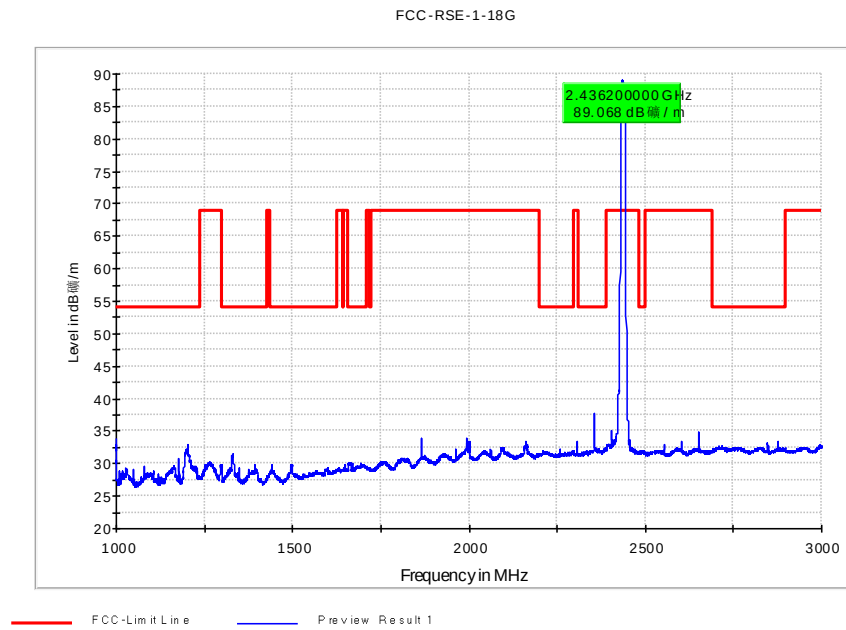


Fig. 40 Radiated Spurious Emission (802.11b, Ch6, 1 GHz-3 GHz)

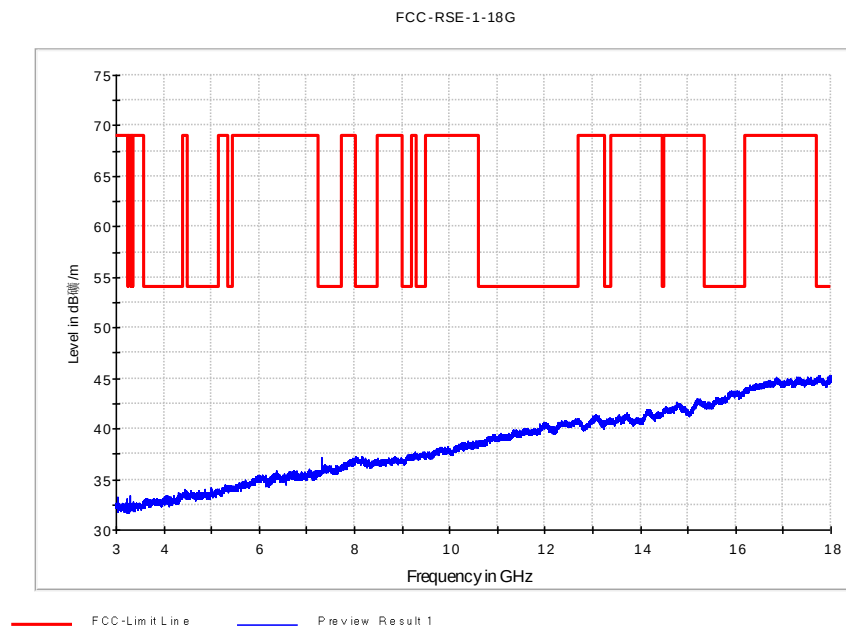


Fig. 41 Radiated Spurious Emission (802.11b, Ch6, 3 GHz-18 GHz)

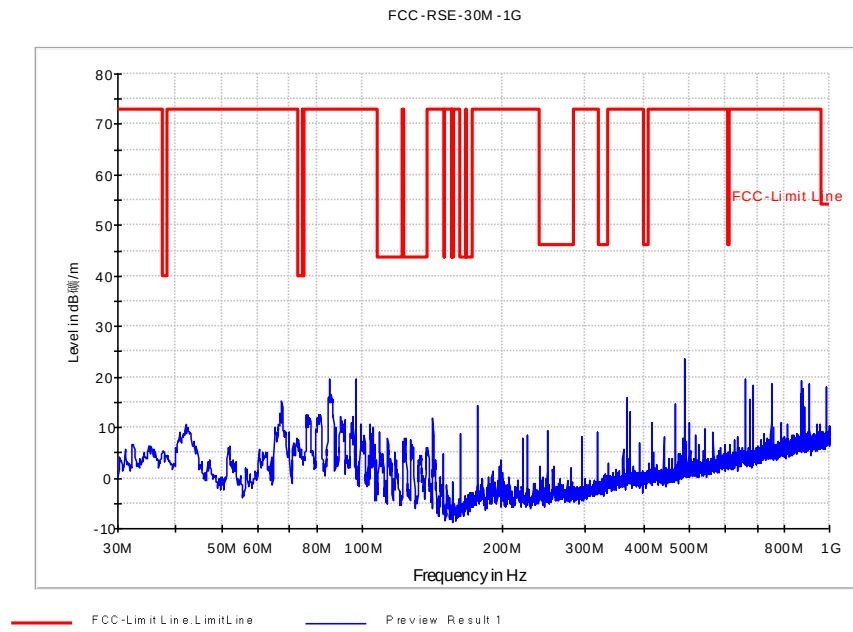


Fig. 42 Radiated Spurious Emission (802.11b, Ch11, 30 MHz-1 GHz)

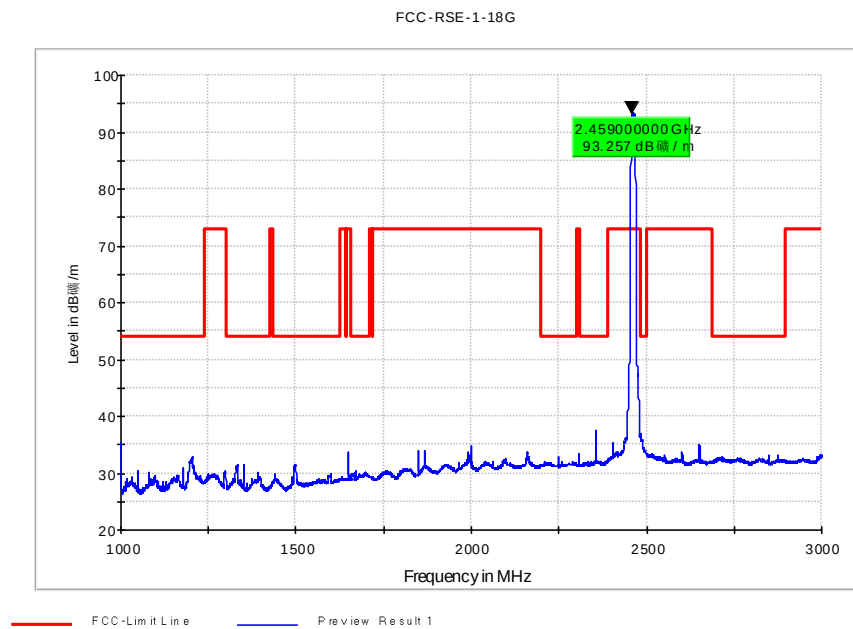


Fig. 43 Radiated Spurious Emission (802.11b, Ch11, 1 GHz-3 GHz)

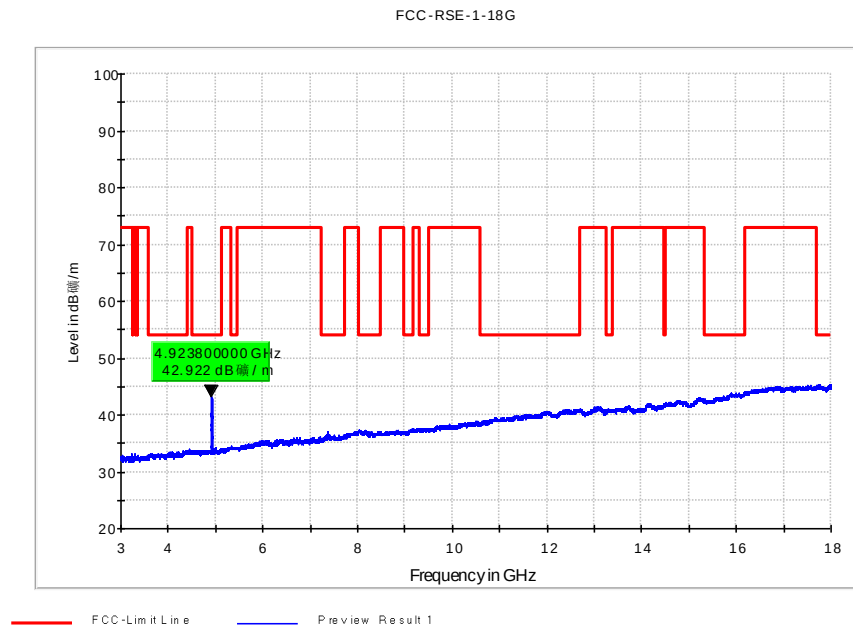


Fig. 44 Radiated Spurious Emission (802.11b, Ch11, 3 GHz-18 GHz)

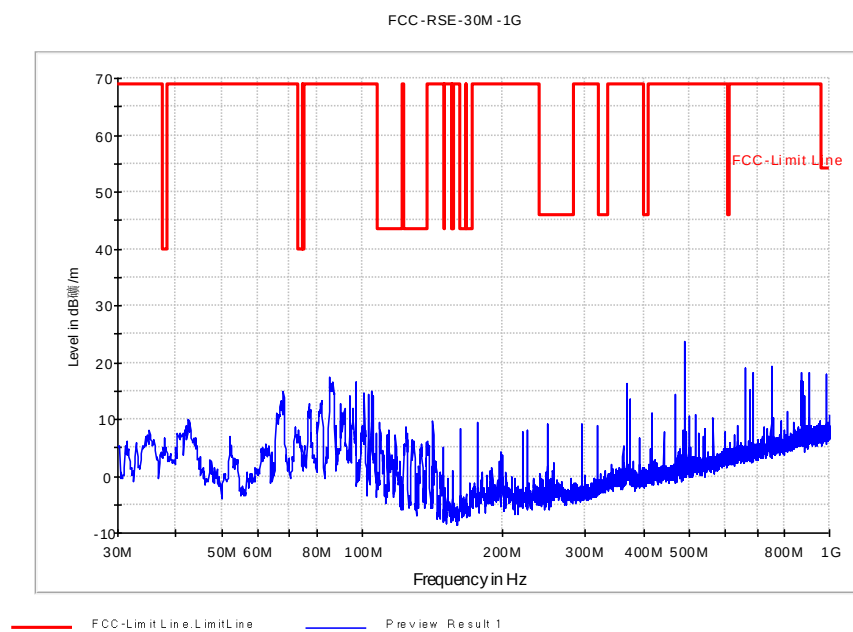


Fig. 45 Radiated Spurious Emission (802.11g, Ch1, 30 MHz-1 GHz)

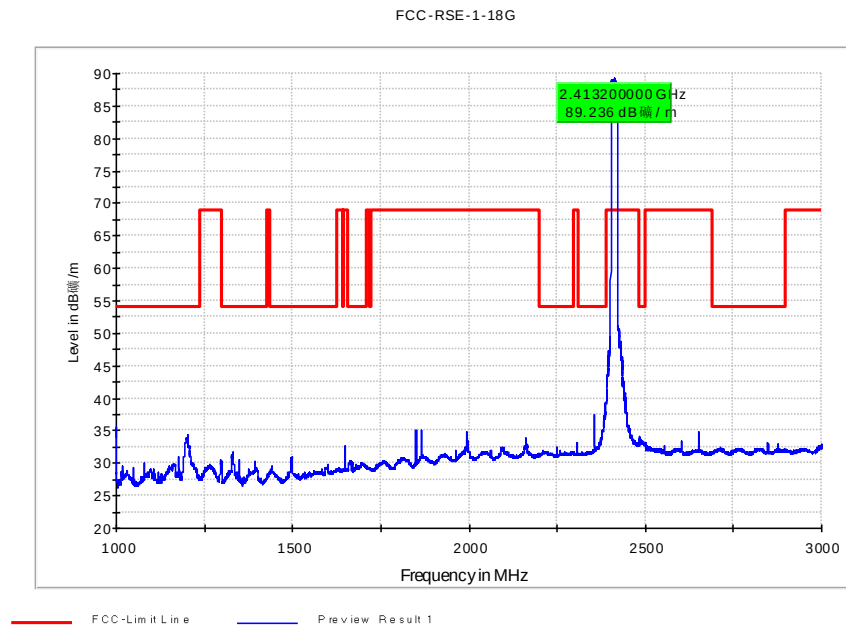


Fig. 46 Radiated Spurious Emission (802.11g, Ch1, 1 GHz-3 GHz)

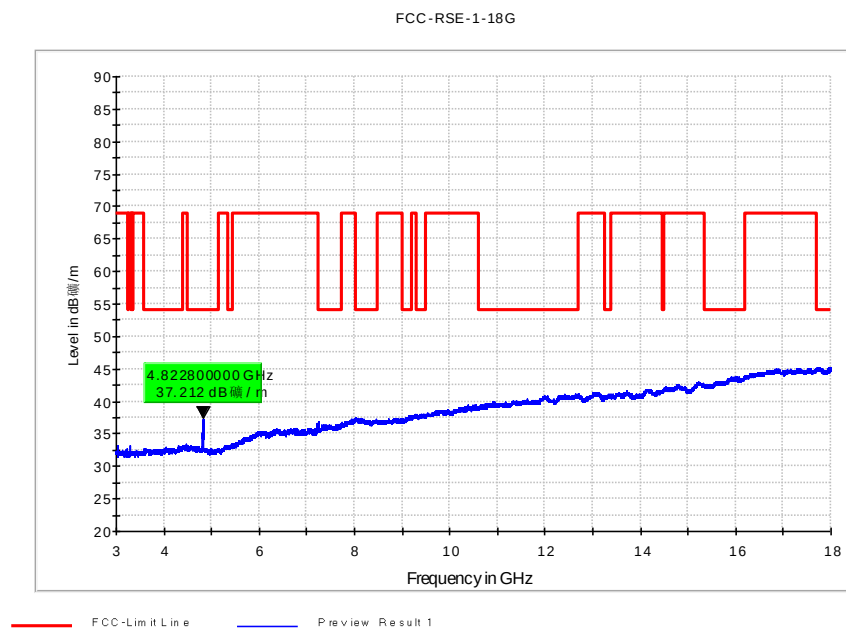


Fig. 47 Radiated Spurious Emission (802.11g, Ch1, 3 GHz-18 GHz)

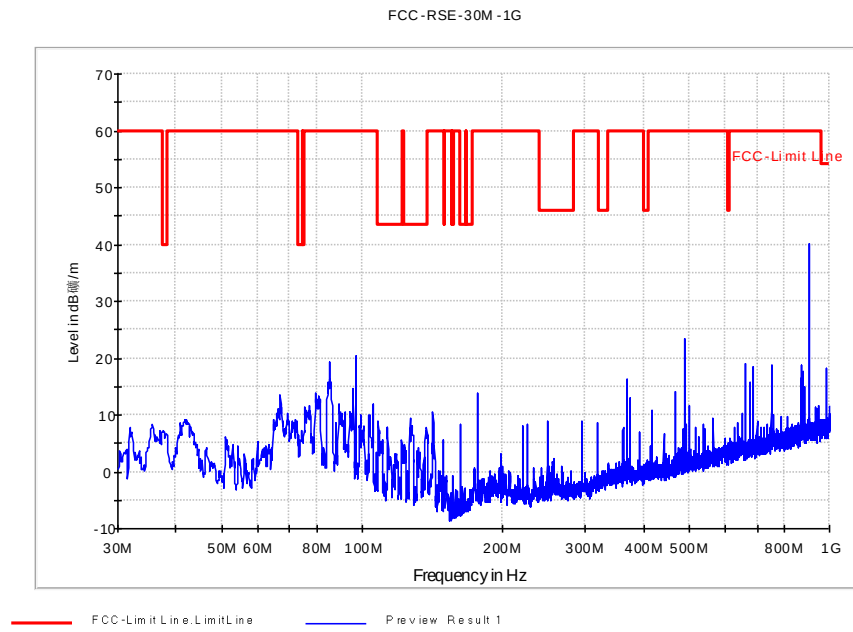


Fig. 48 Radiated Spurious Emission (802.11g, Ch6, 30 MHz-1 GHz)

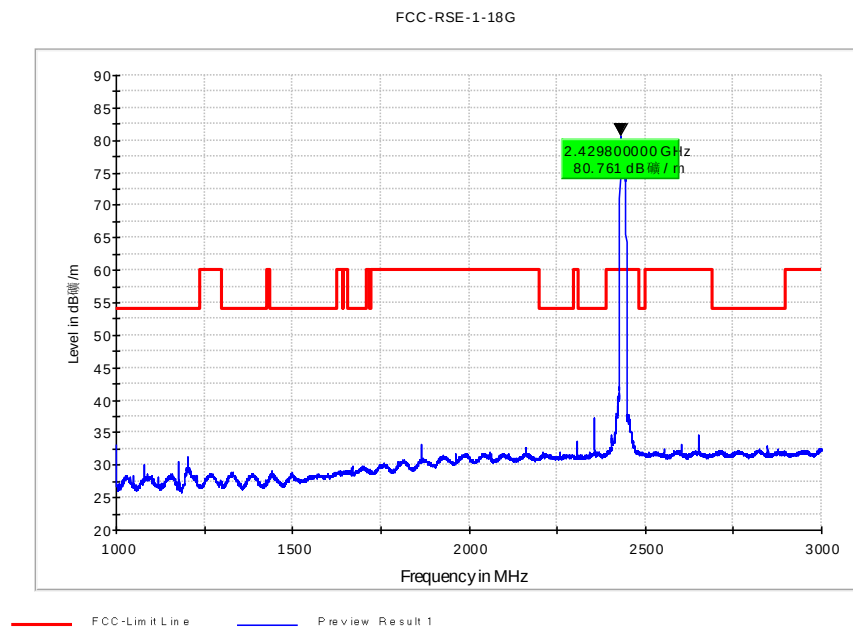


Fig. 49 Radiated Spurious Emission (802.11g, Ch6, 1 GHz-3 GHz)

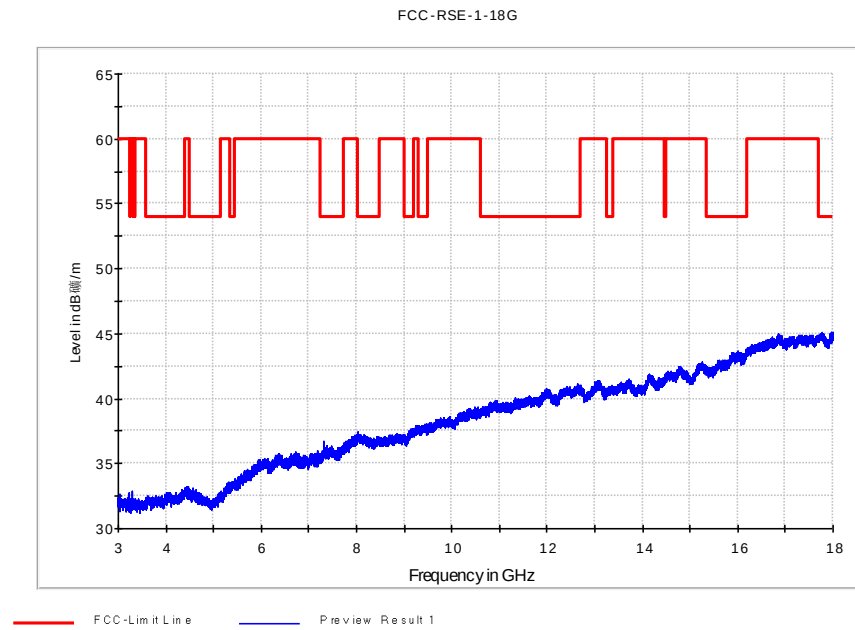


Fig. 50 Radiated Spurious Emission (802.11g, Ch6, 3 GHz-18 GHz)

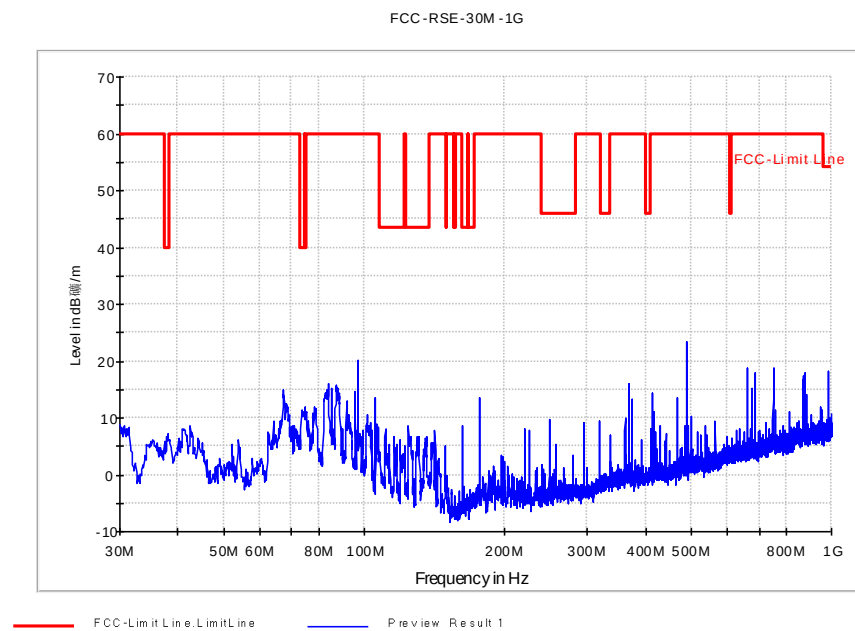


Fig. 51 Radiated Spurious Emission (802.11g, Ch11, 30 MHz-1 GHz)

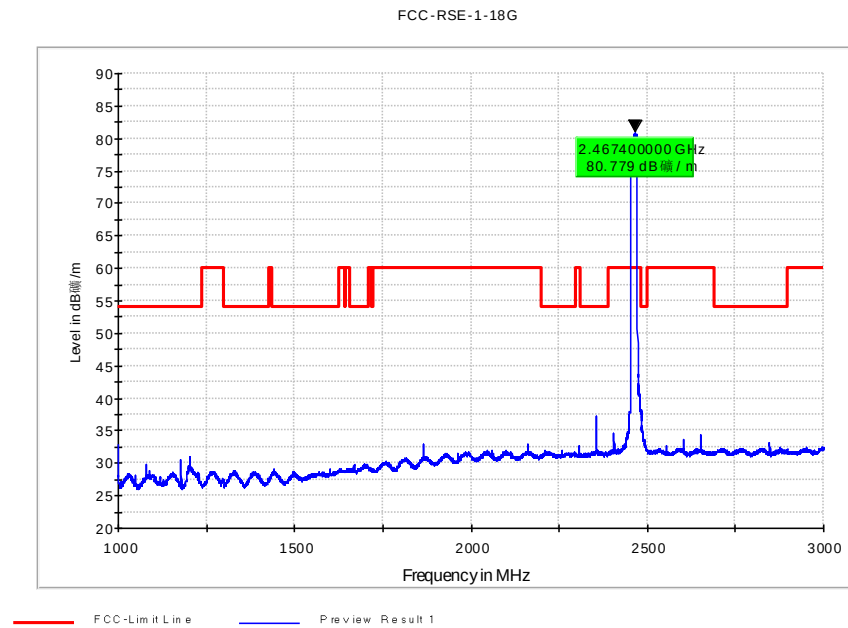


Fig. 52 Radiated Spurious Emission (802.11g, Ch11, 1 GHz-3 GHz)

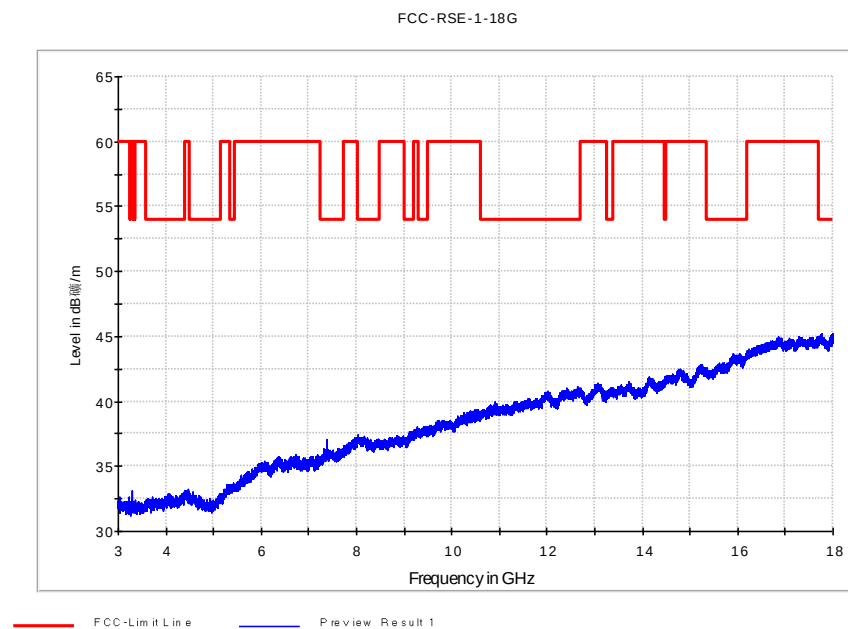


Fig. 53 Radiated Spurious Emission (802.11g, Ch11, 3 GHz-18 GHz)

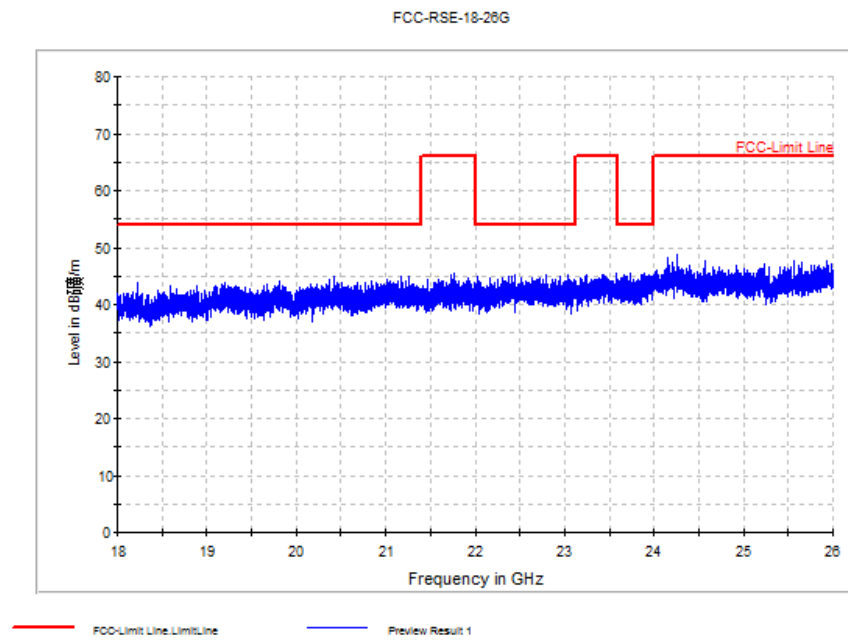


Fig. 54 Radiated emission: 18 GHz - 26.5 GHz

B.8. AC Powerline Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)			Conclusion
		With charger			
		11b mode	11g mode	11n mode	
0.15 to 0.5	66 o 56	Fig.55	Fig.56	/	P
0.5 to 5	56				
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)			Conclusion
		With charger			
		11b mode	11g mode	11n mode	
0.15 to 0.5	56 to 46	Fig.55	Fig.56	/	P
0.5 to 5	46				
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.4 and KDB558074

Conclusion: PASS

Test graphs as below:

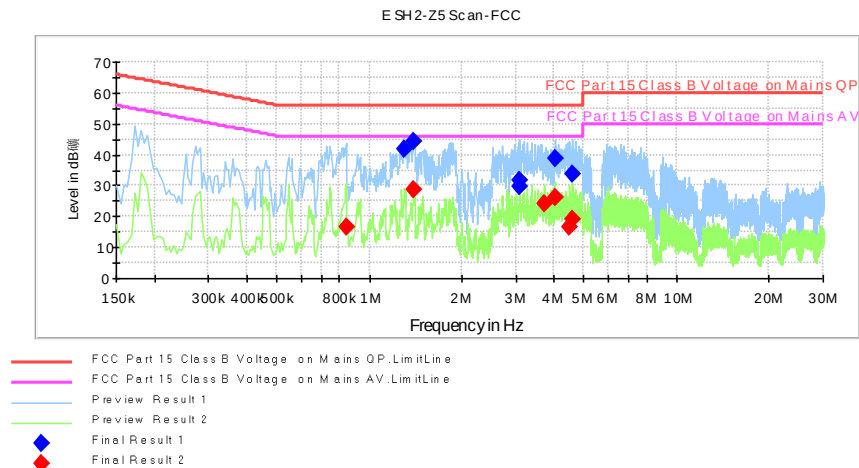


Fig. 55 AC Powerline Conducted Emission-802.11b

MEASUREMENT RESULT: " QuasiPeak "

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.306500	41.8	FLO	L1	10.1	14.2	56.0
1.401000	44.5	FLO	L1	10.1	11.5	56.0
3.066000	29.6	FLO	N	10.2	26.4	56.0
3.084000	31.9	FLO	N	10.2	24.1	56.0
4.033500	39.0	FLO	L1	10.2	17.0	56.0
4.596000	33.6	FLO	L1	10.2	22.4	56.0

MEASUREMENT RESULT: " Average "

Frequency (MHz)	CAverage (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.843000	16.5	FLO	N	10.0	29.5	46.0
1.401000	28.5	FLO	L1	10.1	17.5	46.0
3.732000	24.3	FLO	L1	10.2	21.7	46.0
4.011000	26.2	FLO	L1	10.2	19.8	46.0
4.501500	16.9	FLO	L1	10.2	29.1	46.0
4.596000	19.1	FLO	N	10.2	26.9	46.0

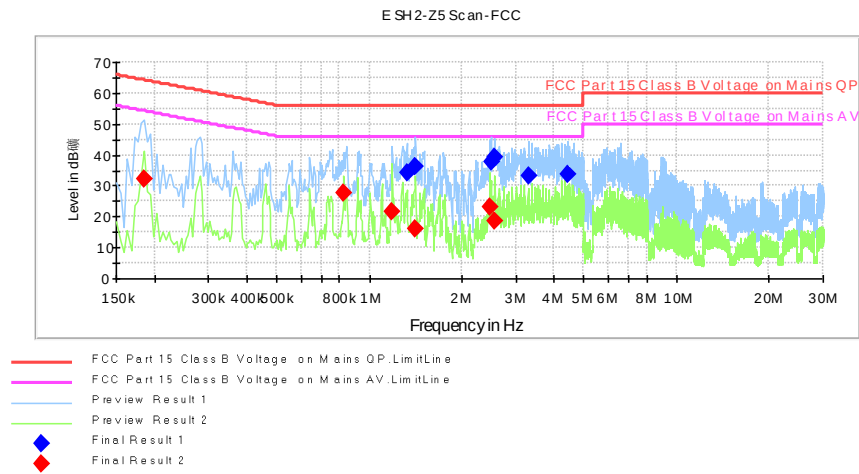


Fig. 56 AC Powerline Conducted Emission-802.11g

MEASUREMENT RESULT: " QuasiPeak "

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.324500	34.3	FLO	L1	10.1	21.7	56.0
1.414500	36.4	FLO	L1	10.1	19.6	56.0
2.485500	37.6	FLO	L1	10.2	18.4	56.0
2.562000	39.1	FLO	L1	10.2	16.9	56.0
3.300000	33.1	FLO	L1	10.2	22.9	56.0
4.434000	33.9	FLO	L1	10.2	22.1	56.0

MEASUREMENT RESULT: " Average "

Frequency (MHz)	CAverage (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.186000	32.3	FLO	N	10.1	21.9	54.2
0.825000	27.6	FLO	L1	10.0	18.4	46.0
1.189500	21.8	FLO	L1	10.0	24.2	46.0
1.414500	16.0	FLO	L1	10.1	30.0	46.0
2.472000	23.4	FLO	L1	10.1	22.6	46.0
2.562000	18.7	FLO	L1	10.2	27.3	46.0

*** END OF REPORT BODY ***