

FCC RF Test Report

APPLICANT : Cellon Communications Technology Co., Ltd.
EQUIPMENT : WCDMA mobile phone
BRAND NAME : Geeksphone, Cellon
MODEL NAME : C8680GP, GP-201(fx)
MARKETING NAME : Peak
FCC ID : T38C8680GP
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Dec. 21, 2012 and completely tested on Jan. 22, 2013. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.

TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Testing Site.....	6
1.6 Applied Standards	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency Channel	7
2.2 Pre-Scanned RF Power.....	8
2.3 Test Mode.....	9
2.4 Connection Diagram of Test System.....	10
2.5 Support Unit used in test configuration and system	11
2.6 RF Utility	11
2.7 Measurement Results Explanation Example.....	11
3 TEST RESULT.....	12
3.1 6dB Bandwidth Measurement	12
3.2 Output Power Measurement.....	19
3.3 Power Spectral Density Measurement	22
3.4 Conducted Band Edges and Spurious Emission Measurement	36
3.5 Radiated Emission Measurement.....	49
3.6 AC Conducted Emission Measurement.....	66
3.7 Antenna Requirements.....	70
4 LIST OF MEASURING EQUIPMENT	71
5 UNCERTAINTY OF EVALUATION	72
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2D2101B	Rev. 01	Initial issue of report	Jan. 23, 2013

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	A8.4	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	A8.5	Radiated Band Edges	15.209(a) & 15.247(d)	Pass	-
			Radiated Spurious Emission		Pass	Under limit 1.55 dB at 4826.000 MHz
3.6	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 10.07 dB at 0.380 MHz
3.7	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Cellon Communications Technology Co., Ltd.

13/F, Skyworth C Building, Gaoxin S.Ave1, Hi-Tech Industrial Park, Nanshan District, Shenzhen, China

1.2 Manufacturer

Cellon Communications Technology Co., Ltd.

13/F, Skyworth C Building, Gaoxin S.Ave1, Hi-Tech Industrial Park, Nanshan District, Shenzhen, China

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA mobile phone
Brand Name	Geeksphone, Cellon
Model Name	C8680GP, GP-201(fx)
Marketing Name	Peak
FCC ID	T38C8680GP
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/WLAN11bgn/Bluetooth
HW Version	P1
SW Version	00.26_4+4
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2412 MHz ~ 2462 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Maximum Output Power to Antenna	802.11b : 13.53 dBm (0.0225 W) 802.11g : 19.41 dBm (0.0873 W) 802.11n HT20 : 19.57 dBm (0.0906 W)
Antenna Type	PIFA Antenna type with gain 0 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH01-KS	CO01-KS	03CH01-KS	149928/4086E-1

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
- ♦ ANSI C63.4-2003 and ANSI C63.10-2009
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, " Receivers Excluded from Industry Canada Requirements", only radio communication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 KHz to 30 MHz) and radiated emission (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and antenna configurations as following table and the highest power data rates were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	13.53	13.5	13.51	13.52
CH 06	2437 MHz	13.18	13.02	13.02	13.07
CH 11	2462 MHz	12.36	12.39	12.41	12.42

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	19.41	18.97	19.24	18.76	19.33	19.12	18.76	18.92
CH 06	2437 MHz	19.18	18.8	19.17	18.54	18.89	19.06	18.67	18.75
CH 11	2462 MHz	19.21	18.8	19.24	18.46	18.99	18.64	18.66	18.72

Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	19.57	19.11	19.53	18.73	18.36	18.52	19.54	17.99
CH 06	2437 MHz	18.79	18.96	19.19	18.45	18.54	18.25	19.52	18.03
CH 11	2462 MHz	18.73	19.04	19.29	18.39	18.79	18.36	19.53	17.95


2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
Conducted TCs	Test Items	Mode	Data Rate	Test Channel
	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone			

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

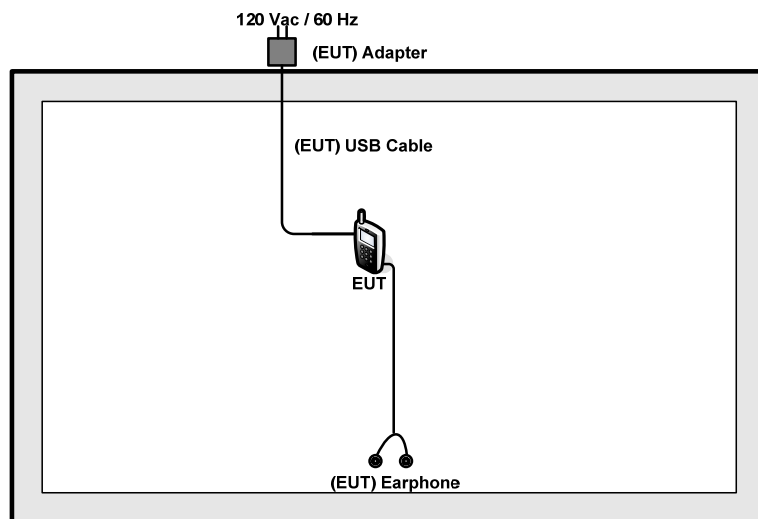

<AC Conducted Emission Mode>

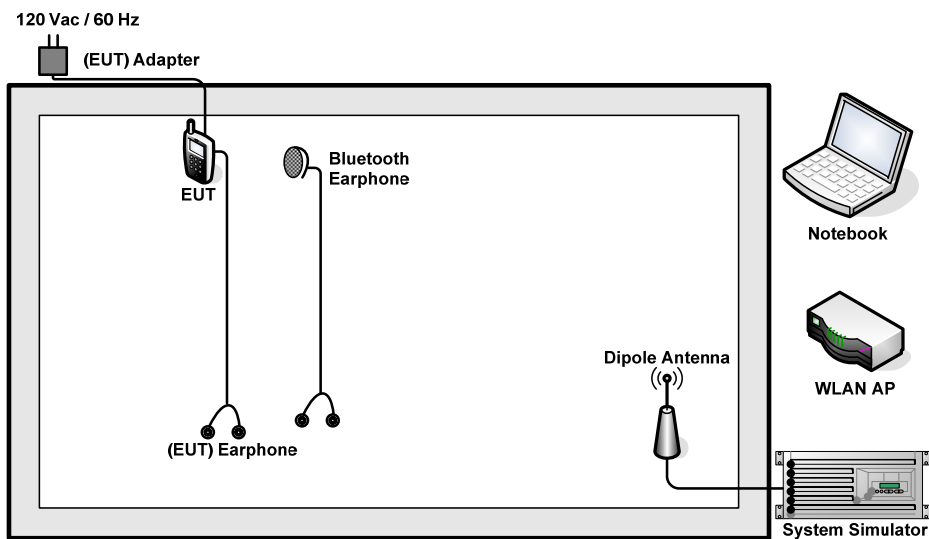

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A

2.6 RF Utility

For WLAN function, key in “* # 254267 #” on the EUT directly. Then, the EUT will get into the engineering modes to contact with WLAN AP for continuous transmitting and receiving signals.

2.7 Measurement Results Explanation Example

For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

Offset = RF cable loss + attenuator factor.

Following table shows an offset computation example with cable loss 5.6 dB.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 5.6 + 10 = 15.6 \text{ (dB)}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

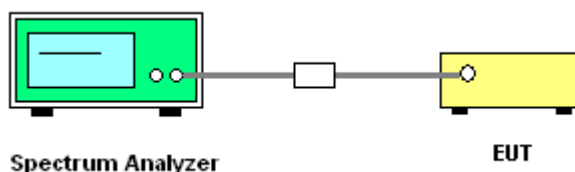


3.1.5 Test Result of 6dB Bandwidth

Test Mode :	802.11b	Temperature :	23~24℃
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	10.06	0.5	Pass
06	2437	10.08	0.5	Pass
11	2462	10.10	0.5	Pass


6 dB Bandwidth Plot on 802.11b Channel 01

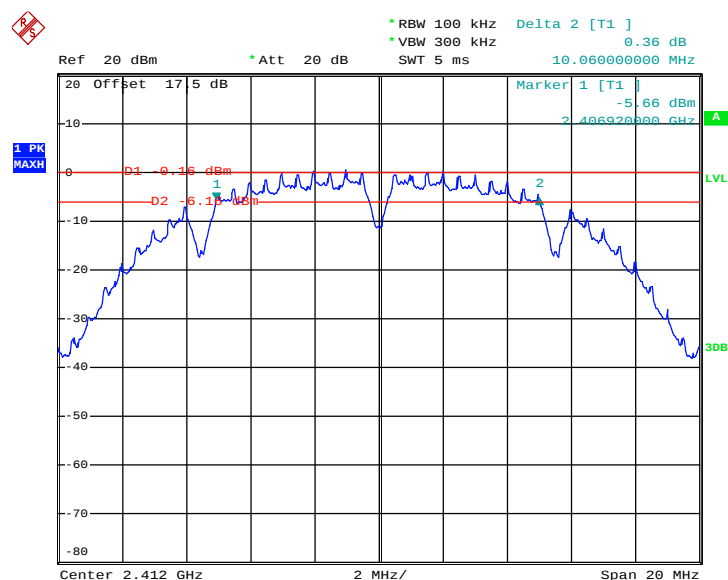

Date: 22.JAN.2013 14:00:26




6 dB Bandwidth Plot on 802.11b Channel 06

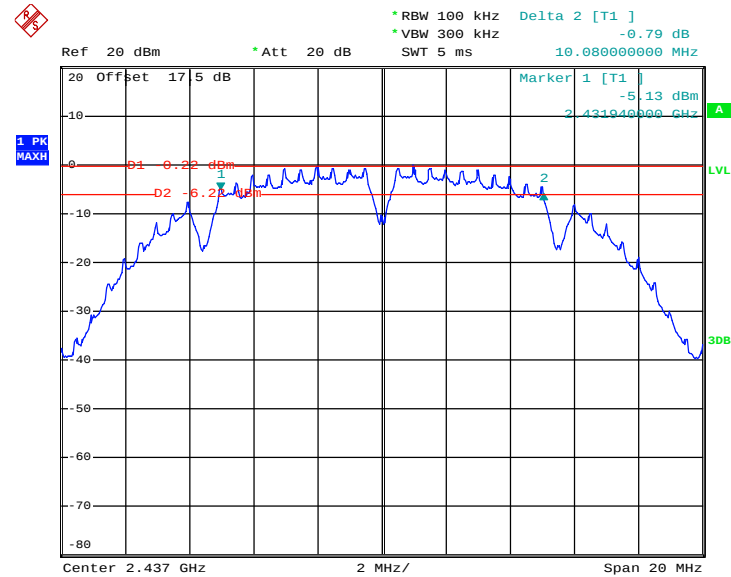

Date: 22.JAN.2013 11:04:01

6 dB Bandwidth Plot on 802.11b Channel 11

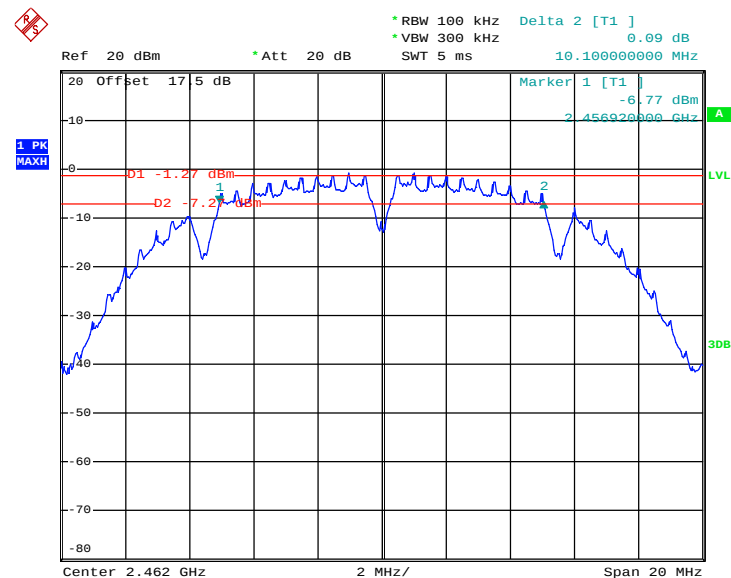


Date: 22.JAN.2013 11:12:16


Test Mode :	802.11g	Temperature :	23~24℃
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	16.32	0.5	Pass
06	2437	16.32	0.5	Pass
11	2462	16.36	0.5	Pass


6 dB Bandwidth Plot on 802.11g Channel 01

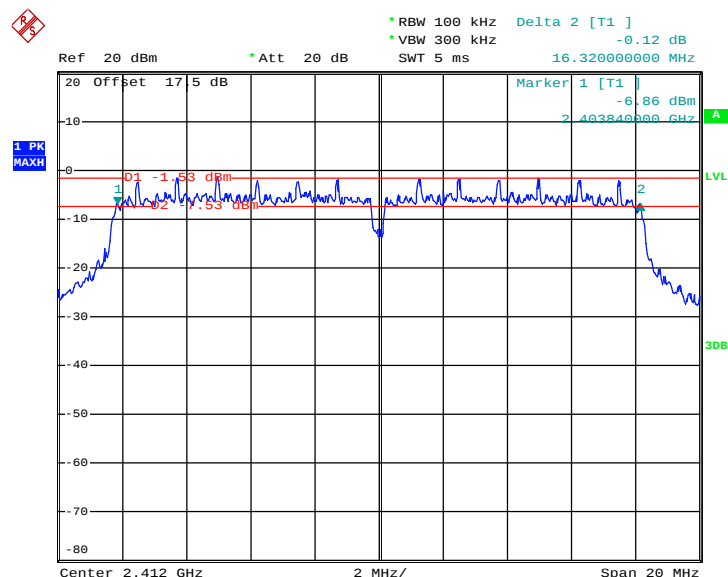

Date: 22.JAN.2013 11:20:01

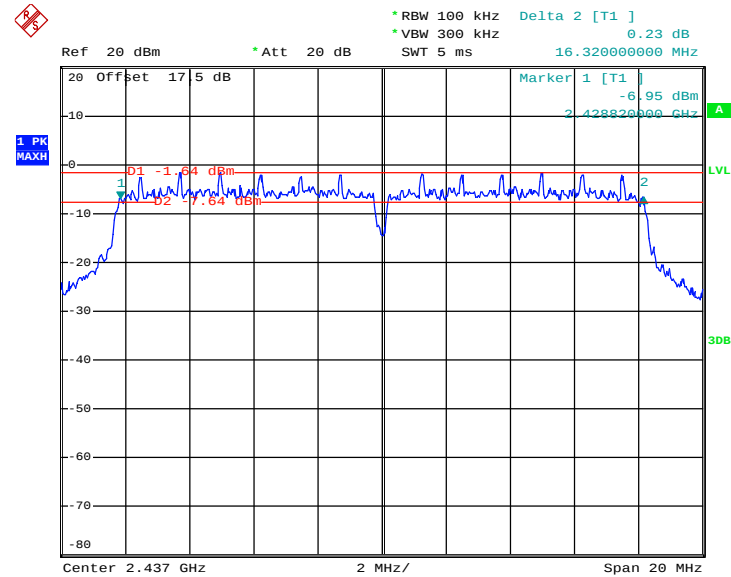6 dB Bandwidth Plot on 802.11g Channel 06


Date: 22.JAN.2013 11:32:04

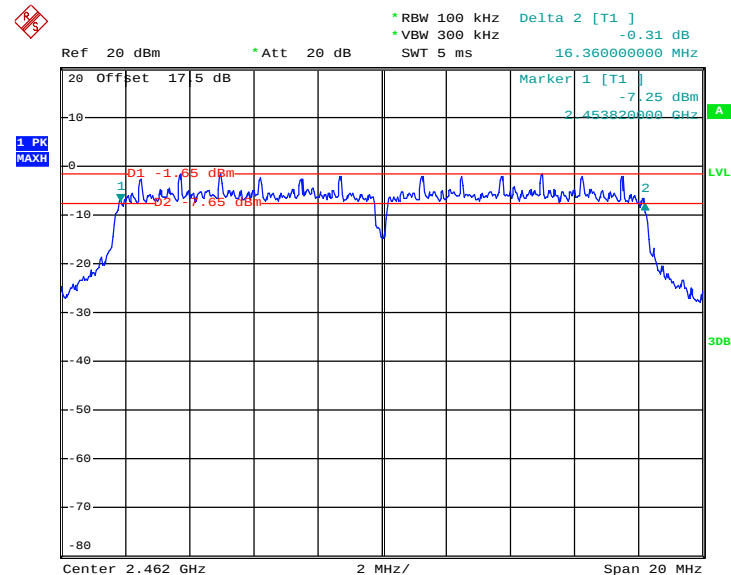6 dB Bandwidth Plot on 802.11g Channel 11


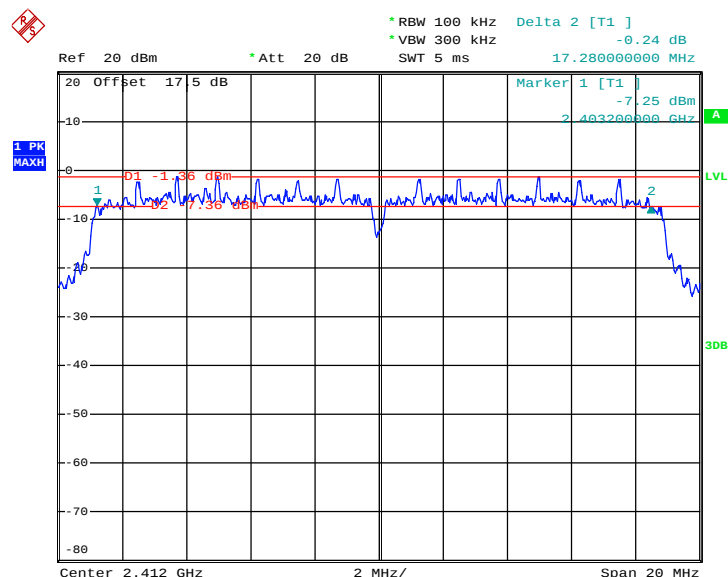
Date: 22.JAN.2013 11:37:23



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	17.28	0.5	Pass
06	2437	17.32	0.5	Pass
11	2462	17.32	0.5	Pass


6 dB Bandwidth Plot on 802.11n HT20 Channel 01



Date: 22.JAN.2013 14:04:30




6 dB Bandwidth Plot on 802.11n HT20 Channel 06

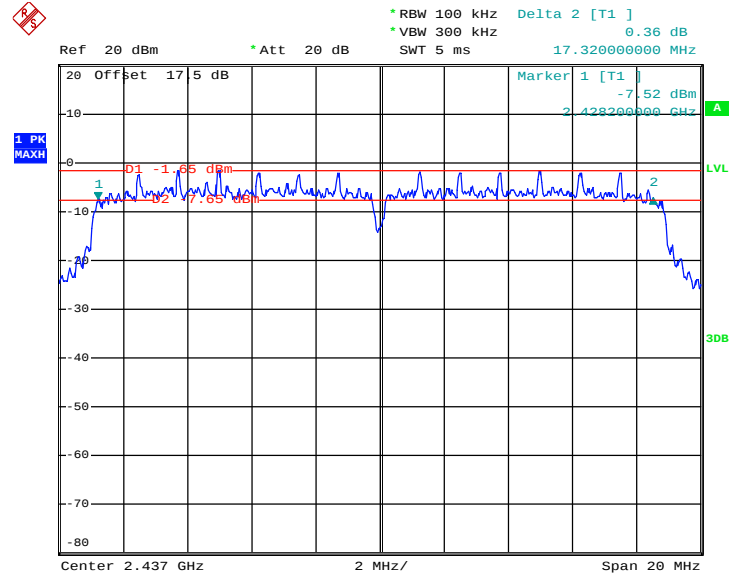

Date: 22.JAN.2013 11:50:27

6 dB Bandwidth Plot on 802.11n HT20 Channel 11

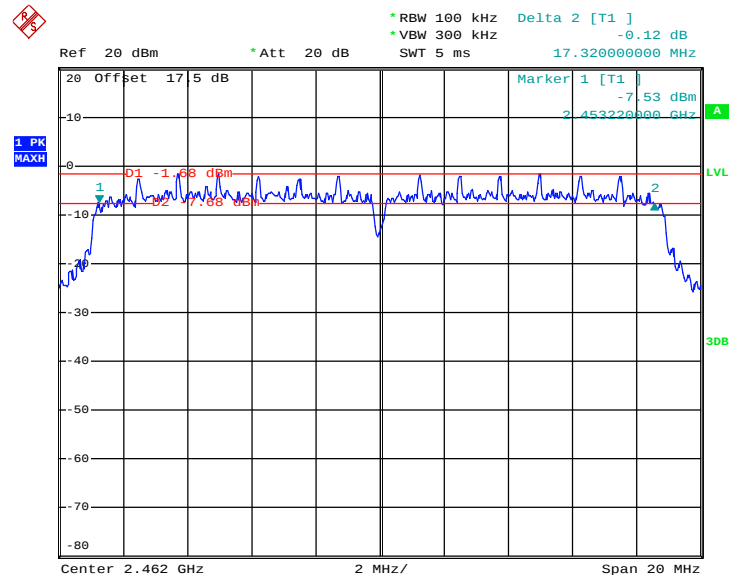

Date: 22.JAN.2013 11:55:40

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

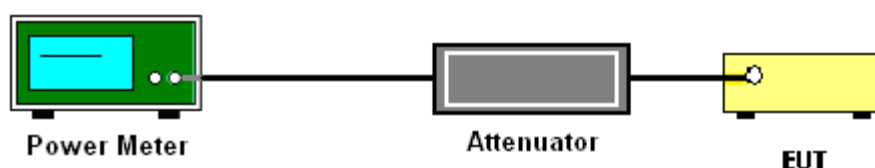

3.2.5 Test Result of Peak Output Power

Test Mode :	802.11b	Temperature :	23~24℃
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	13.53	30	Pass
06	2437	13.18	30	Pass
11	2462	12.36	30	Pass

Test Mode :	802.11g	Temperature :	23~24℃
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	19.41	30	Pass
06	2437	19.18	30	Pass
11	2462	19.21	30	Pass

Test Mode :	802.11n HT20	Temperature :	23~24℃
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	19.57	30	Pass
06	2437	18.79	30	Pass
11	2462	18.73	30	Pass

3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	802.11b	Temperature :	23~24℃
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%
Duty Cycle:	100%	Duty Factor:	0.00dB

Channel	Frequency (MHz)	802.11b Average Output Power (dBm)
01	2412	11.27
06	2437	10.70
11	2462	9.84

Test Mode :	802.11g	Temperature :	23~24℃
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%
Duty Cycle:	95.43%	Duty Factor:	0.20dB

Channel	Frequency (MHz)	802.11g Average Output Power (dBm)
01	2412	10.33
06	2437	9.77
11	2462	9.62

Test Mode :	802.11n HT20	Temperature :	23~24℃
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%
Duty Cycle:	95.74%	Duty Factor:	0.19dB

Channel	Frequency (MHz)	802.11n HT20 Average Output Power (dBm)
01	2412	10.36
06	2437	9.74
11	2462	9.57

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 9.1 Option 1 of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

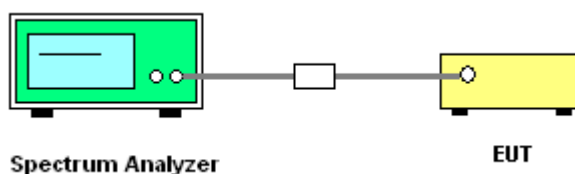

3.3.5 Test Result of Power Spectral Density

Test Mode :	802.11b	Temperature :	23~24℃
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	0.29	-15.66	8	Pass
06	2437	-0.21	-15.50	8	Pass
11	2462	-1.48	-16.48	8	Pass

Test Mode :	802.11g	Temperature :	23~24℃
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	-1.57	-16.77	8	Pass
06	2437	-1.73	-16.96	8	Pass
11	2462	-1.76	-15.95	8	Pass


Test Mode :	802.11n HT20	Temperature :	23~24℃
Test Engineer :	Zhi Lu	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11n HT20 Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	-1.07	-16.82	8	Pass
06	2437	-1.88	-16.69	8	Pass
11	2462	-1.75	-16.90	8	Pass


Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100KHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.

3.3.6 Test Result of Power Spectral Density Plots (100kHz)

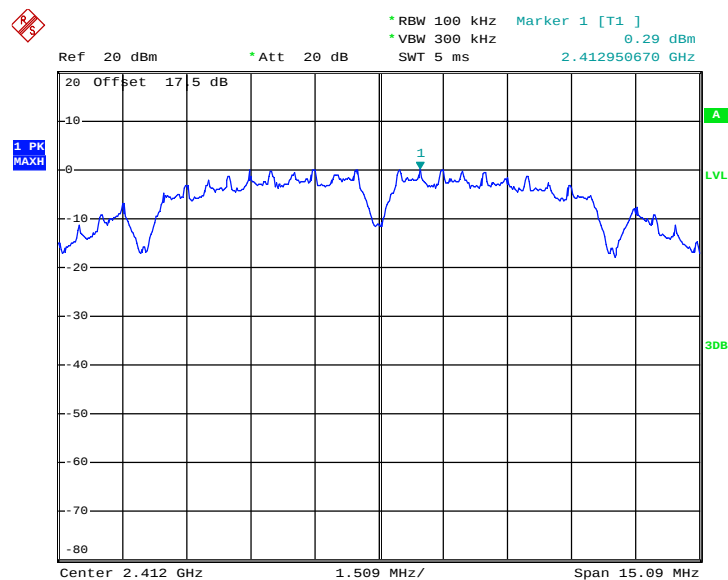PSD 100kHz Plot on 802.11b Channel 01


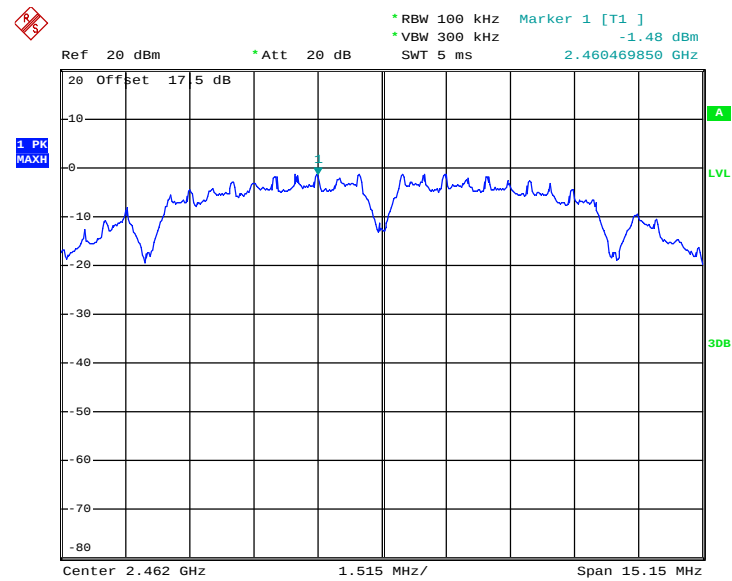
Date: 22.JAN.2013 11:00:35

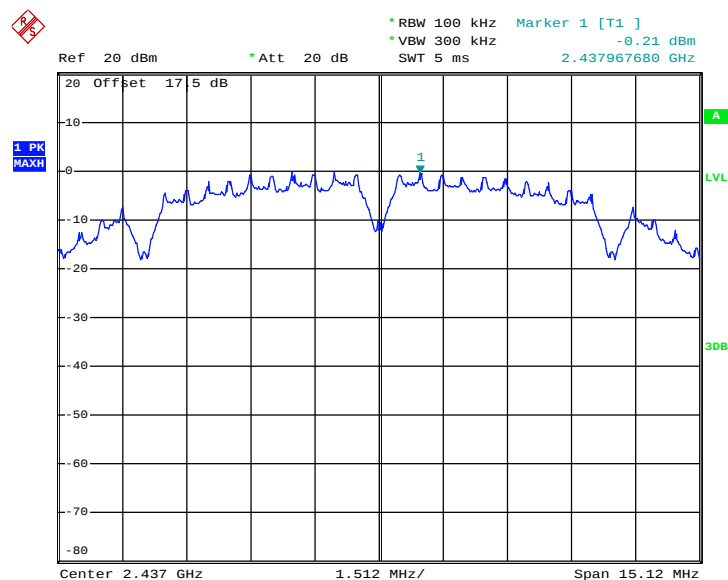PSD 100kHz Plot on 802.11b Channel 06


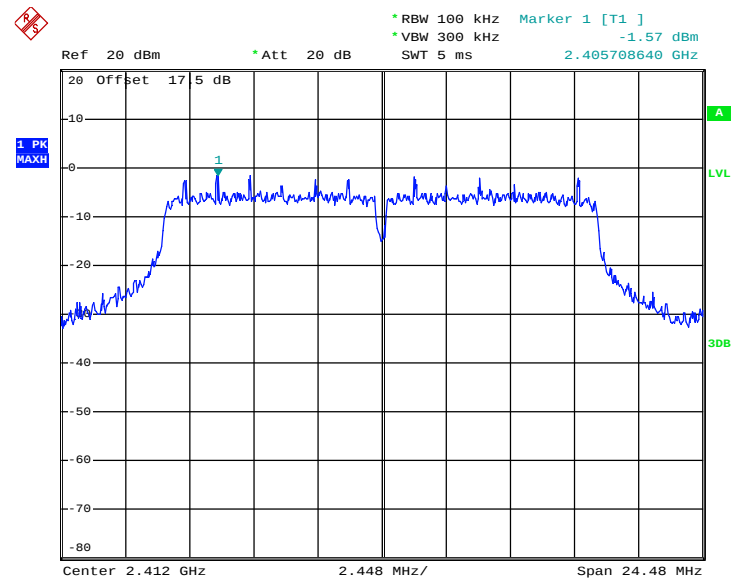
Date: 22.JAN.2013 11:04:54




PSD 100kHz Plot on 802.11b Channel 11



Date: 22.JAN.2013 11:14:34

PSD 100kHz Plot on 802.11g Channel 01


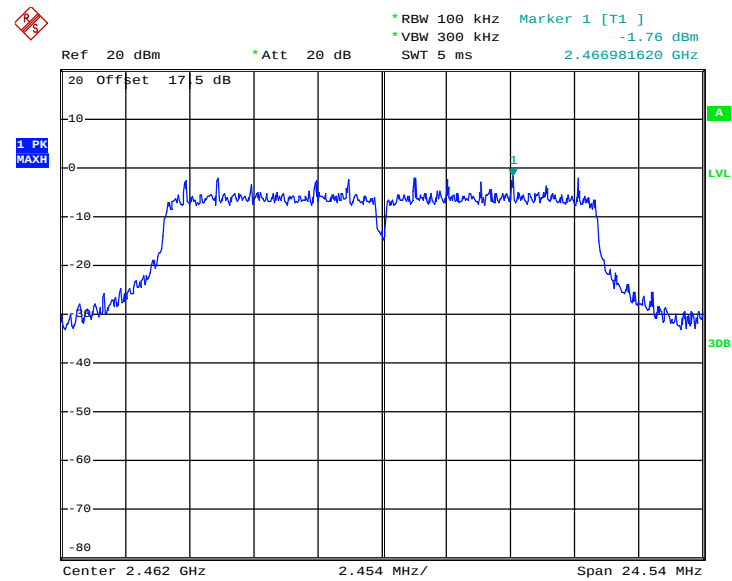
Date: 22.JAN.2013 11:21:04

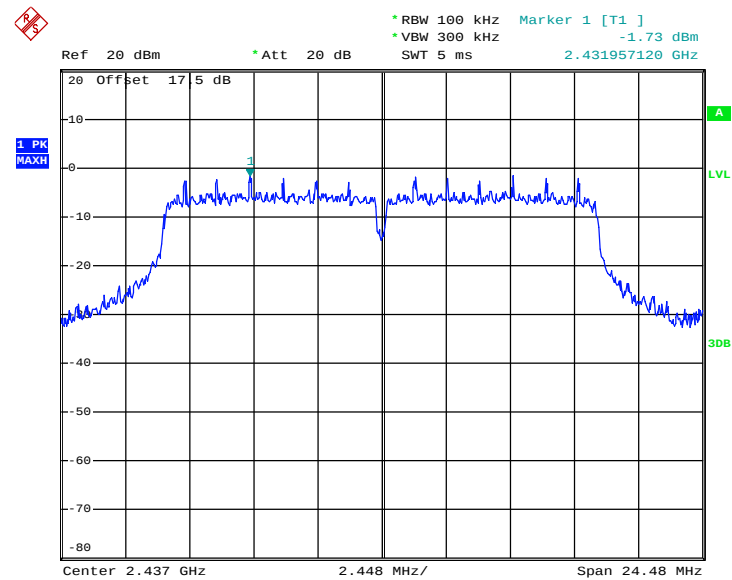PSD 100kHz Plot on 802.11g Channel 06


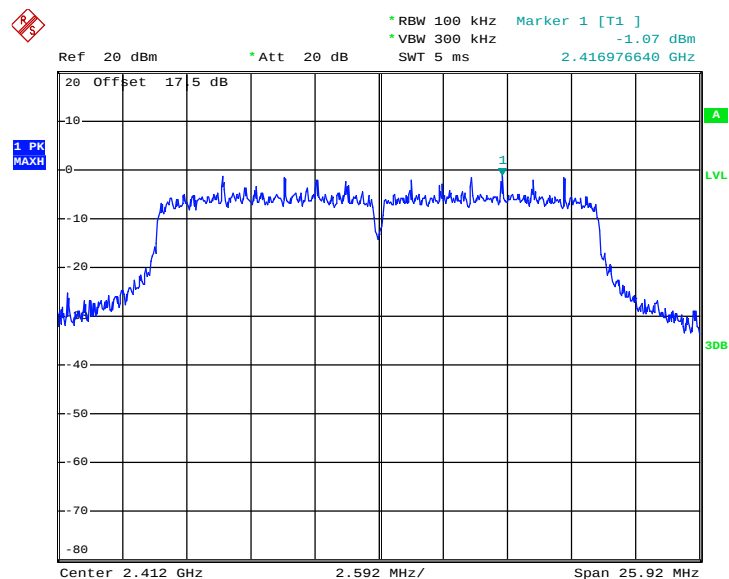
Date: 22.JAN.2013 11:33:34




PSD 100kHz Plot on 802.11g Channel 11



Date: 22.JAN.2013 11:38:31

PSD 100kHz Plot on 802.11n HT20 Channel 01


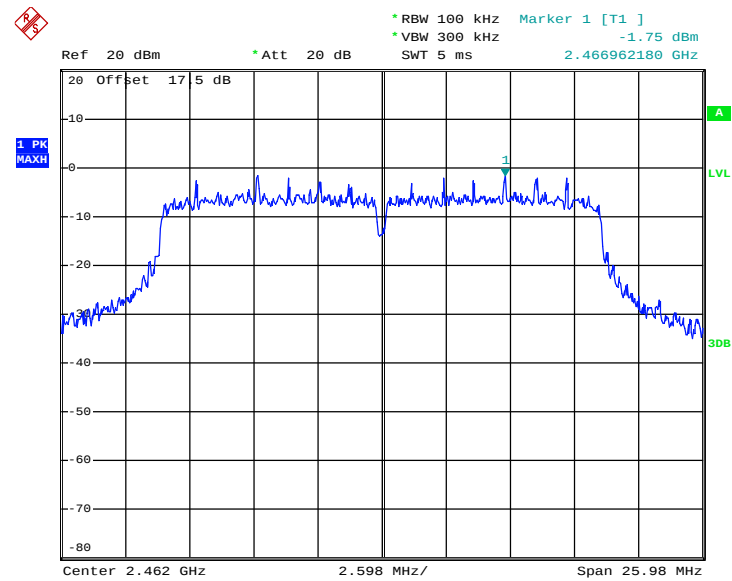
Date: 22.JAN.2013 11:46:03

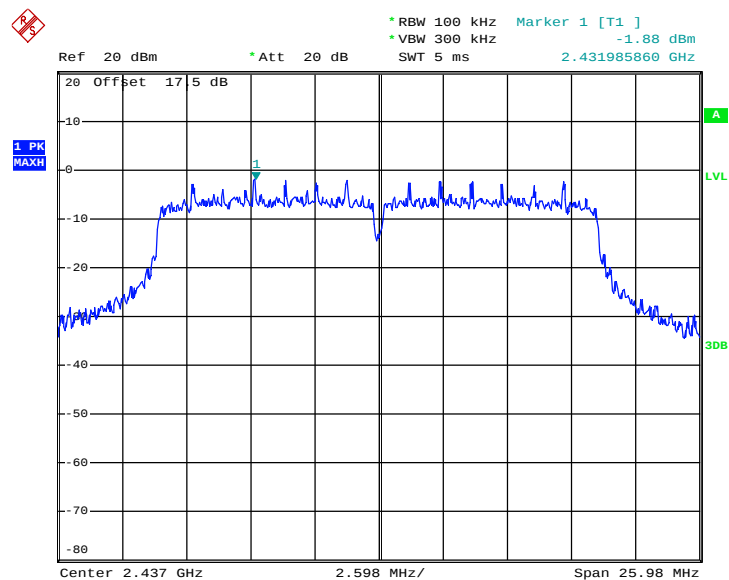PSD 100kHz Plot on 802.11n HT20 Channel 06


Date: 22.JAN.2013 11:52:07




PSD 100kHz Plot on 802.11n HT20 Channel 11




Date: 22.JAN.2013 11:56:55

3.3.7 Test Result of Power Spectral Density Plots (3kHz)

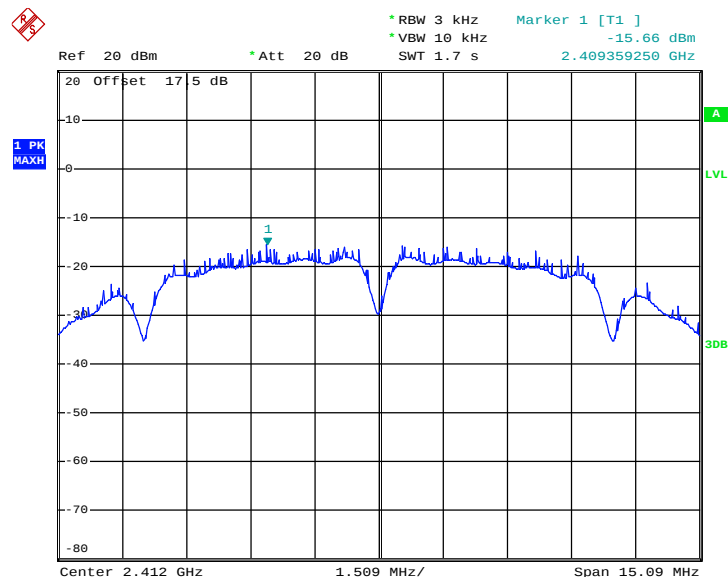PSD 3kHz Plot on 802.11b Channel 01


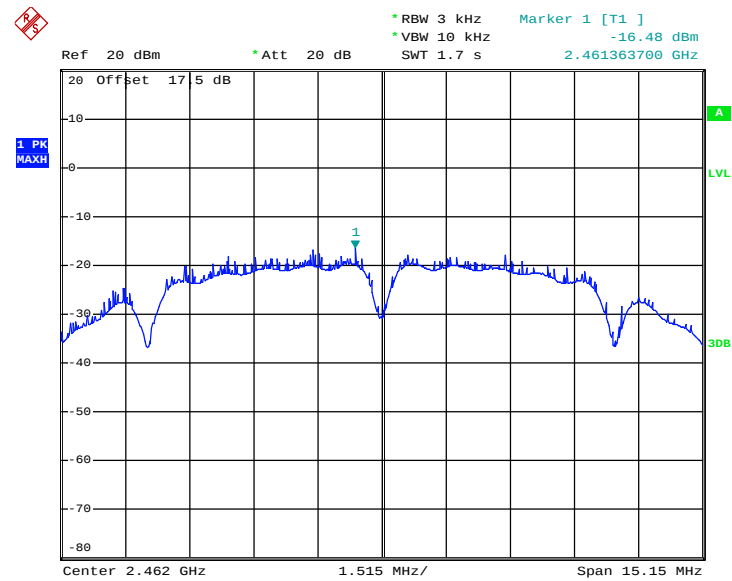
Date: 22.JAN.2013 11:00:08

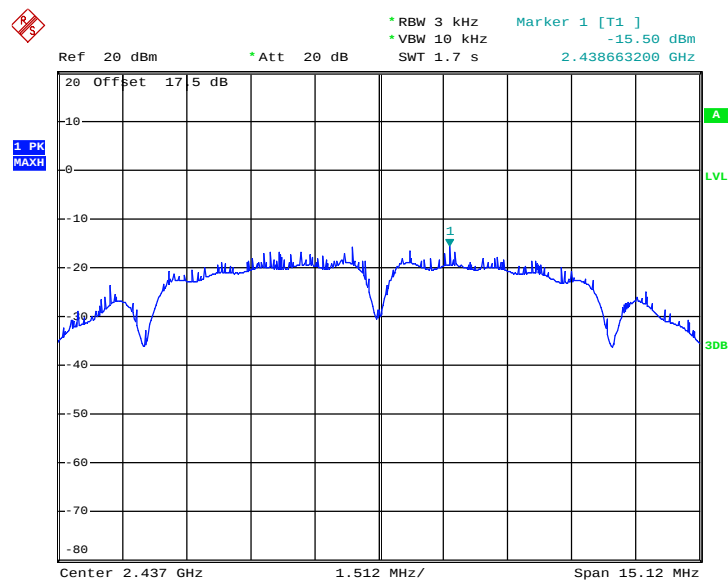PSD 3kHz Plot on 802.11b Channel 06


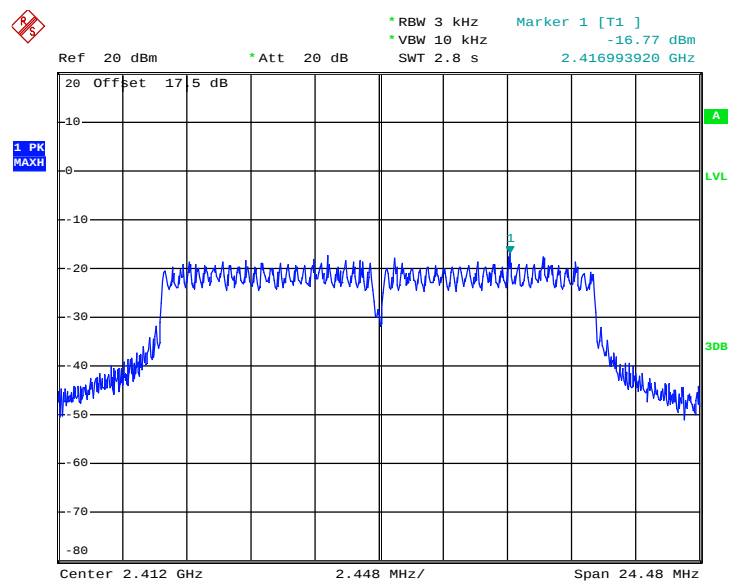
Date: 22.JAN.2013 11:04:29




PSD 3kHz Plot on 802.11b Channel 11



Date: 22.JAN.2013 11:13:57

PSD 3kHz Plot on 802.11g Channel 01


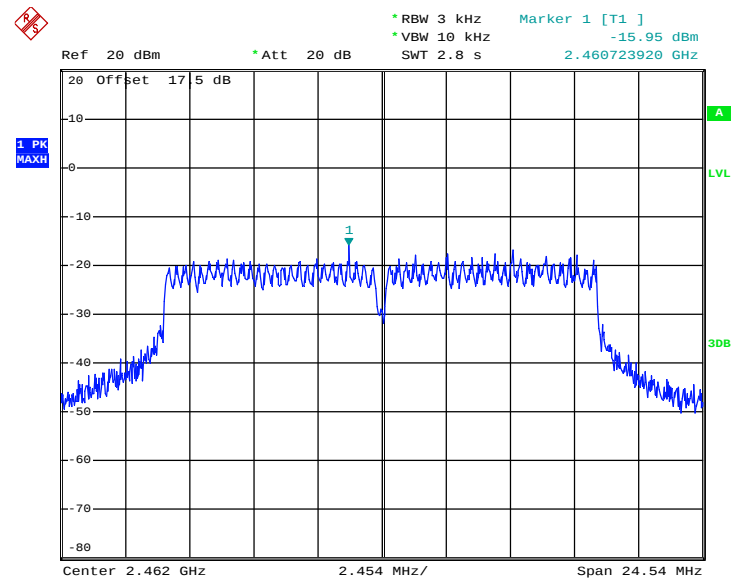
Date: 22.JAN.2013 11:20:43

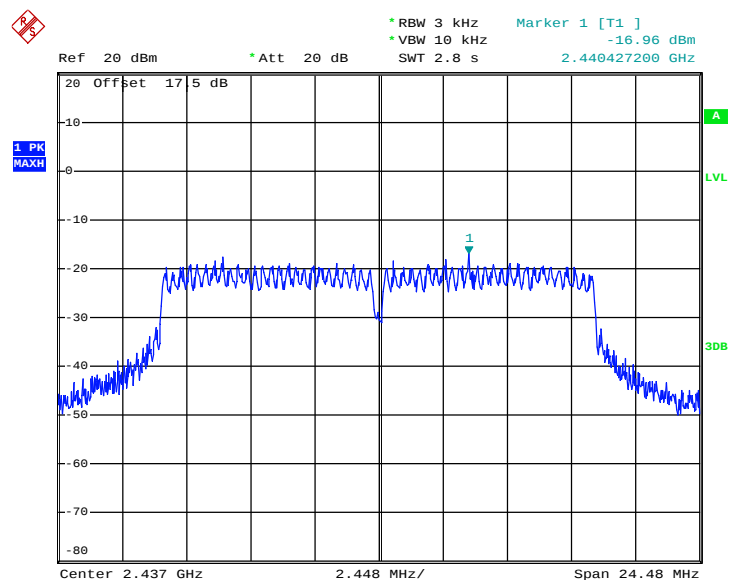PSD 3kHz Plot on 802.11g Channel 06


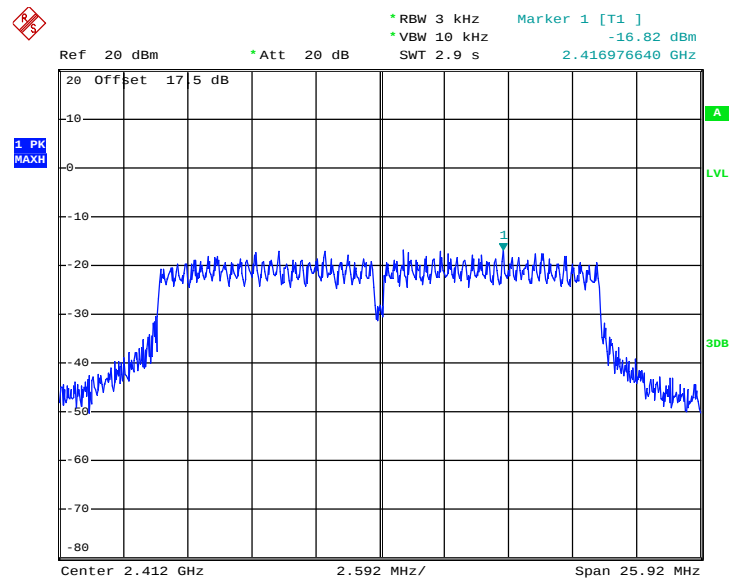
Date: 22.JAN.2013 11:32:37




PSD 3kHz Plot on 802.11g Channel 11




Date: 22.JAN.2013 11:38:10

PSD 3kHz Plot on 802.11n HT20 Channel 01


Date: 22.JAN.2013 11:45:26

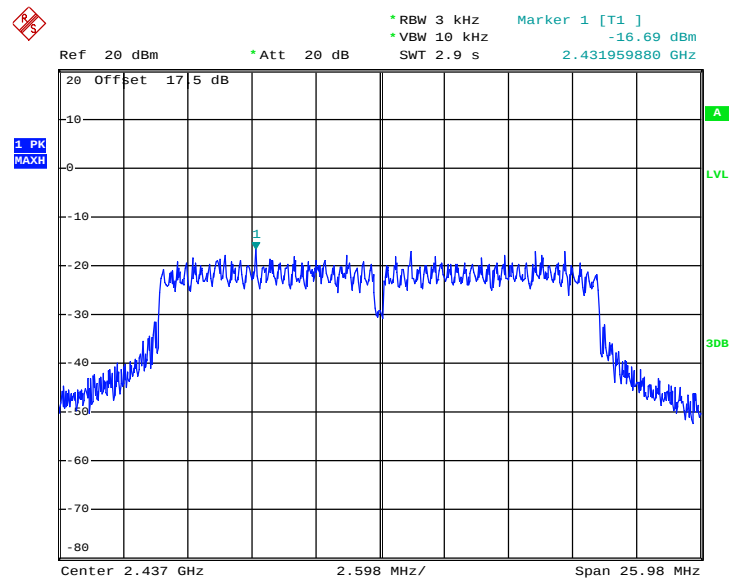PSD 3kHz Plot on 802.11n HT20 Channel 06


Date: 22.JAN.2013 11:51:36

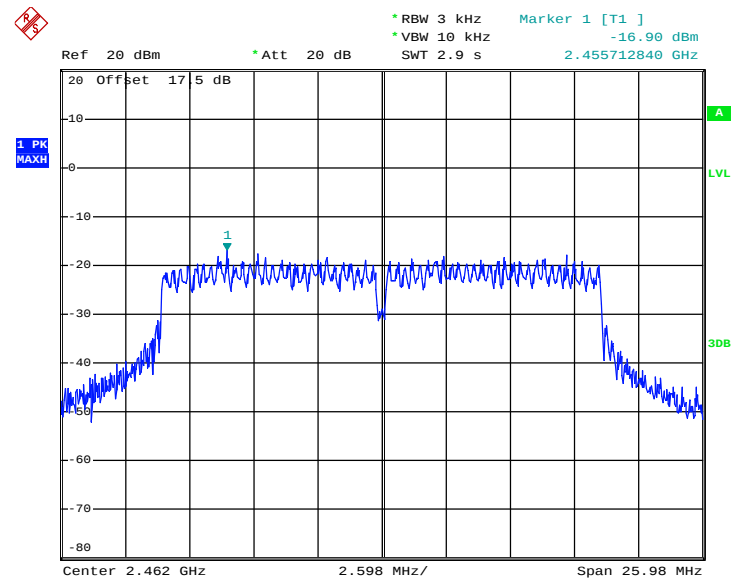PSD 3kHz Plot on 802.11n HT20 Channel 11


Date: 22.JAN.2013 11:56:38

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW=300 KHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz, when maximum peak conducted output power procedure is used. The attenuation is set to 30dB, when maximum conducted output power procedure is used.
5. Measure and record the results in the test report.


3.4.4 Test Setup

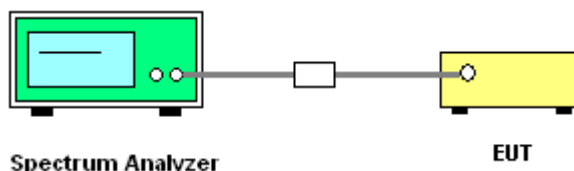

3.4.5 Test Plots of Conducted Band Edges


Test Mode :	802.11b	Temperature :	23~24℃
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Zhi Lu

Low Band Edge Plot on 802.11b Channel 01

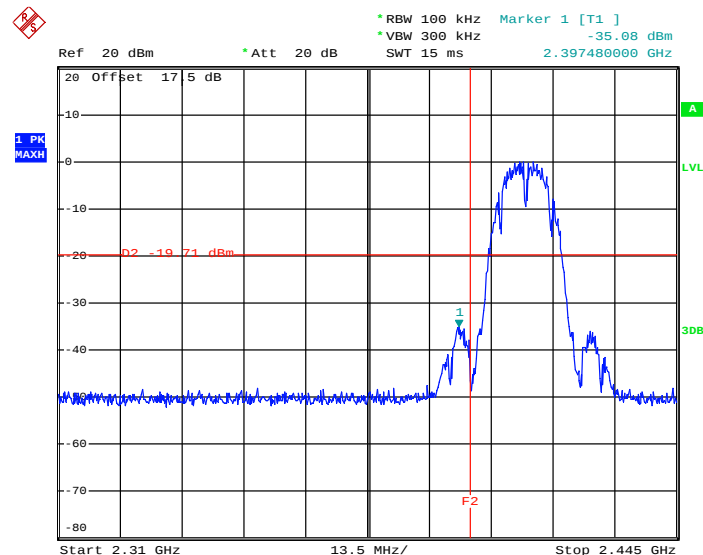

Date: 22.JAN.2013 11:01:10


High Band Edge Plot on 802.11b Channel 11

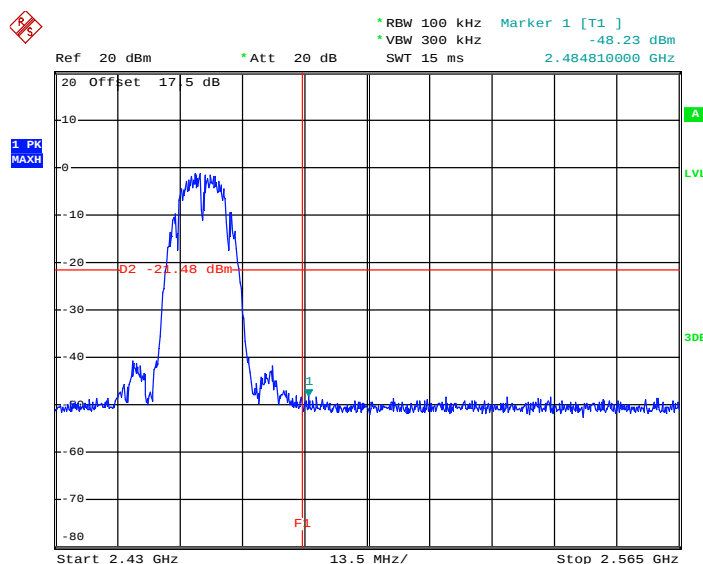


Date: 22.JAN.2013 11:15:43



Test Mode :	802.11g	Temperature :	23~24℃
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Zhi Lu

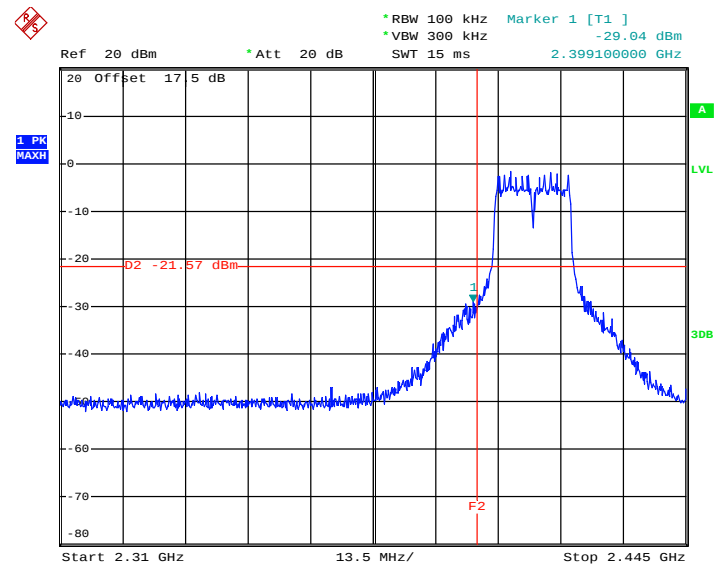Low Band Edge Plot on 802.11g Channel 01

Date: 22.JAN.2013 11:21:35

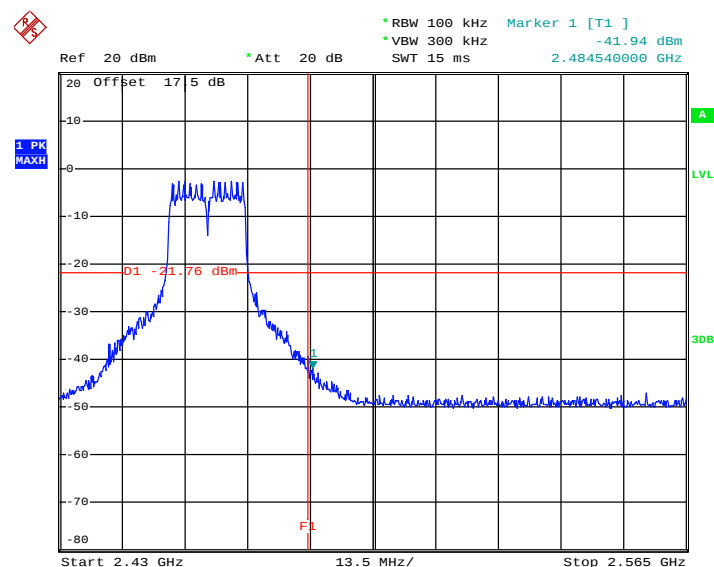
High Band Edge Plot on 802.11g Channel 11

Date: 22.JAN.2013 15:11:48




Test Mode :	802.11n HT20	Temperature :	23~24℃
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Zhi Lu

Low Band Edge Plot on 802.11n HT20 Channel 01

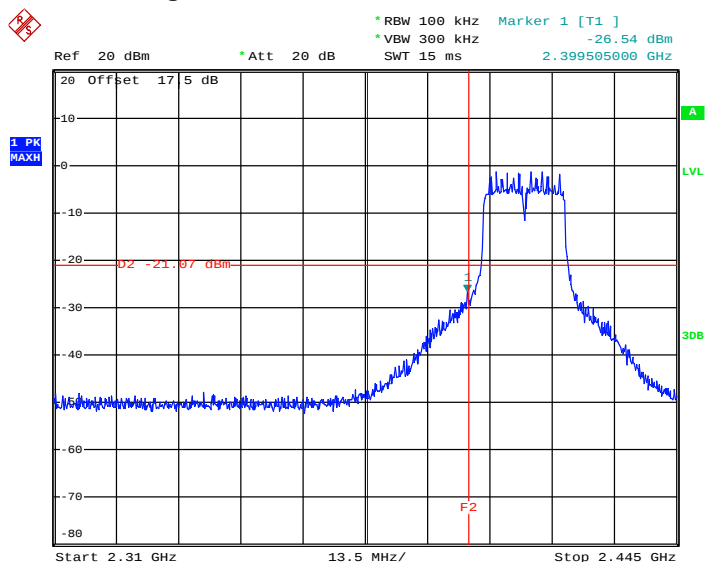

Date: 22.JAN.2013 11:46:30

High Band Edge Plot on 802.11n HT20 Channel 11

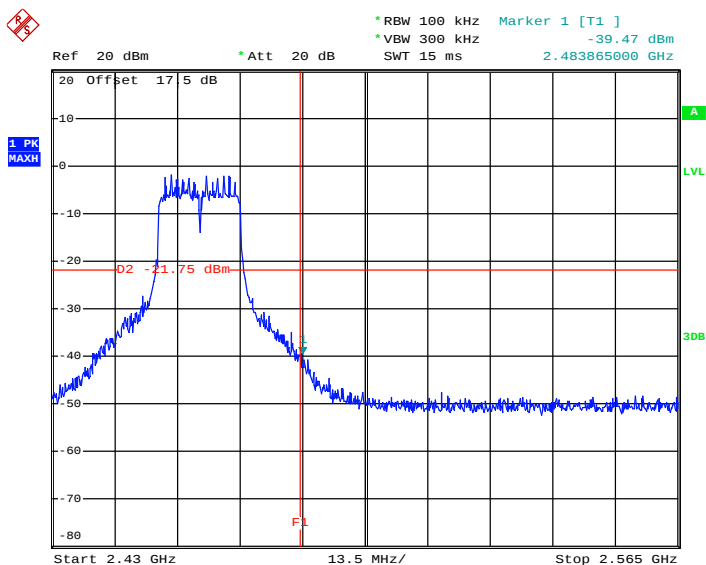


Date: 22.JAN.2013 11:57:22

3.4.6 Test Plots of Spurious Emission

Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Zhi Lu

802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

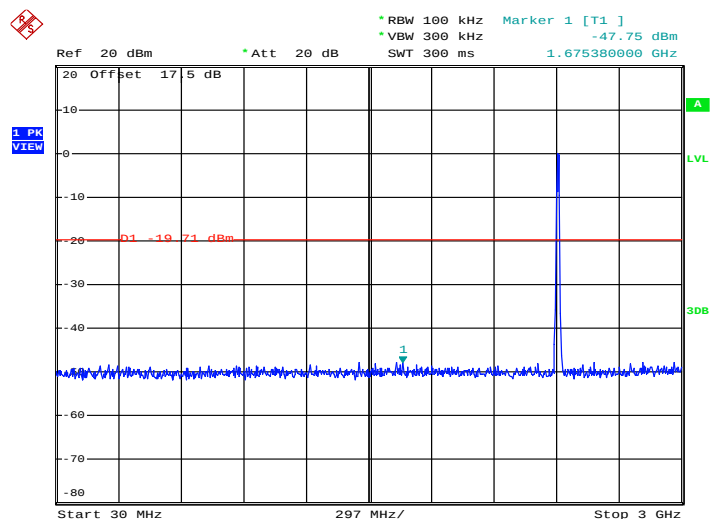


Date: 22.JAN.2013 11:01:56

802.11b 2 GHz~25 GHz


Conducted Spurious Emission Plot on Channel 01

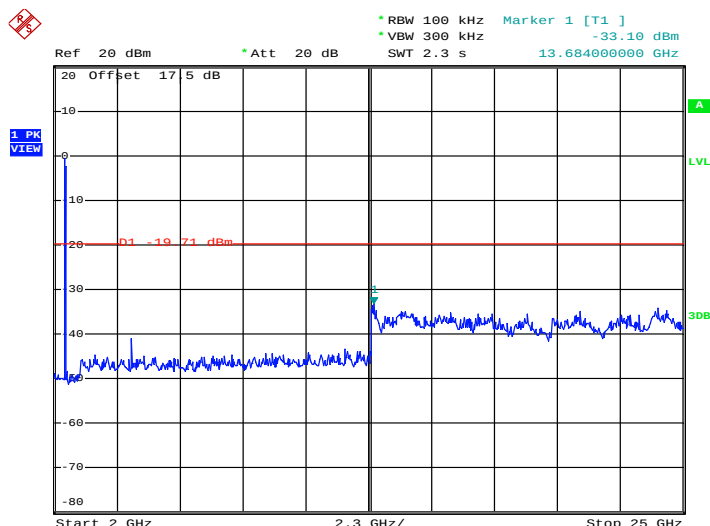


Date: 22.JAN.2013 11:02:14

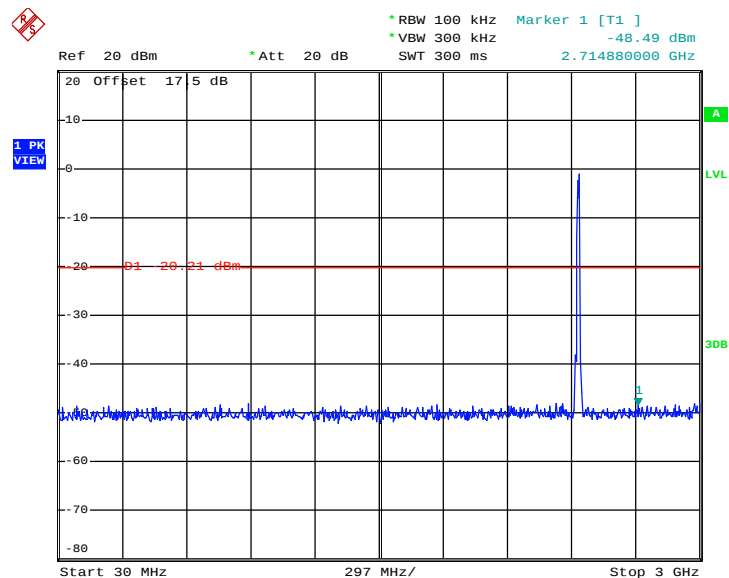802.11b 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 06


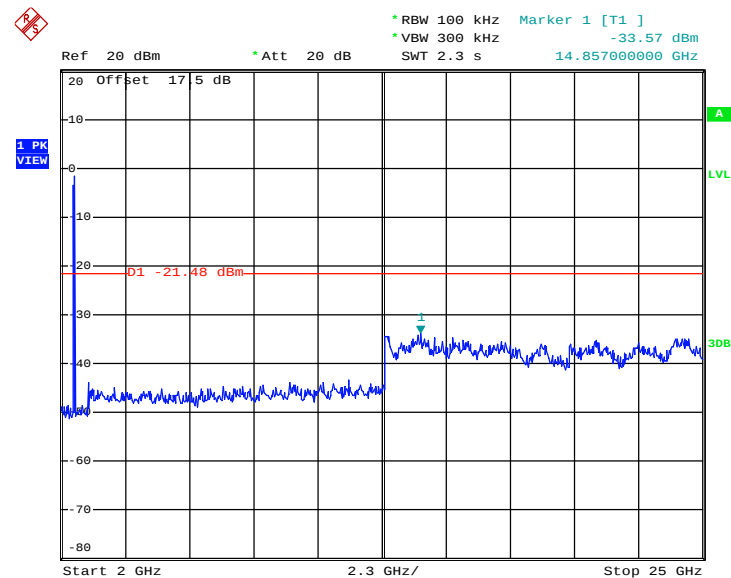
Date: 22.JAN.2013 15:15:25

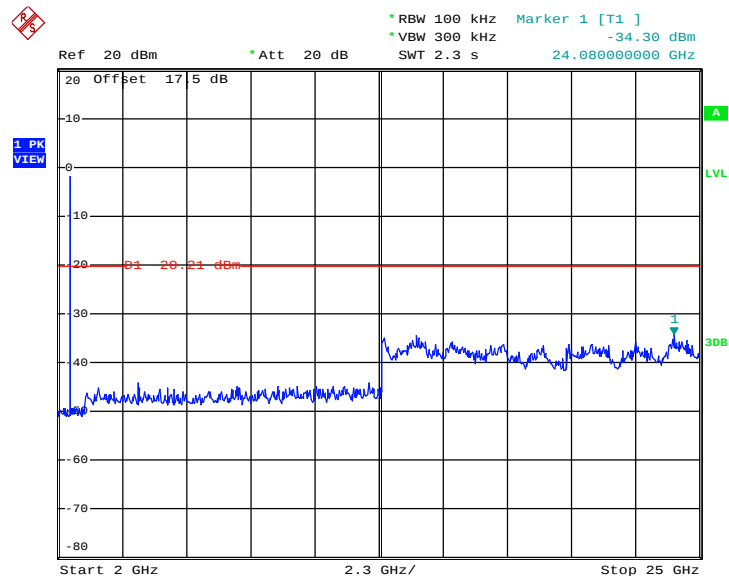802.11b 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 06


Date: 22.JAN.2013 15:16:30

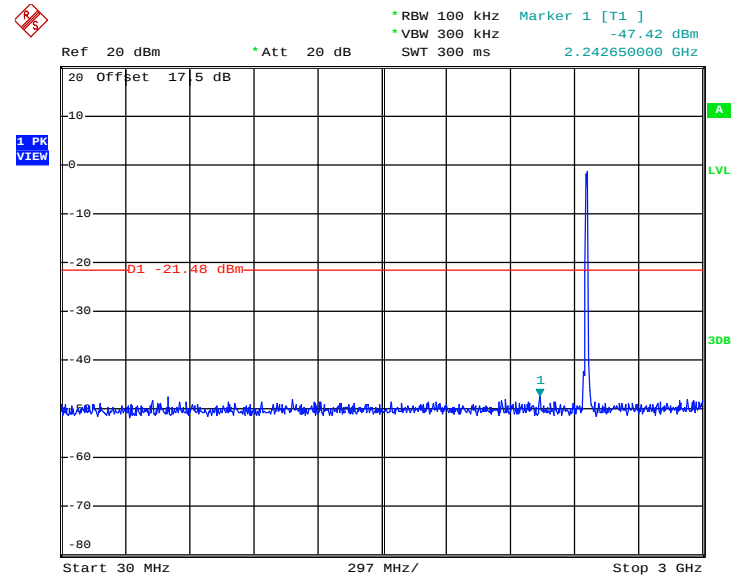802.11b 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 11


Date: 22.JAN.2013 11:16:11

802.11b 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 11


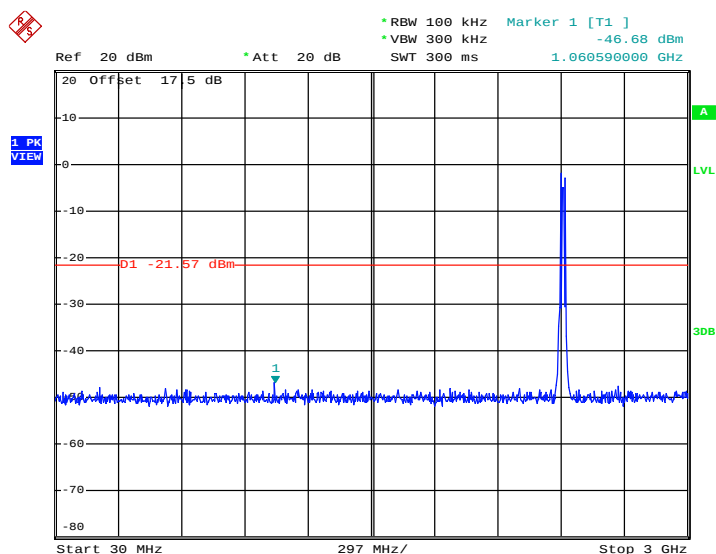
Date: 22.JAN.2013 11:16:30



Test Mode :	802.11g	Temperature :	23~24℃
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Zhi Lu

802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01




Date: 22.JAN.2013 11:22:07

802.11g 2 GHz~25 GHz


Conducted Spurious Emission Plot on Channel 01

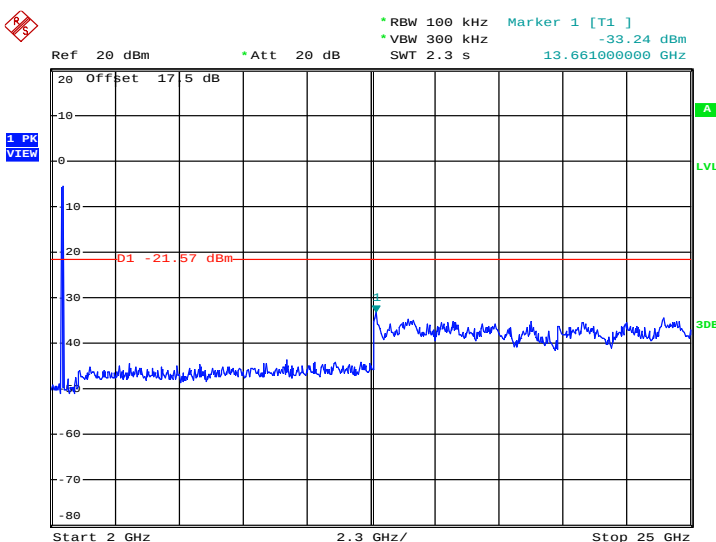


Date: 22.JAN.2013 11:22:26

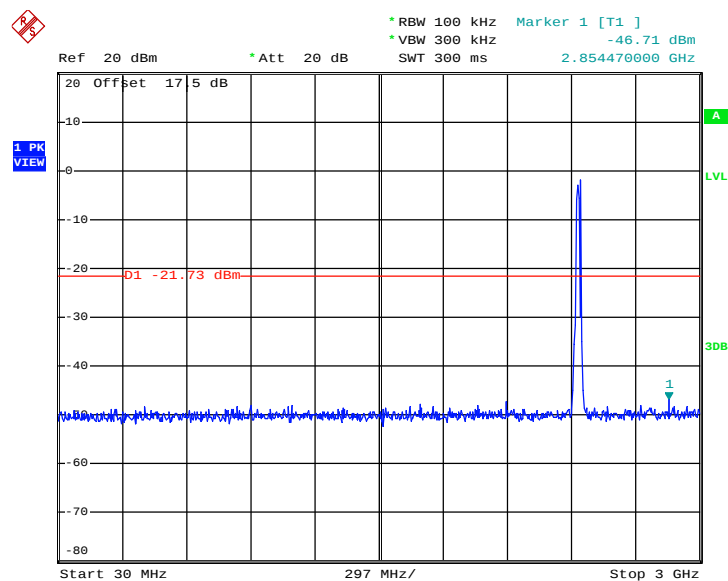802.11g 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 06


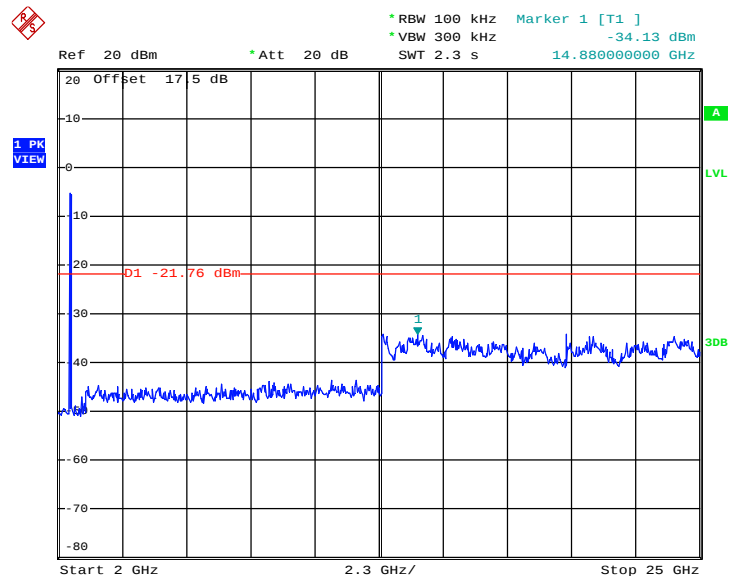
Date: 22.JAN.2013 11:34:05

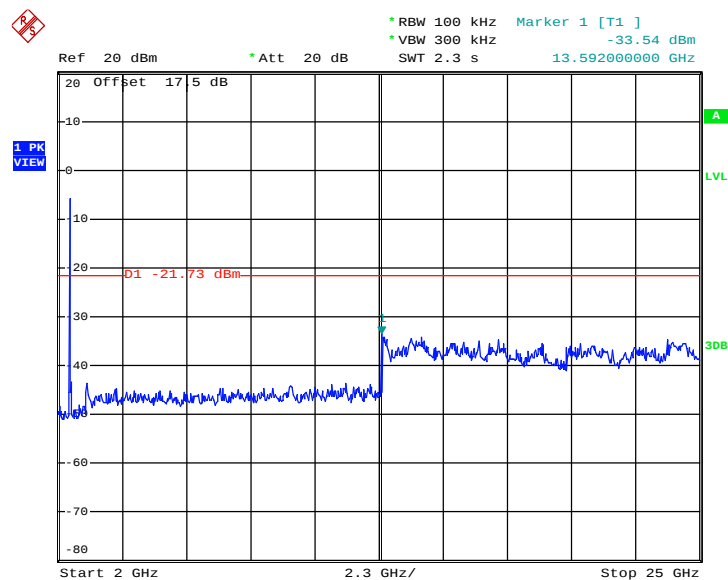802.11g 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 06


Date: 22.JAN.2013 11:34:23

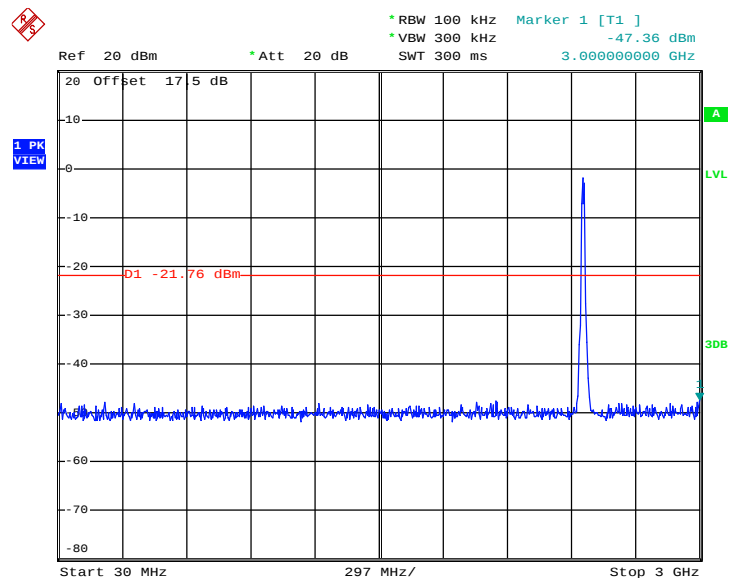802.11g 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 11


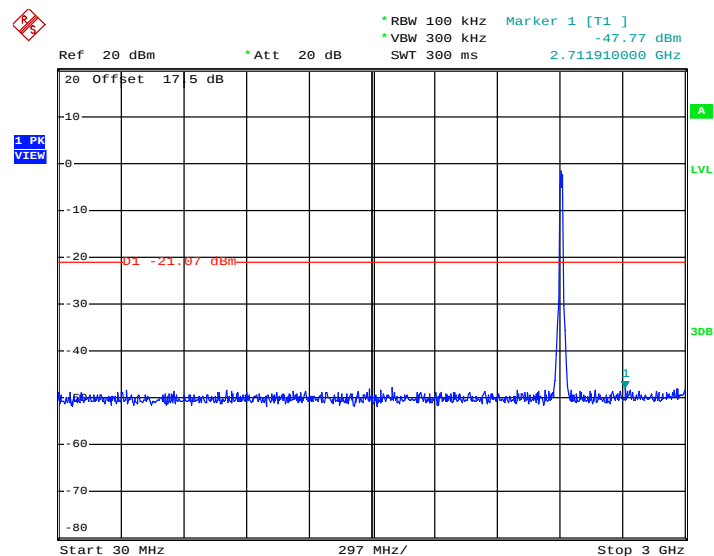
Date: 22.JAN.2013 11:39:55

802.11g 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 11


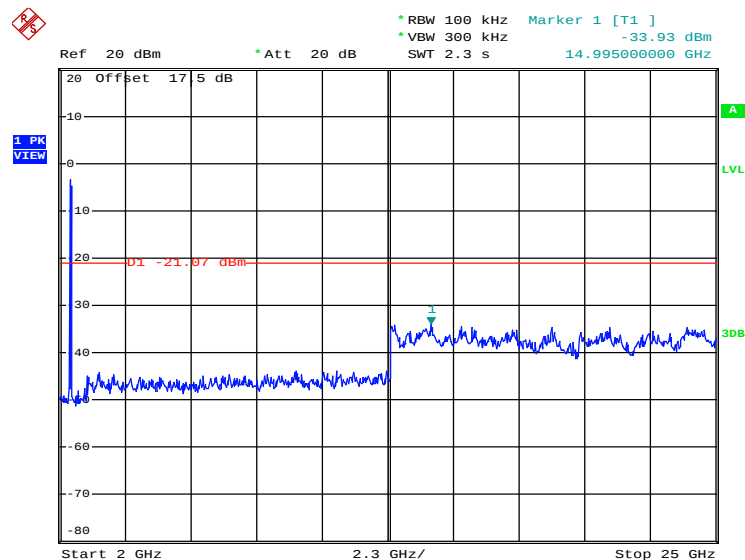
Date: 22.JAN.2013 11:40:13




Test Mode :	802.11n HT20	Temperature :	23~24℃
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Zhi Lu

802.11n HT20 30 MHz~3 GHz**Conducted Spurious Emission Plot on Channel 01**


Date: 22.JAN.2013 11:46:56

802.11n HT20 2 GHz~25 GHz**Conducted Spurious Emission Plot on Channel 01**


Date: 22.JAN.2013 11:47:14

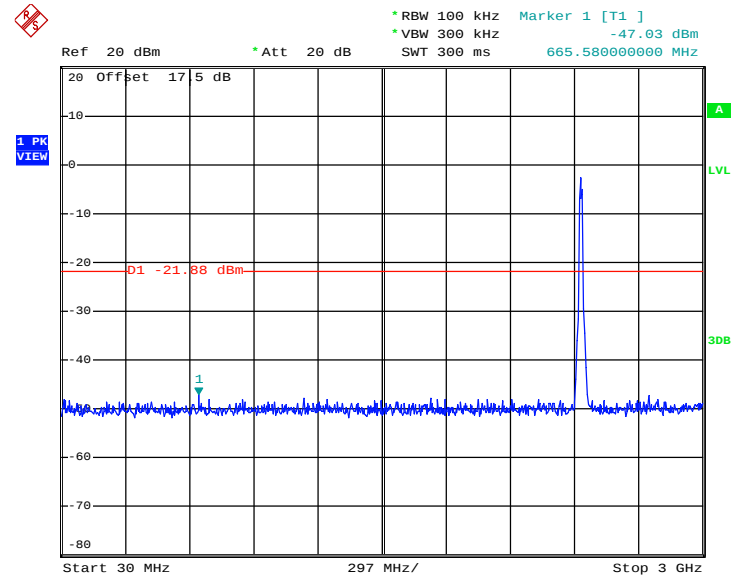802.11n HT20 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 06


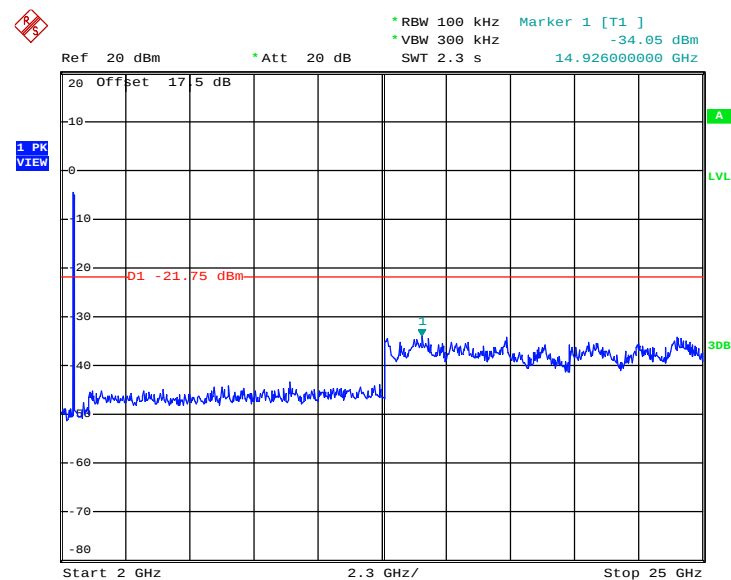
Date: 22.JAN.2013 11:52:54

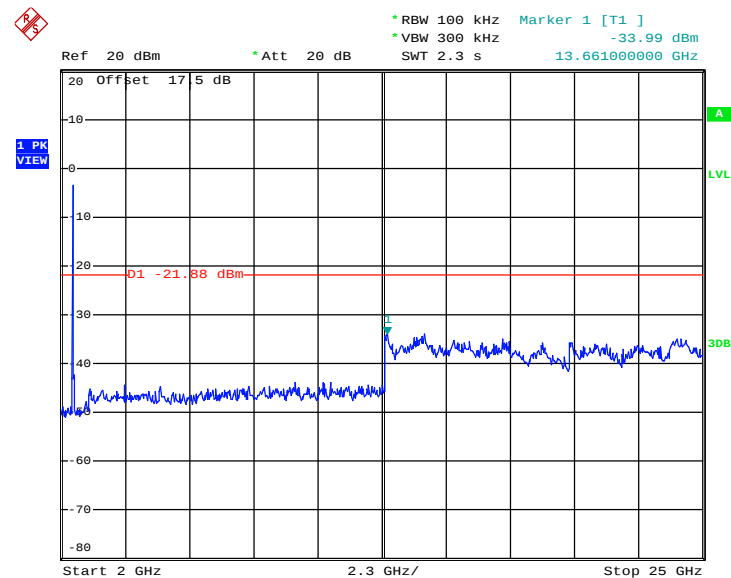802.11n HT20 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 06


Date: 22.JAN.2013 11:53:13

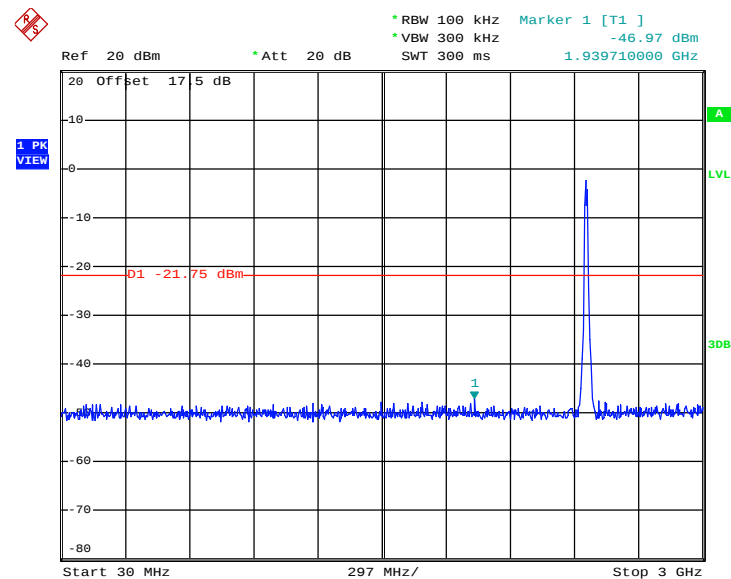802.11n HT20 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 11


Date: 22.JAN.2013 11:57:58

802.11n HT20 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 11


Date: 22.JAN.2013 11:58:17

3.5 Radiated Emission Measurement

3.5.1 Limit of Radiated Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows the guidelines in ANSI C63. 10-2009
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(KHz)	VBW Setting
802.11b	100.00	-	-	10Hz
802.11g	94.718310	0.538	1.858736	3KHz
2.4G 802.11n HT20	88.652482	0.250	4	10KHz


Note: For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

3.5.4 Test Setup


For radiated emissions below 30MHz

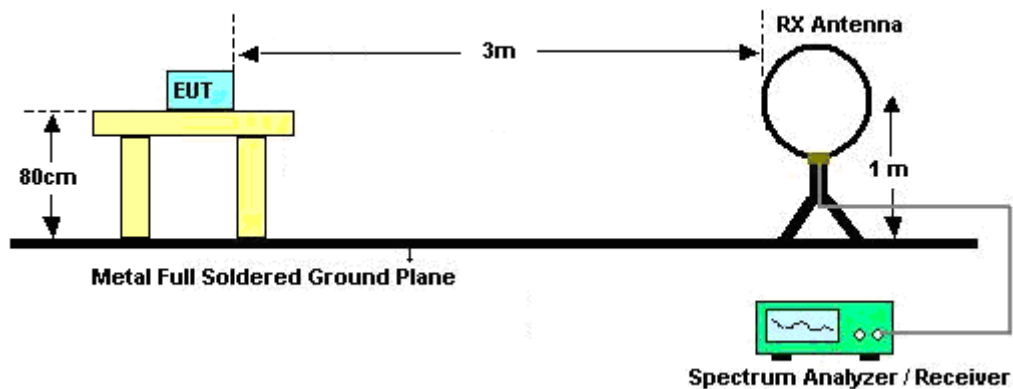

For radiated emissions from 30MHz to 1GHz

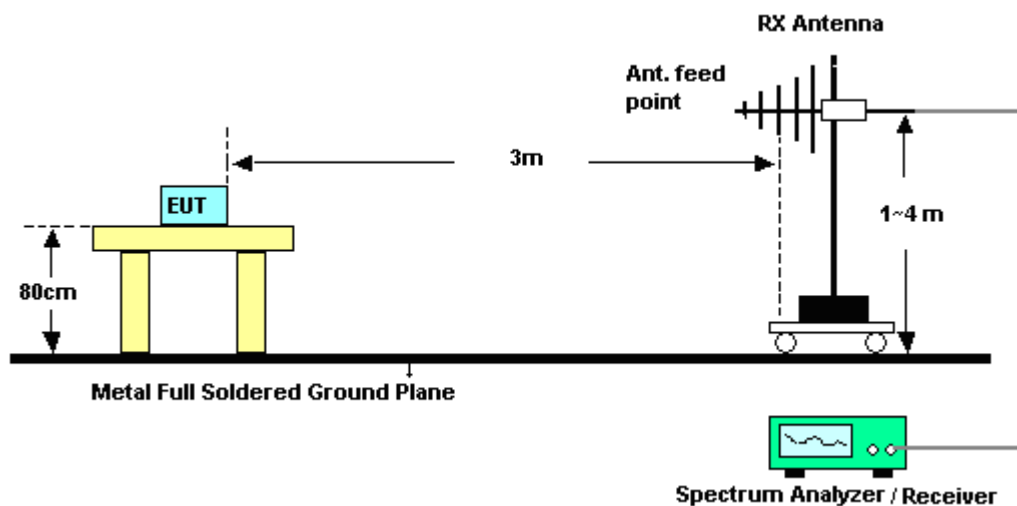

For radiated emissions above 1GHz

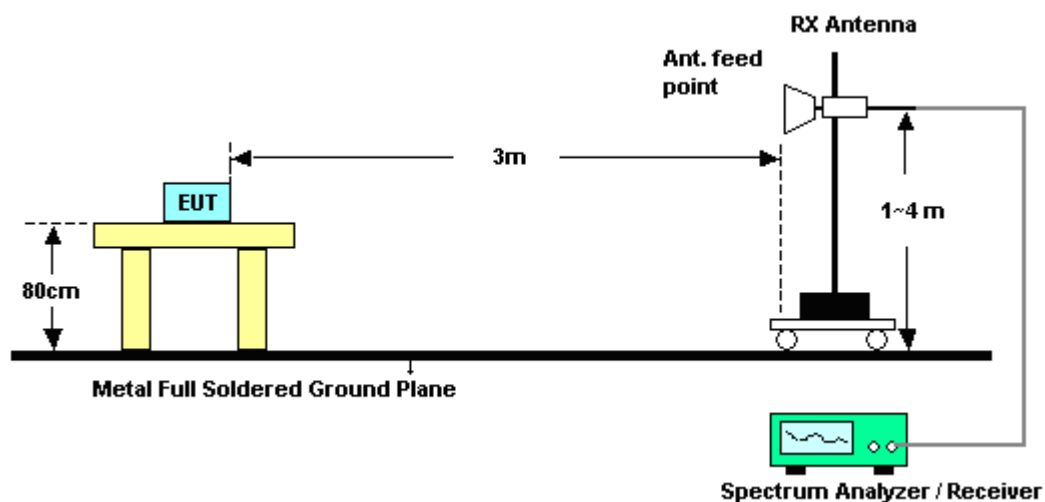

3.5.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Band Edges

Test Mode :	802.11b	Temperature :	21~22°C
Test Band :	Low	Relative Humidity :	45~46%
Test Channel :	01	Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.65	47.95	-26.05	74	46.84	32.86	2.11	33.86	100	112	Peak
2390	38.34	-15.66	54	37.26	32.86	2.11	33.89	100	112	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.11	47.04	-26.96	74	45.93	32.86	2.11	33.86	100	139	Peak
2389.74	37.9	-16.1	54	36.79	32.86	2.11	33.86	100	139	Average

Test Mode :	802.11b	Temperature :	21~22°C
Test Band :	High	Relative Humidity :	45~46%
Test Channel :	11	Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	56.22	-17.78	74	52.56	33.01	2.16	31.51	112	45	Peak
2483.5	47.25	-6.75	54	43.59	33.01	2.16	31.51	109	46	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	54.51	-19.49	74	50.85	33.01	2.16	31.51	125	96	Peak
2483.5	43.86	-10.14	54	40.2	33.01	2.16	31.51	125	93	Average

Test Mode :	802.11g	Temperature :	21~22°C
Test Band :	Low	Relative Humidity :	45~46%
Test Channel :	01	Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	64.76	-9.24	74	63.68	32.86	2.11	33.89	100	160	Peak
2390	48.85	-5.15	54	47.77	32.86	2.11	33.89	100	160	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	51.25	-22.75	74	50.17	32.86	2.11	33.89	100	281	Peak
2390	36.9	-17.1	54	35.82	32.86	2.11	33.89	100	281	Average

Test Mode :	802.11g	Temperature :	21~22°C
Test Band :	High	Relative Humidity :	45~46%
Test Channel :	11	Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	64	-10	74	62.82	33.01	2.16	33.99	100	160	Peak
2483.83	47.72	-6.28	54	46.54	33.01	2.16	33.99	100	160	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.59	58.15	-15.85	74	56.97	33.01	2.16	33.99	100	331	Peak
2483.53	41.9	-12.1	54	40.72	33.01	2.16	33.99	100	331	Average

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Band :	Low	Relative Humidity :	45~46%
Test Channel :	01	Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	64.91	-9.09	74	63.83	32.86	2.11	33.89	100	169	Peak
2390	50.11	-3.89	54	49.03	32.86	2.11	33.89	100	169	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	53.07	-20.93	74	51.99	32.86	2.11	33.89	100	261	Peak
2390	39.92	-14.08	54	38.84	32.86	2.11	33.89	100	261	Average

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Band :	High	Relative Humidity :	45~46%
Test Channel :	11	Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.53	65.43	-8.57	74	64.25	33.01	2.16	33.99	100	166	Peak
2483.5	51.79	-2.21	54	50.61	33.01	2.16	33.99	100	166	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.53	60.77	-13.23	74	59.59	33.01	2.16	33.99	100	310	Peak
2483.62	47.35	-6.65	54	46.17	33.01	2.16	33.99	100	310	Average

3.5.7 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

NOTE: Below 1GHz for radiated emission measurement, pre-scanned all test modes and only choose the worst case mode was recorded in the report.

Test Mode :	802.11b	Temperature :	21~22℃
Test Channel :	01	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. For example, 102.24 dBuV/m - 20dB = 82.24 dBuV/m.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	57.55	-24.69	82.24	56.47	32.86	2.11	33.89	100	160	Peak
2412	102.24	-	-	101.12	32.89	2.12	33.89	100	160	Peak
2412	97.64	-	-	96.52	32.89	2.12	33.89	100	160	Average
4826	54.68	-19.32	74	50.56	35.17	3.09	34.14	103	330	Peak
4826	52.45	-1.55	54	48.33	35.17	3.09	34.14	103	330	Average
7236	43.55	-38.69	82.24	38.41	36.18	3.24	34.28	100	321	Peak

Test Mode :	802.11b	Temperature :	21~22℃
Test Channel :	01	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	57.35	-23.06	80.41	56.27	32.86	2.11	33.89	100	138	Peak
2412	100.41	-	-	99.29	32.89	2.12	33.89	100	138	Peak
2412	95.3	-	-	94.18	32.89	2.12	33.89	100	138	Average
4826	47.99	-26.01	74	43.87	35.17	3.09	34.14	100	36	Peak
4826	44.78	-9.22	54	40.66	35.17	3.09	34.14	100	36	Average
7236	43.65	-36.76	80.41	38.51	36.18	3.24	34.28	100	61	Peak

Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	102.2	-	-	101.04	32.95	2.14	33.93	100	160	Peak
2437	97.37	-	-	96.21	32.95	2.14	33.93	100	160	Average
4874	45.03	-28.97	74	40.77	35.18	3.12	34.04	100	62	Peak
7311	43.86	-30.14	74	38.71	36.2	3.21	34.26	100	96	Peak

Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	98.14	-	-	96.98	32.95	2.14	33.93	132	239	Peak
2437	92.36	-	-	91.2	32.95	2.14	33.93	132	239	Average
4876	49.2	-24.8	74	44.94	35.18	3.12	34.04	100	21	Peak
4876	45.88	-8.12	54	41.62	35.18	3.12	34.04	100	21	Average
7311	43.67	-30.33	74	38.52	36.2	3.21	34.26	100	25	Peak

Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	101.52	-	-	100.35	32.98	2.15	33.96	100	160	Peak
2462	96.03	-	-	94.86	32.98	2.15	33.96	100	160	Average
4924	44.63	-29.37	74	40.23	35.19	3.15	33.94	100	30	Peak
7386	44.35	-29.65	74	39.15	36.24	3.19	34.23	100	92	Peak

Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	97.86	-	-	96.69	32.98	2.15	33.96	120	231	Peak
2462	92.68	-	-	91.51	32.98	2.15	33.96	120	231	Average
4924	44.44	-29.56	74	40.04	35.19	3.15	33.94	100	206	Peak
7386	44.71	-29.29	74	39.51	36.24	3.19	34.23	100	62	Peak

Test Mode :	802.11g	Temperature :	21~22℃
Test Channel :	01	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	75.27	-8.68	83.95	74.19	32.86	2.11	33.89	100	161	Peak
2412	103.95	-	-	102.83	32.89	2.12	33.89	100	161	Peak
2412	92.32	-	-	91.2	32.89	2.12	33.89	100	161	Average
4822	53.57	-20.43	74	49.45	35.17	3.09	34.14	100	122	Peak
4822	44.29	-9.71	54	40.17	35.17	3.09	34.14	100	122	Average
7236	44.42	-39.53	83.95	39.28	36.18	3.24	34.28	100	115	Peak

Test Mode :	802.11g	Temperature :	21~22℃
Test Channel :	01	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	56.07	-21.43	77.5	54.99	32.86	2.11	33.89	128	271	Peak
2412	97.5	-	-	96.38	32.89	2.12	33.89	128	271	Peak
2412	85.76	-	-	84.64	32.89	2.12	33.89	128	271	Average
4822	59.99	-14.01	74	55.87	35.17	3.09	34.14	100	320	Peak
4822	49.75	-4.25	54	45.63	35.17	3.09	34.14	100	320	Average
7236	44.4	-33.1	77.5	39.26	36.18	3.24	34.28	100	200	Peak

Test Mode :	802.11g	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	104.09	-	-	102.93	32.95	2.14	33.93	100	161	Peak
2437	91.35	-	-	90.19	32.95	2.14	33.93	100	161	Average
4874	49.87	-24.13	74	45.61	35.18	3.12	34.04	100	332	Peak
4874	38.16	-15.84	54	33.9	35.18	3.12	34.04	100	332	Average
7311	44.26	-29.74	74	39.11	36.2	3.21	34.26	100	250	Peak

Test Mode :	802.11g	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	97.65	-	-	96.49	32.95	2.14	33.93	100	335	Peak
2437	85.97	-	-	84.81	32.95	2.14	33.93	100	335	Average
4876	51.62	-22.38	74	47.36	35.18	3.12	34.04	100	0	Peak
4876	40.93	-13.07	54	36.67	35.18	3.12	34.04	100	0	Average
7311	44.35	-29.65	74	39.2	36.2	3.21	34.26	100	216	Peak

Test Mode :	802.11g	Temperature :	21~22℃
Test Channel :	11	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	20.06	-19.94	40	35.29	18	0.34	33.57	-	-	Peak
172.599	16.78	-26.72	43.5	40.57	9.01	0.77	33.57	-	-	Peak
196.51	18.07	-25.43	43.5	41.95	8.86	0.82	33.56	-	-	Peak
300.367	19.98	-26.02	46	39.34	13.02	0.99	33.37	-	-	Peak
878.322	23.68	-22.32	46	34.04	20.47	1.72	32.55	-	-	Peak
938.833	30.54	-15.46	46	40.55	20.68	1.75	32.44	124	97	Peak
2462	104.28	-	-	103.11	32.98	2.15	33.96	100	162	Peak
2462	92.49	-	-	91.32	32.98	2.15	33.96	100	162	Average
4922	48.11	-25.89	74	43.71	35.19	3.15	33.94	100	19	Peak
4922	35.6	-18.4	54	31.2	35.19	3.15	33.94	100	19	Average
7386	44.35	-29.65	74	39.15	36.24	3.19	34.23	100	0	Peak

Test Mode :	802.11g	Temperature :	21~22℃
Test Channel :	11	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
34.882	21.79	-18.21	40	39.93	15.1	0.37	33.61	-	-	Peak
41.713	23.52	-16.48	40	45.81	10.95	0.4	33.64	-	-	Peak
58.203	21.44	-18.56	40	48.96	5.59	0.47	33.58	-	-	Peak
101.289	24.61	-18.89	43.5	47.02	10.62	0.58	33.61	-	-	Peak
878.322	24.33	-21.67	46	34.69	20.47	1.72	32.55	-	-	Peak
945.44	30.7	-15.3	46	40.68	20.71	1.75	32.44	100	357	Peak
2462	98.68	-	-	97.51	32.98	2.15	33.96	103	335	Peak
2462	86.56	-	-	85.39	32.98	2.15	33.96	103	335	Average
4924	51.21	-22.79	74	46.81	35.19	3.15	33.94	100	360	Peak
4924	38.93	-15.07	54	34.53	35.19	3.15	33.94	100	360	Average
7386	44.06	-29.94	74	38.86	36.24	3.19	34.23	100	10	Peak

Test Mode :	802.11n HT20	Temperature :	21~22℃
Test Channel :	01	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	77.13	-5.93	83.06	76.05	32.86	2.11	33.89	100	166	Peak
2412	103.06	-	-	101.94	32.89	2.12	33.89	100	166	Peak
2412	92.6	-	-	91.48	32.89	2.12	33.89	100	166	Average
4828	52.67	-21.33	74	48.55	35.17	3.09	34.14	100	160	Peak
4828	41.66	-12.34	54	37.54	35.17	3.09	34.14	100	160	Average
7236	44.39	-38.67	83.06	39.25	36.18	3.24	34.28	100	28	Peak

Test Mode :	802.11n HT20	Temperature :	21~22℃
Test Channel :	01	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	61.65	-16.54	78.19	60.57	32.86	2.11	33.89	100	275	Peak
2412	98.19	-	-	97.07	32.89	2.12	33.89	100	275	Peak
2412	87.62	-	-	86.5	32.89	2.12	33.89	100	275	Average
4824	55.5	-18.5	74	51.38	35.17	3.09	34.14	100	0	Peak
4824	44.94	-9.06	54	40.82	35.17	3.09	34.14	100	0	Average
7236	44.51	-33.68	78.19	39.37	36.18	3.24	34.28	100	92	Peak

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	102.88	-	-	101.72	32.95	2.14	33.93	100	166	Peak
2437	91.81	-	-	90.65	32.95	2.14	33.93	100	166	Average
4870	47.77	-26.23	74	43.51	35.18	3.12	34.04	100	21	Peak
4870	36.87	-17.13	54	32.61	35.18	3.12	34.04	100	21	Average
7311	44.35	-29.65	74	39.2	36.2	3.21	34.26	100	178	Peak

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	99.06	-	-	97.9	32.95	2.14	33.93	100	278	Peak
2437	88.31	-	-	87.15	32.95	2.14	33.93	100	278	Average
4874	52.65	-21.35	74	48.39	35.18	3.12	34.04	100	0	Peak
4874	41.77	-12.23	54	37.51	35.18	3.12	34.04	100	0	Average
7311	44.36	-29.64	74	39.21	36.2	3.21	34.26	200	0	Peak

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	103.04	-	-	101.87	32.98	2.15	33.96	100	168	Peak
2462	92.37	-	-	91.2	32.98	2.15	33.96	100	168	Average
4924	47.59	-26.41	74	43.19	35.19	3.15	33.94	100	0	Peak
4924	36.55	-17.45	54	32.15	35.19	3.15	33.94	100	0	Average
7386	44.36	-29.64	74	39.16	36.24	3.19	34.23	100	291	Peak

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	99.62	-	-	98.45	32.98	2.15	33.96	106	309	Peak
2462	89.52	-	-	88.35	32.98	2.15	33.96	106	309	Average
4922	49.44	-24.56	74	45.04	35.19	3.15	33.94	100	0	Peak
4922	38.91	-15.09	54	34.51	35.19	3.15	33.94	100	0	Average
7386	44.27	-29.73	74	39.07	36.24	3.19	34.23	100	105	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

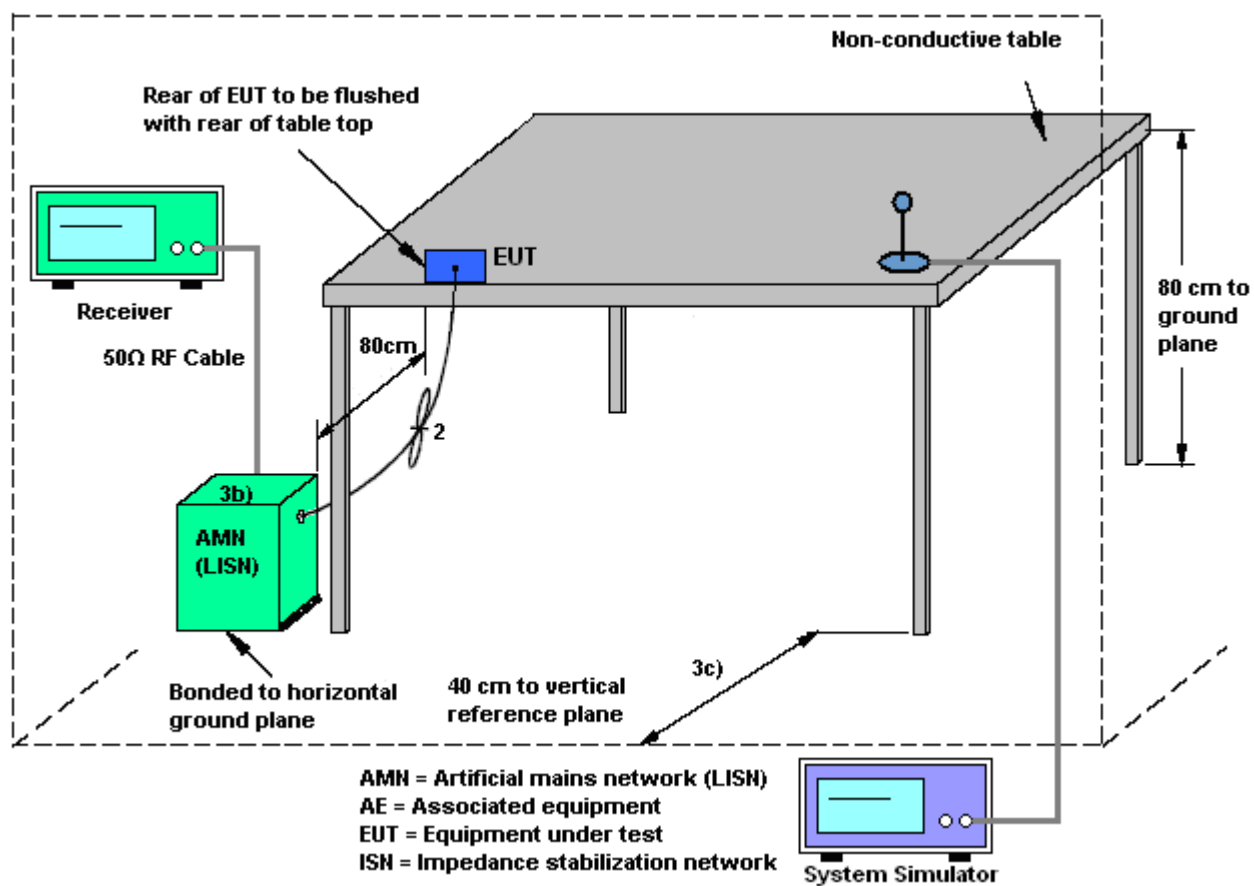

3.6.5 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	19~20℃
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

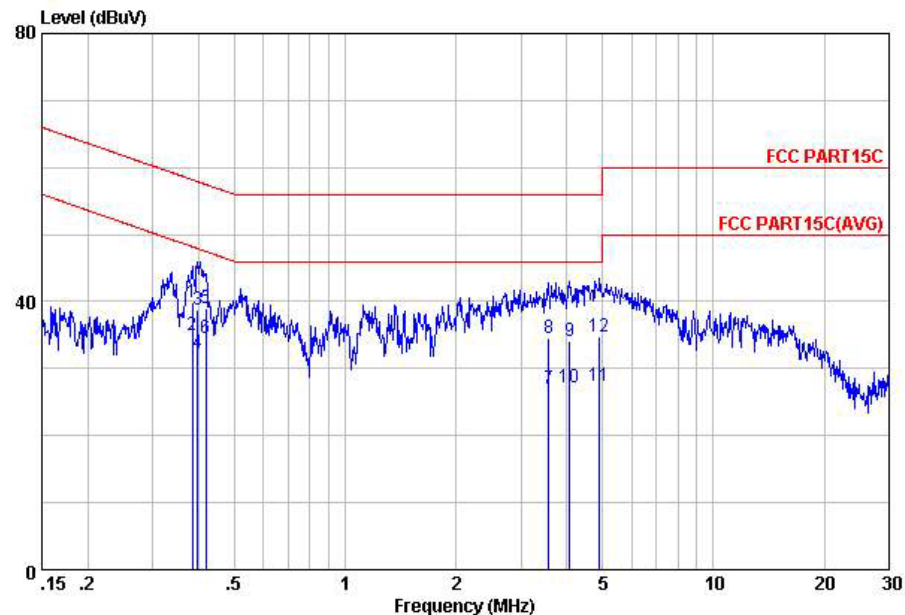

Site : C001-KS
Condition: FCC PART15C LISN-111230 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.39	39.84	-18.33	58.17	29.30	-0.08	10.62	QP
2	0.39	34.94	-13.23	48.17	24.40	-0.08	10.62	Average
3	0.40	38.74	-19.16	57.90	28.20	-0.08	10.62	QP
4	0.40	32.24	-15.66	47.90	21.70	-0.08	10.62	Average
5	0.42	38.94	-18.52	57.46	28.40	-0.08	10.62	QP
6	0.42	34.54	-12.92	47.46	24.00	-0.08	10.62	Average
7	3.57	26.99	-19.01	46.00	16.29	-0.12	10.82	Average
8	3.57	34.49	-21.51	56.00	23.79	-0.12	10.82	QP
9	4.07	34.10	-21.90	56.00	23.40	-0.13	10.83	QP
10	4.07	27.10	-18.90	46.00	16.40	-0.13	10.83	Average
11	4.90	27.52	-18.48	46.00	16.80	-0.13	10.85	Average
12	4.90	34.72	-21.28	56.00	24.00	-0.13	10.85	QP

Test Mode :	Mode 1	Temperature :	19~20℃
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

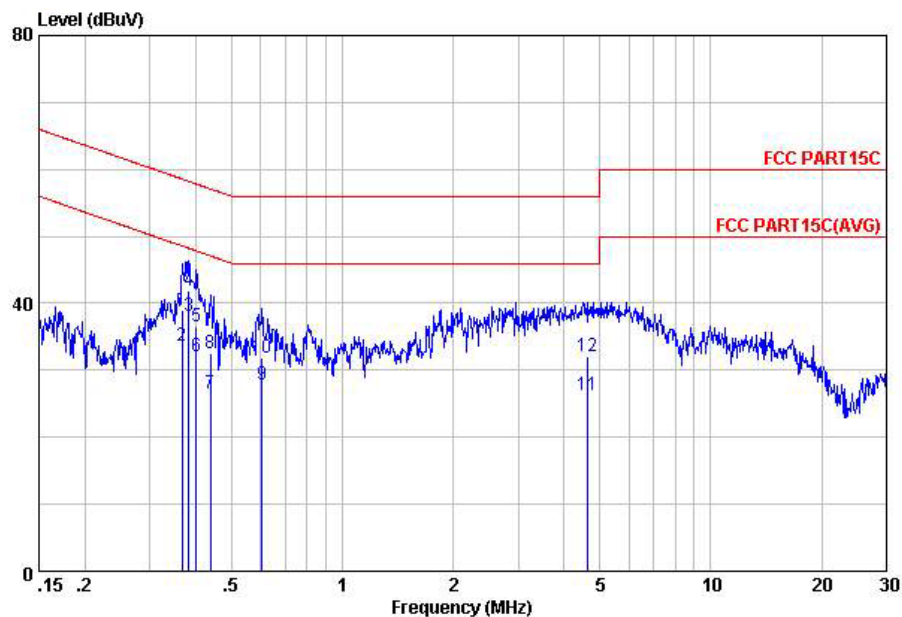

Site : C001-KS
Condition: FCC PART15C LISN-111230 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.37	38.93	-19.63	58.56	28.40	-0.08	10.61	QP
2	0.37	33.73	-14.83	48.56	23.20	-0.08	10.61	Average
3	0.38	38.14	-10.07	48.21	27.60	-0.08	10.62	Average
4	0.38	41.84	-16.37	58.21	31.30	-0.08	10.62	QP
5	0.40	36.64	-21.17	57.81	26.10	-0.08	10.62	QP
6	0.40	32.04	-15.77	47.81	21.50	-0.08	10.62	Average
7	0.44	26.44	-20.67	47.11	15.90	-0.08	10.62	Average
8	0.44	32.54	-24.57	57.11	22.00	-0.08	10.62	QP
9	0.60	27.75	-18.25	46.00	17.20	-0.08	10.63	Average
10	0.60	31.95	-24.05	56.00	21.40	-0.08	10.63	QP
11	4.65	26.21	-19.79	46.00	15.50	-0.13	10.84	Average
12	4.65	32.11	-23.89	56.00	21.40	-0.13	10.84	QP

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Connected Construction

Non-standard connector used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 29, 2012	Jan. 22, 2013	Dec. 28, 2013	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 22, 2012	Jan. 22, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 22, 2012	Jan. 22, 2013	Aug. 21, 2013	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 22, 2012	Jan. 22, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 29, 2012	Jan. 22, 2013	Dec. 28, 2013	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 08, 2012	Jan. 17, 2013	Nov. 07, 2013	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	100400	9kHz~30GHz	Jun. 01, 2012	Jan. 17, 2013	May 31, 2013	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 07, 2012	Jan. 17, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 03, 2012	Jan. 17, 2013	Jul. 02, 2014	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	1908/7/13	00075957	1GHz~18GHz	Dec. 07, 2012	Jan. 17, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz	Jun. 01, 2012	Jan. 17, 2013	May 31, 2013	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 29, 2012	Jan. 17, 2013	Dec. 28, 2013	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2012	Jan. 17, 2013	Nov. 06, 2013	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	9170249	15GHz~40GHz	Nov. 23, 2012	Jan. 17, 2013	Nov. 22, 2013	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 01, 2012	Dec. 24, 2012	May 31, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 29, 2011	Dec. 24, 2012	Dec. 28, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 29, 2011	Dec. 24, 2012	Dec. 28, 2012	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 15, 2012	Dec. 24, 2012	Nov. 14, 2013	Conduction (CO01-KS)
System Simulator	R&S	CMU200	837587/066	2G Full-Band	Dec. 29, 2011	Dec. 24, 2012	Dec. 28, 2012	Conduction (CO01-KS)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26
--	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54
--	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72
--	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP2D2101 as below.