

# SF-245

## 2400MHz Omnidirectional Antenna


### Specifications:

- 2400-2500MHz
- Gain: 7.4dBi
- Length: 19 inches
- Weight: 4.7 oz
- -3dB Beam-width: 20 degrees
- Cross Polar Rejection: 15dB +
- Max Power: 50 watts
- Max wind survival: 150MPH +
- Wind Load: 7.1 sq in
- Connector: Integral N-male
- Radome: Black UV stabilized fiberglass
- Mast mounting hardware optional
- Mobile lip mount optional

### Vertical radiation pattern

Elevation pattern at:

- 2400MHz
- 2425MHz
- 2450MHz
- 2475MHz
- 2500MHz

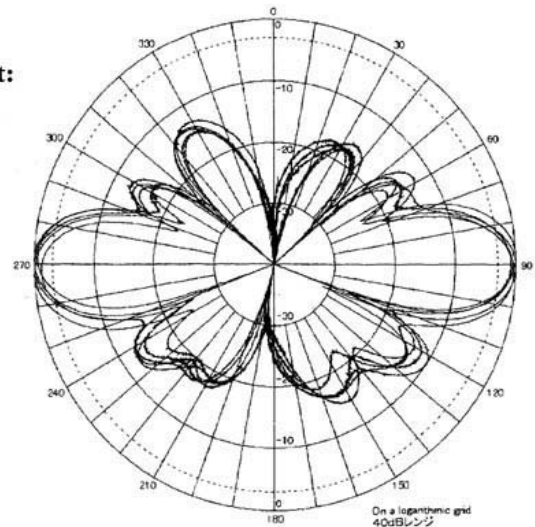

### NCG Company

1275 N. Grove St.  
Anaheim, CA 92806-2114

Phone: 800.962.2611

Fax: 714.630.7024

Email: micks@natcommgroup.com

### FEATURES:

- 802.11b and 802.11g compatible
- Compact gain antenna for point-to-multipoint applications.
- Male N-connector for easy installation
- BASE or MOBILE use
- Heavy duty fiberglass for durability
- Weather proof for indoor or outdoor use
- **MB-100:** Mast mount
- **GR-5N:** Mobile lip mount
- **5D4N:** 5/8 inch hole mount



GR-5N mobile lip mount



5D4N hole mount



MB-100 mast mount