



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Code of Federal Regulations 47 Part 15 – Radio Frequency Devices

Subpart C – Intentional Radiators

Section 15.247

Operation within the bands 902 - 928 MHz,
2400 - 2483.5 MHz, 5725 - 5875 MHz,
and 24.0 - 24.25 GHz.

THE FOLLOWING **MEETS** THE ABOVE TEST SPECIFICATION

Formal Name: 3 Series Smart Switch

Kind of Equipment: Wireless Switch

Frequency Range: 2405-2480 MHz

Test Configuration: Tabletop

Model Number(s): 3130

Model(s) Tested: 3130 (prototype)
- nicknamed Honolulu on data sheets

Serial Number(s): SN1

Date of Tests: June 25th through June 27th, 2014

Test Conducted For: CentraLite Systems, Inc.
1000 Cody Road South STE-A
Mobile, AL 36695, USA

NOTICE: “This test report relates only to the items tested and must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government”. Please see the "Description of Test Sample" page listed inside of this report.

© Copyright 1983 - 2014 D.L.S. Electronic Systems, Inc.

COPYRIGHT NOTICE

This report must not be reproduced (except in full), without the approval of D.L.S. Electronic Systems, Inc.



166 South Carter, Genoa City, WI 53128

Company:	CentraLite Systems, Inc.
Model Tested:	3130
Report Number:	20178
DLS Project:	6685

SIGNATURE PAGE

Tested By:

A handwritten signature in black ink that reads "Craig Brandt". The signature is written in a cursive style with a long horizontal stroke at the end.

Craig Brandt
Test Engineer

Reviewed By:

A handwritten signature in black ink that reads "William Stumpf". The signature is written in a cursive style with a long horizontal stroke at the end.

William Stumpf
OATS Manager

Approved By:

A handwritten signature in black ink that reads "Brian J. Mattson". The signature is written in a cursive style with a long horizontal stroke at the end.

Brian Mattson
General Manager



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Table of Contents

i. Cover Page 1
ii. Signature Page 2
iii. Table of Contents 3
iv. NVLAP Certificate of Accreditation 4
1.0 Summary of Test Report 5
2.0 Introduction 6
3.0 Test Facilities 6
4.0 Description of Test Sample 6
5.0 Test Equipment 8
6.0 Test Arrangements 9
7.0 Test Conditions 9
8.0 Modifications Made To EUT For Compliance 10
9.0 Additional Descriptions 10
10.0 Results 10
11.0 Conclusion 10
Appendix A – Test Photos 11
Appendix B – Measurement Data 17
1.0 Duty Cycle of Test Unit 17
2.0 DTS Bandwidth 19
3.0 Fundamental Emission Output Power 23
4.0 Maximum Power Spectral Density (PSD) 27
5.0 Emissions in Non-Restricted Frequency Bands - RF Conducted 31
6.0 Emissions in Restricted Frequency Bands – Radiated 47
7.0 Band-Edge Measurements – RF Conducted 61
8.0 Band-Edge Measurements – Radiated 65
8.0a - Channel 26 66
8.0b - Channel 25 70



166 South Carter, Genoa City, WI 53128

Company:
Model Tested:
Report Number:
DLS Project:

CentraLite Systems, Inc.
3130
20178
6685

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 100276-0

D.L.S. Electronic Systems, Inc.
Wheeling, IL

is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).

2013-10-01 through 2014-09-30

Effective dates



For the National Institute of Standards and Technology



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
 Model Tested: 3130
 Report Number: 20178
 DLS Project: 6685

1.0 Summary of Test Report

It was determined that the CentraLite Systems, Inc. 3 Series Smart Switch, Model 3130, complies with the requirements of CFR 47 Part 15 Subpart C Section 15.247.

Subpart C Section 15.247 Applicable Technical Requirements Tested:

Section	Description	Procedure	Note	Compliant?
15.35(c)	Duty Cycle	558074 D01 DTS Meas Guidance v03r02 Section 6.0(b) & ANSI C63.10-2009	1	N/A
15.247(a)(2)	DTS Bandwidth (6 dB bandwidth)	558074 D01 DTS Meas Guidance v03r02 Section 8.1	2	Yes
15.247(b)(3)	Fundamental Emission Output Power	558074 D01 DTS Meas Guidance v03r02 Sections 9.1 & 9.1.1	2	Yes
15.247(e)	Maximum Power Spectral Density	558074 D01 DTS Meas Guidance v03r02 Sections 10.0 & 10.2	2	Yes
15.247(d)	Emissions in Non- Restricted Frequency Bands - RF Conducted	558074 D01 DTS Meas Guidance v03r02 Sections 11.1(a), 11.2 & 11.3	2	Yes
15.247(d) 15.205(a) 15.209(a)	Emissions in Restricted Frequency Bands - Radiated	558074 D01 DTS Meas Guidance v03r02 Section 12.1 & ANSI C63.10-2009	3	Yes
15.247(d)	Band-Edge Measurements - RF Conducted	558074 D01 DTS Meas Guidance v03r02 Sections 11.1(a), 11.2 & 11.3	2	Yes
15.247(d) 15.205(a) 15.209(a)	Band-Edge Measurements - Radiated	558074 D01 DTS Meas Guidance v03r02 Sections 12.1, 13.0, 13.3 & 13.3.1 & ANSI C63.10-2009	3	Yes

Note 1: Informative

Note 2: RF conducted measurement.

Note 3: Radiated emission measurement.



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

2.0 Introduction

In June, 2014 the 3 Series Smart Switch, Model 3130, as provided from CentraLite Systems, Inc. was tested to the requirements of CFR 47 Part 15 Subpart C Section 15.247. To meet these requirements, the procedures contained within this report were performed by personnel of D.L.S Electronic Systems, Inc.

3.0 Test Facilities

D.L.S. Electronic Systems, Inc. is a full service EMC/Safety Testing Laboratory accredited to ISO 17025. NVLAP Certificate and Scope can be viewed at <http://www.dlsemc.com/certificate>. Our facilities are registered with the FCC, Industry Canada, and VCCI.

Wisconsin Test Facility:

D.L.S. Electronic Systems, Inc.
166 S. Carter Street
Genoa City, Wisconsin 53128

Wheeling Test Facility:

D.L.S. Electronic Systems, Inc.
1250 Peterson Drive
Wheeling, IL 60090

4.0 Description of Test Sample

Description:

The device consists of two momentary push buttons connected to the GPIO of a MCU. When one of the buttons are pressed, a message can be transmitted wirelessly to some other device or end node.

Type of Equipment / Frequency Range:

Portable wireless switch / 2405-2480 MHz

Physical Dimensions of Equipment Under Test:

4 inch x 2 inch x 1 inch



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

4.0 Description of Test Sample (continued)

Power Source:

3VDC (Lab DC bench power supply used for testing)

Internal Frequencies:

24 MHz

Transmit / Receive Frequencies Used For Test Purpose:

Low channel: 2405 MHz
Middle channel: 2440 MHz
High channel: 2480 MHz

Type of Modulation(s) / Antenna Type:

O-QPSK (802.15.4) / PCB Trace Antenna

Description of Circuit Board(s) / Part Number:

PCB	0016-00-01-04-00-001 Rev X1
-----	-----------------------------



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
 Model Tested: 3130
 Report Number: 20178
 DLS Project: 6685

5.0 Test Equipment

A list of the equipment used can be found in the table below. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.

D.L.S. Wisconsin - G1

30 – 1000 MHz

Description	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Date	Cal Due Dates
Receiver	Rohde & Schwarz	ESI 26	835336/003	20 Hz – 26.5 GHz	3-13-14	3-13-15
Low Pass Filter	Mini-Circuits	VLFX-1125	R UU92600920	DC - 1 GHz	8-13-13	8-13-14
Preamplifier	Rohde & Schwarz	TS-PR10	032001/004	9 kHz – 1 GHz	1-4-14	1-4-15
Antenna	EMCO	3104C	00054892	20 MHz – 200 MHz	9-13-12	9-13-14
Antenna	EMCO	3146	1205	200 MHz – 1 GHz	9-19-12	9-19-14
Test Software	Rohde & Schwarz	ESK-1	V1.7.1	N/A	N/A	N/A

Additional if 1-18 GHz

Description	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Date	Cal Due Dates
Spectrum Analyzer	Agilent	E4446A	MY48250278	3 Hz - 44 GHz	9-25-13	9-25-14
Receiver	Rohde & Schwarz	ESI 40	837808/005	20 Hz – 40 GHz	7-23-13	7-23-14
High Pass Filter	Q Microwave	100462	2	4.2 -18 GHz	6-24-14	6-24-15
Preamp	Ciao	CA118-4010	101	1GHz-18GHz	2-14-14	2-14-15
Horn Antenna	EMCO	3115	6204	1-18GHz	6-5-13	6-5-15
Test Software	Rohde & Schwarz	ESK-1	V1.7.1	N/A	N/A	N/A

Additional if 18-26 GHz

Description	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Date	Cal Due Dates
Receiver	Rohde & Schwarz	ESI 26	835336/003	20 Hz – 26.5 GHz	3-13-14	3-13-15
High Pass Filter	K & L	11SH10- 18000/T40000-K-K	8	18 - 40 GHz	3-6-14	3-6-15
Preamp	Miteq	AMF-8B-180265-40- 10P-H/S	438727	18GHz-26GHz	8-13-13	8-13-14
Horn Antenna	ETS Lindgren	3116	00062917	18 – 40GHz	8-15-13	8-15-15
Test Software	Rohde & Schwarz	ESK-1	V1.7.1	N/A	N/A	N/A



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

6.0 Test Arrangements

Radiated Emissions Measurement Arrangement:

All radiated emission measurements were performed at D.L.S. Electronic Systems, Inc. and set up according to FCC KDB 558074 D01 DTS Meas Guidance v03r02, ANSI C63.4-2009 and ANSI C63.10-2009, unless otherwise noted. Description of procedures and measurements can be found in Appendix B – Measurement Data. See Appendix A for additional photos of the test set up.

Unless otherwise noted, the bandwidth of the measuring receiver / analyzer used during testing is shown below.

Frequency Range	Bandwidth (-6 dB)
10 to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz
Above 1 GHz	1 MHz

RF Conducted Emissions Measurement Arrangement:

All RF conducted emission measurements were performed at D.L.S. Electronic Systems, Inc. and set up according to FCC KDB 558074 D01 DTS Meas Guidance v03r02, ANSI C63.4-2009 and ANSI C63.10-2009, unless otherwise noted. Description of procedures and measurements can be found in Appendix B – Measurement Data. See Appendix A for additional photos of the test set up.

7.0 Test Conditions

Normal Test Conditions:

Temperature and Humidity:

68°F at 62% RH or noted on test data

Supply Voltage:

3VDC



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

8.0 Modifications Made To EUT For Compliance

The output power setting on channel 26 was changed from 8 to -3 to meet the radiated band-edge requirement at the 2.4835 GHz restricted band edge.

9.0 Additional Descriptions

The EUT was connected to the measuring equipment through a temporary SMA connector, soldered in place of the antenna, for RF conducted measurements.

The EUT was powered with an external DC bench supply.

The EUT was tested stand-alone.

The EUT was programmed to transmit continuously at Low, Mid, and High channels.

The EUT was rotated through 2 orthogonal axis (upright or laying down) to find worst-case. (This represents actual usage.)

10.0 Results

Measurements were performed in accordance with FCC KDB 558074 D01 DTS Meas Guidance v03r02 and ANSI C63.10-2009. Graphical and tabular data can be found in Appendix B at the end of this report.

11.0 Conclusion


The 3 Series Smart Switch, Model 3130, as provided from CentraLite Systems, Inc., tested in June, 2014 **meets** the requirements of CFR 47 Part 15 Subpart C Section 15.247.

Appendix A – Test Photos

Photo Information and Test Setup:

- Item0: 3 Series Smart Switch, Model 3130
Item1: DC Power cable to DC bench supply, 1.4 meter long

Radiated Emissions below 1 GHz – Position 1

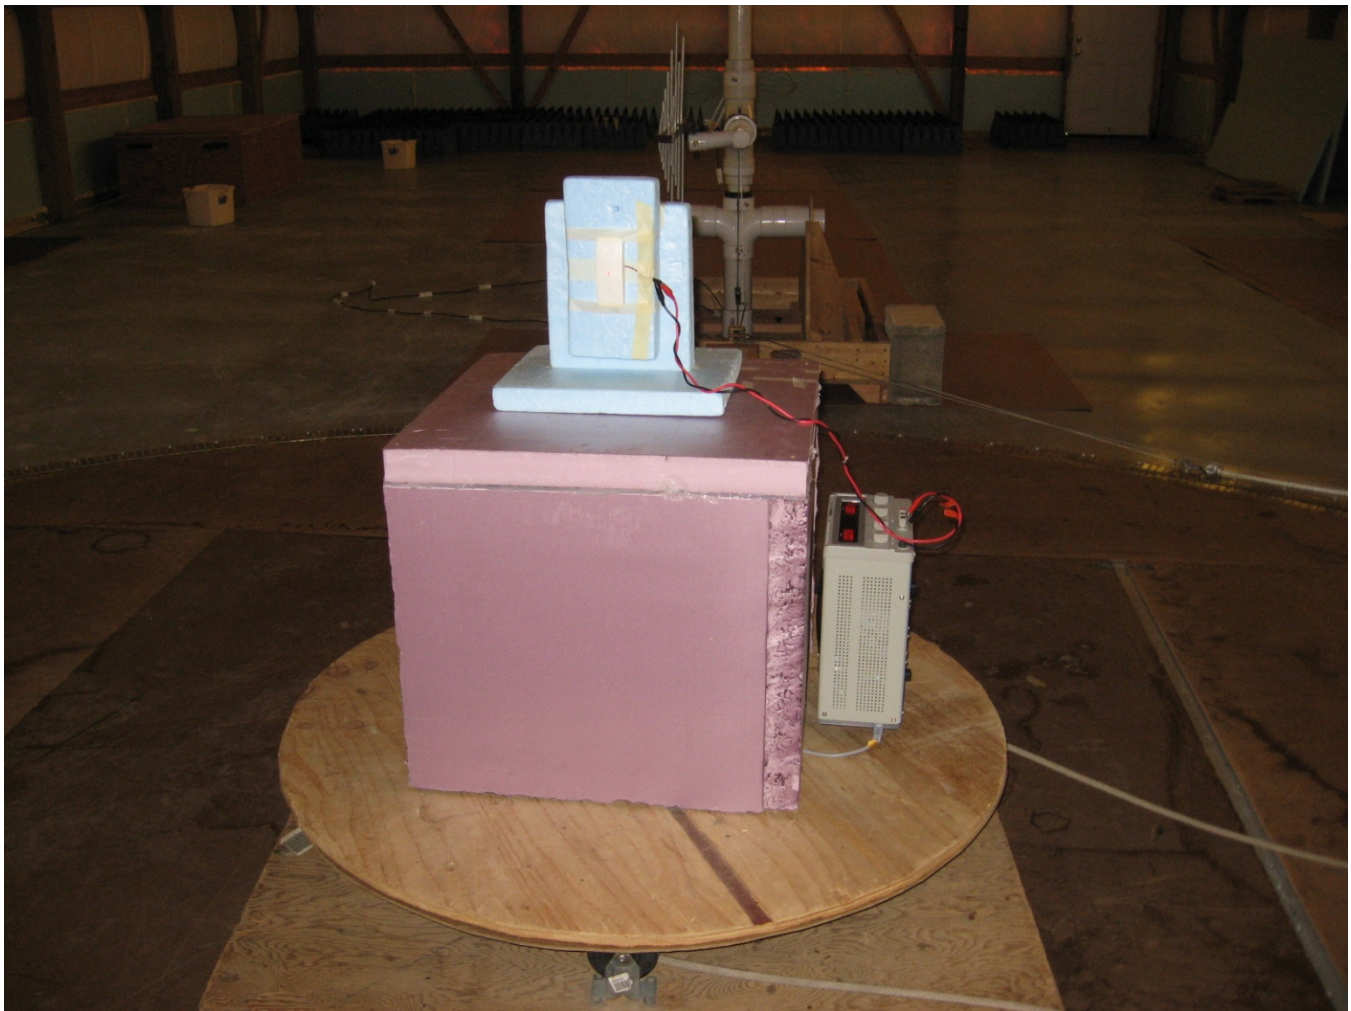




166 South Carter, Genoa City, WI 53128

Company:	CentraLite Systems, Inc.
Model Tested:	3130
Report Number:	20178
DLS Project:	6685

Appendix A

Radiated Emissions below 1 GHz – Position 2

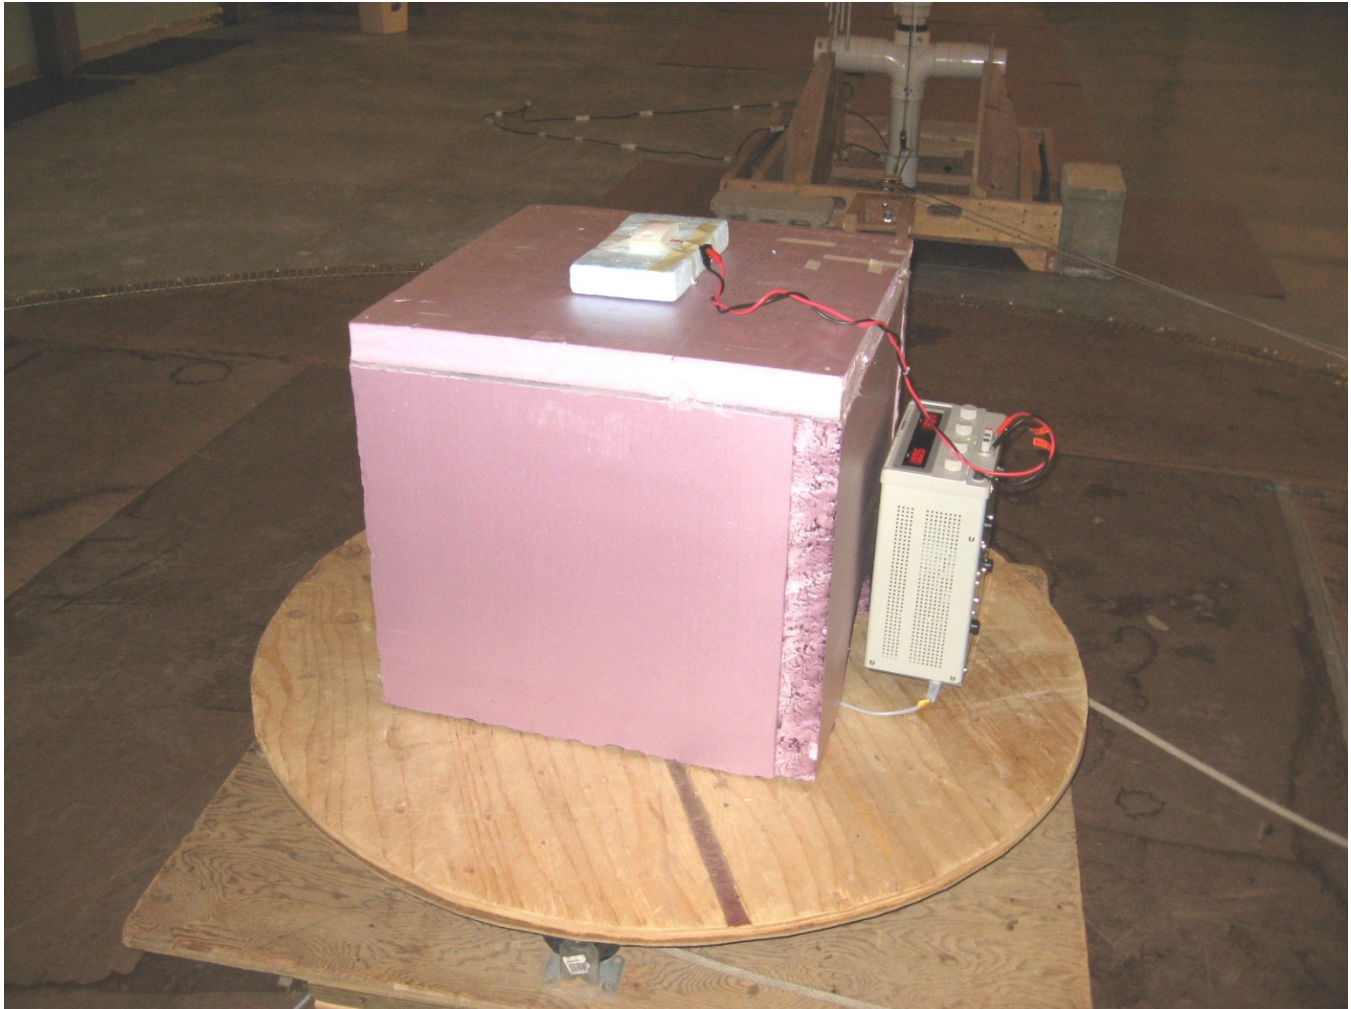



166 South Carter, Genoa City, WI 53128

Company:	CentraLite Systems, Inc.
Model Tested:	3130
Report Number:	20178
DLS Project:	6685


Appendix A

Radiated Emissions above 1 GHz




Appendix A

Radiated Emissions above 1 GHz – Position 1

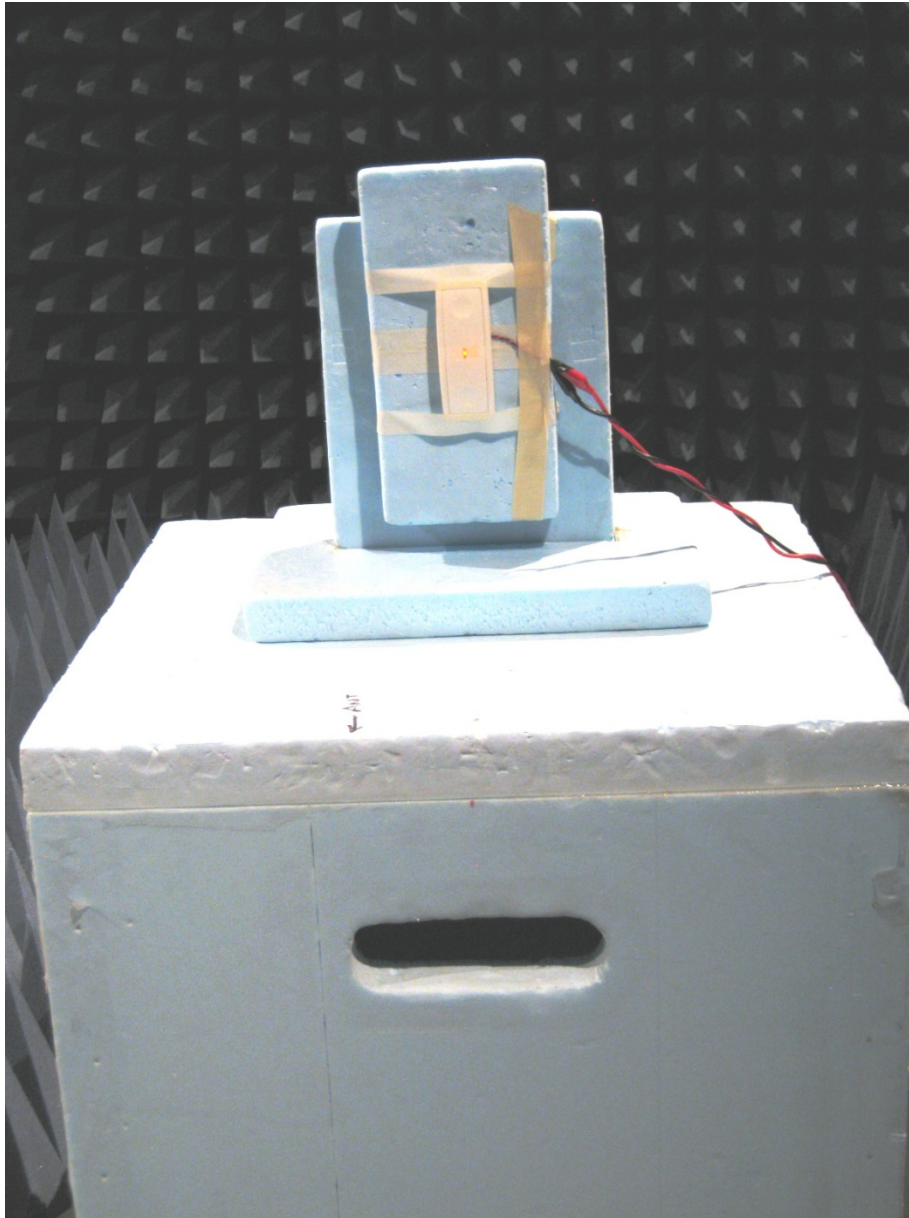

Appendix A

Radiated Emissions above 1 GHz – Position 2

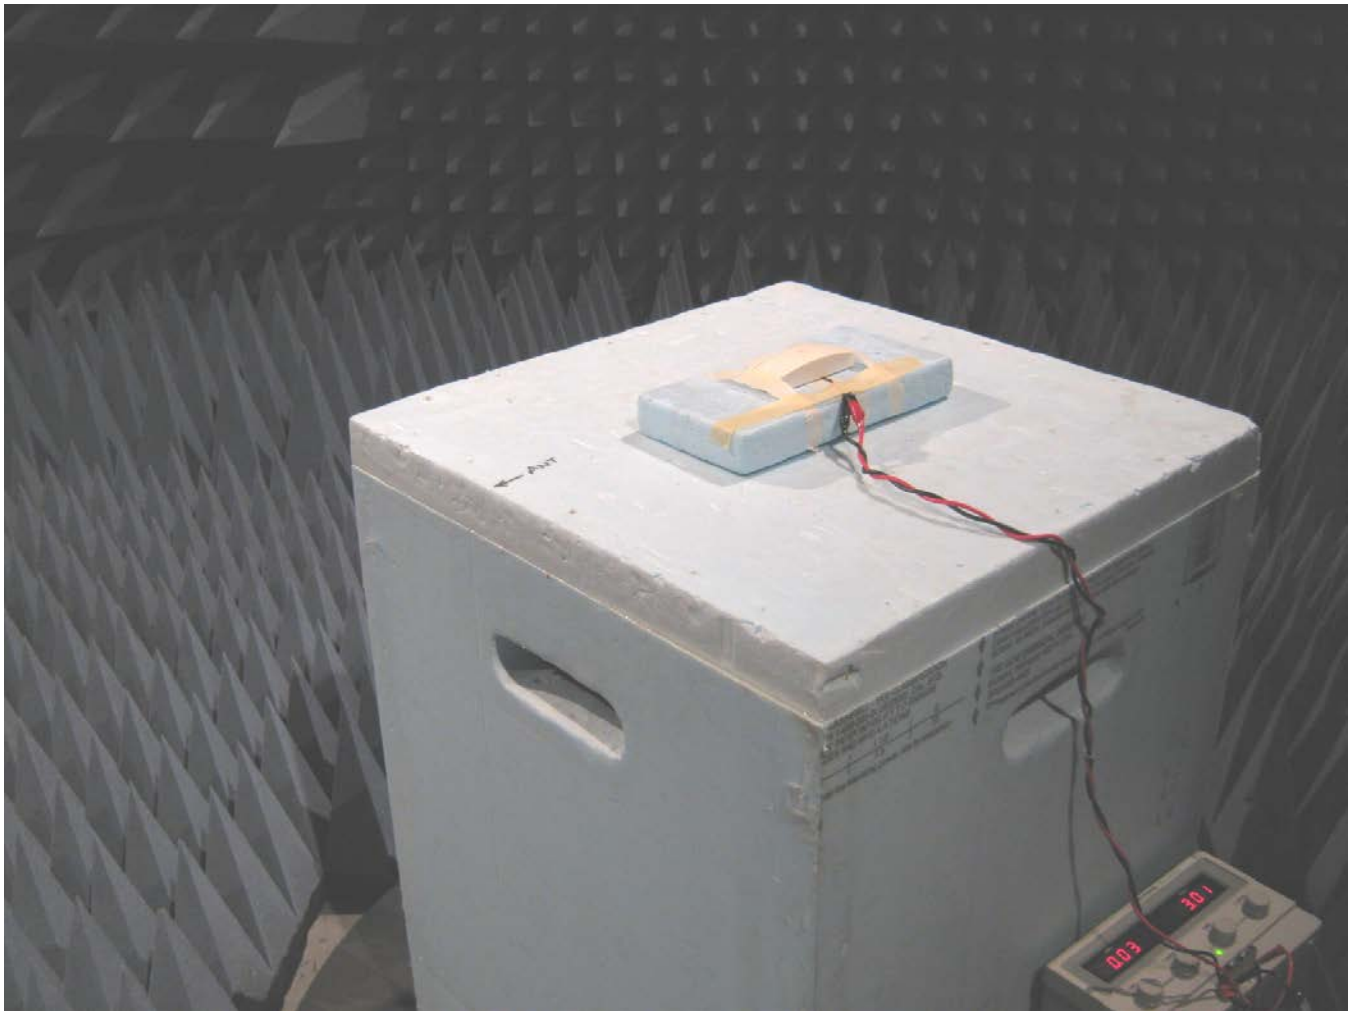




166 South Carter, Genoa City, WI 53128

Company:
Model Tested:
Report Number:
DLS Project:

CentraLite Systems, Inc.
3130
20178
6685

Appendix A

RF Conducted

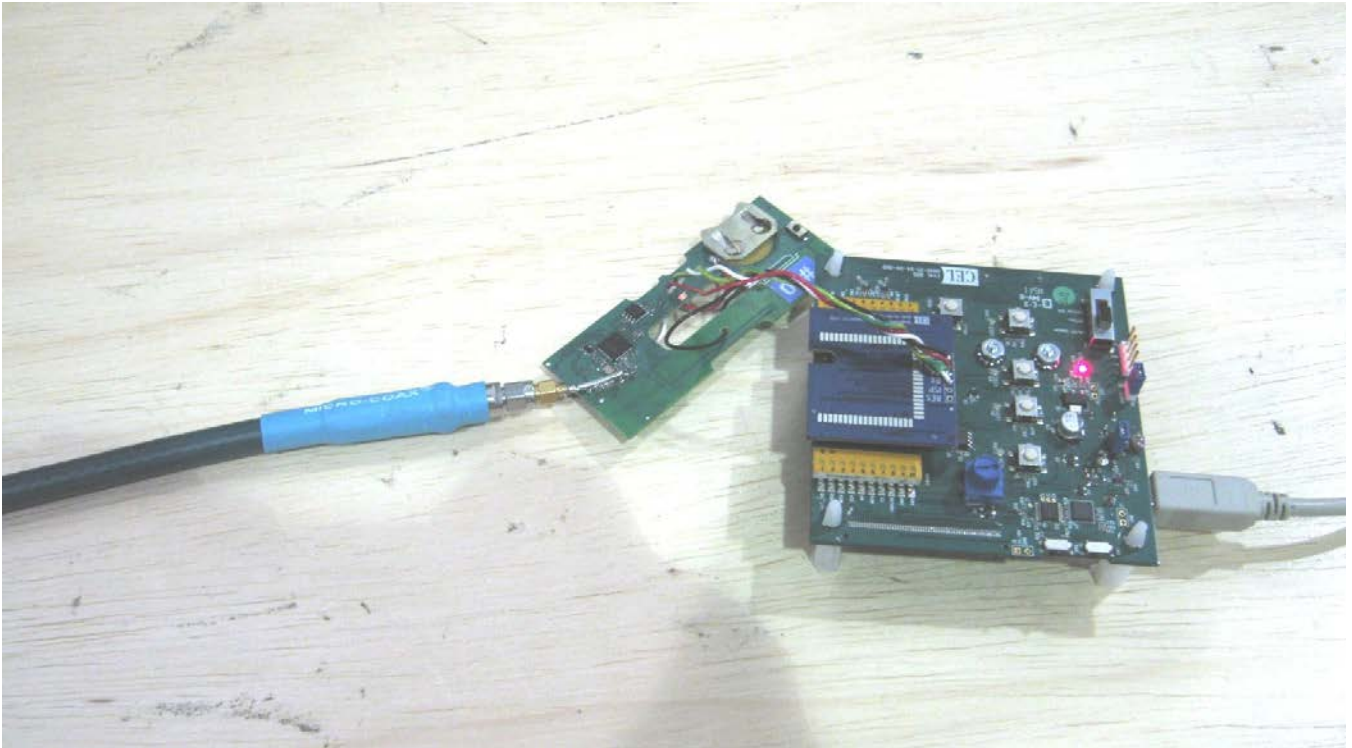



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Appendix B – Measurement Data

1.0 Duty Cycle of Test Unit

Rule Part: FCC Section 15.35(c)

Test Procedure: ANSI C63.10-2009
KDB 558074 D01 DTS Meas Guidance v03r02, section 6.0(b)

Limits: Informative

Results: EUT is continuously transmitting (duty cycle = 100%).

Sample Equations: None

Notes: No duty cycle correction factor was applied to measurements for this device.





166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Duty Cycle of test unit
Operator: Craig B

Comment: Total ON time in 100 ms = 100 ms; Duty cycle = 100%

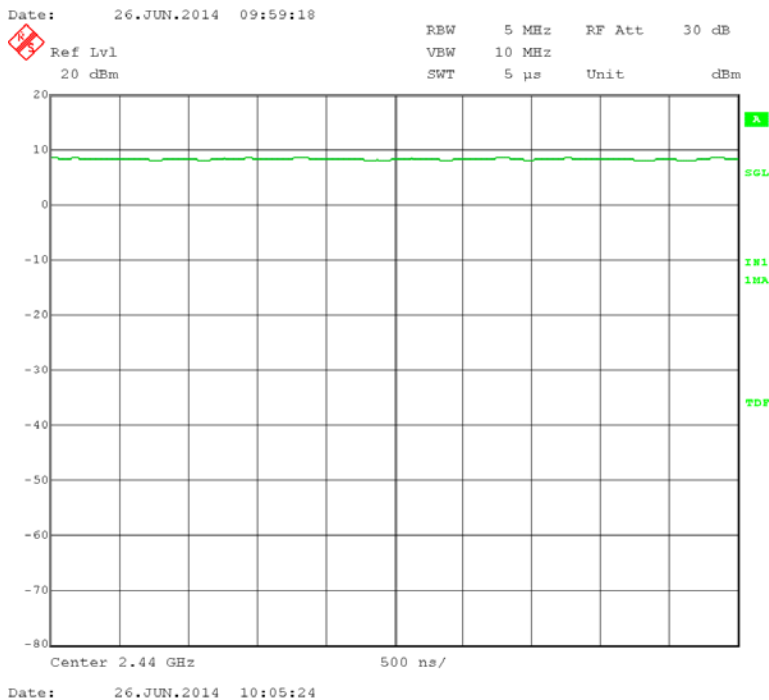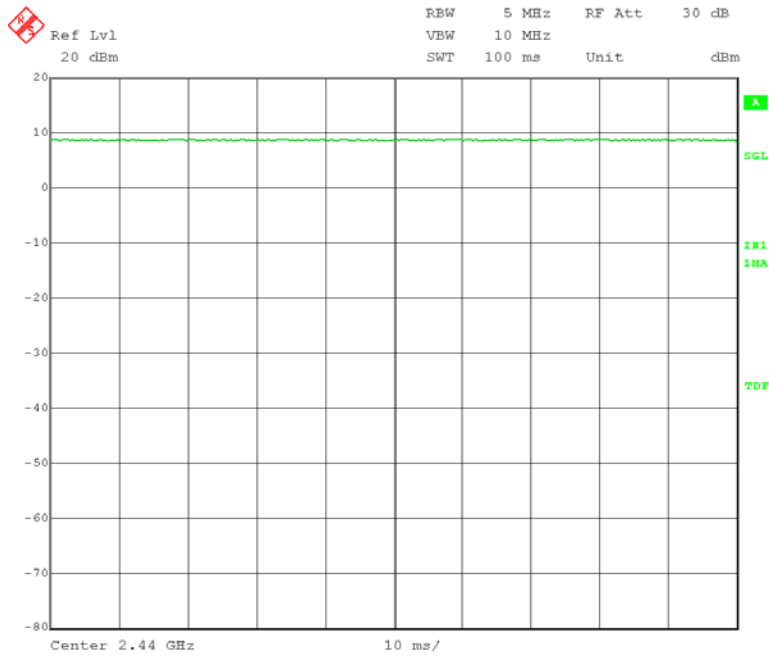



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Appendix B

2.0 DTS Bandwidth

Rule Part:

Section 15.247(a)(2)

Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r02, section 8.1

Limit:

6 dB bandwidth shall be at least 500 kHz

Results:

Compliant
Minimum 6 dB bandwidth: **1.62 MHz**

Notes:

This was an RF conducted measurement. The EUT was connected to the measuring equipment through an SMA connector soldered in place of the antenna. Cable loss and attenuation was accounted for in the transducer factors set in the analyzer.

The EUT was powered through a cable that was connected to the bench supply set to 3.0 VDC. The EUT was set to transmit continuously at its maximum power (power setting 8), with a modulating signal representative of the worst-case signal encountered in a real system operation on the low, middle, and high channels of the operating band.



166 South Carter, Genoa City, WI 53128


Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: DTS Emission Bandwidth (6 dB) - Conducted
Operator: Craig B

Comment: RBW = 100 kHz
VBW = 300 kHz
Detector = Peak
Sweep = auto couple
Trace = max hold

Comment: **Low Channel: Frequency – 2.405 GHz**
Output power setting: 8

6 dB Emission Bandwidth = 1.62 MHz

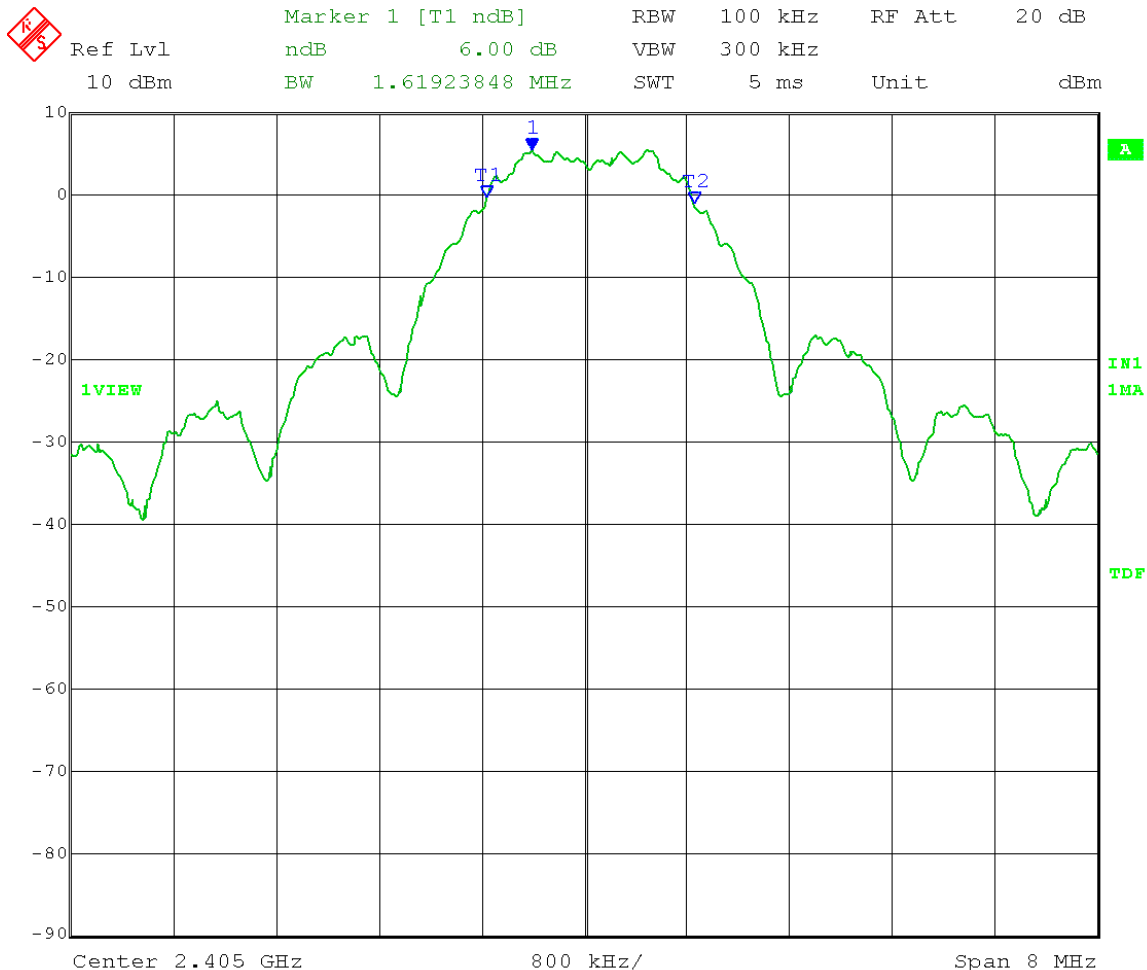

Date: 26.JUN.2014 09:12:37



166 South Carter, Genoa City, WI 53128


Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: DTS Emission Bandwidth (6 dB) - Conducted
Operator: Craig B

Comment: RBW = 100 kHz
VBW = 300 kHz
Detector = Peak
Sweep = auto couple
Trace = max hold

Comment: **Mid Channel: Frequency - 2.440 GHz**
Output power setting: 8

6 dB Emission Bandwidth = 1.62 MHz

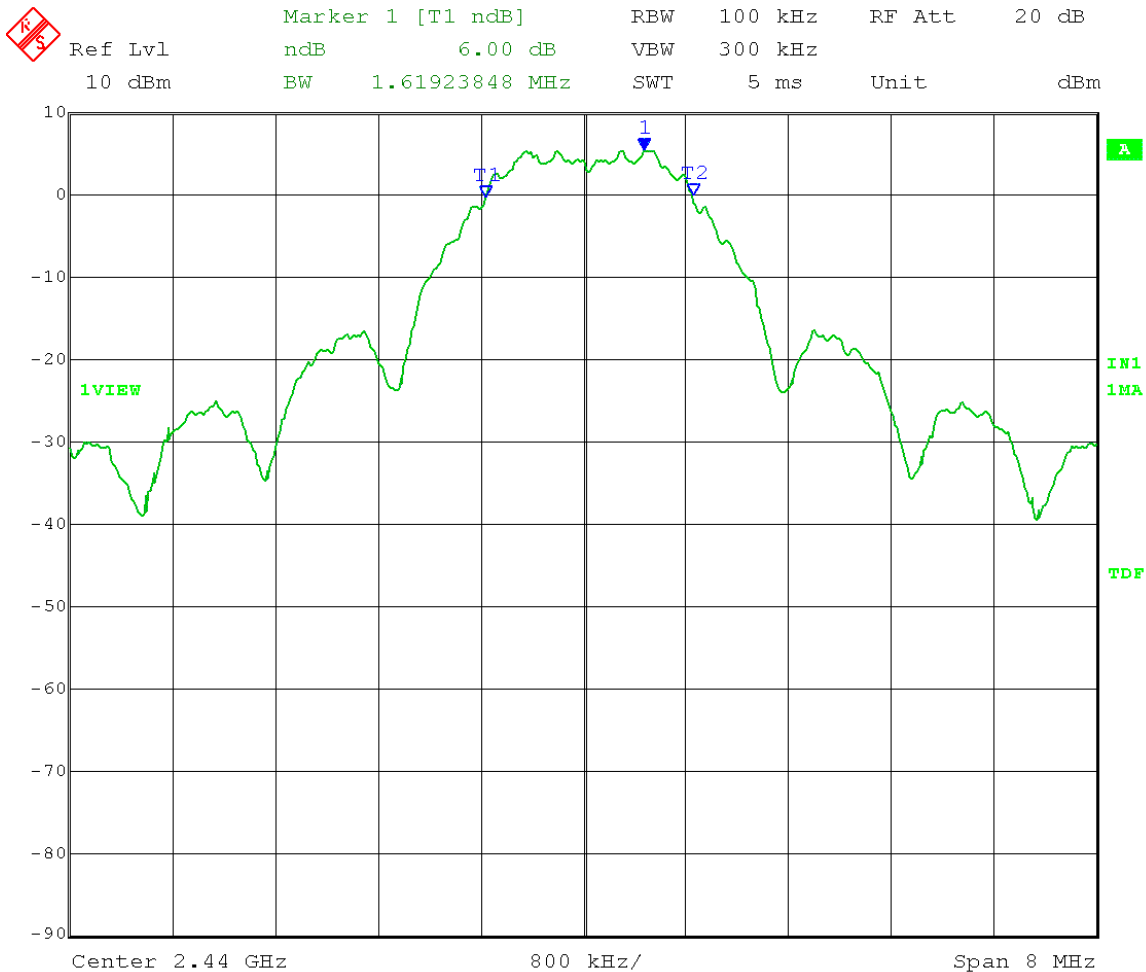

Date: 26.JUN.2014 09:27:37



166 South Carter, Genoa City, WI 53128


Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: DTS Emission Bandwidth (6 dB) - Conducted
Operator: Craig B

Comment: RBW = 100 kHz
VBW = 300 kHz
Detector = Peak
Sweep = auto couple
Trace = max hold

Comment: High Channel: Frequency - 2.480 GHz
Output power setting: -3

6 dB Emission Bandwidth = 1.63 MHz

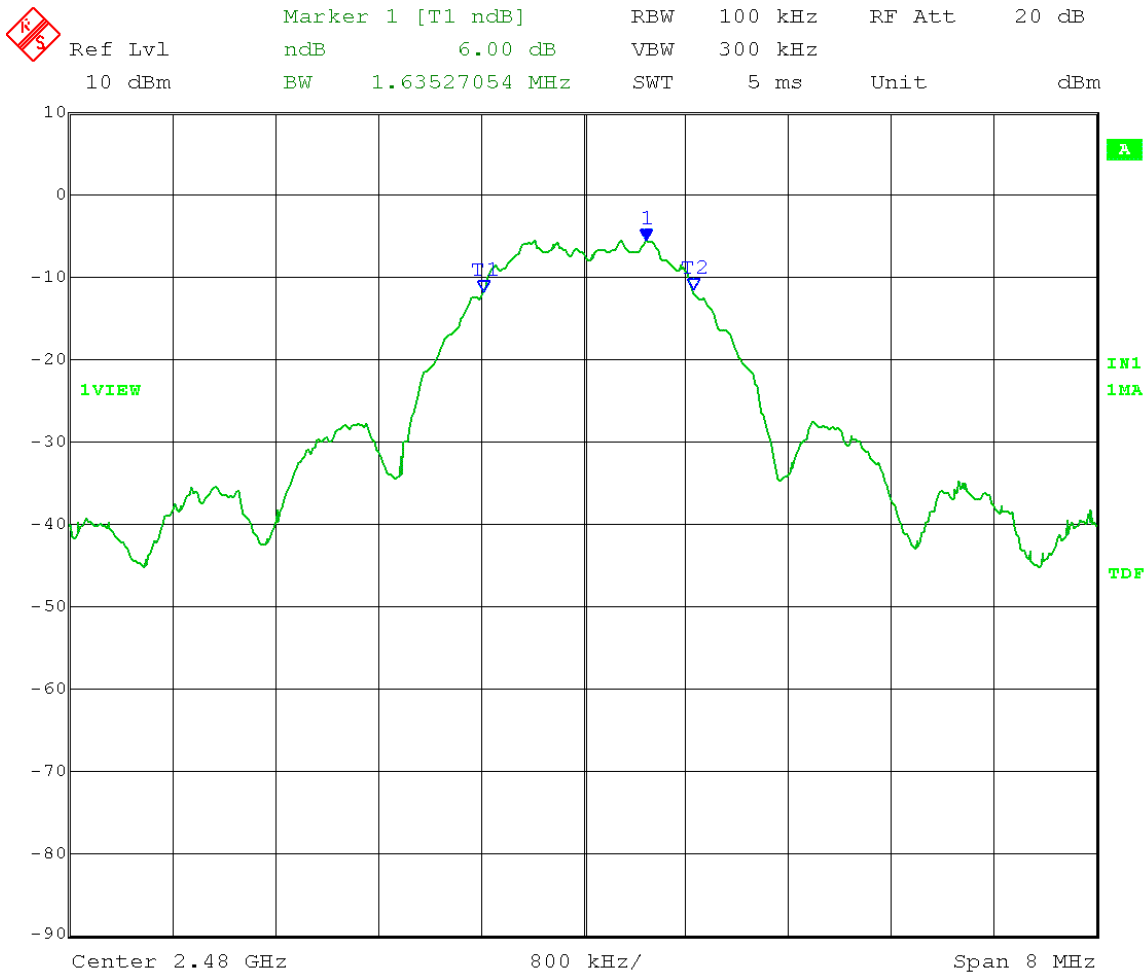

Date: 26.JUN.2014 09:23:41



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Appendix B

3.0 Fundamental Emission Output Power

Rule Part:

15.247(b)(3)

Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r02
Maximum Peak Conducted Output Power, Section 9.1
RBW \geq DTS bandwidth, Section 9.1.1

Limit:

The maximum peak conducted output power limit is 1 watt (30 dBm).

Results:

Compliant
Maximum peak conducted output power: **7.48 mW (8.74 dBm)**

Notes:

This was an RF conducted measurement. The EUT was connected to the measuring equipment through an SMA connector soldered in place of the antenna. Cable loss and attenuation was accounted for in the transducer factors set in the analyzer.

The EUT was powered through a cable that was connected to the bench supply set to 3.0 VDC. The EUT was set to transmit continuously at its maximum power (power setting 8), with a modulating signal representative of the worst-case signal encountered in a real system operation on the low, middle, and high channels of the operating band.

The High channel (channel 26) power setting was reduced from 8 to -3 to meet the radiated upper band-edge requirement at the 2.4835 GHz restricted frequency band edge.



166 South Carter, Genoa City, WI 53128


Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Fundamental Emission Output Power – Peak Conducted Power
Operator: Craig B

Comment: RBW ≥ DTS bandwidth
VBW ≥ 3 x RBW
Span ≥ 3 x RBW
Sweep time = auto couple
Detector = peak
Trace = max hold

Comment: **Low Channel: Frequency – 2.405 GHz**
Output power setting: 8

Fundamental Emission Output Power = 8.73 dBm = **7.46 mW**

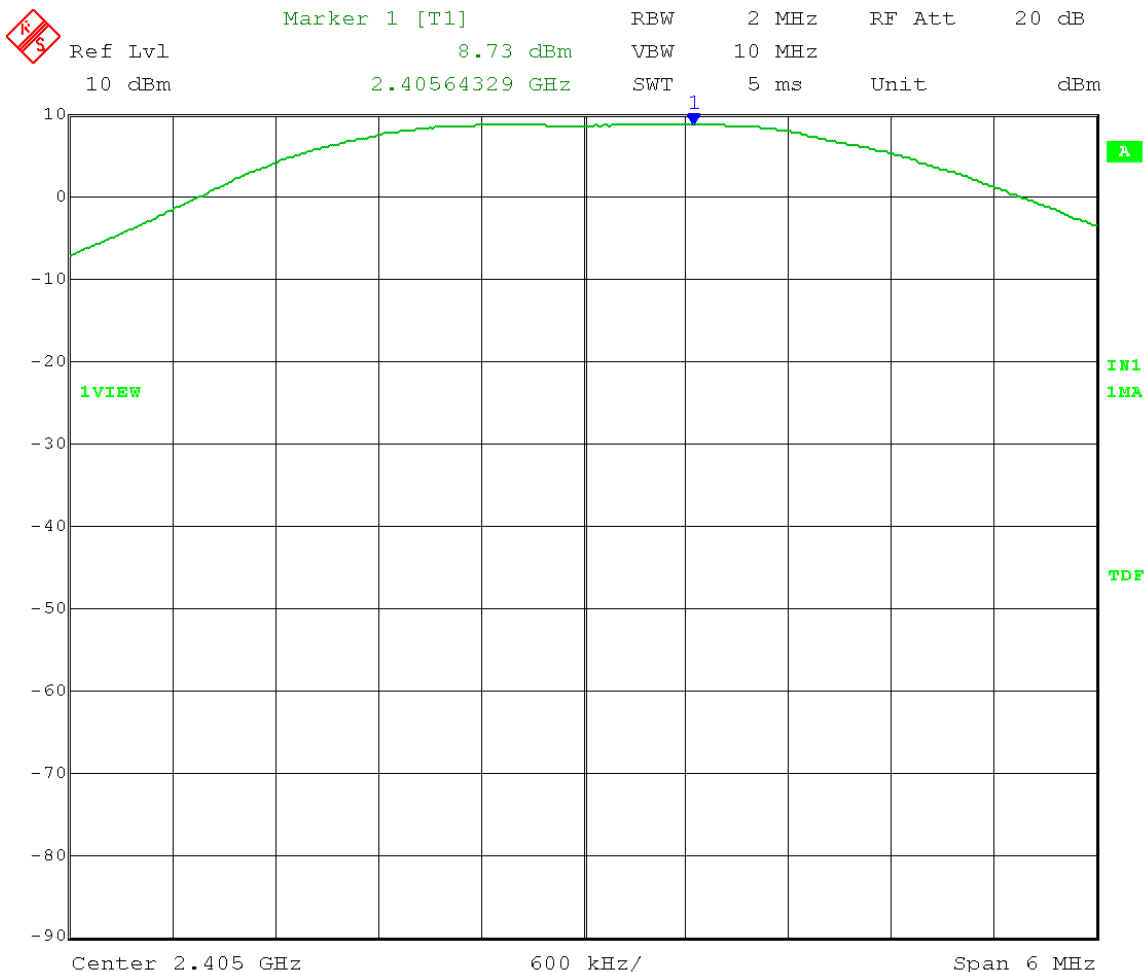

Date: 26.JUN.2014 10:31:40



166 South Carter, Genoa City, WI 53128


Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Fundamental Emission Output Power – Peak Conducted Power
Operator: Craig B

Comment: RBW ≥ DTS bandwidth
VBW ≥ 3 x RBW
Span ≥ 3 x RBW
Sweep time = auto couple
Detector = peak
Trace = max hold

Comment: **Mid Channel: Frequency – 2.440 GHz**
Output power setting: 8

Fundamental Emission Output Power = 8.74 dBm = **7.48 mW**

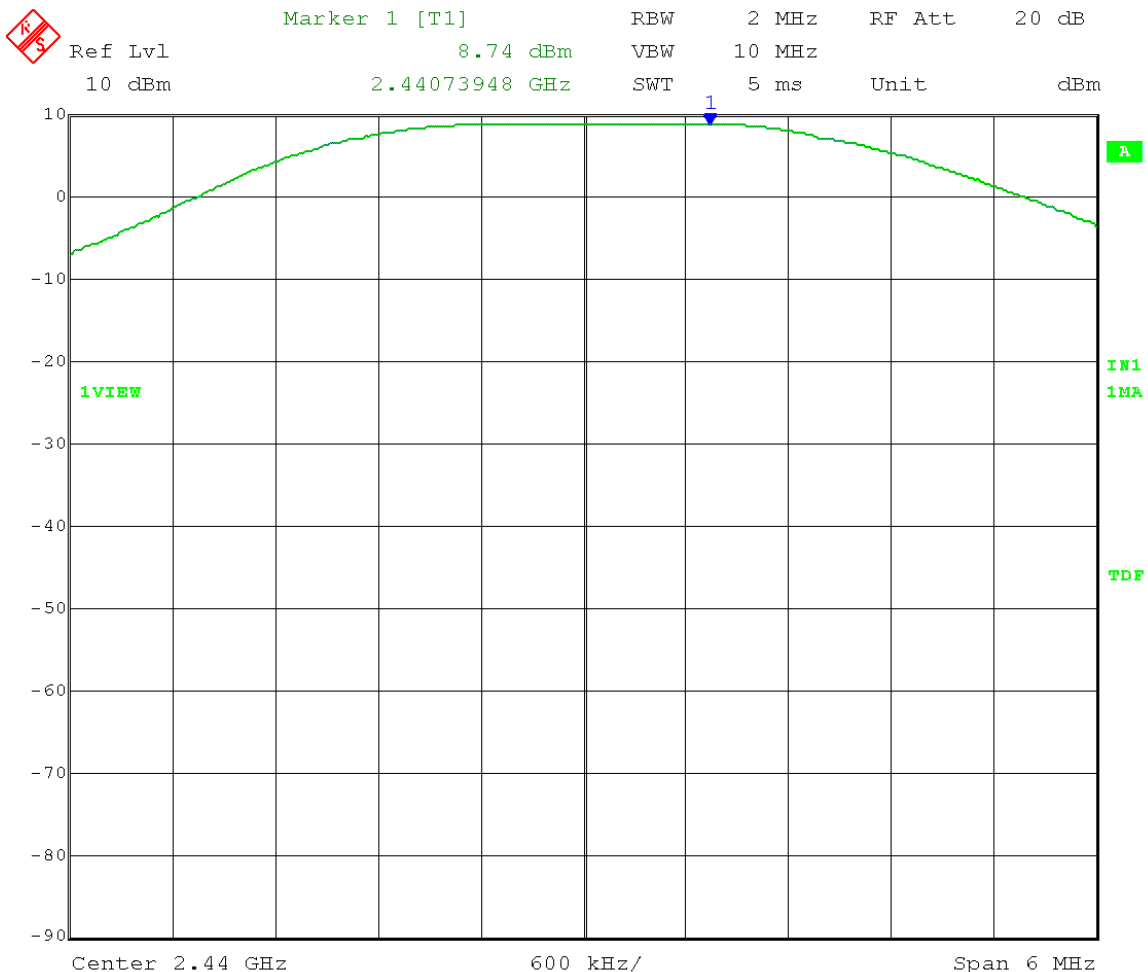

Date: 26.JUN.2014 10:35:23



166 South Carter, Genoa City, WI 53128


Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Fundamental Emission Output Power – Peak Conducted Power
Operator: Craig B

Comment: RBW ≥ DTS bandwidth
VBW ≥ 3 x RBW
Span ≥ 3 x RBW
Sweep time = auto couple
Detector = peak
Trace = max hold

Comment: High Channel: Frequency – 2.480 GHz
Output power setting: -3

Fundamental Emission Output Power = -2.10 dBm = 0.62 mW

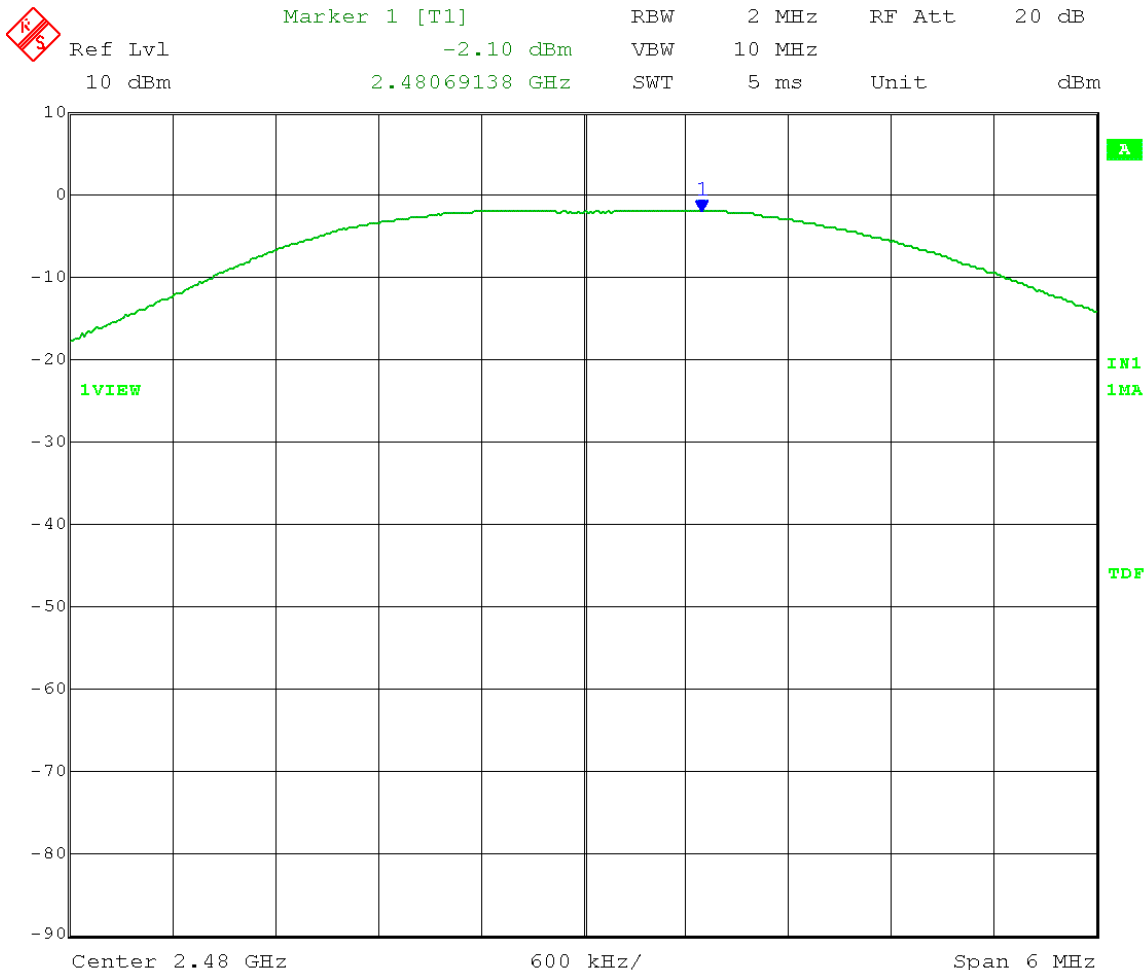

Date: 26.JUN.2014 10:38:51



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Appendix B

4.0 Maximum Power Spectral Density (PSD)

Rule Part:

15.247(e)

Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r02
Maximum Power Spectral Density Level in the Fundamental Emission, Section 10.0
Measurement Procedure PKPSD (peak PSD), Section 10.2

Limit:

8 dBm in any 3 kHz band segment within the DTS bandwidth during any time interval of continuous transmission.

Results:

Compliant
Peak conducted power spectral density (peak PSD): **1.69 dBm / 30 kHz**

Notes:

This was an RF conducted measurement. The EUT was connected to the measuring equipment through an SMA connector soldered in place of the antenna. Cable loss and attenuation was accounted for in the transducer factors set in the analyzer.

The EUT was powered through a cable that was connected to the bench supply set to 3.0 VDC. The EUT was set to transmit continuously at its maximum power (power setting 8), with a modulating signal representative of the worst-case signal encountered in a real system operation on the low, middle, and high channels of the operating band.

The High channel (channel 26) power setting was reduced from 8 to -3 to meet the radiated upper band-edge requirement at the 2.4835 GHz restricted frequency band edge.



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Maximum Power Spectral Density – Peak PSD - Conducted
Operator: Craig B

Comment: RBW: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW $\geq 3 \times \text{RBW}$
Span $\geq 1.5 \times \text{DTS bandwidth}$
Detector = Peak
Sweep = auto couple
Trace = max hold


Low Channel: Frequency – 2.405 GHz

Output power setting: 8

Limit: 8 dBm / 3 kHz

Peak PSD = 1.69 dBm / 30 kHz

	Ref Lvl	1.69 dBm	RBW	30 kHz	RF Att	20 dB
	10 dBm	2.40492735 GHz	VBW	100 kHz	SWT	7 ms
			Unit			dBm

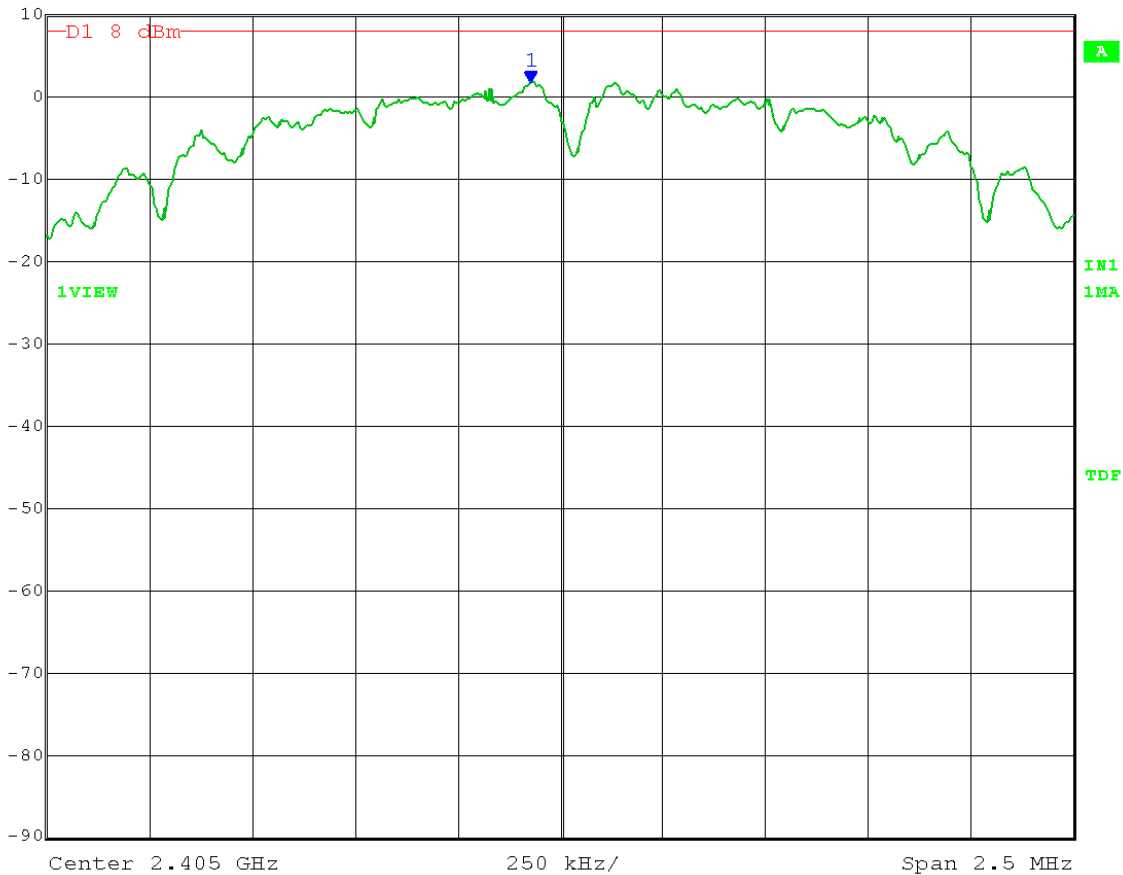

Date: 26.JUN.2014 10:53:30



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Maximum Power Spectral Density – Peak PSD - Conducted
Operator: Craig B

Comment: RBW: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW $\geq 3 \times \text{RBW}$
Span $\geq 1.5 \times \text{DTS bandwidth}$
Detector = Peak
Sweep = auto couple
Trace = max hold


Mid Channel: Frequency – 2.440 GHz

Output power setting: 8

Limit: 8 dBm / 3 kHz

Peak PSD = 1.30 dBm / 30 kHz

	Ref Lvl	1.30 dBm	RBW	30 kHz	RF Att	20 dB
	10 dBm	2.43993737 GHz	VBW	100 kHz	Unit	dBm
			SWT	7 ms		

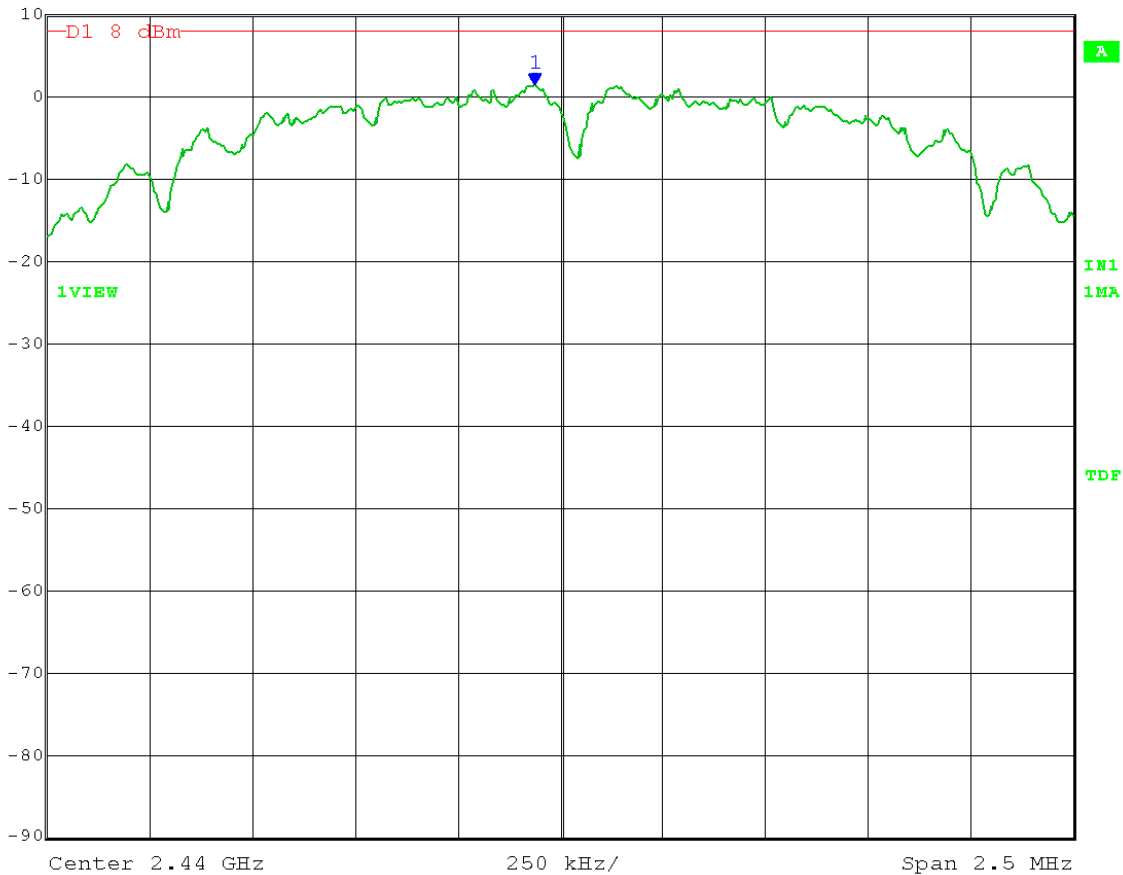

Date: 26.JUN.2014 10:56:35



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Maximum Power Spectral Density – Peak PSD - Conducted
Operator: Craig B

Comment: RBW: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW $\geq 3 \times \text{RBW}$
Span $\geq 1.5 \times \text{DTS bandwidth}$
Detector = Peak
Sweep = auto couple
Trace = max hold


High Channel: Frequency – 2.480 GHz

Output power setting: -3

Limit: 8 dBm / 3 kHz

Peak PSD = -9.32 dBm / 30 kHz

	Marker 1 [T1]	RBW	30 kHz	RF Att	20 dB
	Ref Lvl	-9.32 dBm	VBW	100 kHz	
	10 dBm	2.48013277 GHz	SWT	7 ms	Unit dBm

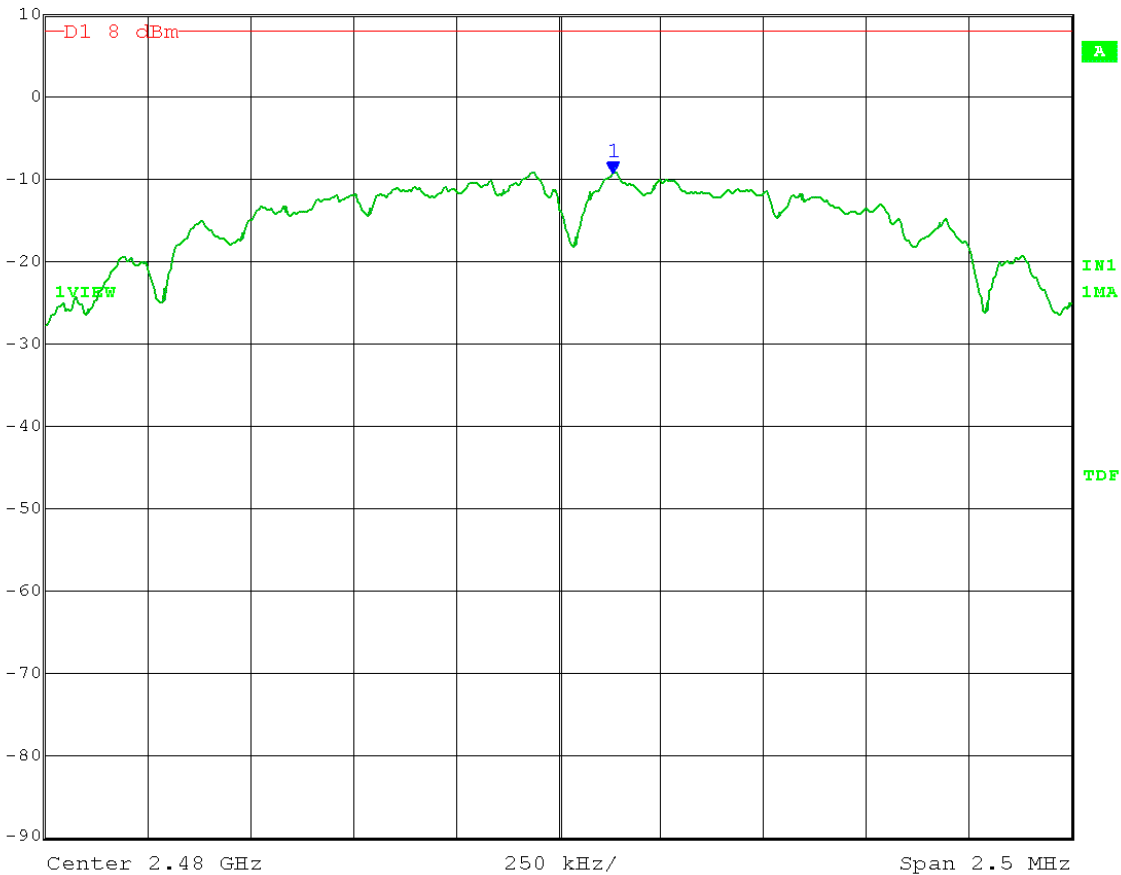

Date: 26.JUN.2014 10:59:29



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Appendix B

5.0 Emissions in Non-Restricted Frequency Bands - RF Conducted

Rule Part:

15.247(d)

Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r02
Emissions in non-restricted frequency bands, Section 11.1(a)
Measurement procedure – Reference level, Section 11.2
Measurement procedure – Emission level, Section 11.3

Limit:

The peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Results:

Compliant

Notes:

This was an RF conducted measurement. The EUT was connected to the measuring equipment through an SMA connector soldered in place of the antenna. Cable loss and attenuation was accounted for in the transducer factors set in the analyzer.

The EUT was powered through a cable that was connected to the bench supply set to 3.0 VDC. The EUT was set to transmit continuously at its maximum power (power setting 8), with a modulating signal representative of the worst-case signal encountered in a real system operation on the low, middle, and high channels of the operating band.

The High channel (channel 26) power setting was reduced from 8 to -3 to meet the radiated upper band-edge requirement at the 2.4835 GHz restricted frequency band edge.

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Maximum Unwanted Emission Levels - Conducted
Operator: Craig B


Comment: RBW = 100 kHz
VBW ≥ 300 kHz
Span ≥ 1.5 x DTS bandwidth
Detector = Peak
Sweep = auto couple
Trace = max hold

Low Channel Transmit = 2.405 GHz

Output power setting: 8

Reference Level measurement

Limit = 5.38 dBm - 20 dB = -14.62 dBm

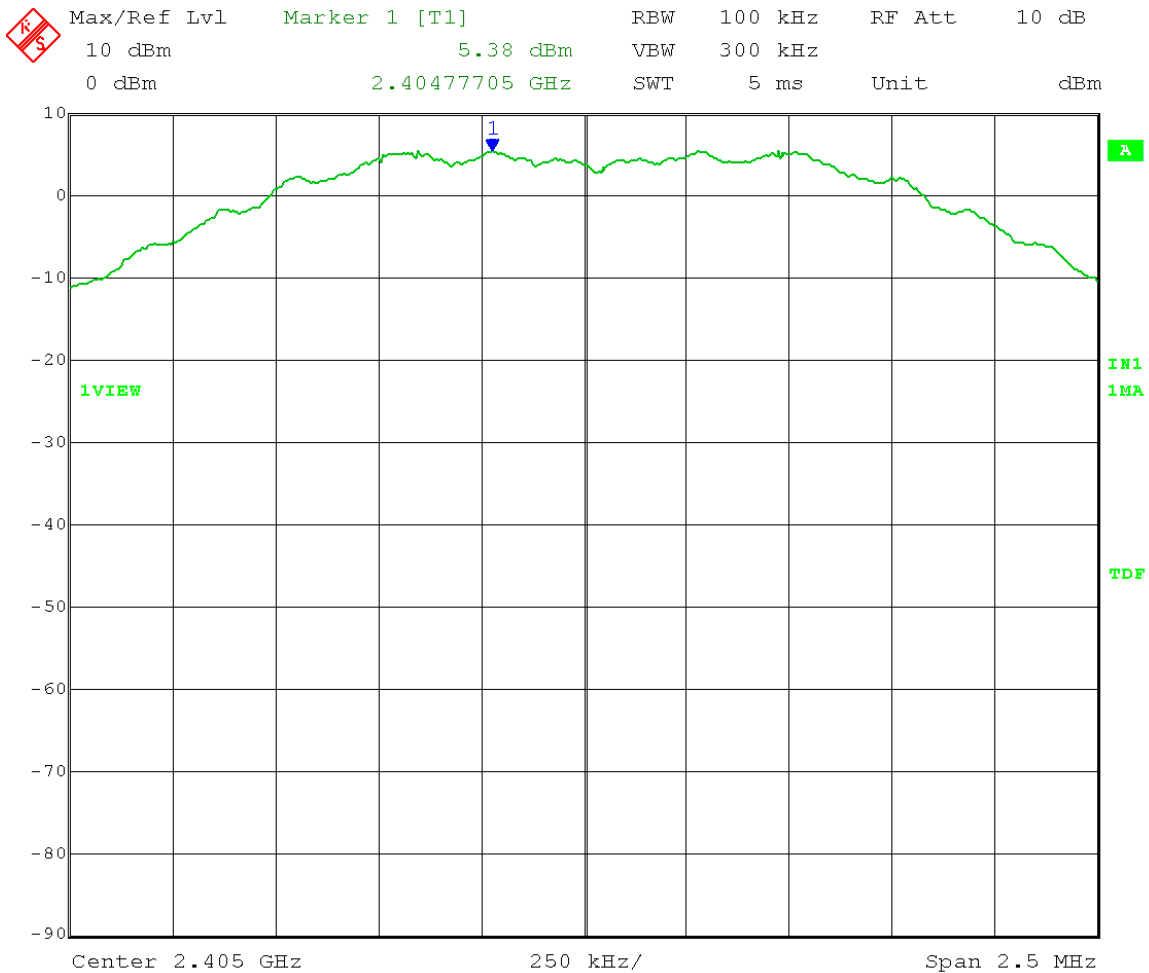

Date: 26.JUN.2014 11:29:33

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Maximum Unwanted Emission Levels - Conducted
Operator: Craig B

Comment: RBW = 100 kHz
VBW \geq 300 kHz
Detector = Peak
Sweep = auto couple
Trace = max hold


Low Channel Transmit = 2.405 GHz

Output power setting: 8

Emission Level measurement

Limit = 5.38 dBm - 20 dB = -14.62 dBm

Frequency Range: 30 - 1000 MHz

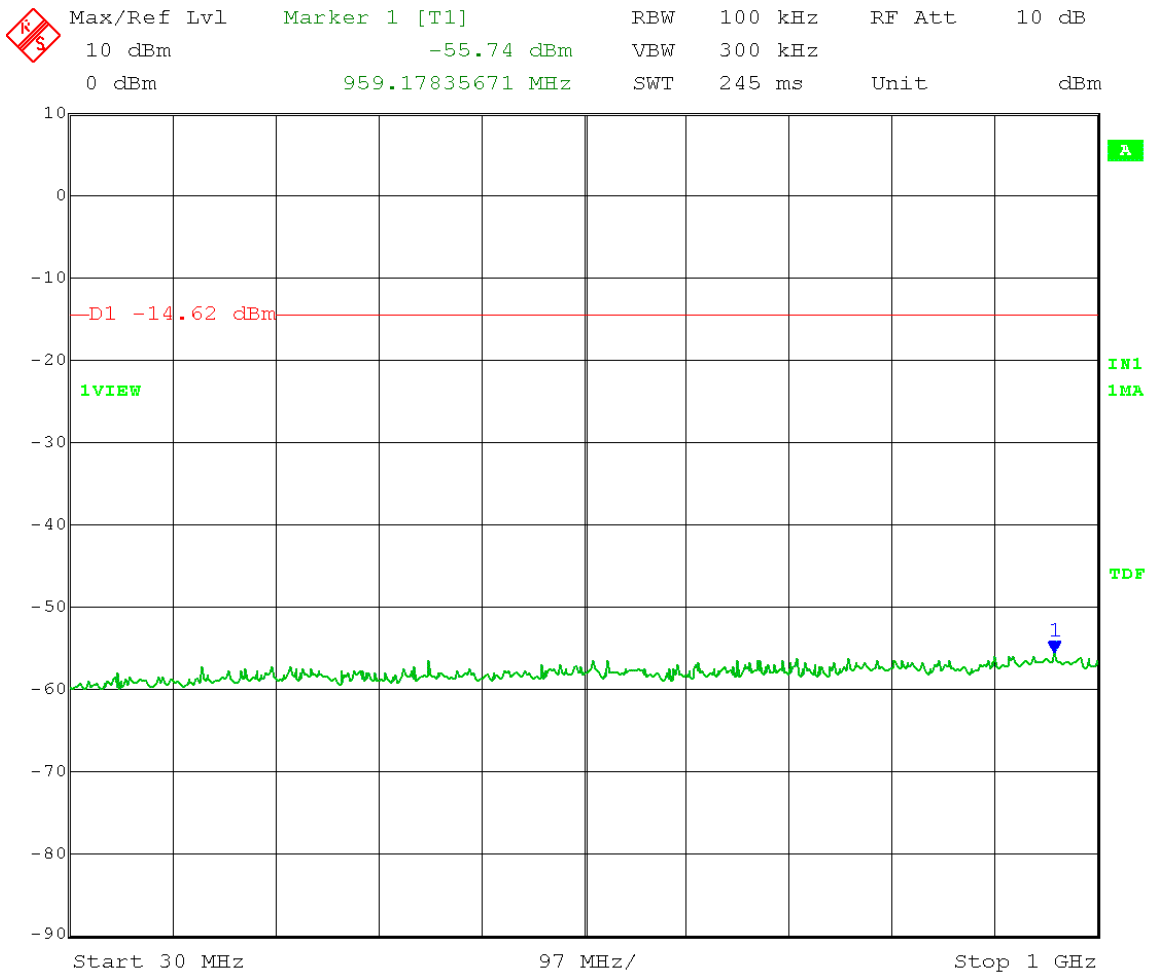

Date: 26.JUN.2014 11:42:10

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Maximum Unwanted Emission Levels - Conducted
Operator: Craig B

Comment: RBW = 100 kHz
VBW \geq 300 kHz
Detector = Peak
Sweep = auto couple
Trace = max hold


Low Channel Transmit = 2.405 GHz

Output power setting: 8

Emission Level measurement

Limit = 5.38 dBm - 20 dB = -14.62 dBm

Frequency Range: 1 - 7 GHz

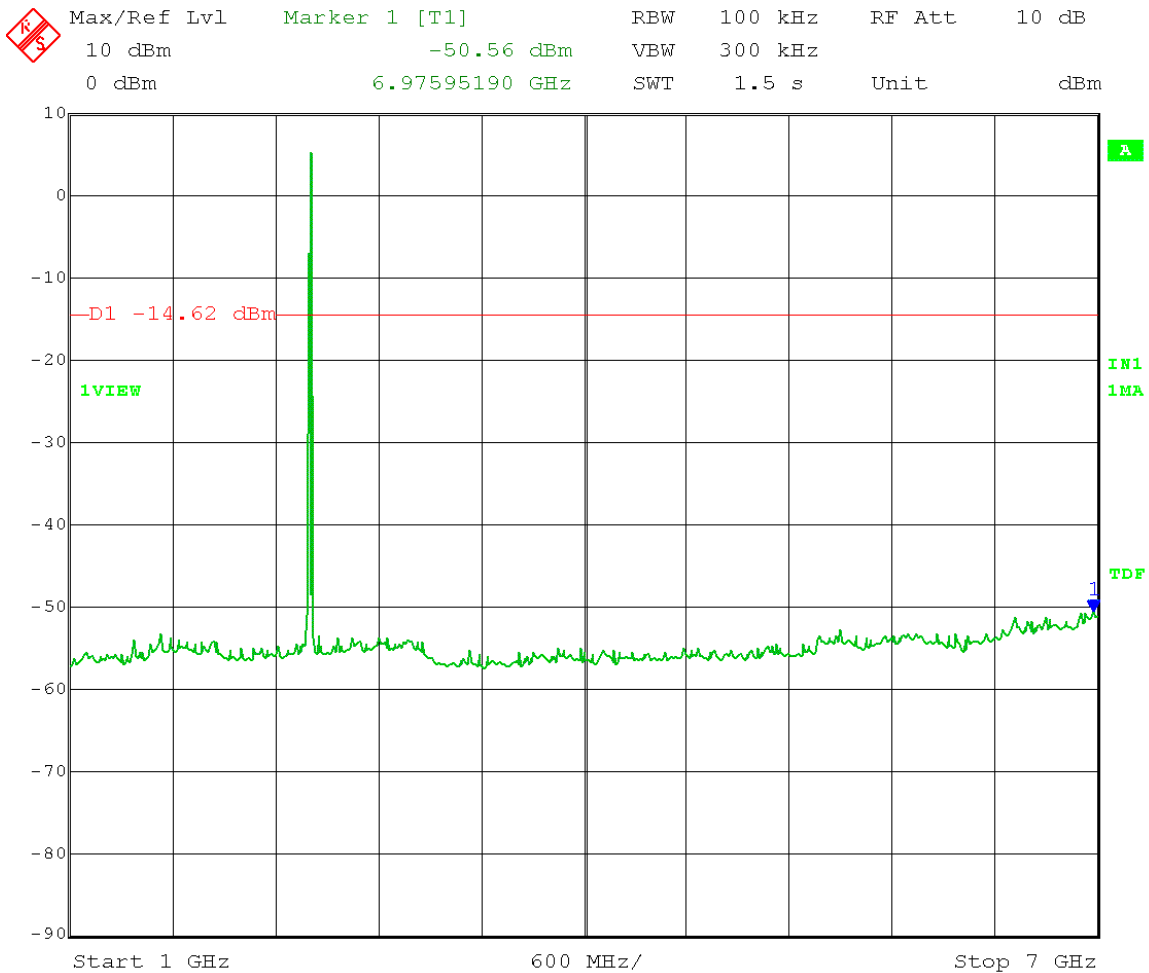

Date: 26.JUN.2014 11:32:56

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Maximum Unwanted Emission Levels - Conducted
Operator: Craig B

Comment: RBW = 100 kHz
VBW ≥ 300 kHz
Detector = Peak
Sweep = auto couple
Trace = max hold


Low Channel Transmit = 2.405 GHz

Output power setting: 8

Emission Level measurement

Limit = 5.38 dBm - 20 dB = -14.62 dBm

Frequency Range: 7 - 18 GHz

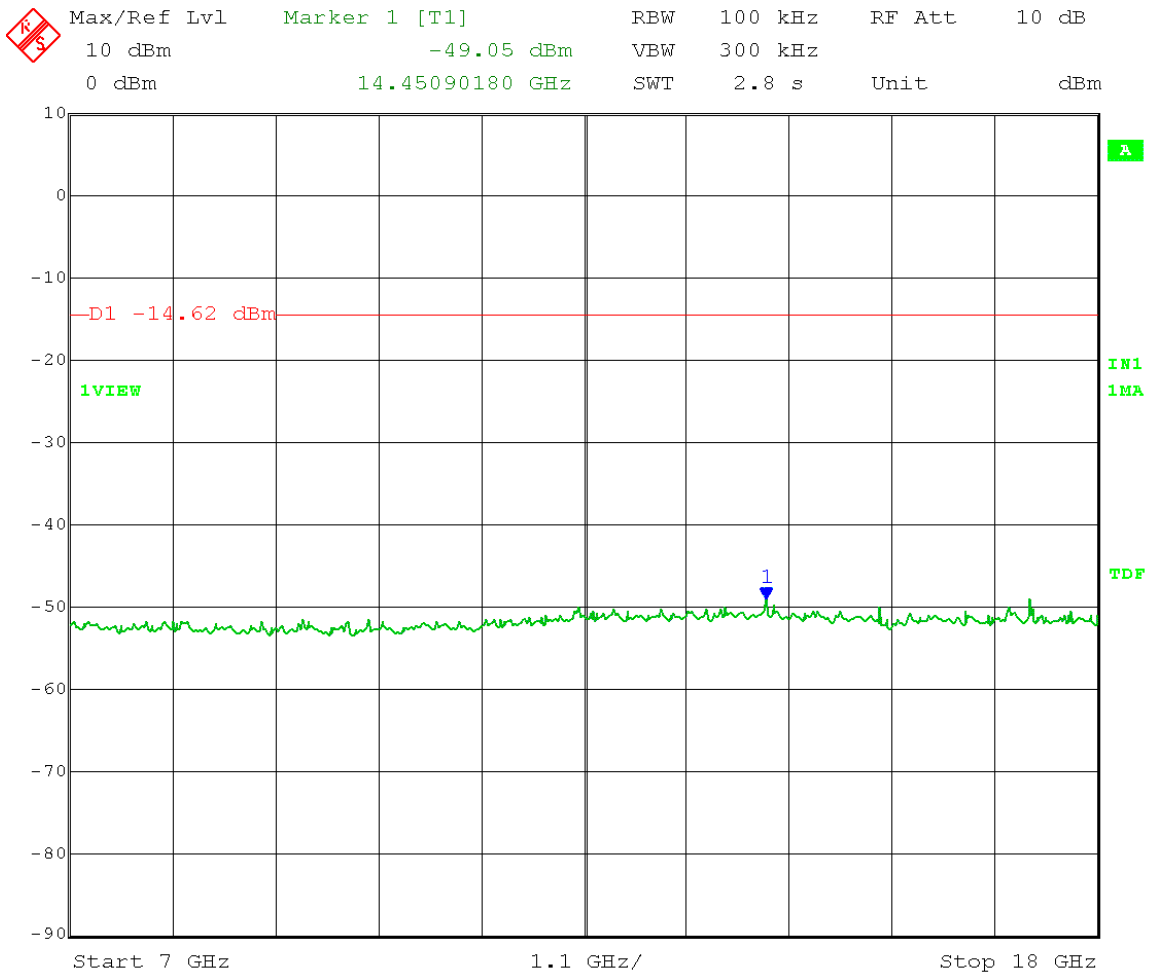

Date: 26.JUN.2014 11:35:45

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Maximum Unwanted Emission Levels - Conducted
Operator: Craig B

Comment: RBW = 100 kHz
VBW \geq 300 kHz
Detector = Peak
Sweep = auto couple
Trace = max hold


Low Channel Transmit = 2.405 GHz

Output power setting: 8

Emission Level measurement

Limit = 5.38 dBm - 20 dB = -14.62 dBm

Frequency Range: 18 - 26 GHz

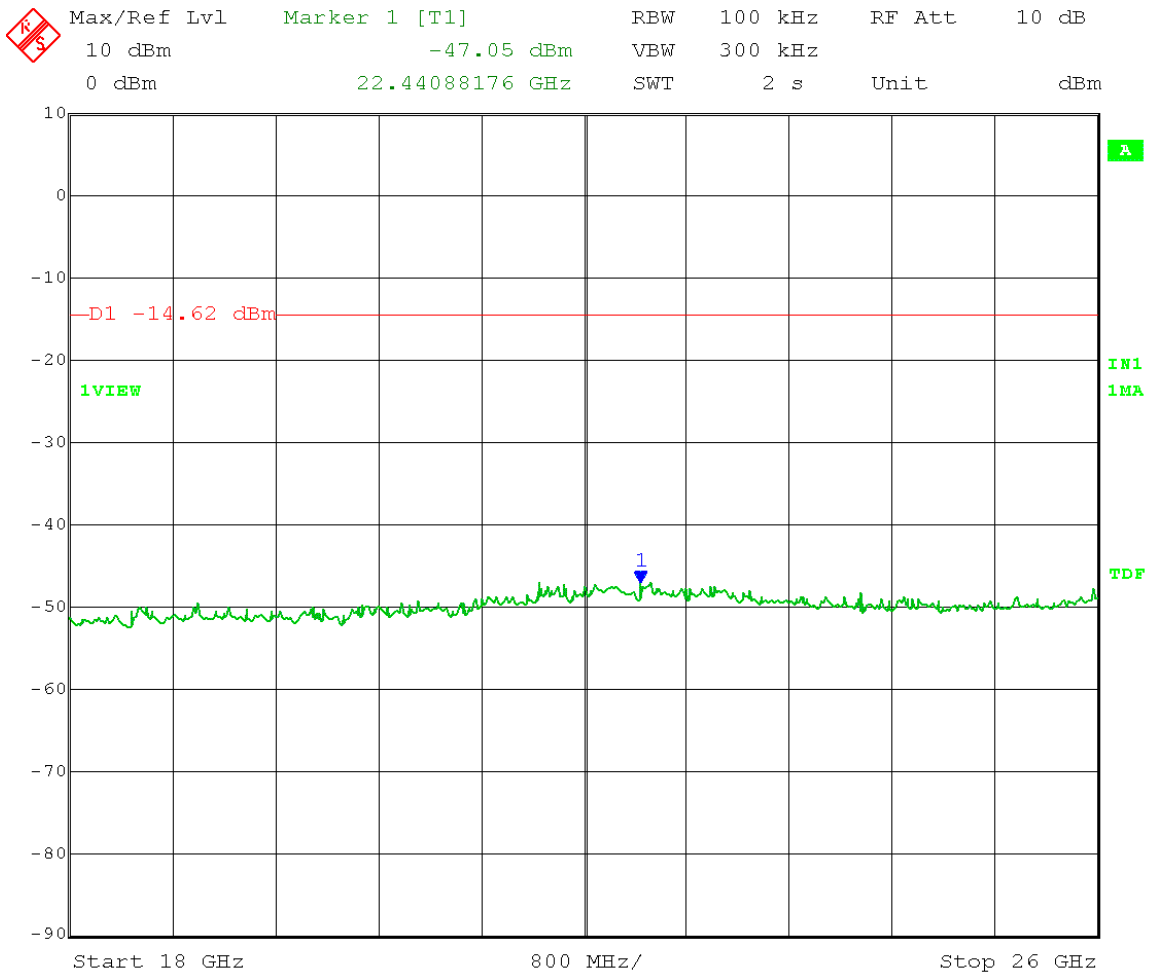

Date: 26.JUN.2014 11:40:01

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Maximum Unwanted Emission Levels - Conducted
Operator: Craig B


Comment: RBW = 100 kHz
VBW ≥ 300 kHz
Span ≥ 1.5 x DTS bandwidth
Detector = Peak
Sweep = auto couple
Trace = max hold

Mid Channel Transmit = 2.440 GHz

Output power setting: 8

Reference Level measurement

Limit = 5.21 dBm - 20 dB = -14.79 dBm

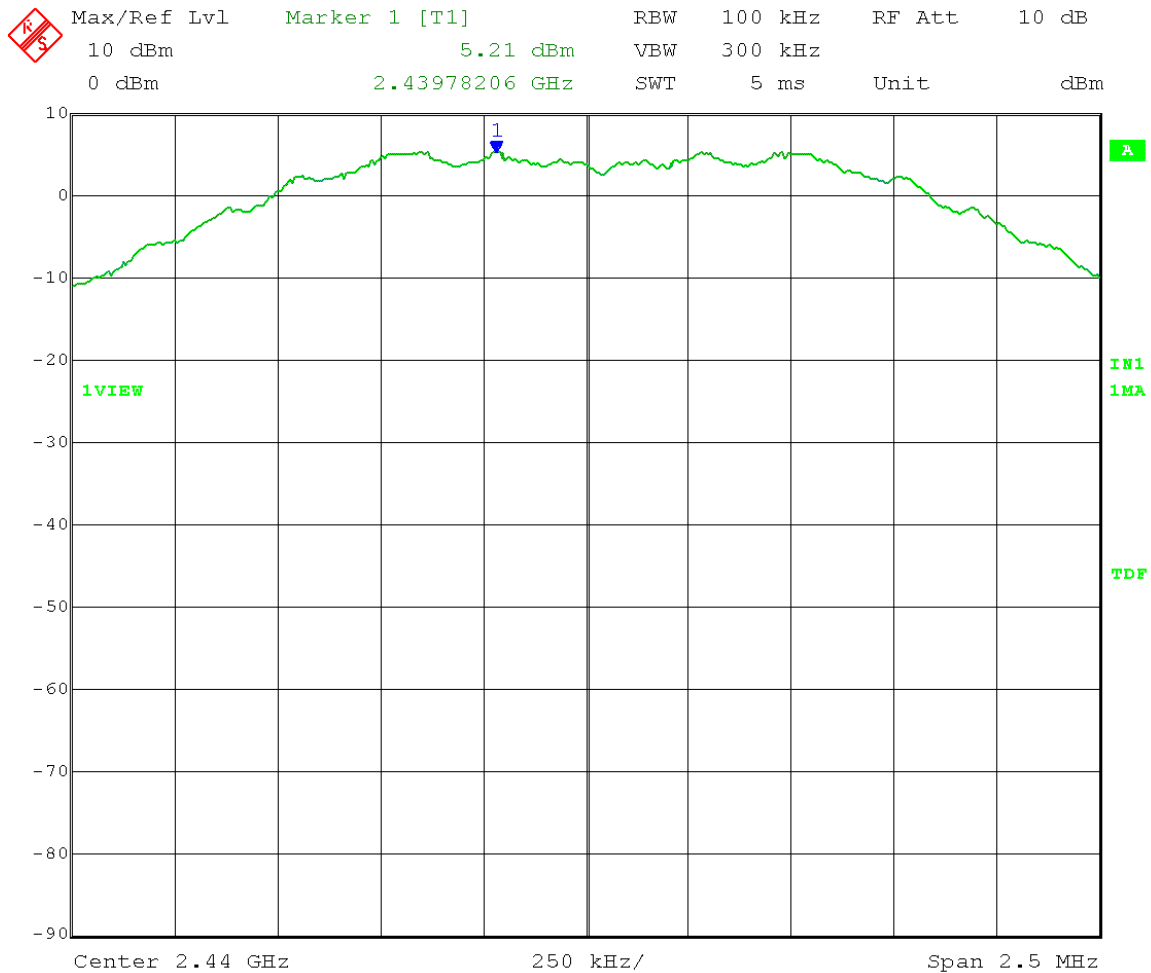

Date: 26.JUN.2014 12:42:42

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Maximum Unwanted Emission Levels - Conducted
Operator: Craig B

Comment: RBW = 100 kHz
VBW \geq 300 kHz
Detector = Peak
Sweep = auto couple
Trace = max hold

Mid Channel Transmit = 2.440 GHz

Output power setting: 8

Emission Level measurement

Limit = 5.21 dBm - 20 dB = -14.79 dBm

Frequency Range: 30 - 1000 MHz



Date: 26.JUN.2014 12:53:00

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Maximum Unwanted Emission Levels - Conducted
Operator: Craig B

Comment: RBW = 100 kHz
VBW \geq 300 kHz
Detector = Peak
Sweep = auto couple
Trace = max hold


Mid Channel Transmit = 2.440 GHz

Output power setting: 8

Emission Level measurement

Limit = 5.21 dBm - 20 dB = -14.79 dBm

Frequency Range: 7 - 18 GHz

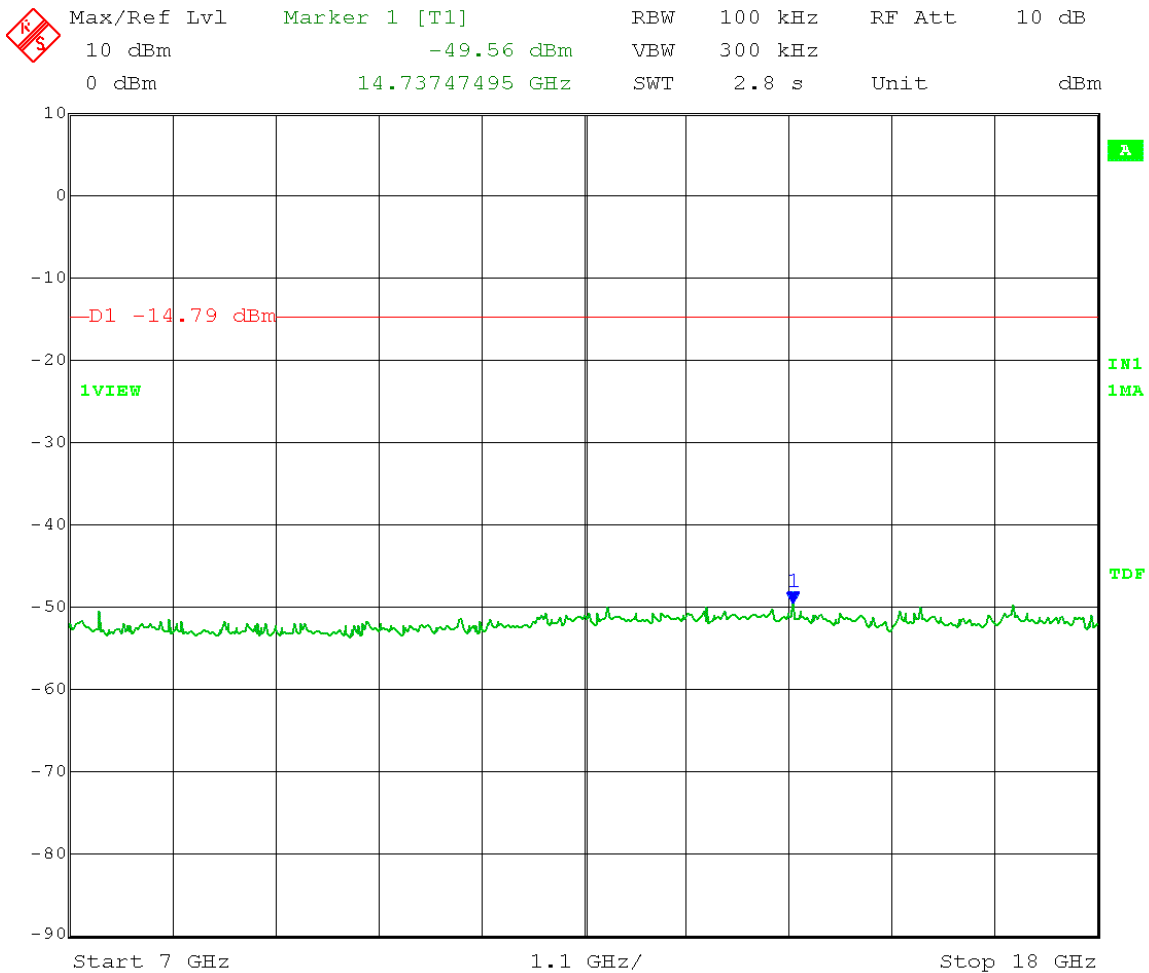


Date: 26.JUN.2014 12:48:42

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Maximum Unwanted Emission Levels - Conducted
Operator: Craig B

Comment: RBW = 100 kHz
VBW \geq 300 kHz
Span \geq 1.5 x DTS bandwidth
Detector = Peak
Sweep = auto couple
Trace = max hold

High Channel Transmit = 2.480 GHz
Output power setting: -3
Reference Level measurement
Limit = -5.57 dBm - 20 dB = -25.57 dBm

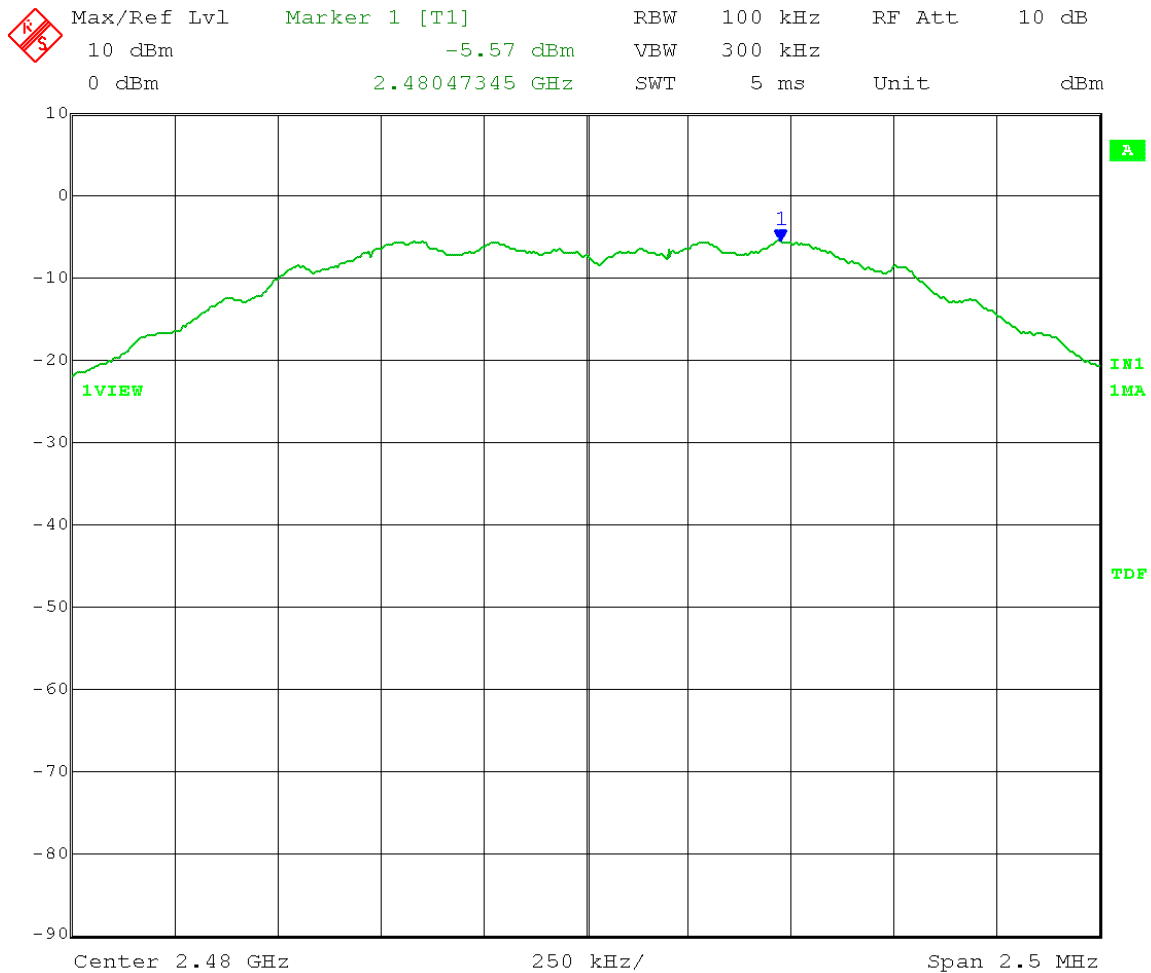


Date: 26.JUN.2014 12:56:18

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Maximum Unwanted Emission Levels - Conducted
Operator: Craig B

Comment: RBW = 100 kHz
VBW \geq 300 kHz
Detector = Peak
Sweep = auto couple
Trace = max hold

High Channel Transmit = 2.480 GHz
Output power setting: -3
Emission Level measurement
Limit = -5.57 dBm - 20 dB = -25.57 dBm
Frequency Range: 30 - 1000 MHz

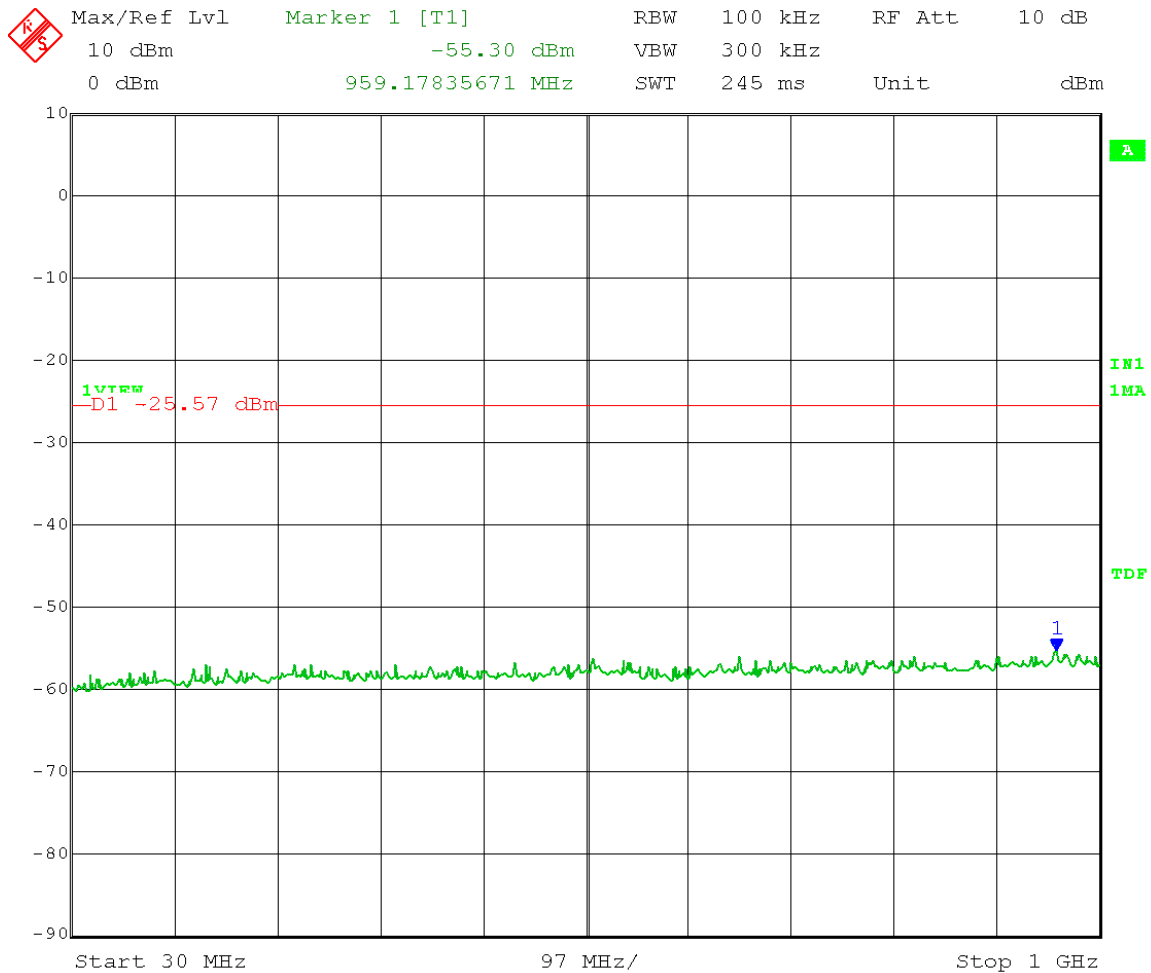

Date: 26.JUN.2014 13:07:21



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Appendix B

6.0 Emissions in Restricted Frequency Bands – Radiated

Rule Part:

15.247(d), 15.205(a), 15.209(a)

Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r02
Emissions in restricted frequency bands, Section 12.1
Measurement Procedure – ANSI C63.10-2009

Limits:

15.209(a)

Results:

Compliant

Notes:

This was a radiated measurement. The EUT was transmitting from its integrated PCB trace antenna. The EUT was powered through a serial interface cable that was connected to the bench supply set to 3.0 VDC. The EUT was set to transmit continuously at its maximum power (power setting 8), with a modulating signal representative of the worst-case signal encountered in a real system operation on the low, middle, and high channels of the operating band.

FCC Part 15.209 Class B

Electric Field Strength

EUT: Honolulu
Manufacturer: Centralite
Operating Condition: 68 deg. F; 62% R.H.
Test Site: DLS O.F. Site 2
Operator: Craig B; DLS#6685
Test Specification: Radiated emissions in restricted bands
Comment: Low, Mid, High channels; continuous transmit
Date: 06-27-2014


TEXT: "Horz 3 meters"

Short Description: Test Set-up

Test Set-up: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

Equations: $Total\ Level(dB\mu V/m) = Level(dB\mu V) + System\ Loss(dB) + Antenna\ Factor(dB\mu V/m)$
 $Margin(dB) = Limit(dB\mu V/m) - Total\ Level(dB\mu V/m)$

Graph Markers: + Frequency marker (Level of marker not related to final level)
| Final maximized level using Quasi-Peak detector
X Final maximized level using Average detector
Final maximized level using Peak detector

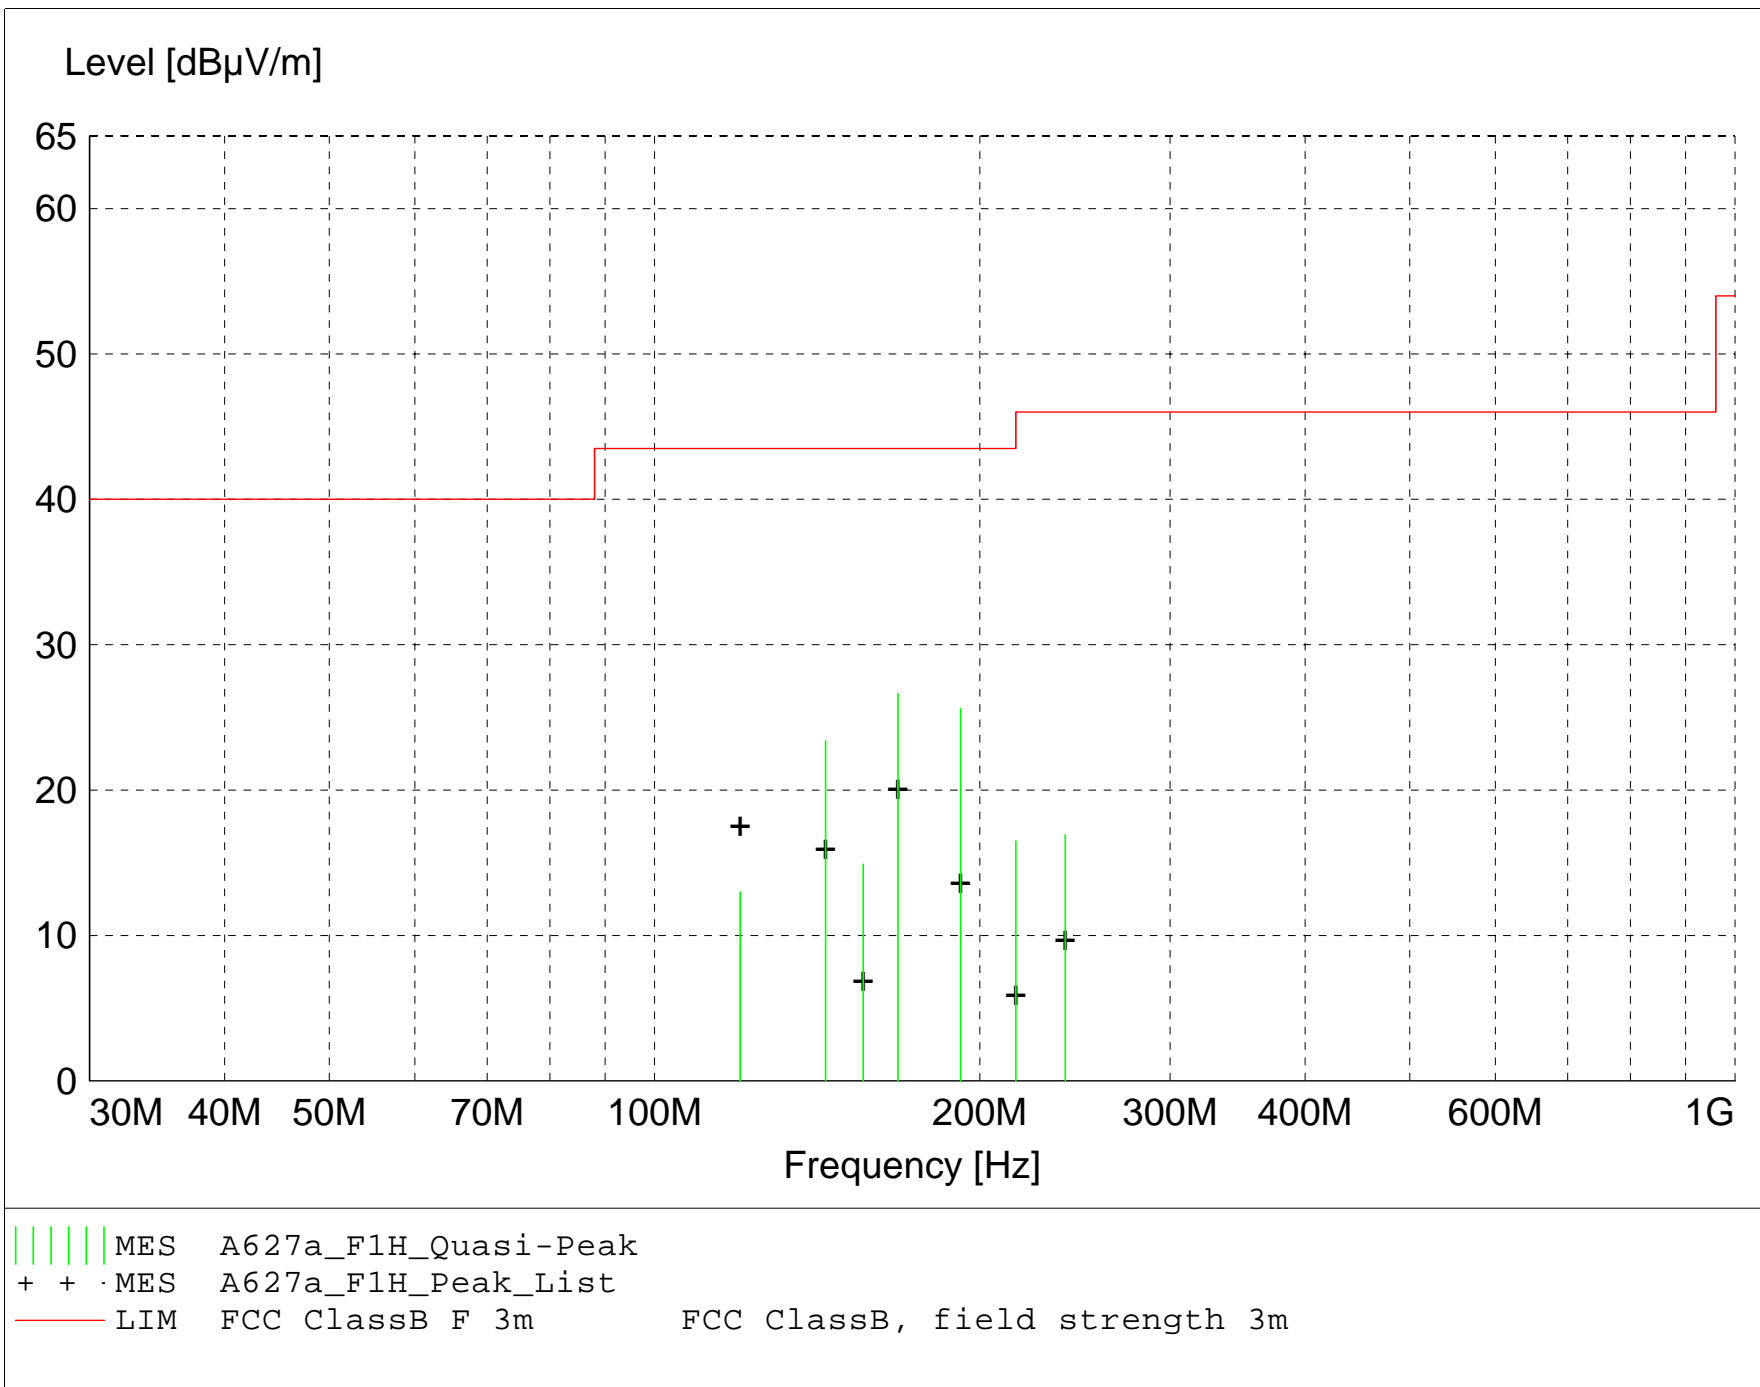

MEASUREMENT RESULT: "A627a_F1H_Final"

6/27/2014 11:40AM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBµV	Factor	Loss	Level	dBµV/m	dB	Ant.	Angle	Detector	
		dBµV/m	dB	dBµV/m	dBµV/m		m	deg		
168.000000	34.87	14.10	-22.3	26.6	43.5	16.9	1.80	150	QUASI-PEAK	None
192.000000	30.43	17.40	-22.2	25.6	43.5	17.9	1.60	160	QUASI-PEAK	None
144.000000	34.06	12.00	-22.7	23.4	43.5	20.1	2.40	135	QUASI-PEAK	None
216.000000	27.07	11.48	-22.0	16.5	43.5	27.0	1.80	30	QUASI-PEAK	None
156.000000	25.06	12.40	-22.6	14.9	43.5	28.6	3.00	160	QUASI-PEAK	None
240.000000	26.68	12.00	-21.7	16.9	46.0	29.1	1.70	25	QUASI-PEAK	None
120.000000	23.02	12.80	-22.8	13.0	43.5	30.5	2.70	30	QUASI-PEAK	None

FCC Part 15.209 Class B

Electric Field Strength

EUT: Honolulu
Manufacturer: Centralite
Operating Condition: 68 deg. F; 62% R.H.
Test Site: DLS O.F. Site 2
Operator: Craig B; DLS#6685
Test Specification: Radiated emissions in restricted bands
Comment: Low, Mid, High channels; continuous transmit
Date: 06-27-2014

TEXT: "Vert 3 meters"


Short Description: Test Set-up

Test Set-up: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

Sample Equations: Total Level(dBµV/m) = Level(dBµV) + System Loss(dB) + Antenna Factor(dBµV/m)
24.6 = 35.51 + (-22.1) + 11.20

Margin(dB) = Limit(dBµV/m) - Total Level(dBµV/m)
15.4 = 40 - 24.6

Graph Markers: + Frequency marker (Level of marker not related to final level)
| Final maximized level using Quasi-Peak detector
X Final maximized level using Average detector
Final maximized level using Peak detector

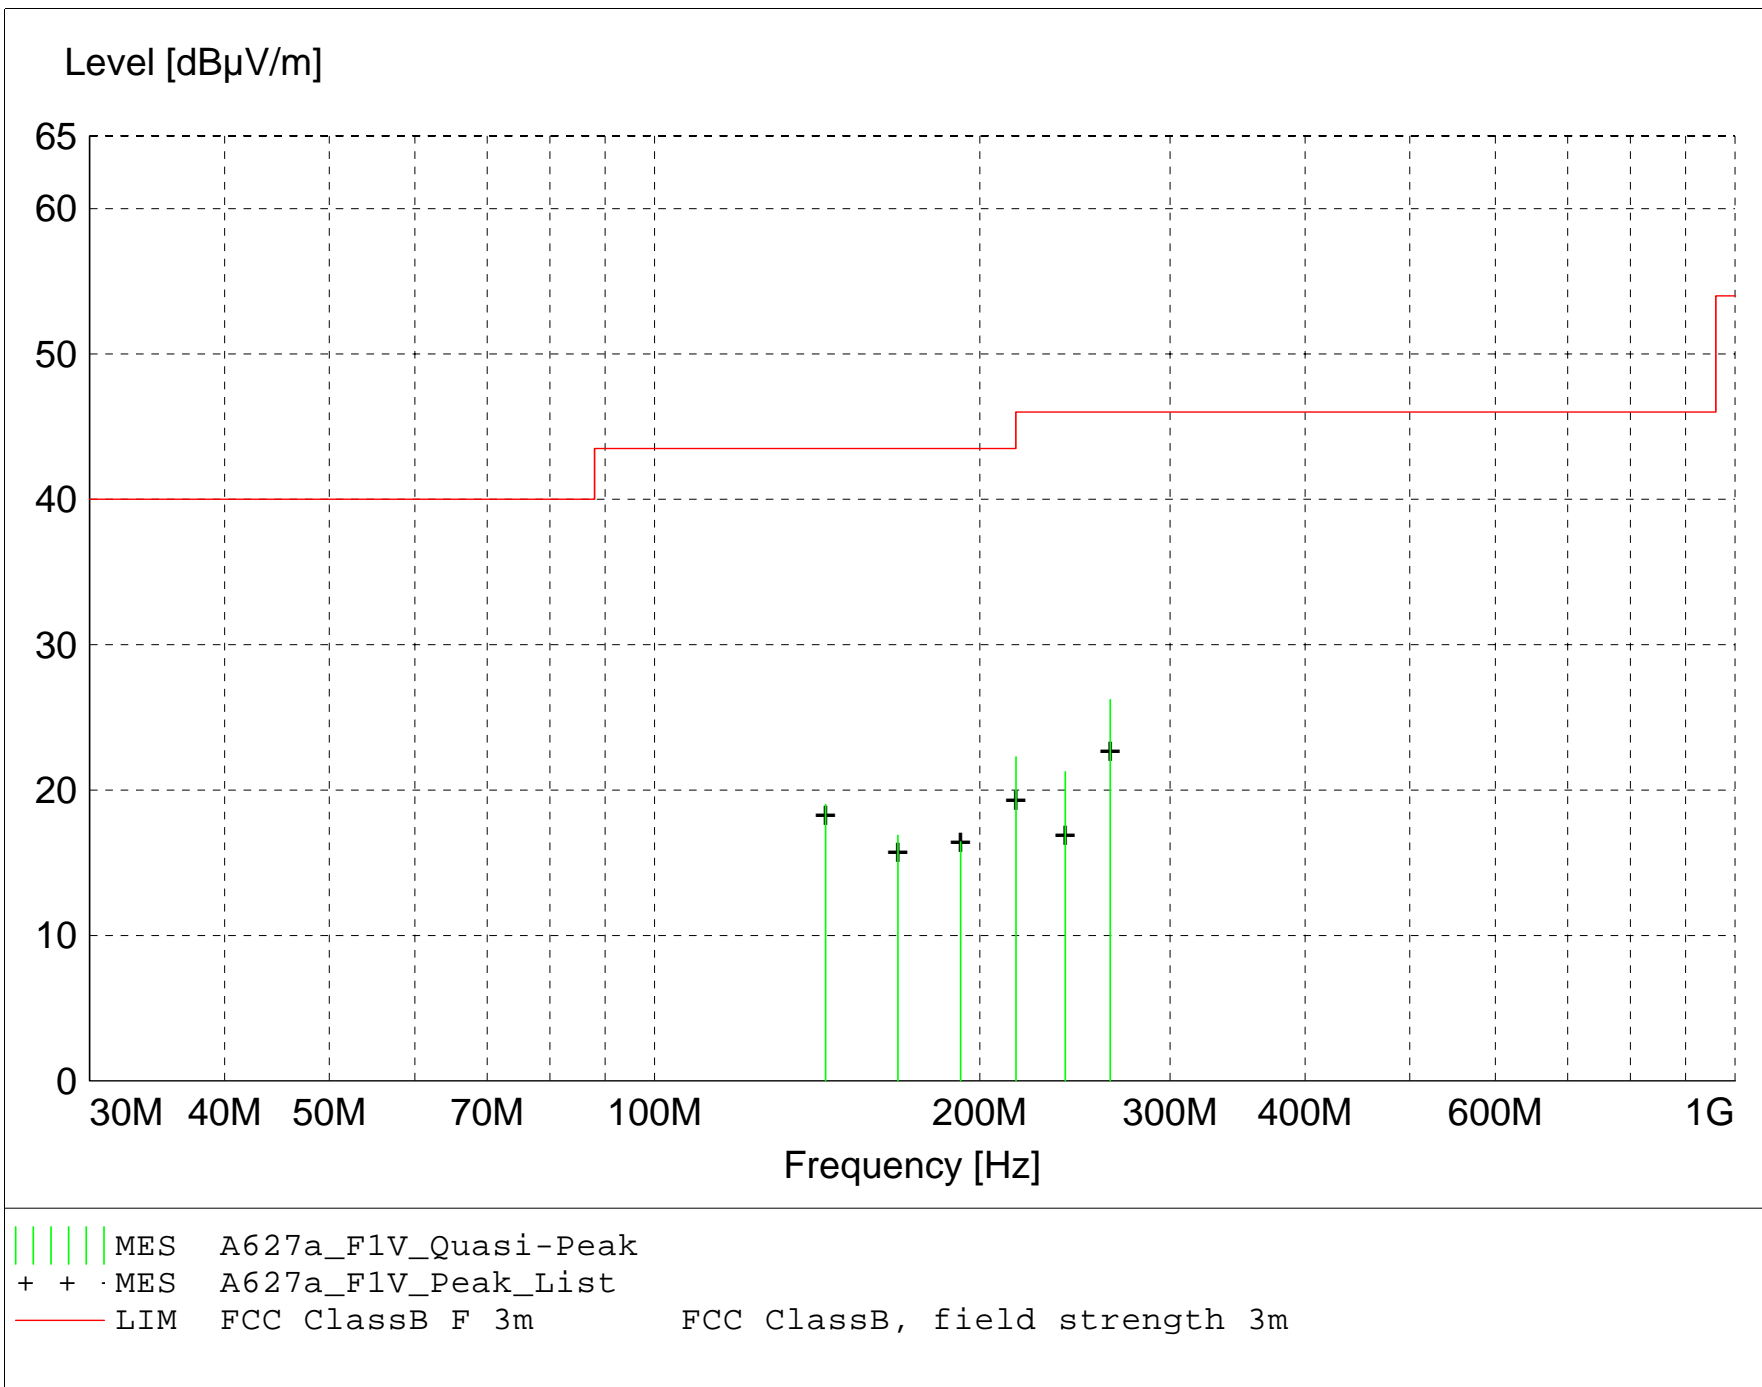

MEASUREMENT RESULT: "A627a_F1V_Final"

6/27/2014 12:28PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dB μ V	Factor	Loss	Level	dB μ V/m	dB	Ant.	Angle	Detector	
		dB μ V/m	dB	dB μ V/m	dB μ V/m		m	deg		
264.050000	34.65	13.16	-21.6	26.2	46.0	19.8	1.00	45	QUASI-PEAK	None
216.040000	32.85	11.48	-22.0	22.3	46.0	23.7	1.00	175	QUASI-PEAK	None
144.000000	29.67	12.00	-22.7	19.0	43.5	24.5	1.00	135	QUASI-PEAK	None
240.000000	31.02	12.00	-21.7	21.3	46.0	24.7	1.00	315	QUASI-PEAK	None
168.005000	25.13	14.10	-22.3	16.9	43.5	26.6	1.00	315	QUASI-PEAK	None
192.000000	21.28	17.40	-22.2	16.5	43.5	27.1	1.00	0	QUASI-PEAK	None

FCC Part 15.209

Electric Field Strength

EUT: Honolulu
Manufacturer: Centralite
Operating Condition: 73 deg C 57% R.H.
Test Site: DLS O.F. G1
Operator: Paul L / Craig B - DLS#6685
Test Specification: Radiated emissions in restricted bands
Comment: L, M, H channels; Power setting 8
Date: 06-25-2014


TEXT: "Horz 3 meters"

Short Description: Test Set-up

Test Set-up: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

Sample Equations: Total Level (dBµV/m) = Level (dBµV) + System Loss (dB) + Antenna Factor (dBµV/m)
24.6 = 35.51 + (-22.1) + 11.20
Margin (dB) = Limit (dBµV/m) - Total Level (dBµV/m)
15.4 = 40 - 24.6

Graph Markers: + Frequency marker (Level of marker not related to final level)
| Final maximized level using Quasi-Peak detector
X Final maximized level using Average detector
Final maximized level using Peak detector
- Background Scan Peak Detector (Optional)
- Background Scan Average Detector (Optional)

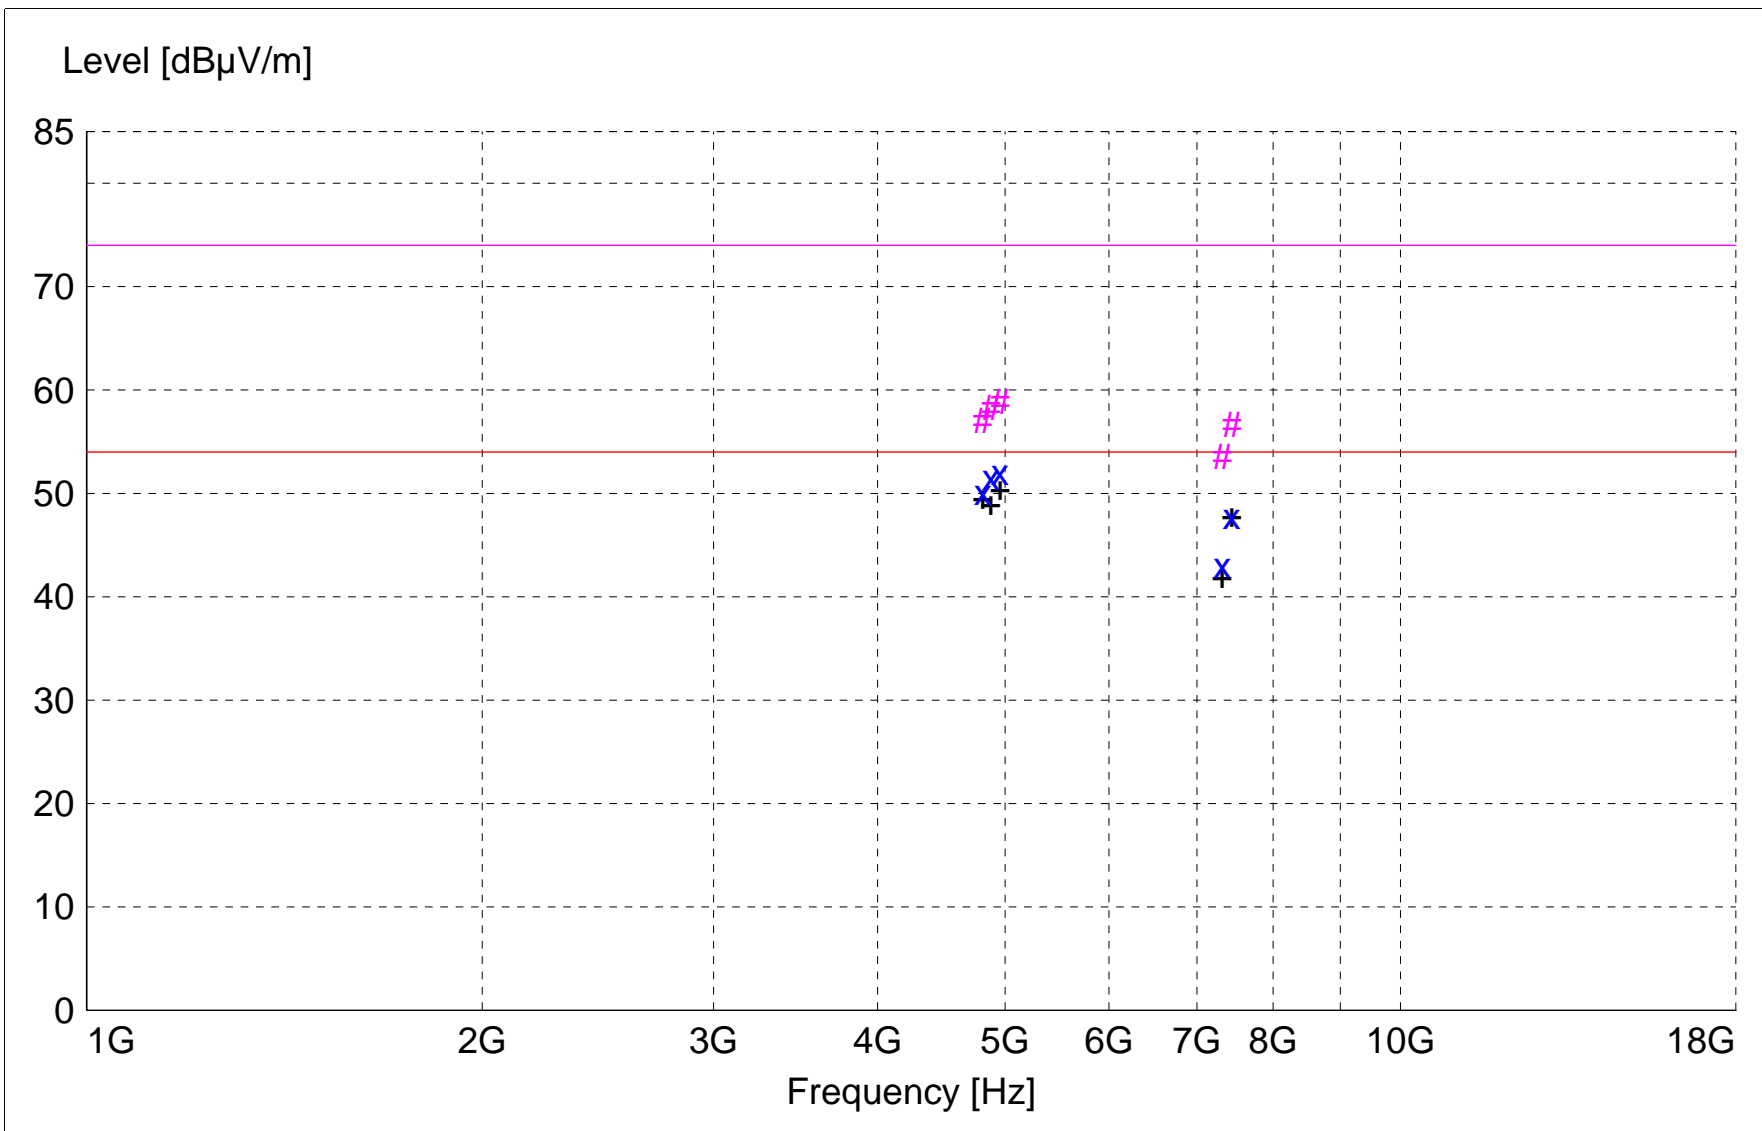

```

x x :MES  A625b_sh_Average
# # :MES  A625b_sh_Peak
+ + :MES  A625b_sh_Peak_List
— LIM  FCC Class B F 3m AVG  Field Strength AVG Limit 3m
— LIM  FCC Class B F 3m PK  Field Strength PEAK Limit 3m

```

MEASUREMENT RESULT: "A625b_sh_Final"

6/25/2014 10:49AM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBµV	Factor	Loss	Level	dBµV/m	dB	Ant.	Angle	Detector	
		dBµV/m	dB	dBµV/m	dBµV/m		m	deg		
4959.040000	56.58	33.20	-37.8	52.0	54.0	2.0	1.28	355	AVERAGE	High ch
4878.960000	56.24	33.06	-37.8	51.5	54.0	2.5	1.00	350	AVERAGE	Mid ch
4809.040000	54.67	32.94	-37.5	50.1	54.0	3.9	1.00	352	AVERAGE	Low ch
7441.580000	45.61	36.51	-34.3	47.8	54.0	6.2	1.43	118	AVERAGE	High ch
7318.520000	41.89	36.18	-35.0	43.0	54.0	11.0	1.43	252	AVERAGE	Mid ch
4959.040000	63.48	33.20	-37.8	58.9	74.0	15.1	1.28	355	MAX PEAK	High ch
4878.960000	63.03	33.06	-37.8	58.3	74.0	15.7	1.00	350	MAX PEAK	Mid ch
4809.040000	61.62	32.94	-37.5	57.0	74.0	17.0	1.00	352	MAX PEAK	Low ch
7441.580000	54.46	36.51	-34.3	56.7	74.0	17.4	1.43	118	MAX PEAK	High ch
7318.520000	52.42	36.18	-35.0	53.6	74.0	20.4	1.43	252	MAX PEAK	Mid ch

FCC Part 15.209

Electric Field Strength

EUT: Honolulu
Manufacturer: Centralite
Operating Condition: 73 deg C 57% R.H.
Test Site: DLS O.F. G1
Operator: Paul L / Craig B - DLS#6685
Test Specification: Radiated emissions in restricted bands
Comment: L, M, H channels; Power setting 8
Date: 06-25-2014


TEXT: "Vert 3 meters"

Short Description: Test Set-up

Test Set-up: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

Sample Equations: Total Level (dBµV/m) = Level (dBµV) + System Loss (dB) + Antenna Factor (dBµV/m)
24.6 = 35.51 + (-22.1) + 11.20
Margin (dB) = Limit (dBµV/m) - Total Level (dBµV/m)
15.4 = 40 - 24.6

Graph Markers: + Frequency marker (Level of marker not related to final level)
| Final maximized level using Quasi-Peak detector
X Final maximized level using Average detector
Final maximized level using Peak detector
- Background Scan Peak Detector (Optional)
- Background Scan Average Detector (Optional)

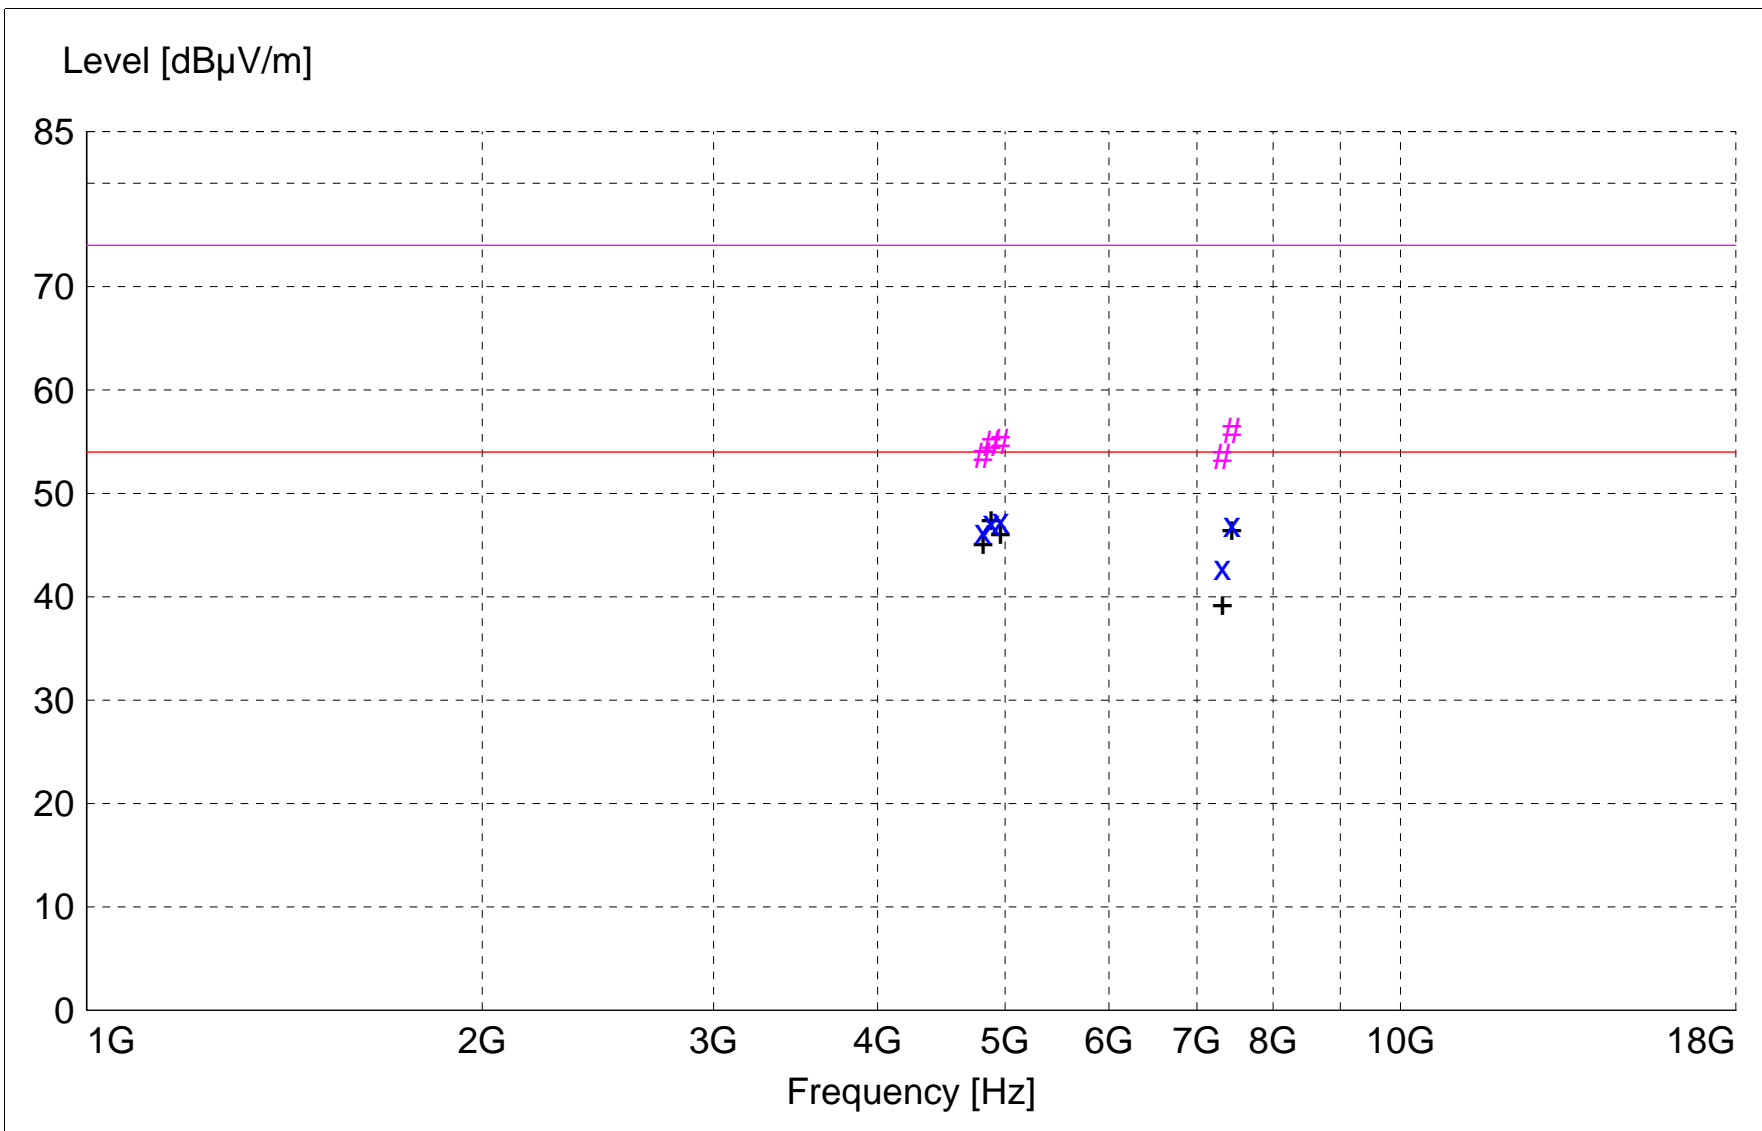

```

x x :MES  A625b_sv_Average
# # :MES  A625b_sv_Peak
+ + :MES  A625b_sv_Peak_List
— — :LIM  FCC Class B F 3m AVG  Field Strength AVG Limit 3m
— — :LIM  FCC Class B F 3m PK   Field Strength PEAK Limit 3m

```

MEASUREMENT RESULT: "A625b_sv_Final"

6/25/2014 12:56PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dBμV	Factor	Loss	Level	dBμV/m	dB	Ant.	Angle	Detector	
		dBμV/m	dB	dBμV/m	dBμV/m		m	deg		
4961.000000	51.90	33.20	-37.8	47.3	54.0	6.7	1.22	2	AVERAGE	High ch
4881.020000	51.91	33.07	-37.8	47.2	54.0	6.8	1.01	22	AVERAGE	Mid ch
7441.580000	44.81	36.51	-34.3	47.0	54.0	7.0	1.95	58	AVERAGE	High ch
4811.000000	50.90	32.95	-37.6	46.3	54.0	7.7	1.27	15	AVERAGE	Low ch
7318.480000	41.71	36.18	-35.0	42.8	54.0	11.2	1.69	285	AVERAGE	Mid ch
7441.580000	53.93	36.51	-34.3	56.1	74.0	17.9	1.95	58	MAX PEAK	High ch
4961.000000	59.61	33.20	-37.8	55.0	74.0	19.0	1.22	2	MAX PEAK	High ch
4881.020000	59.55	33.07	-37.8	54.9	74.0	19.2	1.01	22	MAX PEAK	Mid ch
4811.000000	58.32	32.95	-37.6	53.7	74.0	20.3	1.27	15	MAX PEAK	Low ch
7318.480000	52.42	36.18	-35.0	53.6	74.0	20.4	1.69	285	MAX PEAK	Mid ch

**No measurable emissions
were detected
from the EUT
above 18 GHz.**

**Radiated emissions
testing was performed
up to 26 GHz.**



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Appendix B

7.0 Band-Edge Measurements – RF Conducted

Rule Part:

15.247(d)

Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r02
Emissions in non-restricted frequency bands, Section 11.1(a)
Measurement procedure – Reference level, Section 11.2
Measurement procedure – Emission level, Section 11.3

Limit:

The peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Results:

Compliant

Notes:

This was an RF conducted measurement. The EUT was connected to the measuring equipment through an SMA connector soldered in place of the antenna. Cable loss and attenuation was accounted for in the transducer factors set in the analyzer.

The EUT was powered through a cable that was connected to the bench supply set to 3.0 VDC. The EUT was set to transmit continuously at its maximum power (power setting 8), with a modulating signal representative of the worst-case signal encountered in a real system operation on the low and high channels of the operating band.

The High channel (channel 26) power setting was reduced from 8 to -3 to meet the radiated upper band-edge requirement at the 2.4835 GHz restricted frequency band edge.

Testing was also performed on channel 25 to show that the output power setting for this channel does not need to be lowered to meet the band-edge requirements.



166 South Carter, Genoa City, WI 53128


Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Band-Edge Measurements - Conducted
Operator: Craig B

Comment: RBW = 100 kHz
VBW ≥ 300 kHz
Detector = Peak
Sweep = auto couple
Trace = max hold

Low Channel: Transmit = 2.405 GHz
Output power setting: 8
Limit: Band-Edge > 20 dB Below Peak In-Band Emission

Band-Edge Frequency = 2.4 GHz

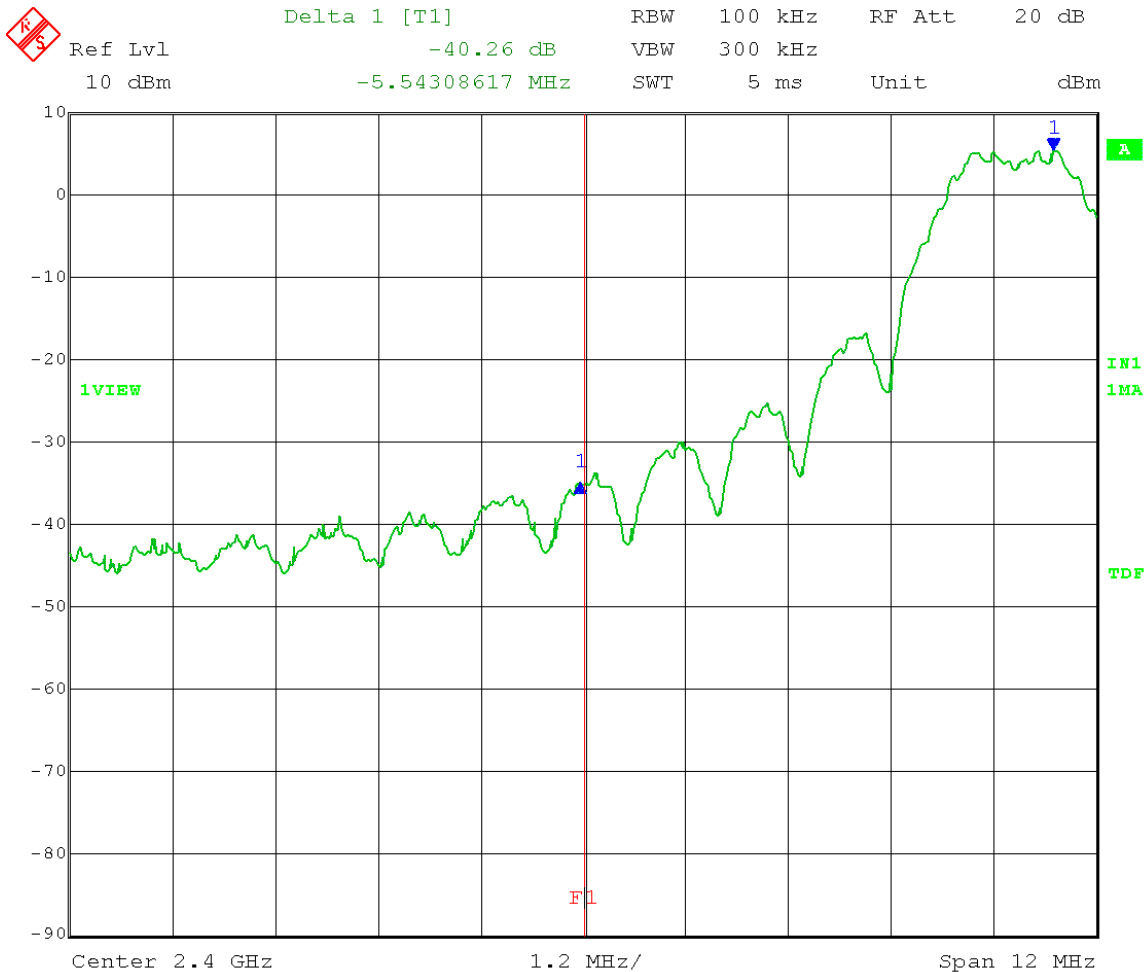

Date: 26.JUN.2014 11:10:38



166 South Carter, Genoa City, WI 53128


Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Band-Edge Measurements - Conducted
Operator: Craig B

Comment: RBW = 100 kHz
VBW ≥ 300 kHz
Detector = Peak
Sweep = auto couple
Trace = max hold

High Channel: Transmit = 2.480 GHz (channel 26)
Output power setting: -3
Limit: Band-Edge > 20 dB Below Peak In-Band Emission

Band-Edge Frequency = 2.4835 GHz

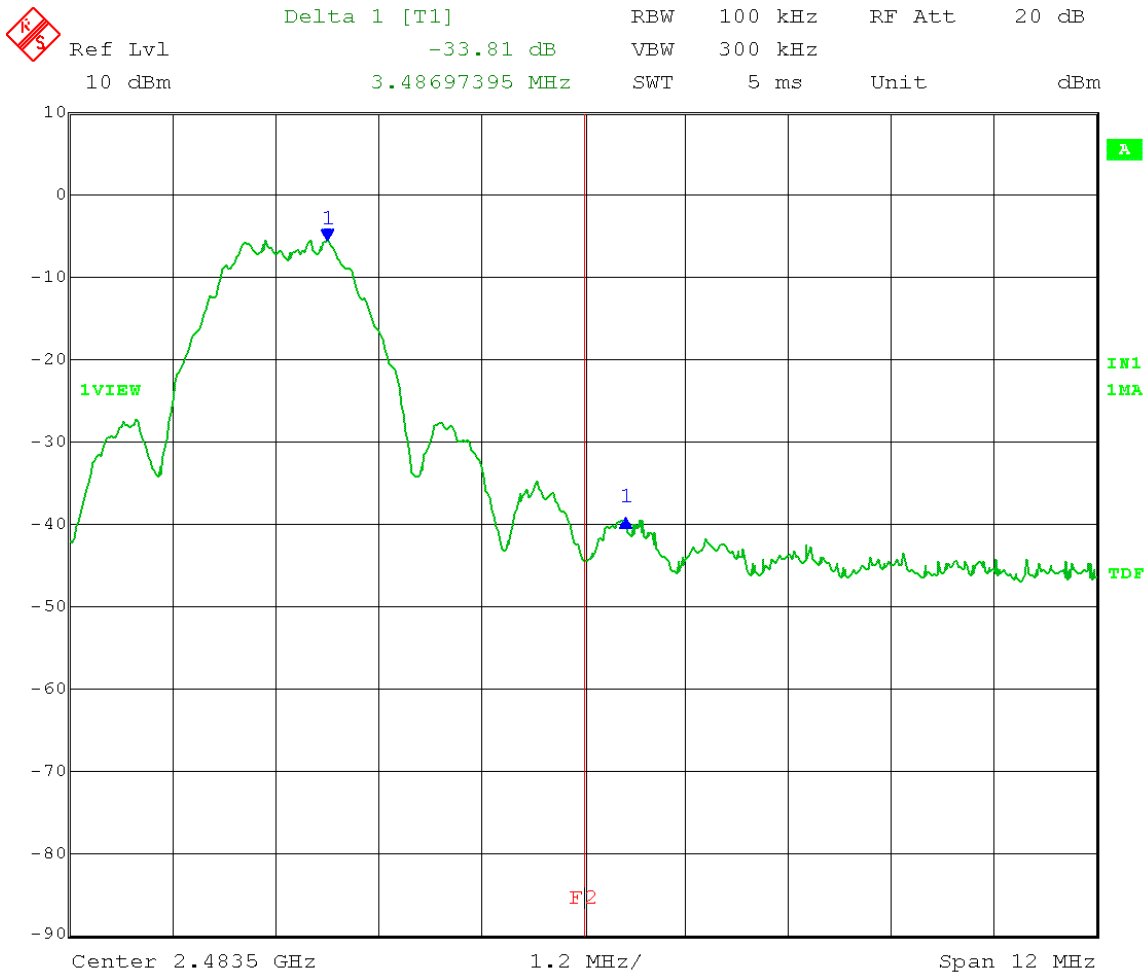

Date: 26.JUN.2014 11:15:17



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Test Date: 06-26-2014
Company: Centralite
EUT: Honolulu
Test: Band-Edge Measurements - Conducted
Operator: Craig B


Comment: RBW = 100 kHz
VBW ≥ 300 kHz
Detector = Peak
Sweep = auto couple
Trace = max hold

Next-to-High Channel (channel 25): Transmit = 2.475 GHz

Output power setting: 8

Limit: Band-Edge > 20 dB Below Peak In-Band Emission

Band-Edge Frequency = 2.4835 GHz

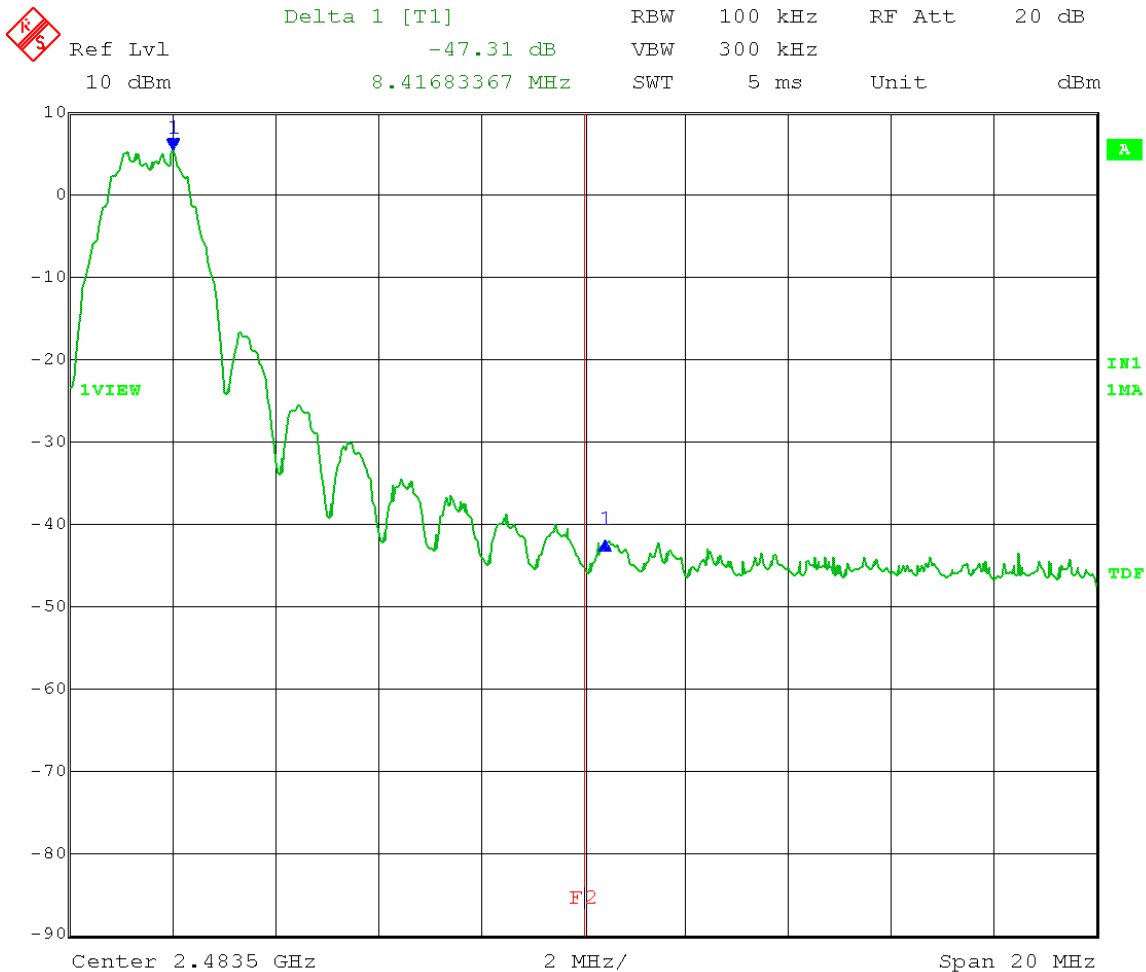

Date: 26.JUN.2014 11:19:29



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

Appendix B

8.0 Band-Edge Measurements – Radiated

Rule Part:

15.247(d), 15.205(a), 15.209(a)

Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r02
Emissions in restricted frequency bands, Section 12.1
13.0 Band-edge measurements
13.3 Integration method
13.3.1 Trace averaging with continuous EUT transmission at full power
ANSI C63.10-2009

Limits:

15.209(a)

Results:

Compliant

Notes:

This was a radiated measurement. The EUT was transmitting from its integrated PCB trace antenna. The EUT was powered through a serial interface cable that was connected to the bench supply set to 3.0 VDC. The EUT was set to transmit continuously at its maximum power, with a modulating signal representative of the worst-case signal encountered in a real system operation on the high channel of the operating band.

The High channel (channel 26) power setting was reduced from 8 to -3 to meet the radiated upper band-edge requirement at the 2.4835 GHz restricted frequency band edge.


Testing was also performed on channel 25 to show that the output power setting for this channel does not need to be lowered to meet the band-edge requirements.

Test Date: 06-25-2014
 Company: Centralite
 EUT: Honolulu
 Test: Upper Band-Edge Radiated – Integration Method
 Rule part: FCC Part 15.247(d) and FCC Part 15.205
 Operator: Craig B
 Comment: Channel 26: Frequency – 2.480 GHz
 Power setting -3

Because the upper band-edge coincides with a restricted band, band-edge compliance for the upper band-edge was determined using the radiated integration method as outlined in FCC KDB 558074 D01 DTS Meas Guidance v03r02, Section 13.3.1.

HORIZONTAL:

AVERAGE: Integrated field strength (over 1 MHz) at upper band edge = 53.6 dB μ V/m

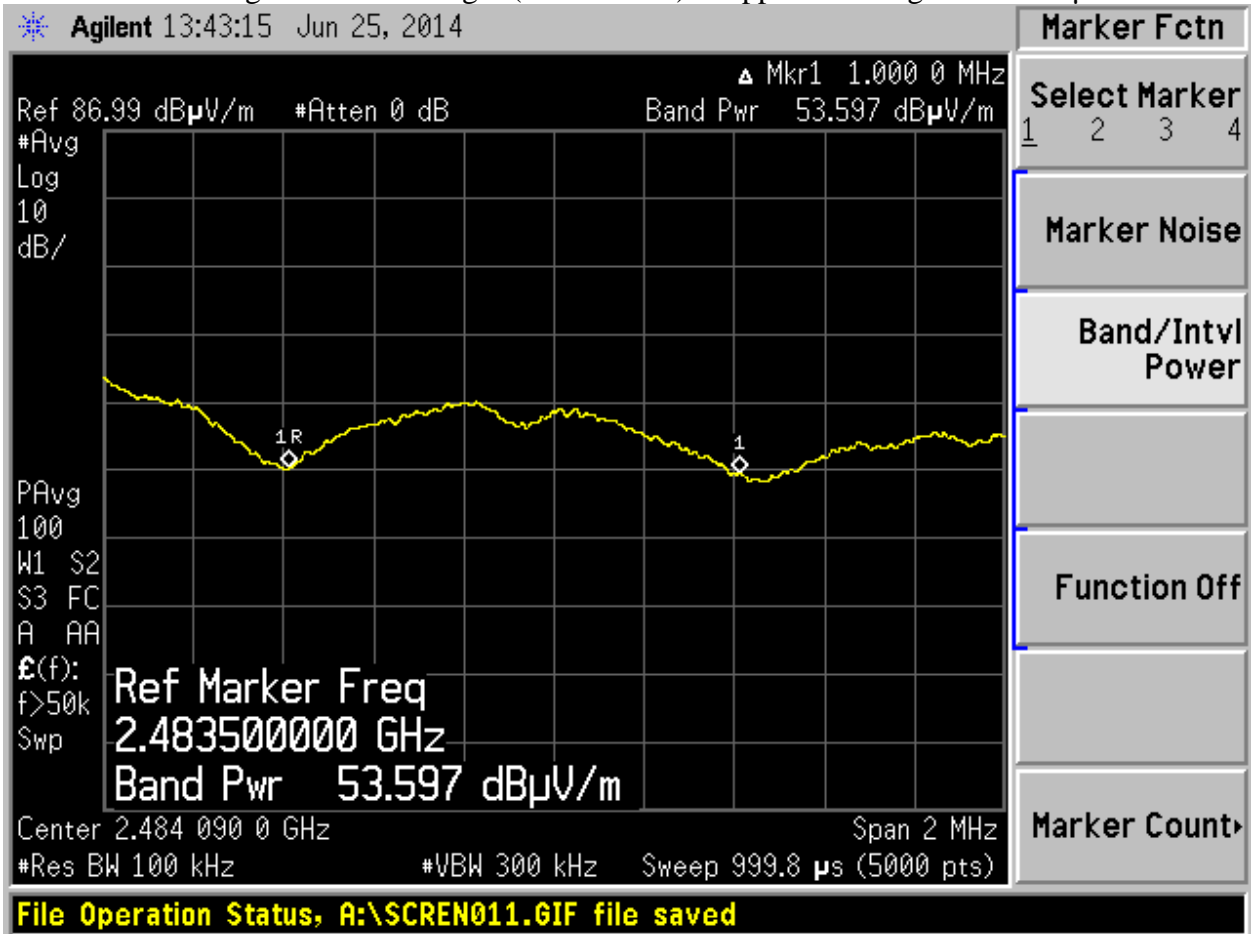


Test Date: 06-25-2014
 Company: Centralite
 EUT: Honolulu
 Test: Upper Band-Edge Radiated – Integration Method
 Rule part: FCC Part 15.247(d) and FCC Part 15.205
 Operator: Craig B
 Comment: Channel 26: Frequency – 2.480 GHz
 Power setting -3

Because the upper band-edge coincides with a restricted band, band-edge compliance for the upper band-edge was determined using the radiated integration method as outlined in FCC KDB 558074 D01 DTS Meas Guidance v03r02, Section 13.3.1.

HORIZONTAL:

PEAK: Integrated field strength (over 1 MHz) at upper band edge = 61.5 dB μ V/m

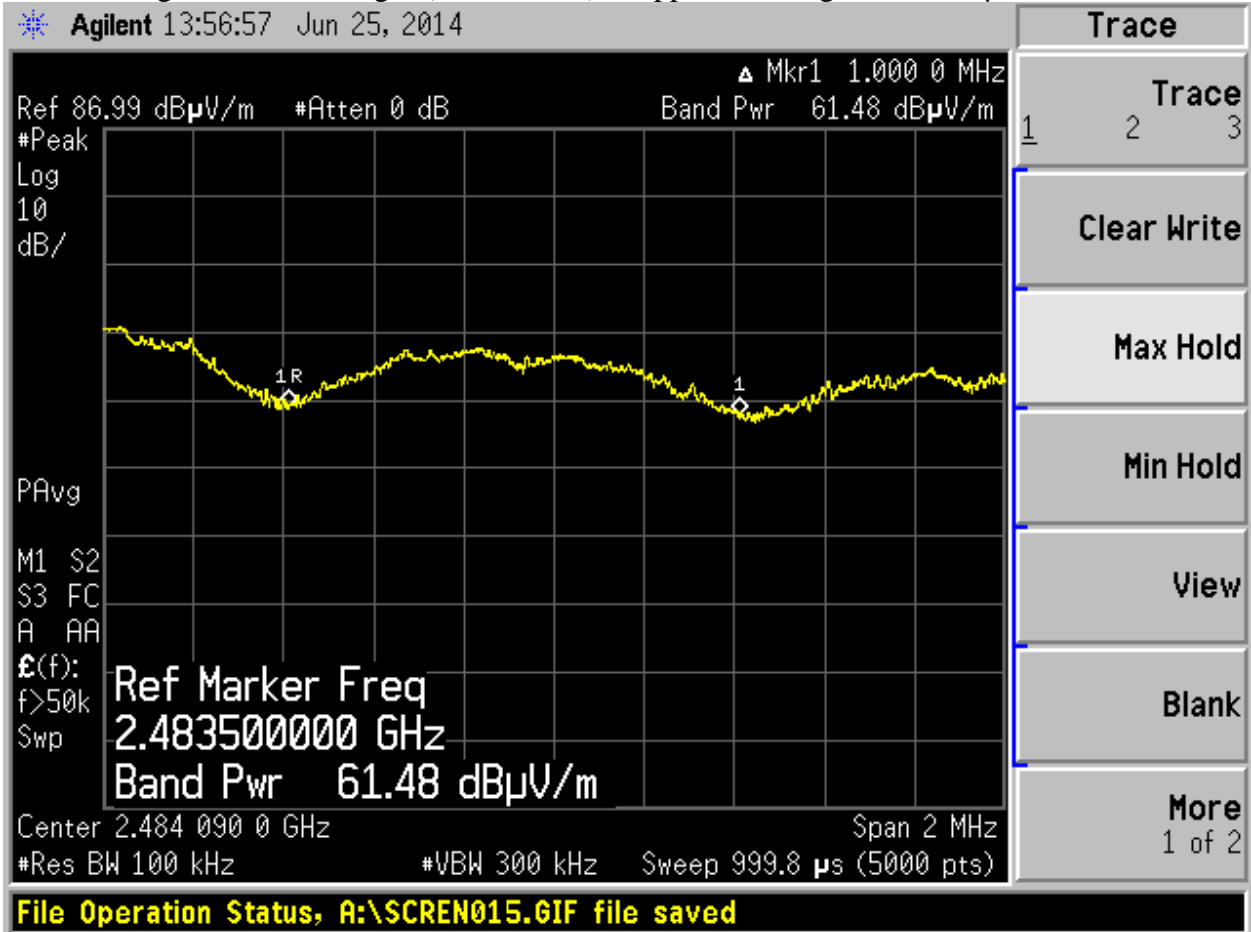


Test Date: 06-25-2014
 Company: Centralite
 EUT: Honolulu
 Test: Upper Band-Edge Radiated – Integration Method
 Rule part: FCC Part 15.247(d) and FCC Part 15.205
 Operator: Craig B
 Comment: Channel 26: Frequency – 2.480 GHz
 Power setting -3

Because the upper band-edge coincides with a restricted band, band-edge compliance for the upper band-edge was determined using the radiated integration method as outlined in FCC KDB 558074 D01 DTS Meas Guidance v03r02, Section 13.3.1.

VERTICAL:

AVERAGE: Integrated field strength (over 1 MHz) at upper band edge = 51.1 dB μ V/m

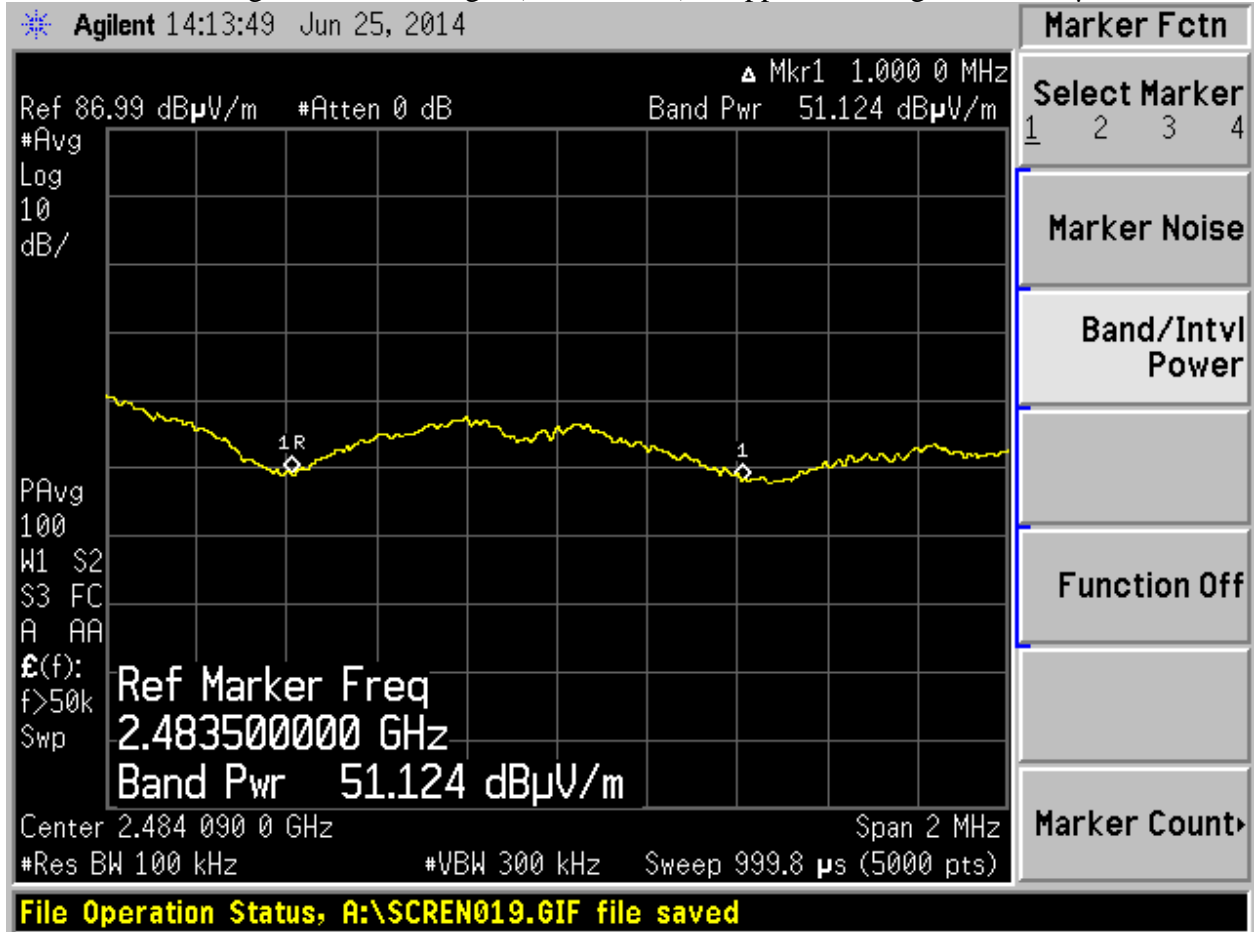


Test Date: 06-25-2014
 Company: Centralite
 EUT: Honolulu
 Test: Upper Band-Edge Radiated – Integration Method
 Rule part: FCC Part 15.247(d) and FCC Part 15.205
 Operator: Craig B
 Comment: Channel 26: Frequency – 2.480 GHz
 Power setting -3

Because the upper band-edge coincides with a restricted band, band-edge compliance for the upper band-edge was determined using the radiated integration method as outlined in FCC KDB 558074 D01 DTS Meas Guidance v03r02, Section 13.3.1.

VERTICAL:

PEAK: Integrated field strength (over 1 MHz) at upper band edge = 59.6 dB μ V/m

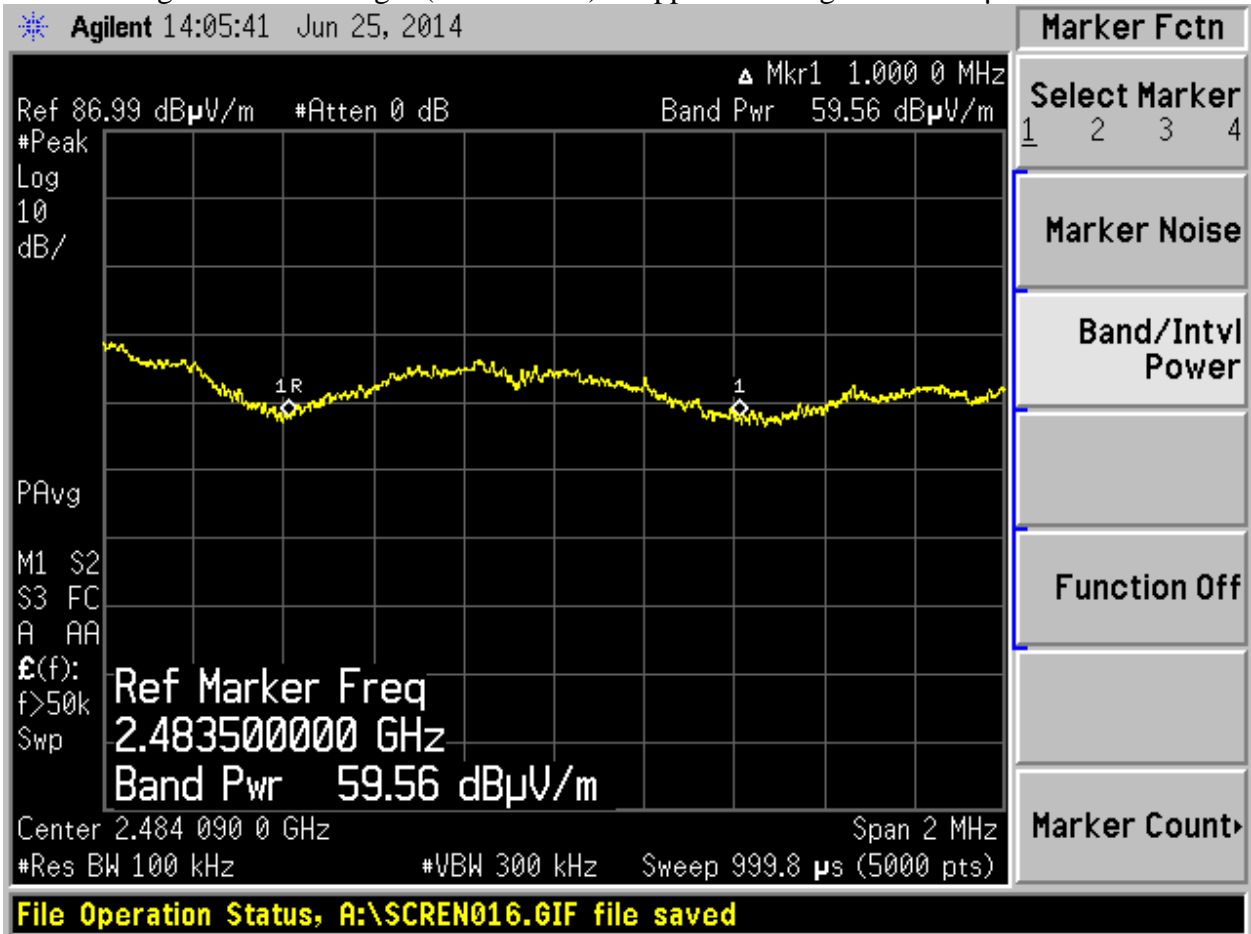


Test Date: 06-25-2014
 Company: Centralite
 EUT: Honolulu
 Test: Upper Band-Edge Radiated – Integration Method
 Rule part: FCC Part 15.247(d) and FCC Part 15.205
 Operator: Craig B
 Comment: **Channel 25: Frequency – 2.475 GHz**
 Power setting: 8

Because the upper band-edge coincides with a restricted band, band-edge compliance for the upper band-edge was determined using the radiated integration method as outlined in FCC KDB 558074 D01 DTS Meas Guidance v03r02, Section 13.3.1.

HORIZONTAL:

AVERAGE: Integrated field strength (over 1 MHz) at upper band edge = 49.5 dB μ V/m

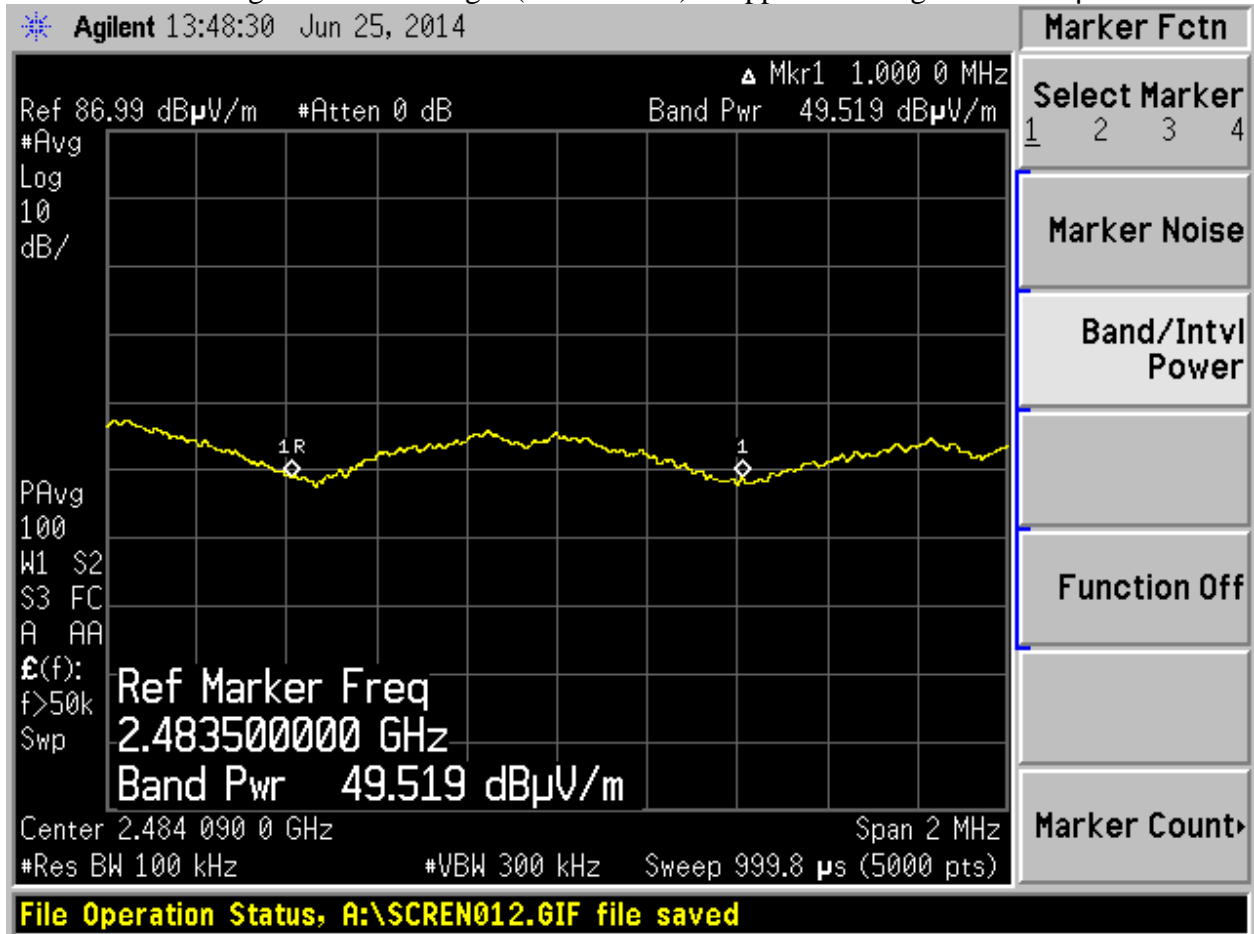


Test Date: 06-25-2014
 Company: Centralite
 EUT: Honolulu
 Test: Upper Band-Edge Radiated – Integration Method
 Rule part: FCC Part 15.247(d) and FCC Part 15.205
 Operator: Craig B
 Comment: **Channel 25: Frequency – 2.475 GHz**
 Power setting: 8

Because the upper band-edge coincides with a restricted band, band-edge compliance for the upper band-edge was determined using the radiated integration method as outlined in FCC KDB 558074 D01 DTS Meas Guidance v03r02, Section 13.3.1.

HORIZONTAL:

PEAK: Integrated field strength (over 1 MHz) at upper band edge = 58.4 dB μ V/m

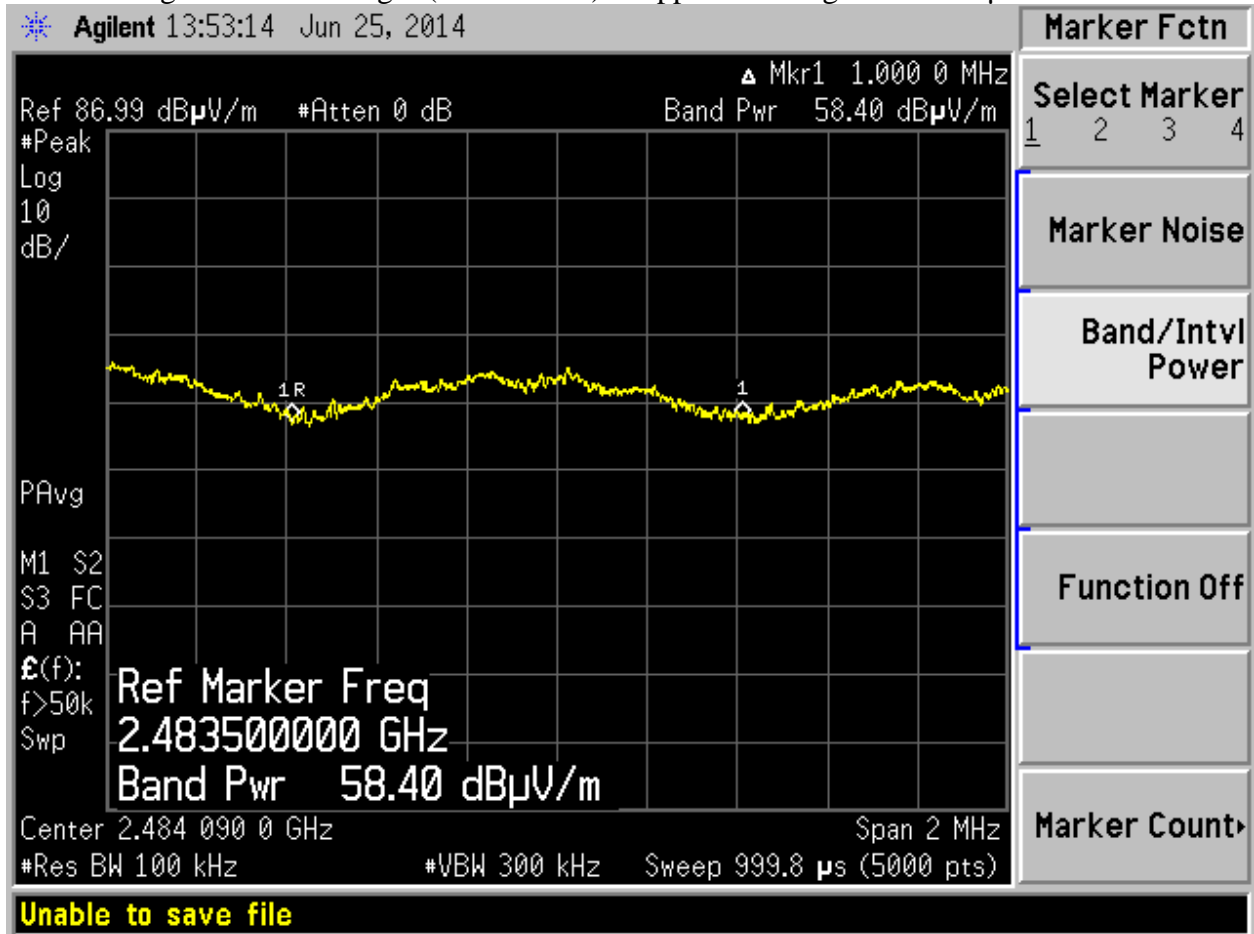


Test Date: 06-25-2014
 Company: Centralite
 EUT: Honolulu
 Test: Upper Band-Edge Radiated – Integration Method
 Rule part: FCC Part 15.247(d) and FCC Part 15.205
 Operator: Craig B
 Comment: **Channel 25: Frequency – 2.475 GHz**
 Power setting: 8

Because the upper band-edge coincides with a restricted band, band-edge compliance for the upper band-edge was determined using the radiated integration method as outlined in FCC KDB 558074 D01 DTS Meas Guidance v03r02, Section 13.3.1.

VERTICAL:

AVERAGE: Integrated field strength (over 1 MHz) at upper band edge = 47.7 dB μ V/m

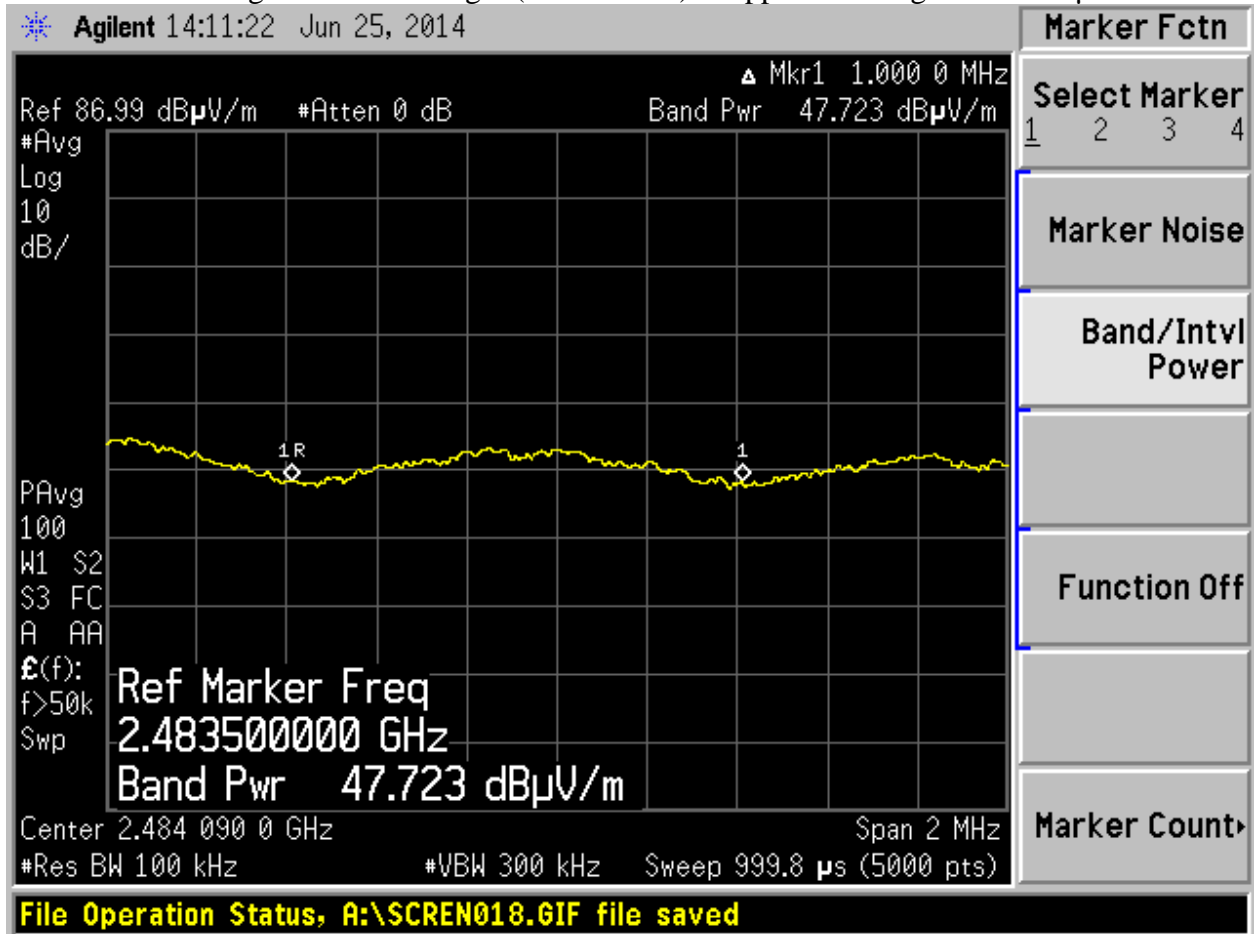


Test Date: 06-25-2014
 Company: Centralite
 EUT: Honolulu
 Test: Upper Band-Edge Radiated – Integration Method
 Rule part: FCC Part 15.247(d) and FCC Part 15.205
 Operator: Craig B
 Comment: **Channel 25: Frequency – 2.475 GHz**
 Power setting: 8

Because the upper band-edge coincides with a restricted band, band-edge compliance for the upper band-edge was determined using the radiated integration method as outlined in FCC KDB 558074 D01 DTS Meas Guidance v03r02, Section 13.3.1.

VERTICAL:

PEAK: Integrated field strength (over 1 MHz) at upper band edge = 56.5 dB μ V/m

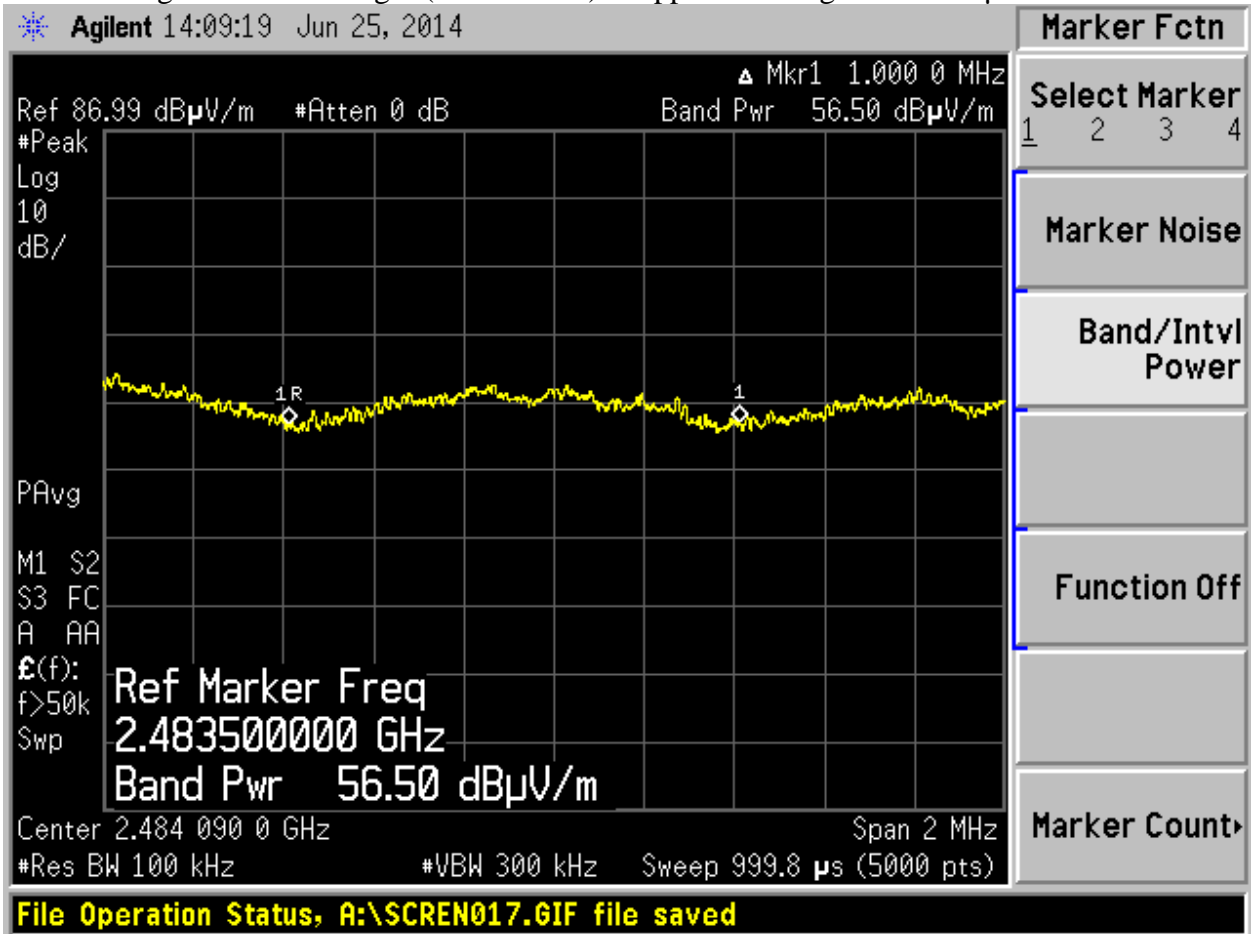



166 South Carter, Genoa City, WI 53128

Company: CentraLite Systems, Inc.
Model Tested: 3130
Report Number: 20178
DLS Project: 6685

END OF REPORT

Revision #	Date	Comments	By
1.0	07-24-2014	Preliminary Release	JS