

ISW-BDL1-W11GX
 ISW-BDL1-W11GY
 ISW-BDL1-W11HX
 ISW-BDL1-W11HY
 ISW-BDL1-W11KX
 ISW-BDL1-W11KY



wLSN Dual Motion Detector
 Installation Instructions

6- AA
 4- P/N: F01U009825
 4- P/N: A24584

ISW-BDL1-W11GX/ISW-BDL1-W11GY
 ISW-BDL1-W11HX/ISW-BDL1-W11HY
 ISW-BDL1-W11KX/ISW-BDL1-W11KY

1

2

3

≤45 kg (100 lb)

4

5

6

B335

55 mm (2.2 in.) 67 mm (2.6 in.) 133 mm (5.2 in.)



www.boschsecurity.com

© 2007 Bosch Security Systems, Inc.
 F01U500901-01a

1




7

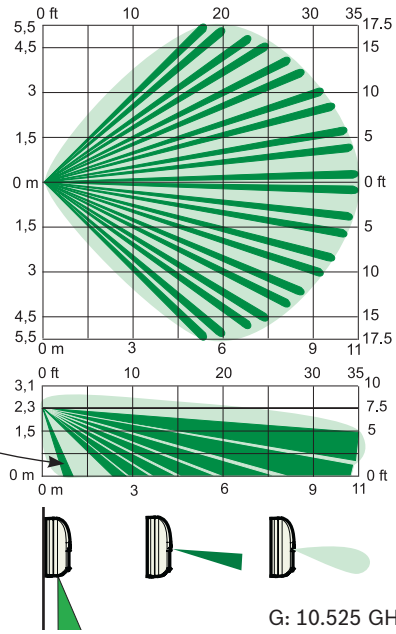


G: 10.525 GHz
H: 10.588 GHz
K: 9.35 GHz

8



1




2




3

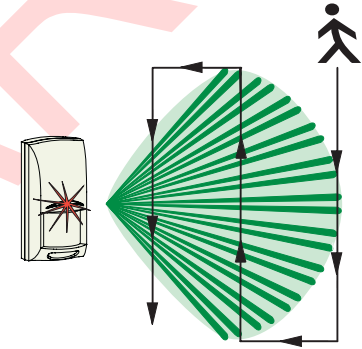

4

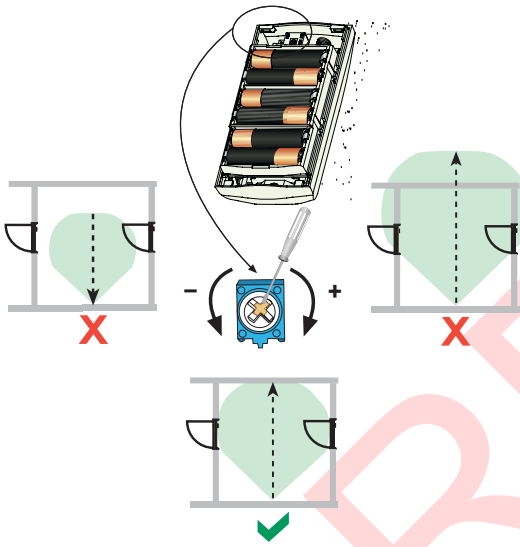

5



ISW-BDL1-W11GX, ISW-BDL1-W11HX, ISW-BDL1-W11KX (868 MHz):



EN50131-1 Grade 2

ISW-BDL1-W11GY, ISW-BDL1-W11HY, ISW-BDL1-W11KY (915 MHz):

FCC, Part 15

IC: Industry Canada RSS-210

UL639: Intrusion Detection Units

ULC-S306-03: Intrusion Detection Units



868 MHz (ISW-BDL1-W11GX, ISW-BDL1-W11GX, ISW-BDL1-W11GX)

915 MHz (ISW-BDL1-W11GY, ISW-BDL1-W11GY, ISW-BDL1-W11GY)



-10°C - +55°C (+14°F - +131°F)

UL: 0°C - +49°C (+32°F - +120°F)

Environmental Class II




<95%


© 2007 Bosch Security Systems, Inc.
F01U500901-01a



VER	CP#	DATE	REVISION RECORD	DR	AUTH
01	X	8/13/07	ACCEPTED DRAWING	JF	PP

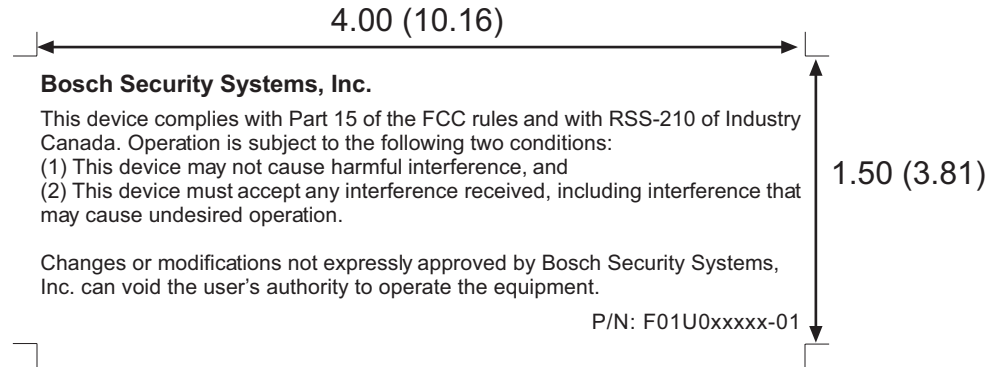

PROPRIETARY DATA
DATA CONTAINED HEREIN SHALL NOT BE USED,
DUPLICATED OR DISCLOSED IN WHOLE OR PART
OUTSIDE OF BOSCH SECURITY SYSTEMS
WITHOUT EXPRESSED WRITTEN PERMISSION OF SAME.

MATERIAL NO. F01U0xxxxx			
BOSCH SECURITY SYSTEMS, INC. 130 PERINTON PARKWAY FAIRPORT, NEW YORK, 14450-9199 USA (585) 223 4060 FAX (585) 223 9180			 BOSCH
DRAWING TITLE			
wLSN Regulatory Insert			
DATE DRAWN: 8/13/07		DRAWN BY: J Freiburger	
DWG TYPE	DRAWING NUMBER	VERSION	SCALE
DRW	F01U0xxxxx	01b	SHEET 1 OF 1