

Report on the FCC and IC Testing of the
 LID Technologies
 WUS MOTO GEN3 4x4 Model: 171090
 In accordance with FCC 47 CFR Part 15 C and
 ISED RSS-210 and ISED RSS-GEN


Prepared for: LID Technologies
 Parc Technologique du Canal
 3 rue Giotto
 31520 Ramonville-Saint-Agne
 France

FCC ID: T45171090
 IC: 6450A-171090

COMMERCIAL-IN-CONFIDENCE

Date: 2023-10-04

Document Number: TR-713294441-05 | Revision: 2

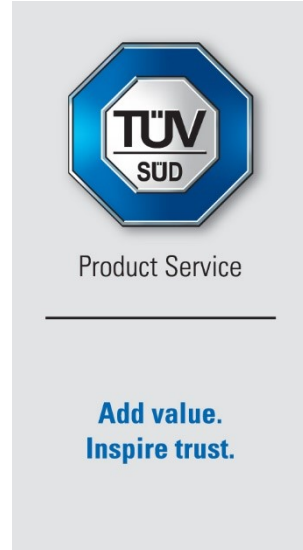

| RESPONSIBLE FOR | NAME | DATE | SIGNATURE |
|----------------------|-----------------|------------|--------------------|
| Project Management | Alex Fink | 2023-10-04 | SIGN-ID 837609 |
| Authorised Signatory | Matthias Stumpe | 2023-10-04 | SIGN-ID 837650 |

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

Engineering Statement:

This measurement shown in this report were made in accordance with the procedures described on test pages.
 All reported testing was carried out on a sample equipment to demonstrate limited compliance with with FCC 47 CFR Part 15 C and ISED RSS-210 and RSS-GEN.

The sample tested was found to comply with the requirements defined in the applied rules.

| RESPONSIBLE FOR | NAME | DATE | SIGNATURE |
|-----------------|-----------|------------|--------------------|
| Testing | Alex Fink | 2023-10-04 | SIGN-ID 837609 |

Laboratory Accreditation Laboratory recognition Industry Canada test site registration
 DAkkS Reg. No. D-PL-11321-11-03 Registration No. BNetzA-CAB-16/21-15 3050A-2
 DAkkS Reg. No. D-PL-11321-11-04

Executive Statement:

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15 C:2021 and ISED RSS210:2020 and RSS-GEN:2019

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2023 TÜV SÜD Product Service.

ACCREDITATION

Our BNetzA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our BNetzA Accreditation.

Results of tests not covered by our BNetzA Accreditation Schedule are marked NBA (Not BNetzA Accredited).

Trade Register Munich
 HRB 85742
 VAT ID No. DE129484267
 Information pursuant to Section 2(1)
 DL-InfoV (Germany) at
 www.tuvsud.com/imprint

Managing Directors:
 Walter Reitmaier (Sprecher / CEO)
 Patrick van Welij

Phone: +49 (0) 9421 56 82-0
 Fax: +49 (0) 9421 56 82-199
 www.tuvsud.com

TÜV SÜD Product Service GmbH
 Äußere Frühlingstraße 45
 94315 Straubing
 Germany



Content

| | | |
|-----|-------------------------------------|---------|
| 1 | Report Summary | 2 |
| 1.1 | Modification Report..... | 2 |
| 1.2 | Introduction..... | 2 |
| 1.3 | Brief Summary of Results | 3 |
| 1.4 | Product Information | 1 |
| 1.5 | EUT Modifications Record | 1 |
| 1.6 | Test Location | 1 |
| 2 | Test Details | 2 |
| 2.1 | Bandwidth of Momentary Signals..... | 2 |
| 2.2 | Periodic Operation Requirement..... | 5 |
| 2.3 | Temperature Stability..... | 9 |
| 2.4 | Radiated emissions | 12 |
| 3 | Measurement Uncertainty | 25 |
| | Annex: Photographs | 2 pages |



1 Report Summary

1.1 Modification Report

Alterations and additions of this report will be issued to the holders of each copy in the form of a complete document.

| <i>Issue</i> | <i>Description of changes</i> | <i>Date of Issue</i> |
|--------------|--|----------------------|
| 0 | First Issue | 2023-05-22 |
| 1 | Model number corrected from "17109" to "171090" | 2023-07-24 |
| 2 | Section 2.2, Spectrum analyser screenshot added for alarm mode | 2023-10-04 |

Table 1: Report of Modifications

1.2 Introduction

| | |
|--------------------------------------|---|
| Applicant | LID Technologies |
| Manufacturer | LID Technologies |
| Model Number(s) | 171090 |
| Serial Number(s) | N/A |
| Hardware Version(s) | 321-093-1090-B |
| Software Version(s) | 421234014021 |
| Number of Samples Tested | 1 |
| Test Specification(s) / Issue / Date | FCC 47 CFR Part 15 C : 2019 ISED RSS-210, Issue 10, Amendment 1 : 2020 ISED RSS-GEN, Issue 5, Amendment 1 : 2019 |
| Test Plan/Issue/Date | --- |
| Order Number | CD-220553 |
| Date | 2022-07-22 |
| Date of Receipt of EUT | 2023-02-20 |
| Start of Test | 2023-03-07 |
| Finish of Test | 2023-04-27 |
| Name of Engineer(s) | Patrick Müller |
| Related Document(s) | ANSI C63.4: 2014 ANSI C63.10: 2013 FCC 47 CFR Part 2 J : 2019 KDB 558074 D01 V05R02 ISED RSS-102, Issue 5, 2015 |



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15 C, ISED RSS-210 and ISED RSS-GEN is shown below.

| <i>Section</i> | <i>Specification Clause</i> | <i>Test Description</i> | <i>Result</i> |
|----------------|---------------------------------------|--|--------------------------------|
| --- | 15.203 | Antenna requirement | --- |
| 2.1 | 15.231(c) | Bandwidth of momentary signals | Pass |
| 2.2 | 15.231(a) / 15.231(3) | Periodic operation requirement | Declared by applicant |
| 2.4 | 15.231(a) / 15.231(e), 15.205, 15.209 | Radiated Emissions | Pass |
| --- | 15.207 | Conducted Emissions on Mains Terminals | Not applicable, battery supply |

Table 2: Results according to FCC 47 CFR Part 15 C

| <i>Section</i> | <i>Specification Clause</i> | <i>Test Description</i> | <i>Result</i> |
|----------------|-----------------------------|--------------------------------|-----------------------|
| 2.1 | A1.3 | Bandwidth of momentary signals | Pass |
| 2.2 | A.1.1 / A1.4 | Periodic operation requirement | Declared by applicant |
| 2.4 | A1.1 / A1.4 | Radiated Emissions | Pass |

Table 3: Results according to ISED RSS-247

| <i>Section</i> | <i>Specification Clause</i> | <i>Test Description</i> | <i>Result</i> |
|----------------|-----------------------------|--|--------------------------------|
| 2.1 | 6.7 | Bandwidth of momentary signals | Pass |
| 2.4 | 8.9, 8.10 | Spurious Emissions | Pass |
| 2.3 | 6.11 | Temperature Stability | Pass |
| --- | 8.8 | Conducted Emissions on Mains Terminals | Not applicable, battery supply |

Table 4: Results according to RSS-Gen



1.4 Product Information

1.4.1 Technical Description

Supply Voltage: 3V Battery (min. 1.9V; max. 3V)
Supply Frequency: DC
Temperature Range: -20°C to 105°C

1.5 EUT Modifications Record

The table below details modifications made to the EUT during the test programme.
The modifications incorporated during each test are recorded on the appropriate test pages.

| Modification State | Description of Modification still fitted to EUT | Modification Fitted By | Date Modification Fitted |
|--------------------|---|------------------------|--------------------------|
| 0 | As supplied by the customer | Not Applicable | Not Applicable |

Table 5

1.6 Test Location

TÜV SÜD Product Service conducted the following tests at our Straubing test laboratory:

| Test Name | Name of Engineer(s) |
|--------------------------------|---------------------|
| Bandwidth of momentary signals | Patrick Müller |
| Periodic operation requirement | Patrick Müller |
| Temperature Stability | Patrick Müller |
| Radiated Emissions | Patrick Müller |

Office Address:

Äußere Frühlingstraße 45
94315 Straubing
Germany



2 Test Details

2.1 Bandwidth of Momentary Signals

2.1.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.231(c)
ISED RSS-210, Clause A.1.3
ISED RSS-Gen, Clause 6.7

2.1.2 Equipment under Test and Modification State

171090, S/N: N/A - Modification State 0

2.1.3 Date of Test

2023-04-26 – 2023-04-27

2.1.4 Environmental Conditions

| | |
|---------------------|-------|
| Ambient Temperature | 22 °C |
| Relative Humidity | 29 % |

2.1.5 Specification Limits

FCC 47 CFR, clause 15.231(c)

The bandwidth of the emission shall be no wider than 0.25 % of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall no wider than 0.5 % of the center frequency. Bandwidth is determined at the points 20 dB down from the modulation carrier.

ISED RSS-210 Issue 10, Amd. 1; clause A1.3

The occupied bandwidth of the momentary devices shall be less than or equal to 0.25 % of the centre frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the occupied bandwidth shall be less than or equal to 0.5 % of the centre frequency.

2.1.6 Test Method


The test was performed according to ANSI C63.10, clauses 6.9
See section 2.4.6 of this test report for details.



2.1.7 Test Results

| | |
|------------------|-----------------------|
| Center frequency | 20 dB Bandwidth (kHz) |
| 433.92 MHz | 50.846 kHz |

Table 6: 20 dB bandwidth

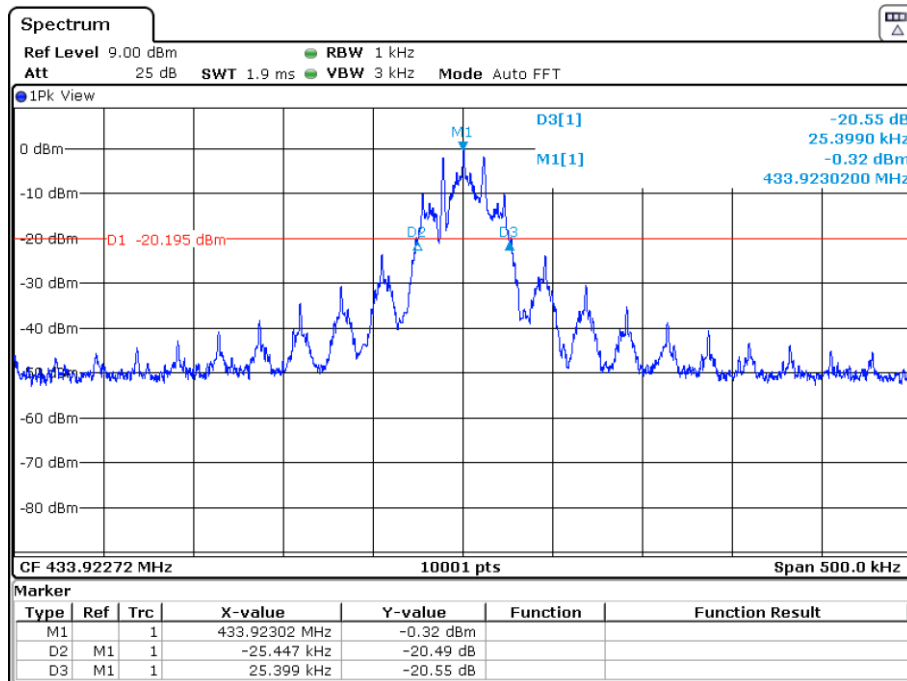


Date: 27.APR.2023 09:08:54



| | |
|------------------|---------------------|
| Centre Frequency | 99% Bandwidth (kHz) |
| 433.92 MHz | 43.896 kHz |

Table 7: 99% bandwidth

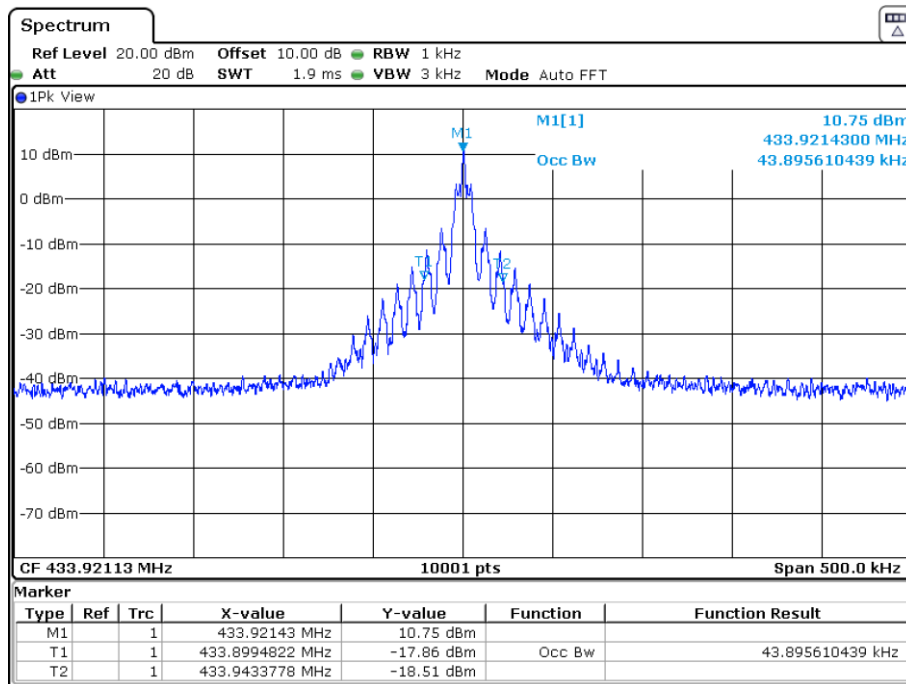

Date: 26.APR.2023 10:43:44

2.1.8 Test Location and Test Equipment

The test was carried out in semi anechoic rooms No. 11

| Instrument | Manufacturer | Type No | TE No | Calibration Period (months) | Calibration Due |
|--------------------------|-----------------|---------------------|-------|-----------------------------|-----------------|
| EMI test receiver | Rohde & Schwarz | ESW44 | 39897 | 12 | 2023-04-30 |
| Loop antenna | Schwarzbeck | FMZB 1519B | 44334 | 36 | 2023-04-30 |
| ULTRALOG Antenna | Rohde & Schwarz | HL562E | 39969 | 36 | 2025-03-31 |
| Semi anechoic room | Frankonia | Cabin No.11 | 42961 | 36 | 2024-09-30 |
| EMC measurement software | Rohde & Schwarz | EMC32 K11 V10.60.20 | 42986 | --- | --- |

Table 8



2.2 Periodic Operation Requirement

2.2.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.231(a)
ISED RSS-210, Clause A.1.1

2.2.2 Equipment under Test and Modification State

171090, S/N: N/A - Modification State 0

2.2.3 Date of Test

2023-04-26 – 2023-04-27

2.2.4 Environmental Conditions

| | |
|---------------------|-------|
| Ambient Temperature | 22 °C |
| Relative Humidity | 29 % |

2.2.5 Test Method

The test was performed using a spectrum analyser in zero-span-mode with the frequency set to the center frequency of the transmitter and the resolution bandwidth set to a value greater of the emission bandwidth to cover the full output power of the transmitter. Sweep time and sweep points were set to values given a reasonable resolution of test results.

| | |
|-------------------|-----|
| Center frequency: | --- |
| RBW: | --- |
| Sweep time: | --- |
| Sweep points: | --- |



2.2.6 Specification Limits

FCC 47 CFR 15.231(a) and ISED RSS-210 A1.1

1. A manually operated transmitter shall employ a push-to-operate switch that will automatically deactivate the transmitter within not more than 5 s of being released.
2. A transmitter activated automatically shall cease transmission within 5 s after activation.
3. Periodic transmissions at regular predetermined intervals are not permitted (except as defined in FCC 47 CFR 15.231(e) and ISED RSS-210 A1.1.4). However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour (2 s/h) for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed 2 s/h.
4. Intentional radiators which are employed for radio control purposes during emergencies involving fire, security of goods (e.g. burglar alarms), and safety-of-life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

FCC 47 CFR 15.231(e) and ISED RSS-210 A1.1.4

In additions, devices operated under these section shall be capable of automatically limiting their operation so that the duration of each transmission is not greater than 1 s and the silent period between transmission is at least 30 times the duration of the transmission, but not less than 10 s und all circumstances.



2.2.7 Test Results

General information on transmitter:

The transmitter is used for

- Security or safety applications
- other applications

- Declared by applicant
- Declared by applicant

The transmitter is operated

- manually
- automatically

- Declared by applicant ¹
- Declared by applicant

Periodic operation according to

CFR 47 Part 15, clause 15.231(a)
ISED RSS-210, Issue 10, Amd. 1, section A1.1

- Only control signals are sent and there is no continuous transmission.
- A manually operated transmitter employs a switch that will automatically deactivate the transmitter within not more than 5 s of being released.
- A transmitter activated automatically ceased transmission within 5 s after activation
- Periodic transmissions at regular predetermined intervals are:
 - not performed
 - performed with total time of two seconds per hour or less (for polling or supervision transmissions to determine system integrity of transmitters used in security or safety applications)

- Declared by applicant
- Test performed
- Passed
- Test performed
- Passed
- Declared by applicant
- Declared by applicant
- Test performed
- Passed

Periodic operation according to

CFR 47 Part 15, clause 15.231(e)
ISED RSS-210, Issue 10, Amd. 1, section A1.4


The device is provided with a means for automatically limiting operation so that the duration of each transmission is not greater than one second and the silent period between transmissions is at least 30 times the duration of the transmission but in no case less than 10 s.

- Declared by applicant
- Test performed
- Passed

¹ Please refer to external photos in annex for details.



Duty Cycle measurement

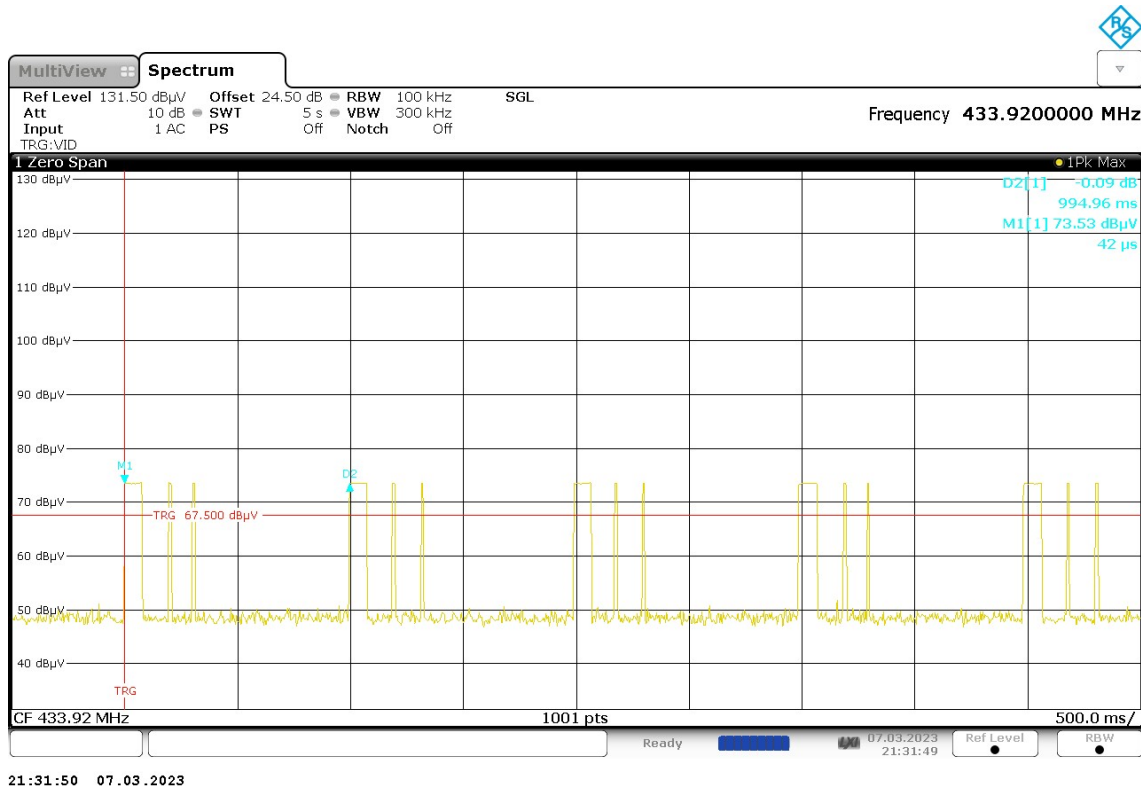

Note: Measurement was performed in alarm mode. In this mode the device transmits every second. In Drive mode the devices transmits every 64 seconds and in park mode 4 times in an hour.



2.3 Temperature Stability

2.3.1 Specification Reference

ISED RSS-Gen, Clause 6.11, 8.11

2.3.2 Equipment under Test and Modification State

171090, S/N: N/A - Modification State 0

2.3.3 Date of Test

2023-04-26

2.3.4 Environmental Conditions


| | |
|---------------------|-------|
| Ambient Temperature | 22 °C |
| Relative Humidity | 34 % |

2.3.5 Specification Limits

If the stability of the license-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80 % of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 85 MHz – 72 MHz, 76 MHz – 88 MHz, 174 MHz – 216 MHz, and 470 MHz – 602 MHz, unless otherwise indicated.

2.3.6 Test Method

The test was performed according to ANSI C63.10, section 6.8.

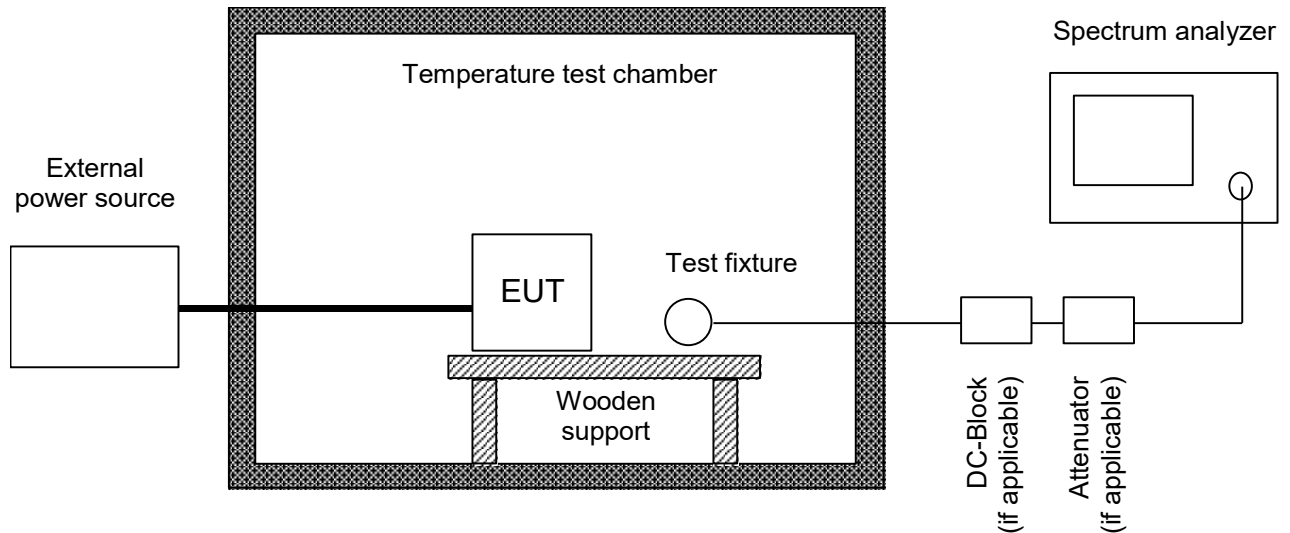

The frequency tolerance of the carrier signal is measured over a temperature variation of $-20\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$ at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of $20\text{ }^{\circ}\text{C}$. Temperature and voltage range may vary if the manufacturer states another temperature or voltage range.

If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as a DC block and appropriate ($50\ \Omega$) attenuators. In case where the EUT does not provide an antenna connector or a test fixture is used.

For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:

- The maximum battery voltage as delivered by a new battery or 115 % of the battery nominal voltage;
- The battery nominal voltage
- 85 % of the battery nominal voltage
- The battery operating end point voltage which shall be specified by the equipment manufacturer.

The EUT is operating providing an unmodulated carrier for frequency error tests. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.

If an unmodulated carrier is not available a significant and stable point of the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1 % of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance is larger than the uncertainty of the measured frequency tolerance.



2.3.7 Test Results

Transmitting continuously on 433.92 MHz
 Test was performed with modulated signal.

| <i>Temperature [°C]</i> | <i>Supply Voltage [Vdc]</i> | <i>Frequency_L [MHz]</i> | <i>Frequency_H [MHz]</i> |
|-------------------------|-----------------------------|--------------------------|--------------------------|
| 20.0 | 3.0 | 433.8994822 | 433.9433778 |
| 20.0 | 1.9 | 433.8978823 | 433.9453276 |
| 20.0 | 3.6 | 433.8993322 | 433.9438777 |
| -20.0 | 3.0 | 433.8996821 | 433.9488772 |
| 105 | 3.0 | 433.9002821 | 433.9417779 |

Table 9

2.3.8 Test Location and Test Equipment

The test was carried out in a climatic test chamber.

| Instrument | Manufacturer | Type No | TE No | Calibration Period (months) | Calibration Due |
|-----------------------|-----------------|----------|-------|-----------------------------|-----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSV40 | 20219 | 24 | 2024-02-29 |
| Climatic test chamber | Feutron | KPK200-2 | 19868 | 24 | 2023-08-31 |

Table 10



2.4 Radiated emissions

2.4.1 Specification Reference

FCC 47 CFR Part 15 C, Clauses 15.205, 15.209 and 15.231(a)
ISED RSS-231, Clause A.1.1
ISED RSS-Gen, Clauses 8.9 and 8.10

2.4.2 Equipment under Test and Modification State

171090, S/N: N/A - Modification State 0

2.4.3 Date of Test

2023-04-26

2.4.4 Environmental Conditions

| | |
|---------------------|-------|
| Ambient Temperature | 22 °C |
| Relative Humidity | 34 % |



2.4.5 Specification Limits

| General radiated emission limits: | | | | | |
|-----------------------------------|----------------------|----------------------------|-------------------------------------|----------------------------|-------------------------------------|
| Frequency Range (MHz) | Test distance (m) | Field strength | | Field strength | |
| | | ($\mu\text{A}/\text{m}$) | ($\text{dB}\mu\text{A}/\text{m}$) | ($\mu\text{V}/\text{m}$) | ($\text{dB}\mu\text{V}/\text{m}$) |
| 0.009 – 0.49 | 300 | $6.37 / f$ | $20*\lg(6.37 / f)$ | $2400 / f$ | $20*\lg(2400 / f)$ |
| 0.49 – 1.705 | 30 | $63.7 / f$ | $20*\lg(63.7 / f)$ | $24000 / f$ | $20*\lg(24000 / f)$ |
| 1.705 - 30 | 30 | 0.08 | $20*\lg(0.08 / f)$ | 30 | $20*\lg(30 / f)$ |
| 30 – 88 | 3 | --- | --- | 100 | 40 |
| 88 – 216 | 3 | -- | --- | 150 | 43.5 |
| 126 – 960 | 3 | -- | --- | 200 | 46 |
| above 960 | 3 | -- | --- | 500 | 54 |

Note 1: f in kHz

Table 11 General radiated emission limits

FCC 47 CFR Part 15 C, Clause 15.231(a); ISED RSS-231, Clause A.1.1

| Frequency Range (MHz) | Field strength of fundamental | | Field strength of spurious emissions | |
|--------------------------|-------------------------------|-------------------------------------|--------------------------------------|-------------------------------------|
| | ($\mu\text{V}/\text{m}$) | ($\text{dB}\mu\text{V}/\text{m}$) | ($\mu\text{V}/\text{m}$) | ($\text{dB}\mu\text{V}/\text{m}$) |
| 40.66 – 40.70 | 2500 | 67.96 | 225 | 47.96 |
| 70 – 130 | 1250 | 61.94 | 125 | 41.94 |
| 130 – 174 | 1250 – 3750 * | 61.94 – 71.48 * | 125 – 375 * | 41.94 – 51.48 * |
| 174 – 260 | 3750 | 71.48 | 375 | 51.48 |
| 260 – 470 | 3750 – 12500 * | 71.48 – 81.94 * | 375 – 1250 * | 51.48 – 61.94 * |
| Above 470 | 12500 | 81.94 | 1250 | 61.94 |

* linear interpolation
 The above field strength limits are specified at a distance of 3 m. The tighter limits apply at the band edges.
 Intentional radiators shall demonstrate compliance with the limits above based on the (linear) average value of the measured emissions. As an alternative, compliance with these limits may be based on the use of measurement instrumentations with a CISPR quasi-peak detector. If average emission measurements are employed, the provisions for averaging pulsed emissions and for limiting peak emissions apply.
 The limits on the field strength of the spurious emissions in the table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or alternatively, CISPR quasi-peak) limits shown in this table or to the general spurious emission limits, whichever limit permits a higher field strength.



FCC 47 CFR Part 15 C, Clause 15.231(e); ISED RSS-231, Clause A.1.4

| <i>Frequency Range (MHz)</i> | <i>Field strength of fundamental</i> | | <i>Field strength of spurious emissions</i> | |
|----------------------------------|--------------------------------------|--------------------------------|---|--------------------------------|
| | <i>(μV/m)</i> | <i>(dBμV/m)</i> | <i>(μV/m)</i> | <i>(dBμV/m)</i> |
| 40.66 – 40.70 | 1000 | 60 | 100 | 40 |
| 70 – 130 | 500 | 53.98 | 50 | 33.98 |
| 130 – 174 | 500 – 1500 * | 53.98 – 63.52 * | 50 – 150 * | 33.98 – 43.52 |
| 174 – 260 | 1500 | 63.52 | 150 | 43.52 |
| 260 – 470 | 1500 – 5000 * | 63.52 – 73.98 * | 150 – 500 * | 43.52 – 53.98 |
| Above 470 | 5000 | 73.98 | 500 | 53.98 |

* linear interpolation

The above field strength limits are specified at a distance of 3 m. The tighter limits apply at the band edges.

Intentional radiators shall demonstrate compliance with the limits above based on the (linear) average value of the measured emissions. As an alternative, compliance with these limits may be based on the use of measurement instrumentations with a CISPR quasi-peak detector. If average emission measurements are employed, the provisions for averaging pulsed emissions and for limiting peak emissions apply.

The limits on the field strength of the spurious emissions in the table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or alternatively, CISPR quasi-peak) limits shown in this table or to the general spurious emission limits, whichever limit permits a higher field strength.

2.4.6 Test Method

The test was performed according to ANSI C63.10, sections 11.11 and 11.12


Prescans are performed in six positions of the EUT to get the full spectrum of emission caused by the EUT with the measuring antenna raised and lowered from 1 m to 4 m with vertical and horizontal polarisation to find the combination of table position, antenna height and antenna polarisation for the maximum emission levels.

Data reduction is applied to these results to select those levels having less margin than 10 dB or exceeding the limit using subranges and limited number of maximums.

Further maximisation for adjusting the maximum position is following.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

2.4.6.1 Frequency range 9 kHz – 30 MHz

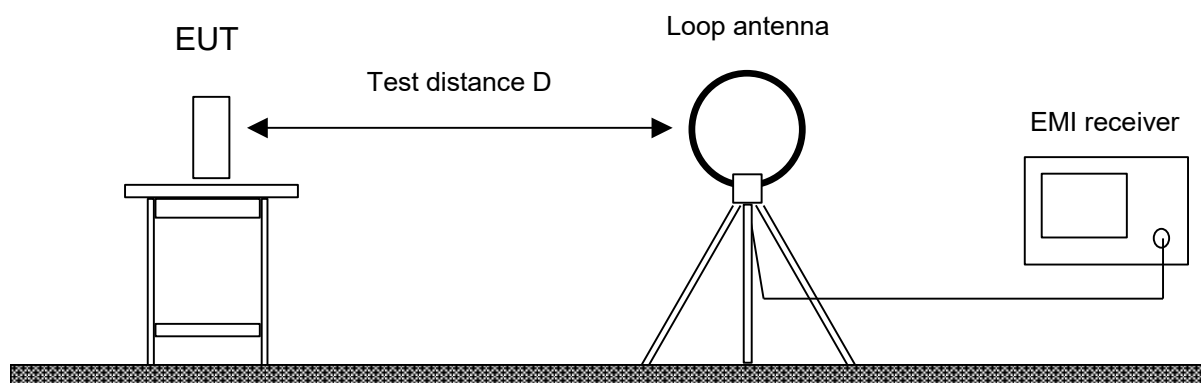


The EUT was placed on a non-conductive table, 0.8 m above the ground.

Radiated emissions in the frequency 9 kHz – 30 MHz is measured within a semi-anechoic room with an active loop antenna with the measurement detector set to peak. In addition in the frequency range 9 kHz to 490 kHz also an average detector was used. The measurement bandwidth of the receiver was set to 300 Hz in the frequency range 9 kHz to 150 kHz and 10 kHz in the frequency range 150 kHz to 30 MHz. Prescans were performed in six positions of the EUT.

For final measurements the detector was set to CISPR quasi-peak and in addition to CISPR average in the frequency range 9 kHz to 490 kHz with a resolution bandwidth 200 Hz in the frequency range 9 kHz to 150 kHz and 9 kHz in the frequency range 150 kHz to 30 MHz. Final tests were performed immediately after a final frequency and zoom (for drifting disturbances) and maximum adjustment.

2.4.6.2 Frequency range 30 MHz – 1 GHz

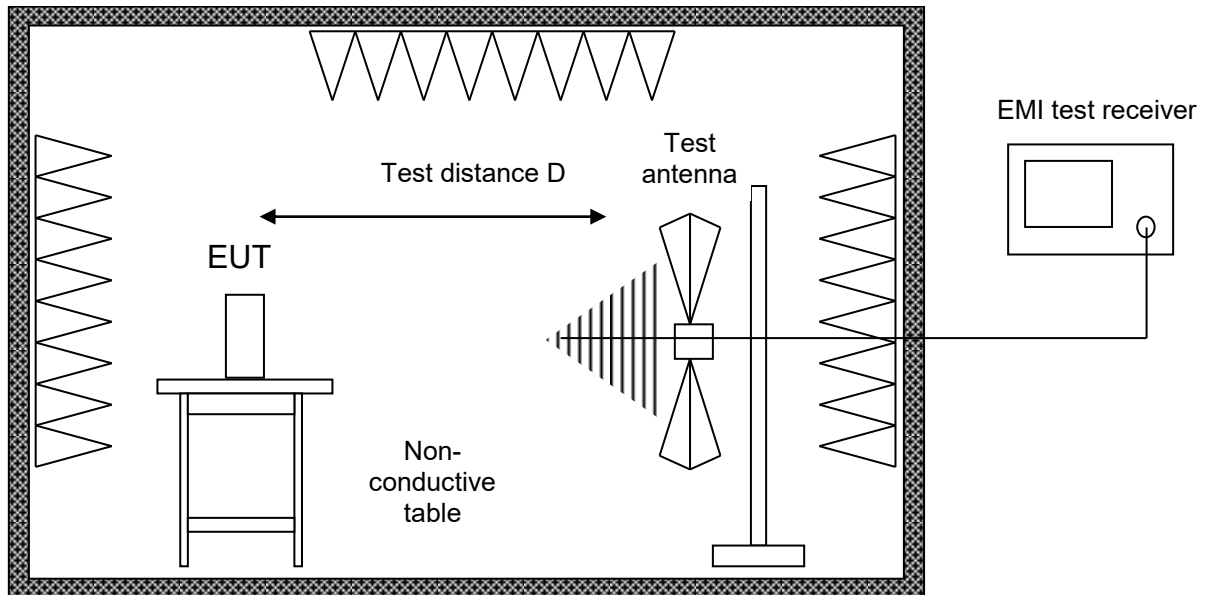


Alternate test site (semi anechoic room)

The EUT was placed on a non-conductive table, 0.8 m above the ground plane. Radiated emissions in the frequency range 30 MHz – 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4. for alternative test sites. A linear polarised logarithmic periodic antenna combined with a 4:1 broadband dipole (“Trilog broadband antenna”) is used.

For prescan tests the test receiver is set to peak-detector with a bandwidth of 120 kHz.

With the measurement bandwidth of the test receiver set to 120 kHz CISPR quasi-peak detector is selected for final measurements following immediately after a final frequency zoom (for drifting disturbances) and maximum adjustment.

2.4.6.3 Frequency range above 1 GHz

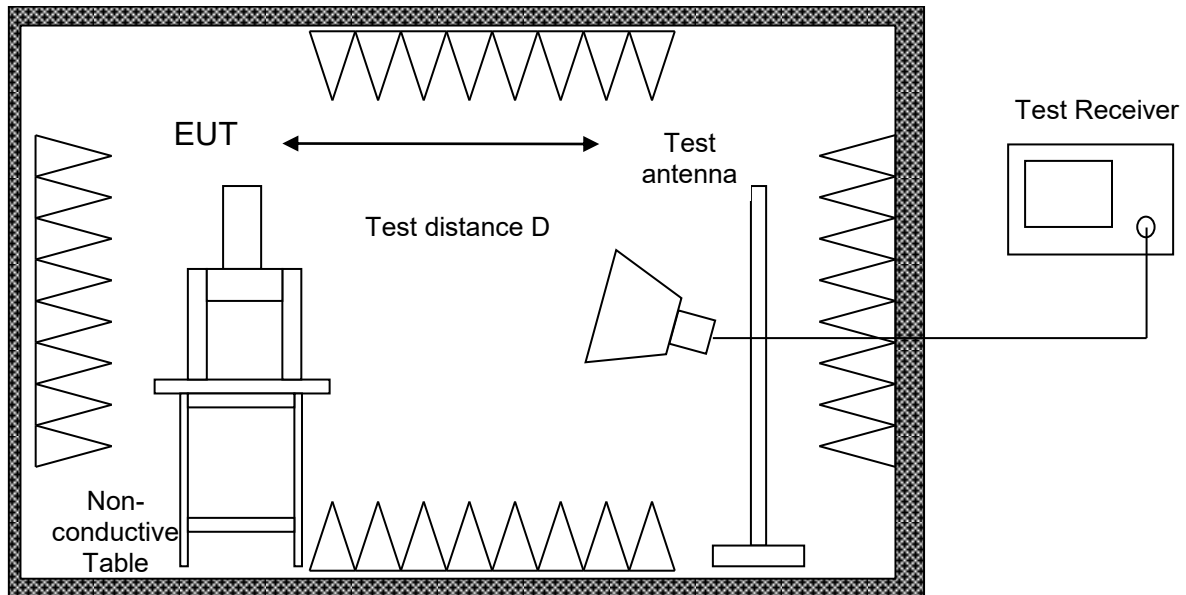

Fully anechoic room

The EUT was placed on a non-conductive table, 1.5 m above the ground plane

Radiated emission tests above 1 GHz are performed in a fully anechoic room with the S_{VSWR} requirements of ANSI C63.4. Measurements are performed both in the horizontal and vertical planes of polarisation using a test receiver with the detector function set to peak and average and the resolution bandwidth set to 1 MHz. Testing above 1 GHz is performed with horn antennas with the EUT in boresight of the antenna.

For prescan tests the test receiver is set to peak- and average-detector with a bandwidth of 1 MHz. With the measurement bandwidth of the test receiver set to 1 MHz and peak- and CISPR average-detector is selected for final measurements following immediately after a final frequency zoom (for drifting disturbances) and maximum adjustment.



2.4.7 Test Results


| Frequency range | Limit applied | Test distance |
|-----------------|---------------------|---------------|
| 9 kHz – 5 GHz | § 15.231(a) / A.1.1 | 3 m |

Table 12

Sample calculation:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + (\text{Cable attenuation (dB)} + \text{Antenna Transducer (dB(1/m)))}$$

Transmitting continuously on 433.92 MHz – Pre-scans for the worst case orientation x-axis

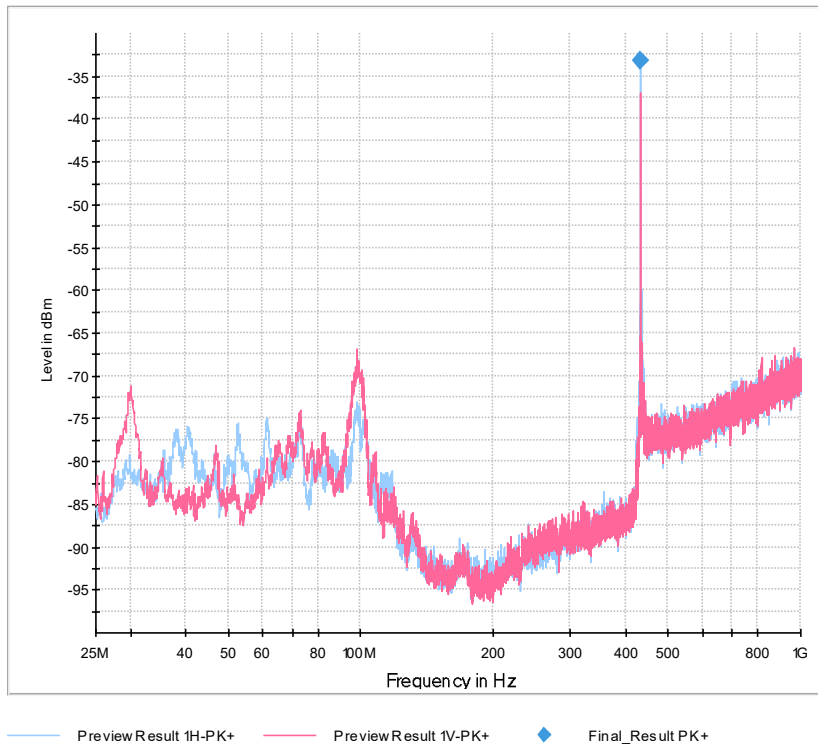


Final Results:

| Frequency MHz | Max-Peak dBm | Limit dBm | Margin dB | Meas. Time ms | Band-width kHz | Height cm | Pol | Azi-muth deg | Corr. dB |
|------------------|-----------------|--------------|--------------|------------------|-------------------|--------------|-----|-----------------|-------------|
| 433.915000 | -33.15 | --- | --- | 2.5 | 100.000 | 150.0 | H | 92.0 | -81 |



Transmitting continuously on 433.92 MHz – Pre-scans for the worst case orientation y-axis

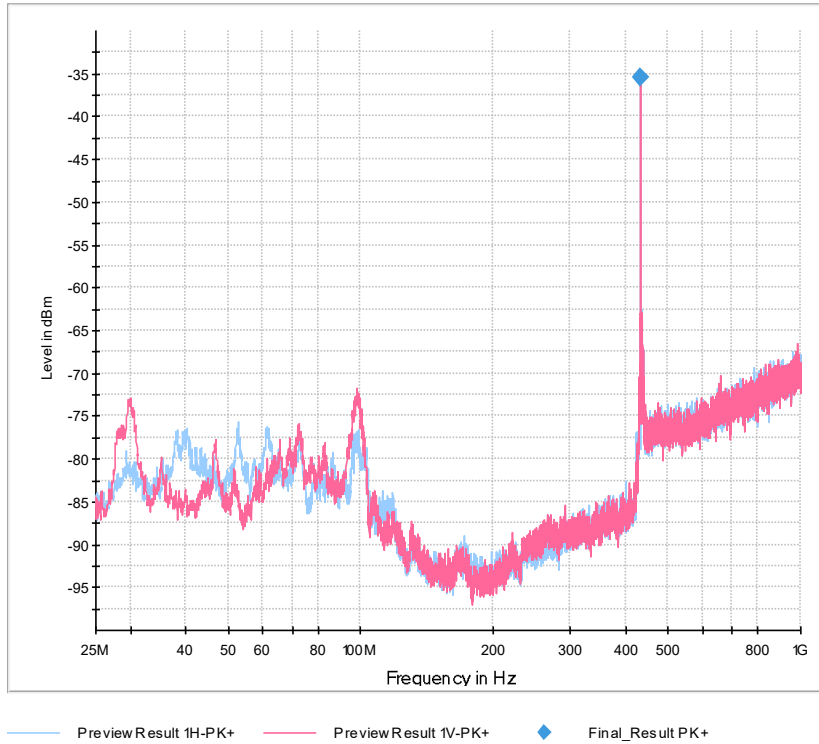


Final Results:

| <i>Frequency</i> MHz | <i>Max-Peak</i> dBm | <i>Limit</i> dBm | <i>Margin</i> dB | <i>Meas. Time</i> ms | <i>Band-width</i> kHz | <i>Height</i> cm | <i>Pol</i> | <i>Azi-muth</i> deg | <i>Corr.</i> dB |
|-------------------------|------------------------|---------------------|---------------------|-------------------------|--------------------------|---------------------|------------|------------------------|--------------------|
| 433.915000 | -35.36 | --- | --- | 2.5 | 100.000 | 150.0 | H | 244.0 | -81 |



Transmitting continuously on 433.92 MHz – Pre-scans for the worst case orientation z-axis

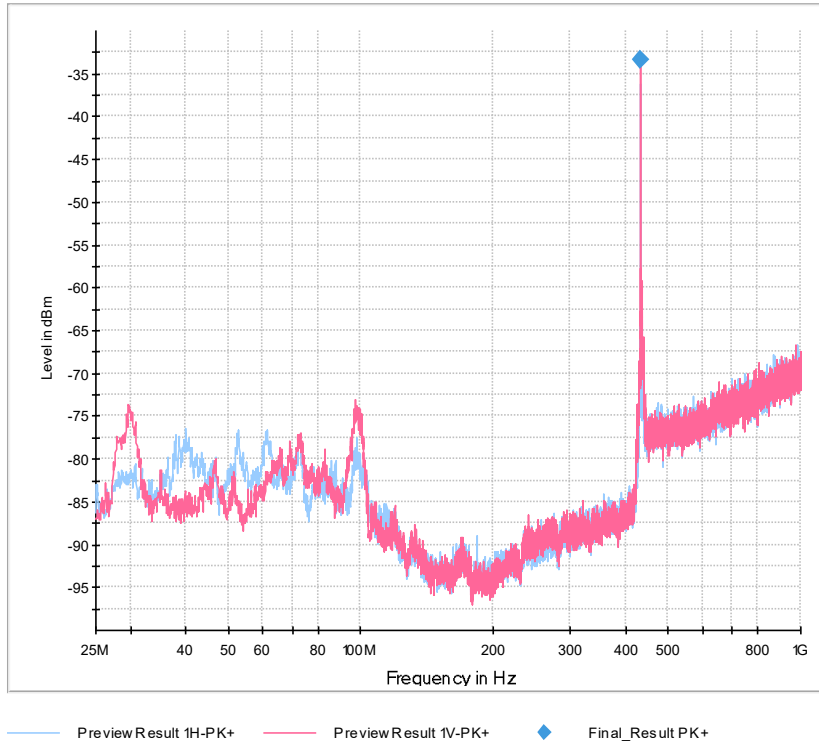


Final Results:

| <i>Frequency</i> MHz | <i>Max-Peak</i> dBm | <i>Limit</i> dBm | <i>Margin</i> dB | <i>Meas. Time</i> ms | <i>Bandwidth</i> kHz | <i>Height</i> cm | <i>Pol</i> | <i>Azimuth</i> deg | <i>Corr.</i> dB |
|-------------------------|------------------------|---------------------|---------------------|-------------------------|-------------------------|---------------------|------------|-----------------------|--------------------|
| 433.915000 | -33.33 | --- | --- | 2.5 | 100.000 | 150.0 | V | 263.0 | -80 |



Frequency range 9 kHz to 30 MHz – x axis:

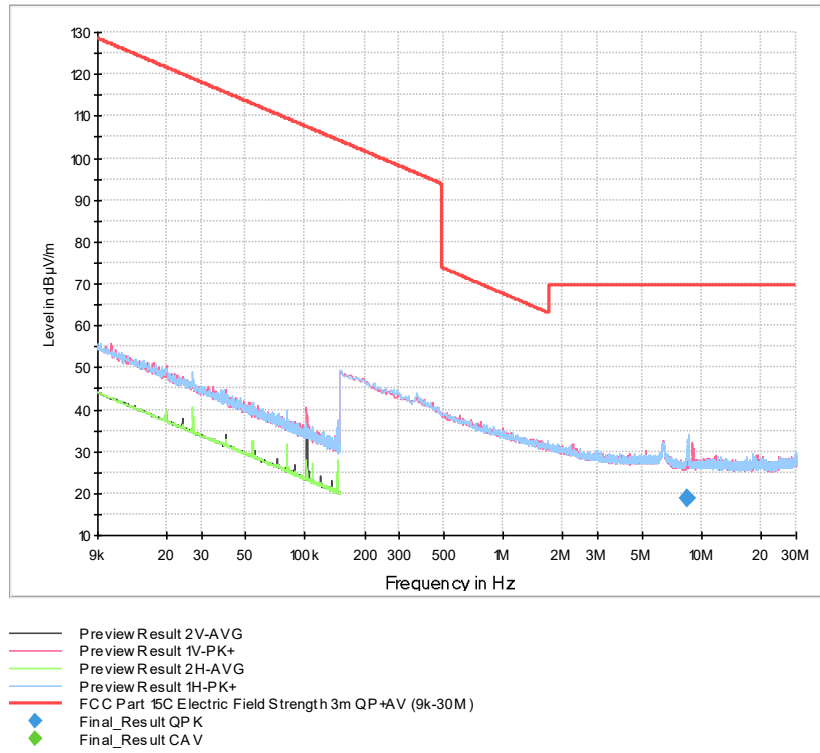


Final Results:

| Frequency MHz | QuasiPeak dBµV/m | CAverage dBµV/m | Limit dBµV/m | Margin dB | Meas. Time ms | Bandwidth kHz | Height cm | Pol | Azimuth deg | Corr. dB/m |
|---------------|------------------|-----------------|--------------|-----------|---------------|---------------|-----------|-----|-------------|------------|
| 8.533500 | 18.82 | --- | 69.54 | 50.72 | 1000.0 | 9.000 | 100.0 | H | -79.0 | 19.1 |



Frequency range 30 MHz to 1 GHz – x axis:

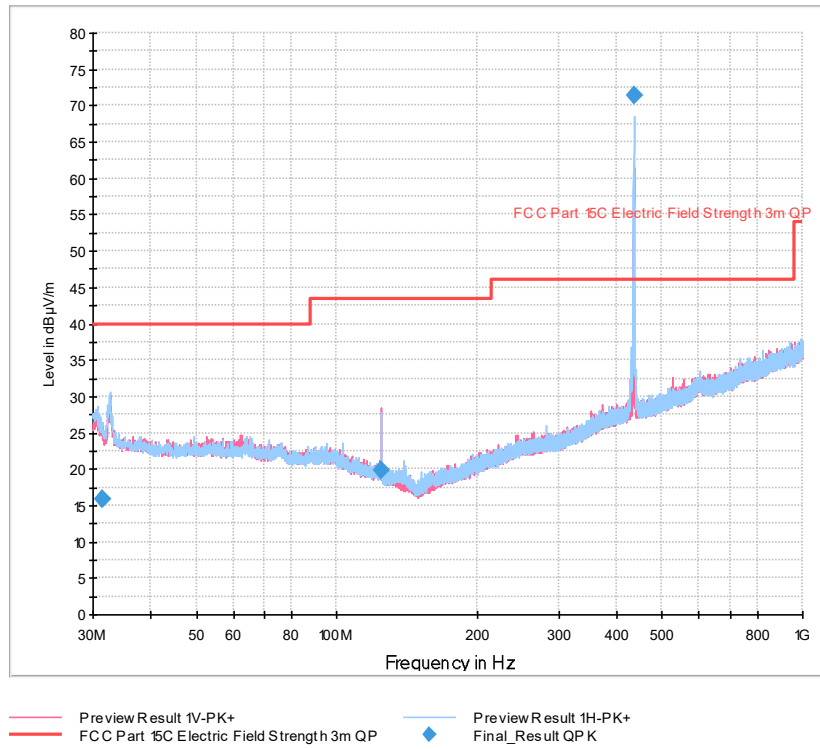


Final Results:

| Frequency MHz | QuasiPeak dBµV/m | Limit dBµV/m | Margin dB | Meas. Time ms | Band- width kHz | Height cm | Pol | Azi- muth deg | Corr. dB/m |
|------------------|---------------------|-----------------|--------------|---------------------|-----------------------|--------------|-----|---------------------|---------------|
| 31.440000 | 15.82 | 40.00 | 24.18 | 1000.0 | 120.000 | 135.0 | H | -150.0 | 19.8 |
| 124.980000 | 19.74 | 43.50 | 23.76 | 1000.0 | 120.000 | 124.0 | V | -158.0 | 16.5 |
| 433.920000 | 71.44 | 72.87 | 1.43 | 1000.0 | 120.000 | 204.0 | H | 120.0 | 24.5 |



Frequency range 1GHz to 6 GHz – x axis:

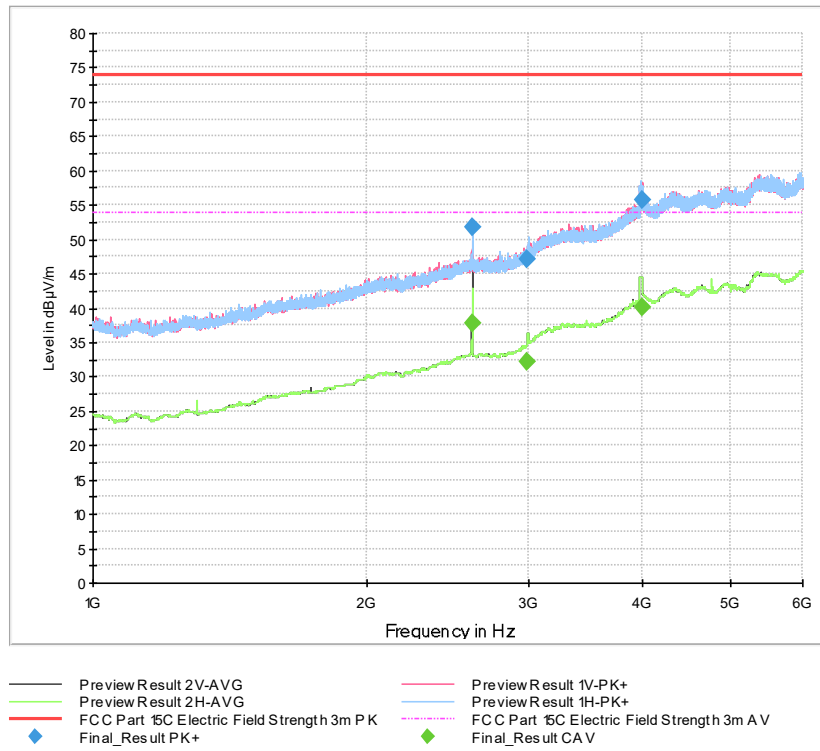

Final Results:

| Frequency MHz | Max-Peak dBµV/m | CAverage dBµV/m | Limit dBµV/m | Margin dB | Meas. Time ms | Band-width kHz | Height cm | Pol | Azi- muth deg | Corr. dB/m |
|------------------|--------------------|--------------------|-----------------|--------------|------------------|-------------------|--------------|-----|---------------------|---------------|
| 2603.500000 | --- | 37.82 | 53.98 | 16.16 | 1000.0 | 1000.000 | 125.0 | V | -135.0 | 35.0 |
| 2603.500000 | 51.76 | --- | 73.98 | 22.21 | 1000.0 | 1000.000 | 125.0 | V | -135.0 | 35.0 |
| 2995.500000 | --- | 32.26 | 53.98 | 21.71 | 1000.0 | 1000.000 | 189.0 | H | 80.0 | 36.2 |
| 2995.500000 | 47.18 | --- | 73.98 | 26.80 | 1000.0 | 1000.000 | 189.0 | H | 80.0 | 36.2 |
| 4003.500000 | --- | 40.21 | 53.98 | 13.77 | 1000.0 | 1000.000 | 314.0 | V | 37.0 | 39.8 |
| 4003.500000 | 55.84 | --- | 73.98 | 18.14 | 1000.0 | 1000.000 | 314.0 | V | 37.0 | 39.8 |



2.4.8 Test Location and Test Equipment

The test was carried out in semi anechoic room - cabin no. 11.

| Instrument | Manufacturer | Type No | TE No | Calibration Period (months) | Calibration Due |
|----------------------------|-----------------|--------------------------------|-------|-----------------------------|-----------------|
| EMI test receiver | Rohde & Schwarz | ESW44 | 39897 | 12 | 2024-04-30 |
| Loop antenna | Schwarzbeck | FMZB 1519 B | 44334 | 36 | 2023-04-30 |
| TRILOG Broadband Antenna | Rohde & Schwarz | VULB 9162 | 20116 | 36 | 2025-01-31 |
| Double ridged horn antenna | Rohde & Schwarz | HF907 | 40089 | 24 | 2024-10-24 |
| EMC measurement software | Rohde & Schwarz | EMC32 Emission K11 - V10.50.10 | 42986 | --- | --- |
| Semi Anechoic Room | Frankonia | Cabin No. 11 | 42961 | 36 | 2024-09-30 |

Table 13



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

| <i>Radio Interference Emission Testing</i> | | |
|--|-----------|-----------------------------|
| <i>Test Name</i> | <i>kp</i> | <i>Expanded Uncertainty</i> |
| Conducted Voltage Emission | | |
| 9 kHz to 150 kHz (50Ω/50μH AMN) | 2 | ± 3.8 dB |
| 150 kHz to 30 MHz (50Ω/50μH AMN) | 2 | ± 3.4 dB |
| 100 kHz to 200 MHz (50Ω/5μH AMN) | 2 | ± 3.6 dB |
| Discontinuous Conducted Emission | | |
| 9 kHz to 150 kHz (50Ω/50μH AMN) | 2 | ± 3.8 dB |
| 150 kHz to 30 MHz (50Ω/50μH AMN) | 2 | ± 3.4 dB |
| Conducted Current Emission | | |
| 9 kHz to 200 MHz | 2 | ± 3.5 dB |
| Magnetic Fieldstrength | | |
| 9 kHz to 30 MHz (with loop antenna) | 2 | ± 3.9 dB |
| 9 kHz to 30 MHz (large-loop antenna 2 m) | 2 | ± 3.5 dB |
| Radiated Emission | | |
| 30 MHz to 300 MHz | 2 | ± 4.9 dB |
| 300 MHz to 1 GHz | 2 | ± 5.0 dB |
| 1 GHz to 6 GHz | 2 | ± 4.6 dB |
| Test distance 10 m | | |
| 30 MHz to 300 MHz | 2 | ± 4.9 dB |
| 300 MHz to 1 GHz | 2 | ± 4.9 dB |
| The expanded uncertainty reported according to CISPR16-4-2: 2011 + A1 + A2 + Cor1 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$ | | |

Table 14 Measurement uncertainty based on CISPR 16-4-2



| <i>Radio Interference Emission Testing</i> | | |
|--|-----------|-----------------------------|
| <i>Test Name</i> | <i>kp</i> | <i>Expanded Uncertainty</i> |
| Occupied Bandwidth | 2 | ± 5 % |
| Conducted Power | | |
| 9 kHz ≤ f < 30 MHz | 2 | ± 1.0 dB |
| 30 MHz ≤ f < 1 GHz | 2 | ± 1.5 dB |
| 1 GHz ≤ f ≤ 40 GHz | 2 | ± 2.5 dB |
| 1 MS/s power sensor (TS8997) | 2 | ± 1.5 dB |
| Occupied Bandwidth | 2 | ± 5 % |
| Power Spectral Density | 2 | ± 3.0 dB |
| Radiated Power | | |
| 25 MHz – 6 GHz | 1.96 | ±4.4 dB |
| 1 GHz – 18 GHz | 1.96 | ±4.7 dB |
| 18 GHz – 40 GHz | 1.96 | ±4.9 dB |
| 40 GHz – 325 GHz | 1.96 | ±6.1 dB |
| Conducted Spurious Emissions | 2 | ± 3.0 dB |
| Radiated Spurious Emissions | 2 | ± 6.0 dB |
| Voltage | | |
| DC | 2 | ± 1.0 % |
| AC | 2 | ± 2.0 % |
| Time (automatic) | 2 | ± 5 % |
| Frequency | 2 | ± 10 ⁻⁷ |
| The expanded uncertainty reported according to ETSI TR 100 028:2001 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$ | | |

Table 15 Measurement uncertainty based on ETSI TR 100 028

The measurement uncertainty in the laboratory is less than or equal to the maximum measurement uncertainty according to CISPR16-4-2: 2011 + A1 + A2 + Cor1 (U_{CISPR}) and as specified in the test report below. This normative regulation means that the measured value is also the value to be assessed in relation to the limit value.



| <i>Test Name</i> | <i>Expanded Uncertainty</i> |
|--|-----------------------------|
| Occupied Bandwidth | ±5 % |
| Conducted Power | |
| 9 kHz ≤ f < 30 MHz | ±1.0 dB |
| 30 MHz ≤ f < 1 GHz | ±1.5 dB |
| 1 GHz ≤ f ≤ 40 GHz | ±2.5 dB |
| 1 MS/s power sensor (2.4 / 5 GHz band) | ±1.5 dB |
| Power Spectral Density | ±3.0 dB |
| Radiated Power | |
| 25 MHz – 26.5 GHz | ±6.0 dB |
| 26.5 GHz – 66 GHz | ±8.0 dB |
| 40 GHz – 325 GHz | ±10.0 dB |
| Conducted Spurious Emissions | ±3.0 dB |
| Radiated Field Strength 9 kHz – 40 GHz | ±6.0 dB |
| Voltage | |
| DC | ± 1.0 % |
| AC | ± 2.0 % |
| Time (automatic) | ± 5 % |
| Frequency | ± 10 ⁻⁷ |

Table 16 Decision Rule: Maximum allowed measurement uncertainty